


Maximum Power Spectral Density


11ax-20(OFDMA), 26-tone RU

5300 MHz

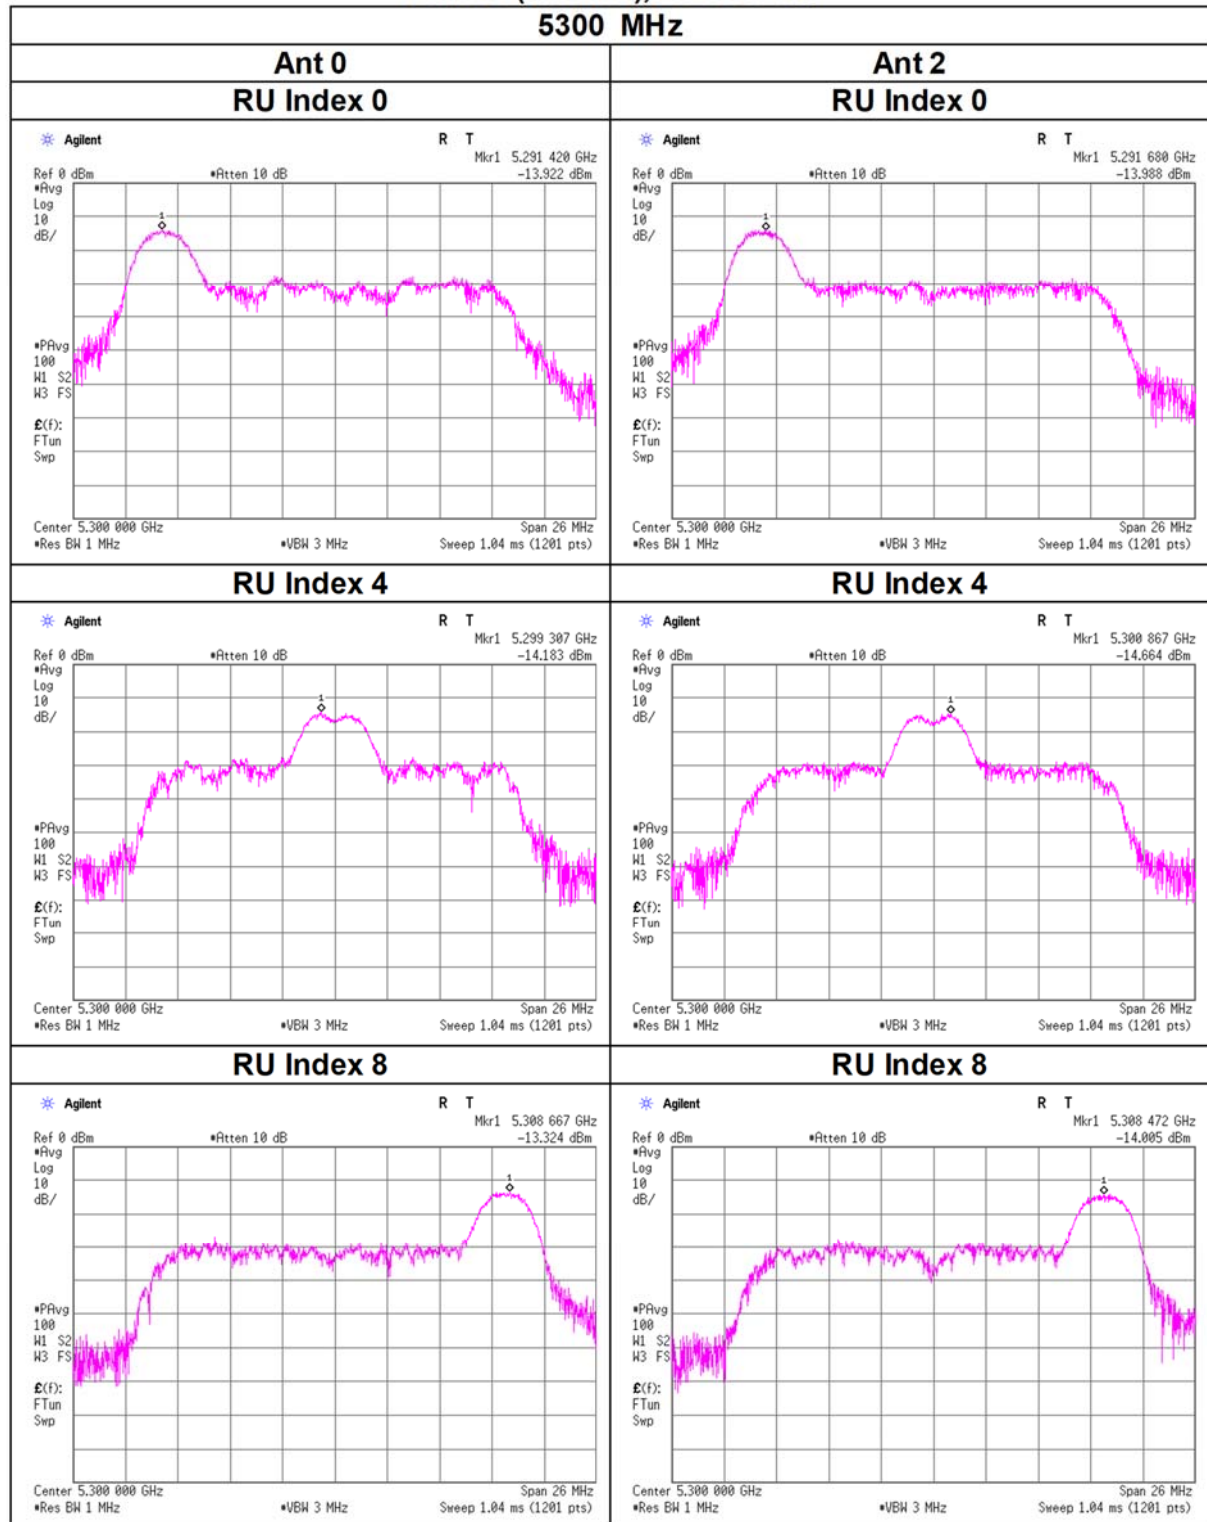


Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU

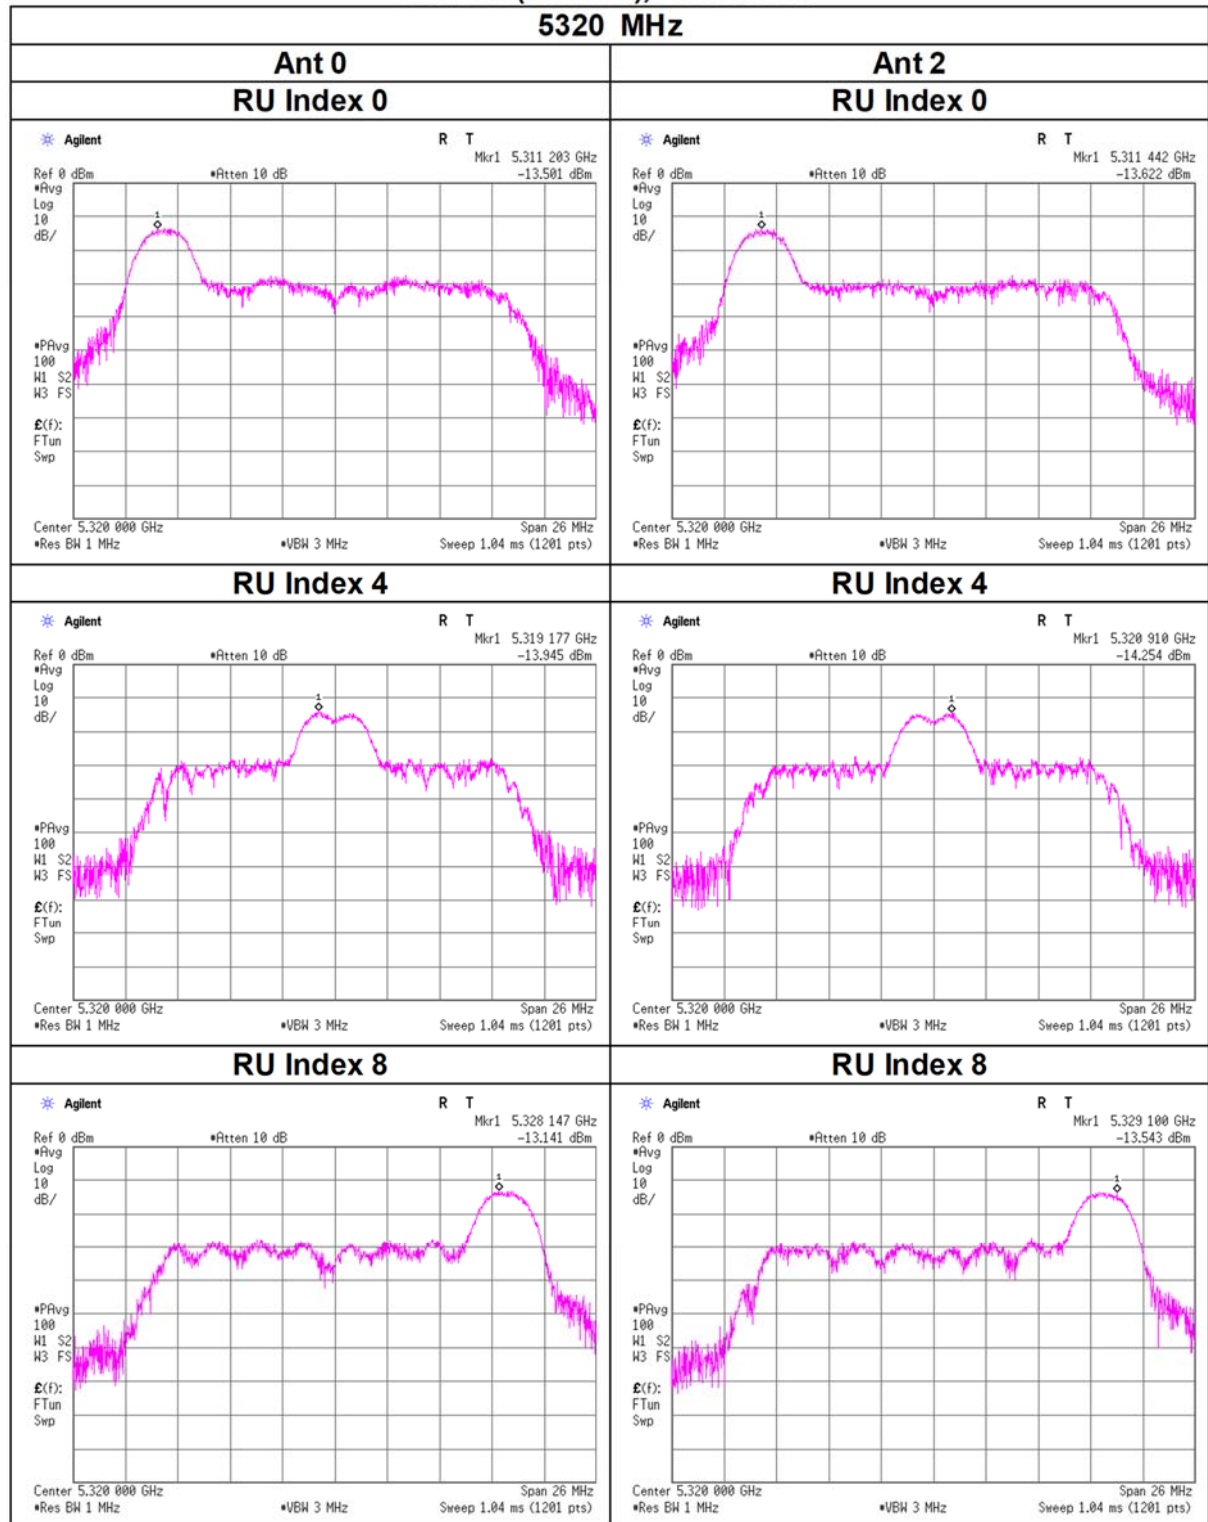


Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU

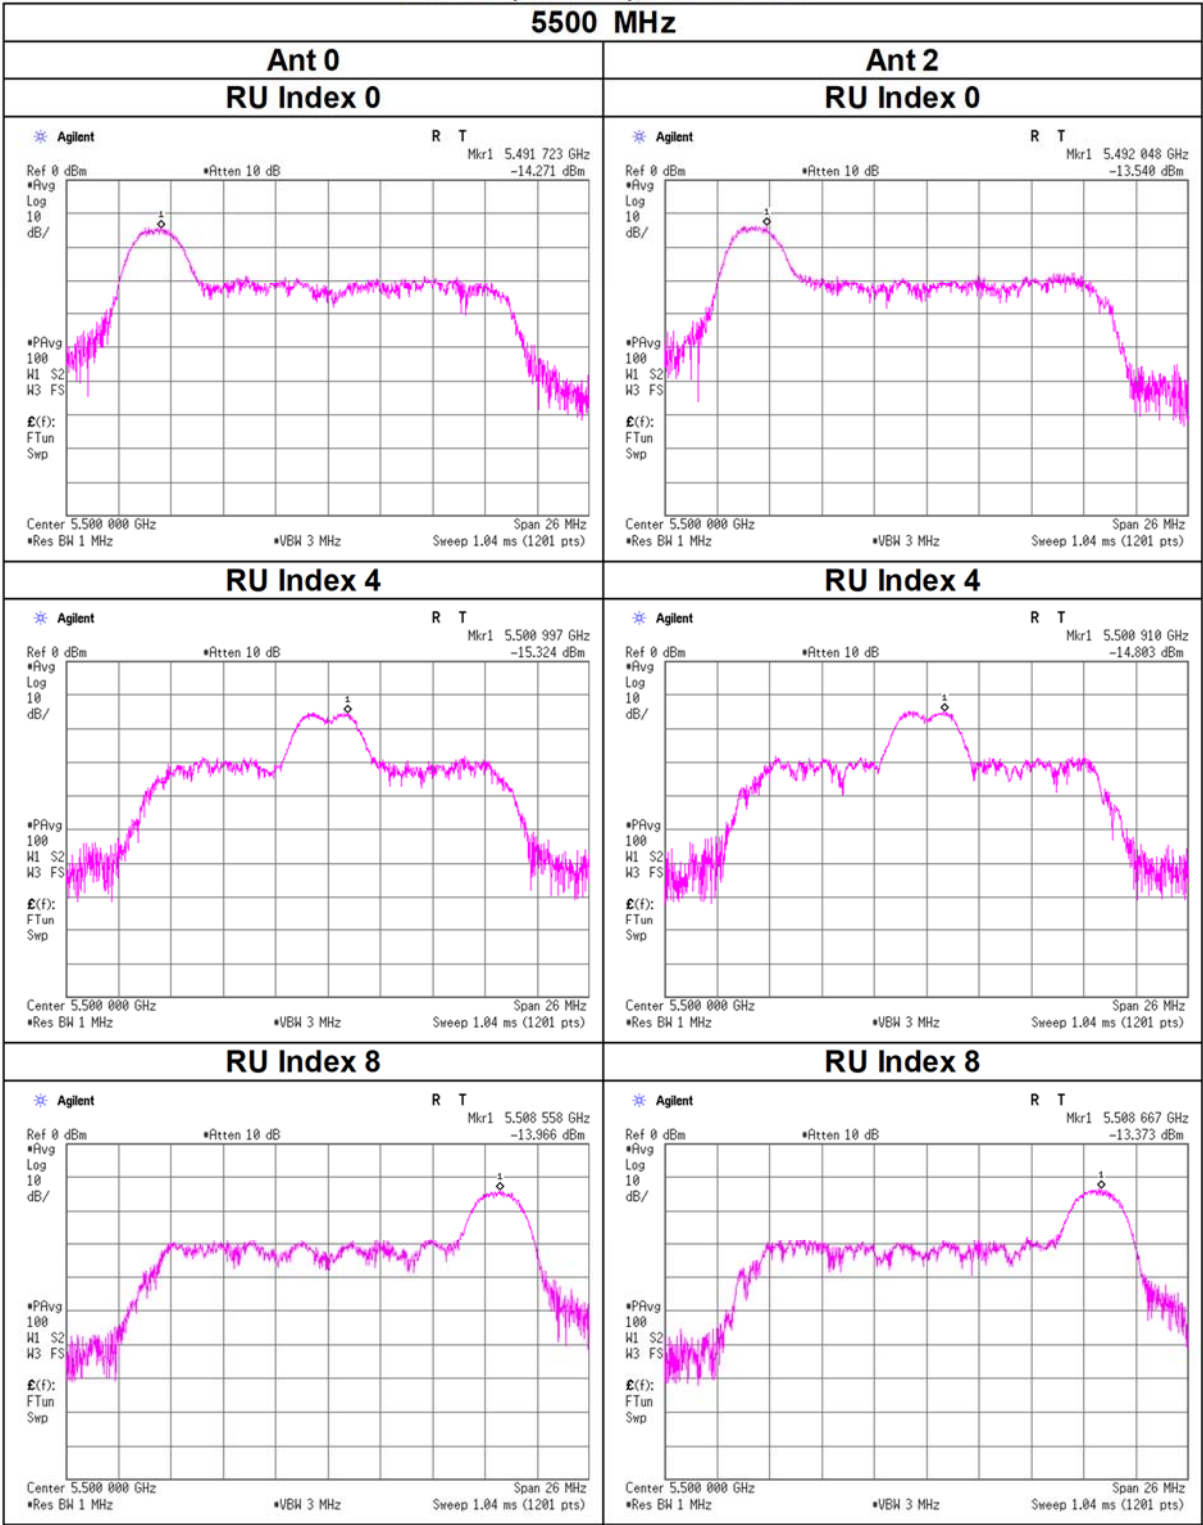

Maximum Power Spectral Density


11ax-20(OFDMA), 26-tone RU
5580 MHz

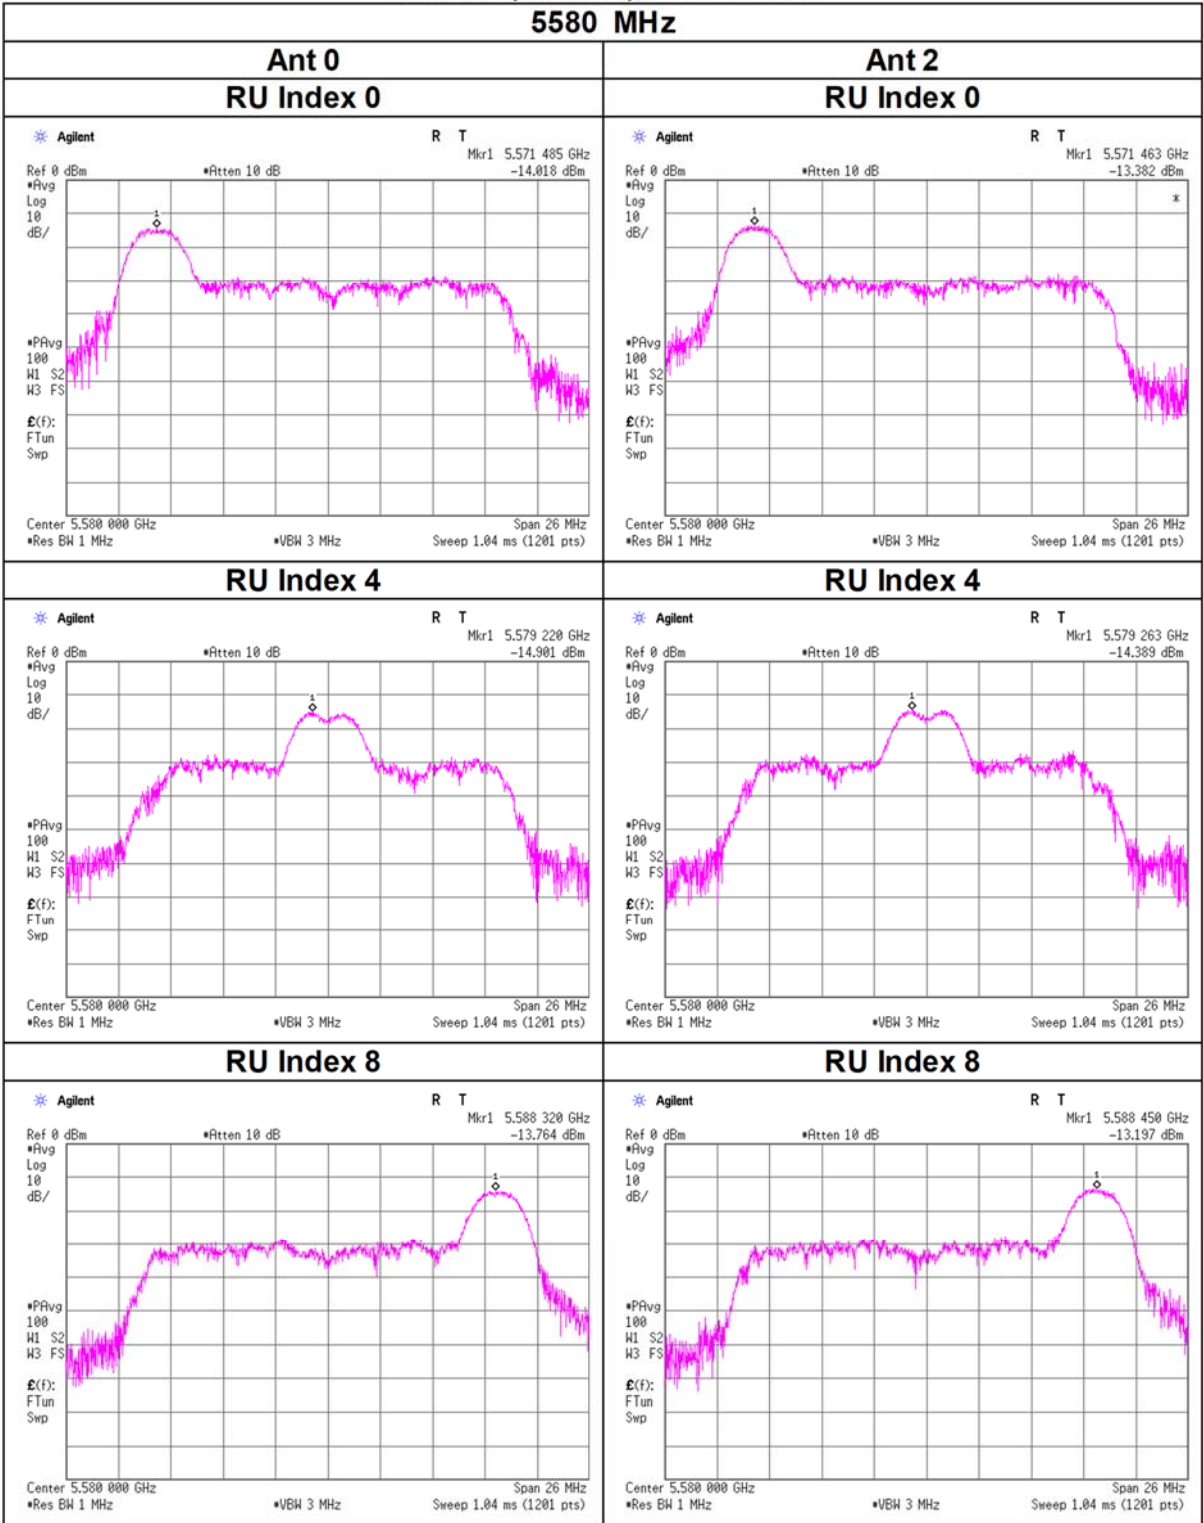

Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU


5700 MHz

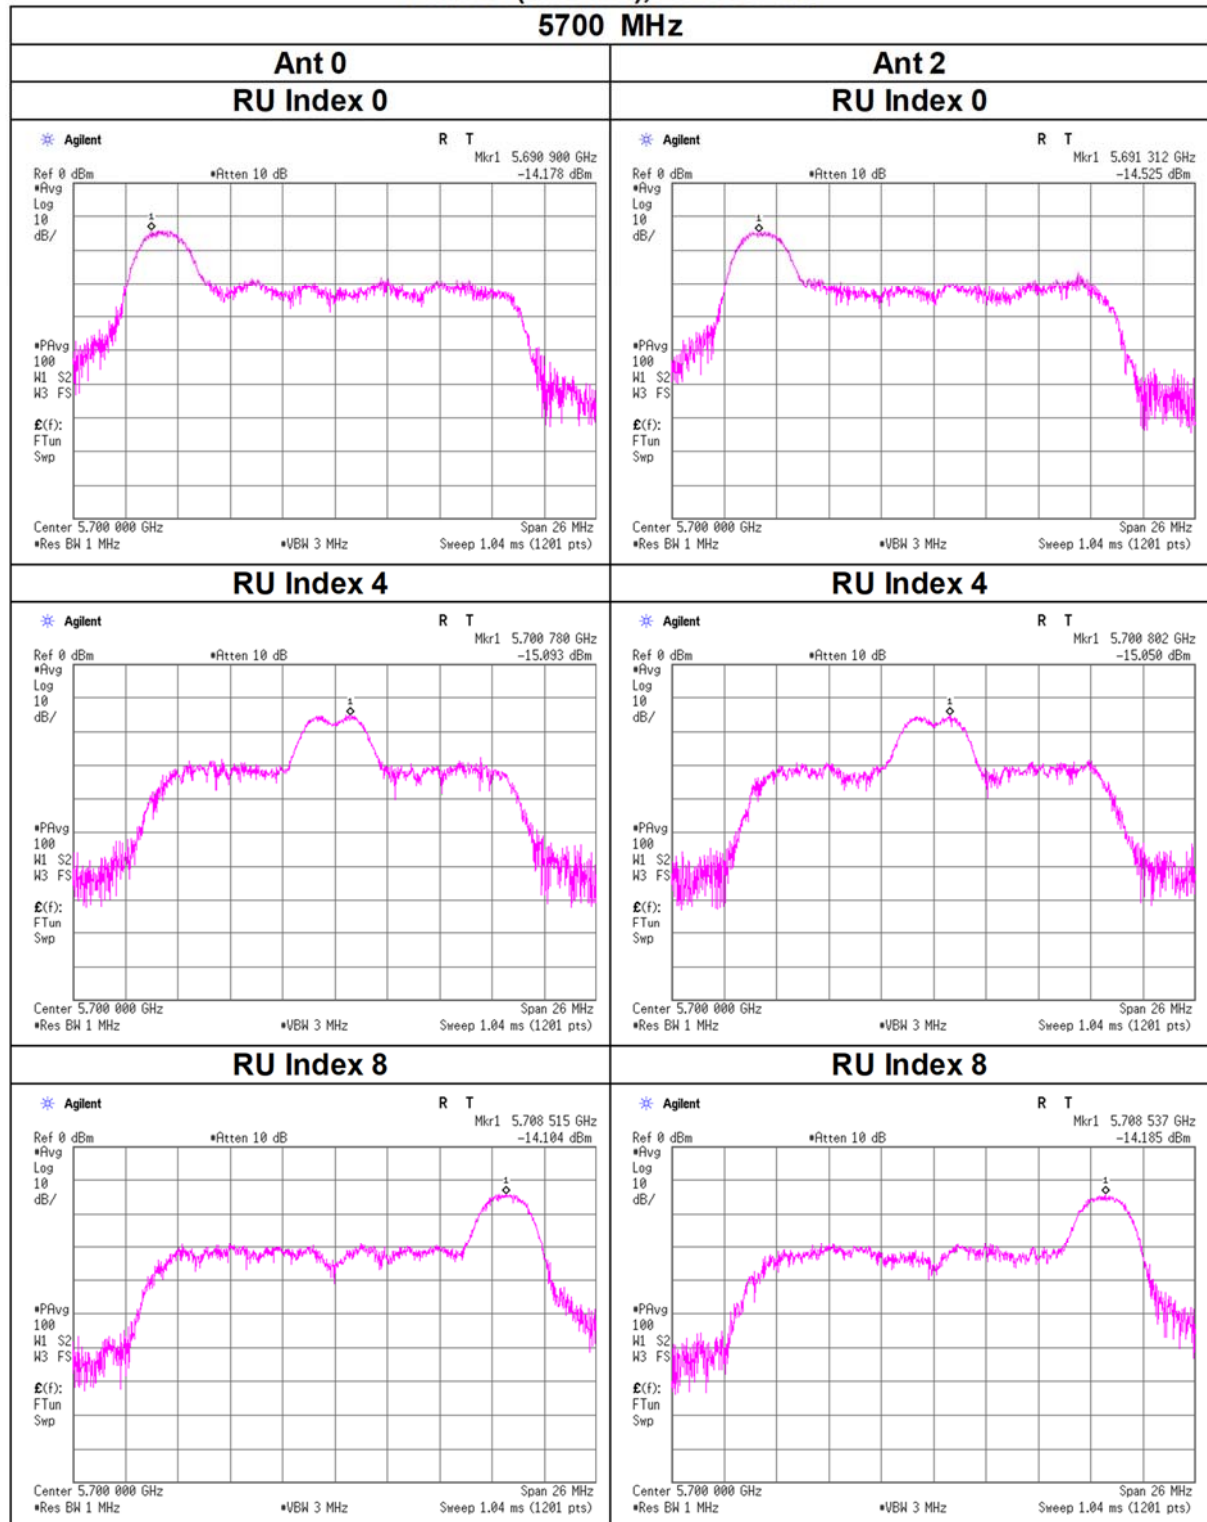

Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU


5745 MHz

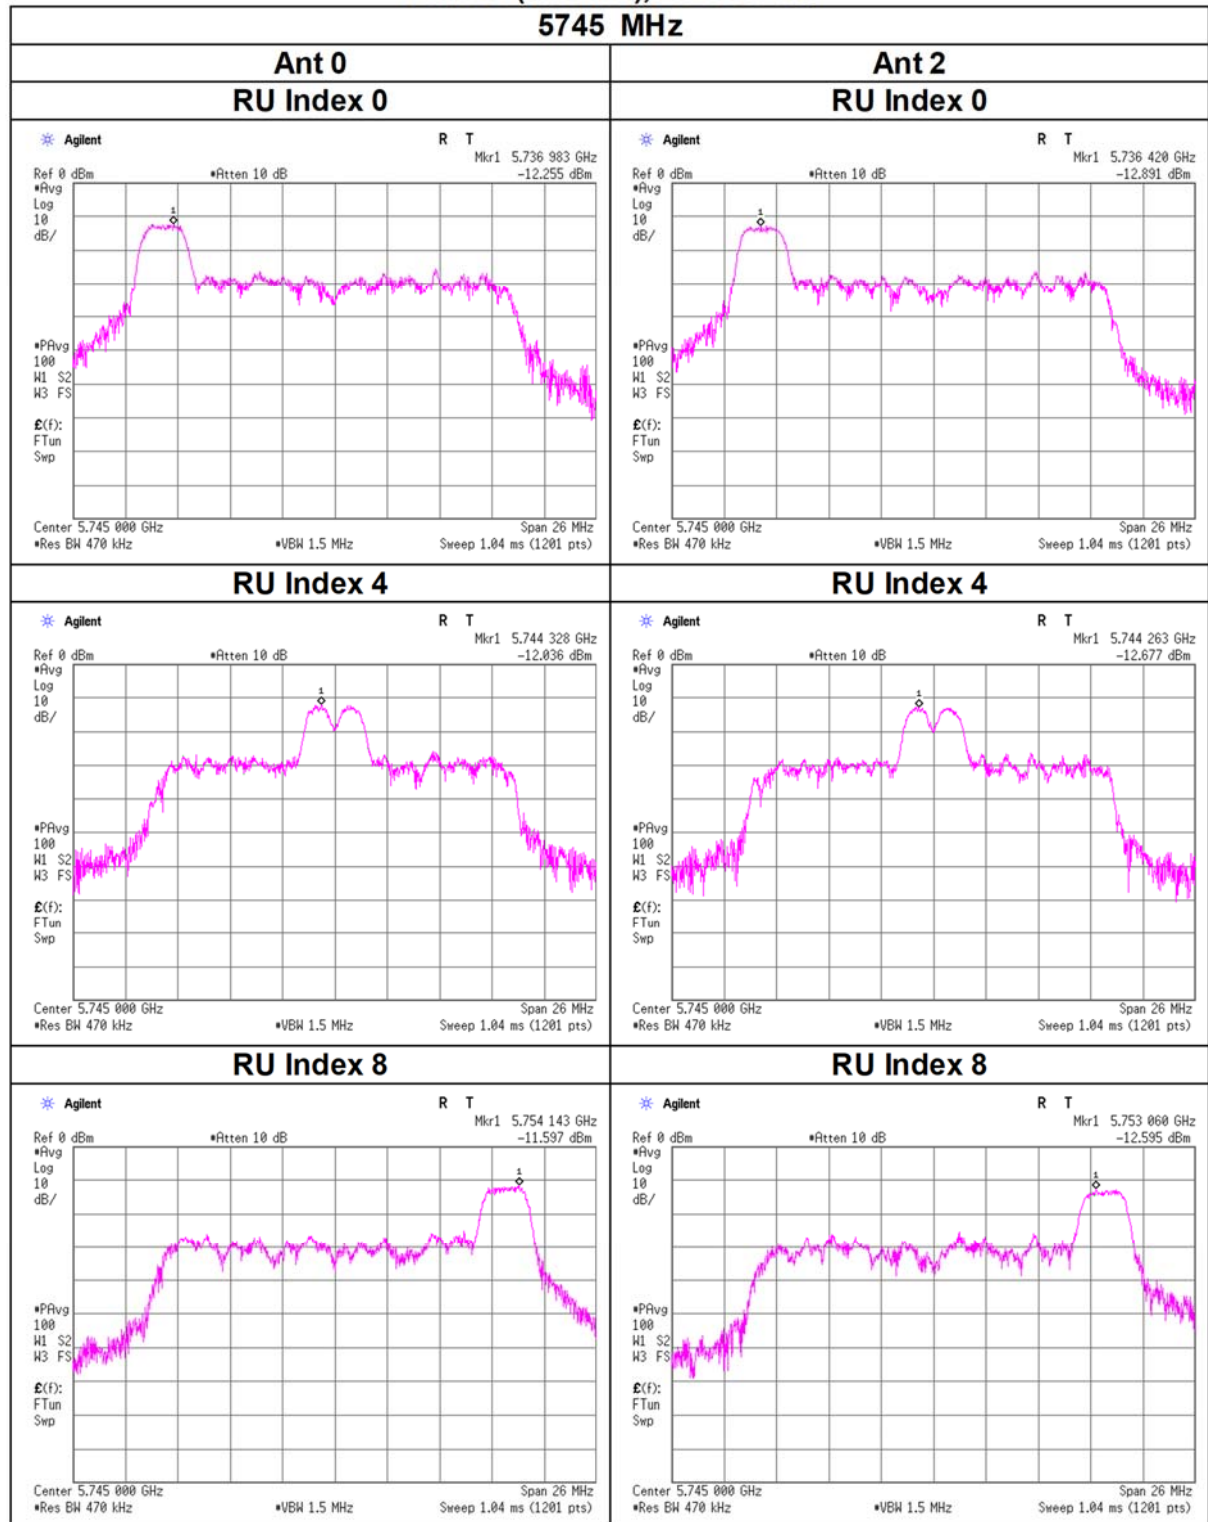

Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU


5785 MHz

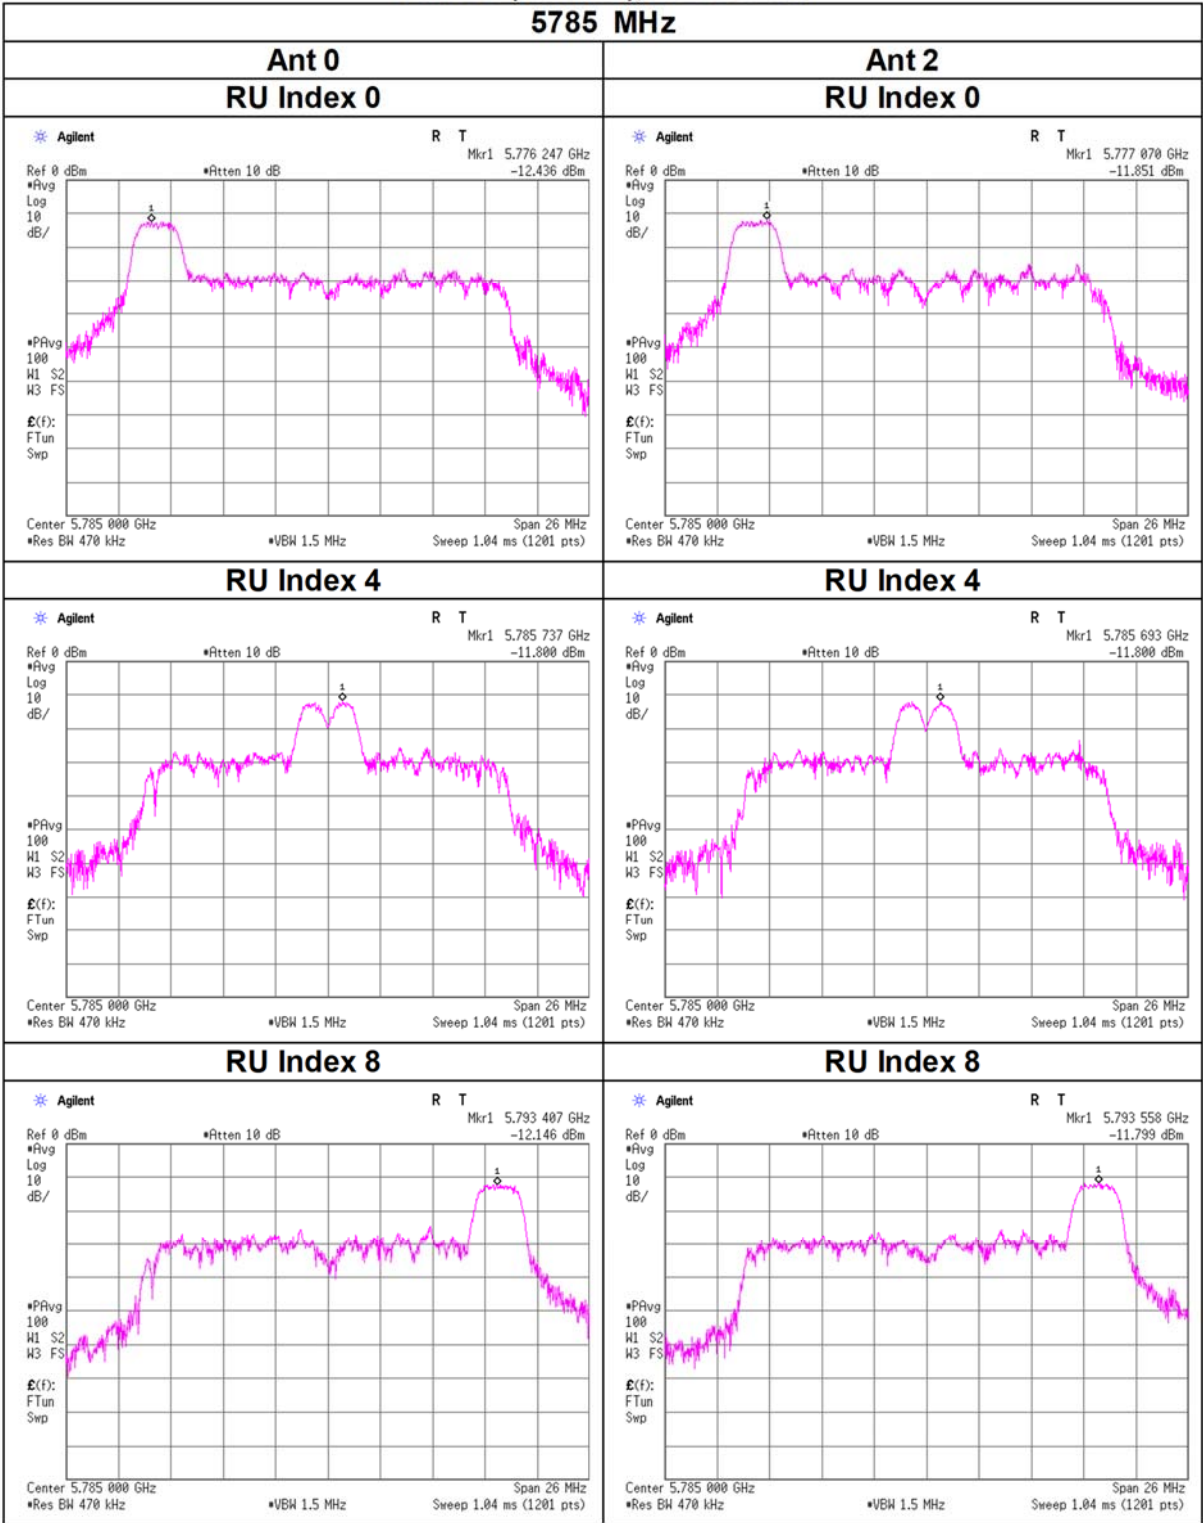

Maximum Power Spectral Density

11ax-20(OFDMA), 26-tone RU

5825 MHz

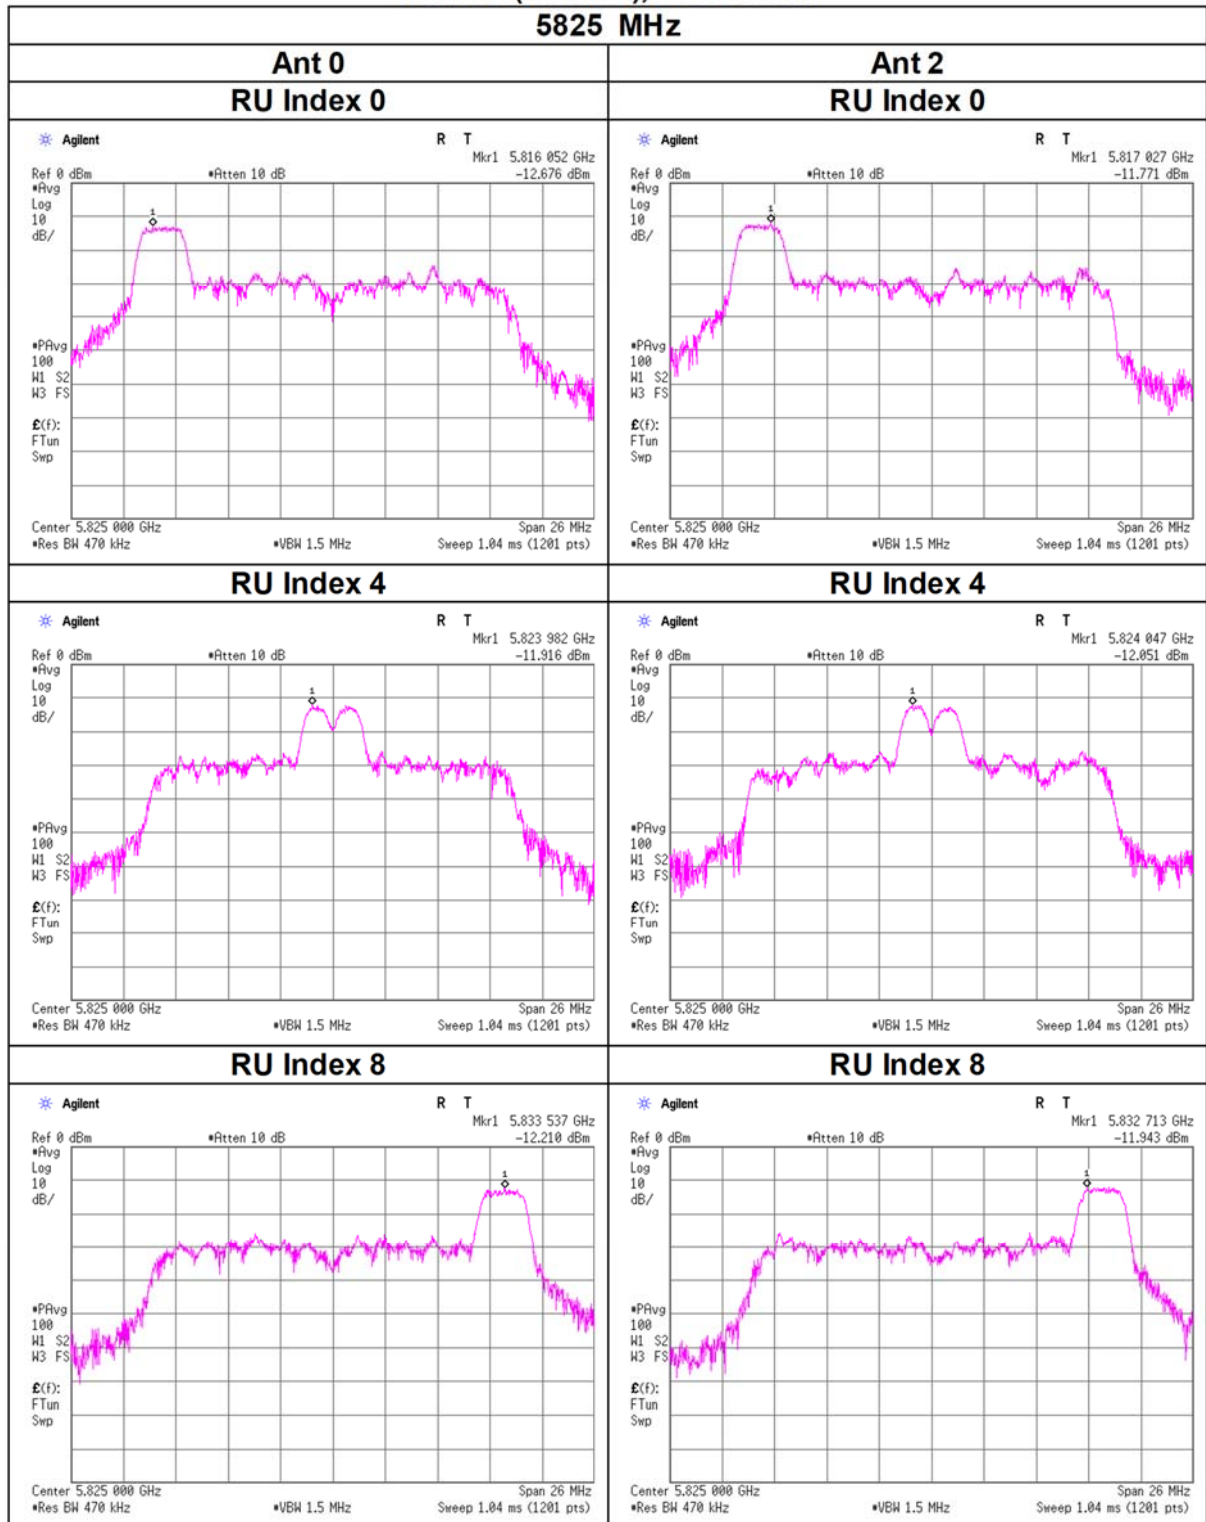

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.1 Measurement Room
Date February 21, 2024
Temperature / Humidity 23 deg. C / 40 % RH
Engineer Kazuya Noda
Mode Tx

Ant 0 + Ant 2 11ax-20(OFDMA)(SDM), 52-tone RU Applied limit: 15.407, Client

Tested Frequency [MHz]	RU Index	PSD (Cond.)						PSD (e.i.r.p.)					
		Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
		Ant 0	Ant 2	Sum				Ant 0	Ant 2	Sum			
		[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[mW/MHz]	[mW/MHz]	[mW/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]
5180	37	0.87	0.81	1.68	2.25	11.00	8.75	1.02	2.06	3.08	4.89	17.00	12.11
	38	0.89	0.91	1.80	2.56	11.00	8.44	1.05	2.33	3.38	5.29	17.00	11.71
	40	0.86	0.89	1.75	2.43	11.00	8.57	1.01	2.28	3.29	5.17	17.00	11.83
5220	37	0.92	0.88	1.80	2.55	11.00	8.45	1.08	2.24	3.32	5.21	17.00	11.79
	38	0.84	0.89	1.74	2.39	11.00	8.61	0.99	2.28	3.27	5.14	17.00	11.86
	40	0.92	0.83	1.76	2.44	11.00	8.56	1.09	2.12	3.21	5.06	17.00	11.94
5240	37	0.94	0.90	1.84	2.64	11.00	8.36	1.10	2.29	3.39	5.31	17.00	11.69
	38	0.94	0.83	1.77	2.49	11.00	8.51	1.11	2.12	3.23	5.09	17.00	11.91
	40	0.95	0.92	1.87	2.71	11.00	8.29	1.11	2.35	3.46	5.40	17.00	11.60
5260	37	1.07	0.99	2.06	3.15	11.00	7.85	1.26	2.53	3.79	5.79	17.00	11.21
	38	1.05	1.10	2.15	3.33	11.00	7.67	1.24	2.81	4.05	6.07	17.00	10.93
	40	1.06	1.11	2.18	3.38	11.00	7.62	1.25	2.85	4.09	6.12	17.00	10.88
5300	37	1.08	1.06	2.13	3.29	11.00	7.71	1.26	2.69	3.96	5.97	17.00	11.03
	38	1.05	1.08	2.12	3.27	11.00	7.73	1.23	2.75	3.98	6.00	17.00	11.00
	40	1.12	0.98	2.11	3.24	11.00	7.76	1.32	2.51	3.83	5.83	17.00	11.17
5320	37	1.06	0.97	2.03	3.09	11.00	7.91	1.25	2.48	3.73	5.72	17.00	11.28
	38	1.05	1.04	2.09	3.19	11.00	7.81	1.23	2.65	3.88	5.89	17.00	11.11
	40	1.24	1.15	2.38	3.77	11.00	7.23	1.45	2.92	4.37	6.41	17.00	10.59

Tested Frequency [MHz]	RU Index	Duty Factor [dB]	RBW Conversion Factor [dB]	Ant 0				PSD Result		Ant 2				PSD Result	
				PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	Cond.	e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	Cond.	e.i.r.p.
				[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]
5180	37	0.89	-	-14.45	2.95	10.01	0.70	-0.60	0.10	-14.78	2.95	10.00	4.07	-0.94	3.13
	38	0.89	-	-14.36	2.95	10.01	0.70	-0.51	0.19	-14.23	2.95	10.00	4.07	-0.39	3.68
	40	0.89	-	-14.51	2.95	10.01	0.70	-0.66	0.04	-14.33	2.95	10.00	4.07	-0.49	3.58
5220	37	0.89	-	-14.21	2.95	10.01	0.70	-0.36	0.34	-14.41	2.95	10.00	4.07	-0.57	3.50
	38	0.89	-	-14.59	2.95	10.01	0.70	-0.74	-0.04	-14.34	2.95	10.00	4.07	-0.50	3.57
	40	0.89	-	-14.19	2.95	10.01	0.70	-0.34	0.36	-14.64	2.95	10.00	4.07	-0.80	3.27
5240	37	0.89	-	-14.12	2.95	10.01	0.70	-0.28	0.42	-14.31	2.95	10.00	4.07	-0.47	3.60
	38	0.89	-	-14.10	2.95	10.01	0.70	-0.25	0.45	-14.65	2.95	10.00	4.07	-0.81	3.26
	40	0.89	-	-14.08	2.95	10.01	0.70	-0.24	0.46	-14.19	2.95	10.00	4.07	-0.36	3.71
5260	37	0.89	-	-13.54	2.95	10.01	0.70	0.31	1.01	-13.89	2.96	10.00	4.07	-0.04	4.03
	38	0.89	-	-13.63	2.95	10.01	0.70	0.22	0.92	-13.43	2.96	10.00	4.07	0.42	4.49
	40	0.89	-	-13.59	2.95	10.01	0.70	0.26	0.96	-13.38	2.96	10.00	4.07	0.47	4.54
5300	37	0.89	-	-13.54	2.96	10.01	0.70	0.32	1.02	-13.62	2.96	10.00	4.07	0.23	4.30
	38	0.89	-	-13.66	2.96	10.01	0.70	0.20	0.90	-13.53	2.96	10.00	4.07	0.32	4.39
	40	0.89	-	-13.36	2.96	10.01	0.70	0.50	1.20	-13.92	2.96	10.00	4.07	-0.07	4.00
5320	37	0.89	-	-13.60	2.96	10.01	0.70	0.26	0.96	-13.97	2.96	10.00	4.07	-0.12	3.95
	38	0.89	-	-13.66	2.96	10.01	0.70	0.20	0.90	-13.68	2.96	10.00	4.07	0.17	4.24
	40	0.89	-	-12.94	2.96	10.01	0.70	0.92	1.62	-13.26	2.96	10.00	4.07	0.59	4.66

Sample Calculation:

PSD: Power Spectral Density

PSD (Conducted) Result = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Conversion Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Maximum Power Spectral Density

Ant 0 + Ant 2

11ax-20(OFDMA)(SDM), 52-tone RU

Applied limit: 15.407, Client

Tested Frequency [MHz]	RU Index	PSD (Cond.)						PSD (e.i.r.p.)					
		Ant 0 [mW/MHz]	Antenna Ant 2 [mW/MHz]	Sum [mW/MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]	Ant 0 [mW/MHz]	Antenna Ant 2 [mW/MHz]	Sum [mW/MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
5500	37	0.98	1.02	2.00	3.01	11.00	7.99	1.15	2.61	3.76	5.75	17.00	11.25
	38	1.00	1.00	2.00	3.01	11.00	7.99	1.18	2.55	3.73	5.72	17.00	11.28
	40	0.98	1.08	2.05	3.13	11.00	7.87	1.15	2.75	3.90	5.91	17.00	11.09
5580	37	1.06	1.09	2.15	3.33	11.00	7.67	1.25	2.78	4.03	6.05	17.00	10.95
	38	1.13	1.15	2.29	3.59	11.00	7.41	1.33	2.95	4.27	6.31	17.00	10.69
	40	1.07	1.10	2.18	3.38	11.00	7.62	1.26	2.81	4.08	6.10	17.00	10.90
5700	37	0.92	0.85	1.78	2.50	11.00	8.50	1.08	2.18	3.26	5.14	17.00	11.86
	38	0.93	0.87	1.80	2.56	11.00	8.44	1.09	2.23	3.32	5.22	17.00	11.78
	40	1.02	0.95	1.97	2.94	11.00	8.06	1.20	2.41	3.61	5.58	17.00	11.42
5745	37	0.79	0.62	1.41	1.51	30.00	28.49	0.93	1.59	2.52	4.01	36.00	31.99
	38	0.86	0.69	1.55	1.91	30.00	28.09	1.01	1.77	2.78	4.44	36.00	31.56
	40	0.87	0.68	1.55	1.90	30.00	28.10	1.02	1.74	2.76	4.41	36.00	31.59
5785	37	0.82	0.75	1.57	1.96	30.00	28.04	0.96	1.92	2.88	4.59	36.00	31.41
	38	0.78	0.78	1.55	1.92	30.00	28.08	0.91	1.99	2.90	4.62	36.00	31.38
	40	0.81	0.71	1.52	1.82	30.00	28.18	0.96	1.80	2.76	4.41	36.00	31.59
5825	37	0.77	0.73	1.49	1.74	30.00	28.26	0.90	1.85	2.75	4.40	36.00	31.60
	38	0.74	0.77	1.52	1.81	30.00	28.19	0.87	1.97	2.85	4.54	36.00	31.46
	40	0.76	0.73	1.49	1.73	30.00	28.27	0.89	1.86	2.75	4.40	36.00	31.60

Tested Frequency [MHz]	RU Index	Duty Factor [dB]	RBW Conversion Factor [dB]	Ant 0					Ant 2				
				PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result Cond. [dBm/MHz] e.i.r.p. [dBm/MHz]	PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result Cond. [dBm/MHz] e.i.r.p. [dBm/MHz]
5500	37	0.89	-	-13.98	2.98	10.01	0.70	-0.11 0.59	-13.78	2.98	10.01	4.07	0.10 4.17
	38	0.89	-	-13.87	2.98	10.01	0.70	0.01 0.71	-13.88	2.98	10.01	4.07	0.00 4.07
	40	0.89	-	-13.97	2.98	10.01	0.70	-0.10 0.60	-13.56	2.98	10.01	4.07	0.32 4.39
5580	37	0.89	-	-13.61	2.98	10.01	0.70	0.27 0.97	-13.51	2.98	10.01	4.07	0.37 4.44
	38	0.89	-	-13.34	2.98	10.01	0.70	0.54 1.24	-13.26	2.98	10.01	4.07	0.62 4.69
	40	0.89	-	-13.57	2.98	10.01	0.70	0.31 1.01	-13.45	2.98	10.01	4.07	0.42 4.49
5700	37	0.89	-	-14.24	2.99	10.01	0.70	-0.35 0.35	-14.57	2.99	10.01	4.07	-0.69 3.38
	38	0.89	-	-14.20	2.99	10.01	0.70	-0.32 0.38	-14.47	2.99	10.01	4.07	-0.59 3.48
	40	0.89	-	-13.79	2.99	10.01	0.70	0.10 0.80	-14.13	2.99	10.01	4.07	-0.24 3.83
5745	37	0.89	0.27	-15.18	3.00	10.01	0.70	-1.01 -0.31	-16.23	3.00	10.02	4.07	-2.06 2.01
	38	0.89	0.27	-14.83	3.00	10.01	0.70	-0.66 0.04	-15.77	3.00	10.02	4.07	-1.59 2.48
	40	0.89	0.27	-14.80	3.00	10.01	0.70	-0.63 0.07	-15.83	3.00	10.02	4.07	-1.65 2.42
5785	37	0.89	0.27	-15.05	3.00	10.01	0.70	-0.88 -0.18	-15.41	3.00	10.02	4.07	-1.23 2.84
	38	0.89	0.27	-15.27	3.00	10.01	0.70	-1.11 -0.41	-15.26	3.00	10.02	4.07	-1.08 2.99
	40	0.89	0.27	-15.06	3.00	10.01	0.70	-0.89 -0.19	-15.68	3.00	10.02	4.07	-1.51 2.56
5825	37	0.89	0.27	-15.33	3.00	10.01	0.70	-1.16 -0.46	-15.56	3.00	10.02	4.07	-1.39 2.68
	38	0.89	0.27	-15.46	3.00	10.01	0.70	-1.29 -0.59	-15.29	3.00	10.02	4.07	-1.12 2.95
	40	0.89	0.27	-15.36	3.00	10.01	0.70	-1.19 -0.49	-15.55	3.00	10.02	4.07	-1.37 2.70

Sample Calculation:

PSD: Power Spectral Density

PSD (Conducted) Result = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Conversion Factor


PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

RBW Conversion Factor = $10 \times \log(500 \text{ kHz} / 470 \text{ kHz})$

Maximum Power Spectral Density


11ax-20(OFDMA), 52-tone RU

5180 MHz

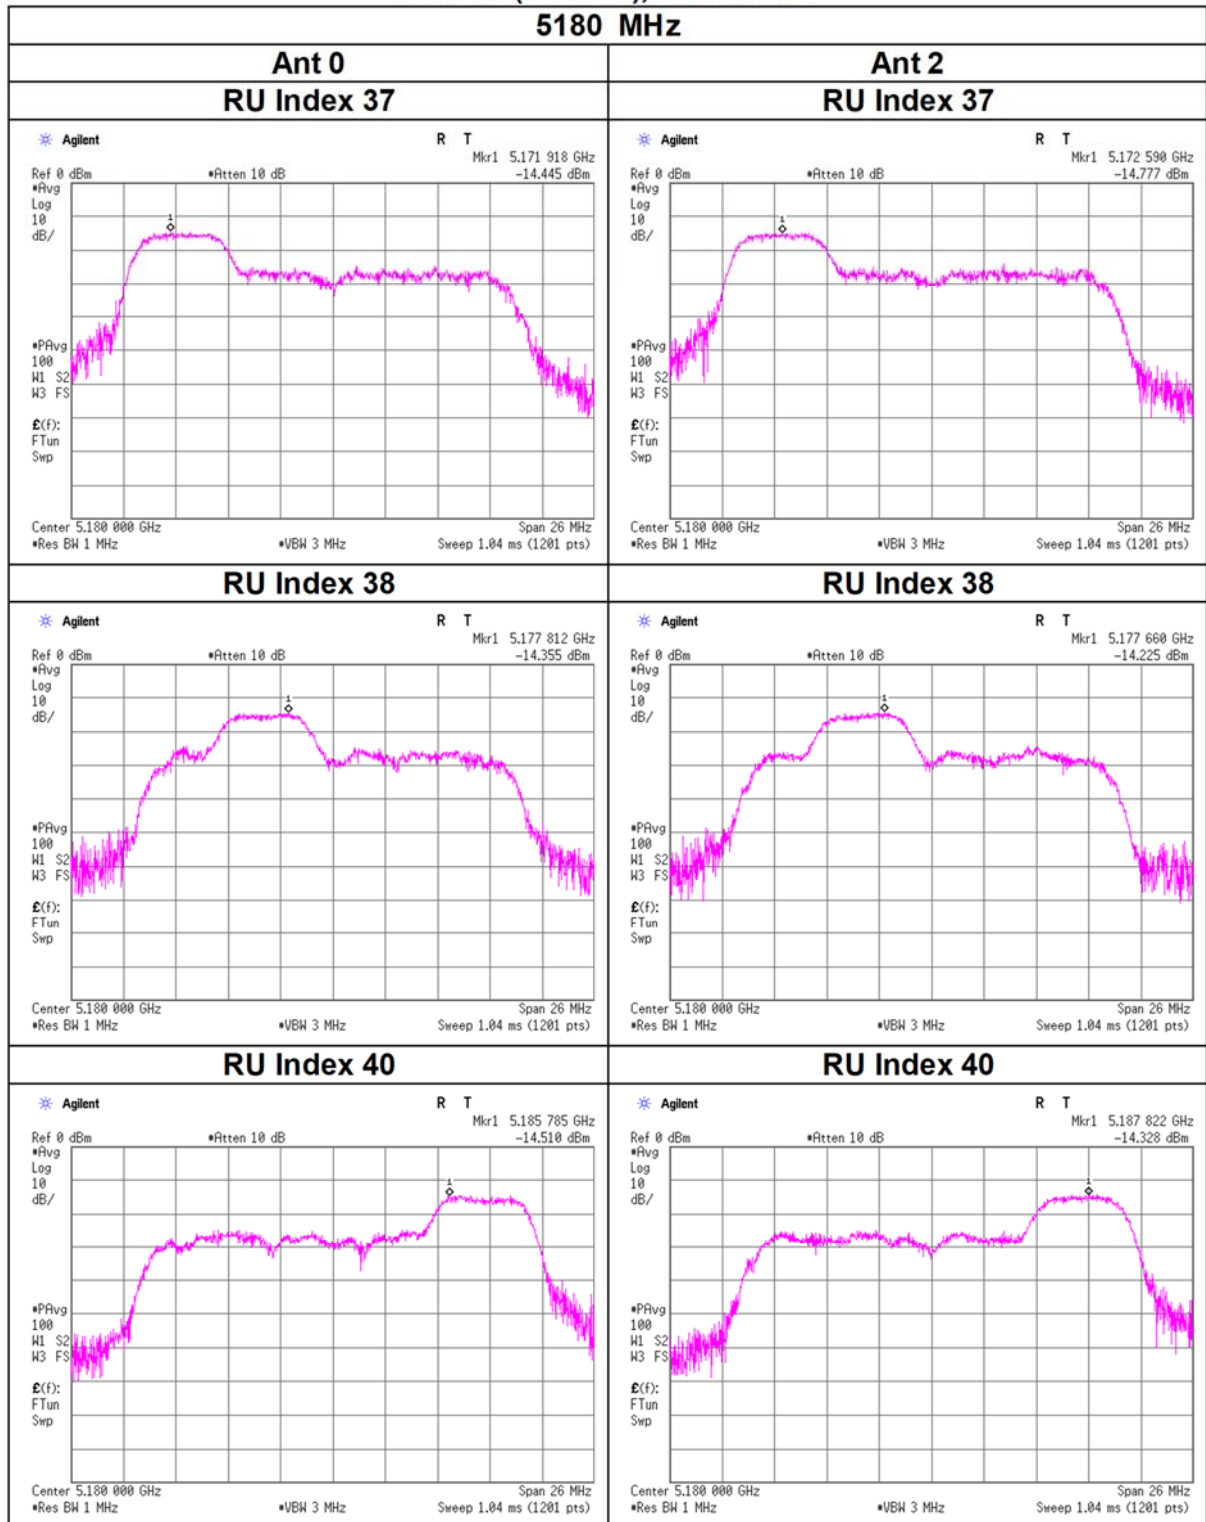


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU

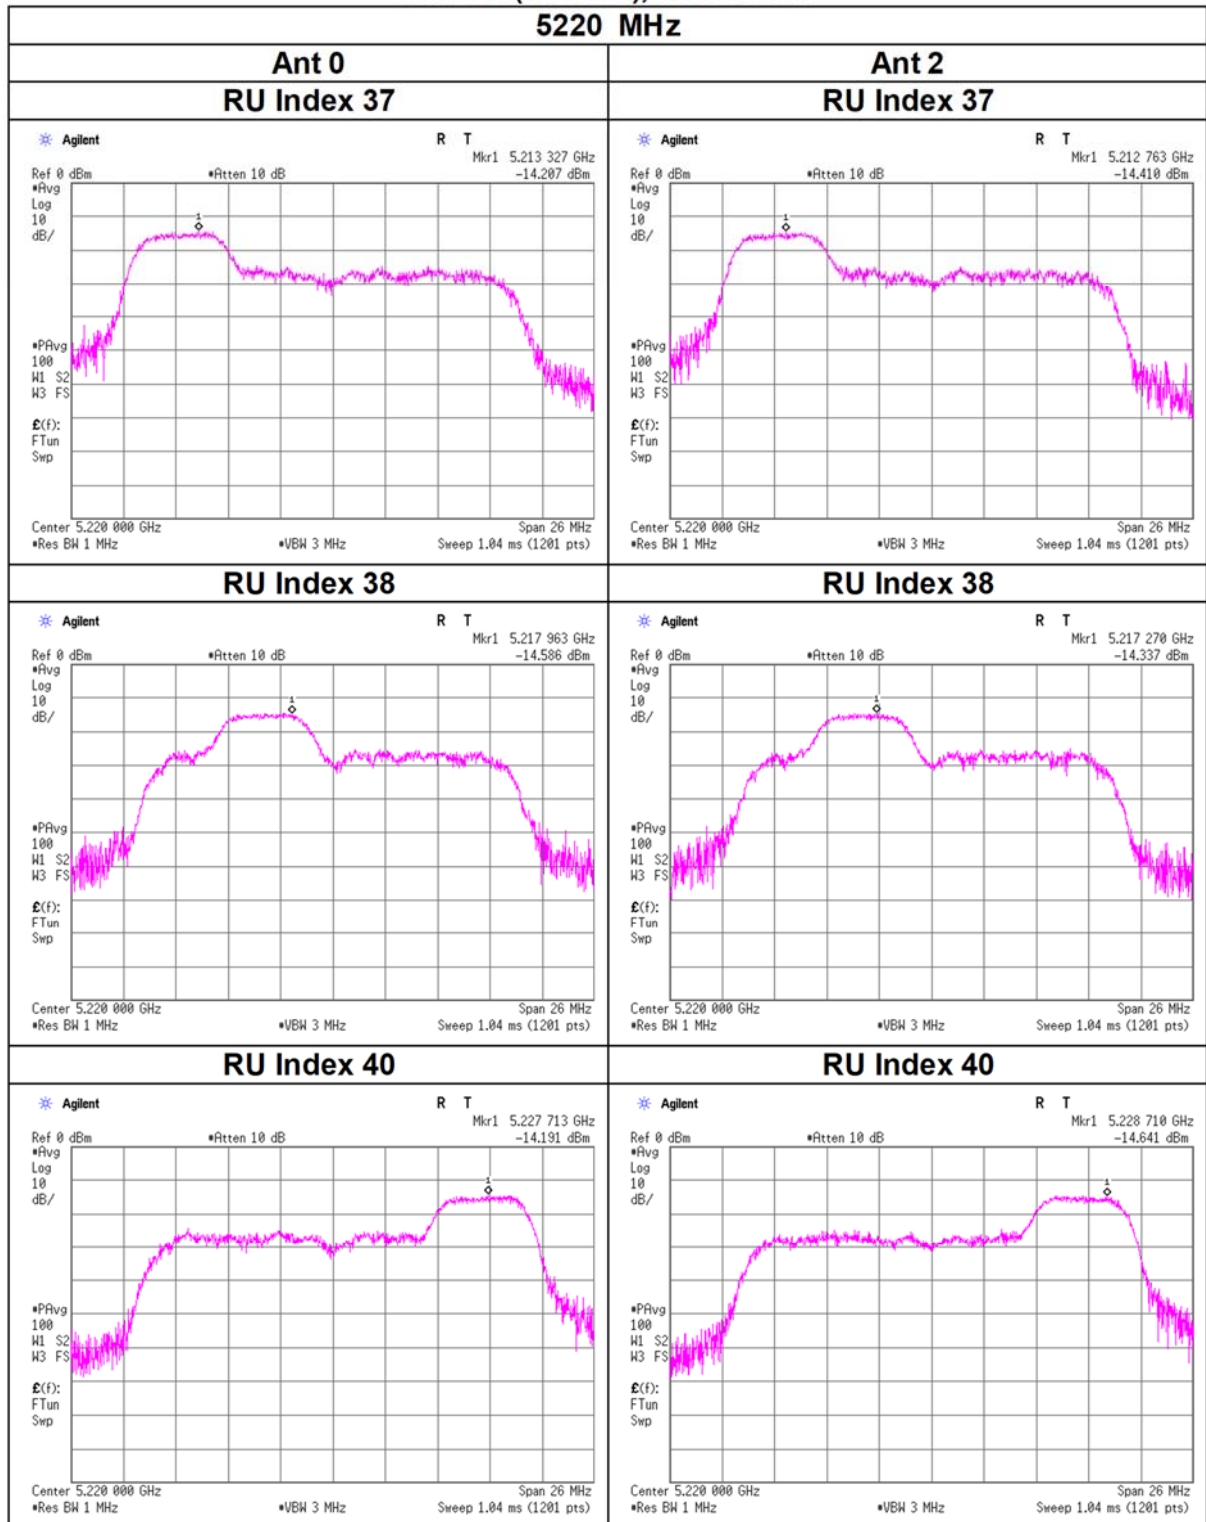

Maximum Power Spectral Density


11ax-20(OFDMA), 52-tone RU

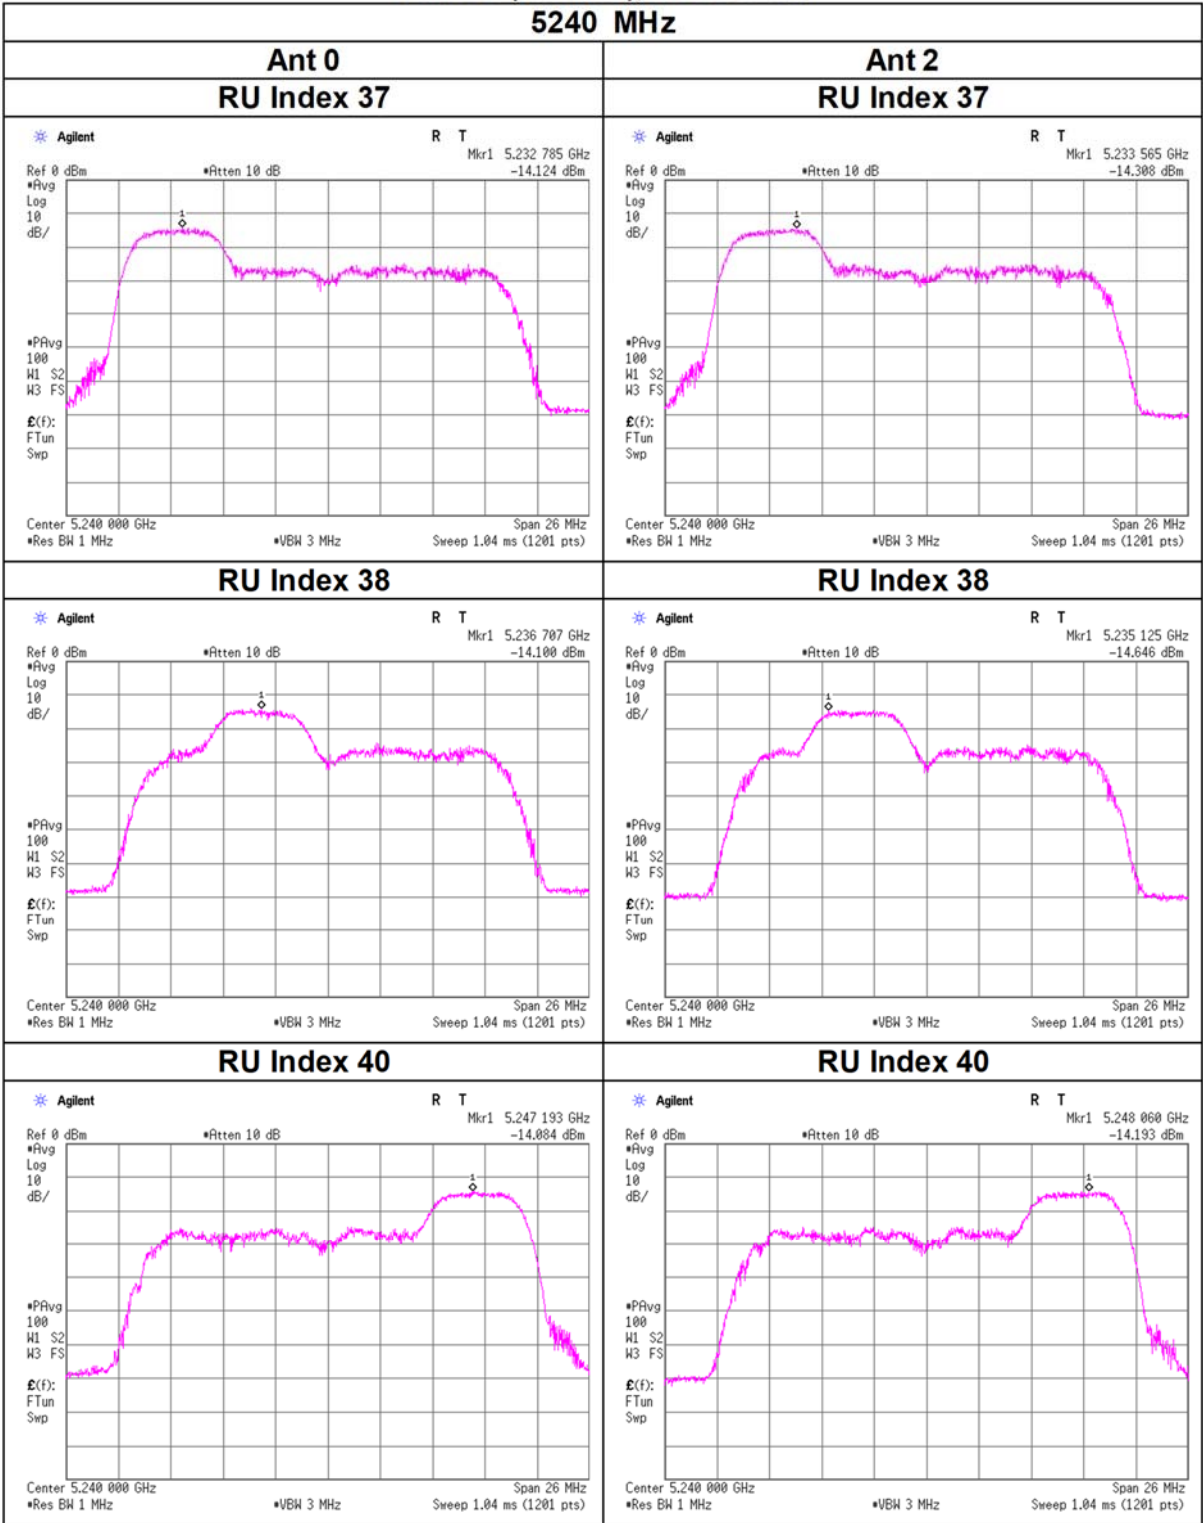

Maximum Power Spectral Density


11ax-20(OFDMA), 52-tone RU

5260 MHz

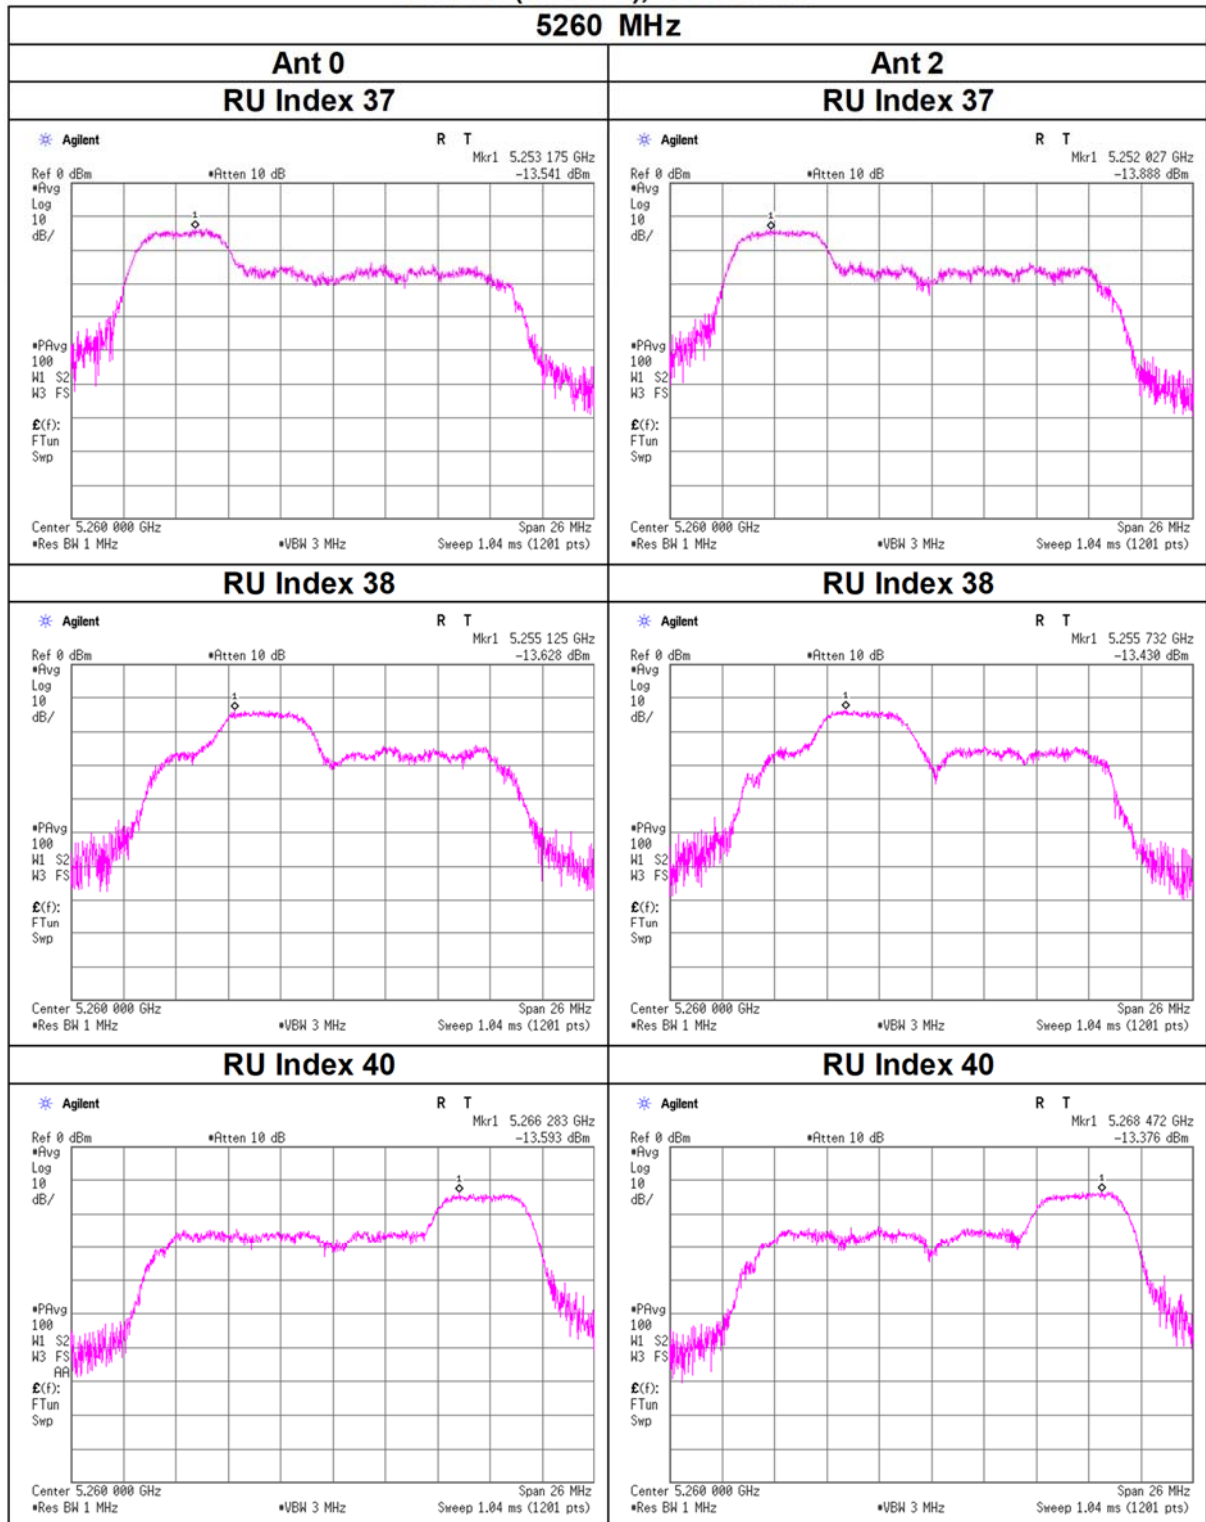


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU

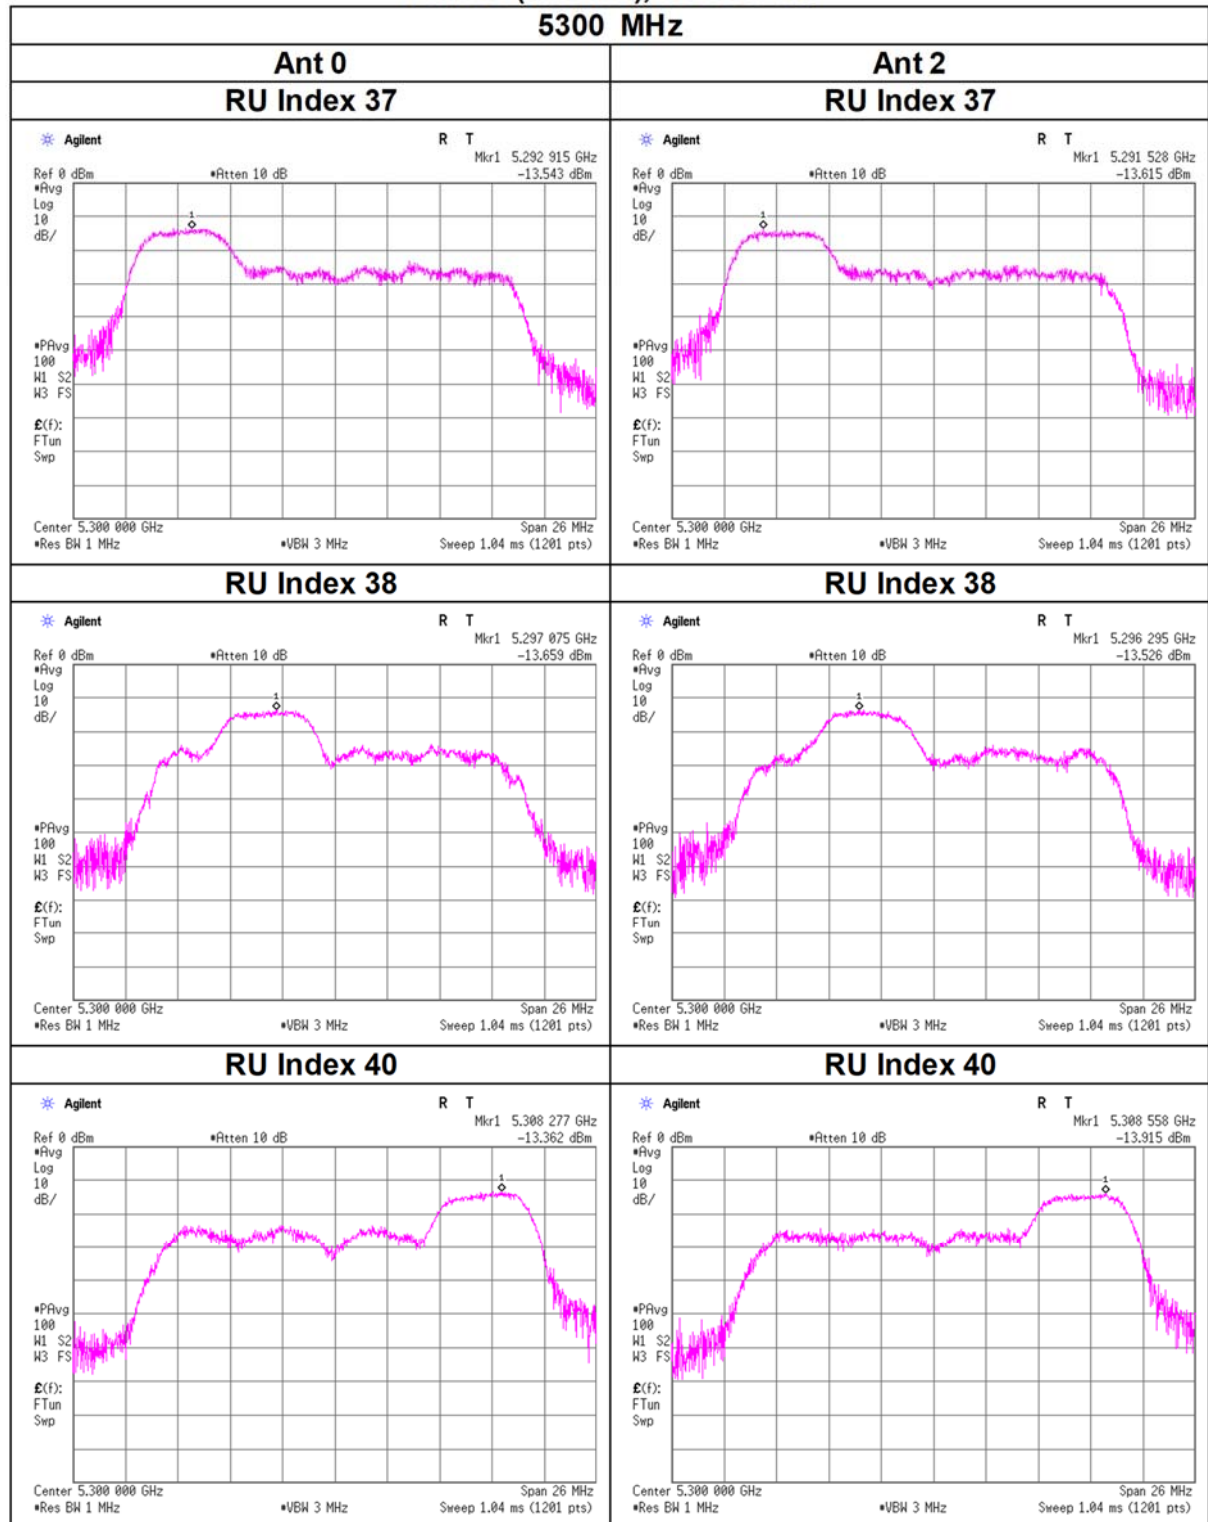


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU

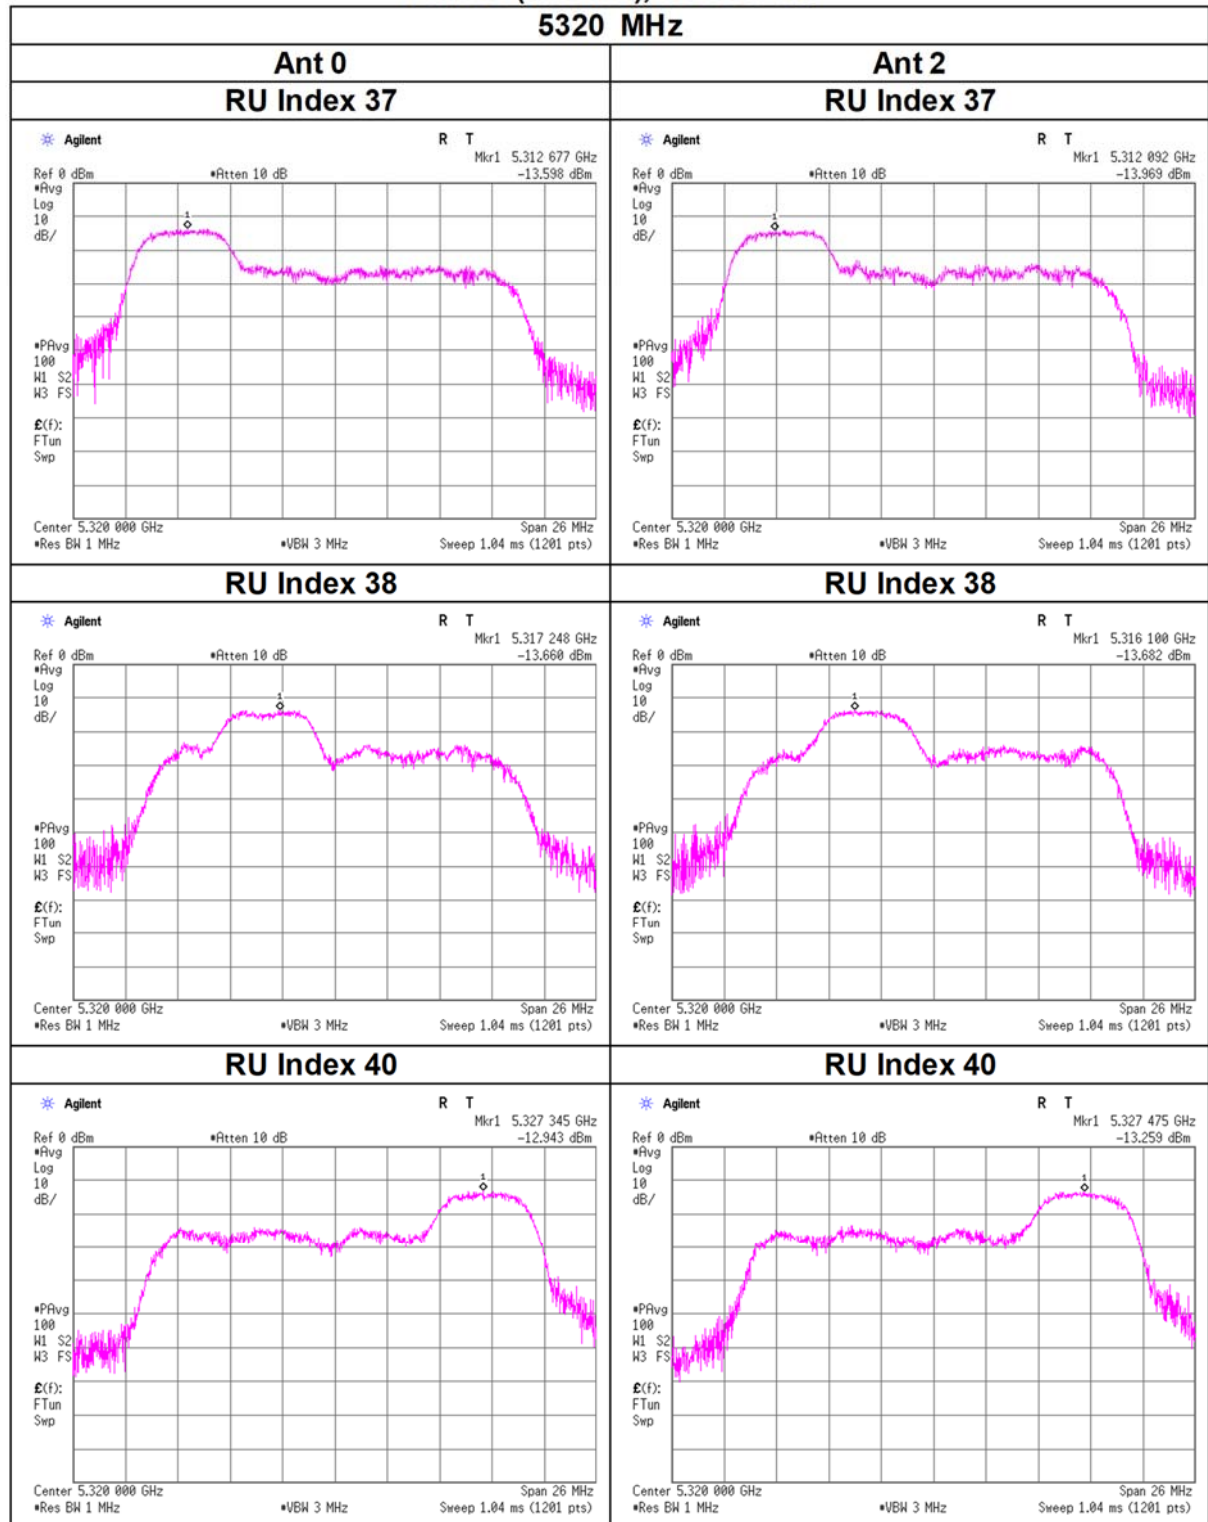


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU

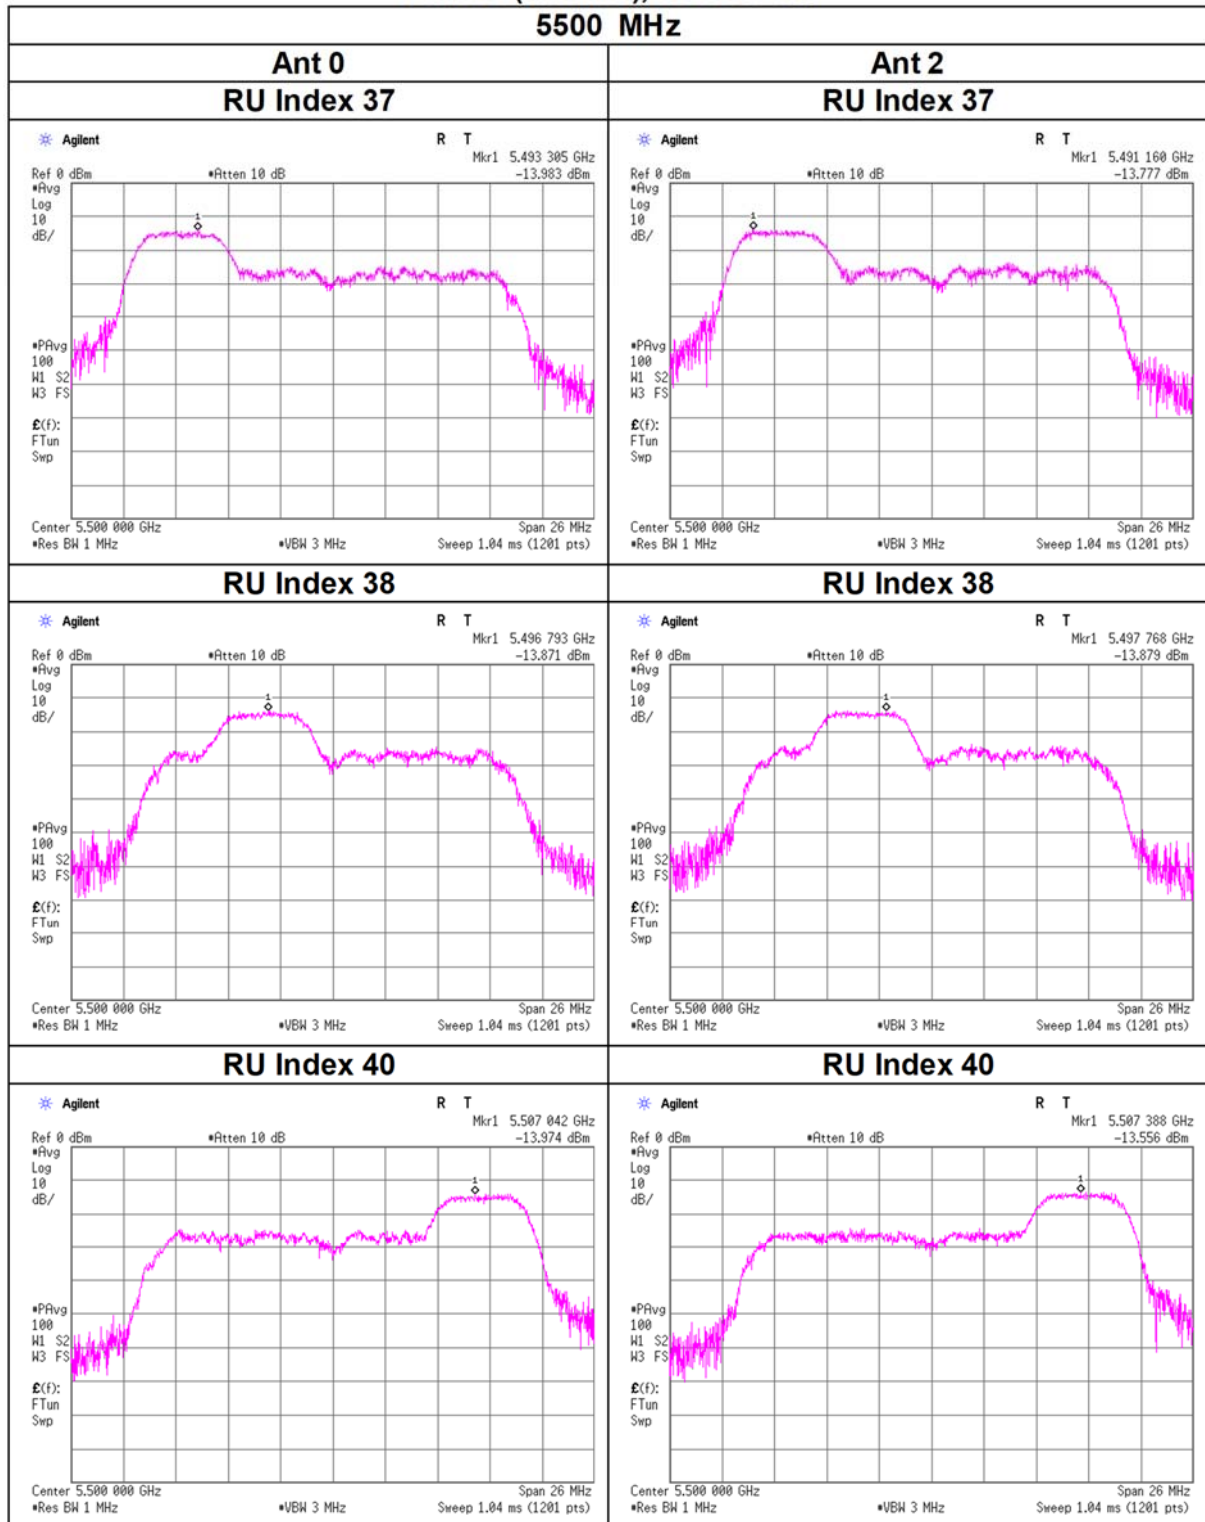


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU

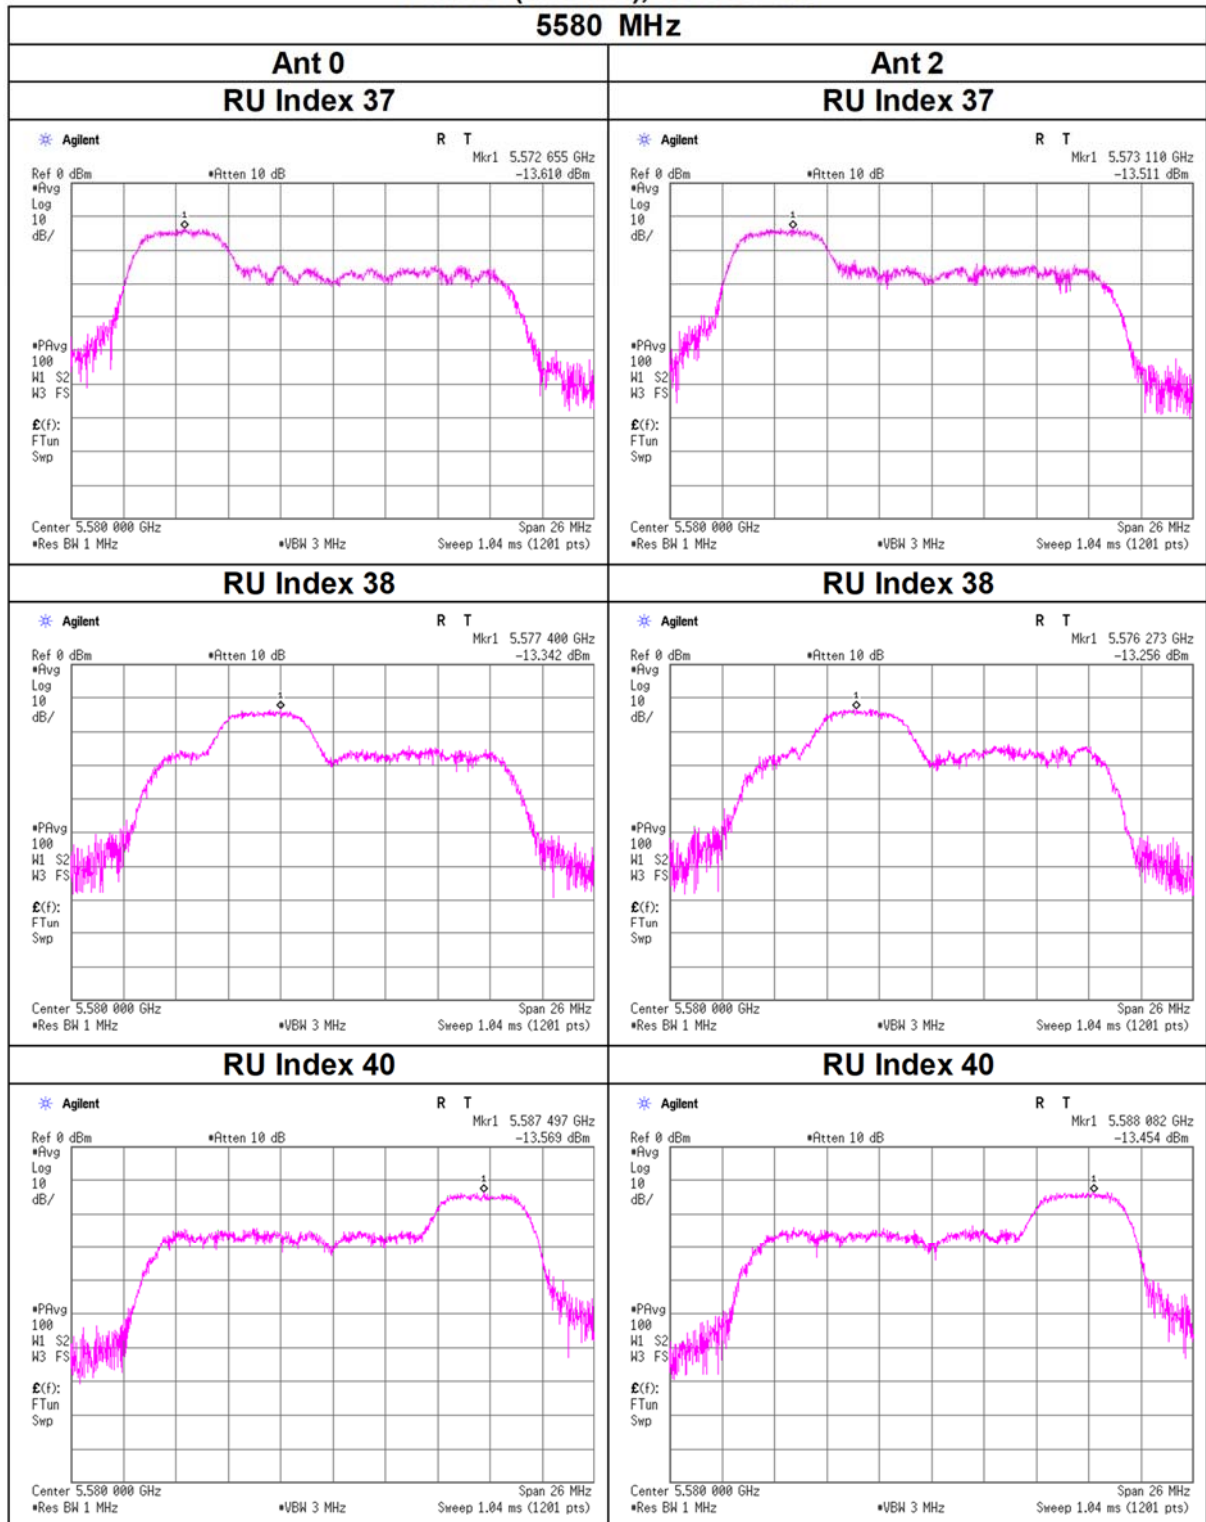


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU

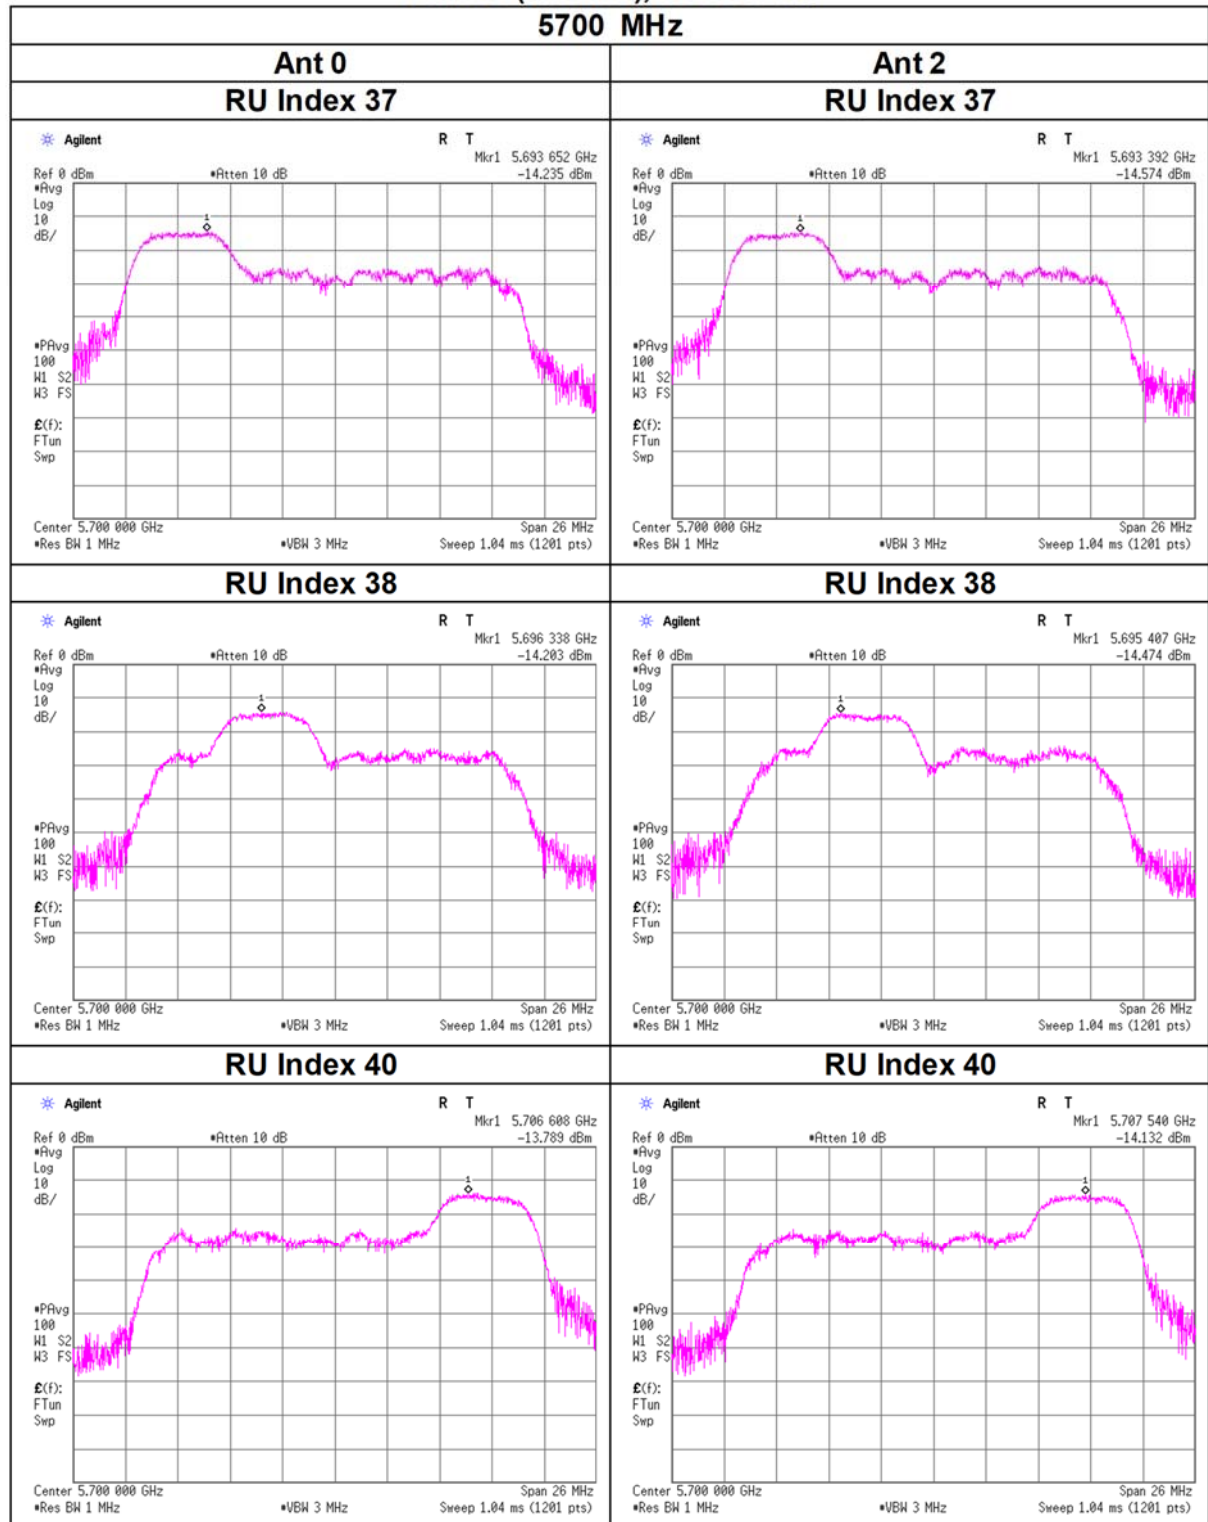


Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU

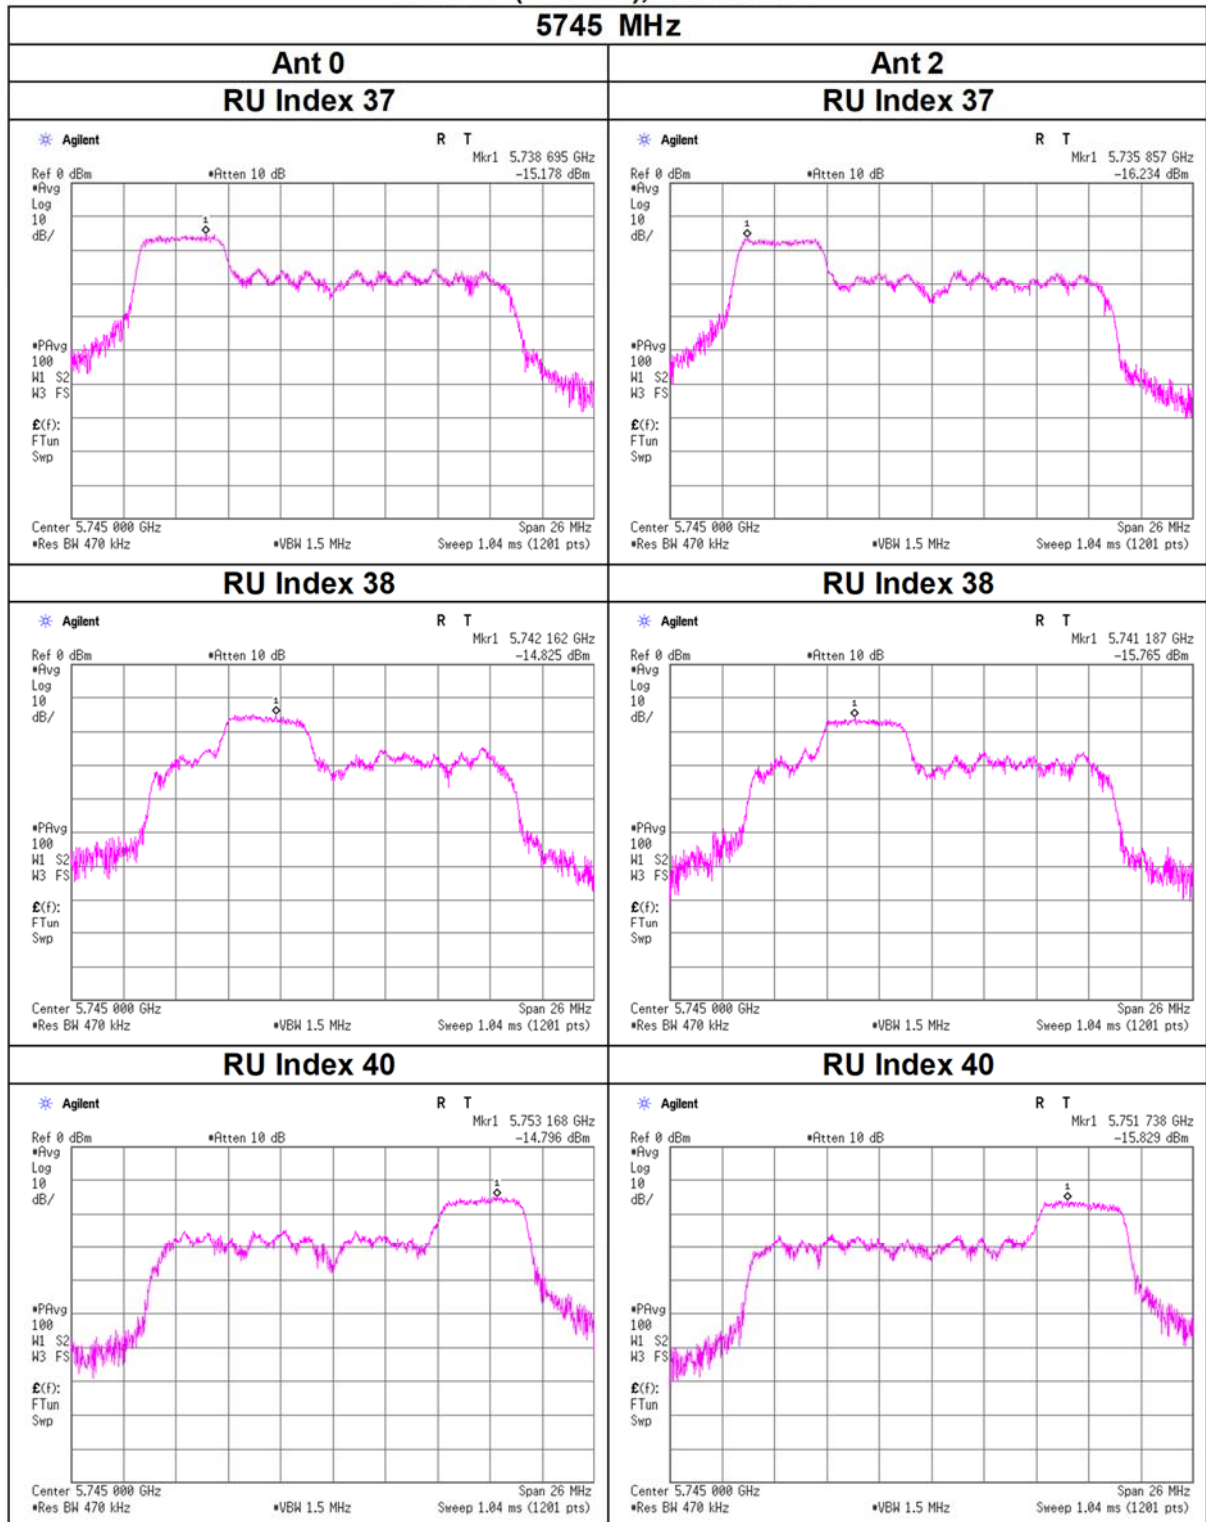

Maximum Power Spectral Density


11ax-20(OFDMA), 52-tone RU
5785 MHz

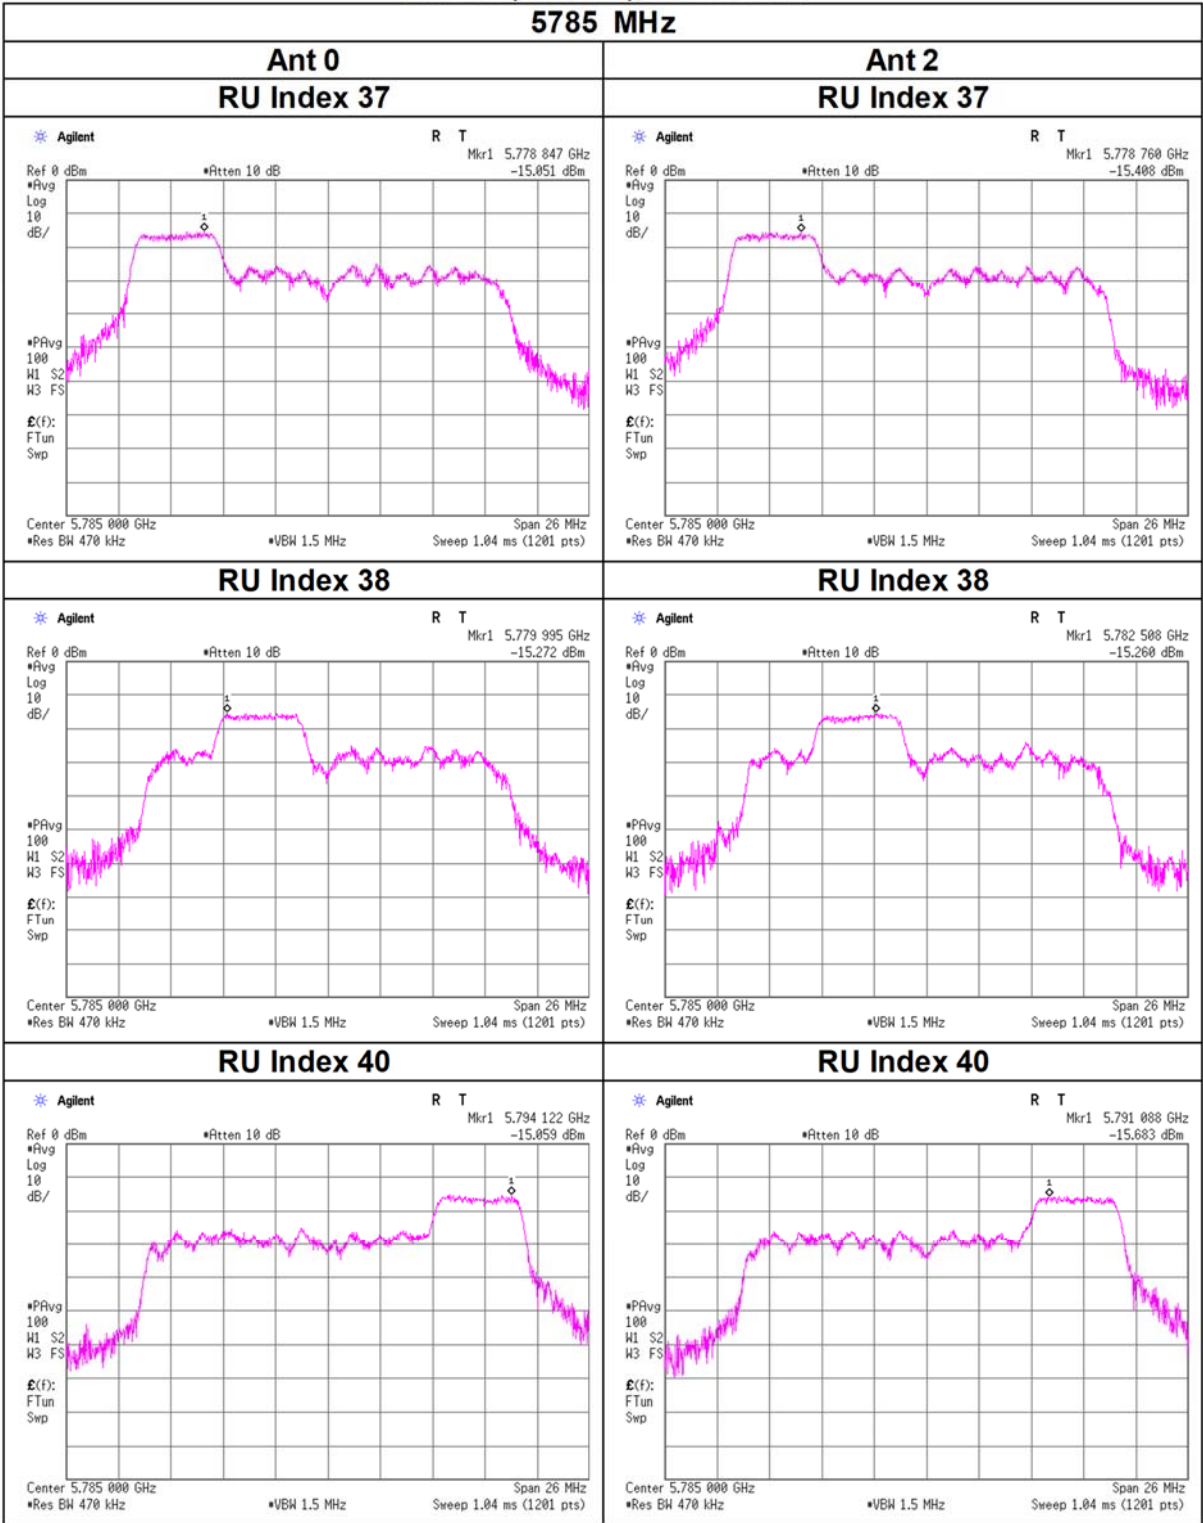

Maximum Power Spectral Density

11ax-20(OFDMA), 52-tone RU

5825 MHz

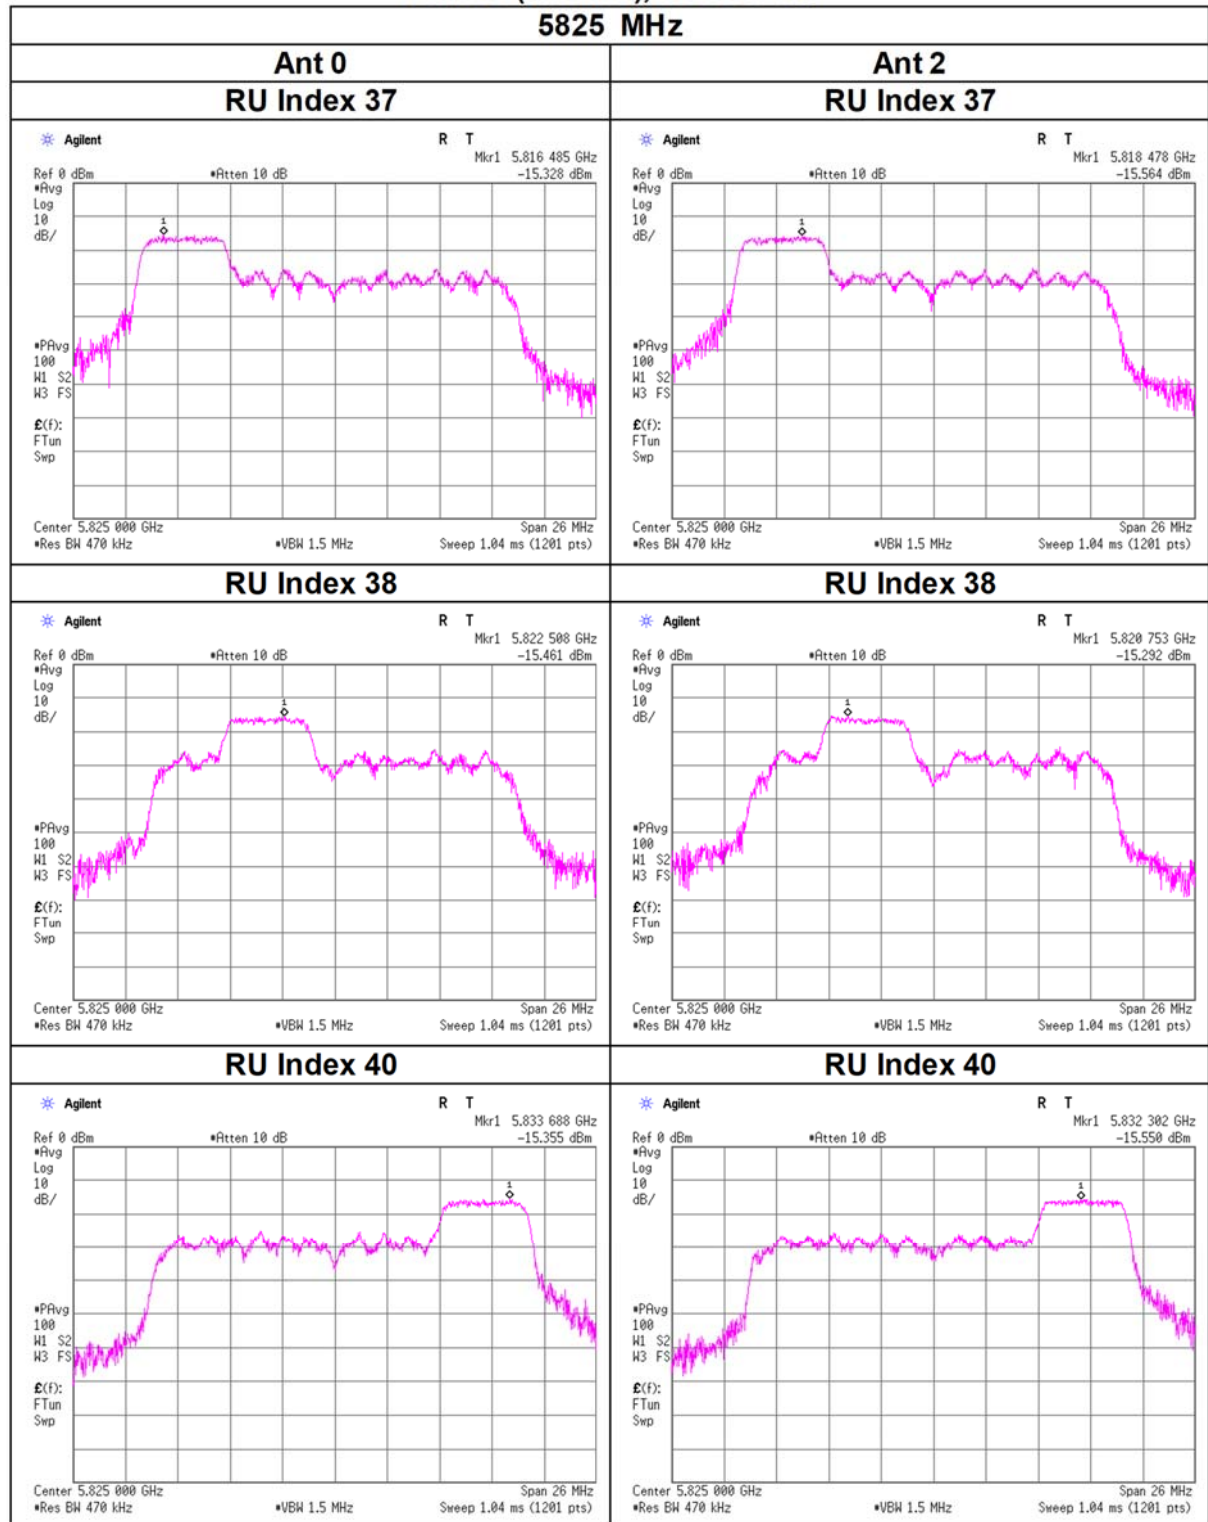

Maximum Power Spectral Density

Test place Shonan EMC Lab. No.1 Measurement Room
Date February 26, 2024
Temperature / Humidity 22 deg. C / 37 % RH
Engineer Kazuya Noda
Mode Tx

Ant 0 + Ant 2 11ax-20(OFDMA)(SDM), 106-tone RU Applied limit: 15.407, Client

Tested Frequency [MHz]	RU Index	PSD (Cond.)							PSD (e.i.r.p.)						
		Antenna			Result [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]		Antenna			Result [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]	
		Ant 0 [mW/MHz]	Ant 2 [mW/MHz]	Sum [mW/MHz]					Ant 0 [mW/MHz]	Ant 2 [mW/MHz]	Sum [mW/MHz]				
5180	53	0.88	0.93	1.81	2.58	11.00	8.42		1.03	2.38	3.41	5.32	17.00	11.68	
	54	0.91	0.87	1.78	2.51	11.00	8.49		1.07	2.21	3.29	5.17	17.00	11.83	
5220	53	0.93	0.88	1.81	2.58	11.00	8.42		1.09	2.24	3.34	5.23	17.00	11.77	
	54	0.93	0.97	1.90	2.79	11.00	8.21		1.10	2.47	3.57	5.52	17.00	11.48	
5240	53	1.00	1.07	2.07	3.16	11.00	7.84		1.17	2.74	3.91	5.92	17.00	11.08	
	54	1.02	1.13	2.15	3.33	11.00	7.67		1.20	2.89	4.09	6.12	17.00	10.88	
5260	53	1.01	1.10	2.11	3.24	11.00	7.76		1.18	2.81	3.99	6.01	17.00	10.99	
	54	1.04	1.06	2.10	3.22	11.00	7.78		1.22	2.71	3.93	5.94	17.00	11.06	
5300	53	1.32	0.87	2.19	3.40	11.00	7.60		1.55	2.22	3.77	5.76	17.00	11.24	
	54	1.14	0.93	2.07	3.16	11.00	7.84		1.34	2.37	3.71	5.69	17.00	11.31	
5320	53	1.05	1.04	2.09	3.19	11.00	7.81		1.23	2.65	3.88	5.89	17.00	11.11	
	54	1.08	1.07	2.14	3.31	11.00	7.69		1.26	2.72	3.98	6.00	17.00	11.00	

Tested Frequency [MHz]	RU Index	Ant 0								Ant 2							
		Duty Factor [dB]	RBW Conversion Factor [dB]	PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result Cond. [dBm/MHz]	PSD Result e.i.r.p. [dBm/MHz]	PSD Reading [dBm/MHz]	Cable Loss [dB]	Atten. Loss [dB]	Antenna Gain [dBi]	PSD Result Cond. [dBm/MHz]	PSD Result e.i.r.p. [dBm/MHz]		
5180	53	1.12	-	-14.64	2.95	10.01	0.70	-0.56	0.14	-14.39	2.95	10.00	4.07	-0.31	3.76		
	54	1.12	-	-14.48	2.95	10.01	0.70	-0.39	0.31	-14.69	2.95	10.00	4.07	-0.62	3.45		
5220	53	1.12	-	-14.39	2.95	10.01	0.70	-0.31	0.39	-14.64	2.95	10.00	4.07	-0.56	3.51		
	54	1.12	-	-14.38	2.95	10.01	0.70	-0.30	0.40	-14.22	2.95	10.00	4.07	-0.14	3.93		
5240	53	1.12	-	-14.10	2.95	10.01	0.70	-0.01	0.69	-13.77	2.95	10.00	4.07	0.30	4.37		
	54	1.12	-	-13.99	2.95	10.01	0.70	0.10	0.80	-13.54	2.95	10.00	4.07	0.53	4.60		
5260	53	1.12	-	-14.06	2.95	10.01	0.70	0.03	0.73	-13.67	2.96	10.00	4.07	0.42	4.49		
	54	1.12	-	-13.93	2.95	10.01	0.70	0.16	0.86	-13.83	2.96	10.00	4.07	0.26	4.33		
5300	53	1.12	-	-12.90	2.96	10.01	0.70	1.20	1.90	-14.69	2.96	10.00	4.07	-0.60	3.47		
	54	1.12	-	-13.52	2.96	10.01	0.70	0.58	1.28	-14.41	2.96	10.00	4.07	-0.33	3.74		
5320	53	1.12	-	-13.90	2.96	10.01	0.70	0.20	0.90	-13.92	2.96	10.00	4.07	0.17	4.24		
	54	1.12	-	-13.78	2.96	10.01	0.70	0.32	1.02	-13.81	2.96	10.00	4.07	0.28	4.35		

Sample Calculation:

PSD: Power Spectral Density

PSD (Conducted) Result = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Conversion Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

Maximum Power Spectral Density

Ant 0 + Ant 2 11ax-20(OFDMA)(SDM), 106-tone RU Applied limit: 15.407, Client

Tested Frequency [MHz]	RU Index	PSD (Cond.)						PSD (e.i.r.p.)					
		Antenna			Result	Limit	Margin	Antenna			Result	Limit	Margin
		Ant 0 [mW/MHz]	Ant 2 [mW/MHz]	Sum [mW/MHz]				Ant 0 [mW/MHz]	Ant 2 [mW/MHz]	Sum [mW/MHz]			
5500	53	0.96	0.93	1.89	2.76	11.00	8.24	1.13	2.37	3.50	5.44	17.00	11.56
	54	0.95	1.01	1.96	2.92	11.00	8.08	1.12	2.57	3.69	5.67	17.00	11.33
5580	53	0.95	1.06	2.01	3.04	11.00	7.96	1.12	2.71	3.83	5.83	17.00	11.17
	54	0.90	1.10	1.99	2.99	11.00	8.01	1.05	2.80	3.85	5.86	17.00	11.14
5700	53	0.92	0.86	1.78	2.50	11.00	8.50	1.08	2.19	3.27	5.15	17.00	11.85
	54	0.96	0.91	1.87	2.73	11.00	8.27	1.13	2.33	3.46	5.39	17.00	11.61
5745	53	0.40	0.33	0.74	-1.33	30.00	31.33	0.48	0.85	1.32	1.21	36.00	34.79
	54	0.40	0.35	0.75	-1.24	30.00	31.24	0.48	0.88	1.36	1.34	36.00	34.66
5785	53	0.39	0.40	0.79	-1.04	30.00	31.04	0.46	1.02	1.48	1.69	36.00	34.31
	54	0.46	0.39	0.85	-0.69	30.00	30.69	0.54	1.00	1.54	1.88	36.00	34.12
5825	53	0.41	0.41	0.83	-0.84	30.00	30.84	0.48	1.05	1.54	1.87	36.00	34.13
	54	0.41	0.41	0.82	-0.84	30.00	30.84	0.49	1.04	1.53	1.85	36.00	34.15

Ant 0										Ant 2						
Tested Frequency	RU Index	Duty Factor	RBW Conversion Factor	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	e.i.r.p.	PSD Reading	Cable Loss	Atten. Loss	Antenna Gain	PSD Result Cond.	e.i.r.p.	
[MHz]		[dB]	[dB]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	[dBm/MHz]	[dB]	[dB]	[dBi]	[dBm/MHz]	[dBm/MHz]	
5500	53	1.12	-	-14.28	2.98	10.01	0.70	-0.17	0.53	-14.44	2.98	10.01	4.07	-0.32	3.75	
	54	1.12	-	-14.32	2.98	10.01	0.70	-0.21	0.49	-14.09	2.98	10.01	4.07	0.03	4.10	
5580	53	1.12	-	-14.34	2.98	10.01	0.70	-0.22	0.48	-13.85	2.98	10.01	4.07	0.27	4.34	
	54	1.12	-	-14.59	2.98	10.01	0.70	-0.48	0.22	-13.72	2.98	10.01	4.07	0.40	4.47	
5700	53	1.12	-	-14.47	2.99	10.01	0.70	-0.35	0.35	-14.80	2.99	10.01	4.07	-0.67	3.40	
	54	1.12	-	-14.29	2.99	10.01	0.70	-0.17	0.53	-14.53	2.99	10.01	4.07	-0.41	3.66	
5745	53	1.12	0.27	-18.33	3.00	10.01	0.70	-3.93	-3.23	-19.21	3.00	10.02	4.07	-4.80	-0.73	
	54	1.12	0.27	-18.33	3.00	10.01	0.70	-3.93	-3.23	-19.02	3.00	10.02	4.07	-4.60	-0.53	
5785	53	1.12	0.27	-18.52	3.00	10.01	0.70	-4.12	-3.42	-18.39	3.00	10.02	4.07	-3.98	0.09	
	54	1.12	0.27	-17.74	3.00	10.01	0.70	-3.34	-2.64	-18.50	3.00	10.02	4.07	-4.09	-0.02	
5825	53	1.12	0.27	-18.25	3.00	10.01	0.70	-3.85	-3.15	-18.26	3.00	10.02	4.07	-3.84	0.23	
	54	1.12	0.27	-18.23	3.00	10.01	0.70	-3.83	-3.13	-18.30	3.00	10.02	4.07	-3.88	0.19	

Sample Calculation:

PSD: Power Spectral Density


PSD (Conducted) Result = Reading + Cable Loss + Atten. Loss + Duty Factor + RBW Conversion Factor

PSD (e.i.r.p.) Result = PSD (Conducted) Result + Antenna Gain

RBW Conversion Factor = $10 \times \log (500 \text{ [kHz]} / 470 \text{ [kHz]})$


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU

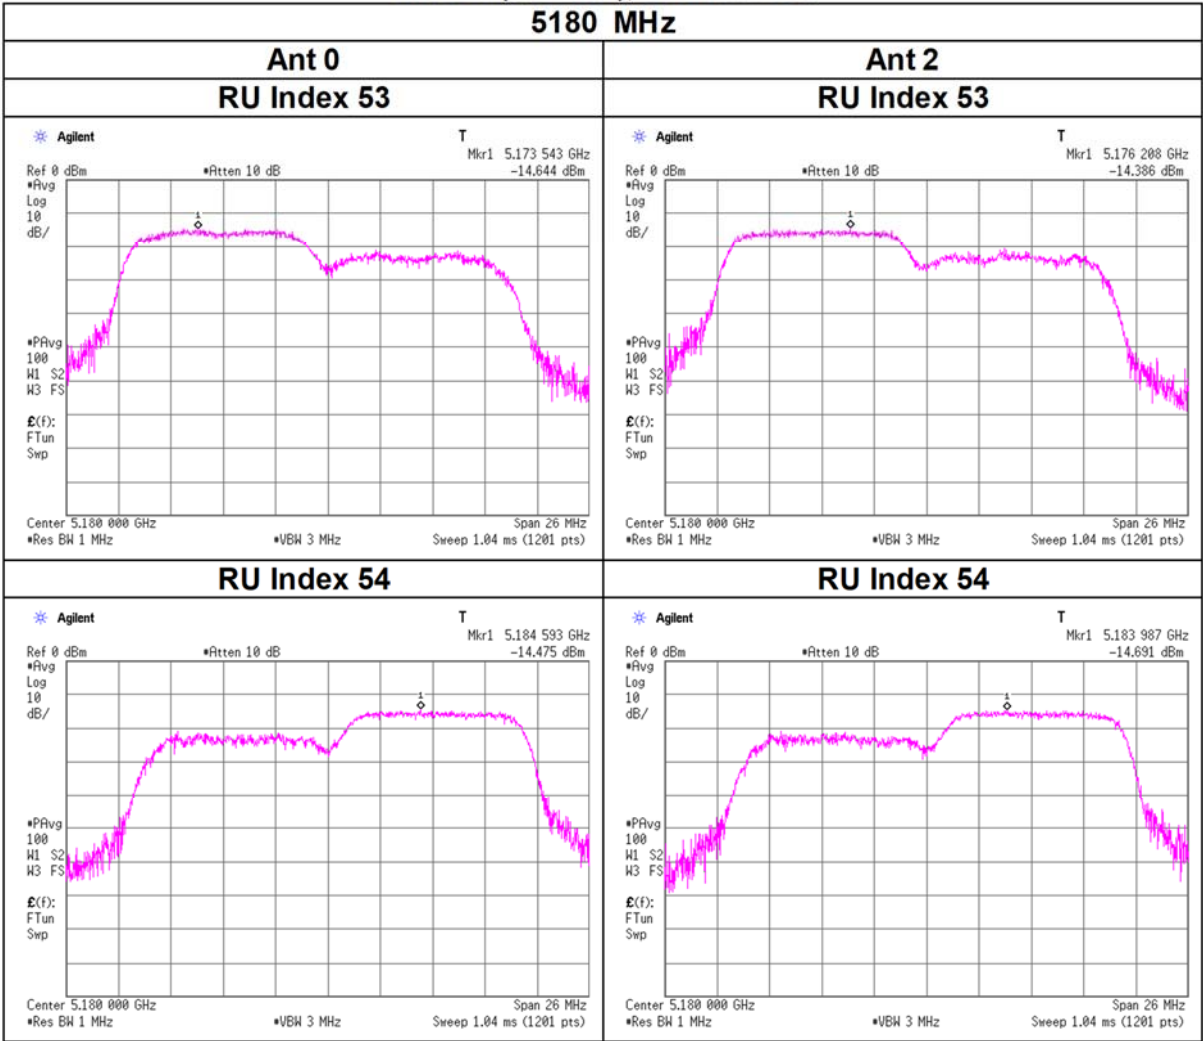


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU

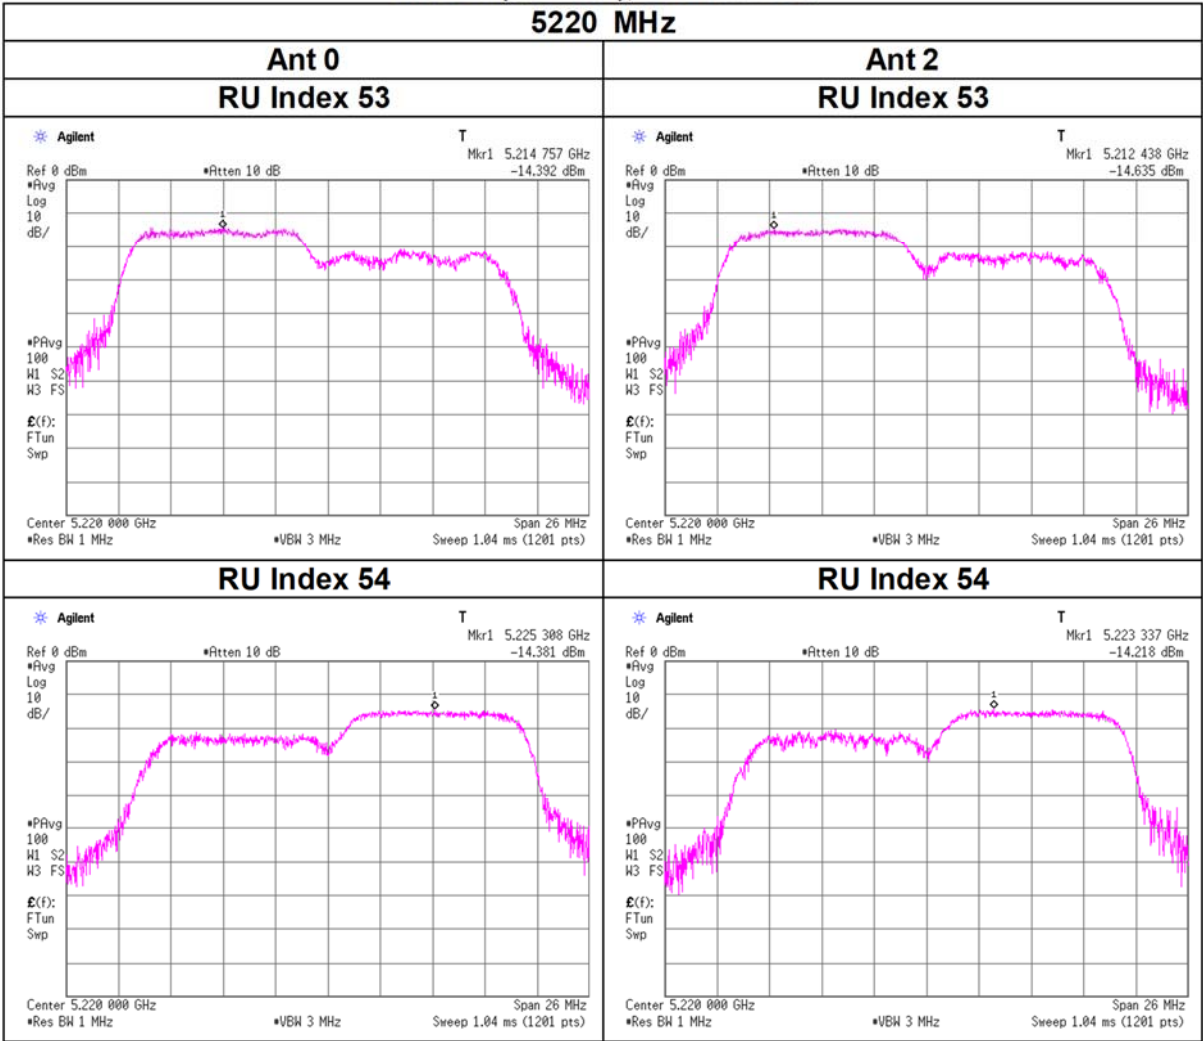


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU

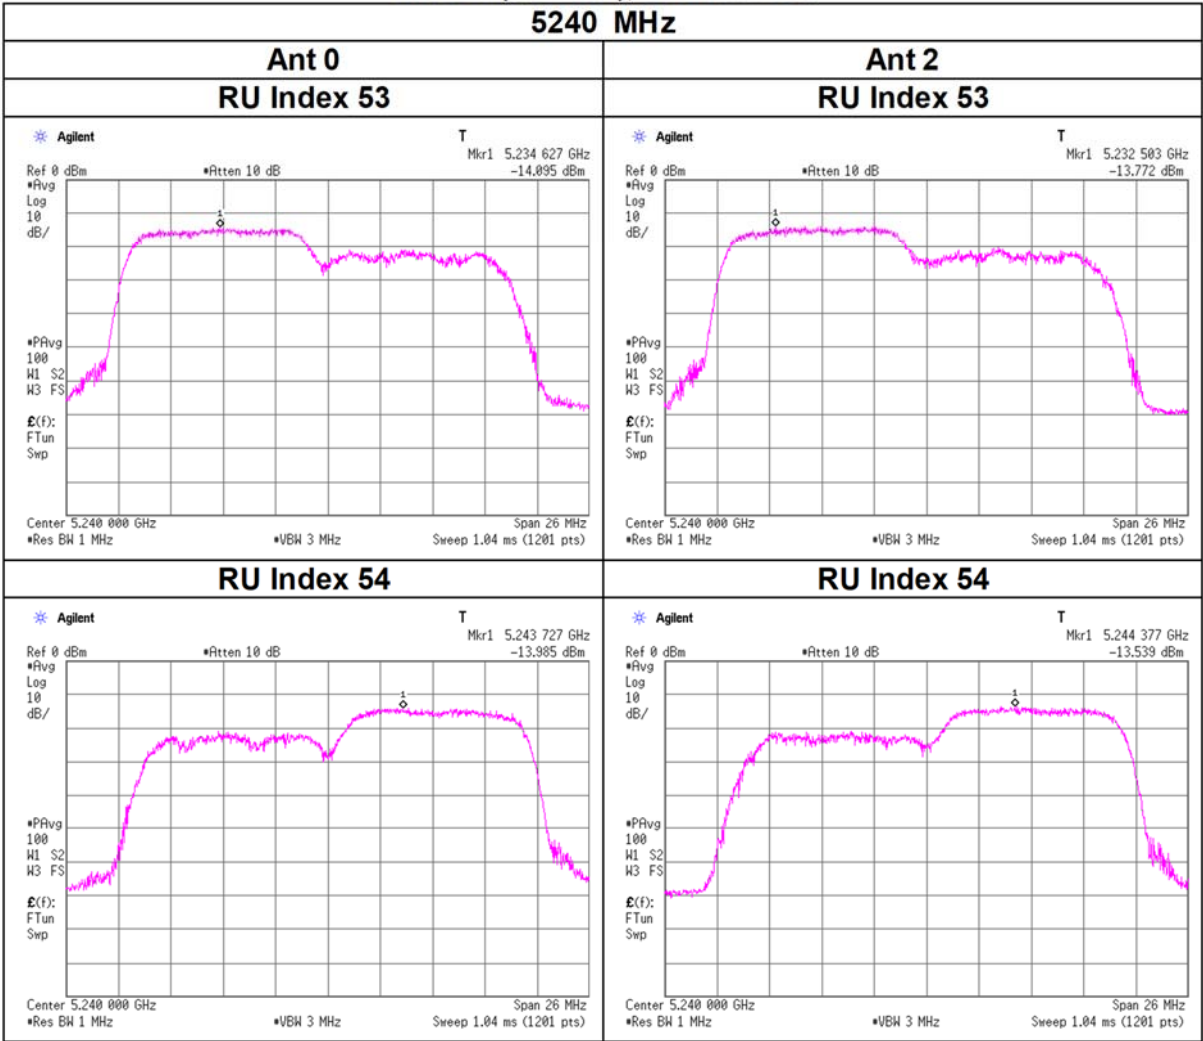


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU

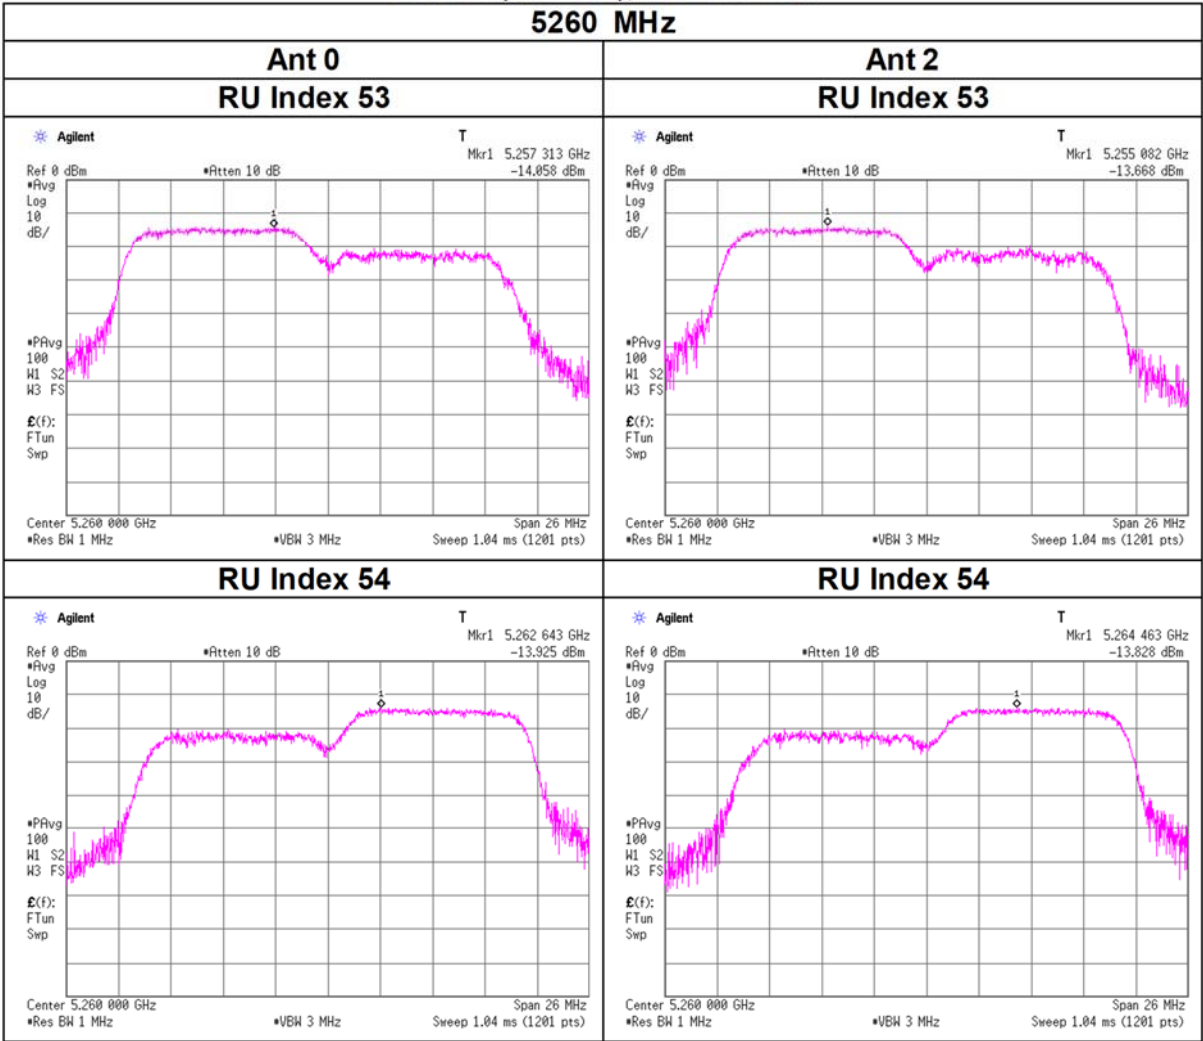


Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU

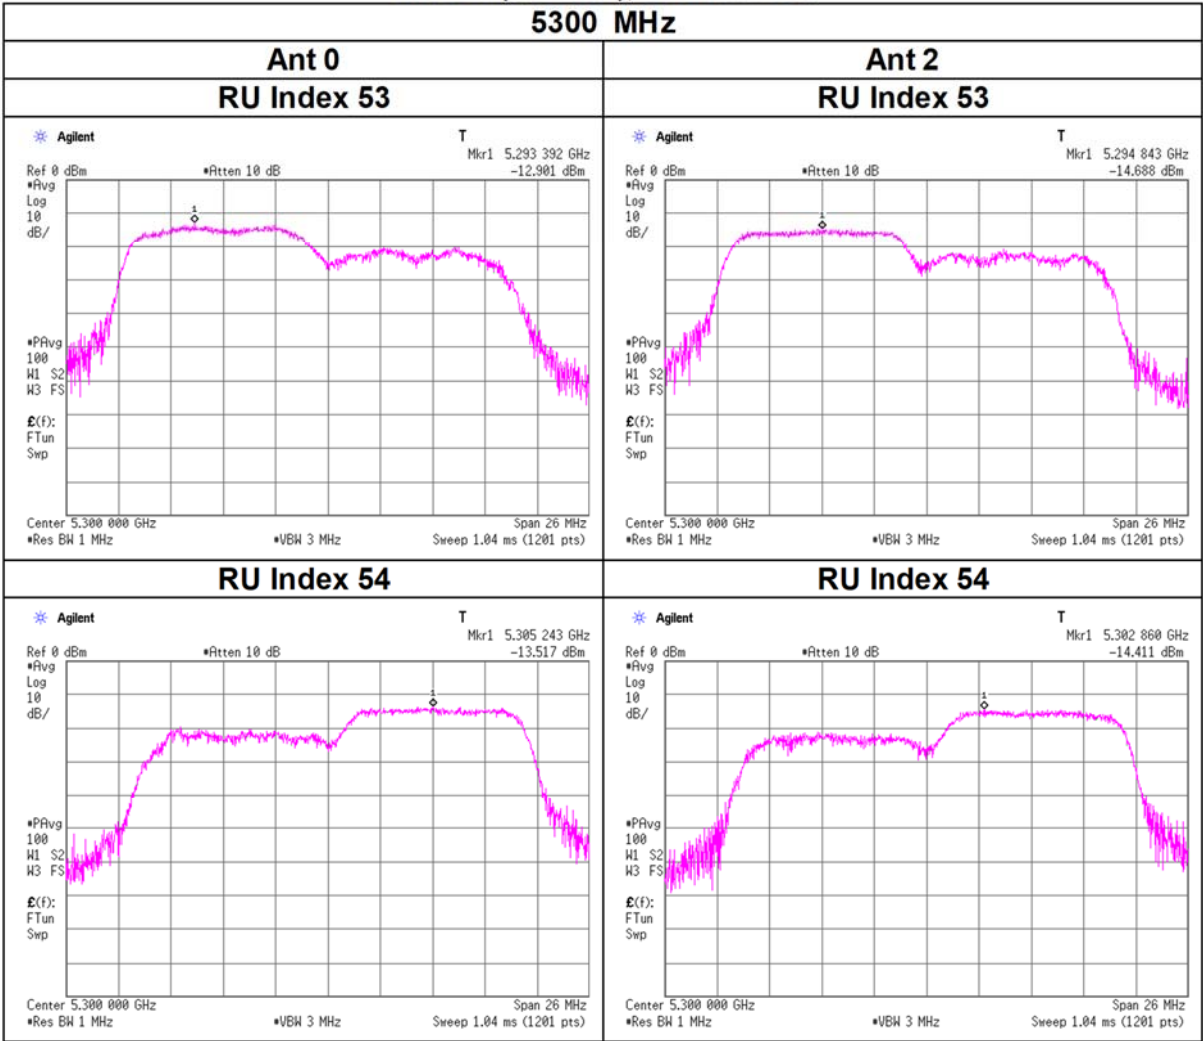

Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU

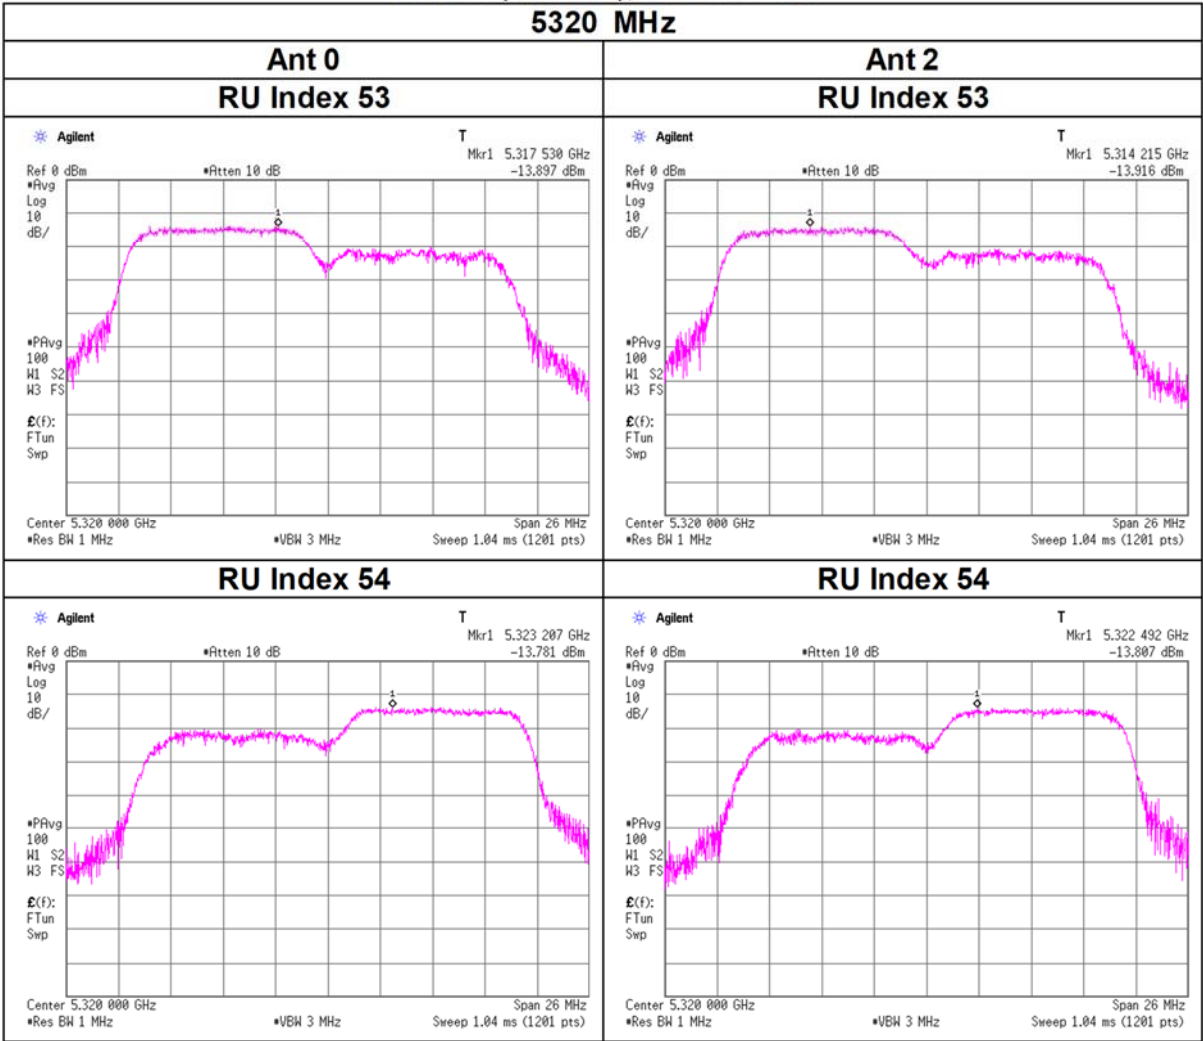

Maximum Power Spectral Density

11ax-20(OFDMA), 106-tone RU

