


# RF EXPOSURE REPORT

Product Name: Super charger  
FCC ID: 2A59PKP-SUPER7  
Trademark: Koo-Power  
Model Number: KP-Super7  
Prepared For: Shenzhen Huani electronics Co., Ltd  
Address: 3rd Floor, Building B, Jinkaijin Industrial Zone, Shilongzai, Shiyan, Bao'an, Shenzhen, GD, CN, 518108  
Manufacturer: Shenzhen Blue Times Technology Co.,Ltd  
Address: B Block, Taixinglong Technology Zone, Hezhou, Xixiang Town, BaoAn District, Shenzhen 518126, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinh Road, Xinqiao Street, Baoan District, Shenzhen China  
Sample Received Date: Mar. 22, 2022  
Sample tested Date: Mar. 22, 2022 to Mar. 29, 2022  
Issue Date: Mar. 29, 2022  
Report No.: CTB220329009RFX  
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310, 47 CFR§2.1091; KDB 680106 D01 RF Exposure Wireless Charging App v03r01  
Test Results: PASS  
Remark: This is wireless charger EMF report.

Compiled by:



Chen Zheng

Reviewed by:



Arron Liu

Approved by:



Bin Mei, Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table of Contents

	Page
1 . GENERAL INFORMATION	3
1.1 . Independent Operation Mode	3
1.2 . Test Supporting System	3
2 .LIST OF TEST AND MEASUREMENT INSTRUMENTS	4
2.1 . For conducted emission at the mains terminals test	4
3. METHOD OF MEASUREMENT	5
3. 1.Applicable Standard	5
4. TEST RESULT	5
4.1. Conducted Emission at the Mains Terminals Test	5
4.2. Equipment Approval Considerations:	6
4.3. E and H field Strength	6

# 1. GENERAL INFORMATION

## 1.1. Independent Operation Mode

The basic operation mode is:

1.1.1. wireless charger power: 15W

## 1.2. Test Supporting System

Input: AC 100-240V, 50/60Hz, 0.5A

Output: Type C & Lighting Cable: PD 5V/2.4A, 9V/2.22A, 12V/1.5A

2\*USB: DC 4.5V/5A, 5V/4.5A, 9V/2A, 12V/1.5A

Wireless:15W/10W/7.5W/5W

Battery capacity: 20000mAh/77Wh(Max.)

## 2.LIST OF TEST AND MEASUREMENT INSTRUMENTS

### 2.1. For conducted emission at the mains terminals test

Item	Equipment	Brand	Model No.	Frequency Range	Last calibration	Calibrated until
1	Broadband Field Meter	NARDA	NBM-550	-	2021.09.27	2022.08.05
2	Magnetic Field Meter	NARDA	ELT-400	1 – 400kHz	2021.09.27	2022.08.05
3	Magnetic Probe	NARDA	HF-3061	300kHz – 30MHz	2021.09.27	2022.08.05
4	Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	2021.09.27	2022.08.05
5	Broadband Field Meter	NARDA	NBM-550	-	2021.09.27	2022.08.05
6	Electric Field Meter	COMBINOV A	EFM 200	5Hz – 400kHz	2021.09.27	2022.08.05
7	E-Field Probe	NARDA	EF-0391	100kHz – 3GHz	2021.09.27	2022.08.05
8	E-Field Probe	NARDA	EF-6091	100MHz – 60GHz	2021.09.27	2022.08.05




### 3. METHOD OF MEASUREMENT

#### 3. 1.Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01: RF Exposure Wireless Charging Apps v 03r01.

### 4. TEST RESULT

#### 4.1. Conducted Emission at the Mains Terminals Test

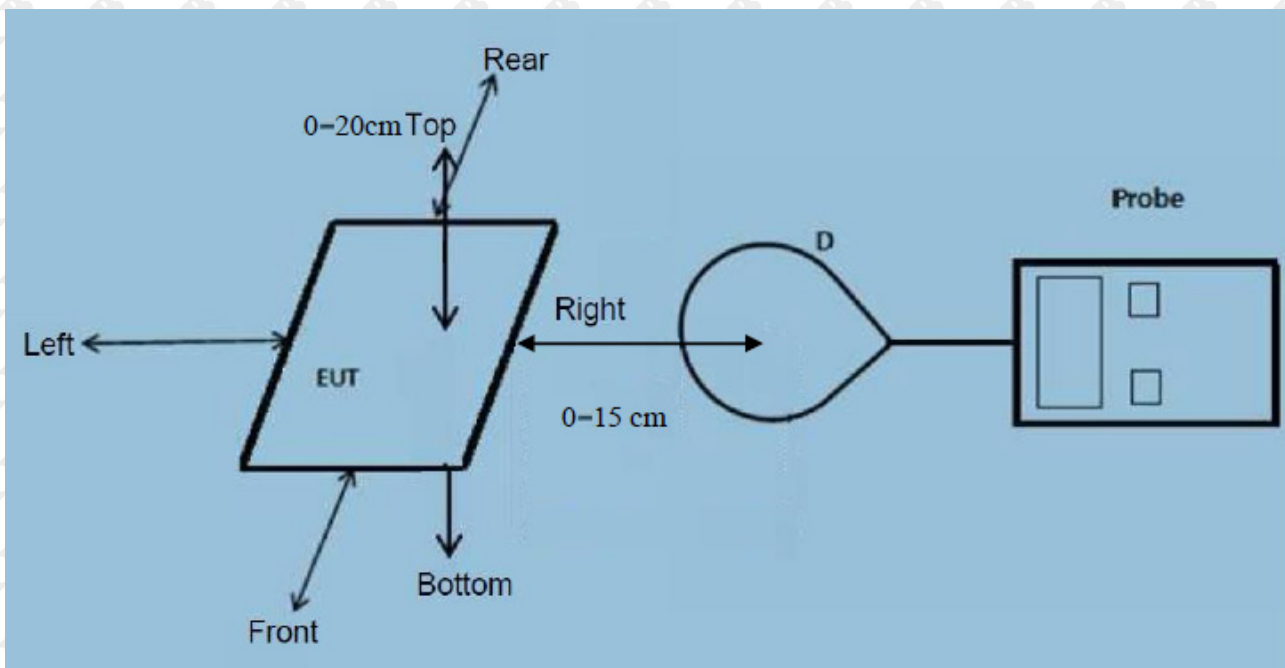

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm-0cm measured from the center of the top, and 15cm-0cm measured from the center of the rest

**Test Procedure:**

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- 20 cm-0cm measured from the center of the top, and 15cm-0cm measured from the center of the rest sides.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- The EUT were measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging App v03r01.

## 4.2. Equipment Approval Considerations:

The EUT does comply with item 5(b) of KDB 680106 D01 RF Exposure Wireless Charging App v03r01

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 110KHz to 205KHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 15000mW.

3) The system may consist of more than one source primary coils, charging one or more clients, if more than one primary coils is present, the coil pairs may be powered on at the same time.

Yes, the transfer system includes only single primary coils.

4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

No, submit a KDB inquiry to get test guideline and fully follow the KDB inquiry guideline.

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are less 50% x MPE limit.

## 4.3. E and H field Strength

The result:

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.14	0.14	0.15	0.15	1.63

H-Filed Strength at 20 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.15	1.63

H-Filed Strength at 18 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.17	0.18	0.18	0.19	1.63

H-Filed Strength at 18 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.19	1.63

H-Filed Strength at 16 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.26	0.27	0.27	0.25	1.63

H-Filed Strength at 16 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.27	1.63

H-Filed Strength at 14 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.31	0.32	0.30	0.30	1.63

H-Filed Strength at 14 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.32	1.63

H-Filed Strength at 12 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.38	0.39	0.36	0.37	1.63

H-Filed Strength at 12 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.39	1.63



H-Filed Strength at 10 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.46	0.49	0.49	0.45	1.63

H-Filed Strength at 10 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.49	1.63

H-Filed Strength at 8 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.57	0.59	0.58	0.56	1.63

H-Filed Strength at 8 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.59	1.63

H-Filed Strength at 6 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.62	0.61	0.62	0.63	1.63

H-Filed Strength at 6 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.63	1.63

H-Filed Strength at 4 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.71	0.72	0.71	0.70	1.63

H-Filed Strength at 4 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.71	1.63

H-Filed Strength at 2 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.76	0.78	0.76	0.79	1.63

H-Filed Strength at 2 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.79	1.63

H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Limits (A/m)
0.110-0.205	0.85	0.88	0.86	0.87	1.63

H-Filed Strength at 0 cm from the top of the EUT (A/m)

Frequency Range (MHz)	Test Position E	Limits (A/m)
0.110-0.205	0.88	1.63

※※※※※THE END※※※※※