

## *List of Exhibits*

**EXHIBIT A    *Sample Label***

**EXHIBIT B    *Measurement Report***

**EXHIBIT C    *User Manual***

**EXHIBIT D    *Circuit Diagram***

**EXHIBIT E    *Block Diagram***

**EXHIBIT F    *Photographs of EUT***

## ***EXHIBIT B***

### ***Measurement Report***

# **MEASUREMENT REPORT**

**of**

## **CORDLESS TELEPHONE**

**Applicant : DBTEL INCORPORATED**

**Model No. : DB-8220**

**EUT : 900 MHz S.S.T. Cordless Phone**

**FCC ID : BW3DB-8220**

**Report No. : D0415953**

**Test by :**

***Training Research Co., Ltd.***

**TEL : 886-2-26935155**

**FAX : 886-2-26934440**

**No. 5-3, Lane 21, Yen Chiu Yuan Rd., Sec. 4, Taipei, 11521 Taiwan R.O.C.**

# CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by *Training Research Co., Ltd.*, No. 5-3, Lane 21, Yen-Chiu-Yuan Rd., Sec. 4, Taipei, 11521 Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.233.

**Applicant** : DBTEL INCORPORATED

**Model No.** : DB-8220


**EUT** : 900 MHz S.S.T. Cordless Phone

**FCC ID** : BW3DB-8220

**Report No.** : D0415953

**Test Date** : MAR. 23, 1999

Prepared by:

  
JACK TSAI

Approved by:

  
JACOB LIN

Test by :

*Training Research Co., Ltd.*

TEL: 886-2-26935155

FAX: 886-2-26934440

No. 5-3, Lane 21, Yen Chiu Yuan Rd., Sec. 4, Taipei, 11521 Taiwan R.O.C.

## *Tables of Contents*

<b>I. GENERAL .....</b>	3
1.1 Introduction .....	3
1.2 Description of EUT .....	3
1.3 Description of Support Equipment .....	3
1.4 Configuration of System Under Test .....	4
1.5 Verify the Frequency and Channel .....	4
1.5.1 Verify the Frequency Pairs .....	4
1.6 Test Procedure .....	5
1.7 Location of the Test Site .....	5
1.8 General Test Condition .....	5
 	)
<b>II. Section 15.207: Power line conducted emissions for AC powered units .....</b>	6
2.1 Test Condition & Setup .....	6
2.2 List of Test Instruments .....	6
2.3 Test Configuration .....	7
2.4 Test Result of Conducted Emissions .....	8
2.4.1 Base Station Transmit Only .....	8
 	)
<b>III. Section 15.247(a)(2): Bandwidth for direct sequence system .....</b>	13
3.1 Test Condition & Setup .....	13
3.2 Test Instruments Configuration .....	13
3.3 List of Test Instruments .....	13
3.4 Test Result of Bandwidth .....	14
 	)
<b>IV. Section 15.247(a) (2) : Power Output .....</b>	15
4.1 Test Condition & Setup .....	15
4.2 List of Test Instruments .....	16
4.3 Test Result of Fundamental Emission .....	17

<b>V. Section 15.247(c) (2) : Spurious Emissions (Radiated)</b>	18
5.1 Test Condition & Setup	18
5.2 List of Test Instruments	19
5.2.1 Duty Cycle Factor Measurement	19
5.3 Test Instruments Configuration	20
5.4 Test Result of Second Harmonic	22
5.5 Test Result of Spurious Radiated Emissions	23
5.5.1 Base and Handset Station Transmit Only	23
<b>VI. Section 15.247(d) : Power Spectral Density</b>	47
6.1 Test Condition & Setup	47
6.2 Test Instruments Configuration	48
6.3 List of Test Instruments	48
6.4 Required of Carrier Frequency	49
6.5 Test Result of Power Spectral Density	50
<b>VII. Section 15.247(e): Processing Gain</b>	51
7.1 Test Condition & Setup	51
7.2 Test Instruments Configuration	53
7.3 List of Test Instruments	54
7.4 Test Procedure	54
7.5 Test Result of Processing Gain	55
<b>Appendix A : Set Up Procedure</b>	57
<b>Appendix B : Antenna Sketch</b>	58
<b>Appendix C : Part15.203</b>	59
<b>Appendix D : Security Code</b>	60

## I. GENERAL

### 1.1 Introduction

The following measurement report is submitted on behalf of Applicant in support of a Cordless Telephone certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

### 1.2 Description of EUT

**EUT** : 900MHz S.S.T. Cordless Phone  
**Model No.** : DB-8220  
**FCC ID** : BW3DB-8220  
**Frequency Range** : Base : 902 - 928 MHz  
                          Handset : 902 - 928 MHz  
**Support Channel** : 20 Channel  
**Modulation Skill** : TDMA / Spread spectrum  
**Security Code** : 12-bit P/N code, 8-bit scramble, 16-bit 2D  
**Power Type** : Base Powered by 120 Vac 60 Hz / 9 Vdc 500 mA  
                          Handset powered by 3.6 V / 600 mAh.  
**Power Cord** : Non-shielded  
**Data Cable** : RJ-11C x 1 => Non-shielded, 7 long, Plastic hoods, No bead  
                          Headset & MIC. => Non-shielded, 217cm long, Plastic hoods,  
                          No bead  
**Applicant** : DBTEL INCORPORATED  
                          29 Tzu-Chiang Street, Tu-Cheng, Taipei Hsien,  
                          Taiwan, R. O. C.

### 1.3 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

**PSTN Simulator** : King Design Public Switched Telephone Network Simulator  
**Model No.** : 8705-A  
**Serial No.** : N/A  
  
**Notebook** : CER Notebook  
**Model No.** : 386SL  
**Serial No.** : 001855  
**Power Type** : Linear  
**Power Cord** : Non-shielded, 6' long, Plastic hoods, No ferrite bead  
**FCC ID** : Q8V4363

## 1.4 Configuration of System Under Test

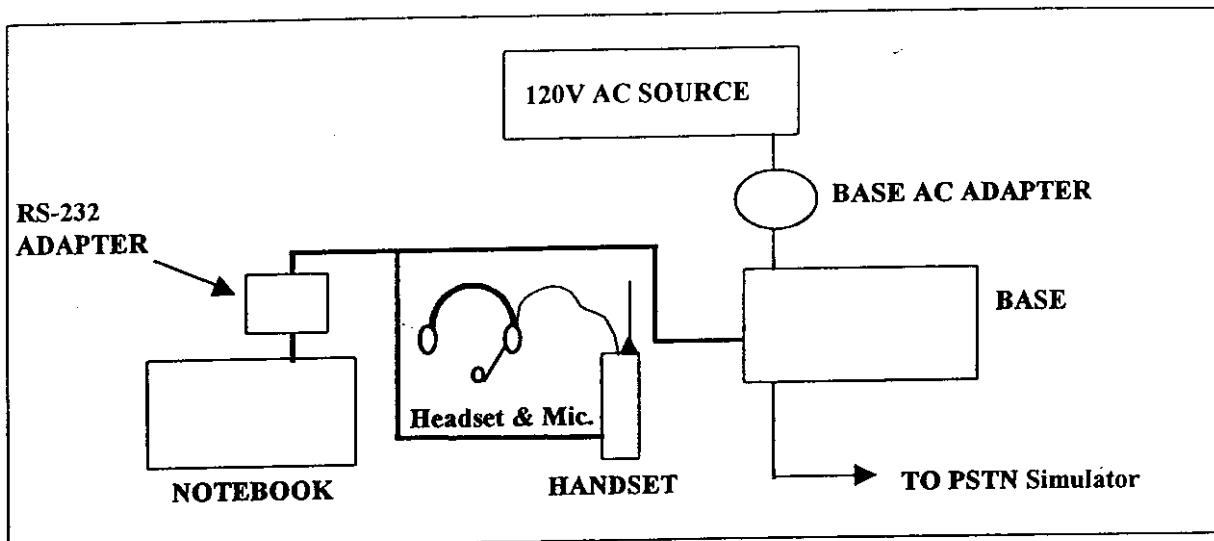


Fig. 1 Configuration of system under test

The tests below are run with the DCT transmitter set at high power in TDD mode. A serial port from a computer to the DCT UUT is needed to force selection of output power level and channel number.

The setting up procedure was recorded in Appendix A.

## 1.5 Verify the Frequency and Channel

### 1.5.1 Verify the Frequency Pairs

Channel	Base(MHz)	Handset(MHz)	Channel	Base(MHz)	Handset(MHz)
1	904.500	904.660	11	915.600	915.600
2	904.800	904.800	12	916.800	916.800
3	906.000	906.000	13	918.000	918.000
4	907.200	907.200	14	919.200	919.200
5	908.400	908.400	15	920.400	920.400
6	909.600	909.600	16	921.600	921.600
7	910.800	910.800	17	922.800	922.800
8	912.000	912.000	18	924.000	924.000
9	913.200	913.200	19	925.200	925.200
10	914.860	914.850	20	926.270	926.280

Note:

1. This is for sure that all frequencies are in 902 MHz to 928 MHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz. (The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 904 MHz to 927 MHz. So all the items as followed in testing report are need to test these three frequencies: top: channel 1, middle: channel 10, bottom: channel 20.

### 1.6 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on Appendix A, the detail setup was written on each test item.

### **1.7 Location of the Test Site**

The radiated emissions measurements required by the rules were performed on the three-meter, open-field test site maintained by *Training Research Co., Ltd.* No. 5-3, Lane 21, Yen-Chiu-Yuan Rd., Sec. 4, Taipei, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a shielded enclosure also located at *Training Research Co., Ltd.* 1F, No. 2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

### 1.8 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated.

In test, the base and handset are tested separately. They were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch10 and ch20 of base and handset were all tested. The setting up procedure is recorded on Appendix A.

## II . Section 15.207: Power Line Conducted Emissions for AC Powered Units

### 2.1 Test Condition & Setup

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3825/2 Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 450 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There are tree test condition apply in this test item, the test procedure description as the following :

1. Base station transmit only:

Using the RS-232 port of notebook and Rockwell software to control the base, handset.

Then making access to the mode of continuous transmission. Three channel is tested, one in the top (CH01), one in the middle (CH10) and the other in bottom (CH20).

2. Idle state (handset park, on hook mode)

The setting up procedure is recorded on Appendix A.

### 2.2 List of Test Instruments

Manufacturer	Device	Model	Input impedance
Hewlett Packard	100Hz-1.5GHz Spectrum Analyzer	HP8591EM	50.00
EMCO	Line Impedance Stabilization Network	3825/2	50.00
TRC	Shielded Room	TRC-SR!	N/A

### 2.3 Test configuration

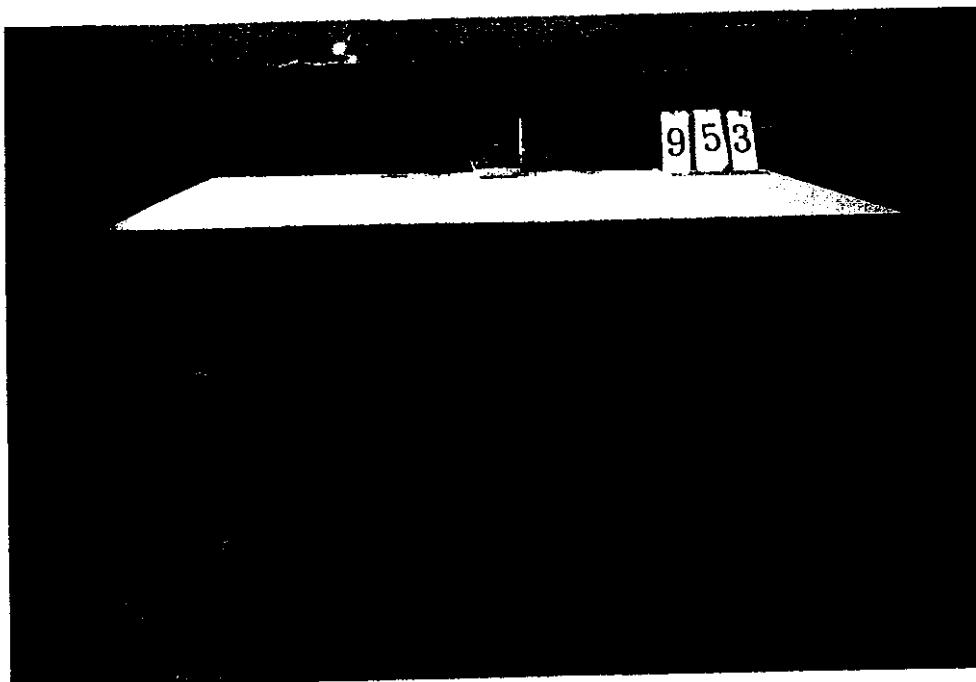


Fig. 3 Conducted emissions test placement (idle only)

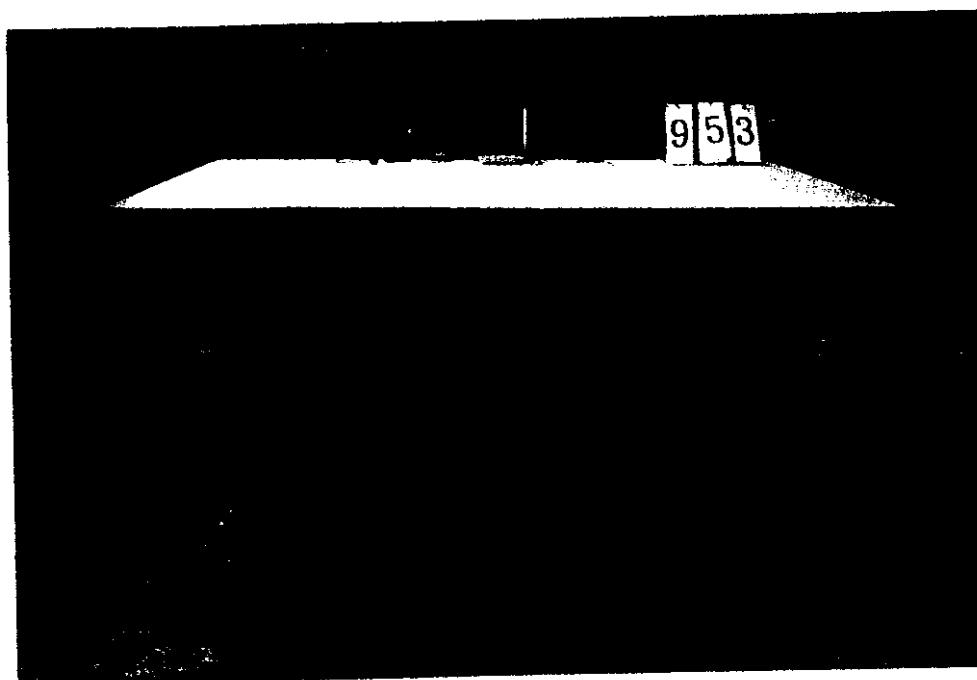


Fig. 4 Conducted emissions test placement (operating only)

## 2.4 Test Result of Conducted Emissions

### 2.4.1 Base station transmit only

The following table shows a summary of the highest emissions of power line conducted emissions on the HOT and NATURAL conductors of the EUT power cord.

Model No. : DB-8220  
 EUT : 900MHz S.S.T. Cordless Phone

*Table 1 Power Line Conducted Emissions (Channel 1)*

Power Conductor	Connected Frequency (KHz)	Emissions Peak Amplitude (dBuV)	FCC Limit (dBuV)	Class B Margin (dB)
Line 1	452.00	38.56	48.00	-9.44
	470.00	31.40	48.00	-16.60
	486.00	37.44	48.00	-10.56
	499.00	37.12	48.00	-10.88
	527.00	36.16	48.00	-11.84
	538.00	36.24	48.00	-11.76
	556.00	35.32	48.00	-12.68
	604.00	33.89	48.00	-14.11
	633.00	33.30	48.00	-14.70
	654.00	32.65	48.00	-15.35
LINE 2	457.00	38.35	48.00	-9.65
	483.00	38.02	48.00	-9.98
	505.00	37.92	48.00	-10.08
	515.00	37.71	48.00	-10.29
	530.00	37.75	48.00	-10.25
	564.00	37.58	48.00	-10.42
	601.00	37.73	48.00	-10.27
	612.00	37.35	48.00	-10.65
	624.00	37.35	48.00	-10.65
	658.00	37.67	48.00	-10.33

#### NOTE:

1. Margin = Peak Amplitude - Limit
2. A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit.

**Table 2 Power Line Conducted Emissions (Channel 10)**

<i>Power Conductor</i>	<i>Connected Frequency (KHz)</i>	<i>Emissions Peak Amplitude (dBuV)</i>	<i>FCC Limit (dBuV)</i>	<i>Class B Margin (dB)</i>
Line 1	461.00	38.63	48.00	-9.37
	489.00	37.72	48.00	-10.28
	508.00	37.11	48.00	-10.89
	527.00	36.46	48.00	-11.54
	564.00	35.49	48.00	-12.51
	590.00	34.96	48.00	-13.04
	624.00	33.59	48.00	-14.41
	645.00	32.88	48.00	-15.12
	675.00	31.98	48.00	-16.02
	692.00	30.99	48.00	-17.01
LINE 2	461.00	37.77	48.00	-10.23
	473.00	38.34	48.00	-9.66
	496.00	38.34	48.00	-9.66
	524.00	38.12	48.00	-9.88
	542.00	37.79	48.00	-10.21
	553.00	37.58	48.00	-10.42
	575.00	37.78	48.00	-10.22
	608.00	37.70	48.00	-10.30
	645.00	37.71	48.00	-10.29
	675.00	37.54	48.00	-10.46

Table 3 Power Line Conducted Emissions (Channel 20)

<i>Power Conductor</i>	<i>Connected Frequency (KHz)</i>	<i>Emissions Peak Amplitude (dBuV)</i>	<i>FCC Limit (dBuV)</i>	<i>Class B Margin (dB)</i>
Line 1	461.00	38.03	48.00	-9.97
	473.00	37.67	48.00	-10.33
	489.00	36.98	48.00	-11.02
	505.00	36.56	48.00	-11.44
	524.00	36.37	48.00	-11.63
	534.00	36.32	48.00	-11.68
	560.00	34.86	48.00	-13.14
	575.00	34.78	48.00	-13.22
	593.00	33.97	48.00	-14.03
	620.00	33.51	48.00	-14.49
LINE 2	461.00	38.33	48.00	-9.67
	473.00	38.04	48.00	-9.96
	486.00	38.23	48.00	-9.77
	508.00	37.64	48.00	-10.36
	518.00	37.80	48.00	-10.20
	553.00	37.51	48.00	-10.49
	579.00	37.64	48.00	-10.36
	620.00	37.42	48.00	-10.58
	654.00	37.34	48.00	-10.66
	671.00	37.43	48.00	-10.57

*Table 4 Power Line Conducted Emissions (Charge)*

<i>Power Conductor</i>	<i>Connected Frequency (KHz)</i>	<i>Emissions Peak Amplitude (dBuV)</i>	<i>FCC Limit (dBuV)</i>	<i>Class B Margin (dB)</i>
Line 1	457.00	38.95	48.00	-9.05
	470.00	38.20	48.00	-9.80
	502.00	37.64	48.00	-10.36
	521.00	36.86	48.00	-11.14
	534.00	36.70	48.00	-11.30
	549.00	36.02	48.00	-11.98
	579.00	35.52	48.00	-12.48
	612.00	34.77	48.00	-13.23
	628.00	33.68	48.00	-14.32
	654.00	33.29	48.00	-14.71
LINE 2	452.00	38.61	48.00	-9.39
	473.00	38.20	48.00	-9.80
	508.00	38.05	48.00	-9.95
	521.00	38.19	48.00	-9.81
	542.00	37.93	48.00	-10.07
	560.00	37.88	48.00	-10.12
	593.00	37.73	48.00	-10.27
	615.00	37.86	48.00	-10.14
	637.00	37.62	48.00	-10.38
	654.00	38.01	48.00	-9.99

*Table 5 Power Line Conducted Emissions (Page: g)*

<i>Power Conductor</i>	<i>Connected Frequency (KHz)</i>	<i>Emissions Peak Amplitude (dBuV)</i>	<i>FCC Limit (dBuV)</i>	<i>Class B Margin (dB)</i>
Line 1	464.00	38.45	48.00	-9.55
	493.00	37.81	48.00	-10.19
	508.00	37.21	48.00	-10.79
	521.00	36.83	48.00	-11.17
	545.00	36.66	48.00	-11.34
	556.00	35.79	48.00	-12.21
	582.00	35.01	48.00	-12.99
	624.00	34.13	48.00	-13.87
	645.00	33.34	48.00	-14.66
	667.00	32.60	48.00	-15.40
LINE 2	455.00	38.33	48.00	-9.67
	470.00	38.00	48.00	-10.00
	512.00	37.75	48.00	-10.25
	527.00	37.40	48.00	-10.60
	549.00	37.65	48.00	-10.35
	575.00	37.76	48.00	-10.24
	612.00	37.58	48.00	-10.42
	633.00	37.79	48.00	-10.21
	663.00	37.67	48.00	-10.33
	675.00	37.54	48.00	-10.46

### III. Section 15.247(a)(2): Bandwidth for Direct Sequence System.


#### 3.1 Test Condition & Setup

The transmitter bandwidth measurements were performed in a shielded enclosure. The EUT was placed on a wooden table which is 0.8 meters height. The EUT was set to transmit continuously. Various channels were also investigated to find the maximum occupied bandwidth. The minimum 6 dB bandwidth shall be at least 500 KHz.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 KHz. Set the span>> RBW. The detector function was set to peak and hold mode to clearly observe the components.

Setting up procedure is written on Appendix A.

#### 3.2 Test Instruments Configuration

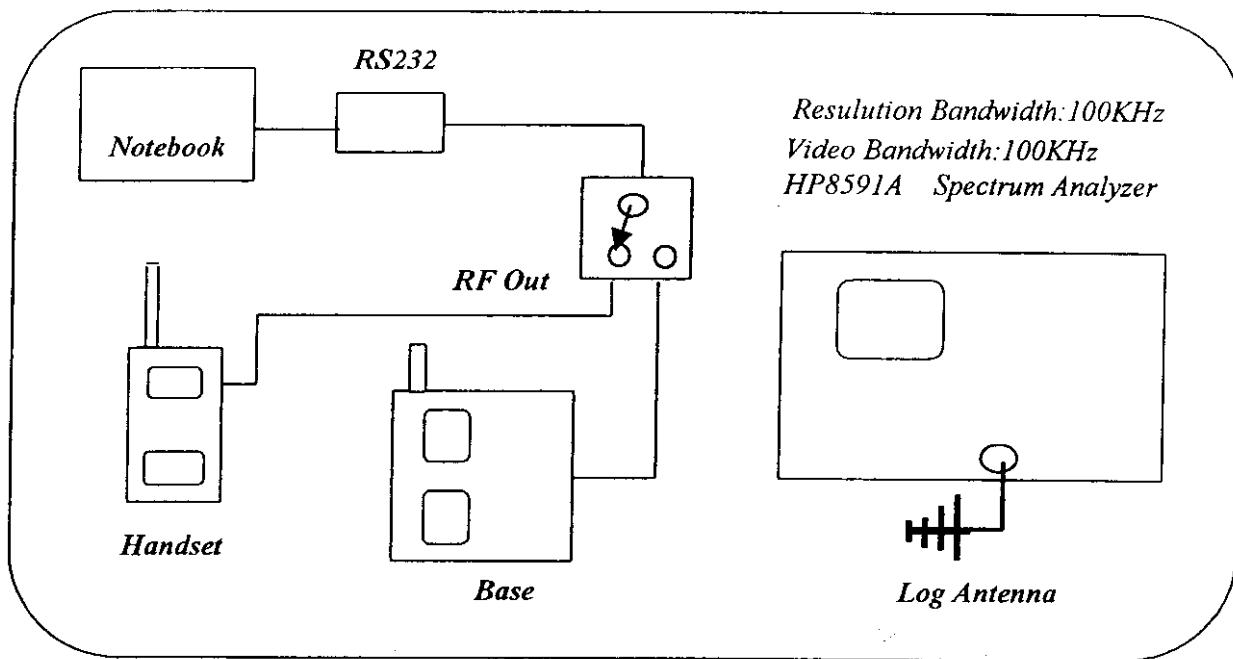

P.S.A serial port from notebook computer to control the EUT at maximal power output and channel Number.

Fig 10. Test Configuration of bandwidth for direct sequence system

#### 3.3 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	0.9KHz – 40 GHz Spectrum Analyzer	HP8591A	50.00
EMCO	Log-Antenna	3146	50.00

### 3.4 Test Result of Bandwidth

#### **Bandwidth of Channel 1**

Bandwidth of Base : 1.47 MHz

Bandwidth of Handset : 1.70 MHz

The min. 6 dB BW at least : 500 KHz

#### **Bandwidth of Channel 10**

Bandwidth of Base : 1.56 MHz

Bandwidth of Handset : 1.44 MHz

The min. 6 dB BW at least : 500 KHz

#### **Bandwidth of Channel 20**

Bandwidth of Base : 1.45 MHz

Bandwidth of Handset : 1.44 MHz

The min. 6 dB BW at least : 500 KHz

#### **Note:**

1. The data in the above table are summarize the following attachment.
2. The attachment follow by this page and there is no page number.




Connector Pane



900MZA.vi

Front Panel

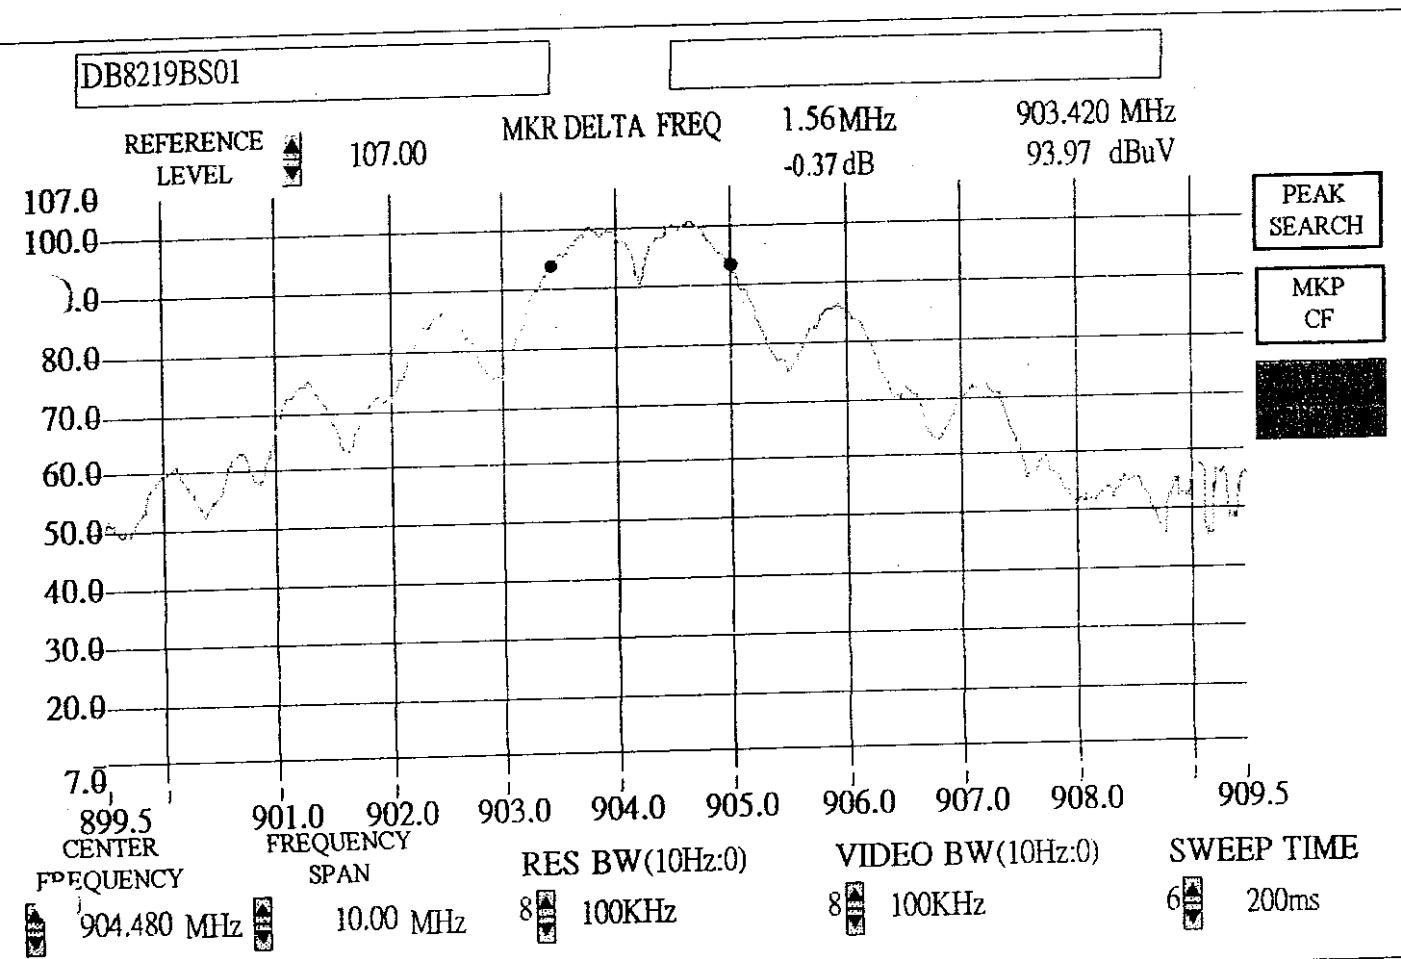

00MZa.vi  
ast modified on 1998/12/25 at PM 02:27  
rinted on 1999/3/14 at PM 03:04


14-2

#### Connector Pane



900MZA.VI

## Front Panel

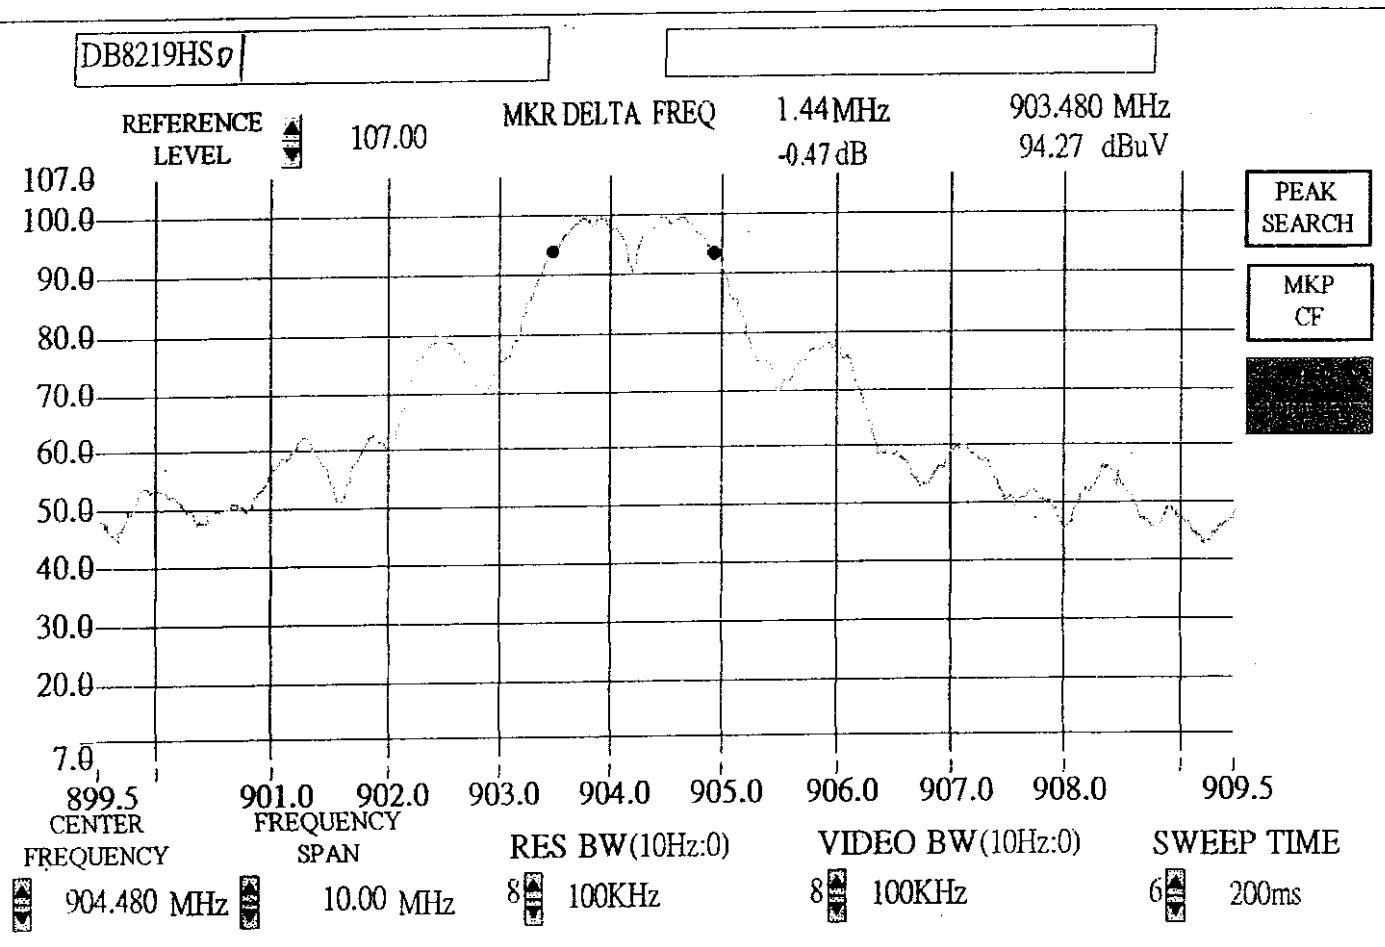

DMZa.vi

last modified on 1998/12/25 at PM 02:27


Digitized on 1999/3/14 at PM 05:20

#### Connector Pane



900MZA.VI

### Front Panel

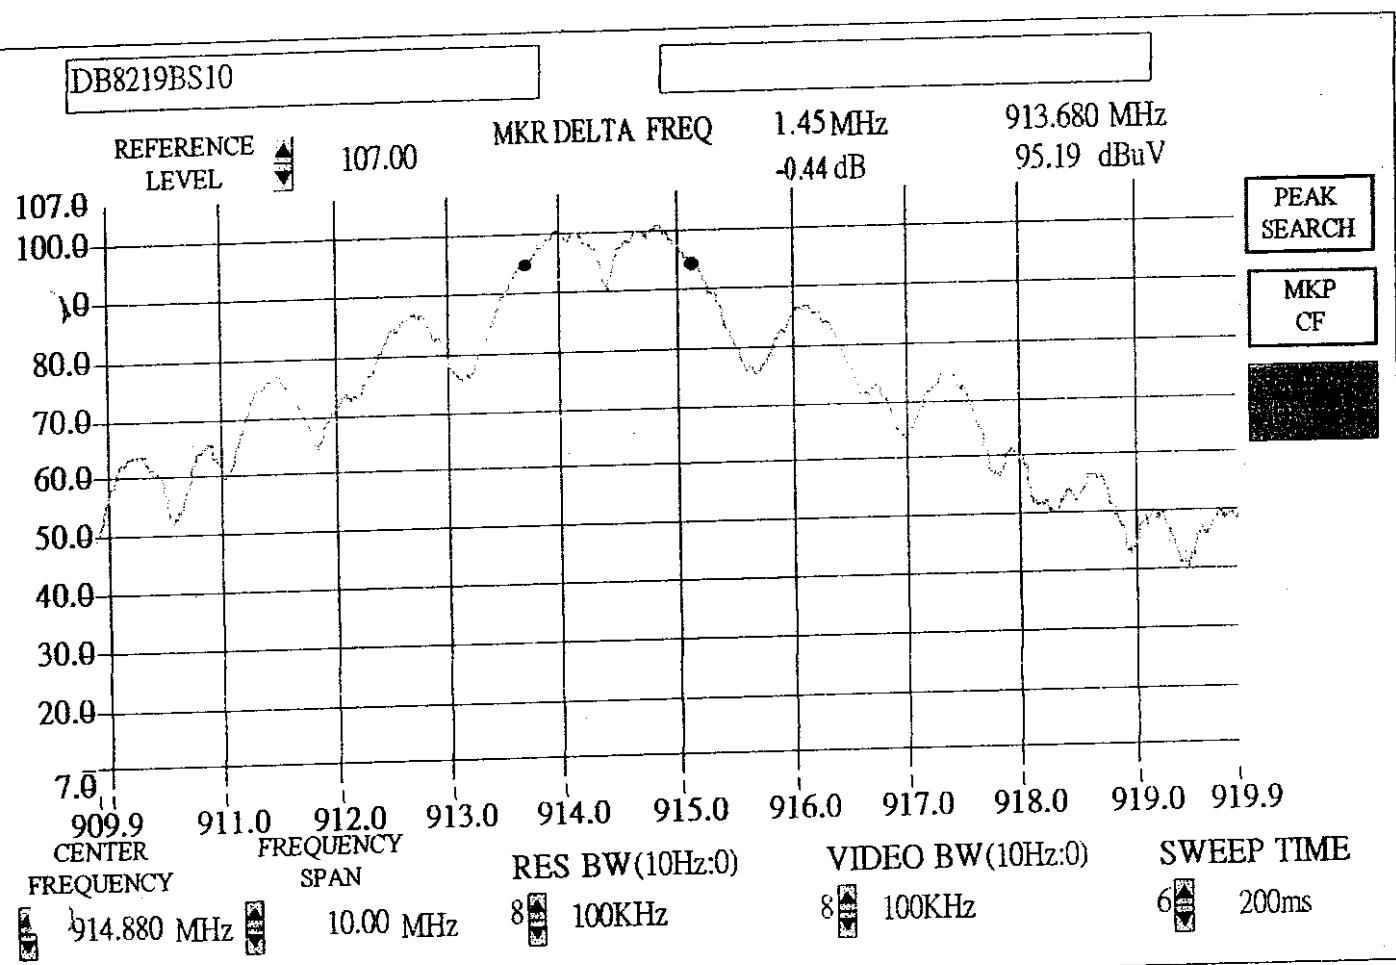



00MZa.vi  
last modified on 1998/12/25 at PM 02:27  
printed on 1999/3/14 at PM 03:01


14-4

Connector Pane



900MZa.vi

Front Panel

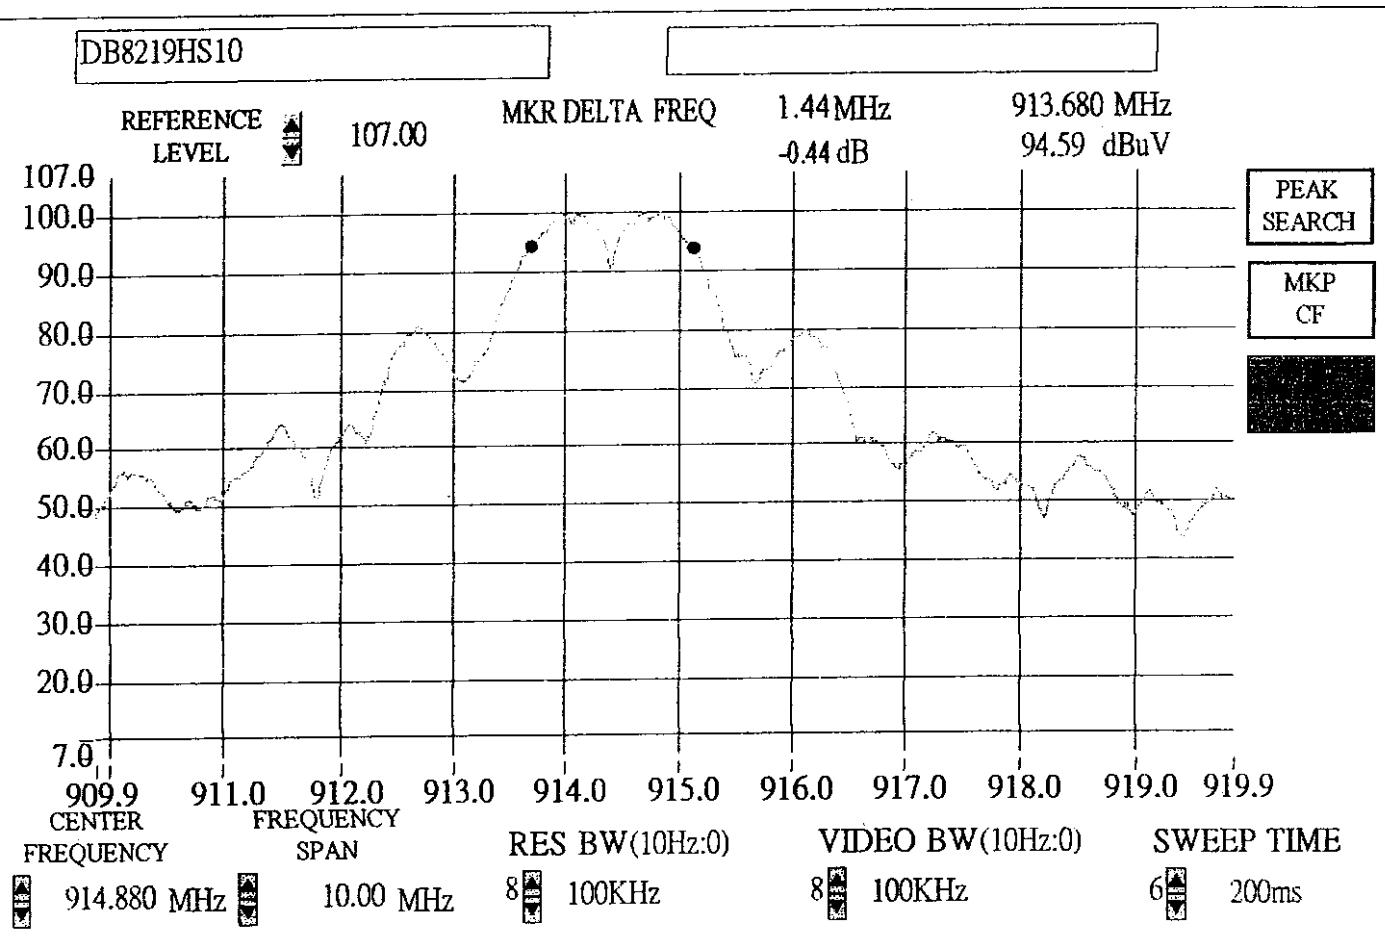



0MZA.vi

Last modified on 1998/12/25 at PM 02:27

Entered on 1999/3/14 at PM 05:37


14-5

Connector Pane



900MZA.vi

Front Panel

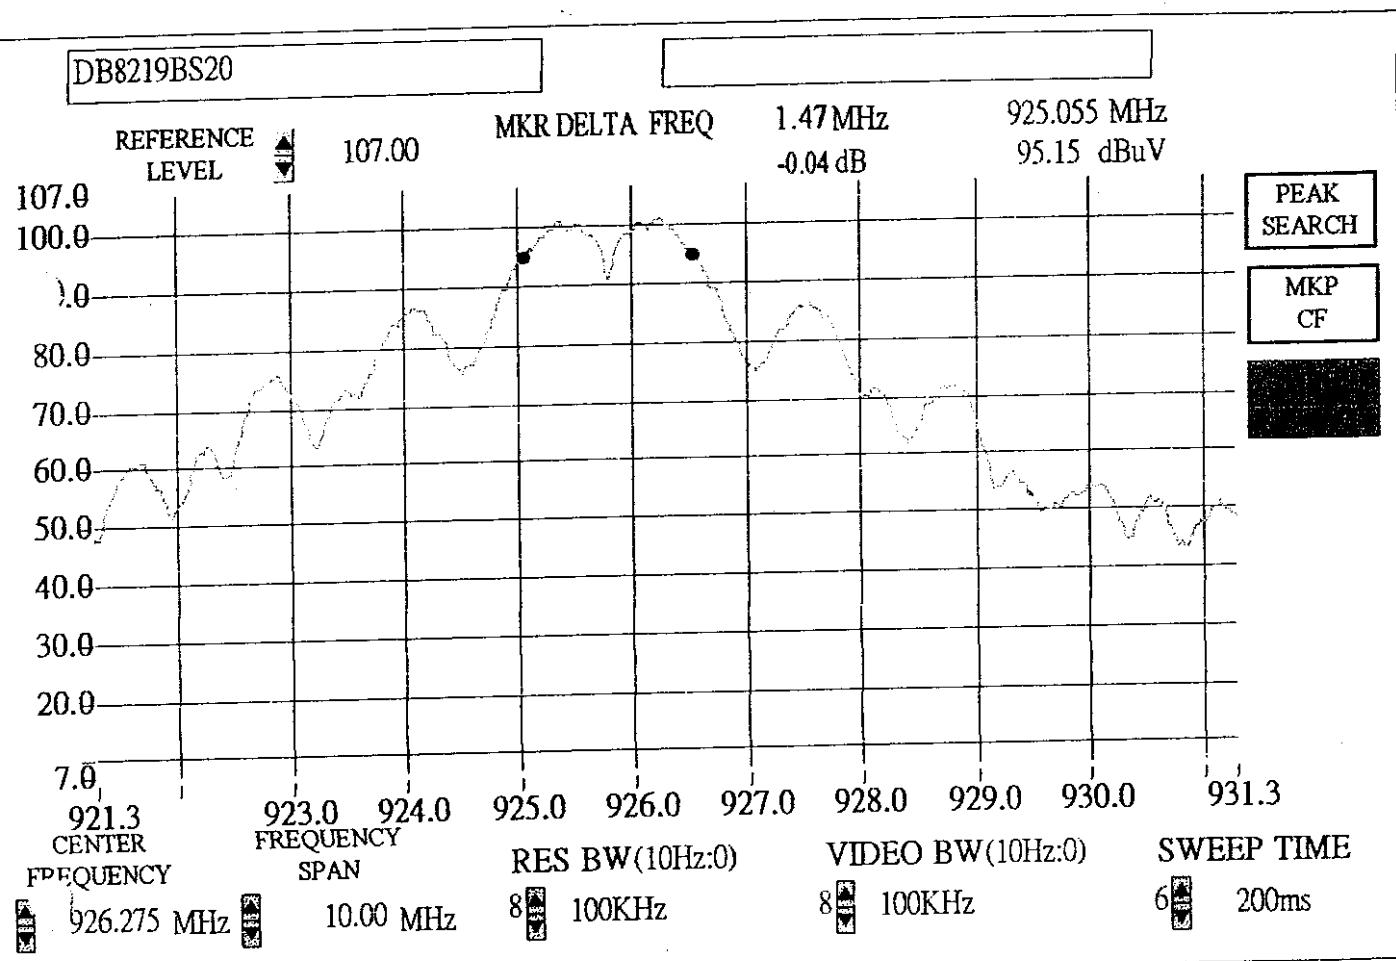

0MZA.vi

last modified on 1998/12/25 at PM 02:27

printed on 1999/3/14 at PM 02:32


14-6

Connector Pane



900MZA.vi

Front Panel

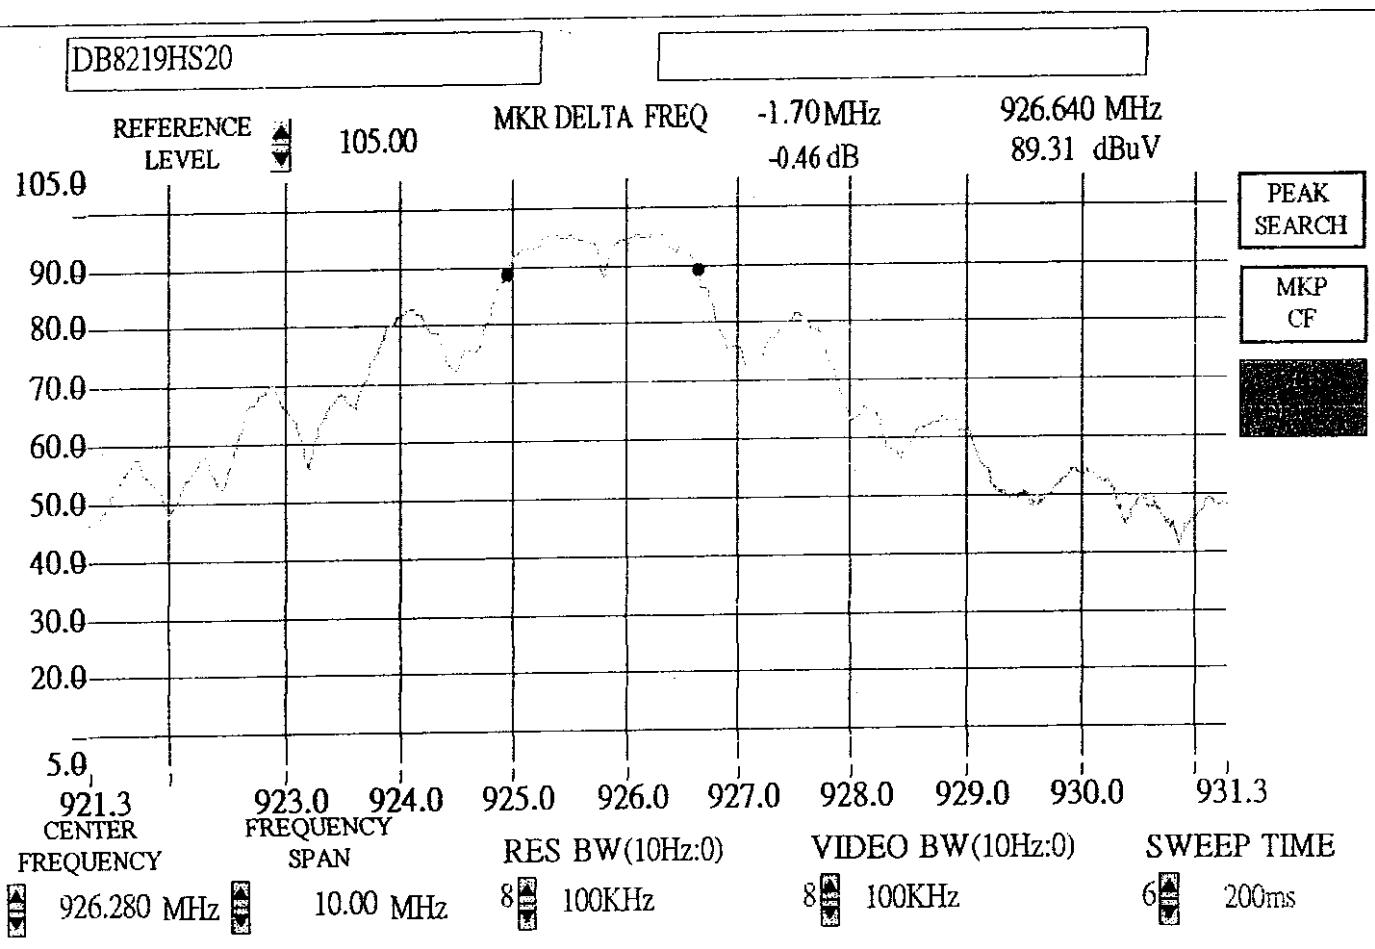

## IV. Section 15.247(B) : Power Output

### 4.1 Test Condition & Setup

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591A Spectrum Analyzer, EMCO Biconical Antenna (Model 3110) for 30 - 200 MHz, EMCO Log-Periodic Antenna (Model 3146) for 200 - 1000 MHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. The spectrum analyzer HP8568b used on this testing for frequency 30MHz to 1000MHz. No post-detector video filters were used in the test. Set the RB= 3 MHz, VB = 3MHz and the span = 5 MHz. The analyzer was operated in the maximum hold mode.

There are two test condition apply in this test item, the test procedure description as the following:

(1) Base and handset station transmit only:

Using the RS-232 port of notebook and Rockwell software to control the base, handset. Then making access to the mode of continuous transmission. Three channel is tested, one in the top (CH01), one in the middle (CH10) and the other in bottom (CH20).

With the transmitter operating from a fully charged battery and using the internal antenna,

Radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to low, mid and high channels in the 902-928 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB<sub>BuV/m</sub>) is determined by algebraically adding the measured reading in dB<sub>BuV</sub>, the antenna factor (dB), and cable loss (dB) at the appropriate frequency.

#### 4.2 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	100Hz-1.5GHz Spectrum Analyze	HP8568B	50.00
Hewlett Packard	50kHz-22GHz Spectrum Analyzer	HP8592B	50.00
Hewlett Packard	10KHz-1GHz Quasi-peak Adapte	HP85650A	50.00
Hewlett Packard	20Hz-2GHz RF Preselector	HP85685A	50.00
Anritsu	0.1-1200MHz Preamplifier	MH648A	50.00
EMCO	20-300MHz Biconical Antenna	3110.00	50.00
EMCO	200-1000MHz Log-Periodic Antenna	3146.00	50.00
TRC	Open Field Test Site	TRC-OFTS1	N/A
TRC	Notch Filter	N/A	50.00

### 4.3 Test Result of Fundamental Emissions

The peak values of fundamental emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

**Model No. :** DB-8220

**EUT :** 900MHz S.S.T. Cordless Phone

**Table 6. Open Field Fundamental Emissions**

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>A.P. (H/V)</b>	<b>A.H. (m)</b>	<b>Table (degree)</b>	<b>Amplitude (dBuV/m)</b>	<b>CF (dB)</b>	<b>Corrected Amplitude (dBuV/m)</b>	<b>E.R.P.(Peak)</b>	
								<b>mW</b>	<b>dBm</b>
Base 01	904.500	H	1.00	183	87.50	8.19	95.69	1.112	0.461
		V	1.00	122	94.10	8.19	102.29	5.083	7.061
Base 10	914.860	H	1.00	188	86.90	8.15	95.05	0.959	-0.178
		V	1.00	46	95.00	8.15	103.15	6.196	7.921
Base 20	926.270	H	1.00	81	73.80	7.81	81.61	0.043	-13.618
		V	1.00	115	95.20	7.82	103.02	6.013	7.791
Handset 01	904.660	H	1.00	180	80.90	8.19	89.09	0.243	-6.138
		V	1.00	300	93.20	8.19	101.39	4.131	6.161
Handset 10	914.850	H	1.00	184	80.50	8.15	88.65	0.219	-6.578
		V	1.00	300	93.00	8.15	101.15	3.909	5.921
Handset 20	926.280	H	1.00	213	83.80	7.82	91.62	0.435	-3.608
		V	1.00	3	91.80	7.82	99.62	2.748	4.391

**Note:**

1. A.P. means antenna polarization, horizontal and vertical.

2. A.H. means antenna height.

3. Table means turntable turning position.

4. Corrected Factor (C. F.) = Cable Loss + Antenna Factor - Amplified Gain  
     Corrected Amplitude = Peak Amplitude + Corrected Factor

5. Amplitude means the fundamental emission measured.

6. Effective Radiation Power ( E.R.P. ) =  $(E d)^2 / 30G$

E is the measured maximum field strength in V/m utilizing the maximum hold mode RBW (3MHz).

G is the numeric gain of the transmitting antenna over an isotropic radiator (1.00).

d is the distance in meters from which the field strength was measured (3M).

Example: the Max Radiation Emission of base ch01 = 95.69 dBuV/m

$$10^{95.69/20} \times 10^{-6} = 0.06088 \text{ V}$$

$$\text{E.R.P.} = (0.06088 \times 3)^2 / 30 = 1.112 \text{ mW} = 10 \times \log (1.112 \text{ mW}/1\text{mW}) = 0.461 \text{ dBm}$$

## V. Section 15.247 (C)(2): Spurious Emissions (Radiated)

### 5.1 Test Condition & Setup

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turn table which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8591A Spectrum Analyzer, EMCO Biconical Antenna (Model 3110) for 30 - 200 MHz, EMCO Log-Periodic Antenna (Model 3146) for 200 - 1000 MHz and spectrum was examined from 1 GHz to 18GHz using an Hewlett Packard 8592A Spectrum Analyzer, EMCO Horn Antenna (Model 3115) for 1 - 18 GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing ,HP8568b for frequency 30MHz to 1000MHz, and HP8592A for frequency 1 GHz to 18 GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6 dB bandwidth was set to 120 KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1 GHz to 18GHz) and the analyzer was operated in the maximum hold mode.

There are two test condition apply in this test item, the test procedure description as the following:

- (1) Base and handset station transmit only:

Using the RS-232 port of notebook and Rockwell software to control the base, handset. Then making access to the mode of continuous transmission. Three channels is tested, one in the top (CH01), one in the middle (CH10) and the other in bottom (CH20).

With the transmitter operating from a fully charged battery and using the internal antenna, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to low, mid and high channels in the 902-928 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB<sub>BuV/m</sub>) is determined by algebraically adding the measured reading in dB<sub>BuV</sub>, the antenna factor (dB), and cable loss (dB) at the appropriate frequency.

**For frequency between 30MHz to 1000MHz**

$F_{Ia} (\text{dBuV/m}) = F_{Ir} (\text{dBuV}) + \text{Correction Factors}$

$F_{Ia}$  : Actual Field Intensity

$F_{Ir}$  : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss

**For frequency between 1 GHz to 18 GHz**

$F_{Ia} (\text{dBuV/m}) = F_{Ir} (\text{dBuV}) + \text{Correction Factor - Duty Cycle}$

$F_{Ia}$  : Actual Field Intensity

$F_{Ir}$  : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Distance Factor (9.54dB)- Amplifier Gain

The setting up procedure is recorded on Appendix A.



## 5.2 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	9KHz-2.9 GHz Spectrum Analyze	HP8594EM	50.00
Hewlett Packard	50kHz-22GHz Spectrum Analyzer	HP8592A	50.00
Hewlett Packard	10KHz-1GHz Quasi-peak Adapte	HP85650A	50.00
Hewlett Packard	20Hz-2GHz RF Preselector	HP85685A	50.00
Hewlett Packard	1GHz-26.5GHz Preamplifier	HP8449B	50.00
Anritsu	0.1-1200MHz Preamplifier	MH648A	50.00
EMCO	20-300MHz Biconical Antenna	3110.00	50.00
EMCO	200-1000MHz Log-Periodic Antenna	3146.00	50.00
EMCO	1G-18GMHz Double Ridge Antenna	3115.00	50.00
TRC	Open Field Test Site	TRC-OFTS1	N/A
TRC	Notch Filter	N/A	50.00
TRC	Horn Antenna with Amplifier	TRC1	50.00


### 5.2.1 Duty Cycle Factor Measurement

The duty cycle factor measurement is performed in a shield enclosure. The test condition and setup is as same as paragraph III. Set the RB = 1MHz, VB=1MHz, and span = 0 MHz. Link the base and handset ,then get the Time of duty and cycle as follow page.

The duty cycle factor =  $20 \log ( T_{\text{duty}} / T_{\text{cycle}} ) = 20 \log ( 0.9500 / 2.0000 ) = -6.46$

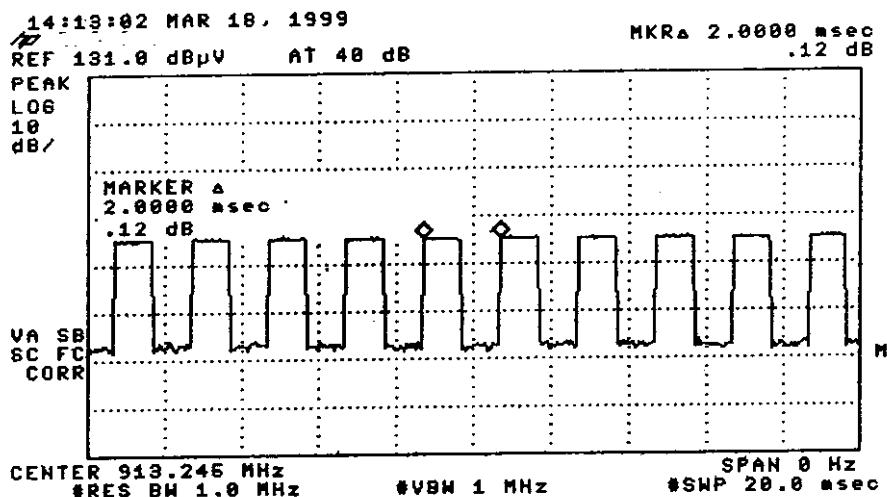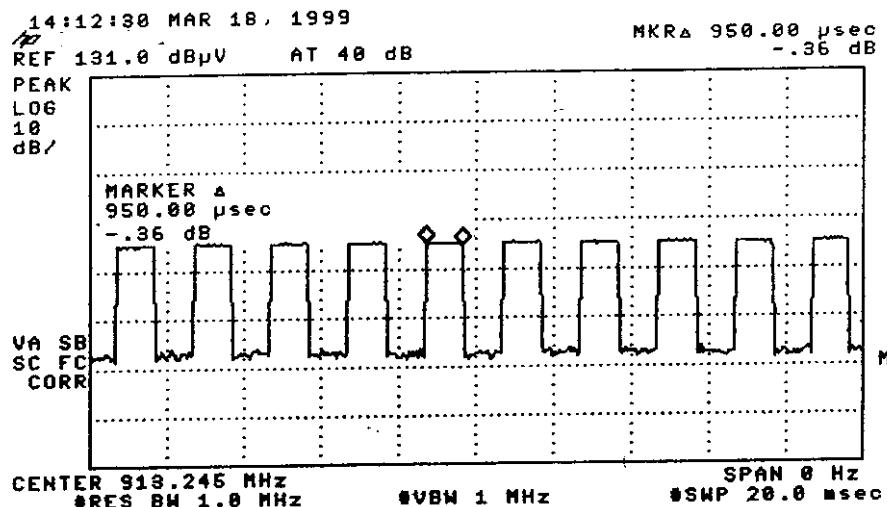


### 5.3 Test Instruments Configuration

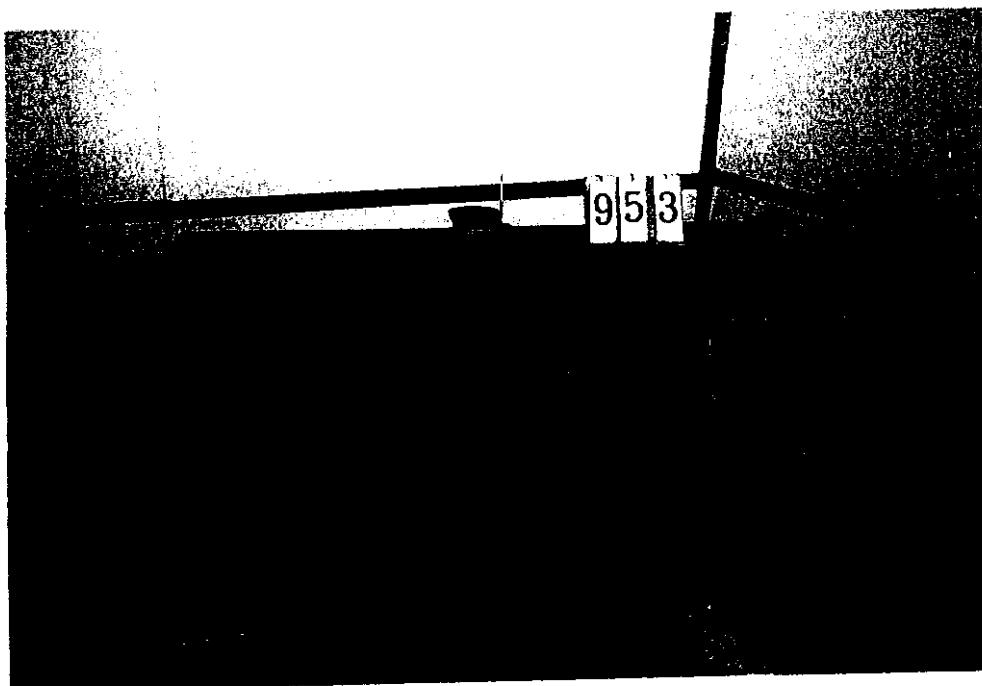


Pig 1 Front View of the Test Configuration ( BASE )



Pig 2 Rear View of the Test Configuration ( BASE )

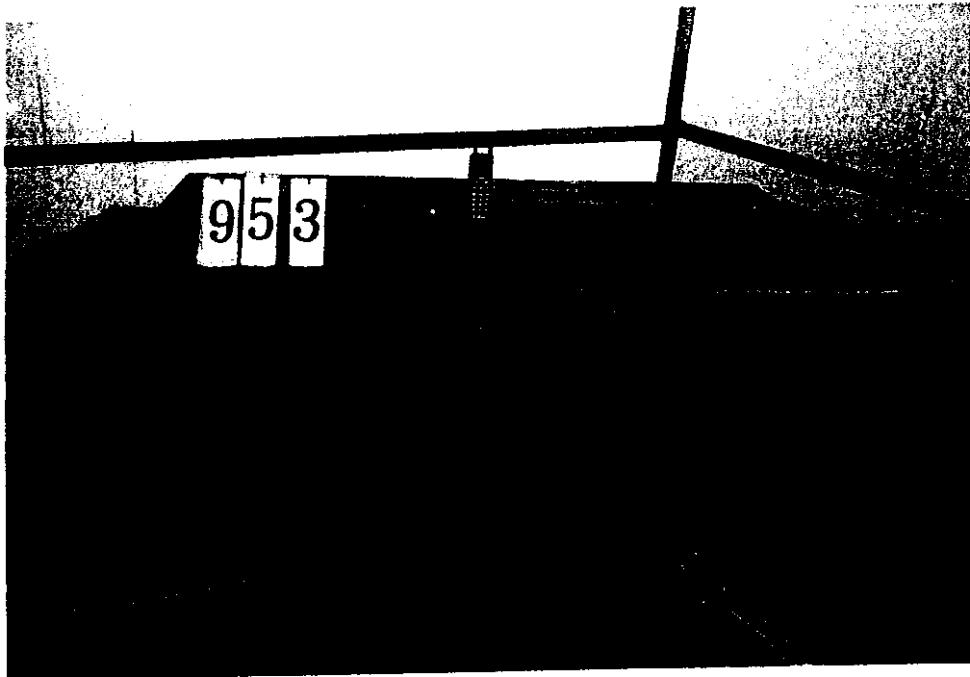

Pig 1 Front View of the Test Configuration (HANDSET)

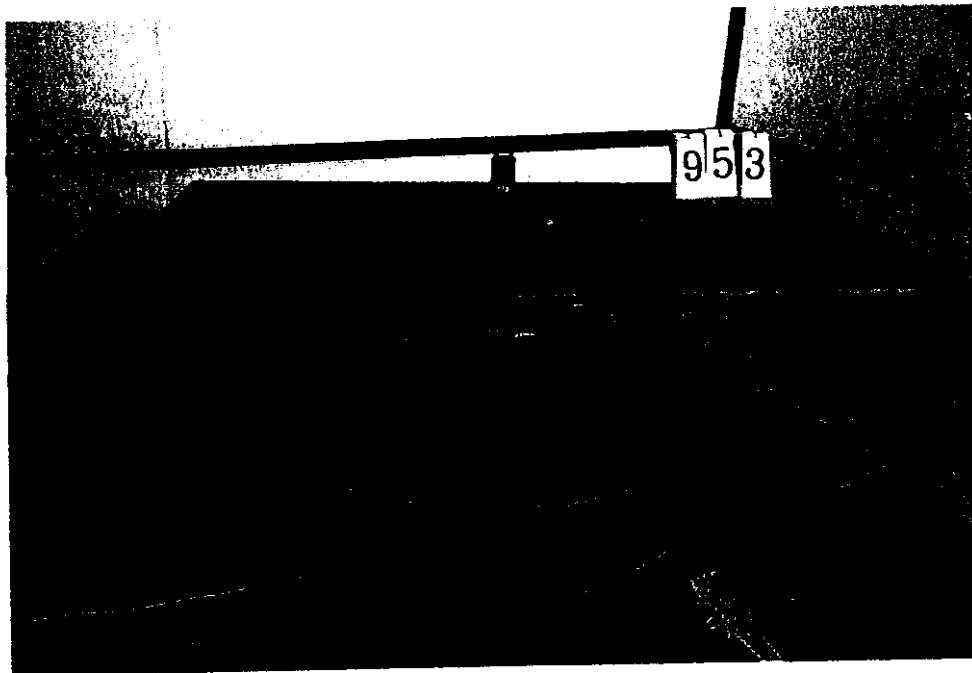

Pig 2 Rear View of the Test Configuration (HANDSET)

The test configuration for frequency between 1 GHz to 18 GHz is same as above.

#### 5.4 Test Result of Second Harmonic

Set the spectrum RB= 3 MHz, VB = 3MHz and span = 5MHz. The correction factors of the second harmonic is the second harmonic must lower 20 dB than the fundamental.

**Model No.** : DB-8219

**EUT** : 900MHz S.S.T. Cordless Phone

*Table 7 Second Harmonic Attendation*

<i>Channel</i>	<i>Fundamental</i> (MHz)	<i>Fundamental</i> (dBuV/m)	<i>2<sup>nd</sup> Harmonic</i> (GHz)	<i>2<sup>nd</sup> Har.</i> (dBuV/m)	<i>Result</i> (F/H dB)	<i>Limit</i> (dB)	<i>Margin</i> (dB)
B/S CH 01	904.500	102.29	1.808	38.49	63.80	20.00	43.80
B/S CH 10	914.860	103.15	1.829	37.99	65.16	20.00	45.16
B/S CH 20	926.270	103.02	1.852	34.99	68.03	20.00	48.03
H/S CH 01	904.660	101.39	1.808	40.99	60.40	20.00	40.40
H/S CH 10	914.850	101.15	1.829	37.99	63.16	20.00	43.16
H/S CH 20	926.280	99.62	1.852	39.49	60.13	20.00	40.13

Note:

1. The data in the above table are summarize the following attachment spectrum analyzer hard copy.

2. Result = Fundamental - 2<sup>nd</sup> Harmonic must over 20 dB.

### 4.3 Test Result of Fundamental Emissions

The peak values of fundamental emissions from the EUT at various antenna heights, antenna polarization, EUT orientation, etc. are recorded on the following.

**Model No. : DB-8220**

**EUT : 900MHz S.S.T. Cordless Phone**

**Table 6 . Open Field Fundamental Emissions**

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>A.P. (H/V)</b>	<b>A.H. (m)</b>	<b>Table (degree)</b>	<b>Amplitude (dBuV/m)</b>	<b>CF (dB)</b>	<b>Corrected Amplitude (dBuV/m)</b>	<b>E.R.P.(Peak)</b>	
								<b>mW</b>	<b>dBm</b>
Base 01	904.500	H	1.00	183	87.50	8.19	95.69	1.112	0.461
		V	1.00	122	94.10	8.19	102.29	5.083	7.061
Base 10	914.860	H	1.00	188	86.90	8.15	95.05	0.959	-0.178
		V	1.00	46	95.00	8.15	103.15	6.196	7.921
Base 20	926.270	H	1.00	81	73.80	7.81	81.61	0.043	-13.618
		V	1.00	115	95.20	7.82	103.02	6.013	7.791
Handset 01	904.660	H	1.00	180	80.90	8.19	89.09	0.243	-6.138
		V	1.00	300	93.20	8.19	101.39	4.131	6.161
Handset 10	914.850	H	1.00	184	80.50	8.15	88.65	0.219	-6.578
		V	1.00	300	93.00	8.15	101.15	3.909	5.921
Handset 20	926.280	H	1.00	213	83.80	7.82	91.62	0.435	-3.608
		V	1.00	3	91.80	7.82	99.62	2.748	4.391

Note:

1.A.P. means antenna polarization, horizontal and vertical.

2.A.H. means antenna height.

3.Table means turntable turning position.

4.Corrected Factor (C. F.) = Cable Loss + Antenna Factor - Amplified Gain  
 Corrected Amplitude = Peak Amplitude + Corrected Factor

5.Amplitude means the fundamental emission measured.

6.Effective Radiation Power (E.R.P.) =  $(E d)^2 / 30G$

E is the measured maximum field strength in V/m utilizing the maximum hold mode RBW (3MHz).

G is the numeric gain of the transmitting antenna over an isotropic radiator (1.00).

d is the distance in meters from which the field strength was measured (3M).

Example: the Max Radiation Emission of base ch01 = 95.69 dBuV/m

$$10^{95.69/20} \times 10^{-6} = 0.06088 \text{ V}$$

$$\text{E.R.P.} = (0.06088 \times 3)^2 / 30 = 1.112 \text{ mW} = 10 \times \log (1.112 \text{ mW}/1\text{mW}) = 0.461 \text{ dBm}$$

Table 9 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 1, Base Horizontal]

Radiated Emission				Correction Factors	Duty Cycle	Corrected Amplitude	FCC Class B (3 M)	
Frequency (GHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table ( ° )				Limit (dBuV/m)	Margin (dB)
2.68	56.12	100.00	269	-8.67	-6.46	40.99	54	-13.01
3.59	48.29	100.00	158	-6.84	-6.46	34.99	54	-19.01
4.50	49.54	100.00	147	3.91	-6.46	46.99	54	-7.01
5.41	27.56	100.00	231	9.72	-6.46	30.82	54	-23.18
6.31	26.23	100.00	28	9.72	-6.46	29.49	54	-24.51
***								

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor + Duty Cycle = Corrected

**Table 10 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 1, Base Vertical]**

*Table 11 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 1, Base Vertical]*

Table 12 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 10, Base Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBuV/m)	FCC Class B (3 M)	
Frequency (MHz)	Amplitude (dBuV/m)	Ant.H. (cm)	Table (°)			Limit (dBuV/m)	Margin (dB)
326.400	45.60	1.00	122	-6.45	39.15	46.00	-6.85
345.610	46.60	1.00	226	-6.06	40.54	46.00	-5.46
355.200	42.30	1.00	41	-5.67	36.63	46.00	-9.37
364.810	40.40	1.00	72	-5.20	35.20	46.00	-10.80
374.400	42.80	4.00	341	-4.73	38.07	46.00	-7.93
460.800	38.70	1.00	25	-2.58	36.12	46.00	-9.88
480.010	37.40	1.00	277	-2.00	35.40	46.00	-10.60
489.610	38.20	1.00	37	-1.90	36.30	46.00	-9.70
***							

*Table 13 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 10, Base Horizontal]*

Table 14 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 10, Base Vertical]

**Table 15 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 10, Base Vertical]**

**Table 16 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 20, Base Horizontal]**

*Table 17 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 20, Base Horizontal]*

*Table 18 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 20, Base Vertical]*

**Table 19 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 20, Base Vertical]**

**Table 20 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 1, Handset Horizontal]**

Table 21 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 1, Handset Horizontal]

Table 22 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 1, Handset Vertical]

Table 23 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 1, Handset Vertical]

Table 24 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 10, Handset Horizontal]

Frequency (MHz)	Antenna Amplitude (dBuV/m)	Table Ant.H. (cm)	Factors	Corrected Emission (3M) FCC Class B	Margin (dB)	
					Limit (dBuV/m)	Margin (dB)
441.610	35.40	1.00	288	-3.27	32.13	46.00
451.210	36.80	1.00	182	-3.04	33.76	46.00
460.810	36.70	1.00	126	-2.58	34.12	46.00
***						-11.88

Table 25 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 10, Handset Horizontal]

Frequency (GHz)	Radiated Emission Amplitude (dBuV/m)	Ant.H. (cm)	Table (°)	(dB)	Corrrected Duty Cycle Factors	Corrected Amplitude (dBuV/m)	FCC Class B Margin (dB)	
							Limit (3M) (dBuV/m)	Margin (dB)
2.71	54.29	100.00	256	-6.84	-6.46	40.99	54	-13.01
3.65	42.76	100.00	289	-5.64	-6.46	30.66	54	-23.34
4.55	51.37	100.00	143	3.91	-6.46	48.82	54	-5.18
5.46	40.90	100.00	328	9.72	-6.46	44.16	54	-9.84
6.37	30.40	100.00	152	9.72	-6.46	33.66	54	-20.34
8.21	32.40	100.00	78	9.72	-6.46	35.66	54	-18.34
9.15	32.40	100.00	9	9.72	-6.46	35.66	54	-18.34
***								

Frequency (MHz)	Radiated Emission		Correlation Factors	Corrected Amplitude (dB)	FCC Class B Margin (dB)
	Ant.H. (dBuV/m)	Table (cm)			
326.410	36.50	1.00	296	-6.45	30.05
422.410	36.70	1.00	69	-3.88	32.82
432.010	37.20	1.00	115	-3.54	33.66
441.610	38.30	1.00	130	-3.27	35.03
899.150	25.50	1.00	8	8.10	33.60
934.070	28.80	1.00	10	7.78	36.58
					46.00
					-9.42
					***

Table 26 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 10, Handset Vertical]

Table 27 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 10, Handset Vertical]

Frequency (GHz)	Radiated Emission						Margin (dB)
	Amplitude (dBuV/m)	Ant.H. (cm)	Table (%)	(dB)	Amplitude (dBuV/m)	Limit (3M) (dB)	
Factors	Duty Cycle	Corrected Amplitude	FCC Class B	Corrections	Amplitude	Margin	Margin
2.71	57.46	100.00	327	-6.84	-6.46	44.16	54
3.65	45.92	100.00	195	-5.64	-6.46	33.82	54
4.55	49.21	100.00	41	3.91	-6.46	46.66	54
5.46	34.90	100.00	96	9.72	-6.46	38.16	54
							-15.84
							***

Table 28 Open Field Radiated Emissions For 30MHz ~ 1GHz /Channel 20, Handset Horizontal

Frequency (MHz)	Radiated Emission Amplitude (dBuV/m)	Ant.H. (cm)	Table Factors	Corrected Amplitude (3M) (dB)	Limit (dBuV/m)	Margin (dB)
432.010	36.00	1.00	190	-3.54	32.46	46.00
451.210	34.10	1.00	29	-3.04	31.06	46.00
460.810	33.60	1.00	291	-2.58	31.02	46.00
547.210	31.90	1.00	274	-0.07	31.83	46.00
935.410	24.70	1.00	108	7.80	32.50	46.00
	***					

Table 29 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 20, Handset Horizontal]

Frequency (GHz)	Radiated Emission	Correlation Factors	Corrected Duty Cycle	Corrected Amplitude (dBuV/m)	FCC Class B		Margin (dB)
					Ant.H. (cm)	Table (°)	
2.77	51.96	100.00	37	-6.84	-6.46	38.66	54 -15.34
3.67	45.09	100.00	219	-5.64	-6.46	32.99	54 -21.01
4.61	48.87	100.00	63	3.91	-6.46	46.32	54 -7.68
5.54	39.23	100.00	7	9.72	-6.46	42.49	54 -11.51
6.48	35.56	100.00	224	9.72	-6.46	38.82	54 -15.18
8.32	33.40	100.00	55	9.72	-6.46	36.66	54 -17.34
9.26	32.06	100.00	562	9.72	-6.46	35.32	54 -18.68
10.16	31.06	100.00	182	9.72	-6.46	34.32	54 -19.68
	***						

Table 30 Open Field Radiated Emissions For 30MHz ~ 1GHz [Channel 20, Handset Vertical]

Table 31 Open Field Radiated Emissions For 1GHz ~ 18GHz [Channel 20, Handset Vertical]

## VI. Section 15.247(d): Power Spectral Density


### 6.1 Test Condition & Setup

The tests below are running with the DCT transmitter set at high power in TDD mode .A serial port from a computer to the DCT UUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. A log antenna was connected with the spectrum analyzer.

The EUT is tested in open field site. Put EUT on the middle of a wooden table. Set spectrum analyzer RBW = 3 KHz, VBW > RBW (e.g. VBW = 10 KHz), Span = 1.5 MHz. Turn around the table to find maximum emission. Then set the Span = 300 KHz and sweep time = 100 sec. Peak the maximum emission again. The peak level measured must be no greater than +8 dBm.

The setting up procedure is recorded on Appendix A.

## 6.2 Test Instruments Configuration

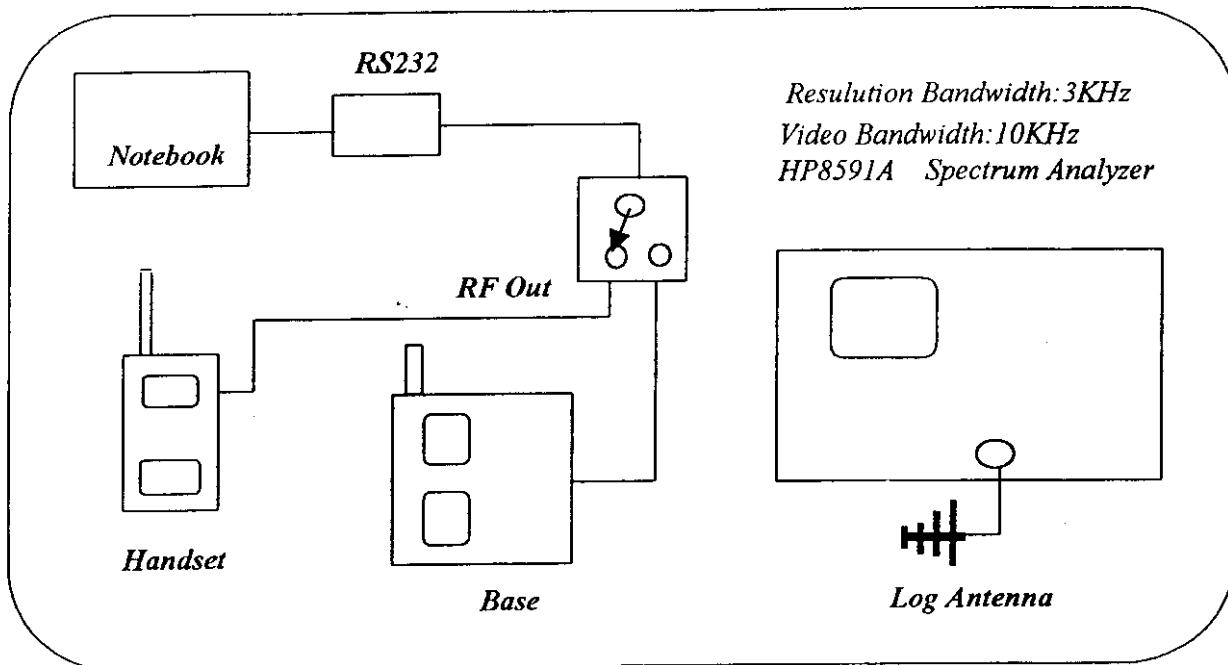

P.S.A serial port from notebook computer to control the EUT at maximal power output and channel Number.

Fig 12. Test Configuration of power spectral density

## 6.3 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	9KHz-2.9 GHz Spectrum Analyze	HP8594EM	50.00

#### **6.4 Required of Carrier frequency**

If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

Test Condition & Setup: same as 3.1



MZa.vi  
modified on 1998/12/25 at PM 02:27  
dated on 1999/3/14 at PM 03:26


49-1

Connector Pane



900MZa.vi

Front Panel

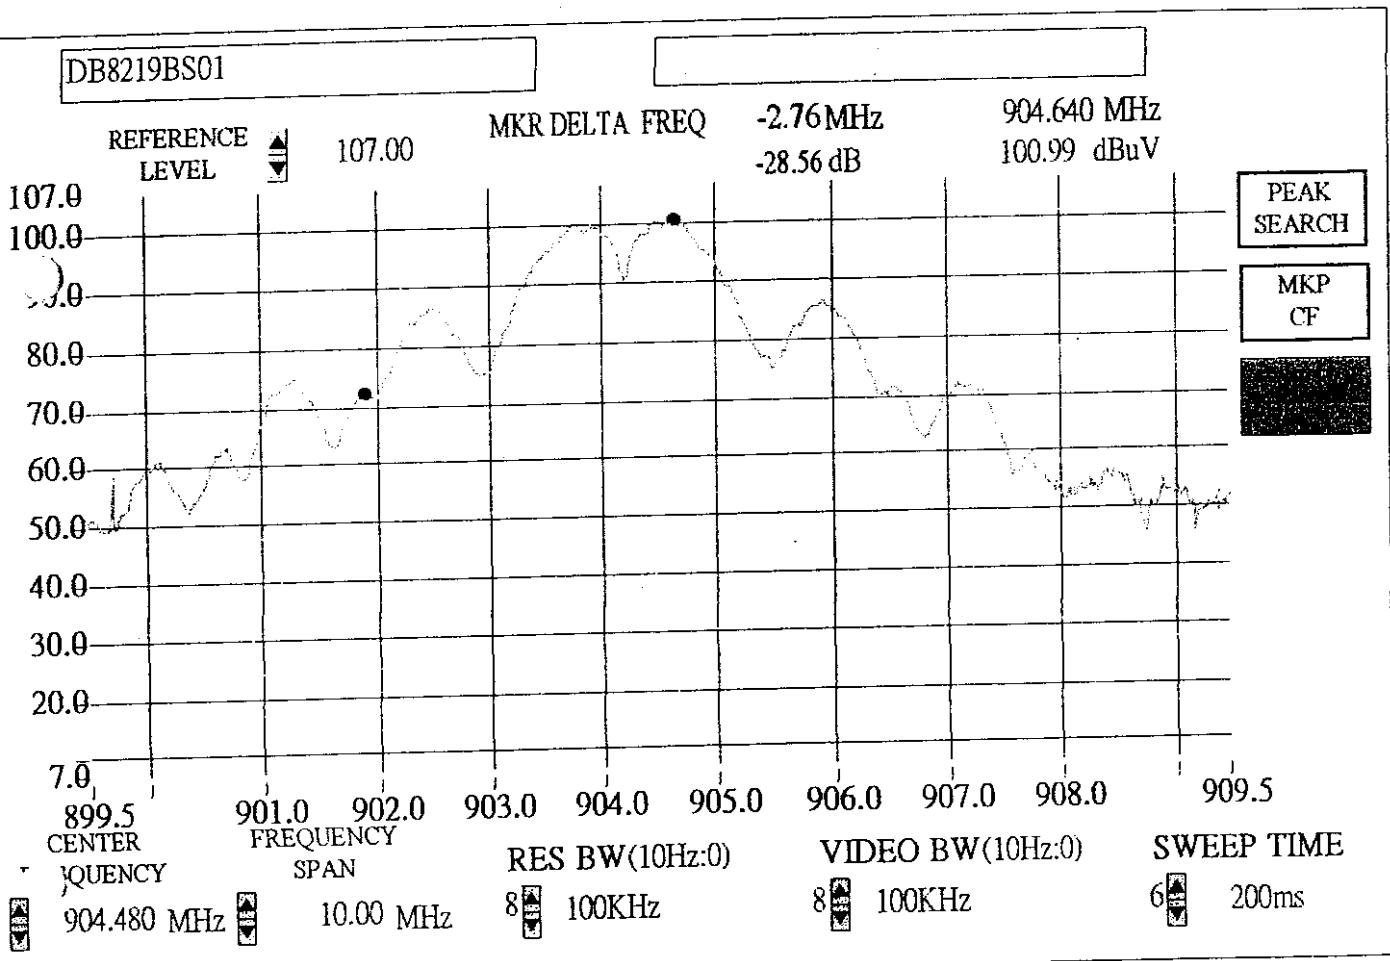



DOMZa.vi

last modified on 1998/12/25 at PM 02:27

Printed on 1999/3/14 at PM 05:39


49-2

### Connector Pane




900MZA.VI

## Front Panel

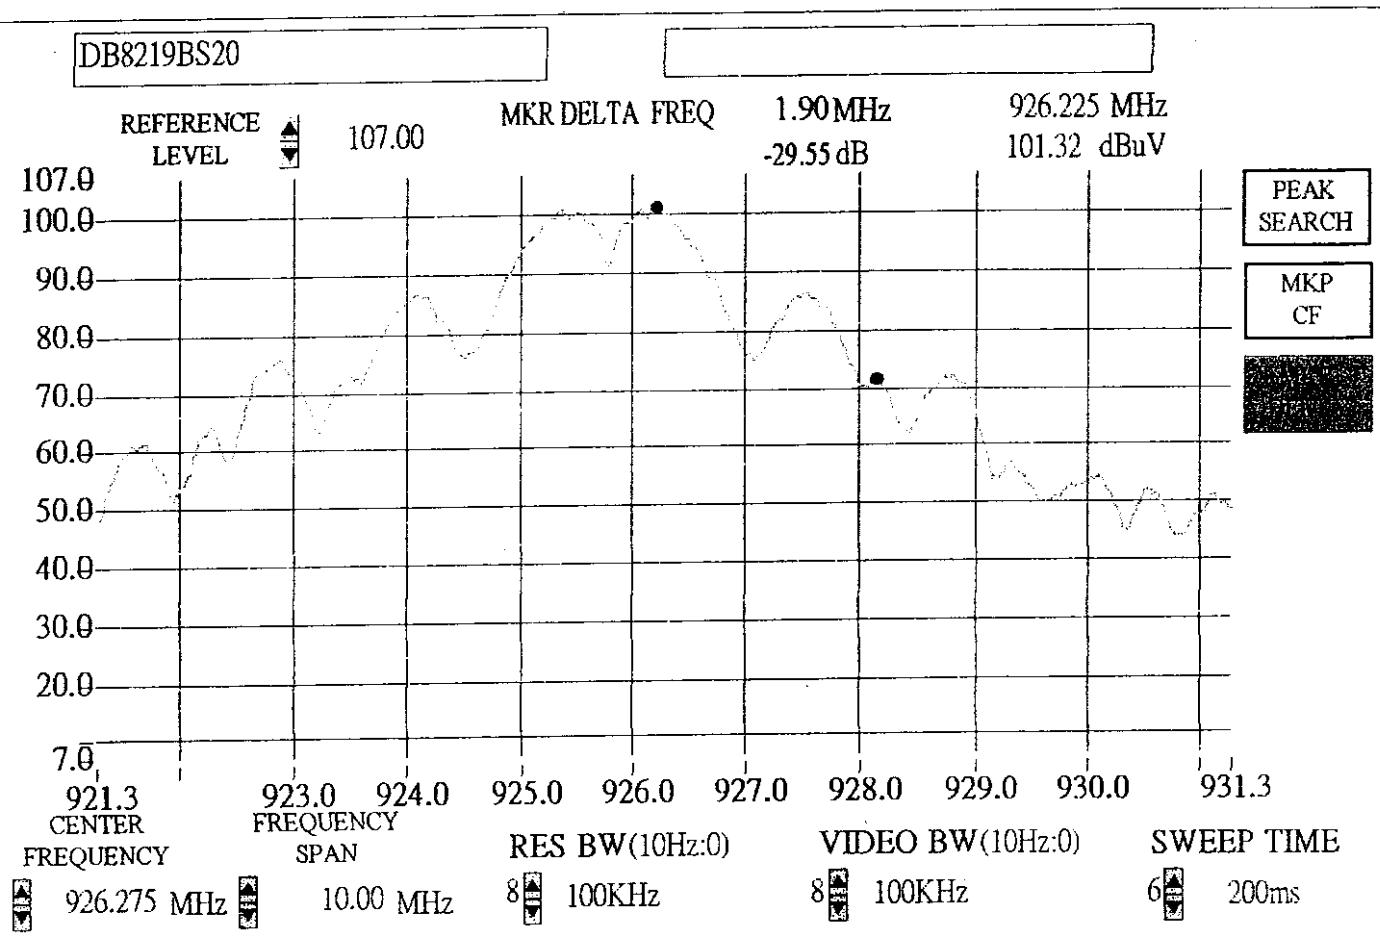


0MZA.vi  
 Last modified on 1998/12/25 at PM 02:27  
 Inserted on 1999/3/14 at PM 03:06

Connector Pane



900MZA.vi

Front Panel

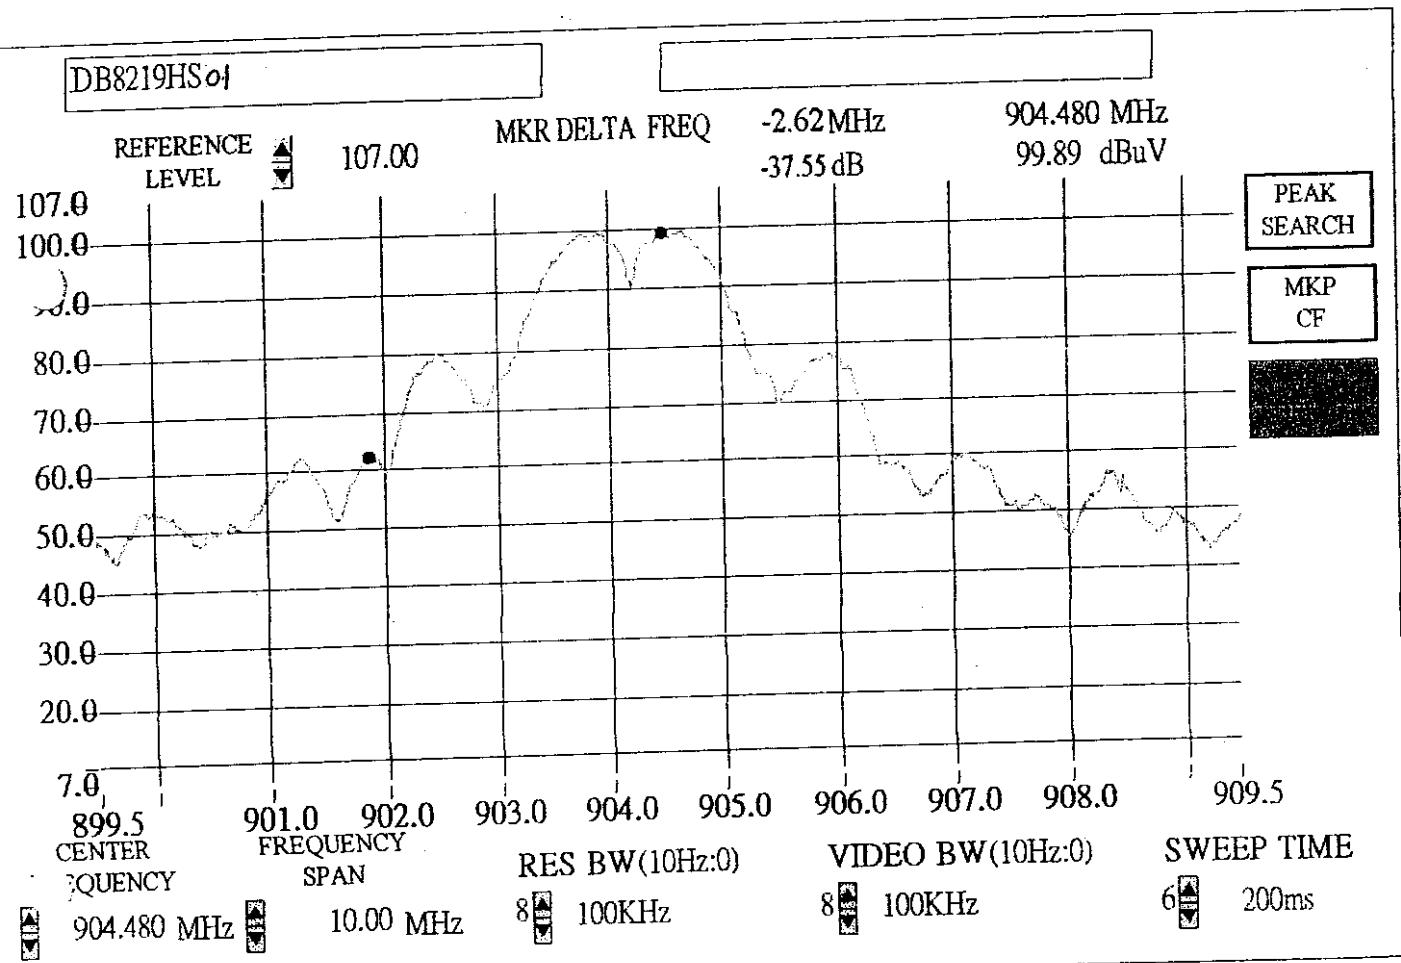



00MZa.vi  
last modified on 1998/12/25 at PM 02:27  
printed on 1999/3/14 at PM 02:35


49-4

Connector Pane



900MZa.vi

Front Panel

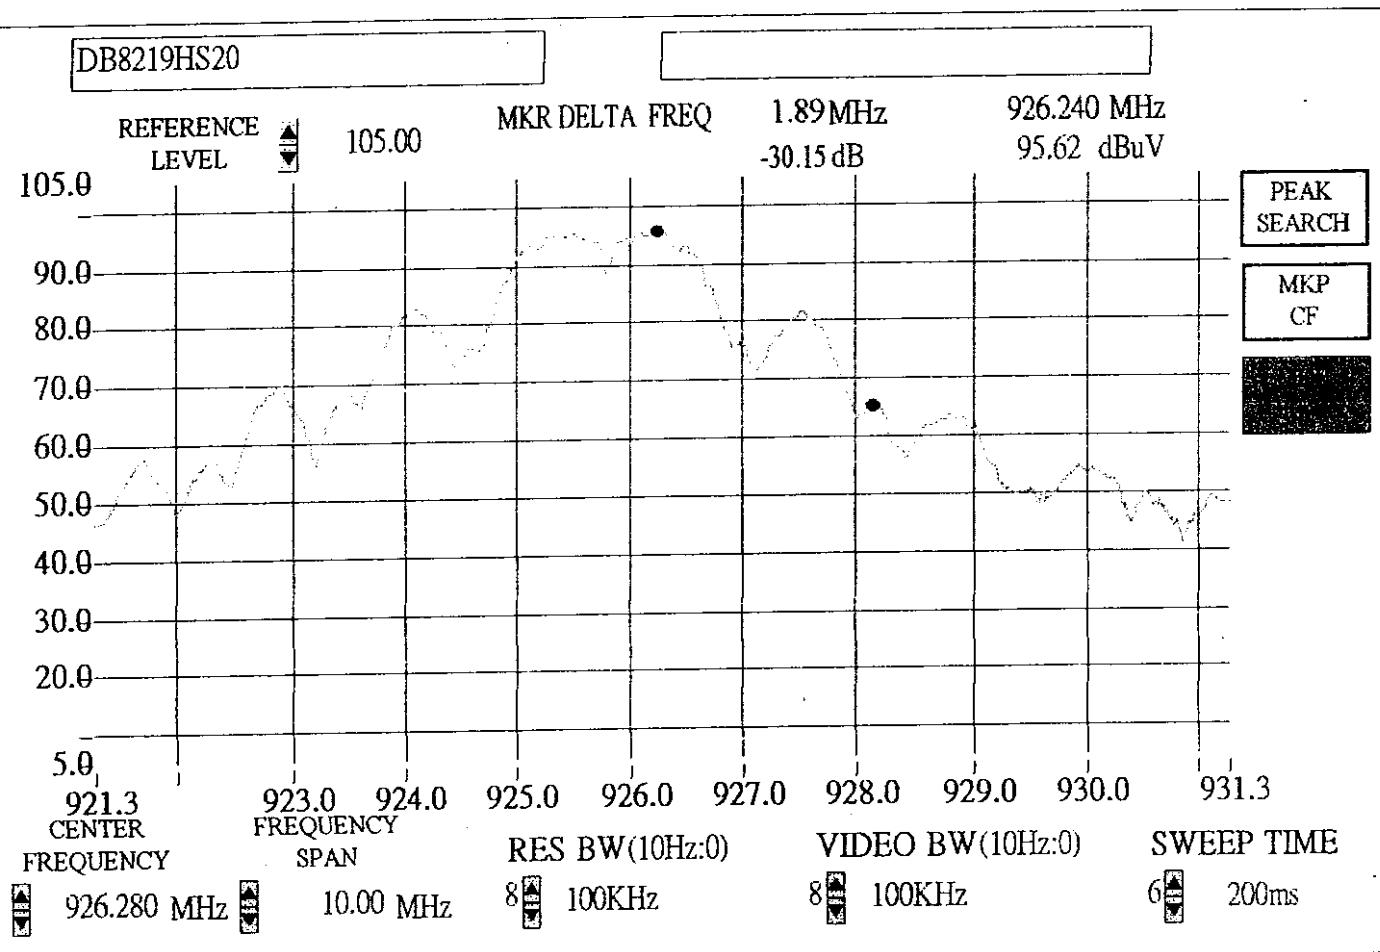

### 6.5 Test Result of Power spectral density.

The following table shows a summary of the highest power out of UT.

**Model No.** : DB-8220  
**EUT** : 900MHz S.S.T. Cordless Phone

*Table 33. Power Spectral Density*

Channel	Frequency (MHz)	Ppr (dBuV)	CF (dB)	Ppq (dBm)	Limit (dB)	Margin (dB)
B/S CH 01	904.517	86.90	8.19	-0.13	8.00	-8.14
B/S CH 10	914.866	88.30	8.15	1.22	8.00	-6.78
B/S CH 20	926.266	88.40	7.82	0.99	8.00	-7.01
H/S CH 01	904.511	86.20	8.19	-0.84	8.00	-8.84
H/S CH 10	914.860	87.30	8.15	0.22	8.00	-7.78
H/S CH 20	925.361	87.12	7.82	-0.29	8.00	-8.29

Note:

1. The attachment follow by this page and there is no page number.
2. Ppr: spectrum read power density (using peak search mode), CF: correct factor, Ppq: actual peak power density in the spread spectrum band.
3.  $Ppq = Ppr + CF$
4. Effective Radiation Power (E.R.P.) =  $(E \cdot d)^2 / 30G$

E is the measured maximum field strength in V/m utilizing the maximum hold mode  
 RBW (3KHz).

G is the numeric gain of the transmitting antenna over an isotropic radiator (1.00).

d is the distance in meters from which the field strength was measured (3M).

Example: the Max Radiation Emission of base ch01 =  $86.90 + 8.19 = 95.09$  dBuV/m

$$10^{(95.09/20)} \times 10^{-4} = 0.05681 \text{V}$$

$$\begin{aligned} \text{E.R.P.} &= (0.05681 \times 3)^2 / 30 = 0.969 \text{ mW} = 10 \times \log (0.969 \text{ mW}/1\text{mW}) \\ &= -0.13 \text{ dBm} \end{aligned}$$

## VII. Section 15.247(e): Processing Gain

### 7.1 Test Condition & Setup

#### A. Bit Error Rate (Pe)

The subjective device RF module (base & handset) digital modulation by Differential Phase -Shift Keying (DPSK), the DPSK can use it's previous waveform as the phase reference for demodulation and thus requires no coherent detection, which greatly simplifies the receiver structure but with some Bit Error Rate (BER) degradation because of noisy phase reference. There is tradeoff between system complexity and system performance. In order to driver the DPSK error probability , we observe that DPSK using differential coding , we observable that DPSK using different coding is essentially an orthogonal signal scheme. A binary 1 is transmitted a sequence of two pulse (P,P) or (-P,-P) over 2 To seconds (no transition). Similarly, a binary 0 is transmitted by a sequence of two plus (P,-P) or (-P,P) over 2 TO seconds (transition). Either of the pulse sequences used for binary 1 is orthogonal to either of the pulse sequences used for binary 0. Because no local carrier is generated for demodulation, the detection is noncoherent , with an effective pulse energy equal to 2 Ep (twice the energy of pulse P ). The actual energy transmitted per digit only Ep, however, the same as in noncoherent FSK, Consequently, the performance of DPSK is 3 dB superior to that of noncoherent FSK, We can write Pe for DPSK as :

The major component inside the subjective device are supplied by Rock well , Included RF block transmitter (RF101), Receiver (RF 100), and Base band block ASIC (c8502-13), CODEC (10497-14), above 4 IC chips are affected the processing gain as following :

$$J/S = (W/RD) / (ED/NO) \text{ [without CODING]}$$

Where: W= Spread Chip Rate = Required Transmitted Base band Bandwidth.

Rb = Information Data Rate

Eb/No = Require Energy per Bit over noise Spectral Density for a Specific Bit Error Probability.

The subjective Device Information Data Rate are 80k and the Spread Chip Rate are 960k So the processing gain ( $10 \log w/Rb$ ) at least 10.79 dB( without Coding).

The ASIC (c8502-13) and CODEC (10497-14) these two chip included the coding function, So, it is great improve the processing gain and also improve the J/S ratio.

The Engineer work for Rock well System in Taiwan had pass us the information about the probability of error rate (Pe) must be lower than 0.001 that the system performance will satisfy for communication between Handset and Base station.

Why we need the Pe lower than 0.001, the Rockwell Semiconductor System is not explained , Since it relative with ASIC and Codec, it is confidential area that Rockwell is not allow to dislouse to the public.

When Pe = 0.001 and then Signal to Noise Ratio (S/N) = 6.2194 = 7.9dB.

DMZa.vi

Last modified on 1998/12/25 at PM 02:27

Entered on 1999/3/14 at PM 03:24


50-1

Connector Panel



900MZa.vi

Front Panel

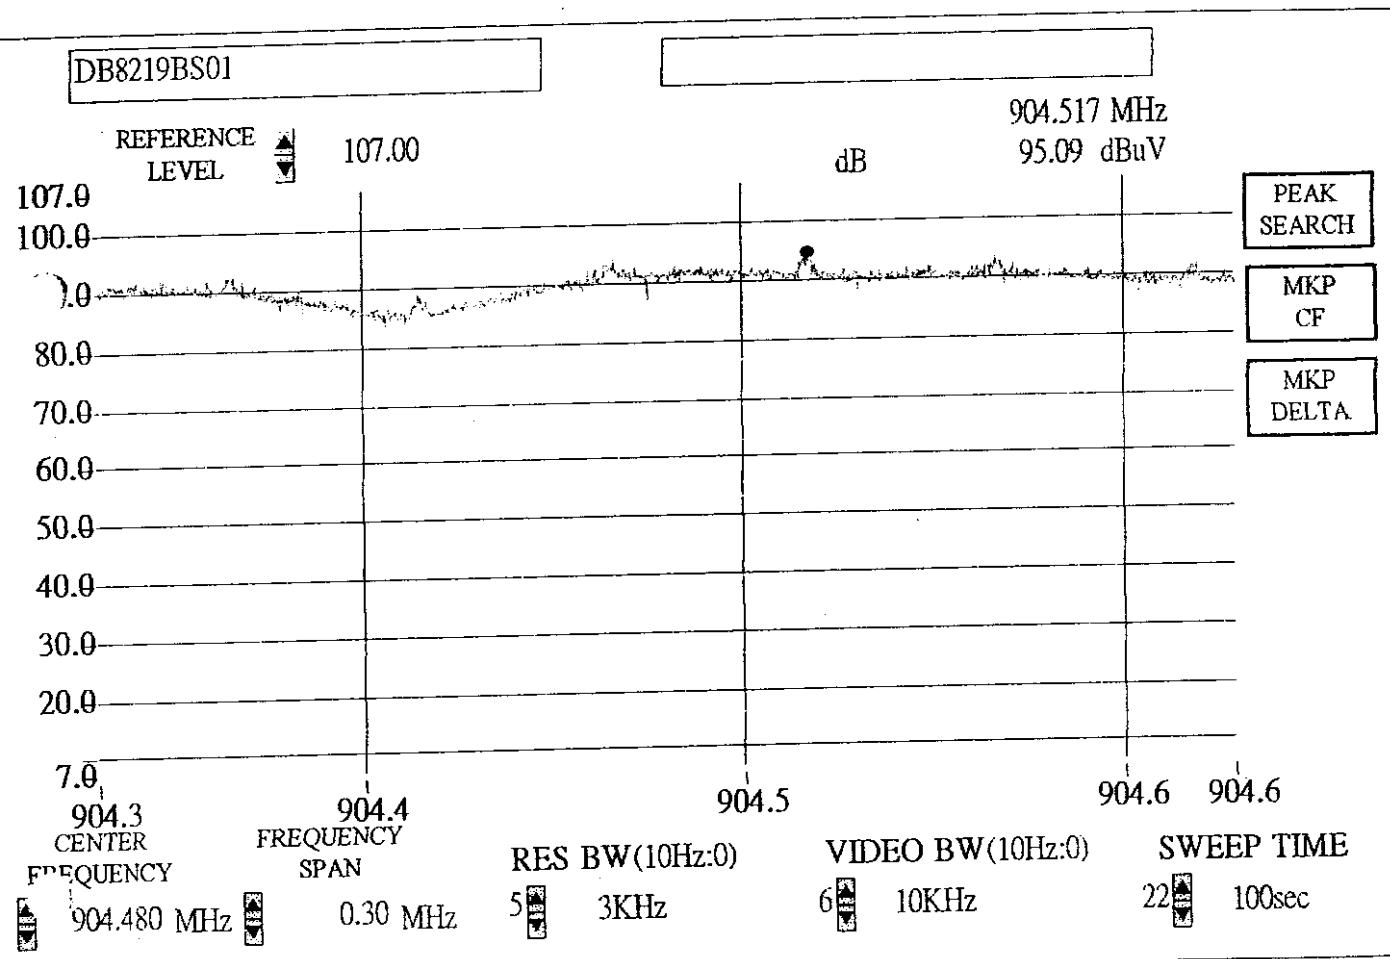



00MZA.vi

last modified on 1998/12/25 at PM 02:27

printed on 1999/3/14 at PM 05:26


50-2

Connector Pane



900MZA.vi

Front Panel

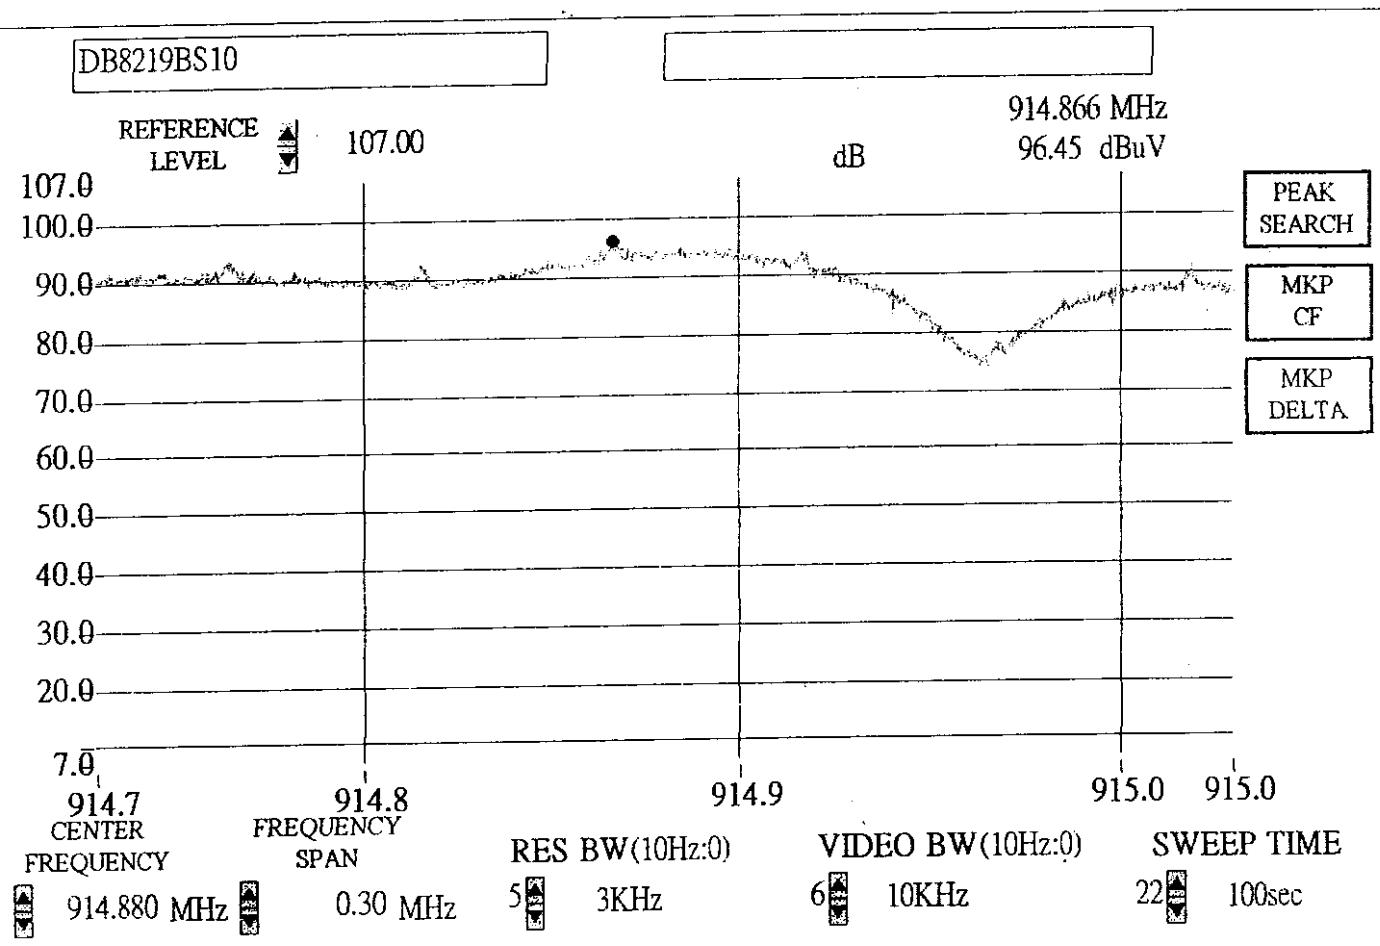

MZA.vi

Last modified on 1998/12/25 at PM 02:27  
Entered on 1999/3/14 at PM 05:34


50-3

Connector Pane



900MZA.vi

Front Panel

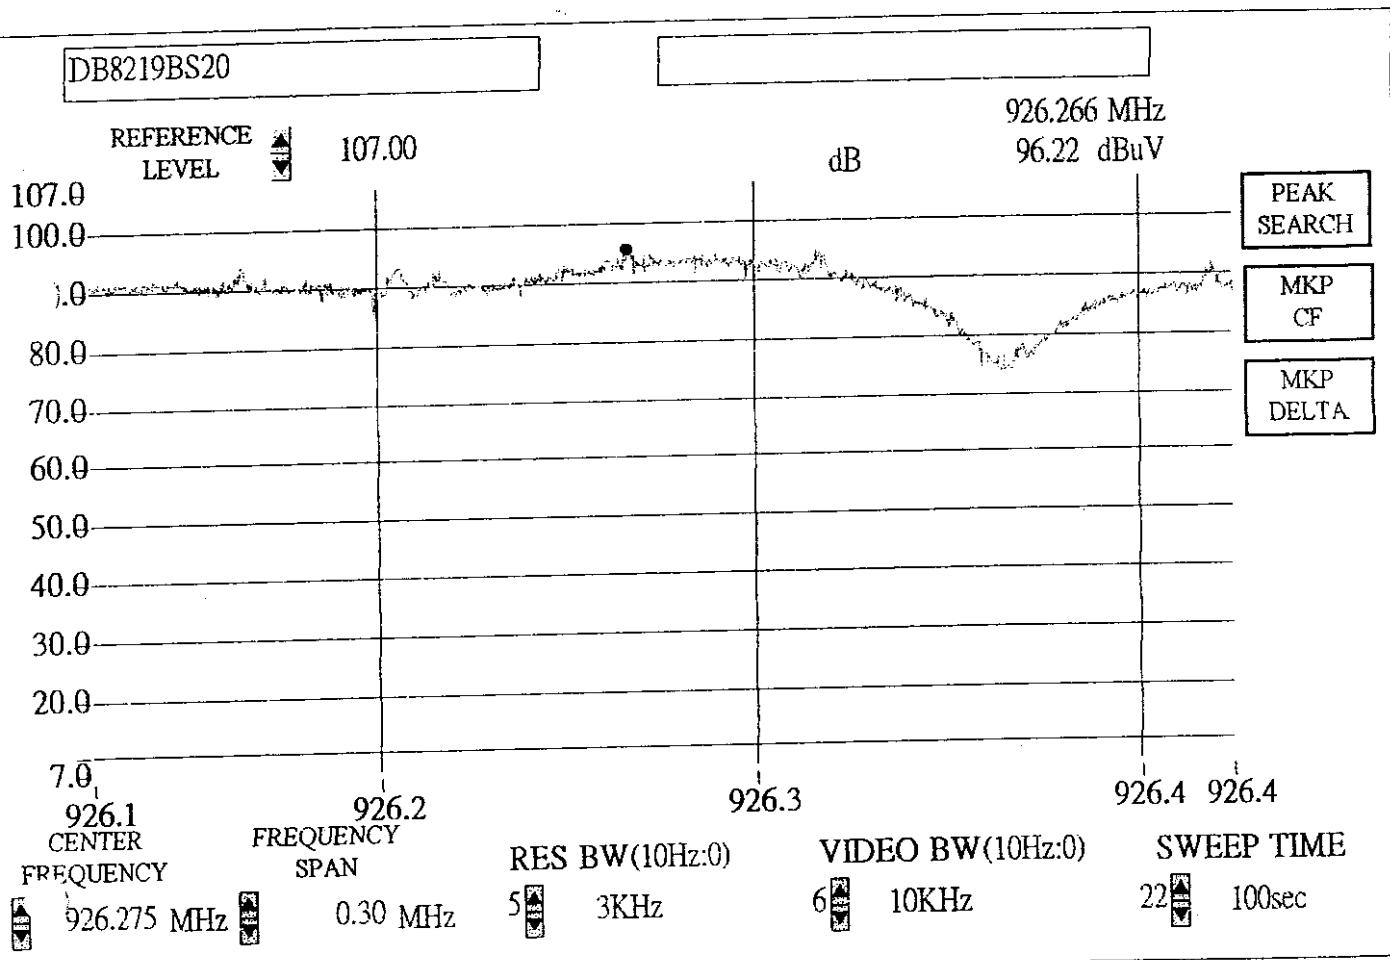



00MZa.vi

last modified on 1998/12/25 at PM 02:27

printed on 1999/3/14 at PM 03:13


50-4

Connector Pane



900MZa.vi

front Panel

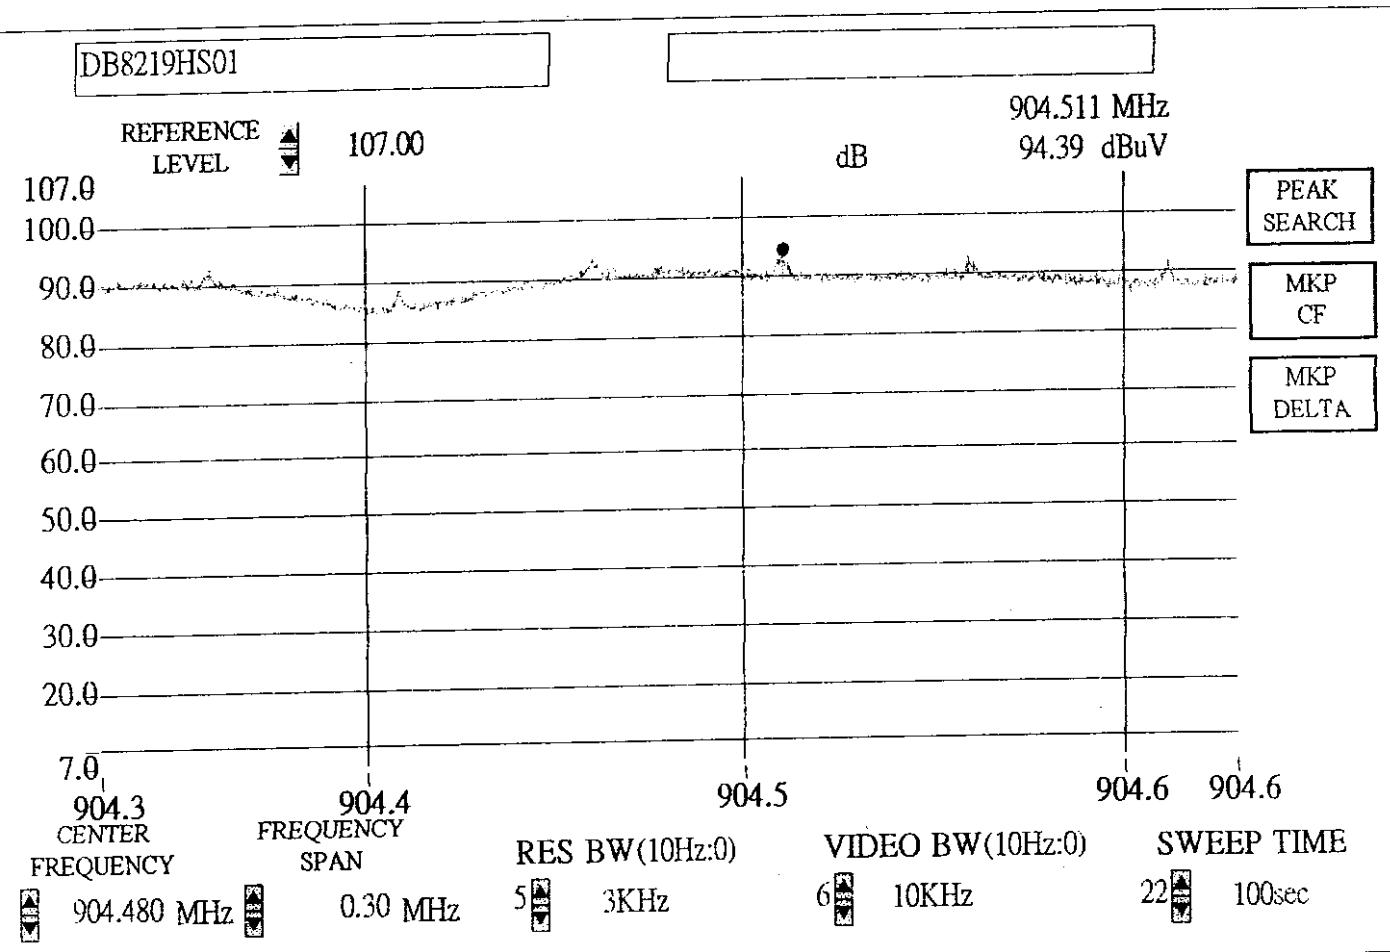

0MZA.vi

Last modified on 1998/12/25 at PM 02:27

Entered on 1999/3/14 at PM 02:57


50-5

Connector Panel



900MZA.vi

Front Panel

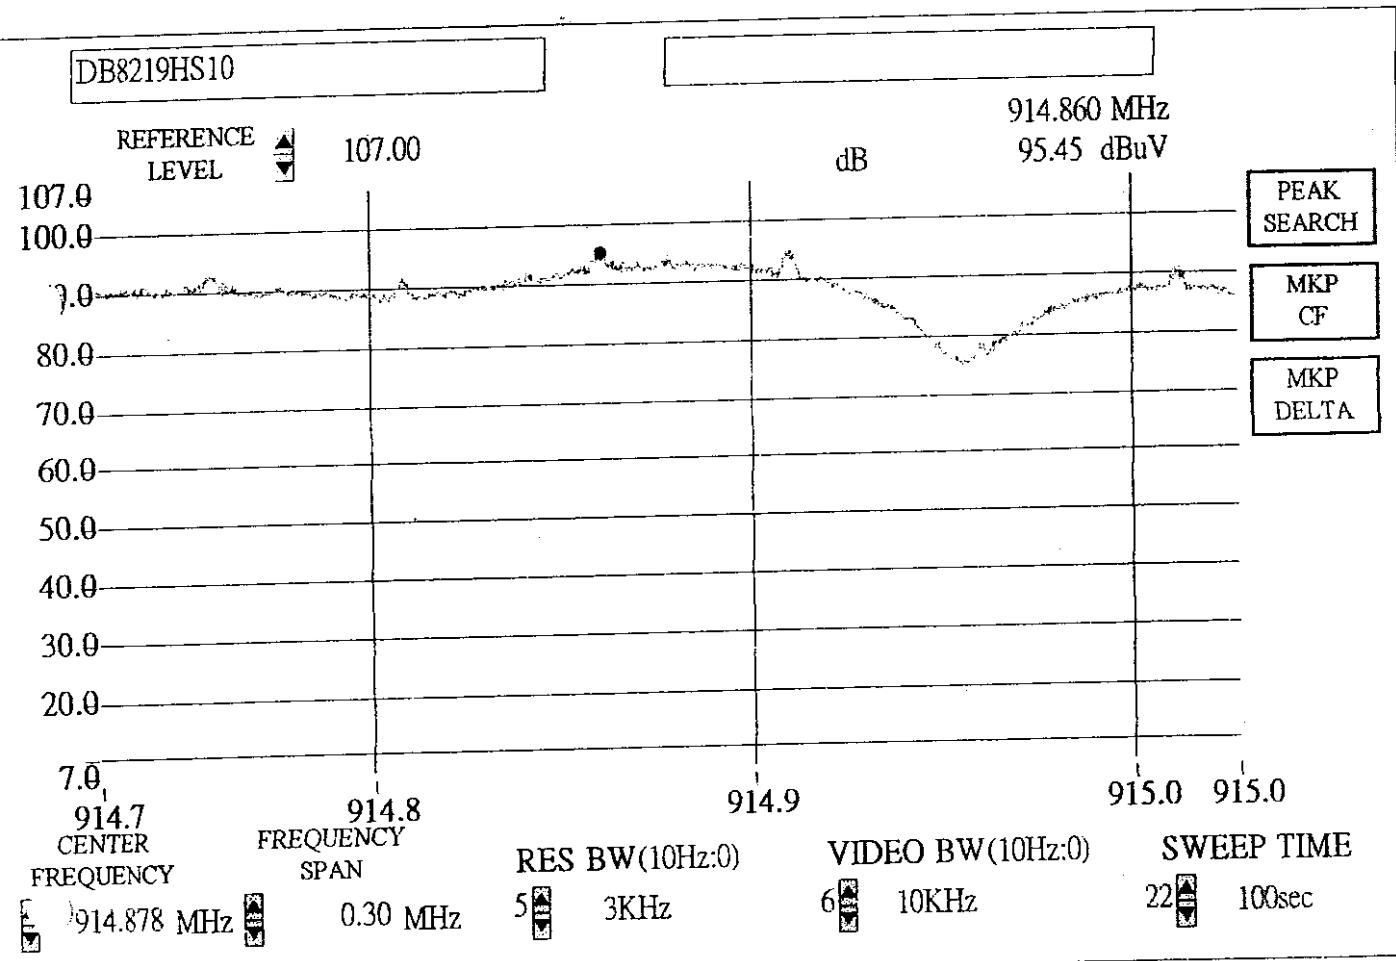



00MZa.vi

last modified on 1998/12/25 at PM 02:27

printed on 1999/3/14 at PM 02:47


50-6

connector Pane



900MZa.vi

ront Panel

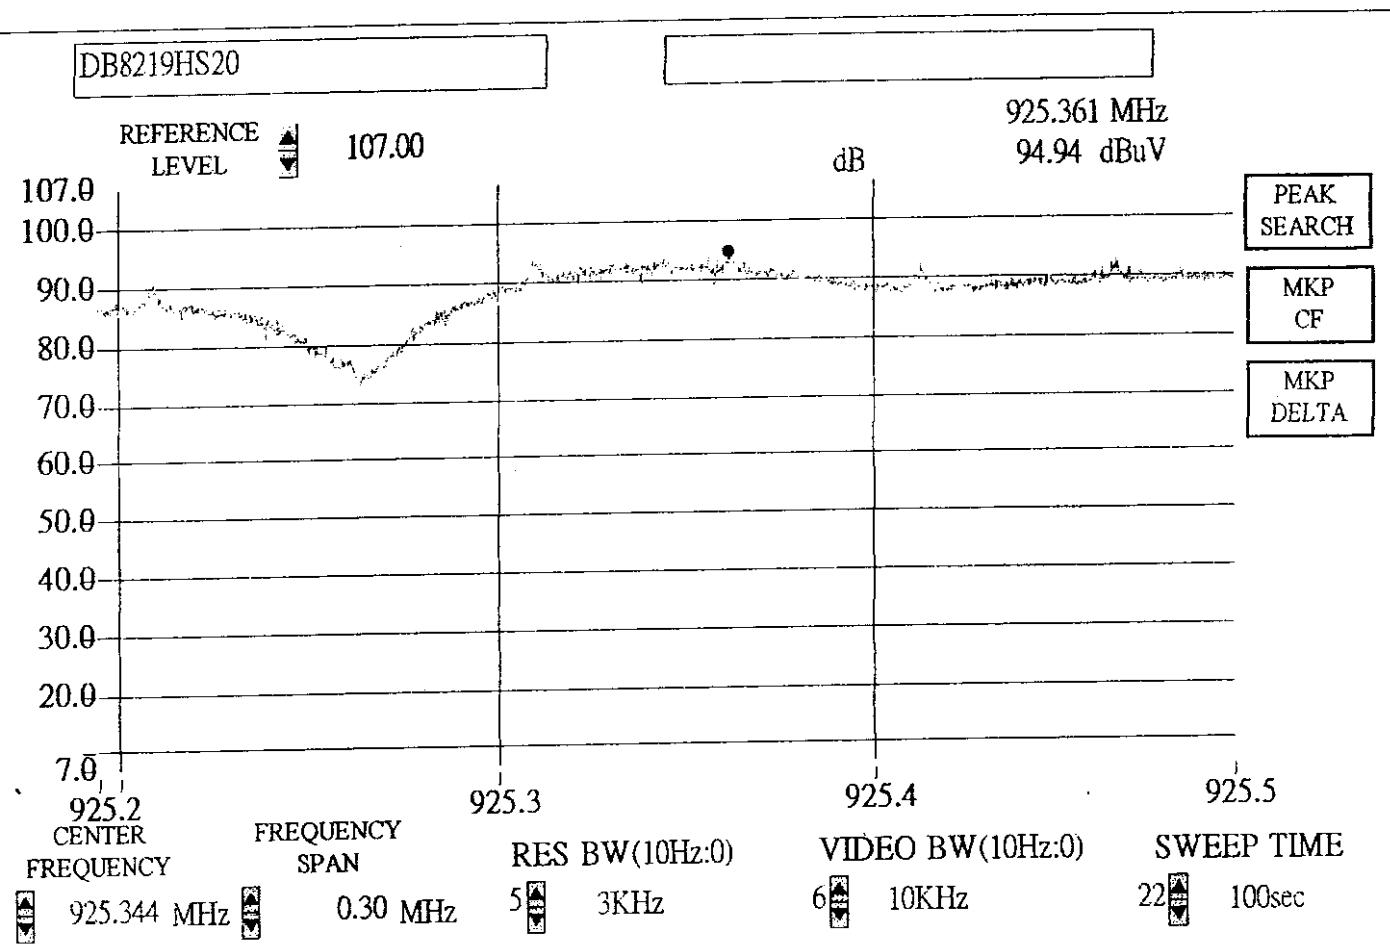

### B. Jamming Margin Method

The Rockwell Semiconductor System give us a software operated in the personal computer, and use the computer series port COM1 and COM2 connect Handset and Base than we can measure the Bit Error Rate.

Using this software we can perform Jamming Margin method testing. The test consists of stepping a signal generator in 50 KHz increments across the pass band of the system (up to 960 KHz away in RI's DCT). At each point, the generator level required to produce the recommend Bit Error Rate (BER = 10e - 3) is recorded. This level is the jamming level. The maximum implementation loss a system can claim in calculating processing gain is 2 dB. The equation to calculate the processing gain (G<sub>p</sub>) is the following:

$$G_p = (S/N) + M_j + L_{sys}$$

$$G_p = 8 \text{ dB} + M_j + 2 \text{ dB}$$

FCC regulation section 15.247 (e) rewire the processing gain of a direct sequence system shall be at least 10 dB, when G<sub>p</sub> must be greater than 10 dB, then the Jammer must be greater than 0 dB.

The processing gain may be measured using the CW jamming margin method. The Jammer to Signal (J/S) ratio is then calculated. Discard the worst 20% of the J/S data points.

1. For avoid the handset and basestation are situation, so, the UUT were in low power mode.
2. The signal generator was selected in interference band, using this software we can perform Jamming Margin method testing, the test consists of stepping a signal generator is 50 KHz increments across the pass band of the system (up to 960 KHz away in RI's DCT). So, the BER will keep in 0.1%.

The setting up procedure is recorded on Appendix A.

## 7.2 Test Instruments Configuration

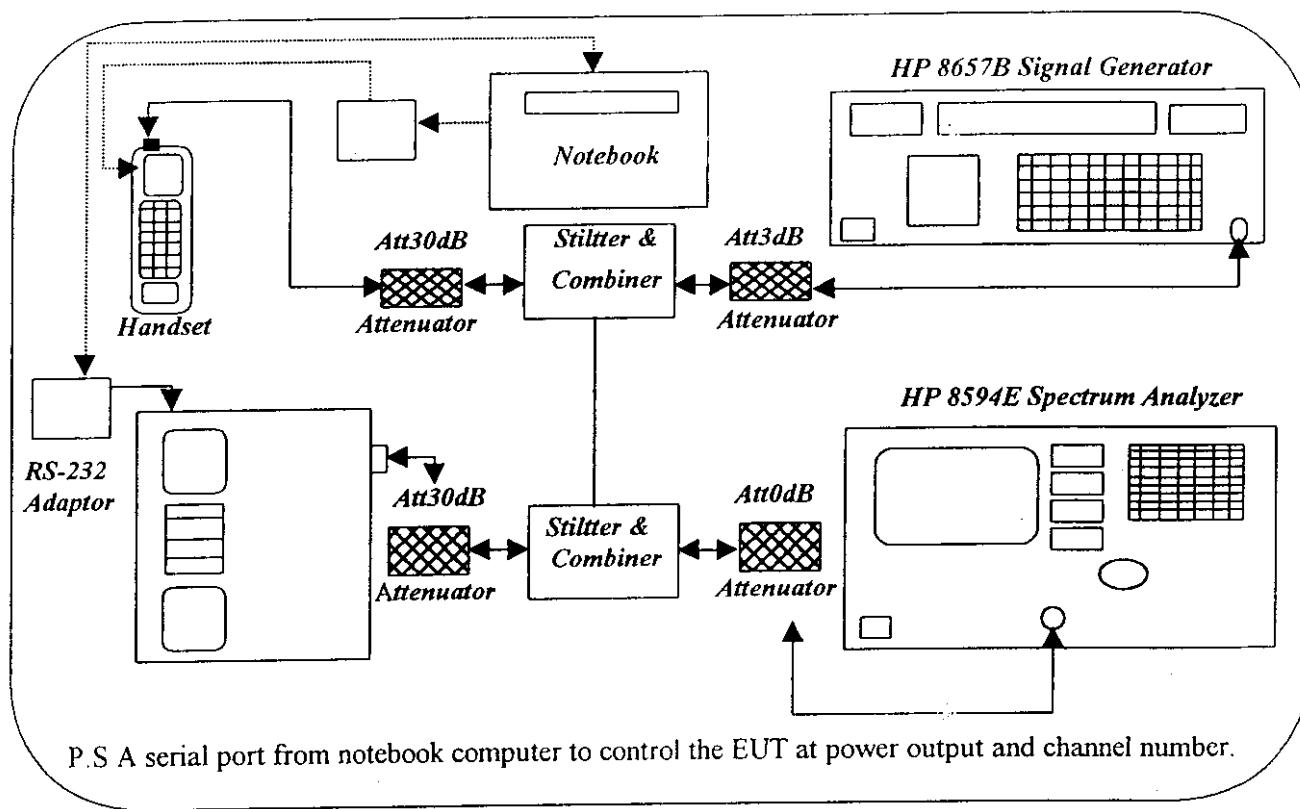


Fig 13. Test Configuration of processing gain for base station

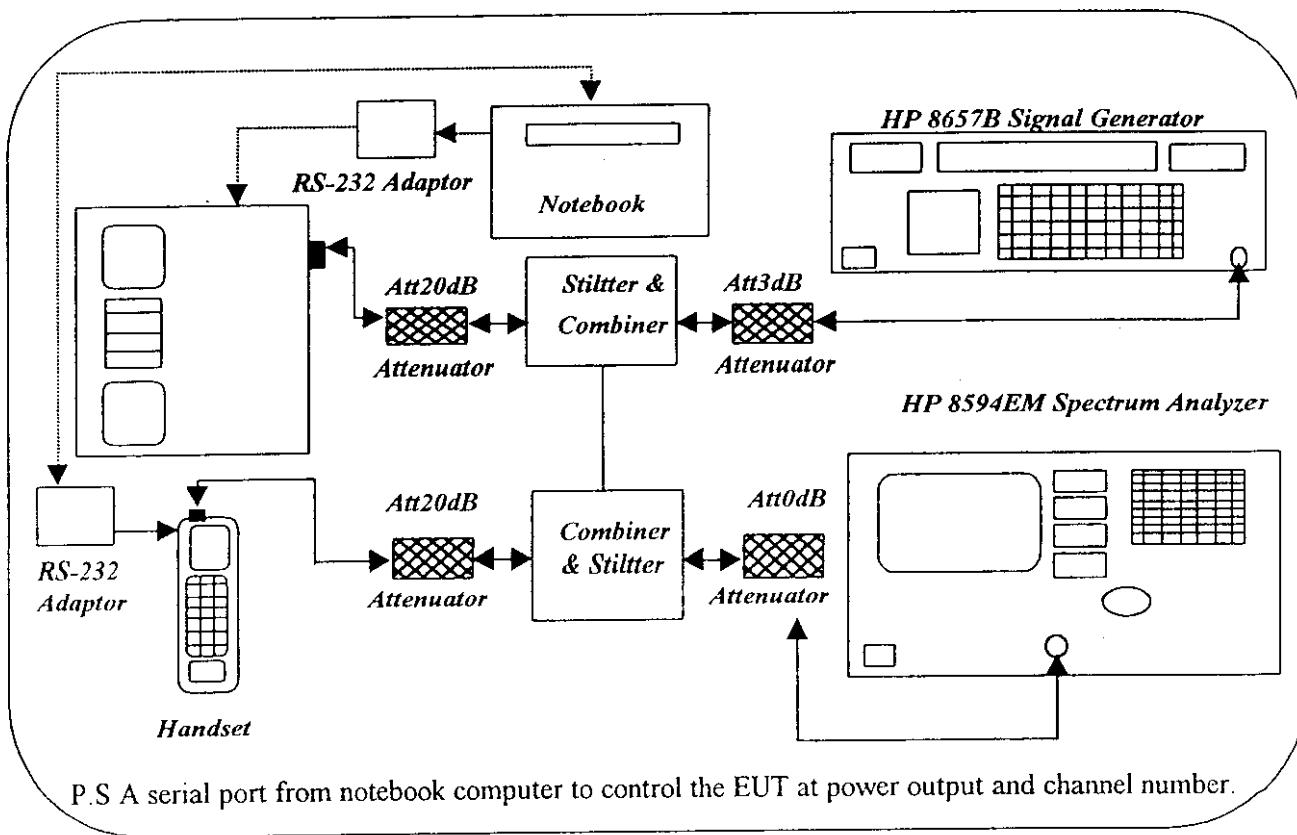


Fig. 14 Test Configuration of processing gain for handset

### 7.3 List of Test Instruments

Manufacturer	Device	Model	Input Impedance
Hewlett Packard	100Hz-1.8GHz Spectrum Analyzer	HP8592A	50.00
Hewlett Packard	100Hz-2.6GHz Signal Generator	HP8657B	50.00
Mini Circuits	10MHz-2GHz Power Stlitter/Combiner	ZESC-2-11	50.00
Mini Circuits	DC-1.5GHz 3dB Attenuator	CAT-3	50.00
Mini Circuits	DC-1.5GHz 20dB Attenuator	CAT-20	50.00
Mini Circuits	DC-1.5GHz 30dB Attenuator	CAT-30	50.00

### 7.4 Test Procedure

According to the Fig. 13 of the page 53, combine the stuffs.

Measure the low power output of the channel 10 of the handset while the handset is in "Transmit-Only-Test" and the whole circuit is as same as Fig. 13. What we measure in this step is "S".

Change to the "BER Test" program. Increase the RF output of the signal generator till the BER is close to the 0.1% but under 0.1%.

Stop the program and turn off the base, handset then record the highest point of the spectrum. What we measure in this step is "J".

Star the Program again and test the next point.

### 7.5 Test Result of Processing Gain.

**Model No. : DB-8220**

**EUT : 900MHz S.S.T. Cordless Phone**

**Table 34. Processing Gain [Channel 10, Handset]**

Jammer Frequency (MHz)	S (dBm)	J (dBm)	M <sub>j</sub> (J/S)	Process Gain (dB)
914.600	-57.26	-49.33	7.93	17.83
914.650	-57.26	-50.34	6.92	16.82
914.700	-57.26	-52.32	4.94	14.84
914.750	-57.26	-52.36	4.90	14.80
914.800	-57.26	-52.37	4.89	14.79
914.850	-57.26	-53.38	3.88	13.78
914.900	-57.26	-53.78	3.48	13.38
914.950	-57.26	-52.77	4.49	14.39
915.000	-57.26	-52.79	4.47	14.37
915.050	-57.26	-52.76	4.50	14.40
915.100	-57.26	-52.75	4.51	14.41
915.150	-57.26	-52.72	4.54	14.44
915.200	-57.26	-52.73	4.53	14.43
915.250	-57.26	-52.74	4.52	14.42
915.300	-57.26	-52.80	4.46	14.36
915.350	-57.26	-52.82	4.44	14.34
915.400	-57.26	-52.84	4.42	14.32
915.450	-57.26	-52.81	4.45	14.35
915.500	-57.26	-51.27	5.99	15.89
915.550	-57.26	-52.21	5.05	14.95
915.600	-57.26	-52.23	5.03	14.93
915.650	-57.26	-52.22	5.04	14.94
915.700	-57.26	-52.26	5.00	14.90
915.750	-57.26	-52.24	5.02	14.92
915.800	-57.26	-52.73	4.53	14.43
915.850	-57.26	-52.39	4.87	14.77
915.900	-57.26	-53.20	4.06	13.96
915.950	-57.26	-54.20	3.06	12.96
916.000	-57.26	-54.21	3.05	12.95
916.050	-57.26	-53.76	3.50	13.40

**Test Result : Processing Gain: 14.32 dB**

**Note:**

$$1. GP = (S/\text{No}) + M_j + L_{\text{sys}} = 7.9 \text{dB} + M_j + 2 \text{ dB}$$

2. S = Signal Level

3. J = Signal Generator RF Output

Table 35 Processing Gain [Channel 10, Base]

Jammer Frequency (MHz)	S (dBm)	J (dBm)	Mj (J/S)	Process Gain (dB)
914.600	-57.15	-50.20	6.95	16.85
914.650	-57.15	-51.16	5.99	15.89
914.700	-57.15	-53.25	3.90	13.80
914.750	-57.15	-52.76	4.39	14.29
914.800	-57.15	-52.28	4.87	14.77
914.850	-57.15	-55.12	2.03	11.93
914.900	-57.15	-55.27	1.88	11.78
914.950	-57.15	-53.72	3.43	13.33
915.000	-57.15	-53.73	3.42	13.32
915.050	-57.15	-53.26	3.89	13.79
915.100	-57.15	-52.77	4.38	14.28
915.150	-57.15	-52.29	4.86	14.76
915.200	-57.15	-52.26	4.89	14.79
915.250	-57.15	-51.15	6.00	15.90
915.300	-57.15	-50.20	6.95	16.85
915.350	-57.15	-52.66	4.49	14.39
915.400	-57.15	-52.70	4.45	14.35
915.450	-57.15	-52.73	4.42	14.32
915.500	-57.15	-52.79	4.36	14.26
915.550	-57.15	-53.71	3.44	13.34
915.600	-57.15	-53.25	3.90	13.80
915.650	-57.15	-53.26	3.89	13.79
915.700	-57.15	-53.27	3.88	13.78
915.750	-57.15	-53.28	3.87	13.77
915.800	-57.15	-53.22	3.93	13.83
915.850	-57.15	-53.29	3.86	13.76
915.900	-57.15	-53.74	3.41	13.31
915.950	-57.15	-53.77	3.38	13.28
916.000	-57.15	-53.75	3.40	13.30
916.050	-57.15	-53.71	3.44	13.34

Test Result : Processing Gain: 13.33 dB

Note:

1.  $GP = (S/No) + Mj + L_{sys} = 7.9\text{dB} + Mj + 2\text{ dB}$

2. S = Signal Level

3. J = Signal Generator RF Output

## *Appendix A*

### **Setting up Procedure**



1. Using an RS-232 Adaptor that is given by customer connected with the COM 1 of the computer.
2. The other end of the RS-232 Adaptor is connected with the EUT.
3. Use the software that is given by the customer and operated in the windows to control the EUT's continuous transmission.

)

## *Appendix B*

### **Antenna Sketch**

8220/8219天线

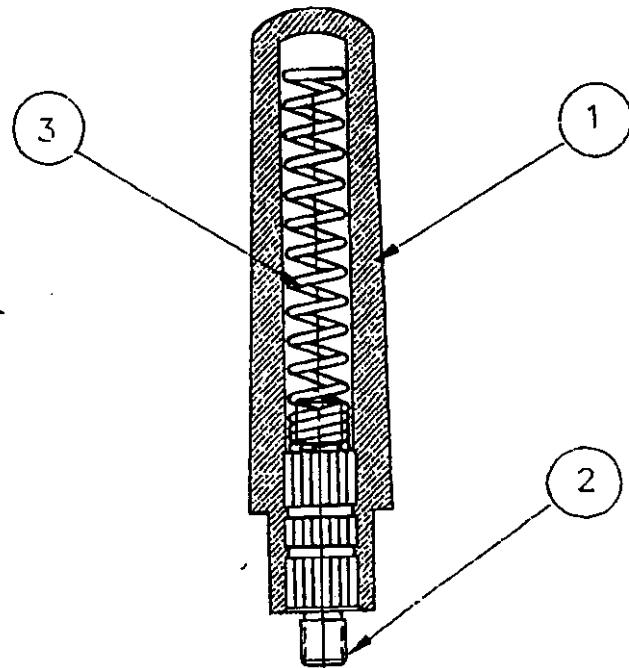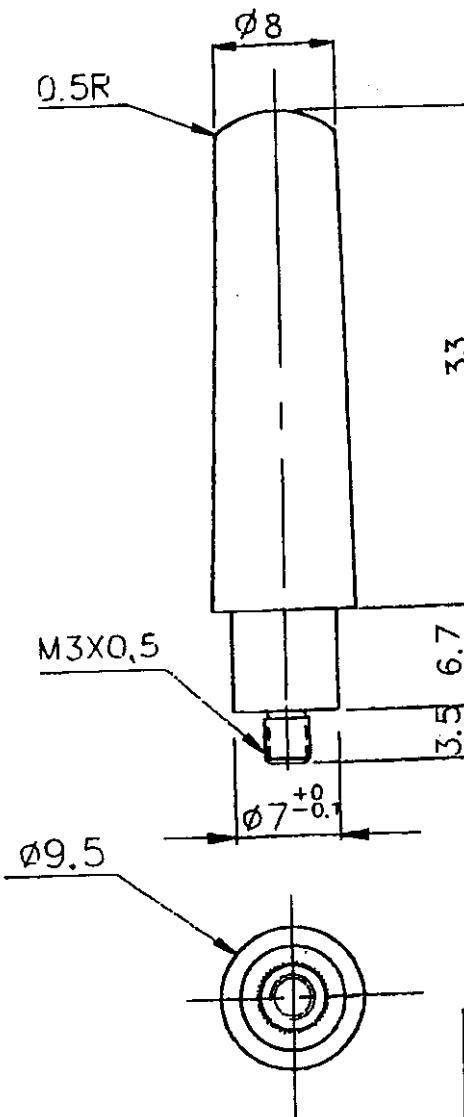

NO.	ELEMENT	SWC	1		
2	ANTENNA BASE	BSBM	1	NI	
1	TUBE	PU	1		
NO.	PARTS NAME	MATERIAL	QTY	FINISH	NOTE

UNLESS OTHERWISE SPECIFIED

ALL DIMENSIONS ARE IN MM

TOLERANCE ON:

LINEAR : X ± 0.2

X.X ± 0.15

X.XX ± 0.1

ANGULAR: X ± 1°

X.X ± 0.5°

ENGR SHEU MODEL DB-8112 8219

DRN SHEU DRAWING TITLE ANTENNA ASSEMBLY

(H/S)

CHK DWG. NO.

APRV CAD FILE

M'TL SCALE 2:1 ISSUE DATE 99/1/12


FINISH DO NOT SCALE SIZE A4 SHEET OF

**DBTEL**  
DIALER AND BUSINESS  
ELECTRONICS CO., LTD.  
大聯電子  
股份有限公司

**WARNING**  
PROPRIETARY INFORMATION  
CANNOT BE DISCLOSED  
WITHOUT PRIOR AUTHORIZATION  
專利所有  
不得泄密

## REVISIONS

REV	DESCRIPTION	ENGR
A		

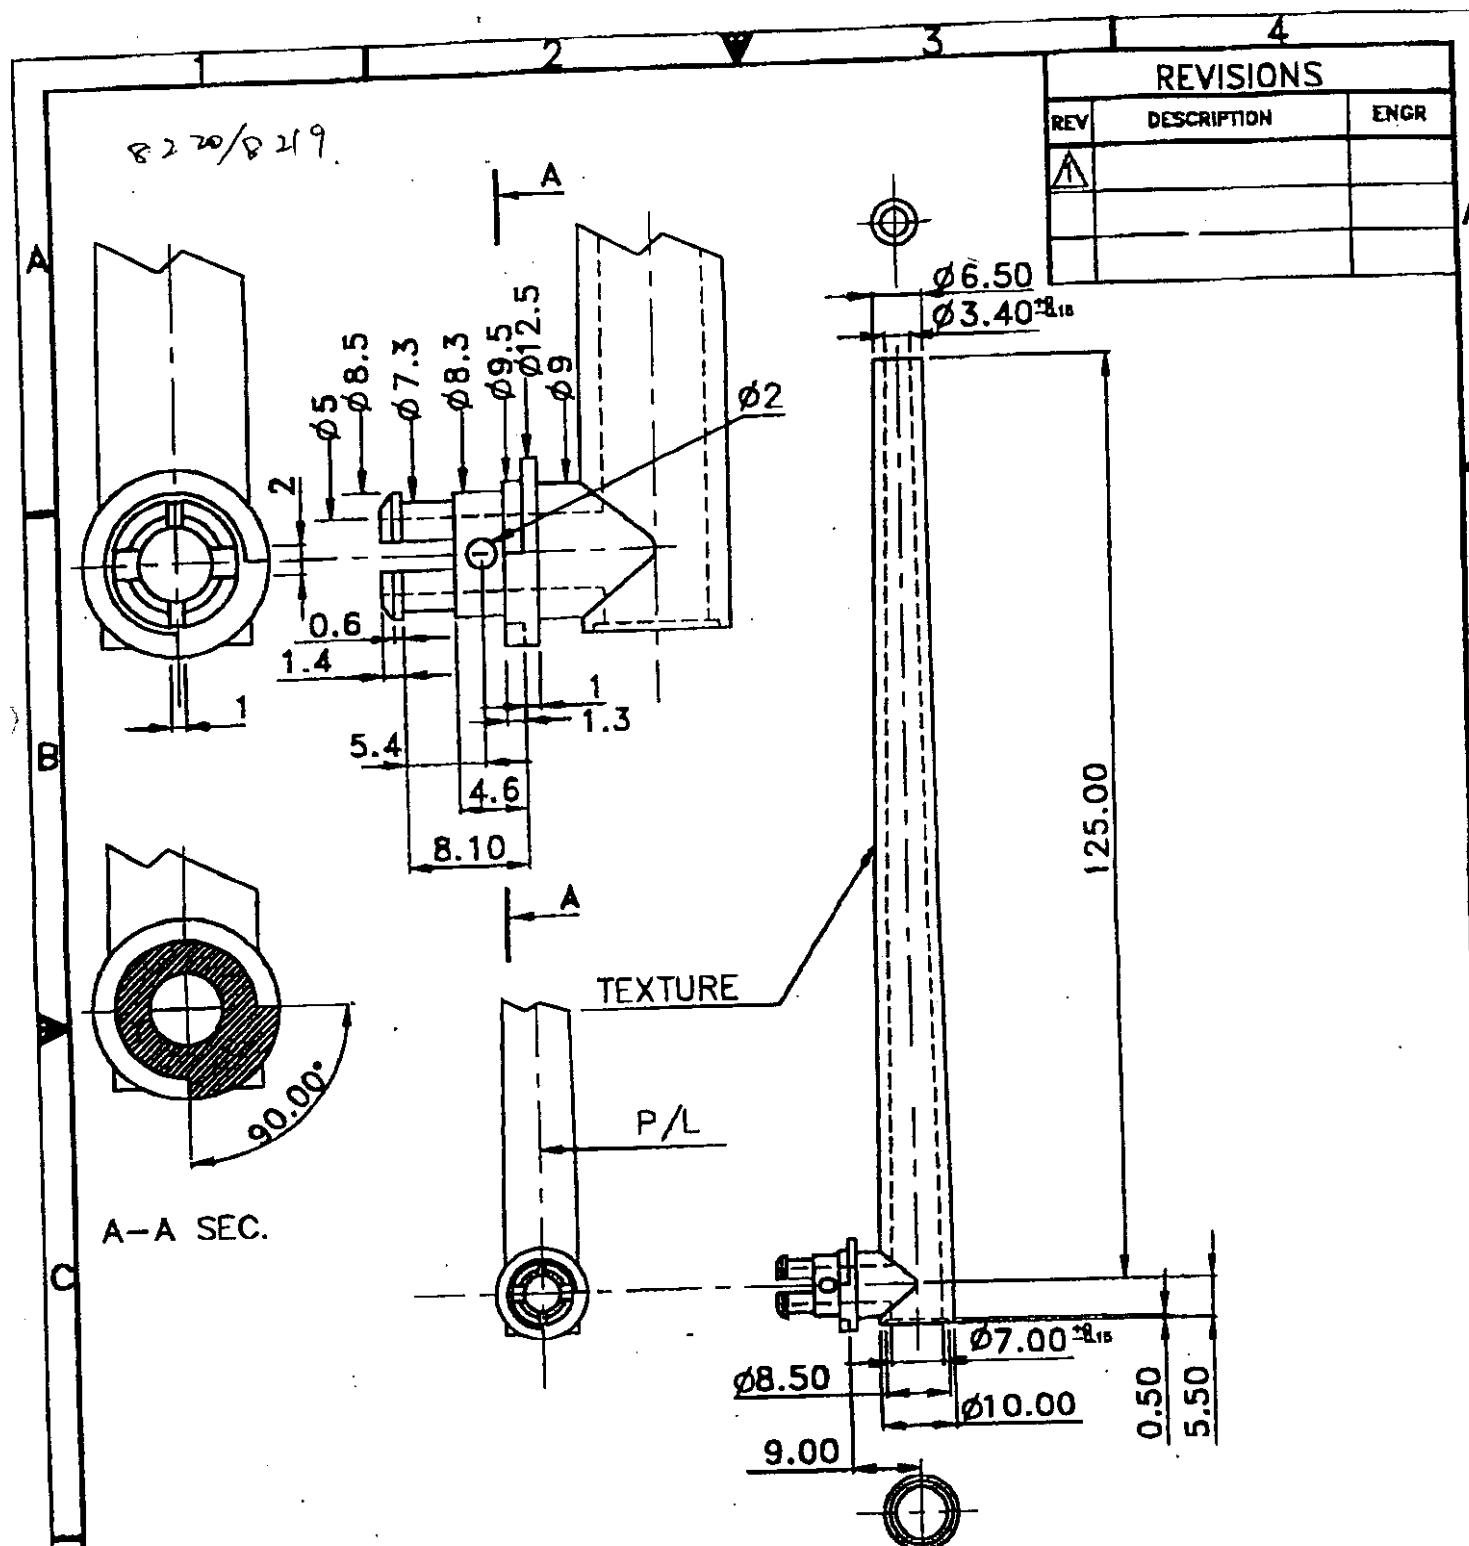

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE IN MM  
TOLERANCE ON:

LINEAR :  $x \pm 0.2$   
 $xx \pm 0.15$

ANGULAR:  $x \pm 1^\circ$   
 $xx \pm 0.5^\circ$



DBTEL Incorporated

WARNING

PROPRIETARY INFORMATION  
CANNOT BE DISCLOSED  
WITHOUT PRIOR AUTHORIZATION

ENGR	JERRY 3/12	MODEL	DB-8112 <del>8219</del>
DRN	SHEU	DRAWING TITLE	ANT. TUBE (B/S)
CHK			
APRV		DWG. NO.	8112-MTB11
M'TL	ABS+PC	CAD FILE	8112TB11
FINISH		SCALE	1:1 ISSUE DATE 99/03/10
	DO NOT SCALE	SIZE	A4 SHEET OF 1

## *Appendix C*

The antenna of the device is screwed inside the device, the user can not remove it freely without any tools from outside the device. This is comply with the FCC rules part 15.203

## *Appendix D*

### **Security Code**



#### ***Description of 900 MHz Direct Spectrum Cordless Phone***

The subject device's 20 independent channels, autoscan at link establishment and smart channel hopping combine to find the clearest channels at all times, automatically. Spread spectrum technology ensures the highest level of security available in a cordless phone.

The spread spectrum technique provides better security than other solutionssince only the receiver has a copy of the pre-assigned spreading code, making itereception virtually impossible. The trainsmitting singal diluted over a large bandwidth with power density at any point being very light, so the singal goes unnoticed by other systems since they are not tuned to receive it. Moreover the scrambling code changes every 8 times the phone is parked, and there are millions of codes.

**Scambler / Descrambler** A16-code randomizes the voice and supervisory data for transmission and reception, more than 64K scramble codes are available from the 16-bit maximal length pesudo-noise sequencu generator.

**Sread Spectrum Spreader** Each trainsmitted bit is multiplied with a 12-chip spreading code, meeting FCC Part 15.247 requirements.

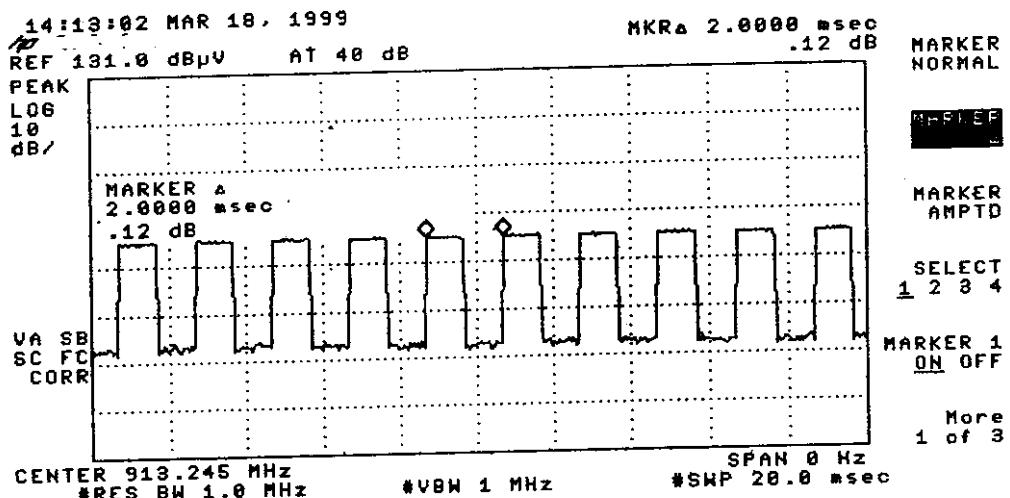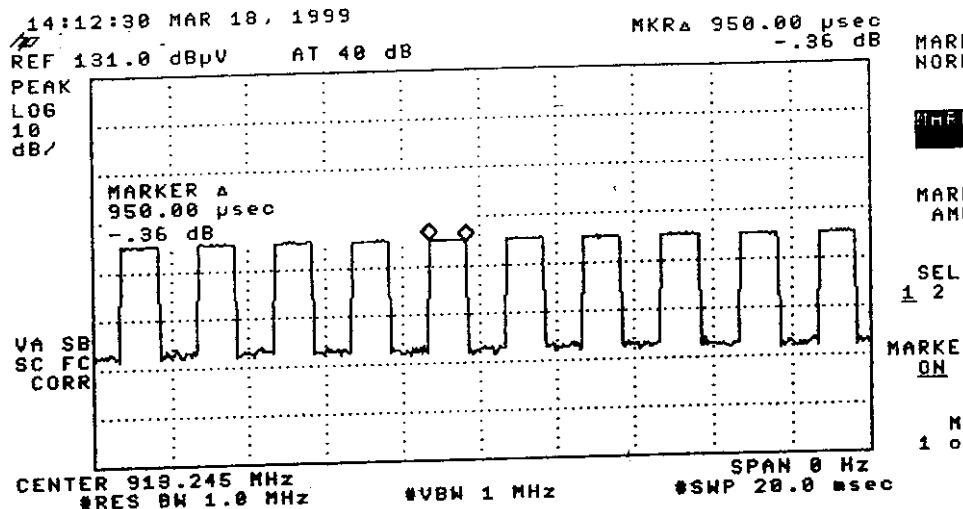


Scanned by PS/1225 at PM 02:27  
 Scanned by PS/1225 at PM 08:28  
 Antenna Panel



900MHz.a.vi

Antenna Panel

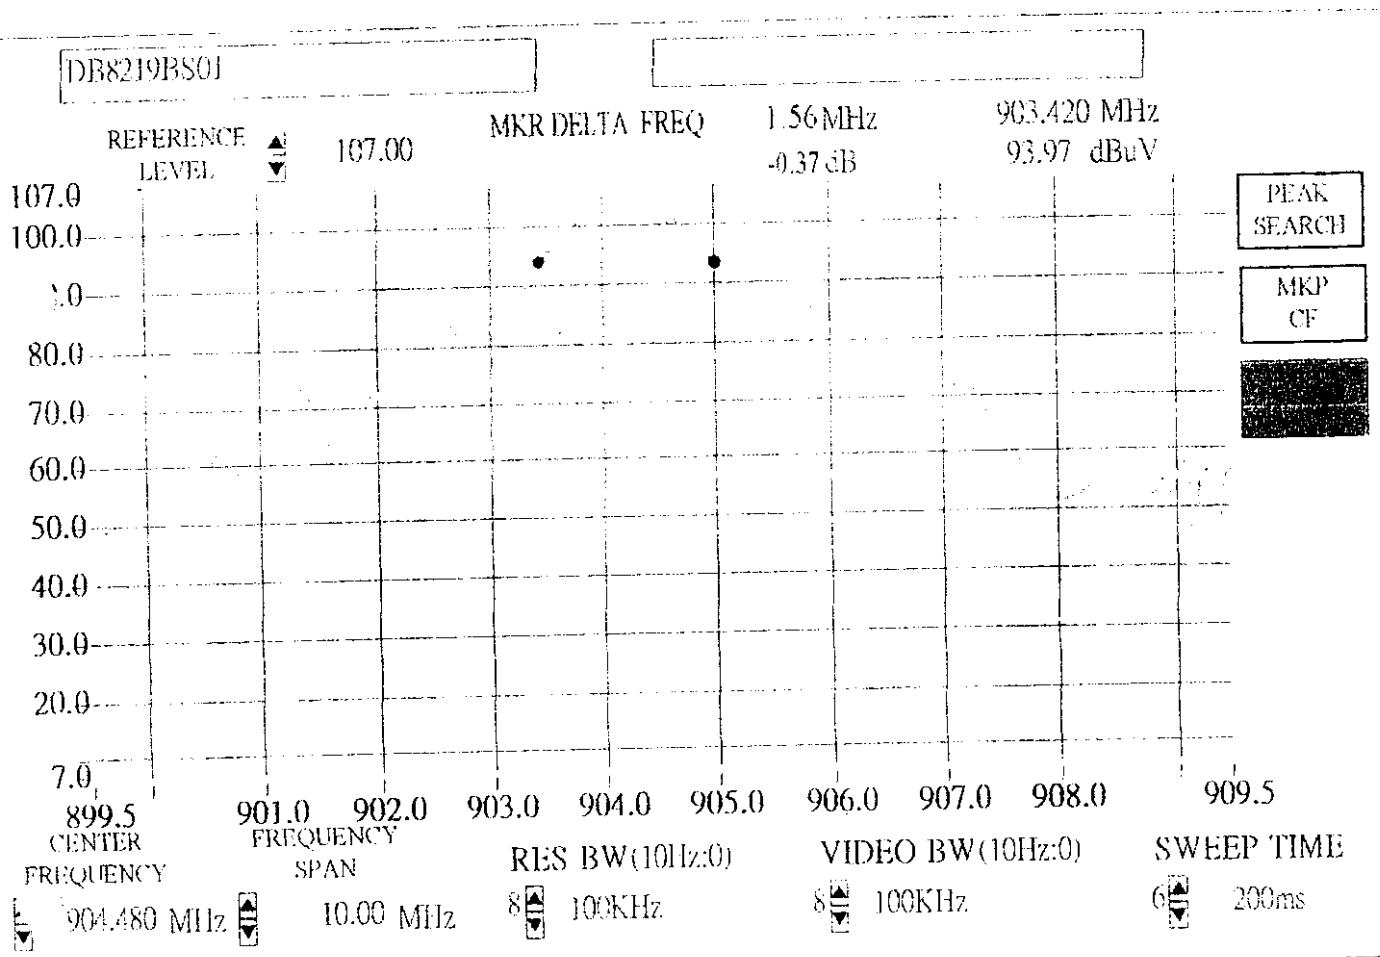




Connector Panel



900M17a.vi

Front Panel

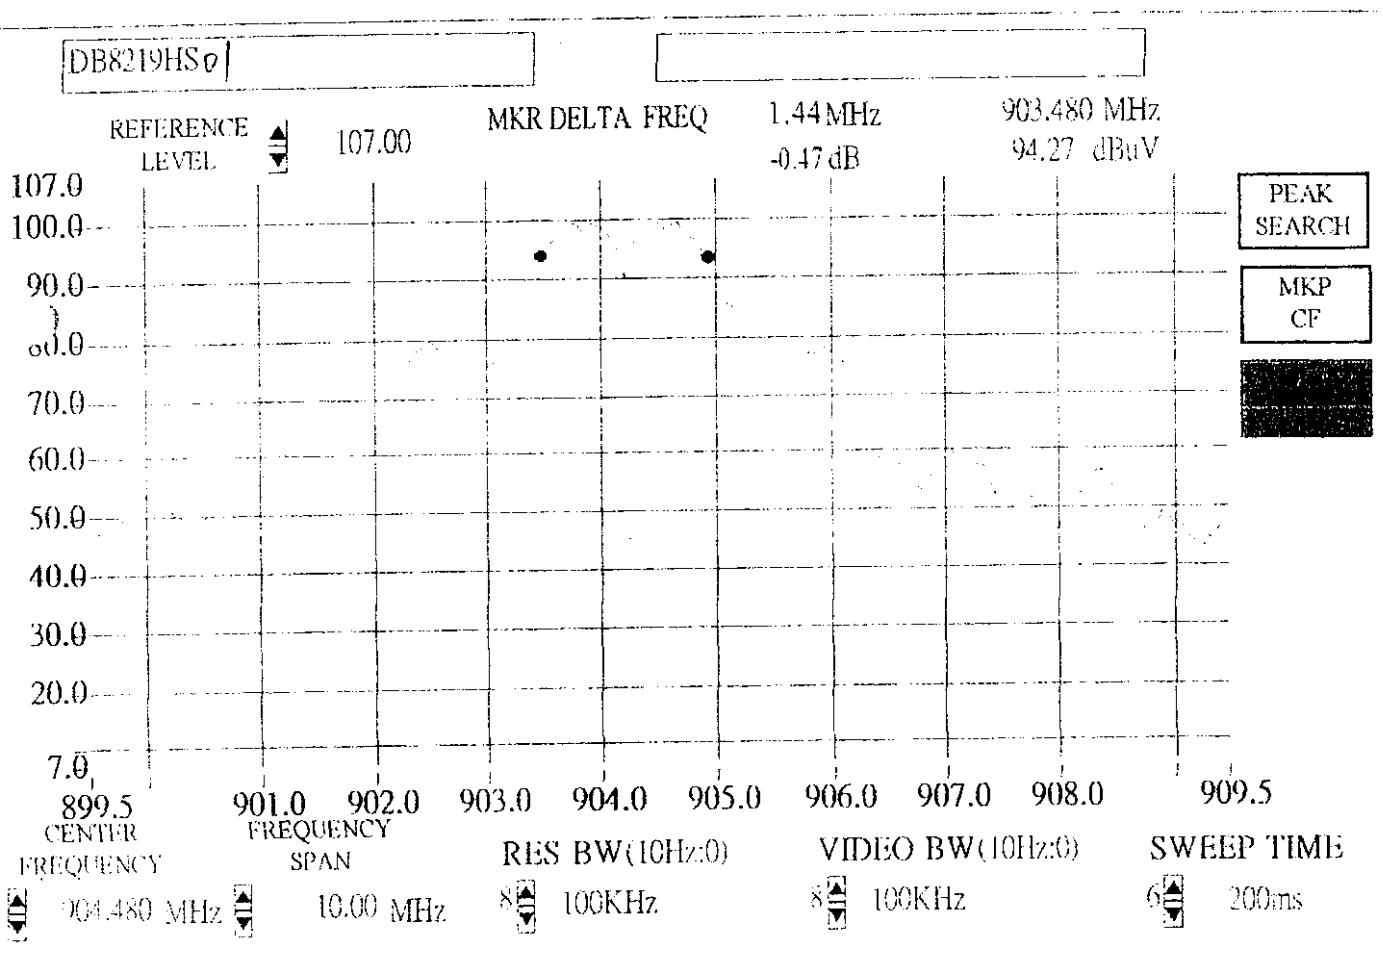



File name: DB8219BS10  
Created on 1998/12/25 at 15:03:11  
End on 1999/1/1 at 14:05:20


14-3

Antenna Panel



900MHz.a.vi


Ant Panel

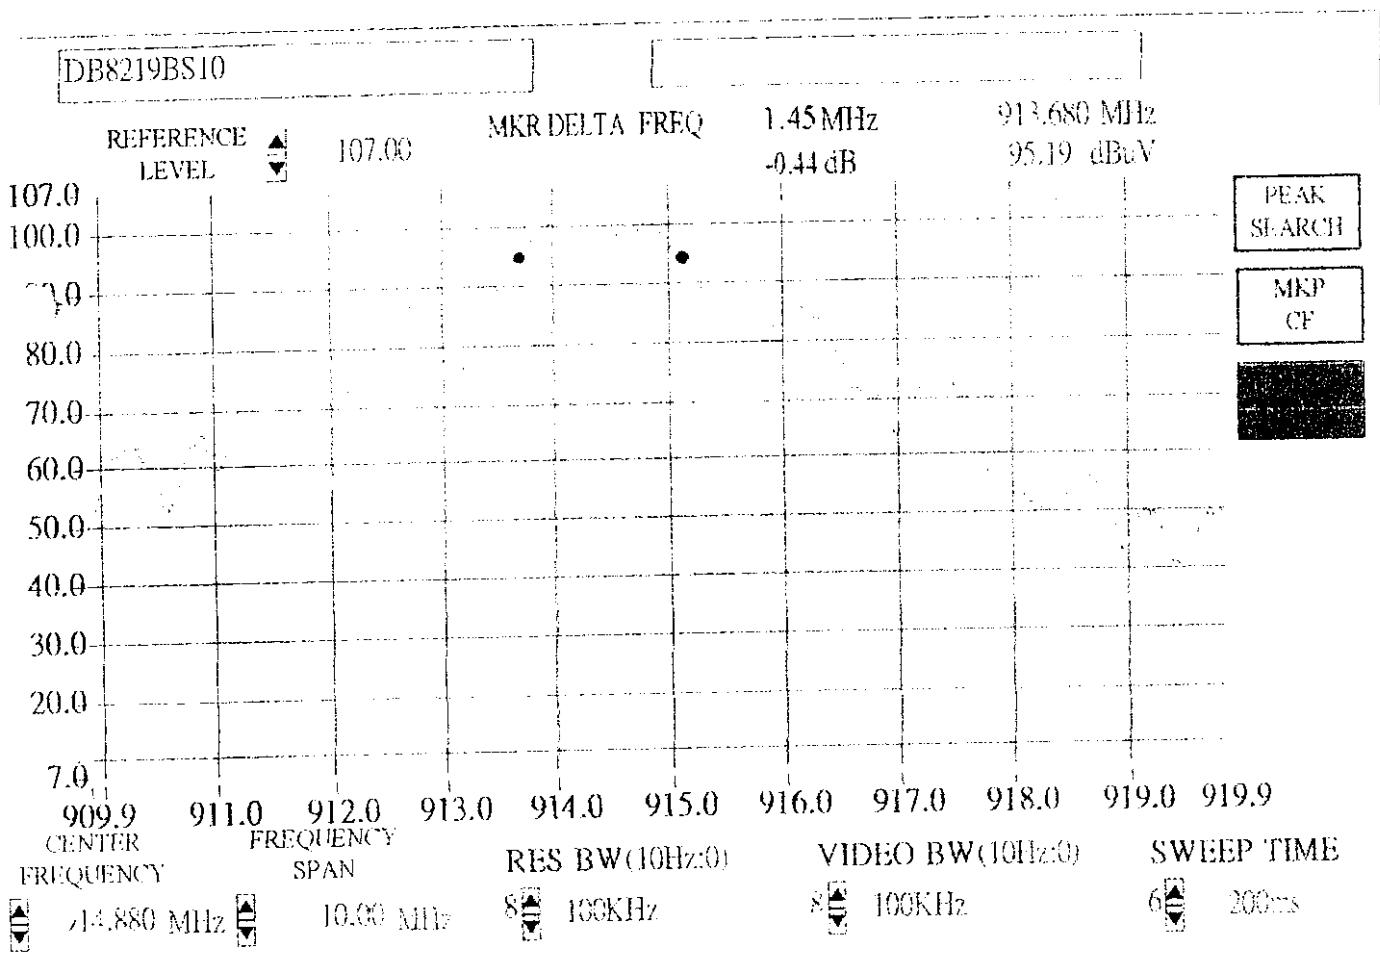



900MHz.a.vi

Front Panel

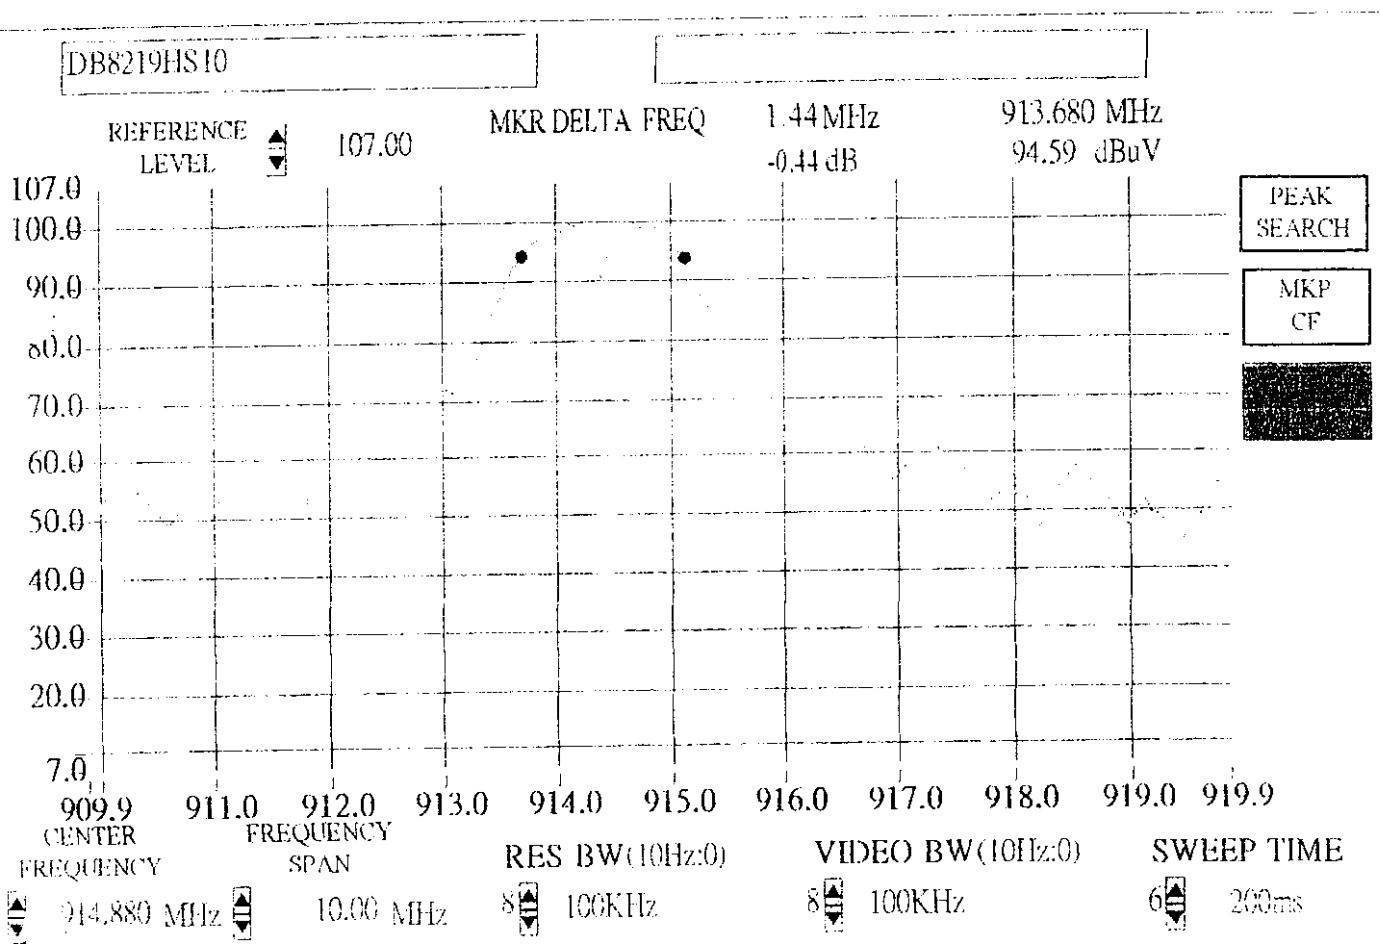


14-5  
1998/3/1 at 16:15:57  
Antenna Panel



900MHz.a.vi

Ant Panel

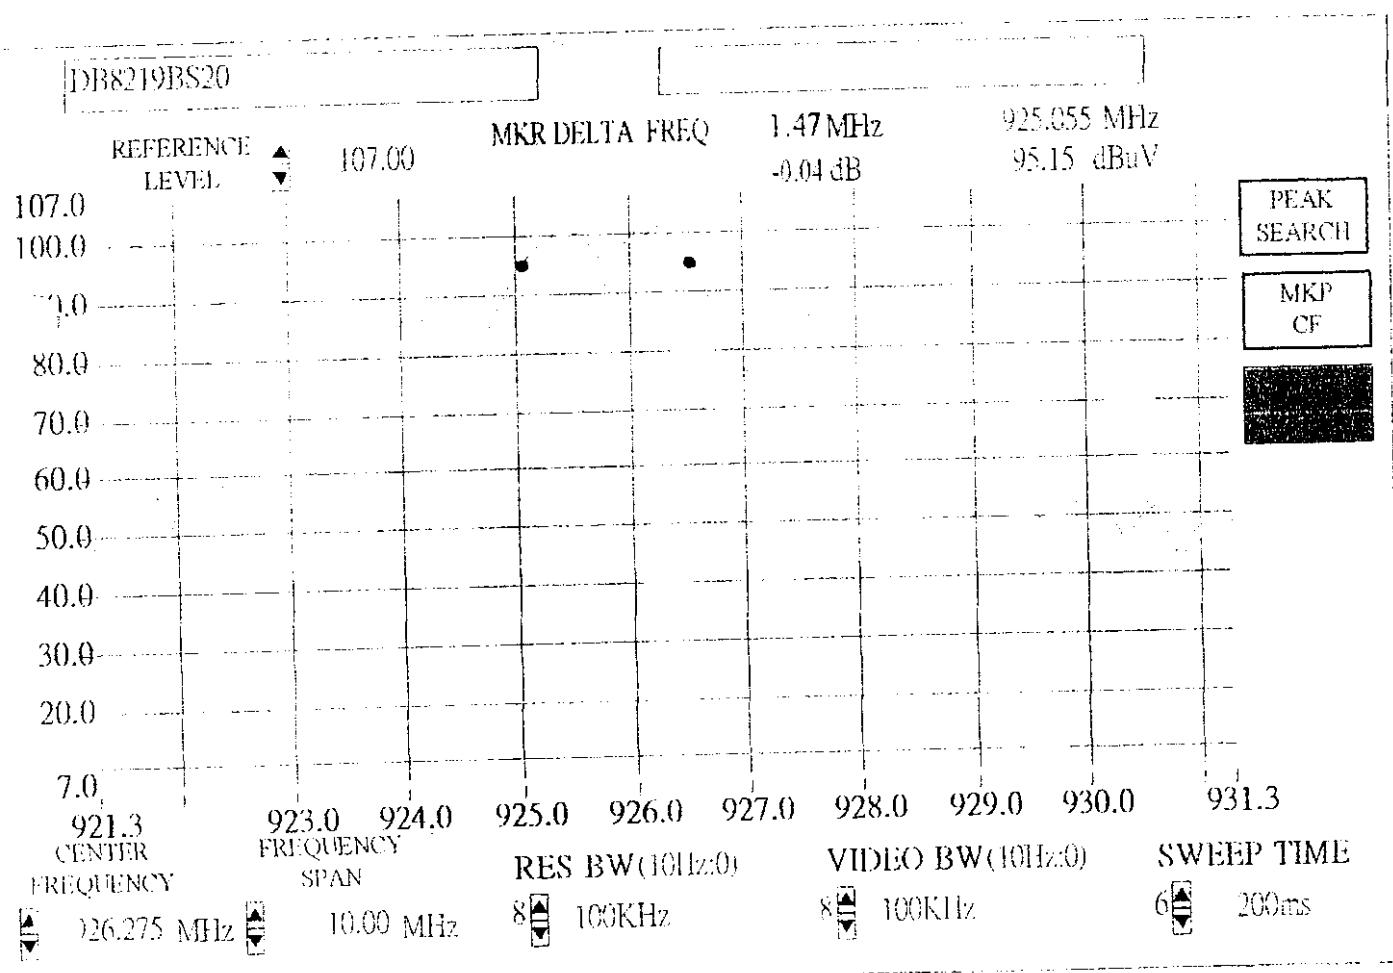

WIZARD


Completed on 1999/12/25 at PM 02:12

Edited on 1999/12/14 at PM 02:12

Connector Panel




14-6



900MHz.vi

Front Panel

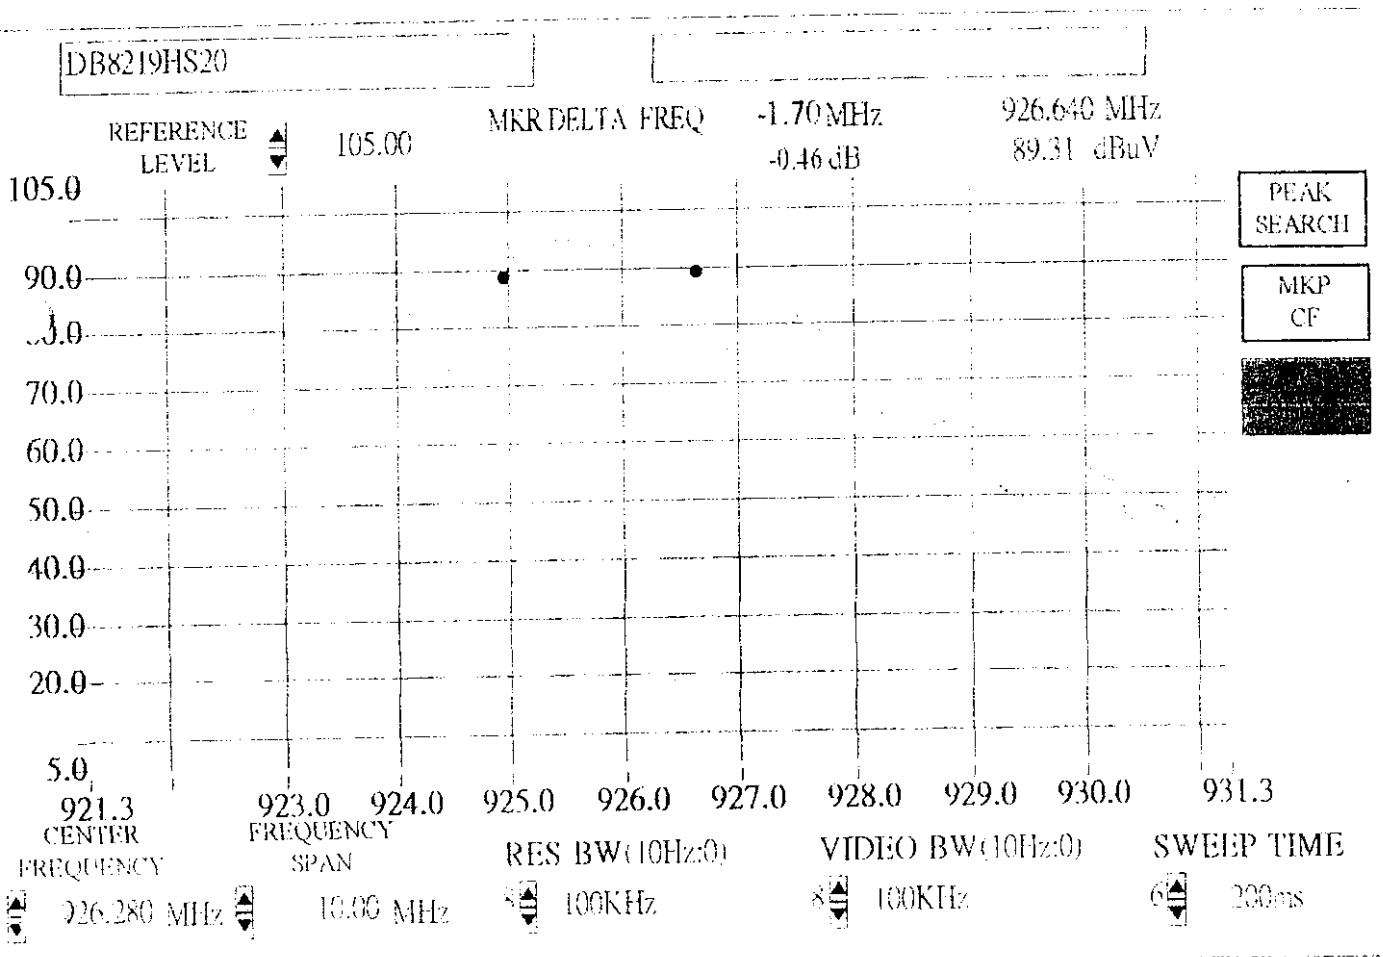

1

2008/3/14 11:14:02.5  
2008/3/14 11:14:20


49-1

Antenna Panel




900MHz.a.vi

Antenna Panel

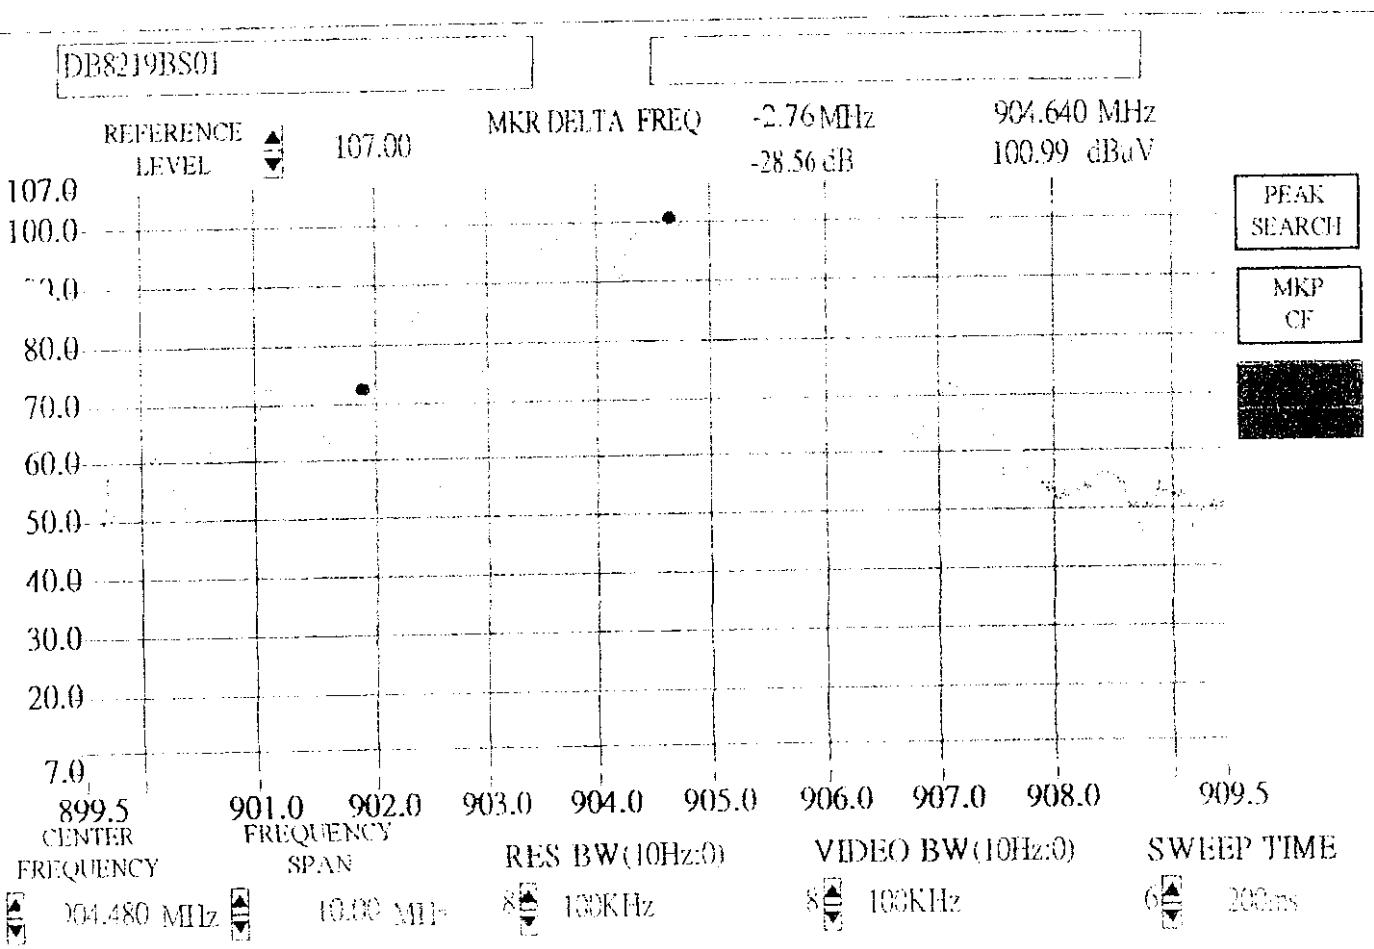




Connector Pane




900MZa.vi

Front Panel

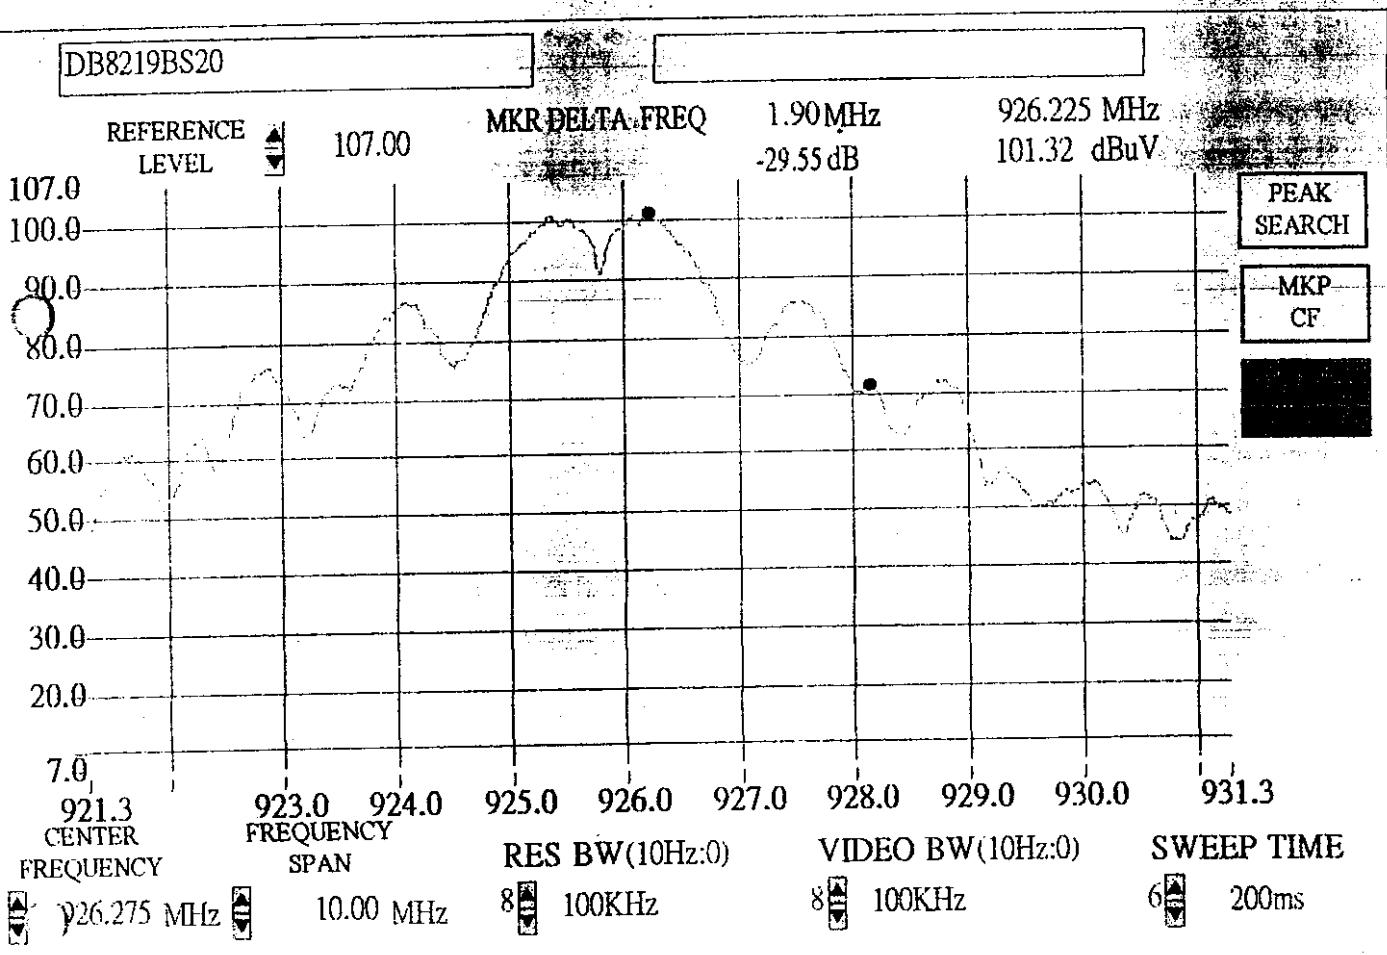


Connector Pane



900MZa.vi

Front Panel

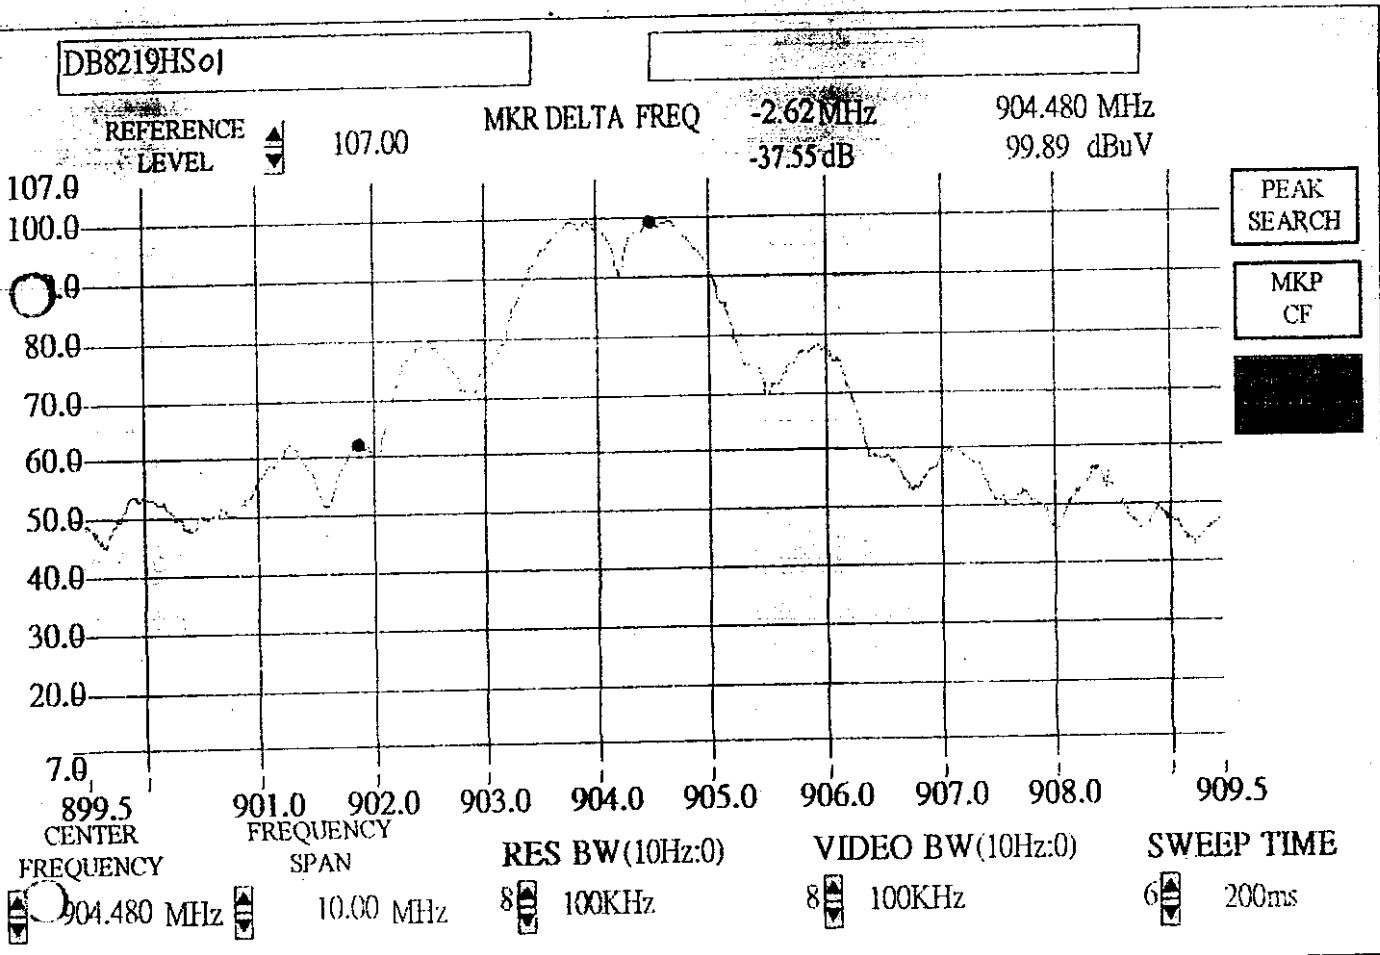

MZA.vi

modified on 1998/12/25 at PM 02:27

ated on 1999/3/14 at PM 02:35


49-4

nector Pane



900MZA.vi

nt Panel

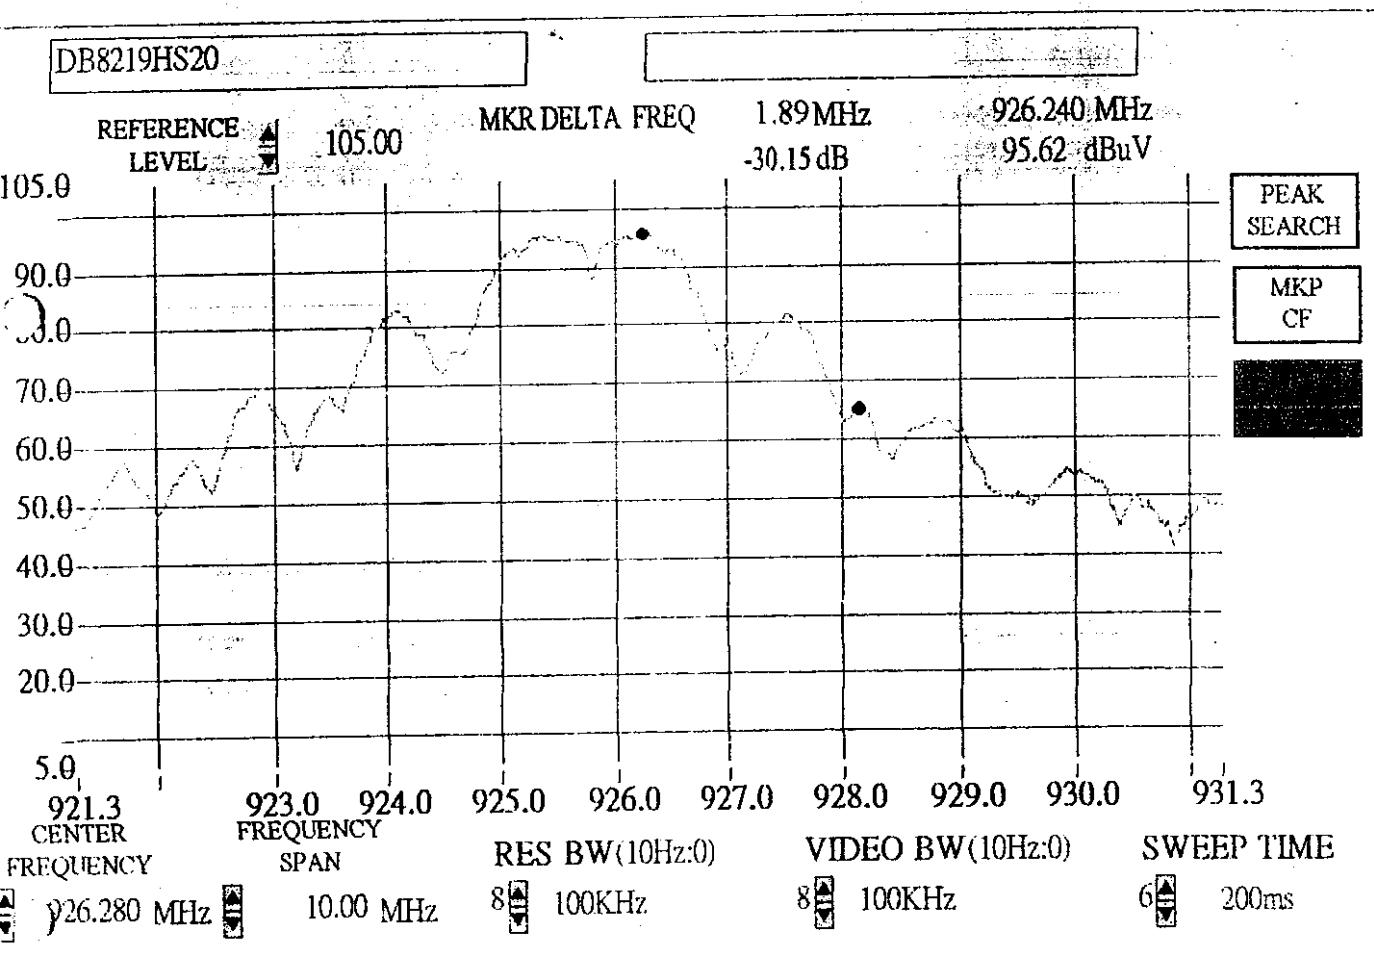

dZaV

modified on 1998/12/25 at PM 02:27

ed on 1999/3/14 at PM 03:24


50-1

Connector Panel



900M7a.vi

Panel

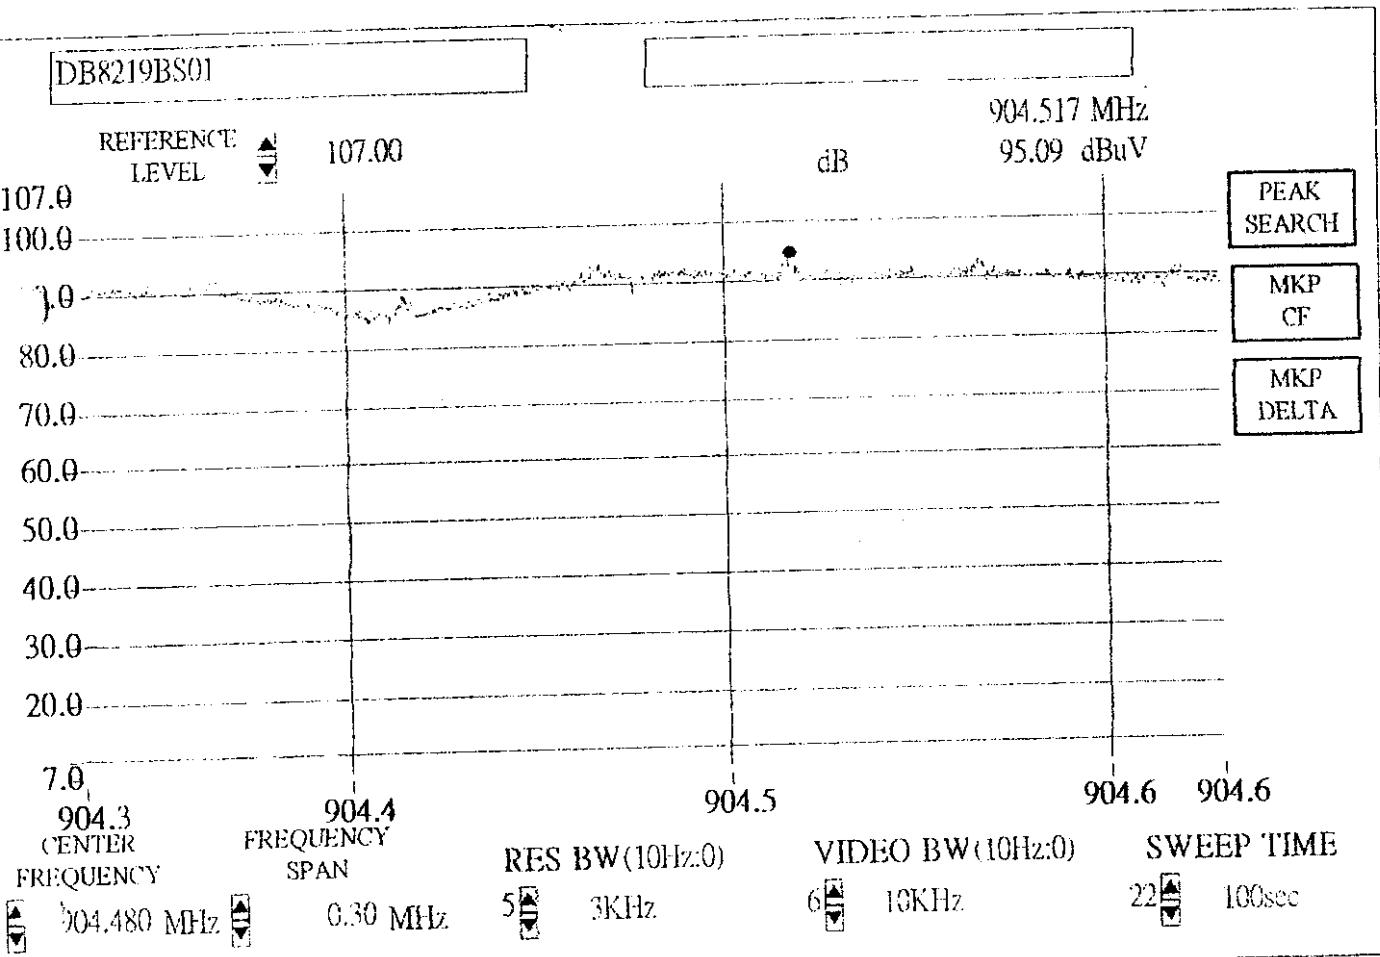


modified on 1998/2/25 at PM 02:27

created on 1999/3/1 at PM 05:26


50-2

Antenna Panel



900MHz.a.vi

Ant Panel

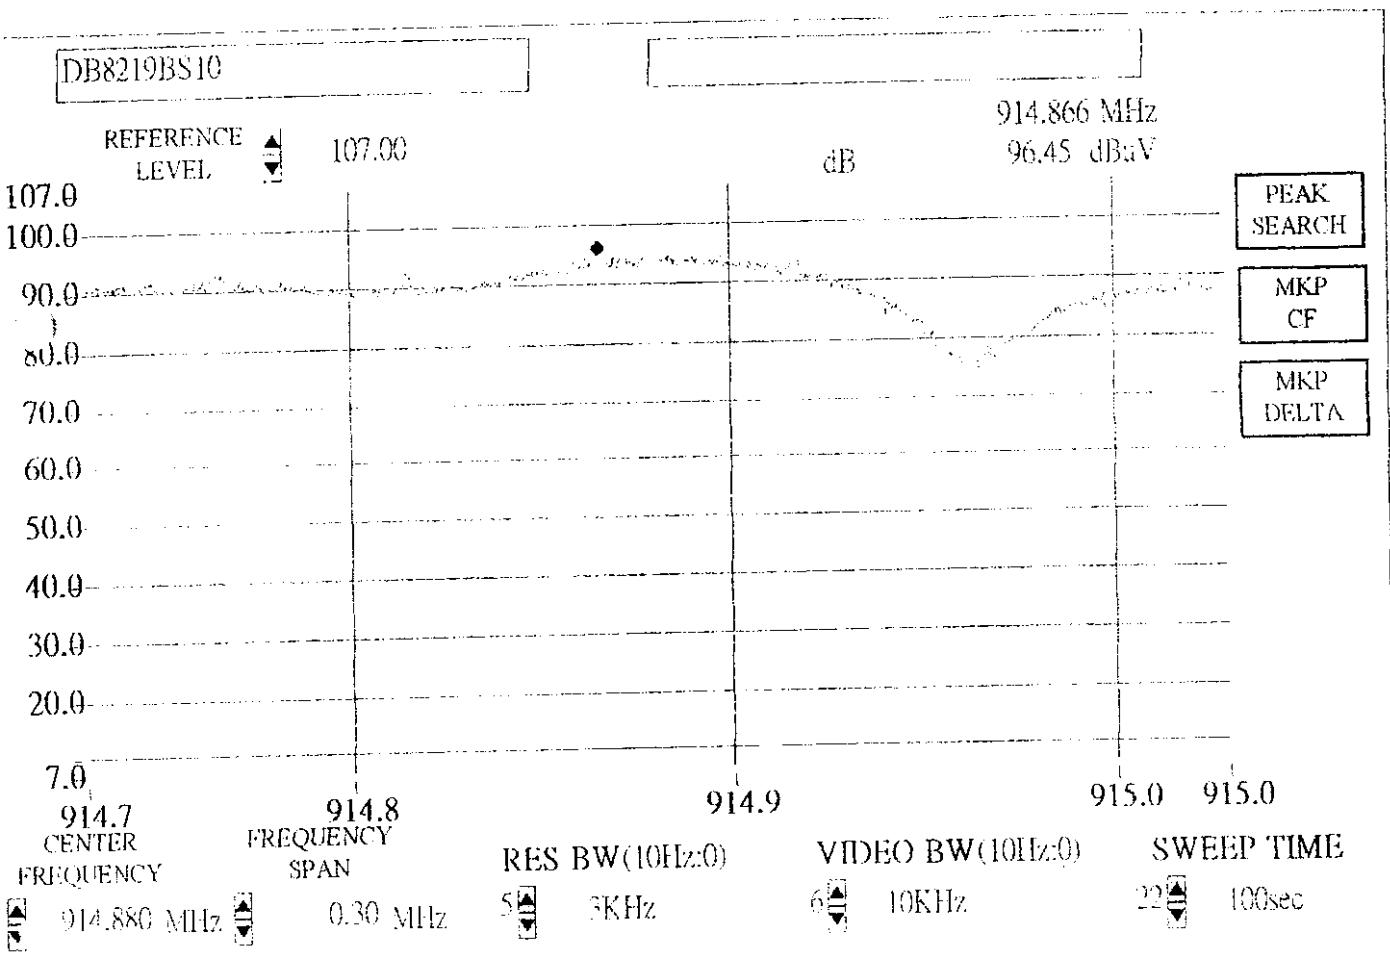

1  
measured at 1PM/2000/10/02  
and on 1998/5/14 at 1PM 05:30


50-3

Marker Panel



900MHz.a.vi

Marker Panel

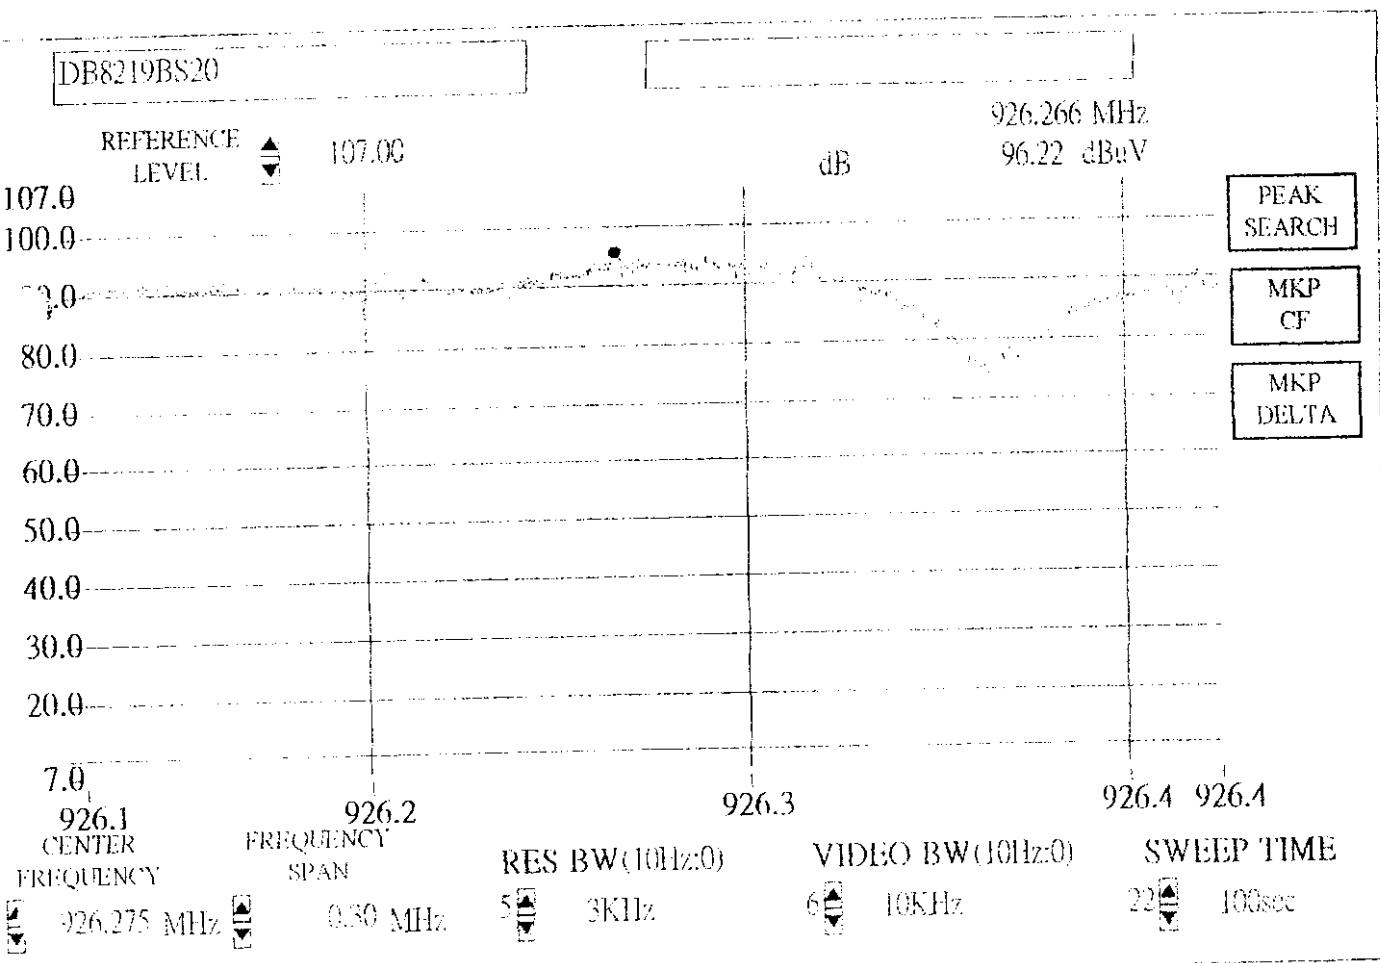

1999/12/25 at PM 02.27  
modified on 1999/12/25 at PM 02.27  
ed on 1999/12/25 at PM 02.27


50-4

Specter Panel



900MZA.vi

Panel

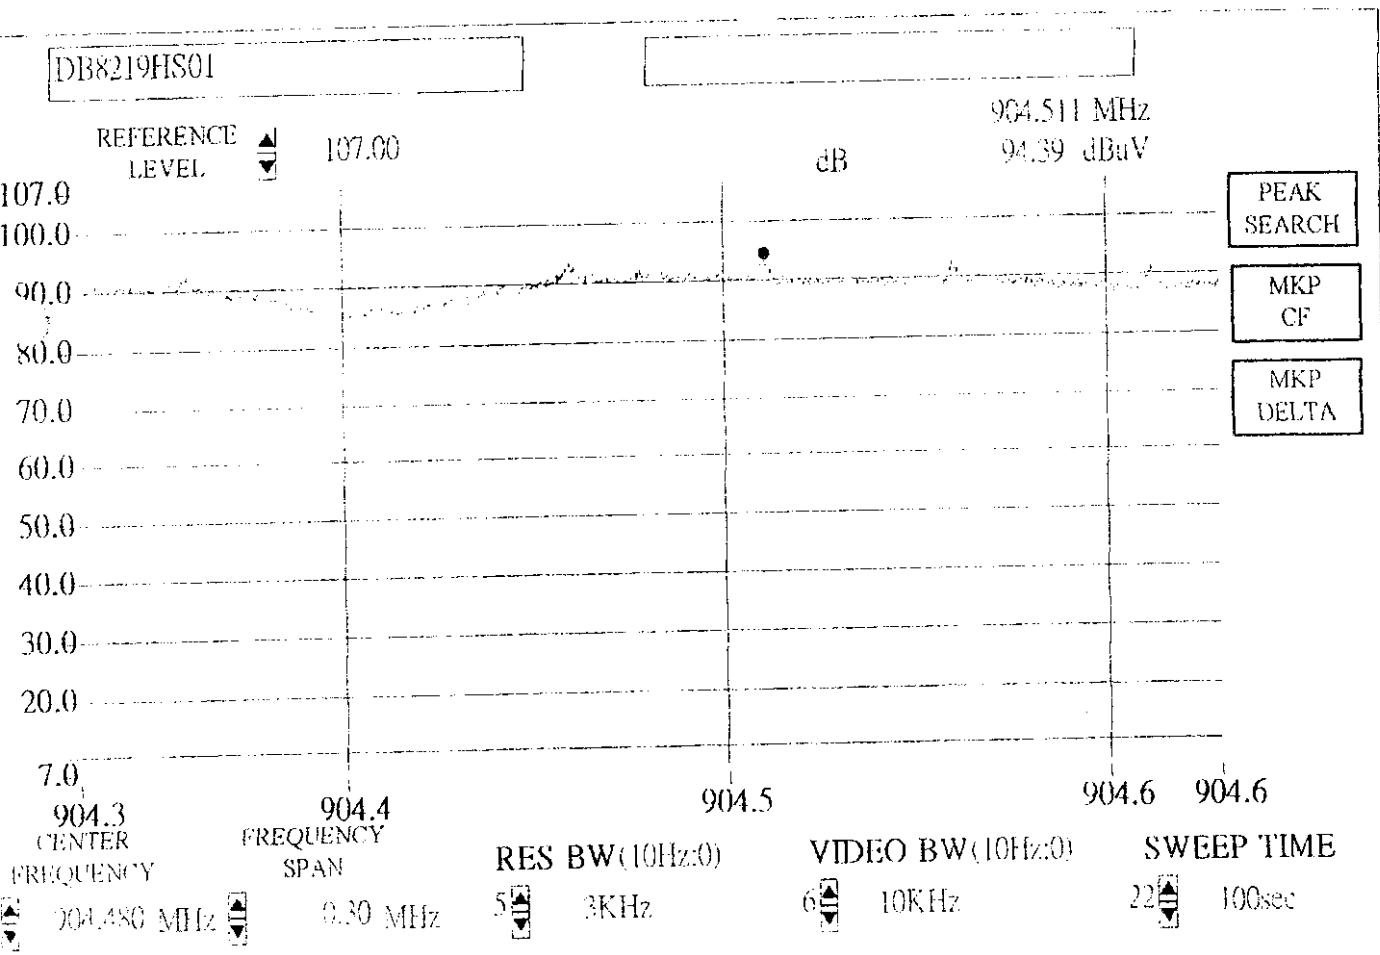

A1234


Captured on 1999/5/1 at PM 02:23

and on 1999/5/1 at PM 02:57




50-5

Connector Panel



900MZA.vi

Ant Panel

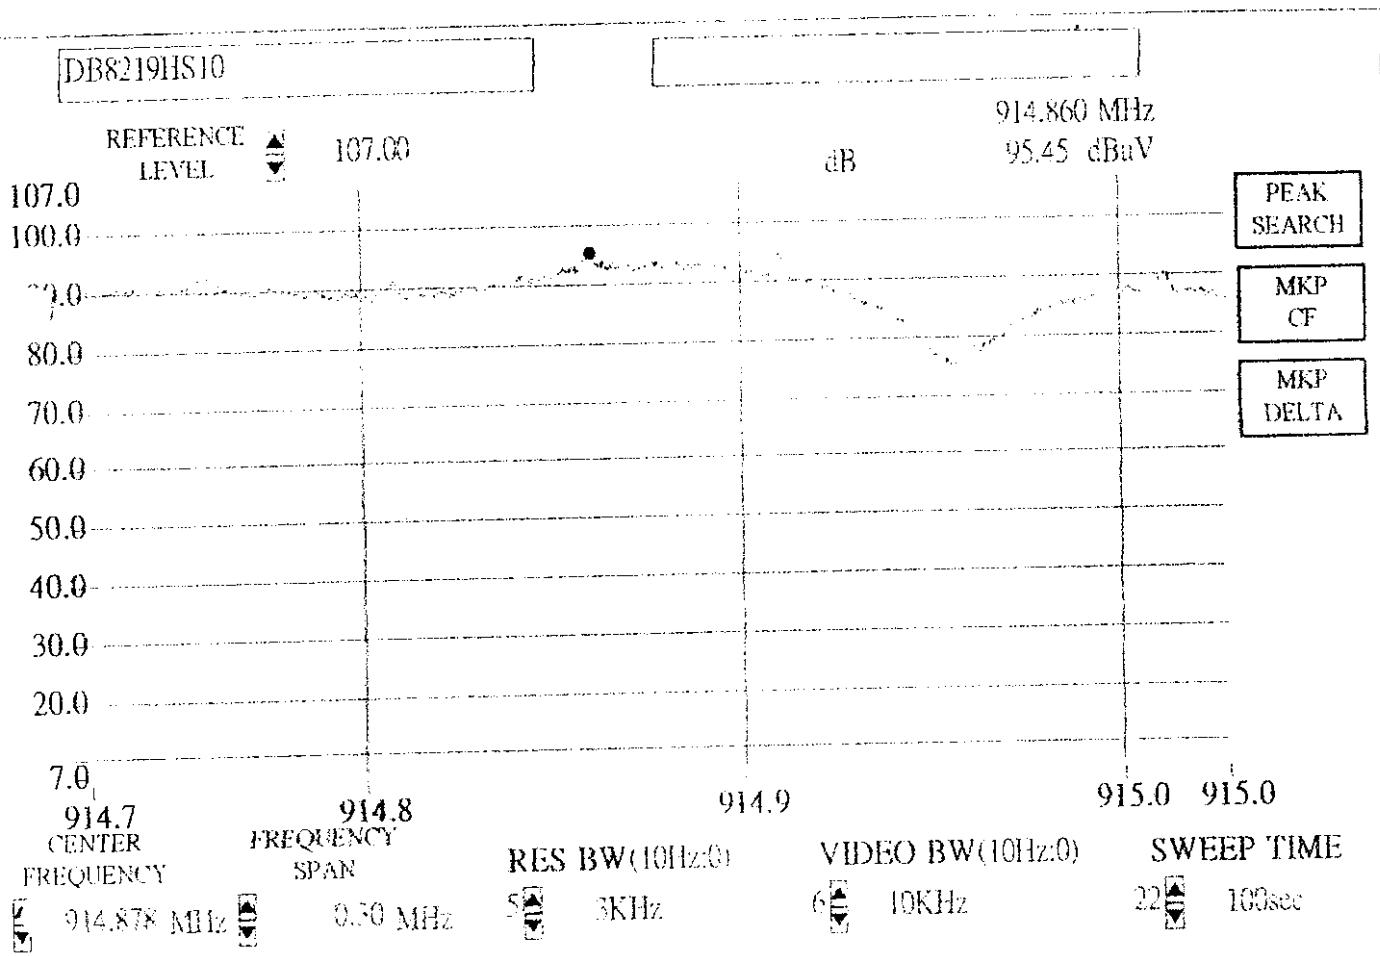

Antenna Panel



900MHz.a.vi

Antenna Panel

