

## **Golden Source Electronics Limited**

Application  
For  
Certification  
**(FCC ID: C2JGMRS2271)**

September 19, 2002

WO# 0210608  
WL/Sandy  
September 19, 2002

- The test results reported in this report shall refer only to the sample actually tested and shall not refer or be deemed a refer to bulk from which such a sample may be said to have been obtained.
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited
- For Terms And Conditions of the services, it can be provided upon request.

---

---

# INTERTEK TESTING SERVICES

---

---

## SUMMARY OF CONTENTS

### LIST OF EXHIBITS

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	RF Power Output
<i>EXHIBIT 4:</i>	Modulation Characteristics
<i>EXHIBIT 5:</i>	Occupied Bandwidth
<i>EXHIBIT 6:</i>	Spurious Emission
<i>EXHIBIT 7:</i>	Frequency Stability
<i>EXHIBIT 8:</i>	Technical Specifications
<i>EXHIBIT 9:</i>	Product Labelling
<i>EXHIBIT 10:</i>	Photographs
<i>EXHIBIT 11:</i>	Instruction Manual
<i>EXHIBIT 12:</i>	Tune Up Procedure
<i>EXHIBIT 13:</i>	Part List
<i>EXHIBIT 14:</i>	RF Exposure Info

## INTERTEK TESTING SERVICES

### MEASUREMENT/TECHNICAL REPORT

**Application** : Golden Source Electronics Limited  
**Trade Name/Model No** : BELLSOUTH 2271(XX)  
BELLSOUTH 2273(XX)  
**Date** : September 19, 2002

This report concerns (check one:) Original Grant X Class II Change \_\_\_\_\_

Equipment Type: GMRS + FRS

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes \_\_\_\_\_ No X \_\_\_\_\_

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on  
that date.

\_\_\_\_\_  
\_\_\_\_\_

Report prepared by:

Wilson Loke  
Intertek Testing Services  
2/F., Garment Centre,  
576 Castle Peak Road,  
Kowloon, Hong Kong.  
Phone: 852-2173-8575  
Fax: 852-2371-0521

---

---

# INTERTEK TESTING SERVICES

---

---

## Table of Contents

<b>1.0 General Description</b>	2
1.1 Product Description	2
1.2 Related Submittal(s) Grants	3
1.3 Test Methodology	3
1.4 Test Facility	3
<b>2.0 System Test Configuration</b>	5
2.1 Justification	5
2.2 EUT Exercising Software	6
2.3 Special Accessories	6
2.4 Measurement Uncertainty	6
2.5 Equipment Modification	6
<b>3.0 RF Output Power (Section 95.639(d))</b>	8
<b>4.0 Modulation Characteristics (Section 95.637(a))</b>	13
4.1 Modulation Frequency Response	14
4.2 Modulation Limiting Characteristic	16
4.3 Audio Low Pass Filter Response	18
<b>5.0 Occupied Bandwidth (Section 95.633(c))</b>	20
<b>6.0 Spurious Emission (Section 95.635(b))</b>	22
6.1 Field Strength of Spurious Radiation	23
<b>7.0 Frequency Stability (Section 95.627)</b>	30
7.1 Frequency Tolerance	31
7.2 Temperature Extreme Condition	33
7.3 Voltage Extreme Condition	36
<b>8.0 Technical Specifications</b>	39
<b>9.0 Product Labelling</b>	43
<b>10.0 Equipment Photographs</b>	46
<b>11.0 Instruction Manna</b>	48
<b>12.0 Tune Up Procedure</b>	50
<b>13.0 Part List</b>	52
<b>14.0 RF Exposure Info</b>	54

## INTERTEK TESTING SERVICES

---

---

### List of attached file

Exhibit type	File Description	Filename
Operation Description	Technical Description	descri.pdf
Test Report	Bandwidth Plot	bw.pdf
Test Report	Modulation Frequency Response	mfr.pdf
Test Report	Modulation Limit Characteristic	mlc.pdf
Test Report	Spurious Emission	spurious.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Test Report	Test Report	report.doc
Test Setup Photo	Radiated Emission	radiated photos.doc
Internal Photo	Internal Photo	internal photos.doc
External Photo	External Photo	external photos.doc
Test Report	Tune Up Procedure	tuneup.pdf
Test Report	Part List	partlist.pdf
Test Report	Audio Low Pass Filter Response	lpf.pdf

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 1**

**GENERAL DESCRIPTION**

---

---

## INTERTEK TESTING SERVICES

---

---

### 1.0 General Description

#### 1.1 Product Description

The Equipment Under Test (EUT) is a Family Radio Service Plus General Mobile Radio Service operating at 462.5500 and 467.7125MHz. The EUT is powered by 9 V d.c. (6 x 1.5 V “AAA” alkaline batteries) or 7.2 V d.c. (1 x 7.2V rechargeable battery pack).

##### Transmitter Portion

- (i) Type of Emission : 5K5F3E
- (ii) Frequency Range : GMRS/FRS 7 Channel from 462.5625 to 462.7125MHz  
FRS 7 Channel from 467.5625 to 467.7125MHz  
GMRS 8 Channel from 462.5500 to 462.7250MHz
- (iii) Maximum Power Rating : FRS - 0.09W ERP, GMRS - 0.71W ERP
- (iv) Antenna Type : Integral

The input current to final r.f. stage at 7.2V d.c. is 0.4A.

The Model: BELLSOUTH 2273(XX) is the same as the Model: BELLSOUTH 2271(XX) in hardware aspect. The difference in model number serves as marketing strategy. The suffix (XX) of the model number represent to customer's color code only.

The brief circuit description is saved with filename: descri.pdf

## INTERTEK TESTING SERVICES

---

### 1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a GMRS + FRS Transceiver. The receiver section of this Transceiver is subject to verification process.

### 1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992) and ANSI/TIA/EIA-603-1992. All measurement were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure of maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

### 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. The test facility and site measurement data have been fully placed on file with the FCC.



---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 2**

**SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 2.0 System Test Configuration

---

#### 2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. When the radiated emissions are measured.

The device was powered by 6 x fully charged 1.5V “AAA” alkaline batteries.

The frequency range from 30 MHz to 4.68 GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

## INTERTEK TESTING SERVICES

---

### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, a signal is transmitted.

### 2.3 Special Accessories

A special headset is provided by client for compliance of this device.

### 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.


### 2.5 Equipment Modification

Any modification installed previous to testing by Golden Source Electronics Limited will be incorporated in each production model sold/leased in the United States.

No modification were installed by Intertek Testing Services.

*Confirmed by:*

*Wilson Loke  
Manager  
Intertek Testing Services  
Agent for Golden Source Electronics Limited*



Signature

September 19, 2002 Date

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 3**

**RF POWER OUTPUT**

---

---

## INTERTEK TESTING SERVICES

---

---

### 3.0 **RF Power Output (Section 2.1046(a))**

#### A. Equipment Used

<b>Equipment</b>	<b>Brand Name</b>	<b>Model No.</b>
Biconical Antenna	CDI	B300
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF
Tuned Dipole Antenna	CDI	Robert Antenna 4
Signal Generator	Maconi	2024

#### B. Testing Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

## **INTERTEK TESTING SERVICES**

---

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

---

---

## INTERTEK TESTING SERVICES

---

---

**Table 1(a)**

**Golden Source Electronics Limited  
BELLSOUTH 2271(XX)**

**Transmission Power (High Power)**

Channel	Frequency (MHz)	Effective Radiated Power		Limit (W)	Margin (W)
		(dBm)	(W)		
1	462.5625	28.5	0.71	5.0	-4.29
2	462.5875	28.5	0.71	5.0	-4.29
3	462.6125	28.5	0.71	5.0	-4.29
4	462.6375	28.5	0.71	5.0	-4.29
5	462.6625	28.5	0.71	5.0	-4.29
6	462.6875	28.5	0.71	5.0	-4.29
7	462.7125	28.5	0.71	5.0	-4.29
8	467.5625	19.4	0.09	0.5	-0.41
9	467.5875	19.4	0.09	0.5	-0.41
10	467.6125	19.4	0.09	0.5	-0.41
11	467.6375	19.4	0.09	0.5	-0.41
12	467.6625	19.4	0.09	0.5	-0.41
13	467.6875	19.4	0.09	0.5	-0.41
14	467.7125	19.4	0.09	0.5	-0.41
15	462.5500	28.5	0.71	5.0	-4.29
16	462.5750	28.5	0.71	5.0	-4.29
17	462.6000	28.5	0.71	5.0	-4.29
18	462.6250	28.5	0.71	5.0	-4.29
19	462.6500	28.5	0.71	5.0	-4.29
20	462.6750	28.5	0.71	5.0	-4.29
21	462.7000	28.5	0.71	5.0	-4.29
22	462.7250	28.5	0.71	5.0	-4.29

Remark: Ch1 - Ch7 and Ch15 - Ch22 can be selected for power High / Low Function.  
Other 7 Channels (Ch8 - Ch14) will use fix power function.

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002

---

---

## INTERTEK TESTING SERVICES

---

---

**Table 1(b)**

**Golden Source Electronics Limited  
BELLSOUTH 2271(XX)**

**Transmission Power (Low Power)**

GMRS Channel	Frequency (MHz)	Effective Radiated Power		Limit (W)	Margin (W)
		(dBm)	(W)		
1	462.5625	19.4	0.09	0.5	-0.41
2	462.5875	19.4	0.09	0.5	-0.41
3	462.6125	19.4	0.09	0.5	-0.41
4	462.6375	19.4	0.09	0.5	-0.41
5	462.6625	19.4	0.09	0.5	-0.41
6	462.6875	19.4	0.09	0.5	-0.41
7	462.7125	19.4	0.09	0.5	-0.41
8	467.5625	19.4	0.09	0.5	-0.41
9	467.5875	19.4	0.09	0.5	-0.41
10	467.6125	19.4	0.09	0.5	-0.41
11	467.6375	19.4	0.09	0.5	-0.41
12	467.6625	19.4	0.09	0.5	-0.41
13	467.6875	19.4	0.09	0.5	-0.41
14	467.7125	19.4	0.09	0.5	-0.41
15	462.5500	19.4	0.09	5.0	-4.91
16	462.5750	19.4	0.09	5.0	-4.91
17	462.6000	19.4	0.09	5.0	-4.91
18	462.6250	19.4	0.09	5.0	-4.91
19	462.6500	19.4	0.09	5.0	-4.91
20	462.6750	19.4	0.09	5.0	-4.91
21	462.7000	19.4	0.09	5.0	-4.91
22	462.7250	19.4	0.09	5.0	-4.91

Remark: Ch1 - Ch7 and Ch15 - Ch22 can be selected for power High / Low Function.  
Other 7 Channels (Ch8 - Ch14) will use fix power function.

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002



---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 4**

**MODULATION CHARACTERISTICS**

## INTERTEK TESTING SERVICES

---

### 4.0 **Modulation Characteristics**

In order to satisfy the 95.637(a) requirement, Modulation Frequency Response and Modulation Limit Characteristics are attached in Exhibit 4.1 & 4.2.

Plots for each tests are saved with filename: mfr.pdf and mlc.pdf

---

---

## INTERTEK TESTING SERVICES

---

---


### 4.1 Modulation Frequency Response

#### A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi Instrument	2945

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

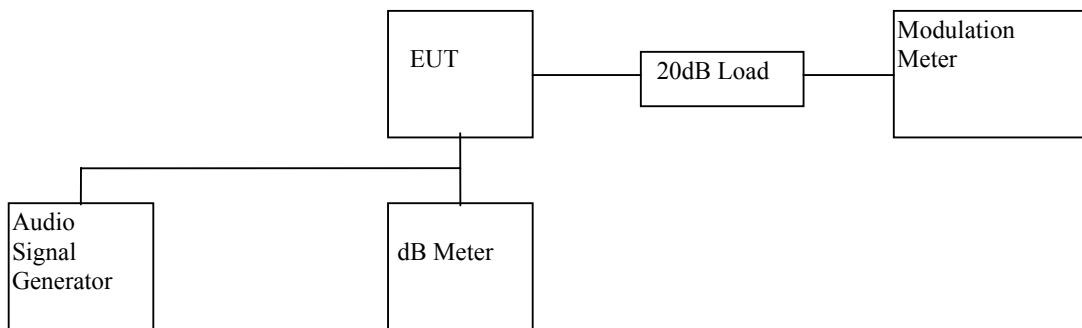

- 2) Set the audio signal generator frequency to the sound pressure level 97.0dB SPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 200Hz to 5kHz.
- 4) Record the frequency deviation.

---

---

## INTERTEK TESTING SERVICES

---

---

### C. Test Result

Table 2

**Golden Source Electronics Limited  
BELLSOUTH 2271(XX)**

### Modulation Frequency Response

Input level = 97.0dB SPL

Modulation Frequency (Hz)	Modulation index (%)
	Test Channel: 4
200	0.03
300	0.96
400	1.05
500	1.12
600	1.34
700	1.62
800	1.85
900	1.77
1000	1.83
1250	1.48
1500	0.80
1750	0.48
2000	0.33
2250	0.27
2500	0.27
2750	0.18
3000	0.16
3125	0.15
3250	0.15
3500	0.14
4000	0.14
5000	0.12

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002

---

---

## INTERTEK TESTING SERVICES

---

---


### 4.2 Modulation Limiting Characteristics (Section 2.1047(b))

#### A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi	2950

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

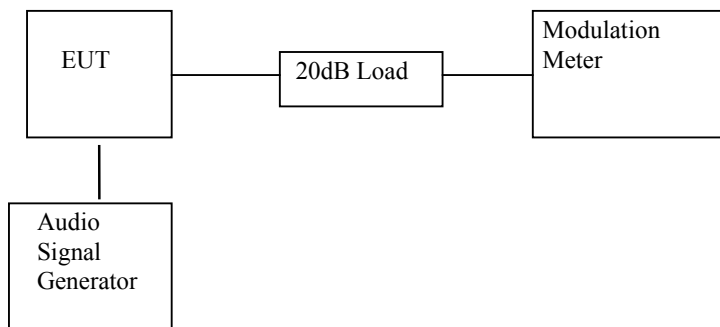

- 2) Set the frequency of the audio signal generator to 500Hz and adjust the level from 47dB SPL to 127dB SPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.

---

---

## INTERTEK TESTING SERVICES

---

---

### C. Test Result

Table 3

Golden Source Electronics Limited  
BELLSOUTH 2271(XX)

#### Modulation Limiting Characteristics

Test Channel : 4

Modulation Input (dBSPL)	Peak Frequency Deviation (kHz) at 500Hz	Peak Frequency Deviation (kHz) at 1000Hz	Peak Frequency Deviation (kHz) at 2500Hz	Peak Frequency Deviation (kHz) at 3125Hz
47	0.04	0.04	0.04	0.11
57	0.04	0.04	0.04	0.11
67	0.04	0.04	0.04	0.11
77	0.05	0.07	0.04	0.11
87	0.11	0.21	0.06	0.12
97	0.31	0.60	0.11	0.15
107	0.96	1.67	0.21	0.20
117	2.17	1.97	0.39	0.27
127	2.24	1.96	0.41	0.29
137	2.24	1.97	0.46	0.34

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002

---

---

## INTERTEK TESTING SERVICES

---

---

### 4.3 Audio Low Pass Filter Response (Section 95.637(b))

#### A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A

#### B. Testing Procedure

- 1) Connect the audio signal generator to the input of the post limiter low pass filter and the dB meter to the output of the post limiter low pass filter.
- 2) Apply a 1000 Hz tone from the audio signal generator and adjust the level per manufacturer's specifications. Record the dB level of the 1000 Hz tone as  $LEV_{REF}$ .
- 3) Set the audio signal generator to the desired test frequency between 3000 Hz and the upper low pass filter limit. Record the dB level at the test frequency as  $LEV_{FREQ}$ .
- 4) Calculate the audio frequency response at the test frequency as:

$$low\ pass\ filter\ response = LEV_{FREQ} - LEV_{REF}$$

- 5) Repeat the above procedure for all the desired test frequencies.

#### C. Test Result

For electronic filing, the audio low pass frequency response is saved with filename: lpf.pdf.

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 5**

**OCCUPIED BANDWIDTH**



## INTERTEK TESTING SERVICES


### 5.0 Occupied Bandwidth (Section 95.633(c))

#### A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Spectrum Analyzer	Hewlett Packard	8951EM

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

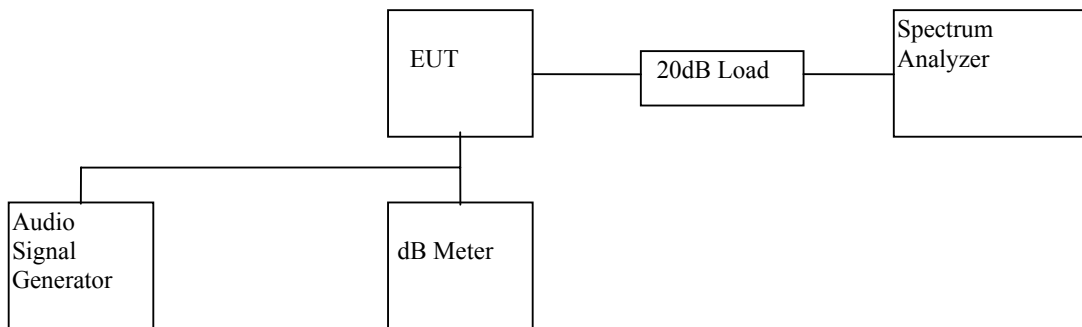

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) The occupied bandwidth is measured with the spectrum analyzer set at 5kHz/div scan and 10dB/div.

#### C. Test Result

The occupied Bandwidth is measured to be 5.5 kHz.

For the electronic filing, the bandwidth plot is saved with filename:  
bw.pdf

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 6**

**SPURIOUS EMISSION**

## INTERTEK TESTING SERVICES

---

### 6.0 **Spurious Emission (Section 95.635)**

In order to satisfy the 95.635 requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

---

---

## INTERTEK TESTING SERVICES

---

---

### 6.1 Field Strength of Spurious Radiation (Section 95.635)

#### A. Test Equipment

Equipment	Brand Name	Model No.
Antenna	CDI	B100,B200,B300, Horn
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF

#### B. Testing Procedure

Radiated emission measurements were performed according to the procedures in ANSI C63.4(1992). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

## **INTERTEK TESTING SERVICES**

---

### **C. Radiated Emission Configuration Photograph**

---

#### **Worst Case Radiated Emission**

For electronic filing, the radiated emission configurations photograph is saved with filename: radiated photos.doc

---

---

## INTERTEK TESTING SERVICES

---

---

### C. Test Result

**Golden Source Electronics Limited  
BELLSOUTH 2271(XX)**

**Table 4(a)**

1. Unwanted emission from CARRIER  $\pm 6.25\text{kHz}$  to CARRIER  $\pm 31.25\text{kHz}$

(Refer to the plots which is saved with filename: spurious.pdf)

Region	Unwanted emission	
	Channel 4	Channel 11
CARRIER $\pm 6.25\text{kHz}$ to $\pm 12.5\text{kHz}$	<25dB	<25dB
CARRIER $\pm 12.5\text{kHz}$ to $\pm 31.25\text{kHz}$	<35dB	<35dB

---

---

## INTERTEK TESTING SERVICES

---

---

**Table 4(b): Channel 4 (High Power)**

<b>Frequency (MHz)</b>	<b>Effective Radiated Power (dBm)</b>	<b>Transmission Power (dBm)</b>	<b>Attenuation (dB)</b>	<b>Limited (dB)</b>	<b>Margin (dB)</b>
925.277	-39.7	28.5	68.2	41.5	26.7
1387.920	-27.4	28.5	55.9	41.5	14.4
1850.566	-40.7	28.5	69.2	41.5	27.7
2313.206	-37.8	28.5	66.3	41.5	24.8
2775.846	-44.4	28.5	72.9	41.5	31.4
3238.483	-37.8	28.5	66.3	41.5	24.8
3701.120	-45.0	28.5	73.5	41.5	32.0
4163.769	-56.8	28.5	85.3	41.5	43.8
4626.403	-58.6	28.5	87.1	41.5	45.6

- Remark:
1. Transmission power is 28.5 dBm or -1.5 dB(W).
  2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least  $43 + 10 \log_{10}(\text{TP})$  dB or 41.5 dB.
  3. The test is performed according to ANSI/TIA/EIA-603-1992.

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002

---

---

## INTERTEK TESTING SERVICES

---

---

**Table 4(b): Channel 4 (Low Power)**

<b>Frequency (MHz)</b>	<b>Effective Radiated Power (dBm)</b>	<b>Transmission Power (dBm)</b>	<b>Attenuation (dB)</b>	<b>Limited (dB)</b>	<b>Margin (dB)</b>
925.277	-40.7	19.4	60.1	32.4	27.7
1387.920	-28.9	19.4	48.3	32.4	15.9
1850.566	-42.2	19.4	61.6	32.4	29.2
2313.206	-42.5	19.4	61.9	32.4	29.5
2775.846	-44.3	19.4	63.7	32.4	31.3
3238.483	-40.3	19.4	59.7	32.4	27.3
3701.120	-45.3	19.4	64.7	32.4	32.3
4163.769	-56.9	19.4	76.3	32.4	43.9
4626.403	-58.9	19.4	78.3	32.4	45.9

- Remark:
1. Transmission power is 19.4 dBm or -10.6 dB(W).
  2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least  $43 + 10 \log_{10} (TP)$  dB or 32.4 dB.
  3. The test is performed according to ANSI/TIA/EIA-603-1992.

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002



---

---

## INTERTEK TESTING SERVICES

---

---

**Table 4(c): Channel 11**

<b>Frequency (MHz)</b>	<b>Effective Radiated Power (dBm)</b>	<b>Transmission Power (dBm)</b>	<b>Attenuation (dB)</b>	<b>Limited (dB)</b>	<b>Margin (dB)</b>
935.282	-40.7	19.4	60.1	32.4	27.7
1402.912	-29.1	19.4	48.5	32.4	16.1
1870.556	-42.7	19.4	62.1	32.4	29.7
2338.177	-43.2	19.4	62.6	32.4	30.2
2805.844	-44.8	19.4	64.2	32.4	31.8
3273.488	-40.8	19.4	60.2	32.4	27.8
3741.132	-45.8	19.4	65.2	32.4	32.8
4208.776	-57.4	19.4	76.8	32.4	44.4
4676.420	-59.4	19.4	78.8	32.4	46.4

- Remark:
1. Transmission power is 19.4 dBm or -10.6 dB(W).
  2. According to Section 95.635(b7), the unwanted emission should be attenuated below TP by at least  $43 + 10 \log_{10}(\text{TP})$  dB or 32.4 dB.
  3. The test is performed according to ANSI/TIA/EIA-603-1992.

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 7**

**FREQUENCY STABILITY**

## INTERTEK TESTING SERVICES

---

### 7.0 **Frequency Stability**

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.

---

---

## INTERTEK TESTING SERVICES

---

---


### 7.1 Frequency Tolerance (Section 95.625)

#### A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

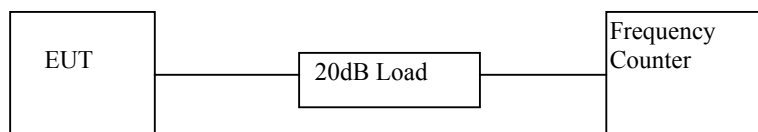

- 2) Measure all transmit channel frequencies in MHz.

---

---

## INTERTEK TESTING SERVICES

---

---

### C. Test Result

Table 5(a)

Golden Source Electronics Limited  
BELLSOUTH 2271(XX)

#### Frequency Tolerance

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
1	462.5625	462.56218	-0.000069
2	462.5875	462.58718	-0.000069
3	462.6125	462.61219	-0.000067
4	462.6375	462.63720	-0.000065
5	462.6625	462.66221	-0.000063
6	462.6875	462.68720	-0.000065
7	462.7125	462.71220	-0.000065
8	467.5625	467.56220	-0.000064
9	467.5875	467.58720	-0.000064
10	467.6125	467.61219	-0.000066
11	467.6375	467.63719	-0.000066
12	467.6625	467.66218	-0.000068
13	467.6875	467.68719	-0.000066
14	467.7125	467.71219	-0.000066
15	462.5750	462.57469	-0.000067
16	462.6250	462.62469	-0.000067
17	462.6750	462.67469	-0.000067
18	462.5500	462.54900	-0.000216
19	462.6000	462.59970	-0.000065
20	462.6500	462.64969	-0.000067
21	462.7000	462.69969	-0.000067
22	462.7250	462.72470	-0.000065

---

---

## INTERTEK TESTING SERVICES

---

---


### 7.2 Frequency Stability - Temperature (Section 2.1055)

#### A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

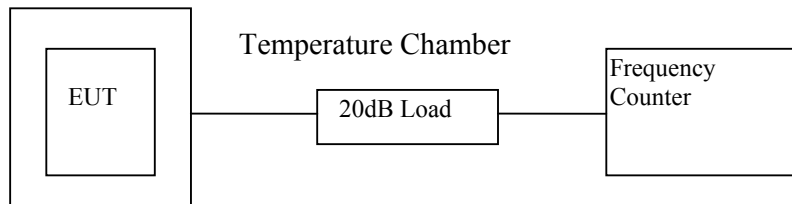

- 2) Set the Temperature Chamber to -20°C and stabilize the EUT temperature for one hour. Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 4, 11 in MHz.
- 4) Turn the EUT OFF
- 5) Repeat the above procedure from -20°C to 50°C with 10°C increment.

---

---

## INTERTEK TESTING SERVICES

---

---

### C. Test Result

**Table 6(a)**

**Golden Source Electronics Limited  
BELLSOUTH 2271(XX)**

**Frequency Deviation with Temperature Variation**

Test Channel : 4

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	% Deviation
-20	462.6375	462.63712	-0.000082
-10	462.6375	462.63732	-0.000039
0	462.6375	462.63748	-0.000004
10	462.6375	462.63743	-0.000015
20	462.6375	462.63720	-0.000065
30	462.6375	462.63752	0.000004
40	462.6375	462.63765	0.000032
50	462.6375	462.63798	0.000104

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002

---

---

## INTERTEK TESTING SERVICES

---

---

### C. Test Result

**Table 6(b)**

**Golden Source Electronics Limited  
BELLSOUTH 2271(XX)**

**Frequency Deviation with Temperature Variation**

Test Channel : 11

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	% Deviation
-20	467.6375	467.63714	-0.000077
-10	467.6375	467.63734	-0.000034
0	467.6375	467.63740	-0.000021
10	467.6375	467.63742	-0.000017
20	467.6375	467.63719	-0.000066
30	467.6375	467.63754	0.000009
40	467.6375	467.63765	0.000032
50	467.6375	467.63795	0.000096

Test Engineer: Ben W. K. Ho

Date of Test: July 30, 2002



---

---

## INTERTEK TESTING SERVICES

---

---


### 7.3 Frequency Stability - Voltage (Section 2.995)

#### A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Voltage meter	Fluke	87
Frequency Counter	Phillips	PM6668

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

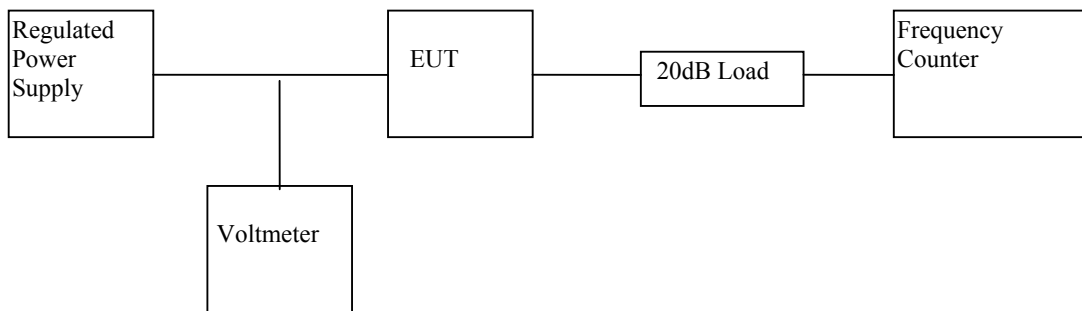

- 2) Vary the level of regulated power supply to the manufacturer specified battery end point of the EUT.
- 3) Measure the channel frequency for channel 4 and 11 in MHz.

---

---

## INTERTEK TESTING SERVICES

---

---

### C. Test Result

Table 7

**Golden Source Electronics Limited  
BELLSOUTH 2271(XX)**

#### **Frequency Deviation with Voltage Variation**

The manufacturer specified battery end point 6.5V

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
4	462.6375	462.63735	-0.000032
11	467.6375	467.63738	-0.000026

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 8**

**TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

### 8.0 Technical Specifications

## INTERTEK TESTING SERVICES

---

### 8.1 Block Diagram

For electronic filing, the block diagram of the FRS is saved with filename:  
block.pdf

Figure 8.1 Block Diagram

## INTERTEK TESTING SERVICES

---

### 8.2 Schematic Diagram

For electronic filing, the schematic diagram of the FRS is saved with filename: circuit.pdf

Figure 8.2 Schematic Diagram

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 9**

**PRODUCT LABELLING**

## INTERTEK TESTING SERVICES

---

### 9.0 Product Labelling



---

## INTERTEK TESTING SERVICES

---

### 9.1 Label Artwork & Location

#### Figure 9.1 Label Artwork & Location

An engineering drawing of the label which will be permanently affixed to the unit. For electronic filing, the label artwork & location are saved with filename: label.pdf

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 10**

**PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

### 10.0 **Equipment Photographs**

For electronic filing, photographs of the tested EUT are saved with filename: external photos.doc and internal photos.doc

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 11**

**INSTRUCTION MANUAL**

## INTERTEK TESTING SERVICES

---

### 11.0 **Instruction Manual**

This manual will be provided to the end-user with each unit sold/leased in the United States.

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 12**

**TUNE UP PROCEDURE**

## INTERTEK TESTING SERVICES

---

### 12.0 Tune Up Procedure

For electronic filing, a preliminary copy of the Tune Up Procedure is saved with filename: tuneup.pdf

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 13**

**PART LIST**



## INTERTEK TESTING SERVICES

---

### 13.0 **Part List**

For electronic filing, a preliminary copy of the Part List is saved with filename: partlist.pdf

---

---

**INTERTEK TESTING SERVICES**

---

---

**EXHIBIT 14**

**RF Exposure Info**

## INTERTEK TESTING SERVICES

---

### 14.0 **RF Exposure Info**

Based on the measured power shown on P.10 (28.5dBm ERP) and the tune-up procedure for the transmission power shown on P. 1 (28.5dBm ERP/ 31.5dBm conducted or 0.71W ERP/ 1.41W conducted), they are below the SAR threshold (1.52W ERP/ 1.5W conducted) and therefore, the EUT is exempted from the SAR requirement.

The RF Safety information is shown on P.6 of the user manual.