

The University of Michigan Radiation Laboratory 3228 EECS Building Ann Arbor, MI 48109-2122 Tel: (734) 764-0500

Measured Radio Frequency Emissions From

Johnson Controls Bluetooth Module Model: CB2BART06

Report No. 415031-255 July 21, 2005

Copyright © 2005

For: Johnson Controls Interiors L.L.C. One Prince Center Holland, MI 49423

> Contact: Jeremy Bos Tel: (616) 394-6076 Fax: (616) 394-6100 PO: Verbal

Measurements made by:

Tests supervised by: Report approved by:

Joseph D. Brunett

Valdis V. Liepa Research Scientist

Summary

Tests for compliance with FCC Regulations, Part 15.247, and with Industry Canada (IC) Regulations, RSS-210, Part 6.2.2, were performed on Johnson Controls model CB2BART06 frequency hopping spread spectrum (FHSS) transmitter. The DUT is subject to the Rules and Regulations as a transmitter.

In testing competed on March 13, 2004, the radiated emissions in restricted bands were met by 14.9 dB. The AC line conducted emissions tests do not apply, since the device is powered from a 12 VDC system. The DUT is exempt as a digital device since it is used in a transportation vehicle. All other testing indicates that the Johnson Controls model CB2BART06 meets the limitations set forth by the FCC and IC for a 2.4 GHz FHSS transmitter.

Introduction

Johnson Controls model CB2BART06 was tested for compliance with FCC Regulations, Part 15, Subpart C, adopted under Docket 87-389, April 18, 1989, and with Industry Canada RSS-210, Issue 5, November, 2001. The tests were performed at the University of Michigan Radiation Laboratory Willow Run Test Range following the procedures described in ANSI C63.4-2003 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The Site description and attenuation characteristics of the Open Site facility are on file with FCC Laboratory, Columbia, Maryland (FCC Reg. No: 91050) and with Industry Canada, Ottawa, ON (File Ref. No: IC 2057).

1. Test Procedure and Equipment Used

The pertinent test equipment commonly used in our facility for measurements is listed in Table 2.1 below. The middle column identifies the specific equipment used in these tests.

Spectrum Analyzer (0.1-1500 MHz)Hewlett-Packard, 182T/8558BSpectrum Analyzer (9kHz-22GHz)XHewlett-Packard 8593A SN: 3107A01358Spectrum Analyzer (9kHz-26GHz)XHewlett-Packard 8593E, SN: 3412A01131Spectrum Analyzer (9kHz-26GHz)Hewlett-Packard 8563E, SN: 3310A01174Spectrum Analyzer (9kHz-40GHz)Hewlett-Packard 8564E, SN: 3745A01031Power MeterHewlett-Packard 432APower MeterPacific Instruments 1018BHarmonic Mixer (26-40 GHz)Hewlett-Packard 11970V, SN: 3003A08327Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970V, SN: 2521A00179Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2521A00179Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2521A00179Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2521A00179Pacific Milimeter Prod, GMA, SN: 26S-Band Std. Gain HornXX-Band Std. Gain HornXX-band horn (8.2-12.4 GHz)XX-band horn (14.26.5 GHz)XX-band horn (14.20.6 GHz)XW-band horn (14.20.7 GHz)XU-band horn (14.20.7 GHz)XU-band horn (14.20.7 GHz)XU-band horn (14.20.7 GHz)XU-band horn (14.20.7 GHz)XUniversity of	Test Instrument	Eqpt. Used	Manufacturer/Model
Spectrum Analyzer (9kHz-26GHz)XHewlett-Packard 8593E, SN: 3412A01131Spectrum Analyzer (9kHz-26GHz)Hewlett-Packard 8563E, SN: 3310A01174Spectrum Analyzer (9kHz-40GHz)Hewlett-Packard 8564E, SN: 3310A01174Power MeterHewlett-Packard 8564E, SN: 3310A01174Power MeterPacific Instruments 1018BPeak Power MeterPacific Instruments 1018BHarmonic Mixer (26-40 GHz)Hewlett-Packard 11970A, SN: 3003A08327Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2322A00500Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2322A00500Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2251A00179Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2251A00179Harmonic Mixer (75-110 GHz)Yourersity of Michigan, NRL designXN-Band Std. Gain HornXUniversity of Michigan, NRL designX-band horn (82-12.4 GHz)XSicentific Atlanta, 12-8.2, SN: 730X-band horn (82-12.4 GHz)XFXR, Inc., K638KFK-band horn (18-26.5 GHz)XFXR, Inc., U638AU-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (26.5-40 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (20-250 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (30-250 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (30-1000 MHz)XUniversity of Michigan, RLBC-2Active Rod Antenna (30-5000 MHz)XUniversity of MichiganActive Rod Antenna (30-5000 MHz)XAvantak, AT1-1, A25-18Amp	Spectrum Analyzer (0.1-1500 MHz)		Hewlett-Packard, 182T/8558B
Spectrum Analyzer (9kHz-26GHz)Hewlett-Packard 8563E, SN: 3310A01174Spectrum Analyzer (9kHz-40GHz)Hewlett-Packard 8563E, SN: 3745A01031Power MeterHewlett-Packard 432APower MeterAnritsu, ML4803A/MPPeak Power MeterPacific Instruments 1018BHarmonic Mixer (26-40 GHz)Hewlett-Packard 11970L, SN: 2332A00500Harmonic Mixer (140-20 GHz)Hewlett-Packard 11970U, SN: 2332A00500Harmonic Mixer (140-220 GHz)Pacific Instruments 1018BS-Band Std. Gain HornXX-Band Std. Gain HornXX-band horn (8.2-12.4 GHz)XX-band horn (8.2-10.4 GHz)XX-band horn (40-60 GHz)XW-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (40-00 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XBicone Antenna (30-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XActive Loop Antenna (30 Hz-50 MHz)XActive Coop Antenna (30 Hz-	Spectrum Analyzer (9kHz-22GHz)	Х	Hewlett-Packard 8593A SN: 3107A01358
Spectrum Analyzer (9kHz-40GHz)Hewlett-Packard 8564E, SN: 3745A01031Power MeterHewlett-Packard, 432APower MeterPackard 8564E, SN: 3745A01031Peak Power MeterPacific Instruments 1018BHarmonic Mixer (26-40 GHz)Hewlett-Packard 11970A, SN: 3003A08327Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2521A00179Harmonic Mixer (140-220 GHz)Pacific Millimeter Prod., GMA, SN: 26S-Band Std, Gain HornXXN-Band Std, Gain HornXX-band horn (8.2-12.4 GHz)XX-band horn (8.2-12.4 GHz)XX-band horn (8.2-12.4 GHz)XX-band horn (25.5 GHz)XK-band horn (25.5 GHz)XW-band horn (75-110 GHz)Custom Microwave, HO19W-band horn (71-110 GHz)Custom Microwave, HO19W-band horn (140-20 GHz)XW-band horn (14-020 GHz)XUbione Antenna (30-250 MHz)XUiversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUiversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (30-500 MHz)XActive Loop Antenna (30-500 MHz)XActive Loop Antenna (30-500 MHz)XAraplifier (5-100 MHz)XAmplifi	Spectrum Analyzer (9kHz-26GHz)	Х	Hewlett-Packard 8593E, SN: 3412A01131
Power MeterHewlett-Packard, 432APower MeterPacific Instruments 1018BPeak Power MeterPacific Instruments 1018BHarmonic Mixer (26-40 GHz)Hewlett-Packard 119700, SN: 2032A00500Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2521A00179Harmonic Mixer (75-110 GHz)Pacific Millimeter Prod., GMA, SN: 26S-Band Std. Gain HornXX-Band horn (8.2- 12.4 GHz)XX-band horn (8.2- 12.4 GHz)XX-band horn (8.2- 12.4 GHz)XX-band horn (8.2- 12.4 GHz)XX-band horn (8.2- 10.4 GHz)XK-band horn (40-60 GHz)XU-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (140-20 GHz)XBicone Antenna (30-250 MHz)XDipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30 Hz-50 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)XActive Rod Antenna (30 Hz-50 MHz)XActive Rod Antenna (30 Hz-50 MHz)XActive Loop Antenna (30 Hz-50 MHz)XActive Loop Antenna (30 Hz-50 MHz)XActive Loop Antenna (30 Hz-50 MHz)XAnplifier (5-100 MHz)XAnplifier (5-100 MHz)XAnplifier (5-100 MHz)XAnplifier (6-16 GHz	Spectrum Analyzer (9kHz-26GHz)		Hewlett-Packard 8563E, SN: 3310A01174
Power MeterAnritsu, ML4803A/MPPeak Power MeterPacific Instruments 1018BHarmonic Mixer (26-40 GHz)Hewlett-Packard 11970A, SN: 303A08327Harmonic Mixer (40-60 GHz)Hewlett-Packard 11970U, SN: 2332A00500Harmonic Mixer (140-220 GHz)Pacific Millimeter Prod., GMA, SN: 26S-Band Std. Gain HornXX-Band horn (8.2- 12.4 GHz)XX-band horn (8.2- 12.4 GHz)XK-band horn (8.2- 12.4 GHz)XK-band horn (20-5 GHz)XK-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (140-220 GHz)XWaband horn (140-200 GHz)XWaband horn (140-200 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (30 Hz-50 MHz)XActive Rod Antenna (30 Hz-50 MHz)XActive Rod Antenna (30 Hz-50 MHz)XActive Rod Antenna (30 Hz-50 MHz)XActive Loop Antenna (30 Hz-50 MHz)XActive Rod Antenna (30 Hz-50 MHz)XArbiffer (5-100 MHz)XArbiffer (5-100 MHz)XArbiffer (5-13 GHz)XArbiffer (6-16 GHz)XAmpliffer (6-16	Spectrum Analyzer (9kHz-40GHz)		Hewlett-Packard 8564E, SN: 3745A01031
Peak Power MeterPacific Instruments 1018BHarmonic Mixer (26-40 GHz)Hewlett-Packard 11970A, SN: 3003A08327Harmonic Mixer (40-60 GHz)Hewlett-Packard 11970W, SN: 2332A00500Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2521A00179Harmonic Mixer (140-220 GHz)Pacific Millimeter Prod., GMA, SN: 26S-Band Std. Gain HornXXN-Band Std. Gain HornXX-Band Std. Gain HornXX-band horn (8.2- 12.4 GHz)XX-band horn (8.2- 12.4 GHz)XX-band horn (8.2- 12.4 GHz)XX-band horn (8.2- 12.4 GHz)XX-band horn (8.2- 12.4 GHz)XK-band horn (18-26.5 GHz)XK-band horn (14-0-60 GHz)XW-band horn (14-0-20 GHz)XW-band horn (14-0-20 GHz)XBicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (30 Hz-50 MHz)Active Loop Antenna (30 Hz-50 MHz)Active Loop Antenna (30 Hz-50 MHz)XActive Loop Antenna (30 Hz-50 MHz)XAmplifier (5-1300 MHz)XAmplifier (5-4500 MHz)XAmplifier (5-4500 MHz)XAmplifier (5-4500 MHz)XAmplifier (5-130 GHz)XAmplifier (6-16 GHz)XXAmplifier (6-26 GHz)XXXXXX<	Power Meter		Hewlett-Packard, 432A
Harmonic Mixer (26-40 GHz)Hewlett-Packard 11970A, SN: 3003A08327Harmonic Mixer (40-60 GHz)Hewlett-Packard 11970U, SN: 2332A00500Harmonic Mixer (140-220 GHz)Pacific Millimeter Prod., GMA, SN: 26S-Band Std. Gain HornXX-Band Std. Gain HornXX-Band Std. Gain HornXX-band horn (8.2-12.4 GHz)XX-band horn (8.2-12.4 GHz)XX-band horn (8.2-12.4 GHz)XX-band horn (26.5-6 GHz)XX-band horn (18-26.5 GHz)XK-band horn (26.5-40 GHz)XW-band horn (140-20 GHz)XW-band horn (140-20 GHz)XKaband horn (26.5-40 GHz)XKaband horn (140-20 GHz)XW-band horn (140-20 GHz)XWithen (140-20 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (30 Hz-50 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30 Hz-50 MHz)XKidge-horn Antenna (30 Hz-50 MHz)XKidge-horn Antenna (30 Hz-50 MHz)XActive Loop Antenna (30 Hz-50 MHz)XAnplifier (5-13 GHz)XAnplifier (5-4500 MHz)XAnplifier (5-4500 MHz)XAnplifier (5-4500 MHz)XAnplifier (6-16 GHz)XAmplifier (6-16 GHz)XAmplifier (6-26 GHz)XAnplifier (6-26 GHz)X<	Power Meter		Anritsu, ML4803A/MP
Harmonic Mixer (40-60 GHz)Hewlett-Packard 11970U, SN: 2332A00500Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970U, SN: 2521A00179Harmonic Mixer (140-220 GHz)Pacific Millimeter Prod., GMA, SN: 26S-Band Std. Gain HornXS/A, Model SGH-2.6C-Band Std. Gain HornXUniversity of Michigan, NRL designXN-Band Std. Gain HornXS/A, Model SGH-2.6X-band horn (8.2-12.4 GHz)XNarda 640X-band horn (8.2-12.4 GHz)XScientific Atlanta, 12-8.2, SN: 730K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (16-60 GHz)XFXR, Inc., U638AU-band horn (140-220 GHz)Custom Microwave, HO19W-band horn (140-220 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (30-500 MHz)XUniversity of MichiganAmplifier (5-130 GHz)XAvantakAmplifier (5-4500 MHz)XAvantakAmplifier (5-4500 MHz)XAvantakAmplifier (6-16 GHz)XAvantakAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	Peak Power Meter		Pacific Instruments 1018B
Harmonic Mixer (75-110 GHz)Hewlett-Packard 11970W, SN: 2521A00179Harmonic Mixer (140-220 GHz)Pacific Millimeter Prod., GMA, SN: 26S-Band Std. Gain HornXC-Band Std. Gain HornXWarmonic Mixer (140-220 GHz)University of Michigan, NRL designXN-Band Std. Gain HornXX-band Std. Gain HornXX-band horn (8.2-12.4 GHz)XX-band horn (8.2-12.4 GHz)XX-band horn (8.2-12.4 GHz)XX-band horn (8.2-6.5 GHz)XK-band horn (40-60 GHz)XW-band horn (75-110 GHz)XW-band horn (75-110 GHz)XW-band horn (75-110 GHz)XWichtama (200-1000 MHz)XBicone Antenna (200-1000 MHz)XUinversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUinversity of Michigan, RLBC-2Dipole Antenna (30-1000 MHz)EMCO 2131C, SN: 992Active Loop Antenna (30Hz-50 MHz)XKidge-horn Antenna (30Hz-50 MHz)XActive Loop Antenna (30Hz)XMighifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-13 GHz)XArantakAnalifier (5-13 GHz)XAvantakAmplifier (16-26 GHz)XXAvantekLISN BoxUniversity of Michigan	Harmonic Mixer (26-40 GHz)		Hewlett-Packard 11970A, SN: 3003A08327
Harmonic Mixer (140-220 GHz)Pacific Millimeter Prod., GMA, SN: 26S-Band Std. Gain HornXS/A, Model SGH-2.6XN-Band Std. Gain HornXUniversity of Michigan, NRL designXN-Band Std. Gain HornXUniversity of Michigan, NRL designX-band horn (8.2- 12.4 GHz)XNarda 640X-band horn (8.2- 12.4 GHz)XScientific Atlanta, 12-8.2, SN: 730K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (140-60 GHz)Custom Microwave, H019W-band horn (140-220 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-500 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna set (30-1000 MHz)EMCO 2131C, SN: 992Active Loop Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantakAmplifier (5-13 GHz)XAvantakAmplifier (6-16 GHz)XTrekAmplifier (6-16 GHz)XTrekAmplifier (6-26 GHz)XAvantekLISN BoxUniversity of Michigan	Harmonic Mixer (40-60 GHz)		Hewlett-Packard 11970U, SN: 2332A00500
S-Band Std. Gain HornXS/A, Model SGH-2.6C-Band Std. Gain HornXUniversity of Michigan, NRL designXN-Band Std. Gain HornXUniversity of Michigan, NRL designX-Band Std. Gain HornXS/A, Model 12-8.2X-band horn (8.2-12.4 GHz)XNarda 640X-band horn (8.2-12.4 GHz)XScientific Atlanta, 12-8.2, SN: 730K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (75-110 GHz)Custom Microwave, HO19G-band horn (140-620 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLBC-2Active Rod Antenna (30 Hz-50 MHz)EMCO 2131C, SN: 992Active Loop Antenna (30-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantakAmplifier (5-13 GHz)XAvantakAmplifier (6-16 GHz)XTrekAmplifier (6-16 GHz)XAvantakAmplifier (16-26 GHz)XAvantakLISN BoxUniversity of Michigan	Harmonic Mixer (75-110 GHz)		Hewlett-Packard 11970W, SN: 2521A00179
C-Band Std. Gain HornXUniversity of Michigan, NRL designXN-Band Std. Gain HornXUniversity of Michigan, NRL designX-Band Std. Gain HornXS/A, Model 12-8.2X-band horn (8.2-12.4 GHz)XNarda 640X-band horn (8.2-12.4 GHz)XScientific Atlanta , 12-8.2, SN: 730K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (40-60 GHz)XFXR, Inc., U638AU-band horn (140-220 GHz)Custom Microwave, HO19W-band horn (140-220 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Active Rod Antenna (30 Hz-50 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-1000 MHz)XAvantakAmplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XTrekAmplifier (16-26 GHz)XVantekLISN BoxUniversity of Michigan	Harmonic Mixer (140-220 GHz)		Pacific Millimeter Prod., GMA, SN: 26
XN-Band Std. Gain HornXUniversity of Michigan, NRL designX-Band Std. Gain HornXS/A, Model 12-8.2X-band horn (8.2-12.4 GHz)XNarda 640X-band horn (8.2-12.4 GHz)XScientific Atlanta , 12-8.2, SN: 730K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (40-60 GHz)Custom Microwave, H019W-band horn (140-220 GHz)Custom Microwave, H010G-band horn (140-220 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (30-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna (30 Hz-50 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-1000 MHz)XAvantakAmplifier (5-1000 MHz)XAvantakActive Loop Antenna (30 Hz-50 MHz)XAvantakAmplifier (5-1000 MHz)XAvantakAmplifier (5-1000 MHz)XAvantakAmplifier (5-1000 MHz)XAvantakAmplifier (6-16 GHz)XAvantakAmplifier (6-16 GHz)XAvantakAmplifier (16-26 GHz)XAvantakAmplifier (16-26 GHz)XAvantakLISN Box	S-Band Std. Gain Horn	Х	S/A, Model SGH-2.6
X-Band Std. Gain HornXS/A, Model 12-8.2X-band horn (8.2-12.4 GHz)XNarda 640X-band horn (8.2-12.4 GHz)XScientific Atlanta , 12-8.2, SN: 730K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (140-220 GHz)Custom Microwave, HO5RBicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna (30 Hz-50 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)XUniversity of MichiganAttive Loop Antenna (30 Hz-50 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XUniversity of MichiganAmplifier (5-100 MHz)XAvantak, A11-1, A25-1SAmplifier (5-100 MHz)XAvantakAmplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	C-Band Std. Gain Horn	Х	University of Michigan, NRL design
X-band horn (8.2- 12.4 GHz)XNarda 640X-band horn (8.2- 12.4 GHz)Scientific Atlanta , 12-8.2, SN: 730K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (140-20 GHz)Custom Microwave, HO10G-band horn (140-220 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna (200-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Active Rod Antenna (30 Hz-50 MHz)EMCO 2131C, SN: 992Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (4.5-13 GHz)XAvantakAmplifier (4-56 GHz)XAvantekLISN BoxUniversity of Michigan	XN-Band Std. Gain Horn	Х	University of Michigan, NRL design
X-band horn (8.2-12.4 GHz)Scientific Atlanta , 12-8.2, SN: 730K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (140-220 GHz)Custom Microwave, HO10G-band horn (140-220 GHz)XBicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna (30 Hz-50 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)XRidge-horn Antenna (300-500 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XActive Loop Antenna (30 Hz-50 MHz)KAvantak, A11-1, A25-1SAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (6-16 GHz)XAmplifier (6-16 GHz)XAmplifier (6-16 GHz)XAmplifier (16-26 GHz)XAmplifier (16-26 GHz)XKAvantekLISN BoxUniversity of Michigan	X-Band Std. Gain Horn	Х	S/A, Model 12-8.2
K-band horn (18-26.5 GHz)XFXR, Inc., K638KFKa-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (40-60 GHz)Custom Microwave, H019W-band horn (75-110 GHz)Custom Microwave, H010G-band horn (140-220 GHz)Custom Microwave, H05RBicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-4500 MHz)XAvantakAmplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	X-band horn (8.2-12.4 GHz)	Х	Narda 640
Ka-band horn (26.5-40 GHz)XFXR, Inc., U638AU-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (75-110 GHz)Custom Microwave, HO10G-band horn (140-220 GHz)XBicone Antenna (30-250 MHz)XBicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-13 GHz)XAmplifier (6-16 GHz)XAmplifier (16-26 GHz)XA	X-band horn (8.2-12.4 GHz)		Scientific Atlanta, 12-8.2, SN: 730
U-band horn (40-60 GHz)Custom Microwave, HO19W-band horn (75-110 GHz)Custom Microwave, HO10G-band horn (140-220 GHz)Custom Microwave, HO5RBicone Antenna (30-250 MHz)XBicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-1Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-600 MHz)XAmplifier (6-16 GHz)XAmplifier (6-16 GHz)XAmplifier (16-26 GHz)XAmplifier	K-band horn (18-26.5 GHz)		
W-band horn(75-110 GHz)Custom Microwave, HO10G-band horn (140-220 GHz)XUniversity of Michigan, RLBC-1Bicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAntenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAntenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAmplifier (6-16 GHz)XAmplifier (6-16 GHz)XAmplifier (6-16 GHz)XAmplifier (16-26 GHz)X <td>Ka-band horn (26.5-40 GHz)</td> <td>Х</td> <td>FXR, Inc., U638A</td>	Ka-band horn (26.5-40 GHz)	Х	FXR, Inc., U638A
G-band horn (140-220 GHz)Custom Microwave, HO5RBicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (6-16 GHz)XAmplifier (16-26 GHz)X	U-band horn (40-60 GHz)		Custom Microwave, HO19
Bicone Antenna (30-250 MHz)XUniversity of Michigan, RLBC-1Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)XEMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-4500 MHz)XAvantakAmplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan			Custom Microwave, HO10
Bicone Antenna (200-1000 MHz)XUniversity of Michigan, RLBC-2Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-4500 MHz)XAmplifier (5-4500 MHz)XAmplifier (6-16 GHz)XAmplifier (6-16 GHz)XAmplifier (16-26 GHz)XAmplifier (16-26 GHz)XLISN BoxUniversity of Michigan			
Dipole Antenna Set (30-1000 MHz)XUniversity of Michigan, RLDP-1,-2,-3Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-4500 MHz)XAmplifier (5-4500 MHz)XAmplifier (6-46 GHz)XAmplifier (6-16 GHz)XAmplifier (16-26 GHz)XAmplifier (16-26 GHz)XAvantekUniversity of Michigan	Bicone Antenna (30-250 MHz)		
Dipole Antenna Set (30-1000 MHz)EMCO 2131C, SN: 992Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XAmplifier (5-1000 MHz)XAmplifier (5-4500 MHz)XAmplifier (5-4500 MHz)XAmplifier (4.5-13 GHz)XAmplifier (6-16 GHz)XAmplifier (16-26 GHz)XAmplifier (16-26 GHz)XAvantekUINVERSITY of Michigan			
Active Rod Antenna (30 Hz-50 MHz)EMCO 3301B, SN: 3223Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-4500 MHz)XAvantakAmplifier (4.5-13 GHz)XAvantek, AFT-12665Amplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	Dipole Antenna Set (30-1000 MHz)	Х	University of Michigan, RLDP-1,-2,-3
Active Loop Antenna (30 Hz-50 MHz)EMCO 6502, SN:2855Ridge-horn Antenna (300-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-4500 MHz)XAvantakAmplifier (5-4500 MHz)XAvantakAmplifier (4.5-13 GHz)XAvantek, AFT-12665Amplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	Dipole Antenna Set (30-1000 MHz)		EMCO 2131C, SN: 992
Ridge-horn Antenna (300-5000 MHz)XUniversity of MichiganAmplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-4500 MHz)XAvantakAmplifier (4.5-13 GHz)XAvantakAmplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	Active Rod Antenna (30 Hz-50 MHz)		EMCO 3301B, SN: 3223
Amplifier (5-1000 MHz)XAvantak, A11-1, A25-1SAmplifier (5-4500 MHz)XAvantakAmplifier (4.5-13 GHz)XAvantek, AFT-12665Amplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	Active Loop Antenna (30 Hz-50 MHz)		EMCO 6502, SN:2855
Amplifier (5-4500 MHz)XAvantakAmplifier (4.5-13 GHz)XAvantek, AFT-12665Amplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	Ridge-horn Antenna (300-5000 MHz)		University of Michigan
Amplifier (4.5-13 GHz)XAvantek, AFT-12665Amplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	Amplifier (5-1000 MHz)		Avantak, A11-1, A25-1S
Amplifier (6-16 GHz)XTrekAmplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan	Amplifier (5-4500 MHz)		Avantak
Amplifier (16-26 GHz)XAvantekLISN BoxUniversity of Michigan			Avantek, AFT-12665
LISN Box University of Michigan			Trek
		Х	
Signal Generator Hewlett-Packard 8657B			
	Signal Generator		Hewlett-Packard 8657B

Table 2.1 Test Equipment

2. Configuration and Identification of Device Under Test

The DUT is a frequency hopping spread spectrum (FHSS) transmitter operating in 2400 - 2483.5 MHz band. The DUT is 5 x 1 x 3.5 inches with an external keypad, and connects to a peripheral laptop computer via a serial interface for testing purposes. The system has been designed to operate with 79 channels spaced 1 MHz apart, between 2402 MHz and 2480 MHz. The DUT has only one antenna built into the PCB.

The DUT was designed and manufactured by Johnson Controls Interiors L.L.C., One Prince Center, Holland, MI 49423. It is identified as:

Johnson Controls Bluetooth Module Model(s): CB2BART06 FCC ID: CB2BART06 IC: 279B-BART06

Peripheral Equipment:

Laptop Computer: Compaq EVO Series Model: PP2040

SN: USD344011D

In addition to a standard unit, a modified unit was provided by the manufacturer which had the internal antenna disabled and a SMA connector attached for conducted antenna measurement purposes.

2.1 EMI Relevant Modifications

No modifications were made to the DUT by this laboratory during testing.

3. Emission Limits

3.1 Radiated Emission Limits

Since the DUT is a spread spectrum device (15.247, 2.4 GHz), the radiated emissions are subject to emissions in restricted bands (15.205). The applicable frequencies, through ten harmonics, are given below in Table 4.1. Emission limits from digital circuitry are specified in Table 4.2.

Table 4.1 Radiated Emission Limits (FCC:	:15.205; IC:RSS-210, 6.3) - Transmitter
--	---

Frequency	Fundamental Ave. Elim (3m)		Spurious* Ave. E _{lim} (3m)	
(MHz)	(µV/m)	dB (µV/m)	(µV/m)	dB (µV/m)
2400-2483.5				
2310-2390	Restricted		500	54.0
2483.5-2500	Bands			
4500-5250	Bands			
7250-7750			500	54.0
14470-14500				
17700-21400	Restricted			
22010-23120	Bands			
23600-24000				

* Measure up to tenth harmonic; 1 MHz res. BW, 100 Hz video BW (for average detection)

Table 4.2 Radiated Emission Limits (FCC:15.109;IC: RSS-210, 7.3) - Digital device.

Frequency	Class A $ds = 10 m$		Class B	ds = 3 m
(MHz)	(µV/m)	$dB (\mu V/m)$	(µV/m)	dB (µV/m)
30-88	90	39.0	100	40.0
88-216	150	43.5	150	43.5
219-960	210	46.4	200	46.0
960-	300	49.5	500	54.0

120 kHz BW up to 1 GHz, 1 MHz BW above 1 GHz

3.2 Conducted Emission Limits

Frequency	Class A (dBµV)		Class B (dBµV)	
MHz	Quasi-peak	Average	Quasi-peak	Average
.150 - 0.50	79	66	66 - 56*	56 - 46*
0.50 - 5	73	60	56	46
5 - 30	73	60	60	50

Table 4.3 Conducted Emission Limits (FCC:15.107(CISPR); IC: RSS-210, 6.6).

Notes:

1. The lower limit shall apply at the transition frequency

2. The limit decreases linearly with the logarithm of the frequency in the range

0.15-0.50 MHz:

Class B Quasi-peak: $dB\mu V = 50.25 - 19.12\log(f)$

*Class B Average: $dB\mu V = 40.25 - 19.12 \cdot \log(f)$

3. 9 kHz RBW

4. Radiated Emission Tests and Results

4.1 Semi-Anechoic Chamber Measurements

In our chamber, there is a set-up similar to that of an outdoor 3-meter site, with a turntable, an antenna mast, and a ground plane. Instrumentation includes spectrum analyzers and other equipment as needed. For these tests the receiver (horn) antennas were placed on a Styrofoam block or antenna mast, at about 1.2 m height, and the DUT on a turntable at 3 meter distance (moved to 1 m distance if needed).

Standard gain horn antennas were used for the measurements. Up to 4.5 GHz the horns were connected to a spectrum analyzer via RG-214 coaxial cable, and above 4.5 GHz a pre-amp was added. The cables and the pre-amplifier used were specially calibrated for these tests using a network analyzer.

The DUT antenna was rotated in all possible ways and the maximum emission recorded. A photograph in the Test Setup portion of this submittal shows the measurement set-up.

4.2 Outdoor Measurements

None made.

4.3 Computations and Results

To convert the dBm measured on the spectrum analyzer to $dB(\mu V/m)$, we use the expression

$$E_3(dB\mu V/m) = 107 + P_R + K_A - K_G + K_E$$

where

 P_R = power recorded on spectrum analyzer, dB, measured at 3m

 K_A = antenna factor, dB/m

 K_{G} = pre-amplifier gain, including cable loss, dB

 K_E = pulse operation correction factor, dB

When presenting the data, the dominant measured emissions at each frequency, under all of the possible orientations, are given. Computations and results are given in Table 5.1. There we see that in the worst case the DUT meets the limit by 14.9 dB at 2483.5 MHz.

Note, that besides the emission measurements, each table contains the frequency range of operation (in upper section of the table).

4.4 Duty Factor for Normal Operation

No duty factor is used.

5. Other Measurements and Computations

5.1 20 dB Bandwidth (15.247(a)(1)(ii))

For this test, the DUT was put in a test mode for continuous data transmission (hopping disabled). The DUT was placed in front of the horn antenna oriented for maximum radiation. The analyzer was set for RBW=10 kHz, VBW=10 kHz, SPAN= 2 MHz. The 20-dB bandwidth was measured for low, mid, and high channels used by the DUT. The maximum limit for 20dB bandwidth of a single channel is 1 MHz. The resulting measured data is below, and plots are shown in Figure 6.1.

Channel	Frequency	<u>20 dB BW</u>	<u>Limit (max)</u>
1	2.402 GHz	625 kHz	1 MHz
39	2.441 GHz	615 kHz	1 MHz
79	2.480 GHz	615 kHz	1 MHz

5.2 Carrier Frequency Separation (15.247(a)(1))

For this test, the DUT was put in a test mode for data transmission (hopping enabled). The DUT was placed in front of the horn antenna at the location of maximum radiation. The analyzer was set for RBW=10 kHz, VBW= 30 kHz, SPAN= 1.8 MHz. The Carrier Frequency Separation was measured for low, mid, and high channels used by the DUT. A minimum carrier separation of 25 kHz, or the 20 dB bandwidth of the hopping channel, whichever is larger, is required. The resulting measured data is below, and plots are shown in Figure 6.2.

Channel	Frequency	Separation	Limit (min)
1	2.402 GHz		
2	2.403 GHz	1.017 MHz	625 kHz
38	2.440 GHz		<i>(</i> 1 <i>P</i> 1 T
39 70	2.441 GHz	1.004 MHz	615 kHz
78 79	2.479 GHz	1 004 MIL	(15 1-II-
19	2.480 GHz	1.004 MHz	615 kHz

Note: The different operating modes (data-mode, acquisition-mode) of a Bluetooth device do not influence the channel spacing. There is only one transmitter which is driven by identical input parameters concerning this value.

5.3 Number of Hopping Frequencies (15.247(a)(1)(ii))

For this test, the DUT was put in a test mode for data transmission (hopping enabled). The DUT was placed in front of the horn antenna at the location of maximum radiation. The analyzer was set for RBW=30 kHz, VBW=30 kHz, SPAN as needed. The total number of hopping channels must be 75 or greater. The number of measured channels is below, and plots are shown in Figure 6.3.

Frequency Range	Number of Channels	Total	<u>Limit</u>
2402.0 - 2428.5	27		
2430.0 - 2454.5	26	79	>75
2455.0 - 2483.5	26		

5.4 Single-Channel Dwell Time (15.247(a)(1)(ii))

For this test, the DUT was put in a test mode for data transmission (hopping enabled). The DUT was placed in front of the horn antenna at the location of maximum radiation. The analyzer was set for RBW= 1 MHz, VBW= 3 MHz, SPAN= 0 Hz. The limit for total average dwell time in a single channel must be less than 0.4 sec in a 30 sec period. The dwell time was measured at low, mid, and high channels and the results are listed below. Plots are shown in Figure 6.4.

Channel	Frequency	Num. Pulses	Active Time	<u>Total</u>	Limit (max)
1	2.402 GHz	16	2.950 ms	0.1416 sec	0.4 sec
39	2.441 GHz	33	2.950 ms	0.2921 sec	0.4 sec
79	2.480 GHz	27	2.950 ms	0.2390 sec	0.4 sec

Note: The measured dwell time above may not indicate the actual single channel dwell time of the DUT. A dwell time of 0.3797 seconds within a 30 second period in data mode is independent from the packet type (packet length) for all Bluetooth devices. Therefore, all Bluetooth devices comply with the FCC dwell time requirement in the data mode.

5.5 Peak-to-Average Ratio (15.35(b))

The measured difference between peak and average is always greater than 20 dB for a Bluetooth device, and this was verified in our measurements.

5.6 Peak and Average Output Power (15.247(b))

For this test, the DUT was put in a test mode for data transmission (hopping disabled). Peak power measurements were made using 1 MHz RBW and 3 MHz VBW on the Spectrum Analyzer. The power was measured from the RF port of DUT (a modified module was provided from the manufacturer for this purpose; the antenna is not generally removable). Table 6.2 presents the results. The maximum peak output power limit is 30dBm (1 Watt).

Freq (MHz)	Peak P(dBm)	Peak Limit (dBm)
2402	3.45	30
2441	2.51	30
2480	1.36	30

 Table 6.2 Peak
 Output Power (Antenna Conducted)

Note: The different operating modes (data-mode, acquisition-mode) of a Bluetooth device do not influence the output power. There is only one transmitter which is driven by identical input parameters concerning this parameter.

5.7 Potential Health Hazard EM Radiation Level

It has been determined that the DUT output power is less than 10 mW (10 dBm), and given the low gain of the PCB antenna (\sim 1 dBi), no health hazard exists beyond the physical dimensions of the DUT. The following table summarizes the power density at a distance of 20 cm from the device as calculated from FCC OET Bulletin 65.

ĺ	Ant.	Ant.Gain (dBi)	Po (mW)	EIRP (mW)	$S (mW/cm^2)$
ĺ	PCB	1	2.21	2.79	0.000554

Table 6.3 Potential Health Hazard Radiation Level

The following equations were used in calculating the operating distance (R).

$$EIRP(mW) = Po(mW) \cdot 10^{\frac{Gain(dB)}{10}}$$

and

$$S(mW/cm^2) = \frac{EIRP(mW)}{4 \cdot \Pi \cdot R(cm)^2}$$
, $R = 20$ cm

5.8 Power Line Conducted Emissions (15.270)

No power line conducted emissions were measured as this device operates from a 12 VDC automotive system.

5.9 RF Antenna Spurious Emissions (15.247(c))

For this test, the DUT was put in a test mode for data transmission (hopping disabled). The spectrum analyzer was connected where the antenna attaches to the system. The analyzer was set for RBW= 100 kHz, VBW= 300 kHz, the frequency was swept from 0 to 25 GHz. The DUT was measured for 3 channels used in the system. See Figure 6.5. In all cases, the noise is at least 30 dB below the carrier. (Limit -20.0 dB below carrier).

5.10 Band Edge Emissions (15.247(c))

For this test, the DUT was put in a test both hopping and non-hopping test modes. The spectrum analyzer was connected where the antenna attaches to the system. The analyzer was set for RBW=100 kHz, VBW=300 kHz, with the SPAN=5 MHz. The DUT was measured for low and high channels used in the system. Figures 6.6 and 6.7 show the band edge emissions, as summarized below.

Not Hopping	nel <u>Frequency</u>	<u>Band Edge</u>	Attenuation	<u>Limit(max)</u>
<u>Chann</u>	2402.0 MHz	2400.0 MHz	47.1 dBc	> 20 dBc
1	2402.0 MHz	2400.0 MHz	47.1 dBc	> 20 dBc
79	2480.0 MHz	2483.5 MHz	46.0 dBc	> 20 dBc
Hopping				
<u>Chann</u>	<u>el</u> <u>Frequency</u>	<u>Band Edge</u>	Attenuation	Limit(max)
1	2402.0 MHz	2400.0 MHz	43.7 dBc	> 20 dBc
79	2480.0 MHz	2483.5 MHz	43.2 dBc	> 20 dBc

The University of Michigan Radiation Laboratory 3228 EECS Building Ann Arbor, Michigan 48109-2122 (734) 764-0500

Radiated Emissions										JCI CB2BART06	
	Freq.	Ant.	Ant.	Peak	Ka	Kg	E3 (Pk)	E3lim (Pk)	Pass		
#	MHz	Used	Pol.	dBm	dB/m	dB	$dB\mu V/m$	$dB\mu V/m$	dB	Comments	
1	2402.0									Low channel	
2	2441.0									Mid channel	
3	2480.0									High channel	
4											
5	2390.0	Horn S	H/V	-73.8	21.5	- 0.6	55.3	74.0	18.7	Low, noise	
6	2390.0	Horn S	H/V	-72.5	21.5	- 0.6	56.6	74.0	17.4	Mid	
7	2390.0	Horn S	H/V	-74.0	21.5	- 0.6	55.1	74.0	18.9	High, noise	
8	2483.5	Horn S	H/V	-74.4	21.5	- 0.6	54.7	74.0	19.3	Low	
9	2483.5	Horn S	H/V	-71.8	21.5	- 0.6	57.3	74.0	16.7	Mid	
10	2483.5	Horn S	H/V	-70.0	21.5	- 0.6	59.1	74.0	14.9	High	
11	4804.0	Horn C	H/V	-37.2	25.5	37.0	58.3	74.0	15.7	Low	
12	4882.0	Horn C	H/V	-38.5	25.5	37.0	57.0	74.0	17.0	Mid	
13	4960.0	Horn C	H/V	-38.3	25.5	37.0	57.2	74.0	16.8	High	
14	7206.0	Horn XN	H/V	-	25.5	36.0	-	N/A	-	Low	
15	7323.0	Horn XN	H/V	-48.1	25.5	36.0	48.4	74.0	25.6	Mid	
16	7440.0	Horn XN	H/V	-48.2	25.5	36.0	48.3	74.0	25.7	High	
17	9608.0	Horn X	H/V	-	25.5	34.0	-	N/A	-	Low	
18	9764.0	Horn X	H/V	-	25.5	34.0	-	N/A	-	Mid	
19	9920.0	Horn X	H/V	-	25.5	34.0	-	N/A	-	High	
20	12010.0	Horn X	H/V	-45.6	25.5	34.0	52.9	74.0	21.1	Low, noise	
21	12205.0	Horn X	H/V	-42.5	25.5	34.0	56.0	74.0	18.0	Mid, noise	
22	12400.0	Horn X	H/V	-44.4	25.5	34.0	54.1	74.0	19.9	High, noise	
23	14412.0	Horn Ku	H/V	-	25.5	17.3	-	N/A	-	Low	
24	14646.0	Horn Ku	H/V	-	32.3	34.0	-	N/A	-	Mid	
25	14880.0	Horn Ku	H/V	-	32.3	34.0	-	N/A	-	High	
26	16814.0	Horn Ku	H/V	-	32.3	34.0	-	N/A	-	Low	
27	17087.0	Horn Ku	H/V	-	32.3	34.0	-	N/A	-	Mid	
28	17360.0	Horn Ku	H/V	-	32.3	34.0	-	N/A	-	High	
29	19216.0	Horn K	H/V	-60.0	32.3	32.0	47.3	74.0	26.7	Low, noise	
30	19528.0	Horn K	H/V	-59.9	32.3	32.0	47.4	74.0	26.6	Mid, noise	
31	19840.0	Horn K	H/V	-60.2	32.3	32.0	47.1	74.0	26.9	High, noise	
32	21618.0	Horn K	H/V	-	32.3	32.0	-	N/A	-	Low	
33	21969.0	Horn K	H/V	-	32.3	32.0	-	N/A	-	Mid	
34	22320.0	Horn K	H/V	-57.2	32.3	32.0	50.1	74.0	23.9	High, noise	
35	24020.0	Horn Ka	H/V	-	32.3	32.0	-	N/A	-	Low	
36	24410.0	Horn Ka	H/V	-	32.3	32.0	-	N/A	-	Mid	
37	24800.0	Horn Ka	H/V	-	32.3	32.0	-	N/A	-	High	
38											
39	* Peak: measured with 1 MHz RBW and 3 MHz VBW										
40	40 * Average measurements were not made, as the Pk to Avg ratio is greater than 20 dB (FCC 15.35)										
41	Note: Digital	emissions	were mo	ore than	20 dB be	low FC	C/IC Class	B Limit.			
42											

Table 5.1 Highest Emissions Measured

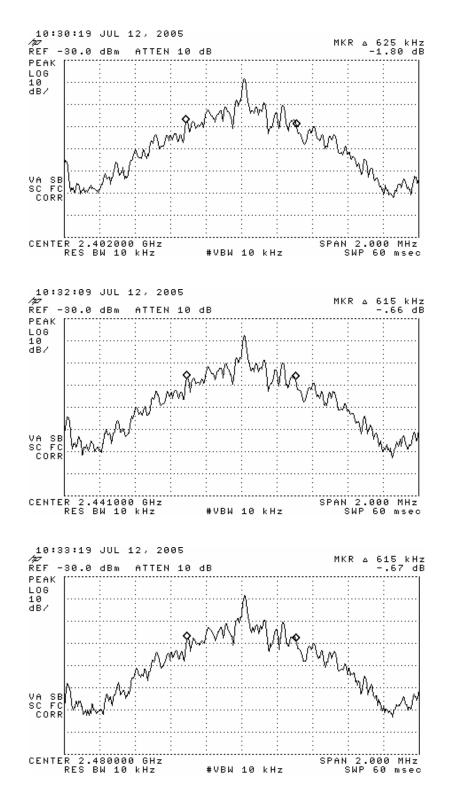


Figure 6.1 Measurement of channel 20 dB bandwidth. (top) Low Channel, (middle) Middle Channel, (bottom) High Channel

Page 10 of 16

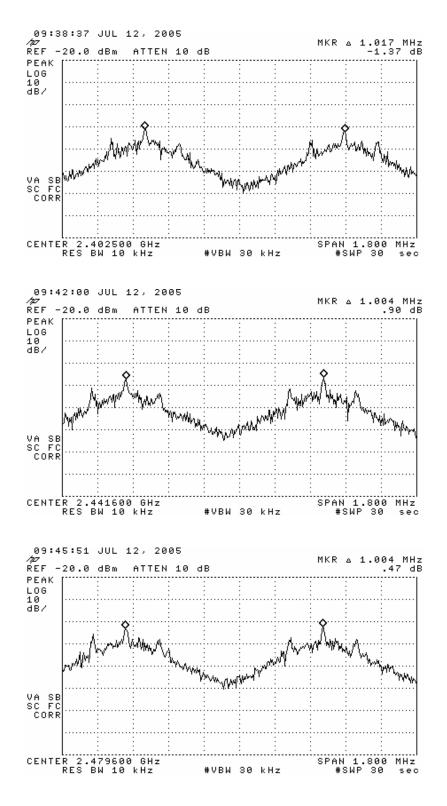


Figure 6.2 Carrier Frequency Separation. (top) Low Channel, (middle) Middle Channel, (bottom) High Channel

Page 11 of 16

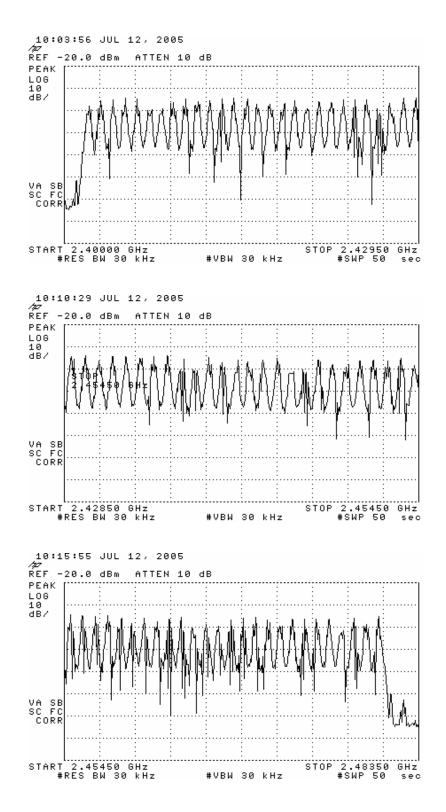
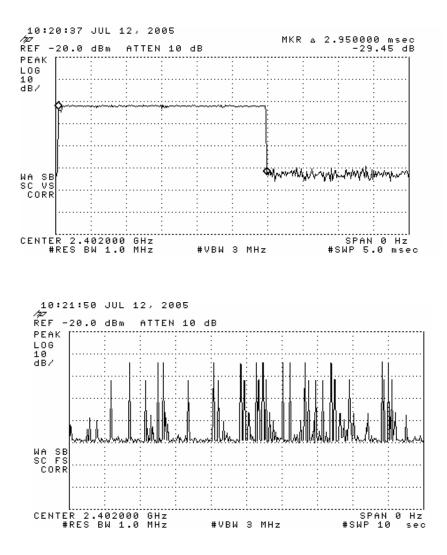

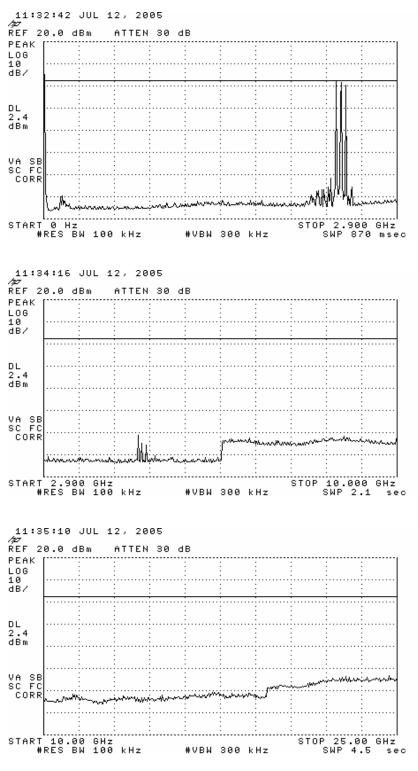



Figure 6.2 Number of Hopping Frequencies. (top) low - last channel repeated in next plot, (middle) middle, (bottom) high portion of band

Page 12 of 16









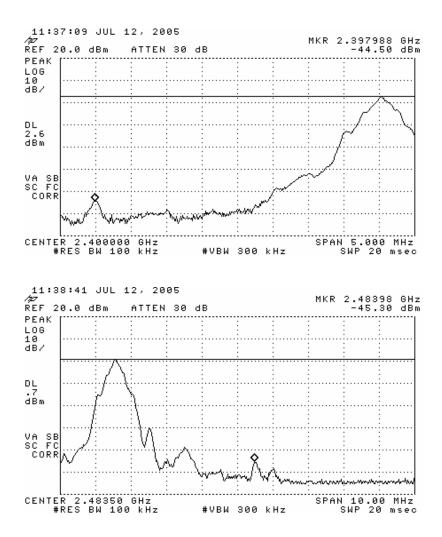


Figure 6.6 Band edge emissions – NOT HOPPING. (top) Low Channel, (bottom) High Channel

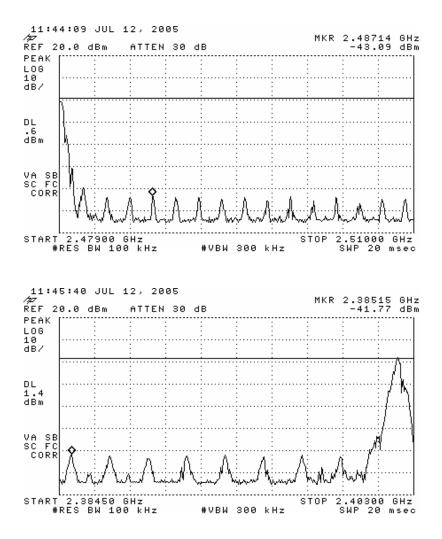


Figure 6.7 Band edge emissions - HOPPING. (top) Low Channel, (bottom) High Channel