6 - 1/2"

2 - 1/4"

5883
SUMMARY OF CONNECTIONS

NOTE: WHEN CIRCUIT BOARD IS MOUNTED IN CONTROL'S CABINET, GROUNDING LUGS (2) PROVIDED *MUST* BE INSERTED IN LEFT-HAND TERMINALS OF ANTENNA BLOCKS AND SECURED TO CABINET (SEE RECEIVER'S AND CONTROL'S INSTRUCTIONS).
WHEN BOARD IS MOUNTED IN A SEPARATE CABINET (COMMERCIAL FIRE APPLICATION), DO NOT USE THE GROUNDING LUGS.

FOR COMMERCIAL FIRE APPLICATION. MOUNT BOARD IN SEPARATE CABINET AND SECURE WITH TWO SCREWS (NOT SUPPLIED) WITH INSULATING WASHERS (ADDRESSABLE ONLY) (SEE RECEIVER'S INSTRUCTIONS).

DIP SWITCH FUNCTIONS

Sw.	Function
1	Not used
	Device Address Settings
	Transmitter: Non-Addr.
	Receiver:
2	
3	
4	
5	**Commercial / Non-commercial installation:**
	ON = commercial fire installation
	OFF = non-commercial fire installation
6 - 8	Not used

	29	29	30	27	28	29	30	31
							6	7
	OFF	OFF	OFF	OFF	ON	ON	ON	ON
	OFF	OFF	ON	ON	OFF	OFF	ON	ON
	OFF	ON	OFF	ON	OFF	ON	OFF	ON

ADEMCO GROUP
165 Eileen Way, Syosset, New York 11791
Copyright © 2006 PITTWAY CORPORATION

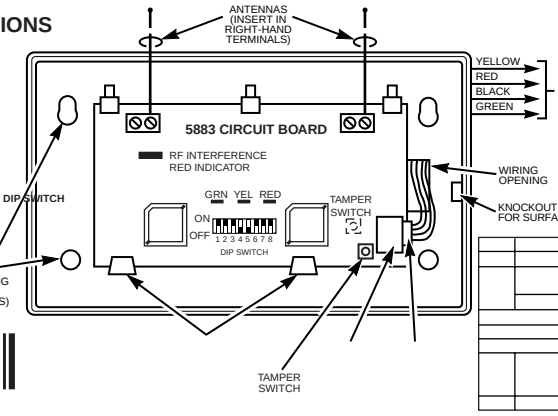

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION.

FCC ID CFS8DL5883-2

IC: 573F-58832

USE MAX. OF 220 ft. (67m) OF #22 (0.64mm) WIRE
OR 550 ft. (168m) OF #18 (1mm) WIRE FOR EACH
RUN. 20 ft. MAX. IN COMMERCIAL FIRE INSTALLATIONS.

PLUG