

## EUT Specification

**FCC ID: 2A5CA-BP970W**

Characteristics	Description
<b>Product Name</b>	POWER BANK
<b>Model number</b>	BP970W
<b>Power Supply</b>	AC120V/60Hz for adapter
<b>Operating Frequency Range</b>	110-205KHz
<b>Modulation Technique</b>	ASK
<b>Antenna Type</b>	Induction coil
<b>Device category</b>	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others ____
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm <sup>2</sup> ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm <sup>2</sup> )
<b>Antenna diversity</b>	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
<b>Evaluation applied</b>	<input checked="" type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation

### Applicable Standard:

FCC Part 1(1.1310) ,Part 2(2.1091) and KDB 680106 D01 RF Exposure Wireless Charging Apps v03

### Applicable Requirement:

Three different categories of transmitters are defined by the FCC in OET Bulletin 65.

These categories are fixed installation, mobile, and portable and are

defined as follows:

**Fixed Installations:** fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.

**Mobile Devices:** a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.

**Portable Devices:** a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093).

The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure.

These two categories are defined as follows:

Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. The phrase fully aware in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of transient persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. Such training is not required for transient persons, but they must receive written and/or verbal information and notification (for example, using signs) concerning their exposure potential and appropriate means available to mitigate their exposure. The phrase exercise control means that an exposed person is allowed to and knows how to reduce or avoid exposure by administrative or engineering controls and work practices, such as use of personal protective equipment or time averaging of exposure.

General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are




exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure. Licensees and applicants are responsible for compliance with both the occupational/controlled exposure limits and the general population/uncontrolled exposure limits as they apply to transmitters under their jurisdiction. Licensees and applicants should be aware that the occupational/controlled exposure limits apply especially in situations where workers may have access to areas in very close proximity to antennas and access to the general public may be restricted.

In lieu of evaluation with the general population/uncontrolled exposure limits, amateur licensees authorized under part 97 of this chapter and members of his or her immediate household may be evaluated with respect to the occupational/controlled exposure limits in this section, provided appropriate training and information has been provided to the amateur licensee and members of his/her household. Other nearby persons who are not members of the amateur licensee's household must be evaluated with respect to the general population/uncontrolled exposure limits.

### Test Procedure

1. EUT was placed on a table, and the measure probe was placed at a measurement distance of 0~10cm from the EUT to the center of the probe.
2. Power on the measuring probe, the EUT was set at the maximum field strength emission state.
3. The EUT was put in different directions (Left, Right, Front, Rear, Top and Bottom) toward to the measure probe. The distance from the EUT to the probe starts from 0cm, and measures every 2cm until the distance is 10cm.
4. Record the worst data of the different directions.

### Measuring Device And Test Equipment

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
	E-Field Probe(9kHz-3GHz)	Narda	EP 601	611WX70311	November 15, 2021	1 Year
	H-Field Probe(9KHz-30MHz)	Narda	ELT-400	M-0174	August 03, 2021	1 Year
	Broadband Field Meter	Narda	ELT-400	M-0173	August 03, 2021	1 Year

**Description of Support Device**

iPhone : Manufacturer: Apple Inc.  
M/N: A1524  
S/N: N/A

Wireless Charger Receiver : Manufacturer: Universal  
Module M/N: N/A  
S/N: N/A

Adapter : Model number:580245A087  
Input: AC 100-240V, 50/60Hz

**Limits for Maximum Permissible Exposure(MPE)**

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm <sup>2</sup> )	Average Time
<b>(A) Limits for Occupational/Control Exposures</b>				
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	F/300	6
1500-100000	--	--	5	6
<b>(B) Limits for General Population/Uncontrol Exposures</b>				
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	F/1500	30
1500-100000	--	--	1	30

Note: f denotes for frequency in MHz.

\* denotes for plane-wave equivalent power density.

### Measurement Result

We pretested four modes (max load, mid load, min load, Standby) for EUT. The worst mode (max load) and worst test frequency(frequency: 140KHz)test data see the following.

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	H- Field(A/m)	Limit(A/m)	10% Limit(A/m)
Measurement Point 1	Front	0	0.145	1.63	0.163
Measurement Point 2	Back	0	0.147		
Measurement Point 3	Left	0	0.146		
Measurement Point 4	Right	0	0.143		
Measurement Point 5	Bottom	0	0.129		
Measurement Point 6	Top	0	0.150		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	E- Field(V/m)	Limit(V/m)	10% Limit(V/m)
Measurement Point 1	Front	0	45.254	614	61.4
Measurement Point 2	Back	0	45.230		
Measurement Point 3	Left	0	45.324		
Measurement Point 4	Right	0	46.741		
Measurement Point 5	Bottom	0	42.374		
Measurement Point 6	Top	0	48.633		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	H- Field(A/m)	Limit(A/m)	10% Limit(A/m)
Measurement Point 1	Front	2	0.139	1.63	0.163
Measurement Point 2	Back	2	0.137		
Measurement Point 3	Left	2	0.136		
Measurement Point 4	Right	2	0.139		
Measurement Point 5	Bottom	2	0.119		
Measurement Point 6	Top	2	0.145		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	E- Field(V/m)	Limit(V/m)	10% Limit(V/m)
Measurement Point 1	Front	2	42.041	614	61.4
Measurement Point 2	Back	2	41.965		
Measurement Point 3	Left	2	41.981		
Measurement Point 4	Right	2	41.325		
Measurement Point 5	Bottom	2	39.524		
Measurement Point 6	Top	2	45.369		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	H- Field(A/m)	Limit(A/m)	10% Limit(A/m)
Measurement Point 1	Front	4	0.131	1.63	0.163
Measurement Point 2	Back	4	0.130		
Measurement Point 3	Left	4	0.129		
Measurement Point 4	Right	4	0.128		
Measurement Point 5	Bottom	4	0.116		
Measurement Point 6	Top	4	0.138		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	E- Field(V/m)	Limit(V/m)	10% Limit(V/m)
Measurement Point 1	Front	4	40.230	614	61.4
Measurement Point 2	Back	4	39.611		
Measurement Point 3	Left	4	39.658		
Measurement Point 4	Right	4	39.614		
Measurement Point 5	Bottom	4	37.524		
Measurement Point 6	Top	4	41.265		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	H- Field(A/m)	Limit(A/m)	10% Limit(A/m)
Measurement Point 1	Front	6	0.126	1.63	0.163
Measurement Point 2	Back	6	0.125		
Measurement Point 3	Left	6	0.124		
Measurement Point 4	Right	6	0.122		
Measurement Point 5	Bottom	6	0.114		
Measurement Point 6	Top	6	0.130		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	E- Field(V/m)	Limit(V/m)	10% Limit(V/m)
Measurement Point 1	Front	6	38.205	614	61.4
Measurement Point 2	Back	6	38.214		
Measurement Point 3	Left	6	38.216		
Measurement Point 4	Right	6	38.742		
Measurement Point 5	Bottom	6	36.582		
Measurement Point 6	Top	6	40.023		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	H- Field(A/m)	Limit(A/m)	10% Limit(A/m)
Measurement Point 1	Front	8	0.118	1.63	0.163
Measurement Point 2	Back	8	0.116		
Measurement Point 3	Left	8	0.114		
Measurement Point 4	Right	8	0.112		
Measurement Point 5	Bottom	8	0.099		
Measurement Point 6	Top	8	0.122		


Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	E- Field(V/m)	Limit(V/m)	10% Limit(V/m)
Measurement Point 1	Front	8	35.524	614	61.4
Measurement Point 2	Back	8	35.147		
Measurement Point 3	Left	8	35.163		
Measurement Point 4	Right	8	34.987		
Measurement Point 5	Bottom	8	32.541		
Measurement Point 6	Top	8	37.598		

Test Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	H- Field(A/m)	Limit(A/m)	10% Limit(A/m)
Measurement Point 1	Front	10	0.112	1.63	0.163
Measurement Point 2	Back	10	0.110		
Measurement Point 3	Left	10	0.105		
Measurement Point 4	Right	10	0.106		
Measurement Point 5	Bottom	10	0.087		
Measurement Point 6	Top	10	0.119		

est Mode: Wireless Charging 5W use iphone					
		Measuring Distance(cm)	E- Field(V/m)	Limit(V/m)	10% Limit(V/m)
Measurement Point 1	Front	10	32.254	614	61.4
Measurement Point 2	Back	10	32.114		
Measurement Point 3	Left	10	32.063		
Measurement Point 4	Right	10	31.584		
Measurement Point 5	Bottom	10	29.365		
Measurement Point 6	Top	10	33.584		



**PHOTOGRAPHS OF TEST SETUP**

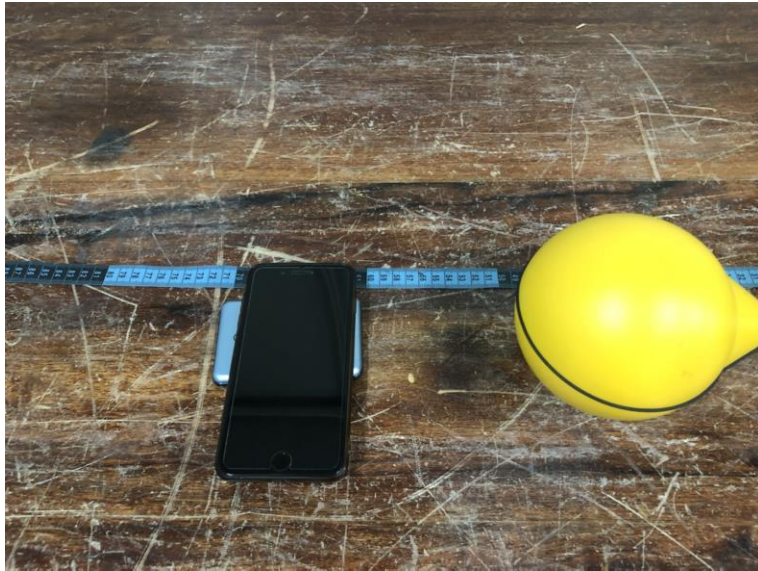

Signature

*Alan He*

Alan He  
Manager

Date: 2022-02-19