

TEST REPORT CONCERNING THE COMPLIANCE OF AN INDUCTIVE PROXIMITY CARD READER, OPERATING ON 120 kHz.
BRAND Nedap, MODEL Prox Booster 2G
WITH 47 CFR PART 15 (10-1-09 EDITION) AND THE REQUIREMENTS OF INDUSTRY CANADA:
RSS-GEN AND RSS-210 (ISSUE 8, DECEMBER 2010)

10112604.fcc02 July 06, 2011

> FCC listed : 90828 Industry Canada : 2932G-1 VCCI Registered : R-1518, C-1598

R&TTE, LVD, EMC Notified Body : 1856

TÜV Rheinland EPS B.V. P.O. Box 15 9822 ZG Niekerk (NL) Smidshornerweg 18 9822 TL Niekerk (NL)

Telephone: +31 594 505005 Telefax: +31 594 504804

E-mail: info@tuv-eps.com Web: www.tuv-eps.com

Project number: 10112604.fcc02 Page 1 of 13



Manufacturer:
Brand mark:

N.V. Nederlandsche Apparatenfabriek "Nedap" Nedap Prox Booster 2G CGBROOSTER4

FCC Part 15, RSS-GEN, RSS-210

Inductive Proximity Card Reader

Model: Prox Booster 2G FCC ID: CGDBOOSTER4 IC: 1444A-BOOSTER4

MEASUREMENT/TECHNICAL REPORT

N.V. Nederlandsche Apparatenfabriek "Nedap"

Brand: Nedap Model: Prox Booster 2G FCC ID: CGDBOOSTER4 IC: 1444A-BOOSTER4

This report concerns: Original grant/certification Class 2 Permissive Change Verification

Equipment type: Inductive Proximity Card Reader

Report prepared by: Name : Richard van der Meer

Company name : TÜV Rheinland EPS B.V.
Address : Smidshornerweg 18
Postal code/city : 9822 TL Niekerk
Mailing address : P.O. Box 15
Postal code/city : 9822 ZG Niekerk
Country : The Netherlands
Telephone number : + 31 594 505 005

Telefax number : + 31 594 504 804 E-mail : info@tuv-eps.com

The data taken for this test and report herein was done in accordance with 47 CFR Part 15 (10-1-09 Edition), RSS-GEN AND RSS-210 and the measurement procedures of ANSI C63.4-2009. TÜV Rheinland EPS B.V. at Niekerk, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: July 06, 2011 Signature:

O. Hoekstra

Senior Engineer Telecom TÜV Rheinland EPS B.V.

Iff Weelsh.

Project number : 10112604.fcc02 Page 2 of 13



Manufacturer: Brand mark:

Model: Prox Booster 2G
FCC ID: CGDBOOSTER4
IC: 1444A-BOOSTER4

Nedap

FCC Part 15, RSS-GEN, RSS-210

Inductive Proximity Card Reader

N.V. Nederlandsche Apparatenfabriek "Nedap"

Summary

The device under test does:

• fulfill the general approval requirements as identified in this test report

o not fulfill the general approval requirements as identified in this test report

Description of test item

Test item (EUT) : Inductive Proximity Card Reader

Manufacturer : N.V. Nederlandsche Apparatenfabriek "Nedap"

Brand : Nedap

Model(s) : Prox Booster 2G

Serial number(s) : -

FCC ID : CGDBOOSTER4
IC : 1444A-BOOSTER4
Receipt date : February 04, 2011

Applicant information

Applicant's representative : Mr. J. Hulshof

Company : N.V. Nederlandsche Apparatenfabriek "Nedap"

Address : Parallelweg 2
Postal code : 7141 DC
City : Groenlo

Country : The Netherlands
Telephone number : +31 544 471 162
Telefax number : +31 544 466 475

Test(s) performed

Location : Niekerk

Test(s) started : March 04, 2011 Test(s) completed : July 05, 2011

Purpose of test(s) : Equipment Authorization (Original grant/certification)

Test specification(s) : 47 CFR Part 15 (10-1-09 Edition) and RSS-GEN AND RSS-210

Compliance statement : The test has demonstrated that this unit complies with stipulated standards.

Test engineer(s) : R. van der Meer

Report written by : R. van der Meer

Report date : July 06, 2011

This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland EPS B.V. The test results relate only to the item(s) tested.

Project number: 10112604.fcc02 Page 3 of 13



Test specification(s):
Description of EUT:
Manufacturer:
Brand mark:
Model:
FCC ID:
IC:

FCC Part 15, RSS-GEN, RSS-210
Inductive Proximity Card Reader
N.V. Nederlandsche Apparatenfabriek "Nedap"
Nedap
Prox Booster 2G
CGDBOOSTER4
1444A-BOOSTER4

Table of contents

1 General information	5
1.1 Product description	5
1.1.1 Introduction	5
1.2 Related submittal(s) and/or Grant(s)	
1.2.1 General	
1.3 Tested system details	5
1.3.1 Description of input and output ports	
1.4 Test Summary	
1.5 Test methodology	7
1.6 Test facility.	
1.7 Test conditions.	7
2 System test configuration	8
2.1 Justification	8
2.2 EUT mode of operation	8
2.3 Special accessories	8
2.4 Equipment modifications	8
2.5 Product Labeling	8
2.6 Block diagram of the EUT	8
2.7 Schematics of the EUT	8
2.8 Part list of the EUT.	8
3 Radiated emission data	9
3.1 Radiated field strength measurements (30 MHz – 1 GHz, E-field)	9
3.1.1 Test equipment used (for reference see test equipment listing)	9
3.2 Radiated field strength measurements (frequency range of 0.009-30 MHz, H-field)10
3.2.1 Test equipment used (for reference see test equipment listing)	10
4 Conducted emission data	11
4.1 Conducted emission data of the EUT	11
5 Plots of measurement data	
5.1 Bandwidth of the emission	12
6 List of utilized test equipment	13



N.V. Nederlandsche Apparatenfabriek "Nedap" Brand mark: Nedap Model:

Prox Booster 2G FCC ID: **CGDBOOSTER4** IC: 1444A-BOOSTER4

FCC Part 15, RSS-GEN, RSS-210

Inductive Proximity Card Reader

General information. 1

Product description. 1.1

1.1.1 Introduction.

The brand Nedap model Prox Booster 2G, hereafter refered to as EUT is an inductive proximity card reader intended to be used in library systems. It is capable of reading 120 kHz inductive tags.

The content of this report and measurement results have not been changed other than the way of presenting the data.

Related submittal(s) and/or Grant(s). 1.2

1.2.1 General.

This test report supports the original grant/certification in equipment authorization files under registration number.

FCC ID: CGDBOOSTER4 and IC: 1444A-BOOSTER4.

1.3 Tested system details.

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT Inductive Proximity Card Reader

Manufacturer N.V. Nederlandsche Apparatenfabriek "Nedap"

Brand Nedap

Model Prox Booster 2G

Serial number

Voltage input rating 3 Vdc Battery operated (2* AAA)

Voltage output rating Current input rating

Antenna Intergral Operating frequency 120 kHz Remarks n.a.

Project number: 10112604.fcc02 Page 5 of 13



nd mark: Nedap
Model: Prox Booster 2G
FCC ID: CGDBOOSTER4
IC: 1444A-BOOSTER4

FCC Part 15, RSS-GEN, RSS-210

Inductive Proximity Card Reader

N.V. Nederlandsche Apparatenfabriek "Nedap"

Cont. field

Cont. field

BOOSTER 26
9948562 TRANS
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 000010
3 0000

Photo 1a: EUT (front) Photo 1b: EUT (back)

1.3.1 Description of input and output ports.

EUT has no specific input and output ports.

1.4 Test Summary

The EUT was tested in accordance with the specifications given in Table 1 below.

Test St	tandard			
47 CFR Part 15 (10-1-09 Edition)	RSS-210 Issue 8, December 2010	Description	Pass / Fail	
15.207(a)	RSS-Gen(7.2.4)	Conducted emissions	Pass	
15.209	RSS-210(A2.6)	Radiated Emissions	Pass	
15.215(c)	RSS-Gen(4.6.1)	Occupied bandwidth	Pass	

Table 1: Test specifications

Testmethods: ANSI C63:2009 and RSS-Gen Issue 3, December 2010

Project number : 10112604.fcc02 Page 6 of 13



nd mark: Nedap

Model: Prox Booster 2G

FCC ID: CGDBOOSTER4

IC: 1444A-BOOSTER4

FCC Part 15, RSS-GEN, RSS-210

Inductive Proximity Card Reader

N.V. Nederlandsche Apparatenfabriek "Nedap"

1.5 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15 (10-1-09 Edition), sections 15.31, 15.35, 15.205, 15.209 and RSS-GEN AND RSS-210 (ISSUE 8, DECEMBER 2010).

The test methods, which have been used, are based on ANSI C63.4: 2009.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters.

Radiated emission tests below 30 MHz were performed at a measurement distance of 3 meters.

To calculate the field strength level from these results to the appropriate distance at which the limit is specified, the appropriate extrapolation factor is used.

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

1.6 Test facility.

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland EPS B.V., located in Niekerk, 9822 TL Smidshornerweg 18, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948(10-1-06 edition).

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-1. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

1.7 Test conditions.

Normal test conditions:

Temperature (*) : +15°C to +35°C Relative humidity(*) : 20 % to 75 %

Supply voltage : 120VAC/60Hz to the AC/DC Power Supply

Air pressure : 950 – 1050 hPa

When is was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

Project number : 10112604.fcc02 Page 7 of 13



Test specification(s):
Description of EUT:
Manufacturer:
Brand mark:
Model:
FCC ID:

IC:

FCC Part 15, RSS-GEN, RSS-210 Inductive Proximity Card Reader N.V. Nederlandsche Apparatenfabriek "Nedap" Nedap Prox Booster 2G CGDBOOSTER4 1444A-BOOSTER4

2 System test configuration.

2.1 Justification.

The system was configured for testing in a typical situation as a customer would normally use it. The testsample was configured by the applicant to enable continuous transmit.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4: 2009.

2.2 EUT mode of operation.

The EUT has been tested in active mode, i.e. the EUT is ready to detect a card. To assess the behavior of the EUT while reading the card, the EUT is tested with a card presented such that it continuously reads the card. The intentional radiator tests have been performed with a complete functioning EUT.

2.3 Special accessories.

No special accessories are used and/or needed to achieve compliance.

2.4 Equipment modifications.

No modifications have been made to the equipment.

2.5 Product Labeling

The product labeling information is available in the technical documentation package.

2.6 Block diagram of the EUT.

The block diagram is available in the technical documentation package.

2.7 Schematics of the EUT.

The schematics are available in the technical documentation package.

2.8 Part list of the EUT.

The part list is available in the technical documentation package.

Project number: 10112604.fcc02 Page 8 of 13



Test specification(s): Description of EUT:

Manufacturer: Brand mark:

Nedap Prox Booster 2G CGDBOOSTER4 1444A-BOOSTER4

FCC Part 15, RSS-GEN, RSS-210

Inductive Proximity Card Reader

N.V. Nederlandsche Apparatenfabriek "Nedap"

Model: FCC ID: IC:

Radiated emission data. 3

3.1 Radiated field strength measurements (30 MHz - 1 GHz, E-field)

Frequency (MHz)	Measurement results @3m Vertical (dBµV)	Measurement results @3m Horizontal (dВµV)	Correction factor (dB)	Results after correction Vertical (dBµV/m)	Results after correction Horizontal (dBµV/m)	Limits @3m (dBµV/m)	Pass/Fail
137.5	6.4	6.2	14.1	20.5	20.3	43.5	Pass
165.0	6.1	6.2	12.7	18.8	18.9	43.5	Pass
192.4	5.8	6.2	12.0	17.8	18.2	43.5	Pass
219.8	5.7	6.9	13.0	18.7	19.9	43.5	Pass
341.9	5.7	5.7	19.2	24.9	24.9	46.0	Pass
369.4	5.7	5.6	20.3	26.0	25.9	46.0	Pass
451.6	6.0	6.0	22.9	28.9	28.9	46.0	Pass
479.0	6.1	5.9	23.6	29.7	29.5	46.0	Pass

Table 2 Radiated emissions of the EUT

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.205, 15.209 and RSS-210 and RSS-Gen, section 2.2 and 2.6 are depicted in Table 2.

Notes:

- 1. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
- 2. Measurement uncertainty is ±5.0dB.
- 3. The EUT was varied in three positions, the measuring antenna was varied in horizontal and vertical orientations and also around it's axis. The reported value is the worst case found at the reported frequency.
- 4. The EUT was tested in both normal mode (i.e. without a label in its proximity) and in activated mode (i.e. with a label in its proximity). Worst case noted.
- 5. A Quasi-peak detector was used with a bandwidth of 120 kHz.

3.1.1 Test equipment used (for reference see test equipment listing).

99699	99547	99071	99070	15633	99174	12476
99606	99580	99608	99107	12477		

Test engineer

Signature

Name : Richard van der Meer

: May 31, 2011 Date

Project number: 10112604.fcc02 Page 9 of 13



Test specification(s): Description of EUT:

Manufacturer: Brand mark:

Inductive Proximity Card Reader N.V. Nederlandsche Apparatenfabriek "Nedap" Nedap

FCC Part 15, RSS-GEN, RSS-210

Model: Prox Booster 2G FCC ID: CGDBOOSTER4 IC: 1444A-BOOSTER4

3.2 Radiated field strength measurements (frequency range of 0.009-30 MHz, H-field).

Frequency (MHz)	Measurement results	Detector	Antenna factor	Cable loss	Extrapolation factor	Measurement results (calculated)	Limits	Pass/Fail
	dBµV @3m		dB	dB	dB	dBµV/m@30m (unless otherwise stated)	dBµV/m@30m (unless otherwise stated)	
0.12052 (fundamental)	47.7	Av	20.1	1	80	-11.2 @300m	26.0 @300m	Pass
0.12052 (fundamental)	50.4	Pk	20.1	1	80	-8.5 @300m	46.0 @300m	Pass
0.24104	20.0	Av	20.1	1	80	-38.9 @300m	20.0 @300m	Pass
0.24104	21.2	Pk	20.1	1	80	-37.7 @300m	40.0 @300m	Pass
0.36156	21.0	Av	20.0	1	80	-38.0 @300m	16.4 @300m	Pass
0.36156	21.9	Pk	20.0	1	80	-37.1 @300m	36.4 @300m	Pass
0.60260	30.1	Qp	19.7	1	40	10.8	32.0 @300m	Pass
1.08468	25.5	Qp	19.7	1	40	6.2	26.9	Pass

Table 3 Radiated emissions of the EUT, in the frequency range 0.009 – 30 MHz

The results of the radiated emission tests in the frequency range 0.009 – 30 MHz, carried out in accordance with 47 CFR Part 15 section 15.209 and RSS-210 and RSS-Gen are depicted in Table 3.

Notes:

- Calculated measurement results are obtained by using the 40dB/decade factor (antenna factor and cable loss is included). i.e at 0.12052 MHz: $20.1 \text{ dB}\mu\text{V} + 20.1 \text{ dB} + 1 \text{dB} - 80 \text{dB} = 26.0 \text{ dB}\mu\text{V/m}$.
- 2. A resolution bandwidth of 9 kHz was used during testing.
- 3. Field strength values of radiated emissions at frequencies not listed in Table 3 are more than 20 dB below the applicable limit.
- 4. The loop antenna was varied in horizontal and vertical orientations and also around it's axis. The reported value is the worst case found at the reported frequency.
- 5. The EUT was tested in horizontal and vertical orientations. Worst case values noted.
- 6. Measurement uncertainty is ±5.0dB.

Test equipment used (for reference see test equipment listing). 3.2.1

99699	99547	99071	99070	99608	15453	99580

Test engineer

Signature

Name : R. van der Meer Date : July 05, 2011

Project number: 10112604.fcc02 Page 10 of 13



Brand mark:

IC: 1444A-BOOSTER4

FCC Part 15, RSS-GEN, RSS-210

Inductive Proximity Card Reader

N.V. Nederlandsche Apparatenfabriek "Nedap" Nedap Prox Booster 2G CGDBOOSTER4 Model: FCC ID:

Conducted emission data.

Conducted emission data of the EUT.

Not applicable, EUT is battery powered only.

Test engineer

Signature

Name : R. van der Meer Date : June 01, 2011

Project number: 10112604.fcc02 Page 11 of 13




Manufacturer: N.V. Nederlandsche Apparatenfabriek "Nedap"
Model: Prox Booster 2G
FCC ID: CGDBOOSTER4
IC: 1444A-BOOSTER4

FCC Part 15, RSS-GEN, RSS-210

Inductive Proximity Card Reader

5 Plots of measurement data

5.1 Bandwidth of the emission

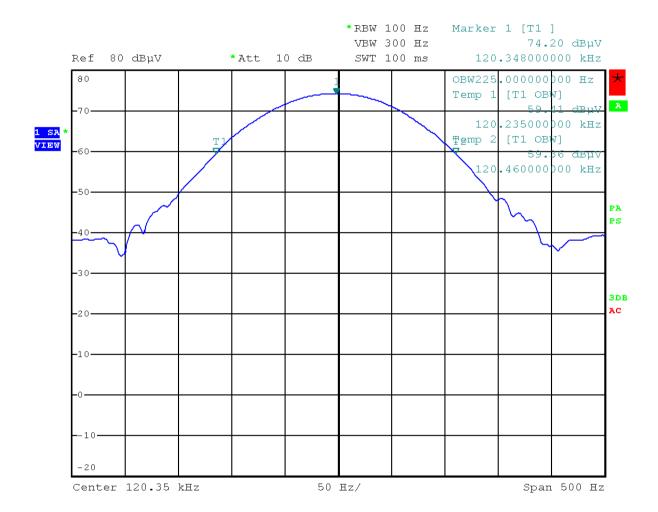

Date: 30.MAR.2011 05:51:30

Plot1: Bandwidth of the emission at 120 kHz (Fundamental Carrier), for IC the measured Occupied Bandwidth is 225 Hz. Measured on a spectrum analyzer.

Project number : 10112604.fcc02 Page 12 of 13



Brand mark: Model:

FCC Part 15, RSS-GEN, RSS-210 **Inductive Proximity Card Reader** N.V. Nederlandsche Apparatenfabriek "Nedap"

Nedap

Prox Booster 2G CGDBOOSTER4 FCC ID: 1444A-BOOSTER4

List of utilized test equipment. 6

Inventory number	Description	Brand	Model	Last cal.	Next cal.
12476	Antenna mast	EMCO	TR3	NA	NA
12477	Antenna mast 1-4 mtr	Poelstra	NA	NA	NA
15453	Active loopant. 60 cm	Chase	HLA6120	05/2010	05/2011
15633	Biconilog Testantenna	Chase	CBL 6111B	02/2011	02/2012
12640	Temperature chamber	Heraeus	VEM03/500	NA	NA
99070	Coax 15m RG213 OATS	NMi Certin B.V.	CABLE 15M OATS	11/2010	11/2011
99071	Coax OATS ground	NMi Certin B.V.	CABLE OATS	11/2010	11/2011
99107	Controller OATS	Heinrich Deisel	4630-100	NA	NA
99318	Digital multimeter	HP	34401A	10/2010	10/2011
99413	Temperatuur-Hygrometer	Tempcontrol	P570	01/2011	01/2012
99547	Temperature-Humiditymeter	Europe supplies	WS-7082	10/2010	10/2011
99580	OATS	Comtest	FCC listed: 90828	08/2008	08/2011
99608	Controller (OATS)	EMCS	DOC202	NA	NA
99609	Antenna mast	EMCS	AP-4702C	NA	NA
99613	Temperature-Humiditymeter	Europe supplies	WS-7082	10/2010	10/2011
99623	Power Supply	EA	PS 2016-050	12/2010	12/2011
99699	Measuring receiver	R&S	ESCI	02/2011	02/2012
99683	Loop antenna, 6cm		7405-901	09/2010	09/2011
99538	Spectrum Analyzer	R&S	FSP40	05/2011	05/2012

NA= Not Applicable

Project number: 10112604.fcc02 Page 13 of 13