

P01 BT_GFSK_Up of EUT_0cm_Ch0_Left**DUT: EUT**

Communication System: BT; Frequency: 2402 MHz; Duty Cycle: 1:1


Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 38.016$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57) @ 2402 MHz; Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2022/1/20
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x101x1):** Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.422 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 5.467 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.568 W/kg
SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.111 W/kg
Maximum value of SAR (measured) = 0.353 W/kg

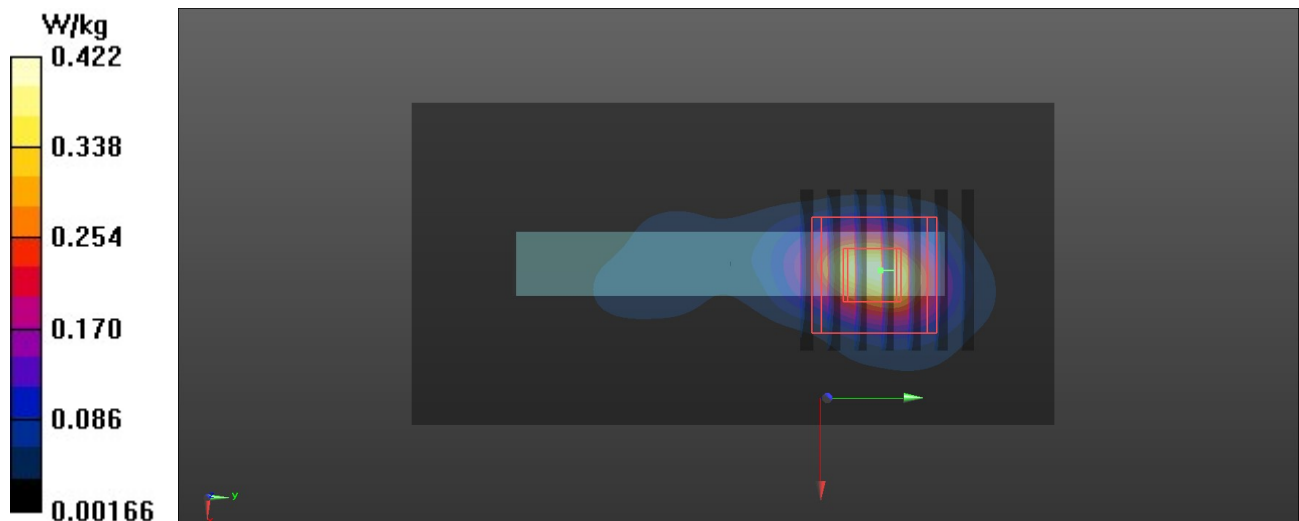

P02 BT_GFSK_Outside of EUT_0cm_Ch0_Right**DUT: EUT**

Communication System: BT; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 38.016$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57) @ 2402 MHz; Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2022/1/20
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x101x1):** Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.382 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 14.10 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.711 W/kg
SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.092 W/kg
Maximum value of SAR (measured) = 0.353 W/kg

