

## TEST REPORT

**Product** : Antenna  
**Trade mark** : FinDreams  
**Model/Type reference** : EG-3642300  
**Serial Number** : N/A  
**Report Number** : EED32O81296201  
**FCC ID** : 2A5DHEG-3642300  
**Date of Issue** : Jun. 08, 2023  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**FinDreams Technology Company Limited**  
**No.3009 BYD Road, Maluan Street, Pingshan New District, Shenzhen**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by:

*Frazer Li*

Frazer Li

Reviewed by:

*Tom Chen*

Tom Chen

Approved by:

*Aaron Ma*

Aaron Ma

Date:

Jun. 08, 2023

Check No.:6713100822



## 1 Version

Version No.	Date	Description
00	Jun. 08, 2023	Original

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10:2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10:2013	N/A
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.209	ANSI C63.10:2013	PASS
20dB Bandwidth	47 CFR Part 15 Subpart C Section 2.1049	ANSI C63.10:2013	PASS

Remark:

1.N/A:Only DC power supply is supported and this item is not considered.

2.Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

## 3 Contents

<b>1 VERSION</b> .....	<b>2</b>
<b>2 TEST SUMMARY</b> .....	<b>3</b>
<b>3 CONTENTS</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF EUT .....	5
4.3 TEST ENVIRONMENT AND MODE .....	6
4.4 DESCRIPTION OF SUPPORT UNITS .....	7
4.5 TEST LOCATION .....	7
4.6 DEVIATION FROM STANDARDS .....	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) .....	7
<b>5 EQUIPMENT LIST</b> .....	<b>8</b>
<b>6 TEST RESULTS AND MEASUREMENT DATA</b> .....	<b>9</b>
6.1 ANTENNA REQUIREMENT .....	9
6.2 RADIATED SPURIOUS EMISSIONS .....	10
6.3 20DB BANDWIDTH .....	14
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP</b> .....	<b>15</b>
<b>APPENDIX 2 PHOTOGRAPHS OF EUT</b> .....	<b>16</b>

## 4 General Information

### 4.1 Client Information

Applicant:	FinDreams Technology Company Limited
Address of Applicant:	No.3009 BYD Road,Maluan Streetl,Pingshan New District,Shenzhen
Manufacturer:	FinDreams Technology Company Limited
Address of Manufacturer:	No.3009 BYD Road,Maluan Streetl,Pingshan New District,Shenzhen
Factory:	FinDreams Technology Company Limited
Address of Factory:	No.3009 BYD Road,Maluan Streetl,Pingshan New District,Shenzhen

### 4.2 General Description of EUT

Product Name:	Antenna
Model No.(EUT):	EG-3642300
Trade Mark:	FinDreams
Product Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Frequency Range:	125kHz
Modulation Type:	ASK
Number of Channels:	1
Antenna Type:	Internal antenna
Antenna Gain:	-16dBi
Power Supply:	DC 12.0V
Test voltage:	DC 12.0V
Sample Received Date:	Aug. 19, 2022
Sample tested Date:	Aug. 22, 2022 to Sep. 08, 2022

**4.3 Test Environment and Mode**

<b>Operating Environment:</b>	
<b>Radiated Spurious Emissions:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
<b>Conducted Emissions:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
<b>RF Conducted:</b>	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
<b>Test mode:</b>	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.



## 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Integrated body controller	N/A	TIO-B/A1AE0	CE&FCC	Client

## 4.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 4.6 Deviation from Standards

None.

## 4.7 Abnormalities from Standard Conditions

None.

## 4.8 Other Information Requested by the Customer

None.

## 4.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 5 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	R&S	FSP40	100416	04-01-2022	03-31-2023

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-22-2022	05-21-2025
Receiver	R&S	ESC17	100938-003	10-14-2021	10-13-2022
Spectrum Analyzer	R&S	FSV40	101200	07-29-2022	07-28-2023
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-15-2021	04-14-2024
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-22-2022	05-21-2023
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-17-2021	04-16-2024
Horn Antenna	A.H.SYSTEMS	SAS-574	374	05-29-2021	05-28-2024
Preamplifier	Agilent	11909A	12-1	04-01-2022	03-31-2023
Preamplifier	EMCI	EMC051845 SE	980380	04-20-2022	04-19-2023
Preamplifier	CD	PAP-1840-60	6041.6042	07-05-2022	07-04-2023
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---



## 6 Test results and Measurement Data

### 6.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>EUT Antenna:</b>	Please see Internal photos
The antenna is Internal antenna. The best case gain of the antenna is -16dBi.	

## 6.2 Radiated Spurious Emissions

**Test Requirement:** 47 CFR Part 15C Section 15.231(b) and 15.209

**Test Method:** ANSI C63.10 2013

**Test Site:** Measurement Distance: 3m (Semi-Anechoic Chamber)

**Receiver Setup:**

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

**Test Setup:**

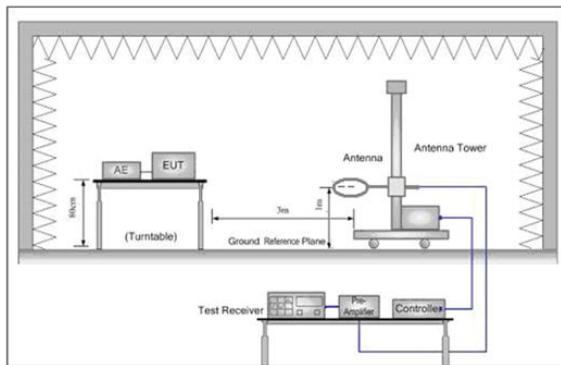


Figure 1. Below 30MHz

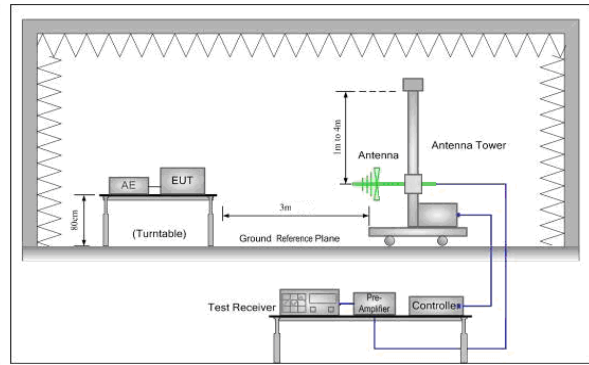


Figure 2. 30MHz to 1GHz

**Test Procedure:** **Below 1GHz test procedure as below:**

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Limit:**  
(Spurious Emissions)

Frequency	Magnetic field strength (HField) ( $\mu\text{A/m}$ )	Limit (dB $\mu\text{A/m}$ )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	6.37/F(kHz)	77.00 to 42.28	-	300
0.490MHz-1.705MHz	63.7/F(kHz)	22.28 to 11.45	-	30
1.705MHz-30MHz	0.08	18.06	-	30

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.


**Test Mode:** Transmitting mode

**Test Results:** Pass

Measurement Data

9kHz~150kHz:

142.0 dBuV/m

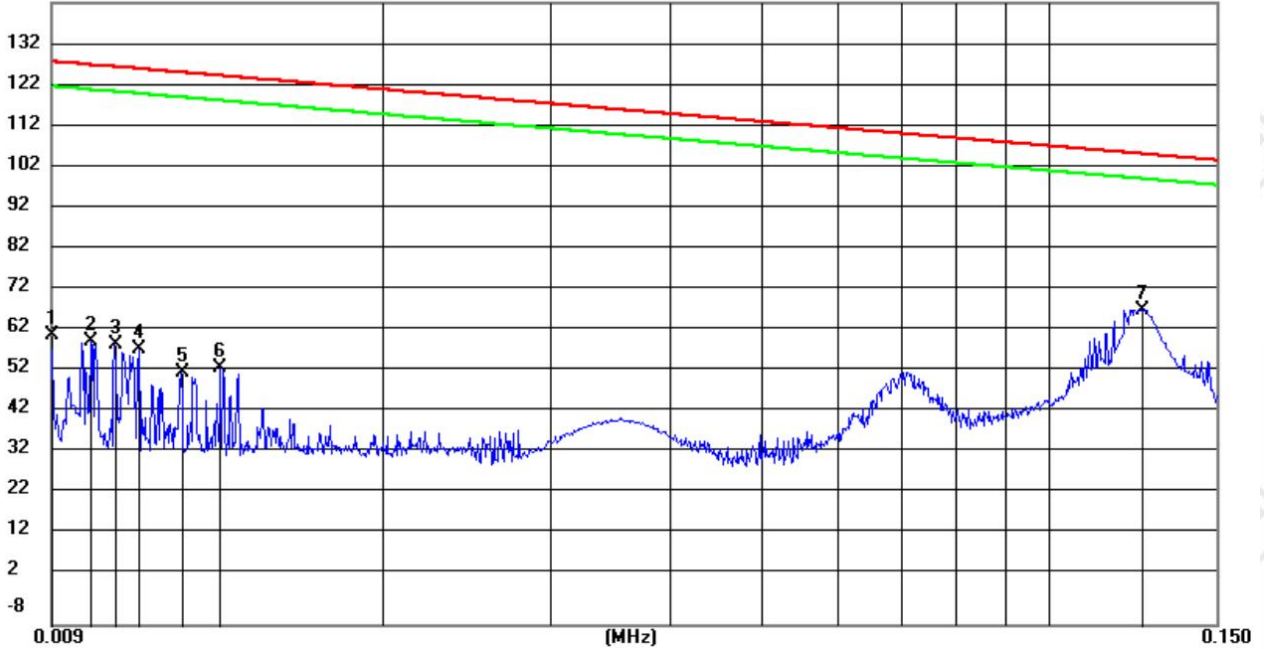


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0090	70.66	-8.88	61.78	127.81	-66.03			peak
2		0.0099	69.25	-8.98	60.27	127.01	-66.74			peak
3		0.0105	68.70	-9.04	59.66	126.51	-66.85			peak
4		0.0111	67.69	-9.10	58.59	126.04	-67.45			peak
5		0.0123	62.17	-9.23	52.94	125.18	-72.24			peak
6		0.0135	63.46	-9.36	54.10	124.39	-70.29			peak
7	*	0.1253	78.46	-10.41	68.05	105.60	-37.55			peak

Remark:

- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading - Correct Factor  
 Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor
- The highest frequency is 125kHz of the EUT, so upper frequency of measurement range is 30MHz.



**150kHz~30MHz:**

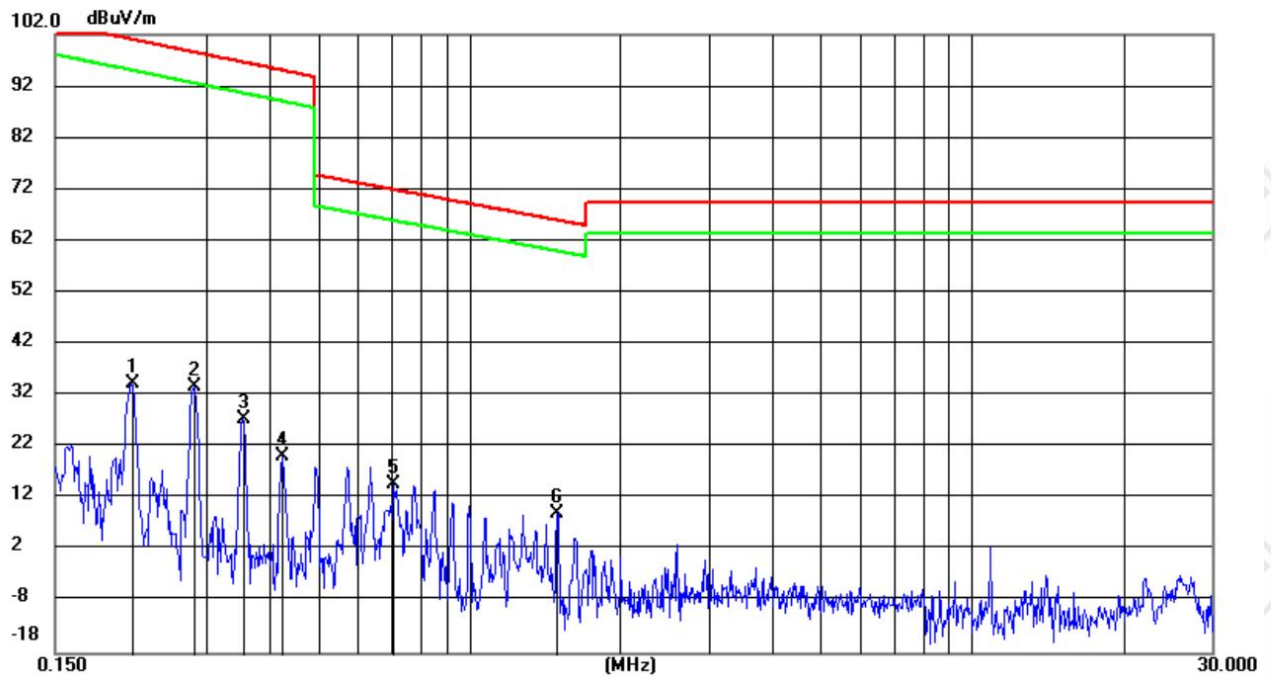

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		0.2128	44.68	-10.45	34.23	101.04	-66.81	peak			
2		0.2833	44.10	-10.49	33.61	98.56	-64.95	peak			
3		0.3539	37.99	-10.53	27.46	96.63	-69.17	peak			
4		0.4237	30.93	-10.59	20.34	95.06	-74.72	peak			
5		0.7084	25.52	-10.67	14.85	71.89	-57.04	peak			
6	*	1.4953	19.88	-10.73	9.15	66.00	-56.85	peak			

**Remark:**

1.The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.

2.The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor– Antenna Factor–Cable Factor


3.The highest frequency is 125kHz of the EUT, so upper frequency of measurement range is 30MHz.

### 6.3 20dB Bandwidth

**Test Requirement:** 47 CFR Part 15C Section 2.1049

**Test Method:** ANSI C63.10 2013

**Limit:** The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

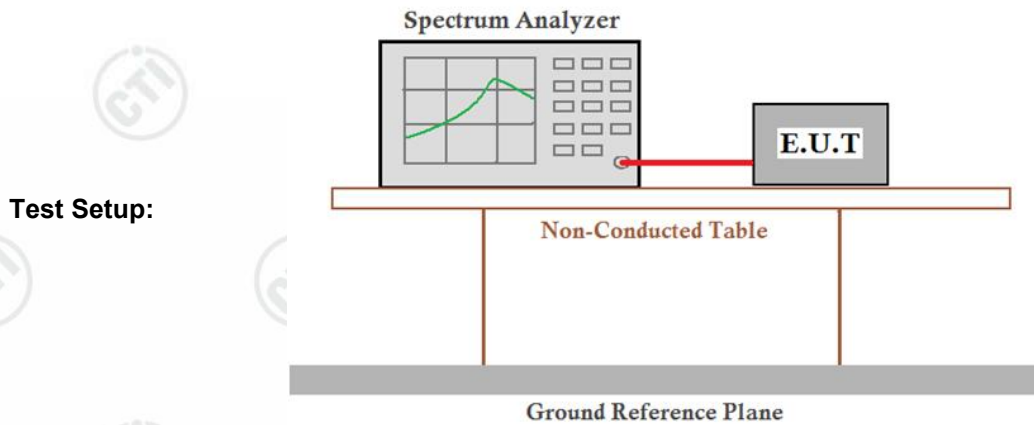


**Test Mode:** Transmitting mode

**Test Results:** Pass

#### Measurement Data


20dB bandwidth (kHz)	Results
30.68	Pass

Test plot as follows:

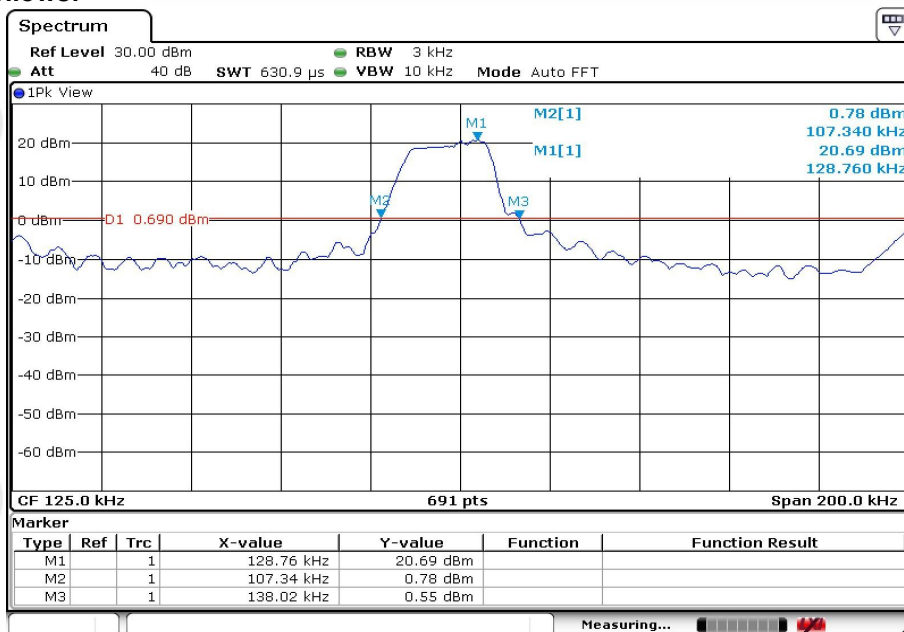




**APPENDIX 1 PHOTOGRAPHS OF TEST SETUP**

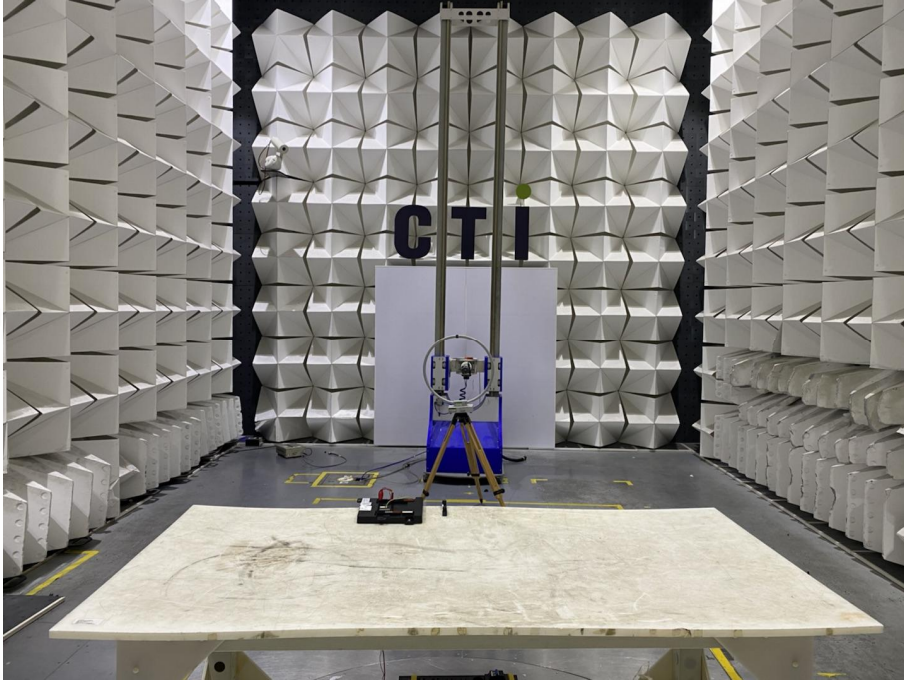


**Radiated Spurious Emissions Test Setup (9kHz~30MHz)**

## APPENDIX 2 PHOTOGRAPHS OF EUT

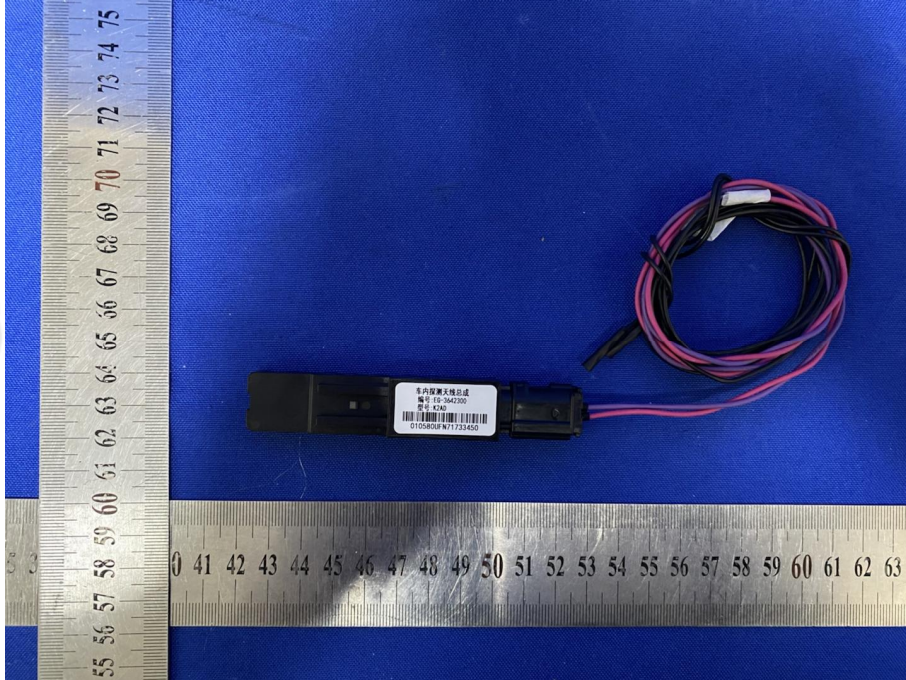


View of Product-1

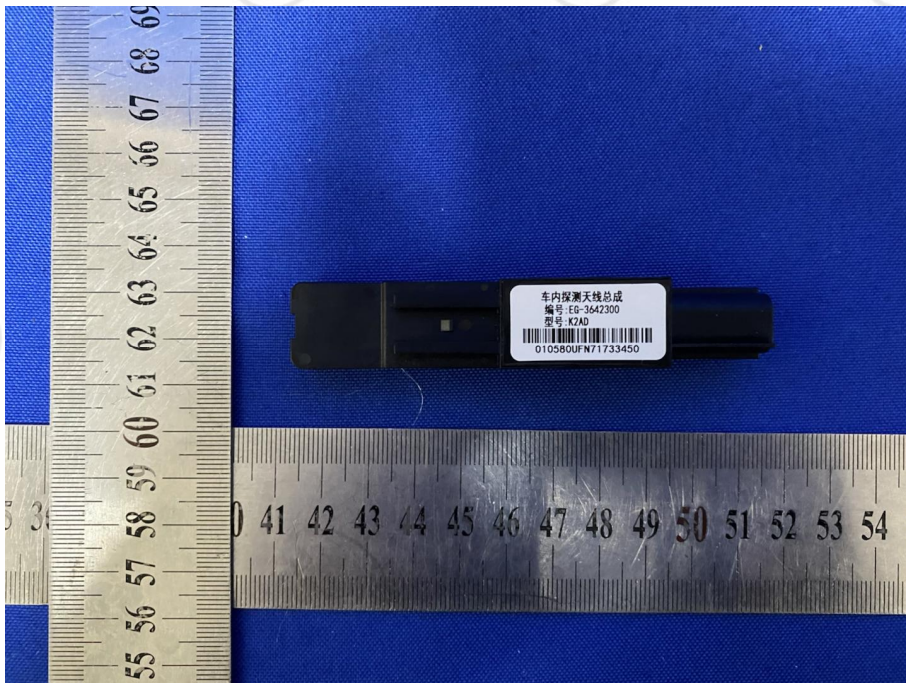

View of Product-2



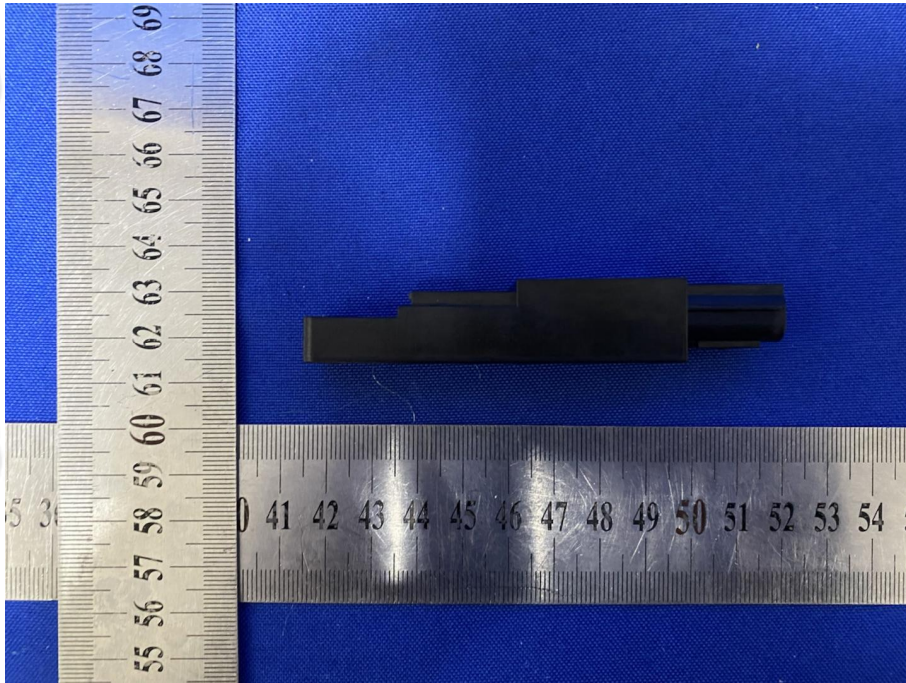


View of Product-3




View of Product-4




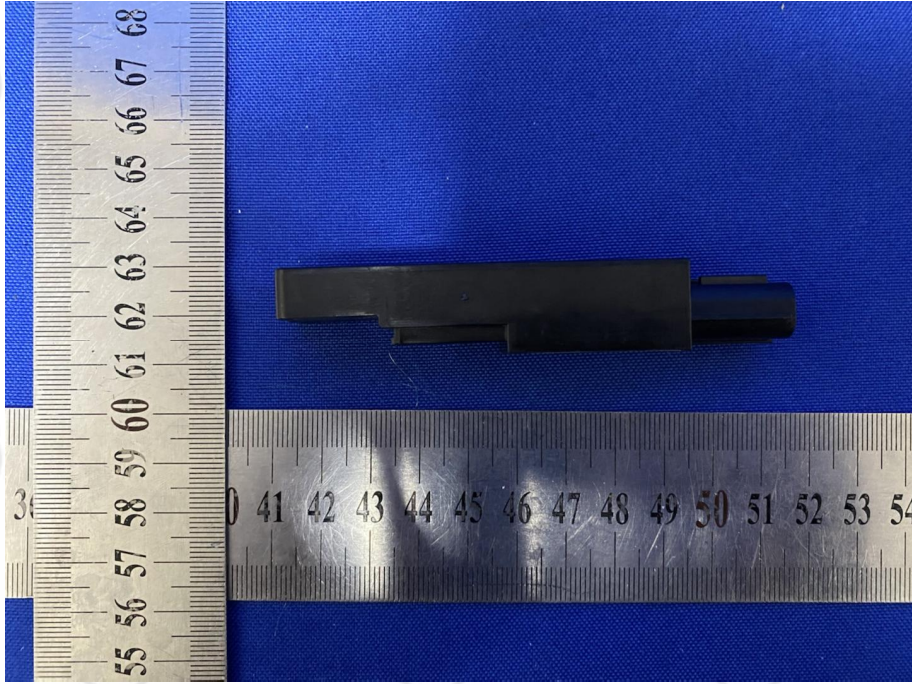


View of Product-5

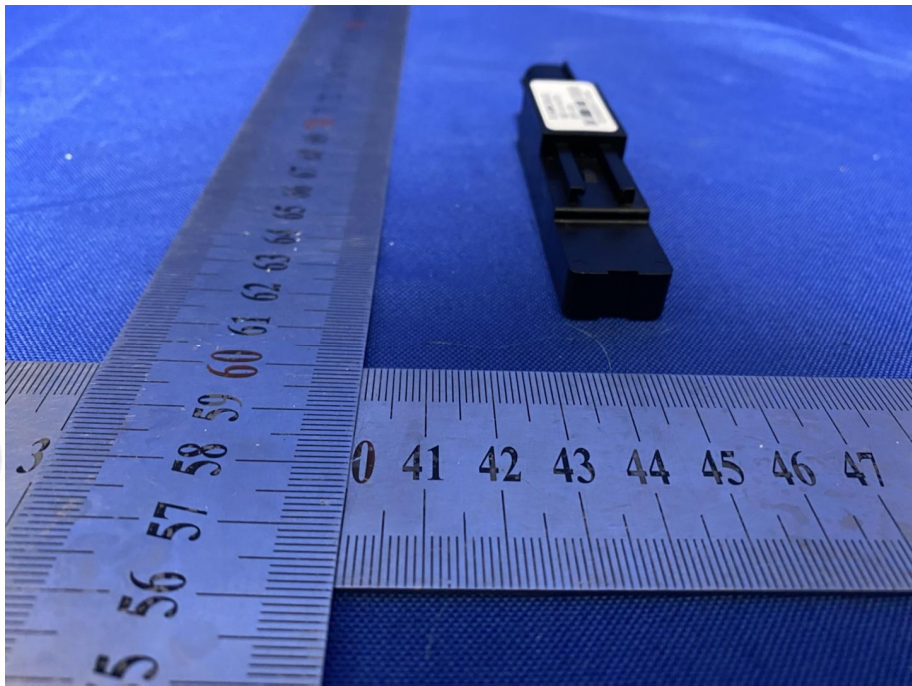

View of Product-6

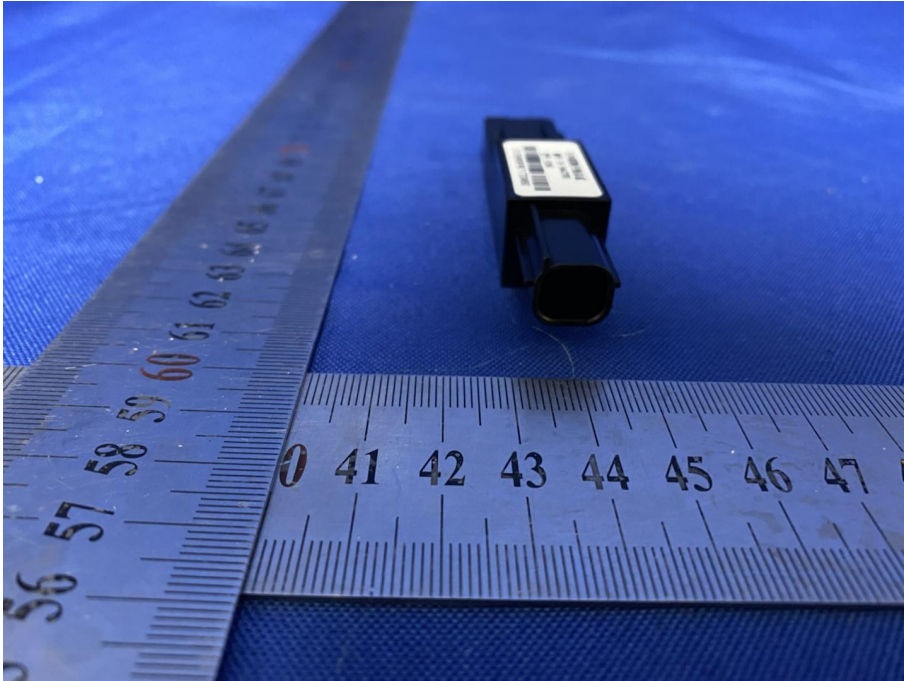


View of Product-7

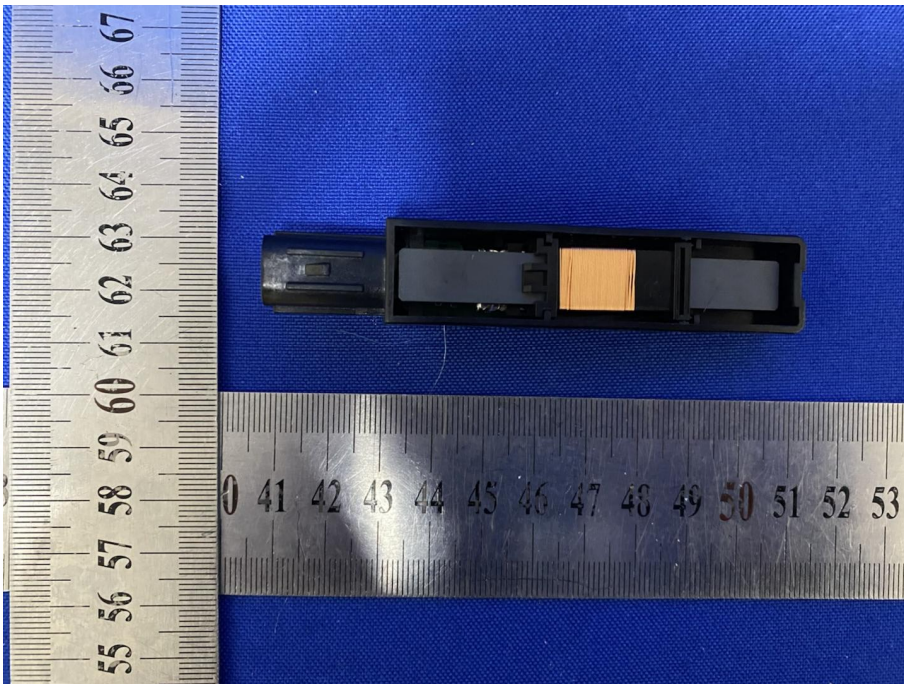

View of Product-8



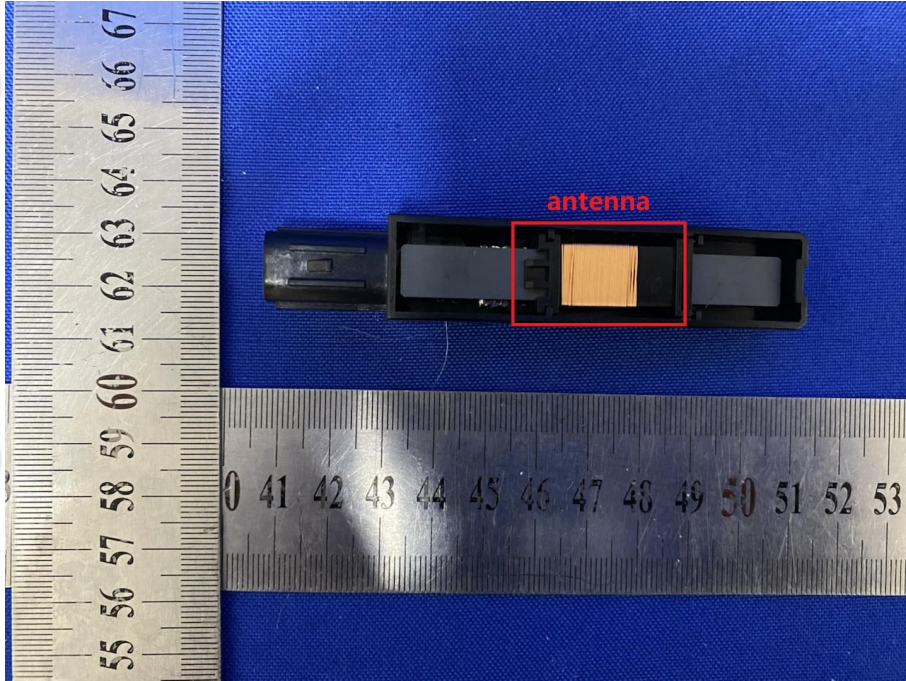

View of Product-9

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.

\*\*\* End of Report \*\*\*