



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

802.11ac 3x3 Set Top Box Client with RF4CE for remote operation

MODEL NUMBER: ID:072

FCC ID: DKNWWT

REPORT NUMBER: 15U21905-E1V3

ISSUE DATE: MARCH 31, 2016

Prepared for
ECHOSTAR
90 INVERNESS CIRCLE EAST
ENGLEWOOD, CO 80112,
U.S.A.

Prepared by
UL VERIFICATION SERVICES INC.
F47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	11/20/15	Initial Issue	C. Vergonio
V2	03/21/16	Updated FCC ID.	C. Vergonio
V3	03/31/16	Updated report and added UNII 5.2, 5.3, and 5.6 data plots.	C. Vergonio

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	10
2. TEST METHODOLOGY	11
3. FACILITIES AND ACCREDITATION	11
4. CALIBRATION AND UNCERTAINTY	11
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	11
4.2. <i>SAMPLE CALCULATION</i>	11
4.3. <i>MEASUREMENT UNCERTAINTY</i>	12
5. EQUIPMENT UNDER TEST	13
5.1. <i>DESCRIPTION OF EUT</i>	13
5.2. <i>MAXIMUM OUTPUT POWER</i>	13
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	15
5.4. <i>SOFTWARE AND FIRMWARE</i>	15
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i>	15
5.6. <i>DESCRIPTION OF TEST SETUP</i>	16
6. TEST AND MEASUREMENT EQUIPMENT	18
7. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	19
7.1. <i>MEASUREMENT METHODS</i>	20
7.2. <i>ON TIME AND DUTY CYCLE RESULTS</i>	21
7.3. <i>DUTY CYCLE PLOTS</i>	22
8. ANTENNA PORT TEST RESULTS	28
8.1. <i>802.11a 1TX SISO MODE IN THE 5.2 GHz BAND</i>	28
8.1.1. 26 dB BANDWIDTH.....	28
8.1.2. 99% BANDWIDTH.....	31
8.1.3. AVERAGE POWER	34
8.1.4. OUTPUT POWER AND PSD	35
8.2. <i>802.11n HT20 1TX SISO MODE IN THE 5.2 GHz BAND</i>	39
8.2.1. 26 dB BANDWIDTH.....	39
8.2.2. 99% BANDWIDTH.....	42
8.2.3. AVERAGE POWER	45
8.2.4. OUTPUT POWER AND PSD	46
8.3. <i>802.11n HT20 3TX CDD MODE IN THE 5.2 GHz BAND</i>	50
8.3.1. 26 dB BANDWIDTH.....	50
8.3.2. 99% BANDWIDTH.....	56
8.3.3. AVERAGE POWER	62
8.3.4. OUTPUT POWER AND PPSD.....	63
8.4. <i>802.11n HT20 3TX SDM MODE IN THE 5.2 GHz BAND</i>	70
8.4.1. 26 dB BANDWIDTH.....	70

8.4.2.	99% BANDWIDTH	76
8.4.3.	AVERAGE POWER	82
8.4.4.	OUTPUT POWER AND PPSD.....	83
8.5.	<i>802.11n HT40 1TX SISO MODE IN THE 5.2 GHz BAND</i>	90
8.5.1.	26 dB BANDWIDTH.....	90
8.5.2.	99% BANDWIDTH	92
8.5.3.	AVERAGE POWER	94
8.5.4.	OUTPUT POWER AND PPSD.....	95
8.6.	<i>802.11n HT40 3TX CDD MODE IN THE 5.2 GHz BAND</i>	98
8.6.1.	26 dB BANDWIDTH.....	98
8.6.2.	99% BANDWIDTH	102
8.6.3.	AVERAGE POWER	106
8.6.4.	OUTPUT POWER AND PPSD.....	107
8.7.	<i>802.11n HT40 3TX SDM MODE IN THE 5.2 GHz BAND</i>	112
8.7.1.	26 dB BANDWIDTH.....	112
8.7.2.	99% BANDWIDTH	116
8.7.3.	AVERAGE POWER	120
8.7.4.	OUTPUT POWER AND PPSD.....	121
8.8.	<i>802.11ac 80MHz 1TX SISO MODE IN THE 5.2 GHz BAND</i>	126
8.8.1.	26 dB BANDWIDTH.....	126
8.8.2.	99% BANDWIDTH	128
8.8.3.	AVERAGE POWER	130
8.8.4.	OUTPUT POWER AND PPSD.....	131
8.9.	<i>802.11ac 80MHz 3TX CDD MODE IN THE 5.2 GHz BAND</i>	134
8.9.1.	26 dB BANDWIDTH.....	134
8.9.2.	99% BANDWIDTH	137
8.9.3.	AVERAGE POWER	140
8.9.4.	OUTPUT POWER AND PPSD.....	141
8.10.	<i>802.11ac 80MHz 3TX SDM MODE IN THE 5.2 GHz BAND</i>	145
8.10.1.	26 dB BANDWIDTH.....	145
8.10.2.	99% BANDWIDTH	148
8.10.3.	AVERAGE POWER	151
8.10.4.	OUTPUT POWER AND PPSD.....	152
8.11.	<i>802.11a 1TX SISO MODE IN THE 5.3 GHz BAND</i>	156
8.11.1.	26 dB BANDWIDTH.....	156
8.11.2.	99% BANDWIDTH	159
8.11.3.	AVERAGE POWER	162
8.11.4.	OUTPUT POWER AND PPSD.....	163
8.12.	<i>802.11n HT20 1TX SISO MODE IN THE 5.3 GHz BAND</i>	167
8.12.1.	26 dB BANDWIDTH.....	167
8.12.2.	99% BANDWIDTH	169
8.12.3.	AVERAGE POWER	173
8.12.4.	OUTPUT POWER AND PPSD.....	174
8.13.	<i>802.11n HT20 3TX CDD MODE IN THE 5.3 GHz BAND</i>	178
8.13.1.	26 dB BANDWIDTH.....	178
8.13.2.	99% BANDWIDTH	184
8.13.3.	AVERAGE POWER	190
8.13.4.	OUTPUT POWER AND PPSD.....	191

8.14.	<i>802.11n HT20 3TX SDM MODE IN THE 5.3 GHz BAND</i>	198
8.14.1.	26 dB BANDWIDTH.....	198
8.14.2.	99% BANDWIDTH.....	204
8.14.3.	AVERAGE POWER	210
8.14.4.	OUTPUT POWER AND PPSD.....	211
8.15.	<i>802.11n HT40 1TX SISO MODE IN THE 5.3 GHz BAND</i>	218
8.15.1.	26 dB BANDWIDTH.....	218
8.15.2.	99% BANDWIDTH.....	220
8.15.3.	AVERAGE POWER	222
8.15.4.	OUTPUT POWER AND PPSD.....	223
8.16.	<i>802.11n HT40 3TX CDD MODE IN THE 5.3 GHz BAND</i>	226
8.16.1.	26 dB BANDWIDTH.....	226
8.16.2.	99% BANDWIDTH.....	230
8.16.3.	AVERAGE POWER	234
8.16.4.	OUTPUT POWER AND PPSD.....	235
8.17.	<i>802.11n HT40 3TX SDM MODE IN THE 5.3 GHz BAND</i>	240
8.17.1.	26 dB BANDWIDTH.....	240
8.17.2.	99% BANDWIDTH.....	244
8.17.3.	AVERAGE POWER	248
8.17.4.	OUTPUT POWER AND PPSD.....	249
8.18.	<i>802.11ac 80MHz 1TX SISO MODE IN THE 5.3 GHz BAND</i>	254
8.18.1.	26 dB BANDWIDTH.....	254
8.18.2.	99% BANDWIDTH.....	256
8.18.3.	AVERAGE POWER	258
8.18.4.	OUTPUT POWER AND PPSD.....	259
8.19.	<i>802.11ac 80MHz 3TX CDD MODE IN THE 5.3 GHz BAND</i>	262
8.19.1.	26 dB BANDWIDTH.....	262
8.19.2.	99% BANDWIDTH.....	265
8.19.3.	AVERAGE POWER	268
8.19.4.	OUTPUT POWER AND PPSD.....	269
8.20.	<i>802.11ac 80MHz 3TX SDM MODE IN THE 5.3 GHz BAND</i>	273
8.20.1.	26 dB BANDWIDTH.....	273
8.20.2.	99% BANDWIDTH.....	276
8.20.3.	AVERAGE POWER	279
8.20.4.	OUTPUT POWER AND PPSD.....	280
8.21.	<i>802.11a 1TX SISO MODE IN THE 5.6 GHz BAND</i>	284
8.21.1.	26 dB BANDWIDTH.....	284
8.21.2.	99% BANDWIDTH.....	287
8.21.3.	AVERAGE POWER	290
8.21.4.	OUTPUT POWER AND PPSD.....	291
8.22.	<i>802.11n HT20 1TX SISO MODE IN THE 5.6 GHz BAND</i>	295
8.22.1.	26 dB BANDWIDTH.....	295
8.22.2.	99% BANDWIDTH.....	298
8.22.3.	AVERAGE POWER	301
8.22.4.	OUTPUT POWER AND PPSD.....	302
8.22.5.	PEAK EXCURSION	306
8.23.	<i>802.11ac 20MHz LEGACY 1TX MODE, CHANNEL 144, 5.6 GHz BAND</i>	308
8.23.1.	26 dB BANDWIDTH.....	308
8.23.2.	99% BANDWIDTH	310

8.23.3. OUTPUT POWER AND PSD	312
8.24. 802.11n HT20 3TX CDD MODE IN THE 5.6 GHz BAND.....	316
8.24.1. 26 dB BANDWIDTH.....	316
8.24.2. 99% BANDWIDTH	322
8.24.3. AVERAGE POWER	328
8.24.4. OUTPUT POWER AND PPSD.....	329
8.24.5. PEAK EXCURSION	336
8.25. 802.11ac 20MHz 3TX CDD MODE, CHANNEL 144, 5.6 GHz BAND	339
8.25.1. 26 dB BANDWIDTH- UNII.....	339
8.25.2. 99% BANDWIDTH	342
8.25.3. OUTPUT POWER AND PSD	345
8.26. 802.11n HT20 3TX SDM MODE IN THE 5.6 GHz BAND	351
8.26.1. 26 dB BANDWIDTH.....	351
8.26.2. 99% BANDWIDTH	357
8.26.3. AVERAGE POWER	363
8.26.4. OUTPUT POWER AND PPSD.....	364
8.26.5. PEAK EXCURSION	371
8.27. 802.11ac 20MHz 3TX SDM MODE, CHANNEL 144, 5.6 GHz BAND	374
8.27.1. 26 dB BANDWIDTH- UNII.....	374
8.27.2. 99% BANDWIDTH	377
8.27.3. OUTPUT POWER AND PSD	380
8.28. 802.11n HT40 1TX SISO MODE IN THE 5.6 GHz BAND.....	386
8.28.1. 26 dB BANDWIDTH.....	386
8.28.2. 99% BANDWIDTH	389
8.28.3. AVERAGE POWER	392
8.28.4. OUTPUT POWER AND PPSD.....	393
8.28.5. PEAK EXCURSION	397
8.29. 802.11ac 40MHz 1TX SISO MODE, CHANNEL 142, 5.6 GHz BAND	399
8.29.1. 26 dB BANDWIDTH.....	399
8.29.2. 99% BANDWIDTH	401
8.29.3. OUTPUT POWER AND PSD	403
8.30. 802.11n HT40 3TX CDD MODE IN THE 5.6 GHz BAND.....	407
8.30.1. 26 dB BANDWIDTH.....	407
8.30.2. 99% BANDWIDTH	413
8.30.3. AVERAGE POWER	419
8.30.4. OUTPUT POWER AND PPSD.....	420
8.30.5. PEAK EXCURSION	427
8.31. 802.11ac 40MHz 3TX CDD MODE, CHANNEL 142, 5.6 GHz BAND	430
8.31.1. 26 dB BANDWIDTH- UNII.....	430
8.31.2. 99% BANDWIDTH	433
8.31.3. OUTPUT POWER AND PSD	436
8.32. 802.11n HT40 3TX SDM MODE IN THE 5.6 GHz BAND	442
8.32.1. 26 dB BANDWIDTH.....	442
8.32.2. 99% BANDWIDTH	448
8.32.3. AVERAGE POWER	454
8.32.4. OUTPUT POWER AND PPSD.....	455
8.32.5. PEAK EXCURSION	462
8.33. 802.11ac 40MHz 3TX SDM MODE, CHANNEL 142, 5.6 GHz BAND	465

8.33.1.	26 dB BANDWIDTH- UNII.....	465
8.33.2.	99% BANDWIDTH	468
8.33.3.	OUTPUT POWER AND PSD	471
8.34.	<i>802.11ac 80MHz 1TX SISO MODE IN THE 5.6 GHz BAND</i>	477
8.34.1.	26 dB BANDWIDTH.....	477
8.34.2.	99% BANDWIDTH	479
8.34.3.	AVERAGE POWER	481
8.34.4.	OUTPUT POWER AND PPSD.....	482
8.34.5.	PEAK EXCURSION	485
8.35.	<i>802.11ac 80MHz 1TX SISO MODE, CHANNEL 138, 5.6 GHz BAND</i>	487
8.35.1.	26 dB BANDWIDTH.....	487
8.35.2.	99% BANDWIDTH	489
8.35.3.	OUTPUT POWER AND PSD	491
8.36.	<i>802.11ac 80MHz 3TX CDD MODE IN THE 5.6 GHz BAND</i>	495
8.36.1.	26 dB BANDWIDTH.....	495
8.36.2.	99% BANDWIDTH	498
8.36.3.	AVERAGE POWER	501
8.36.4.	OUTPUT POWER AND PPSD.....	502
8.36.5.	PEAK EXCURSION	506
8.37.	<i>802.11ac 80MHz CDD 3TX MODE, CHANNEL 138, 5.6 GHz BAND</i>	509
8.37.1.	26 dB BANDWIDTH- UNII.....	509
8.37.2.	99% BANDWIDTH	512
8.37.3.	OUTPUT POWER AND PSD	515
8.38.	<i>802.11ac 80MHz 3TX SDM MODE IN THE 5.6 GHz BAND</i>	521
8.38.1.	26 dB BANDWIDTH.....	521
8.38.2.	99% BANDWIDTH	524
8.38.3.	AVERAGE POWER	527
8.38.4.	OUTPUT POWER AND PPSD.....	528
8.38.5.	PEAK EXCURSION	532
8.39.	<i>802.11ac 80MHz SDM 3TX MODE, CHANNEL 138, 5.6 GHz BAND</i>	535
8.39.1.	26 dB BANDWIDTH- UNII.....	535
8.39.2.	99% BANDWIDTH	538
8.39.3.	OUTPUT POWER AND PSD	541
8.40.	<i>802.11a S/ISO MODE IN THE 5.8 GHz BAND</i>	547
8.40.1.	OUTPUT POWER.....	547
8.40.2.	Maximum Power Spectral Density (PSD)	549
8.41.	<i>802.11n HT20 SISO MODE IN THE 5.8 GHz BAND</i>	554
8.41.1.	OUTPUT POWER.....	554
8.41.2.	Maximum Power Spectral Density (PSD)	556
8.42.	<i>802.11n HT20 3TX CDD MODE IN THE 5.8 GHz BAND</i>	561
8.42.1.	OUTPUT POWER.....	561
8.42.2.	Maximum Power Spectral Density (PSD)	563
8.43.	<i>802.11n HT40 SISO MODE IN THE 5.8 GHz BAND</i>	571
8.43.1.	OUTPUT POWER.....	571
8.43.2.	Maximum Power Spectral Density (PSD)	573
8.44.	<i>802.11n HT40 3TX CDD MODE IN THE 5.8 GHz BAND</i>	577
8.44.1.	OUTPUT POWER.....	577
8.44.1.	Maximum Power Spectral Density (PSD)	579

8.45.	802.11ac VHT80 SISO MODE IN THE 5.8 GHz BAND	585
8.45.1.	OUTPUT POWER.....	585
8.45.2.	Maximum Power Spectral Density (PSD)	587
8.46.	802.11ac VHT80 3TX CDD MODE IN THE 5.8 GHz BAND.....	591
8.46.1.	OUTPUT POWER.....	591
9.	RADIATED TEST RESULTS.....	598
9.1.	LIMITS AND PROCEDURE	598
9.2.	TRANSMITTER ABOVE 1 GHz	599
9.2.1.	802.11a 1TX SISO MODE IN THE 5.2 GHz BAND	599
9.2.2.	802.11n HT20 1TX SISO MODE IN THE 5.2 GHz BAND	604
9.2.3.	802.11n HT20 3TX CDD MODE IN THE 5.2 GHz BAND	609
9.2.4.	802.11n HT20 3TX SDM MODE IN THE 5.2 GHz BAND	614
9.2.5.	802.11n HT40 1TX SISO MODE IN THE 5.2 GHz BAND	619
9.2.6.	802.11n HT40 3TX CDD MODE IN THE 5.2 GHz BAND	623
9.2.7.	802.11n HT40 3TX SDM MODE IN THE 5.2 GHz BAND	627
9.2.8.	802.11ac 80MHz 1TX SISO MODE IN THE 5.2 GHz BAND	631
9.2.9.	802.11ac 80MHz 3TX CDD MODE IN THE 5.2 GHz BAND	634
9.2.10.	802.11ac 80MHz 3TX SDM MODE IN THE 5.2 GHz BAND.....	637
9.2.11.	802.11a 1TX SISO MODE IN THE 5.3 GHz BAND	640
9.2.12.	802.11n HT20 1TX SISO MODE IN THE 5.3 GHz BAND	645
9.2.13.	802.11n HT20 3TX CDD MODE IN THE 5.3 GHz BAND	650
9.2.14.	802.11n HT20 3TX SDM MODE IN THE 5.3 GHz BAND	655
9.2.15.	802.11n HT40 1TX SISO MODE IN THE 5.3 GHz BAND	660
9.2.16.	802.11n HT40 3TX CDD MODE IN THE 5.3 GHz BAND	664
9.2.17.	802.11n HT40 3TX SDM MODE IN THE 5.3 GHz BAND	668
9.2.18.	802.11ac 80MHz 1TX SISO MODE IN THE 5.3 GHz BAND	672
9.2.19.	802.11ac 80MHz 3TX CDD MODE IN THE 5.3 GHz BAND	675
9.2.20.	802.11ac 80MHz 3TX SDM MODE IN THE 5.3 GHz BAND.....	678
9.2.21.	802.11a 1TX SISO MODE IN THE 5.6 GHz BAND	681
9.2.22.	802.11n HT20 1TX SISO MODE IN THE 5.6 GHz BAND	688
9.2.23.	802.11ac 20MHz 1TX SISO MODE, CHANNEL 144, IN THE 5.6 GHz BAND	695
9.2.24.	802.11n HT20 3TX CDD MODE IN THE 5.6 GHz BAND	696
9.2.25.	802.11ac 20MHz 3TX CDD, CHANNEL 144, IN THE 5.6 GHz BAND	702
9.2.26.	802.11n HT20 3TX SDM MODE IN THE 5.6 GHz BAND	703
9.2.27.	802.11ac 20MHz 3TX SDM, CHANNEL 144, IN THE 5.6 GHz BAND	709
9.2.28.	802.11n HT40 1TX SISO MODE IN THE 5.6 GHz BAND	710
9.2.29.	802.11ac 40MHz 1TX SISO, CHANNEL 142, IN THE 5.6 GHz BAND	717
9.2.30.	802.11n HT40 3TX CDD MODE IN THE 5.6 GHz BAND	718
9.2.31.	802.11ac 40MHz 3TX CDD, CHANNEL 142, IN THE 5.6 GHz BAND	725
9.2.32.	802.11n HT40 3TX SDM MODE IN THE 5.6 GHz BAND	726
9.2.33.	802.11ac 40MHz 3TX SDM, CHANNEL 142, IN THE 5.6 GHz BAND	733
9.2.34.	802.11ac 80MHz 1TX SISO MODE IN THE 5.6 GHz BAND	734
9.2.35.	802.11ac 80MHz 3TX CDD MODE IN THE 5.6 GHz BAND	738
9.2.36.	802.11ac 80MHz 3TX SDM MODE IN THE 5.6 GHz BAND	742
9.2.37.	TX ABOVE 1 GHz 802.11a SISO MODE IN THE 5.8 GHz BAND	746
9.2.38.	TX ABOVE 1 GHz 802.11n HT20 SISO MODE IN THE 5.8 GHz BAND	756
9.2.39.	TX ABOVE 1 GHz 802.11n HT20 3TX CDD MODE IN THE 5.8 GHz BAND....	766
9.2.40.	TX ABOVE 1 GHz 802.11n HT40 SISO MODE IN THE 5.8 GHz BAND	776
9.2.41.	TX ABOVE 1 GHz 802.11n HT40 3TX CDD MODE IN THE 5.8 GHz BAND....	784
9.2.42.	TX ABOVE 1 GHz 802.11ac HT80 SISO MODE IN THE 5.8 GHz BAND	792
9.2.43.	TX ABOVE 1 GHz 802.11ac HT80 3TX CDD MODE IN THE 5.8 GHz BAND ..	798

9.3. WORST-CASE ABOVE 18 GHz	805
9.4. WORST-CASE BELOW 1 GHz.....	811
10. AC POWER LINE CONDUCTED EMISSIONS	813
11. DFS	818
11.1. TEST METHODOLOGY.....	818
11.2. FACILITIES AND ACCREDITATION.....	818
11.3. CALIBRATION AND UNCERTAINTY.....	818
11.3.1. MEASURING INSTRUMENT CALIBRATION	818
11.3.2. SAMPLE CALCULATION	818
11.3.3. MEASUREMENT UNCERTAINTY	818
11.4. DYNAMIC FREQUENCY SELECTION	819
11.4.1. OVERVIEW	819
11.4.1.1. LIMITS	819
11.4.1.2. TEST AND MEASUREMENT SYSTEM	822
11.4.1.3. SETUP OF EUT	825
11.4.1.4. DESCRIPTION OF EUT	826
11.4.2. RESULTS FOR 20 MHz BANDWIDTH	828
11.4.2.1. TEST CHANNEL.....	828
11.4.2.2. RADAR WAVEFORM AND TRAFFIC	828
11.4.2.3. OVERLAPPING CHANNEL TESTS	830
11.4.2.4. MOVE AND CLOSING TIME	830
11.4.3. RESULTS FOR 40 MHz BANDWIDTH	834
11.4.3.1. TEST CHANNEL.....	834
11.4.3.2. RADAR WAVEFORM AND TRAFFIC	834
11.4.3.3. OVERLAPPING CHANNEL TESTS	836
11.4.3.4. MOVE AND CLOSING TIME	836
11.4.3.5. NON-OCCUPANCY PERIOD	840
12. SETUP PHOTOS	841

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ECHOSTAR
90 INVERNESS CIRCLE EAST
ENGLEWOOD, CO 80112, U.S.A.

EUT DESCRIPTION: 802.11ac 3x3 Set Top Box Client with RF4CE for remote operation

MODEL: ID: 072

SERIAL NUMBER: P2-224 & AB02045Y00156K (Conducted), P2-230 & AB02045Y00218K (Radiated)

DATE TESTED: DECEMBER 09, 2013 - NOVEMBER 18, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
WiSE ENGINEER
UL Verification Services Inc.

Tested By:

ROLLY ALEGRE
CONSUMER TECHNOLOGY DIVISION
WiSE LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input checked="" type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input checked="" type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input checked="" type="checkbox"/> Chamber F

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) +

Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.52 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11ac 3x3 Set Top Box Client with RF4CE for remote operation.

The set-top box is intended to be connected to any secondary television in a consumer's home. Using an 802.11ac link to an 802.11ac AP it will decode and output high-definition TV2 programming from an Echostar host STB.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

5.2 GHz BAND

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.2 GHz band, 1TX			
5180 - 5240	802.11a 1TX SISO	14.46	27.93
5180 - 5240	802.11n HT20 1TX SISO	14.66	29.24
5190 - 5230	802.11n HT40 1TX SISO	16.95	49.55
5170 - 5250	802.11ac 80MHz 1TX SISO	12.76	18.88
5.2 GHz band, 3TX			
5180 - 5240	802.11n HT20 3TX CDD	13.40	21.88
5180 - 5240	802.11n HT20 3TX SDM	13.76	23.77
5190 - 5230	802.11n HT40 3TX CDD	16.25	42.17
5190 - 5230	802.11n HT40 3TX SDM	16.77	47.53
5170 - 5250	802.11ac 80MHz 3TX CDD	14.53	28.38
5170 - 5250	802.11ac 80MHz 3TX SDM	16.80	47.86

5.3 GHz BAND

5.3 GHz band, 1TX			
5260 - 5320	802.11a 1TX SISO	21.67	146.89
5260 - 5320	802.11n HT20 1TX SISO	21.82	152.05
5270 - 5310	802.11n HT40 1TX SISO	18.94	78.34
5250 - 5330	802.11ac 80MHz 1TX SISO	13.49	22.34
5.3 GHz band, 3TX			
5260 - 5320	802.11n HT20 3TX CDD	20.70	117.49
5260 - 5320	802.11n HT20 3TX SDM	21.66	146.55
5270 - 5310	802.11n HT40 3TX CDD	18.72	74.47
5270 - 5310	802.11n HT40 3TX SDM	22.12	162.93
5250 - 5330	802.11ac 80MHz 3TX CDD	15.58	36.14
5250 - 5330	802.11ac 80MHz 3TX SDM	16.85	48.42

5.6 GHz BAND

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5.6 GHz band, 1TX			
5500 - 5700	802.11a 1TX SISO	21.22	132.43
5500 - 5700	802.11n HT20 1TX SISO	22.17	164.82
5510 - 5670	802.11n HT40 1TX SISO	23.21	209.41
5490 - 5570	802.11ac 80MHz 1TX SISO	13.63	23.07
5.6 GHz band, 3TX			
5500-5700	802.11n HT20 3TX CDD	20.58	114.29
5500-5700	802.11n HT20 3TX SDM	21.14	130.02
5510-5670	802.11n HT40 3TX CDD	22.23	167.11
5510-5670	802.11n HT40 3TX SDM	23.43	220.29
5490 - 5570	802.11ac 80MHz 3TX CDD	14.58	28.71
5490 - 5570	802.11ac 80MHz 3TX SDM	15.67	36.90

5690 - 5730	802.11ac 40MHz 1TX SISO	23.31	214.29
5650 - 5730	802.11ac 80MHz 1TX SISO	21.68	147.23
5.6 GHz band, 3TX (Channels overlapping UNII and DTS bands)			
5710 - 5730	802.11ac 20MHz 3TX CDD	18.99	79.25
5710 - 5730	802.11ac 20MHz 3TX SDM	19.69	93.11
5690 - 5730	802.11ac 40MHz 3TX CDD	21.74	149.28
5690 - 5730	802.11ac 40MHz 3TX SDM	23.9	245.47
5650 - 5730	802.11ac 80MHz 3TX CDD	18.71	74.30
5650 - 5730	802.11ac 80MHz 3TX SDM	22.40	173.78

5.8 GHz BAND

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
5.8 GHz band, 1TX						
5745-5825	802.11a	20.30	N/A	N/A	20.30	107.15
5755-5795	802.11n HT20	21.04	N/A	N/A	21.04	127.06
5755-5795	802.11n HT40	20.64	N/A	N/A	20.64	115.88
5775	802.11n AC80	15.44	N/A	N/A	15.44	34.99
5.8 GHz band, 3TX						
5745-5825	802.11n HT20 CDD	17.83	17.98	17.64	22.59	181.56
5755-5795	802.11n HT40 CDD	19.65	19.87	19.53	24.46	279.05
5775	802.11n AC80 CDD	15.45	15.77	15.67	20.40	109.73

Testing performed was done on 1TX and 3TX modes only. All 2TX mode testing was waived because the power settings for these modes will leverage on the power setting for 3TX. 3TX modes are worst case representation of 2 TX modes.

The manufacturer will use 3TX power settings on 2TX modes.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an N5x20B Embedded antenna, with a maximum gain of;

Freq. Band (GHz)	Antenna Gain (dBi)
5.2	2.25
5.3	2.40
5.6	2.82
5.8	3.16

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was FCC2 ZDAH.

The test utility software used during testing was MTool version 2.0.1.1

5.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports only one orientation; therefore, X orientation (upright) was investigated and is considered the worst case.

Worst-case data rates as provided by the client were:

802.11a SISO mode: 6 Mbps
802.11n HT20 1TX SISO mode: MCS0
802.11n HT20 3TX CDD mode: MCS0
802.11n HT20 3TX SDM mode: MCS0
802.11n HT40 1TX SISO mode: MCS0
802.11n HT40 3TX CDD mode: MCS0
802.11n HT40 3TX SDM mode: MCS0
802.11ac 20 1TX SISO mode: MCS0
802.11ac 20 3TX CDD mode: MCS0
802.11ac 20 3TX SDM mode: MCS0
802.11ac 40 1TX SISO mode: MCS0
802.11ac 40 3TX CDD mode: MCS0
802.11ac 40 3TX SDM mode: MCS0
802.11ac 80 1TX SISO mode: MCS0
802.11ac 80 3TX CDD mode: MCS0
802.11ac 80 3TX SDM mode: MCS0

Worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was the mode and channel with the highest output power.

5.6. DESCRIPTION OF TEST SETUP



SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
EUT AC adapter	Delta Elect.	ADP-25AW B	115	N/A
Laptop	HP	8470p	Compliance 1-HP	DOC
AC adapter	HP	PA-1650-32HJ	606703	DoC
Access Point	Netgear	WNDR3700	21840B5K06E39	PY309200112
AC adapter	Netgear	MU30-5120250-A1	1023400U3	N/A

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
EUT AC Adapter	Delta Electronics	ADP-25AQ b	GUBD394000123	N/A
Laotop	HP	8470P	CNU342CP7Y	DOC
AC Adapter	HP	PA-1650-32HJ	WCNXA0C3U5IAIC	DOC
Access Point	D-Link	EBR-2310	F311393000205	DOC
AC Adapter	D-Link	AF0605-B	-	N/A

I/O CABLES

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	3	2-Prong	Un-Shielded	1.8m	NA
2	DC	1	Barrel	Un-Shielded	1.8	NA
3	DC	1	Barrel	Un-Shielded	1.8	To Spectrum Analyzer
4	DC	1	Locking 2-Pin	Un-Shielded	1.8	NA
5	LAN	1	RJ45	Un-Shielded	2	NA
6	LAN	1	RJ45	Un-Shielded	2	To Spectrum Analyzer
7	Antenna	1	SMA	Coax	0.1	NA
8	LAN	1	RJ45	Un-Shielded	7.5	NA

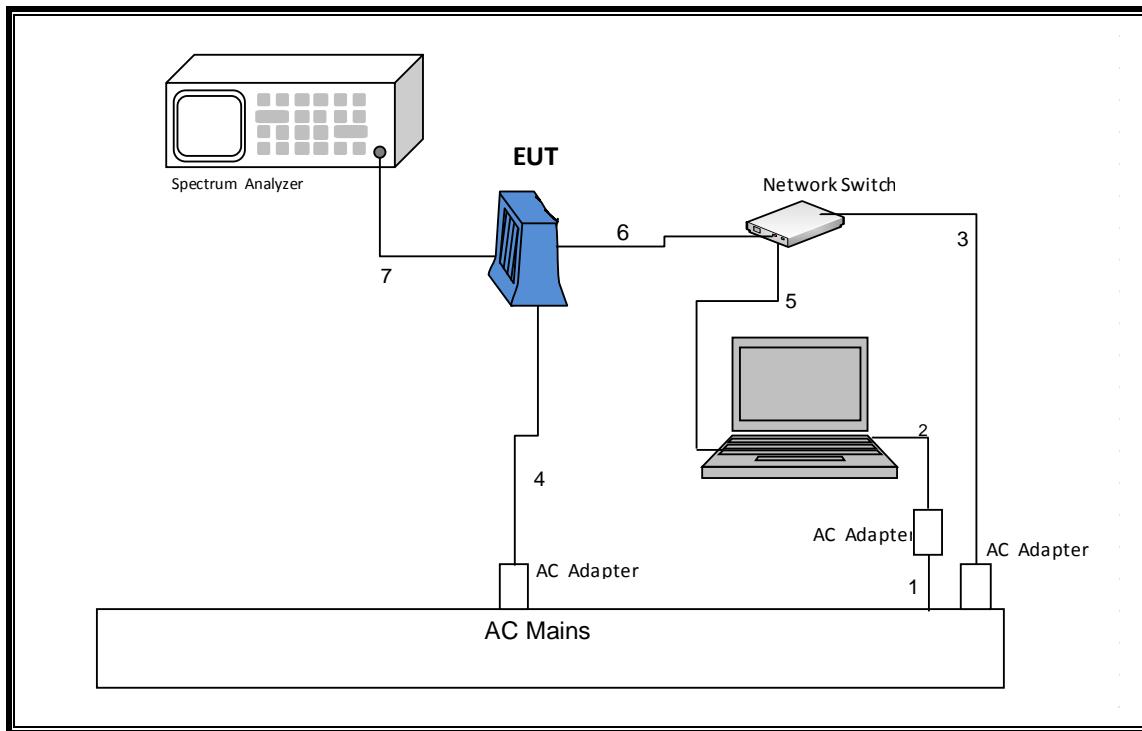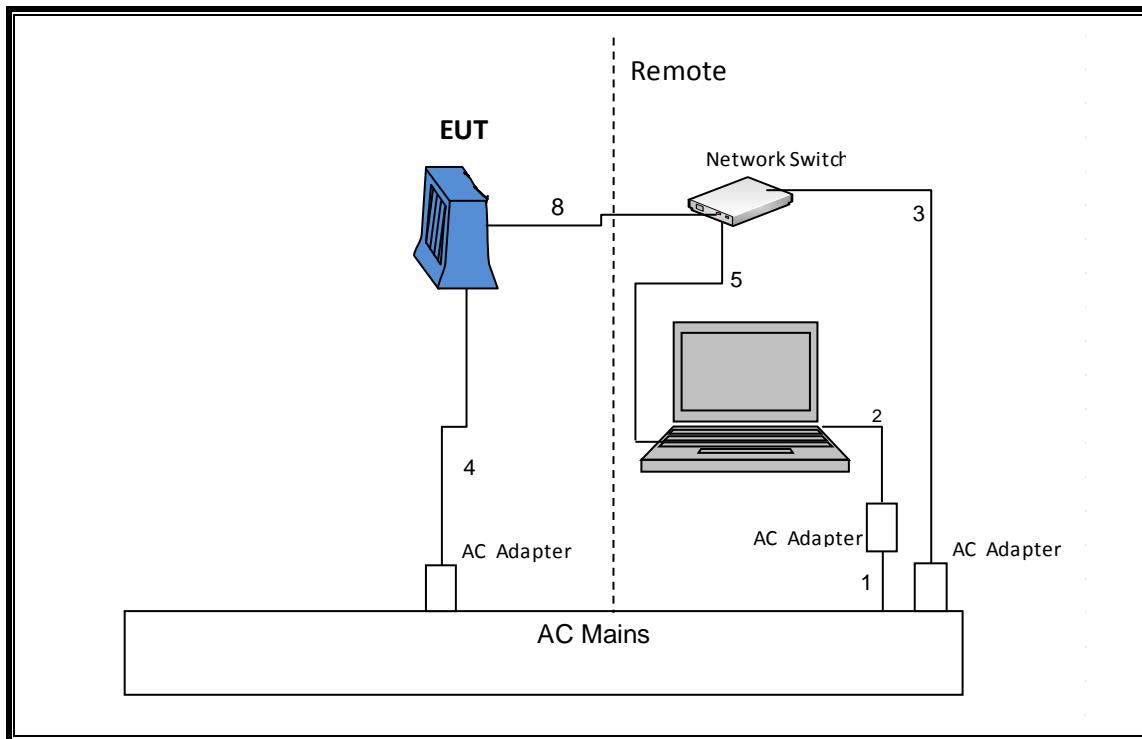SETUP DIAGRAM FOR CONDUCTED TESTS**SETUP DIAGRAM FOR RADIATED TESTS**

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB3	F00027	03/07/14
Antenna, Horn 1-18GHz	ETS Lindgren	3117	F00131	02/19/14
Antenna, Horn, 26.5 GHz	ARA	SWH-28	C01015	05/06/14
Antenna, Horn, 40 GHz	ARA	MWH-2640/B	F00194	05/14/14
Spectrum Analyzer, 40 GHz	Agilent / HP	8564E	C00951	07/29/14
Spectrum Analyzer, 3Hz-44GHz	Agilent	N9030A	F00127	02/22/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/14
PreApmplifier, 1-26.5GHz	Agilent	8449B	C01052	06/26/14
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	08/20/14
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/15/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/14
Peak / Average Power Sensor	Agilent / HP	E9323A	F00163	04/03/14
P-Series single channel Power Meter	Agilent / HP	N1911A	F00164	04/03/14

Test Equipment List					
Description	Manufacturer	Model	T No.	Cal Date	Cal Due
Bilog Antenna 30-1000MHz	Sunol	JB1	130	09/01/15	09/01/16
Horn Antenna 1-18GHz	ETS	3117	136	03/03/15	03/03/16
Horn Antenna 1-18GHz	ETS	3117	345	03/03/15	03/03/16
Horn Antenna 18-26GHz	ARA	SWH-28	98	12/17/14	12/17/15
Horn Antenna 26.5- 40GHz	ARA	MWH-2640/B	90	07/28/15	07/28/16
Preamp 10kHz-1000MHz	Sonoma	310	300	09/01/15	09/01/16
Preamp 1-8GHz	Miteq	AMF-4D-01000	782	11/17/14	11/17/15
Preamp 1-18GHz	Miteq	AFS42-0010180	493	01/16/15	01/16/16
Preamp 1-26.5GHz	Agilent	8449B	404	04/13/15	04/13/16
Amplifier, 26-40GHz	Miteq	NSP4000-SP2	88	04/07/15	04/07/16
Spectrum Analyzer 3kHz - 44GHz	Agilent	N9030A	908	06/16/15	05/26/16
Spectrum Analyzer 3kHz - 44GHz	Agilent	N9030A	907	05/15/15	05/15/16
Spectrum Analyzer 9kHz - 40GHz	HP	8564E	106	08/14/15	08/14/16
3GHz HPF	Micro-Tronics	HPM17543	487	01/31/15	01/31/16
EMI Test Receiver	Rohde & Schwarz	ECSI 7	212	08/07/15	08/07/16
Power Meter	Agilent	N1911A	377	06/16/15	06/16/16
LISN for Conducted Emission	FCC	50/250-25-2	24	01/16/15	01/16/16
Power Sensor	Agilent	E9323A	400	05/05/15	05/05/16

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/24/15
Conducted Software	UL	UL EMC	Version 9.5, 05/26/15
Antenna Port Software	UL	UL RF	Version 3.6, 10/23/15

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407 (a)	Occupied Band width (26dB)	N/A	Conducted	Pass
15.407	6dB Band width (5.8Ghz)	500KHz		Pass
15.407 (a)(1)	TX Cond. Power, 5.15-5.25	<24dBm		Pass
15.407 (a)(2)	TX Cond. Power, 5.25-5.35 & 5.47-5.725	<24dBm		Pass
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm		Pass
15.407 (a)(1)	PSD (5.1GHz)	<11dBm		Pass
15.407 (a)(5)	PSD (5.3,5.5GHz)	<11dBm		Pass
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	Pass
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		Pass

8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

8.1. MEASUREMENT METHODS

On Time and Duty Cycle: KDB 789033 D02 v01r01, Section B.

6 dB Emission BW: KDB 789033 D02 v01r01, Section C, and KDB 662911 D01 v02r01.

26 dB Emission BW: KDB 789033 D02 v01r01, Section C, and KDB 662911 D01 v02r01.

99% Occupied BW: KDB 789033 D02 v01r01, Section D, and KDB 662911 D01 v02r01.

Conducted Output Power: KDB 789033 D02 v01r01, Section E.2.b Section, E.3.b (Method PM-G), and KDB 662911 D01 v02r01.

Power Spectral Density: KDB 789033 D02 v01r01, Section F, and KDB 662911 D01 v02r01.

Unwanted emissions in restricted bands: KDB 789033 D02 v01r01, Sections G.3, G.4, G.5, and G.6 and KDB 662911 D01 v02r01.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01r01, Sections G.3, G.4, and G.5 and KDB 662911 D01 v02r01.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8.2. ON TIME AND DUTY CYCLE RESULTS

LIMITS

None; for reporting purposes only.



PROCEDURE



KDB 558074 Zero-Span Spectrum Analyzer Method.



Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
802.11a SISO	2.064	2.169	0.952	95.16%	0.22	0.484
802.11a 3TX CDD	2.064	2.172	0.950	95.03%	0.22	0.484
802.11n HT20 SISO	1.920	2.019	0.951	95.10%	0.22	0.521
802.11n HT20 3TX CDD	1.917	2.016	0.951	95.09%	0.22	0.522
802.11n HT20 3TX SDM	0.684	0.712	0.961	96.12%	0.17	1.462
802.11n HT40 SISO	0.945	1.041	0.908	90.78%	0.42	1.058
802.11n HT40 3TX CDD	0.9500	0.9820	0.967	96.74%	0.14	1.053
802.11n HT40 3TX SDM	0.355	0.384	0.924	92.45%	0.34	2.817
802.11ac 80MHz SISO	0.4590	0.4880	0.941	94.06%	0.27	2.179
802.11ac 80MHz CDD	0.4590	0.4880	0.941	94.06%	0.27	2.179
802.11ac 80MHz SDM	0.1915	0.2200	0.870	87.05%	0.60	5.222



8.3. DUTY CYCLE PLOTS



5 GHz BANDS

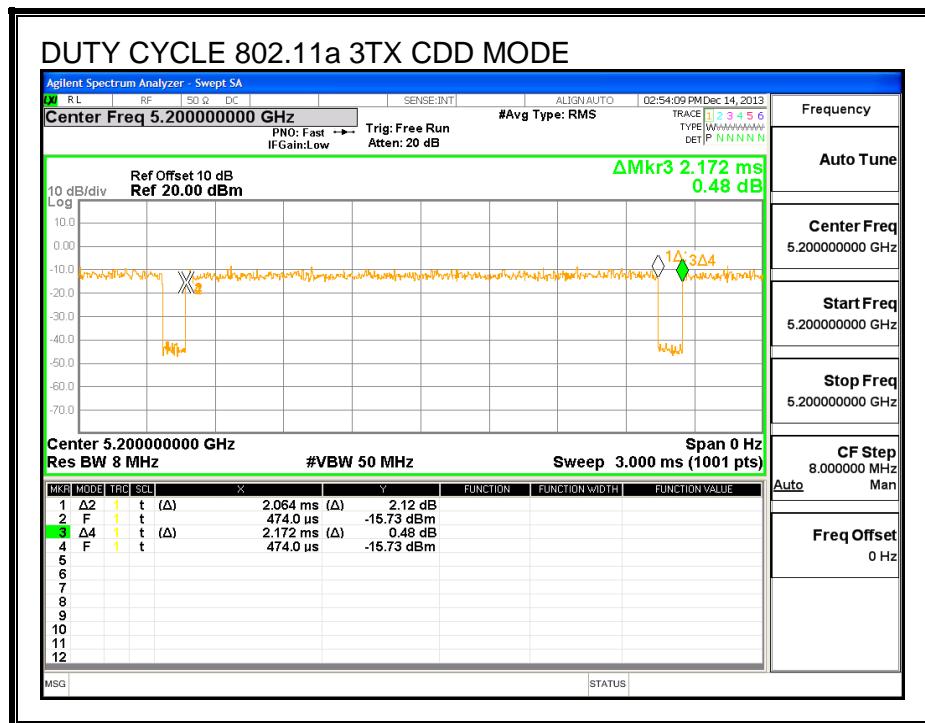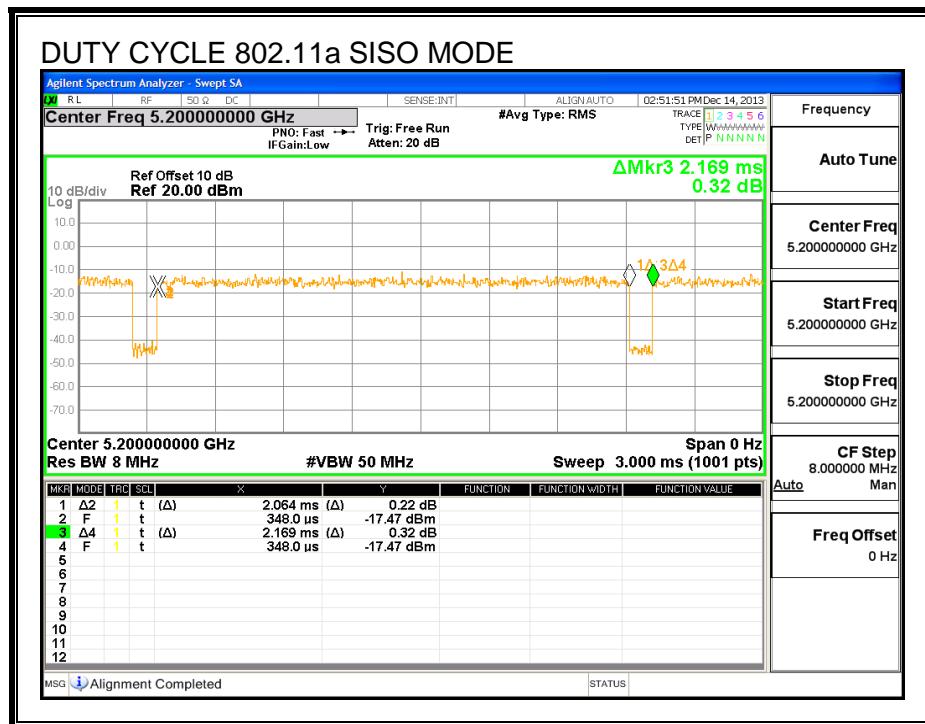


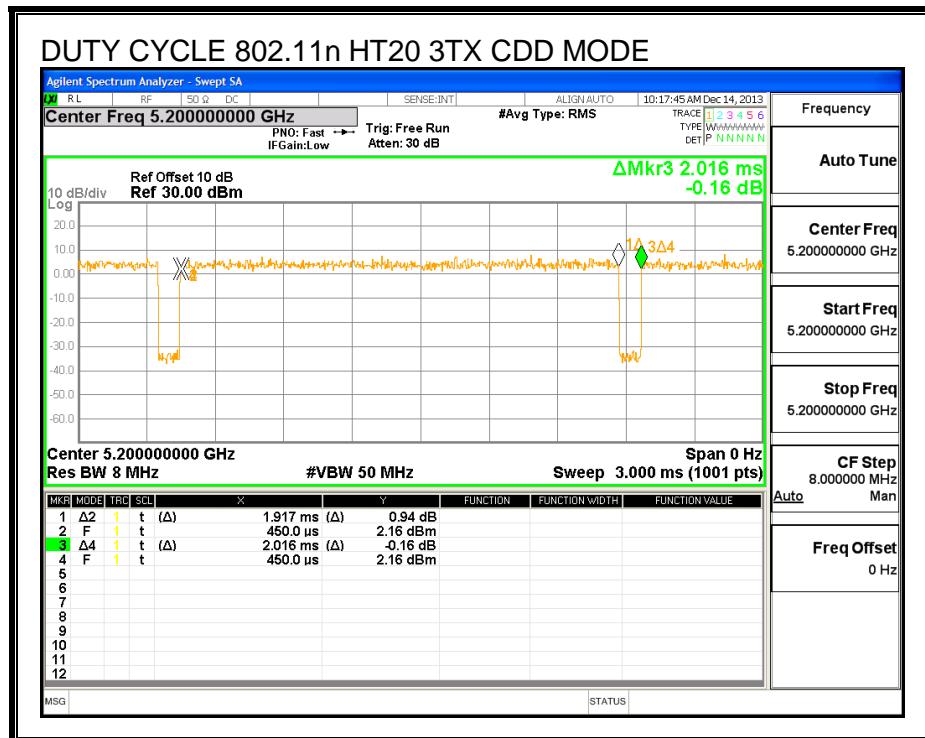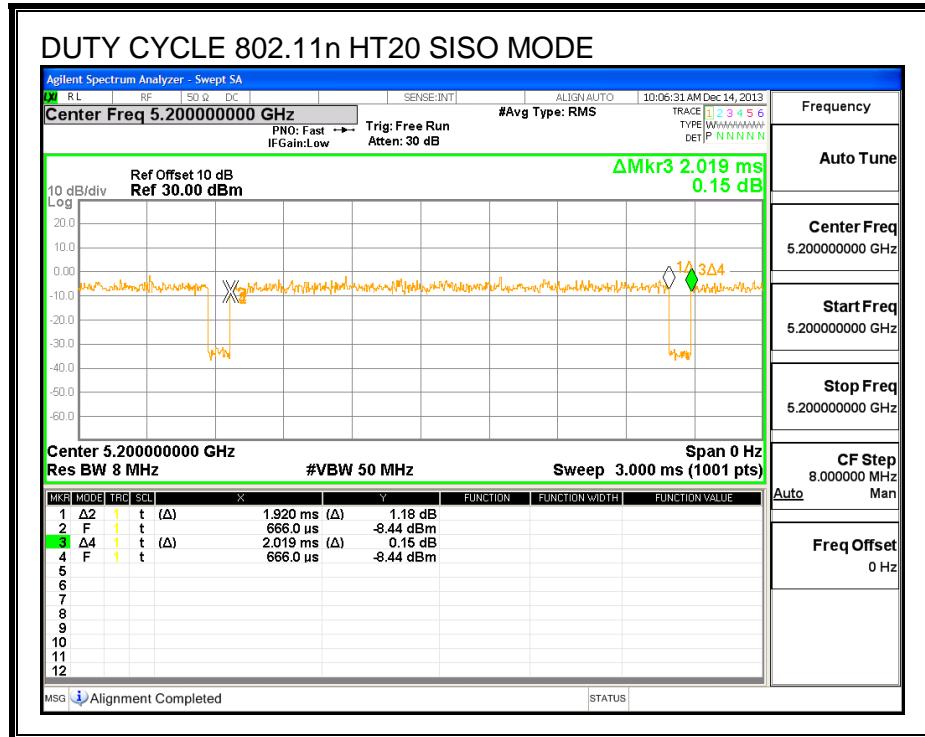

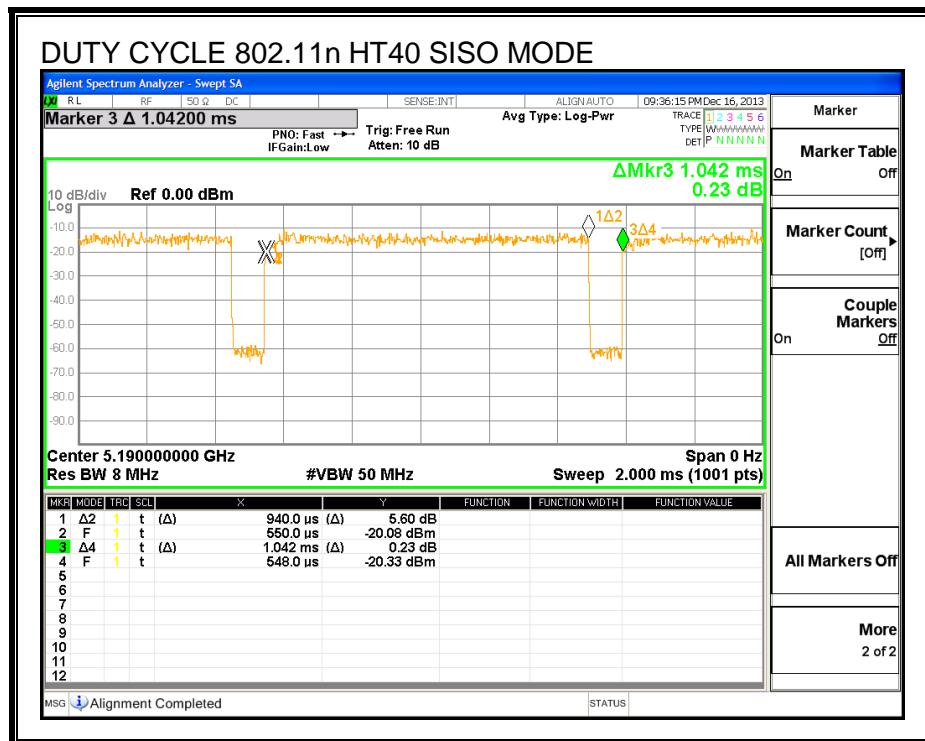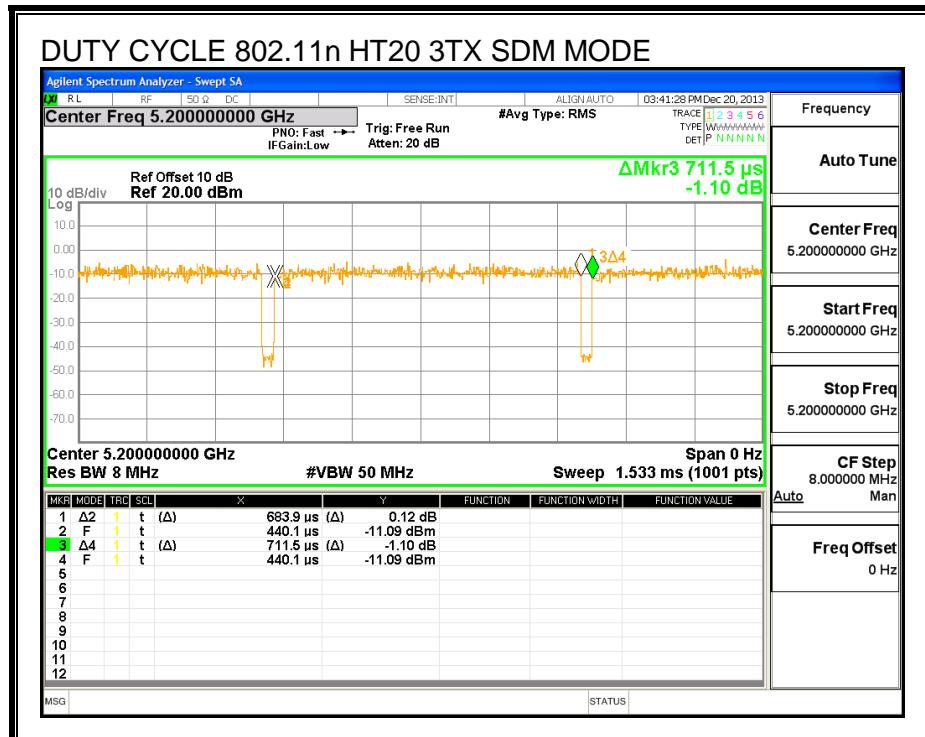

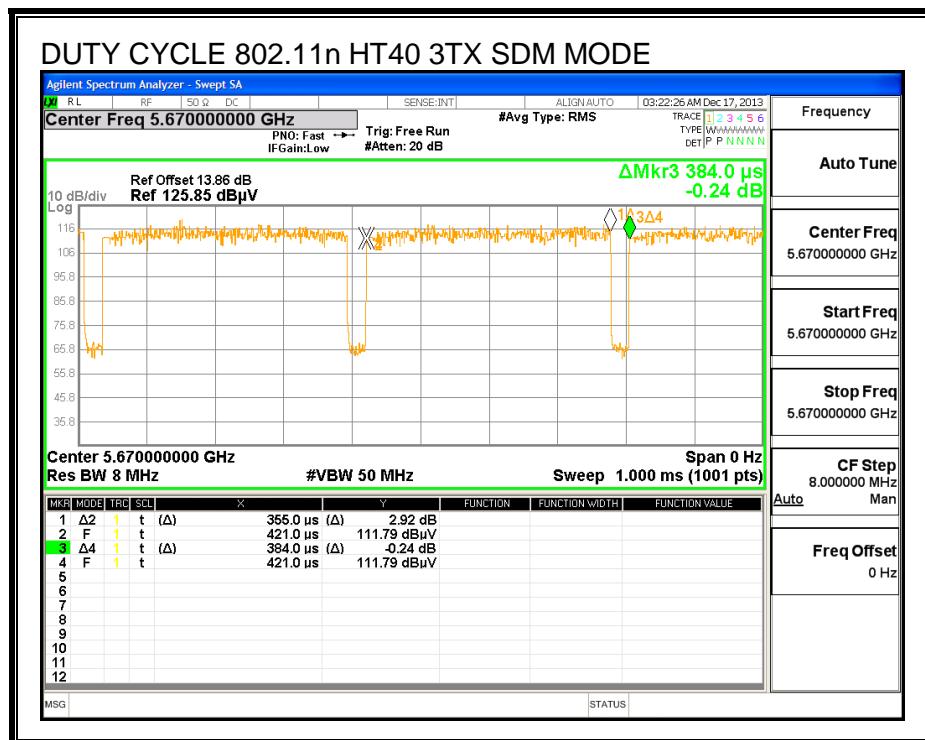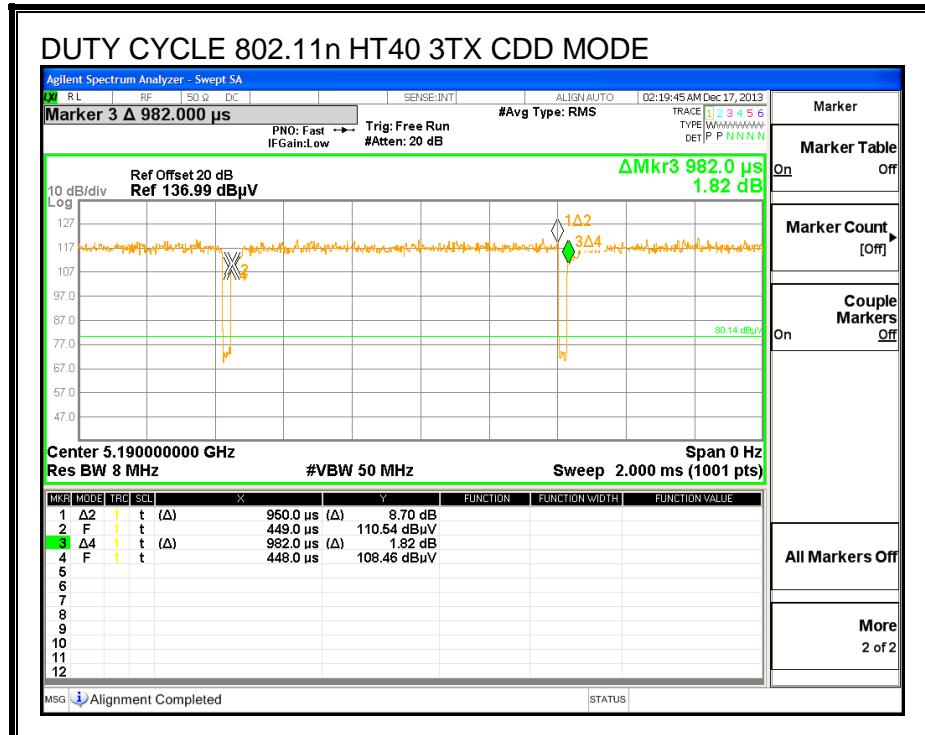

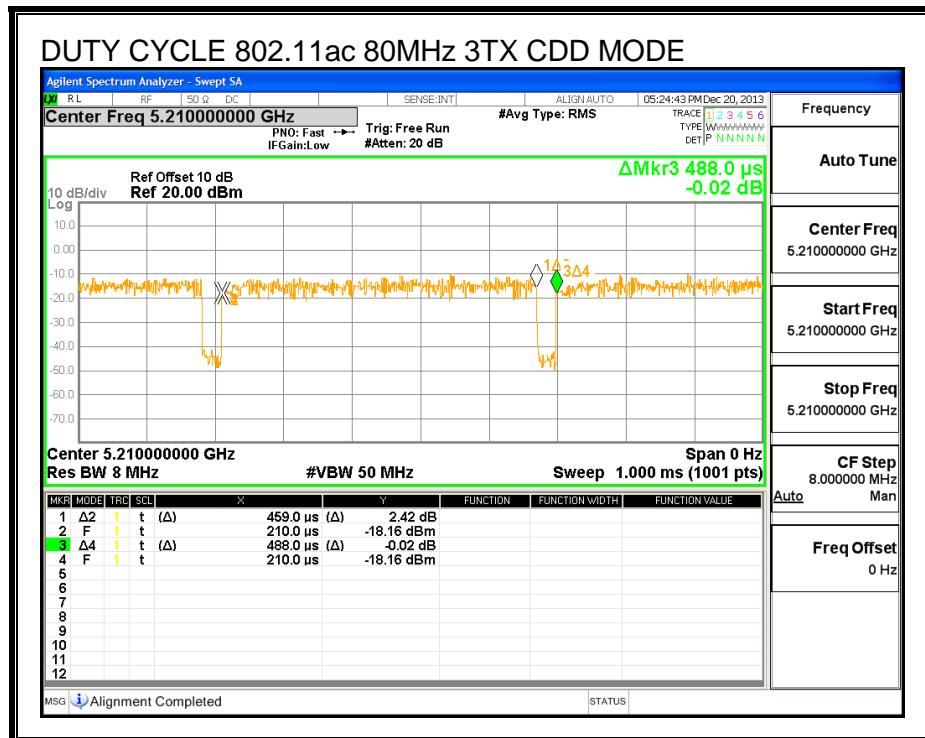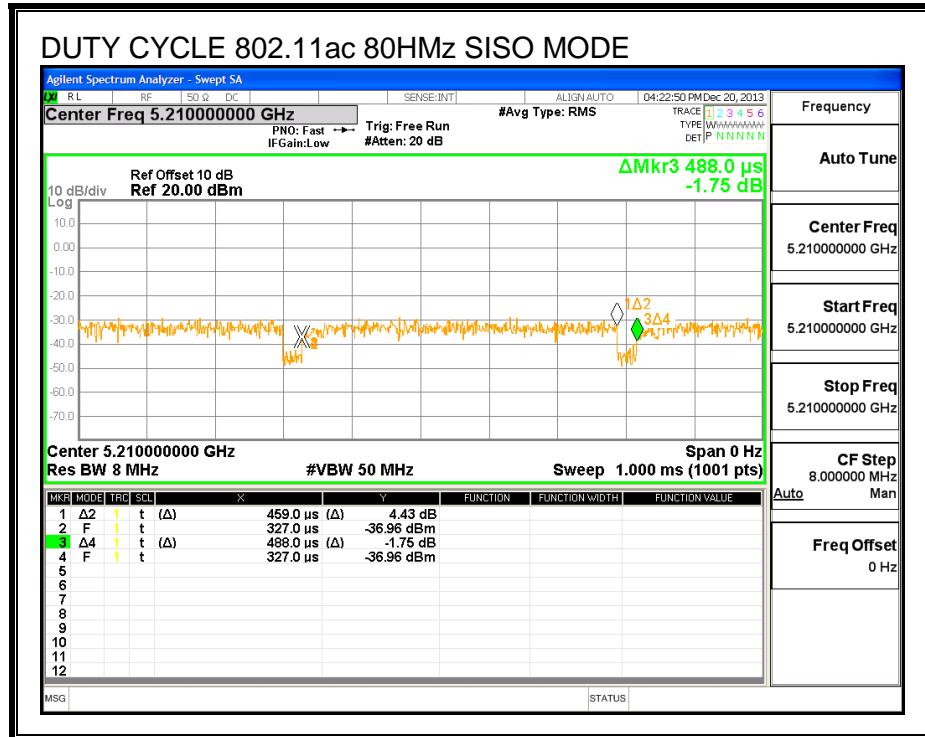

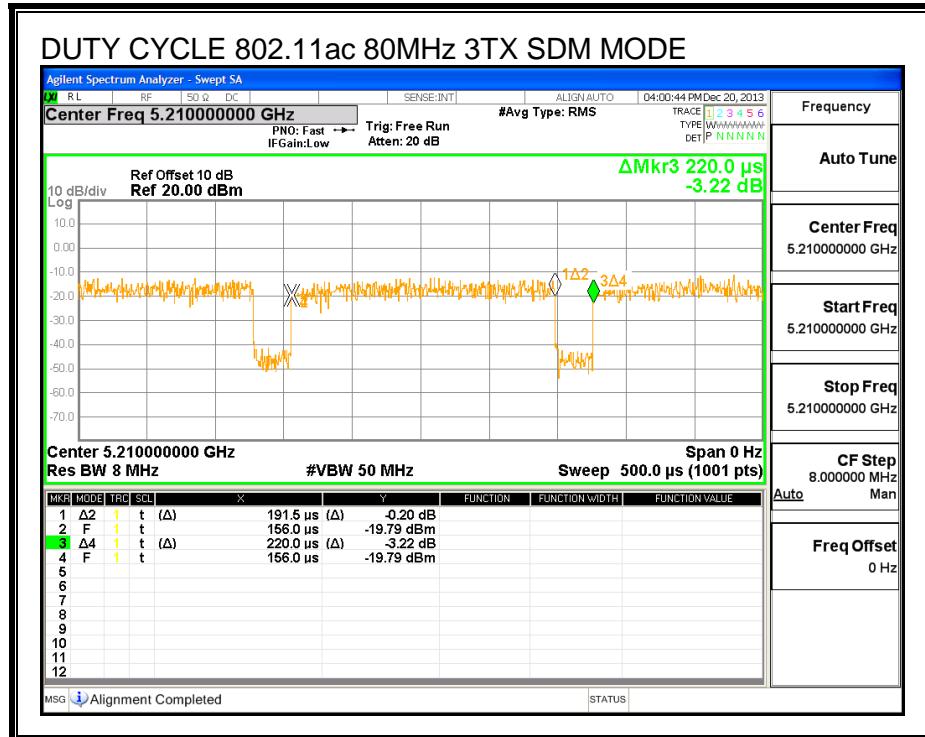

9. ANTENNA PORT TEST RESULTS

9.1. 802.11a 1TX SISO MODE IN THE 5.2 GHz BAND



9.1.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.27
40	5200	20.20
48	5240	20.13

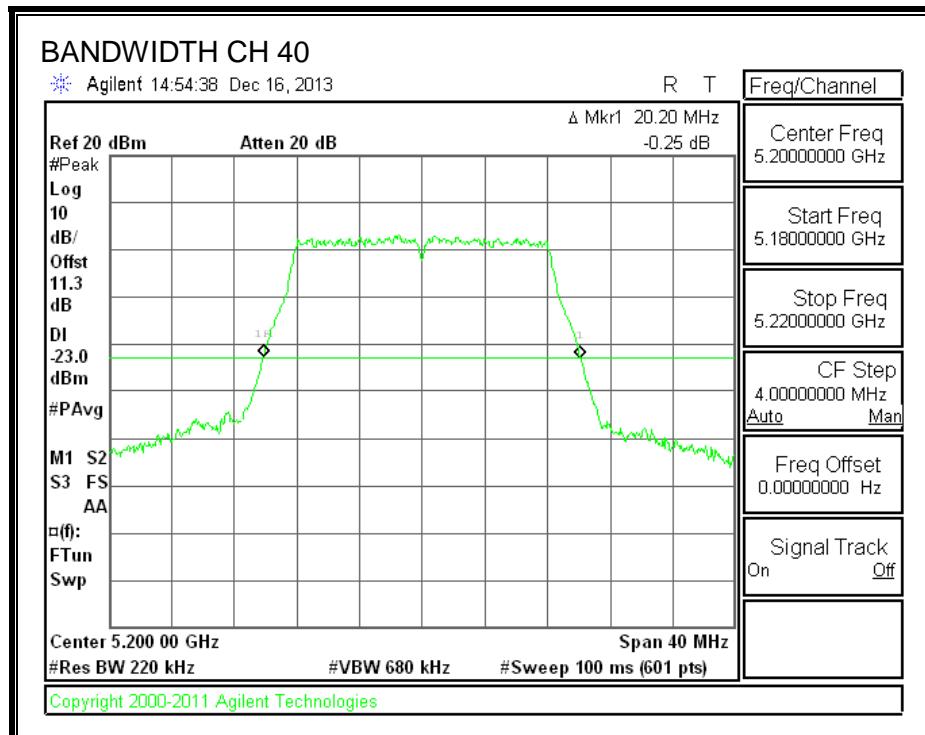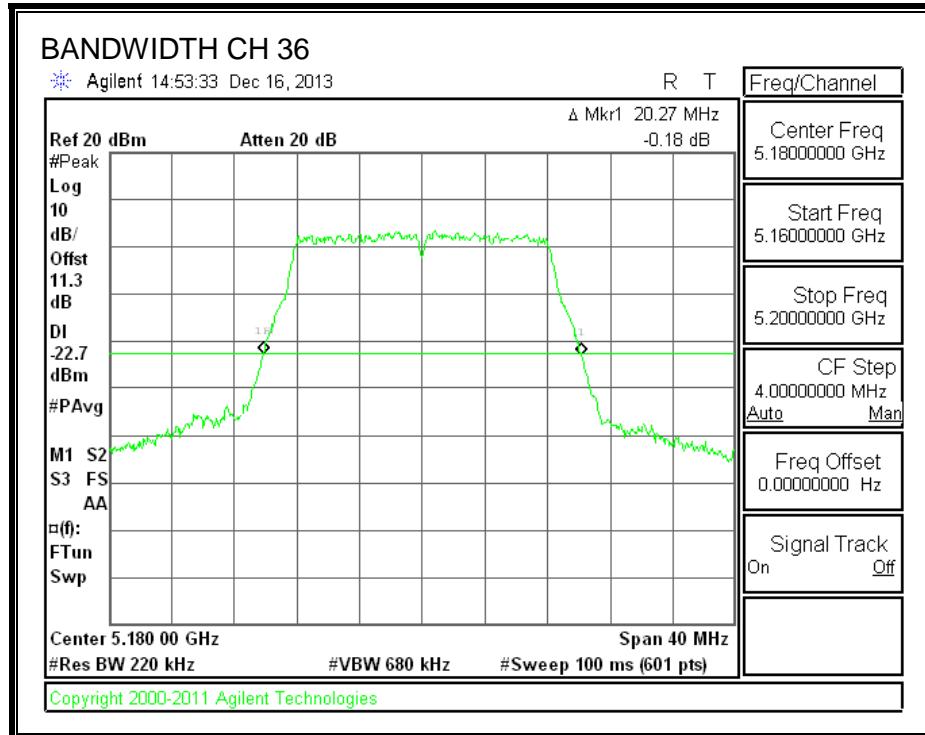

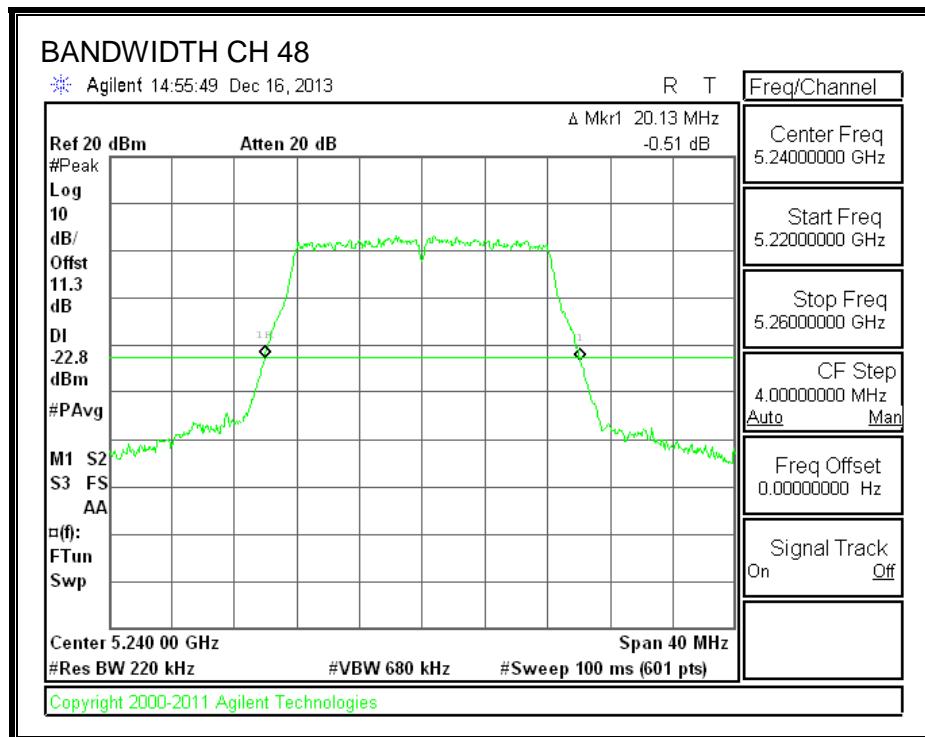



9.1.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
36	5180	16.4316
40	5200	16.4541
48	5240	16.4236

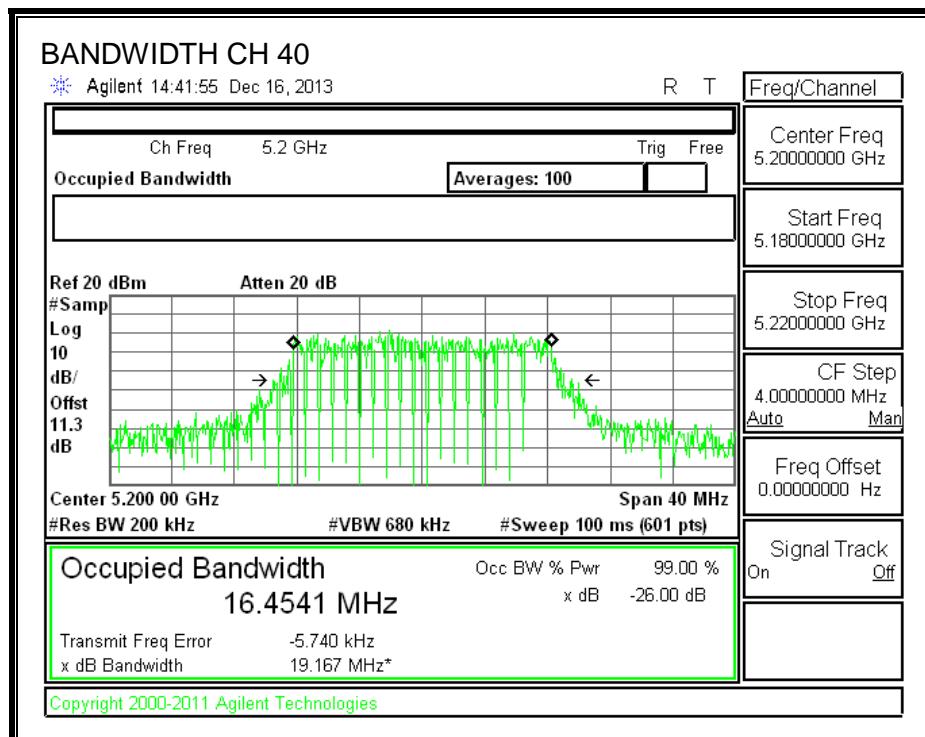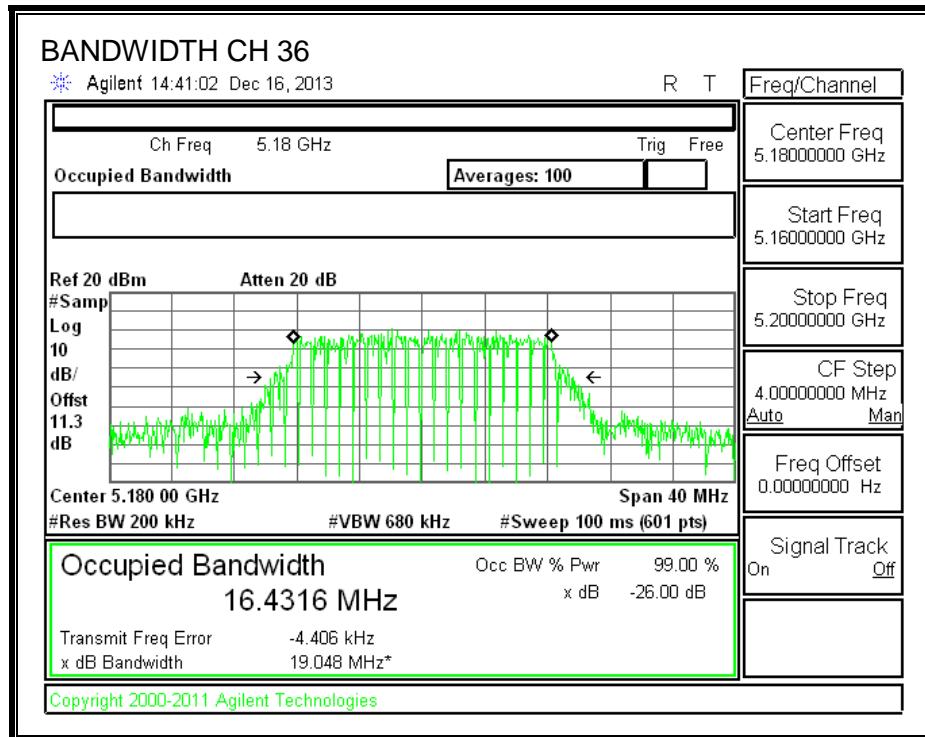

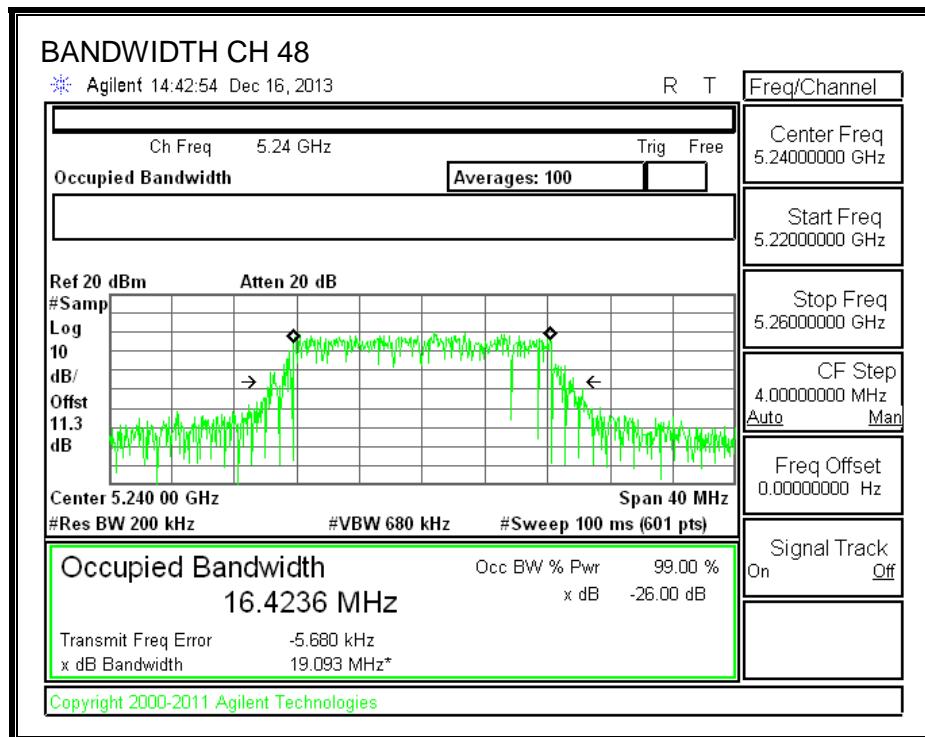

9.1.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
36	5180	12.45
40	5200	13.92
48	5240	13.60

9.1.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
36	5180	20.3	16.4	2.25
40	5200	20.2	16.5	2.25
48	5240	20.1	16.4	2.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm)	IC eirp PSD Limit (dBm)	PSD Limit (dBm)
36	5180	17.00	22.16	19.91	17.00	4.00	10.00	4.00
40	5200	17.00	22.16	19.91	17.00	4.00	10.00	4.00
48	5240	17.00	22.15	19.90	17.00	4.00	10.00	4.00



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
36	5180	12.87	13.09	17.00	-3.91
40	5200	14.24	14.46	17.00	-2.54
48	5240	14.14	14.36	17.00	-2.64

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
36	5180	1.70	1.92	4.00	-2.08
40	5200	3.76	3.98	4.00	-0.02
48	5240	3.71	3.93	4.00	-0.07

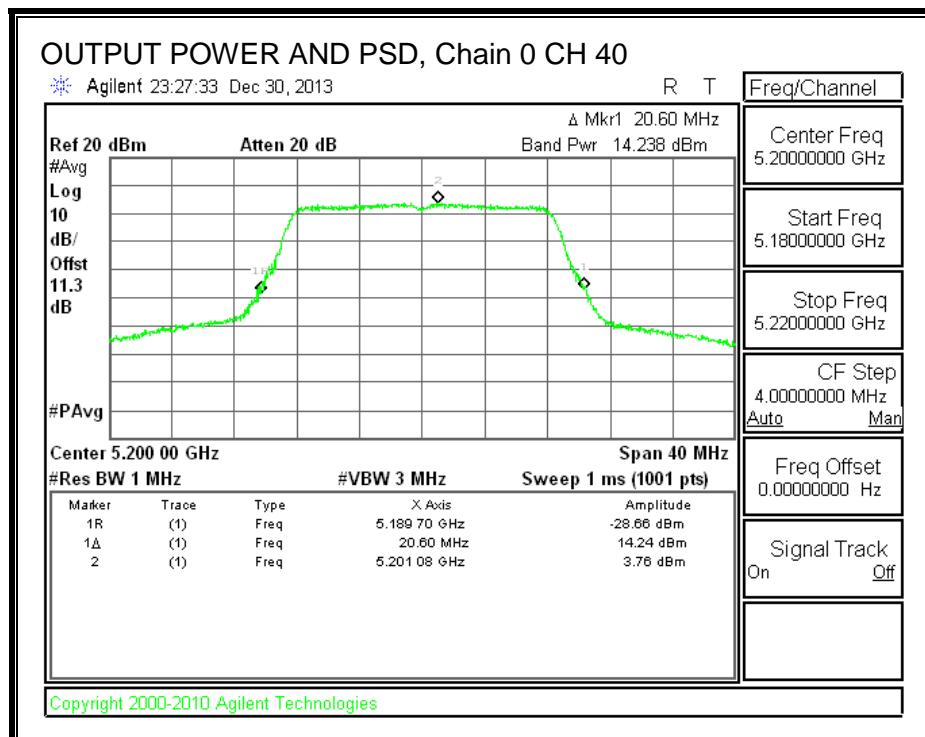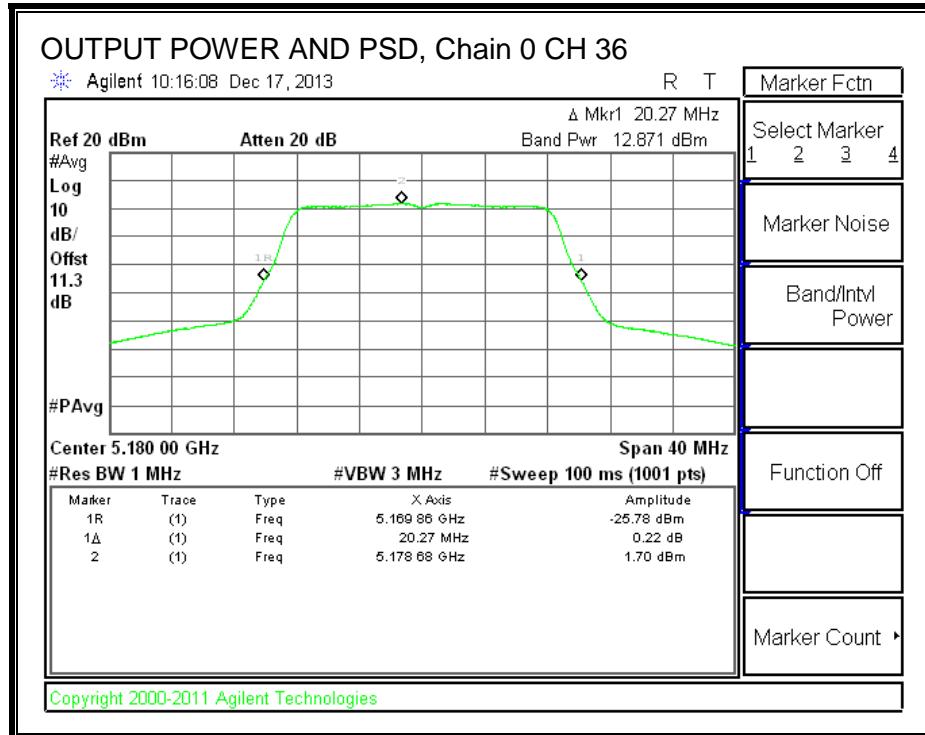

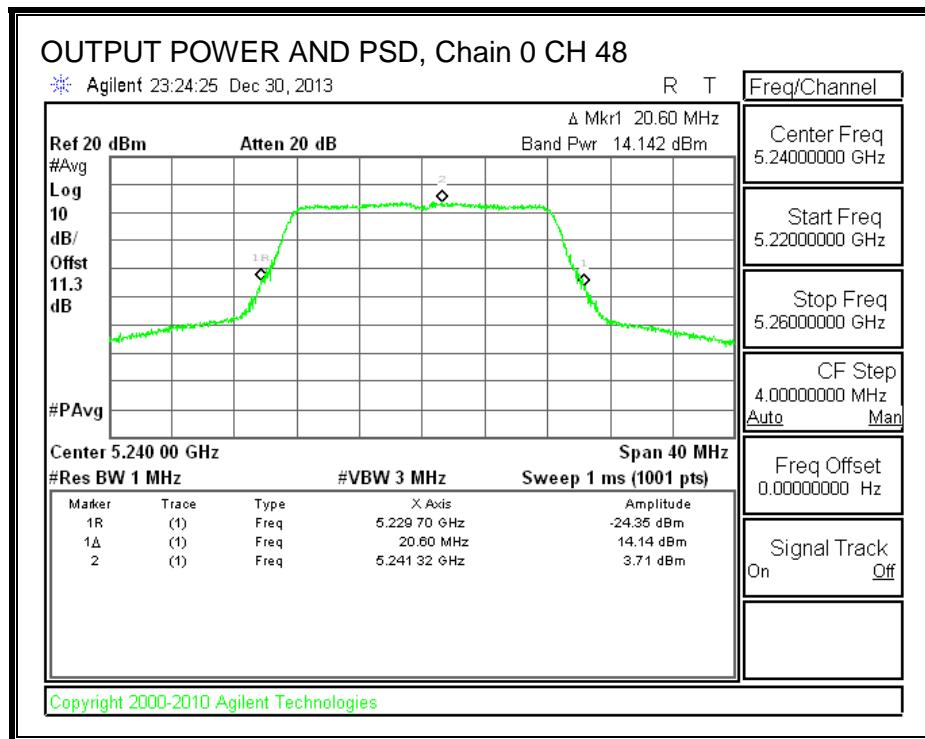

9.2. 802.11n HT20 1TX SISO MODE IN THE 5.2 GHz BAND



9.2.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	20.53
40	5200	20.40
48	5240	20.60

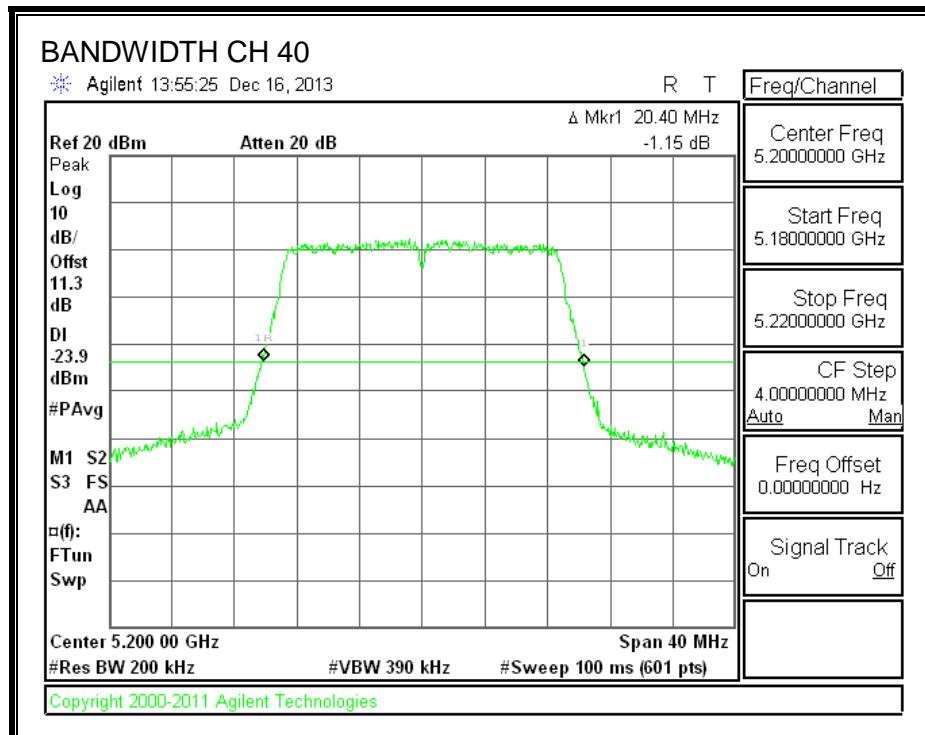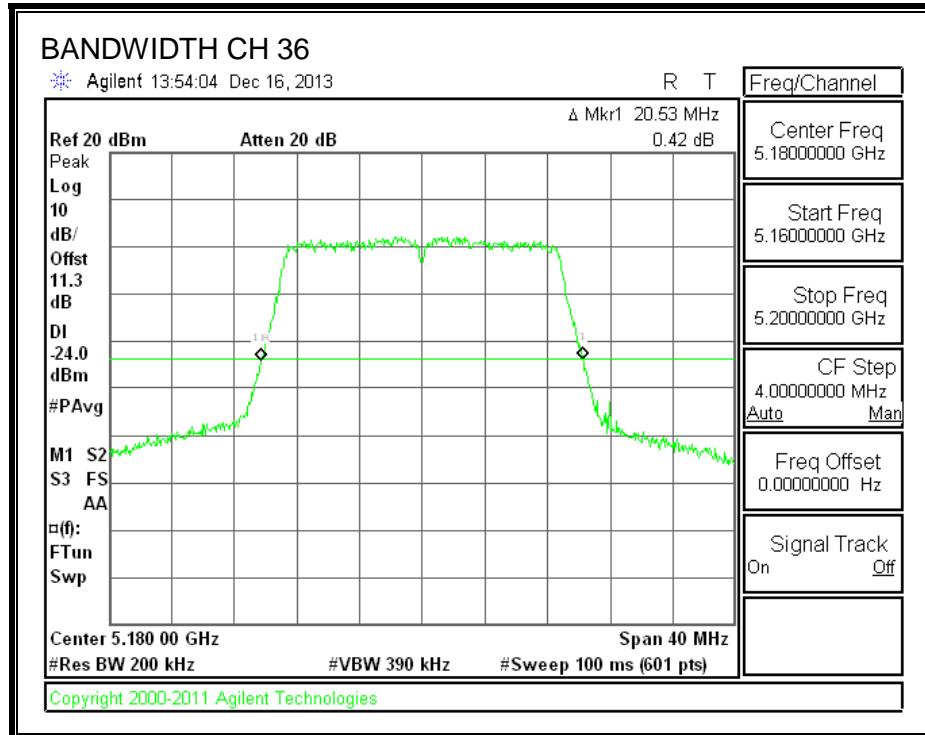

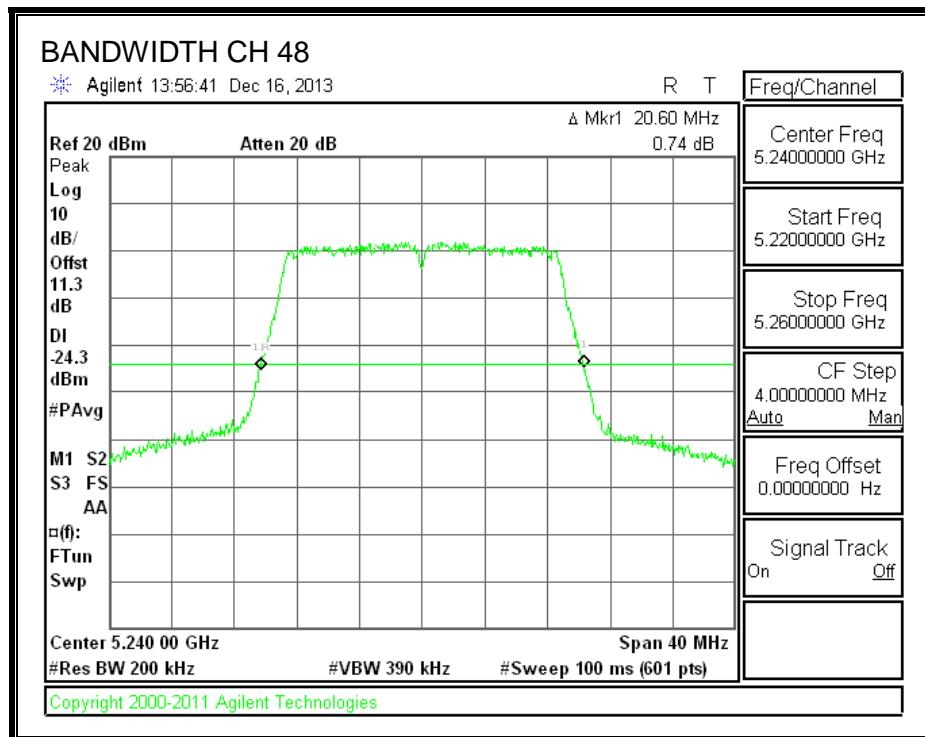



9.2.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
36	5180	17.6300
40	5200	17.6118
48	5240	17.6361

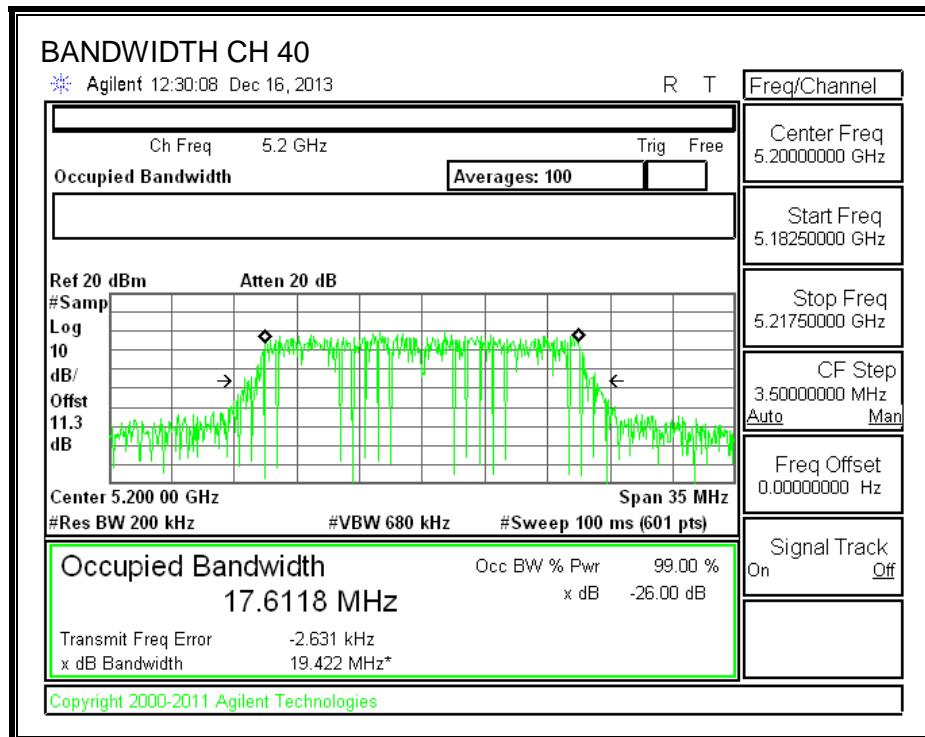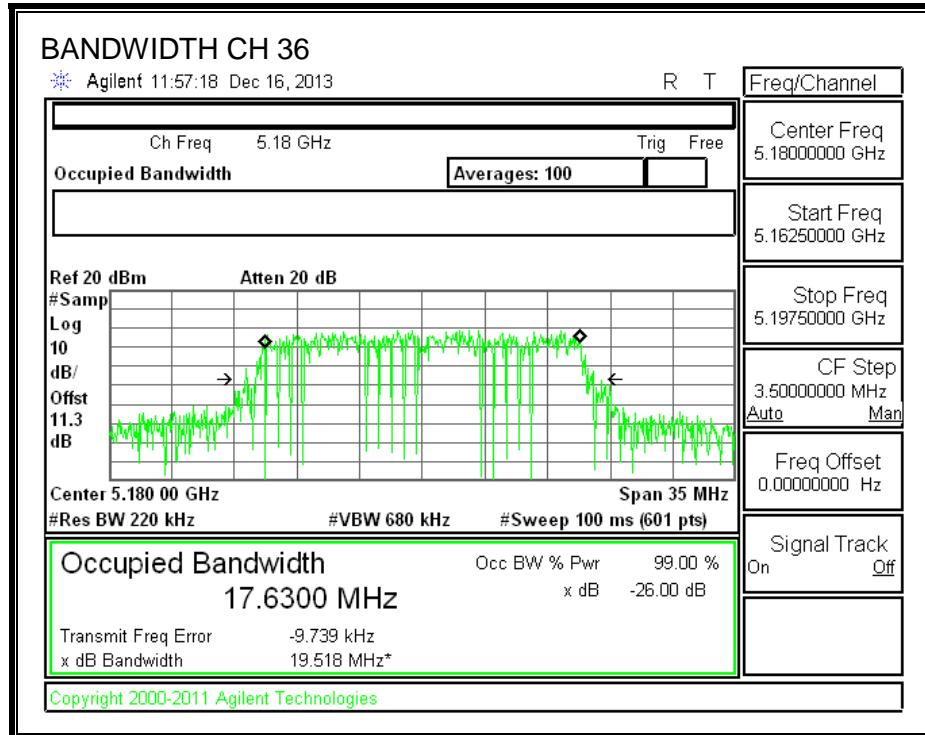

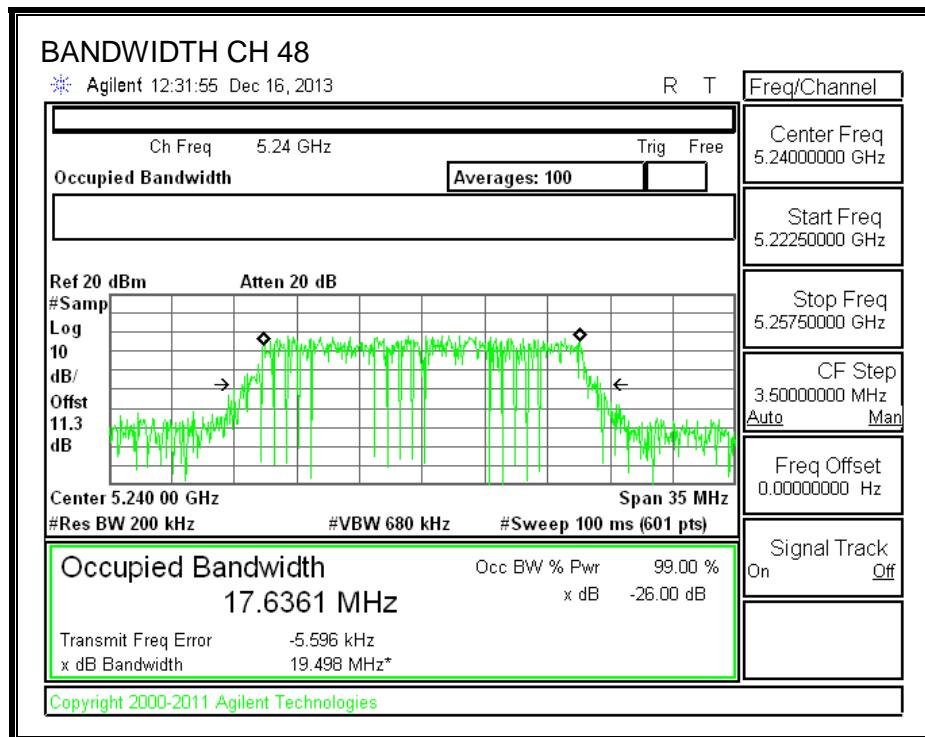

9.2.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
36	5180	12.17
40	5200	14.05
48	5240	13.89

9.2.4. OUTPUT POWER AND PSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
36	5180	20.5	17.6	2.25
40	5200	20.4	17.6	2.25
48	5240	20.6	17.6	2.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PSD Limit (dBm)	IC eirp PSD Limit (dBm)	PSD Limit (dBm)
36	5180	17.00	22.46	20.21	17.00	4.00	10.00	4.00
40	5200	17.00	22.46	20.21	17.00	4.00	10.00	4.00
48	5240	17.00	22.46	20.21	17.00	4.00	10.00	4.00



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PSD
--------------------	------	--


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
36	5180	12.47	12.69	17.00	-4.31
40	5200	14.44	14.66	17.00	-2.34
48	5240	14.26	14.48	17.00	-2.52

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
36	5180	1.03	1.25	4.00	-2.75
40	5200	3.69	3.91	4.00	-0.09
48	5240	3.23	3.45	4.00	-0.55

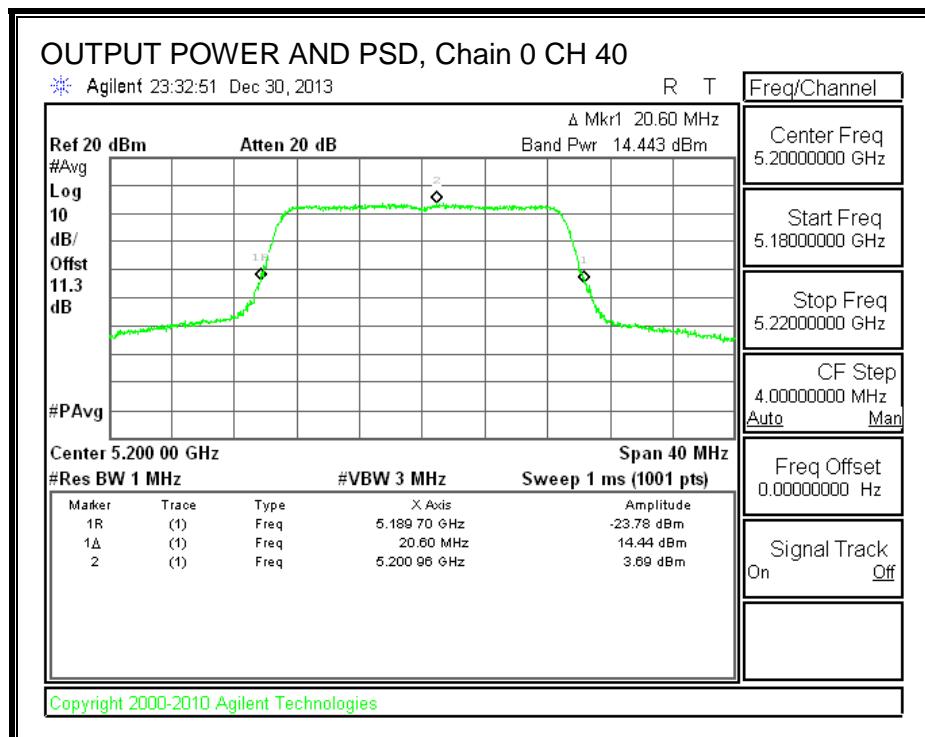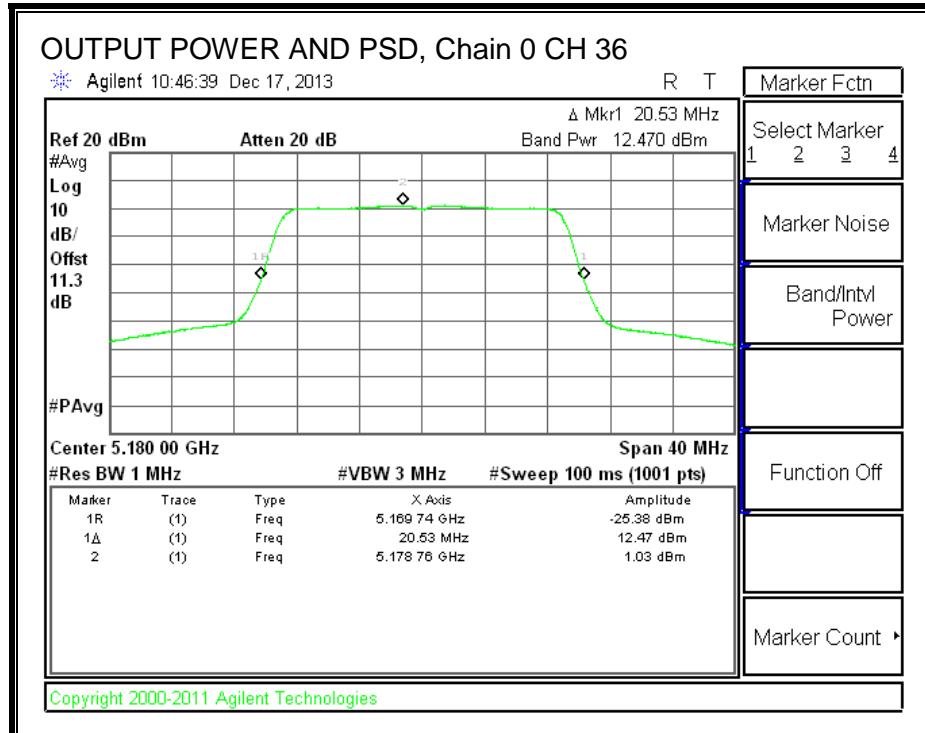

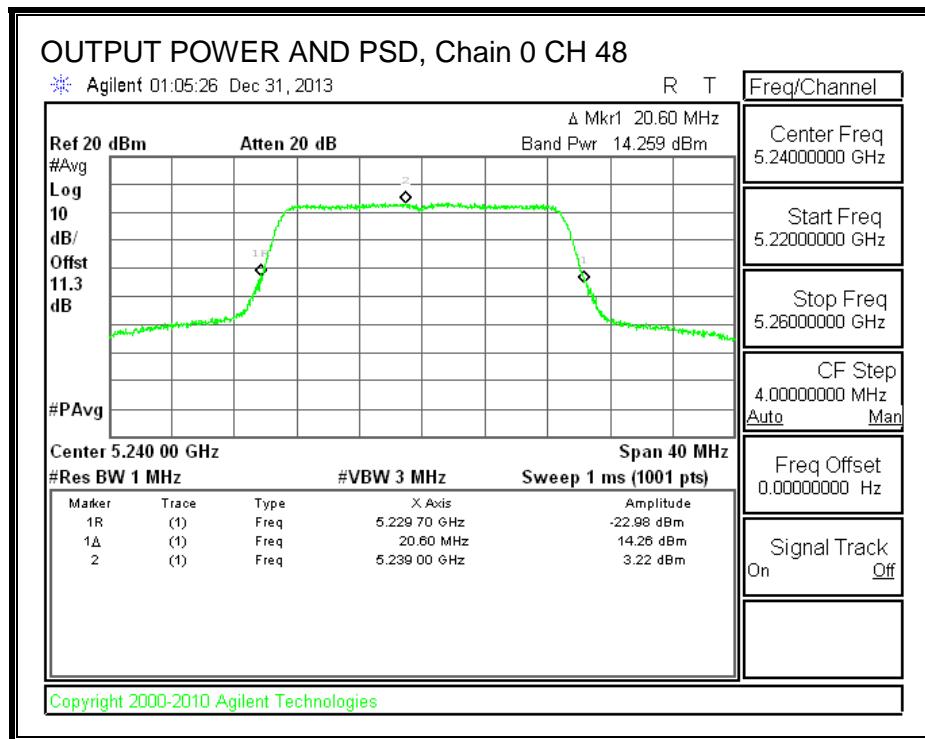

9.3. 802.11n HT20 3TX CDD MODE IN THE 5.2 GHz BAND

9.3.1. 26 dB BANDWIDTH

LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
36	5180	20.52	20.32	20.40
40	5200	20.48	20.40	20.48
48	5240	20.52	20.48	20.44


26 dB BANDWIDTH



26 dB BANDWIDTH, Chain 0

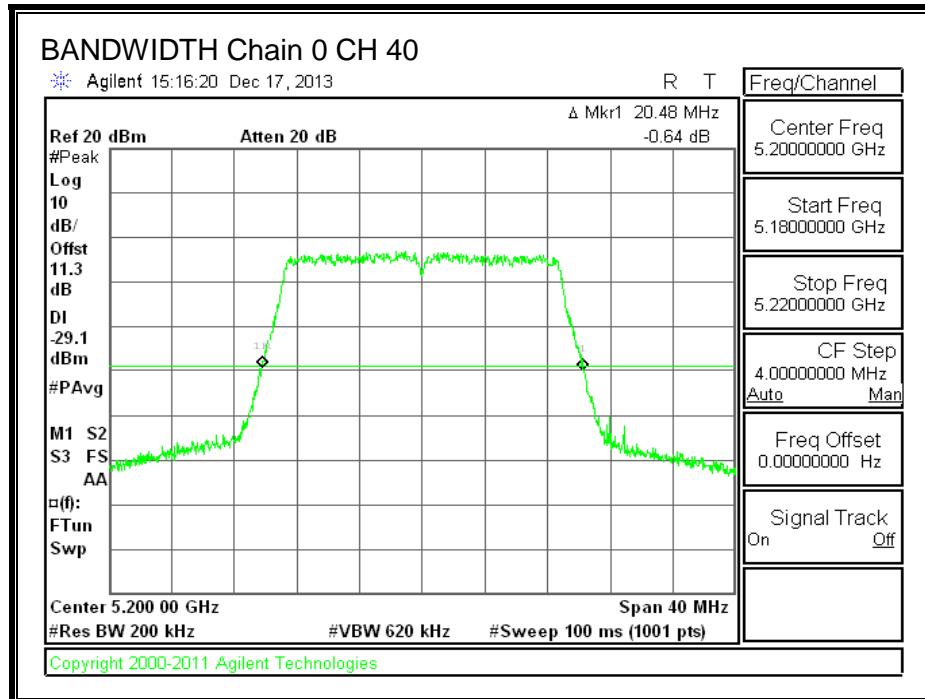
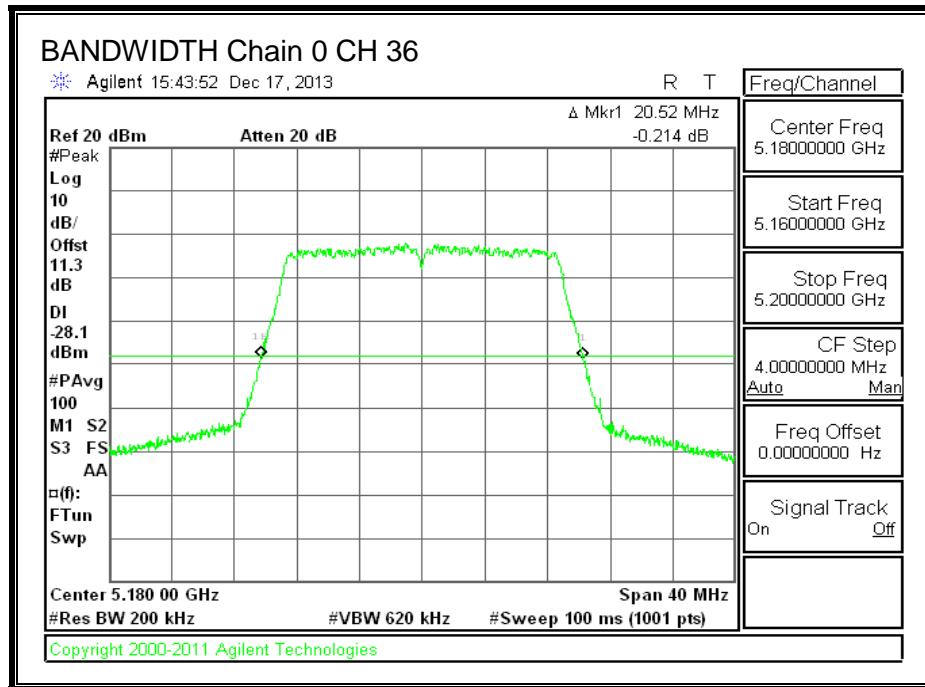


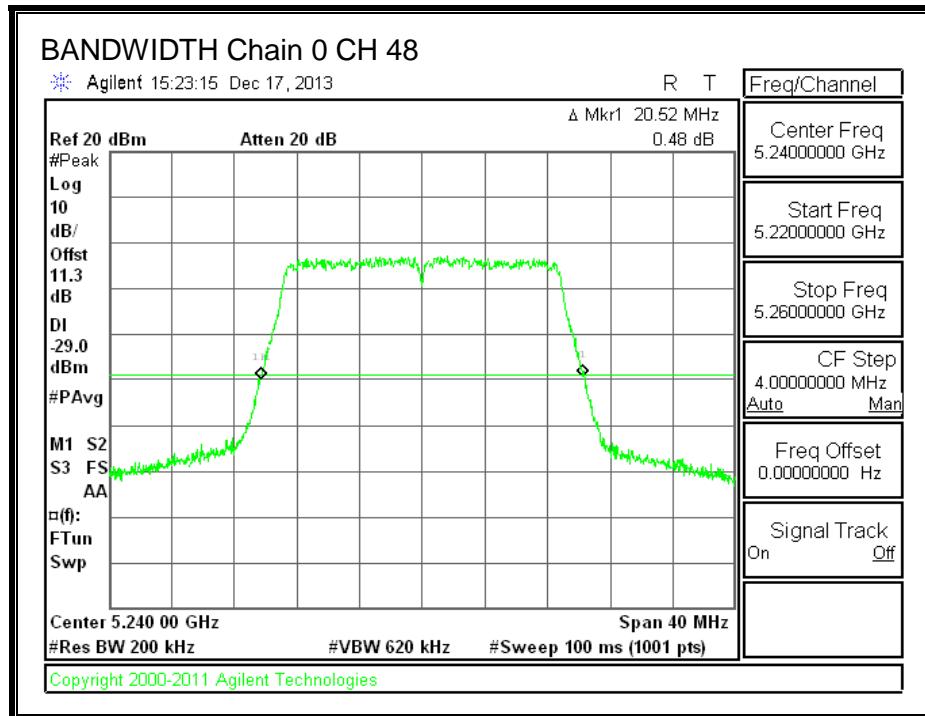


26 dB BANDWIDTH, Chain 1

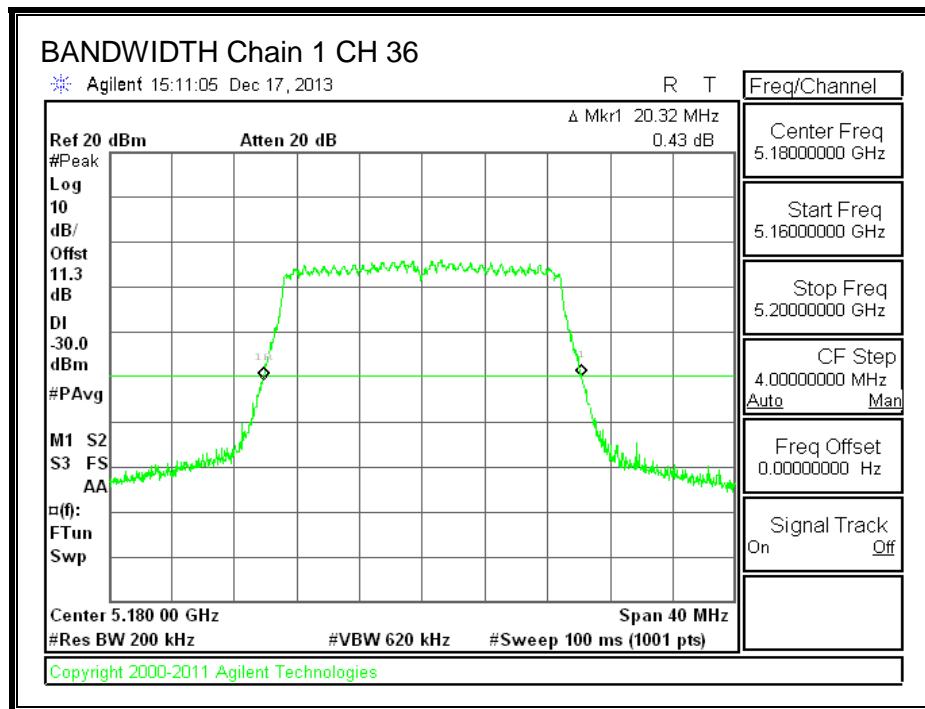

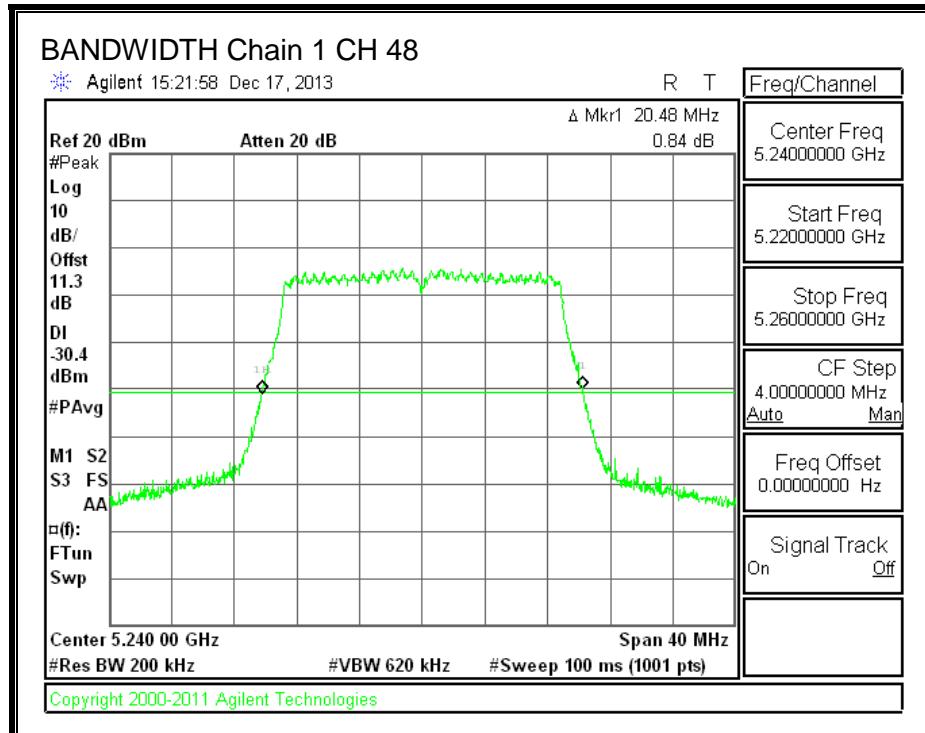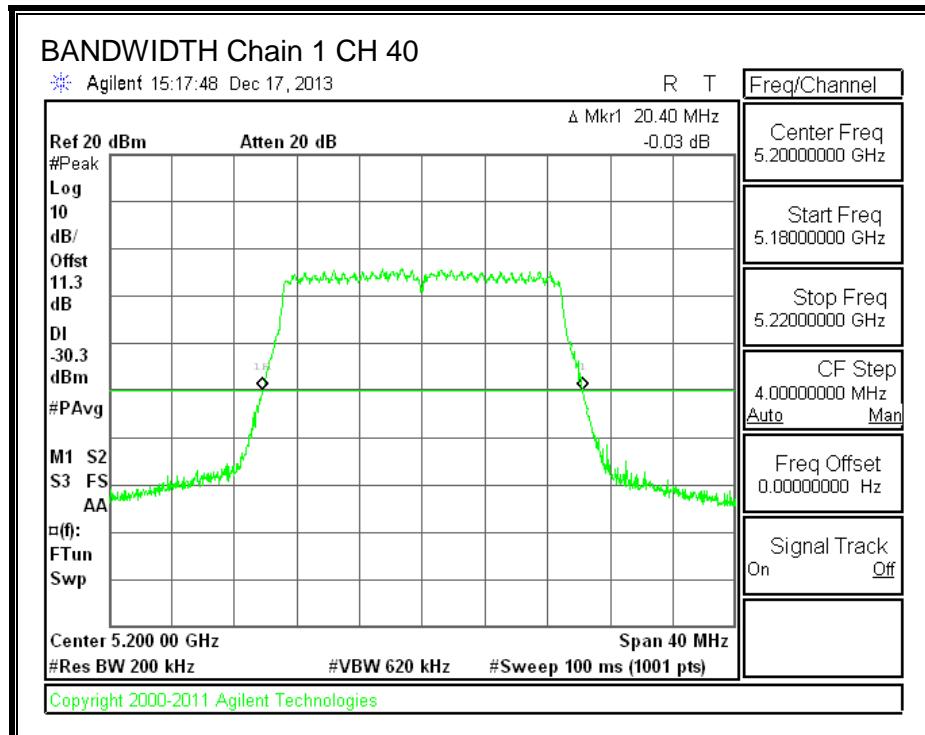

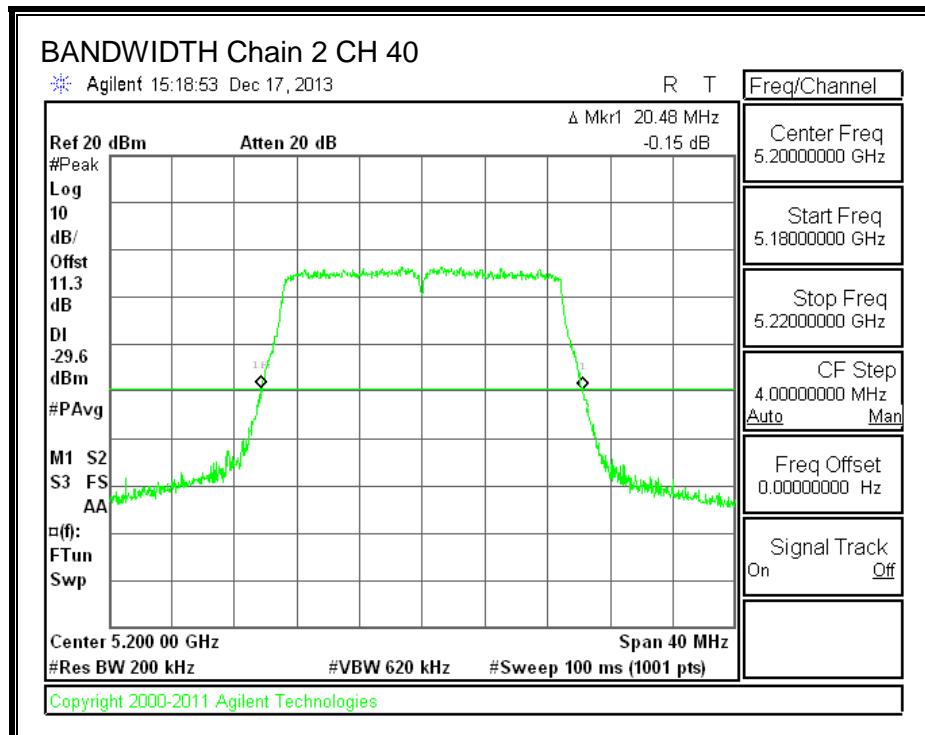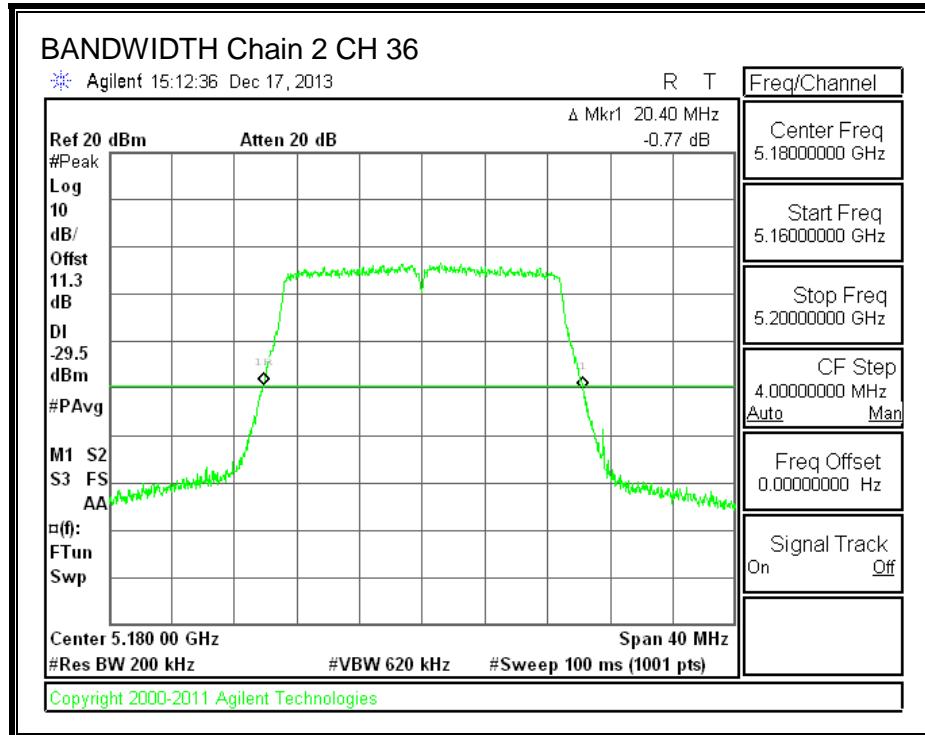

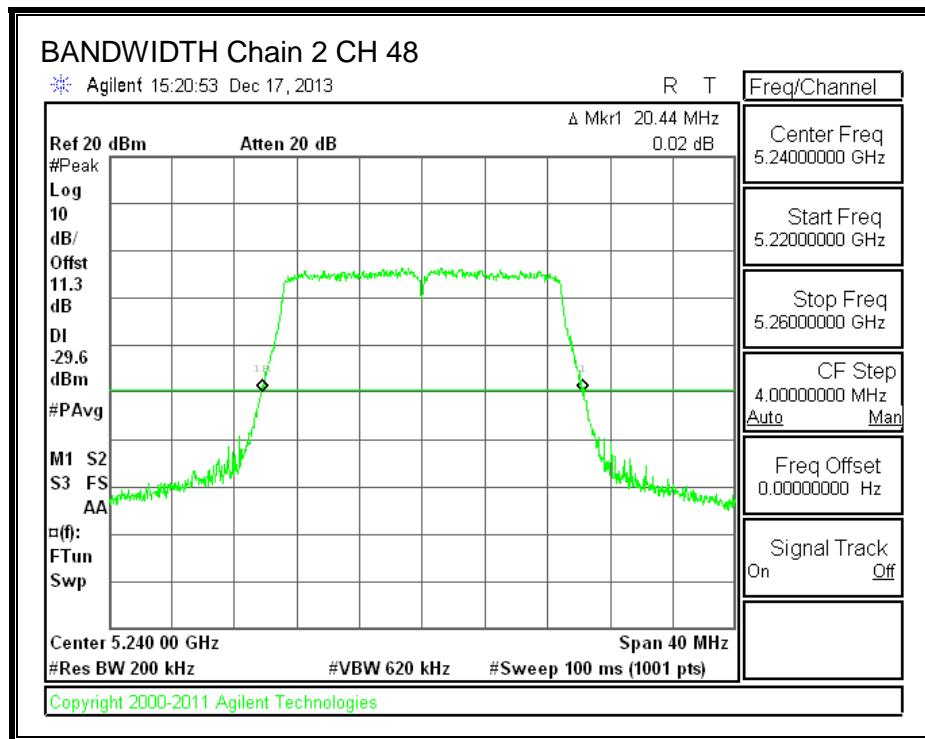

9.3.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
36	5180	17.6398	17.6339	17.6331
40	5200	17.6309	17.6385	17.6374
48	5240	17.6625	17.6516	17.6454



99% BANDWIDTH, Chain 0

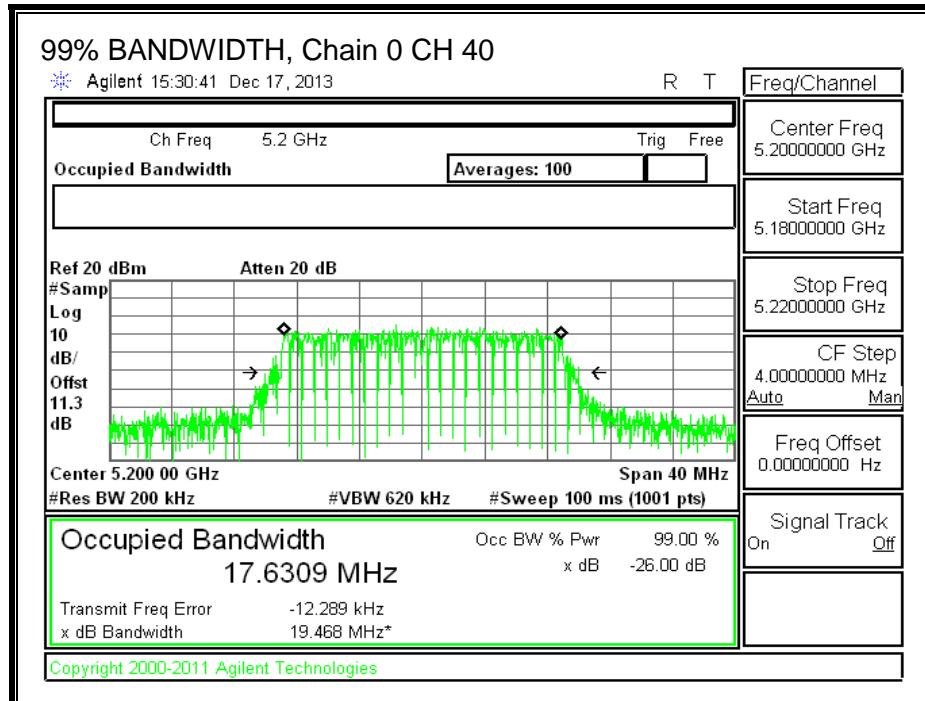
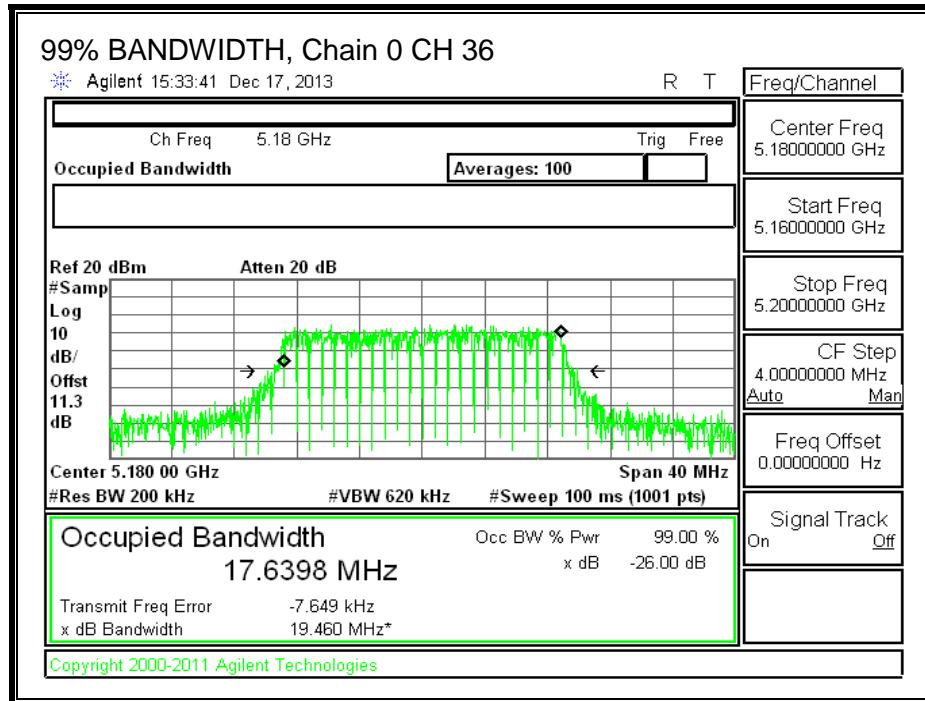


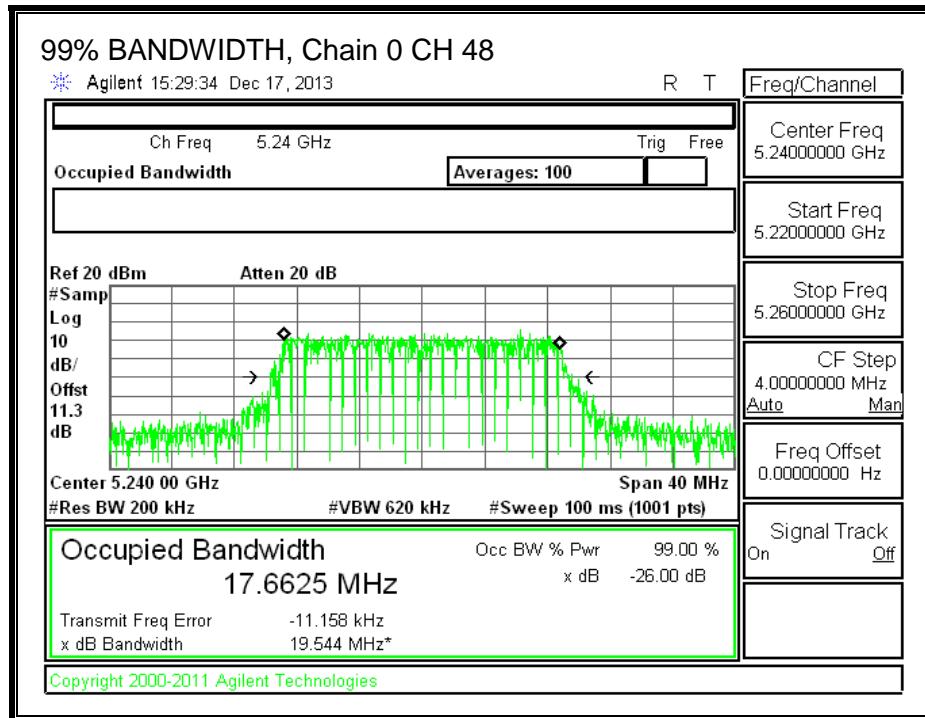


99% BANDWIDTH, Chain 1

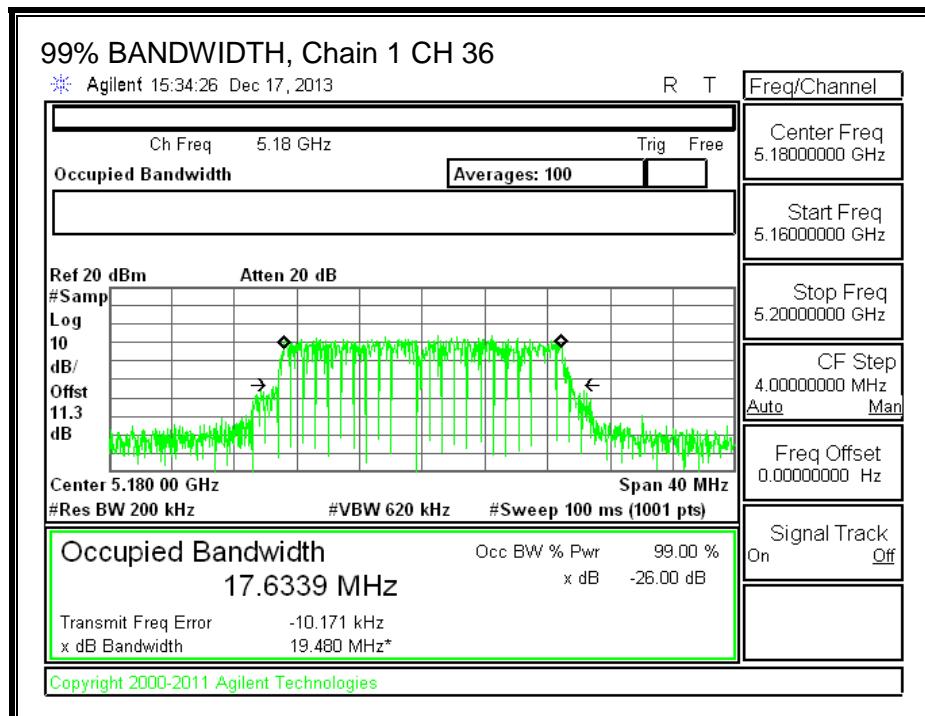

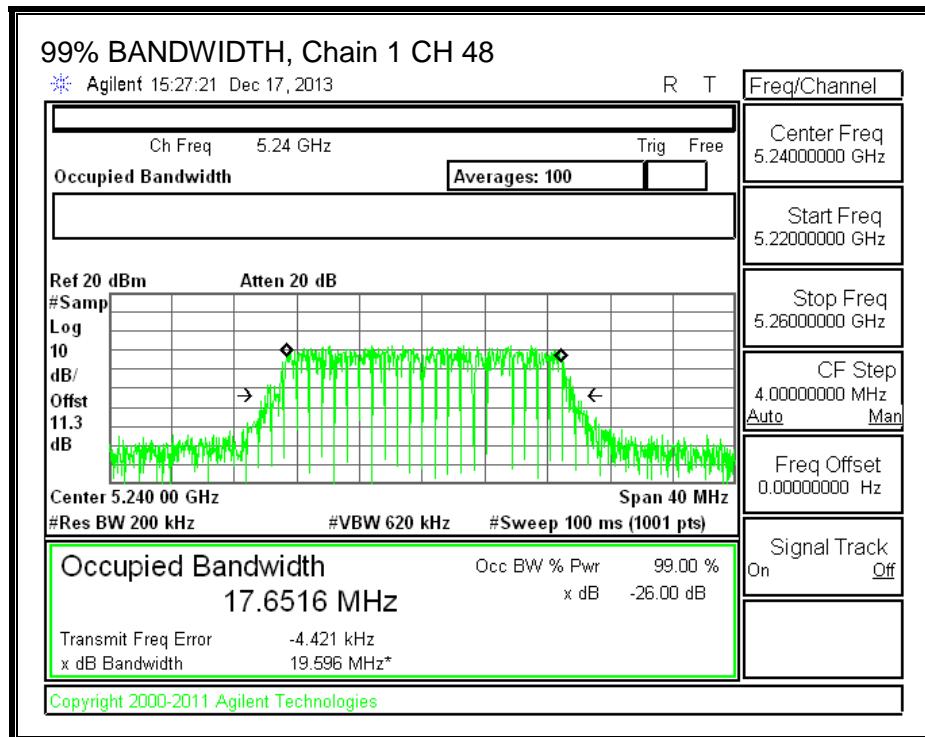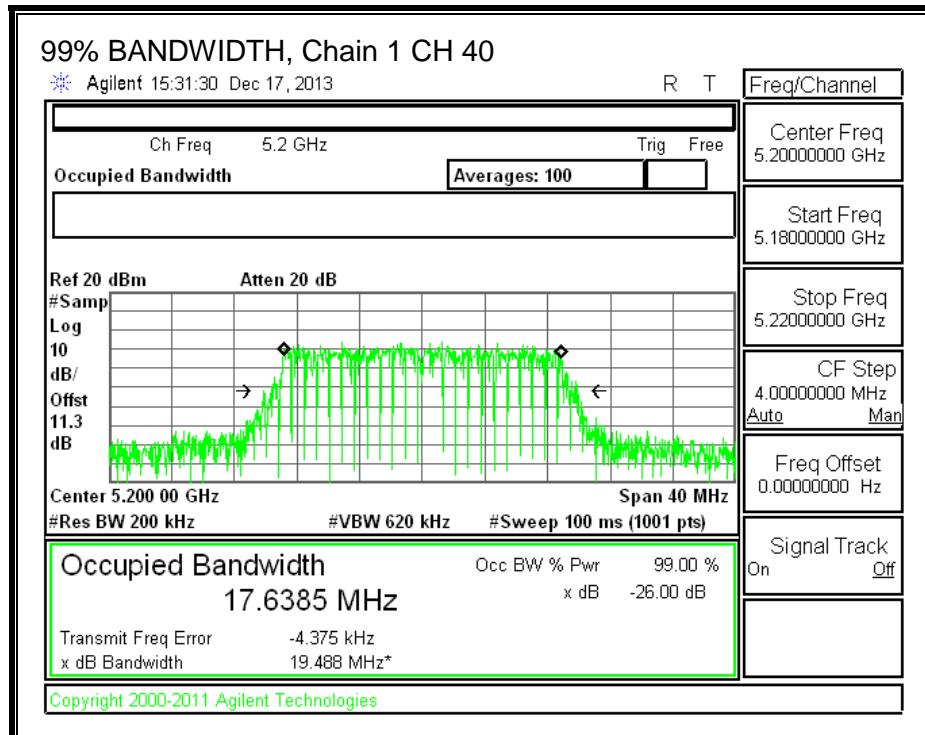

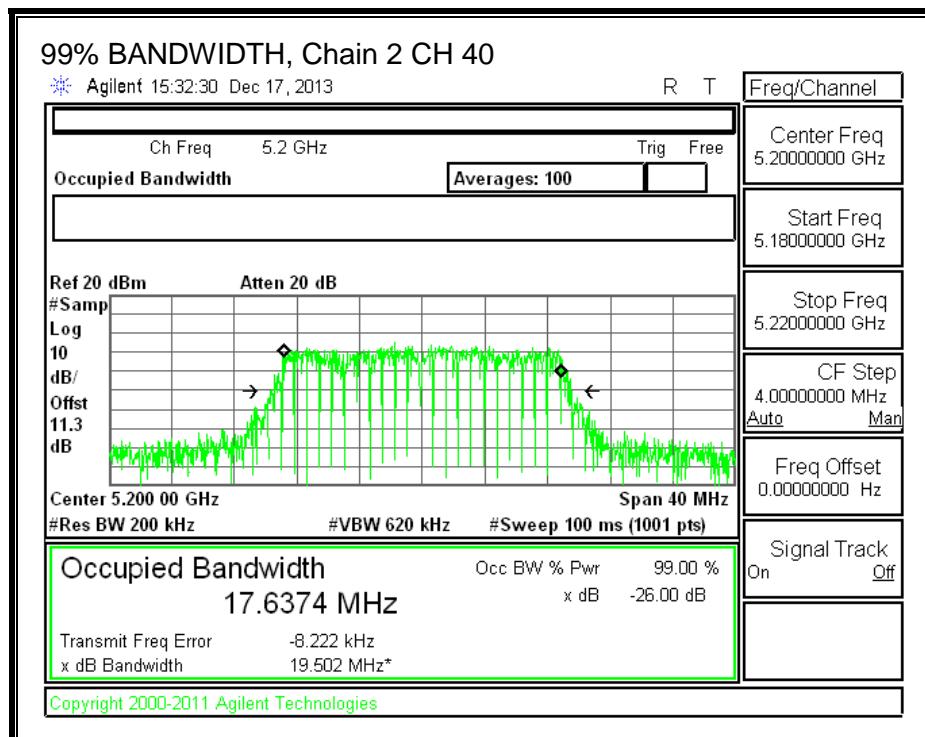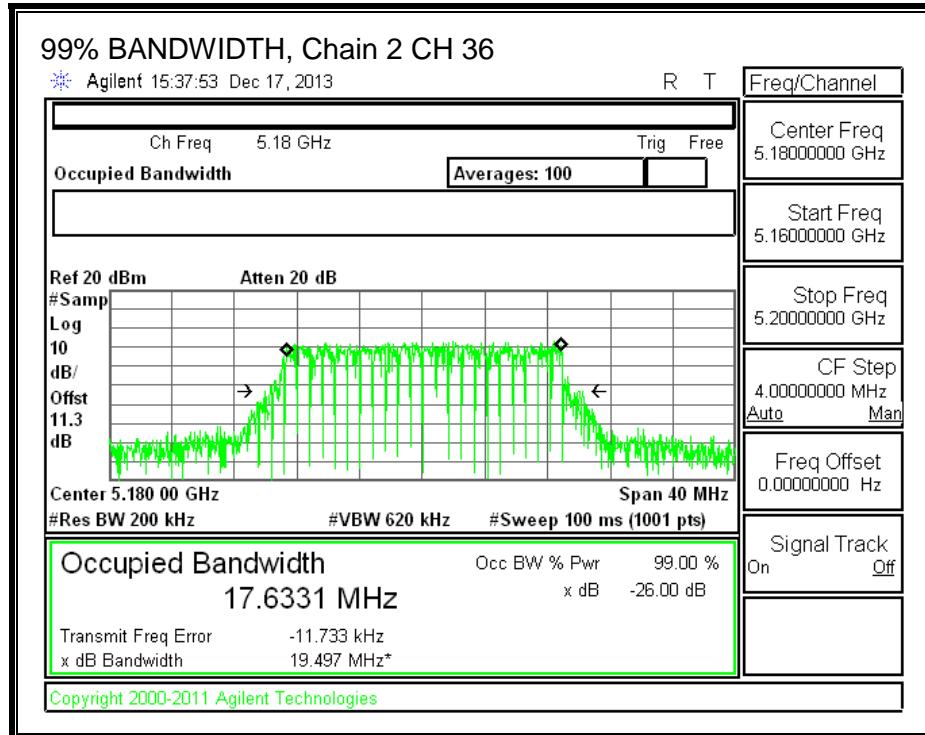

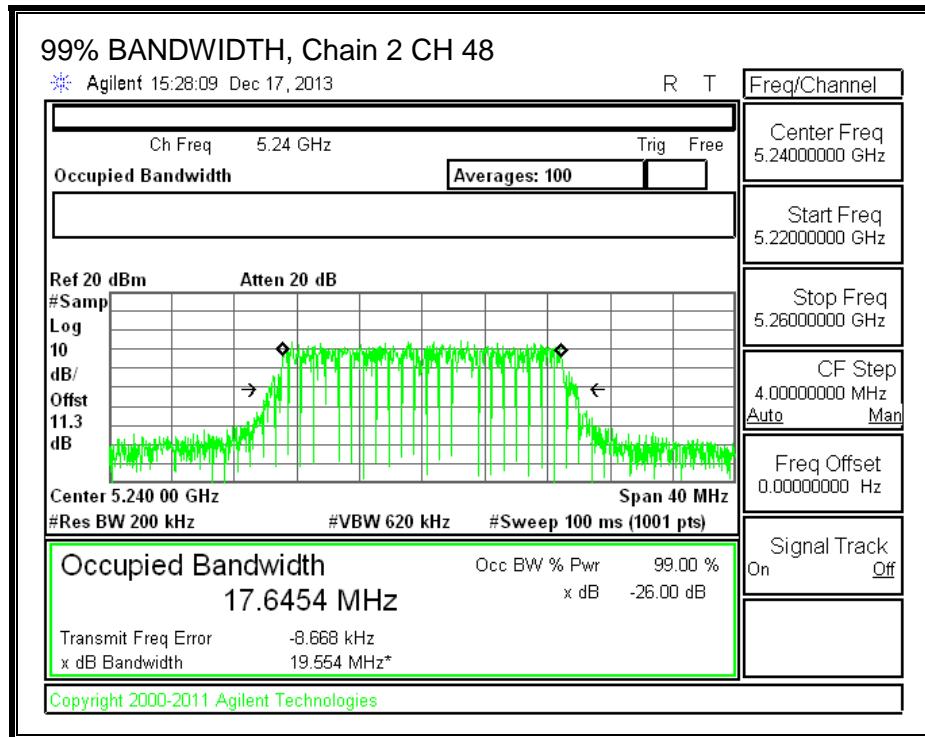

9.3.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
36	5180	7.48	6.12	6.97	11.66
40	5200	8.38	7.55	8.43	12.91
48	5240	8.21	7.09	8.24	12.65

9.3.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

Antenna Gain (dBi)	10 * Log (3 chains) (dB)	Correlated Chains Directional Gain (dBi)
2.25	4.77	7.02

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW	Min 99% BW	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
36	5180	20.52	17.6398	2.25	7.02
40	5200	20.48	17.6309	2.25	7.02
48	5240	20.52	17.6625	2.25	7.02

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
36	5180	17.00	22.46	20.21	17.00	2.98	10.00	2.98
40	5200	17.00	22.46	20.21	17.00	2.98	10.00	2.98
48	5240	17.00	22.47	20.22	17.00	2.98	10.00	2.98



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
36	5180	7.69	6.54	7.00	12.09	17.00	-4.91
40	5200	8.84	7.72	8.60	13.40	17.00	-3.60
48	5240	8.41	7.40	8.21	13.02	17.00	-3.98


PPSD Results



Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
36	5180	-3.77	-4.79	-4.41	0.69	2.98	-2.29
40	5200	-2.19	-3.03	-2.51	2.43	2.98	-0.55
48	5240	-2.34	-3.46	-2.32	2.32	2.98	-0.66

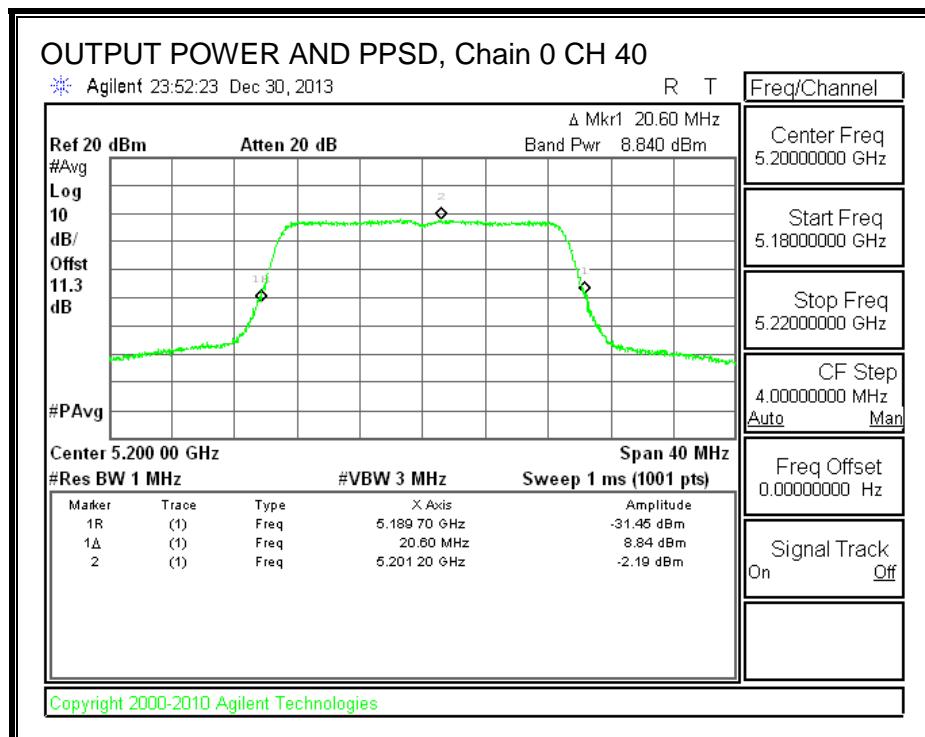
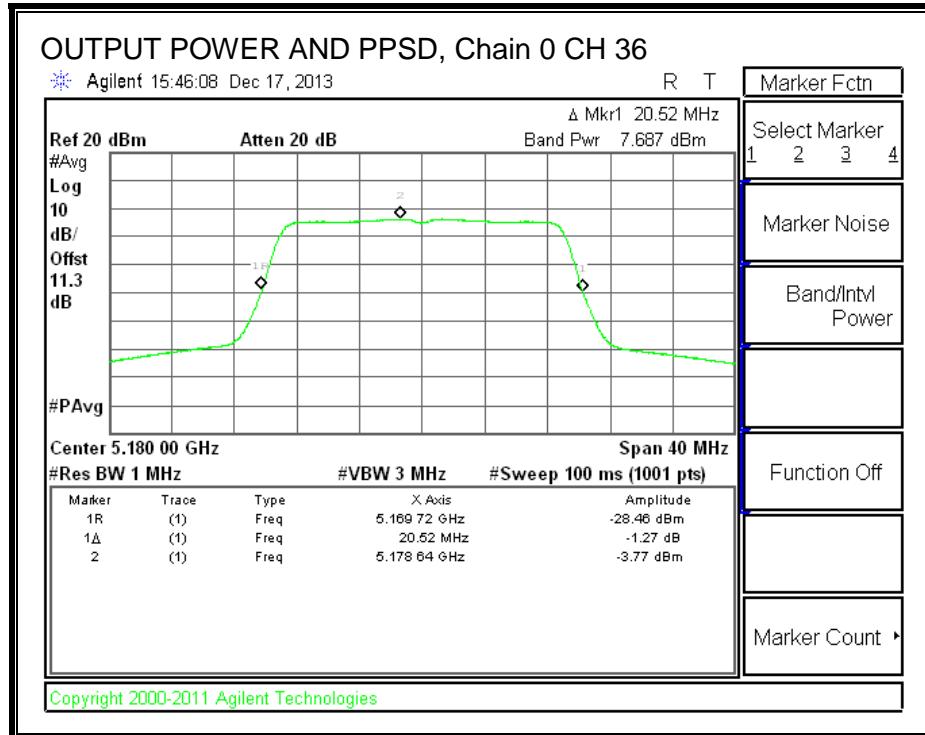


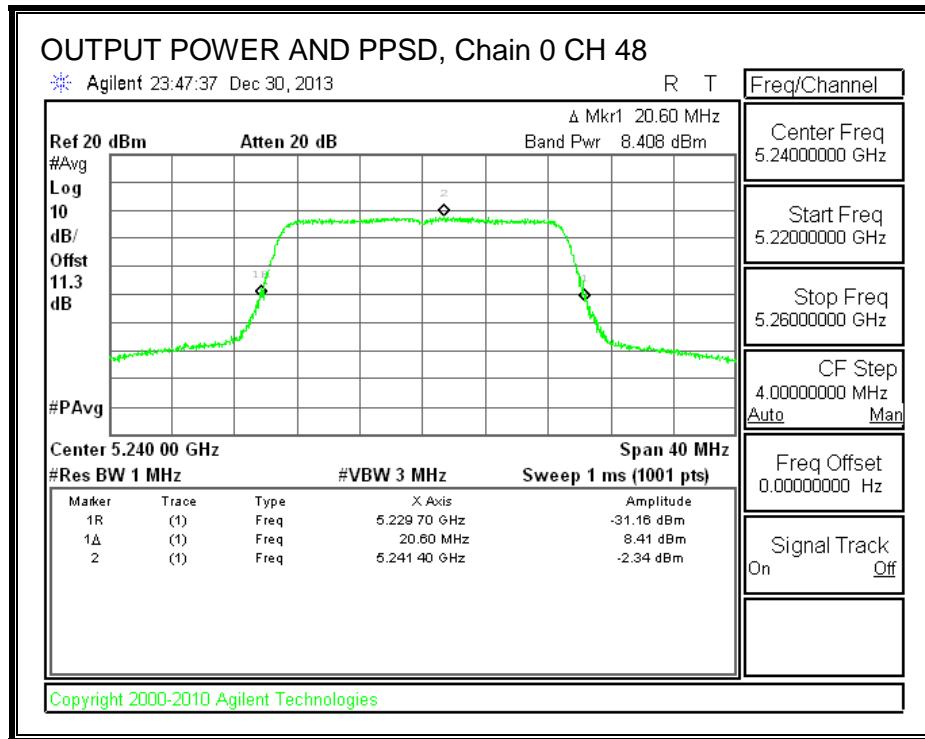


OUTPUT POWER AND PPSD, Chain 1

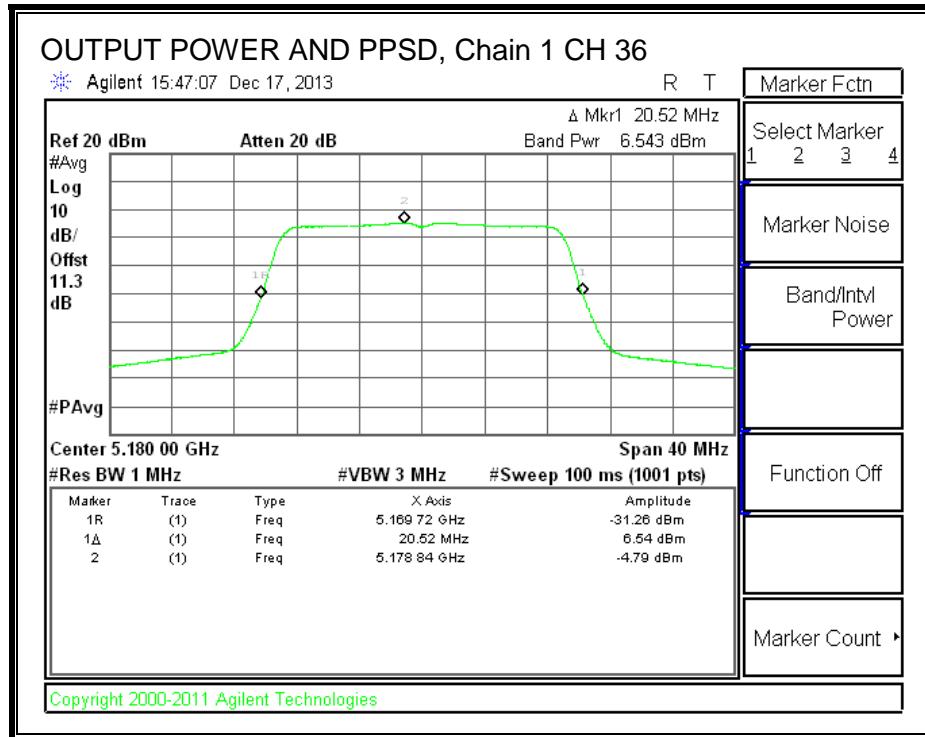

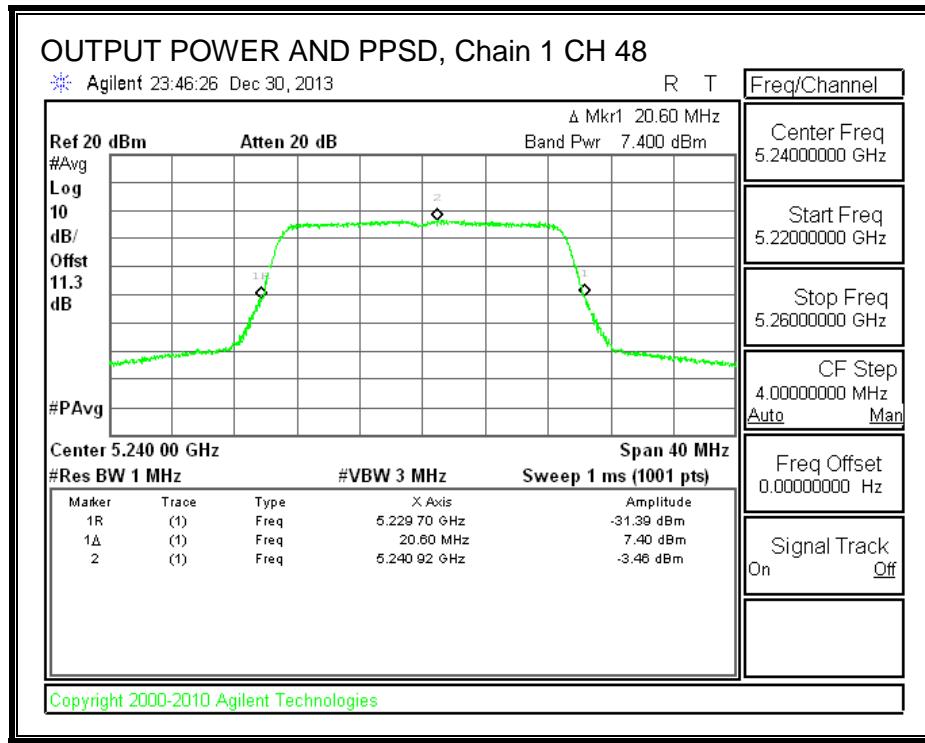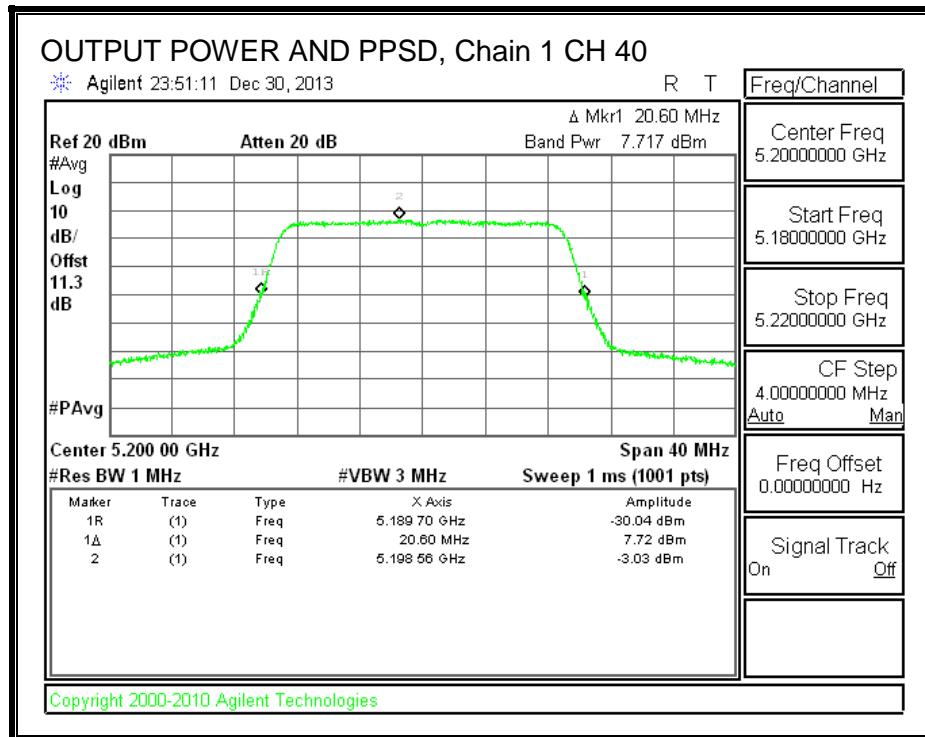

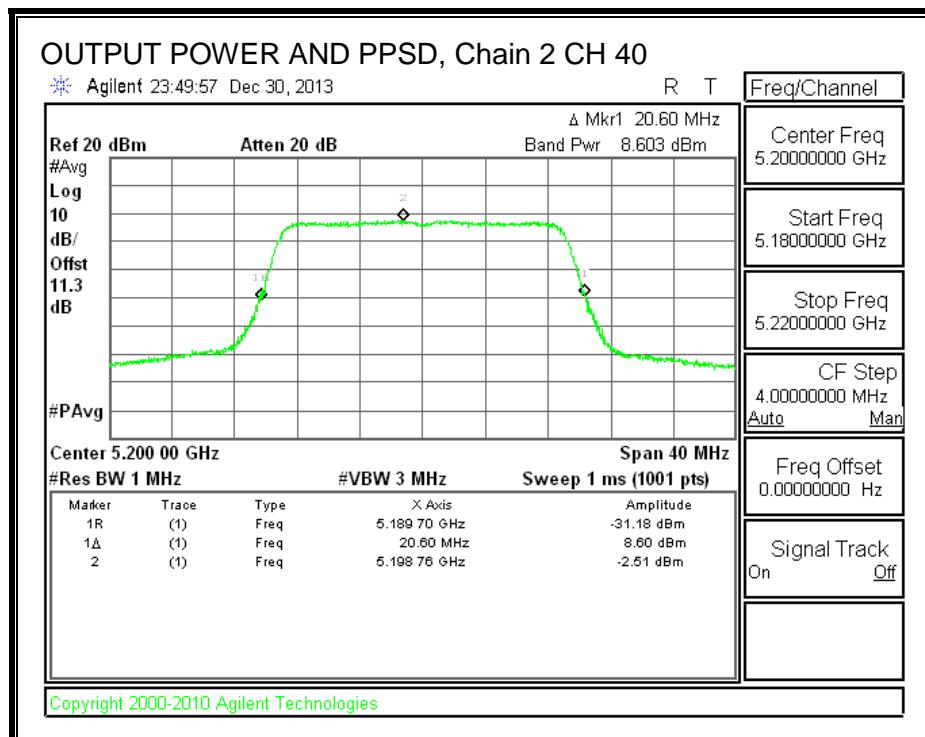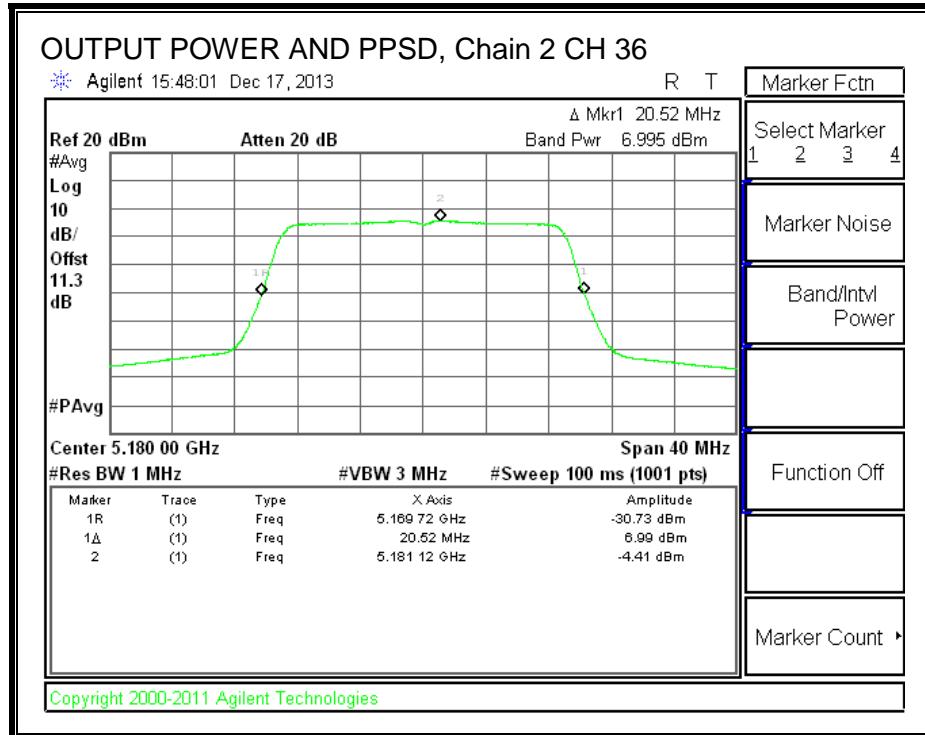

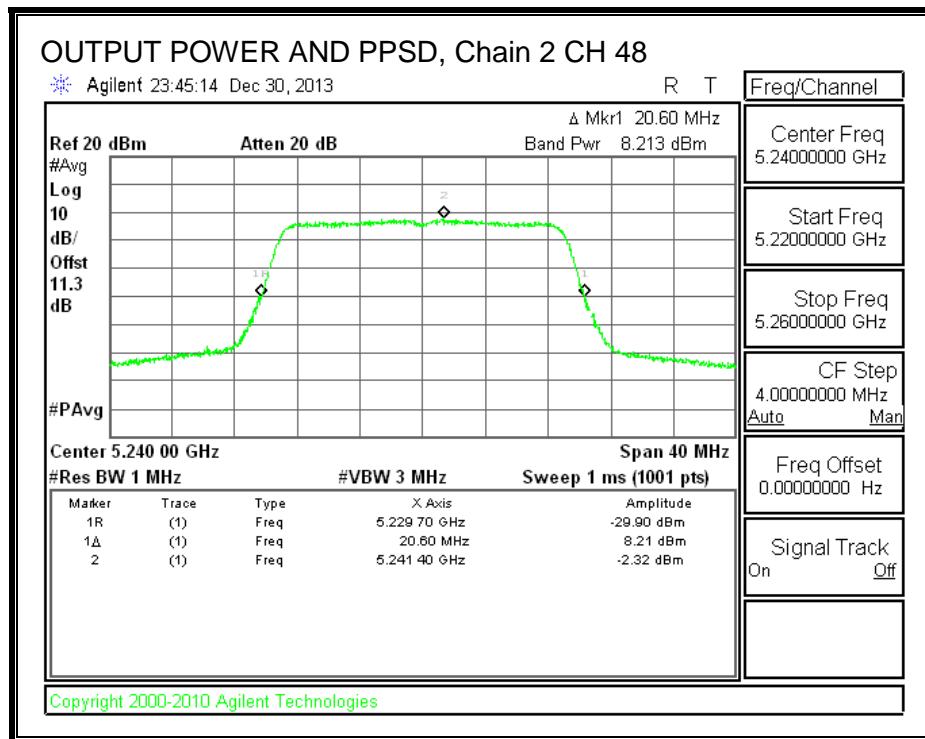

9.4. 802.11n HT20 3TX SDM MODE IN THE 5.2 GHz BAND

9.4.1. 26 dB BANDWIDTH

LIMITS



None; for reporting purposes only.


RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
36	5180	19.96	20.32	20.40
40	5200	20.56	20.36	20.40
48	5240	20.52	20.36	20.44


26 dB BANDWIDTH



26 dB BANDWIDTH, Chain 0

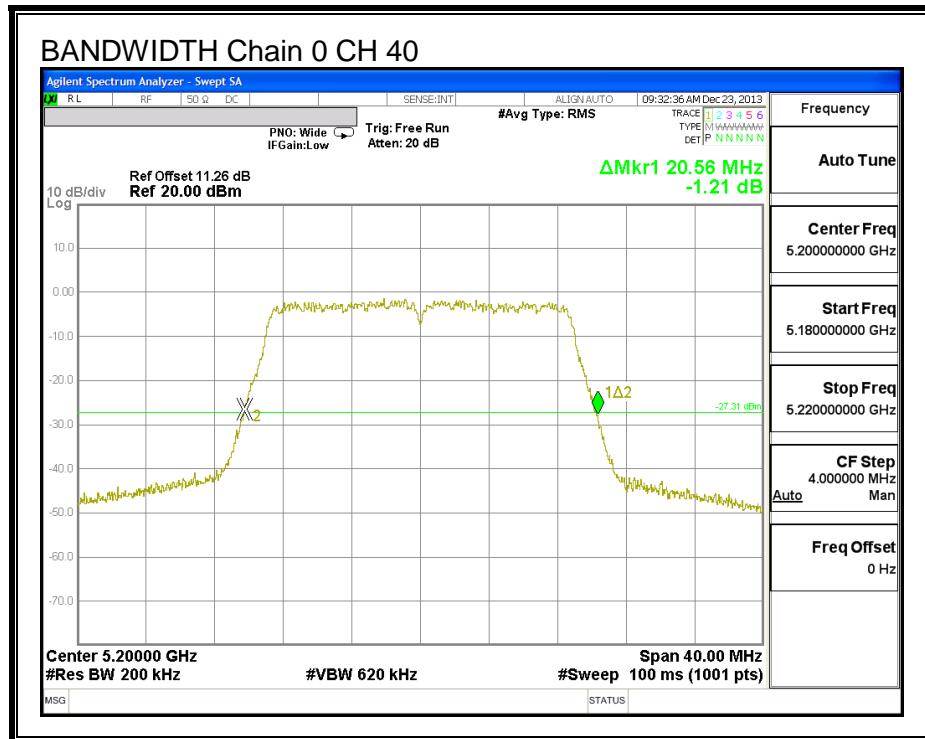
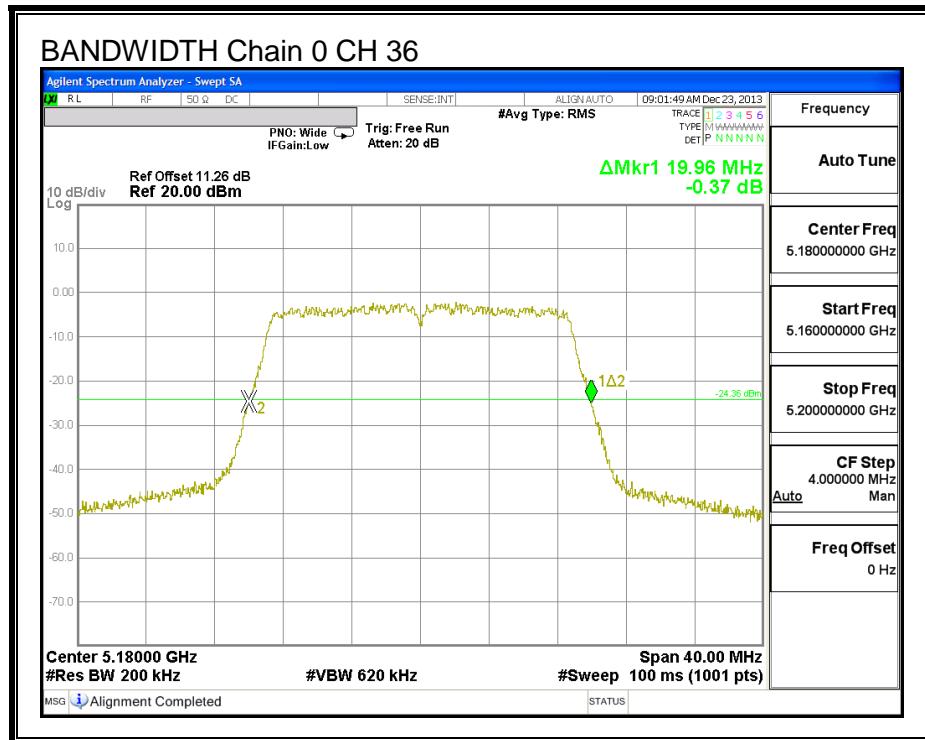


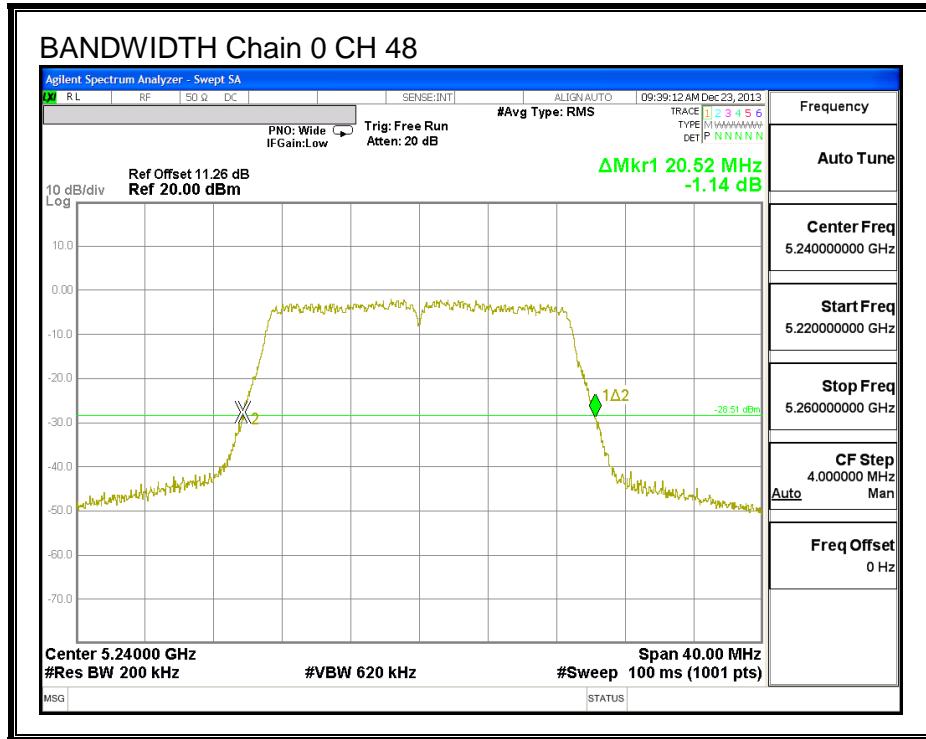


26 dB BANDWIDTH, Chain 1

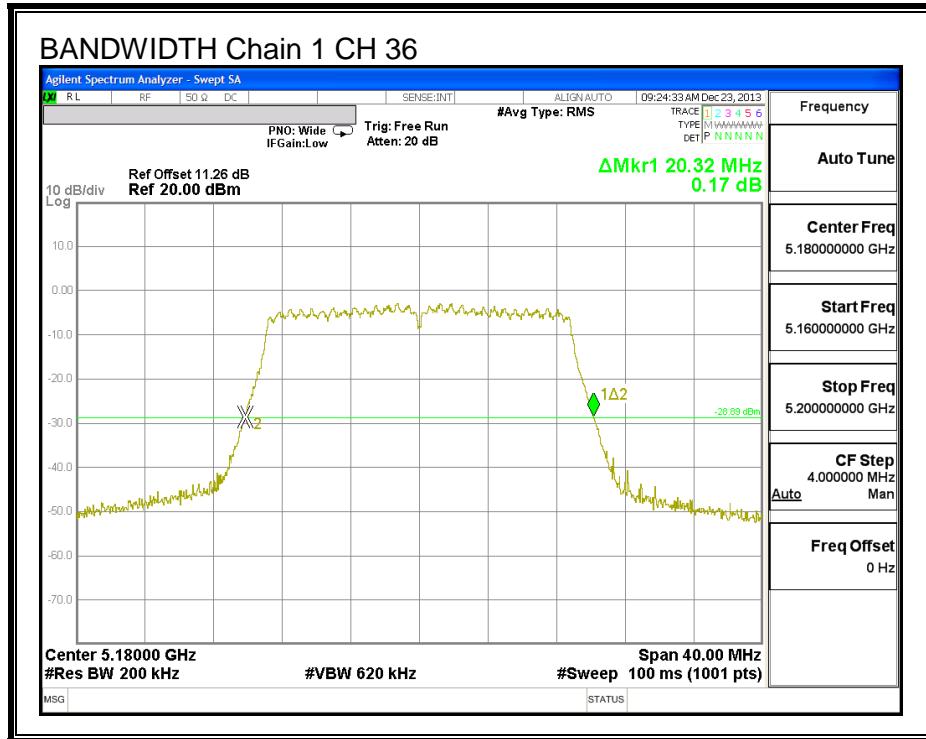

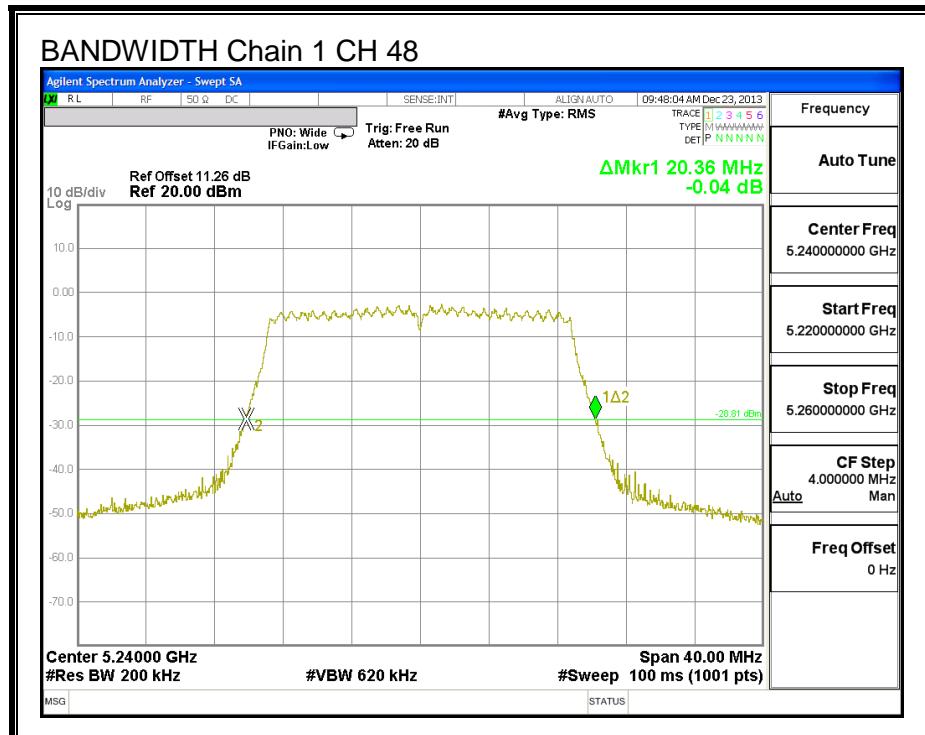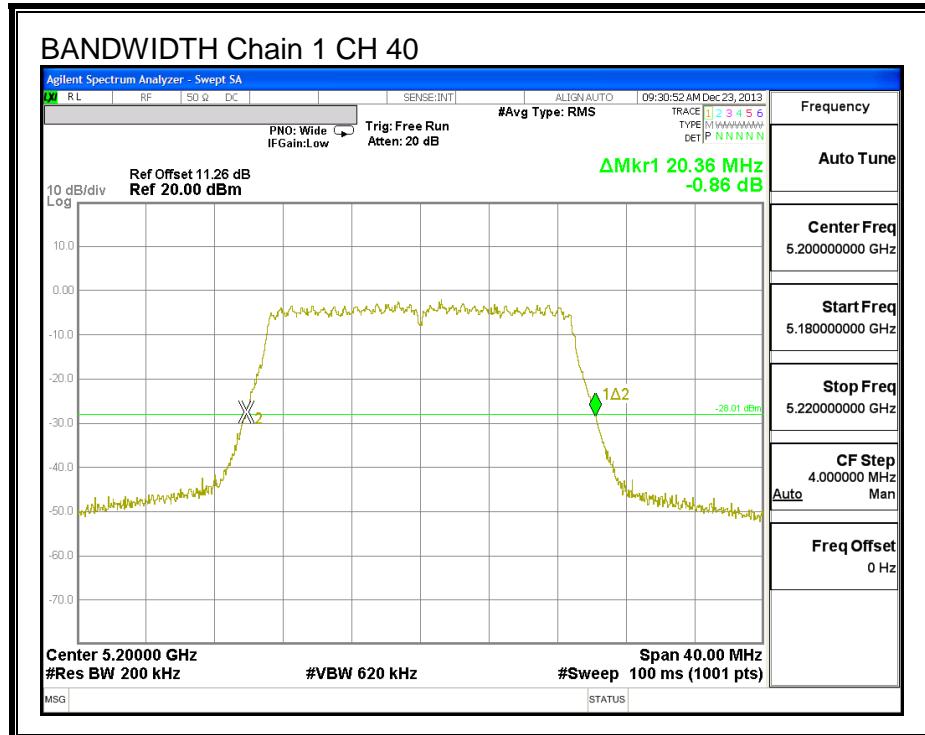

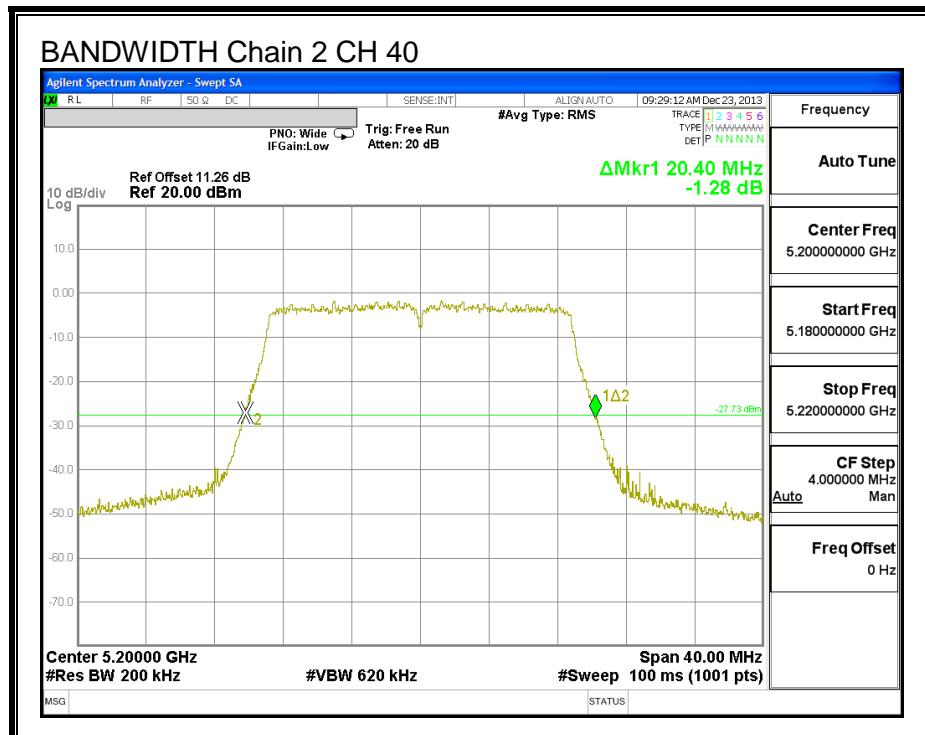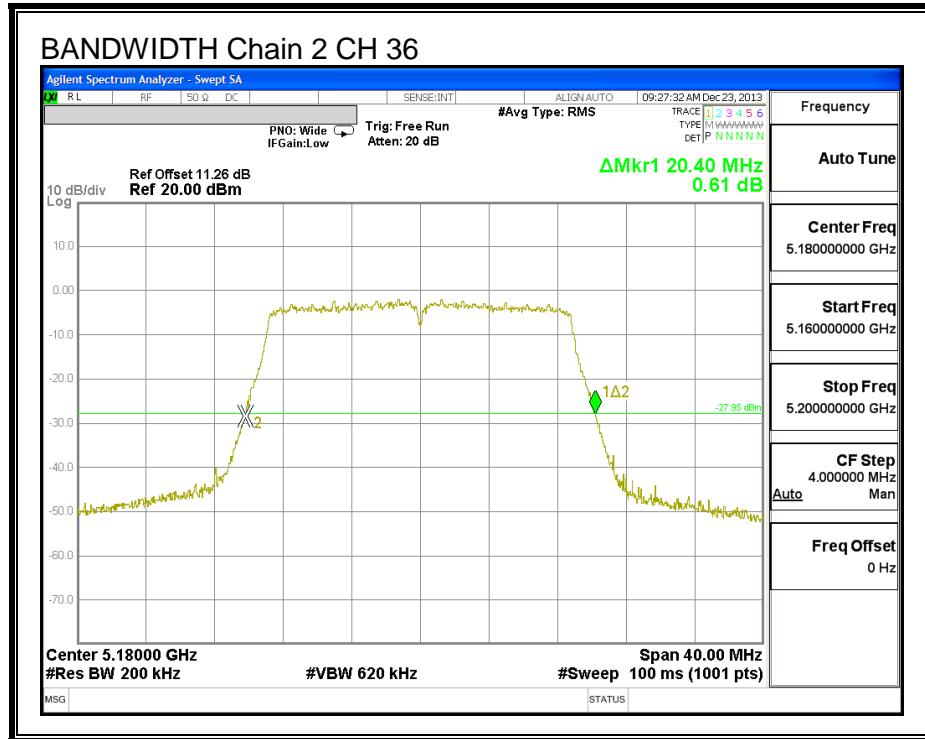

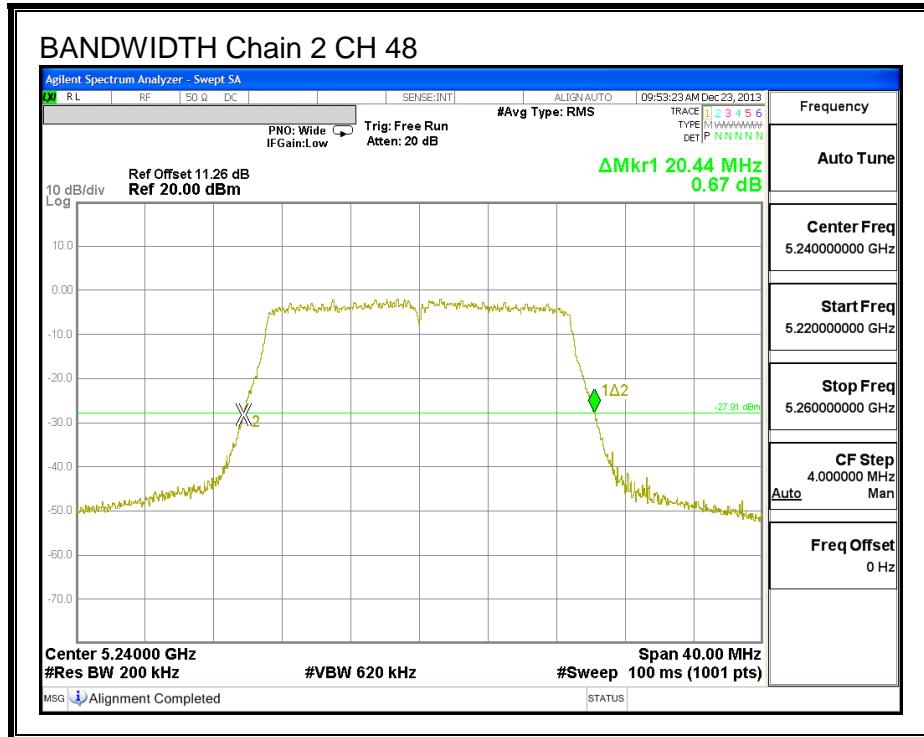

9.4.2. 99% BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
36	5180	17.716	17.619	17.678
40	5200	17.649	17.605	17.683
48	5240	17.646	17.728	17.657



99% BANDWIDTH, Chain 0

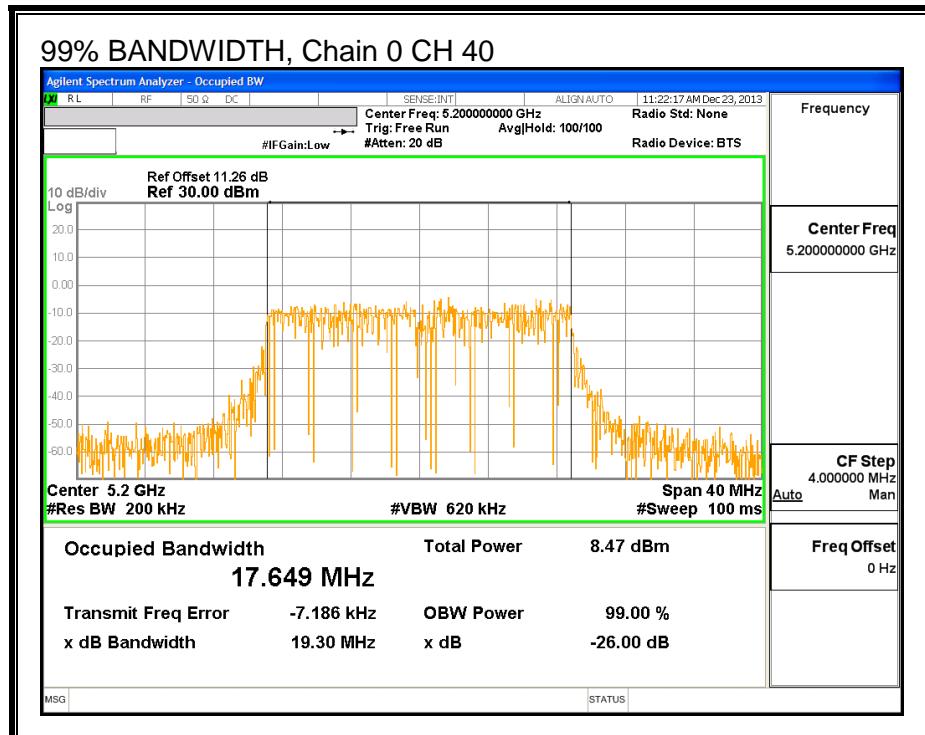
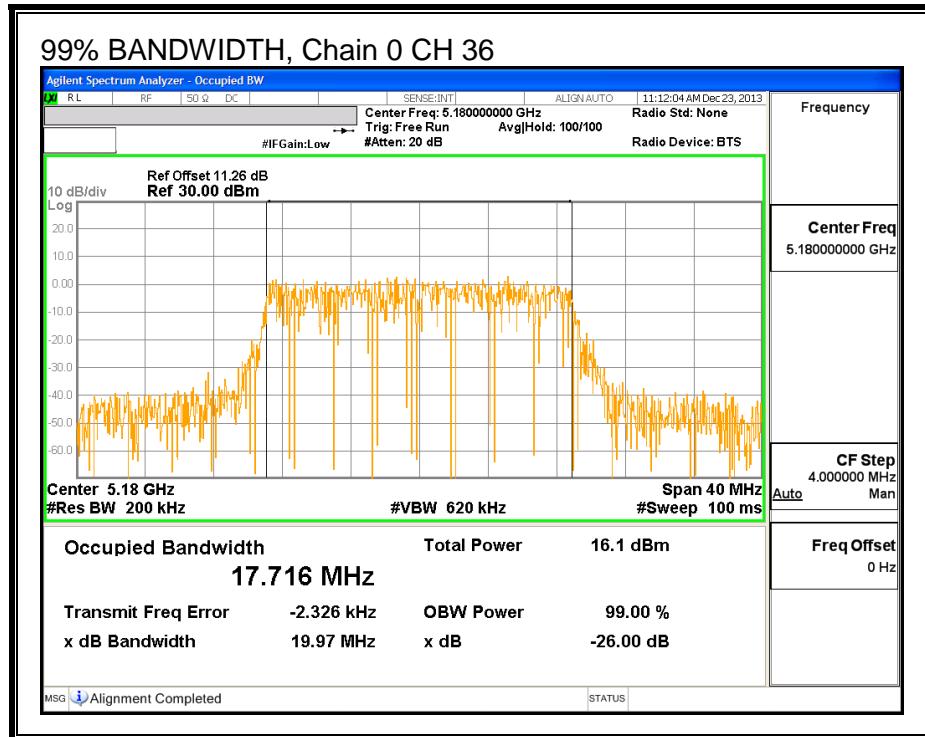


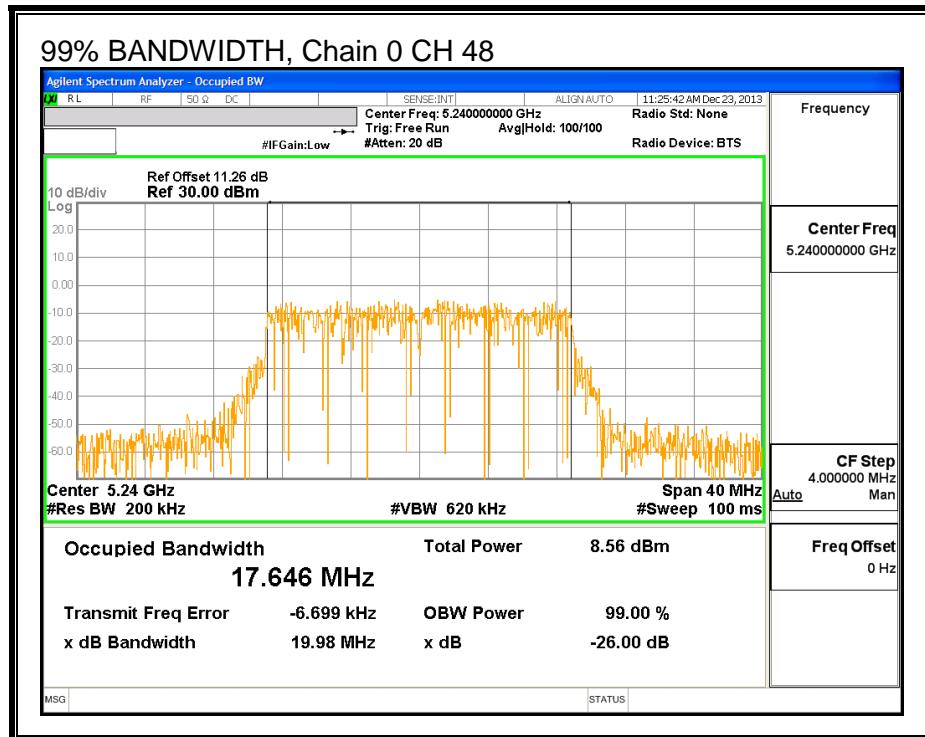


99% BANDWIDTH, Chain 1

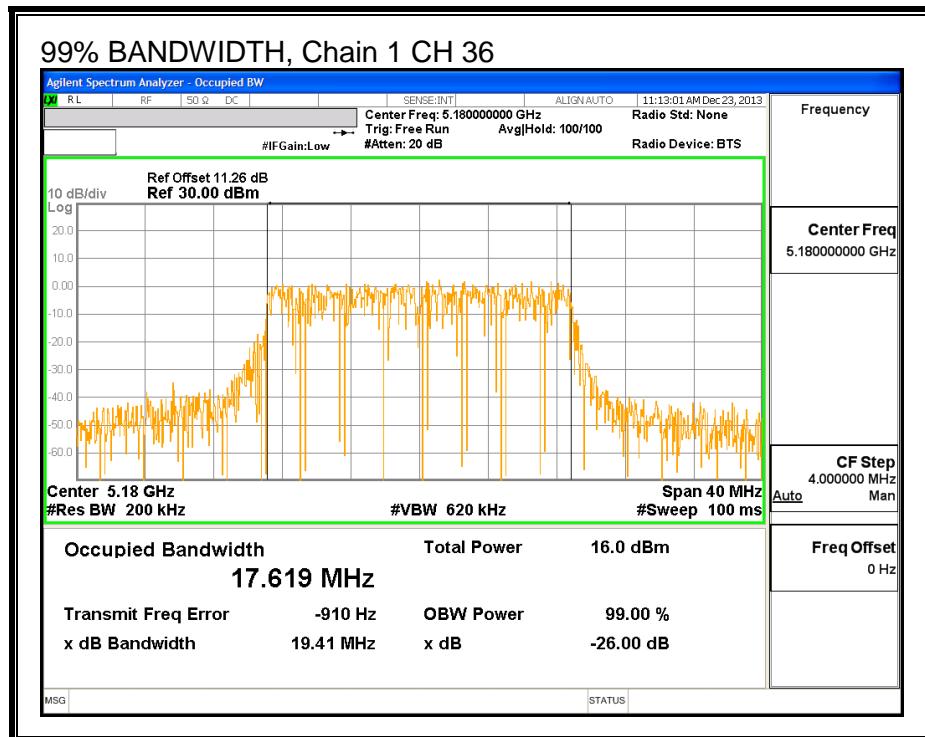

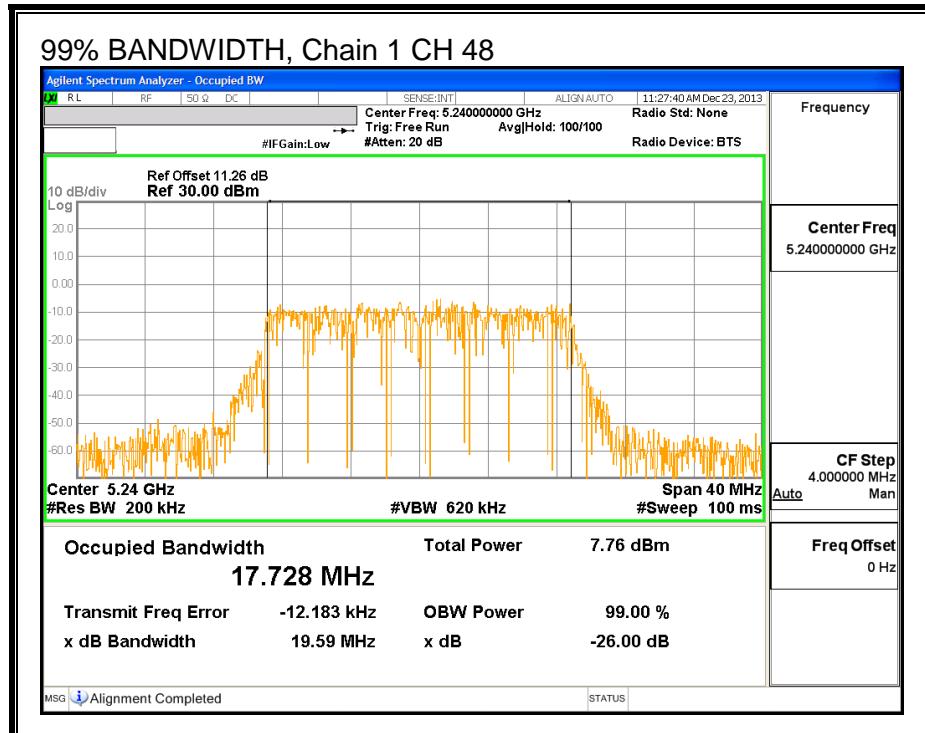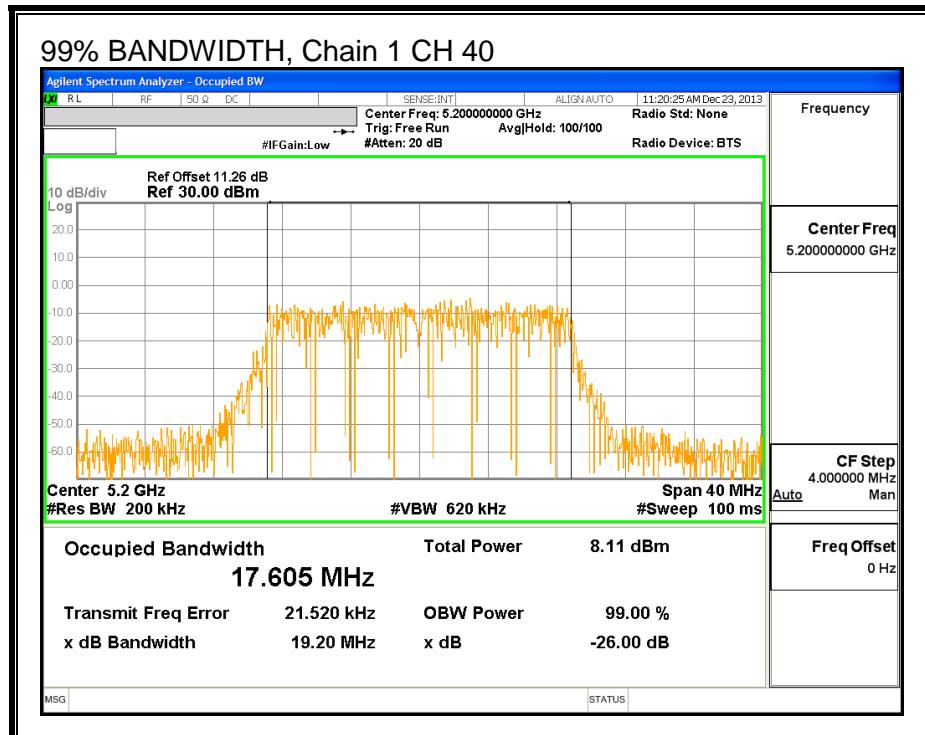

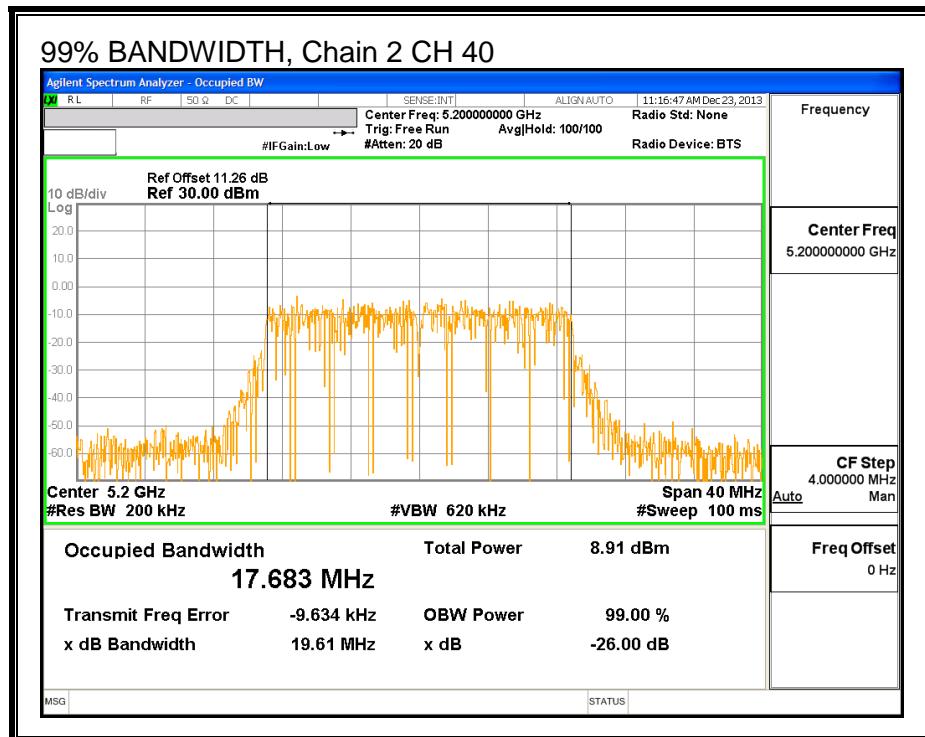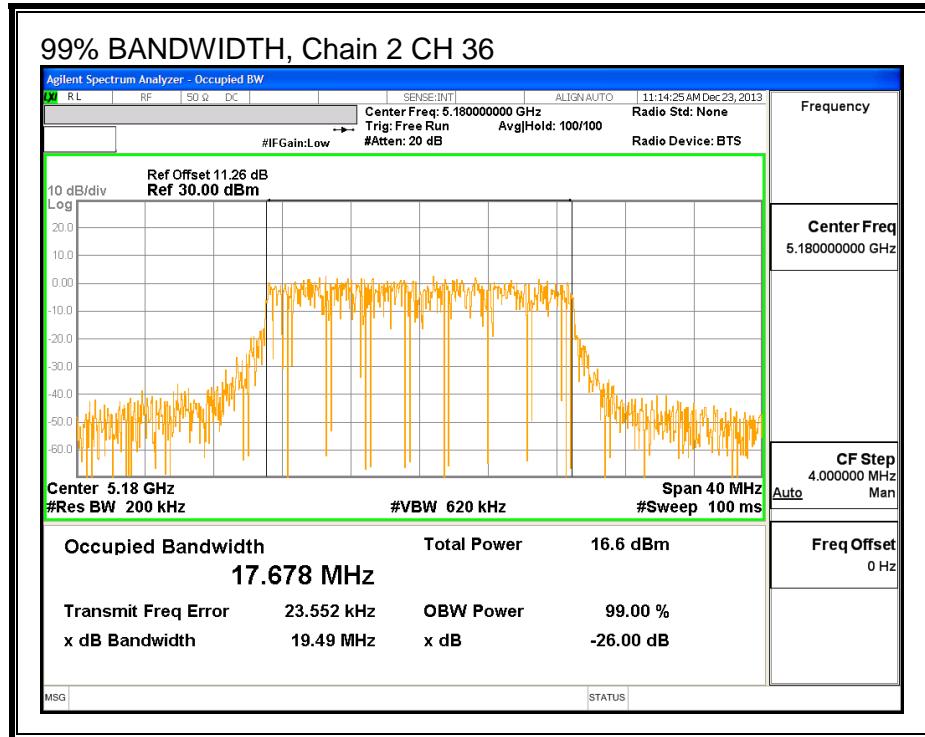

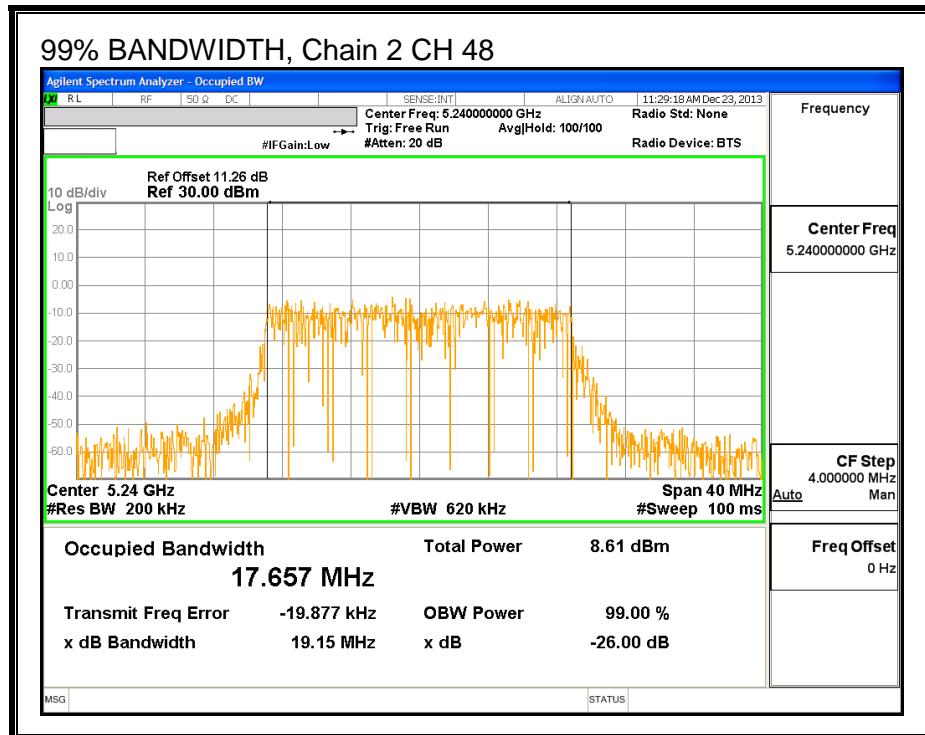

9.4.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
36	5180	8.75	8.01	8.66	13.26
40	5200	8.83	7.95	8.92	13.36
48	5240	8.79	7.98	8.87	13.34

9.4.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

RESULTS

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
36	5180	19.96	17.6190	2.25	2.25
40	5200	20.36	17.6050	2.25	2.25
48	5240	20.36	17.6460	2.25	2.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
36	5180	17.00	22.46	20.21	17.00	4.00	10.00	4.00
40	5200	17.00	22.46	20.21	17.00	4.00	10.00	4.00
48	5240	17.00	22.47	20.22	17.00	4.00	10.00	4.00



Duty Cycle CF (dB)	0.17	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
36	5180	9.08	8.13	9.09	13.73	17.00	-3.27
40	5200	9.07	8.18	9.10	13.74	17.00	-3.26
48	5240	9.16	8.05	9.16	13.76	17.00	-3.24


PPSD Results



Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
36	5180	-1.70	-2.73	-1.51	2.99	4.00	-1.01
40	5200	-1.54	-2.51	-1.73	3.03	4.00	-0.97
48	5240	-1.39	-2.33	-1.68	3.16	4.00	-0.84

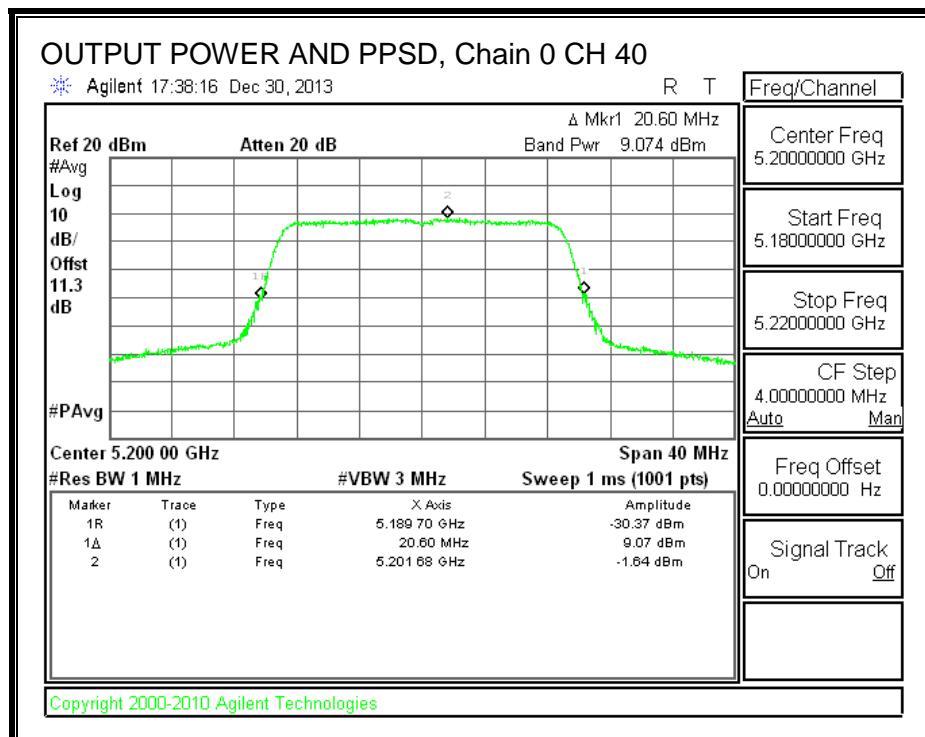
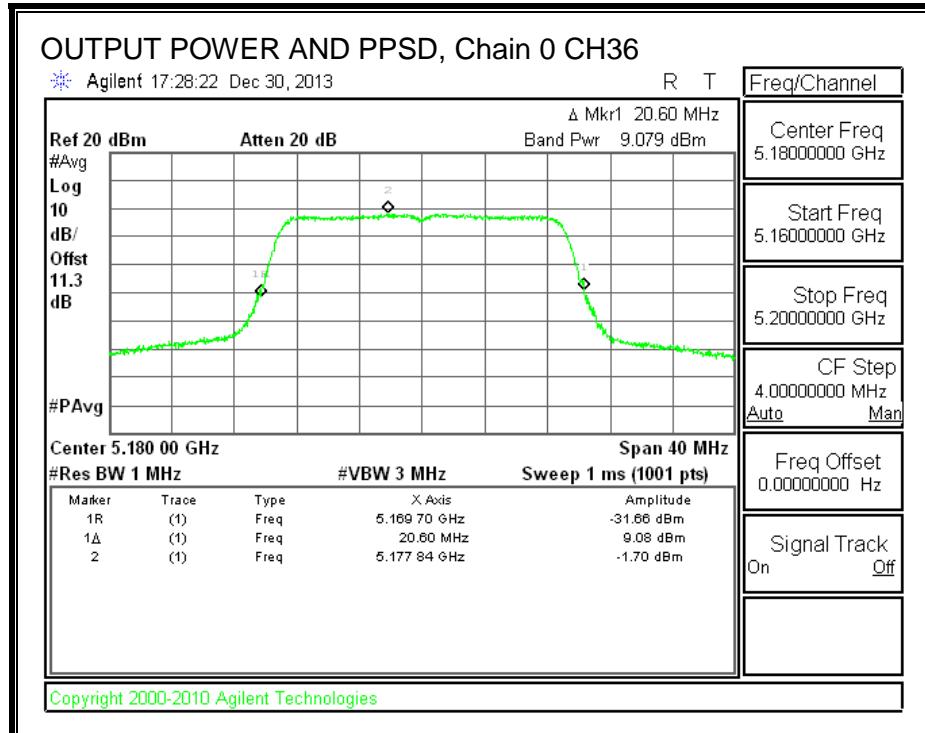


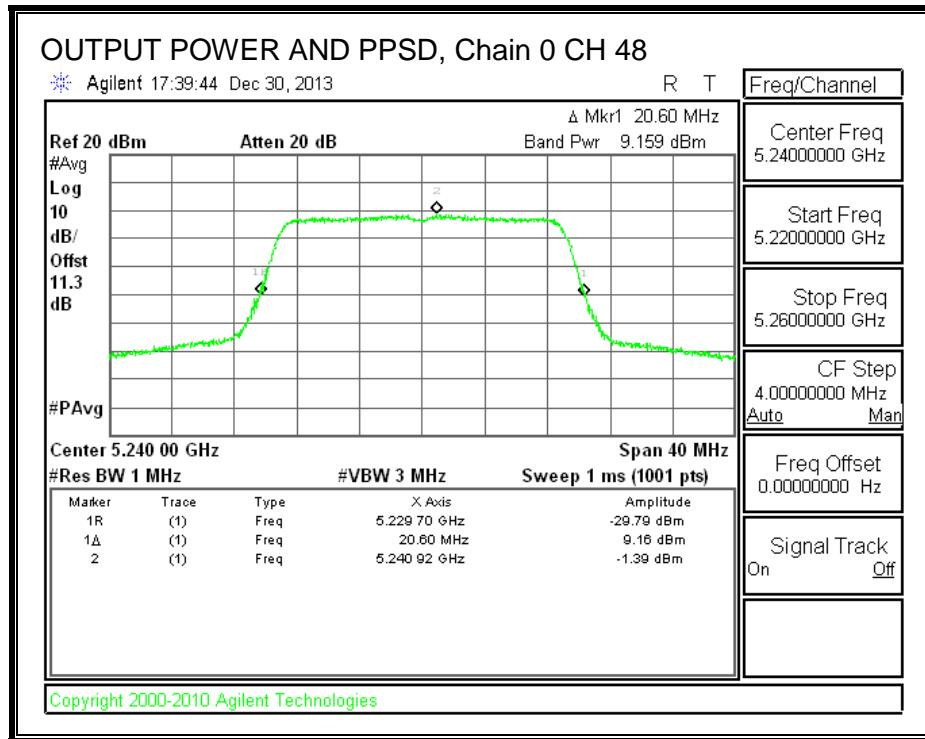


OUTPUT POWER AND PPSD, Chain 1

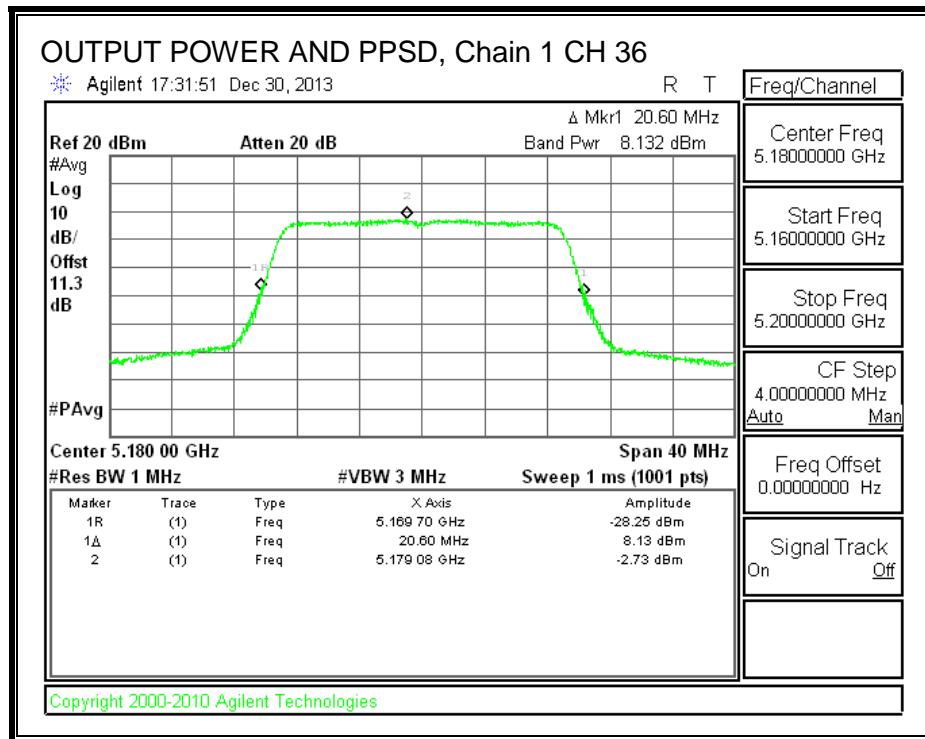

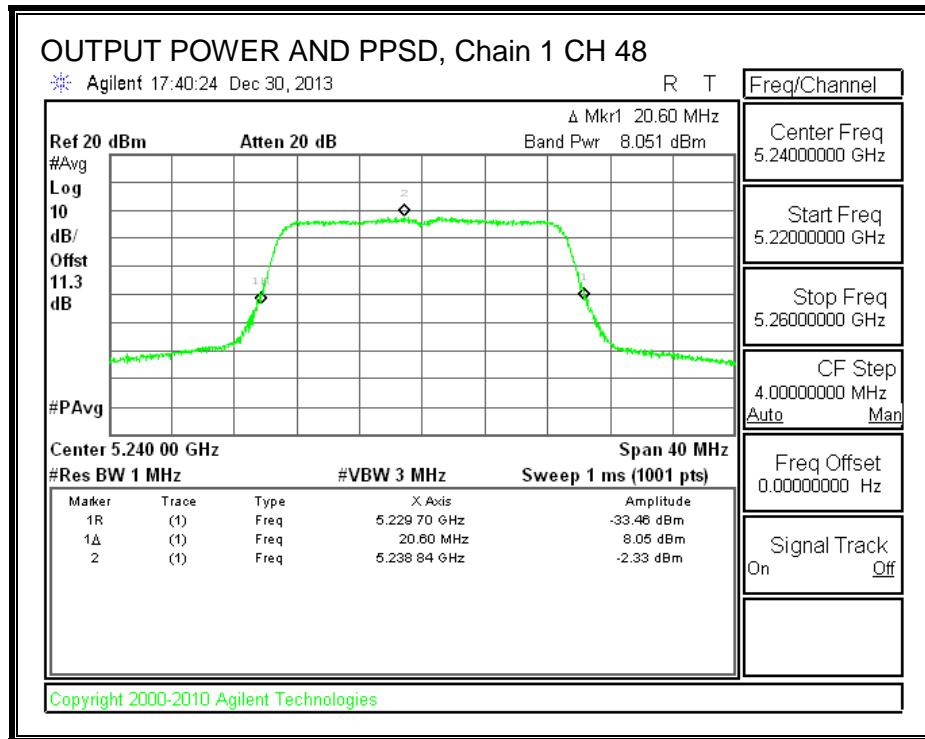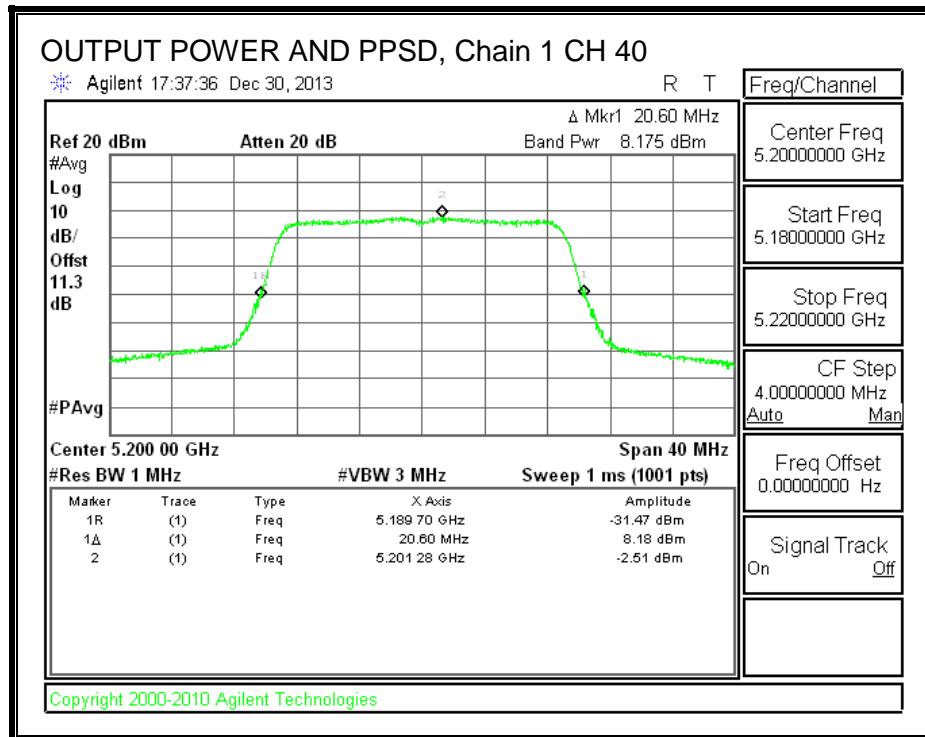

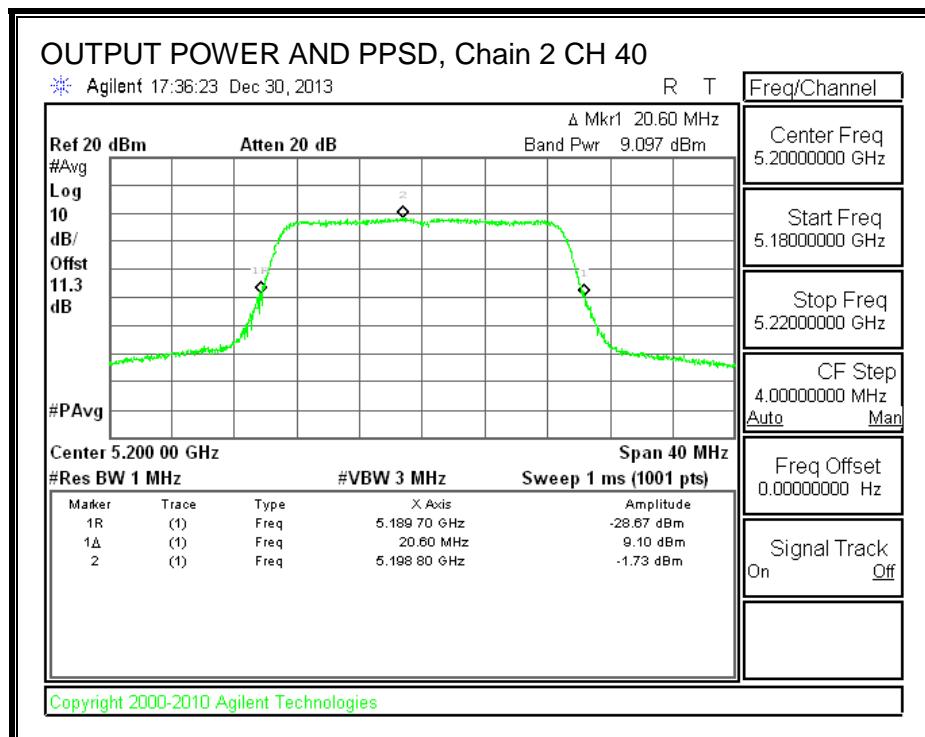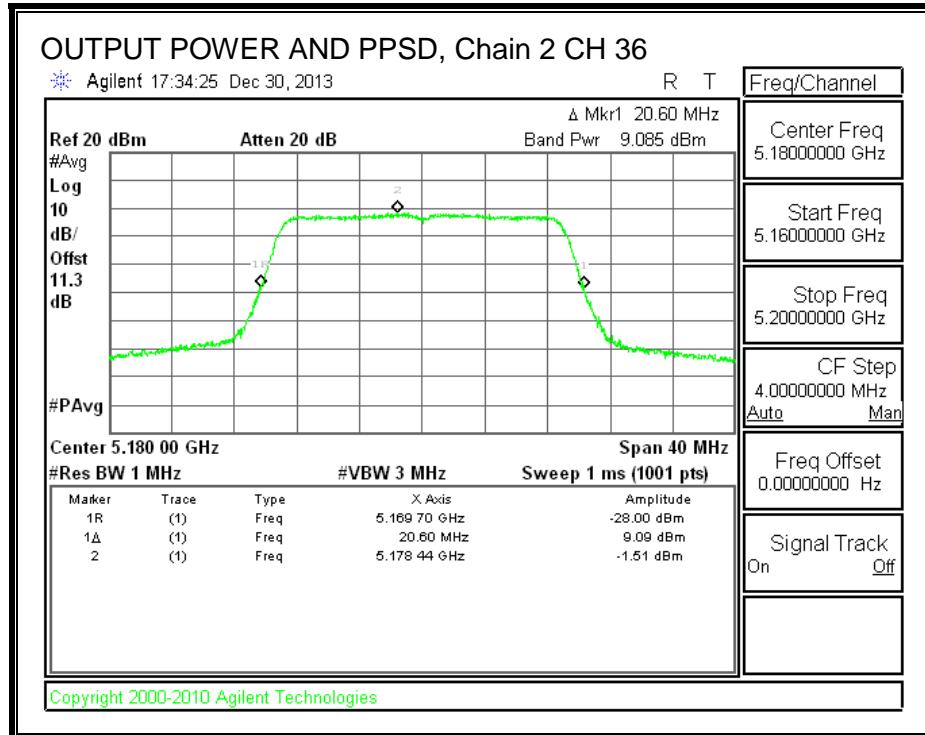

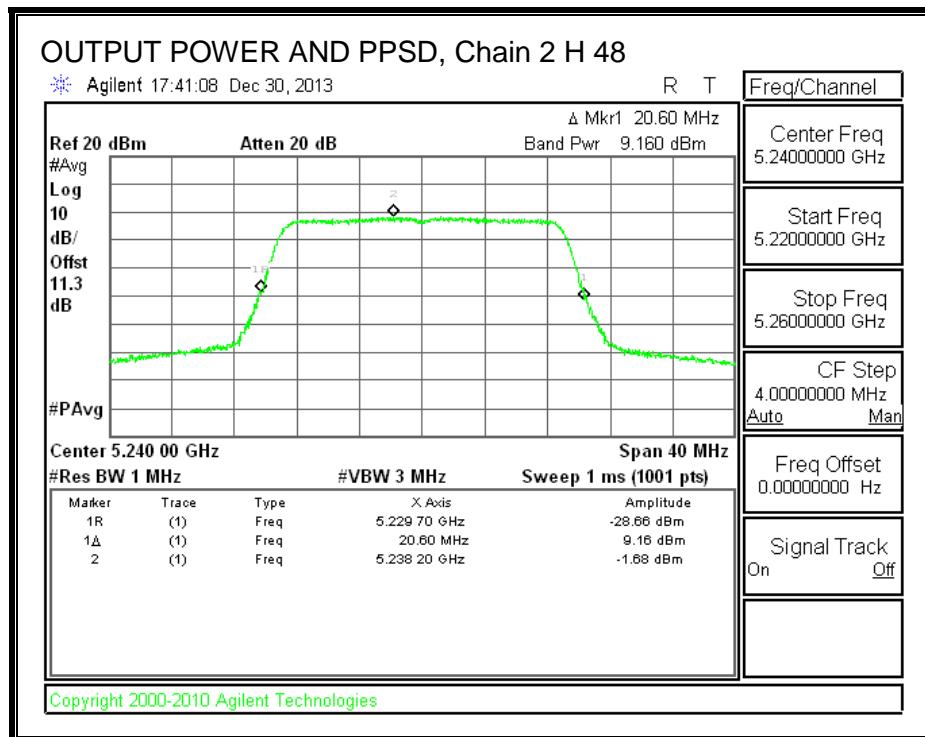

9.5. 802.11n HT40 1TX SISO MODE IN THE 5.2 GHz BAND



9.5.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	39.96
46	5230	40.20

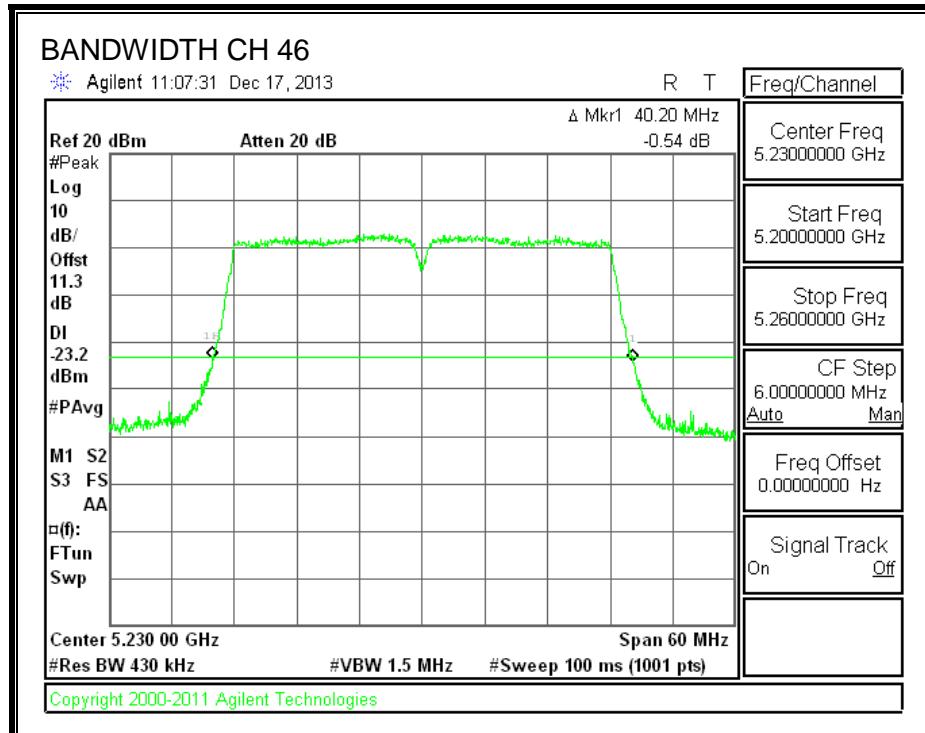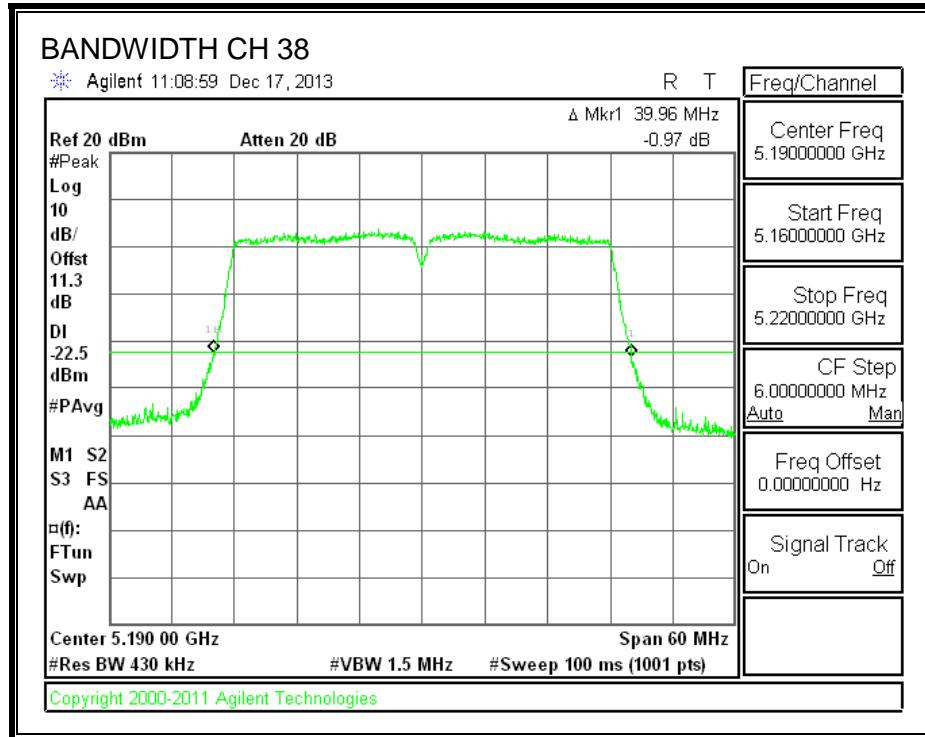



9.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
38	5190	36.1653
46	5230	36.1610

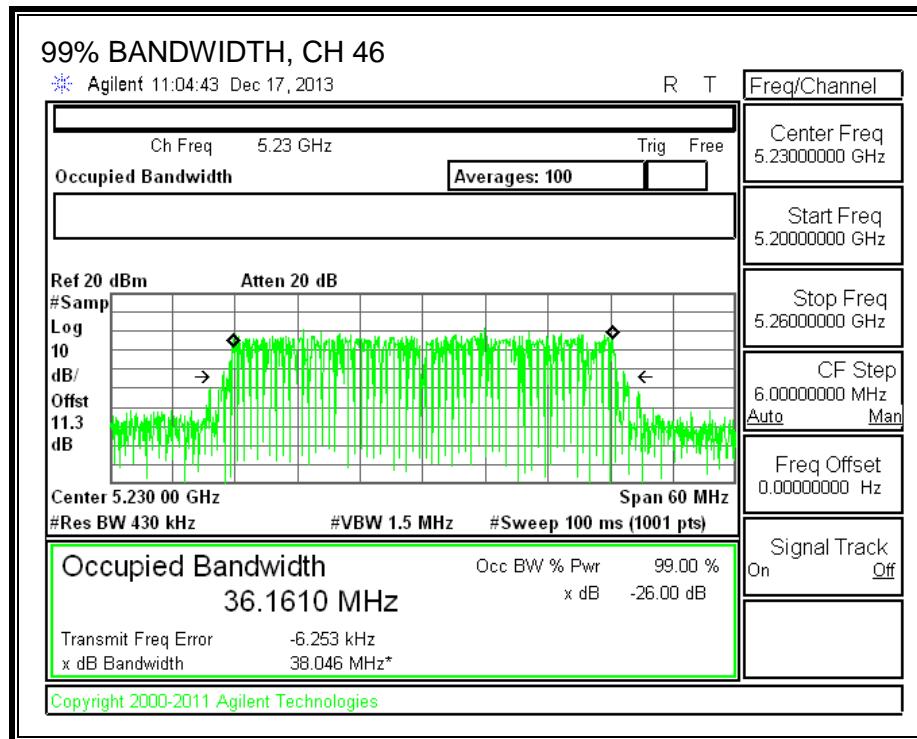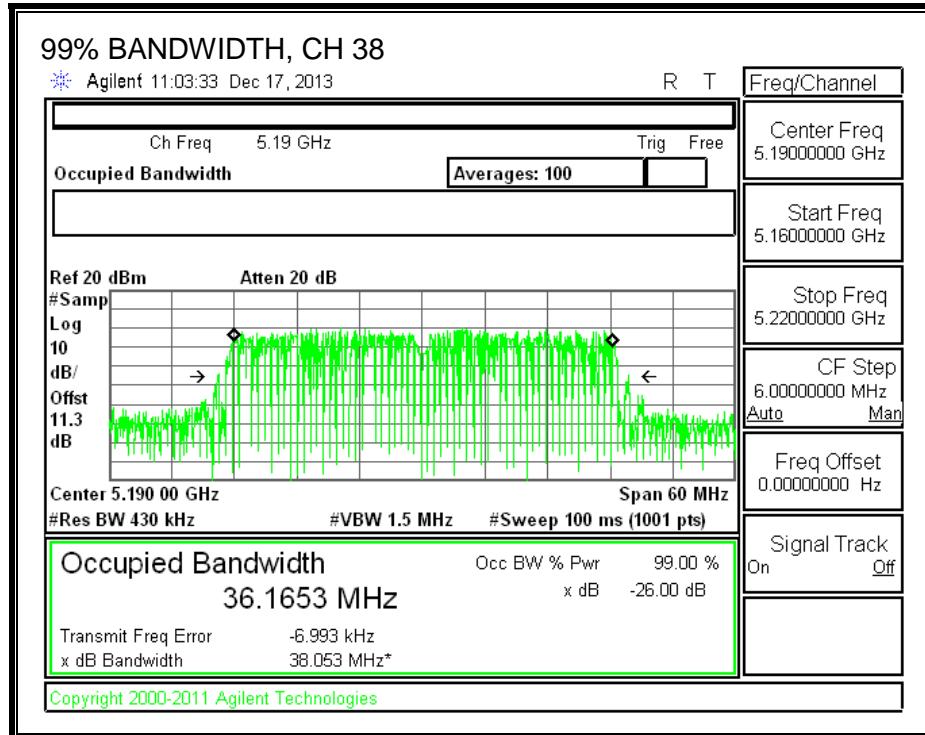

9.5.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)
38	5190	11.94
46	5230	15.90

9.5.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
38	5190	40.0	36.2	2.25
46	5230	40.2	36.2	2.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
38	5190	17.00	23.00	20.75	17.00	4.00	10.00	4.00
46	5230	17.00	23.00	20.75	17.00	4.00	10.00	4.00



Duty Cycle CF (dB)	0.42	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
38	5190	12.55	12.97	17.00	-4.03
46	5230	16.53	16.95	17.00	-0.05

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
38	5190	-1.91	-1.49	4.00	-5.49
46	5230	2.83	3.25	4.00	-0.75

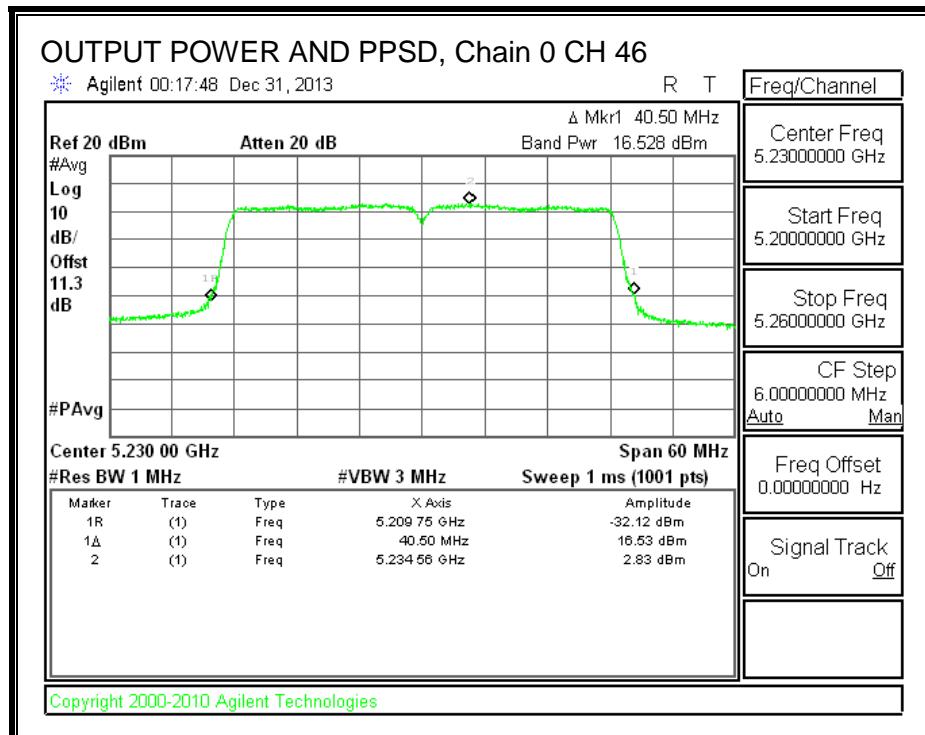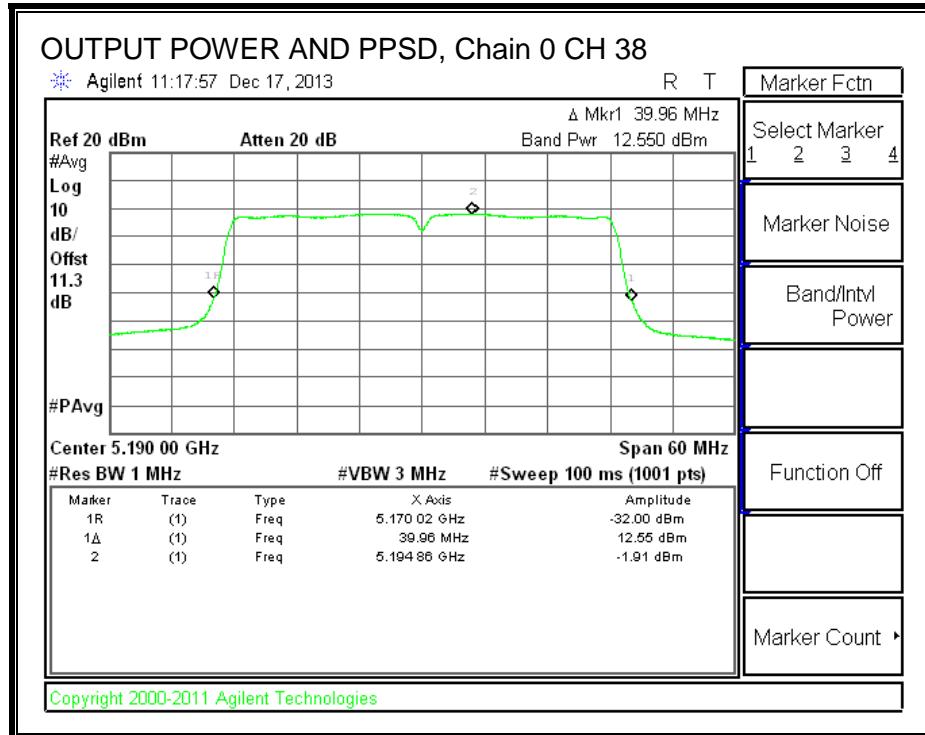

9.6. 802.11n HT40 3TX CDD MODE IN THE 5.2 GHz BAND

9.6.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
38	5190	40.08	39.42	39.54
46	5230	39.84	39.42	39.42



26 dB BANDWIDTH, Chain 0

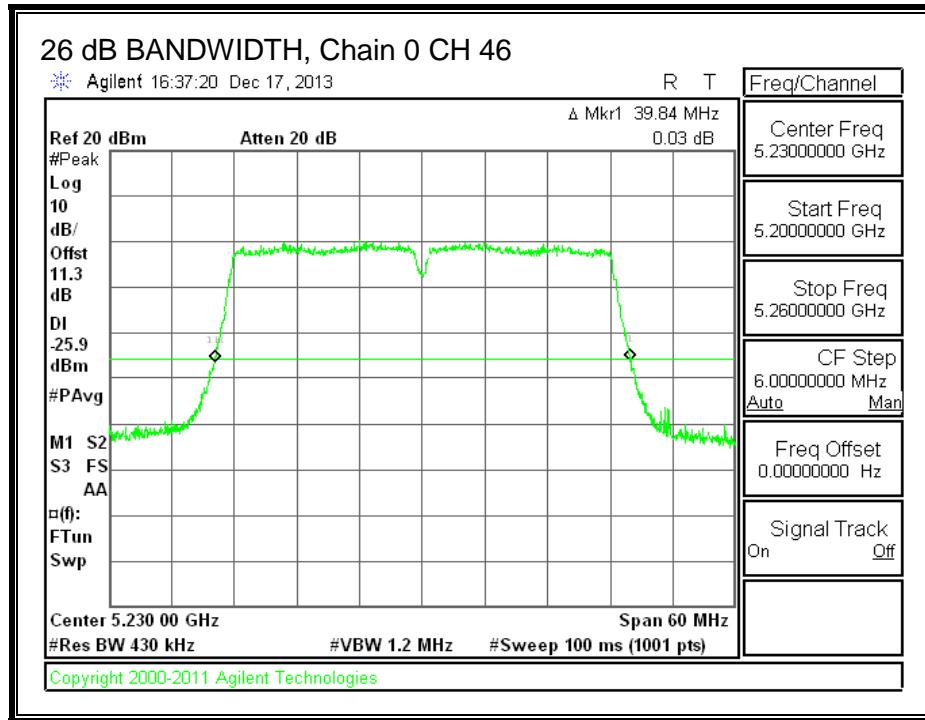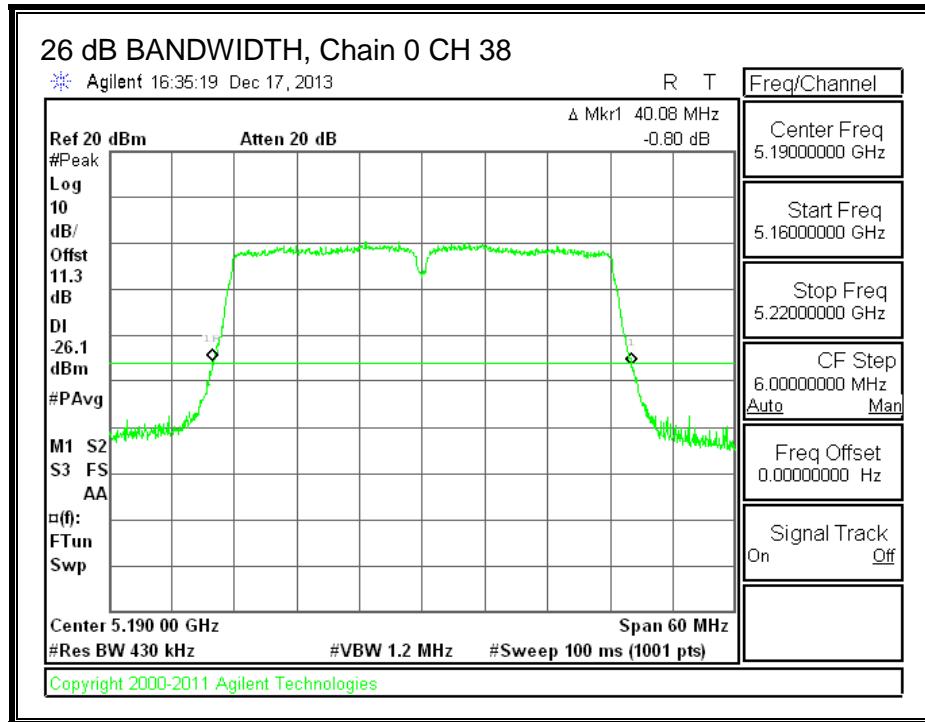

26 dB BANDWIDTH, Chain 1

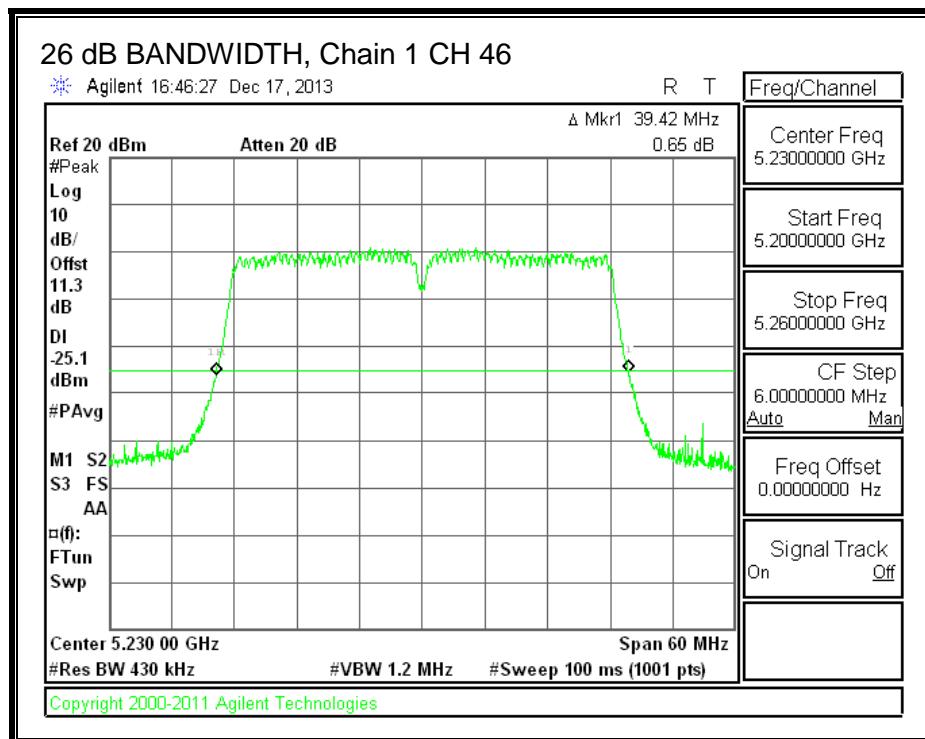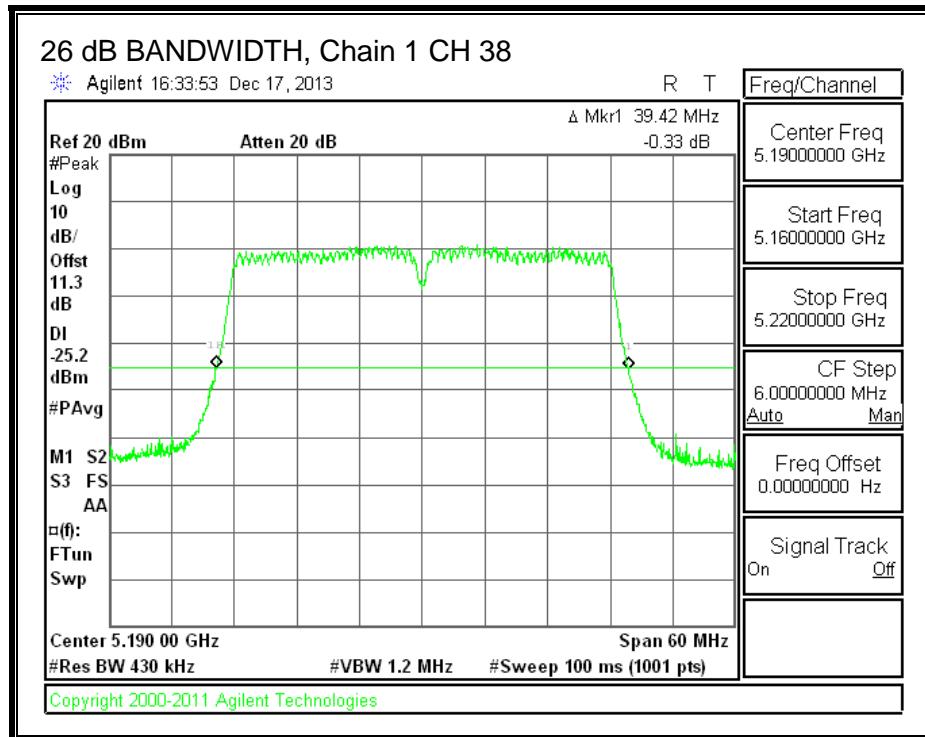

26 dB BANDWIDTH, Chain 2

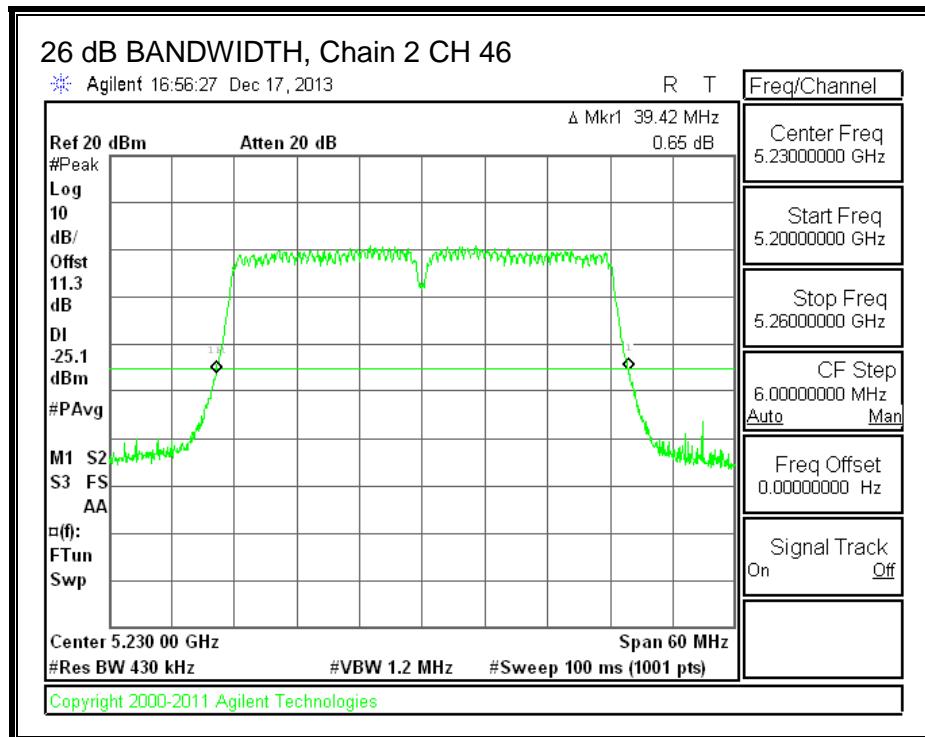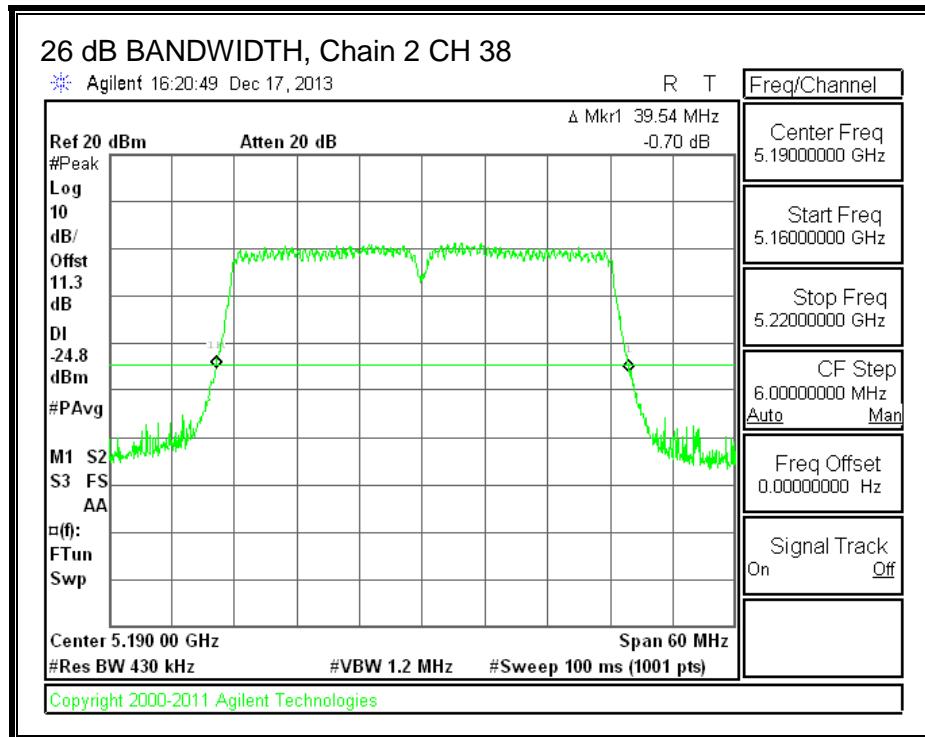

9.6.2. 99% BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
38	5190	36.1590	36.1560	36.1115
46	5230	36.1523	36.1400	36.1584



99% BANDWIDTH, Chain 0

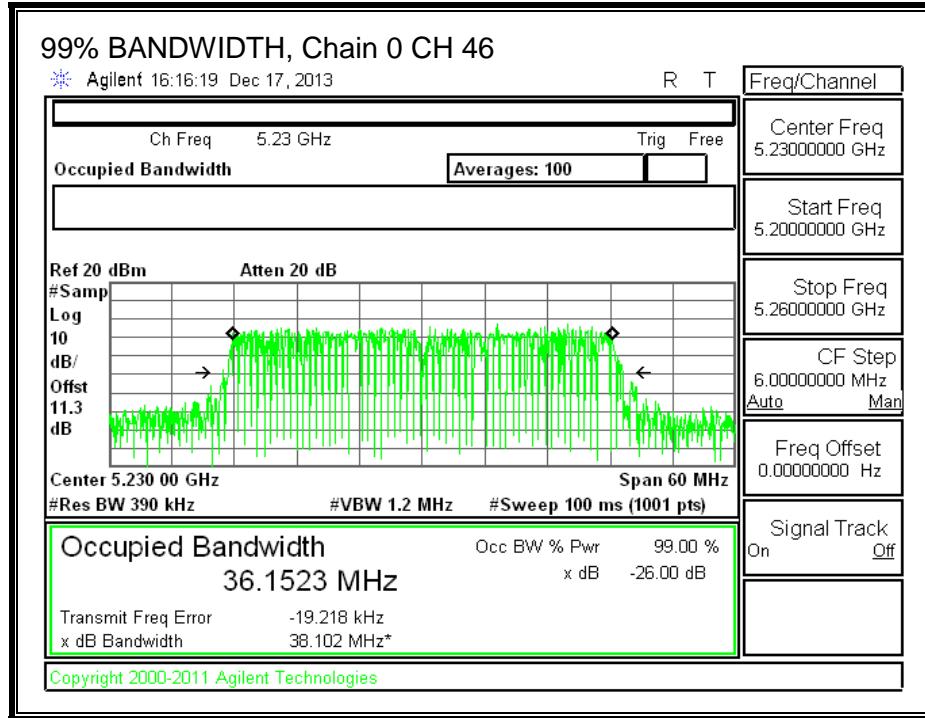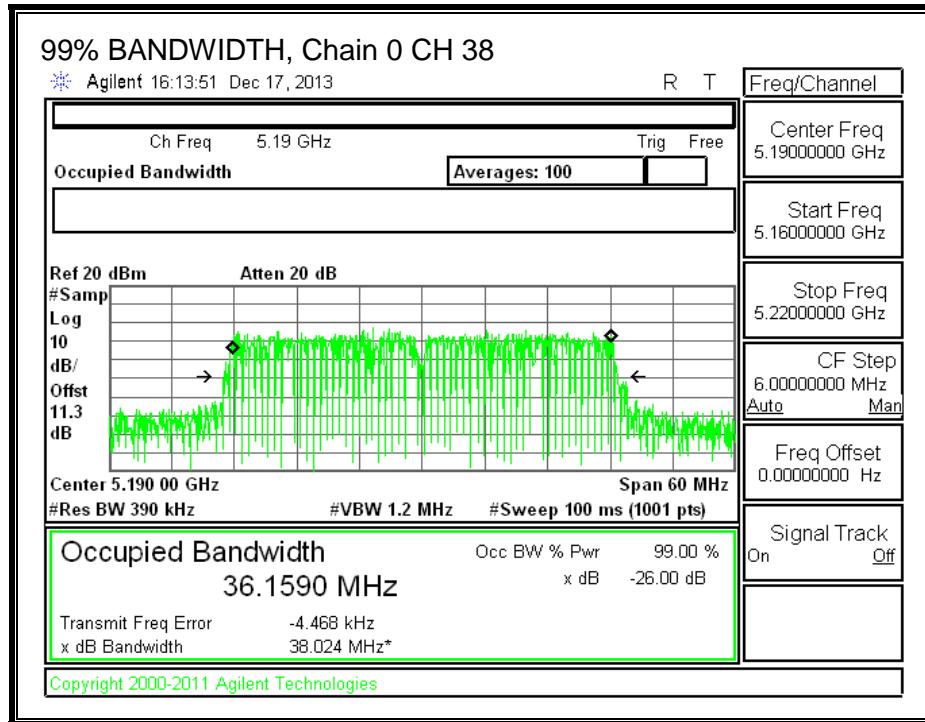

99% BANDWIDTH, Chain 1

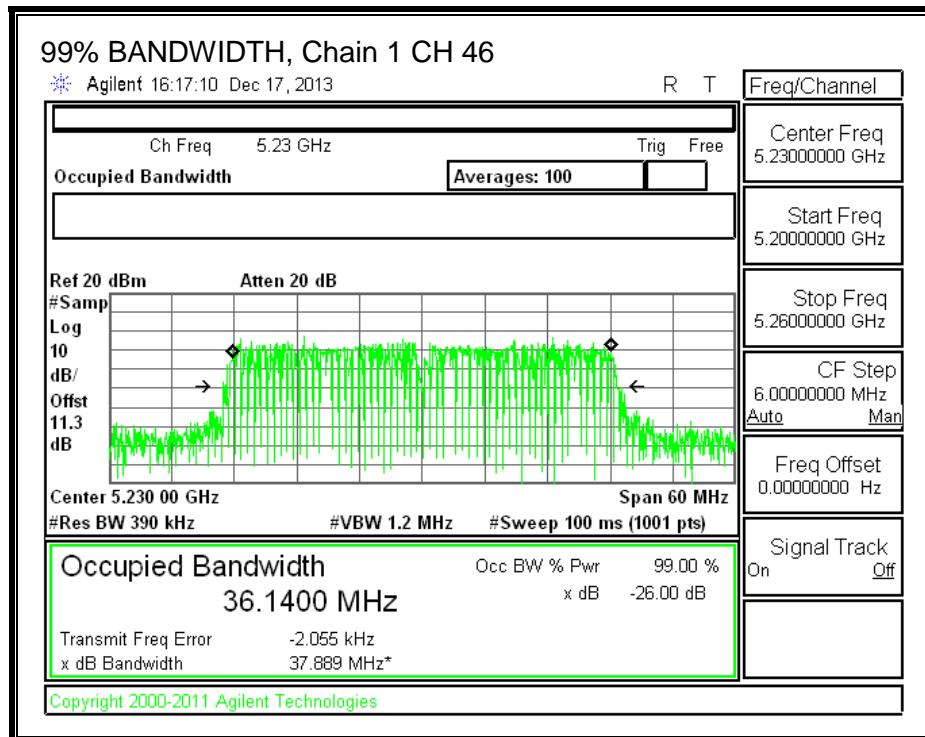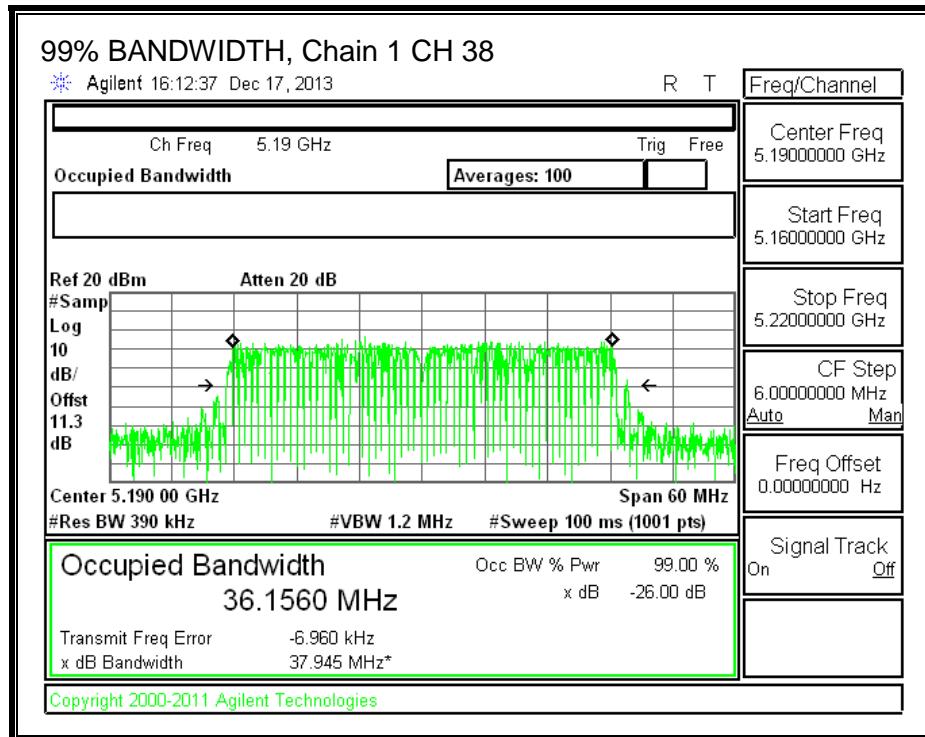

99% BANDWIDTH, Chain 2

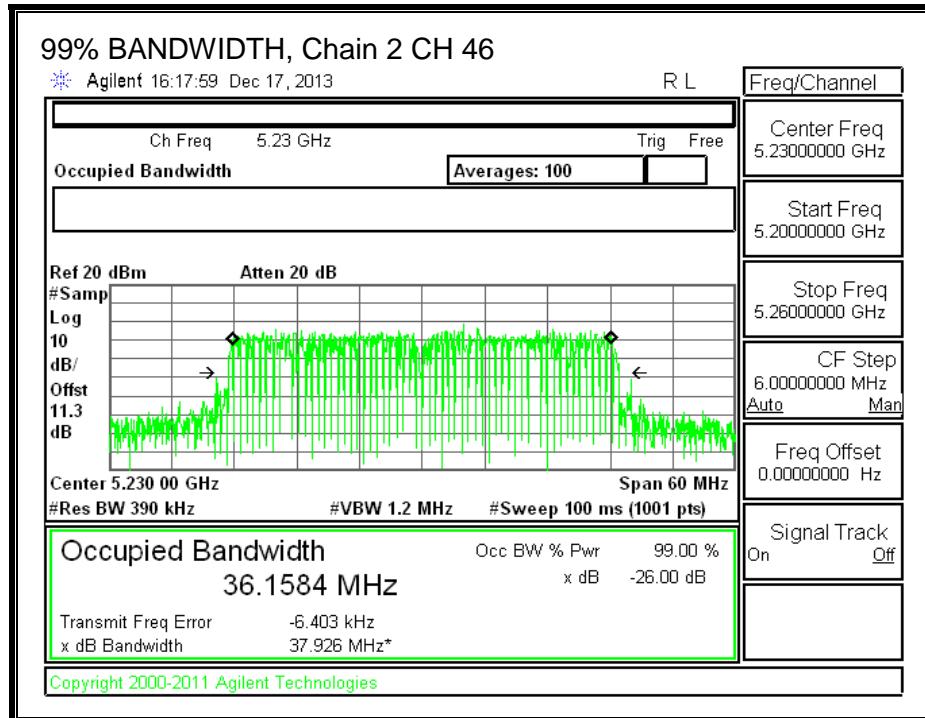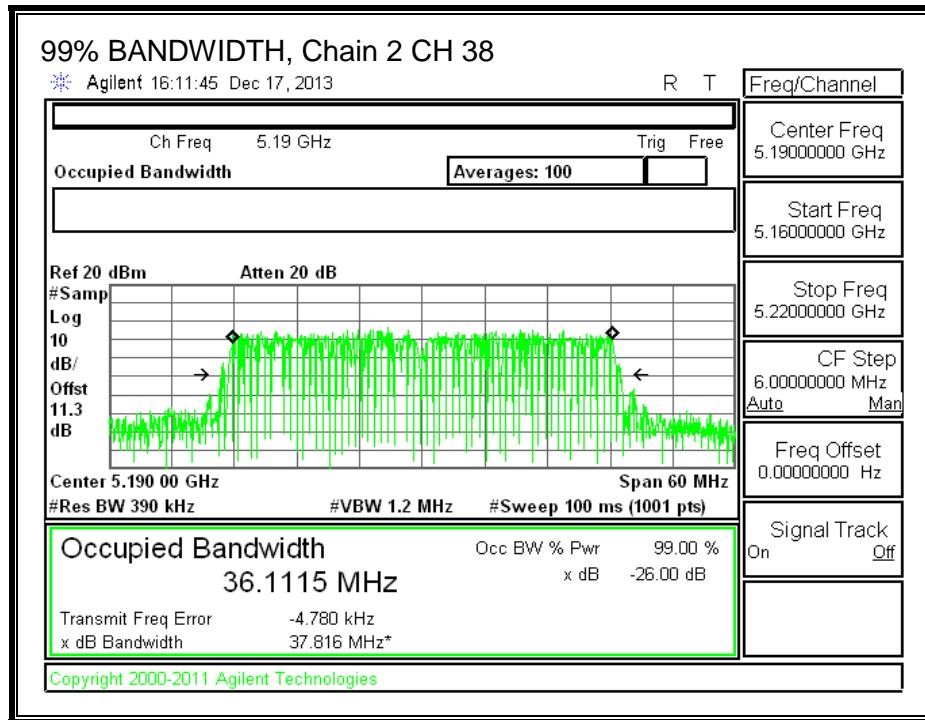

9.6.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
38	5190	8.70	7.68	8.76	13.18
46	5230	11.04	10.28	11.14	15.61

9.6.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

Antenna Gain (dBi)	10 * Log (3 chains) (dB)	Correlated Chains Directional Gain (dBi)
2.25	4.77	7.02

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min BW (MHz)	Min BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
38	5190	39.42	36.1115	2.25	7.02
46	5230	39.42	36.1400	2.25	7.02

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
38	5190	17.00	23.00	20.75	17.00	2.98	10.00	2.98
46	5230	17.00	23.00	20.75	17.00	2.98	10.00	2.98



Duty Cycle CF (dB)	0.14	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
38	5190	9.32	8.35	9.05	13.84	17.00	-3.16
46	5230	11.45	10.87	11.65	16.25	17.00	-0.75

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
38	5190	-5.14	-5.90	-5.24	-0.50	2.98	-3.48
46	5230	-2.25	-2.84	-2.05	2.54	2.98	-0.44

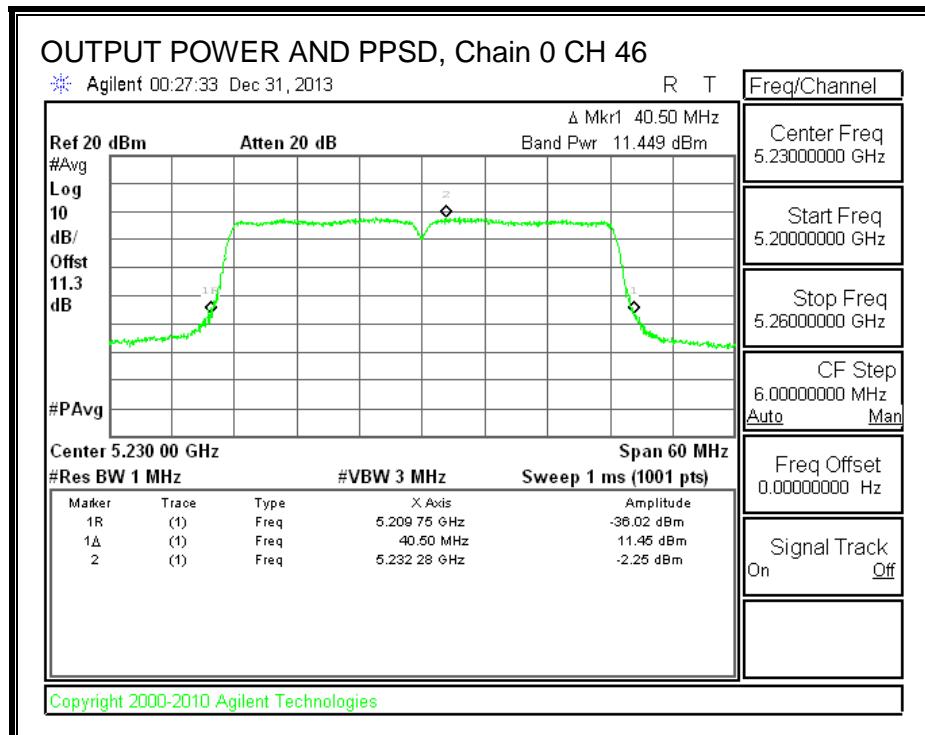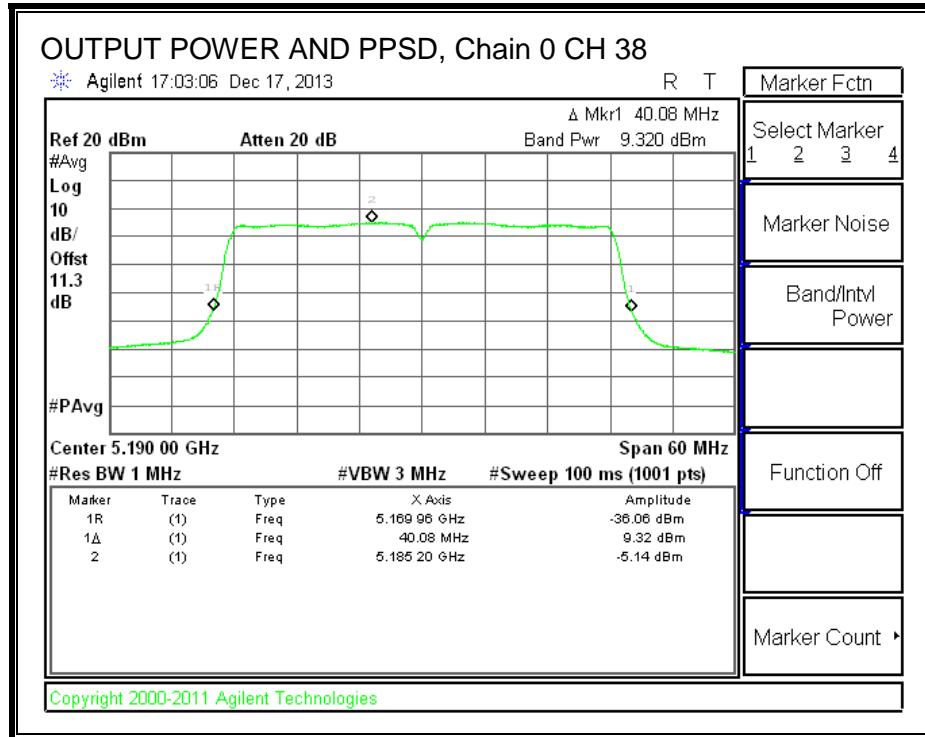OUTPUT POWER AND PPSD, Chain 1

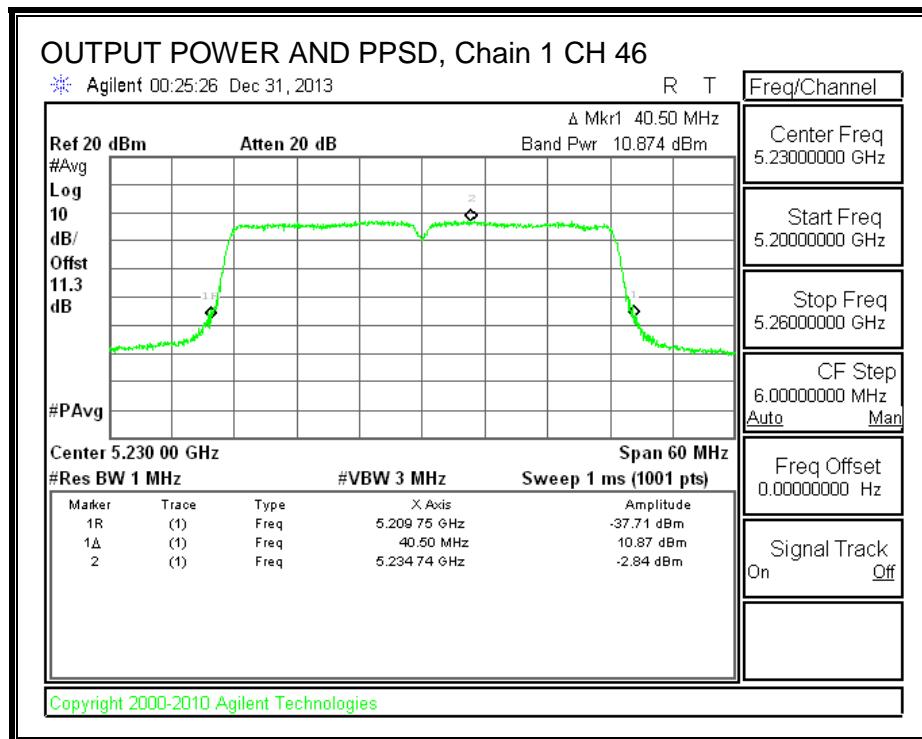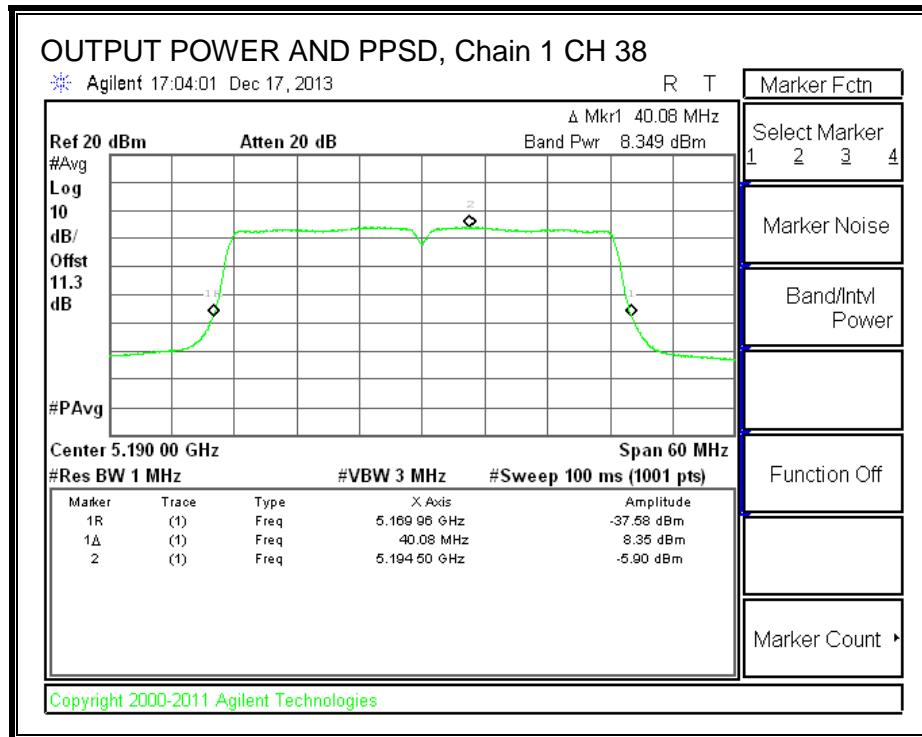

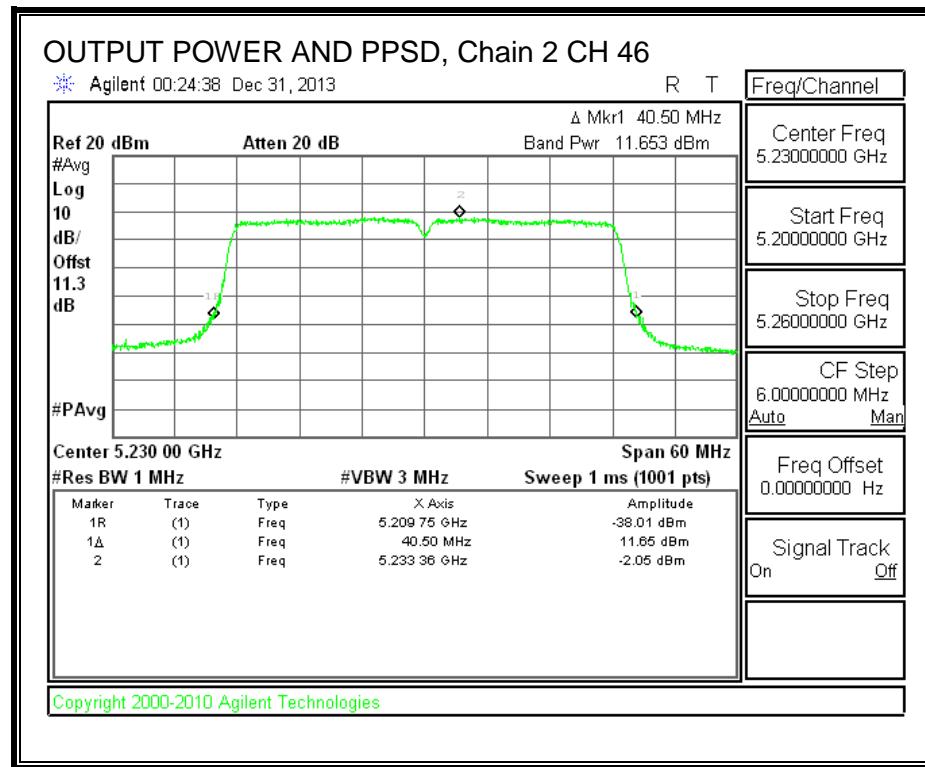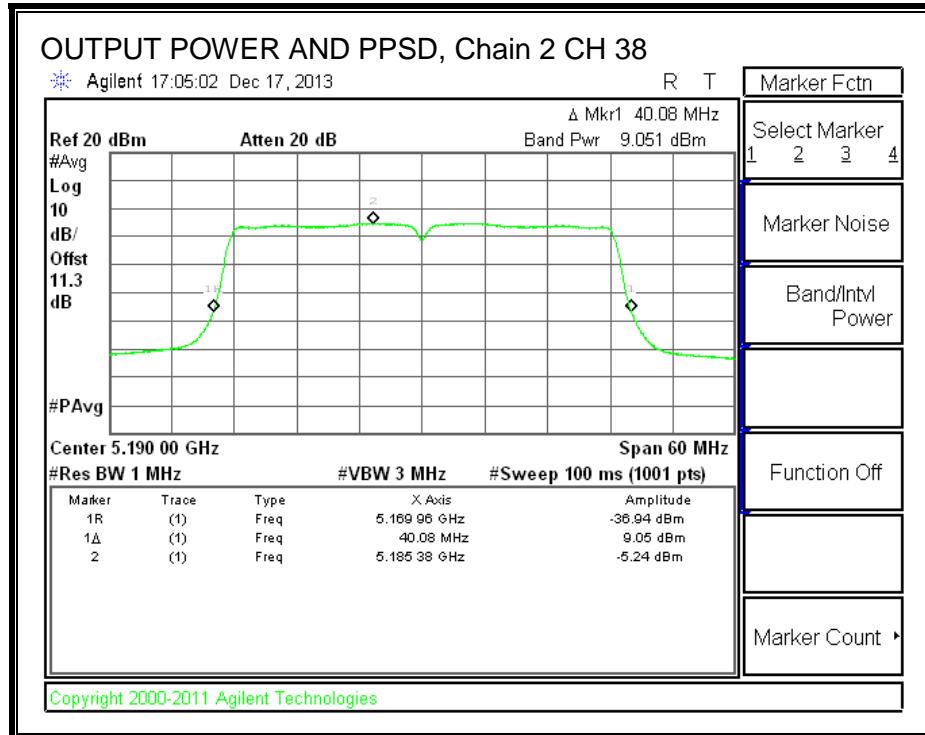

9.7. 802.11n HT40 3TX SDM MODE IN THE 5.2 GHz BAND

9.7.1. 26 dB BANDWIDTH



LIMITS

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
38	5190	39.96	39.42	39.42
46	5230	40.02	39.18	39.60



26 dB BANDWIDTH, Chain 0

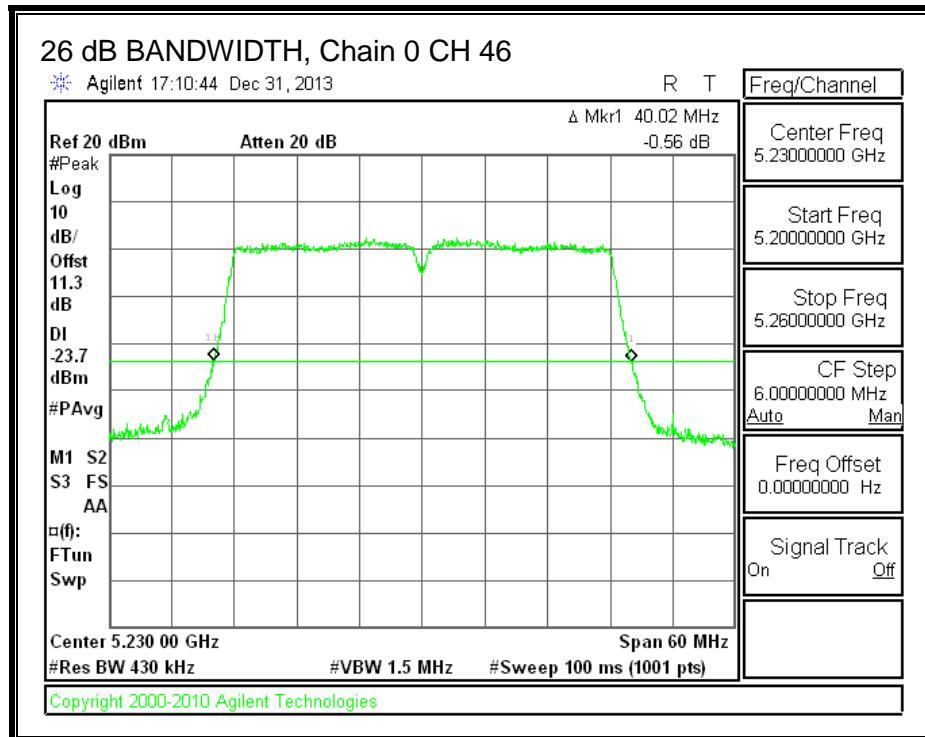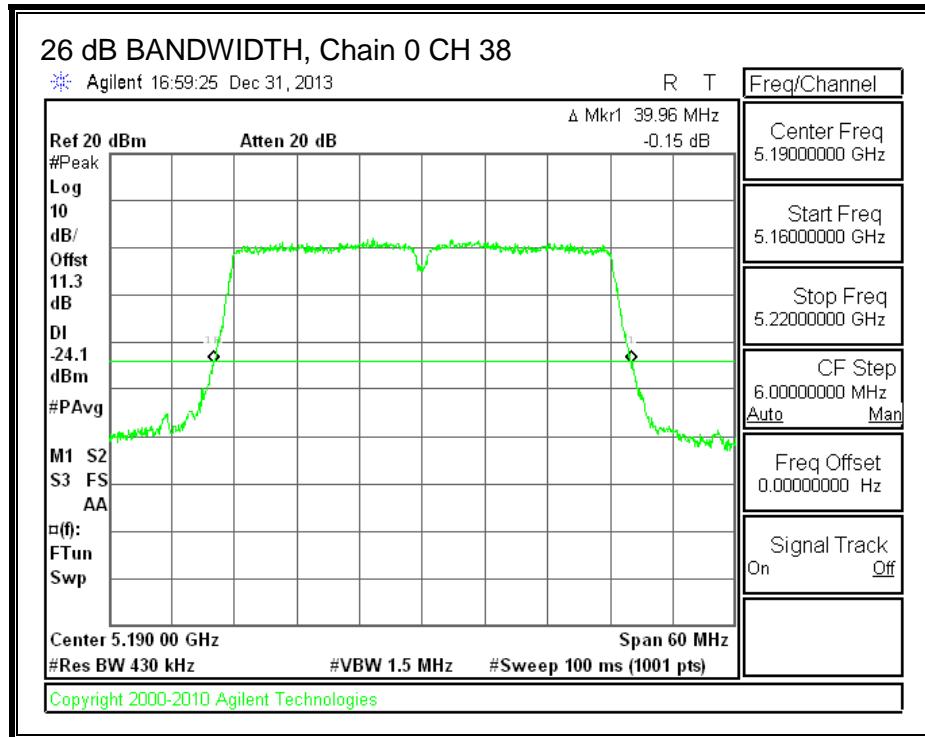

26 dB BANDWIDTH, Chain 1

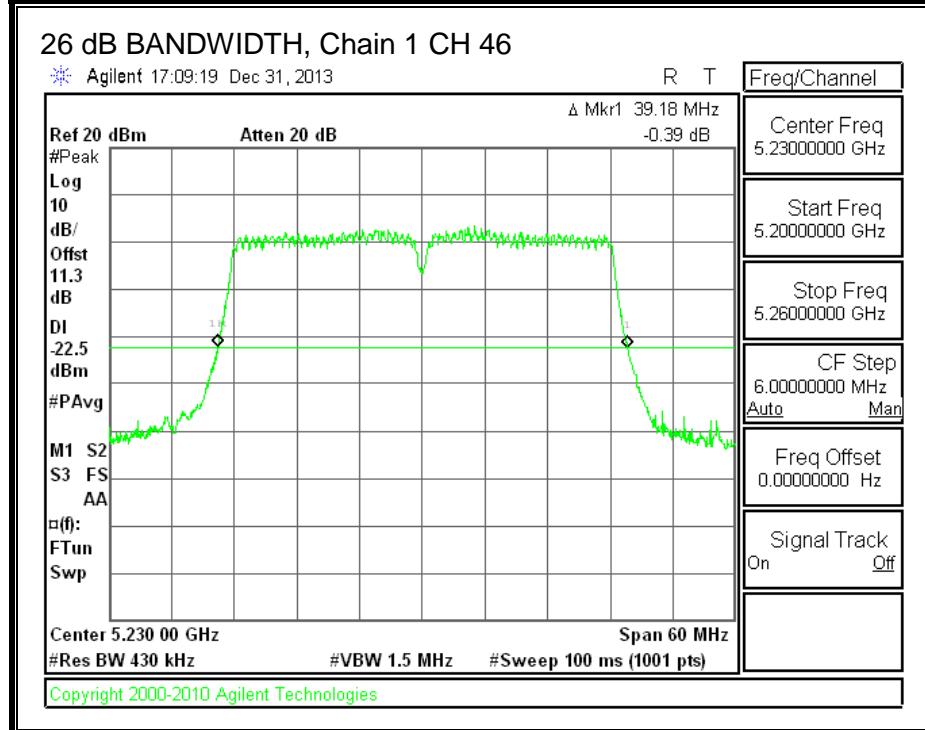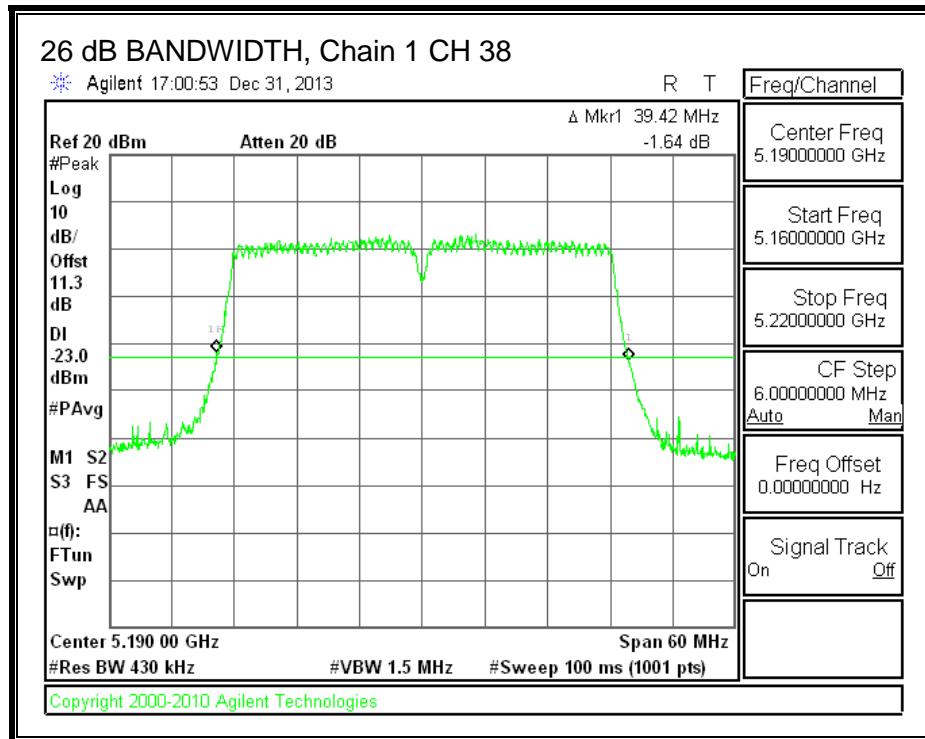

26 dB BANDWIDTH, Chain 2

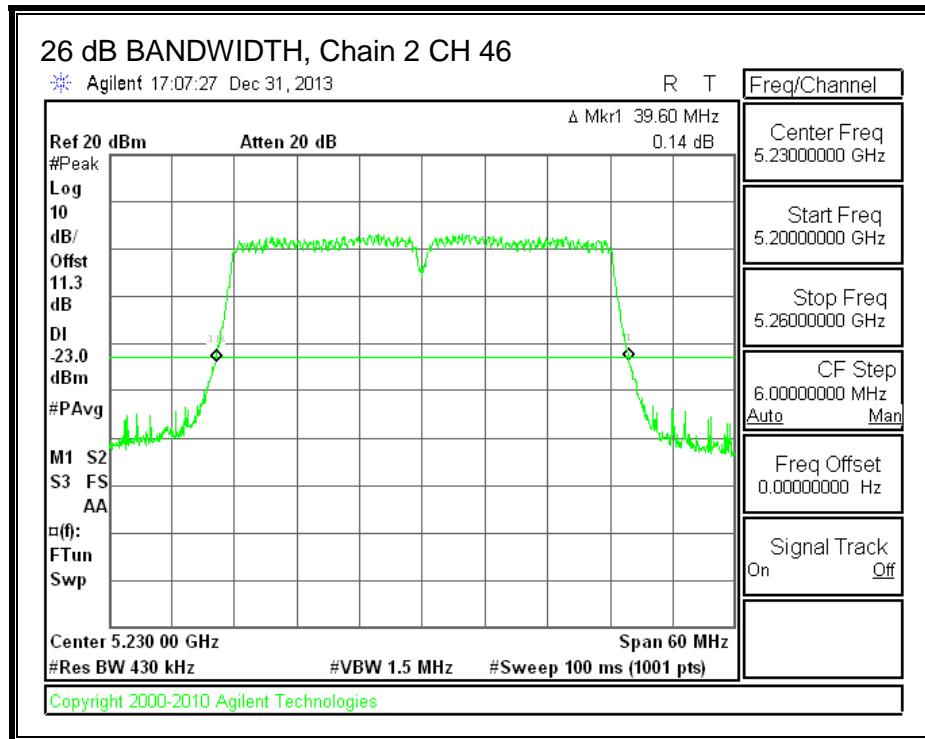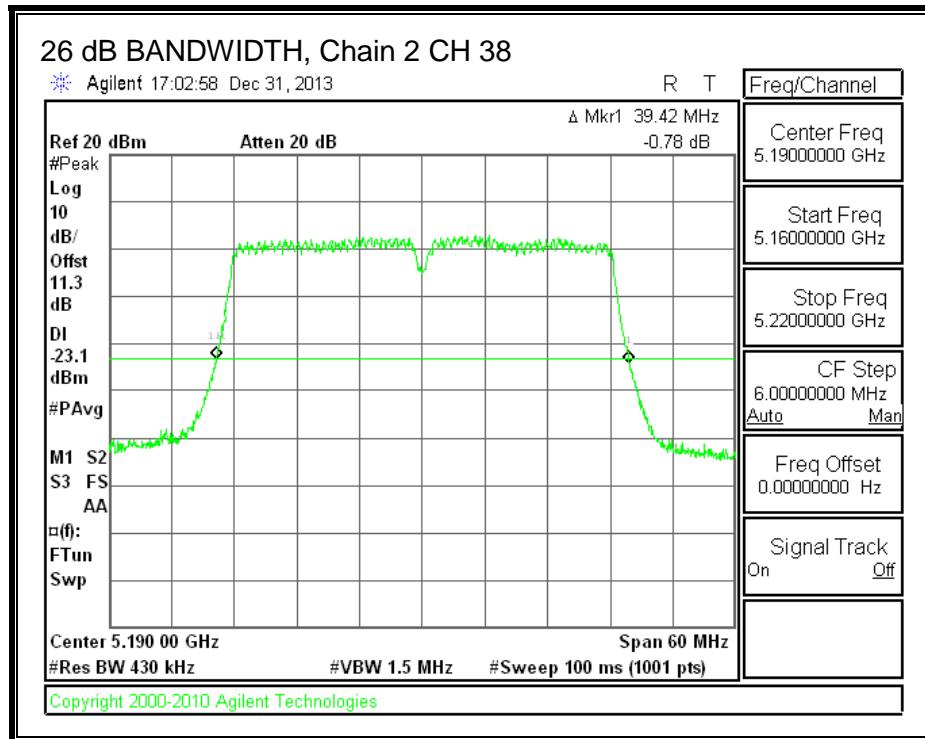



9.7.2. 99% BANDWIDTH**LIMITS**

None; for reporting purposes only.



RESULTS

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
38	5190	36.1726	36.1349	36.1436
46	5230	36.1646	36.1660	36.1571



99% BANDWIDTH, Chain 0

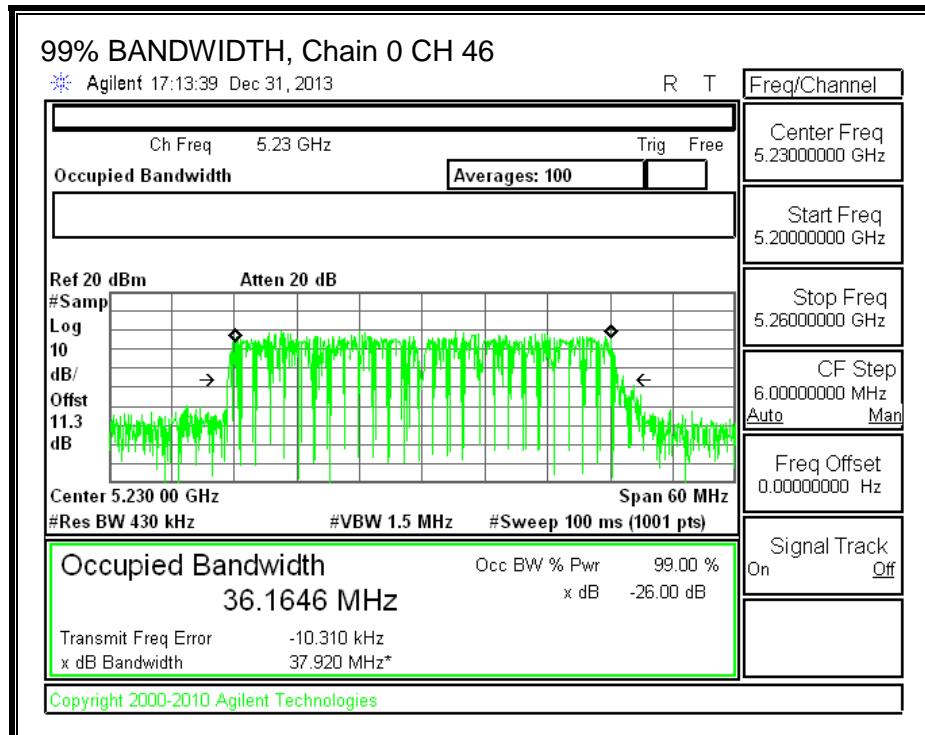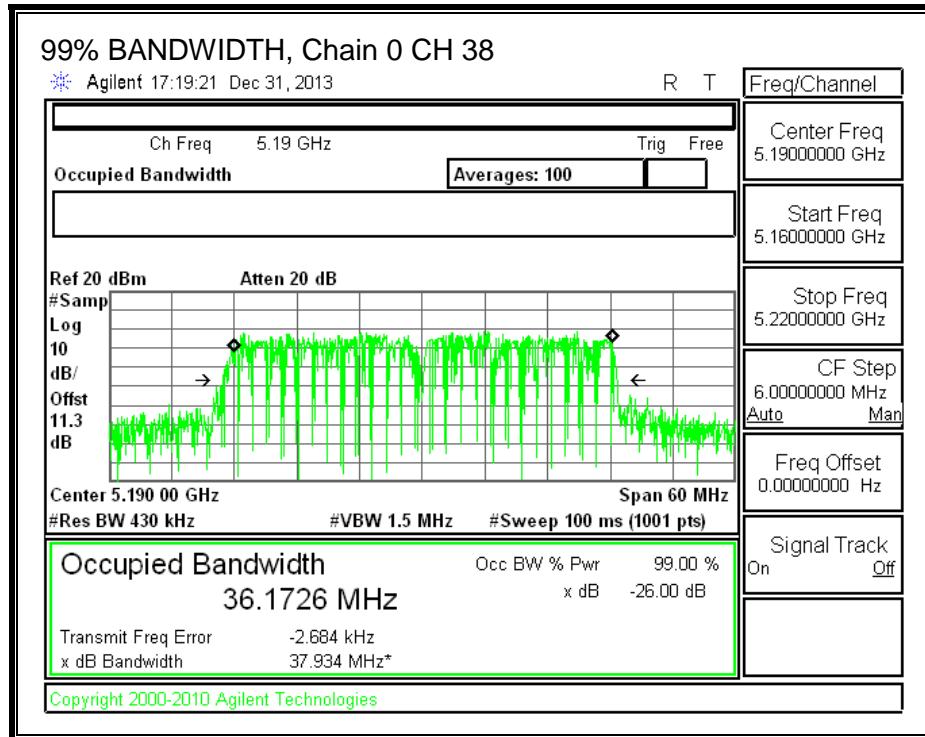

99% BANDWIDTH, Chain 1

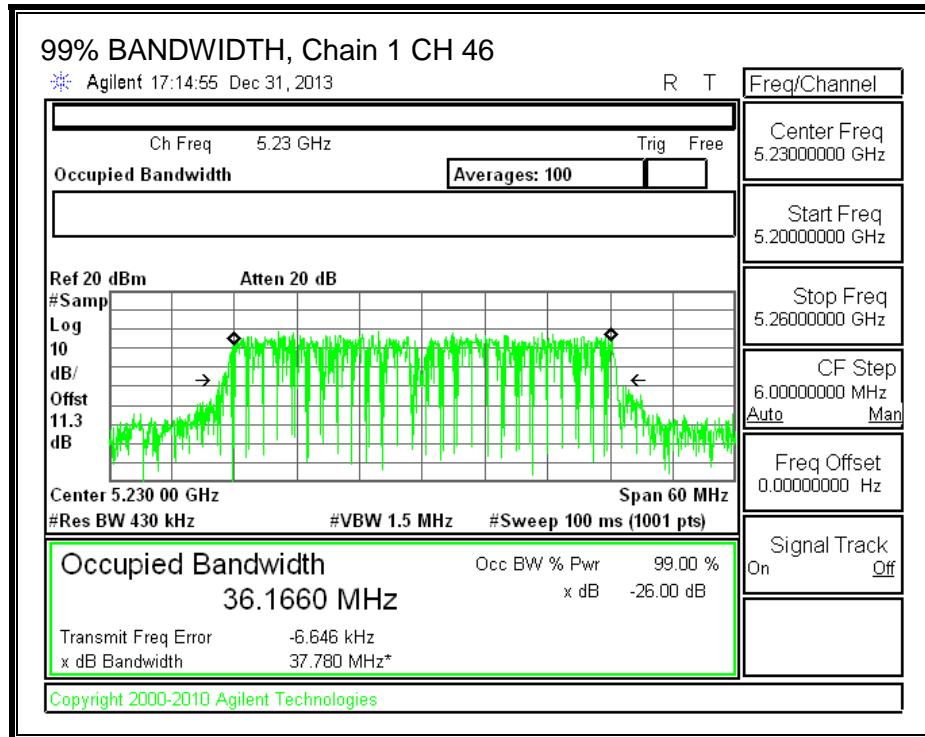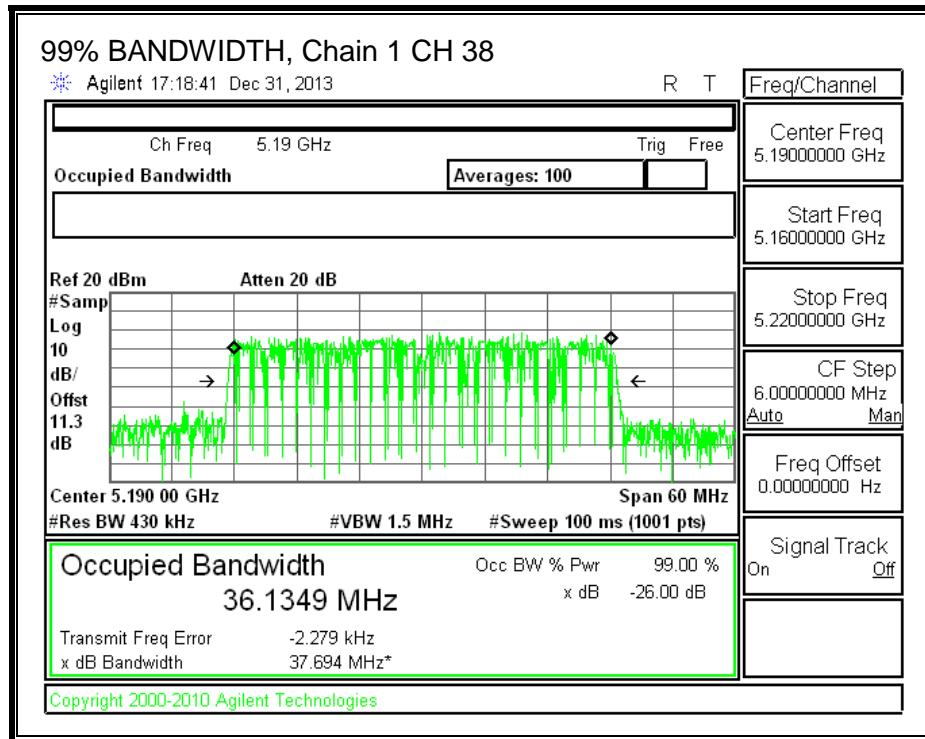

99% BANDWIDTH, Chain 2

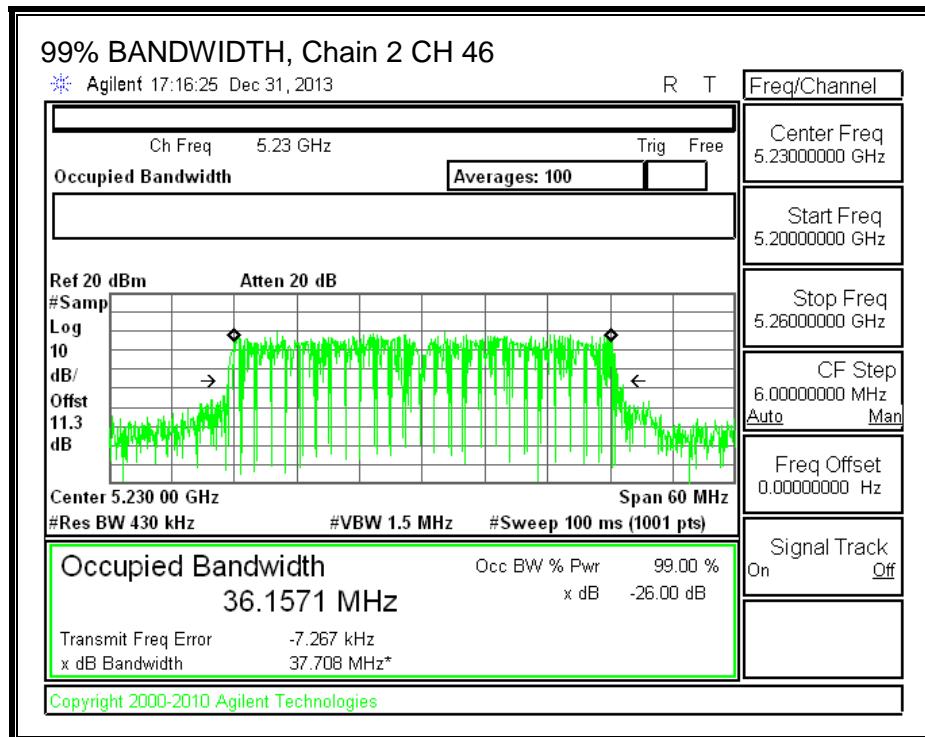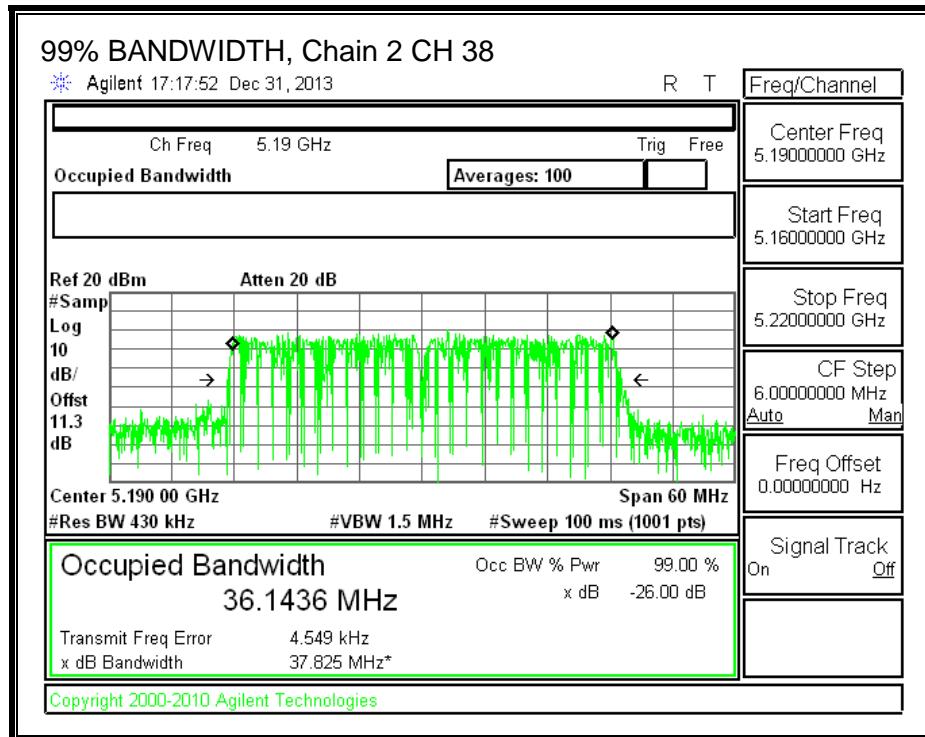

9.7.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
38	5190	11.32	10.53	11.27	15.83
46	5230	11.41	10.91	11.65	16.11

9.7.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

Antenna Gain (dBi)
2.25

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW	Min 99% BW	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
38	5190	39.42	36.1349	2.25	2.25
46	5230	39.18	36.1571	2.25	2.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
38	5190	17.00	23.00	20.75	17.00	4.00	10.00	4.00
46	5230	17.00	23.00	20.75	17.00	4.00	10.00	4.00



Duty Cycle CF (dB)	0.34	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---



Output Power Results



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
38	5190	11.40	10.86	11.49	16.37	17.00	-0.63
46	5230	11.70	11.24	11.99	16.77	17.00	-0.23

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
38	5190	-2.85	-3.39	-2.86	2.09	4.00	-1.91
46	5230	-2.61	-3.12	-2.31	2.45	4.00	-1.55

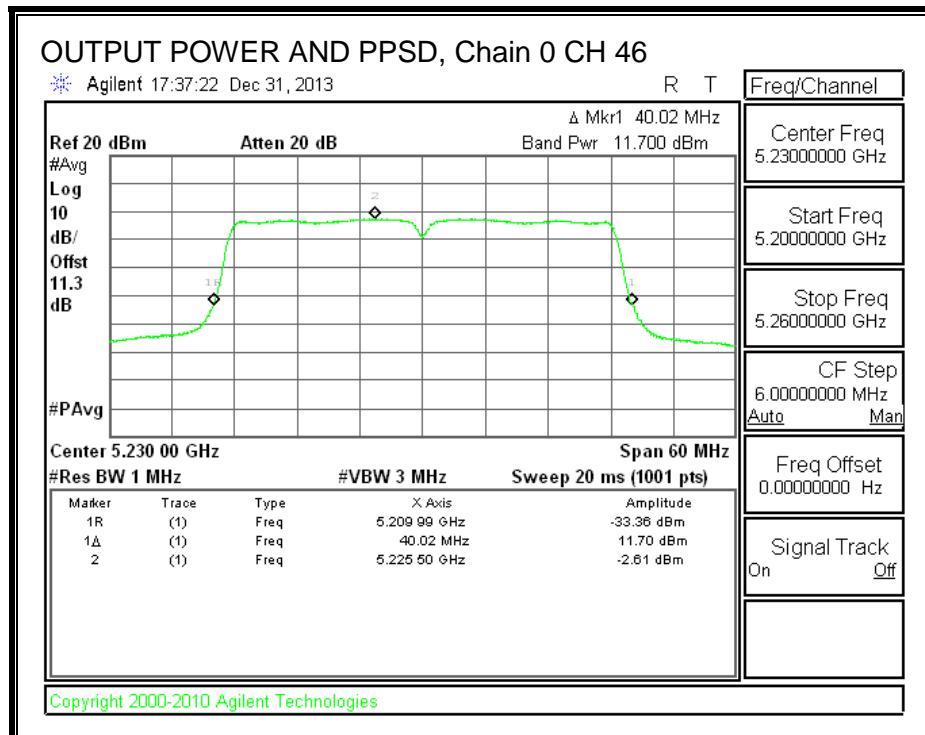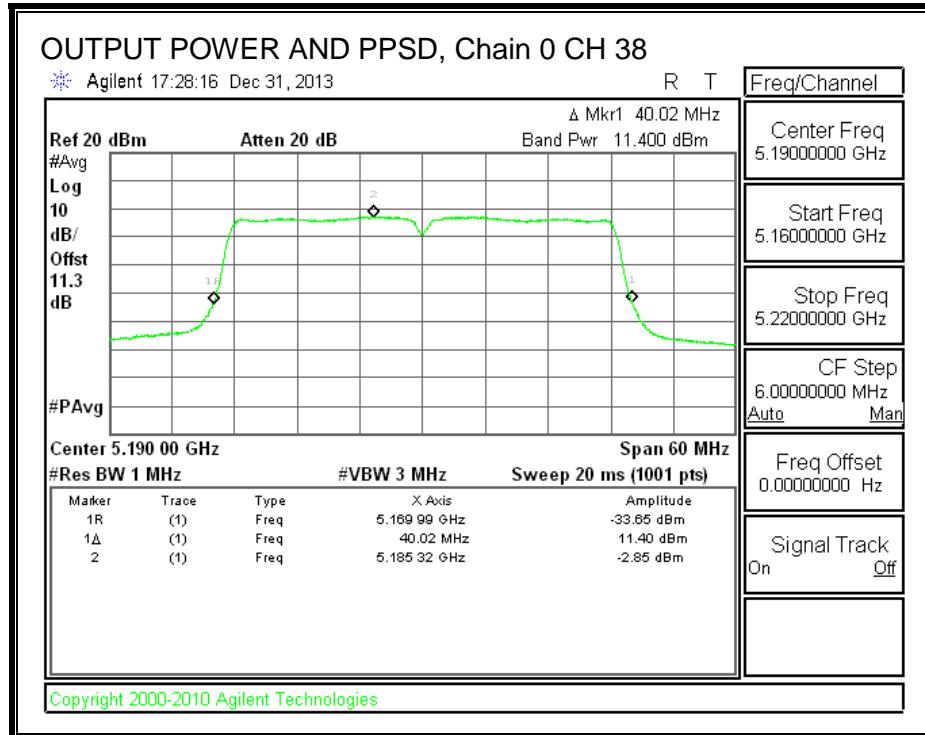**OUTPUT POWER AND PPSD, Chain 1**

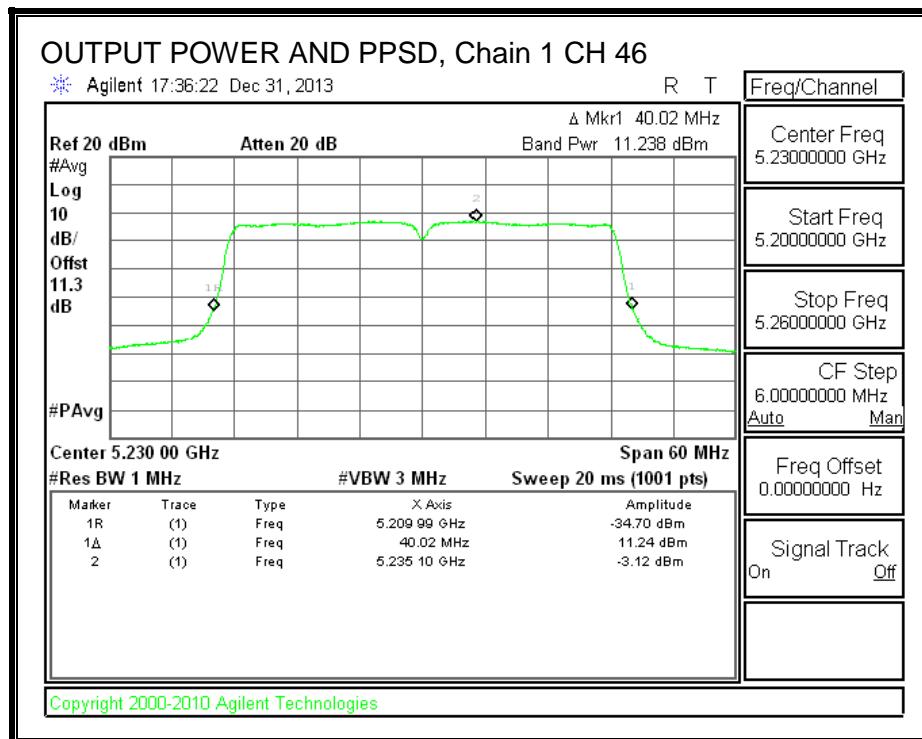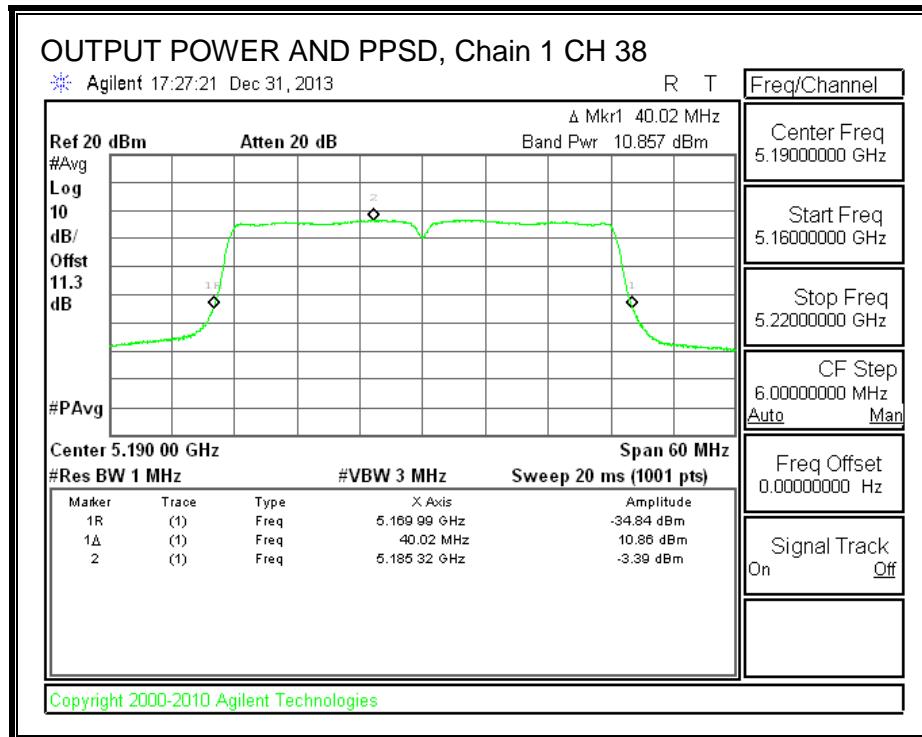

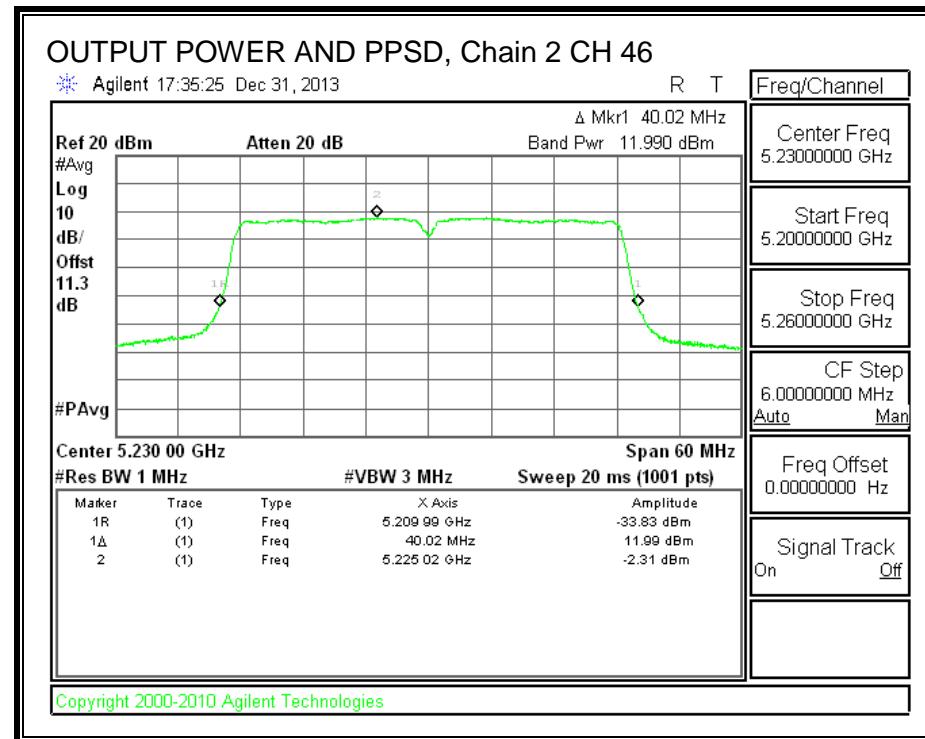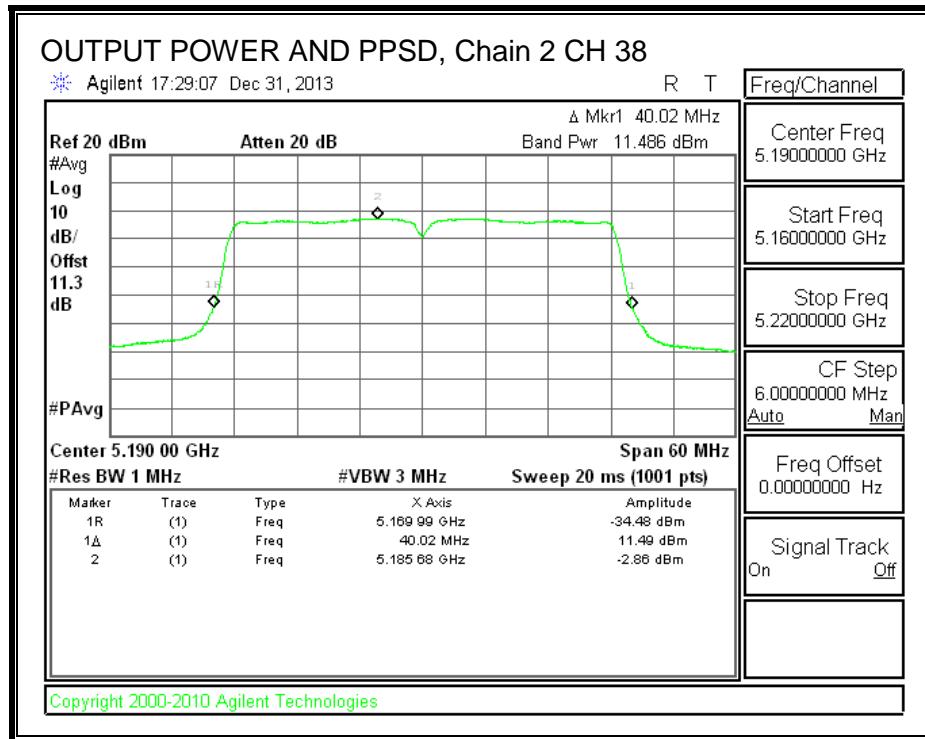

9.8. 802.11ac 80MHz 1TX SISO MODE IN THE 5.2 GHz BAND


9.8.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	82.68

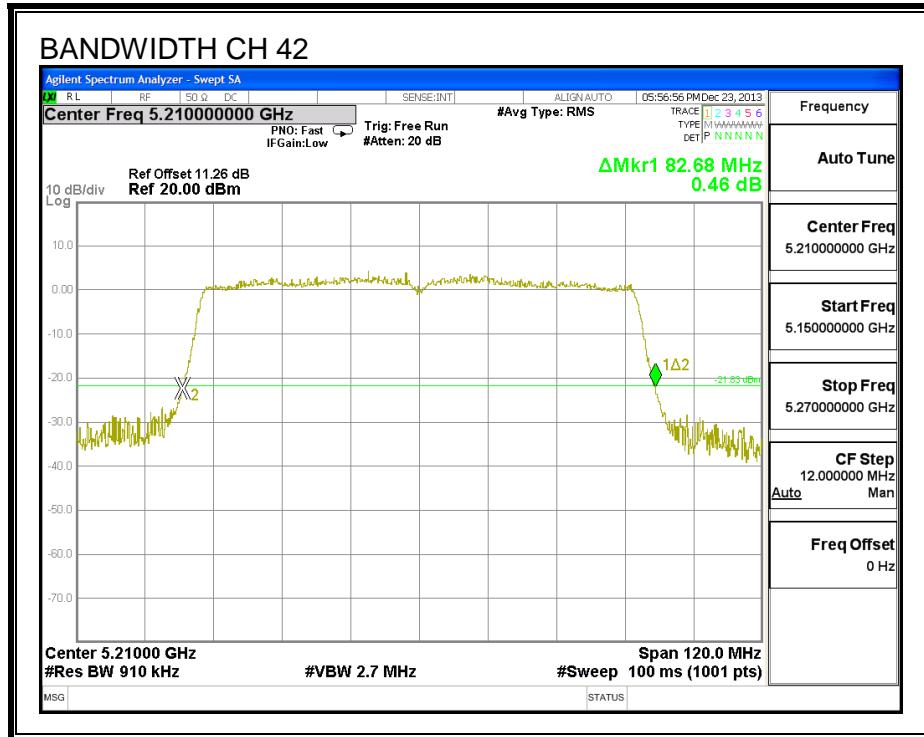


9.8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
42	5210	75.501

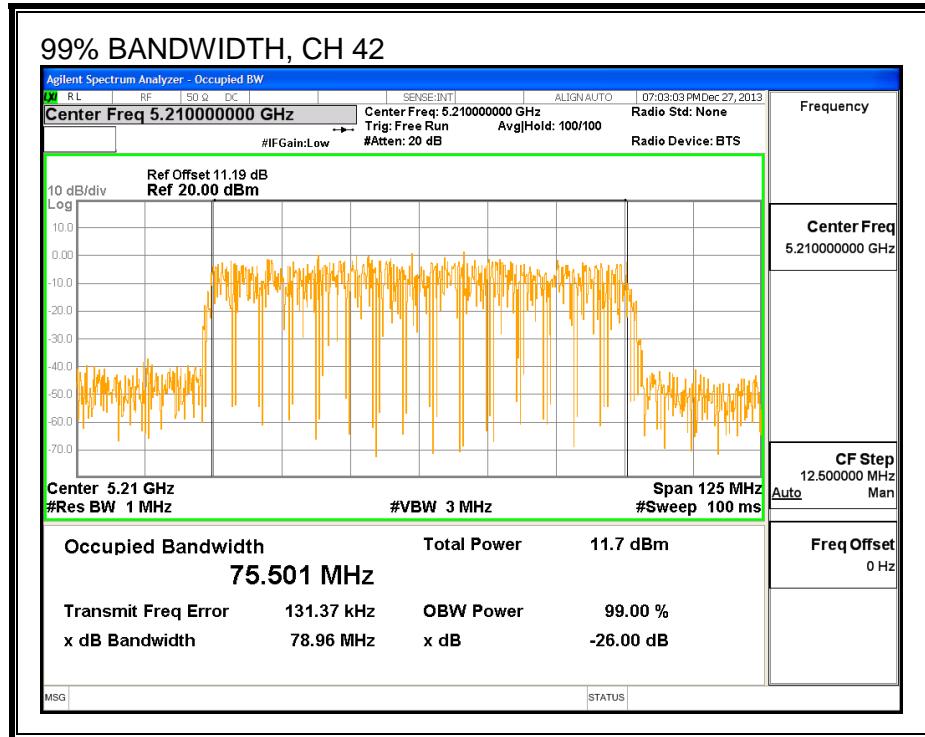

9.8.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
42	5210	11.91

9.8.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Antenna Gain (dBi)
2.25

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
42	5210	82.7	75.2	2.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
42	5210	17.00	23.00	20.75	17.00	4.00	10.00	4.00


Duty Cycle CF (dB)	0.27	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
42	5210	12.49	12.76	17.00	-4.24

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
42	5210	-4.67	-4.40	4.00	-8.40

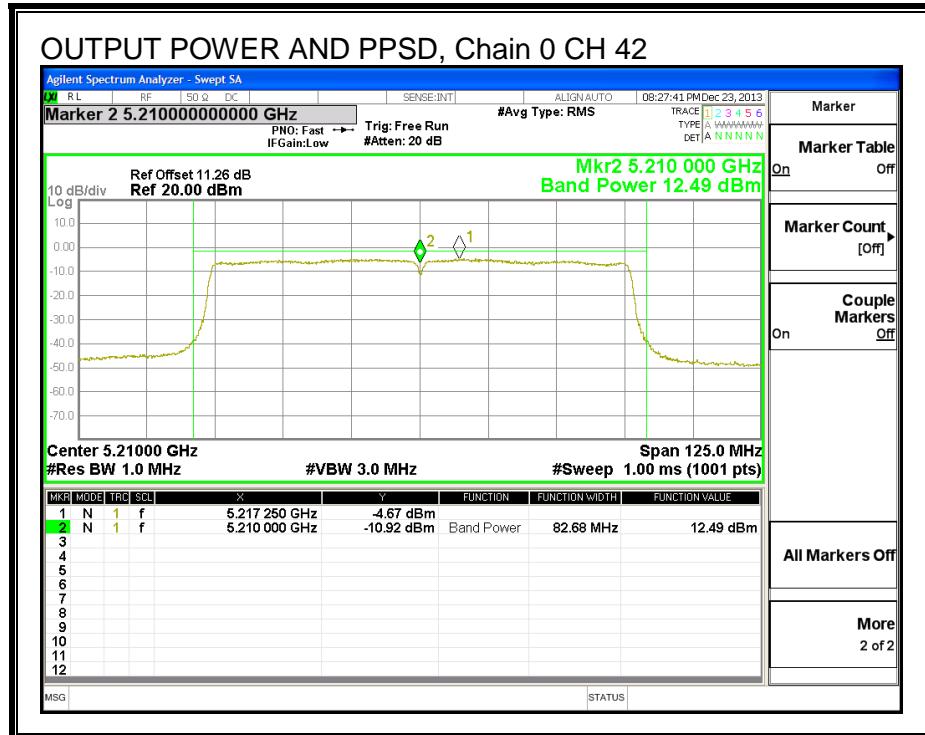

9.9. 802.11ac 80MHz 3TX CDD MODE IN THE 5.2 GHz BAND

9.9.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
42	5210	82.56	82.44	81.96

26 dB BANDWIDTH, Chain 0

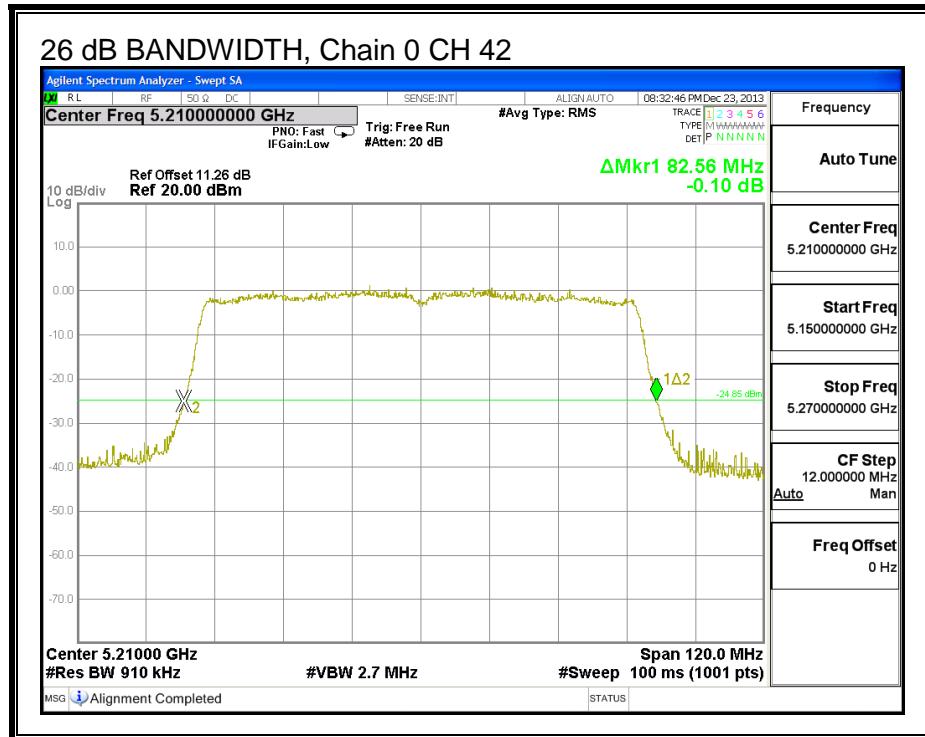

26 dB BANDWIDTH, Chain 1

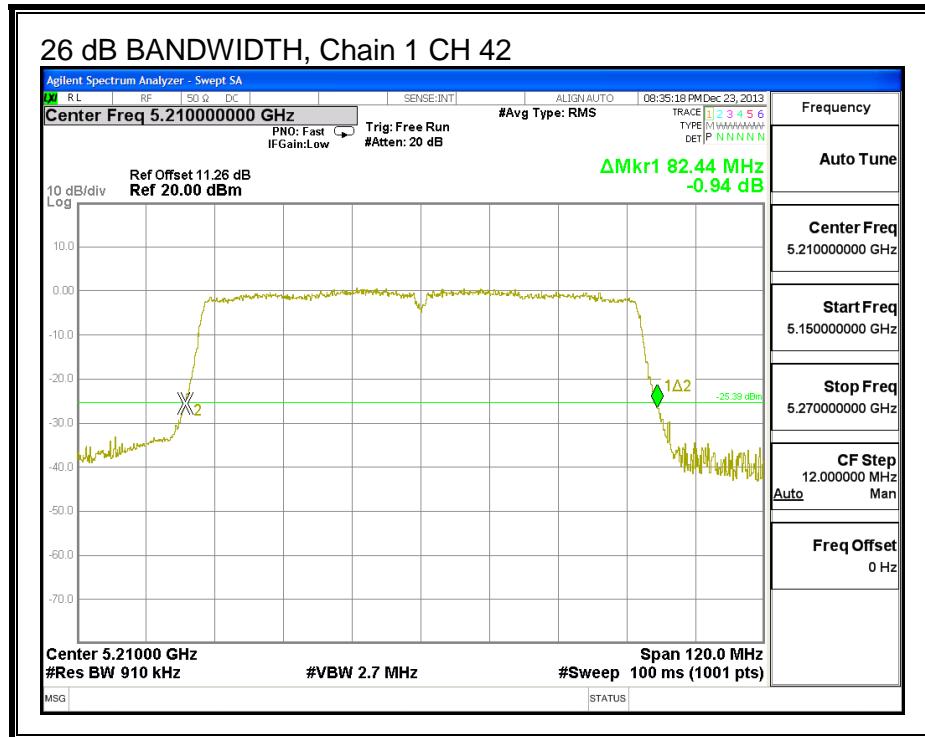

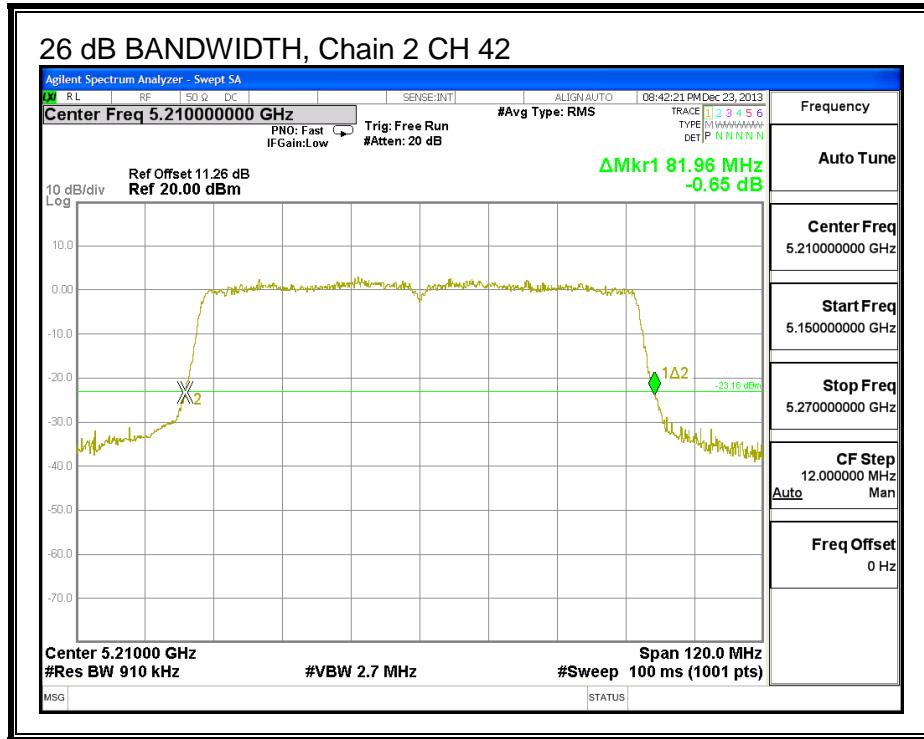


9.9.2. 99% BANDWIDTH**LIMITS**

None; for reporting purposes only.


RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
42	5210	75.252	75.646	75.937

99% BANDWIDTH, Chain 0

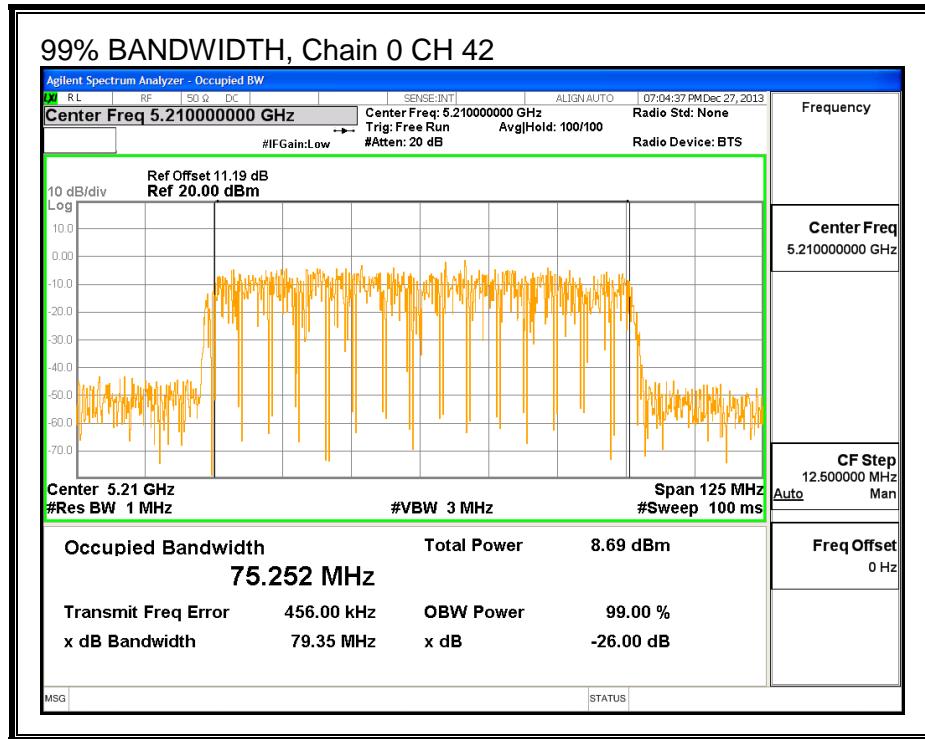

99% BANDWIDTH, Chain 1

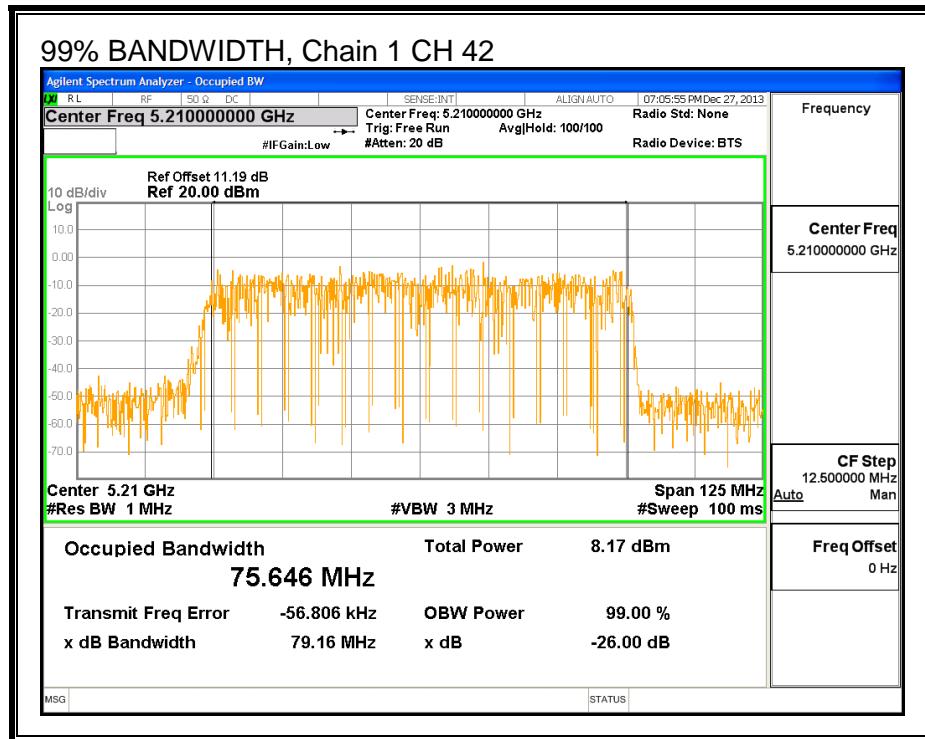

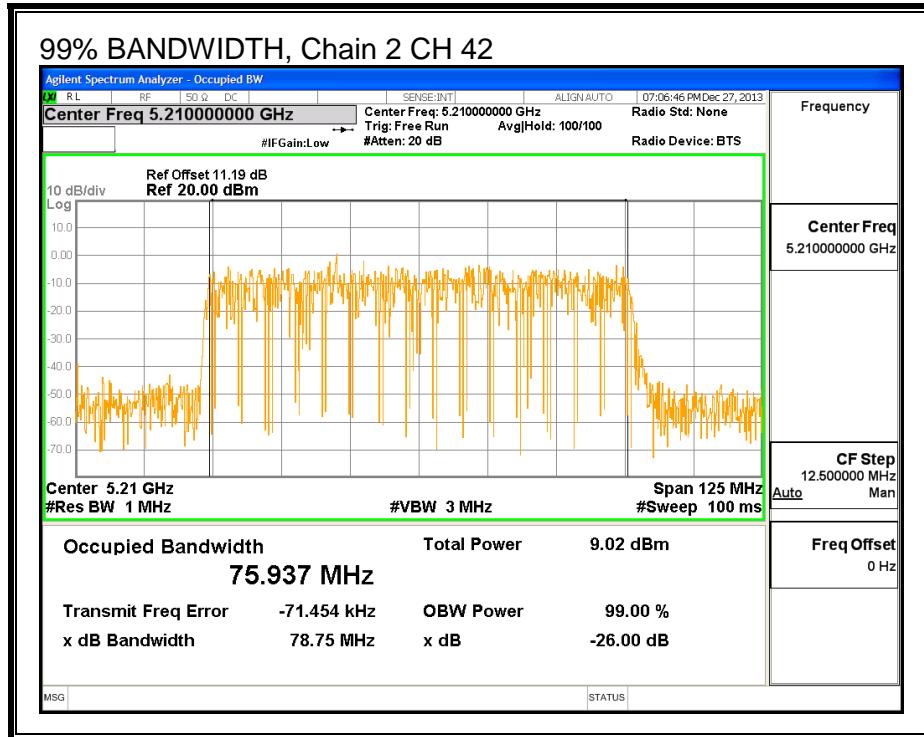

9.9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
42	5210	9.18	8.47	9.55	13.86

9.9.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is the same for each chain. The directional gain is:

Antenna Gain (dBi)	10 * Log (3 chains) (dB)	Correlated Chains Directional Gain (dBi)
2.25	4.77	7.02

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW	Min 99% BW	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
42	5210	82.56	75.5680	2.25	7.02

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
42	5210	17.00	23.00	20.75	17.00	2.98	10.00	2.98



Duty Cycle CF (dB)	0.26	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
42	5210	9.44	8.79	10.16	14.53	17.00	-2.47

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
42	5210	-7.61	-8.31	-7.19	-2.65	2.98	-5.63

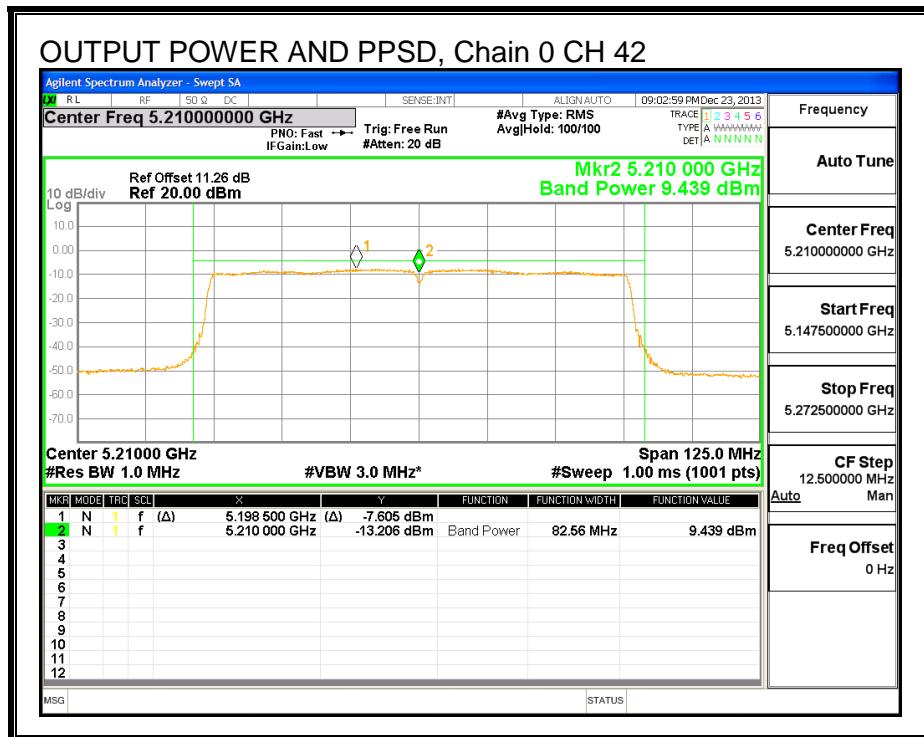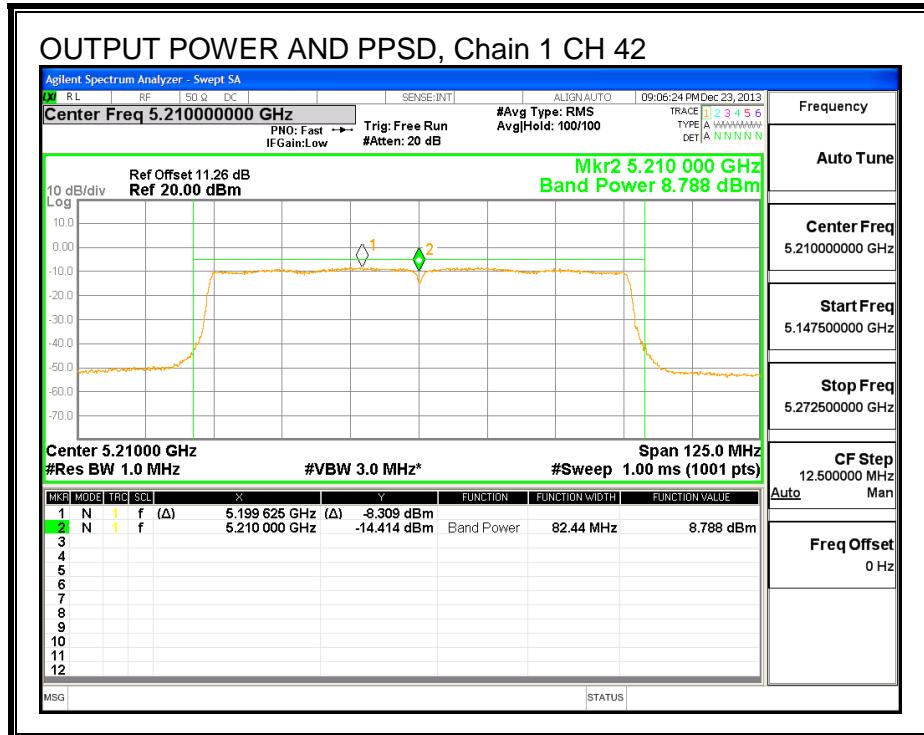OUTPUT POWER AND PPSD, Chain 0OUTPUT POWER AND PPSD, Chain 1

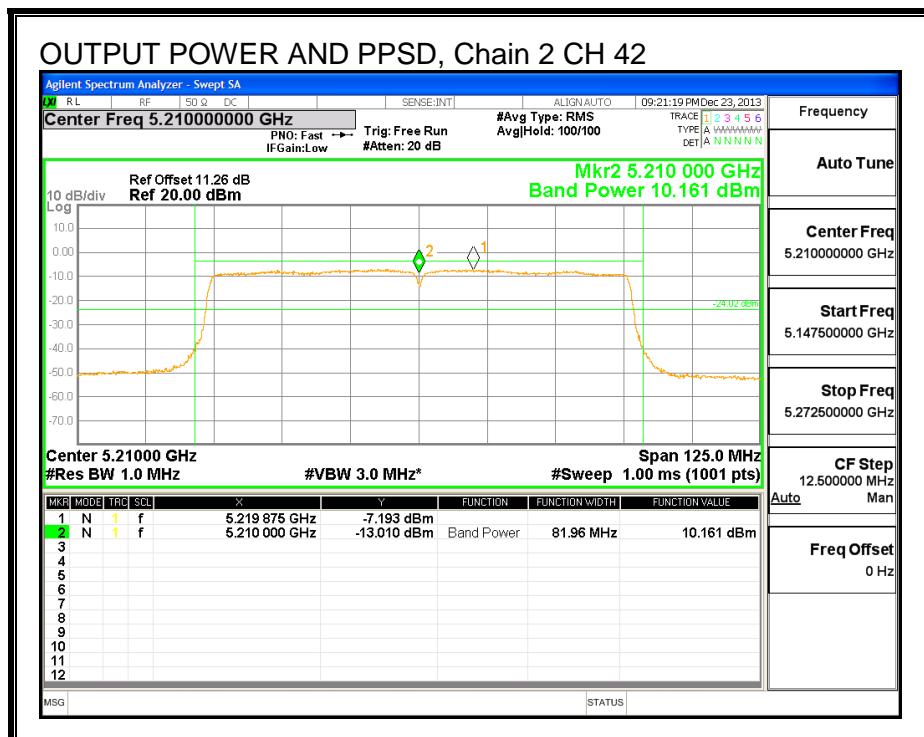

9.10. 802.11ac 80MHz 3TX SDM MODE IN THE 5.2 GHz BAND

9.10.1. 26 dB BANDWIDTH


LIMITS

None; for reporting purposes only.


RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
42	5210	83.125	82.500	82.250

26 dB BANDWIDTH, Chain 0

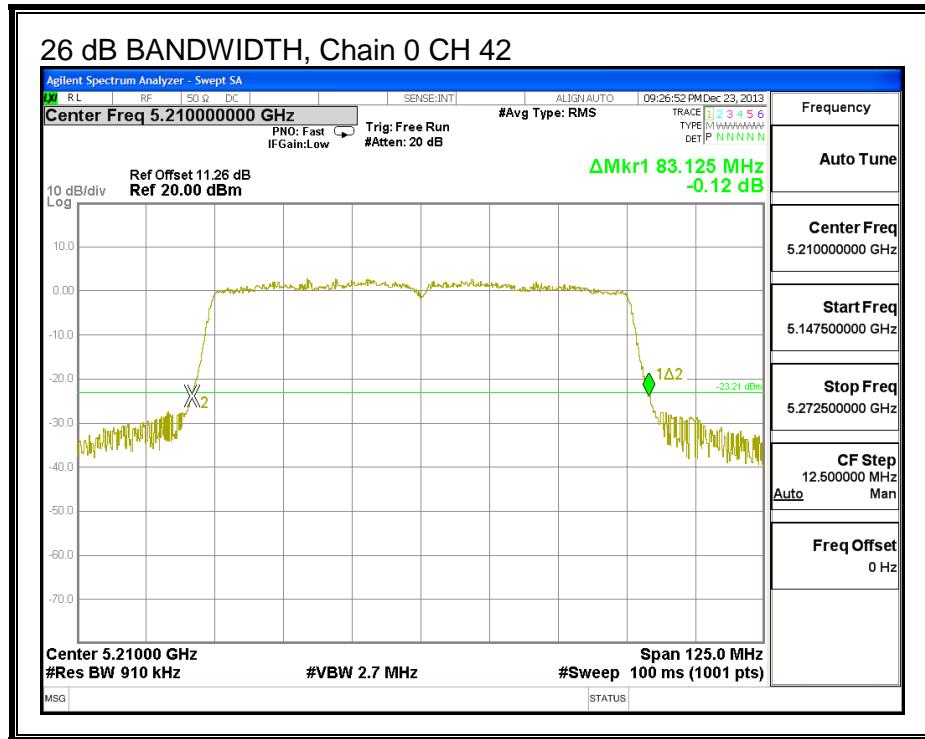

26 dB BANDWIDTH, Chain 1

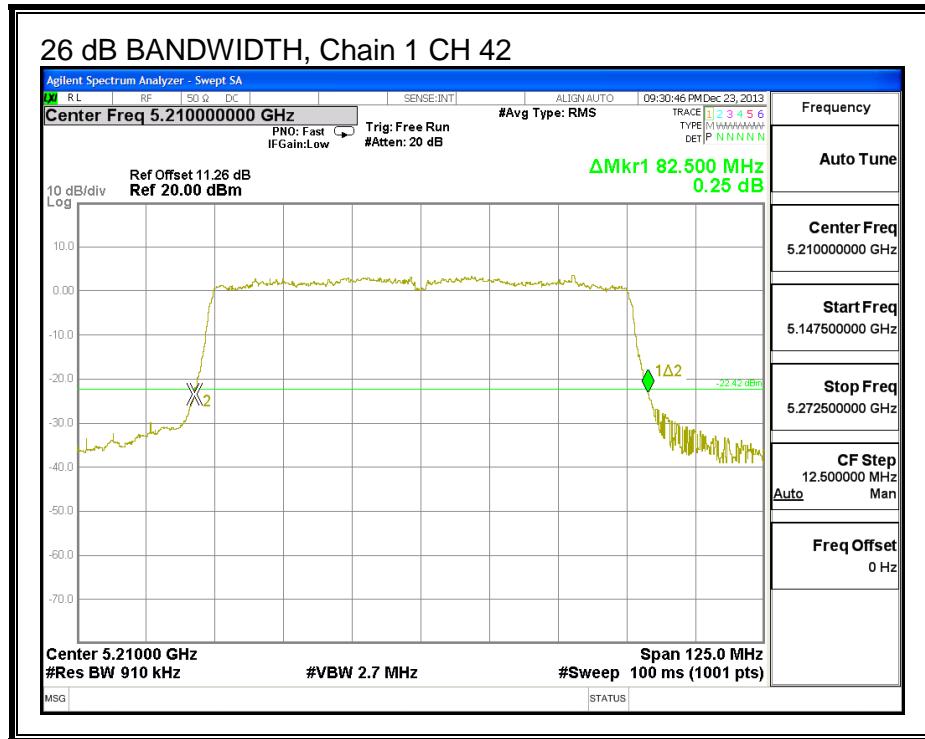

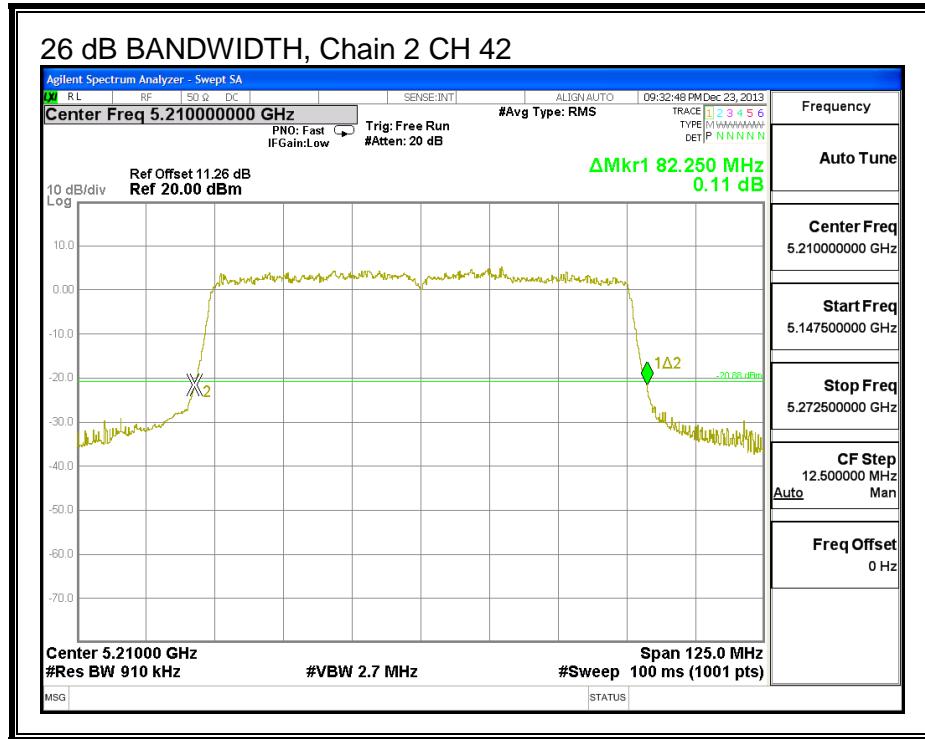


9.10.2. 99% BANDWIDTH**LIMITS**

None; for reporting purposes only.


RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
42	5210	76.029	75.778	75.040

99% BANDWIDTH, Chain 0

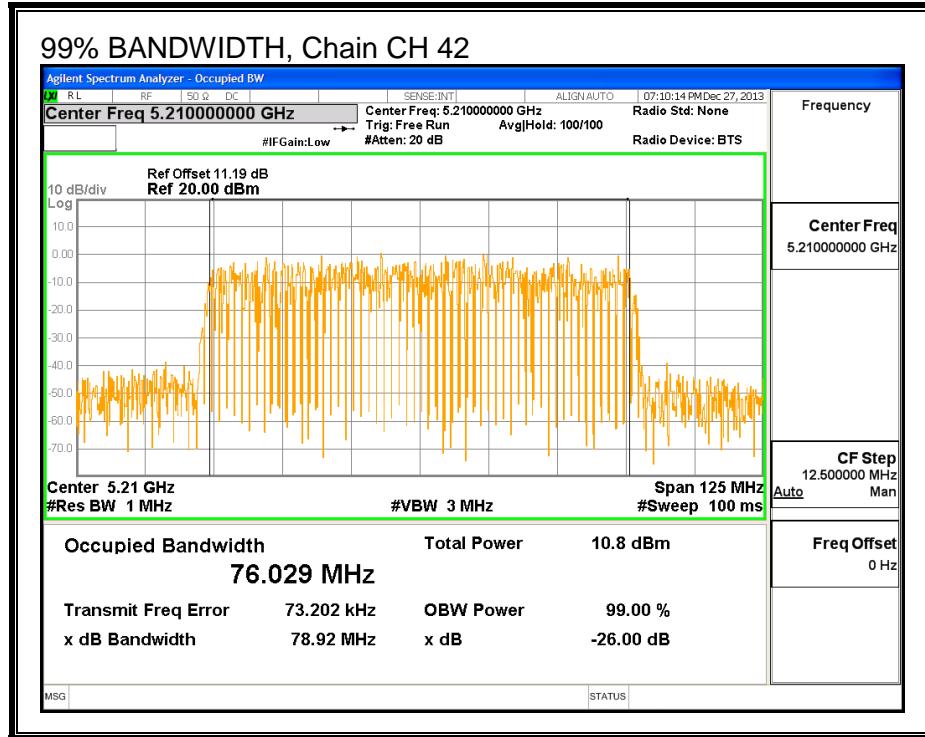

99% BANDWIDTH, Chain 1

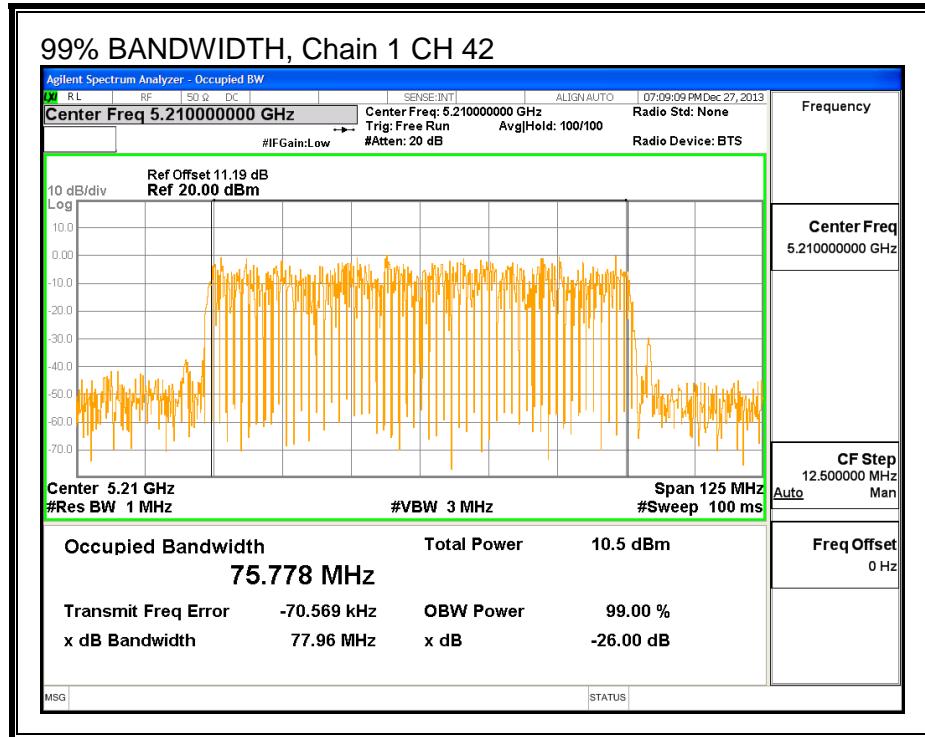

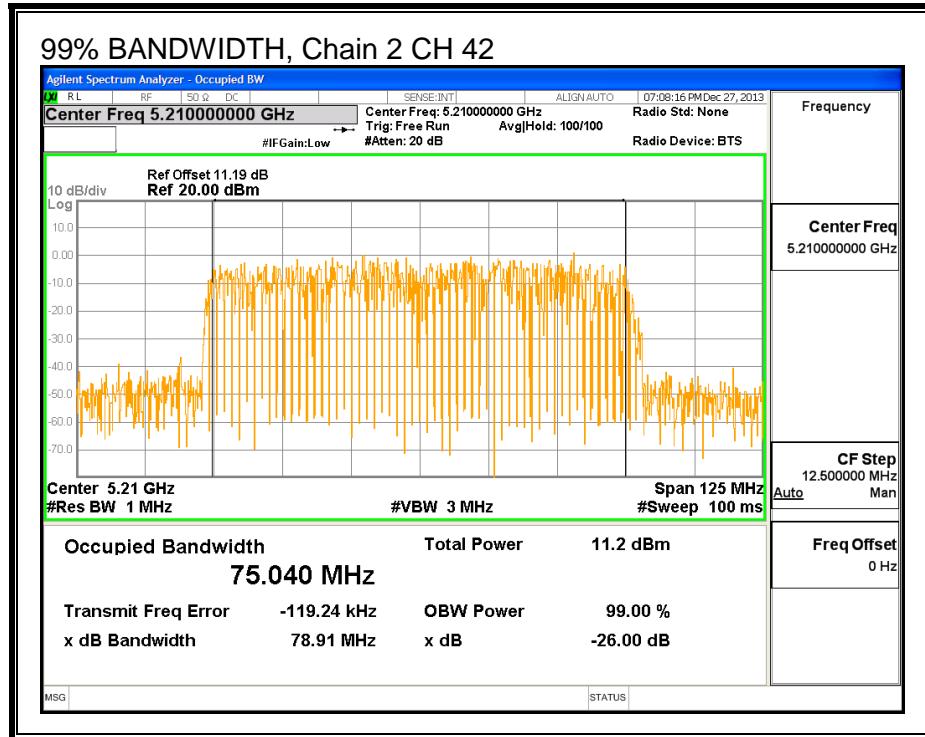

9.10.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.26 dB (including 10 dB pad and 1.26 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Average Power Results

Channel	Frequency (MHz)	Chain 0 Power (dBm)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
42	5210	11.27	10.91	11.61	16.04

9.10.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

Antenna Gain (dBi)
2.25

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW	Min 99% BW	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
42	5210	83.13	76.0110	2.25	2.25

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
42	5210	17.00	23.00	20.75	17.00	4.00	10.00	4.00



Duty Cycle CF (dB)	0.60	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
42	5210	11.22	11.05	11.97	16.80	17.00	-0.20

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Chain 2 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
42	5210	-5.70	-5.70	-4.82	-0.01	4.00	-4.01

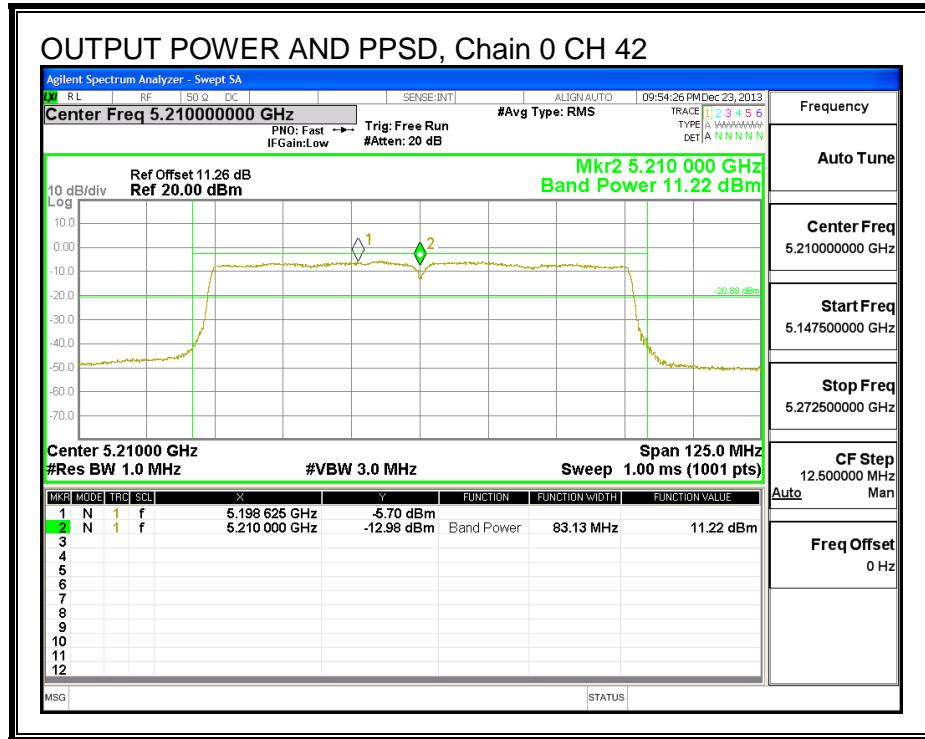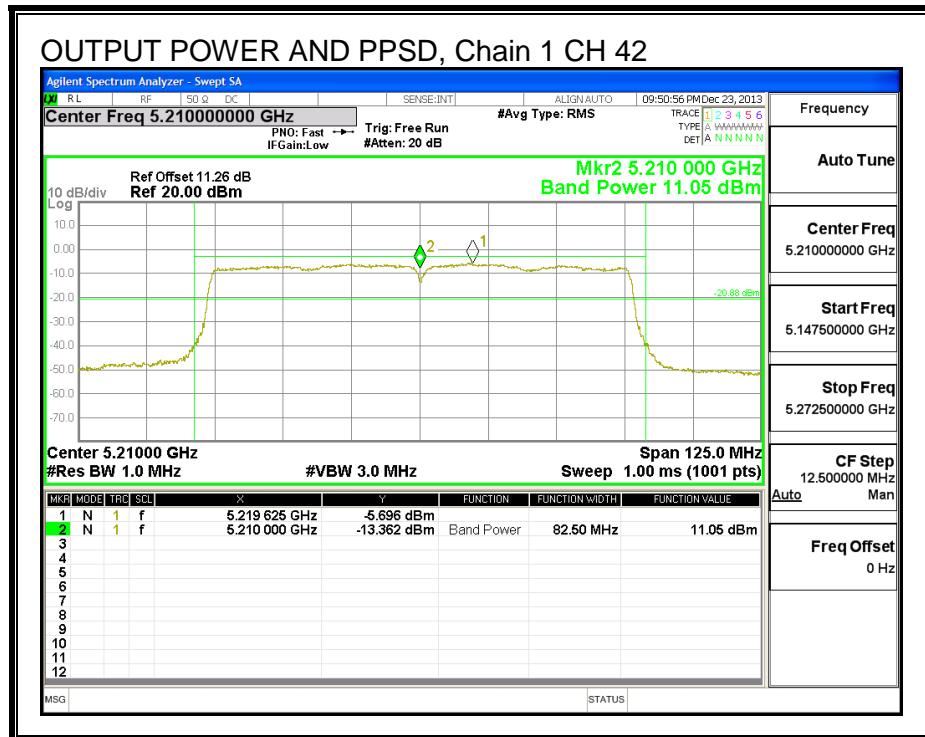OUTPUT POWER AND PPSD, Chain 1

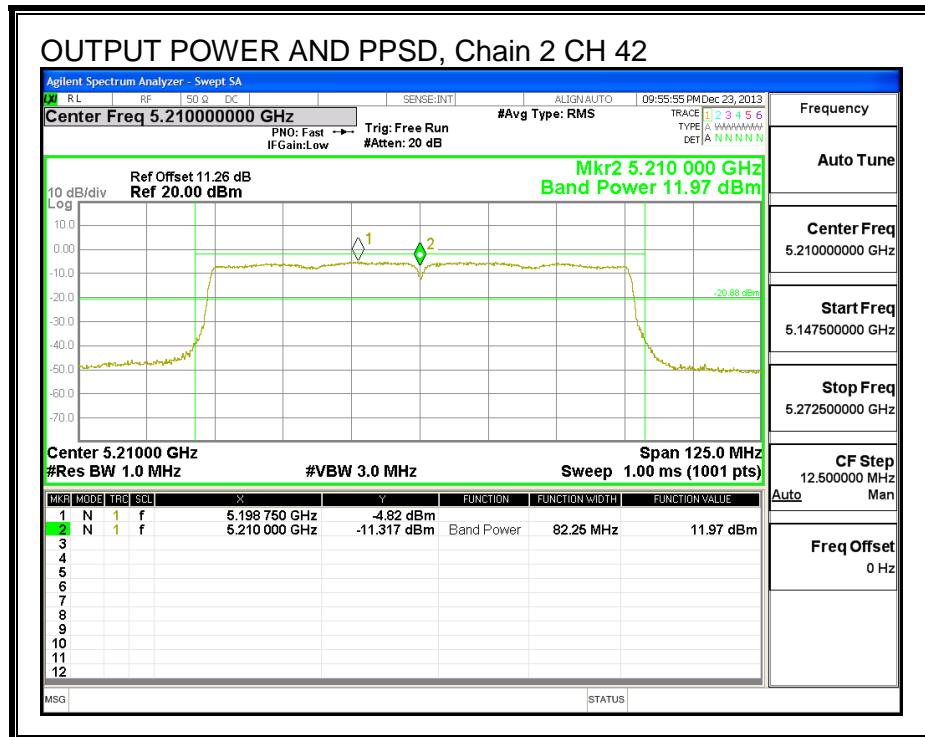

9.11. 802.11a 1TX SISO MODE IN THE 5.3 GHz BAND

9.11.1. 26 dB BANDWIDTH



LIMITS


None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB BW (MHz)
52	5260	20.04
60	5300	20.08
64	5320	20.20

26 dB BANDWIDTH, Chain 0

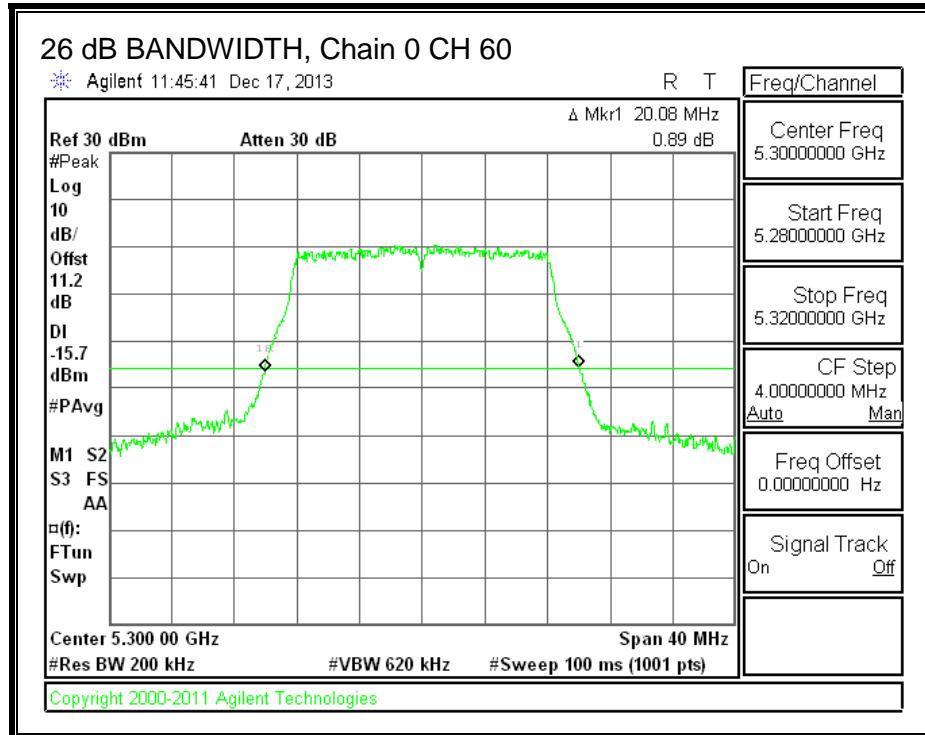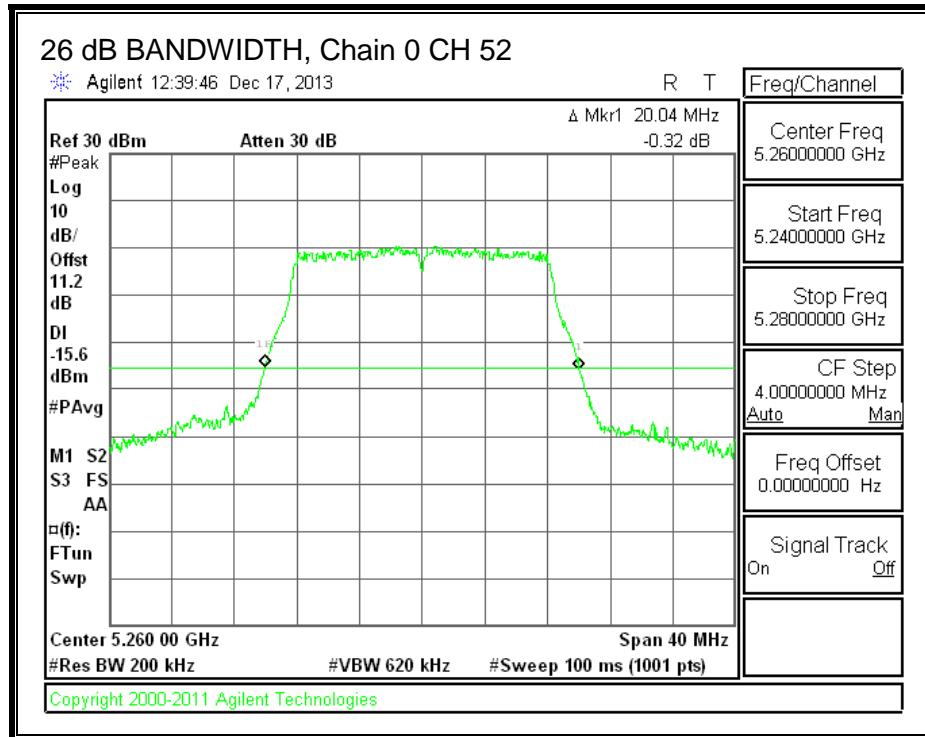

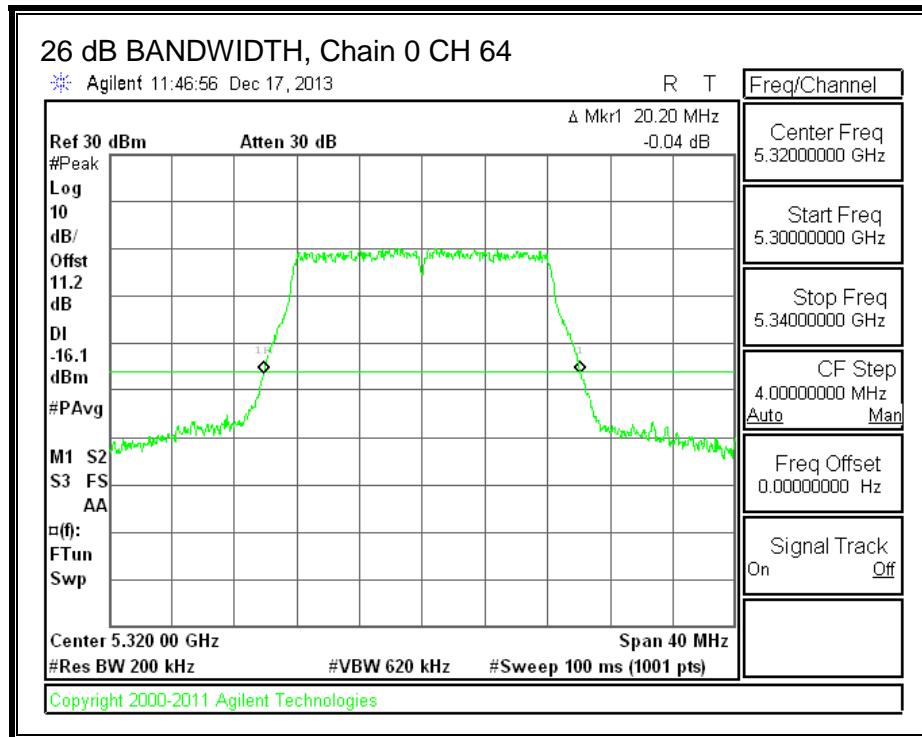



9.11.2. 99% BANDWIDTH


LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
52	5260	16.4493
60	5300	16.4504
64	5320	16.4556

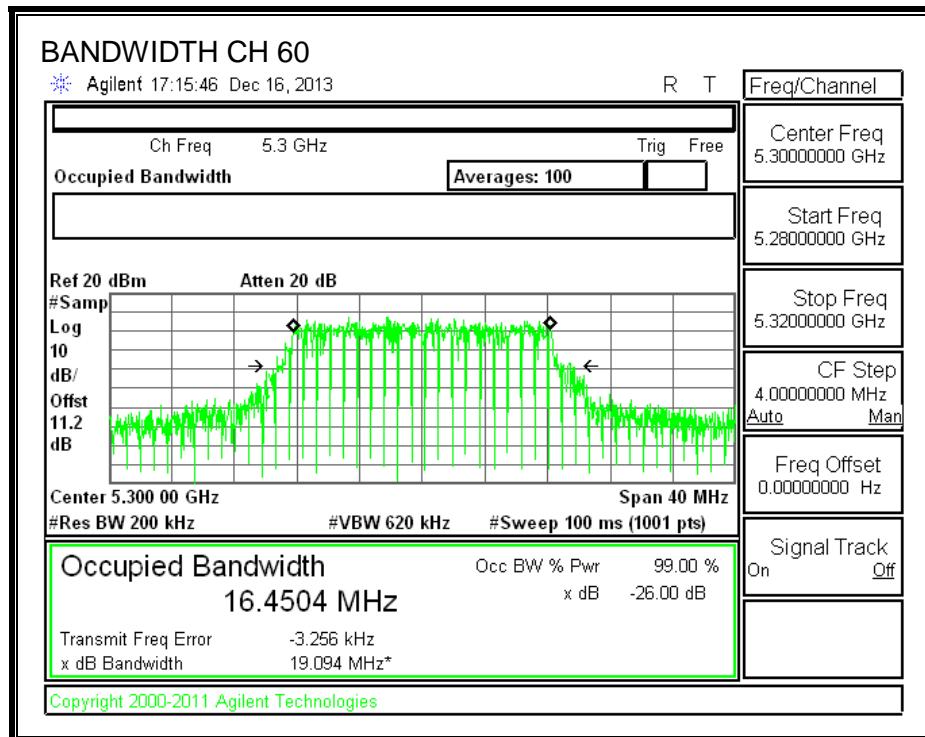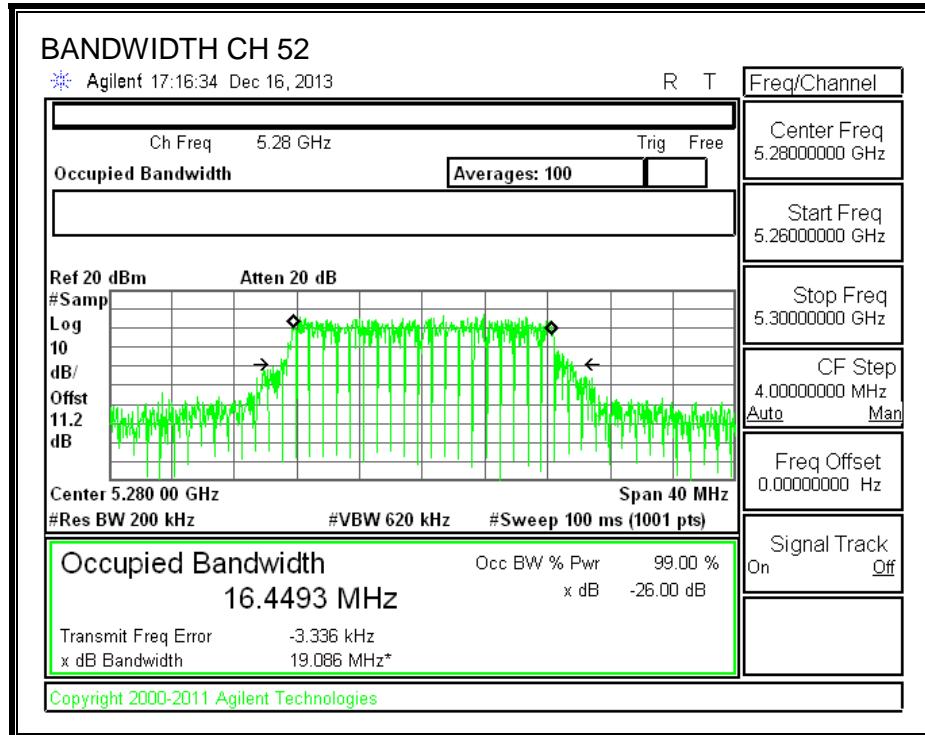

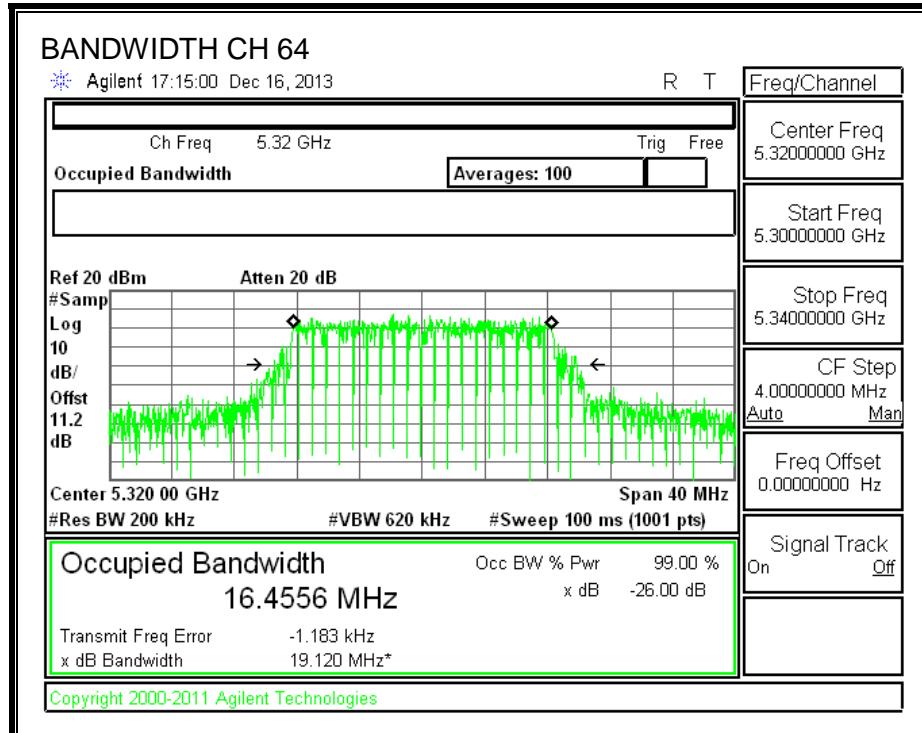

9.11.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.19 dB (including 10 dB pad and 1.19 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
52	5260	20.52
60	5300	20.97
64	5320	19.77

9.11.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
52	5260	20.0	16.4	2.40
60	5300	20.1	16.5	2.40
64	5320	20.2	16.5	2.40

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
52	5260	24.00	23.16	29.16	23.16	11.00	11.00	11.00
60	5300	24.00	23.16	29.16	23.16	11.00	11.00	11.00
64	5320	24.00	23.16	29.16	23.16	11.00	11.00	11.00



Duty Cycle CF (dB)	0.22	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
52	5260	21.07	21.29	23.16	-1.87
60	5300	21.45	21.67	23.16	-1.49
64	5320	20.72	20.94	23.16	-2.22

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
52	5260	10.51	10.73	11.00	-0.27
60	5300	10.66	10.88	11.00	-0.12
64	5320	9.41	9.63	11.00	-1.37

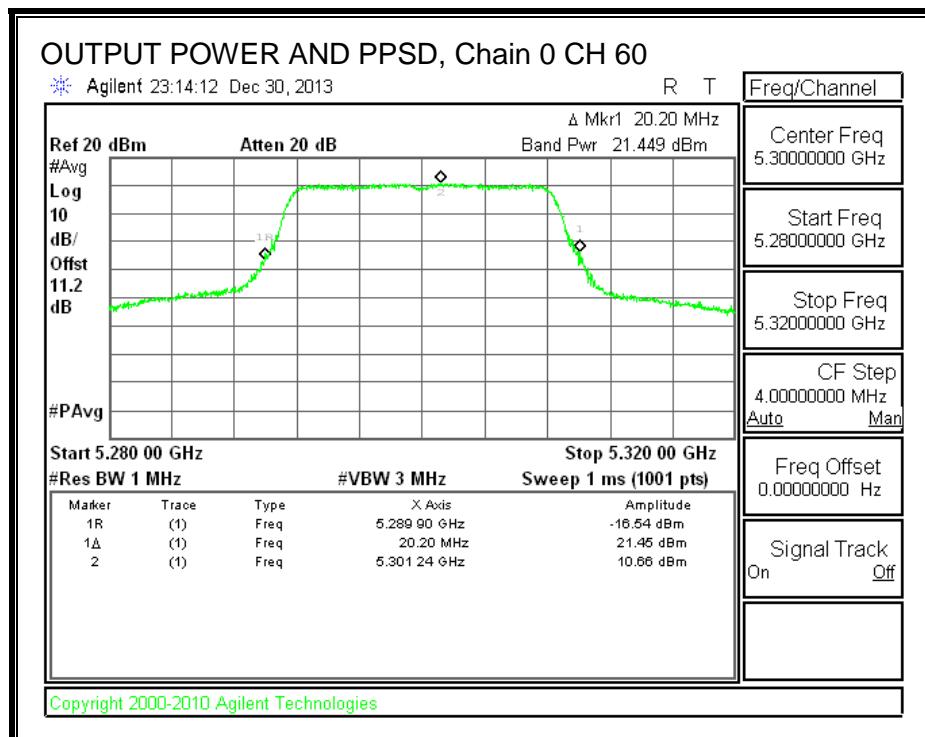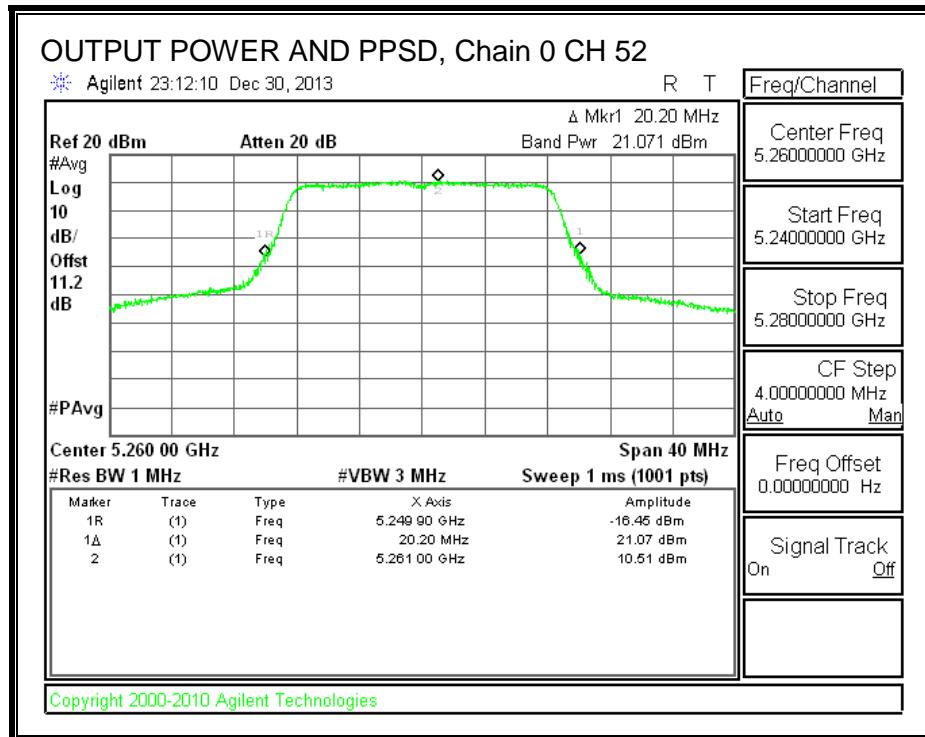

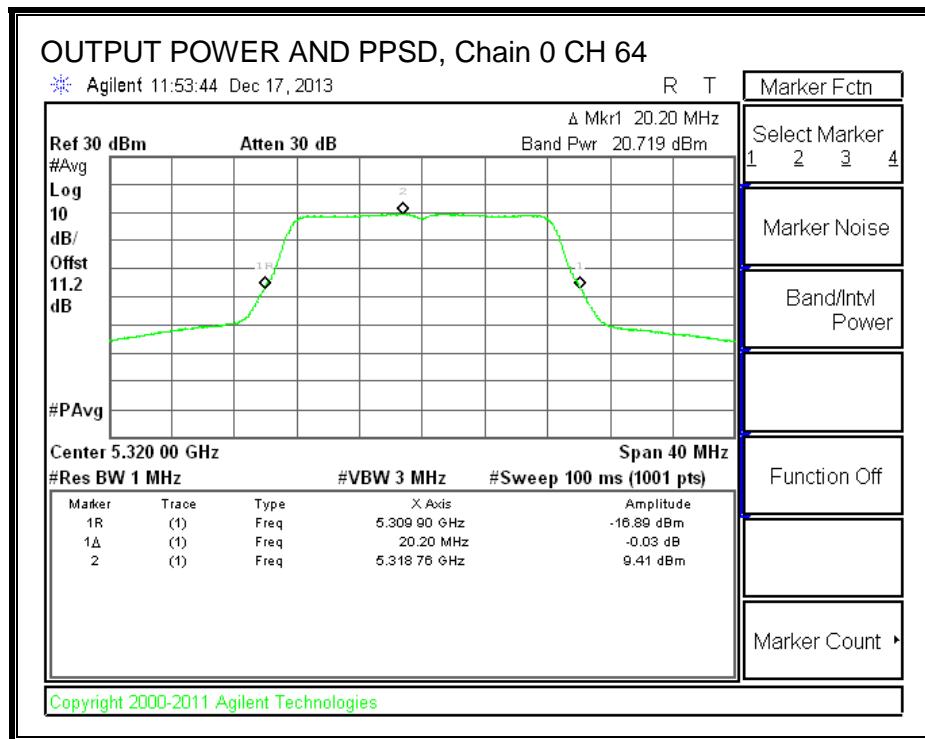

9.12. 802.11n HT20 1TX SISO MODE IN THE 5.3 GHz BAND

9.12.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
52	5260	20.60
60	5300	20.60
64	5320	20.56

26 dB BANDWIDTH

