

承 认 书

APPROVAL SHEET

客 户 名 称

CUSTOMER NAME:

产 品 名 称

PRODUCT NAME: 2.4G W70 白色天线 L=130mm+端子

客 户 料 号

CUSTOMER P/N:

优比电子料号

Youbi P/N: UB02C130W3D2511A REV: B

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
CHECKED BY:	Yongxin. Lu 	
APPROVED BY:	Changxing. Liu	
DATE:	2021/10/29	

Modification History

Version	Content Revision	Issued by	Date
A	Original version	Yongxin. Lu	2021-10-23

Content



<i>Item</i>	<i>Description</i>
1.-----	Electrical Specification
2.-----	Test Items and Equipment
3.-----	S Parameter
4.-----	Efficiency and Gain
5.-----	Radiation Pattern
6.-----	Mechanical Specification
7.-----	Packaging

1. Electrical Specification:

Characteristics	Specifications	Unit
Outline Dimensions	13x105,L130	mm
Frequency	2400-2500	MHz
Impedance	50	Ω
VSWR	≤ 1.92	
Polarization	Linear Polarization	
Gain	3.0 $\pm$ 0.5	dBi
Efficiency	>50	%
Connector Type	MHF-1-Plug	
Operating temperature	-20 $^{\circ}$ C~+50 $^{\circ}$ C	
Storage Temp	-20 $^{\circ}$ C~+50 $^{\circ}$ C	

2.Test Items and Equipment


	Test items	Test equipment
S Parameter	1.Return Loss 2.VSWR	Network analyzer (Agilent E5071B)
The whole machine of Passive parameters	1.Frequency 2.Gain 3.Radiation Pattern	1.3D microwave darkroom (5m*5m*5m) 2.Network analyzer (Agilent E5071B)
The whole machine of Active parameters	1.TRP 2.TIS	1.3D microwave darkroom (5m*5m*5m) 2.Comprehensive test instrument (CMW500)

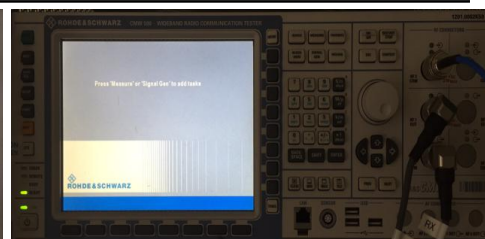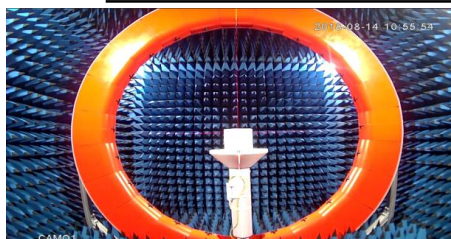

3. S Parameter


Frequency (MHz)	Return Loss (dB)	VSWR
2400	-13.04	1.57
2450	-21.76	1.17
2500	-21.14	1.19

* Voltage Standing Wave Ratio(VSWR)
Return Loss(RL)
 $RL=20*\log_{10}[(VSWR+1)/(VSWR-1)]$

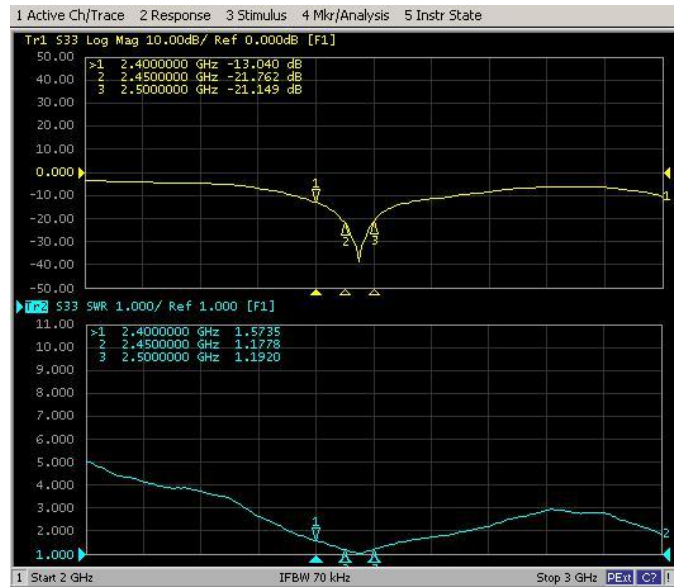


4. Efficiency and Gain

Frequency (MHz)	2400	2450	2500
Efficiency (%)	68.55	69.82	72.11
Gain (dBi)	3.14	3.33	3.34

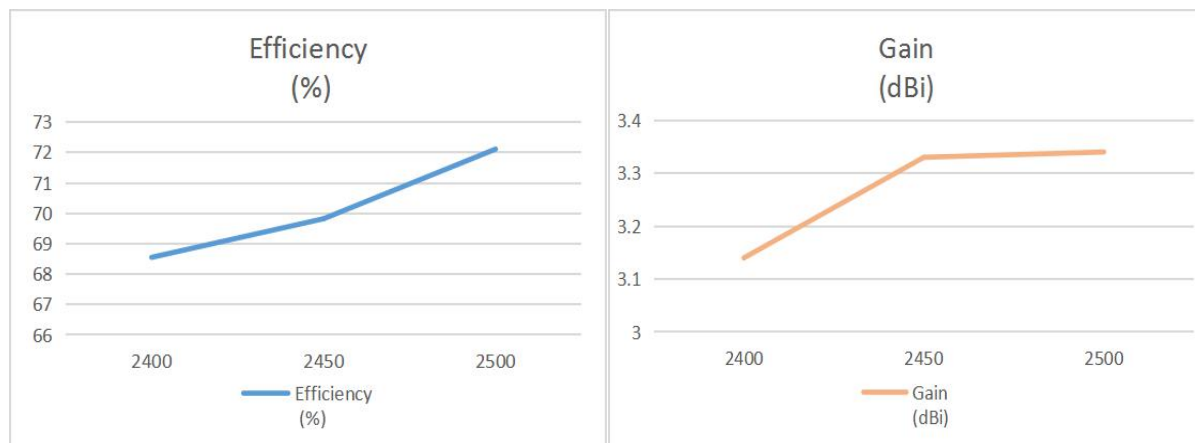


5. Radiation Pattern


5-1 Antenna 3D Radiation Pattern

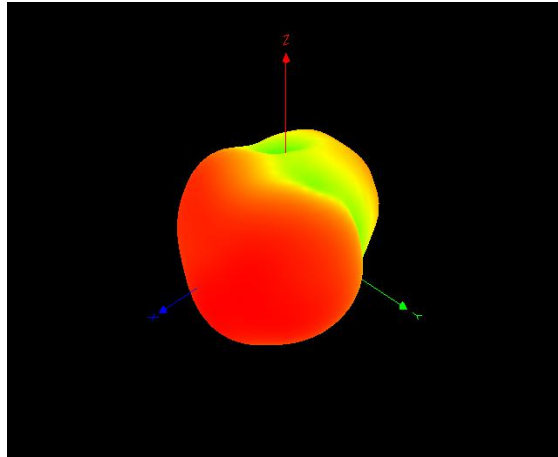

2400MHz

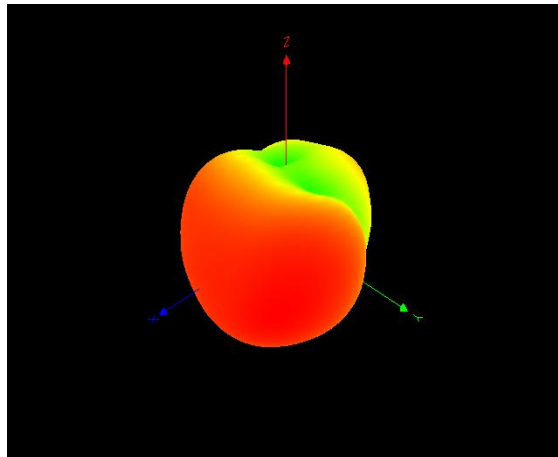


2450MHz

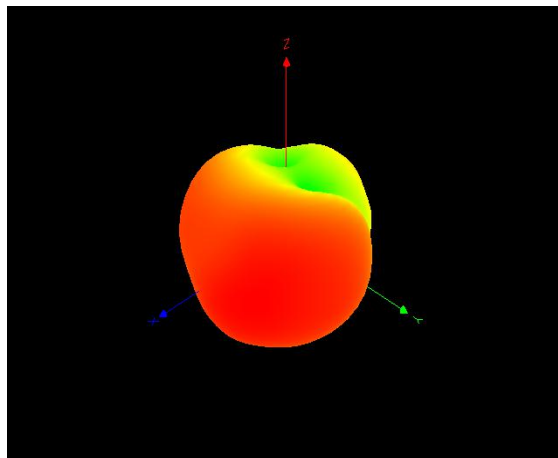


2500MHz


5-2 Antenna 2D Radiation Pattern

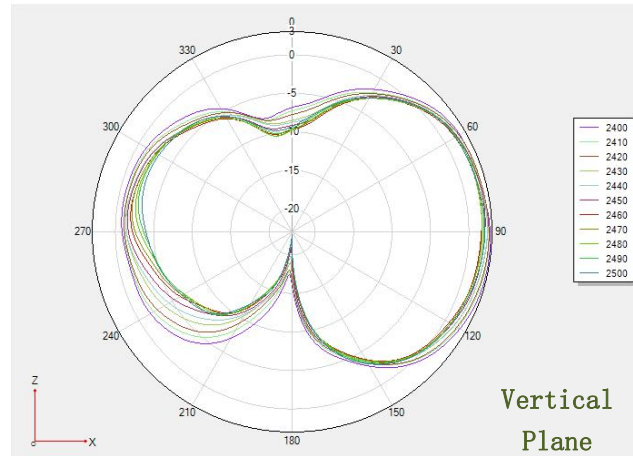

Phi 0 2D

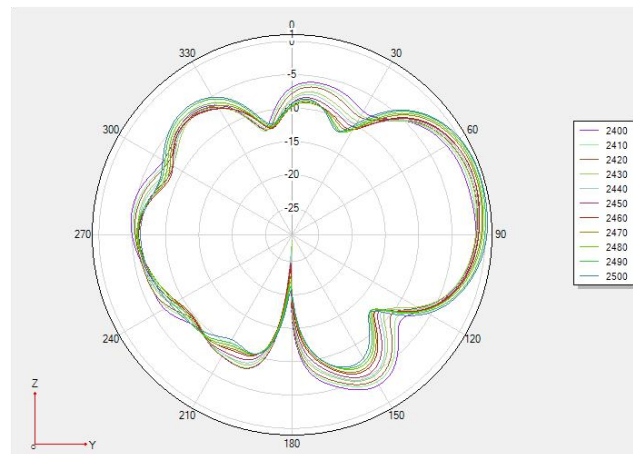


Phi 90 2D

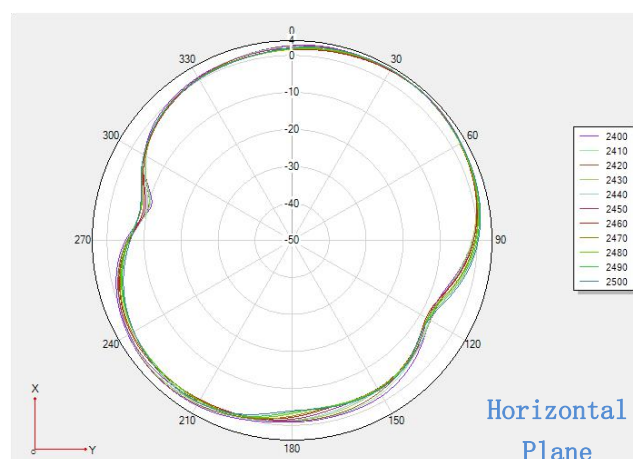

Theta 90 2D

6. Mechanical Specification:

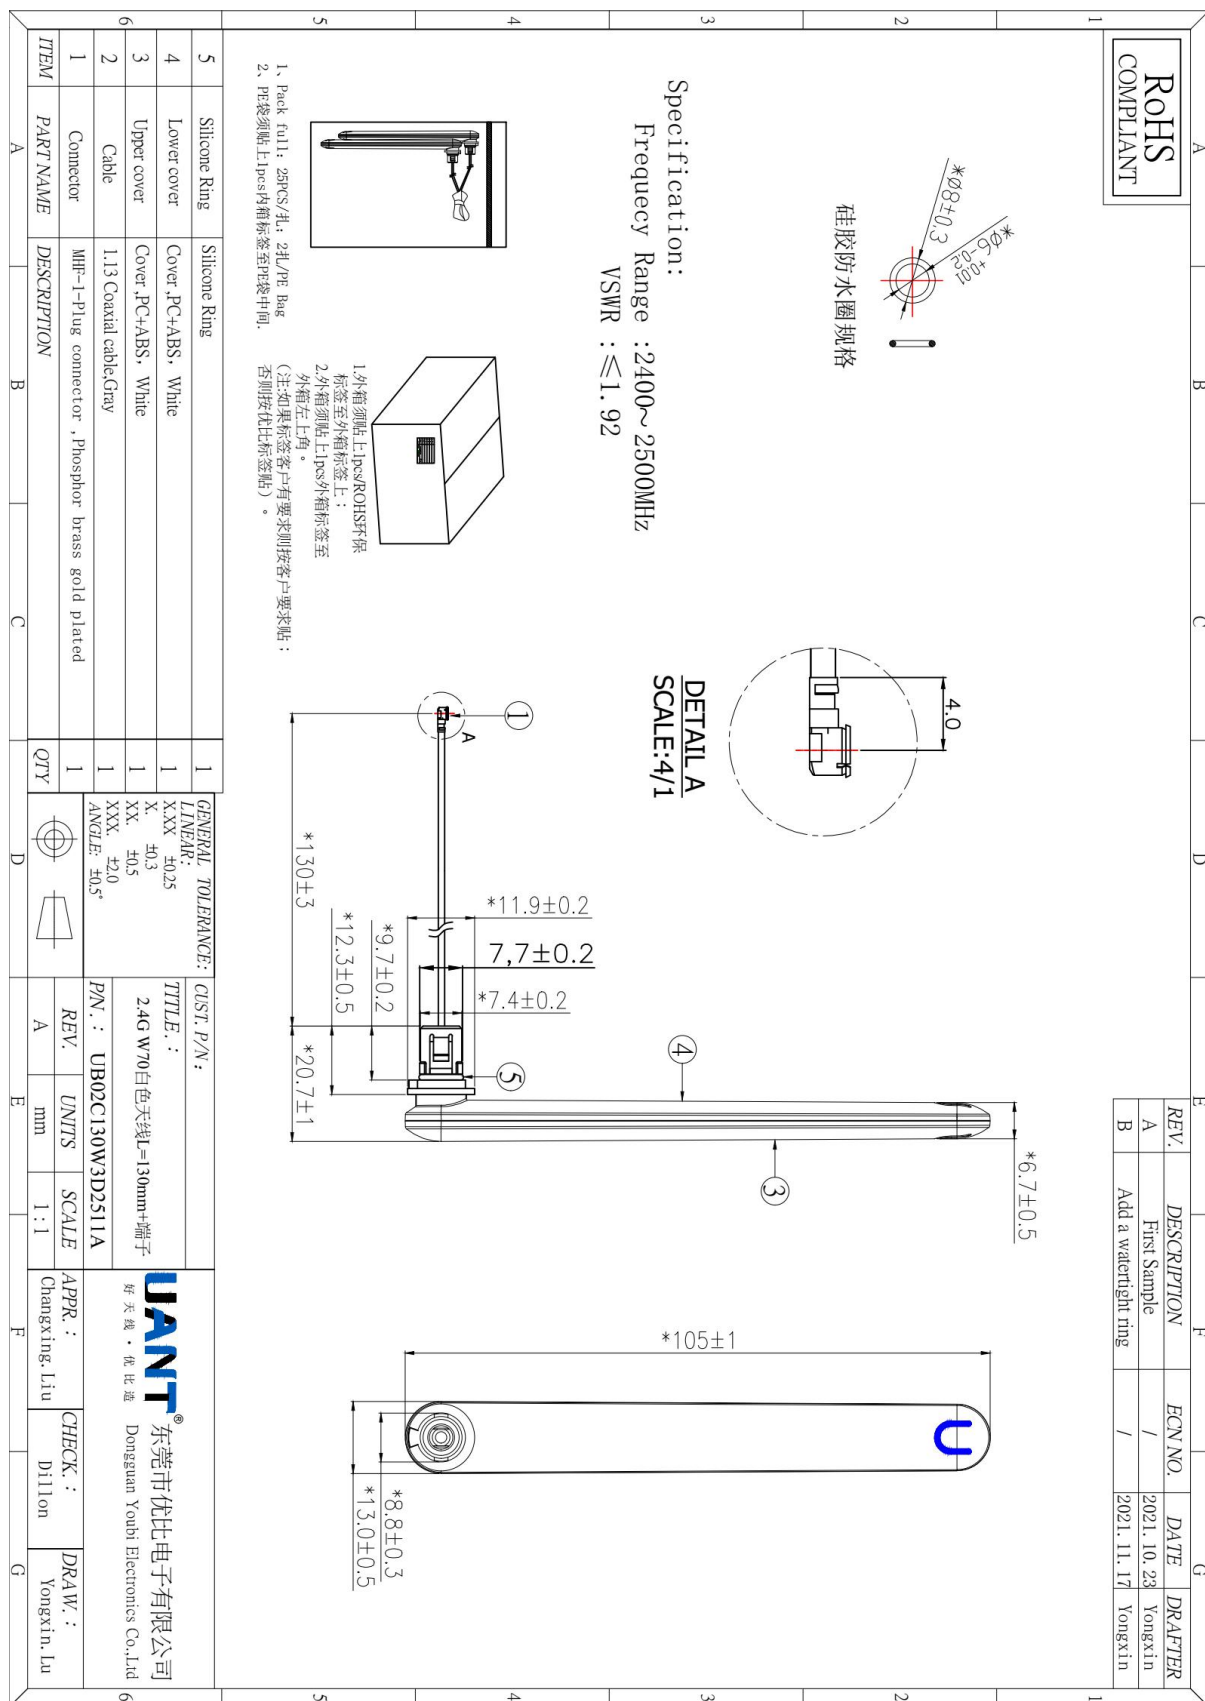

7. Packaging

