


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

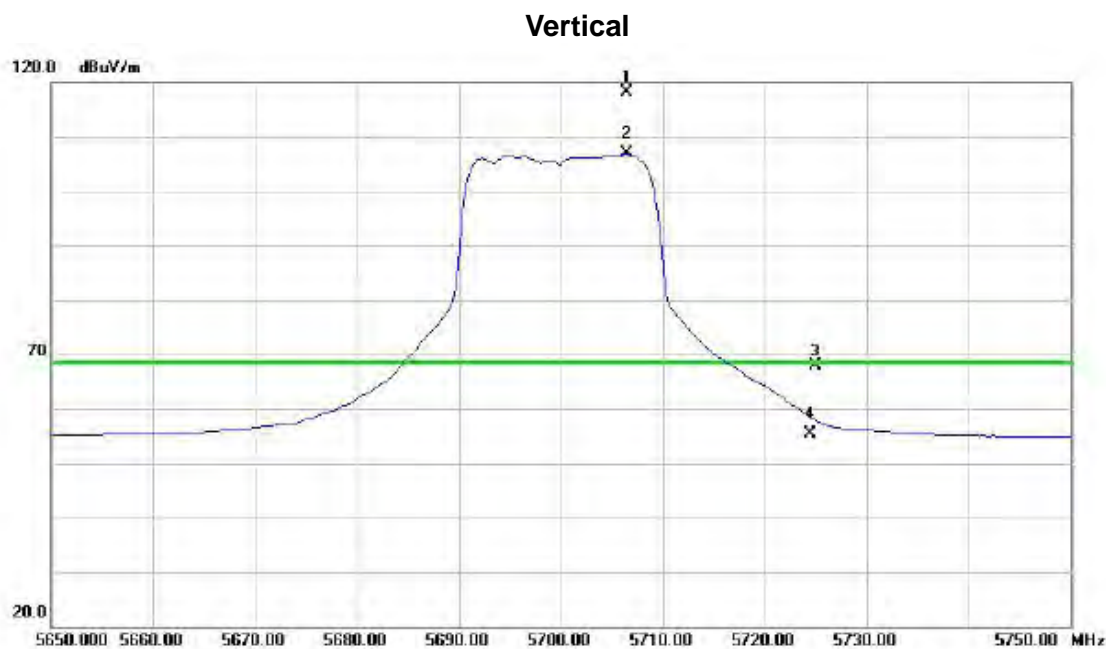

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5706.500	78.75	39.41	118.16	68.30	49.86	peak	No Limit
2	X	5706.500	67.53	39.41	106.94	68.30	38.64	AVG	No Limit
3		5725.000	28.48	39.45	67.93	68.30	-0.37	peak	
4		5725.000	15.82	39.45	55.27	68.30	-13.03	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.10	41.10	20.47	61.57	74.00	-12.43	peak	
2	*	11400.10	30.88	20.47	51.35	54.00	-2.65	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

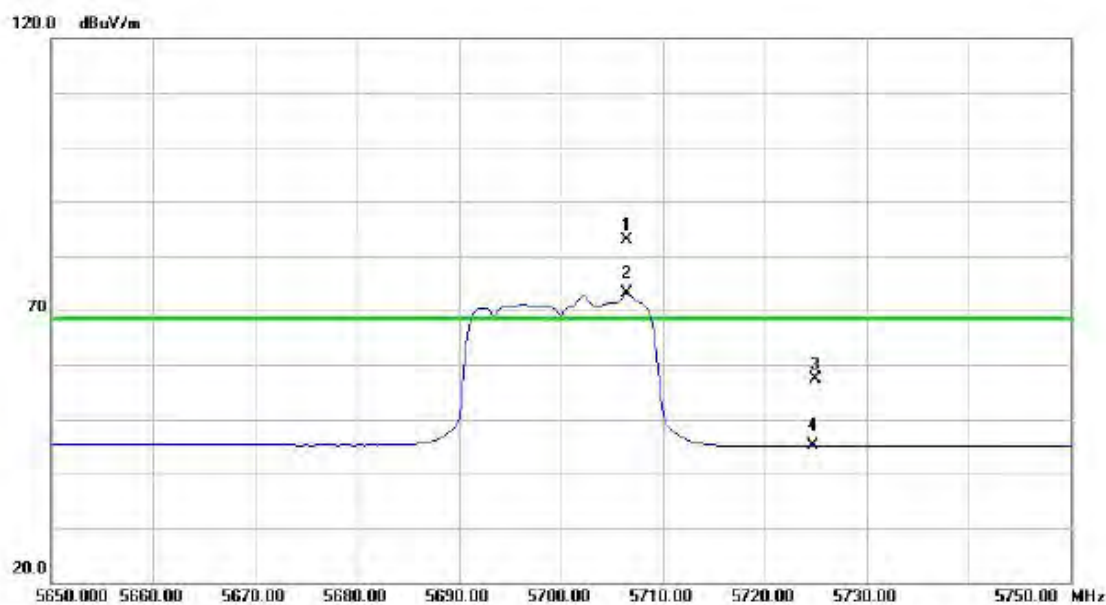

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5706.500	50.83	32.07	82.90	68.30	14.60	peak	No Limit
2	X	5706.500	40.99	32.07	73.06	68.30	4.76	AVG	No Limit
3		5725.000	25.38	32.10	57.48	68.30	-10.82	peak	
4		5725.000	13.00	32.10	45.10	68.30	-23.20	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	43.38	20.47	63.85	74.00	-10.15	peak	
2	*	11400.00	31.40	20.47	51.87	54.00	-2.13	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

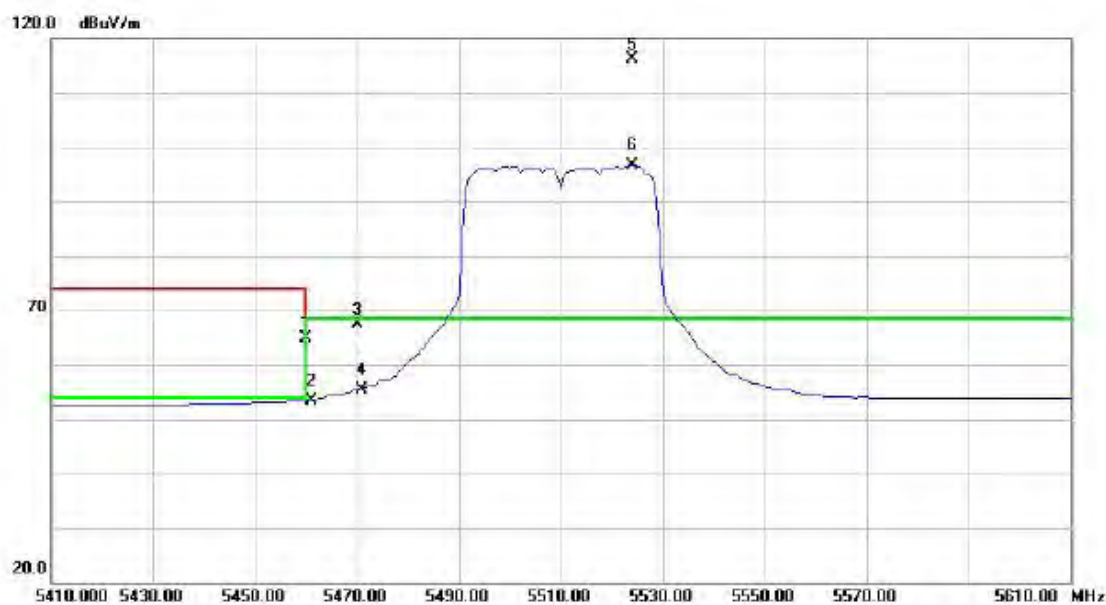

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	26.19	38.81	65.00	68.30	-3.30	peak	
2		5460.000	14.69	38.81	53.50	54.00	-0.50	AVG	
3		5470.000	28.53	38.84	67.37	68.30	-0.93	peak	
4		5470.000	16.50	38.84	55.34	68.30	-12.96	AVG	
5	*	5524.000	77.16	39.00	116.16	68.30	47.86	peak	No Limit
6	X	5524.000	57.66	39.00	96.66	68.30	28.36	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11021.35	44.42	21.02	65.44	74.00	-8.56	peak	
2	*	11021.35	32.83	21.02	53.85	54.00	-0.15	AVG	
3		16531.72	47.12	20.38	67.50	68.30	-0.80	peak	
4		16531.72	33.46	20.38	53.84	68.30	-14.46	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

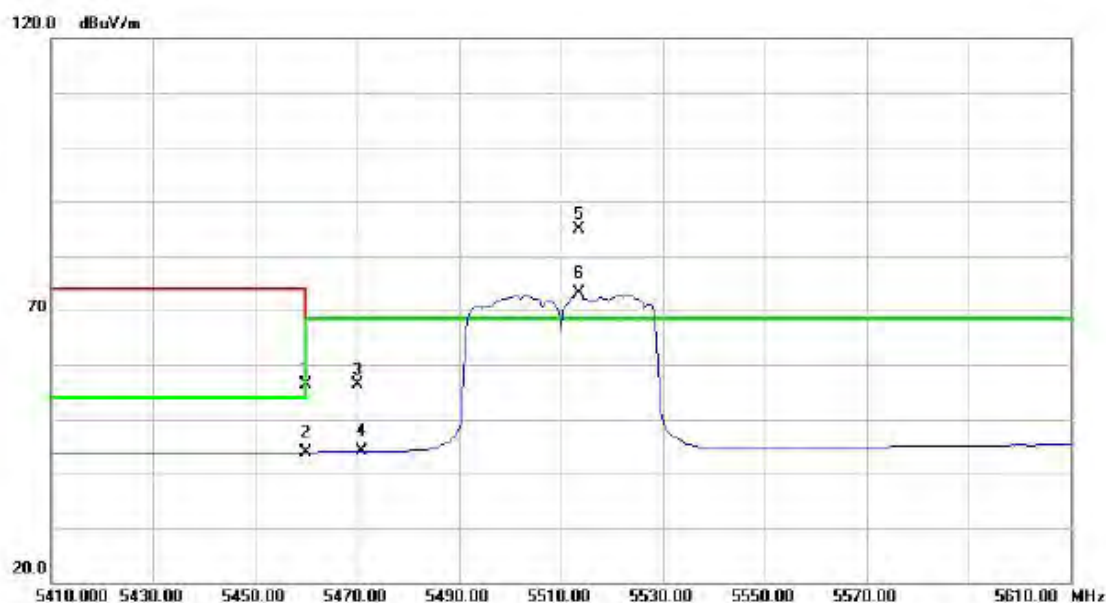

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	24.80	31.65	56.45	68.30	-11.85	peak	
2		5460.000	12.35	31.65	44.00	54.00	-10.00	AVG	
3		5470.000	24.71	31.66	56.37	68.30	-11.93	peak	
4		5470.000	12.43	31.66	44.09	68.30	-24.21	AVG	
5	*	5513.500	53.10	31.72	84.82	68.30	16.52	peak	No Limit
6	X	5513.500	41.53	31.72	73.25	68.30	4.95	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11021.67	43.73	21.02	64.75	74.00	-9.25	peak	
2	*	11021.67	30.75	21.02	51.77	54.00	-2.23	AVG	
3		16530.00	45.40	20.35	65.75	68.30	-2.55	peak	
4		16530.00	34.03	20.35	54.38	68.30	-13.92	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical

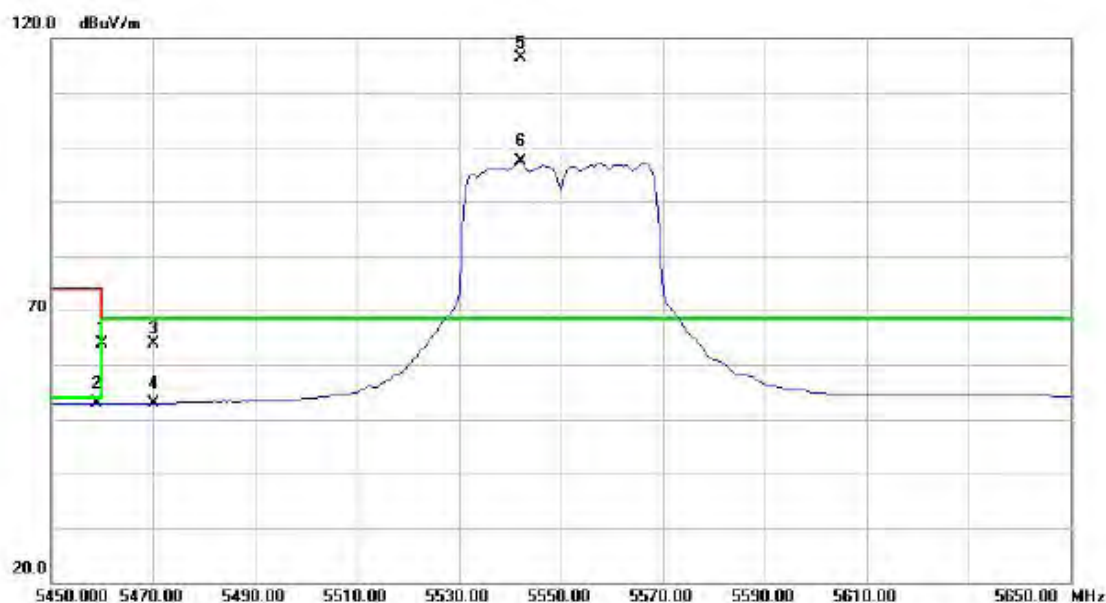

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	25.19	38.81	64.00	68.30	-4.30	peak	
2		5460.000	13.98	38.81	52.79	54.00	-1.21	AVG	
3		5470.000	24.99	38.84	63.83	68.30	-4.47	peak	
4		5470.000	14.10	38.84	52.94	68.30	-15.36	AVG	
5	*	5542.000	77.21	39.05	116.26	68.30	47.96	peak	No Limit
6	X	5542.000	58.22	39.05	97.27	68.30	28.97	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11101.60	45.77	20.90	66.67	74.00	-7.33	peak	
2	*	11101.60	32.75	20.90	53.65	54.00	-0.35	AVG	
3		16646.95	45.14	21.58	66.72	68.30	-1.58	peak	
4		16646.95	33.11	21.58	54.69	68.30	-13.61	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Horizontal

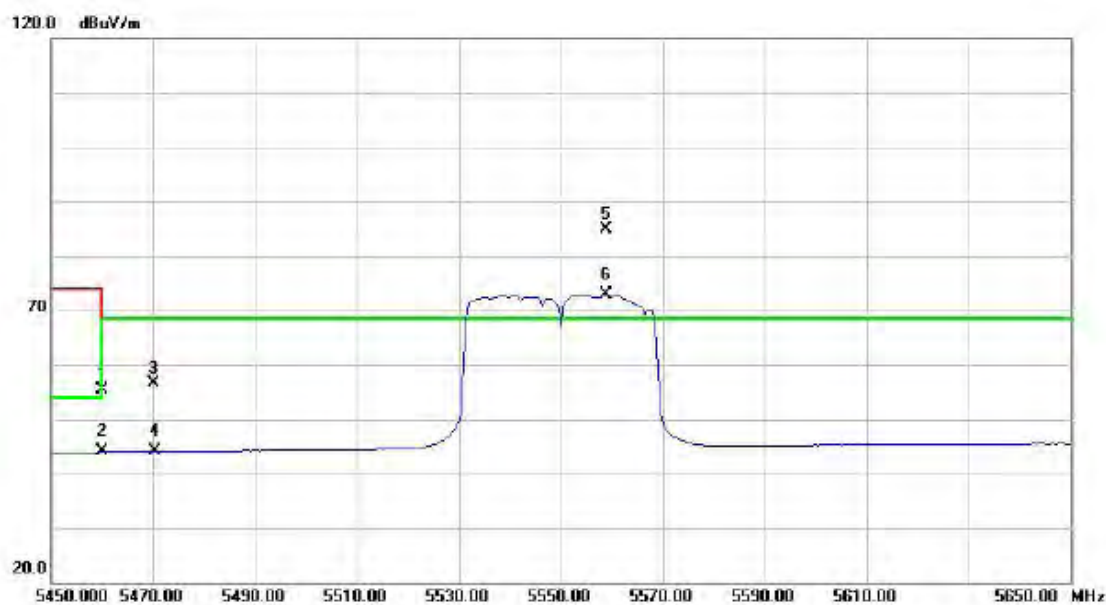

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	23.62	31.65	55.27	68.30	-13.03	peak	
2		5460.000	12.38	31.65	44.03	54.00	-9.97	AVG	
3		5470.000	24.97	31.66	56.63	68.30	-11.67	peak	
4		5470.000	12.43	31.66	44.09	68.30	-24.21	AVG	
5	*	5559.000	53.12	31.81	84.93	68.30	16.63	peak	No Limit
6	X	5559.000	41.09	31.81	72.90	68.30	4.60	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11099.32	43.27	20.91	64.18	74.00	-9.82	peak	
2		11099.32	30.79	20.91	51.70	54.00	-2.30	AVG	
3	*	16648.52	44.53	21.59	66.12	68.30	-2.18	peak	
4		16648.52	33.03	21.59	54.62	68.30	-13.68	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

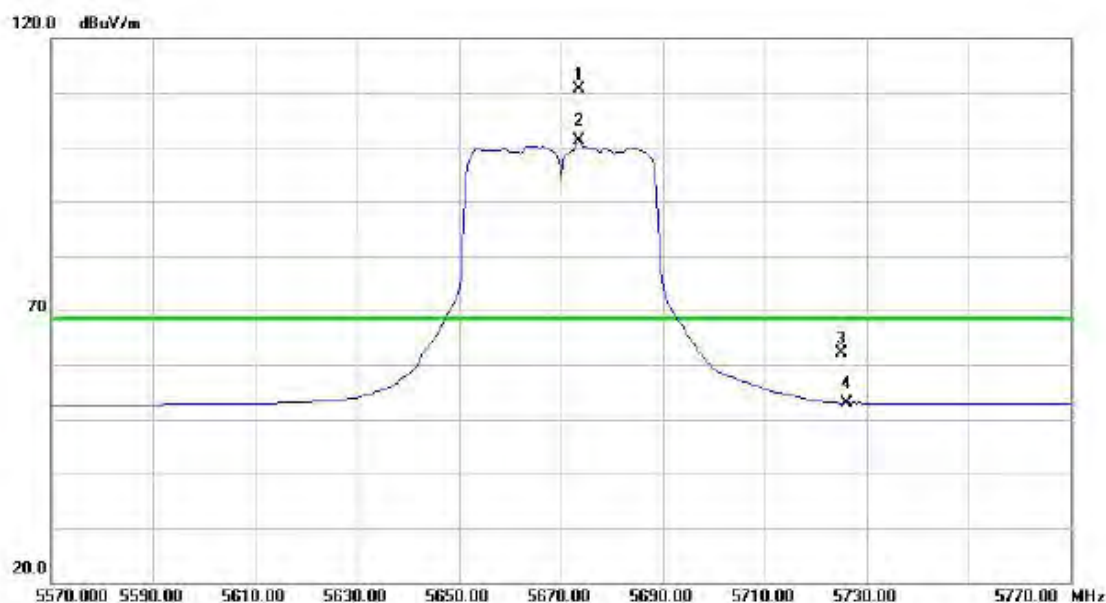

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5673.500	71.20	39.34	110.54	68.30	42.24	peak	No Limit
2	X	5673.500	61.67	39.34	101.01	68.30	32.71	AVG	No Limit
3		5725.000	22.80	39.45	62.25	68.30	-6.05	peak	
4		5725.000	13.54	39.45	52.99	68.30	-15.31	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.30	43.08	20.56	63.64	74.00	-10.36	peak	
2	*	11340.30	30.85	20.56	51.41	54.00	-2.59	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

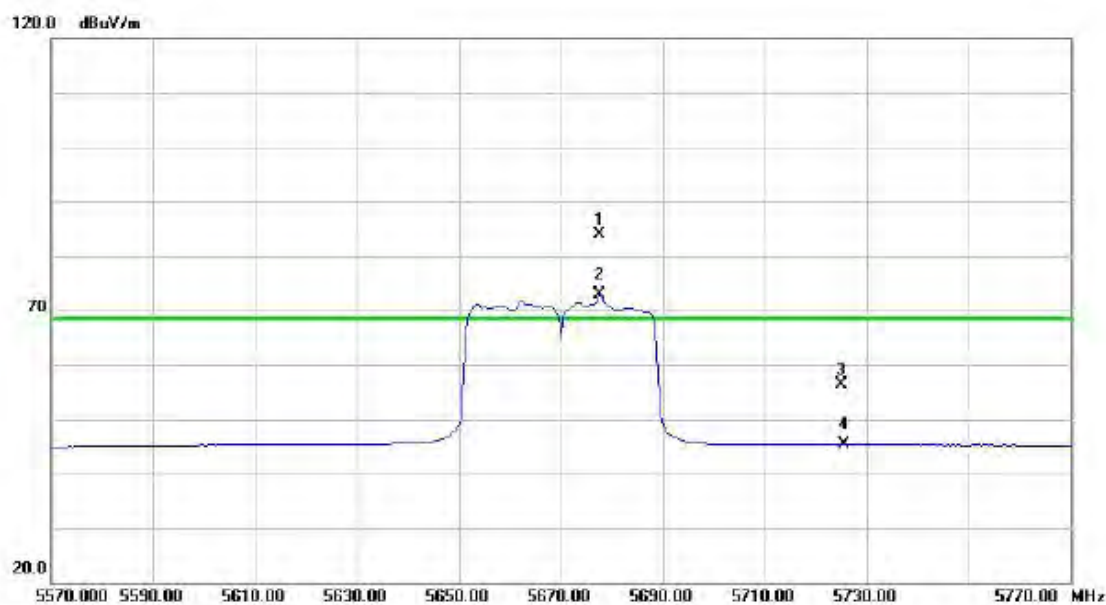

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5677.500	51.82	32.02	83.84	68.30	15.54	peak	No Limit
2	X	5677.500	40.79	32.02	72.81	68.30	4.51	AVG	No Limit
3		5725.000	24.30	32.10	56.40	68.30	-11.90	peak	
4		5725.000	13.21	32.10	45.31	68.30	-22.99	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11338.20	44.13	20.56	64.69	74.00	-9.31	peak	
2	*	11338.20	31.13	20.56	51.69	54.00	-2.31	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5455.000	28.36	38.80	67.16	74.00	-6.84	peak	
2		5455.000	14.84	38.80	53.64	54.00	-0.36	AVG	
3	*	5535.000	71.48	39.03	110.51	68.30	42.21	peak	No Limit
4	X	5535.000	40.04	39.03	79.07	68.30	10.77	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.12	43.22	20.97	64.19	74.00	-9.81	peak	
2	*	11060.12	30.80	20.97	51.77	54.00	-2.23	AVG	
3		16590.32	43.77	20.99	64.76	68.30	-3.54	peak	
4		16590.32	32.75	20.99	53.74	68.30	-14.56	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5455.000	24.17	31.65	55.82	74.00	-18.18	peak	
2		5455.000	12.31	31.65	43.96	54.00	-10.04	AVG	
3	*	5496.000	50.14	31.70	81.84	68.30	13.54	peak	No Limit
4		5496.000	33.72	31.70	65.42	68.30	-2.88	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11061.07	44.71	20.97	65.68	74.00	-8.32	peak	
2	*	11061.07	31.00	20.97	51.97	54.00	-2.03	AVG	
3		16589.25	44.57	20.98	65.55	68.30	-2.75	peak	
4		16589.25	32.75	20.98	53.73	68.30	-14.57	AVG	

TX A Mode_DUTY CYCLE

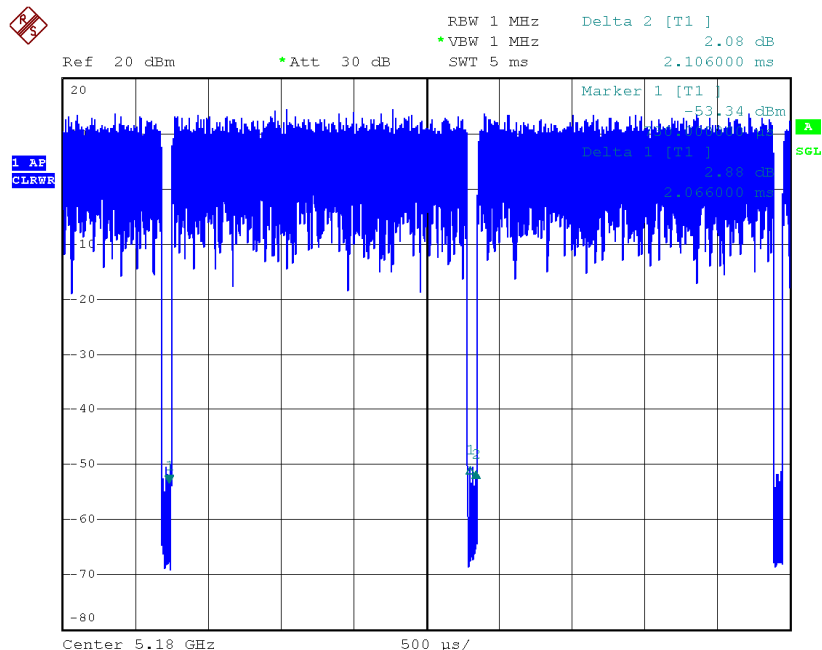

Date: 20.NOV.2014 15:17:22

Duty cycle: TX 5180MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :2.0msec

T_{Total} :2.1msec

Duty cycle: 0.981

Duty Factor= $10 \log(1/\text{Duty cycle})$


Duty Factor =0.08

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

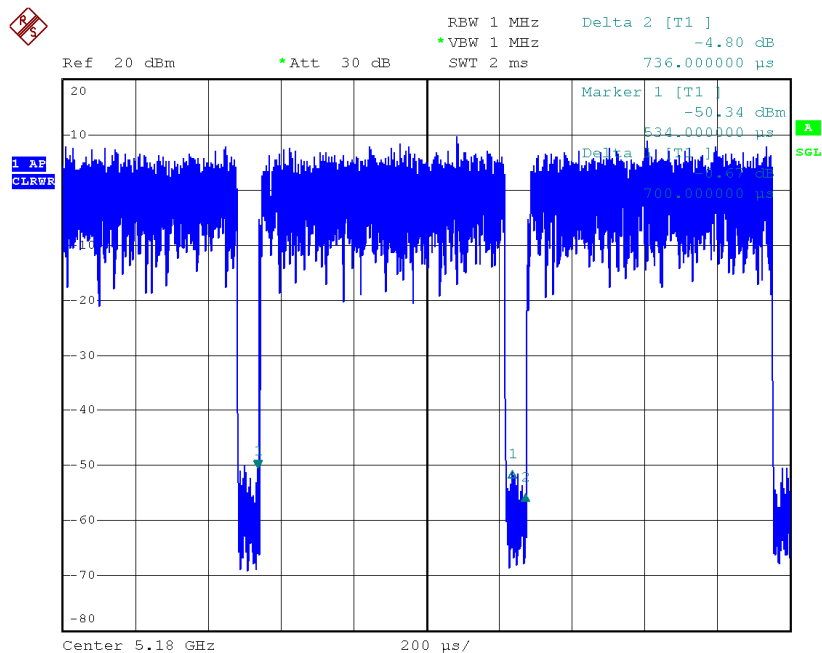

Date: 20.NOV.2014 15:19:52

Duty cycle: TX 5180MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :0.70msec

T_{Total} :0.74msec

Duty cycle: 0.951

Duty Factor= $10 \log(1/\text{Duty cycle})$


Duty Factor =0.22

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

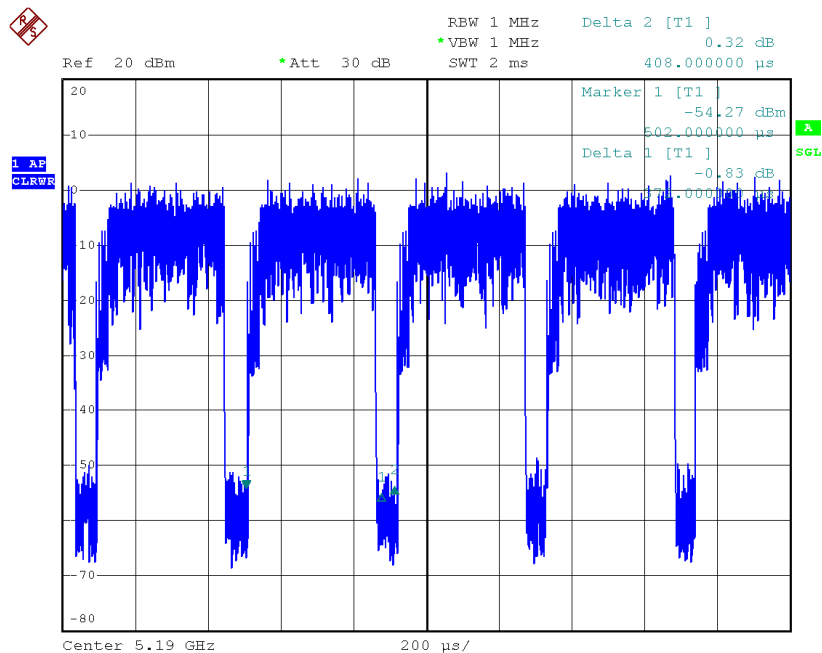

Date: 20.NOV.2014 15:20:55

Duty cycle: TX 5190MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :0.37 msec

T_{Total} :0.41msec

Duty cycle: 0.912

Duty Factor= $10 \log(1/\text{Duty cycle})$


Duty Factor =0.40

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

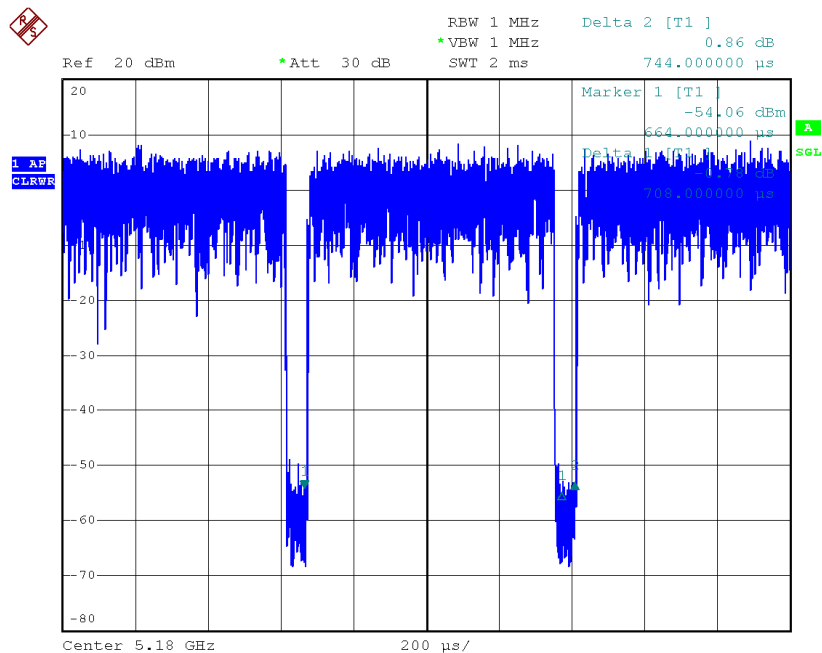

Date: 20.NOV.2014 15:22:34

Duty cycle: TX 5180MHz

Duty cycle = T_{ON} / T_{Total}

T_{ON} :0.71msec

T_{Total} :0.74msec

Duty cycle: 0.952

Duty Factor= $10 \log(1/Duty \text{ cycle})$


Duty Factor =0.22

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

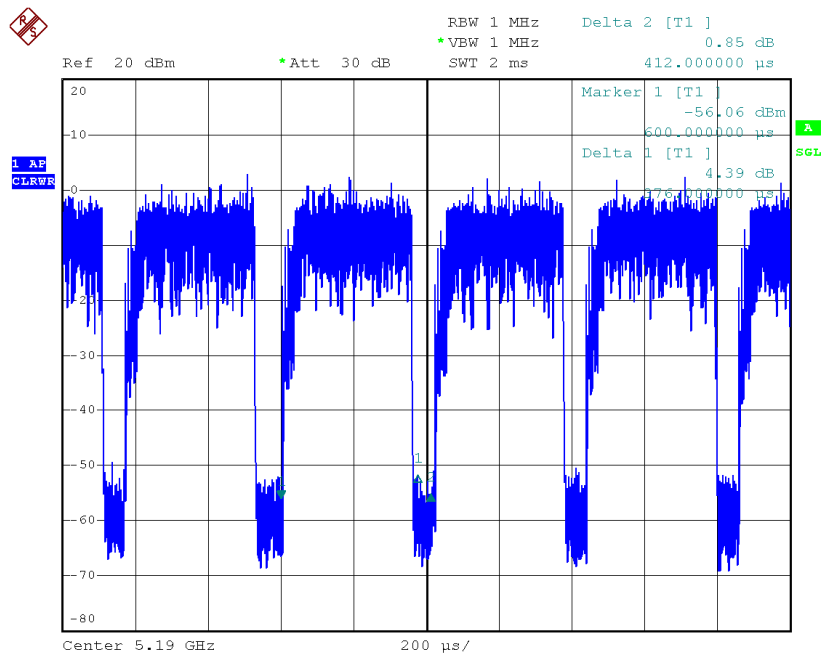

Date: 20.NOV.2014 15:24:23

Duty cycle: TX 5190MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :0.38msec

T_{Total} :0.41msec

Duty cycle: 0.912

Duty Factor= $10 \log(1/\text{Duty cycle})$


Duty Factor =0.40

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

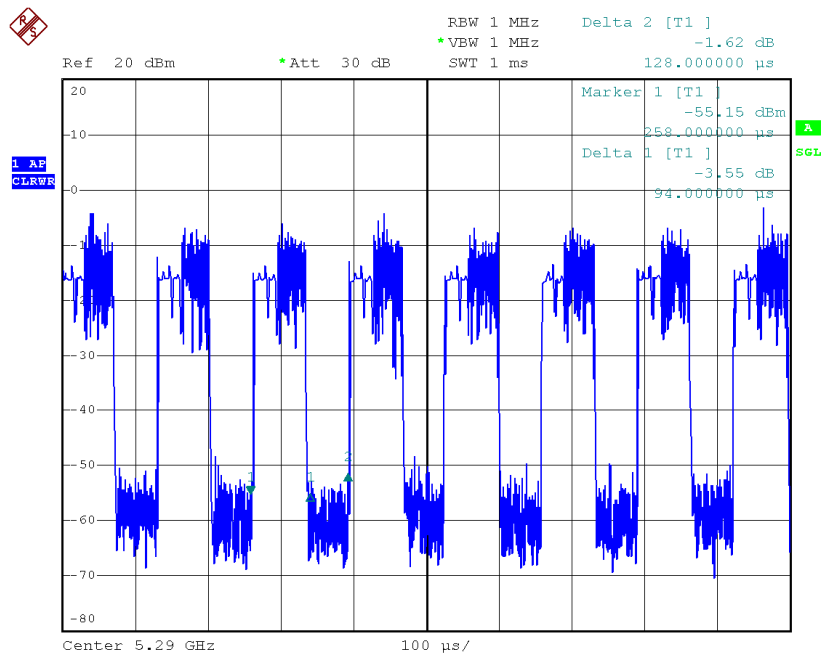

Date: 20.NOV.2014 15:37:46

Duty cycle: TX 5290MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :0.94msec

T_{Total} :1.28msec

Duty cycle: 0.734

Duty Factor= $10 \log(1/\text{Duty cycle})$

Duty Factor =1.34

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor


Power Spectral Density = Measured density + Duty factor

ATTACHMENTE -BANDWIDTH

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	23.05	17.00
CH60	5300	22.75	17.00
CH64	5320	22.15	17.00

TX CH52

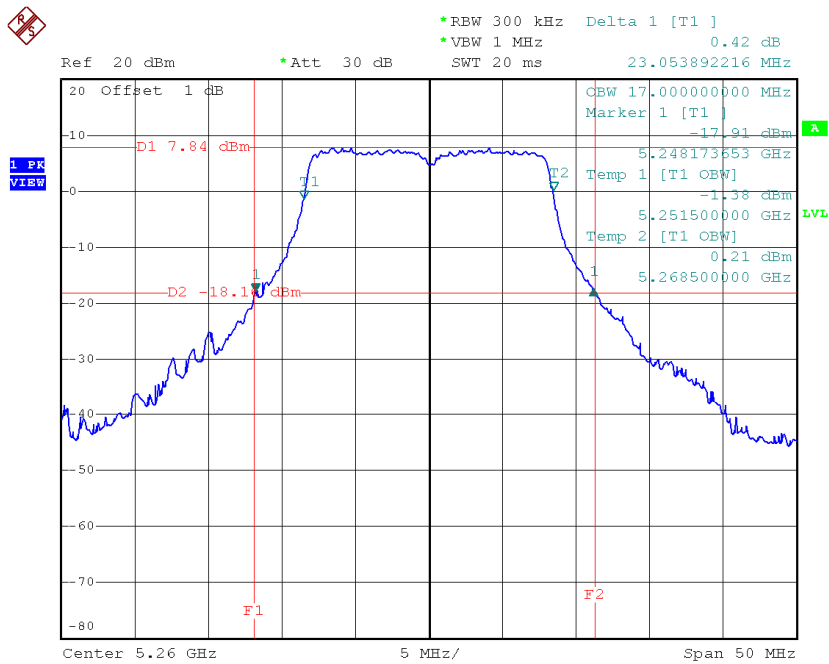


Date: 9.JAN.2015 16:33:12

TX CH60

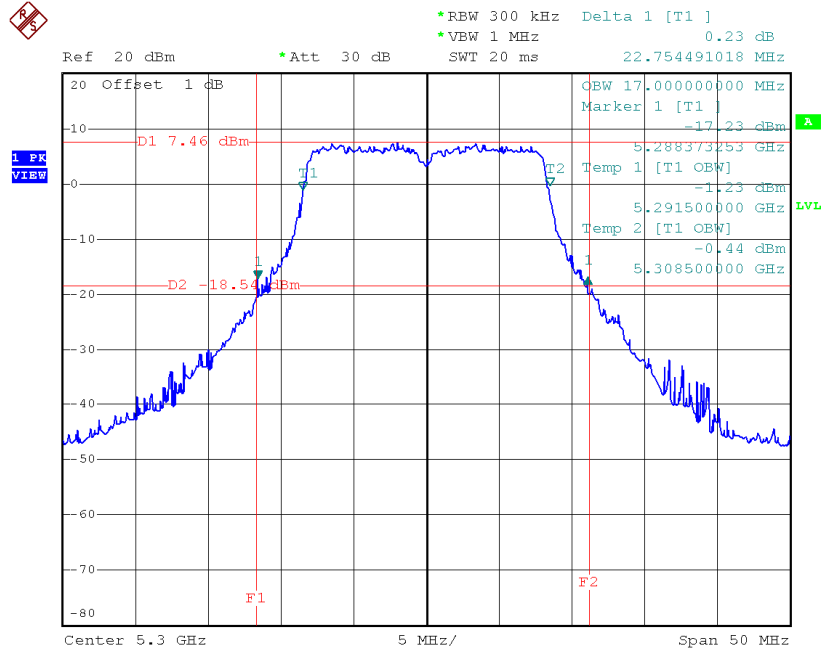

Date: 9.JAN.2015 16:34:05

TX CH64

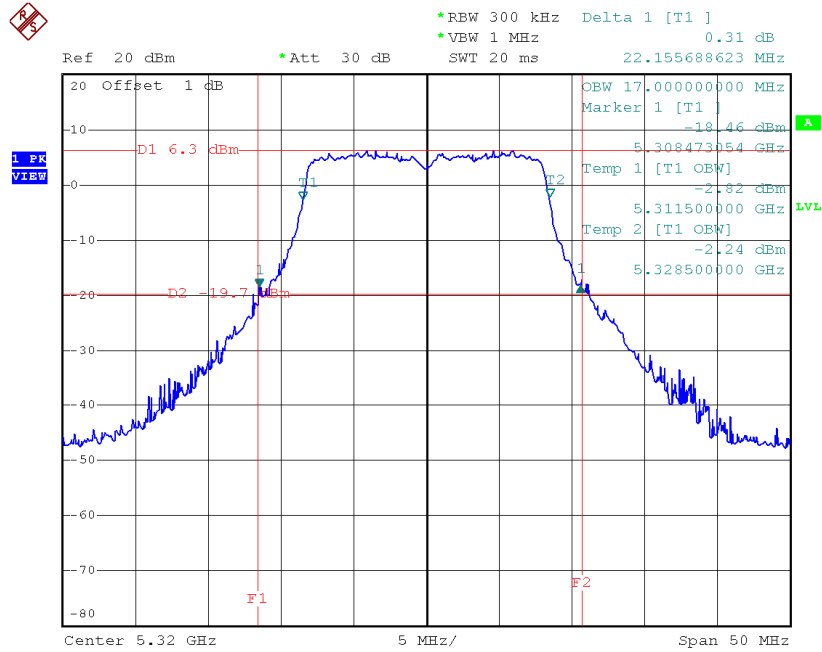


Date: 9.JAN.2015 16:35:00

Test Mode: UNII-2/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	23.05	18.00
CH60	5300	23.15	18.00
CH64	5320	23.15	18.00

TX CH52

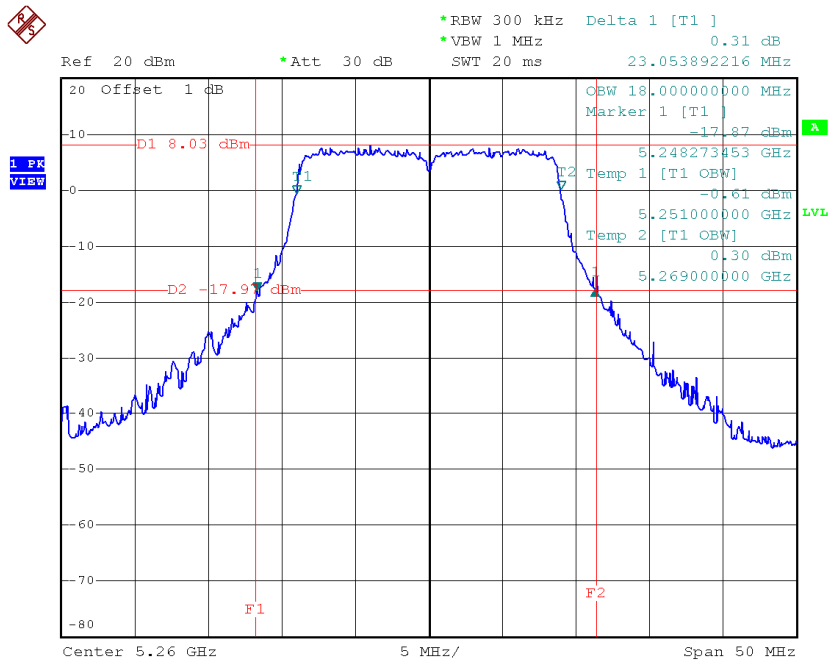


Date: 9.JAN.2015 16:40:02

TX CH60

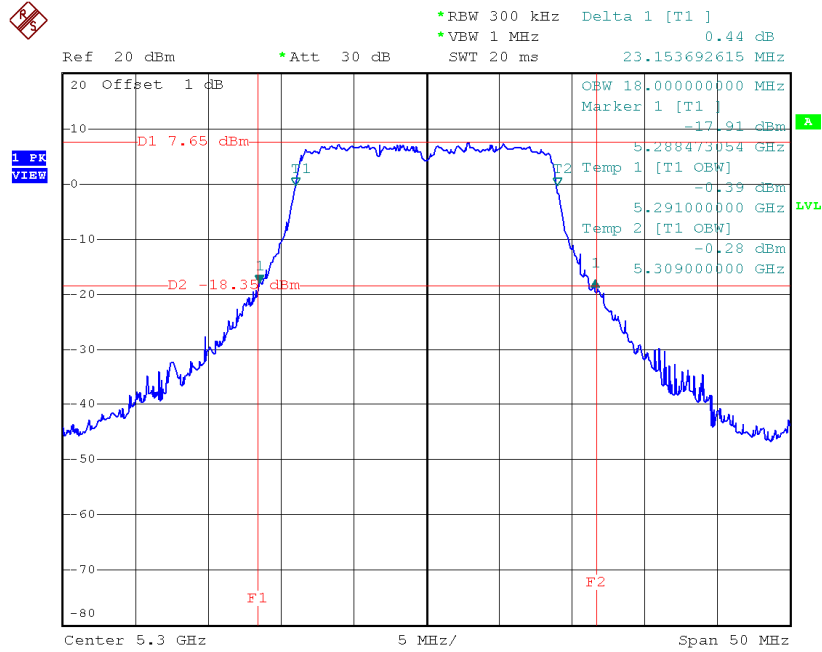

Date: 9.JAN.2015 16:43:32

TX CH64

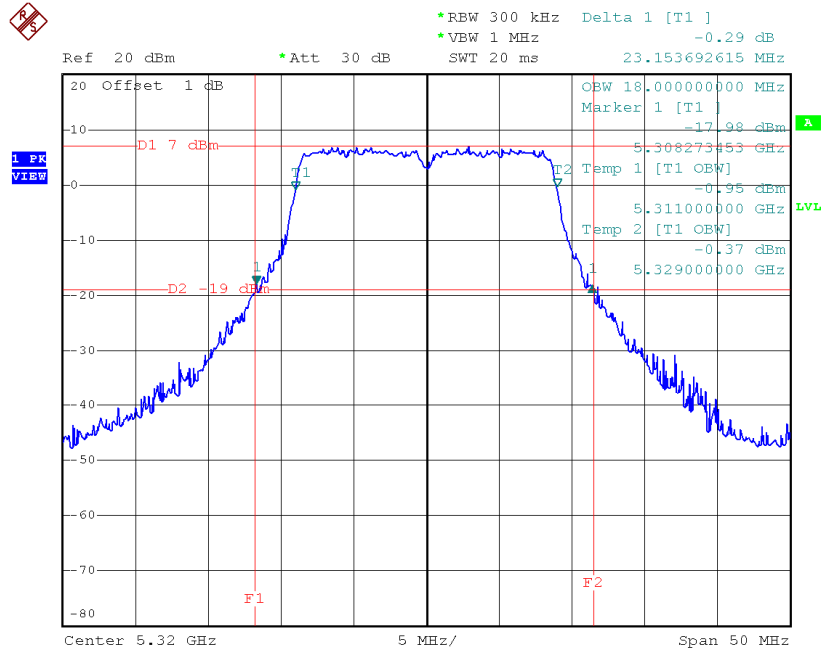


Date: 9.JAN.2015 16:45:52

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	42.91	36.40
CH62	5310	43.31	36.40

TX CH54

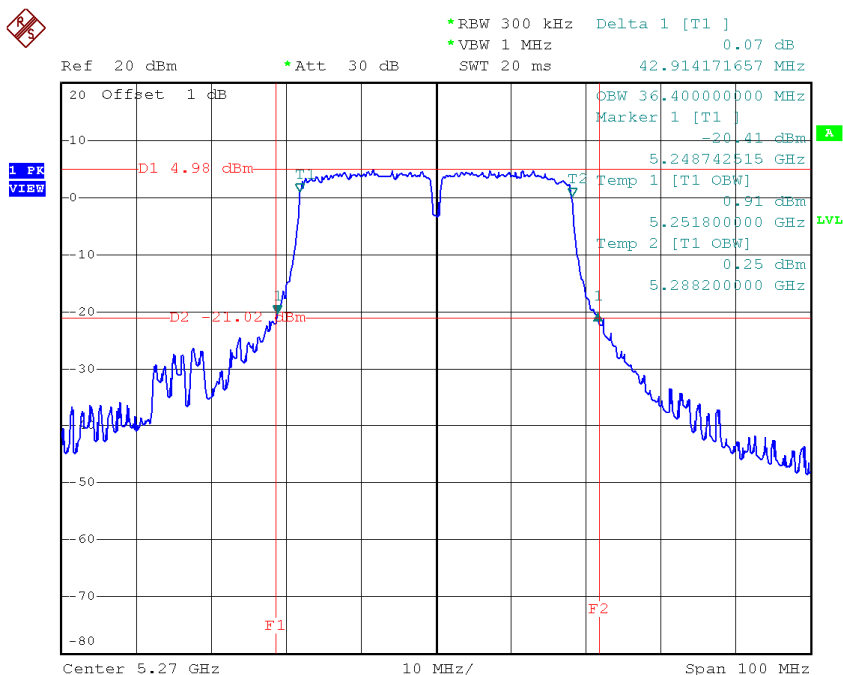

Date: 9.JAN.2015 17:02:37

TX CH62

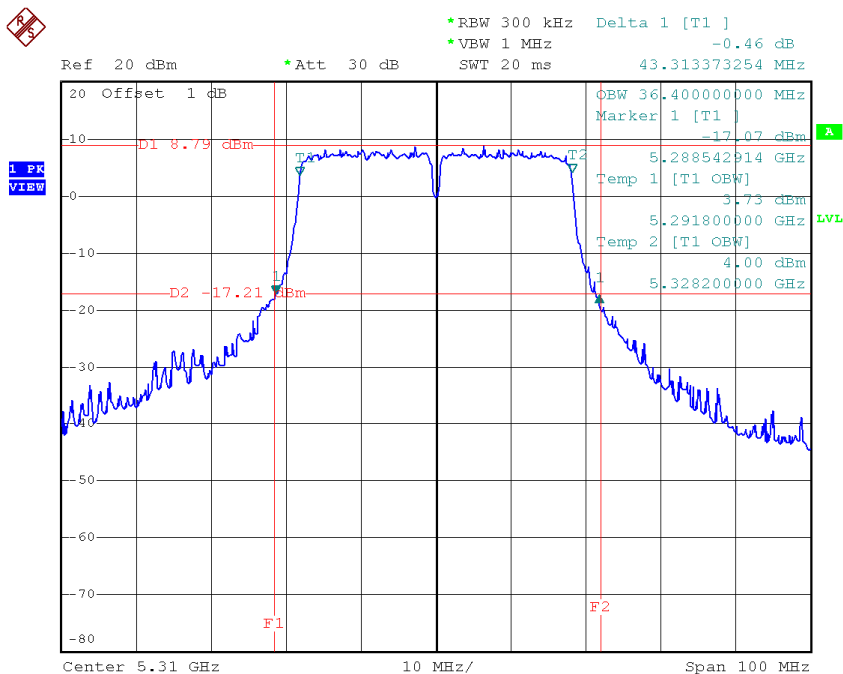


Date: 9.JAN.2015 17:06:11

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.85	16.90
CH116	5580	22.45	17.00
CH140	5700	22.25	17.00

TX CH100

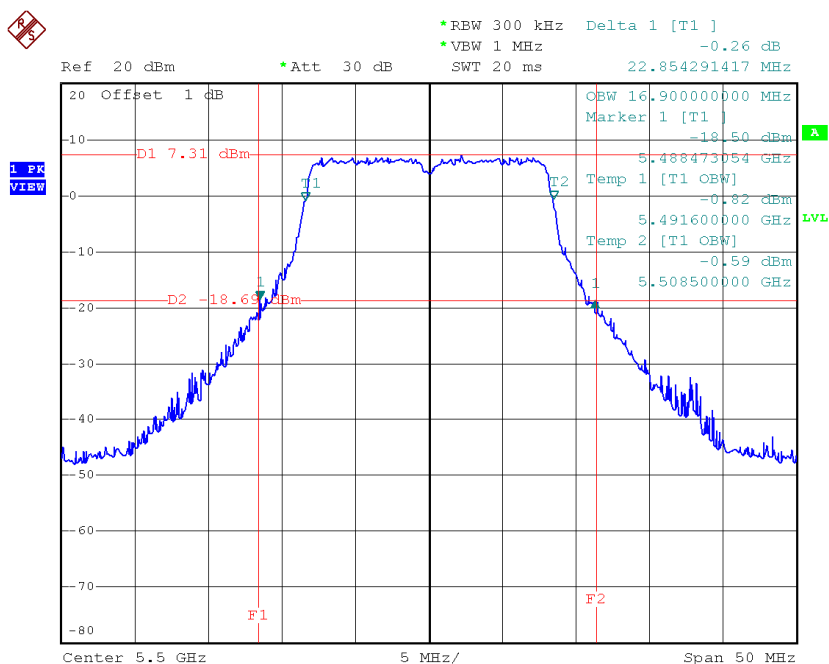


Date: 9.JAN.2015 16:35:39

TX CH116

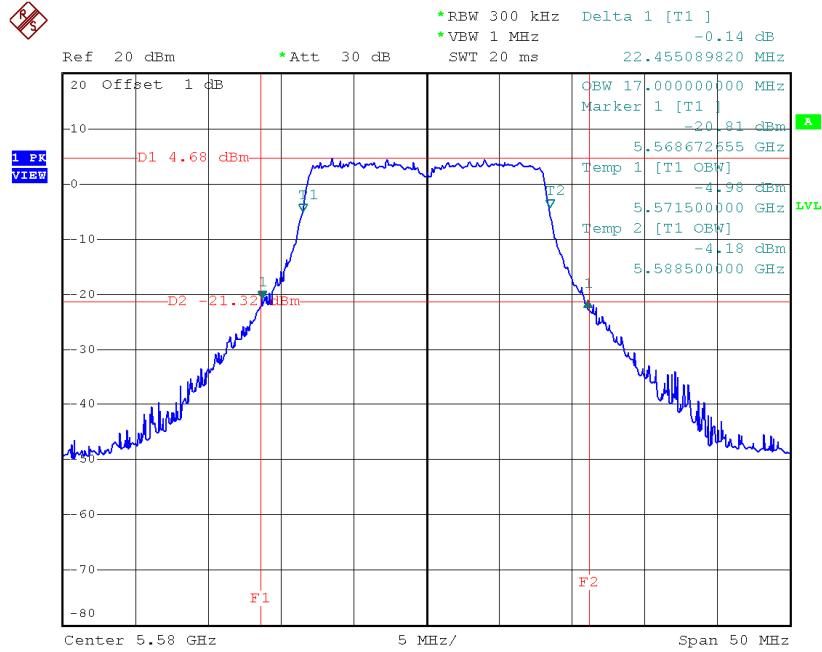

Date: 9.JAN.2015 16:37:49

TX CH140

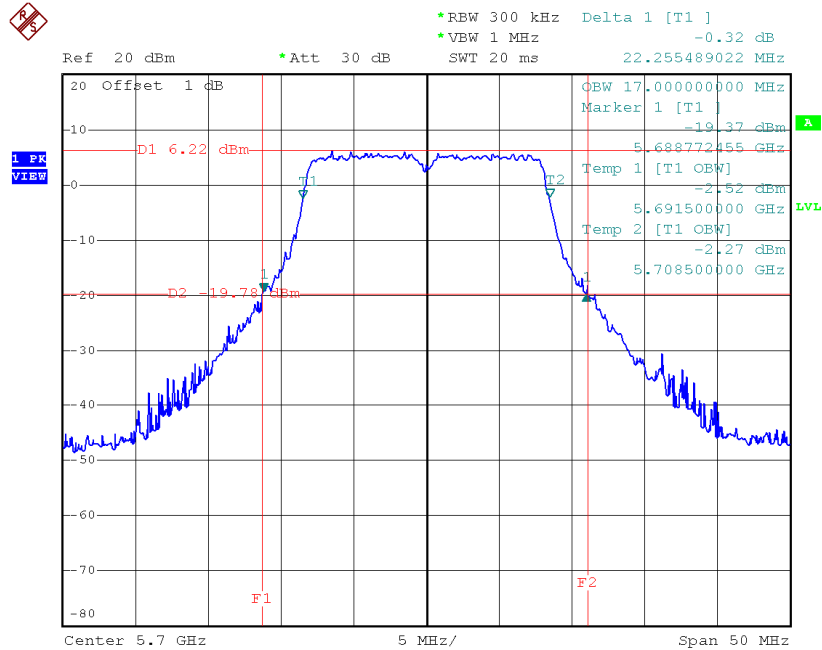


Date: 9.JAN.2015 16:38:25

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.45	18.00
CH116	5580	23.05	18.00
CH140	5700	23.45	18.00

TX CH100

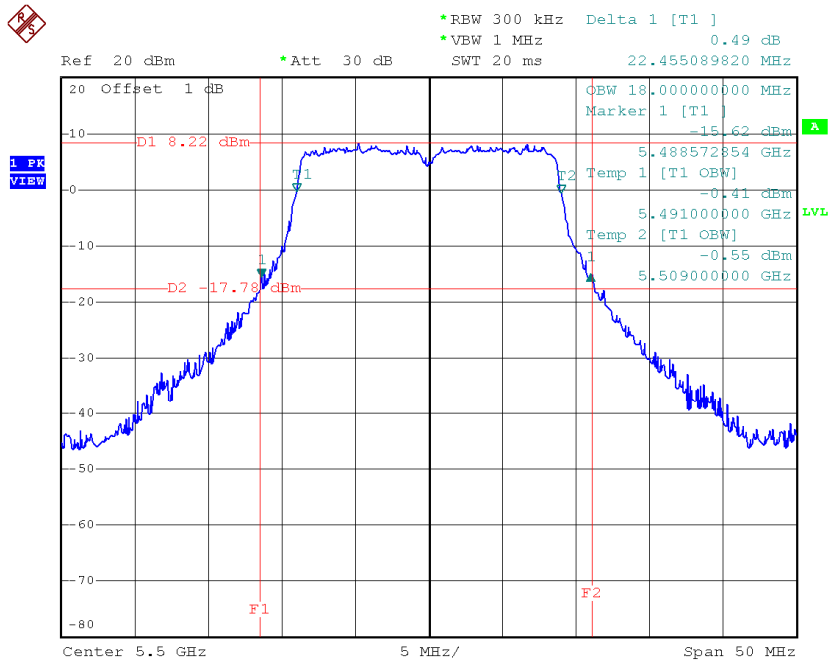


Date: 9.JAN.2015 16:48:24

TX CH116

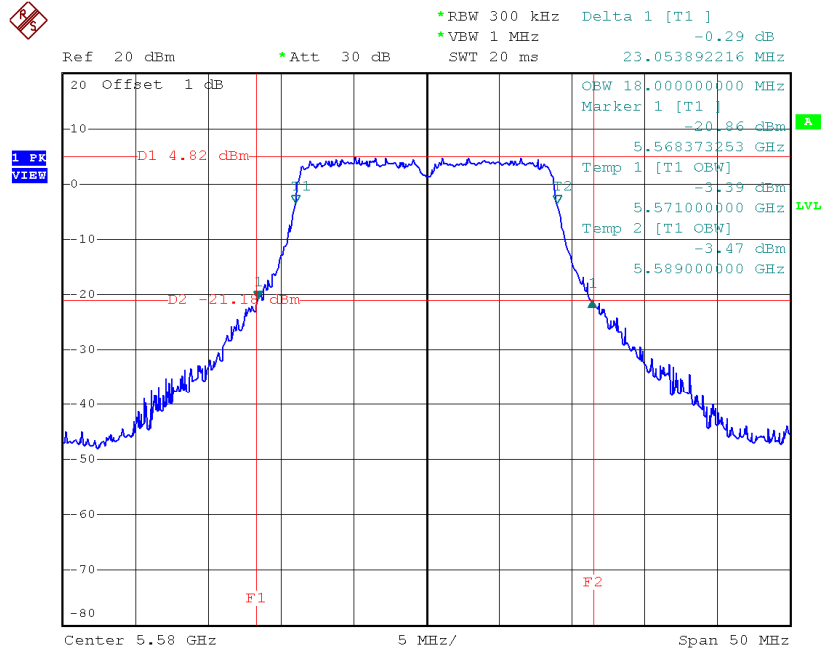

Date: 9.JAN.2015 16:50:13

TX CH140

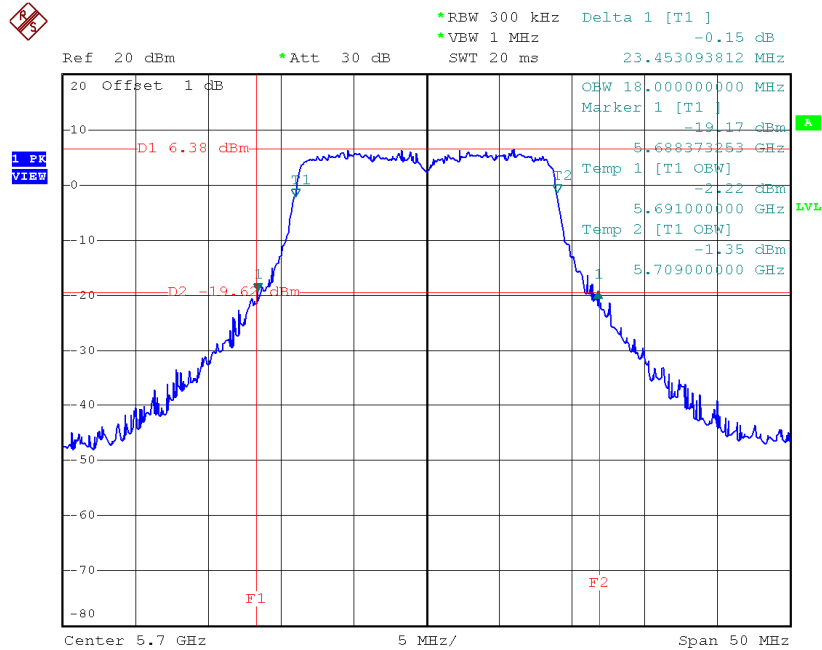


Date: 9.JAN.2015 16:56:23

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	44.31	36.40
CH110	5550	43.31	36.40
CH134	5670	43.14	36.50

TX CH102

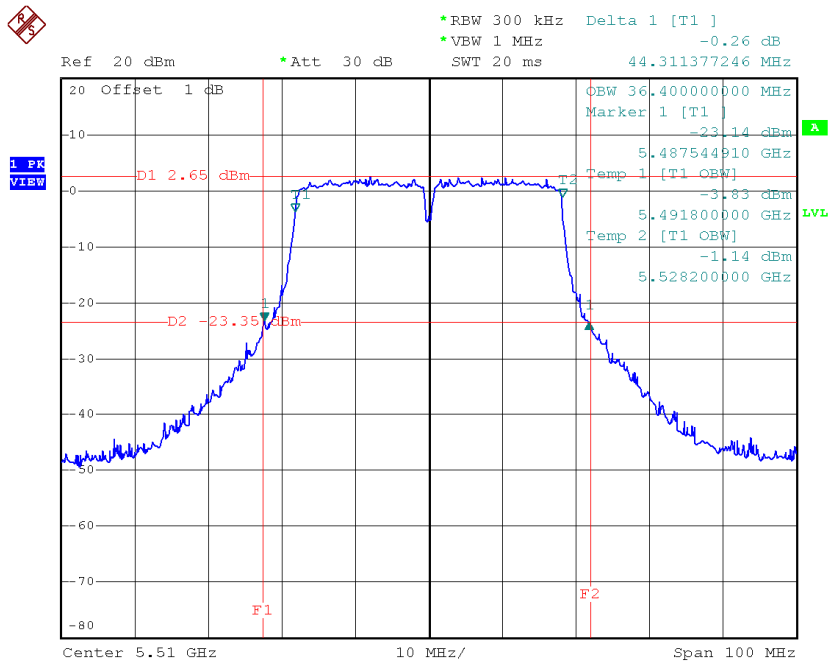


Date: 9.JAN.2015 17:10:27

TX CH110

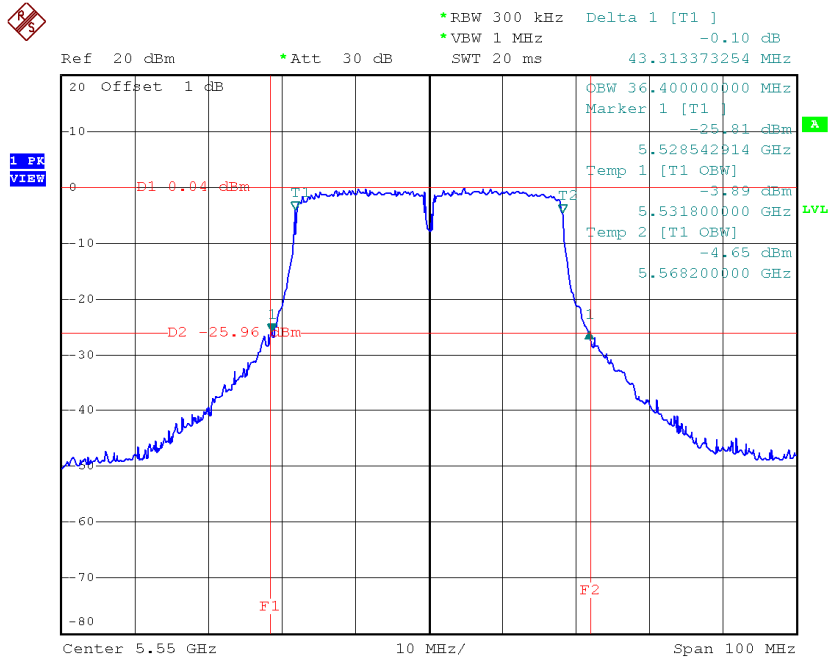

Date: 9.JAN.2015 17:15:41

TX CH134

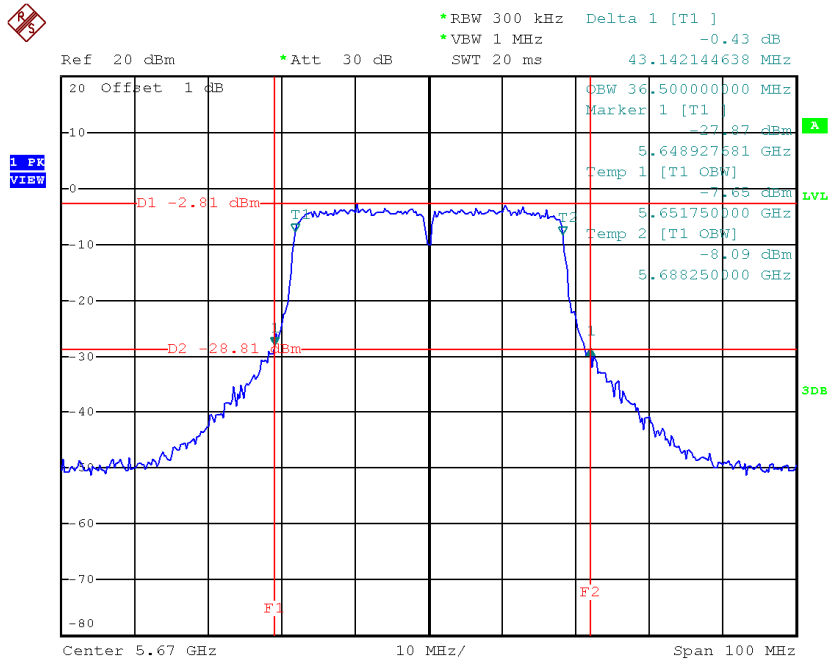


Date: 16.JAN.2015 14:49:15

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	42.64	36.50
CH62	5310	42.64	36.50

TX CH54

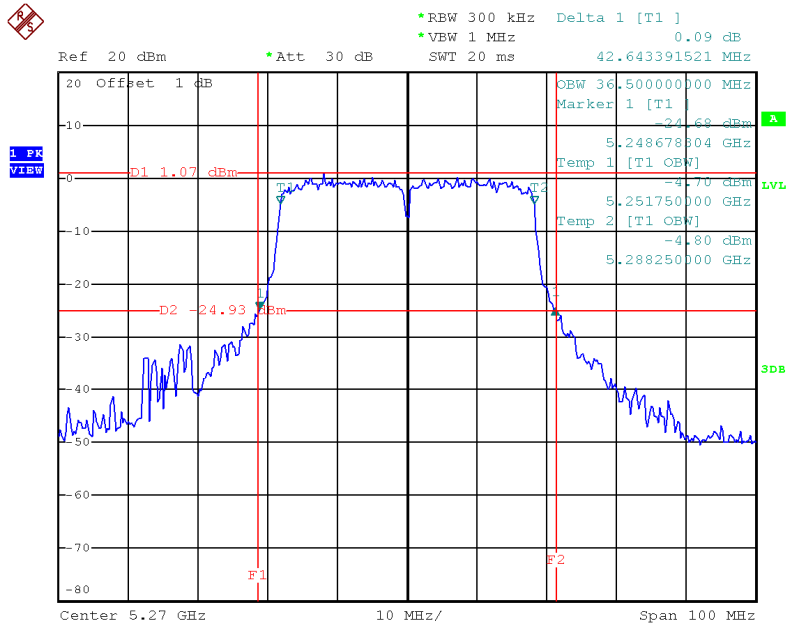

Date: 14.JAN.2015 15:48:24

TX CH62

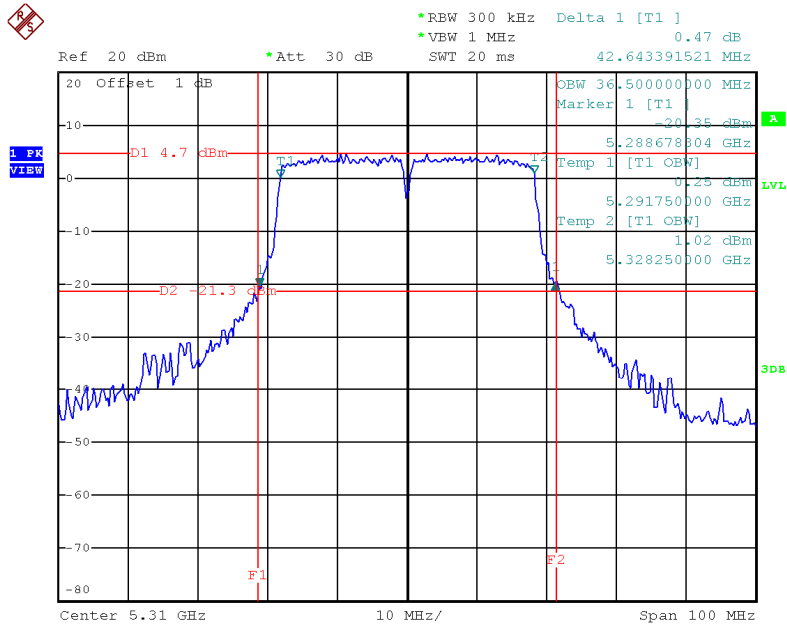


Date: 14.JAN.2015 15:54:14

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	86.98	76.00

TX CH58

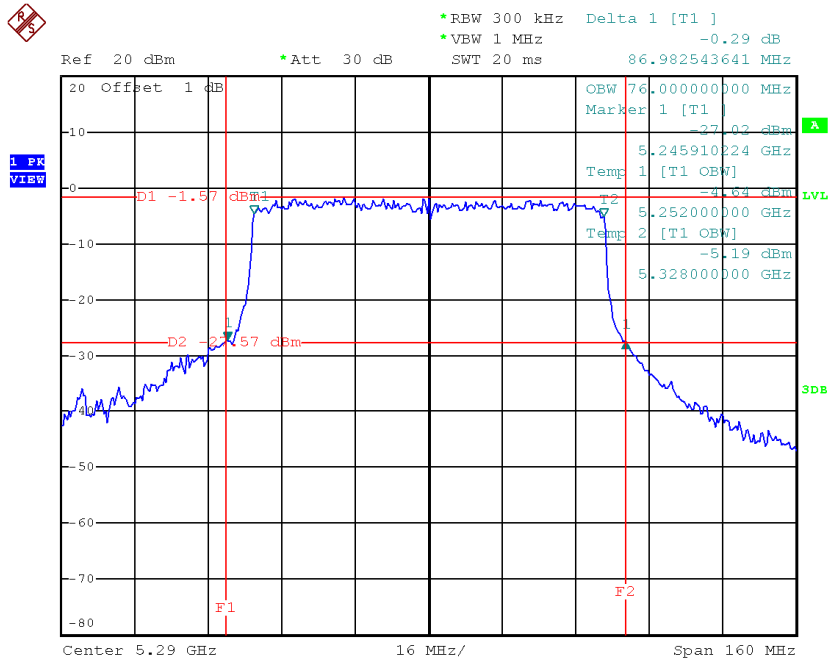


Date: 14.JAN.2015 16:25:09

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	23.35	18.00
CH116	5580	23.15	18.10
CH140	5700	23.55	18.00

TX CH100

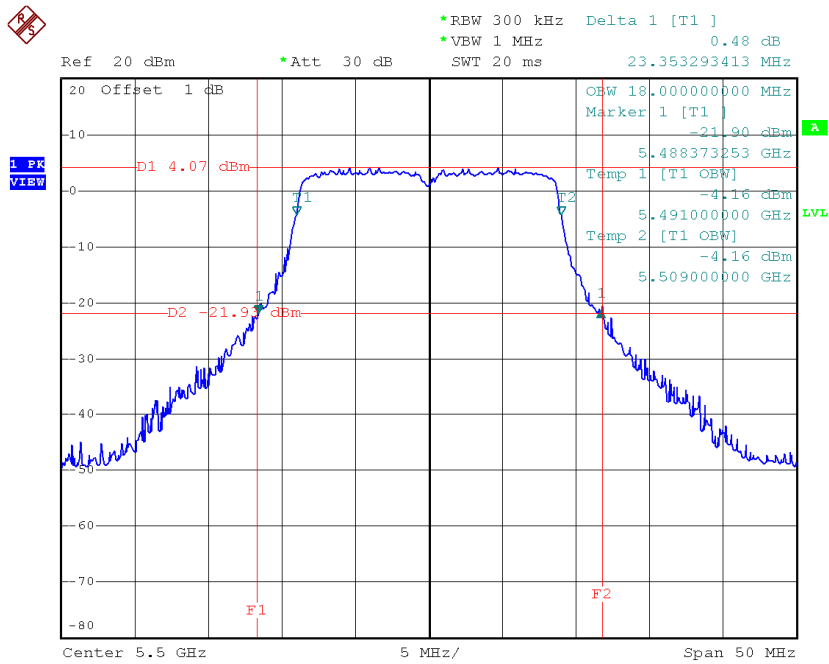


Date: 9.JAN.2015 18:15:19

TX CH116

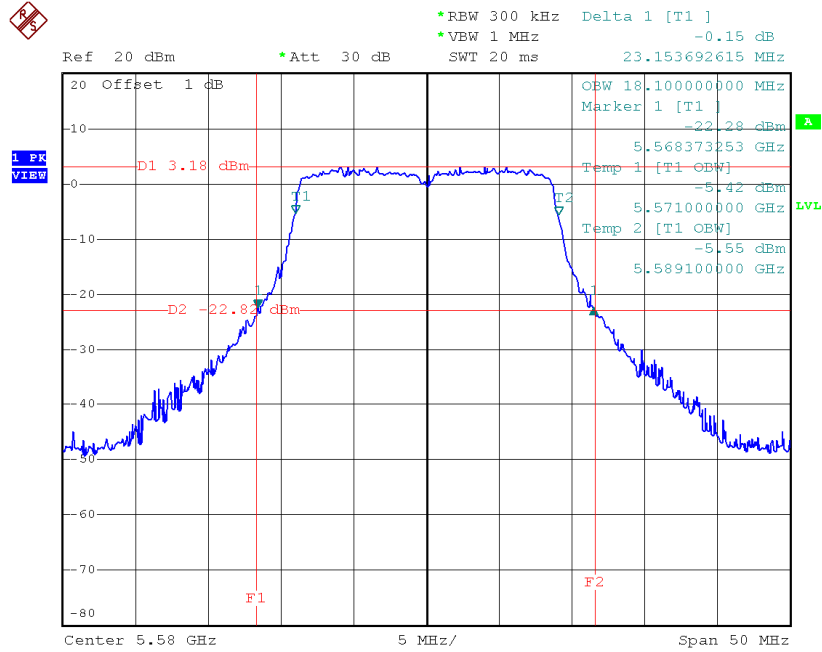

Date: 9.JAN.2015 18:18:17

TX CH140

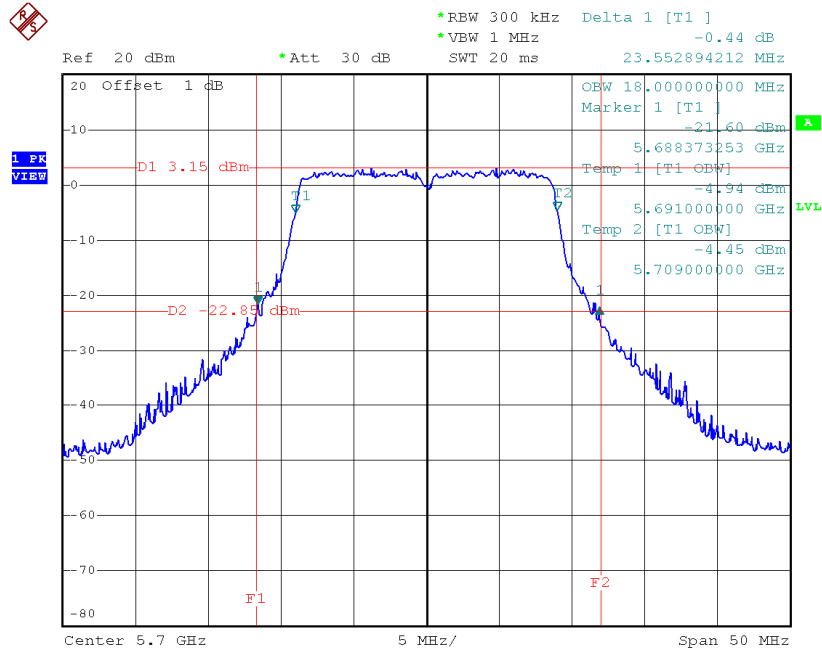


Date: 9.JAN.2015 18:21:38

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	43.89	36.50
CH110	5550	42.64	36.50
CH134	5670	43.64	36.50

TX CH102

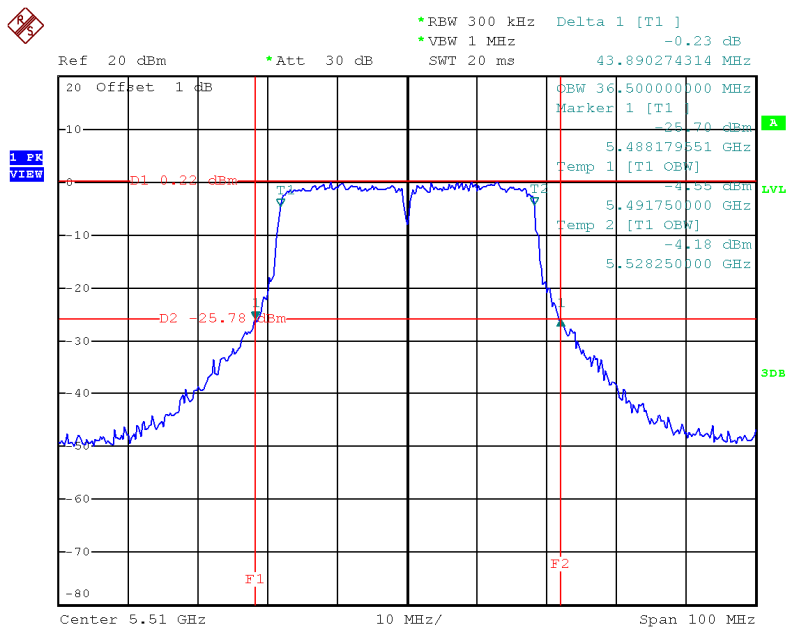


Date: 14.JAN.2015 16:04:42

TX CH110

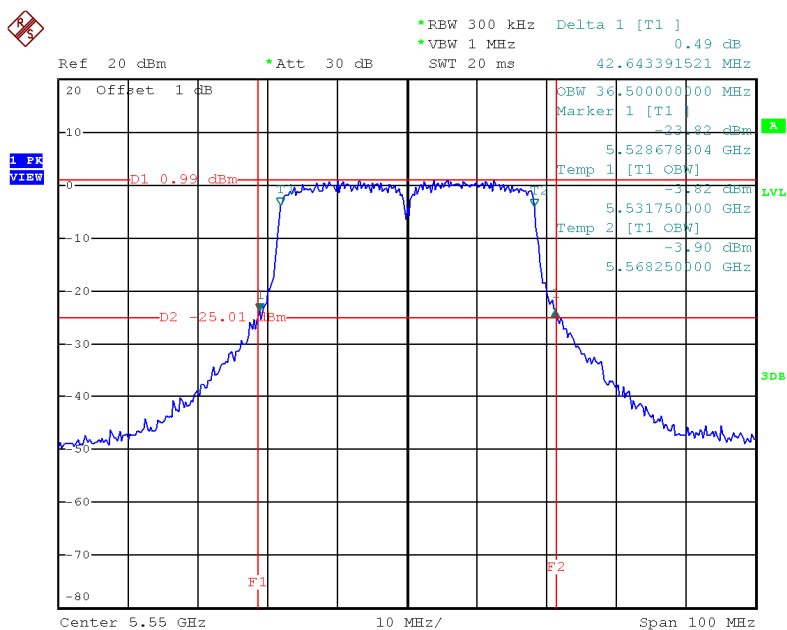

Date: 14.JAN.2015 16:07:04

TX CH134

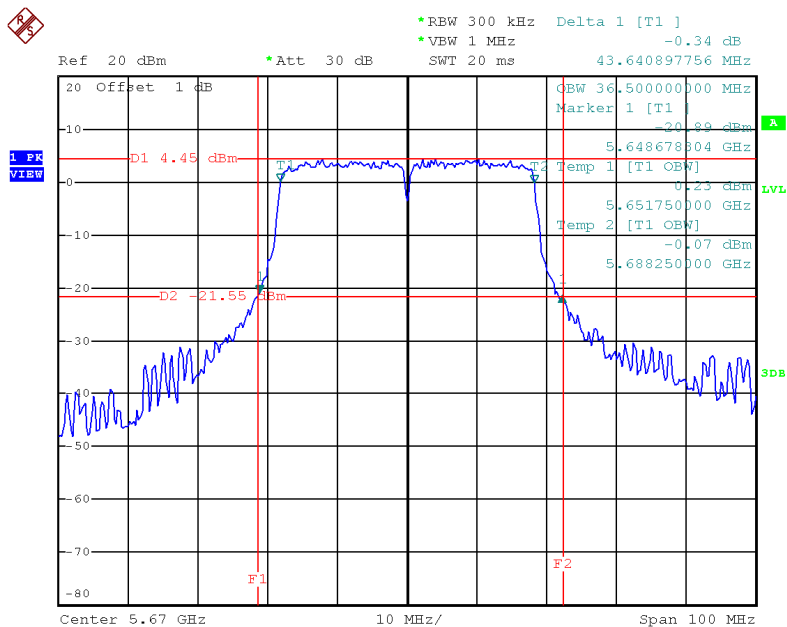


Date: 14.JAN.2015 16:11:05

Test Mode: UNII-2C/TX AC80 Mode_CH106

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	86.18	76.00

TX CH106

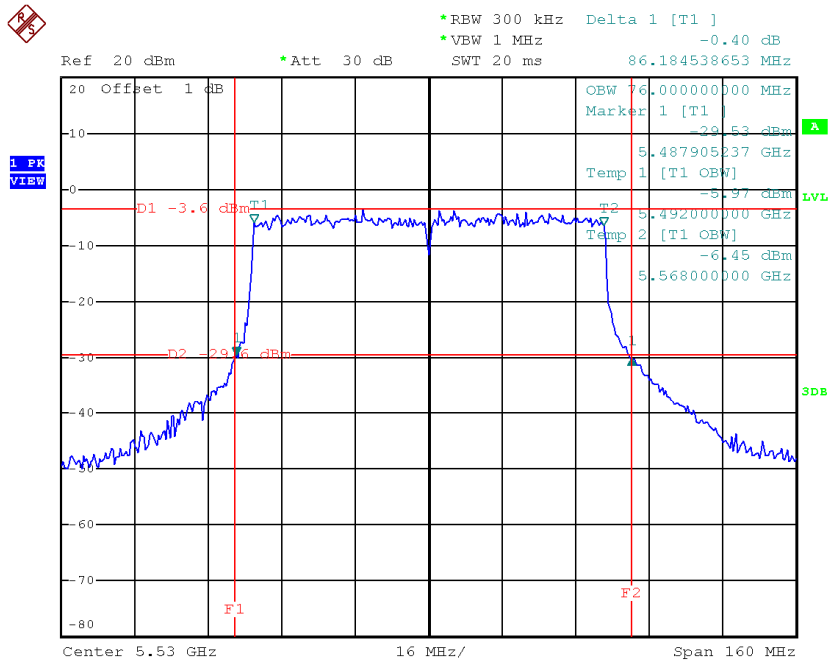

Date: 14.JAN.2015 16:29:28

ATTACHMENTF - MAXIMUM OUTPUT POWER

Test Mode: UNII-2A/TX A Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	13.95	24.00	0.25
CH60	5300	14.20	24.00	0.25
CH64	5320	12.52	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.75	24.00	0.25
CH60	5300	14.74	24.00	0.25
CH64	5320	13.30	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.44	24.00	0.25
CH60	5300	14.70	24.00	0.25
CH64	5320	13.20	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.17	24.00	0.25
CH60	5300	19.33	24.00	0.25
CH64	5320	17.79	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.55	24.00	0.25
CH60	5300	14.90	24.00	0.25
CH64	5320	14.44	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.74	24.00	0.25
CH60	5300	15.77	24.00	0.25
CH64	5320	15.10	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.15	24.00	0.25
CH60	5300	15.26	24.00	0.25
CH64	5320	15.00	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.94	24.00	0.25
CH60	5300	20.09	24.00	0.25
CH64	5320	19.63	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.96	24.00	0.25
CH62	5310	11.57	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.78	24.00	0.25
CH62	5310	12.48	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.52	24.00	0.25
CH62	5310	11.98	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	20.21	24.00	0.25
CH62	5310	16.80	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.55	24.00	0.25
CH116	5580	10.80	24.00	0.25
CH140	5700	12.63	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.35	24.00	0.25
CH116	5580	11.13	24.00	0.25
CH140	5700	13.29	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.73	24.00	0.25
CH116	5580	11.11	24.00	0.25
CH140	5700	13.30	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.66	24.00	0.25
CH116	5580	15.79	24.00	0.25
CH140	5700	17.86	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.45	24.00	0.25
CH116	5580	11.70	24.00	0.25
CH140	5700	13.69	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.07	24.00	0.25
CH116	5580	12.09	24.00	0.25
CH140	5700	13.95	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.51	24.00	0.25
CH116	5580	11.94	24.00	0.25
CH140	5700	14.44	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.45	24.00	0.25
CH116	5580	16.68	24.00	0.25
CH140	5700	18.81	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.09	24.00	0.25
CH110	5550	9.52	24.00	0.25
CH134	5670	11.32	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.73	24.00	0.25
CH110	5550	10.29	24.00	0.25
CH134	5670	11.73	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.99	24.00	0.25
CH110	5550	9.83	24.00	0.25
CH134	5670	11.65	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	18.05	24.00	0.25
CH110	5550	14.66	24.00	0.25
CH134	5670	16.34	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.56	24.00	0.25
CH60	5300	12.65	24.00	0.25
CH64	5320	12.75	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	13.55	24.00	0.25
CH60	5300	13.66	24.00	0.25
CH64	5320	13.68	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	13.18	24.00	0.25
CH60	5300	13.36	24.00	0.25
CH64	5320	13.33	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.88	24.00	0.25
CH60	5300	18.01	24.00	0.25
CH64	5320	18.04	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	13.64	24.00	0.25
CH62	5310	12.05	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.43	24.00	0.25
CH62	5310	12.73	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	13.96	24.00	0.25
CH62	5310	12.66	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.79	24.00	0.25
CH62	5310	17.26	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	16.45	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	16.79	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	16.61	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	21.39	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.86	24.00	0.25
CH116	5580	9.98	24.00	0.25
CH140	5700	10.14	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.78	24.00	0.25
CH116	5580	10.43	24.00	0.25
CH140	5700	10.69	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.84	24.00	0.25
CH116	5580	10.20	24.00	0.25
CH140	5700	10.78	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.95	24.00	0.25
CH116	5580	14.97	24.00	0.25
CH140	5700	15.31	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.94	24.00	0.25
CH110	5550	12.95	24.00	0.25
CH134	5670	13.96	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.53	24.00	0.25
CH110	5550	13.62	24.00	0.25
CH134	5670	14.44	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.24	24.00	0.25
CH110	5550	13.64	24.00	0.25
CH134	5670	14.52	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	19.01	24.00	0.25
CH110	5550	18.18	24.00	0.25
CH134	5670	19.08	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 4

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	13.67	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 5

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	14.01	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 6

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	13.78	24.00	0.25


Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	18.59	24.00	0.25

ATTACHMENTG - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: UNII-2A/TX A Mode_ANT 4

TX mode CH52

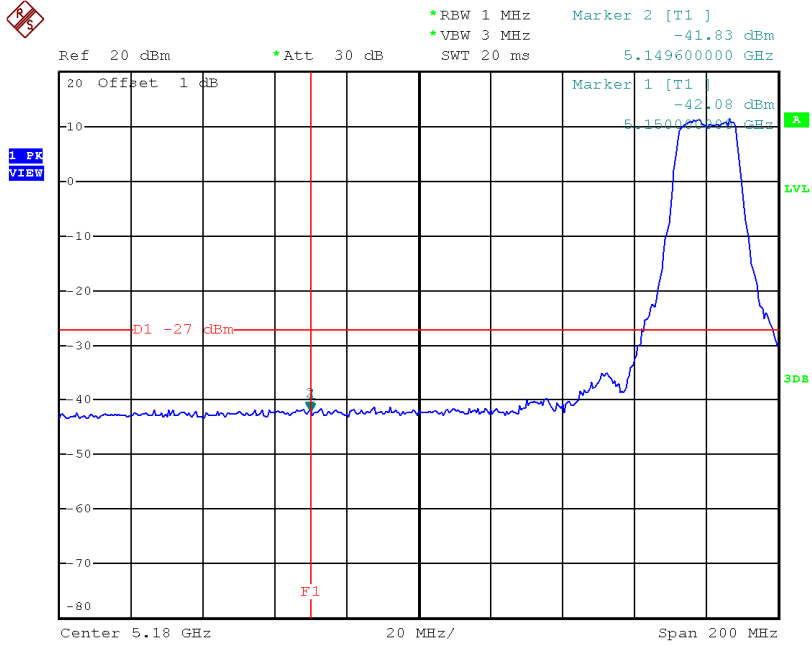

Date: 15.JAN.2015 16:02:28


TX mode CH64

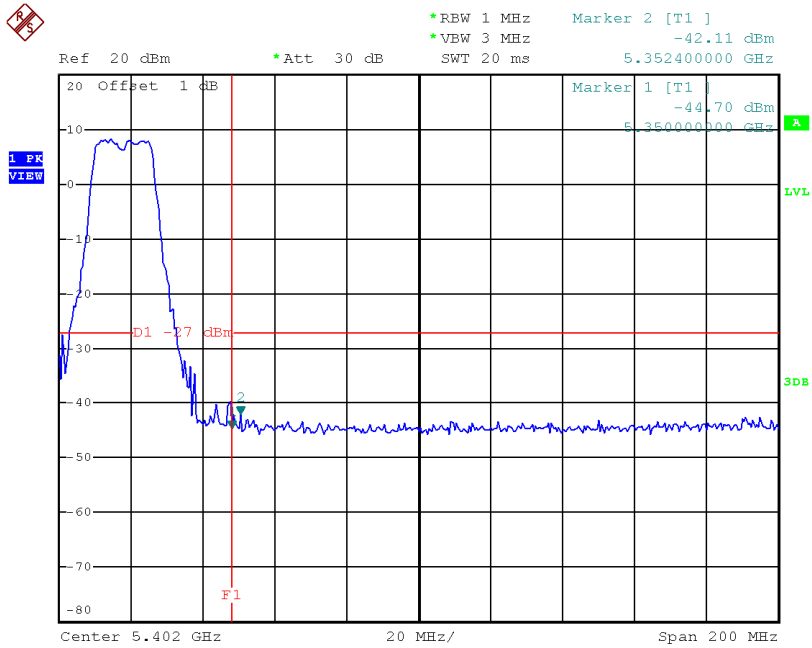

Date: 15.JAN.2015 16:12:05


Test Mode: UNII-2A/TX A Mode_ANT 5

TX mode CH52

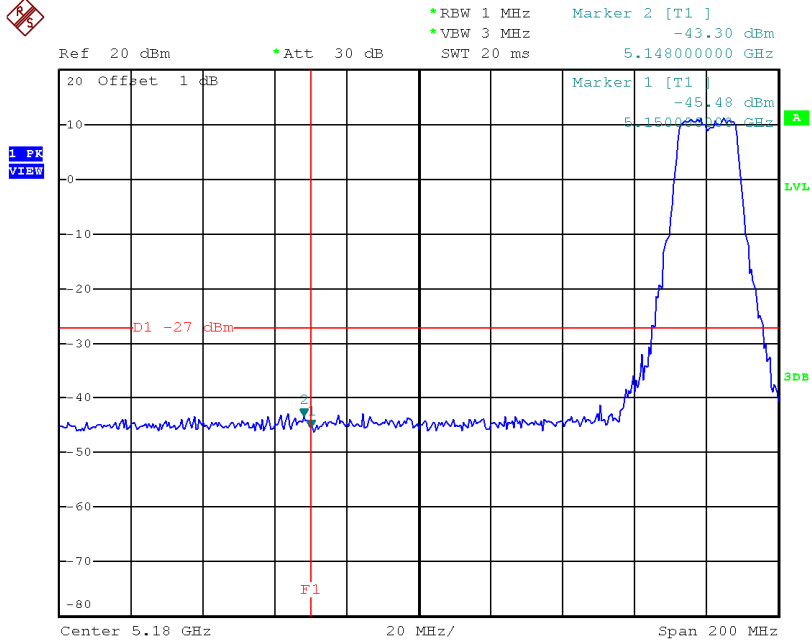

Date: 15.JAN.2015 16:03:07


TX mode CH64

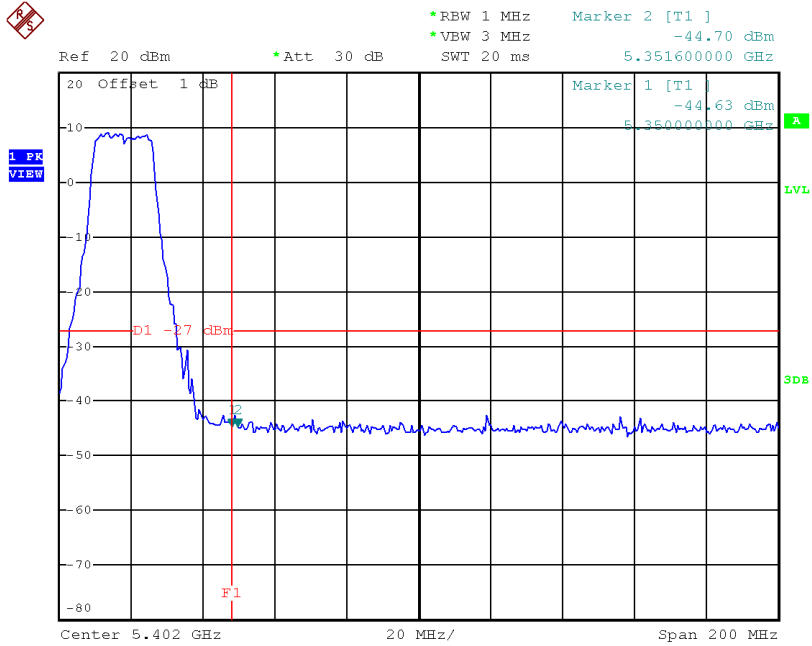

Date: 15.JAN.2015 16:11:30


Test Mode: UNII-2A/TX A Mode_ANT 6

TX mode CH52

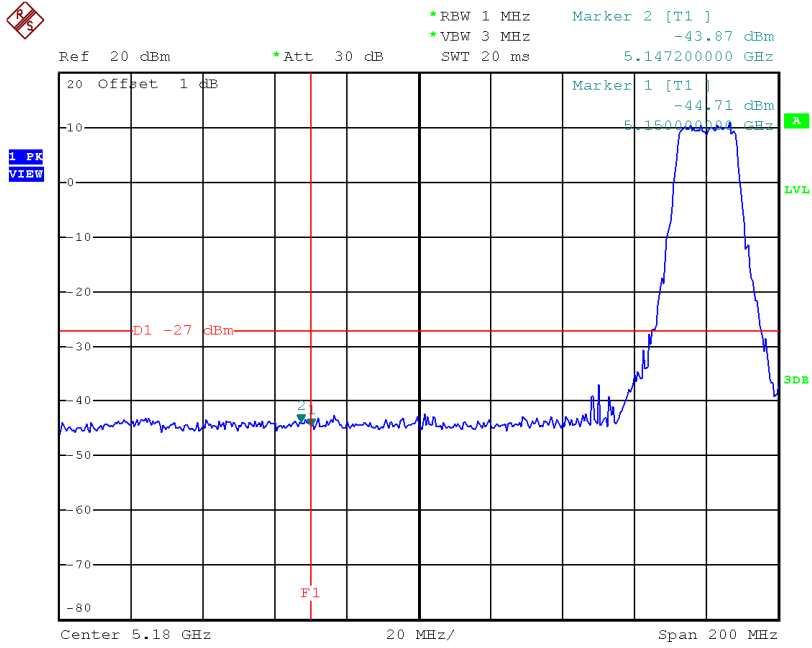

Date: 15.JAN.2015 16:03:32


TX mode CH64

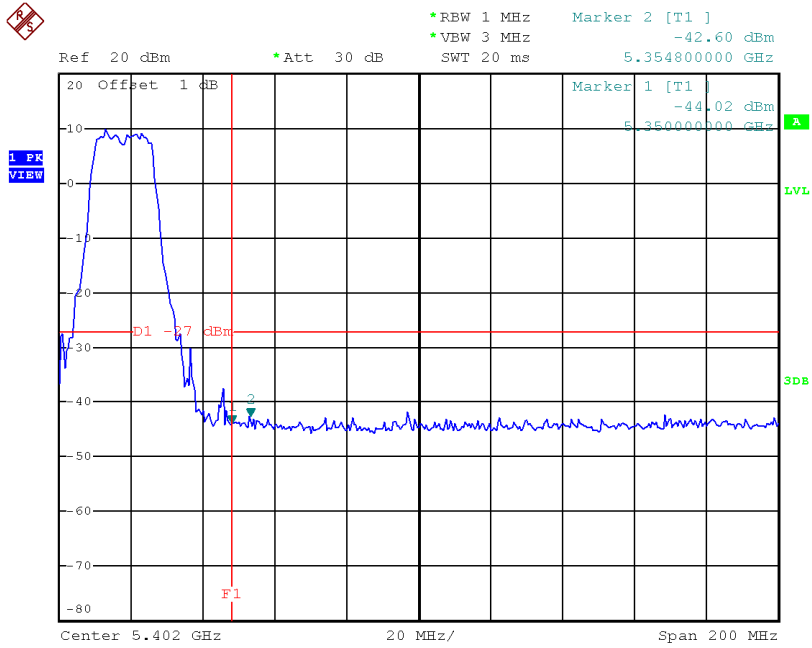

Date: 15.JAN.2015 16:10:49


Test Mode: UNII-2A/TX N20 Mode_ANT 4

TX mode CH52

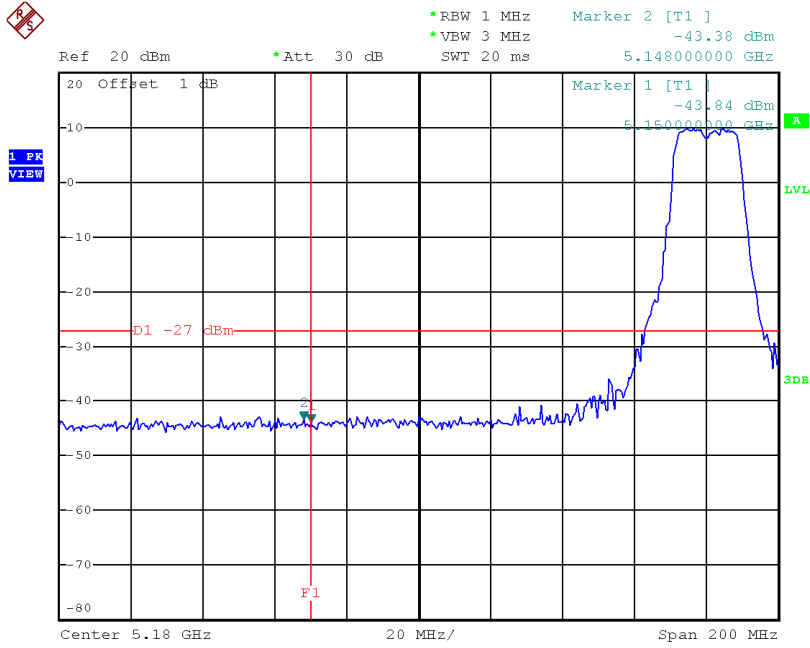

Date: 15.JAN.2015 16:07:15


TX mode CH64

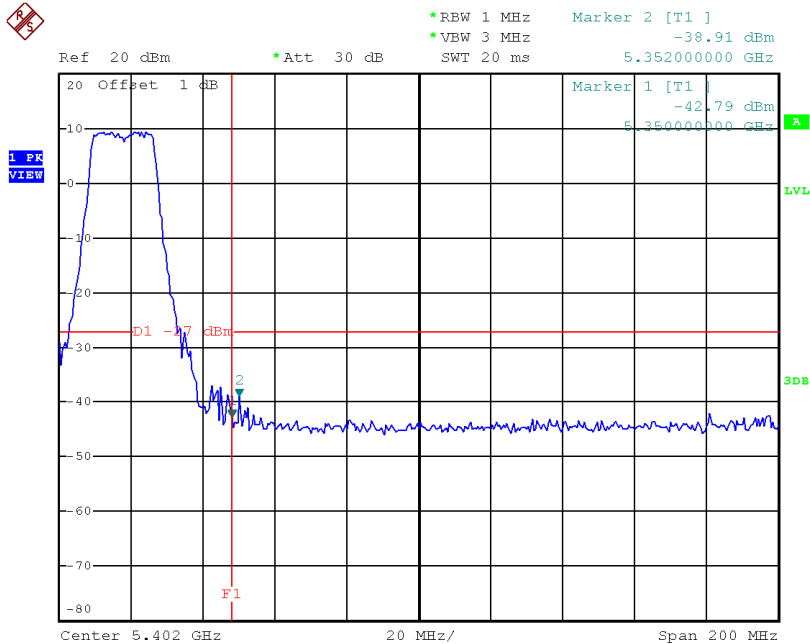

Date: 15.JAN.2015 16:12:46


Test Mode: UNII-2A/TX N20 Mode_ANT 5

TX mode CH52

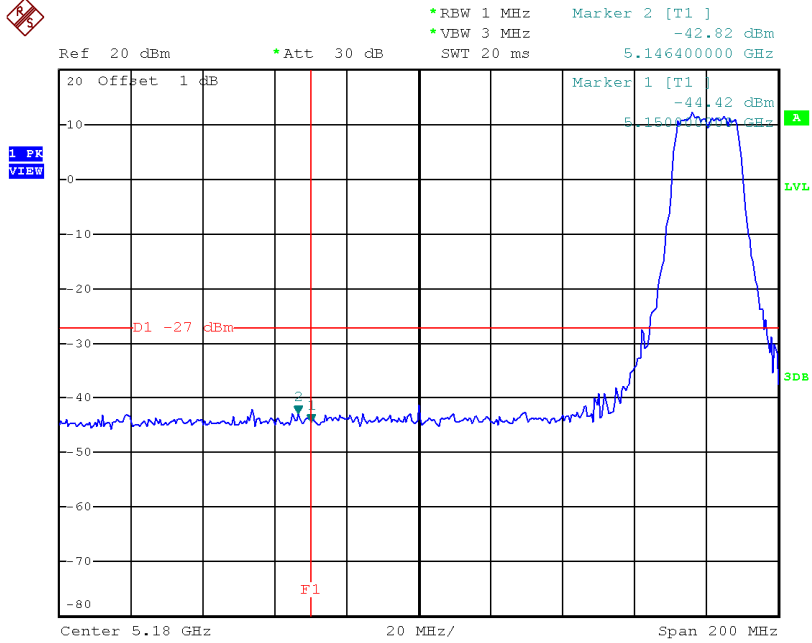

Date: 15.JAN.2015 16:05:24


TX mode CH64

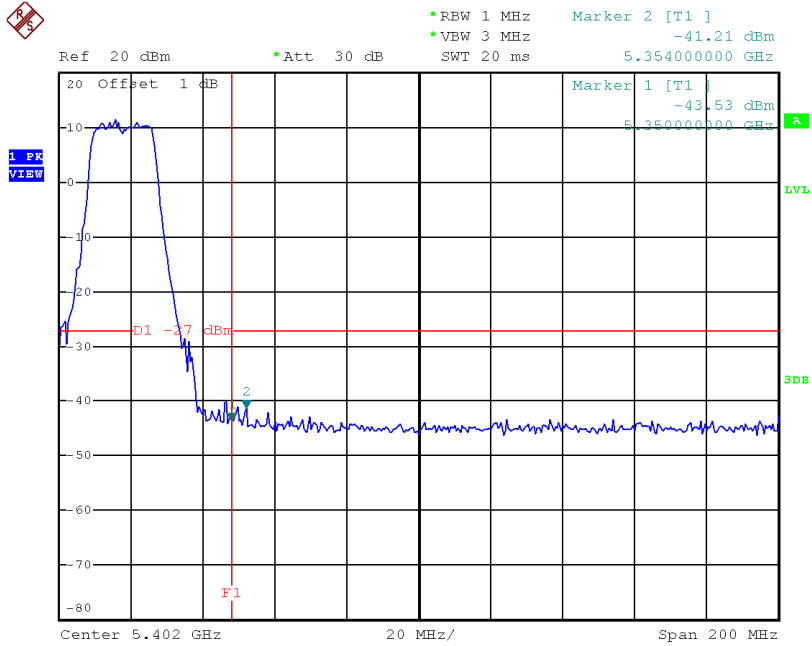

Date: 15.JAN.2015 16:13:17


Test Mode: UNII-2A/TX N20 Mode_ANT 6

TX mode CH52

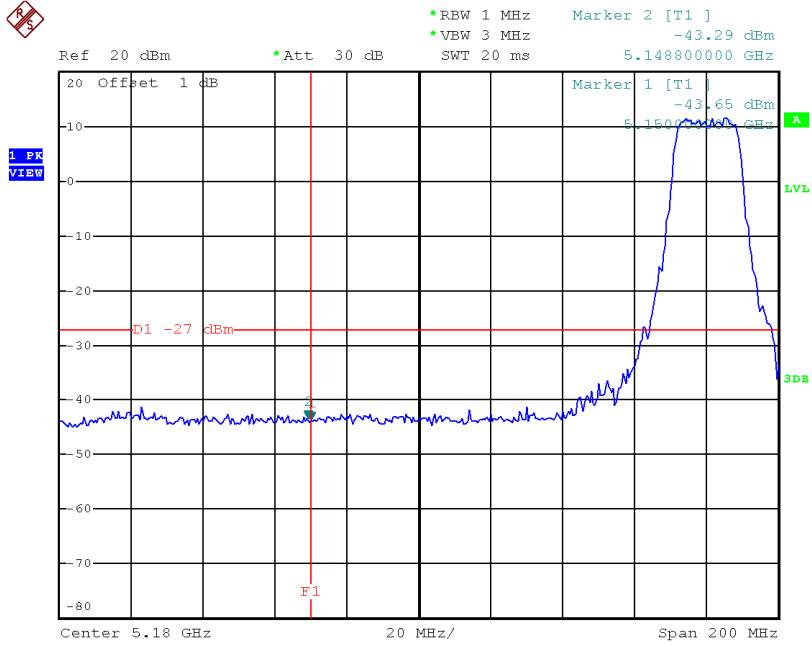

Date: 15.JAN.2015 16:04:41


TX mode CH64

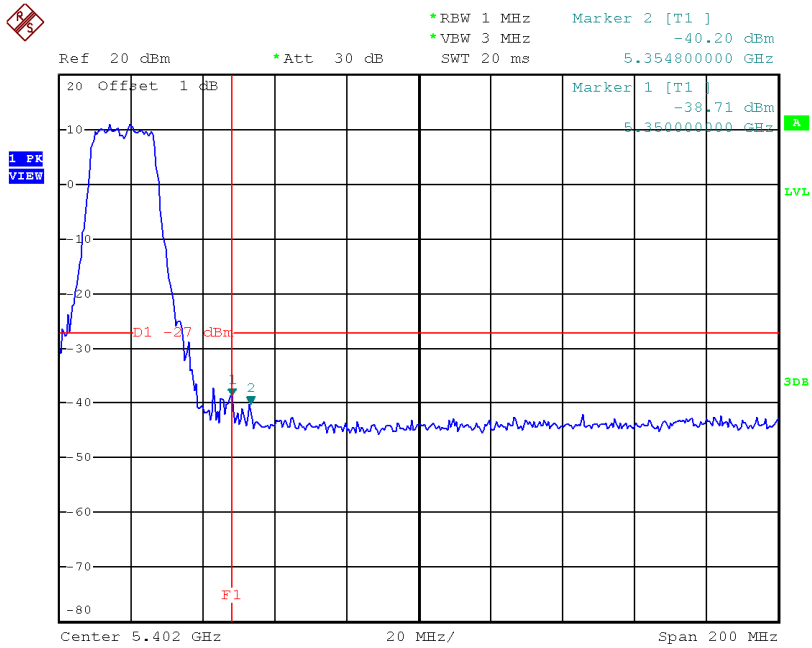

Date: 15.JAN.2015 16:13:42


Test Mode: UNII-2A/TX N40 Mode_ANT 4

TX mode CH54

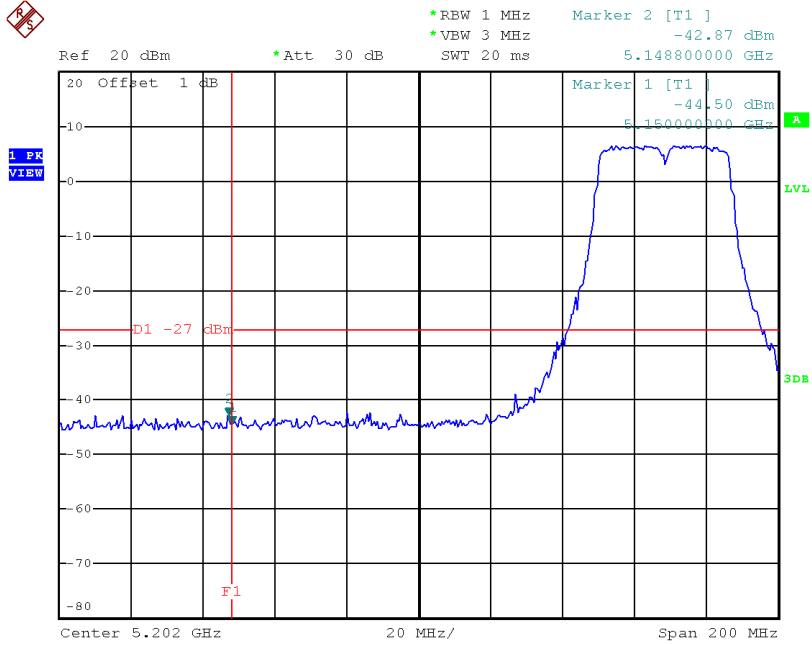

Date: 15.JAN.2015 17:49:59


TX mode CH62

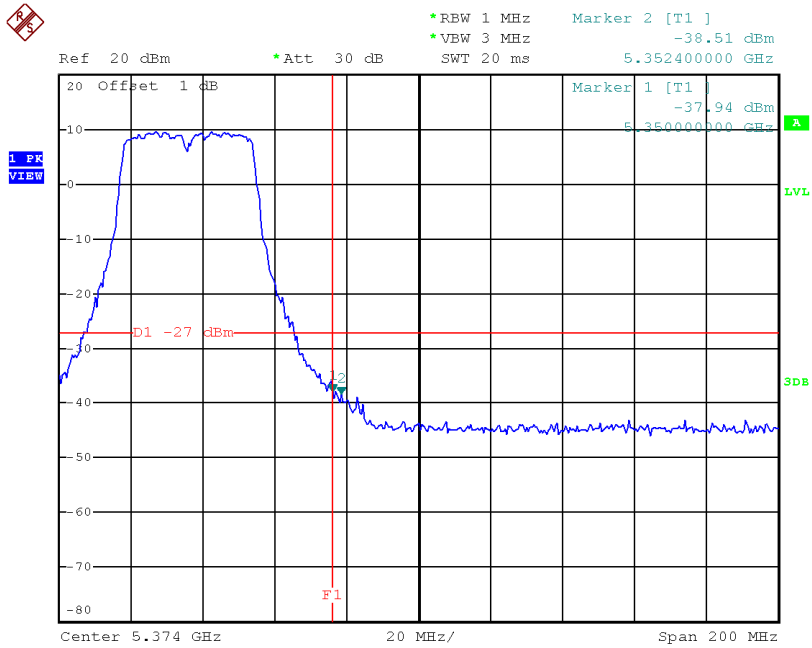

Date: 15.JAN.2015 17:55:04


Test Mode: UNII-2A/TX N40 Mode_ANT 5

TX mode CH54

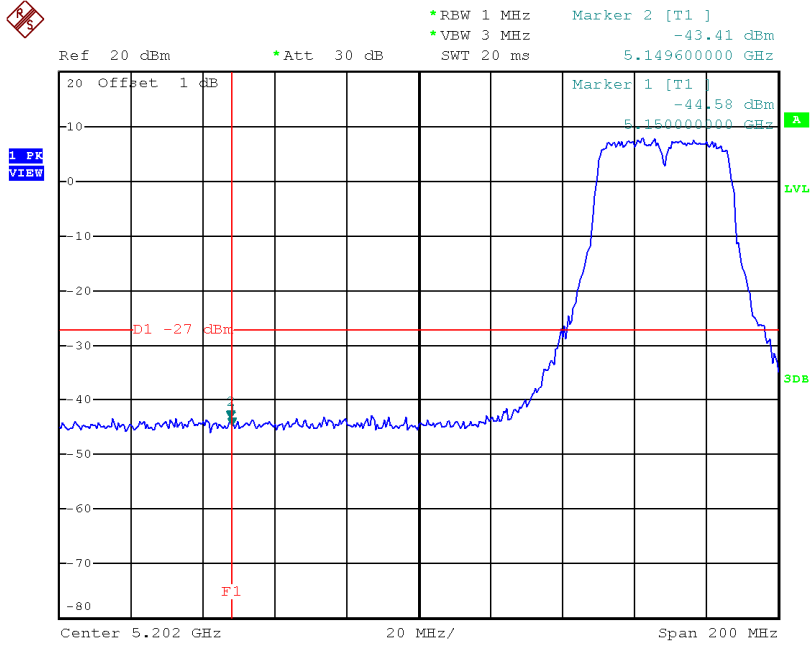

Date: 15.JAN.2015 17:49:28


TX mode CH62

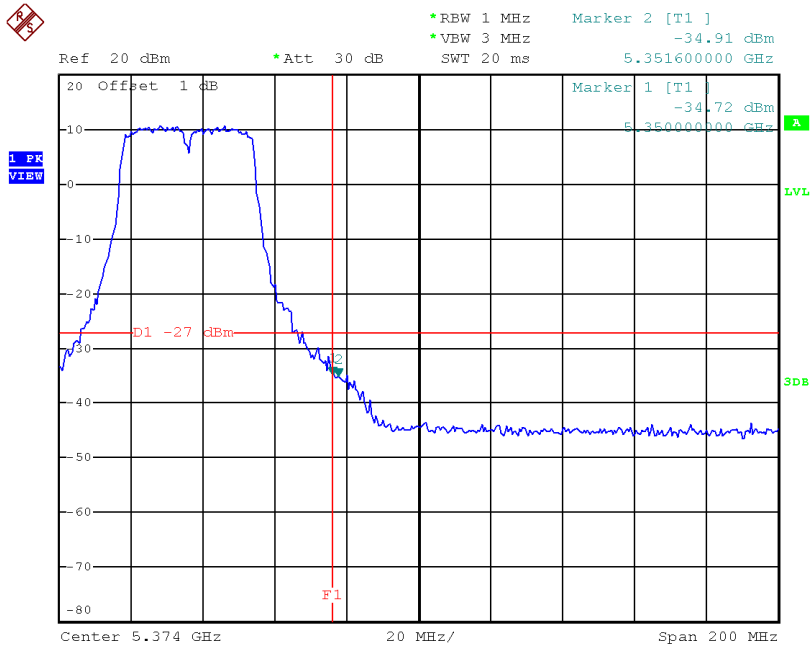

Date: 15.JAN.2015 17:54:36


Test Mode: UNII-2A/TX N40 Mode_ANT 6

TX mode CH54

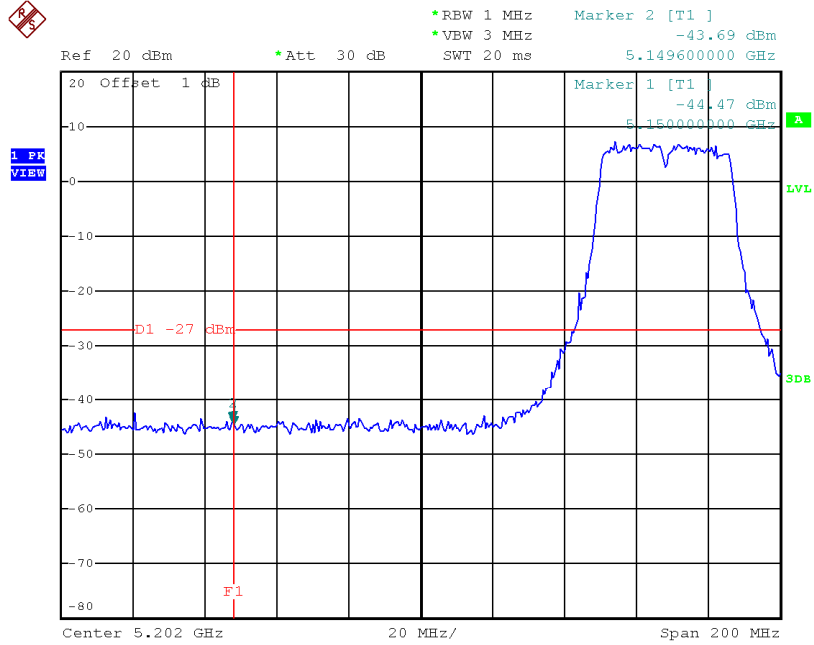

Date: 15.JAN.2015 17:48:47


TX mode CH62

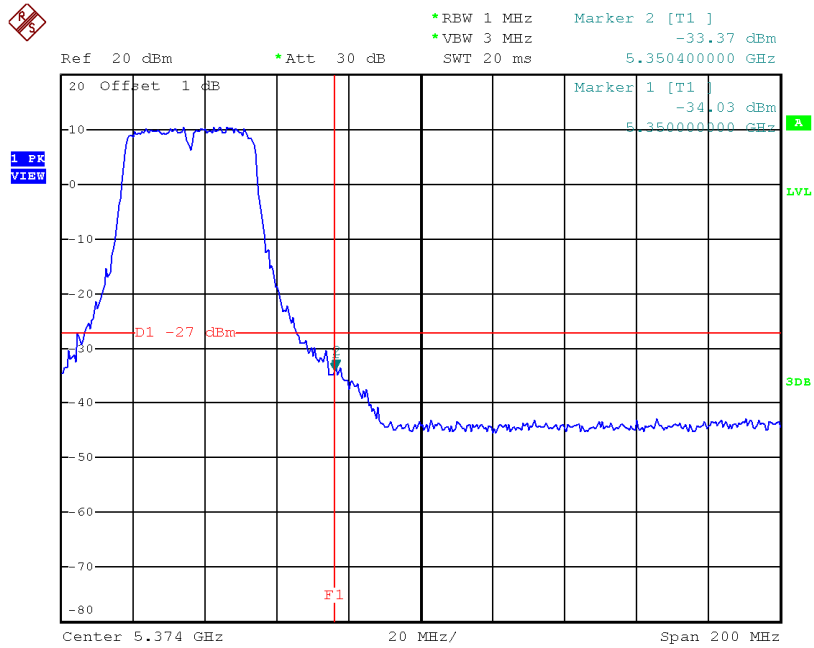

Date: 15.JAN.2015 17:53:53


Test Mode: UNII-2C/TX A Mode_ANT 4

TX mode CH100

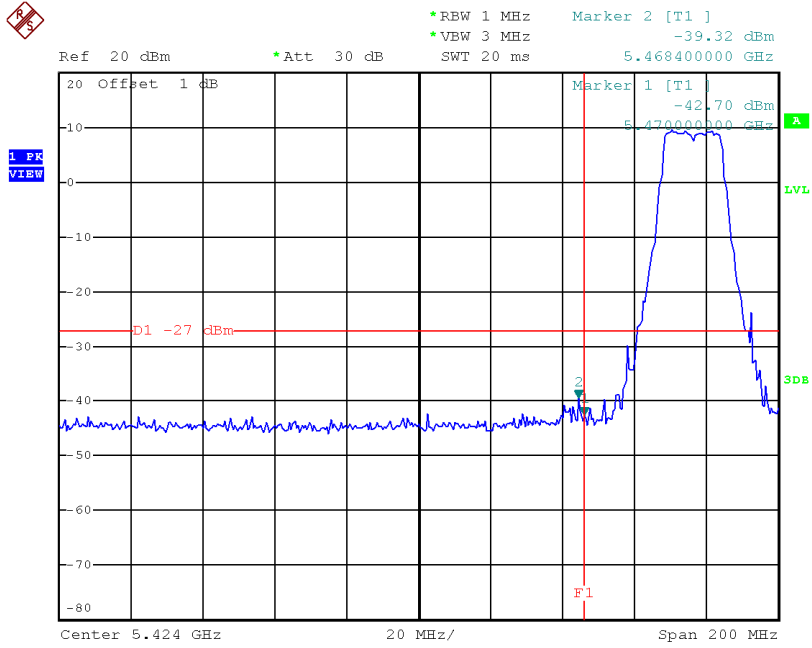

Date: 15.JAN.2015 16:16:59


TX mode CH140

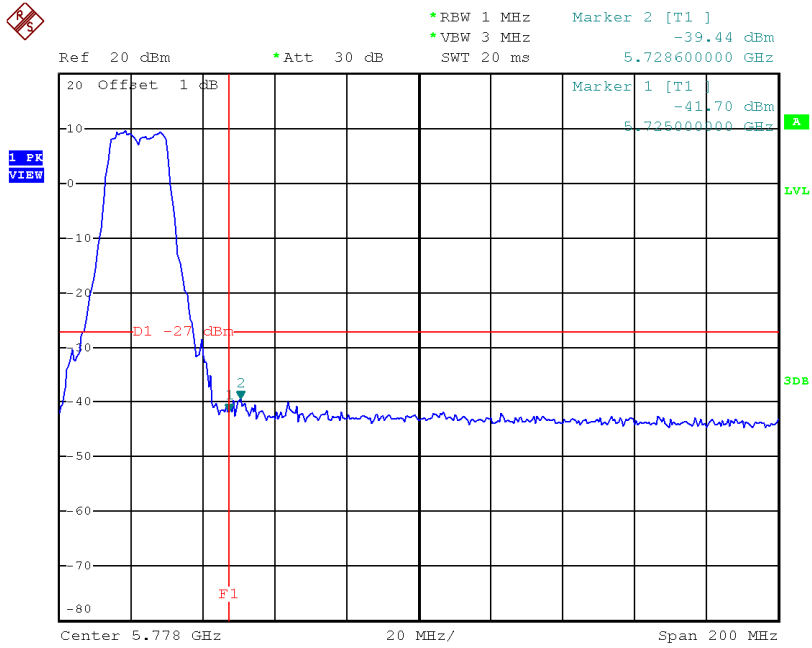

Date: 15.JAN.2015 17:36:29


Test Mode: UNII-2C/TX A Mode_ANT 5

TX mode CH100

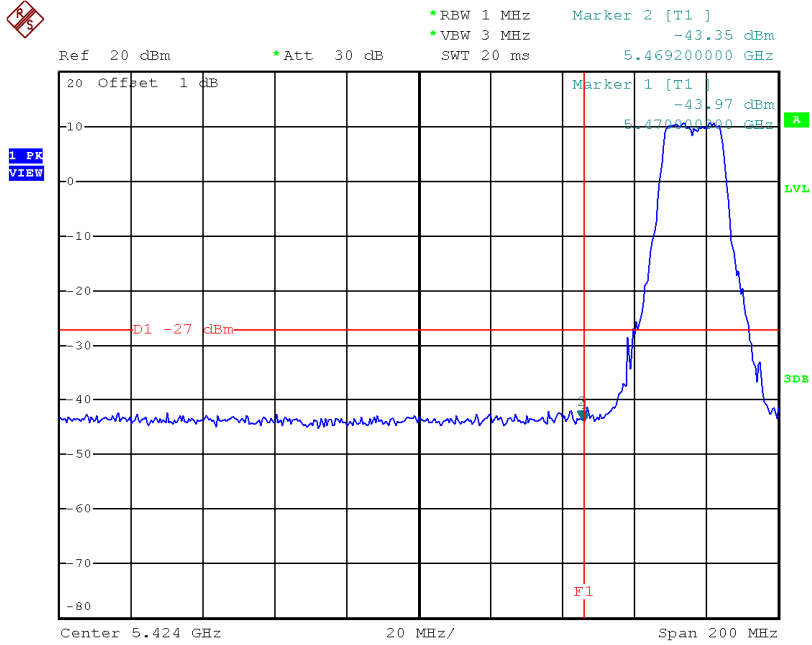

Date: 15.JAN.2015 16:17:30


TX mode CH140

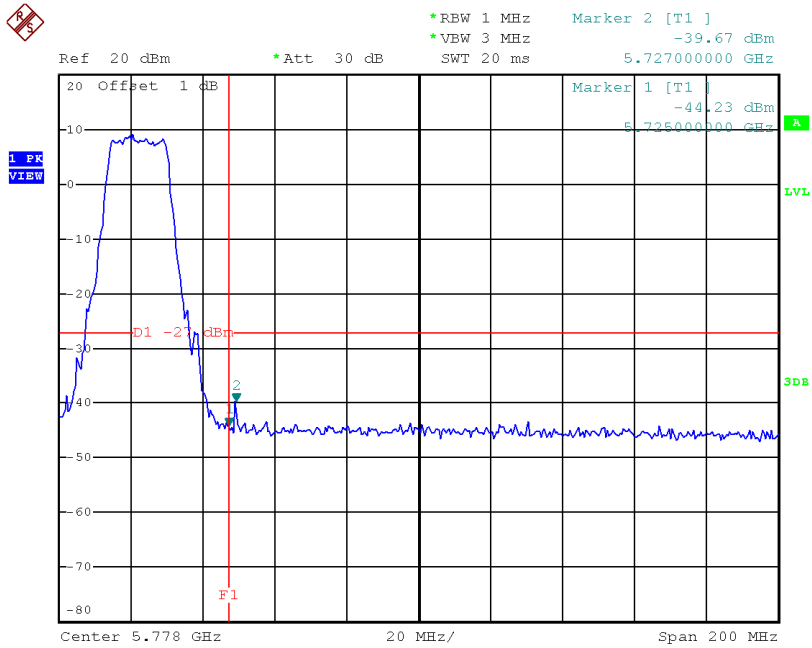

Date: 15.JAN.2015 17:37:17


Test Mode: UNII-2C/TX A Mode_ANT 6

TX mode CH100

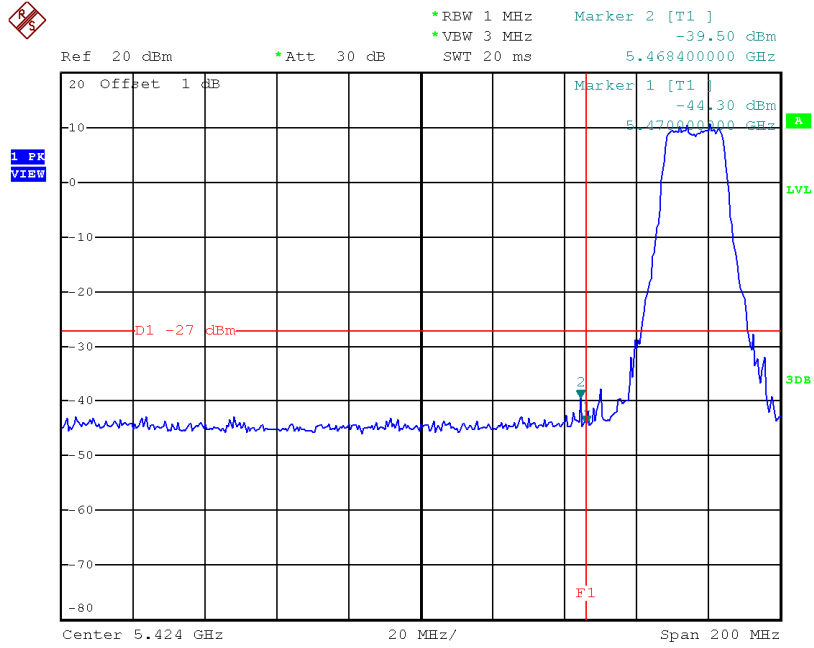

Date: 15.JAN.2015 16:17:56


TX mode CH140

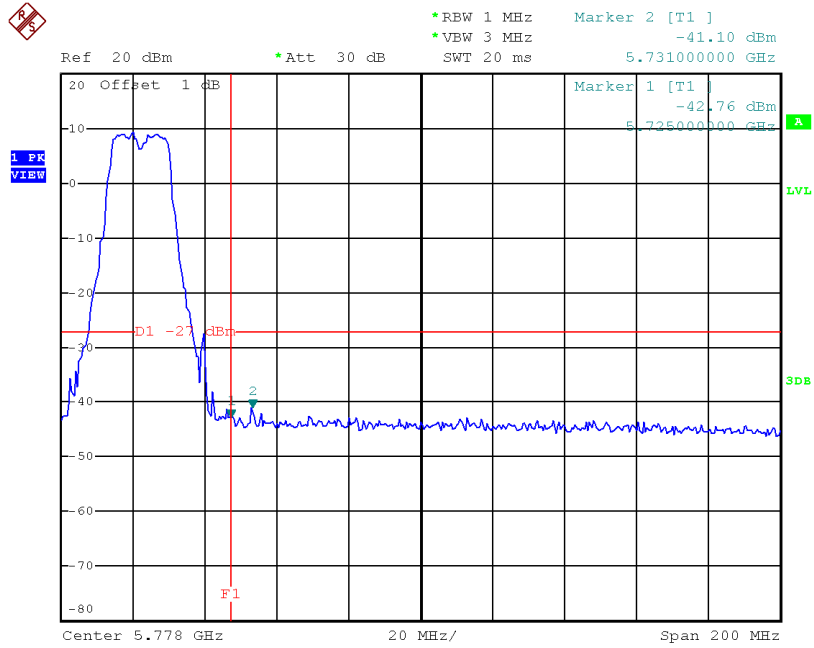

Date: 15.JAN.2015 17:37:44


Test Mode: UNII-2C/TX N20 Mode_ANT 4

TX mode CH100

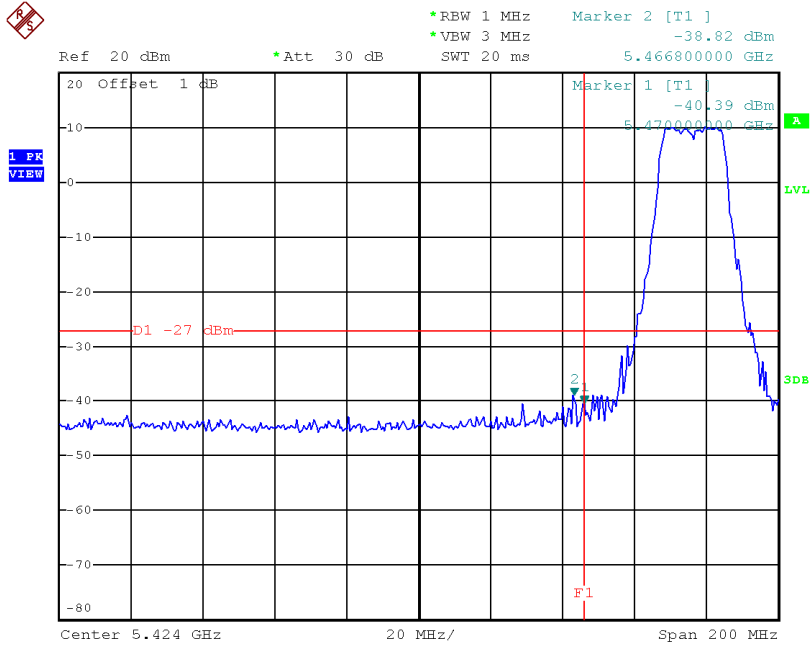

Date: 15.JAN.2015 16:19:32


TX mode CH140

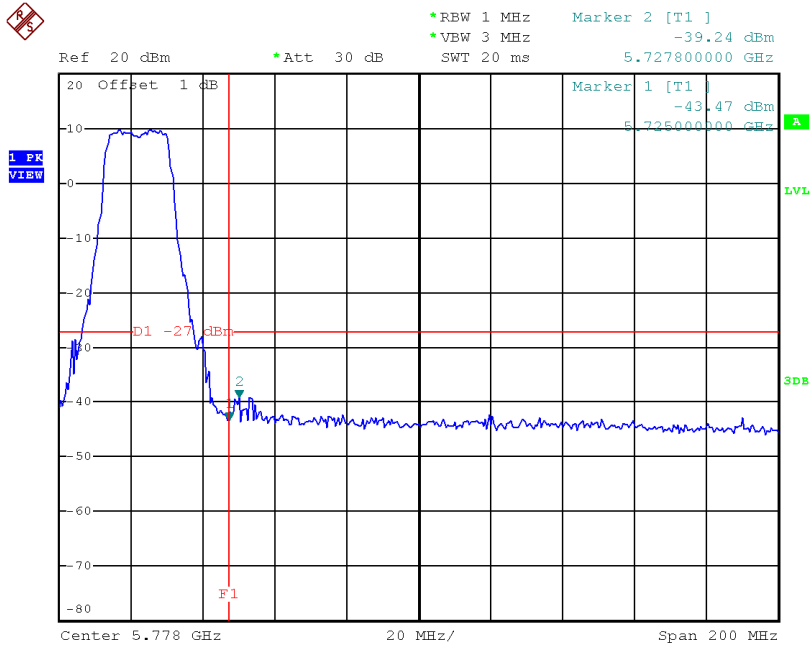

Date: 15.JAN.2015 17:42:10


Test Mode: UNII-2C/TX N20 Mode_ANT 5

TX mode CH100

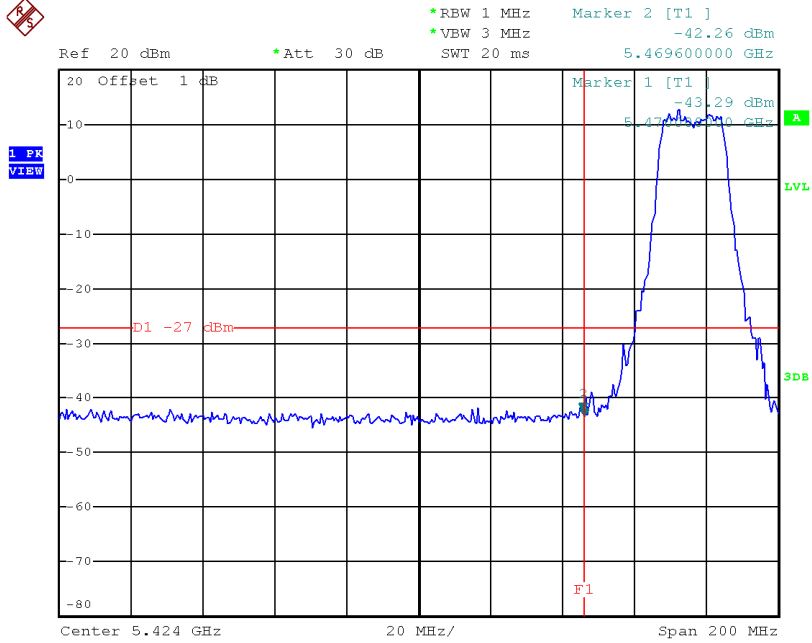

Date: 15.JAN.2015 16:19:10


TX mode CH140

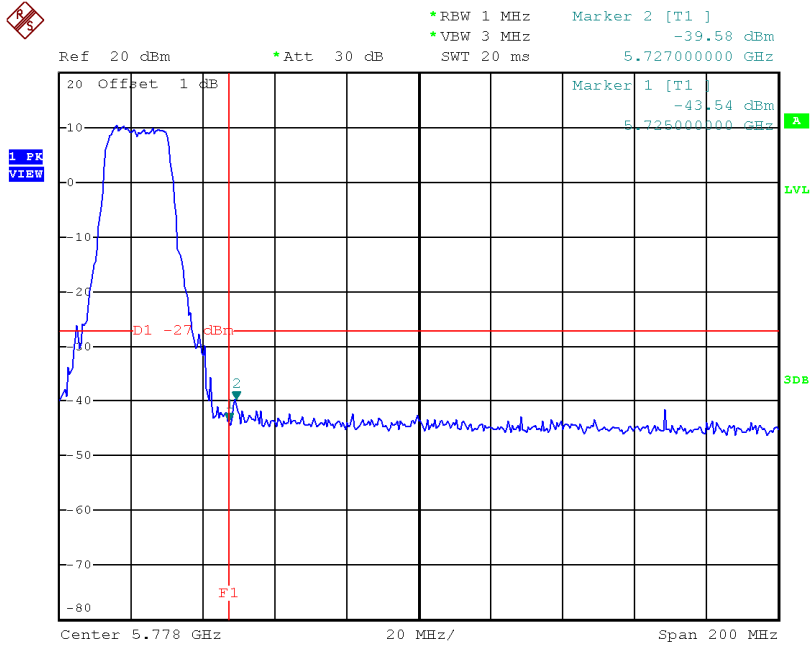

Date: 15.JAN.2015 17:41:38


Test Mode: UNII-2C/TX N20 Mode_ANT 6

TX mode CH100

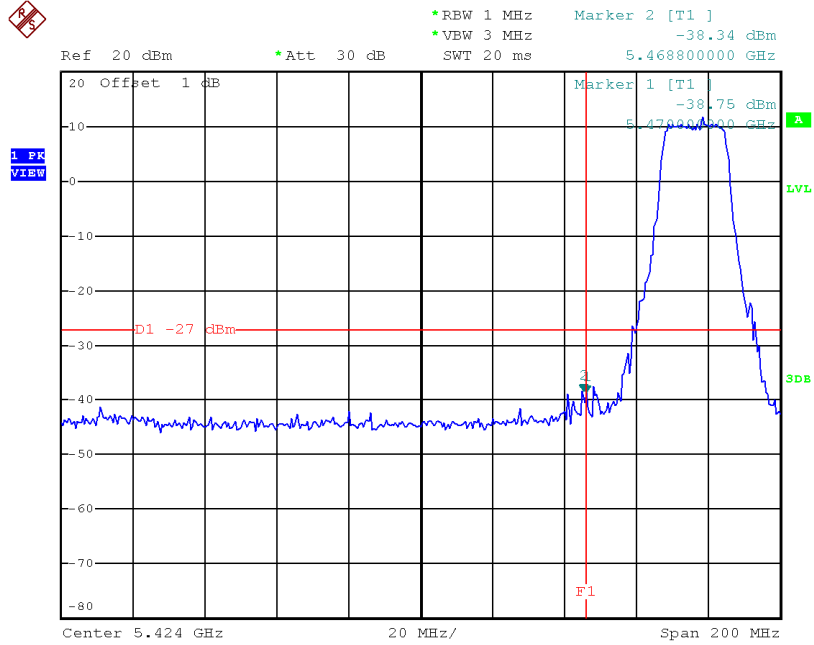

Date: 15.JAN.2015 16:18:34


TX mode CH140

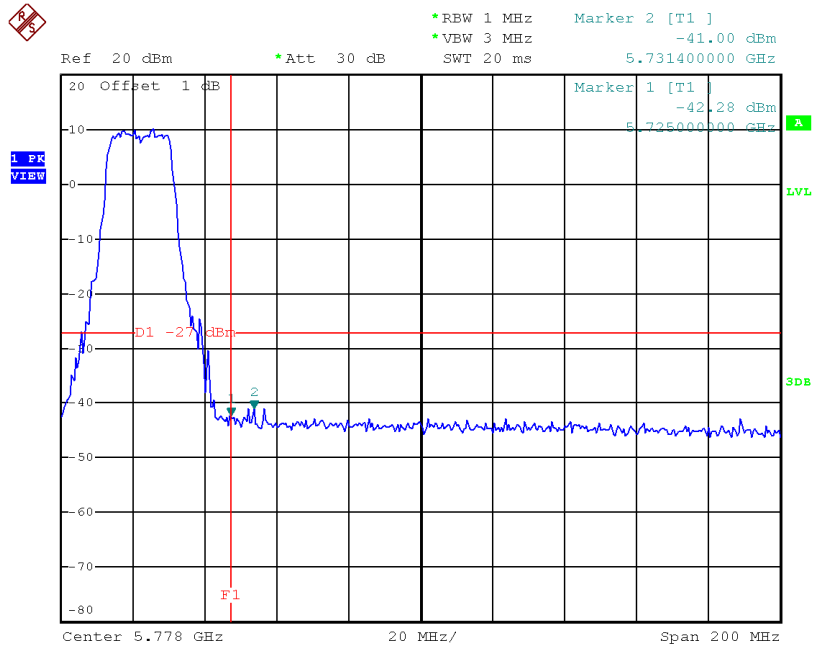

Date: 15.JAN.2015 17:41:00


Test Mode: UNII-2C/TX N40 Mode_ANT 4

TX mode CH102

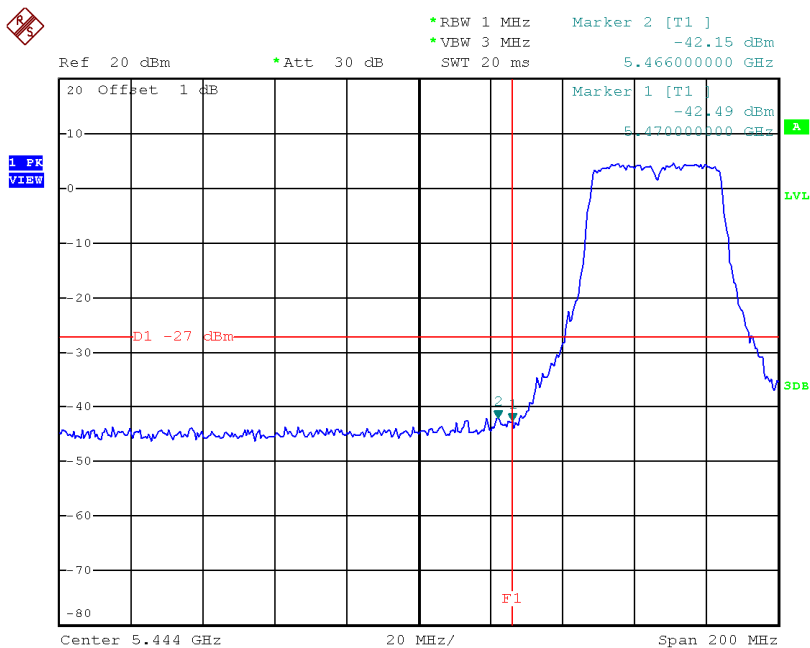

Date: 15.JAN.2015 17:59:43


TX mode CH134

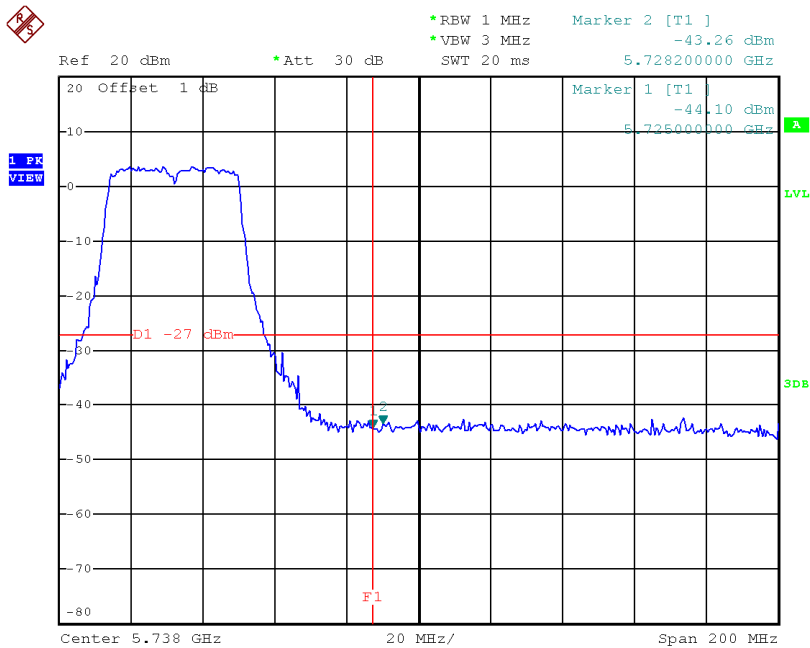

Date: 15.JAN.2015 18:07:49


Test Mode: UNII-2C/TX N40 Mode_ANT 5

TX mode CH102

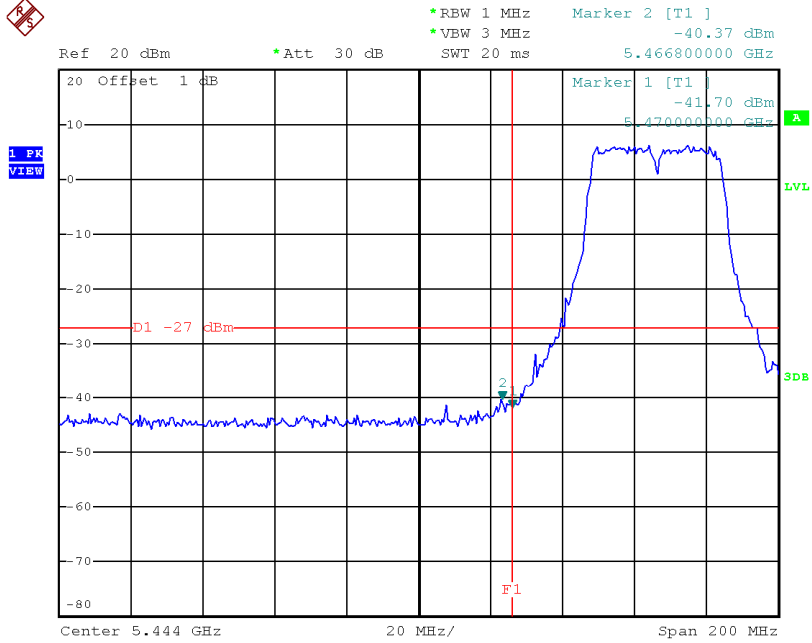

Date: 15.JAN.2015 17:59:18


TX mode CH134

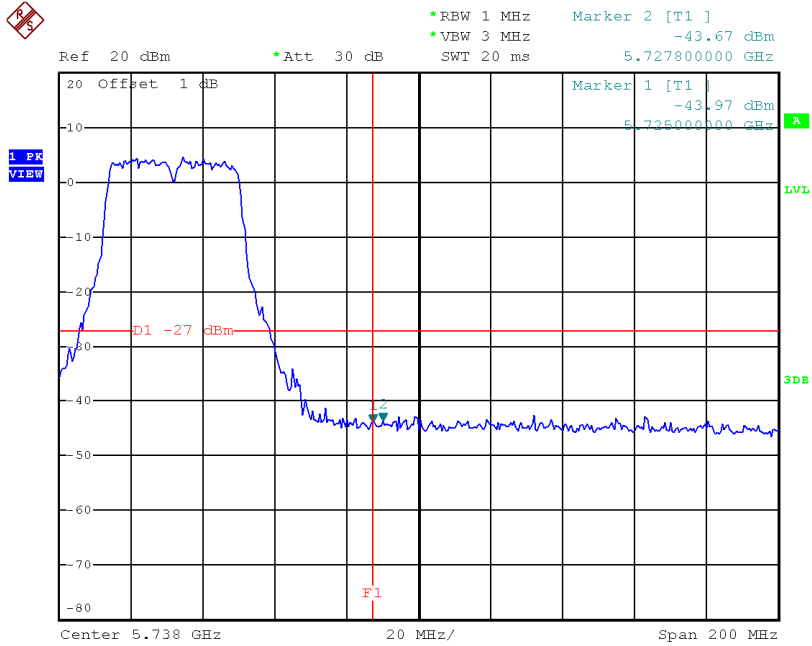

Date: 15.JAN.2015 18:08:12


Test Mode: UNII-2C/TX N40 Mode_ANT 6

TX mode CH102

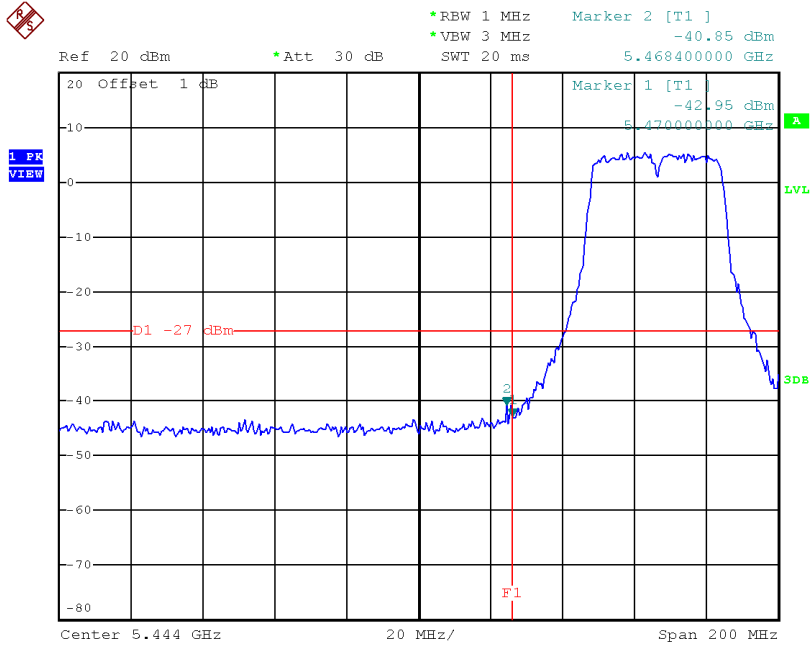

Date: 15.JAN.2015 17:58:41


TX mode CH134

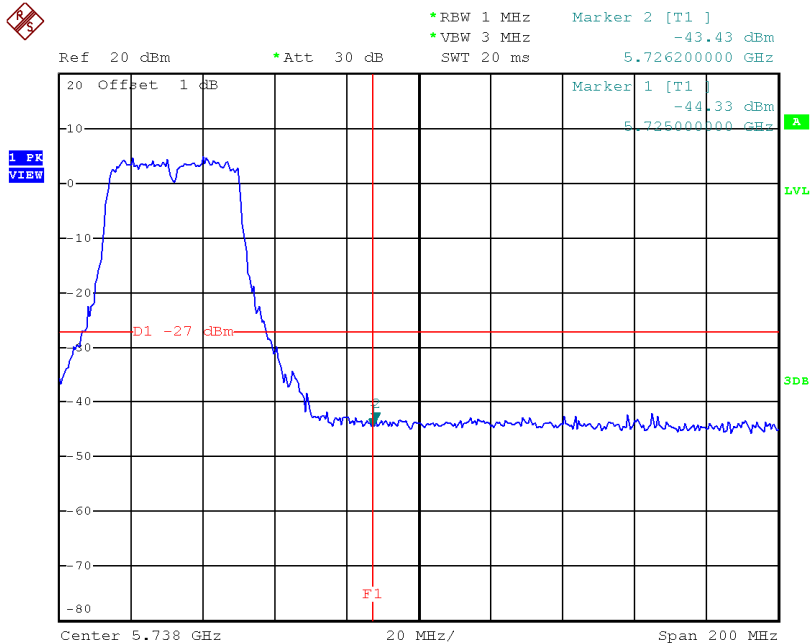

Date: 15.JAN.2015 18:06:13


Test Mode: UNII-2C/TX AC20 Mode_ANT 4

TX mode CH100

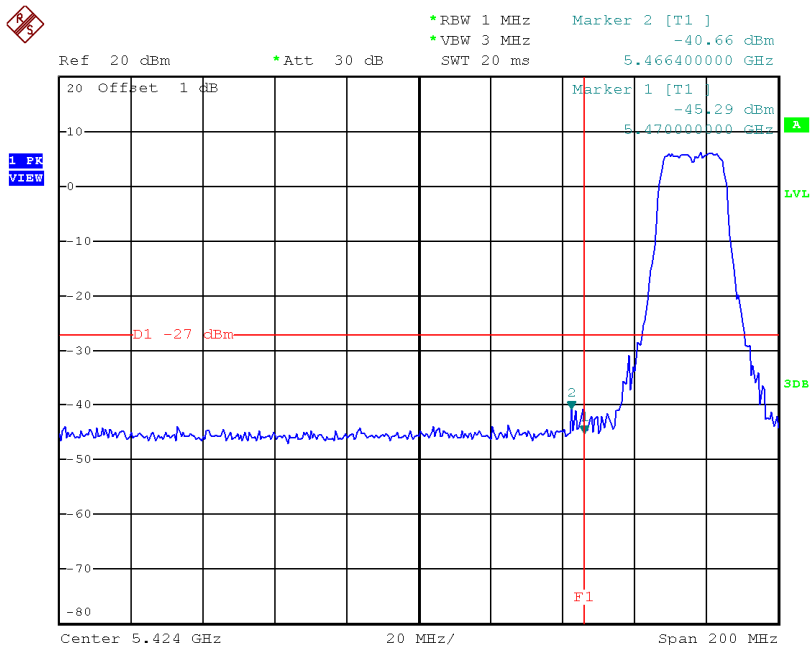

Date: 15.JAN.2015 16:31:20


TX mode CH140

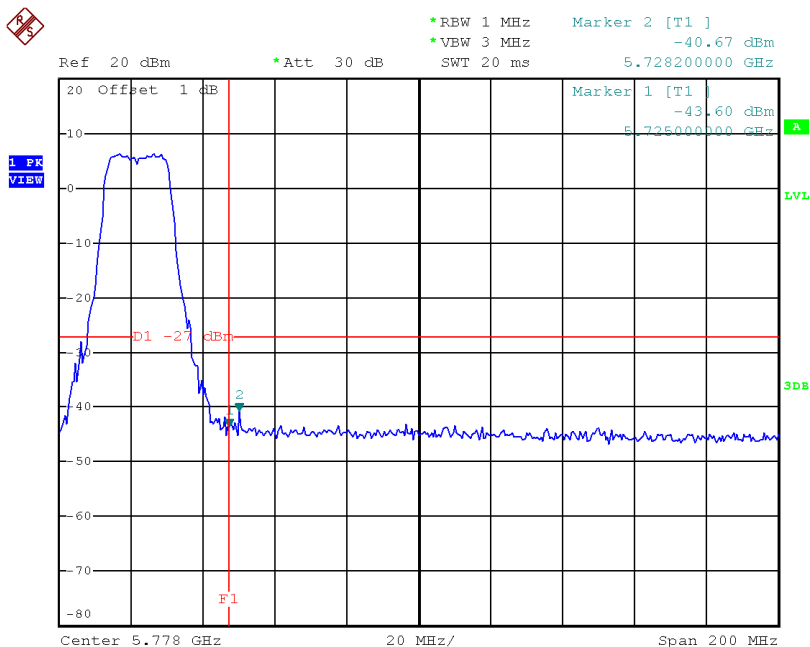

Date: 15.JAN.2015 17:42:55


Test Mode: UNII-2C/TX AC20 Mode_ANT 5

TX mode CH100

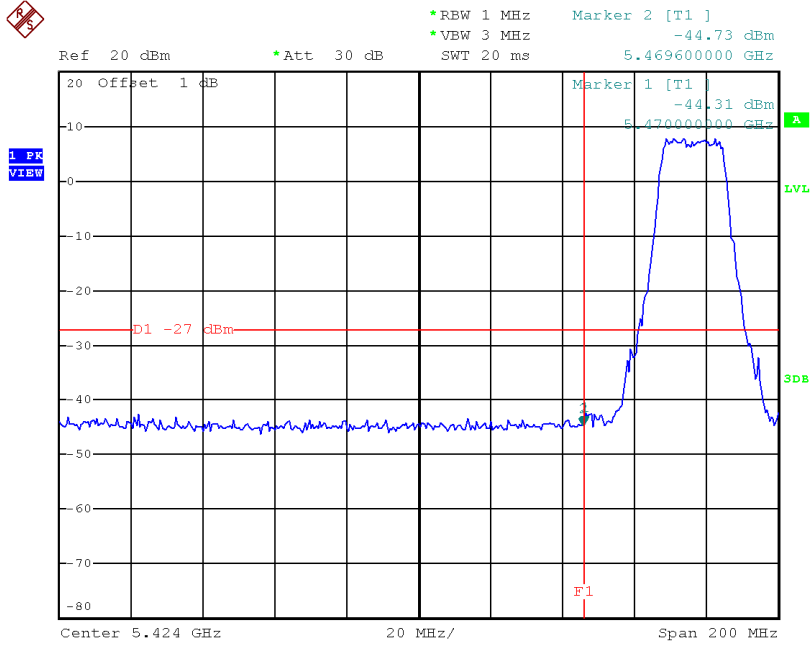

Date: 15.JAN.2015 16:31:52


TX mode CH140

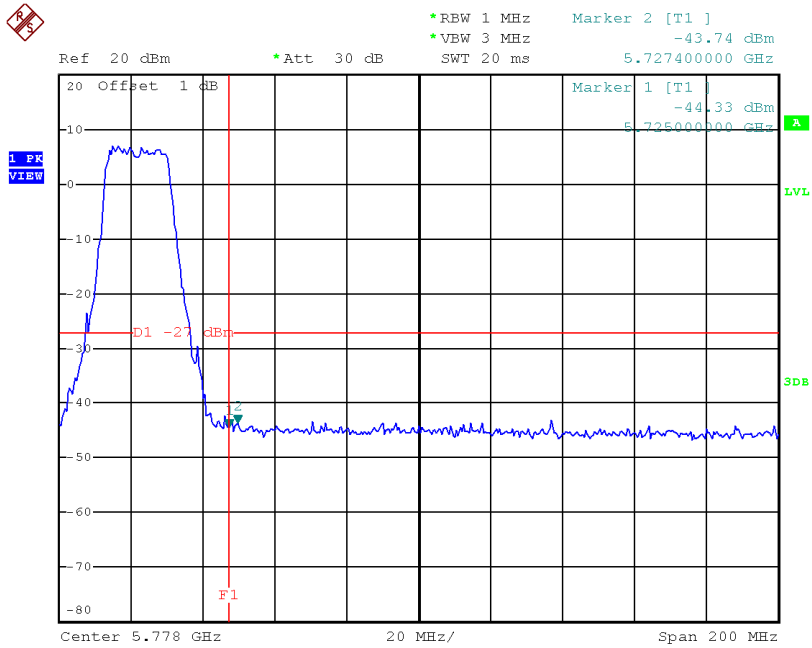

Date: 15.JAN.2015 17:43:21


Test Mode: UNII-2C/TX AC20 Mode_ANT 6

TX mode CH100

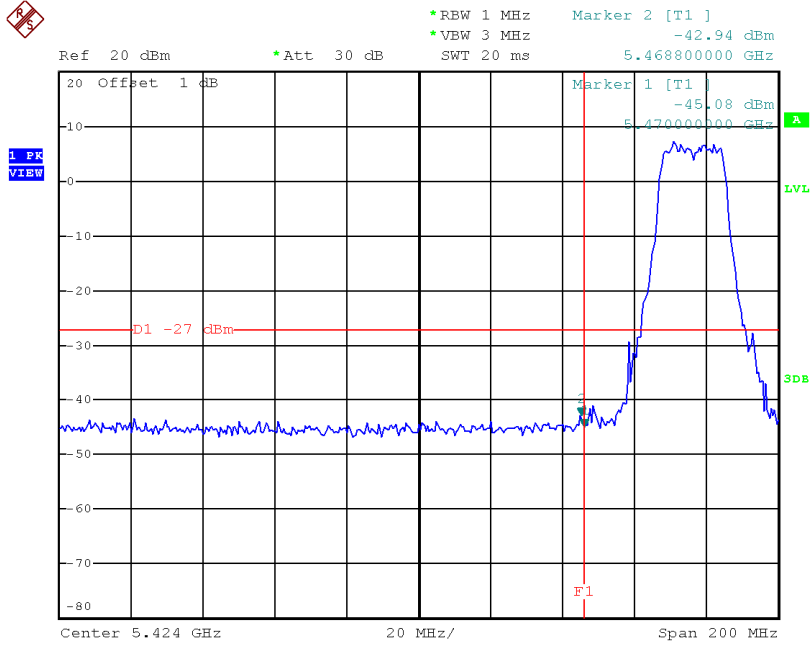

Date: 15.JAN.2015 16:32:16


TX mode CH140

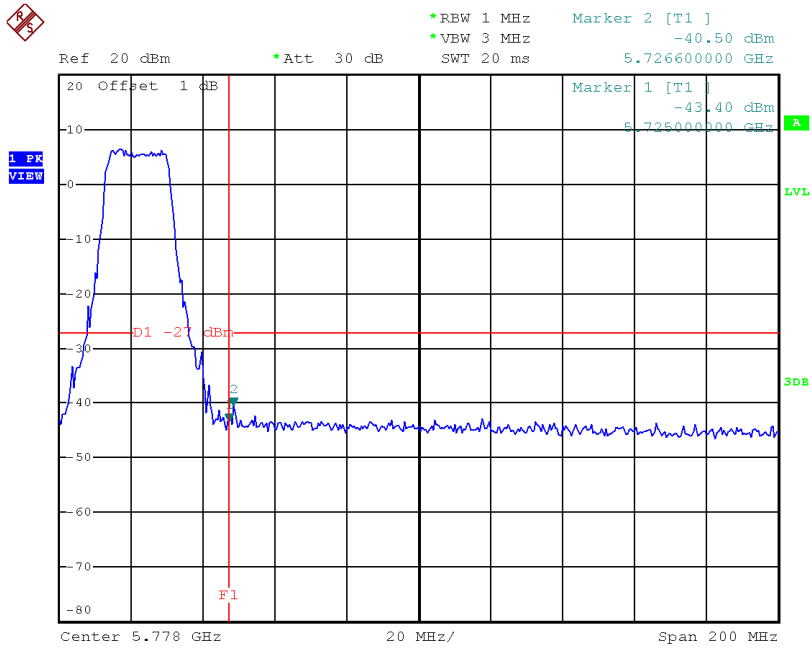

Date: 15.JAN.2015 17:43:44


Test Mode: UNII-2C/TX AC40 Mode_ANT 4

TX mode CH102

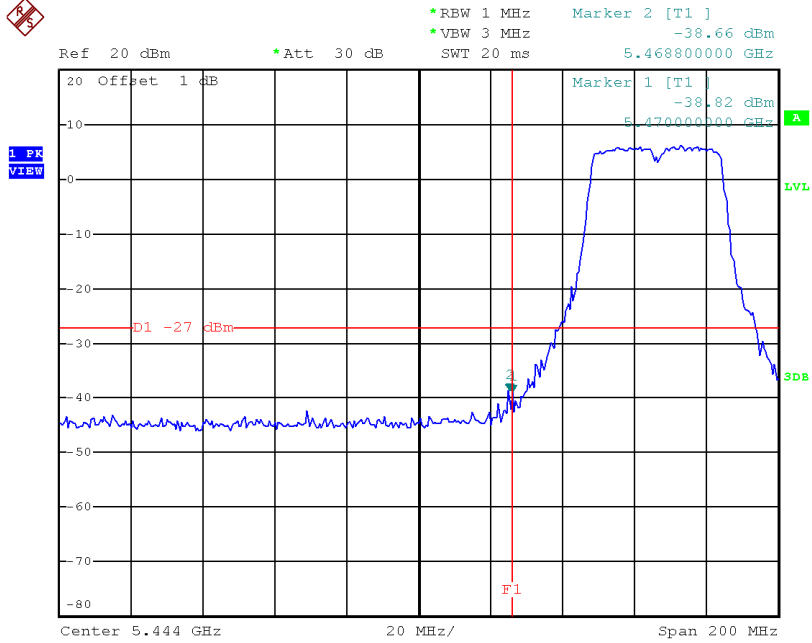

Date: 15.JAN.2015 18:01:21


TX mode CH134

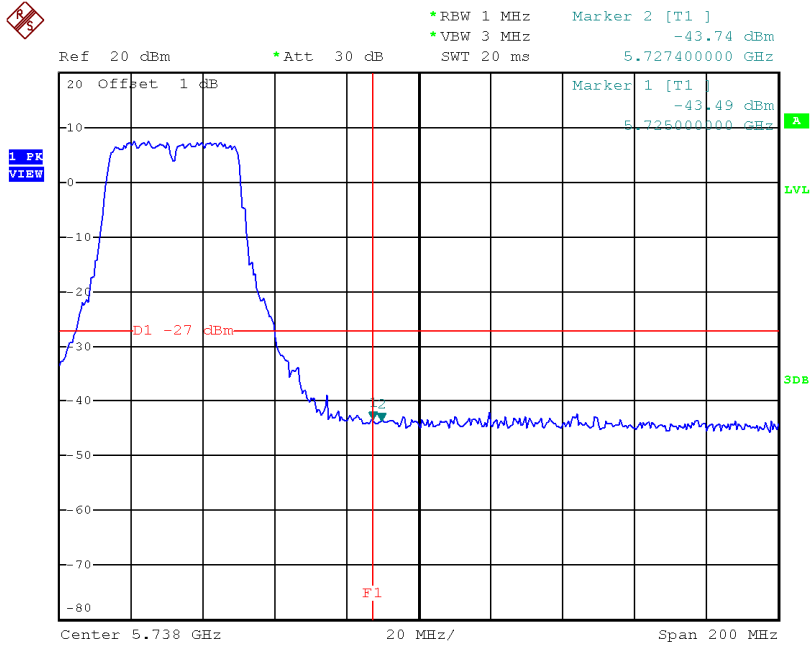

Date: 15.JAN.2015 18:12:00


Test Mode: UNII-2C/TX AC40 Mode_ANT 5

TX mode CH102

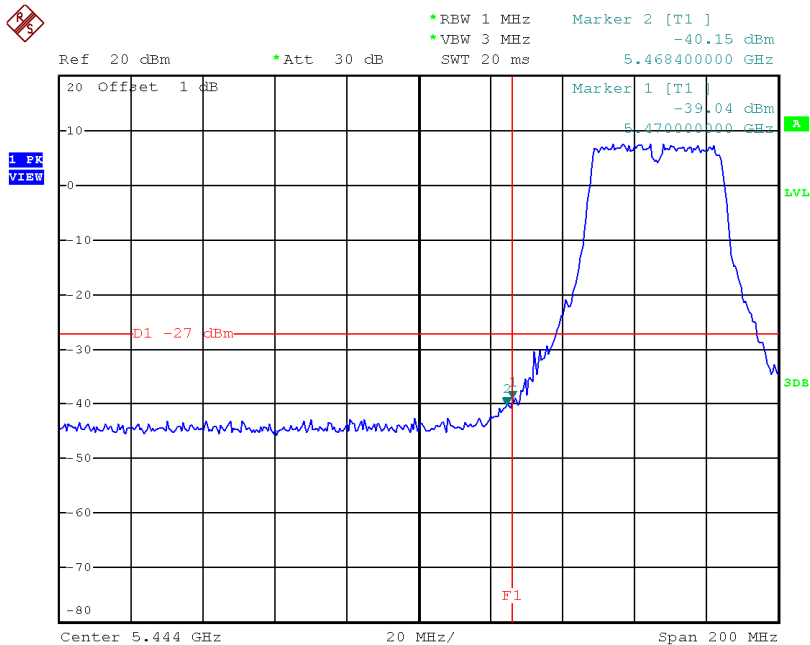

Date: 15.JAN.2015 18:01:57


TX mode CH134

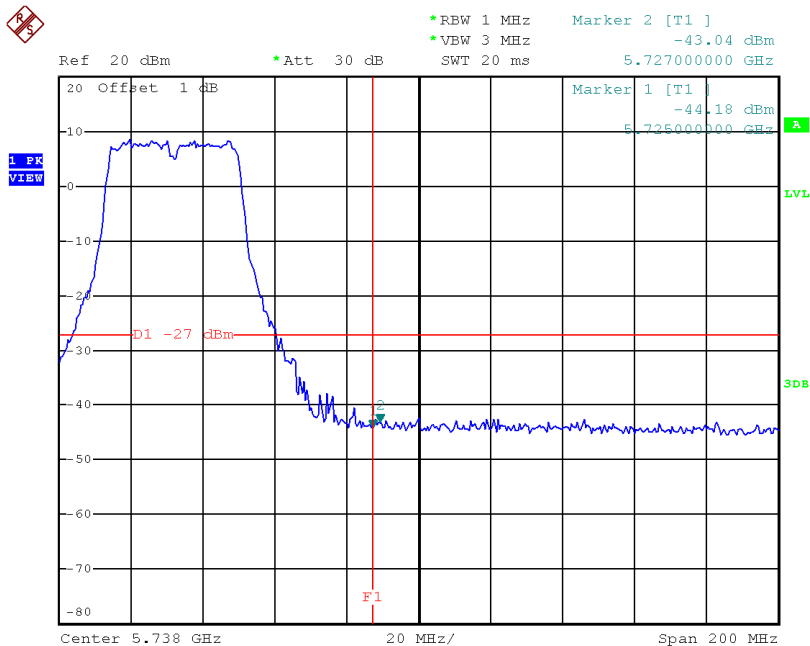

Date: 15.JAN.2015 18:09:06


Test Mode: UNII-2C/TX AC40 Mode_ANT 6

TX mode CH102

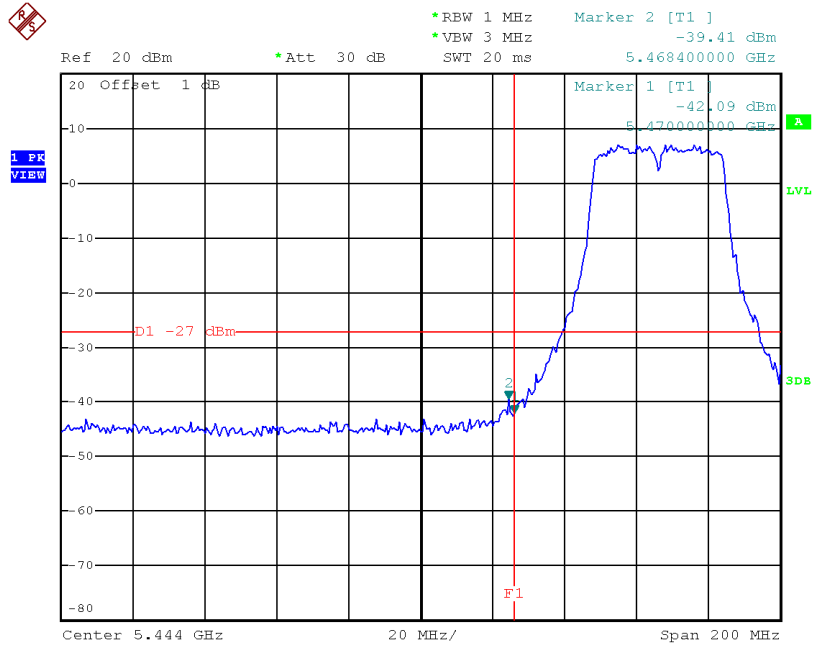

Date: 15.JAN.2015 18:02:17


TX mode CH134

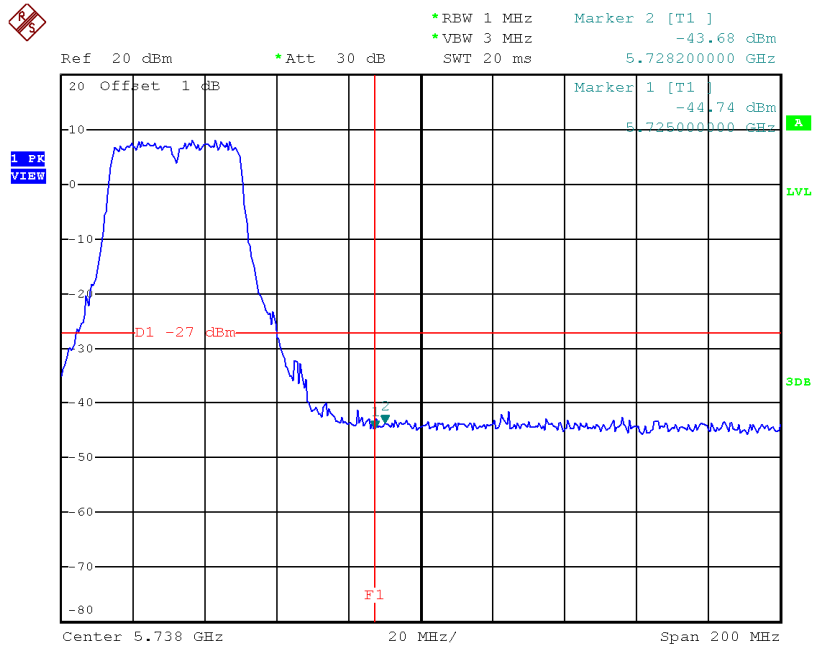

Date: 15.JAN.2015 18:12:22

Test Mode: UNII-2C/TX AC80 Mode_ANT 4


TX mode CH106

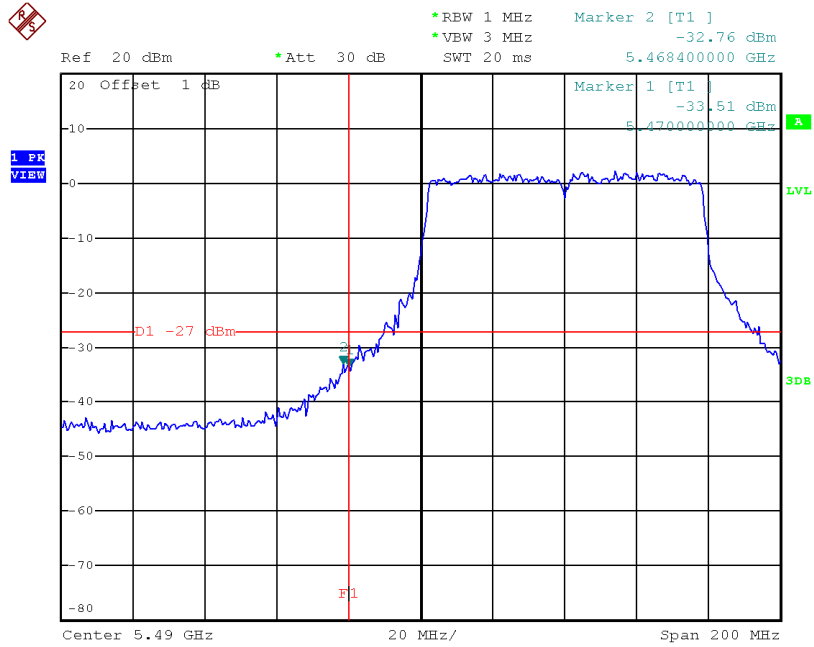

Date: 15.JAN.2015 18:18:47

Test Mode: UNII-2C/TX AC80 Mode_ANT 5


TX mode CH106

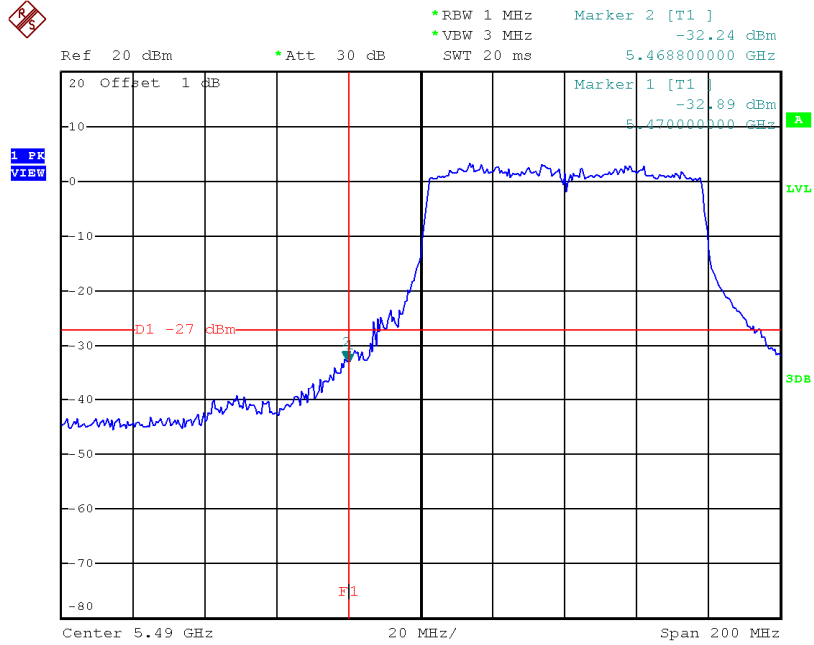

Date: 15.JAN.2015 18:19:15

Test Mode: UNII-2C/TX AC80 Mode_ANT 6

TX mode CH106

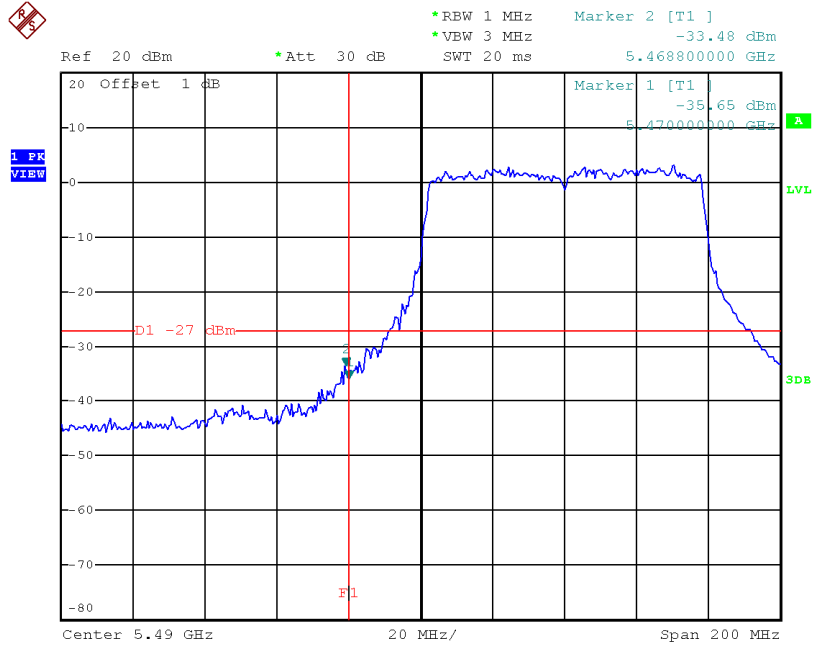


Date: 15.JAN.2015 18:20:10

ATTACHMENTH - POWER SPECTRAL DENSITY


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 4

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.05	6.34
CH60	5300	-0.60	6.34
CH64	5320	-2.37	6.34

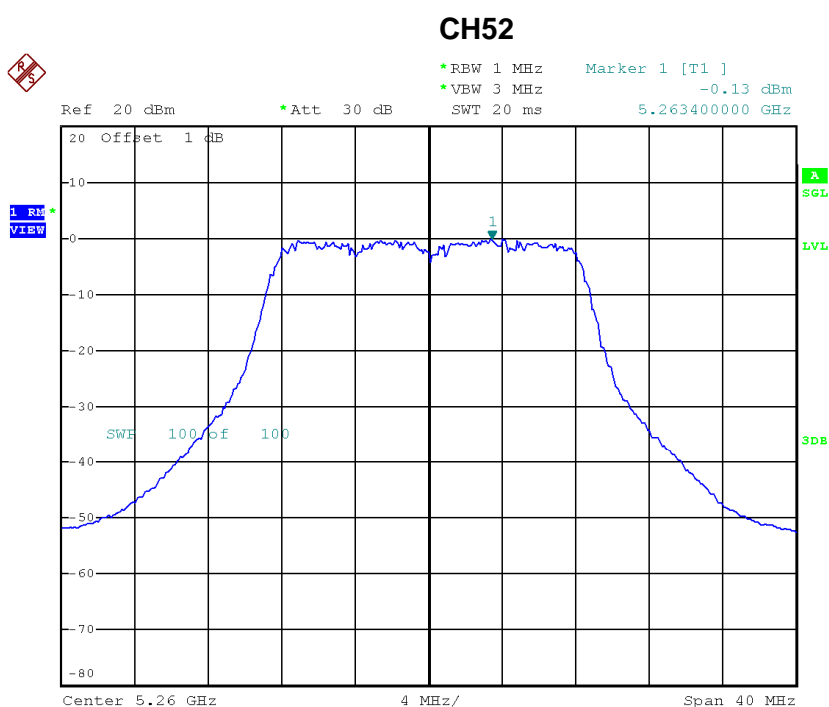


Date: 16.JAN.2015 15:45:34

CH60

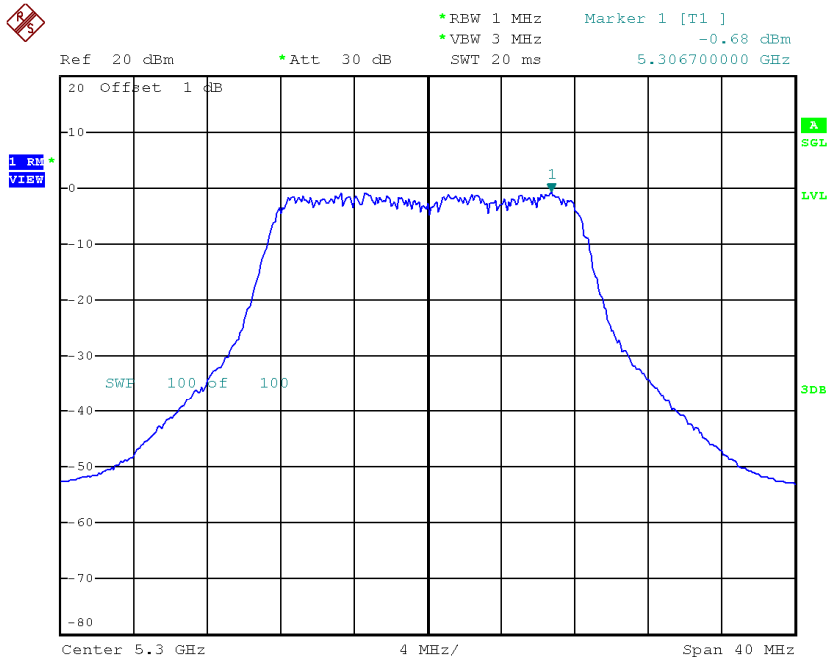

Date: 16.JAN.2015 15:38:05


CH64

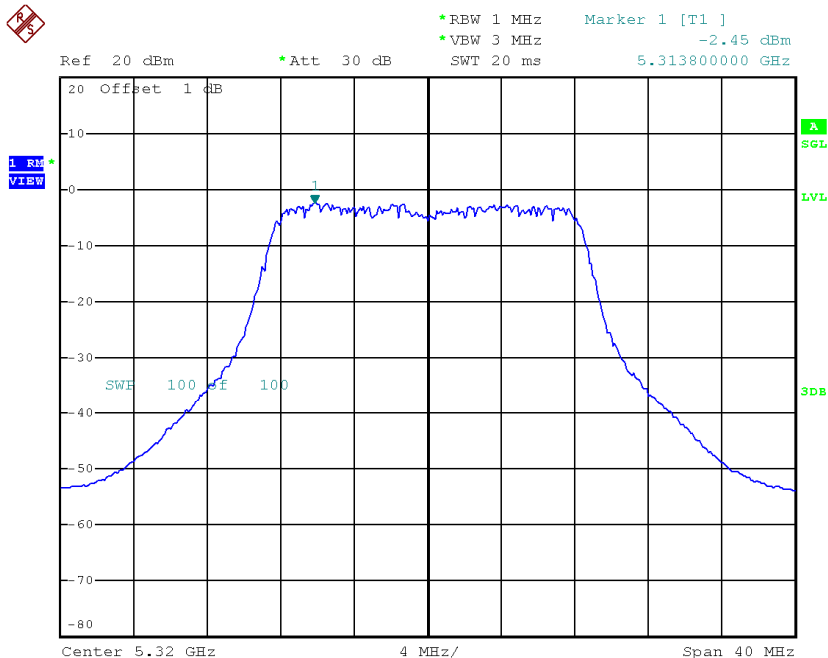

Date: 16.JAN.2015 15:39:57


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 5

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.06	6.34
CH60	5300	-0.64	6.34
CH64	5320	-1.96	6.34

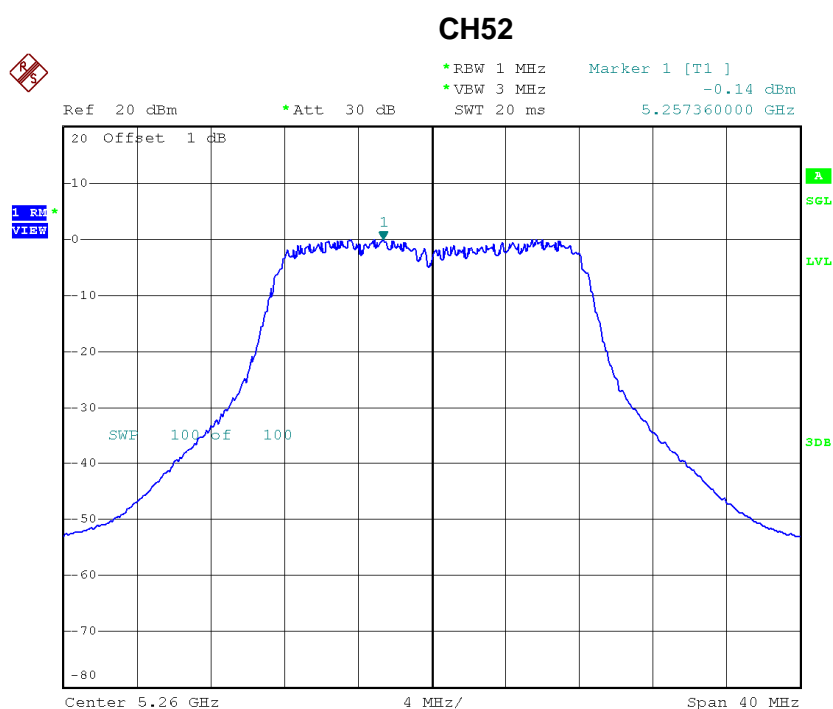


Date: 2.MAR.2015 18:03:56

CH60

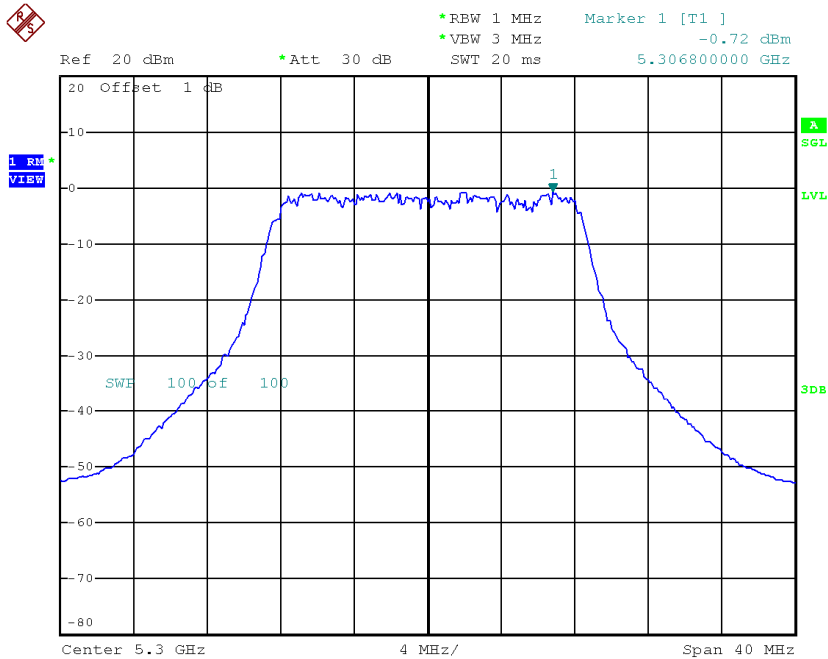


Date: 16.JAN.2015 15:38:25

CH64

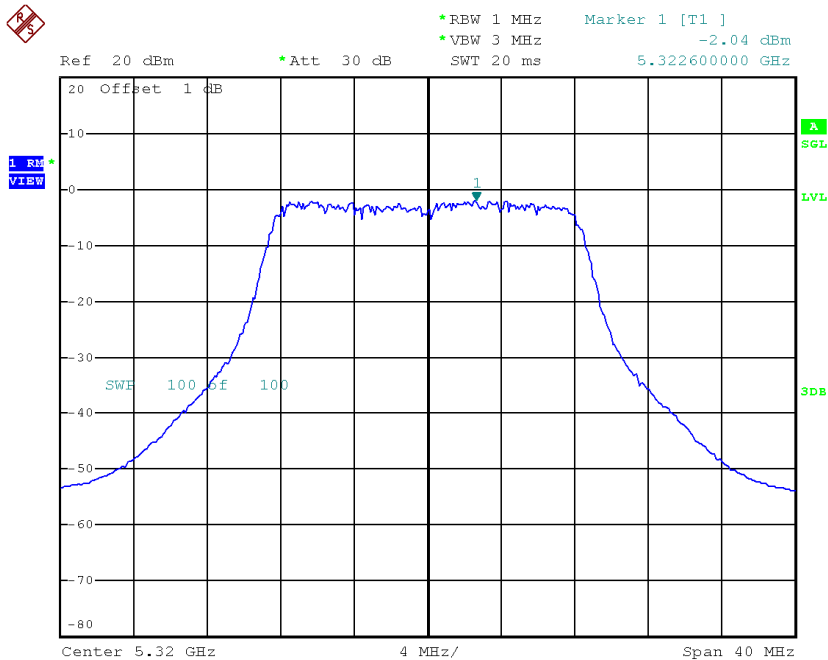


Date: 16.JAN.2015 15:40:21

CH60

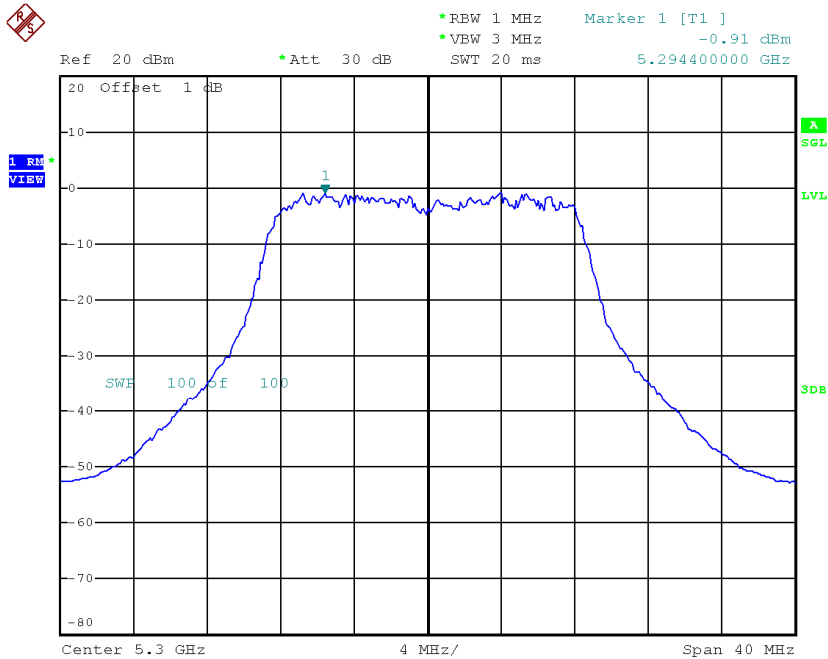

Date: 16.JAN.2015 15:38:43

CH64

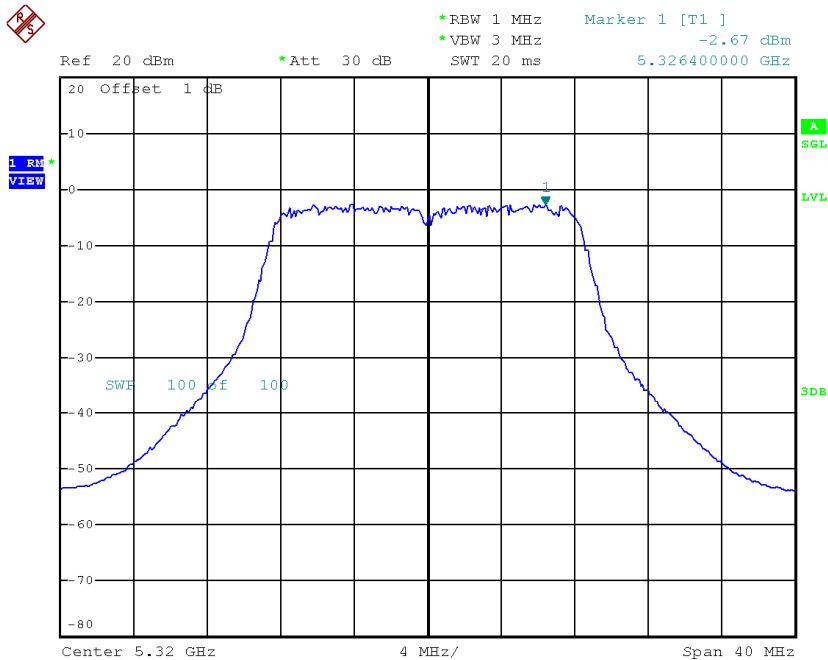


Date: 16.JAN.2015 15:40:44

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 4


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.47	11.00
CH60	5300	-1.07	11.00
CH64	5320	-1.66	11.00

CH52

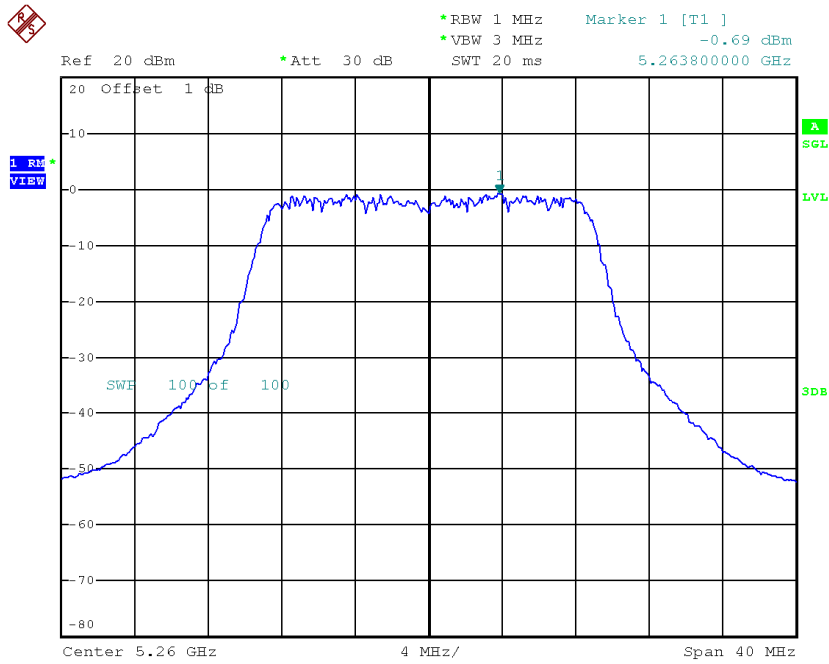


Date: 16.JAN.2015 14:51:50

CH60

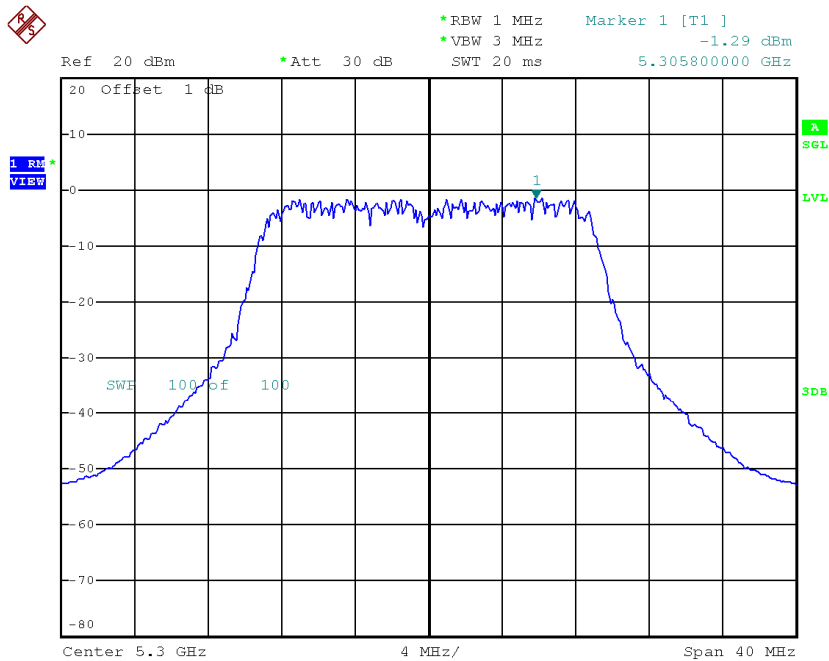

Date: 16.JAN.2015 14:50:15

CH64

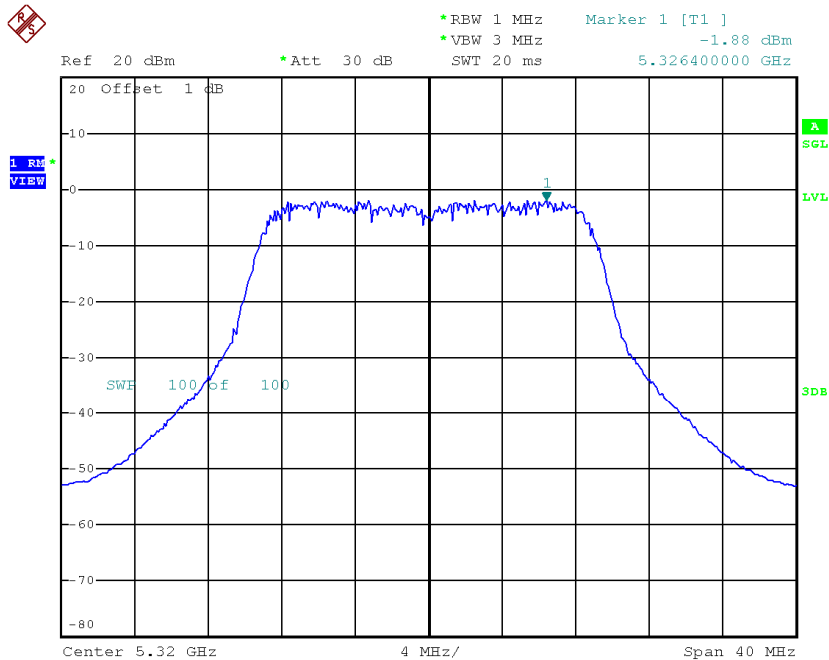


Date: 16.JAN.2015 15:52:30

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 5


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.14	11.00
CH60	5300	-0.76	11.00
CH64	5320	-0.67	11.00

CH52

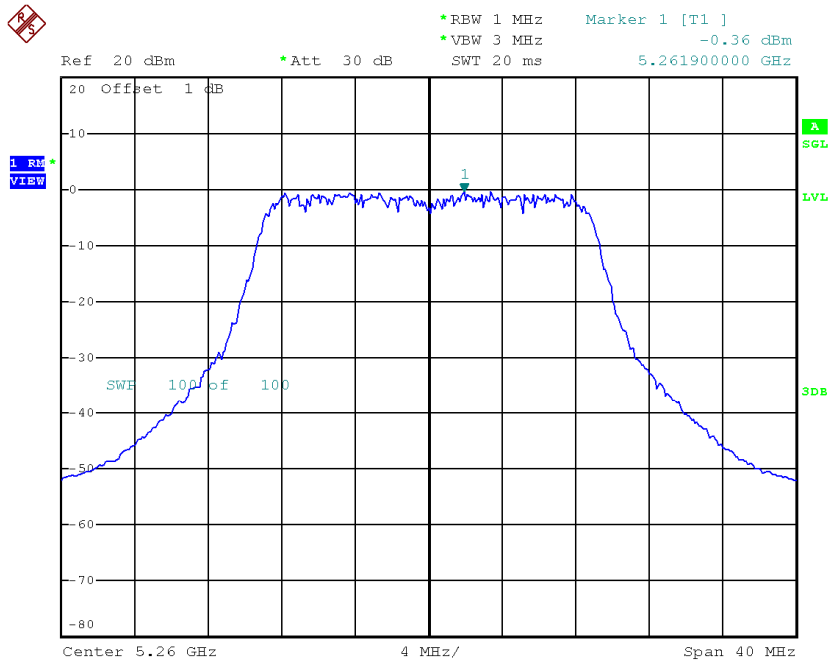


Date: 16.JAN.2015 14:53:18

CH60

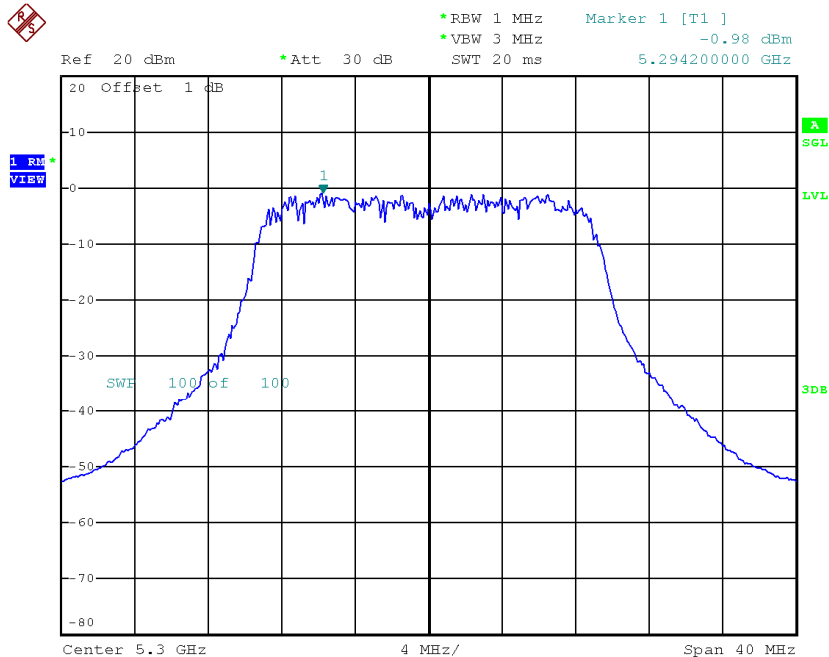

Date: 16.JAN.2015 14:50:33


CH64

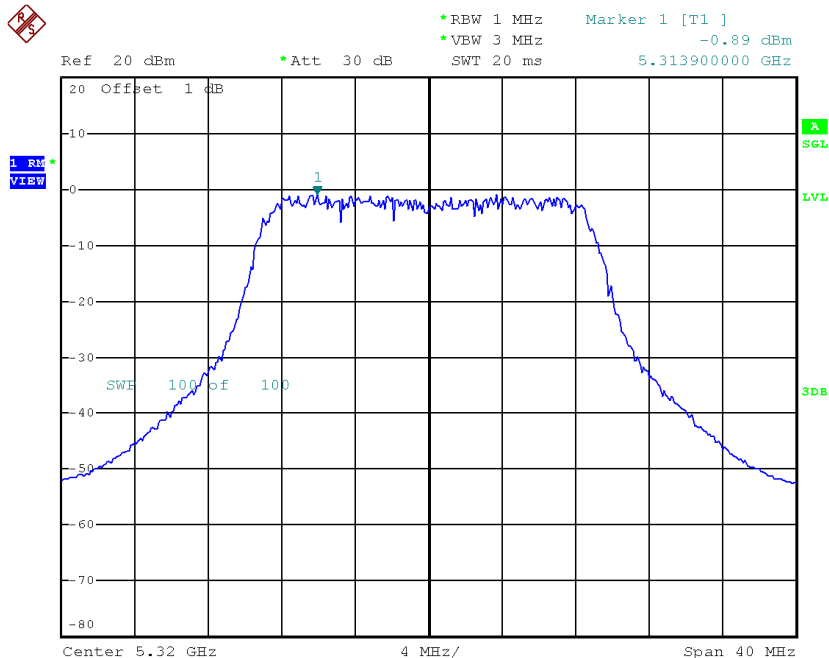

Date: 16.JAN.2015 15:53:02


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 6

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.78	11.00
CH60	5300	-1.07	11.00
CH64	5320	-1.27	11.00

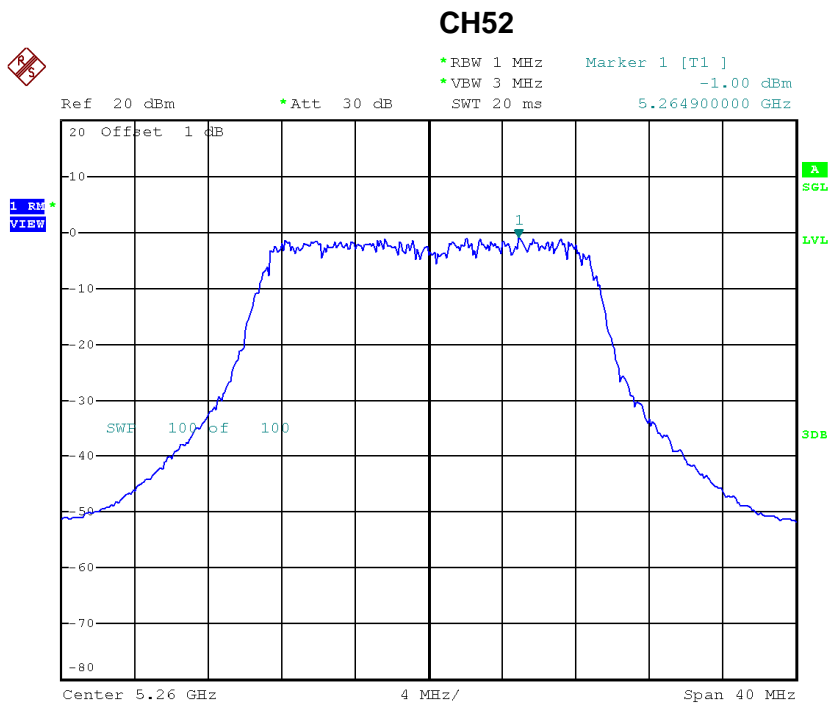


Date: 16.JAN.2015 14:53:59

CH60

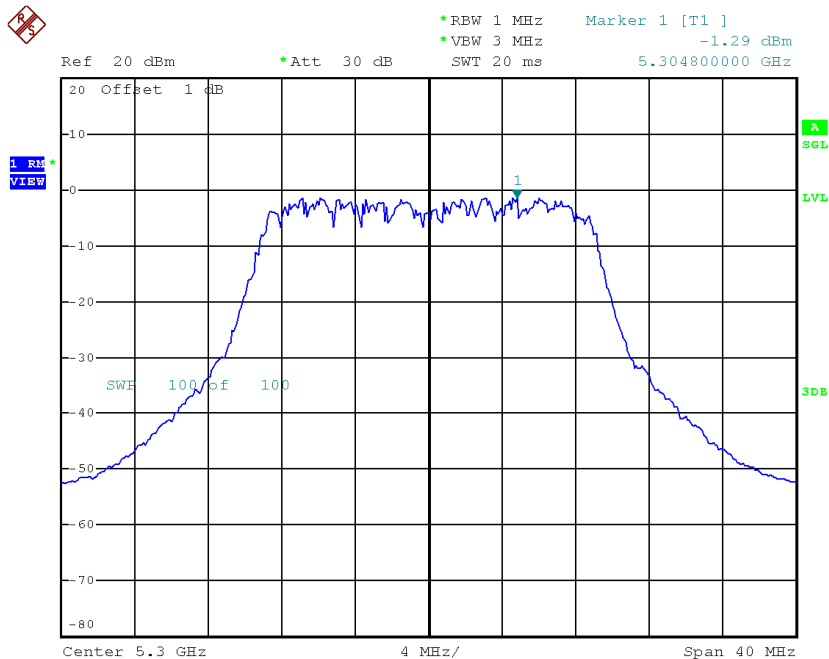

Date: 16.JAN.2015 14:50:52

CH64

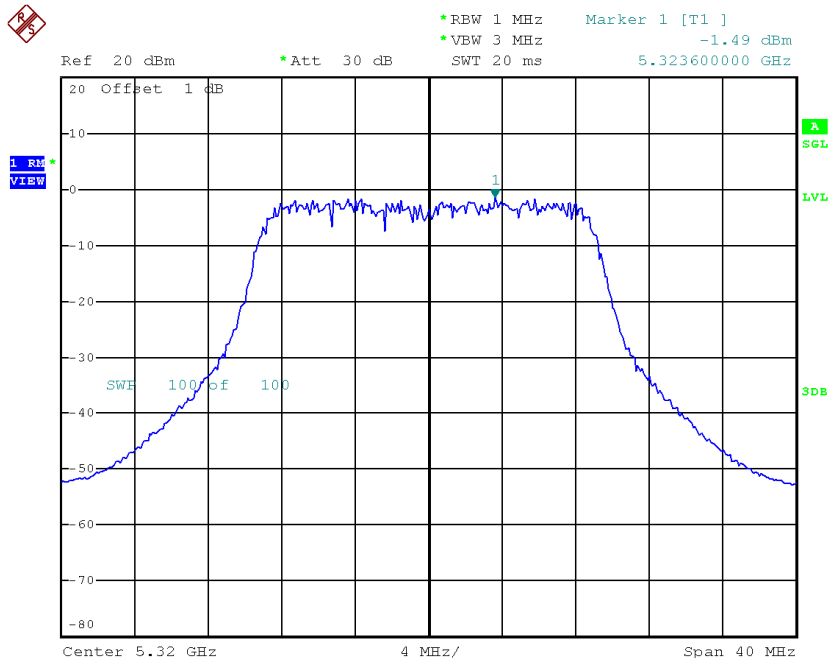

Date: 16.JAN.2015 15:53:20


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	4.31	11.00
CH60	5300	3.80	11.00
CH64	5320	3.59	11.00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 4


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-4.18	11.00
CH62	5310	-8.54	11.00

CH54

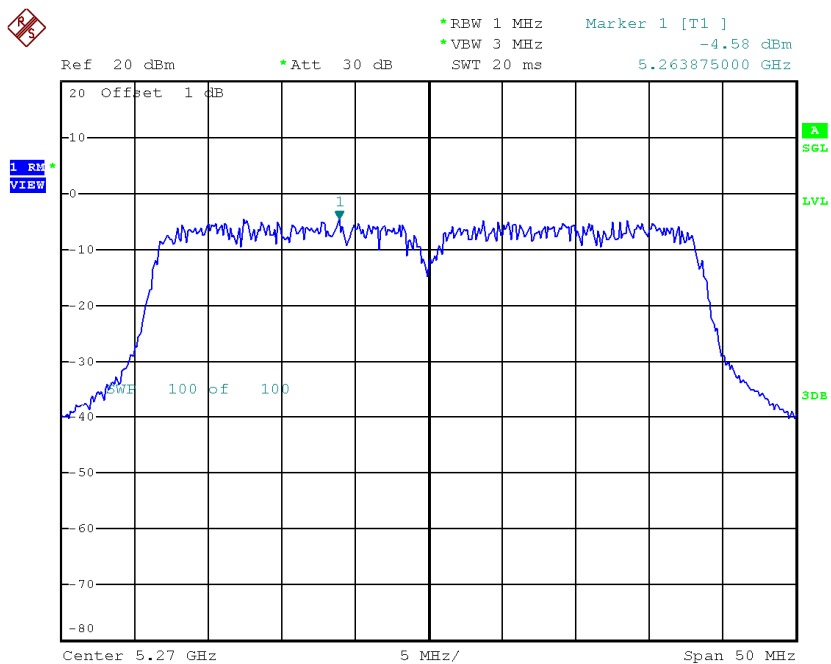

Date: 16.JAN.2015 15:06:17

CH62

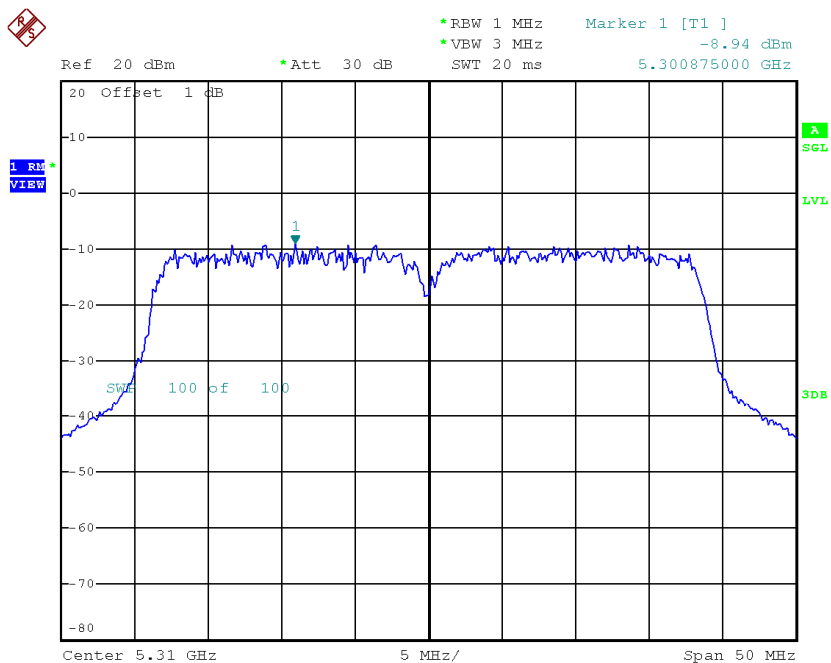


Date: 16.JAN.2015 15:08:26

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 5


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-3.19	11.00
CH62	5310	-7.74	11.00

CH54

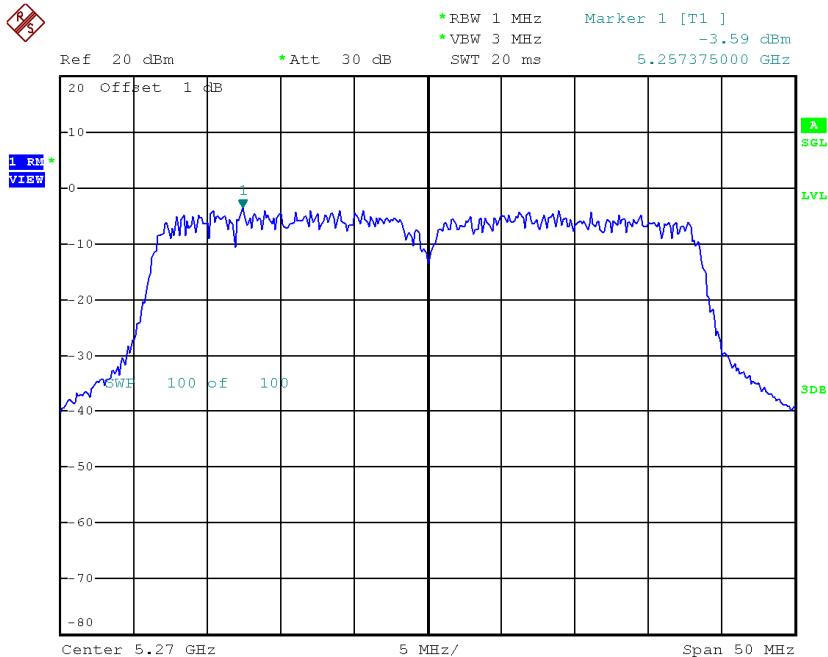

Date: 16.JAN.2015 15:06:37

CH62

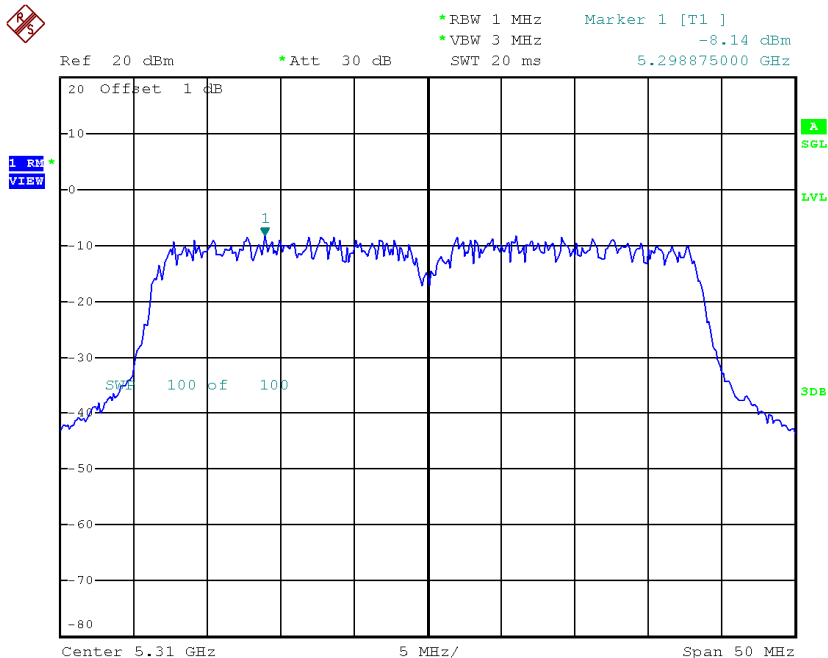


Date: 16.JAN.2015 15:08:43

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 6


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-4.37	11.00
CH62	5310	-8.39	11.00

CH54

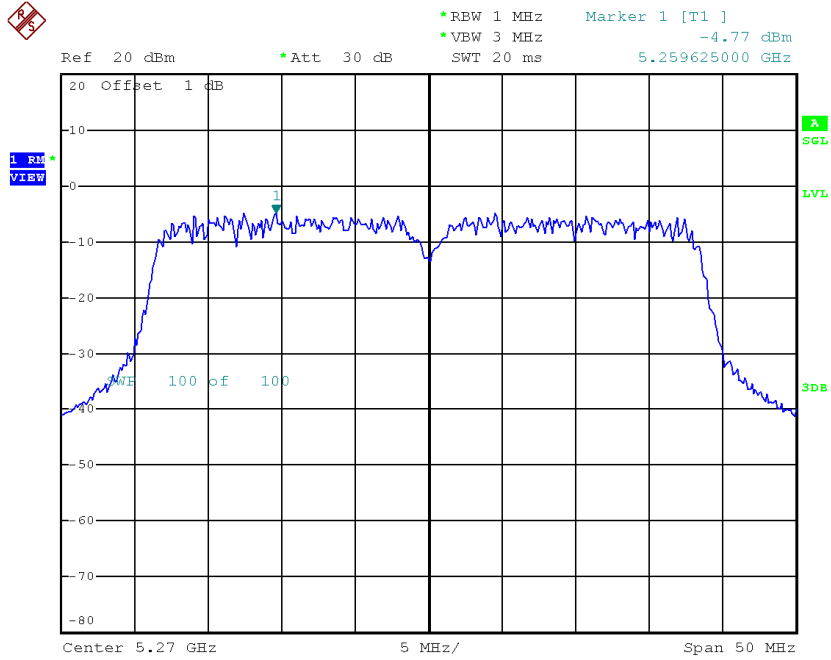

Date: 16.JAN.2015 15:07:37

CH62

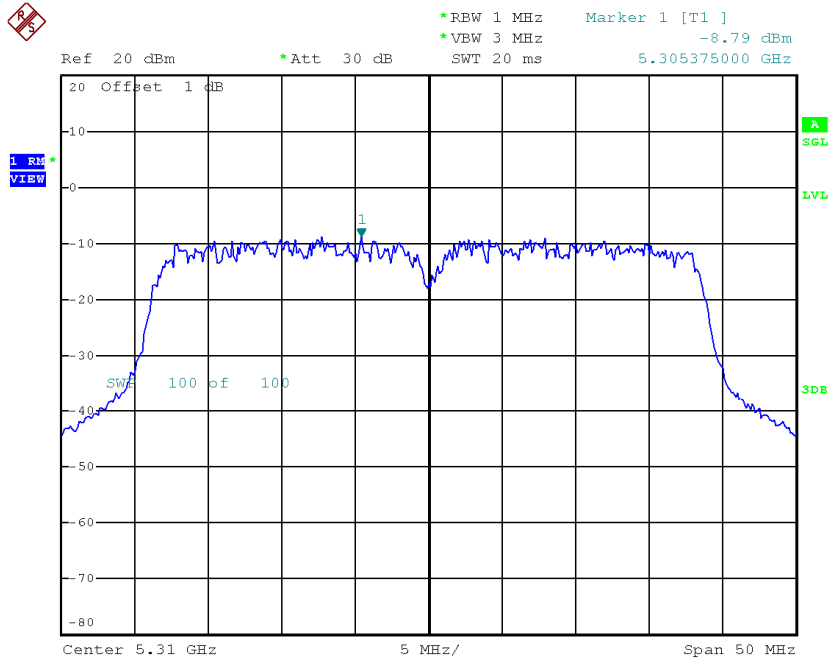


Date: 16.JAN.2015 15:09:00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	0.89	11.00
CH62	5310	-3.44	11.00


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 4

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.28	6.34
CH116	5580	-2.50	6.34
CH140	5700	0.19	6.34

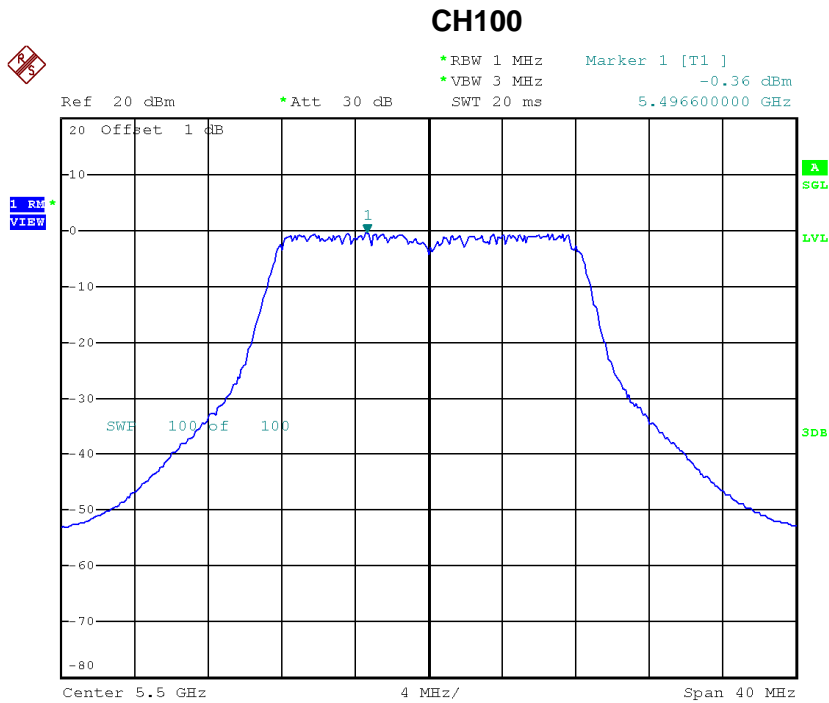


Date: 16.JAN.2015 15:41:40

CH116

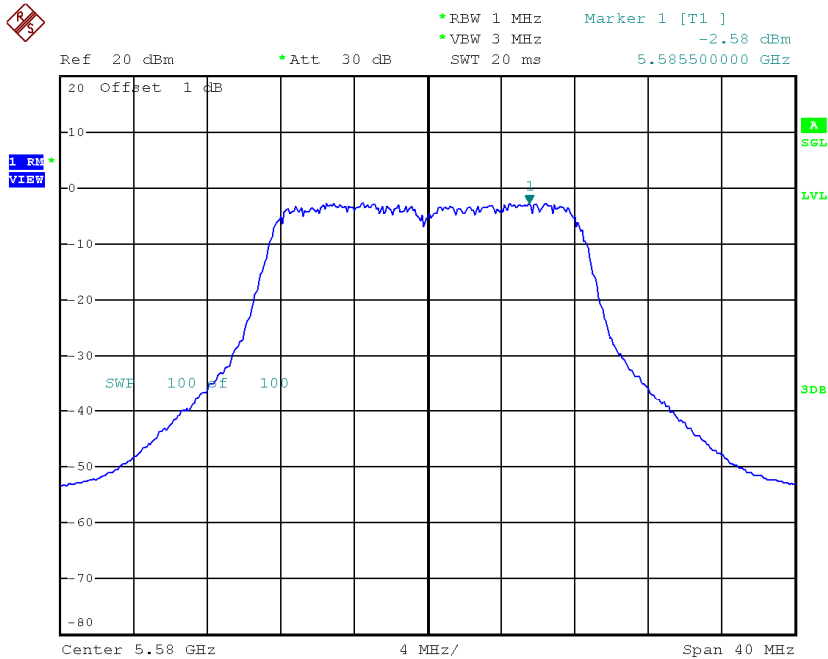


Date: 16.JAN.2015 15:42:47

CH140

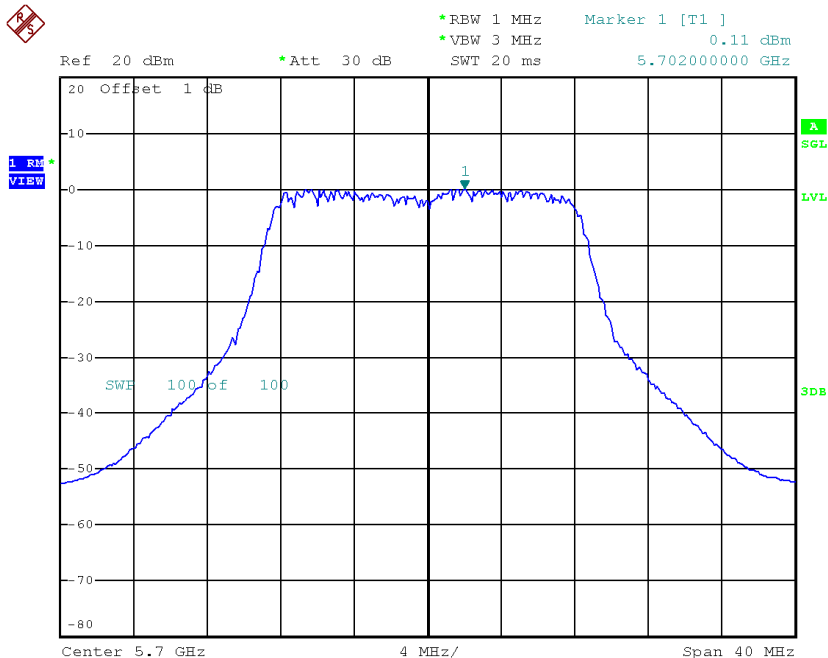


Date: 16.JAN.2015 15:43:56

CH116

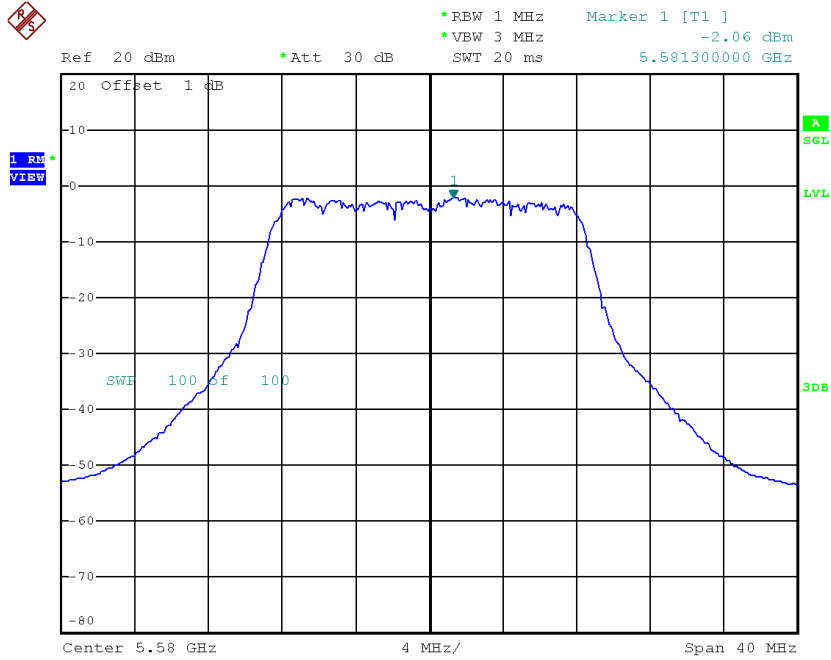

Date: 16.JAN.2015 15:43:05


CH140

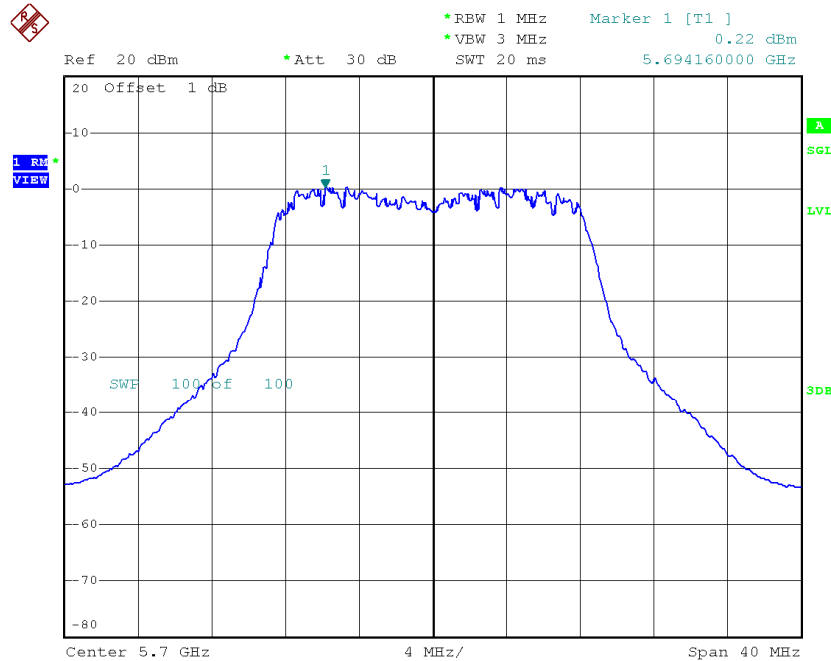

Date: 2.MAR.2015 18:01:37


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 6

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.11	6.34
CH116	5580	-2.35	6.34
CH140	5700	0.30	6.34

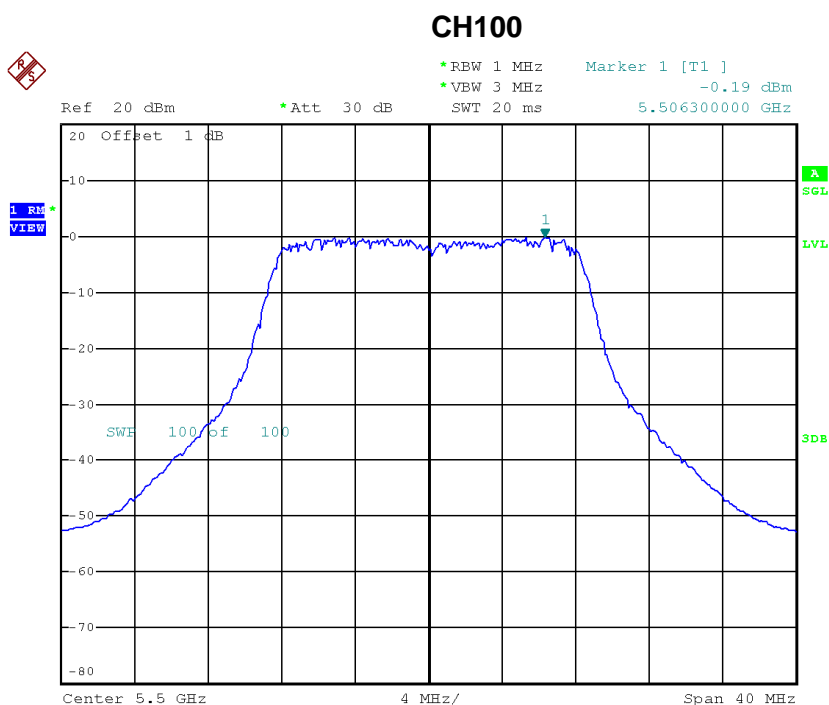


Date: 16.JAN.2015 15:42:16

CH116

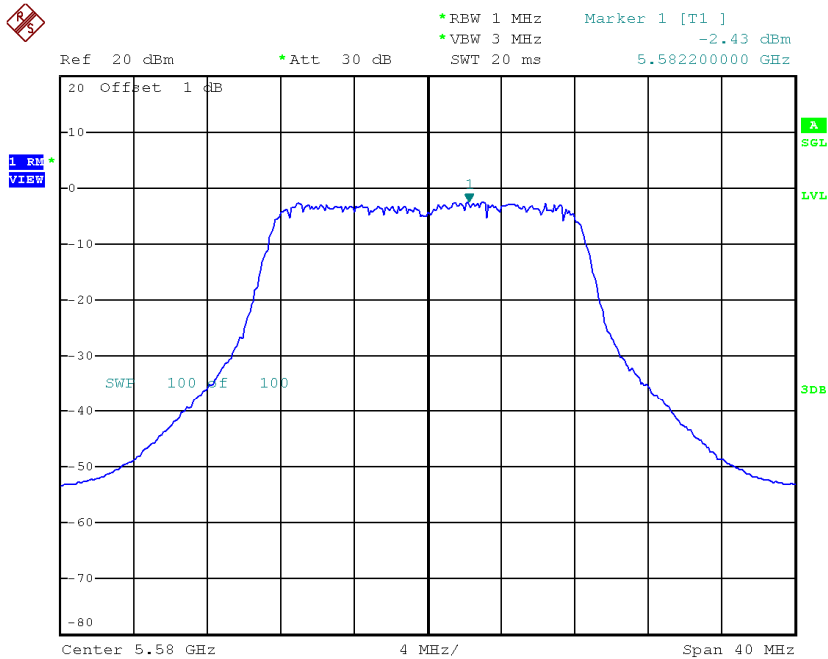

Date: 16.JAN.2015 15:43:23

CH140

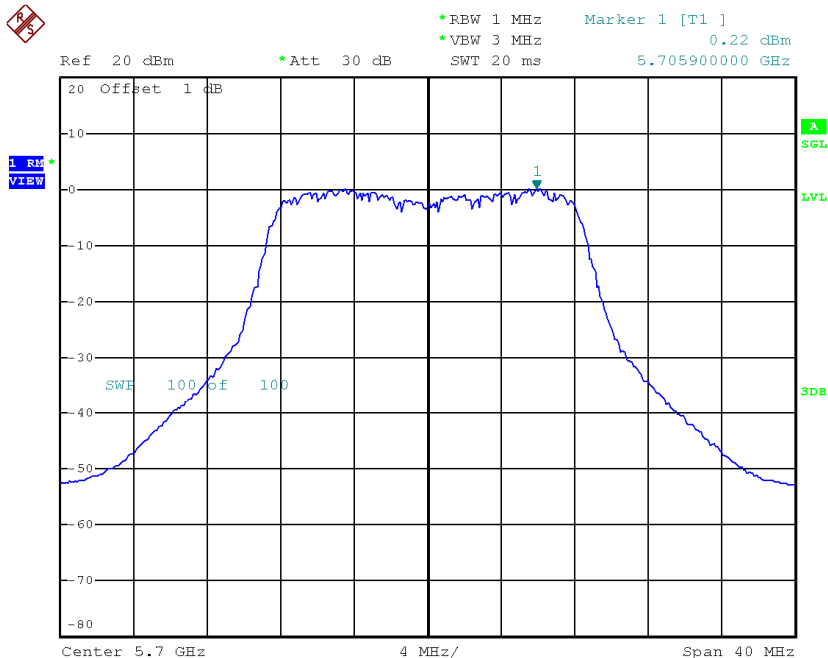


Date: 16.JAN.2015 15:44:37

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 4


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.25	11.00
CH116	5580	-1.96	11.00
CH140	5700	0.25	11.00

CH100

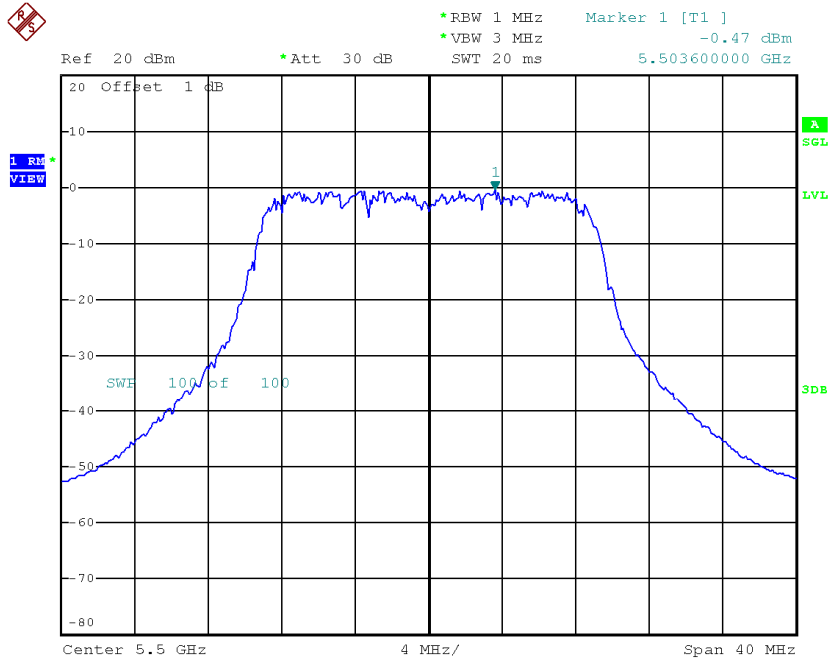


Date: 16.JAN.2015 14:59:07

CH116

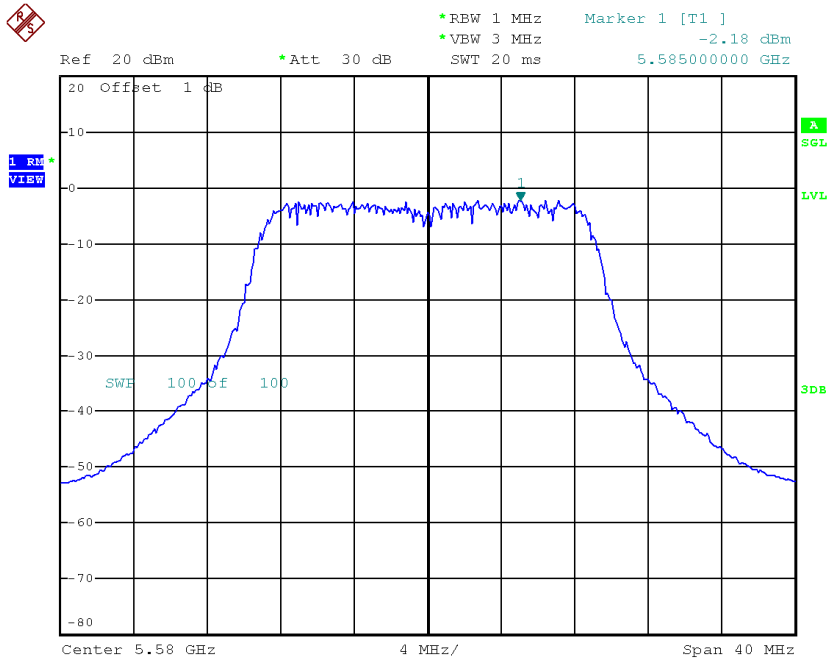

Date: 16.JAN.2015 15:58:34

CH140

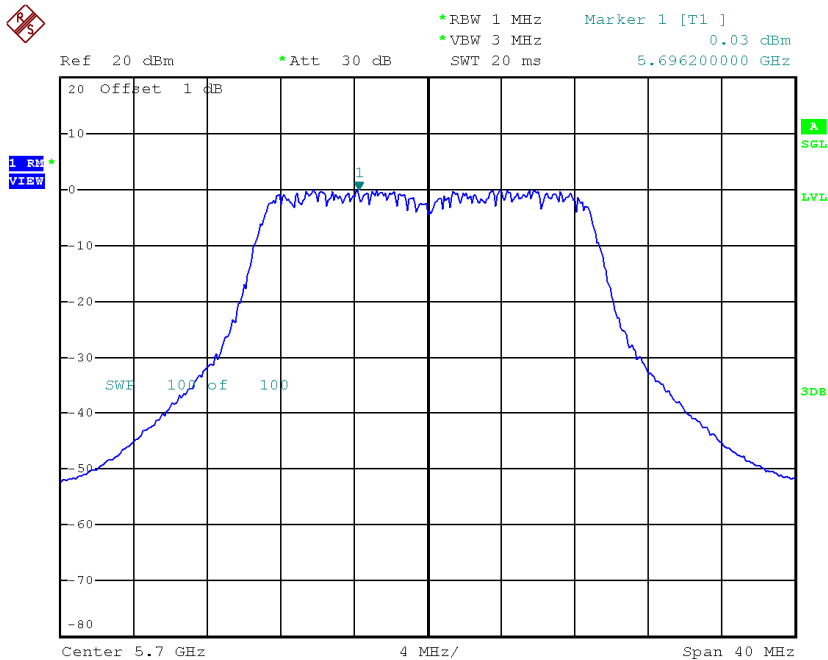


Date: 16.JAN.2015 15:04:04

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 5


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	0.86	11.00
CH116	5580	-1.64	11.00
CH140	5700	0.47	11.00

CH100

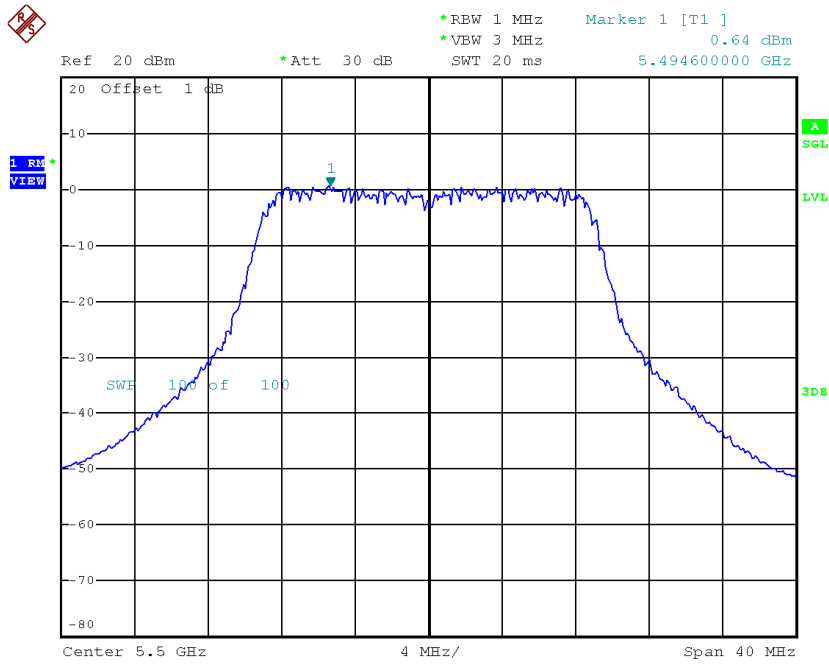


Date: 16.JAN.2015 14:59:28

CH116

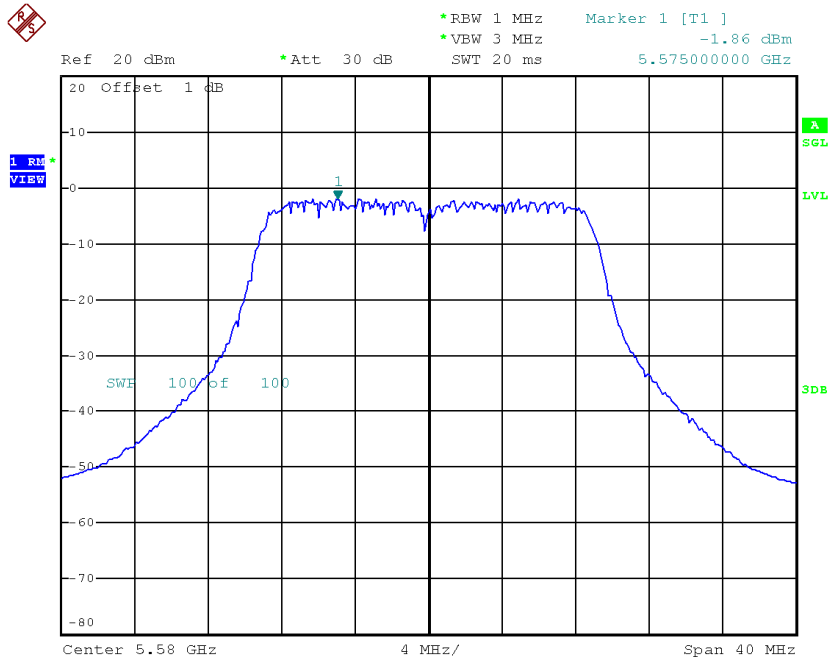


Date: 16.JAN.2015 15:58:53

CH140

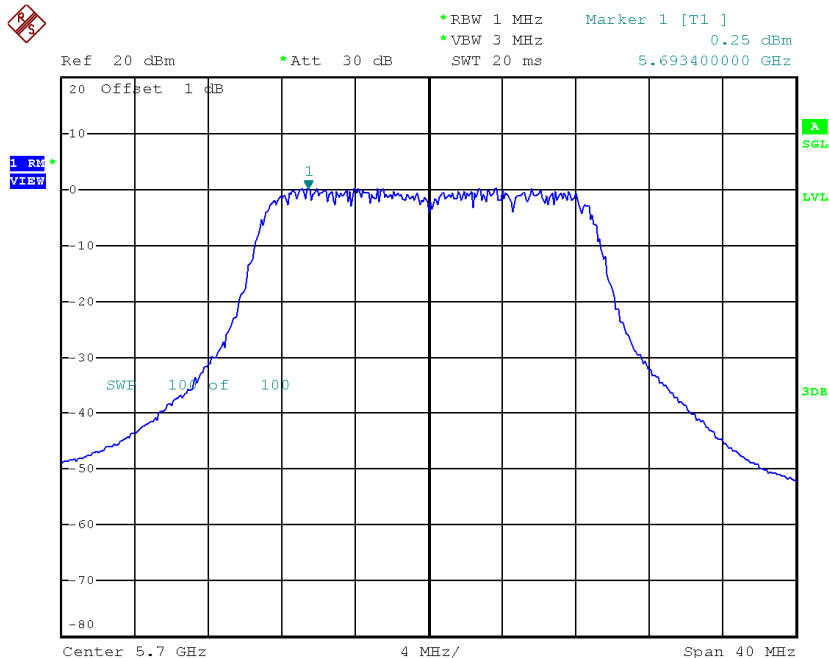


Date: 16.JAN.2015 15:04:19

CH116

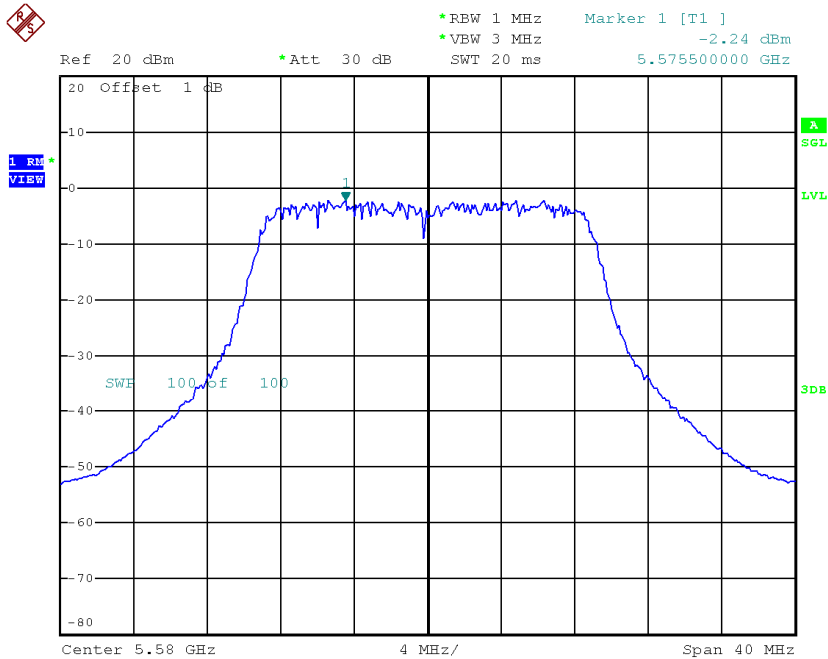

Date: 16.JAN.2015 15:59:13

CH140

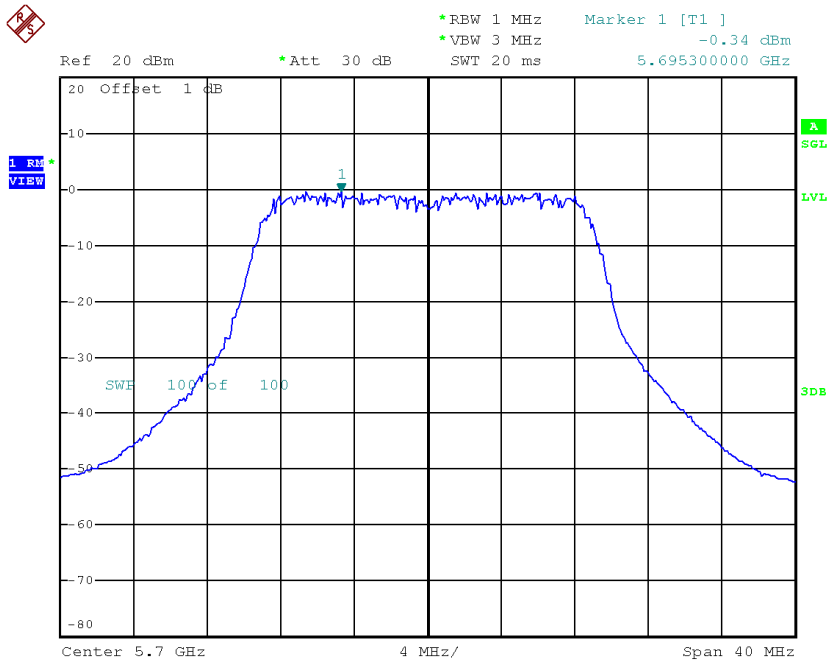


Date: 16.JAN.2015 15:04:37

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	4.98	11.00
CH116	5580	2.90	11.00
CH140	5700	4.98	11.00


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 4

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-5.87	11.00
CH110	5550	-7.93	11.00
CH134	5670	-6.82	11.00

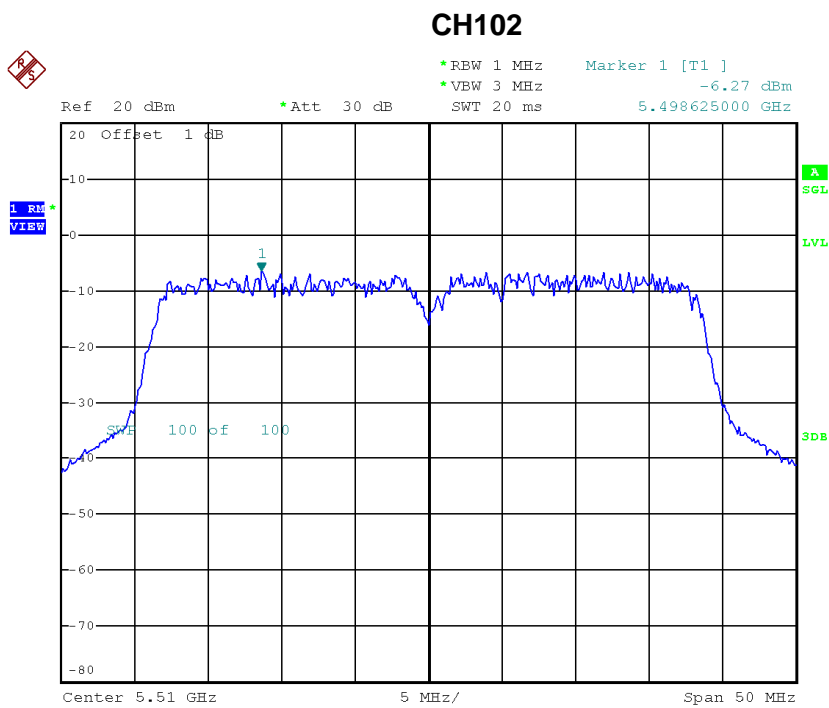


Date: 16.JAN.2015 15:10:02

CH110

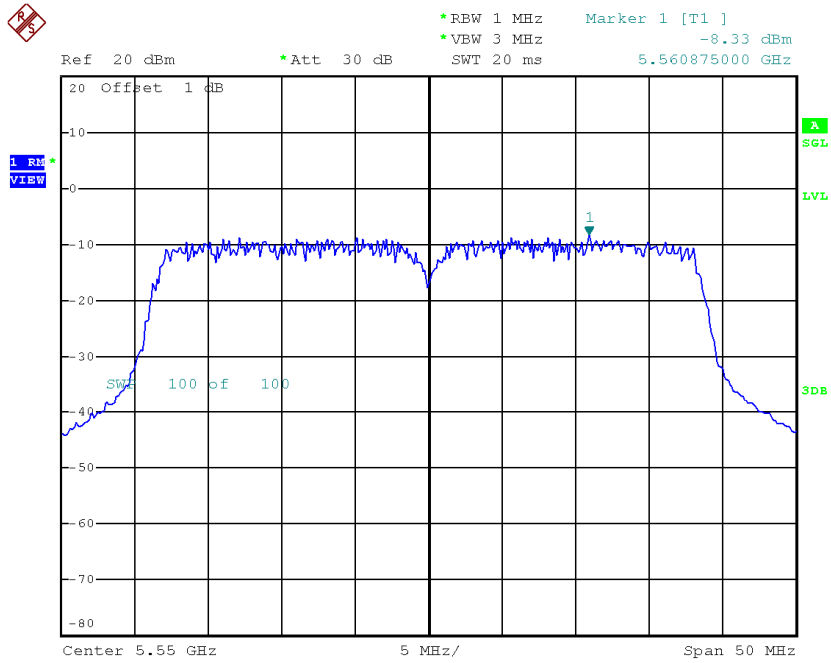

Date: 16.JAN.2015 15:11:18


CH134

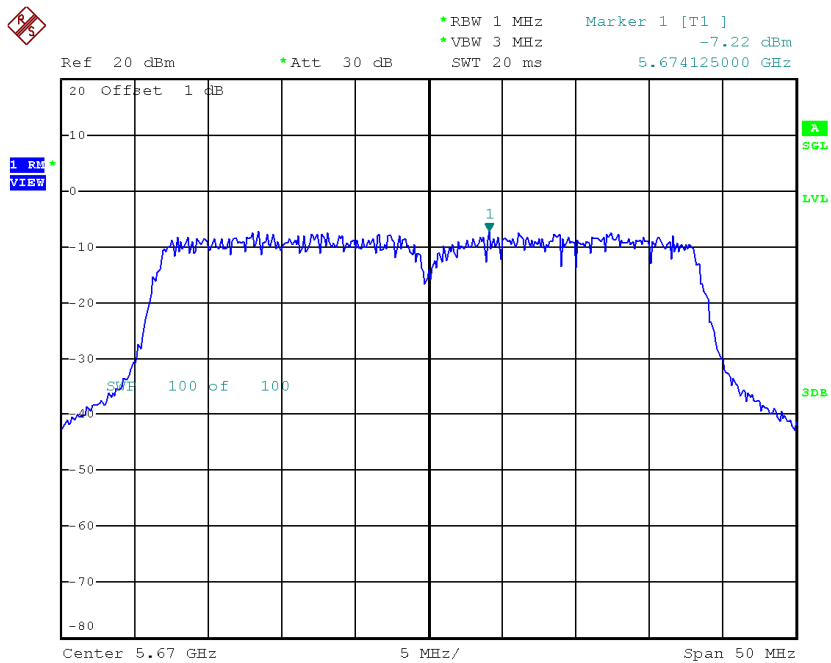

Date: 16.JAN.2015 15:12:32

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 5

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-4.62	11.00
CH110	5550	-7.85	11.00
CH134	5670	-6.62	11.00

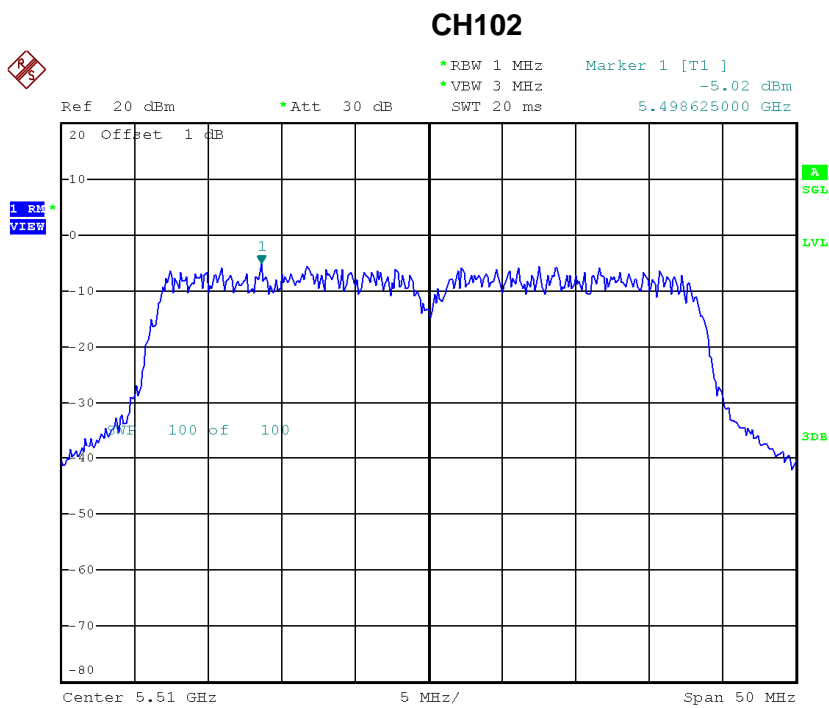


Date: 16.JAN.2015 15:10:20

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-0.59	11.00
CH110	5550	-3.26	11.00
CH134	5670	-2.03	11.00


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 4

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-2.06	11.00
CH60	5300	-2.88	11.00
CH64	5320	-3.00	11.00

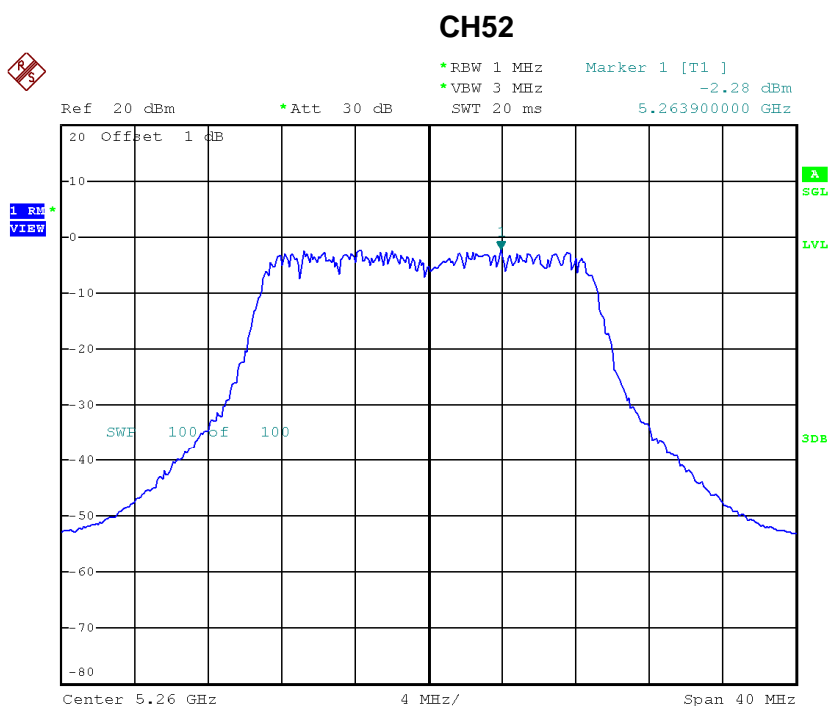


Date: 16.JAN.2015 16:45:06

CH60

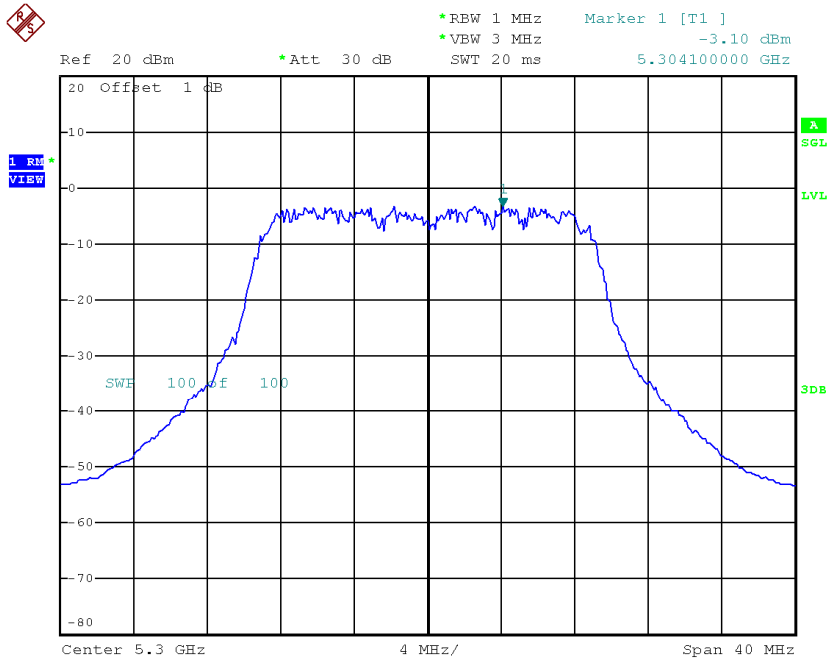


Date: 16.JAN.2015 16:18:44

CH64

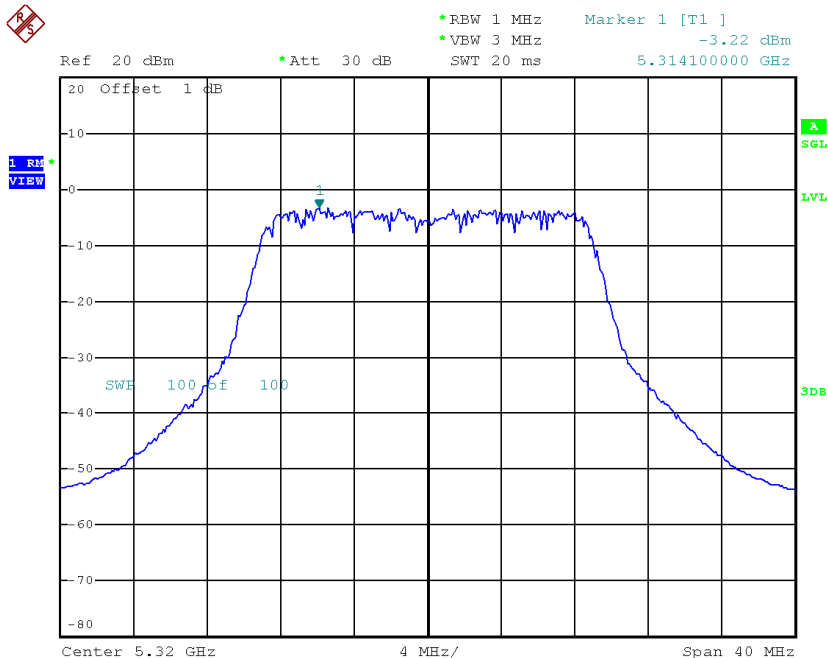


Date: 16.JAN.2015 16:20:15

CH60

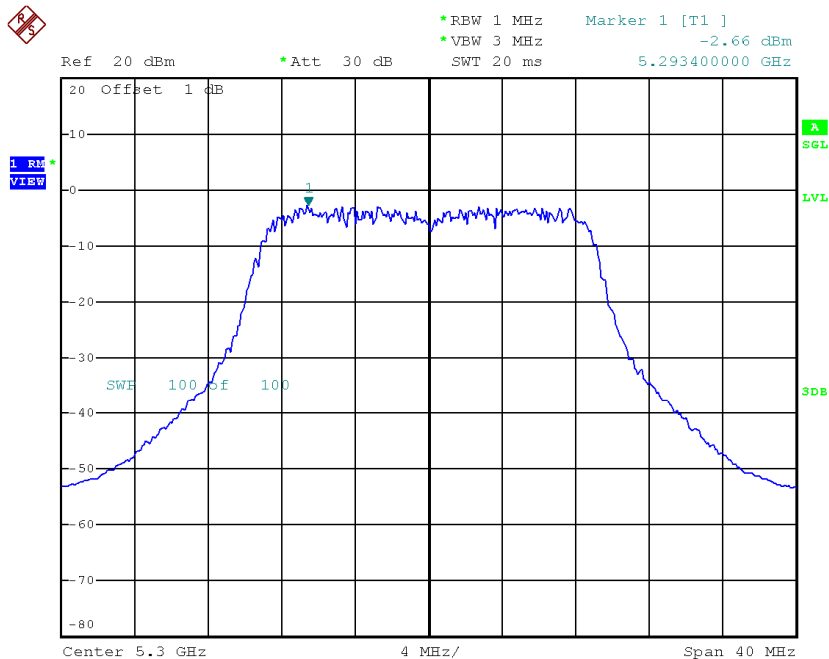

Date: 16.JAN.2015 16:19:02


CH64

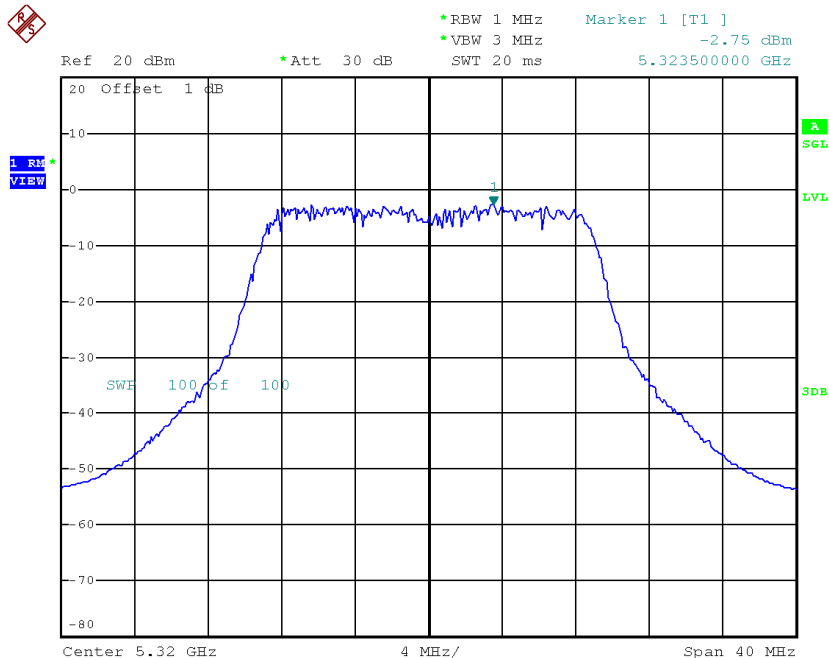

Date: 16.JAN.2015 16:20:46


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 6

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-2.95	11.00
CH60	5300	-3.11	11.00
CH64	5320	-3.05	11.00

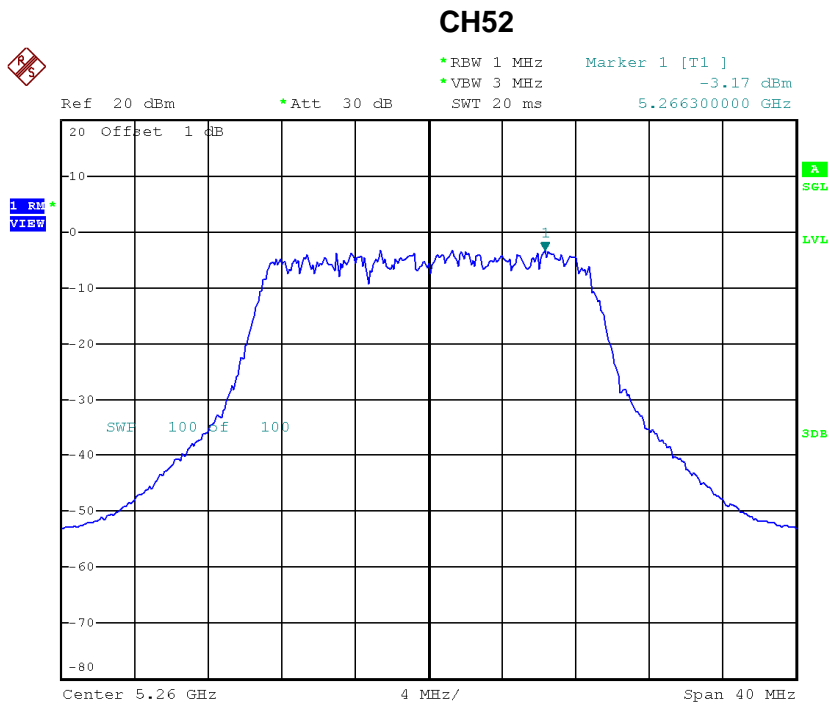


Date: 16.JAN.2015 16:18:02

CH60

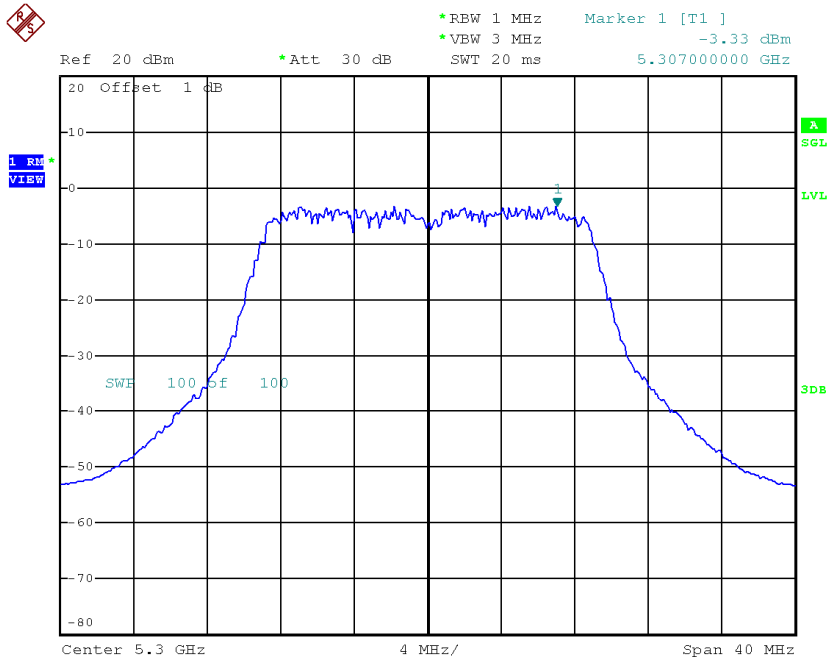

Date: 16.JAN.2015 16:19:23

CH64

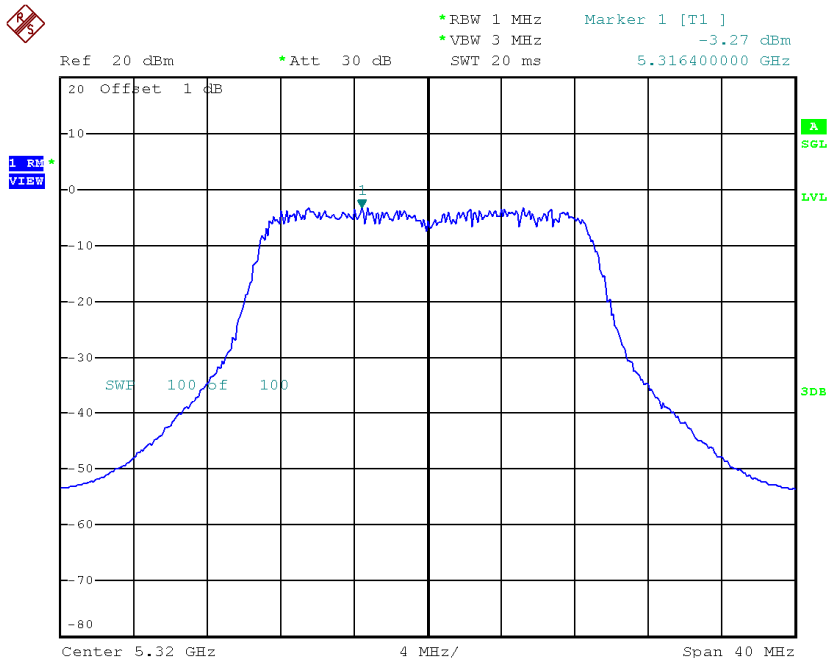

Date: 16.JAN.2015 16:21:21


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	2.40	11.00
CH60	5300	1.97	11.00
CH64	5320	1.91	11.00

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 4


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-5.11	11.00
CH62	5310	-1.08	11.00

CH54

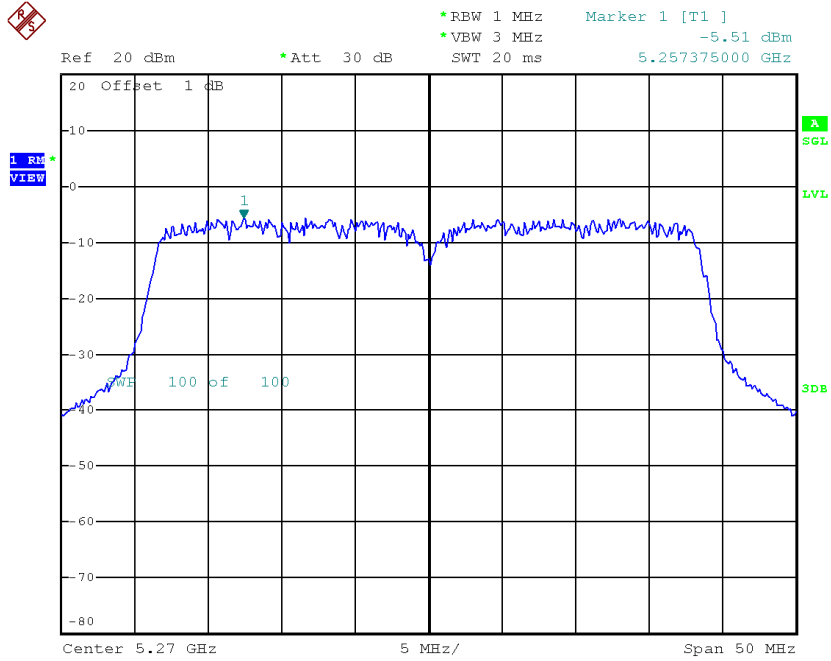

Date: 16.JAN.2015 16:28:09

CH62

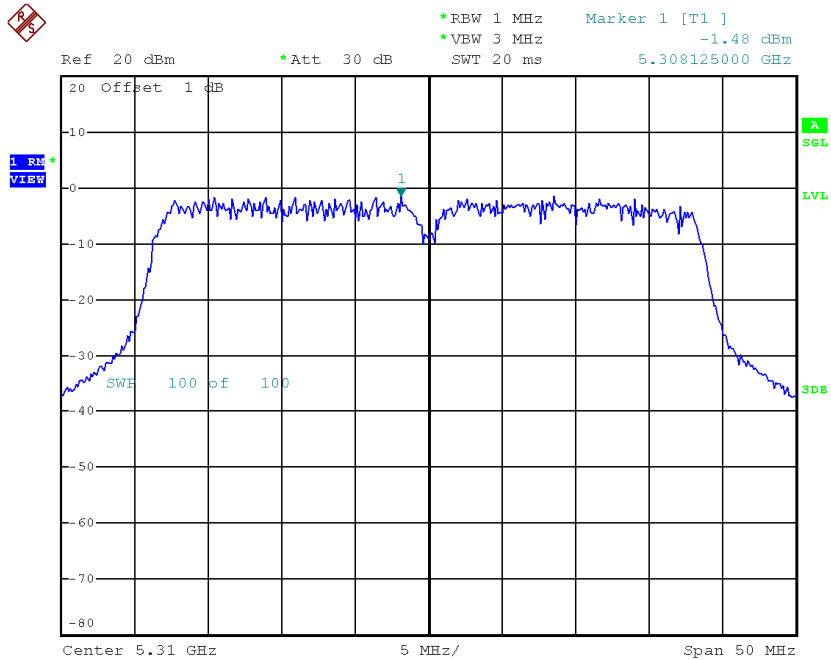


Date: 16.JAN.2015 16:30:00

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 5


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-4.60	11.00
CH62	5310	-0.04	11.00

CH54

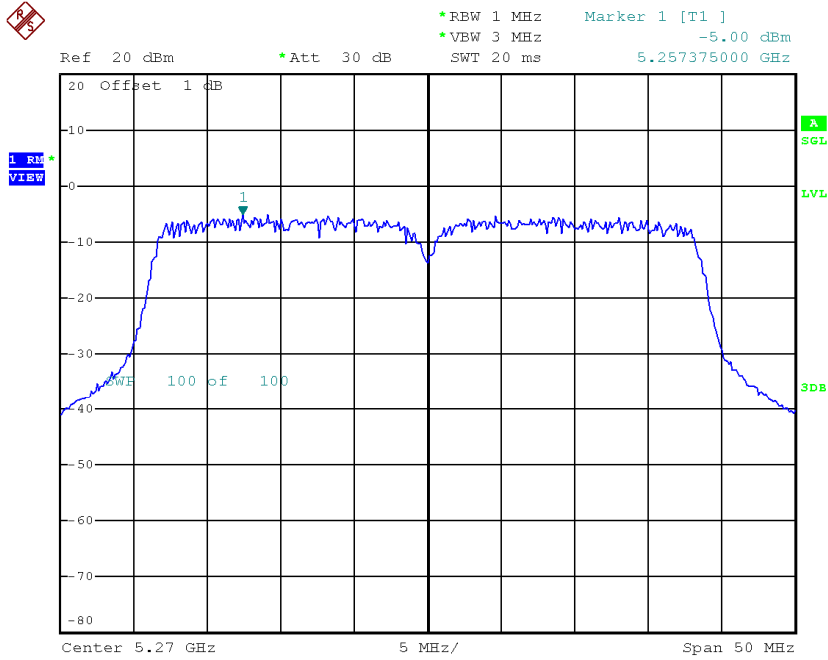

Date: 16.JAN.2015 16:28:41

CH62

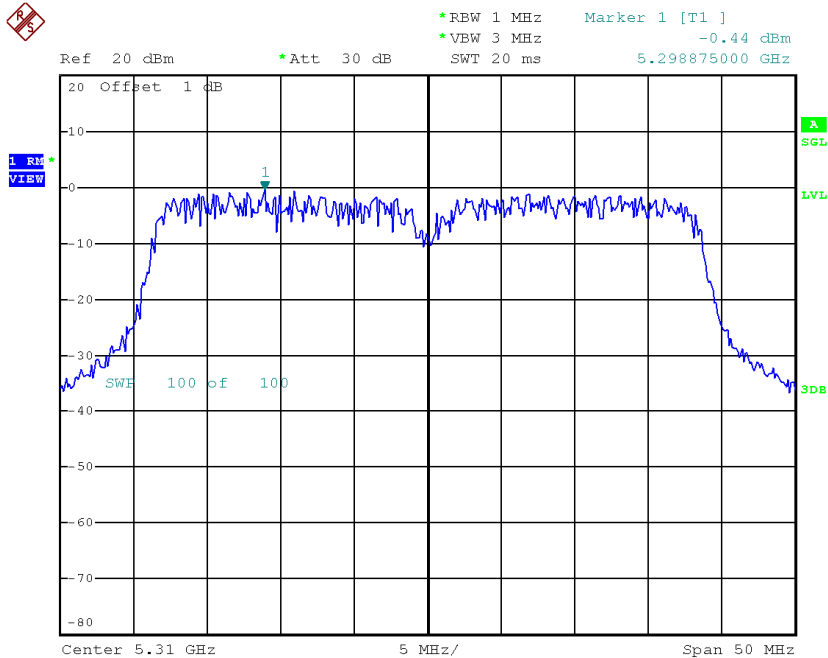


Date: 16.JAN.2015 16:30:24

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 6


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-5.53	11.00
CH62	5310	-0.77	11.00

CH54

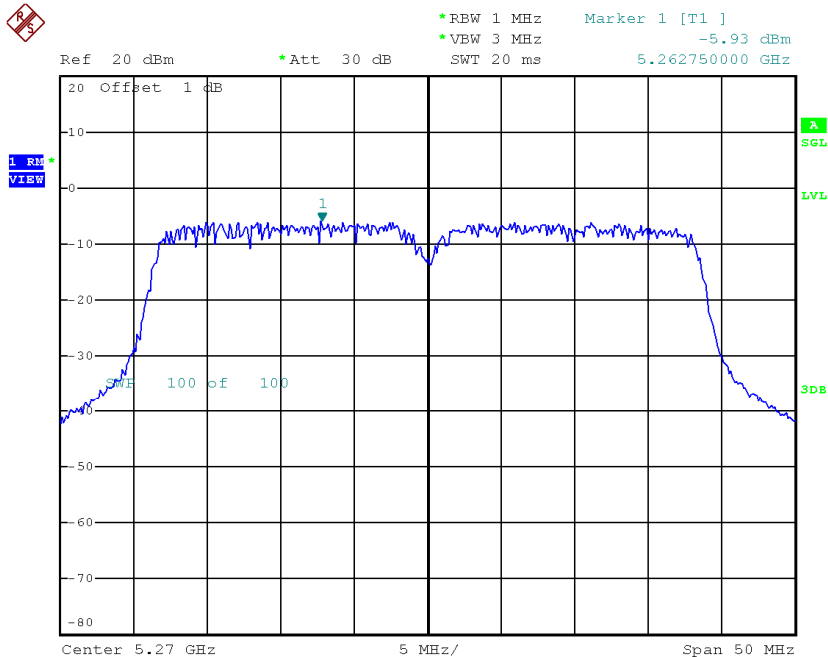

Date: 16.JAN.2015 16:29:09

CH62

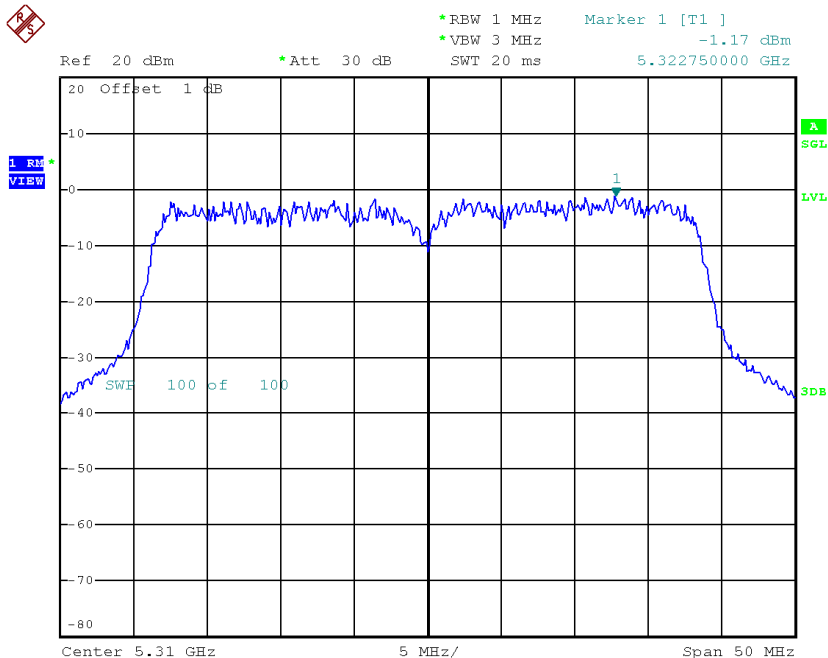


Date: 16.JAN.2015 16:30:41

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-0.30	11.00
CH62	5310	4.16	11.00

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 5


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-9.18	11.00

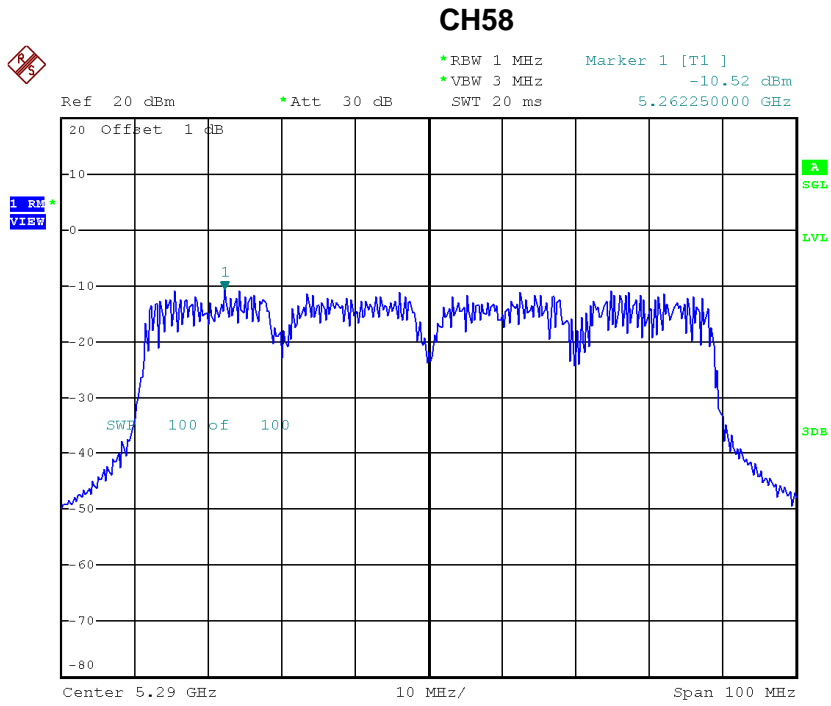

Date: 16.JAN.2015 17:15:02

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 6

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-10.45	11.00

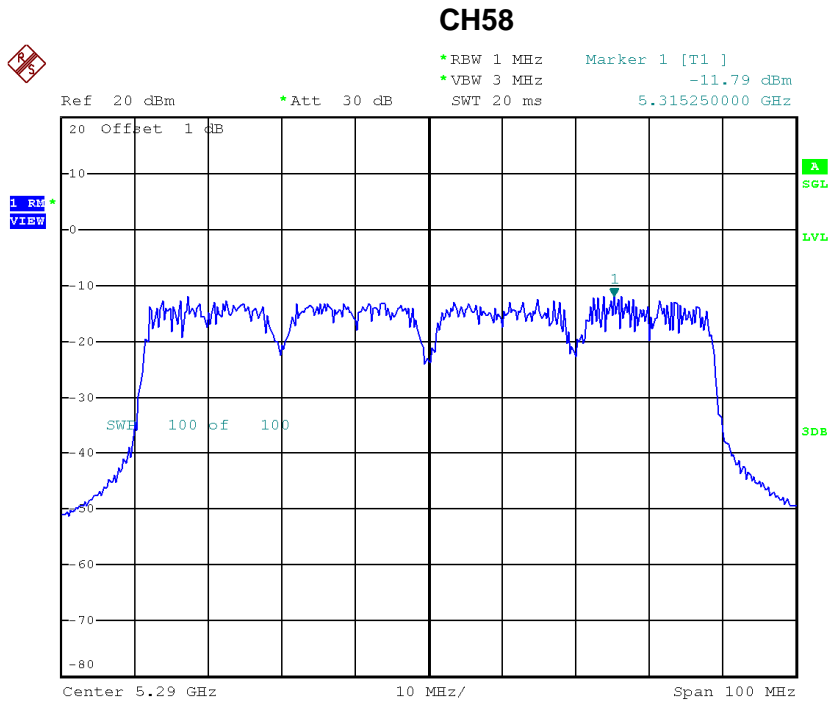


Date: 16.JAN.2015 17:15:37

Test Mode: UNII-2A/TX AC80 Mode_CH58_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-5.19	11.00

CH116

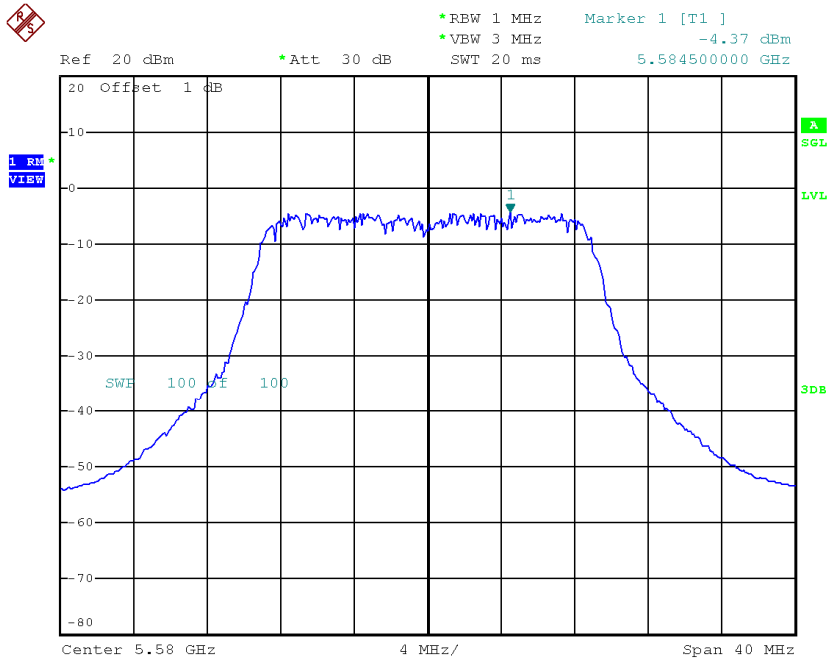


Date: 16.JAN.2015 16:25:15

CH140

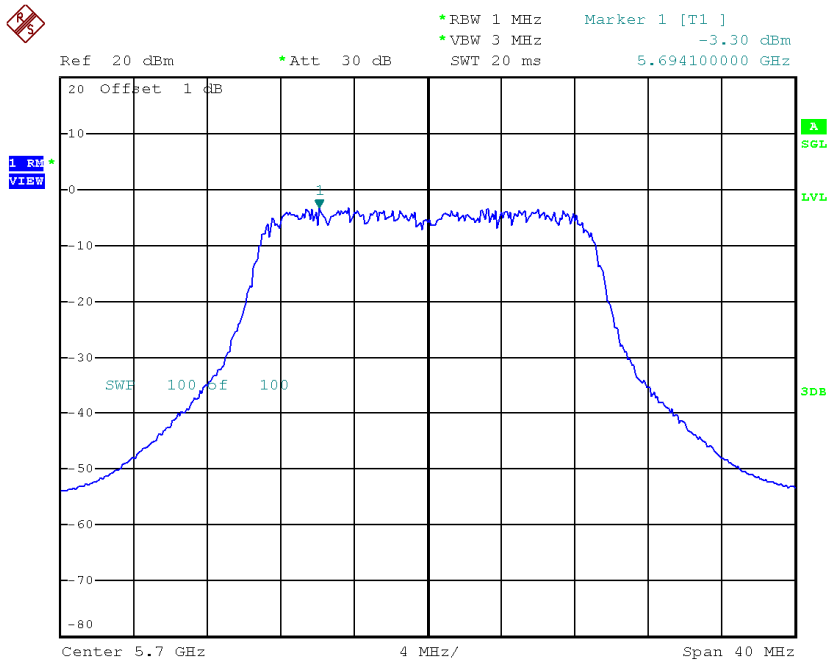


Date: 16.JAN.2015 16:26:23

CH116

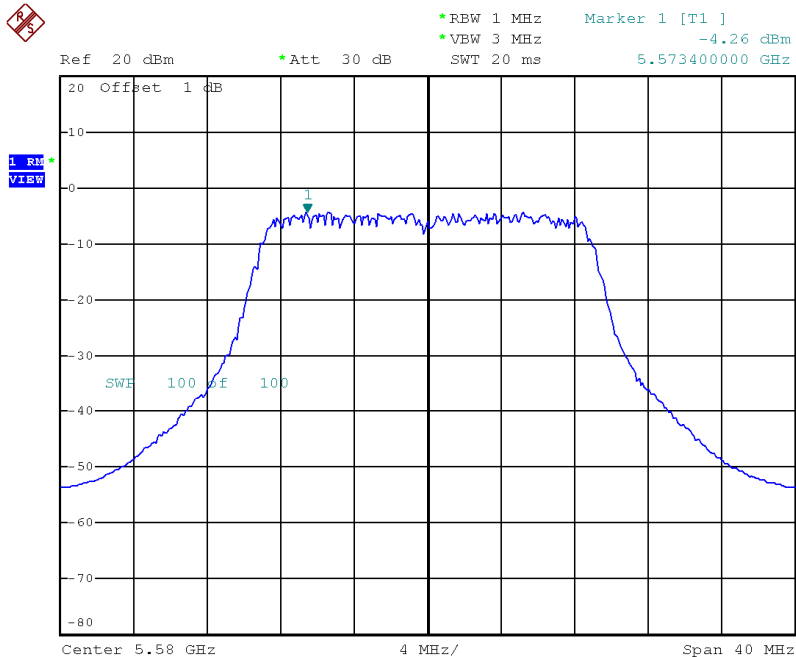


Date: 16.JAN.2015 16:25:32

CH140

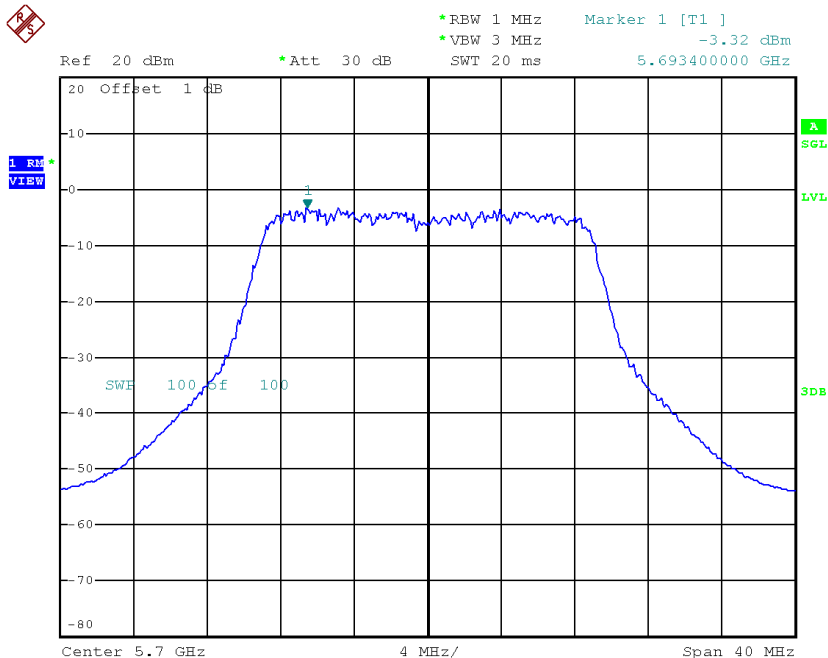


Date: 16.JAN.2015 16:26:41

CH116

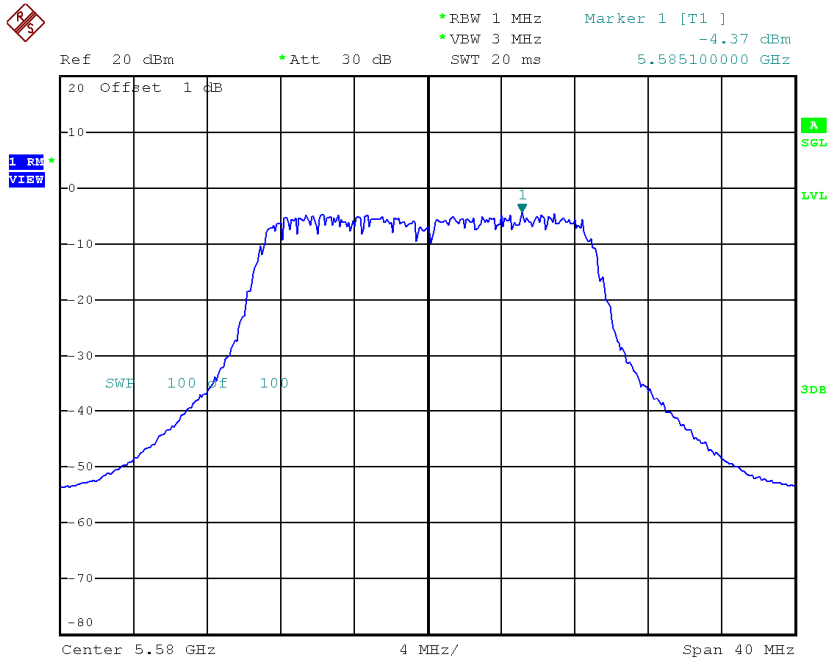

Date: 16.JAN.2015 16:25:49

CH140

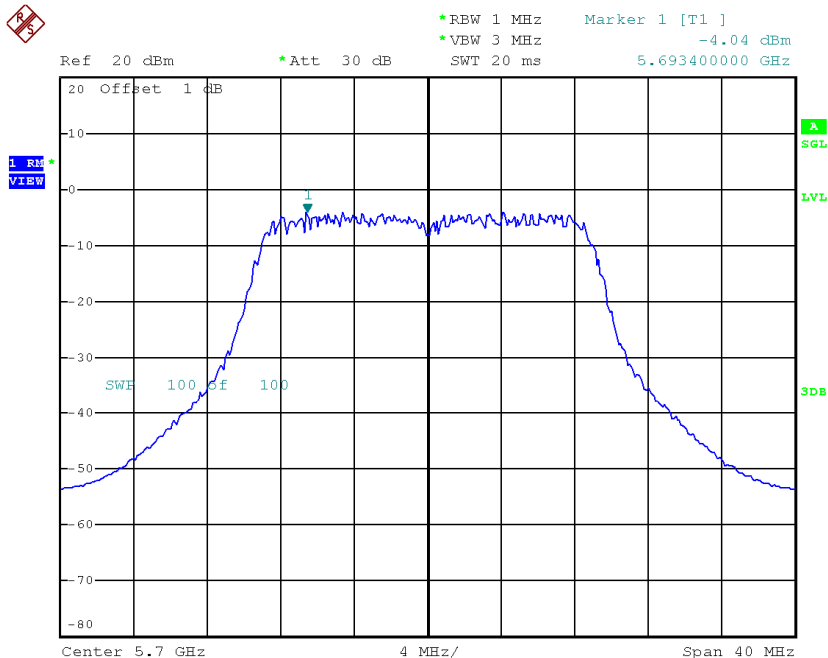


Date: 16.JAN.2015 16:27:00

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	1.16	11.00
CH116	5580	0.65	11.00
CH140	5700	1.45	11.00


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 4

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-4.16	11.00
CH110	5550	-4.65	11.00
CH134	5670	-2.75	11.00

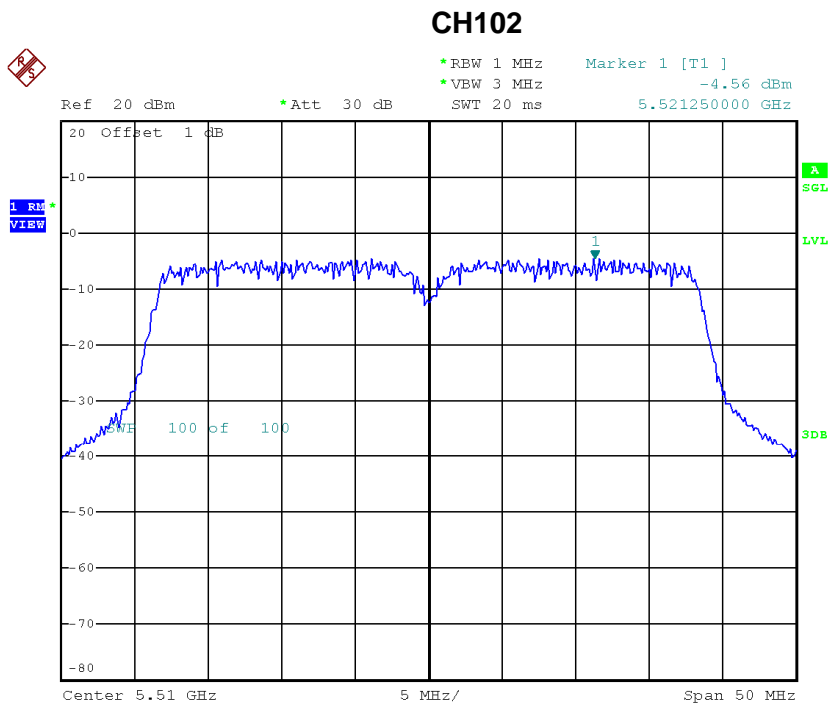


Date: 16.JAN.2015 16:31:44

CH110

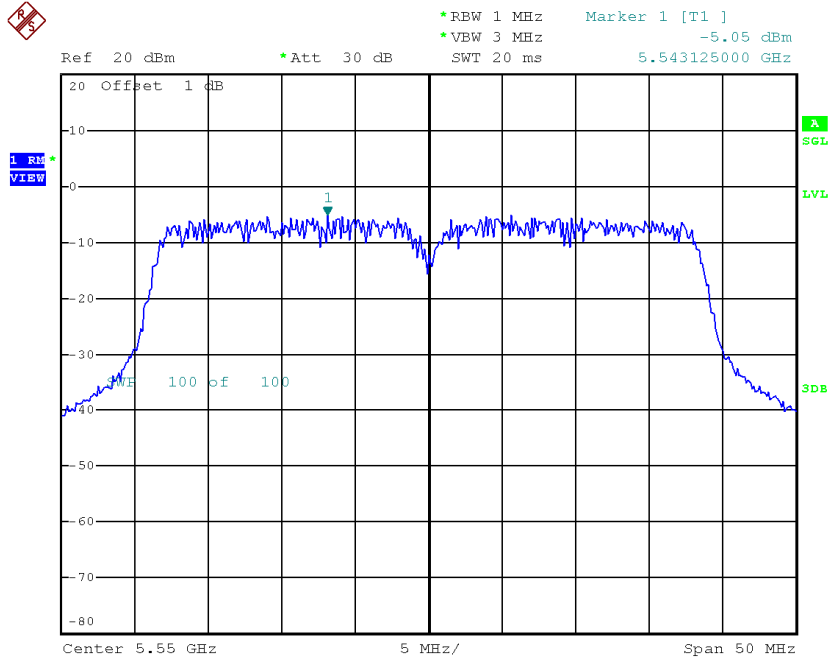

Date: 16.JAN.2015 17:30:14


CH134

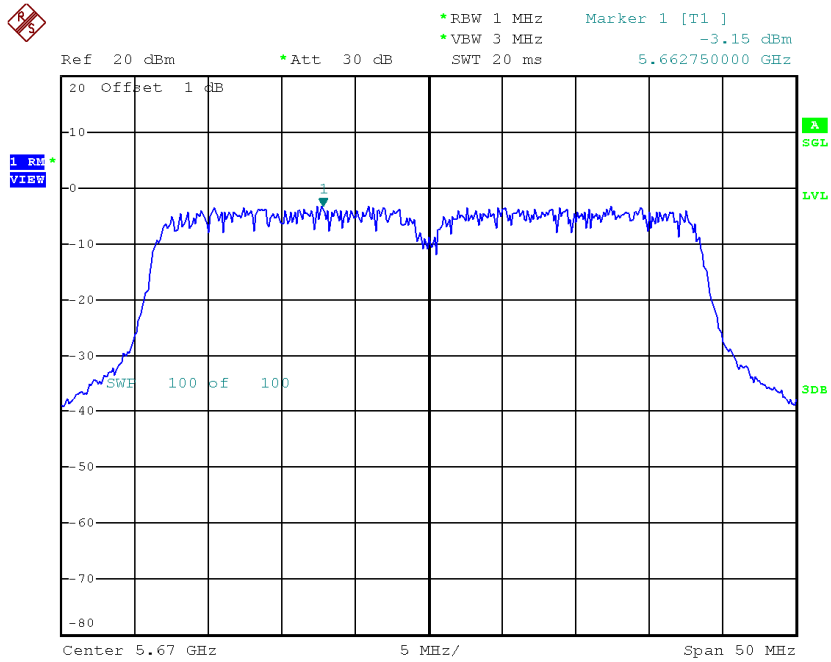

Date: 16.JAN.2015 17:04:35


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 5

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-3.15	11.00
CH110	5550	-4.52	11.00
CH134	5670	-2.36	11.00

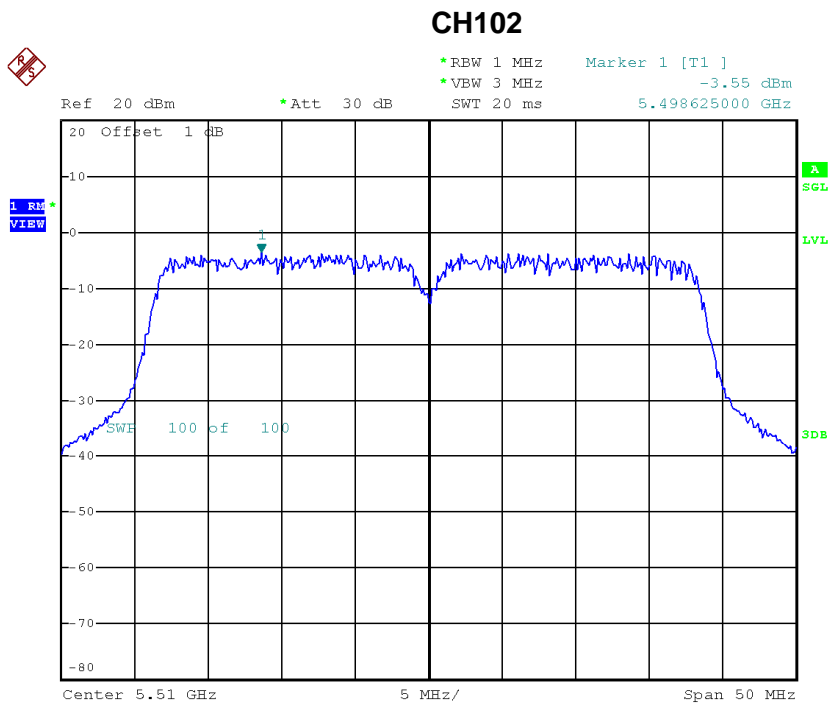


Date: 16.JAN.2015 16:32:09

CH110

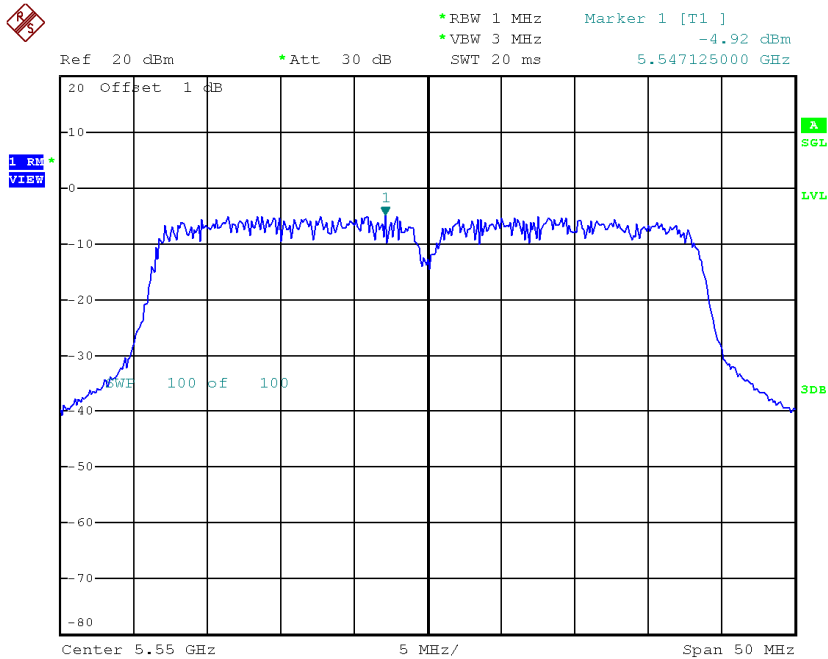


Date: 16.JAN.2015 17:30:31

CH134

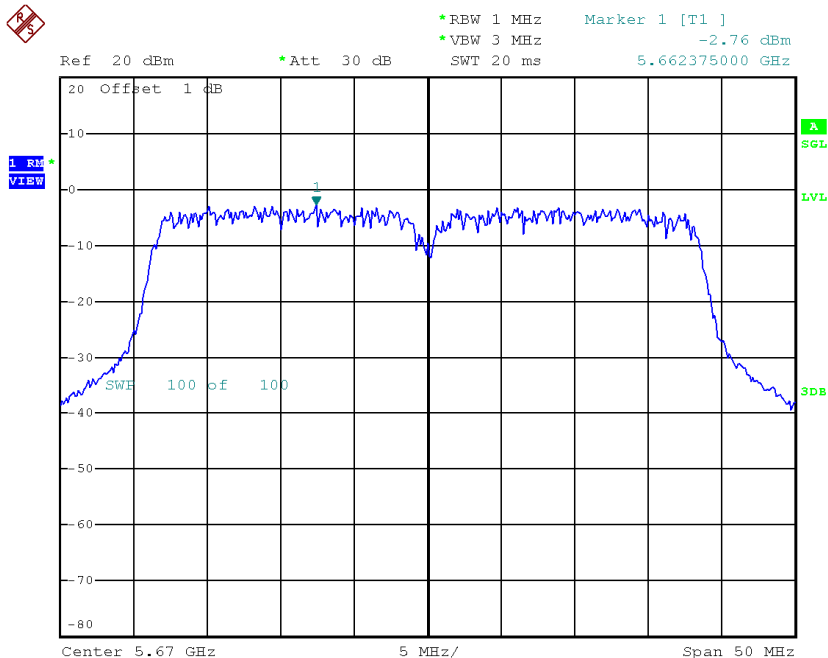


Date: 16.JAN.2015 17:05:01

CH110

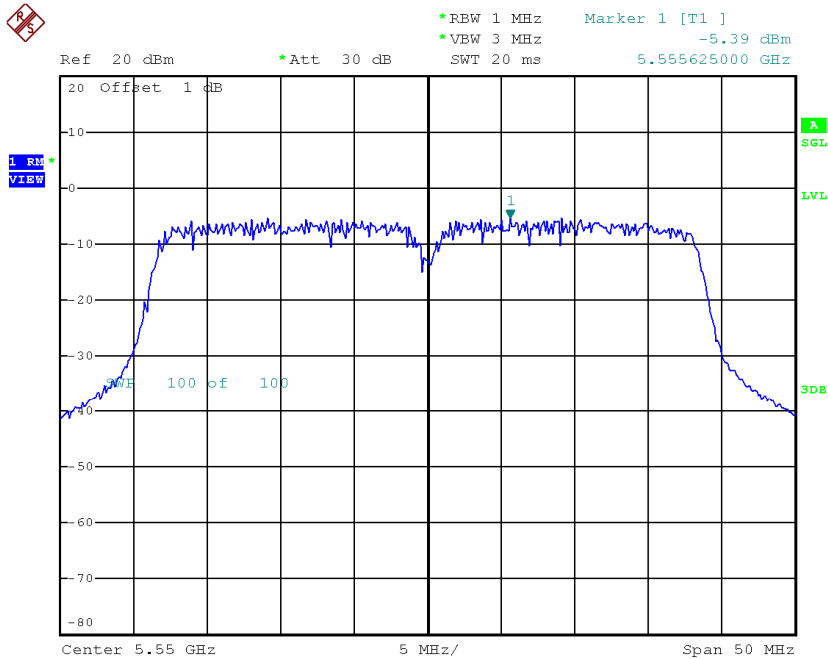

Date: 16.JAN.2015 17:30:53

CH134

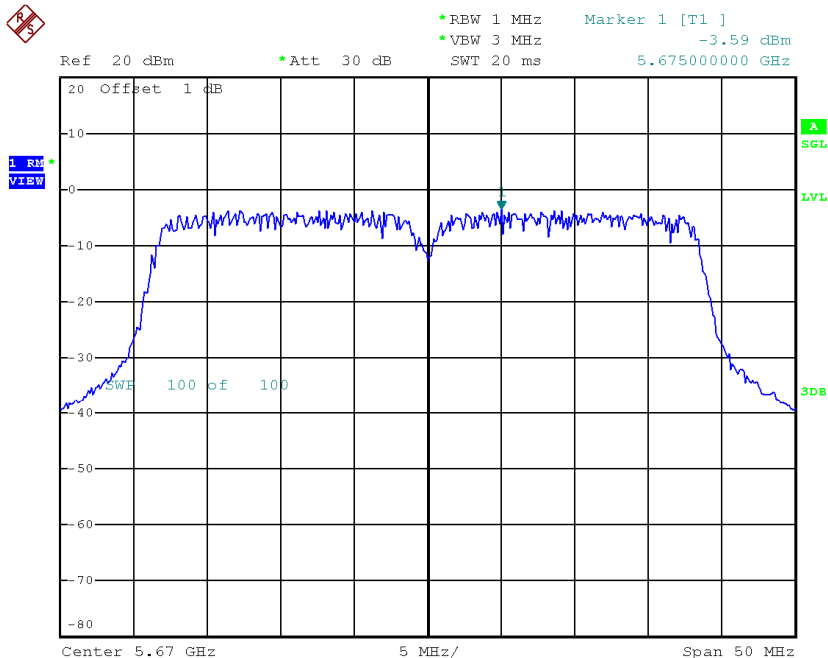


Date: 16.JAN.2015 17:05:19

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	1.08	11.00
CH110	5550	0.05	11.00
CH134	5670	2.01	11.00

Test Mode: UNII-2C/TX AC80 Mode_CH106_ANT 4


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-10.04	11.00

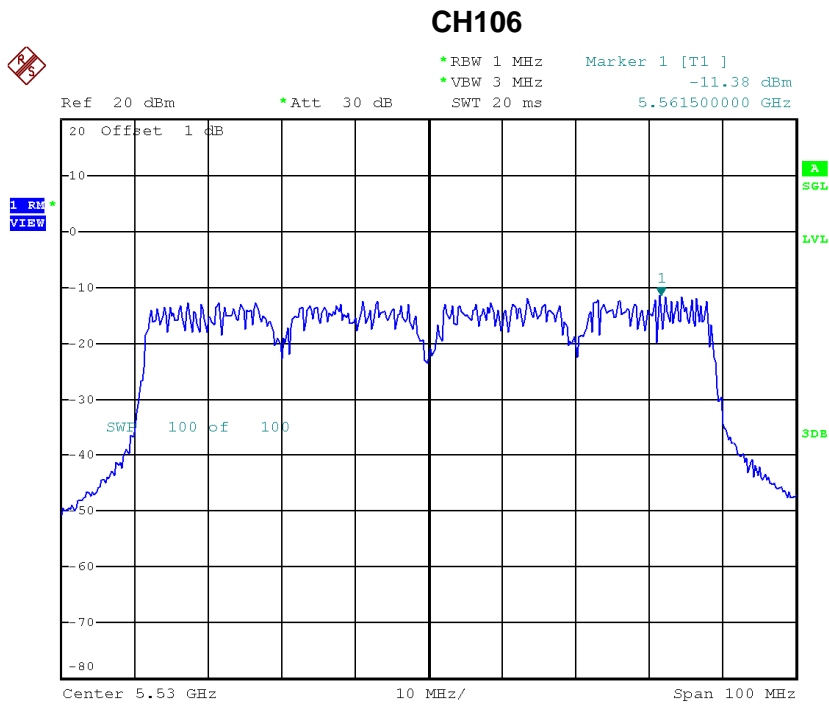

Date: 14.JAN.2015 16:30:27

Test Mode: UNII-2C/TX AC80 Mode_CH106_ANT 5


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-9.91	11.00

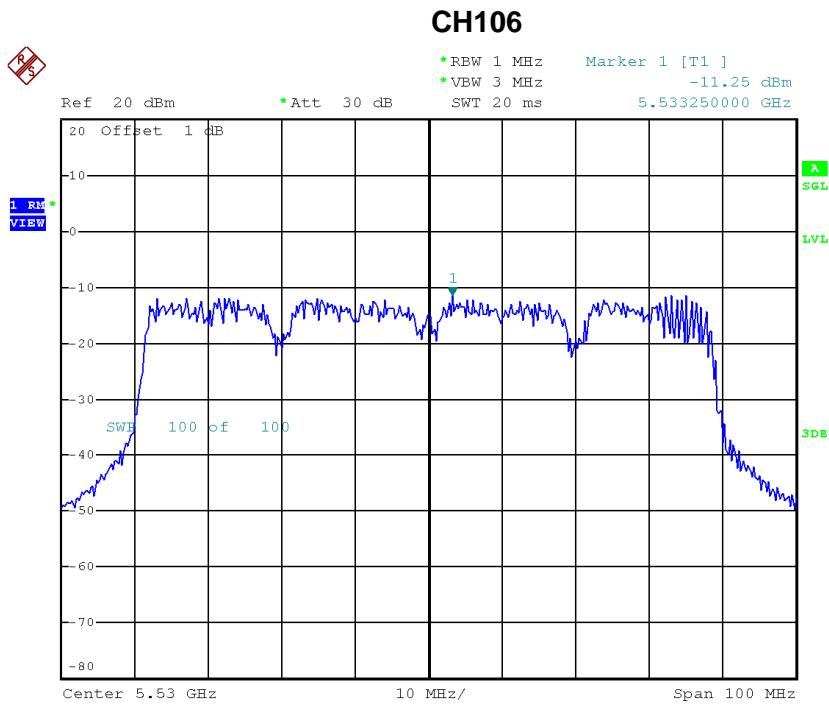

Date: 14.JAN.2015 16:31:06

Test Mode: UNII-2C/TX AC80 Mode_CH106_ANT 6

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-9.66	11.00

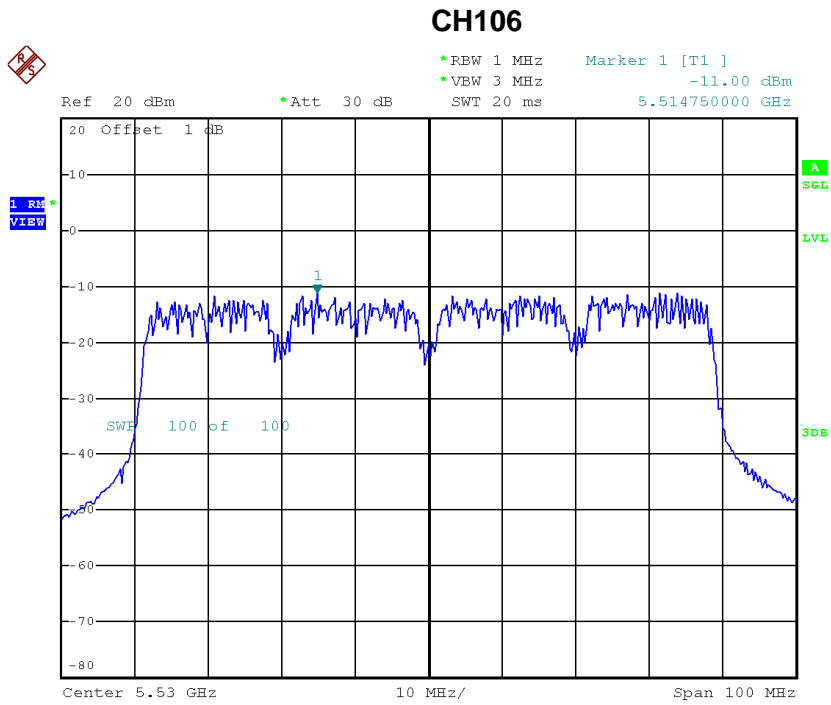

Date: 14.JAN.2015 16:35:34

Test Mode: UNII-2C/TX AC80 Mode_CH106_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-5.10	11.00

ATTACHMENTI-FREQUENCY STABILITY

Test Mode:	UNII-2A
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5260.0080
120	5260.0220
108	5260.0088
Max. Deviation (MHz)	0.0220
Max. Deviation (ppm)	4.1825

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
-5	5260.0064
5	5260.0160
15	5260.0084
25	5260.0056
35	5260.0182
45	5260.0099
50	5260.0110
Max. Deviation (MHz)	0.0182
Max. Deviation (ppm)	3.4601

Test Mode:	UNII-2C
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5500.0284
120	5500.0033
108	5500.0151
Max. Deviation (MHz)	0.0284
Max. Deviation (ppm)	5.1636


Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
-5	5500.0026
5	5500.0067
15	5500.0192
25	5500.0104
35	5500.0015
45	5500.0034
50	5500.0047
Max. Deviation (MHz)	0.0192
Max. Deviation (ppm)	3.4909

ATTACHMENTJ -PEAK EXCURSION MEASUREMENT


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 4

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	9.01	13
CH60	5300	9.19	13
CH64	5320	10.67	13

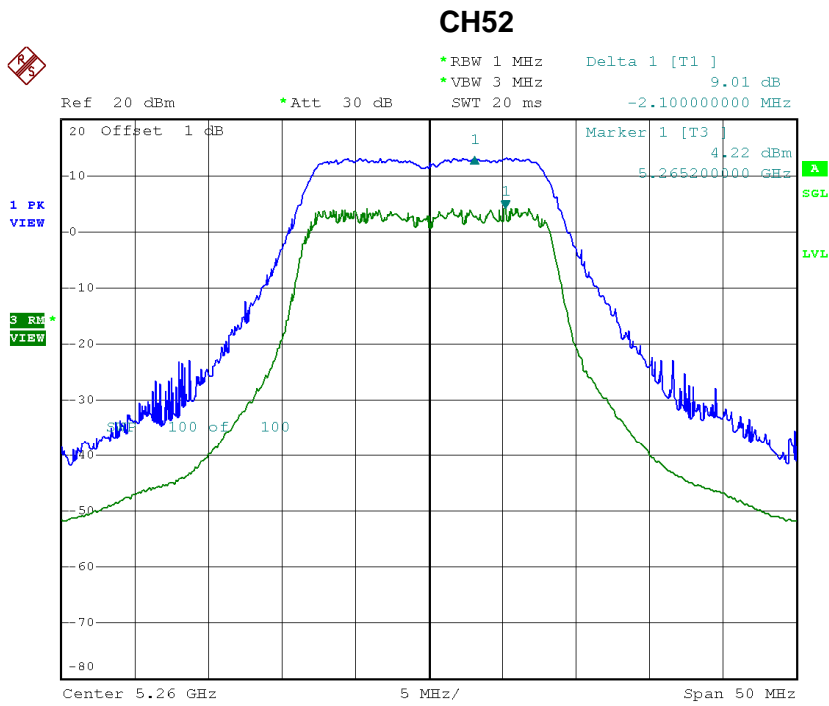


Date: 9.FEB.2015 20:52:56

CH60

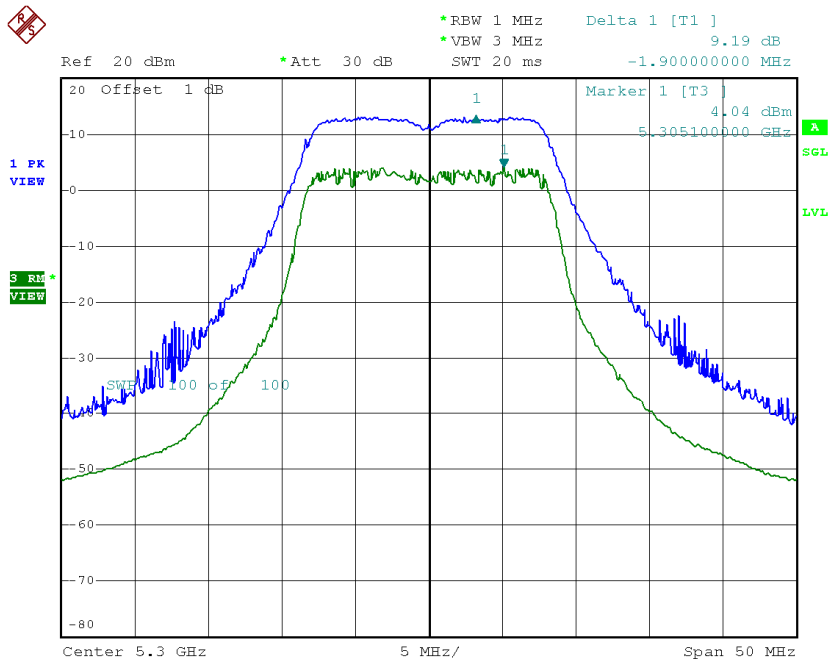

Date: 9.FEB.2015 20:54:19


CH64

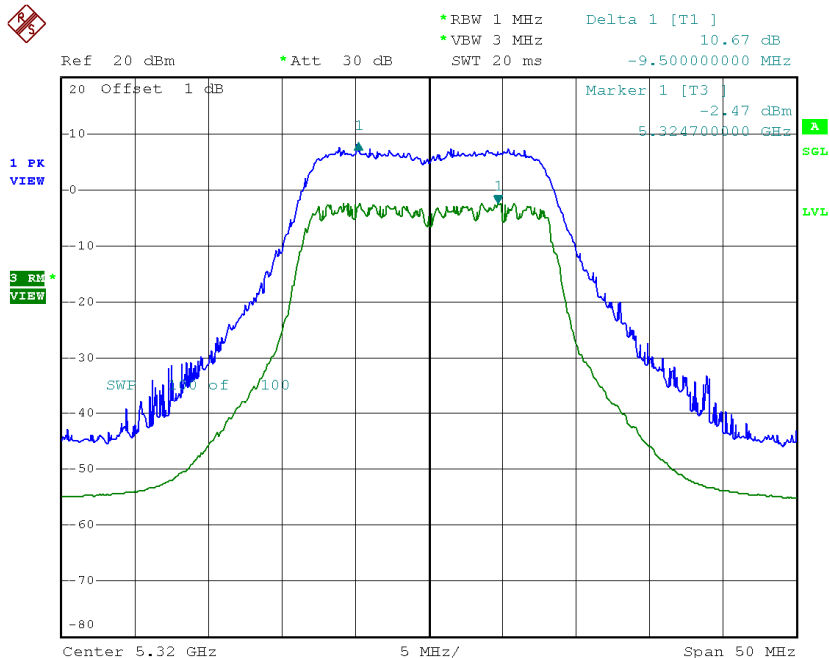

Date: 9.FEB.2015 20:57:05


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 5

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	9.75	13
CH60	5300	10.3	13
CH64	5320	9.49	13

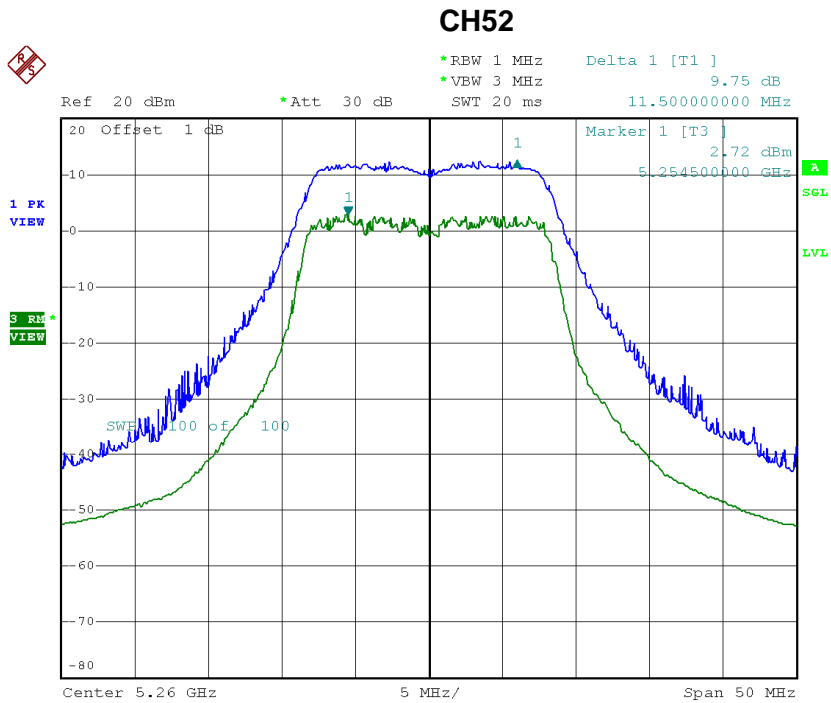


Date: 9.FEB.2015 20:52:09

CH60

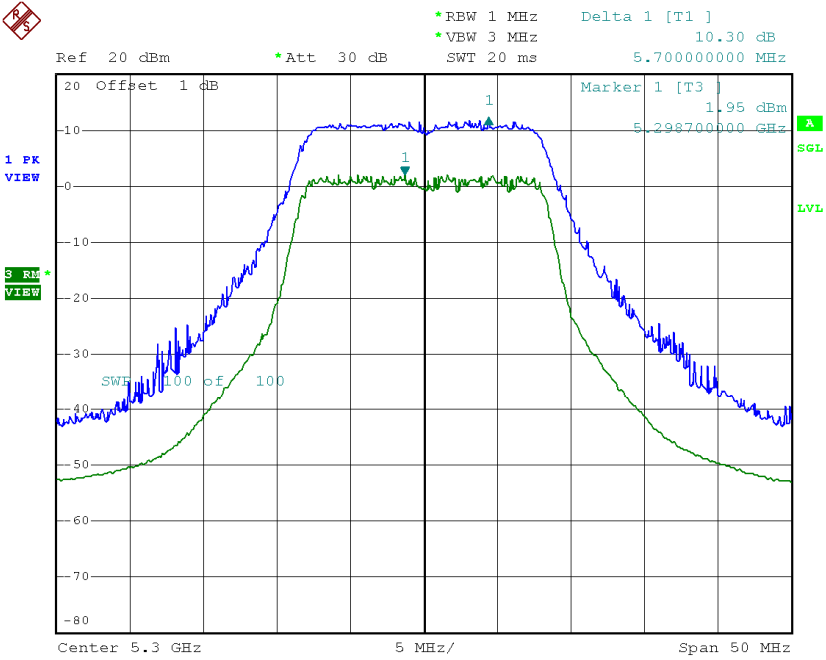

Date: 9.FEB.2015 20:54:47


CH64

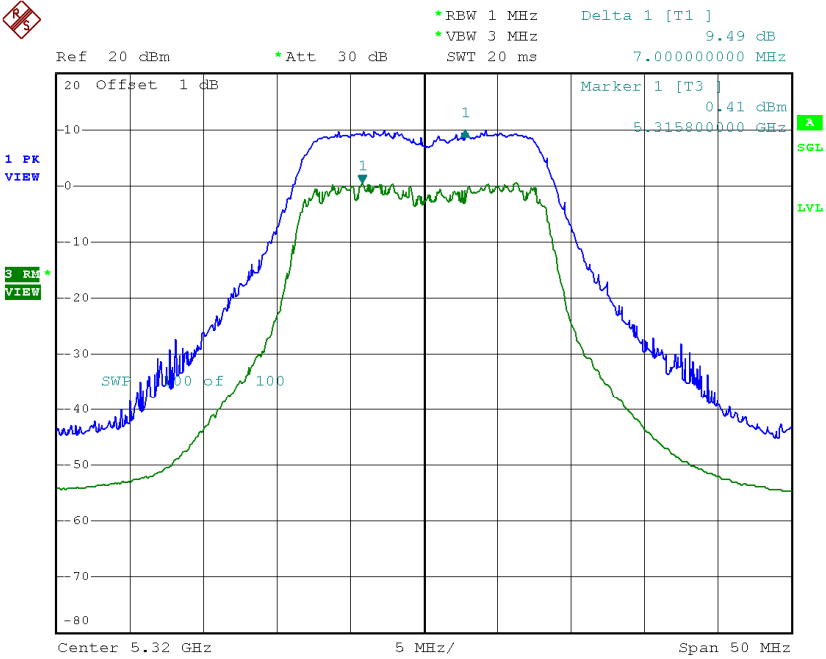

Date: 9.FEB.2015 20:57:35


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 6

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	9.94	13
CH60	5300	10.35	13
CH64	5320	9.25	13

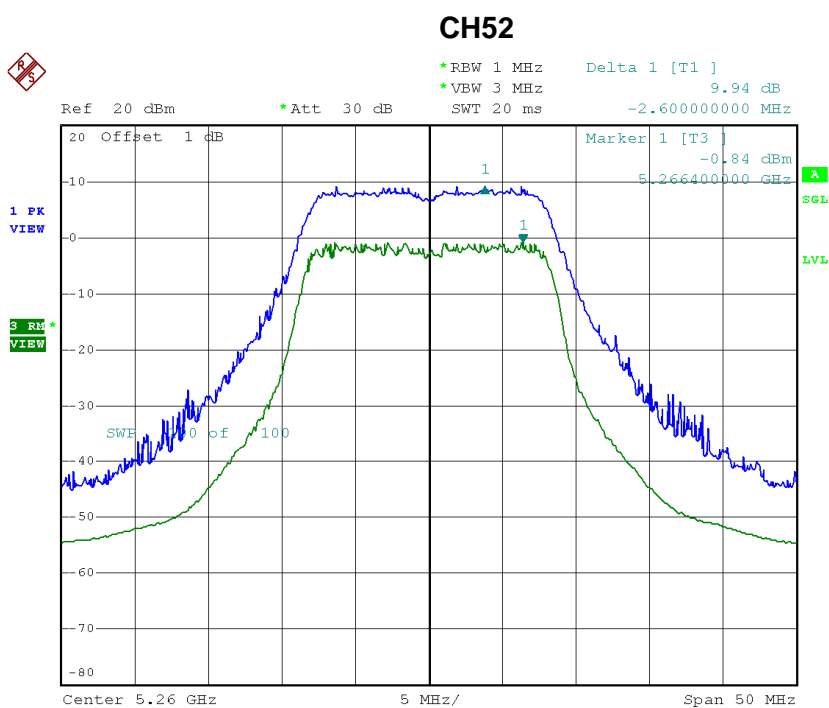


Date: 9.FEB.2015 20:51:36

CH60

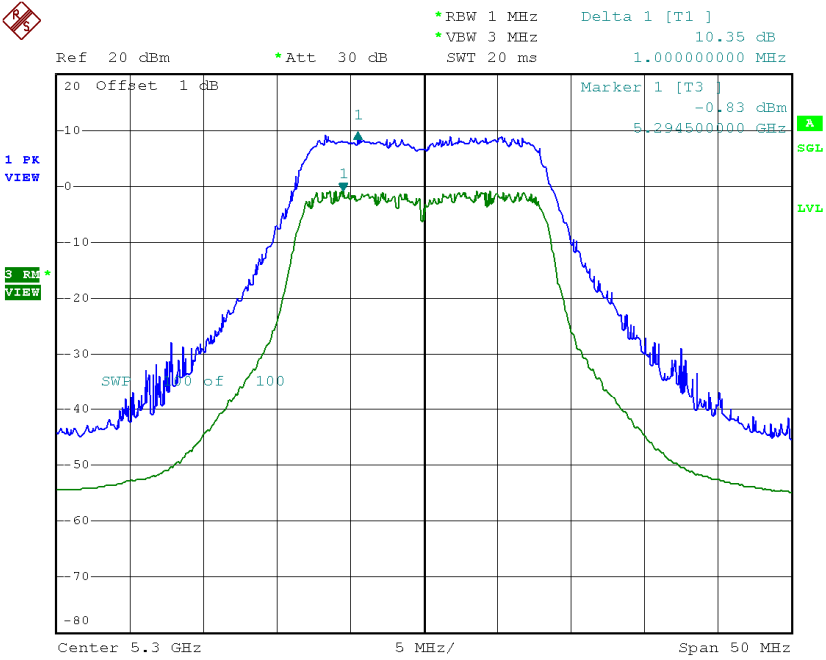

Date: 9.FEB.2015 20:55:12


CH64

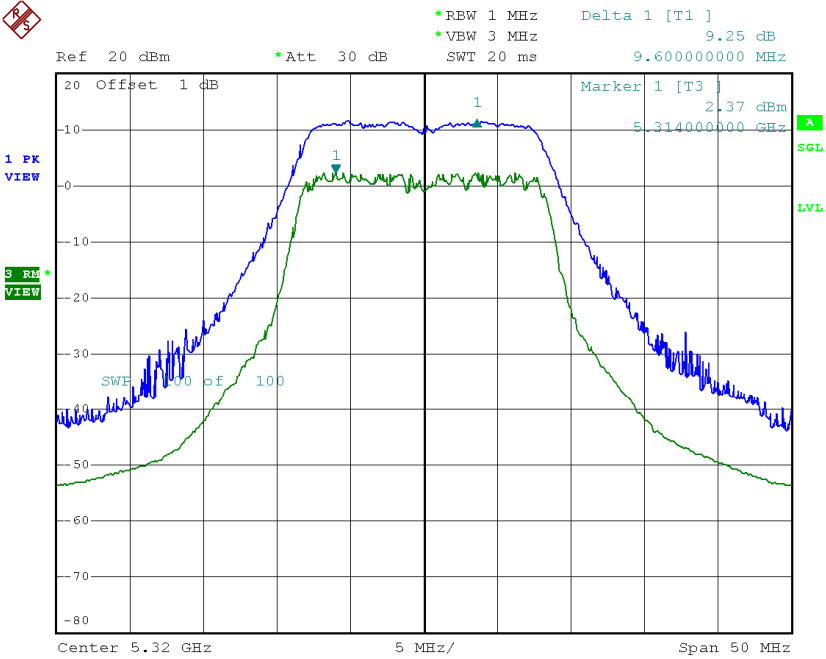

Date: 9.FEB.2015 20:58:11


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 4

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	9.96	13
CH60	5300	9.61	13
CH64	5320	9.81	13

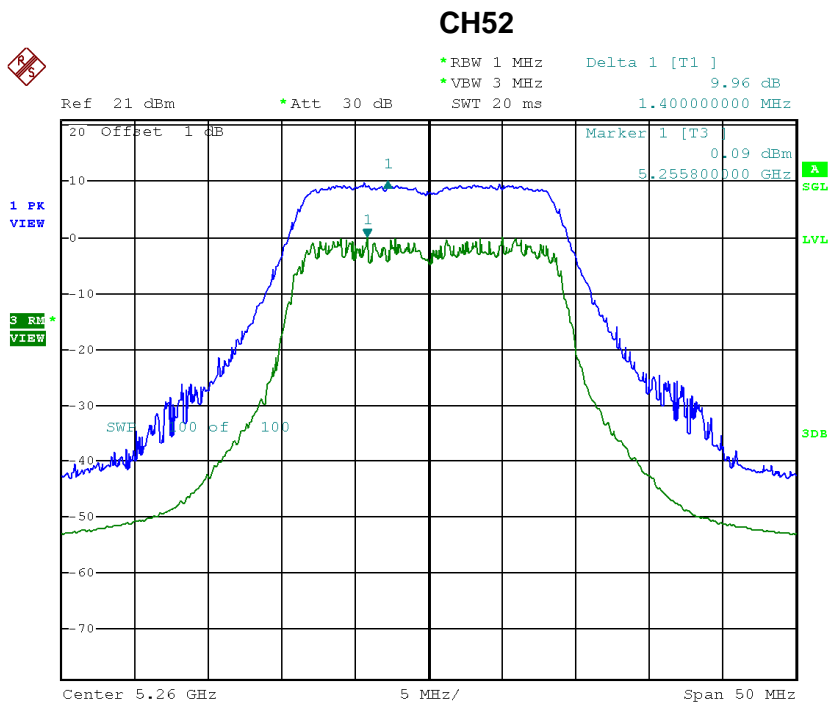


Date: 11.FEB.2015 19:41:33

CH60

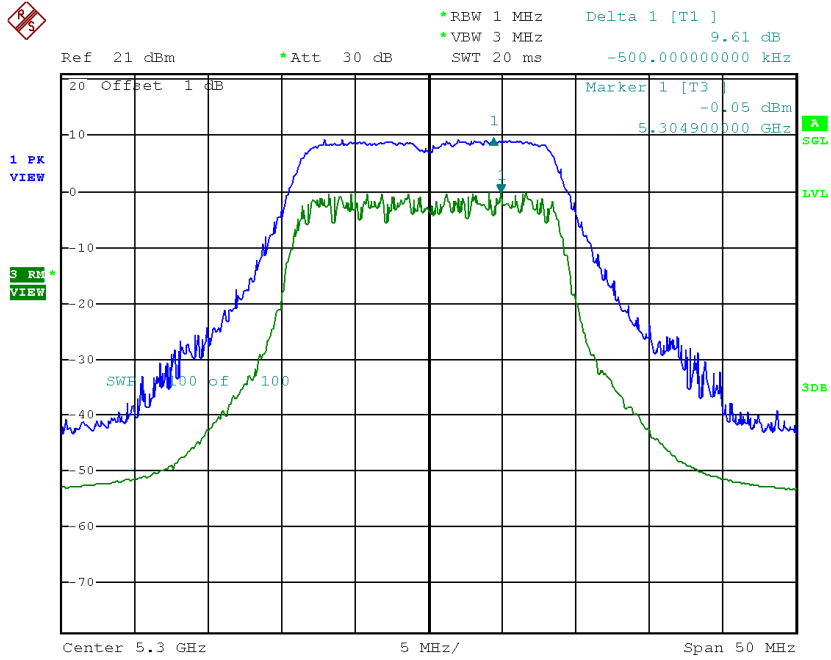

Date: 11.FEB.2015 20:14:31


CH64

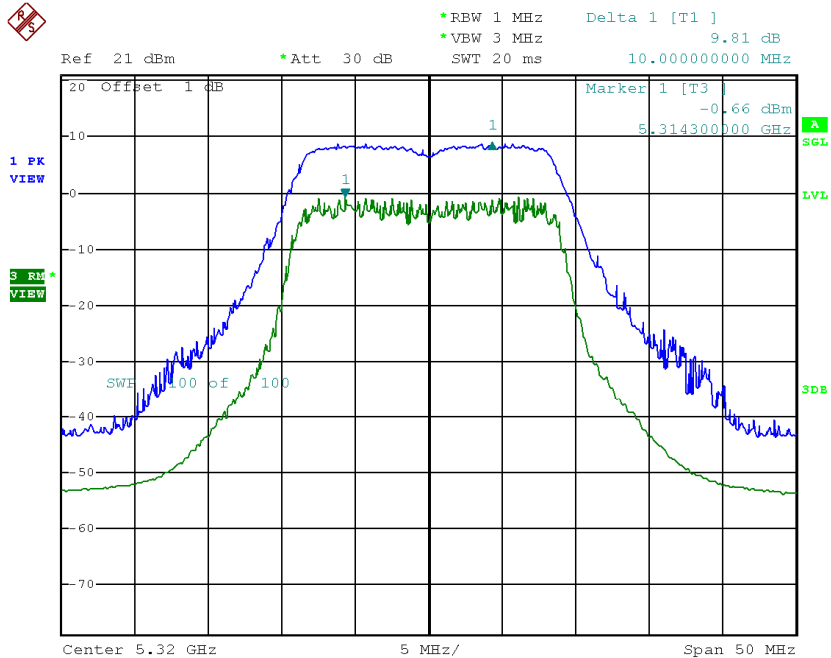

Date: 11.FEB.2015 20:15:35


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 5

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	10.76	13
CH60	5300	10.51	13
CH64	5320	10.45	13

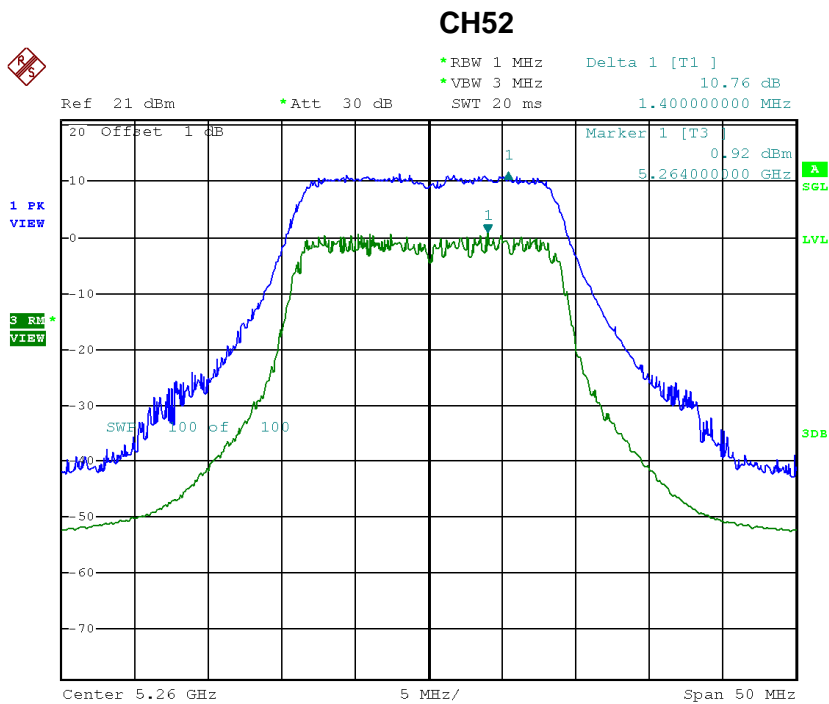


Date: 11.FEB.2015 19:43:10

CH60

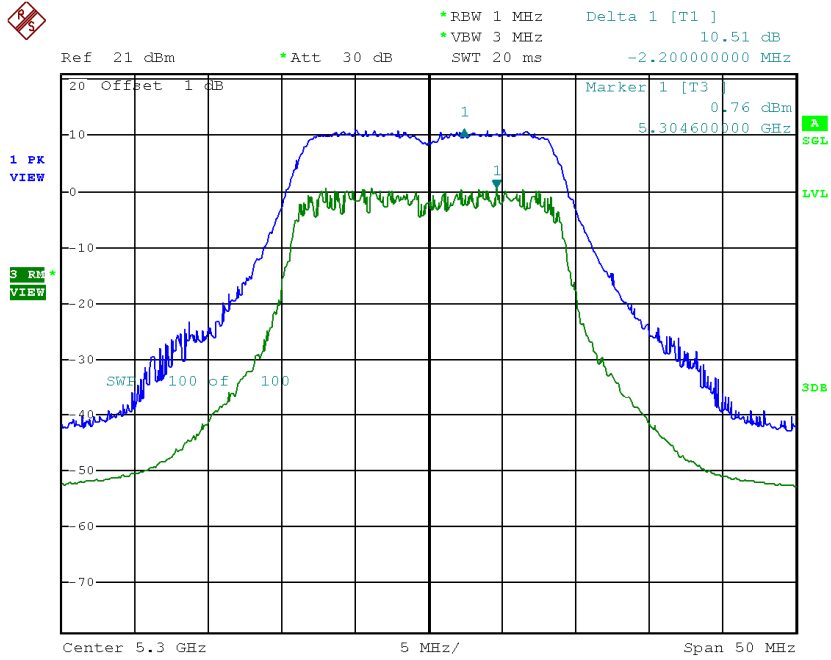

Date: 11.FEB.2015 20:13:55


CH64

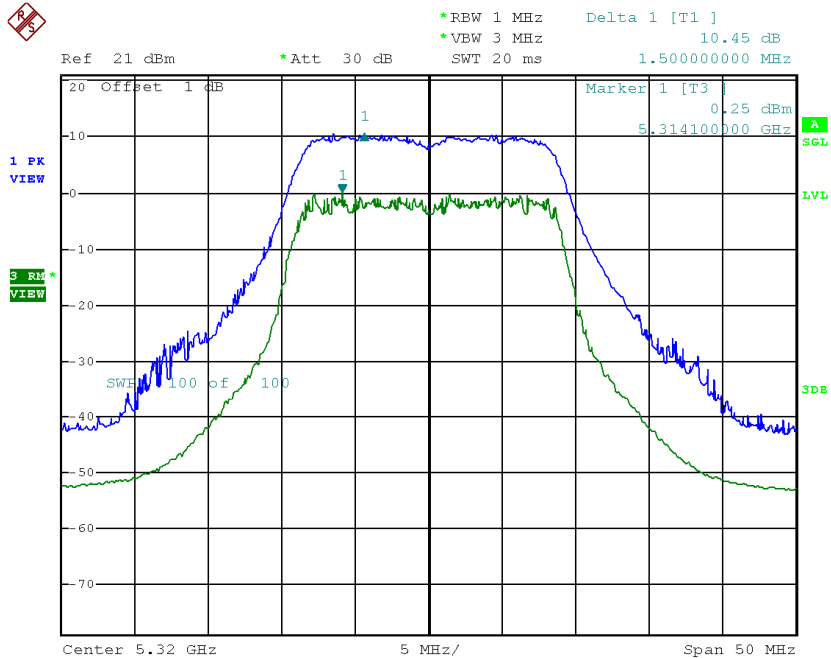

Date: 11.FEB.2015 20:16:11


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 6

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	10.42	13
CH60	5300	10.95	13
CH64	5320	11.17	13

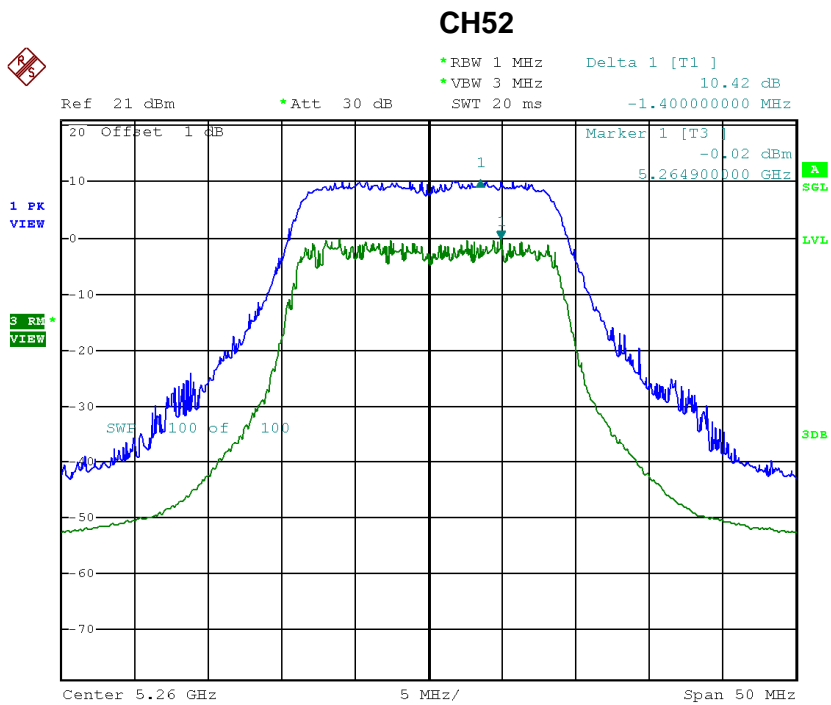


Date: 11.FEB.2015 20:10:22

CH60

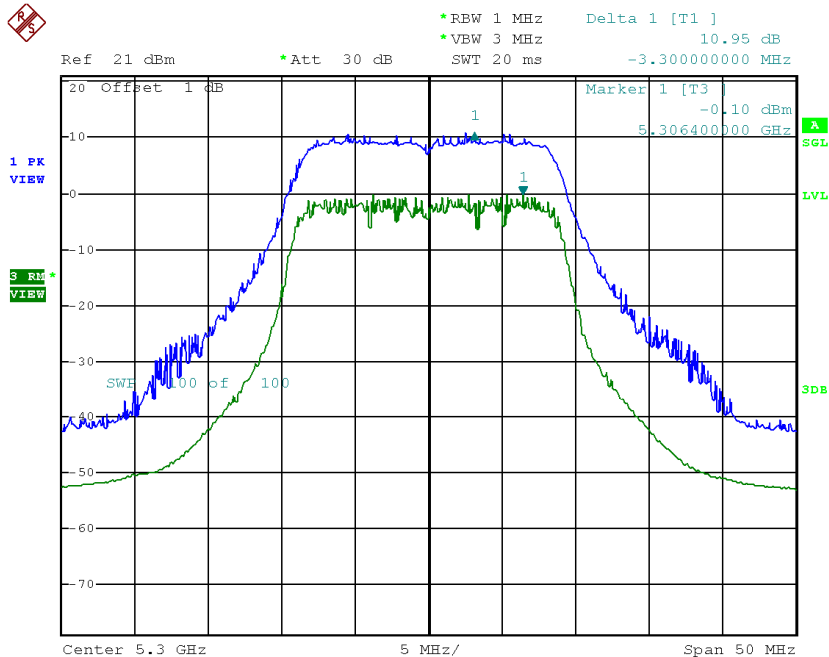

Date: 11.FEB.2015 20:11:26

CH64

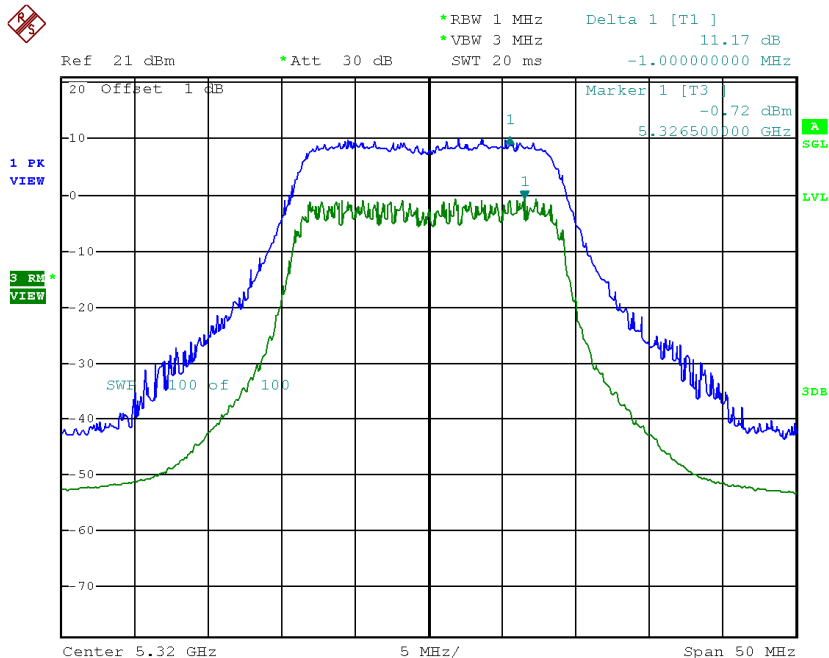


Date: 11.FEB.2015 20:16:44

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 4


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH54	5270	10.64	13
CH62	5310	10.32	13

CH54

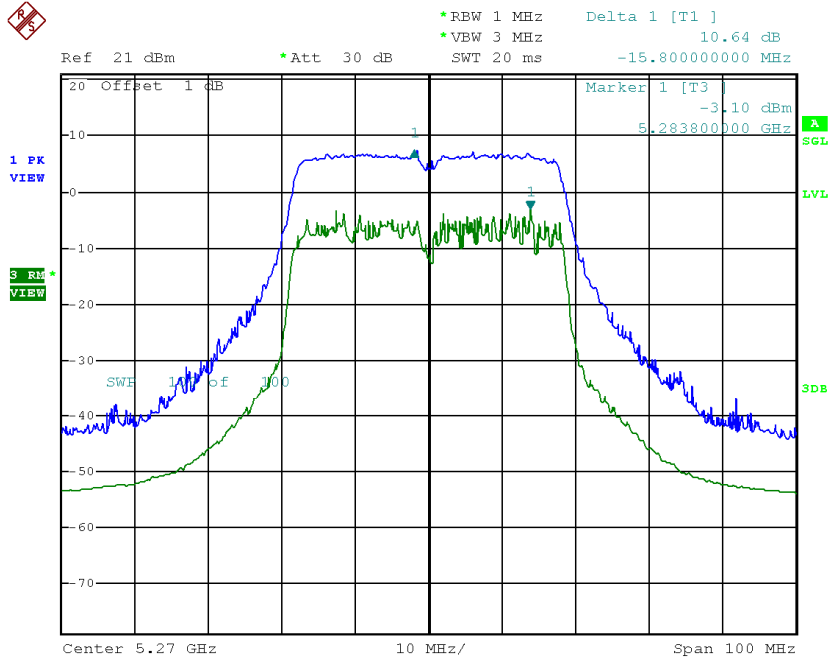

Date: 11.FEB.2015 21:07:54

CH62

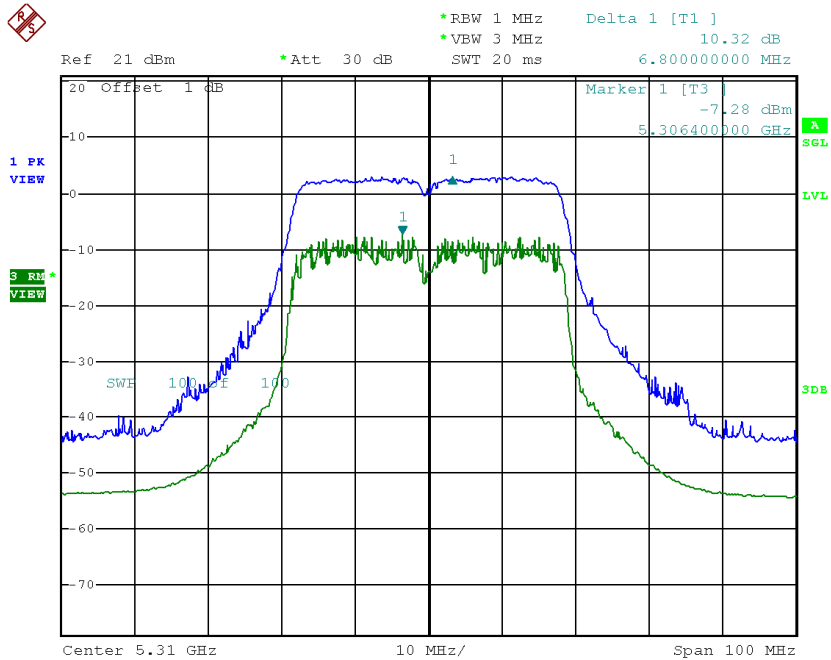


Date: 11.FEB.2015 21:09:00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 5


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH54	5270	11.09	13
CH62	5310	11.32	13

CH54

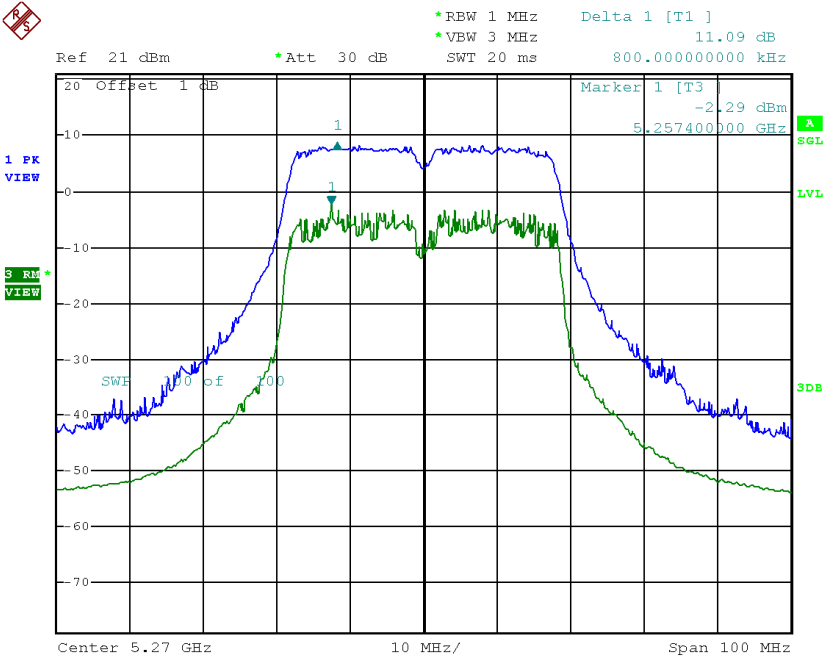

Date: 11.FEB.2015 21:06:24

CH62

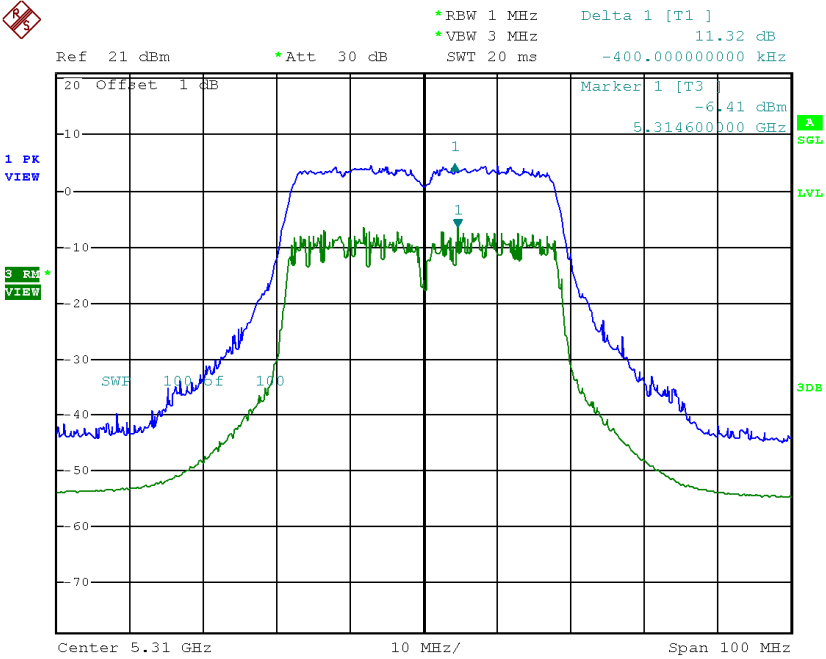


Date: 11.FEB.2015 21:09:49

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 6


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH54	5270	11.15	13
CH62	5310	11.74	13

CH54

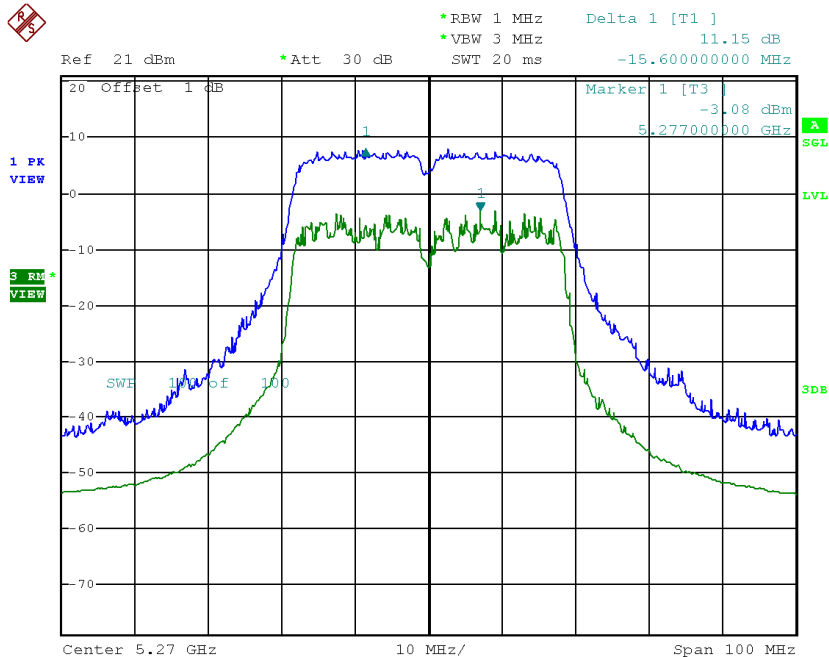


Date: 11.FEB.2015 21:05:42

CH62

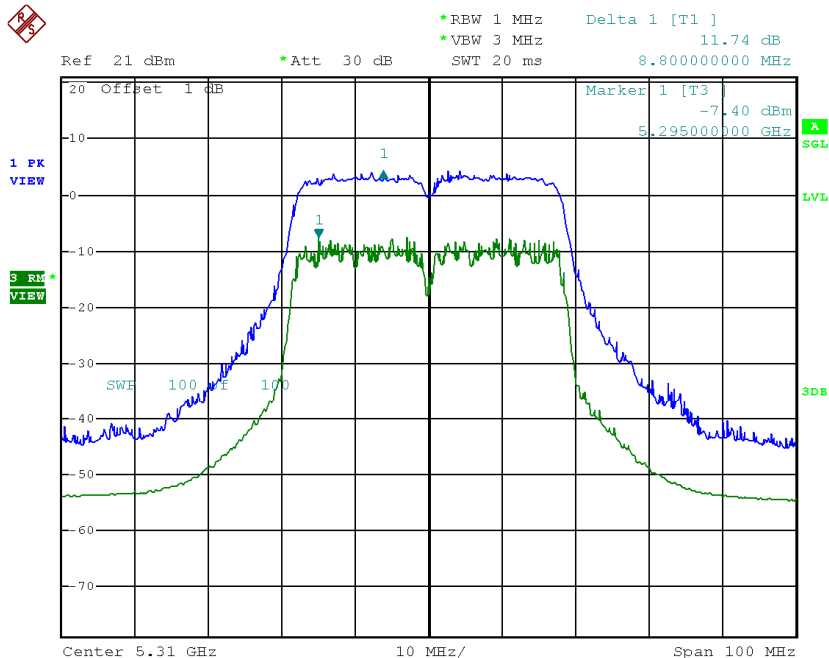


Date: 11.FEB.2015 21:10:20

CH116

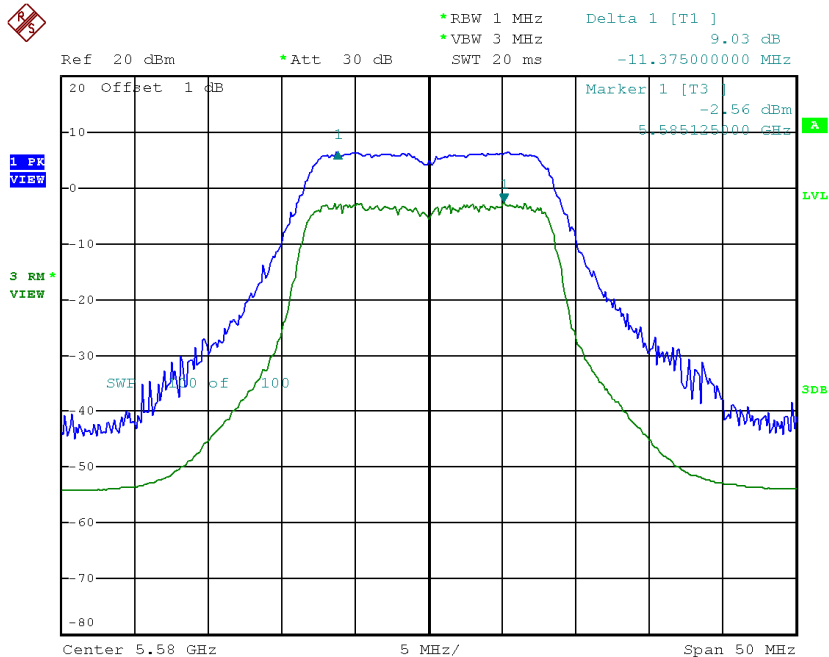

Date: 14.JAN.2015 21:55:52


CH140

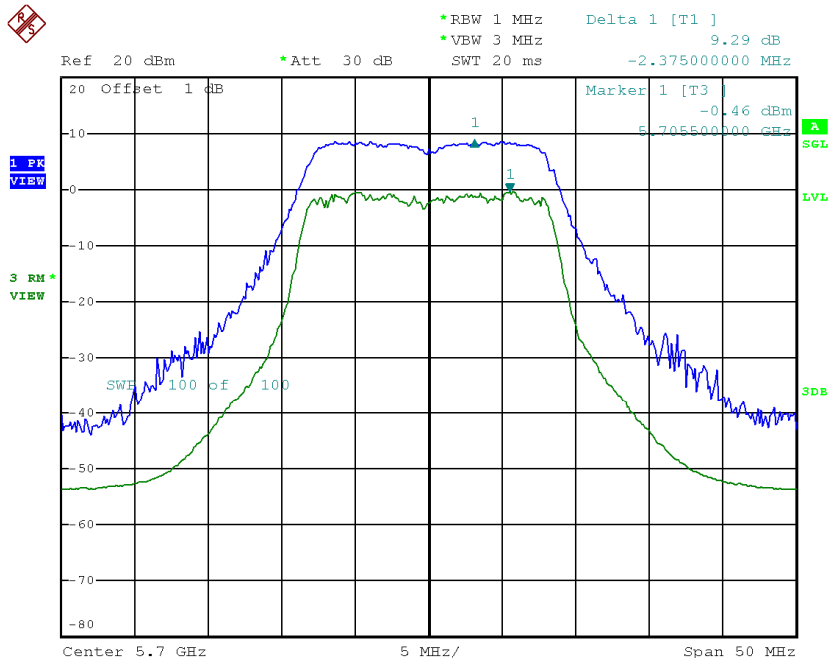

Date: 14.JAN.2015 22:00:10


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 5

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH100	5500	9.84	13
CH116	5580	9.58	13
CH140	5700	10.09	13

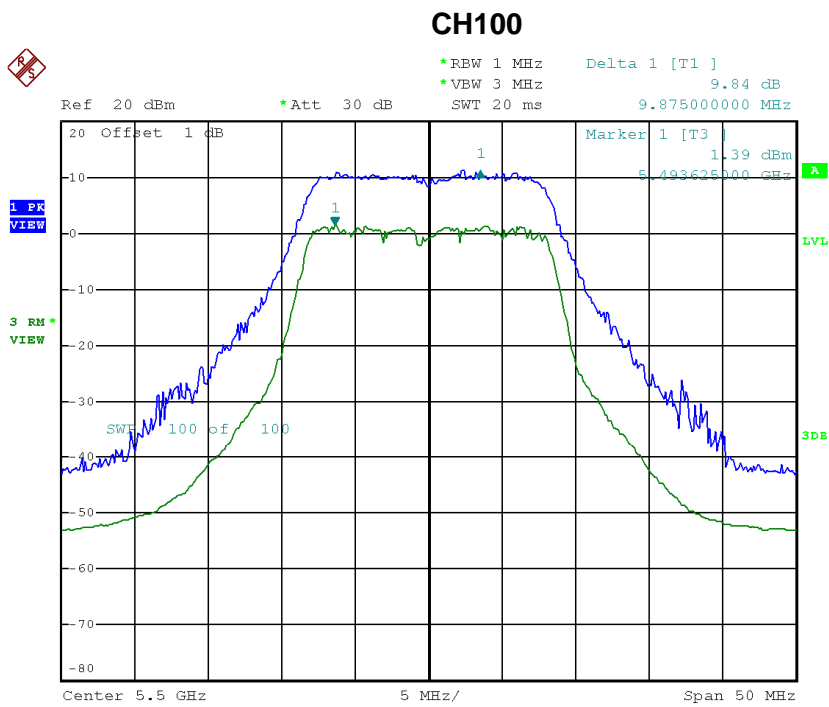


Date: 14.JAN.2015 21:48:56

CH116

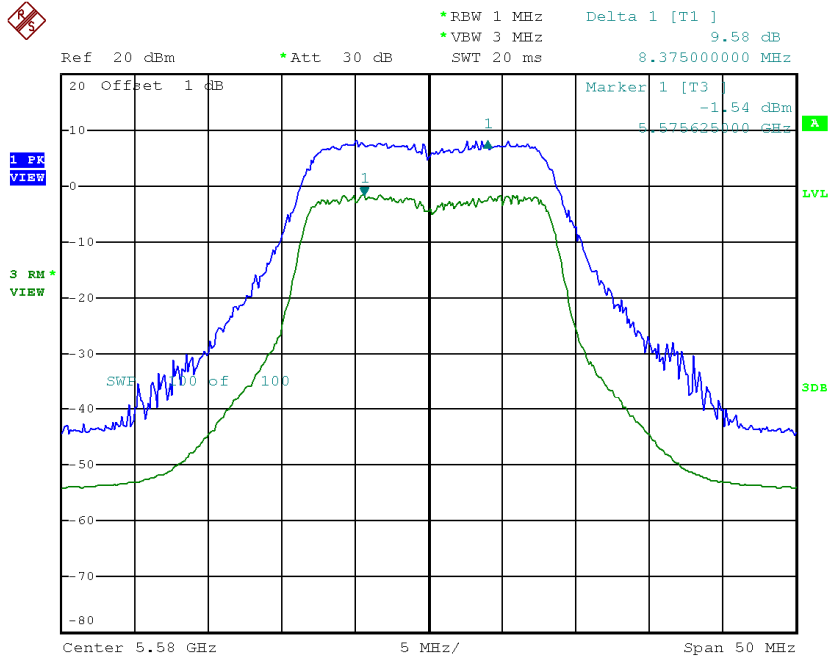

Date: 14.JAN.2015 21:56:58


CH140

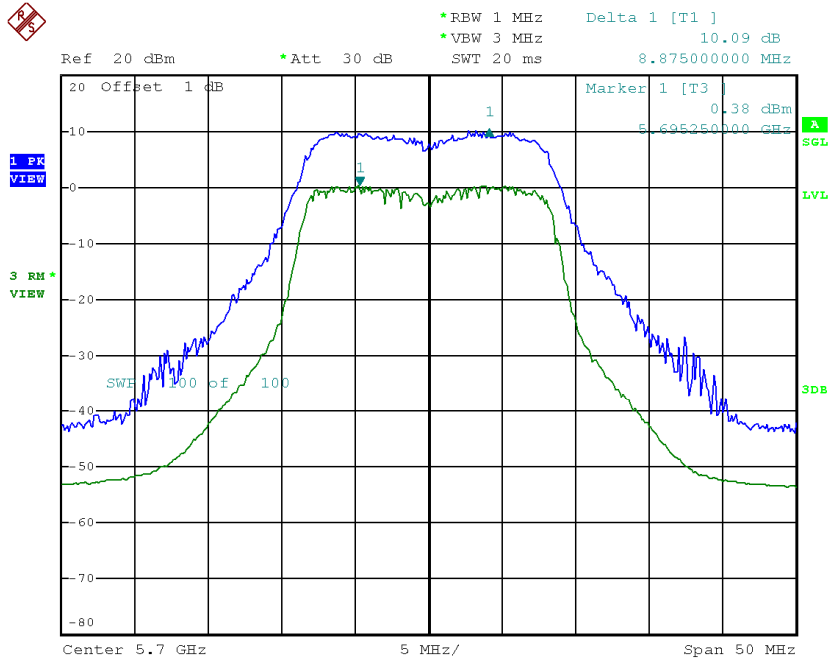

Date: 14.JAN.2015 22:02:45


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 6

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH100	5500	11.00	13
CH116	5580	10.01	13
CH140	5700	10.11	13

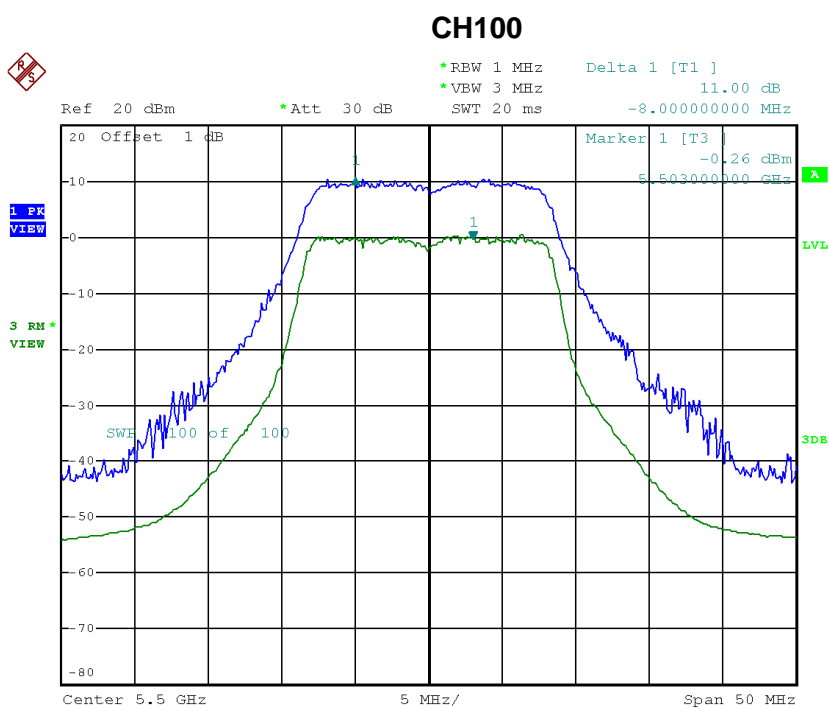


Date: 14.JAN.2015 21:52:53

CH116

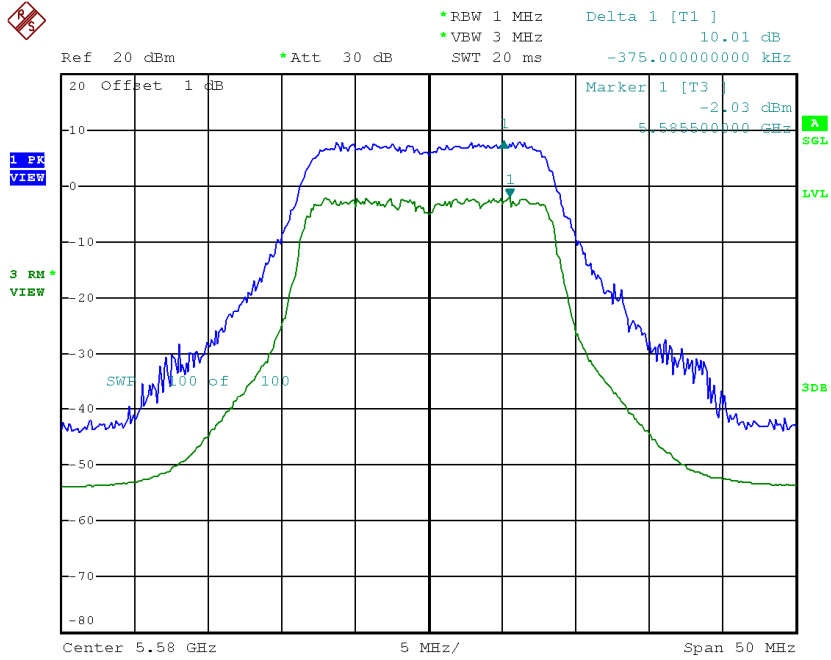


Date: 14.JAN.2015 21:58:43

CH140

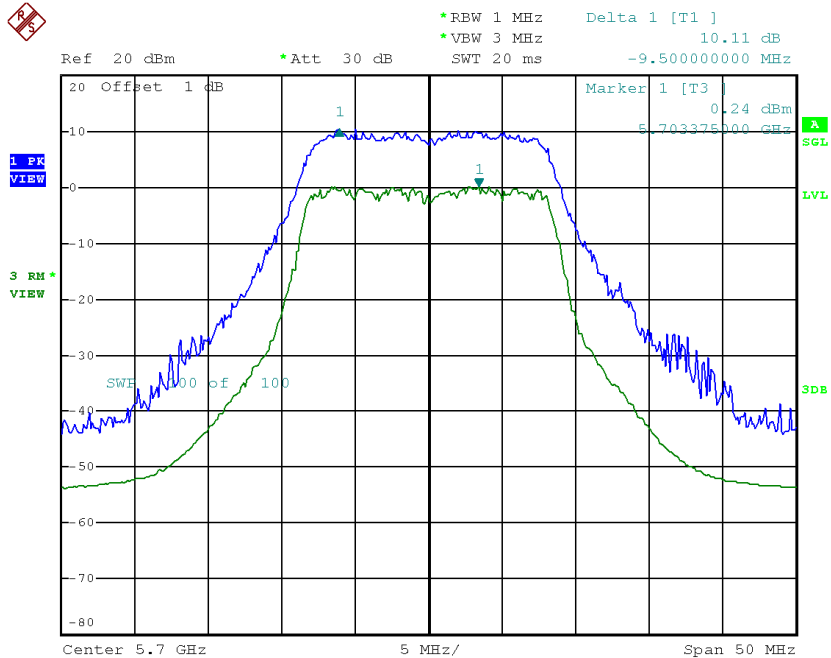


Date: 14.JAN.2015 22:04:47

CH116

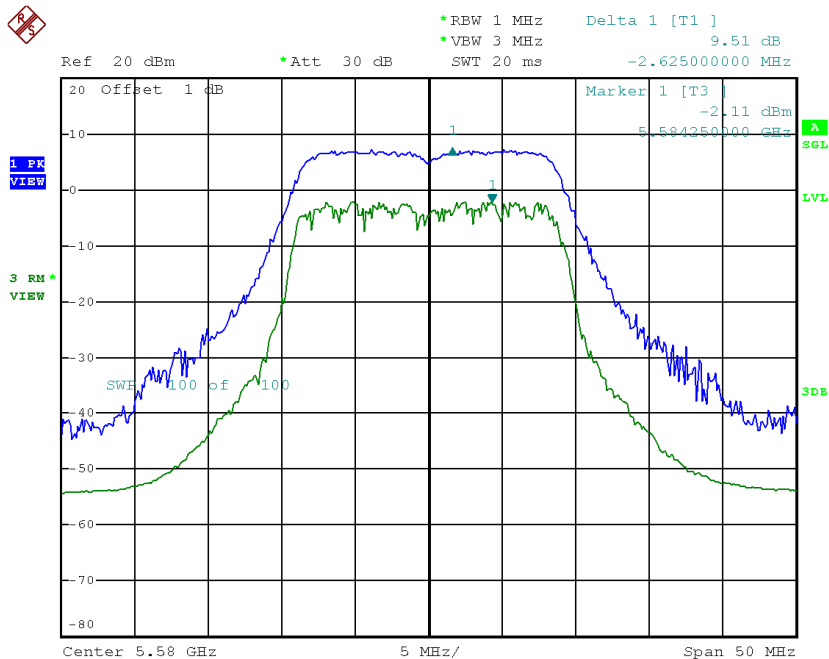

Date: 14.JAN.2015 22:48:01


CH140

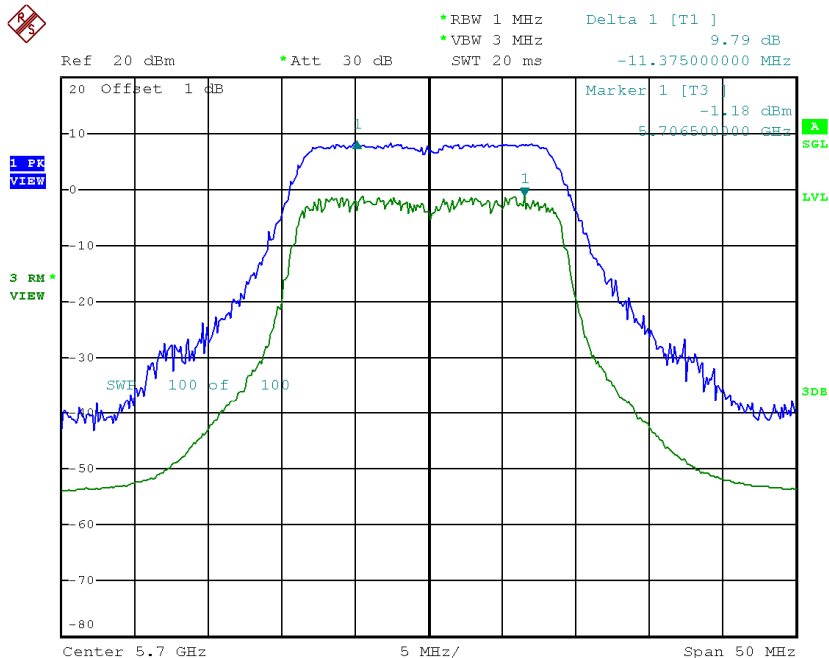

Date: 14.JAN.2015 22:50:54


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 5

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH100	5500	10.45	13
CH116	5580	10.60	13
CH140	5700	10.46	13

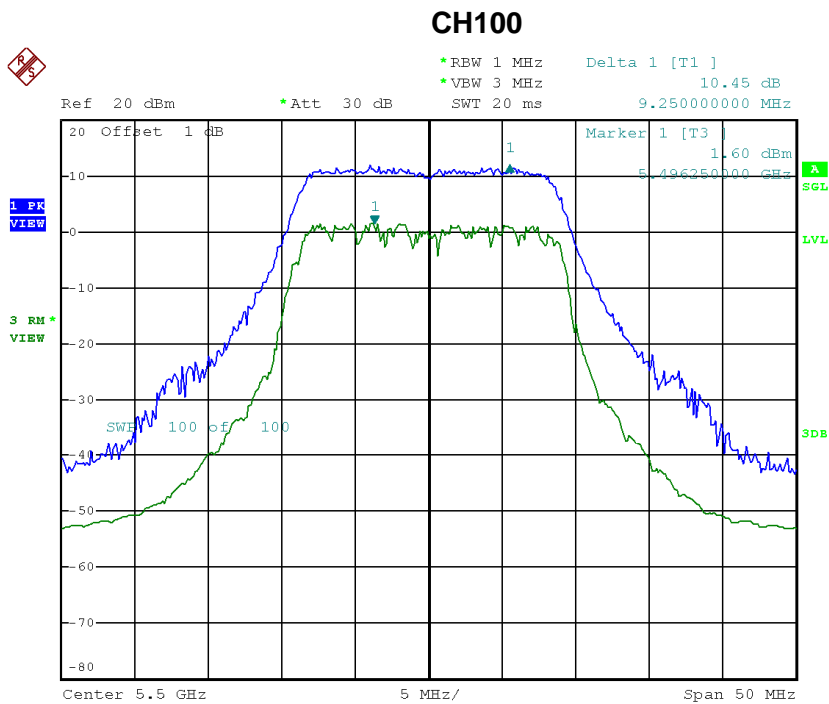


Date: 15.JAN.2015 14:13:40

CH116

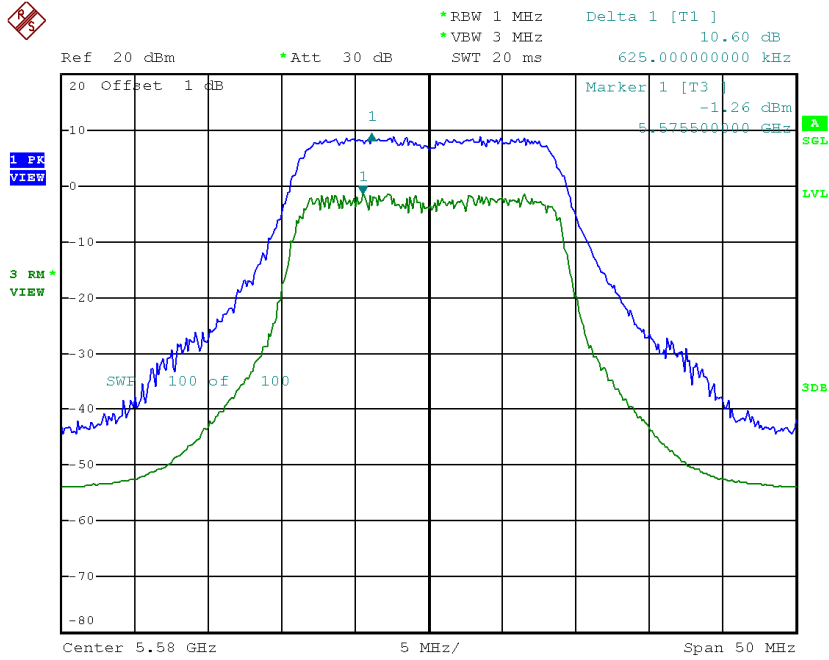

Date: 14.JAN.2015 22:48:55


CH140

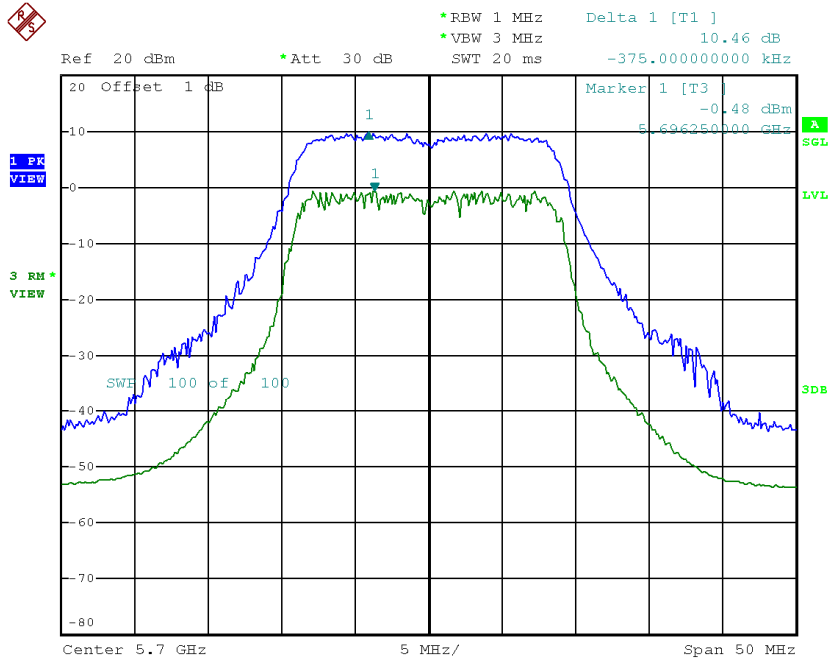

Date: 14.JAN.2015 22:51:57

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 6


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH100	5500	10.69	13
CH116	5580	10.63	13
CH140	5700	10.87	13

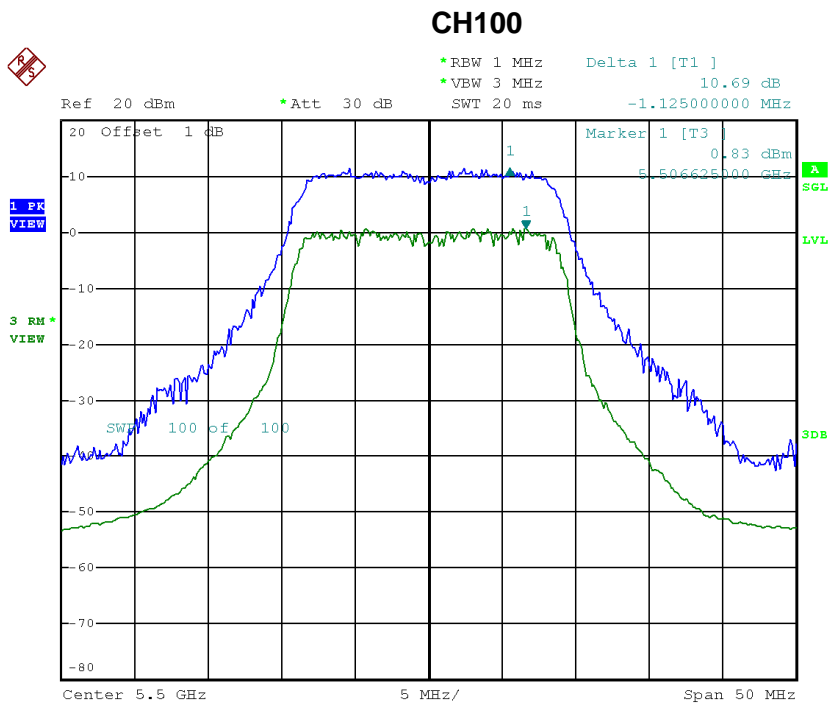

Date: 14.JAN.2015 22:46:08


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 4

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH102	5510	10.76	13
CH110	5550	10.43	13
CH134	5670	10.77	13

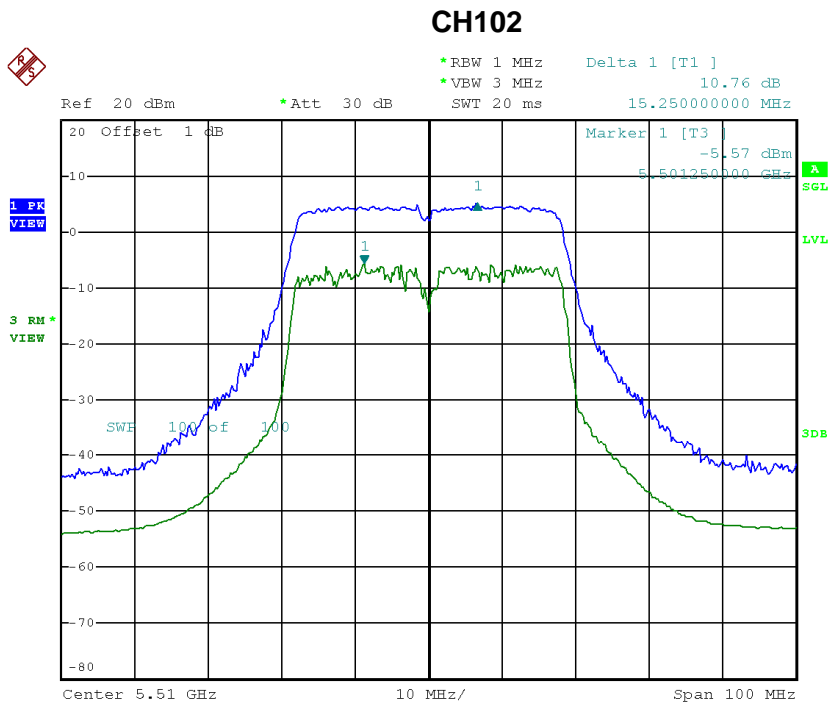


Date: 15.JAN.2015 15:26:56

CH110

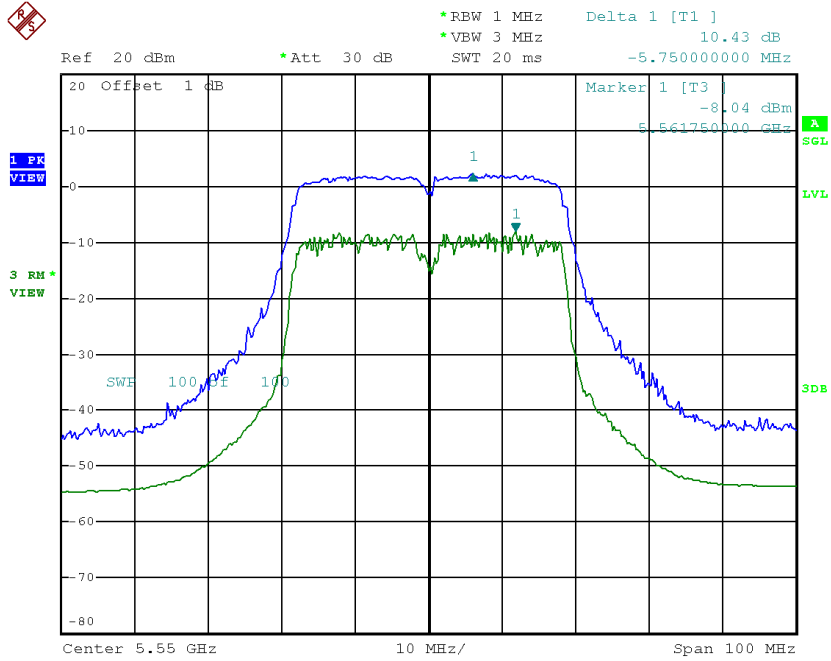

Date: 15.JAN.2015 15:28:10


CH134

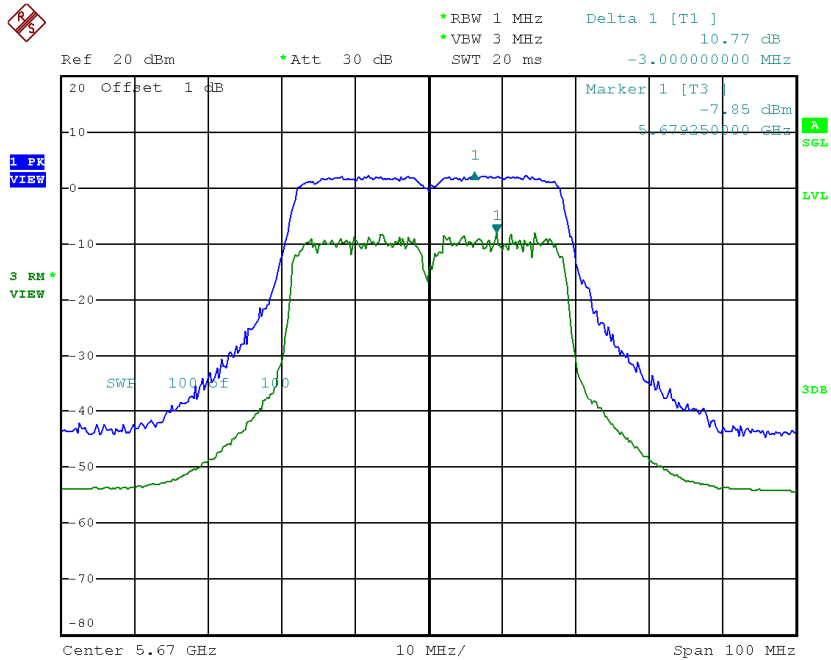

Date: 15.JAN.2015 15:36:41


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 5

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH102	5510	11.44	13
CH110	5550	11.27	13
CH134	5670	11.28	13

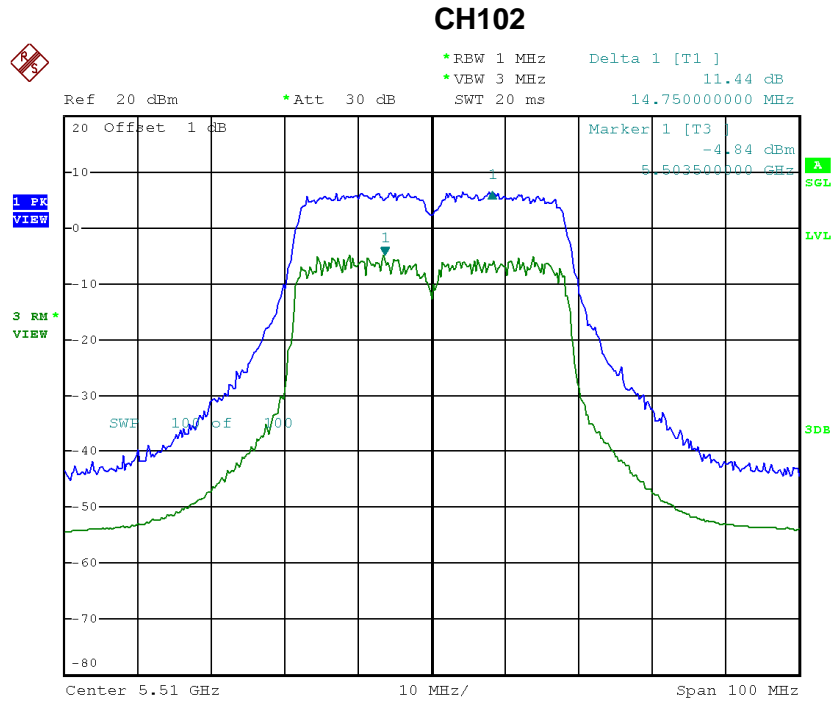


Date: 15.JAN.2015 15:25:38

CH110

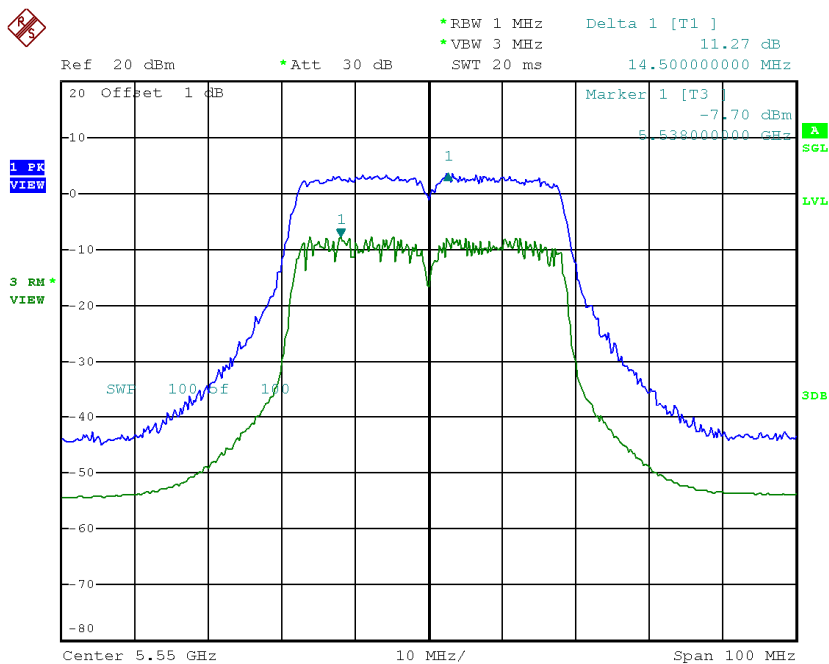

Date: 15.JAN.2015 15:28:55

CH134

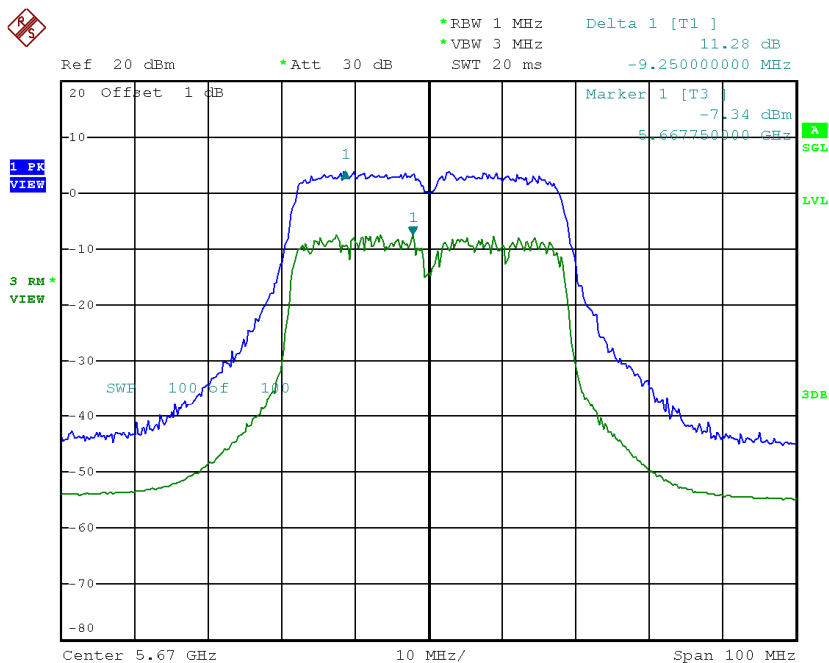


Date: 15.JAN.2015 15:35:56

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 6


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH102	5510	11.18	13
CH110	5550	11.22	13
CH134	5670	11.41	13

CH102

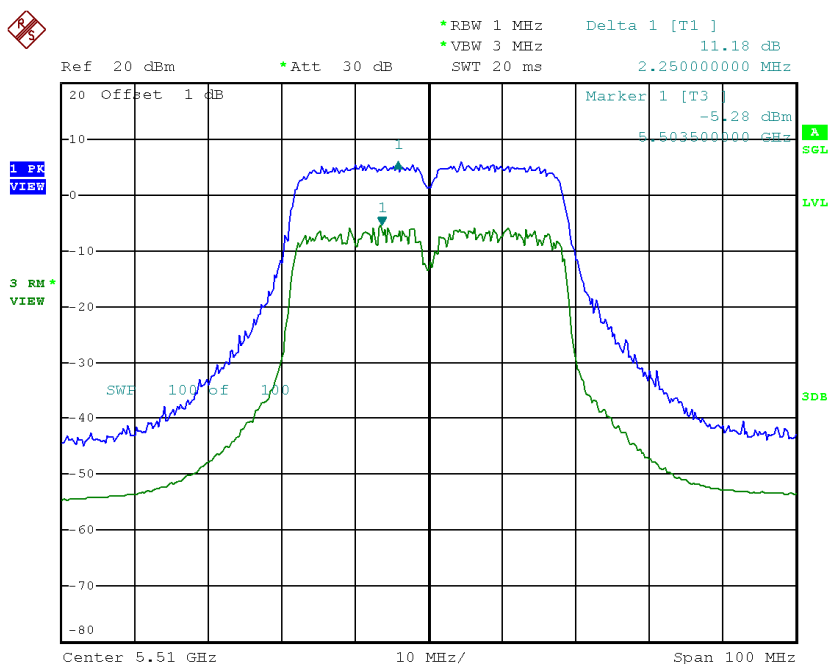


Date: 15.JAN.2015 15:24:49

CH110

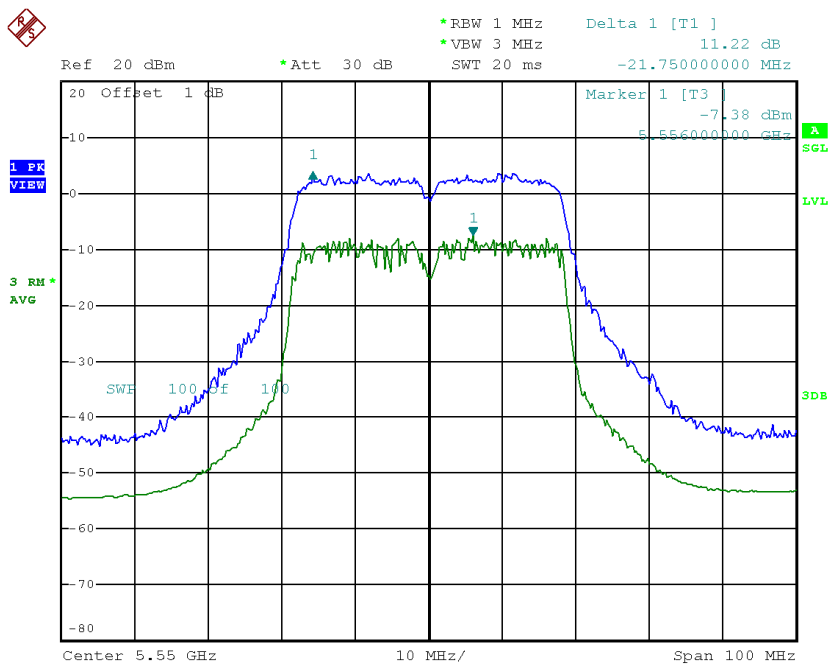

Date: 15.JAN.2015 15:32:31


CH134

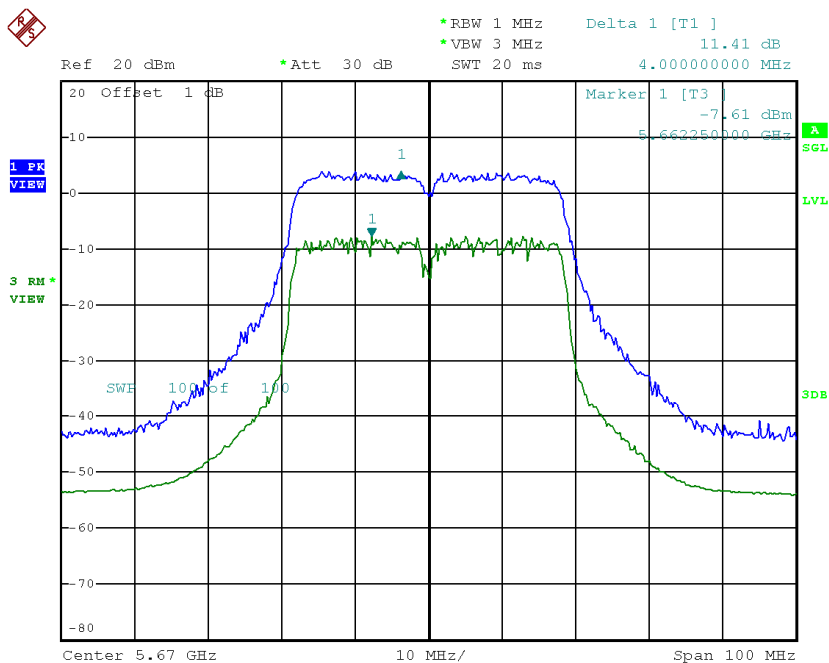

Date: 15.JAN.2015 15:33:38


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 4

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	9.92	13
CH60	5300	9.47	13
CH64	5320	9.72	13

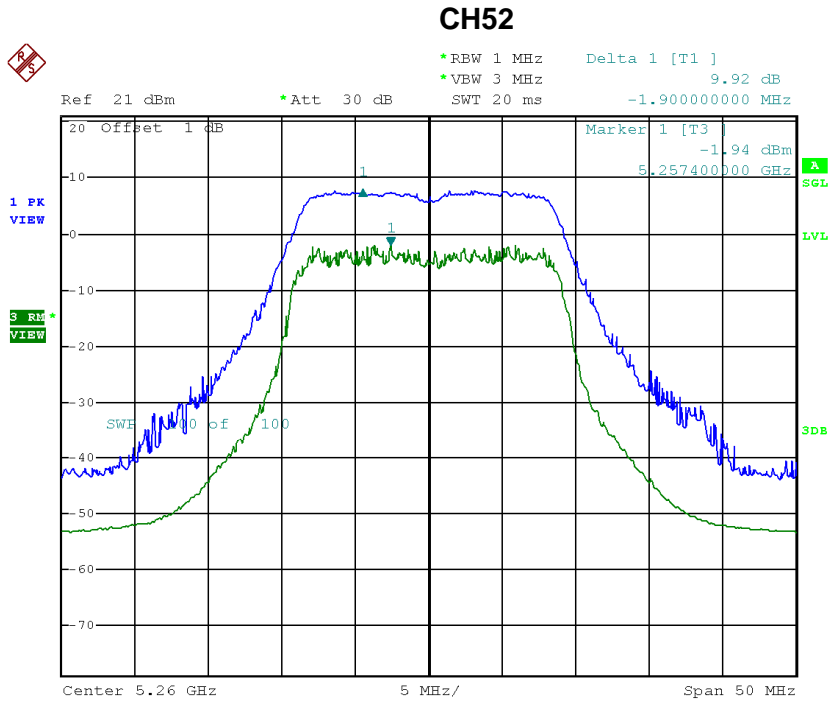


Date: 11.FEB.2015 20:47:50

CH60

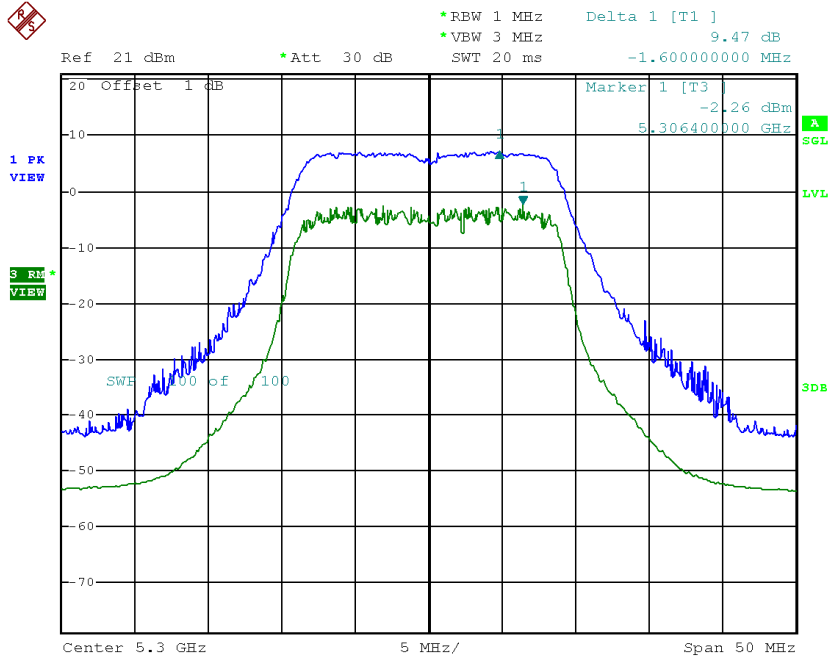


Date: 11.FEB.2015 20:55:04

CH64

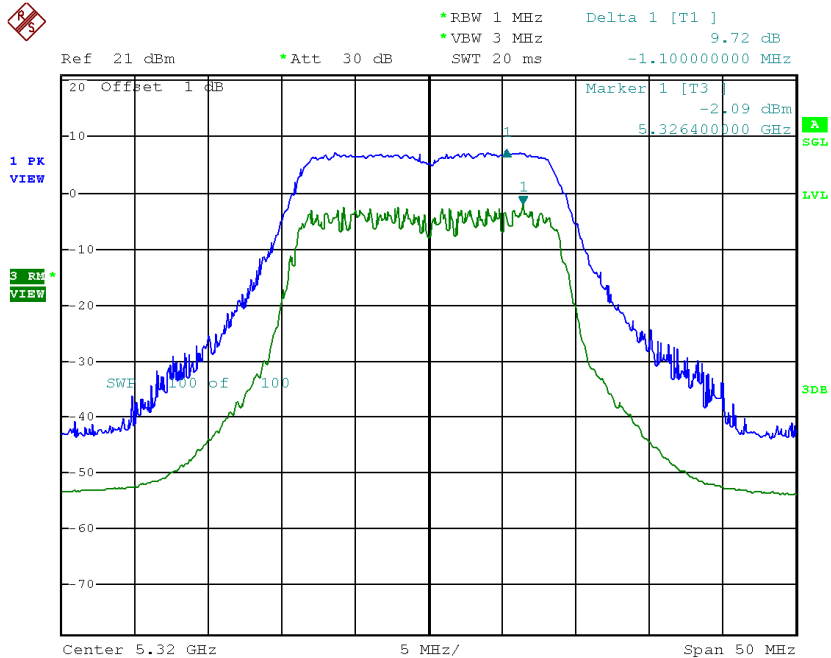


Date: 11.FEB.2015 20:55:59

CH60

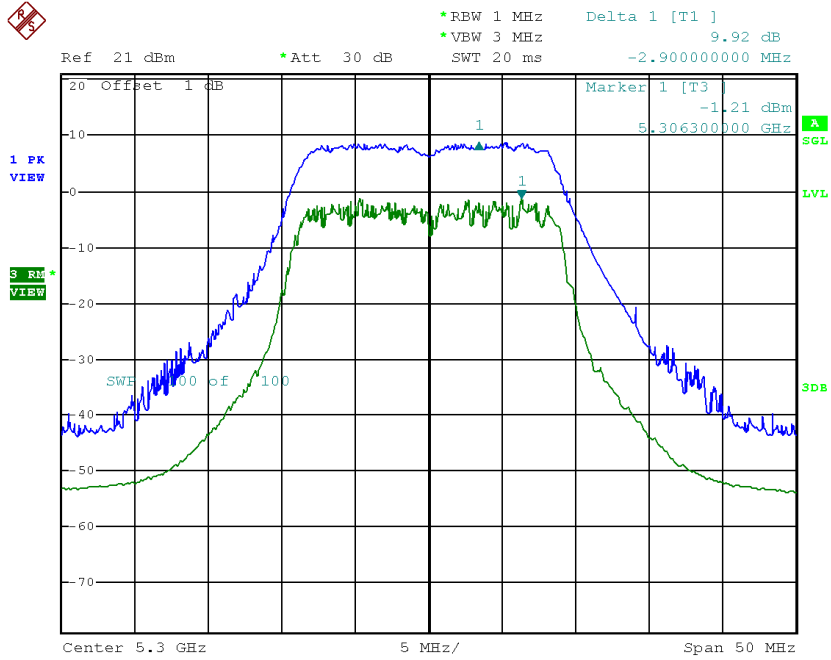

Date: 11.FEB.2015 20:54:12


CH64

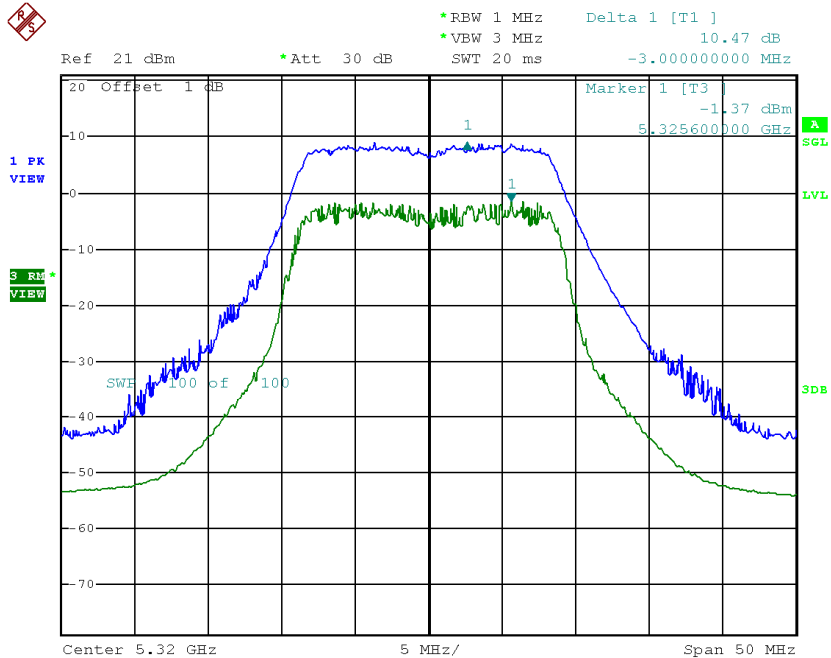

Date: 11.FEB.2015 20:57:30


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 6

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH52	5260	10.05	13
CH60	5300	10.85	13
CH64	5320	10.88	13

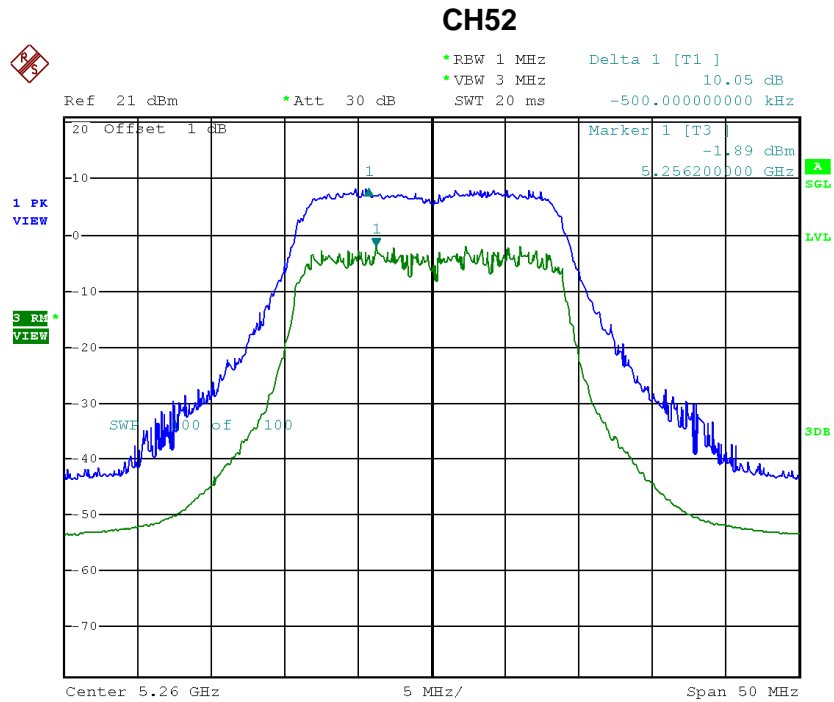


Date: 11.FEB.2015 20:49:37

CH60

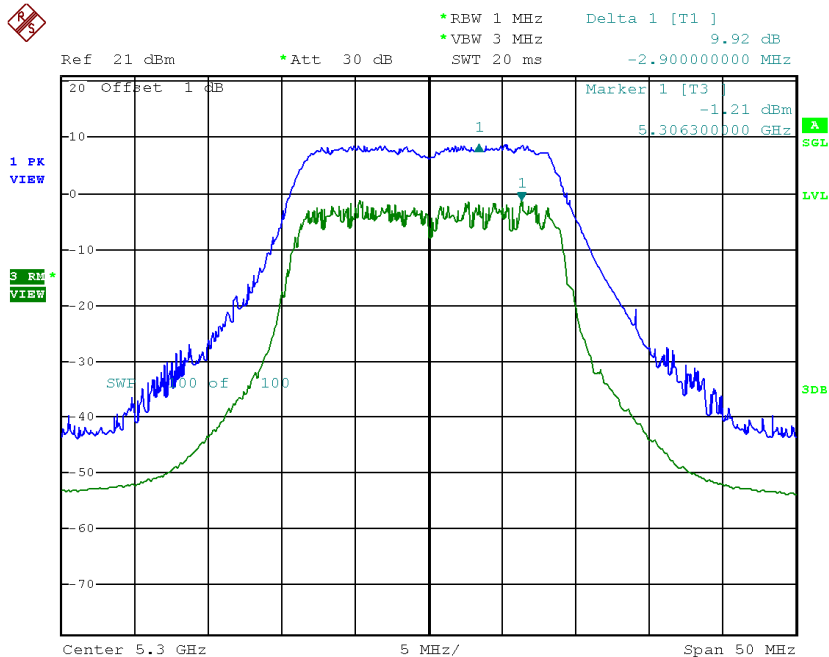

Date: 11.FEB.2015 20:54:12

CH64

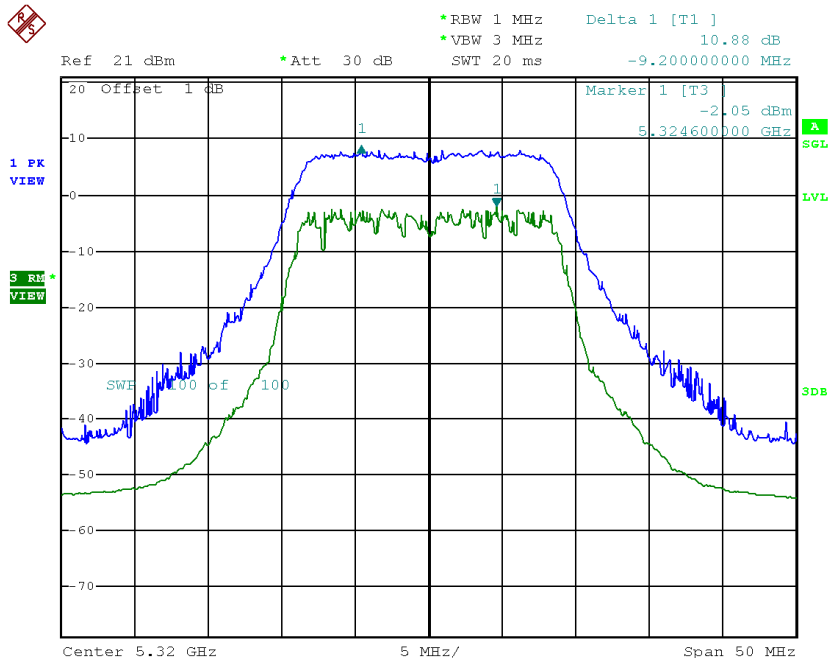


Date: 11.FEB.2015 20:58:08

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 4


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH54	5270	11.03	13
CH62	5310	10.36	13

CH54

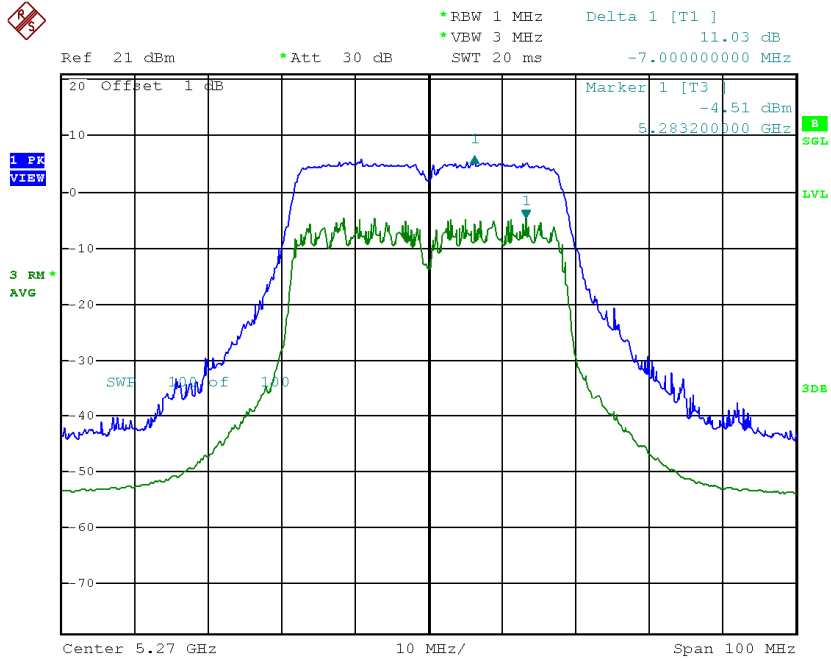

Date: 11.FEB.2015 21:47:03

CH62

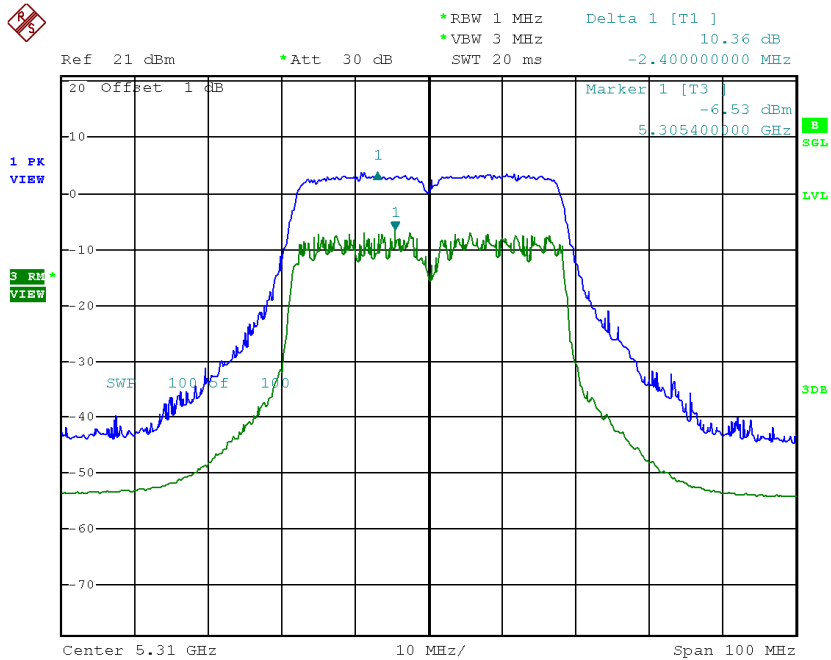


Date: 11.FEB.2015 21:48:27

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 5


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH54	5270	8.60	13
CH62	5310	11.74	13

CH54

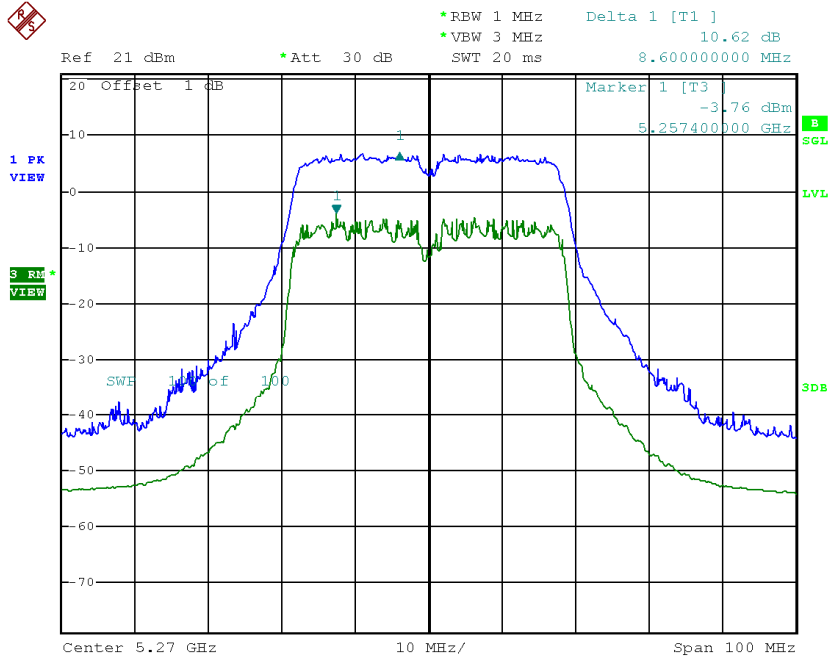

Date: 11.FEB.2015 21:45:18

CH62

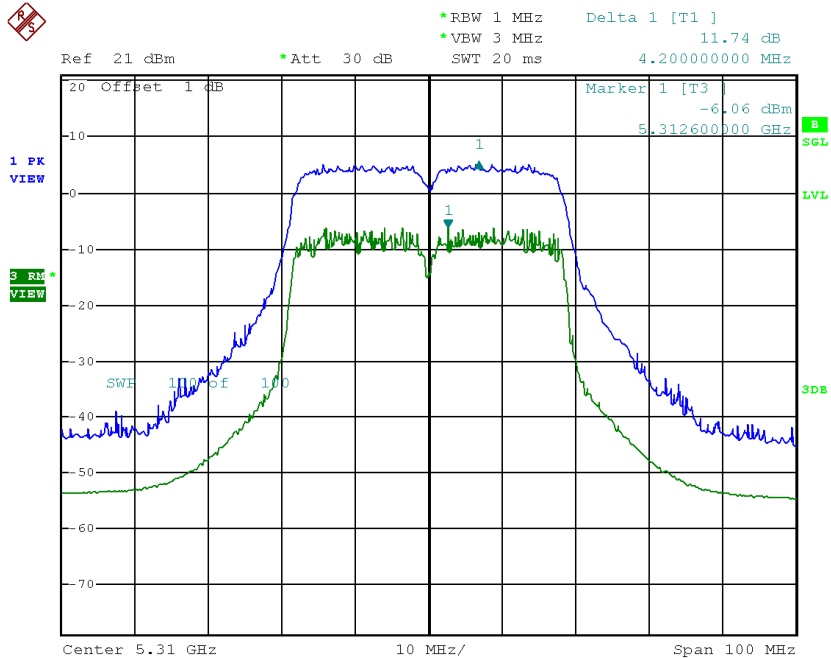


Date: 11.FEB.2015 21:49:31

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 6


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH54	5270	11.53	13
CH62	5310	12.08	13

CH54

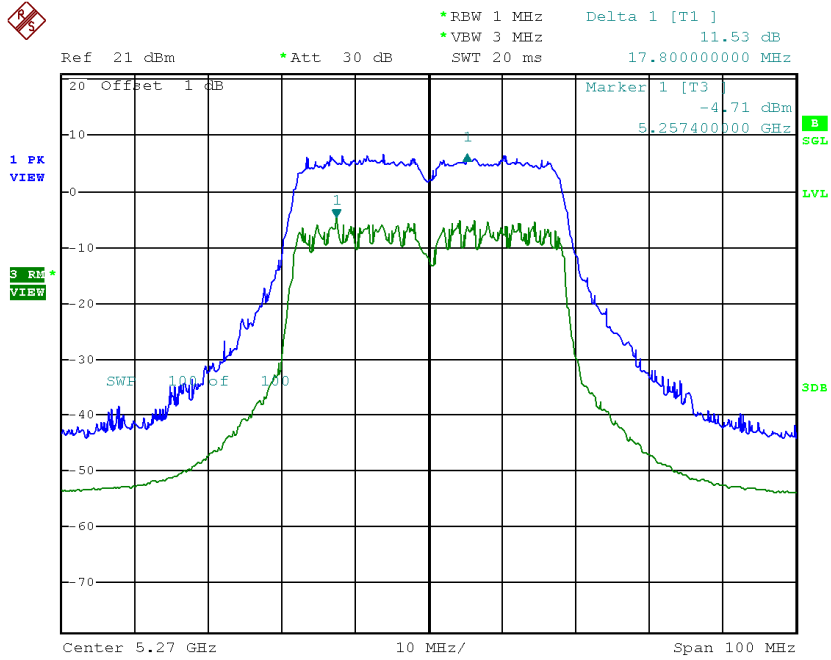

Date: 11.FEB.2015 21:44:41


CH62

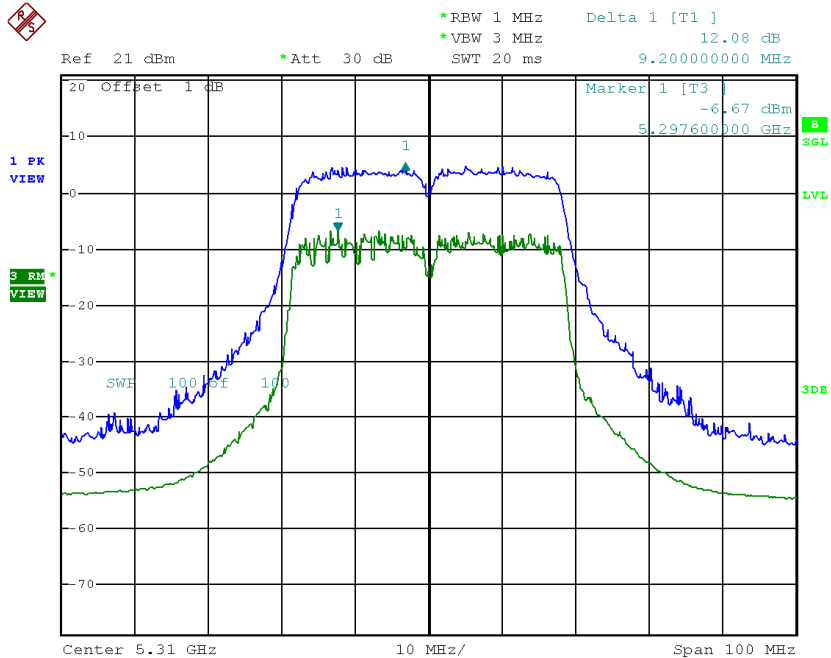

Date: 11.FEB.2015 21:51:07

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 4


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH58	5290	12.78	13

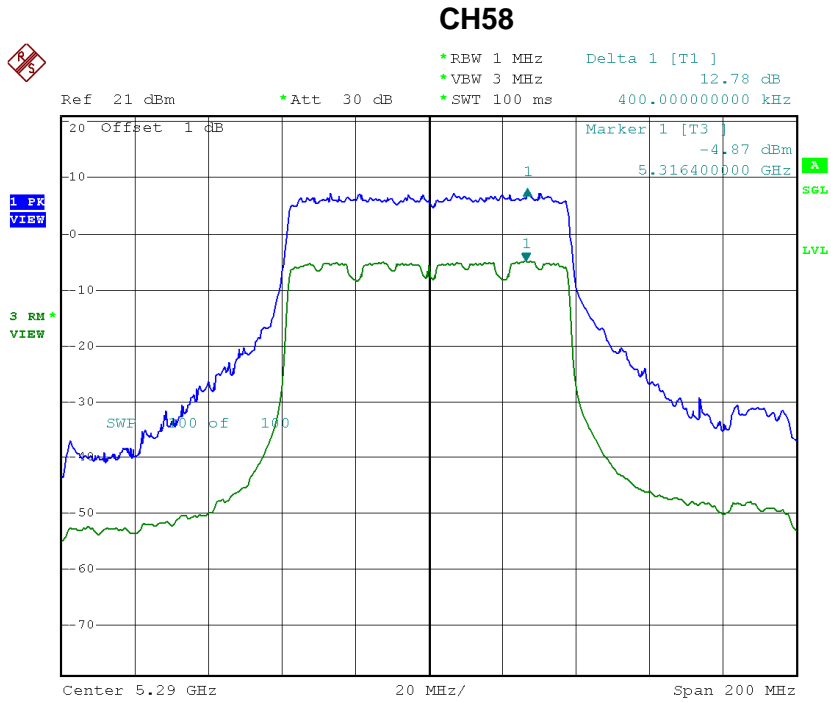

Date: 13.FEB.2015 14:39:44

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 5


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH58	5290	12.95	13

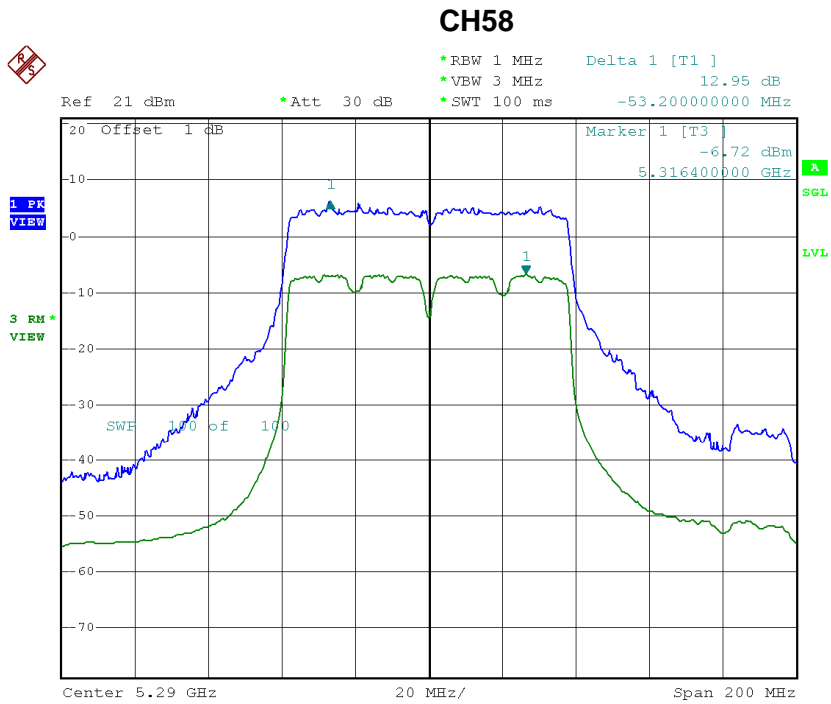

Date: 13.FEB.2015 14:38:15

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 6


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH58	5290	12.91	13

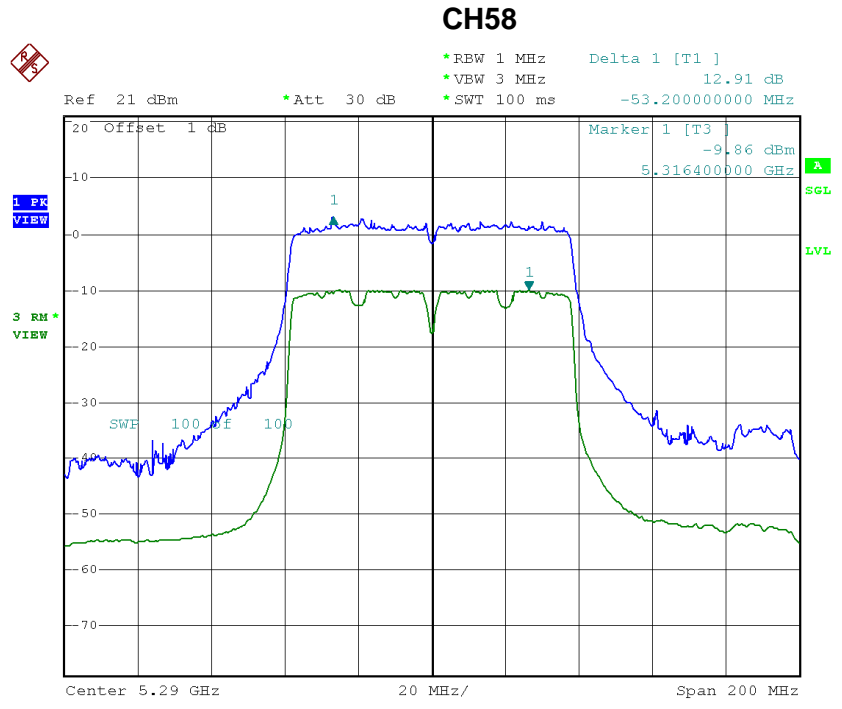

Date: 13.FEB.2015 14:42:53


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 4

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH100	5500	9.95	13
CH116	5580	9.68	13
CH140	5700	9.81	13

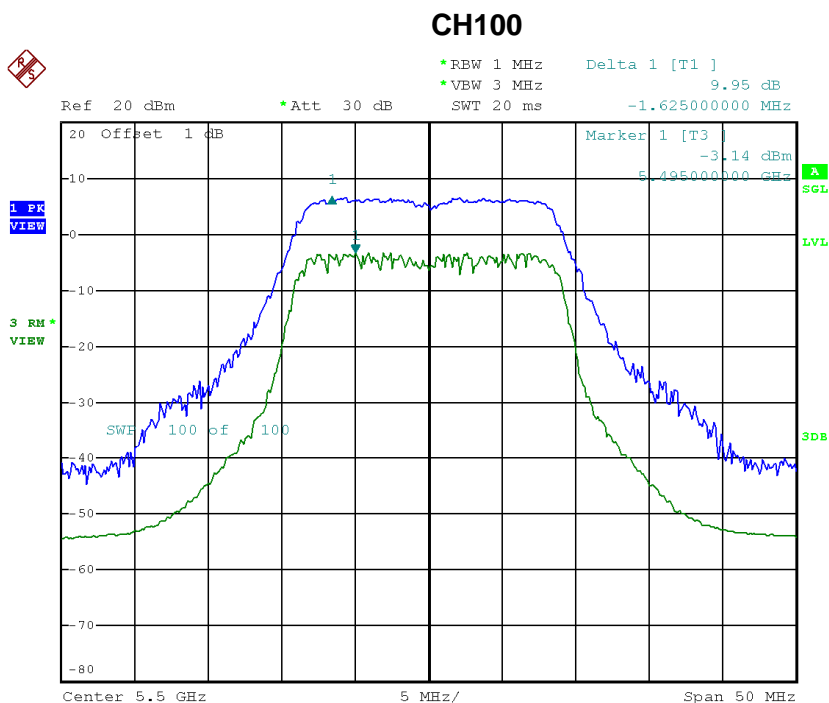


Date: 15.JAN.2015 14:23:22

CH116

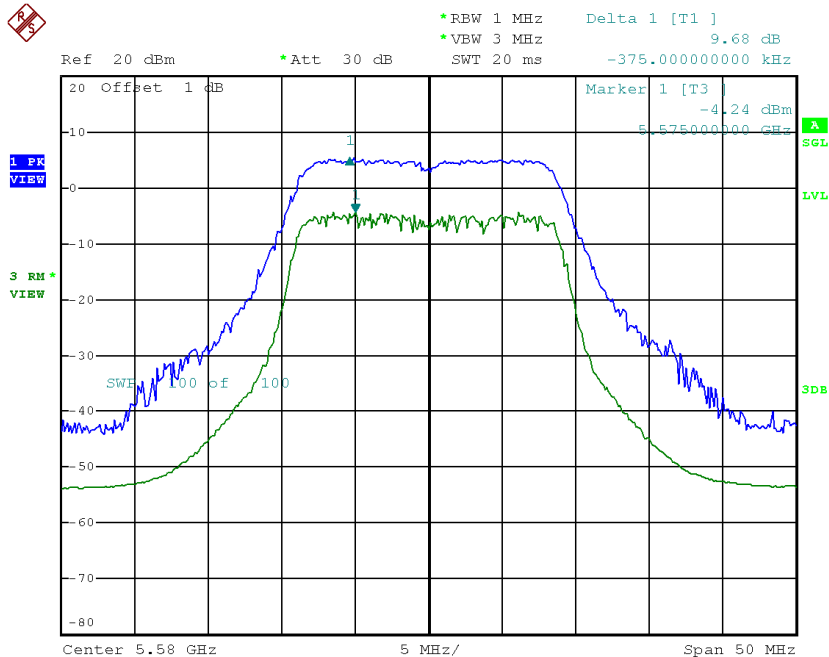

Date: 15.JAN.2015 14:26:21


CH140

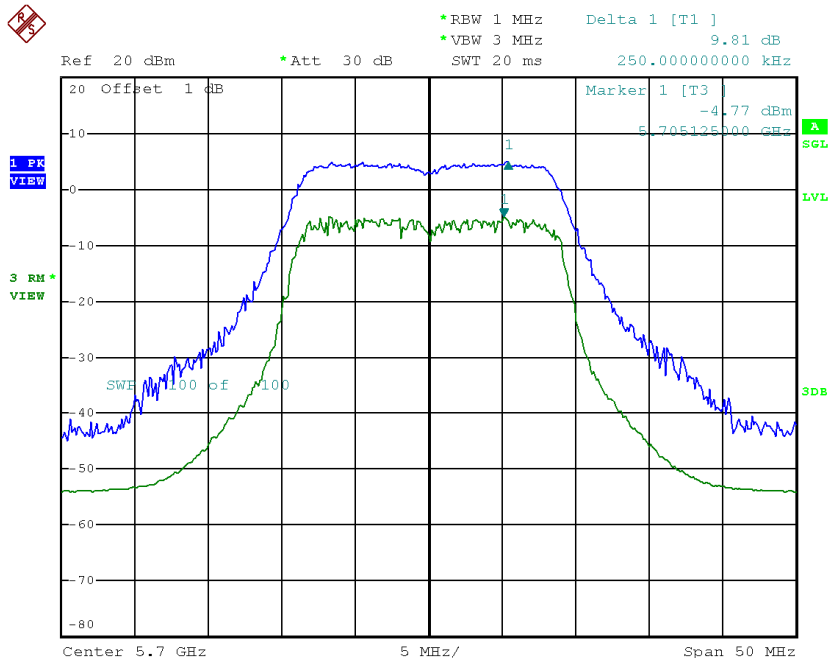

Date: 15.JAN.2015 14:29:39


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 5

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH100	5500	10.09	13
CH116	5580	10.42	13
CH140	5700	11.26	13

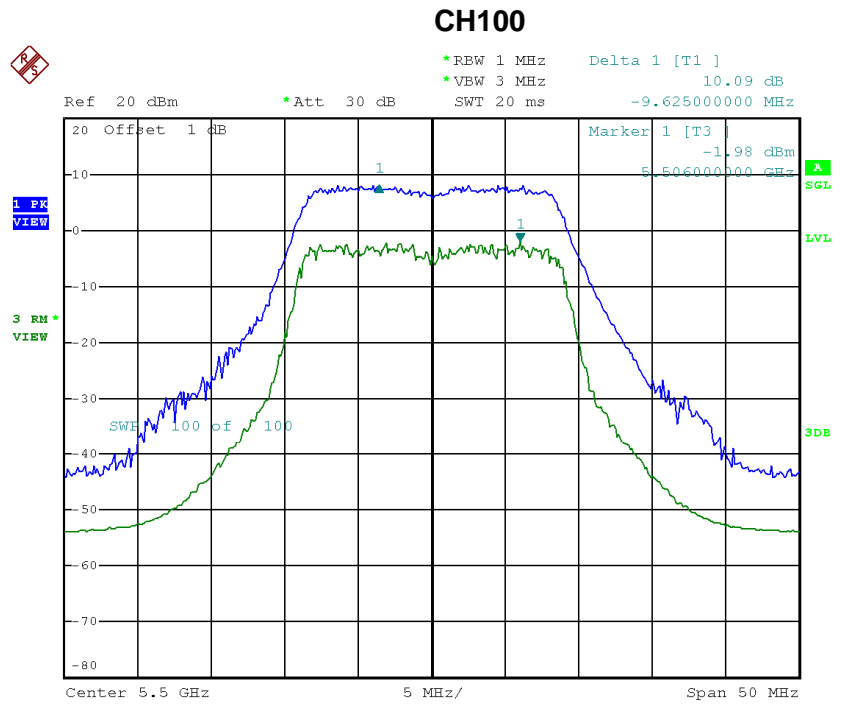


Date: 15.JAN.2015 14:24:15

CH116

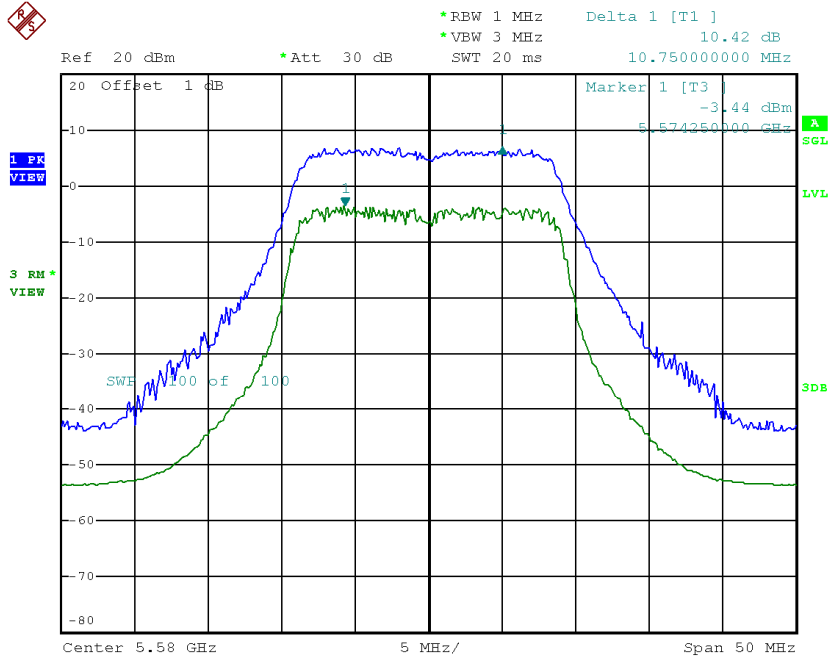


Date: 15.JAN.2015 14:27:16

CH140

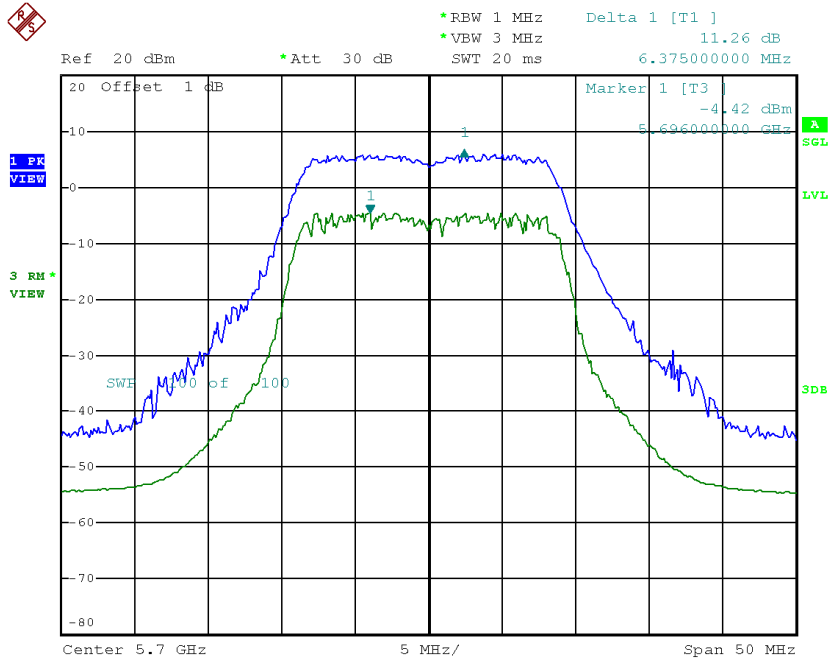


Date: 15.JAN.2015 14:30:29

CH116

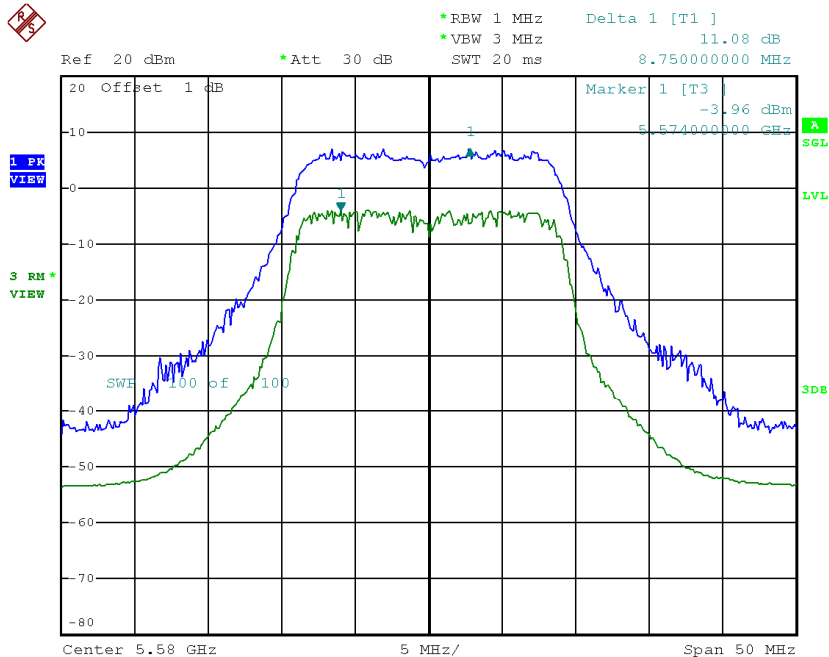


Date: 15.JAN.2015 14:28:19

CH140

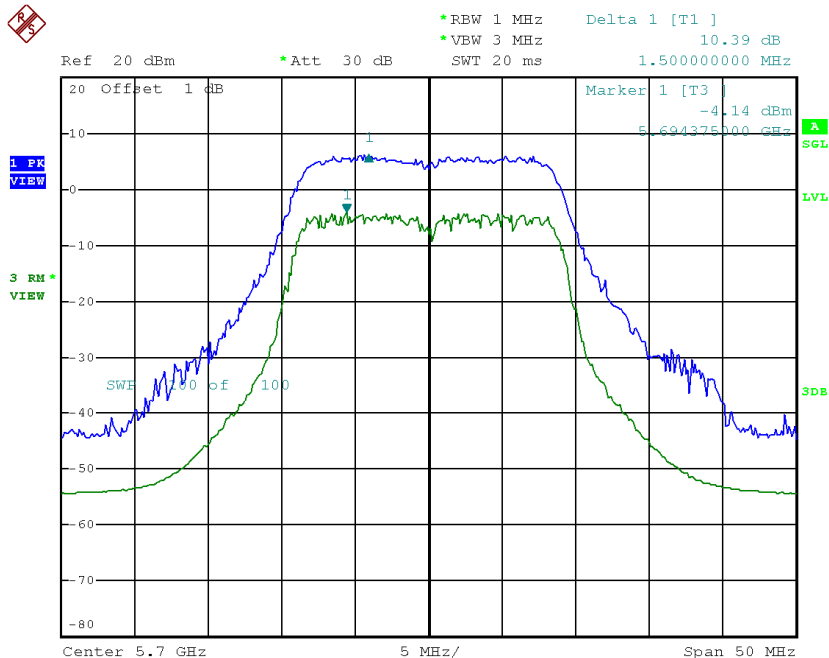


Date: 15.JAN.2015 14:31:15

CH110

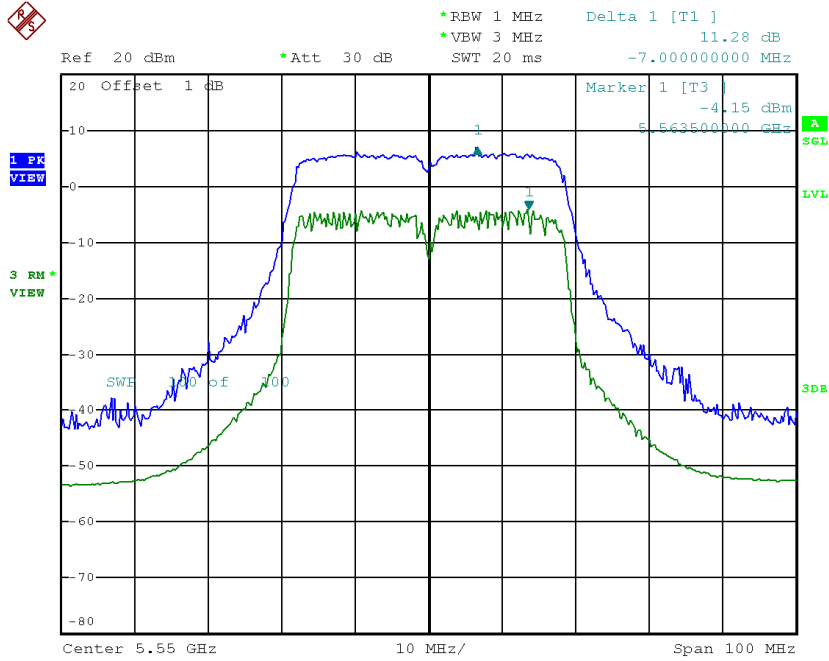


Date: 15.JAN.2015 14:52:25

CH134

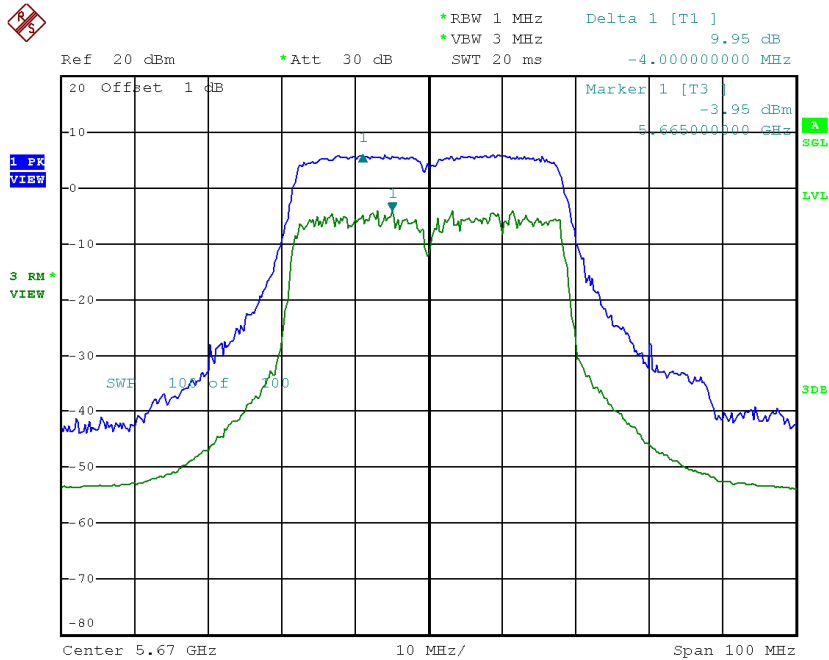


Date: 15.JAN.2015 15:17:50

CH110

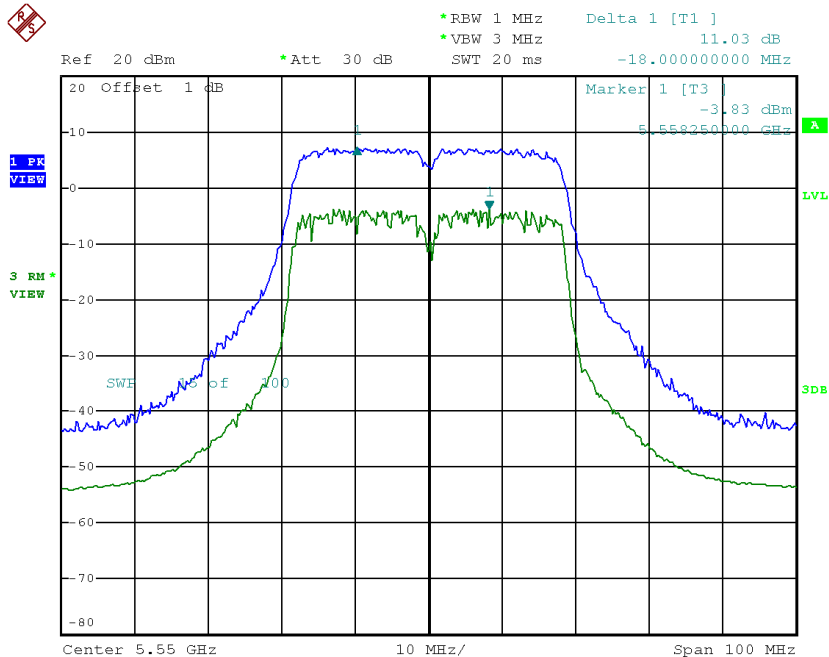


Date: 15.JAN.2015 14:54:23

CH134

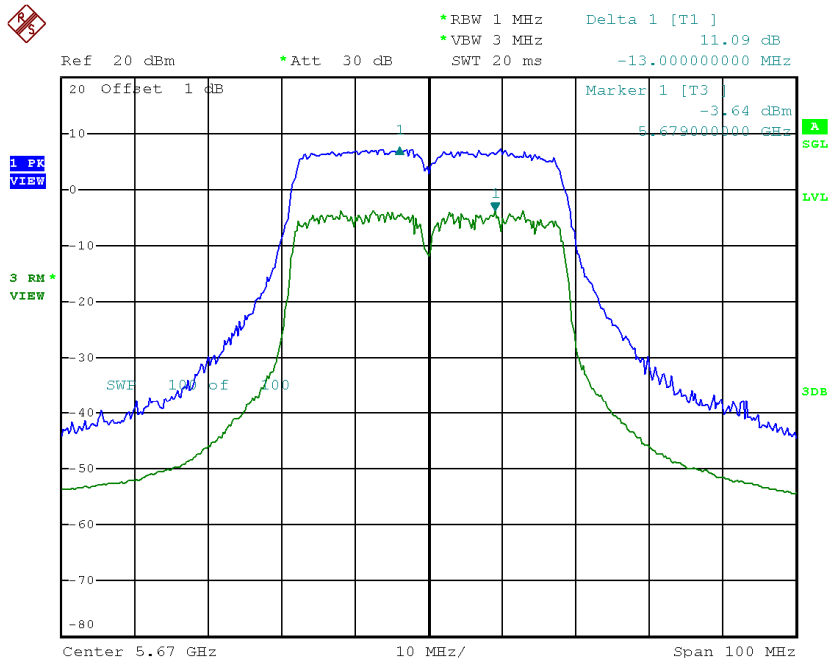


Date: 15.JAN.2015 15:22:10

CH110

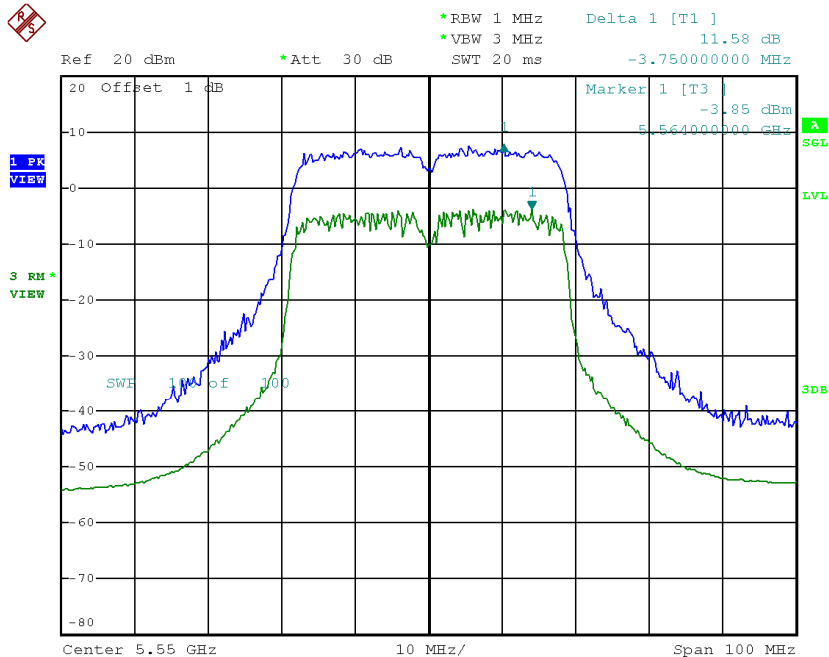

Date: 15.JAN.2015 15:16:18


CH134

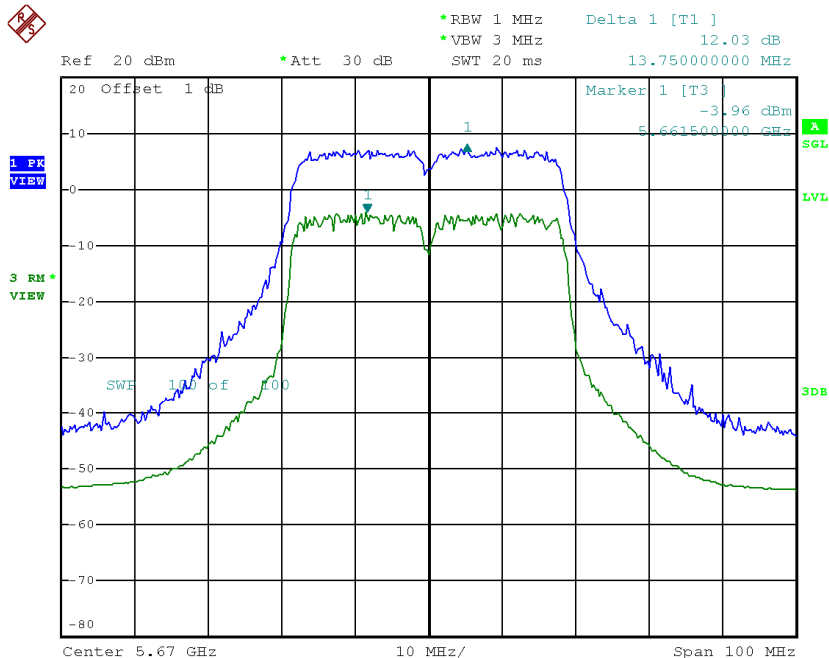

Date: 15.JAN.2015 15:22:57

Test Mode: UNII-2C/TX AC80 Mode_CH106 _ANT 4


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH106	5530	12.40	13

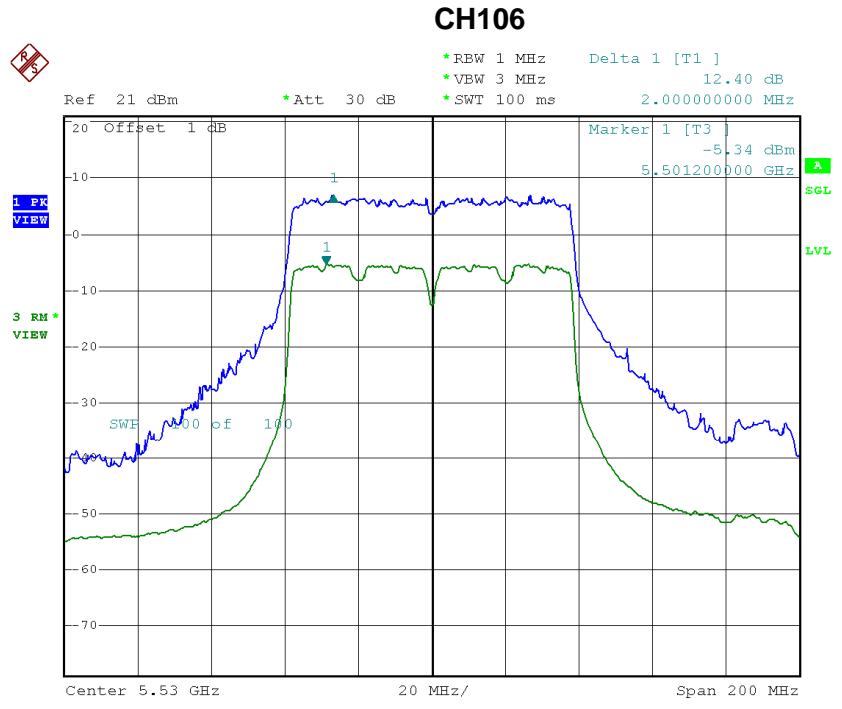

Date: 13.FEB.2015 14:52:18

Test Mode: UNII-2C/TX AC80 Mode_CH106_ANT 5


Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH106	5530	12.55	13

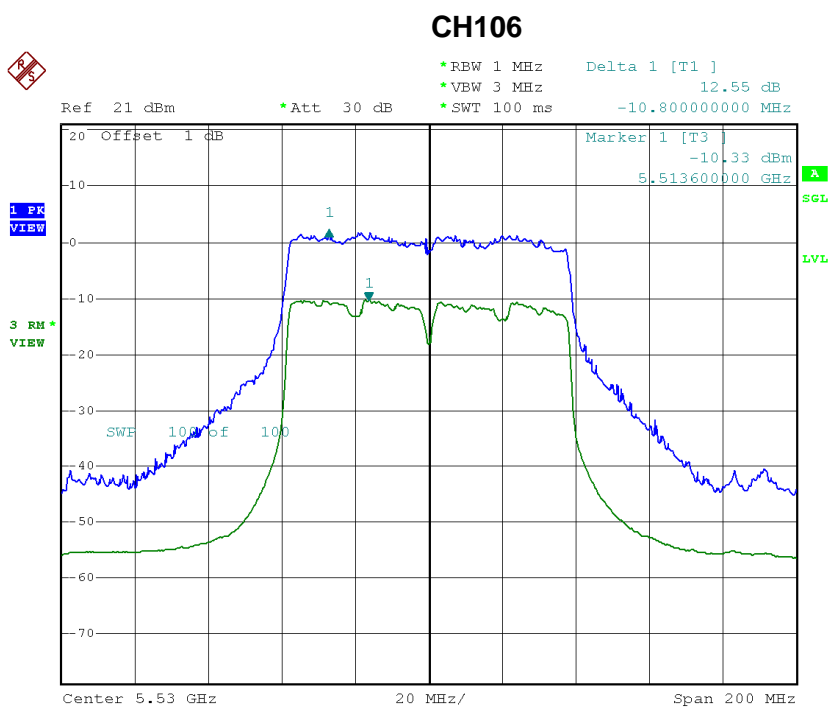

Date: 13.FEB.2015 14:50:55

Test Mode: UNII-2C/TX AC80 Mode_CH106 _ANT 6

Test Channel	Frequency (MHz)	Peak Excursion (dB)	LIMIT (dB)
CH106	5530	12.64	13

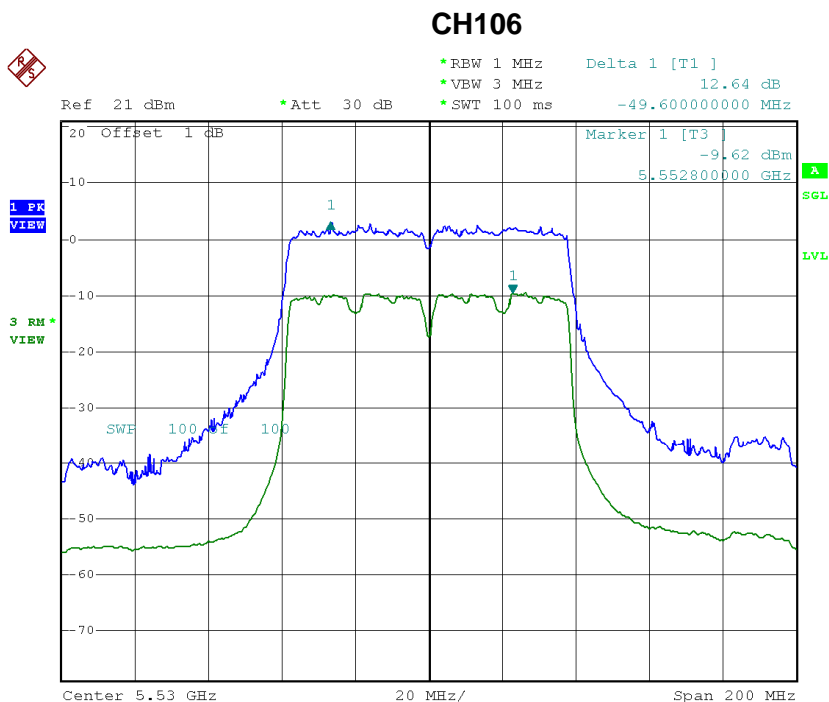

Date: 13.FEB.2015 14:49:08