

## FCC Test Report

**Report No.:** RF190709C33

**FCC ID:** E2K-T03H003

**Test Model:** T03H

**Series Model:** T03H003 (refer to item 3.1 for more details)

**Received Date:** Jul. 09, 2019

**Test Date:** Jul. 23 ~ Aug. 06, 2019

**Issued Date:** Aug. 07, 2019

**Applicant:** Dell Inc.

**Address:** One Dell Way, Round Rock, Texas 78682, USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Data.....	9
3.3 Description of Support Units.....	11
3.3.1 Configuration of System under Test.....	11
3.4 General Description of Applied Standards.....	11
<b>4 Test Types and Results</b> .....	<b>12</b>
4.1 Radiated Emission Measurement.....	12
4.1.1 Limits of Radiated Emission Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard.....	15
4.1.5 Test Set Up.....	15
4.1.6 EUT Operating Conditions.....	15
4.1.7 Test Results.....	16
4.2 Conducted Emission Measurement.....	128
4.2.1 Limits of Conducted Emission Measurement.....	128
4.2.2 Test Instruments.....	128
4.2.3 Test Procedures.....	129
4.2.4 Deviation from Test Standard.....	129
4.2.5 Test Setup.....	129
4.2.6 EUT Operating Conditions.....	129
4.2.7 Test Results.....	130
4.3 Frequency Stability.....	218
4.3.1 Limits of Frequency Stability Measurement.....	218
4.3.2 Test Setup.....	218
4.3.3 Test Instruments.....	218
4.3.4 Test Procedure.....	218
4.3.5 Deviation from Test Standard.....	219
4.3.6 EUT Operating Conditions.....	219
4.3.7 Test Result.....	219
4.4 20dB Bandwidth.....	223
4.4.1 Limits of 20dB Bandwidth Measurement.....	223
4.4.2 Test Setup.....	223
4.4.3 Test Instruments.....	223
4.4.4 Test Procedures.....	223
4.4.5 Deviation from Test Standard.....	223
4.4.6 EUT Operating Conditions.....	223
4.4.7 Test Results.....	224
<b>5 Pictures of Test Arrangements</b> .....	<b>228</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>229</b>

### Release Control Record

Issue No.	Description	Date Issued
RF190709C33	Original release	Aug. 07, 2019

## 1 Certificate of Conformity

**Product:** Tablet PC

**Brand:** DELL

**Test Model:** T03H

**Series Model:** T03H003 (refer to item 3.1 for more details)

**Sample Status:** Engineering sample

**Applicant:** Dell Inc.

**Test Date:** Jul. 23 ~ Aug. 06, 2019

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.225)  
47 CFR FCC Part 15, Subpart C (Section 15.215)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Aug. 07, 2019  
Polly Chien / Specialist

**Approved by :**  , **Date:** Aug. 07, 2019  
Bruce Chen / Senior Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)			
FCC Clause	Test Item	Result	Remarks
15.207	Conducted emission test	Pass	Meet the requirement of limit. Minimum passing margin is -0.14dB at 13.56000MHz
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	Pass	Meet the requirement of limit. Minimum passing margin is -62.5dB at 13.56MHz.
15.225 (b)	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	Pass	Meet the requirement of limit.
15.225 (c)	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	Pass	Meet the requirement of limit.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	Pass	Meet the requirement of limit. Minimum passing margin is -0.7dB at 298.21MHz.
15.225 (e)	The frequency tolerance	Pass	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	Pass	Meet the requirement of limit.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Tablet PC
Brand	DELL
Test Model	T03H
Series Model	T03H003
Model Difference	For marketing purpose.
Sample Status	Engineering sample
Nominal Voltage	5Vdc / 9Vdc / 15Vdc / 19.5Vdc /20Vdc (adapter)
Modulation Type	ASK
Operating Frequency	13.56MHz
Data Rate	Type A: 106kbit/s Type B: 106kbit/s Type F: 424kbit/s Type V: 848kbit/s
Field Strength	Type A: 61.4dBuV/m (3m) Type B: 61.3dBuV/m (3m) Type F: 61.3dBuV/m (3m) Type V: 61.5dBuV/m (3m)
Antenna Type	Loop Antenna
Antenna Connector	NA
Accessory Device	Adapter (optional)
Cable Supplied	NA

Note:

- The EUT consumes power from the following adapters.

Adapter 1	
Brand	DELL
Model	LA90PM170
Input Power	100-240Vac, ~50-60Hz, 1.5A
Output Power	5V / 9V / 15V / 20V / 3A / 3A / 3A / 4.5A
Power cord	1.8m cable without core attached on adapter

Adapter 2	
Brand	Dell
Model	HA65NM170
Input Power	100-240Vac, ~50-60Hz, 1.7A
Output Power	5V / 9V / 15V / 20V / 3A / 3A / 3A /3.25A
Power cord	1.8m cable without core attached on adapter

Adapter 3	
Brand	DELL
Model	HA45NM170
Input Power	100-240Vac, ~50-60Hz, 1.3A
Output Power	5V / 9V / 15V / 20V / 3A / 3A / 3A / 2.25A
Power cord	1.8m cable without core attached on adapter

Adapter 4	
Brand	DELL
Model	LA45NM131
Input Power	100-240Vac, ~50/60Hz, 1.3A
Output Power	19.5V / 2.31A
Power cord	1.98m cable without core attached on adapter

Adapter 5	
Brand	DELL
Model	LA45NM171
Input Power	100-240Vac, ~50/60Hz, 1.3A
Output Power	5V/9V/15V/20V/3A/3A/3A/2.25A
Power cord	1.78m cable without core attached on adapter

Adapter 6	
Brand	DELL
Model	LA65NM170
Input Power	100-240Vac, ~50/60Hz, 1.7A
Output Power	5V/9V/15V/20V/3A/3A/3A/2.25A
Power cord	1.77m cable without core attached on adapter

Adapter 7	
Brand	Dell
Model	LA90PM111
Input Power	100-240Vac, ~50-60Hz, 1.5A
Output Power	19.5Vdc / 4.62A
Power cord	1.75m cable with 1 core attached on adapter

Adapter 8	
Brand	DELL
Model	DA90PM170
Input Power	100-240Vac, ~50-60Hz, 1.5A
Output Power	20V / 15V / 9V / 5V / 4.5A / 3 / 3 / 3A
Power cord	1.8m cable without core attached on adapter

Adapter 9	
Brand	DELL
Model	DA65NM170
Input Power	100-240Vac, ~50-60Hz, 1.7A
Output Power	20V / 15V / 9V / 5V / 3.25 / 3 / 3 / 3A
Power cord	1.8m cable without core attached on adapter

Adapter 10	
Brand	DELL
Model	DA45NM170
Input Power	100-240Vac, ~50-60Hz, 1.3A
Output Power	20V / 15V / 9V / 5V / 2.25 / 3 / 3 / 3A
Power cord	1.8m cable without core attached on adapter

Adapter 11	
Brand	DELL
Model	DA45NM131
Input Power	100-240Vac, ~50-60Hz, 1.3A
Output Power	19.5V / 2.31A
Power cord	2m cable without core attached on adapter

### 3.2 Description of Test Modes

1 channel is provided to this EUT

Channel	Freq. (MHz)
1	13.56



### 3.2.1 Test Mode Applicability and Tested Channel Data

EUT Configure Mode	Applicable to				Adapter	Description
	RE	PLC	FS	EB		
A1	√	√	√	√	1	Tag Type A
A2	√	√	√	√		Tag Type B
A3	√	√	√	√		Tag Type F
A4	√	√	√	√		Tag Type V
B1	√	√	-	-	2	Tag Type A
B2	√	√	-	-		Tag Type B
B3	√	√	-	-		Tag Type F
B4	√	√	-	-		Tag Type V
C1	√	√	-	-	3	Tag Type A
C2	√	√	-	-		Tag Type B
C3	√	√	-	-		Tag Type F
C4	√	√	-	-		Tag Type V
D1	√	√	-	-	4	Tag Type A
D2	√	√	-	-		Tag Type B
D3	√	√	-	-		Tag Type F
D4	√	√	-	-		Tag Type V
E1	√	√	-	-	5	Tag Type A
E2	√	√	-	-		Tag Type B
E3	√	√	-	-		Tag Type F
E4	√	√	-	-		Tag Type V
F1	√	√	-	-	6	Tag Type A
F2	√	√	-	-		Tag Type B
F3	√	√	-	-		Tag Type F
F4	√	√	-	-		Tag Type V
G1	√	√	-	-	7	Tag Type A
G2	√	√	-	-		Tag Type B
G3	√	√	-	-		Tag Type F
G4	√	√	-	-		Tag Type V
H1	√	√	-	-	8	Tag Type A
H2	√	√	-	-		Tag Type B
H3	√	√	-	-		Tag Type F
H4	√	√	-	-		Tag Type V
I1	√	√	-	-	9	Tag Type A
I2	√	√	-	-		Tag Type B
I3	√	√	-	-		Tag Type F
I4	√	√	-	-		Tag Type V
J1	√	√	-	-	10	Tag Type A
J2	√	√	-	-		Tag Type B
J3	√	√	-	-		Tag Type F
J4	√	√	-	-		Tag Type V
K1	√	√	-	-	11	Tag Type A
K2	√	√	-	-		Tag Type B
K3	√	√	-	-		Tag Type F
K4	√	√	-	-		Tag Type V

Where RE: Radiated Emission  
FS: Frequency Stability

PLC: Power Line Conducted Emission  
EB: 20dB Bandwidth measurement

Note: 1. The antenna had been pre-tested on the positioned of each 3 axis. The worst cases were found when positioned on Z-plane.  
2. "-": Means no effect.

**Radiated Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

**Field Strength & Radiated Emission Below 30MHz tests**

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, A3, A4	1	1	ASK

**Radiated Emission Below 1000MHz test:**

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, A3, A4, B1, B2, B3, B4 C1, C2, C3, C4, D1, D2, D3, D4 E1, E2, E3, E4, F1, F2, F3, F4 G1, G2, G3, G4, H1, H2, H3, H4 I1, I2, I3, I4, J1, J2, J3, J4 K1, K2, K3, K4	1	1	ASK

**Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, A3, A4, B1, B2, B3, B4 C1, C2, C3, C4, D1, D2, D3, D4 E1, E2, E3, E4, F1, F2, F3, F4 G1, G2, G3, G4, H1, H2, H3, H4 I1, I2, I3, I4, J1, J2, J3, J4 K1, K2, K3, K4	1	1	ASK

**Frequency Stability:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, A3, A4	1	1	ASK

**20dB Bandwidth:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A1, A2, A3, A4	1	1	ASK


**Test Condition:**

Applicable to	Environmental Conditions	Input Power	Tested by
RE	24 deg. C, 69% RH 25 deg. C, 70% RH 24 deg. C, 70% RH	120Vac, 60Hz	Willy Cheng, Titan Hsu
PLC	24 deg. C, 67% RH 24 deg. C, 68% RH	120Vac, 60Hz	Willy Cheng
FS	24 deg. C, 69% RH	120Vac, 60Hz	Willy Cheng
BW	24 deg. C, 69% RH	120Vac, 60Hz	Willy Cheng

### 3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

#### 3.3.1 Configuration of System under Test

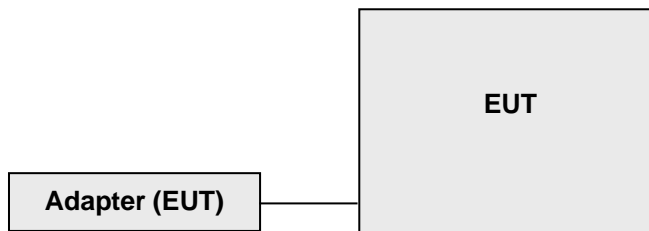

### 3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.225)**

**FCC Part 15, Subpart C (15.215)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 30, 2019	May 29, 2020
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 22, 2018	Nov. 21, 2019
HORN Antenna SCHWARZBECK	9120D	209	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 25, 2018	Nov. 24, 2019
Loop Antenna TESEQ	HLA 6121	45745	Jul. 01, 2019	Jun. 30, 2020
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 21, 2018	Aug. 20, 2019
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 27, 2019	Mar. 26, 2020
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2018	Aug. 20, 2019
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM- SM-8000	Cable-CH3-03 (309224+170907)	Aug. 21, 2018	Aug. 20, 2019
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 3.

### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### For Radiated emission below 30MHz

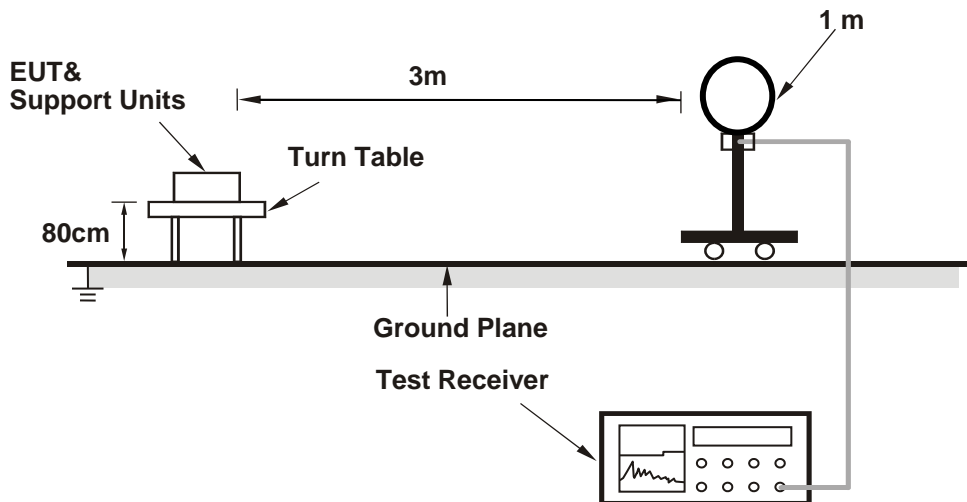

##### For Radiated emission 30MHz to 1GHz

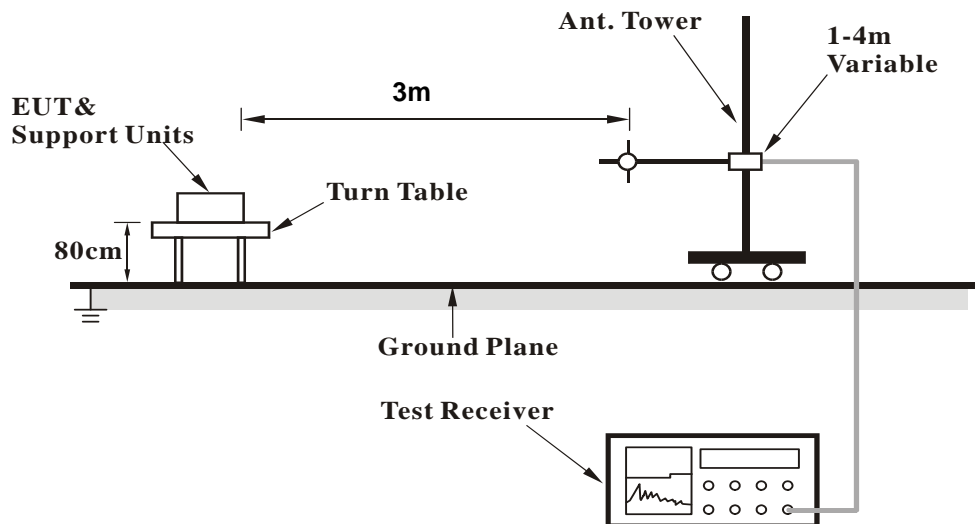

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

##### Type A

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A1		

##### Antenna Polarity & Test Distance: Loop Antenna Open At 3m


No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	61.4 QP	124.0 QP	-62.6	1.00	355	39.6	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

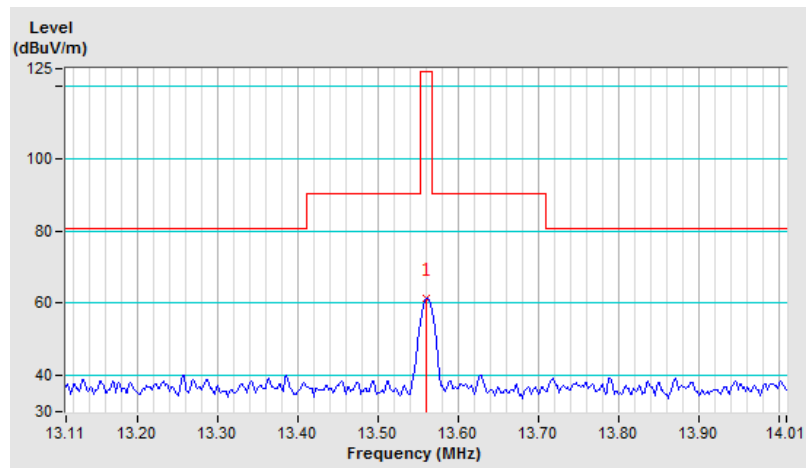

##### Antenna Polarity & Test Distance: Loop Antenna Open At 30m

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	21.4 QP	84.0 QP	-62.6

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>



EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A1		


Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	58.7 QP	124.0 QP	-65.3	1.00	85	36.9	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

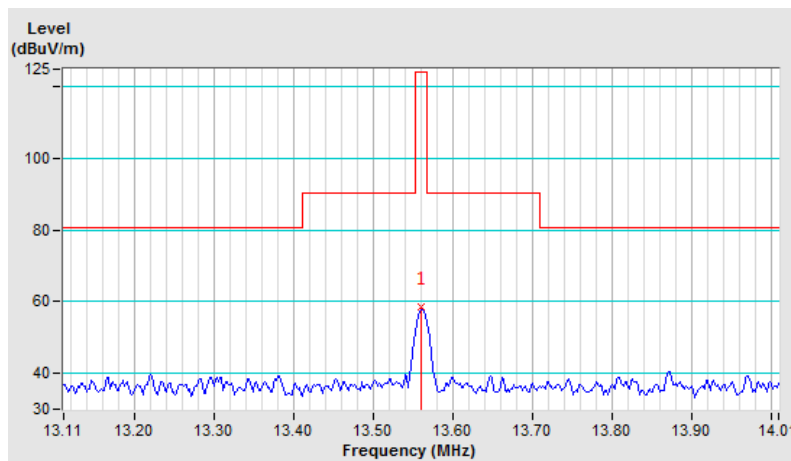

Antenna Polarity & Test Distance: Loop Antenna Close At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	18.7 QP	84.0 QP	-65.3

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A1		


Antenna Polarity & Test Distance: Loop Antenna Ground Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	54.1 QP	124.0 QP	-69.9	1.00	354	32.3	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

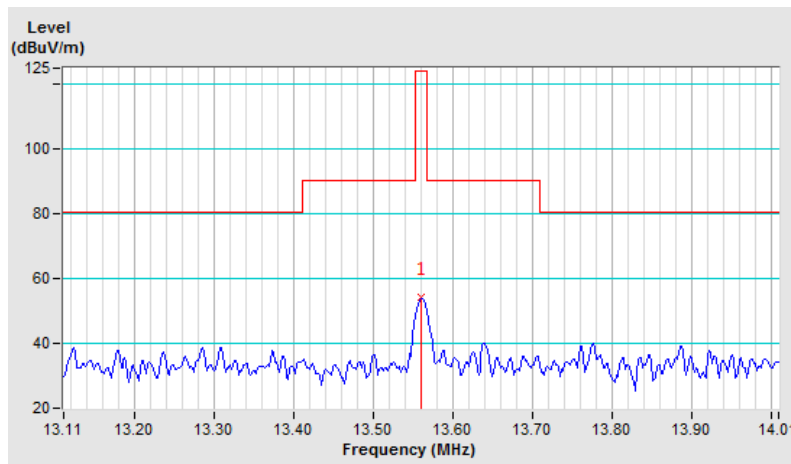

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	14.1 QP	84.0 QP	-69.9

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

**Type B**

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A2		


Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	61.3 QP	124.0 QP	-62.7	1.00	355	39.5	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

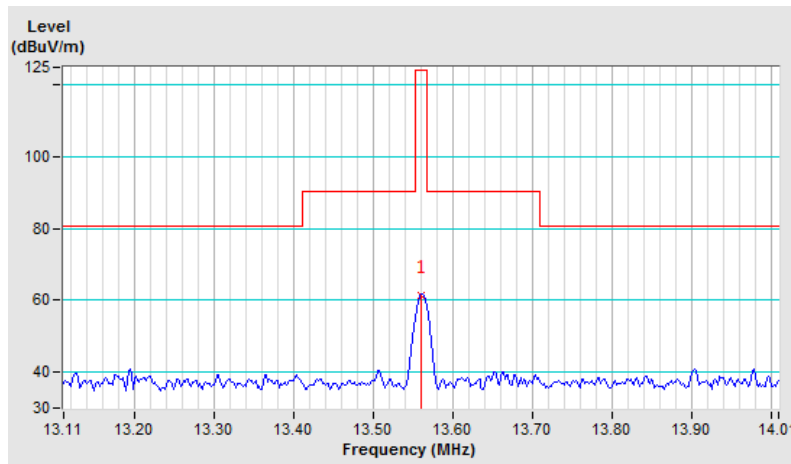

Antenna Polarity & Test Distance: Loop Antenna Open At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	21.3 QP	84.0 QP	-62.7

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A2		


Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	58.7 QP	124.0 QP	-65.3	1.00	84	36.9	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

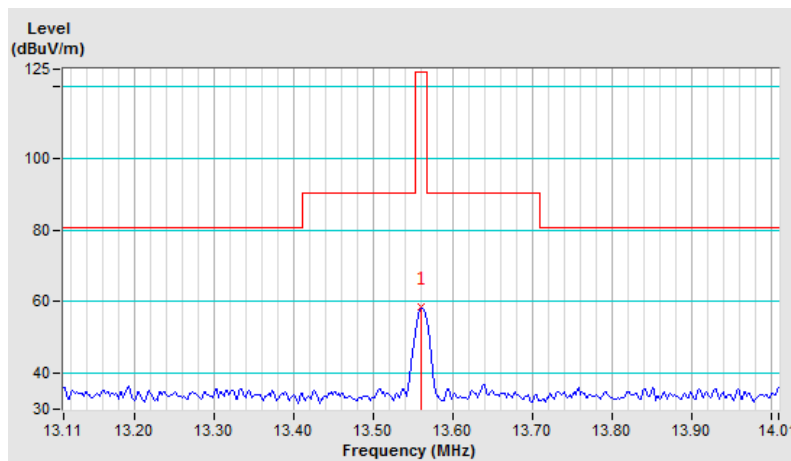

Antenna Polarity & Test Distance: Loop Antenna Close At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	18.7 QP	84.0 QP	-65.3

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A2		


Antenna Polarity & Test Distance: Loop Antenna Ground Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	54.2 QP	124.0 QP	-69.8	1.00	4	32.4	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

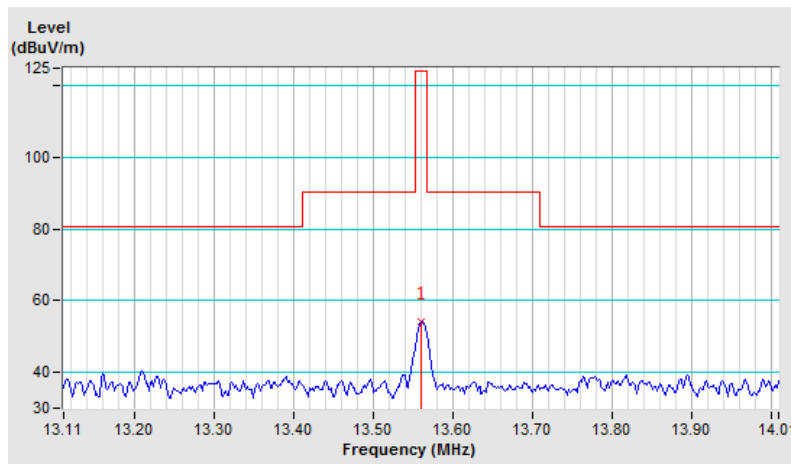

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	14.2 QP	84.0 QP	-69.8

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

## Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A3		


Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	61.3 QP	124.0 QP	-62.7	1.00	357	39.5	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

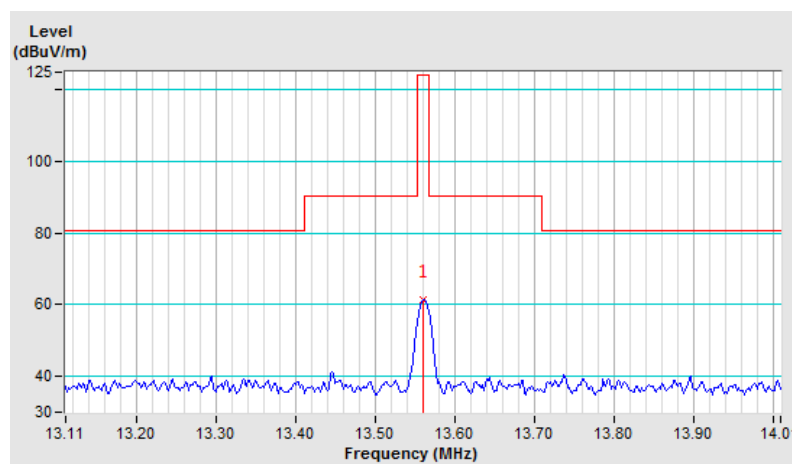

Antenna Polarity & Test Distance: Loop Antenna Open At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	21.3 QP	84.0 QP	-62.7

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A3		


Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	58.6 QP	124.0 QP	-65.4	1.00	83	36.8	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

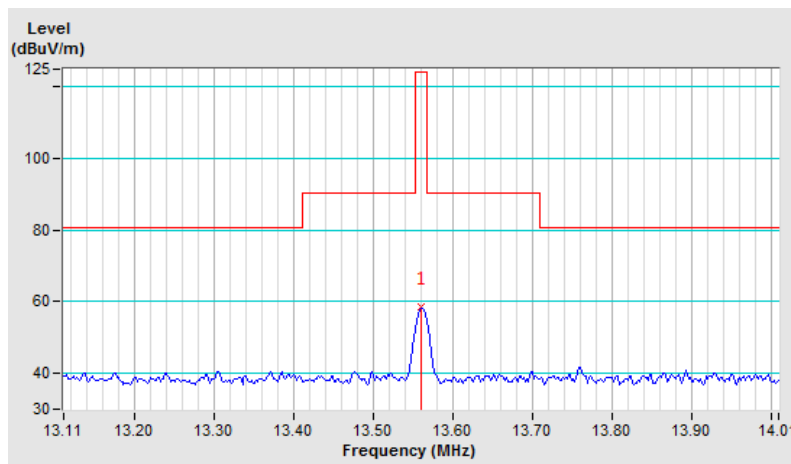

Antenna Polarity & Test Distance: Loop Antenna Close At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	18.6 QP	84.0 QP	-65.4

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A3		


Antenna Polarity & Test Distance: Loop Antenna Ground Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	53.7 QP	124.0 QP	-70.3	1.00	7	31.9	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

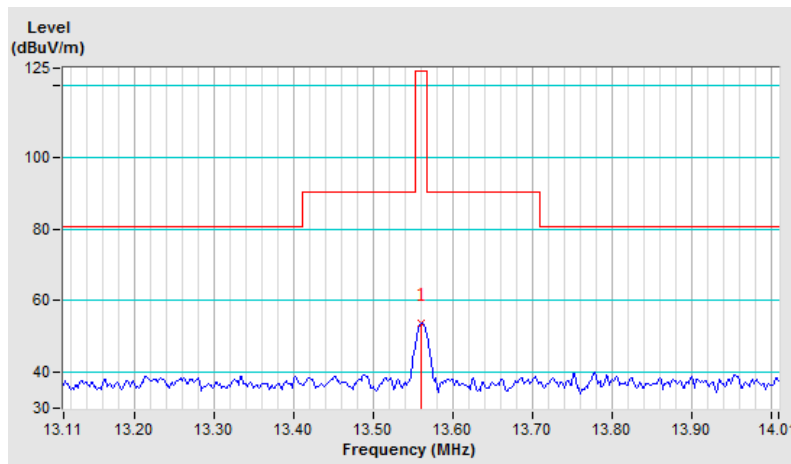

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	13.7 QP	84.0 QP	-70.3

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>



### Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A4		


Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	61.5 QP	124.0 QP	-62.5	1.00	4	39.7	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

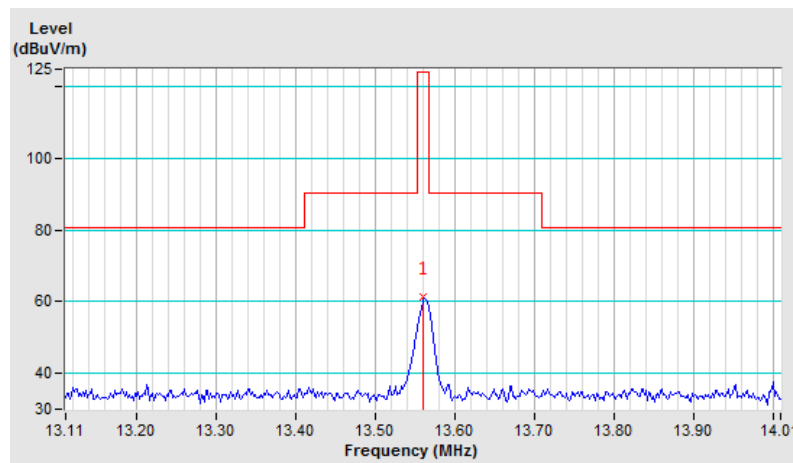

Antenna Polarity & Test Distance: Loop Antenna Open At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	21.5 QP	84.0 QP	-62.5

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A4		


Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	59.4 QP	124.0 QP	-64.6	1.00	88	37.6	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

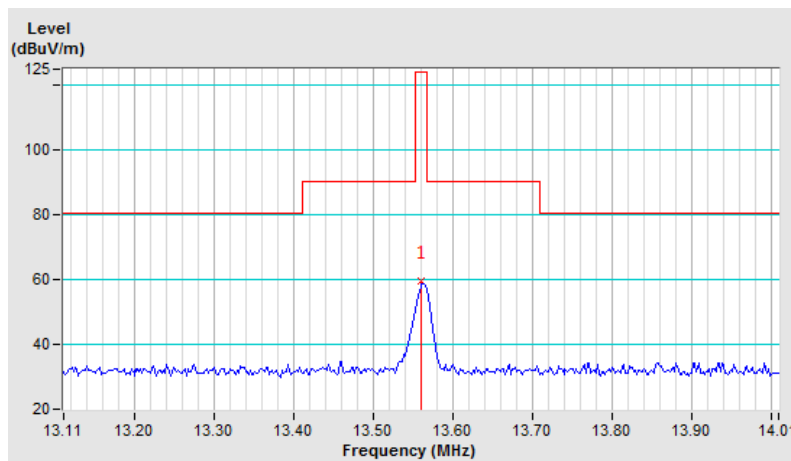

Antenna Polarity & Test Distance: Loop Antenna Close At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	19.4 QP	84.0 QP	-64.6

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A4		


Antenna Polarity & Test Distance: Loop Antenna Ground Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	54.2 QP	124.0 QP	-69.8	1.00	11	32.4	21.8

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

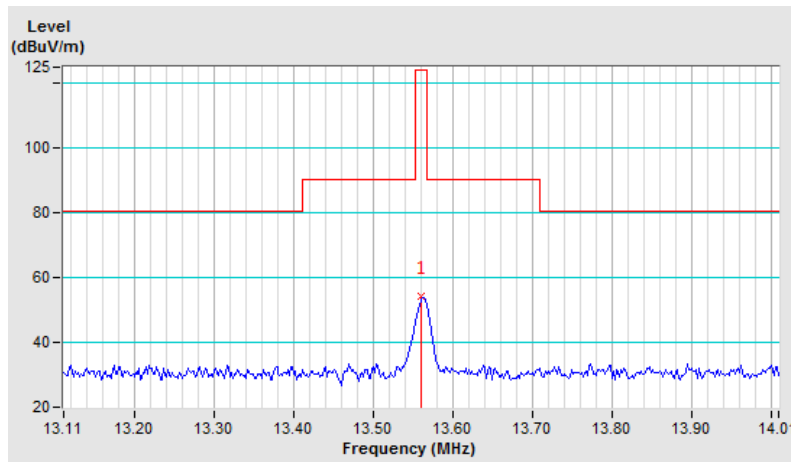

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 30m				
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	*13.56	14.2 QP	84.0 QP	-69.8

Remarks: Emission Level at 30m = Emission Level at 3m + 20log(3/30)<sup>2</sup>


**Type A**  
**Below 30MHz**

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A1		

Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.03	40.1 QP	67.3 QP	-27.2	1.00	136	20.3	19.8
2	2.53	44.6 QP	69.5 QP	-24.9	1.00	87	24.7	19.9
3	3.13	49.0 QP	69.5 QP	-20.5	1.00	5	29.1	19.9
4	17.86	33.2 QP	69.5 QP	-36.3	1.00	262	11.2	22.0
5	20.26	35.4 QP	69.5 QP	-34.1	1.00	167	13.3	22.1
6	24.11	34.3 QP	69.5 QP	-35.2	1.00	37	12.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

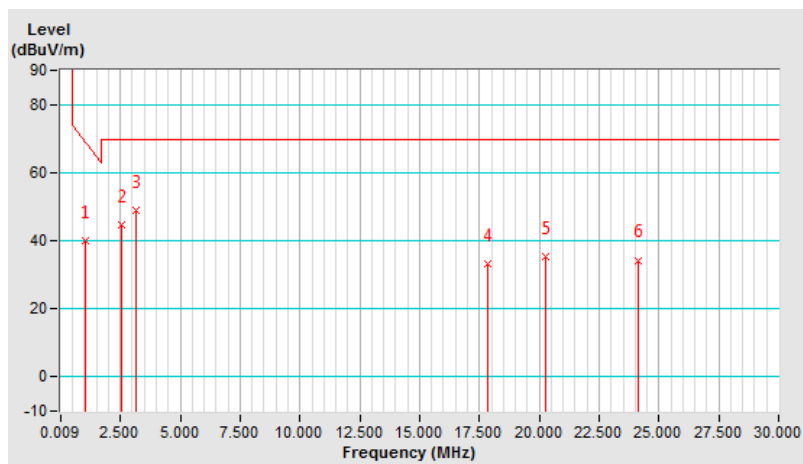


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A1		

Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.33	41.3 QP	65.1 QP	-23.8	1.00	155	21.5	19.8
2	2.65	44.9 QP	69.5 QP	-24.6	1.00	88	25.0	19.9
3	3.13	49.0 QP	69.5 QP	-20.5	1.00	129	29.1	19.9
4	3.62	36.9 QP	69.5 QP	-32.6	1.00	154	16.9	20.0
5	20.56	34.2 QP	69.5 QP	-35.3	1.00	329	12.1	22.1
6	24.11	34.1 QP	69.5 QP	-35.4	1.00	9	12.0	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

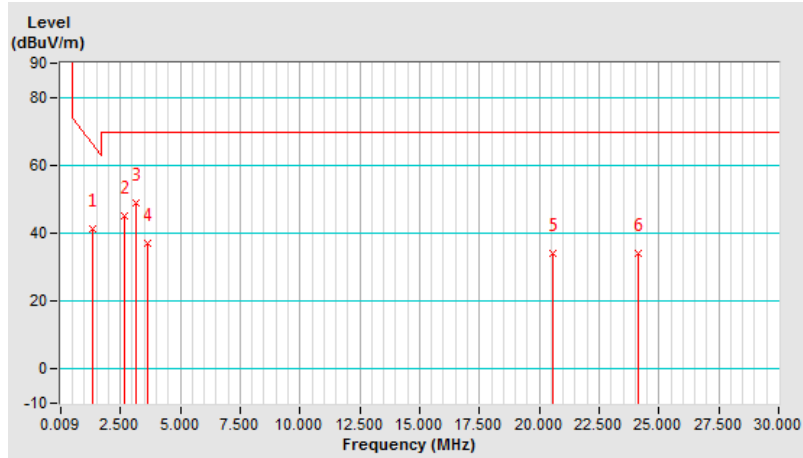


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A1		

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.09	41.4 QP	66.8 QP	-25.4	1.00	9	21.6	19.8
2	1.33	40.4 QP	65.1 QP	-24.7	1.00	244	20.6	19.8
3	2.53	45.2 QP	69.5 QP	-24.3	1.00	15	25.3	19.9
4	3.13	46.9 QP	69.5 QP	-22.6	1.00	88	27.0	19.9
5	22.13	36.3 QP	69.5 QP	-33.2	1.00	199	14.2	22.1
6	24.11	35.9 QP	69.5 QP	-33.6	1.00	93	13.8	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

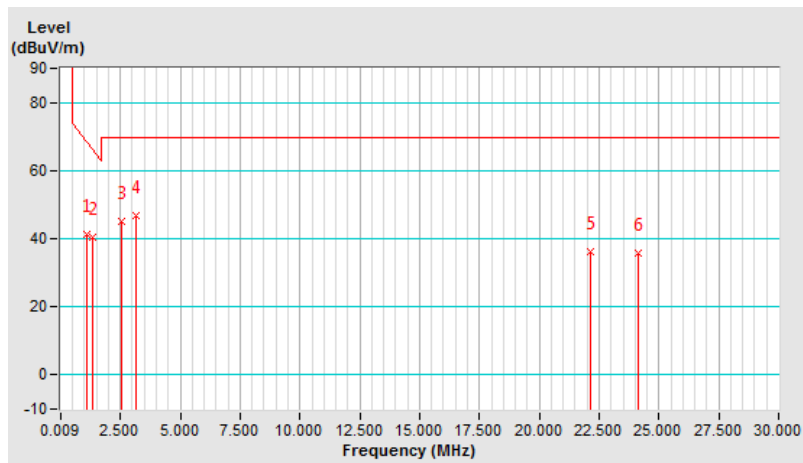


**Type B**

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A2		

Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.03	42.1 QP	67.3 QP	-25.2	1.00	74	22.3	19.8
2	2.53	47.5 QP	69.5 QP	-22.0	1.00	1	27.6	19.9
3	3.13	49.1 QP	69.5 QP	-20.4	1.00	189	29.2	19.9
4	4.76	35.5 QP	69.5 QP	-34.0	1.00	310	15.4	20.1
5	19.42	35.3 QP	69.5 QP	-34.2	1.00	347	13.2	22.1
6	21.83	35.0 QP	69.5 QP	-34.5	1.00	289	12.9	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

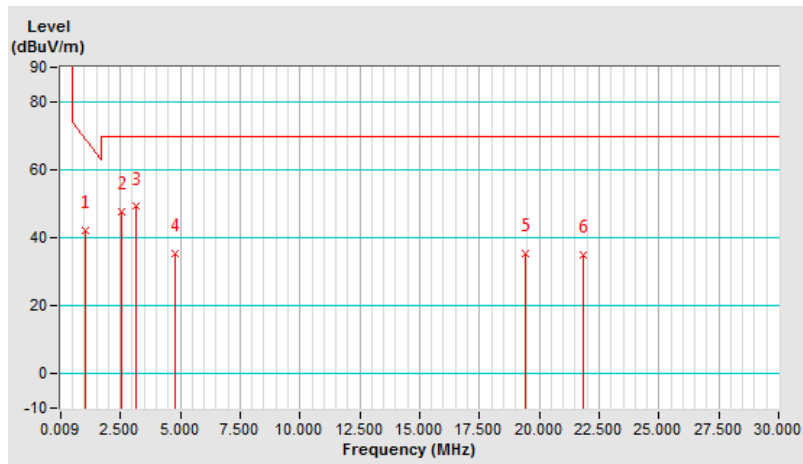


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A2		

Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.27	41.6 QP	65.5 QP	-23.9	1.00	87	21.8	19.8
2	2.35	45.4 QP	69.5 QP	-24.1	1.00	244	25.5	19.9
3	3.13	49.2 QP	69.5 QP	-20.3	1.00	318	29.3	19.9
4	3.74	38.0 QP	69.5 QP	-31.5	1.00	80	18.0	20.0
5	22.13	34.9 QP	69.5 QP	-34.6	1.00	68	12.8	22.1
6	24.35	34.6 QP	69.5 QP	-34.9	1.00	192	12.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

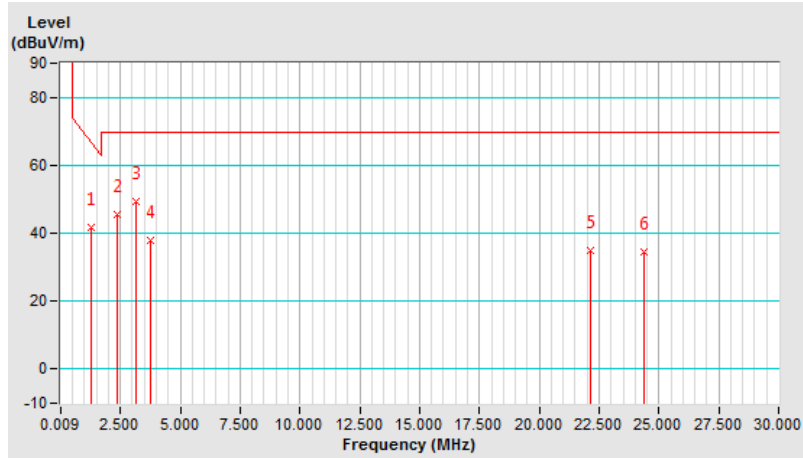




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A2		

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.97	42.0 QP	67.9 QP	-25.90	1.00	65	22.2	19.8
2	2.65	45.4 QP	69.5 QP	-24.10	1.00	309	25.5	19.9
3	3.07	47.4 QP	69.5 QP	-22.10	1.00	6	27.5	19.9
4	3.25	48.6 QP	69.5 QP	-20.90	1.00	260	28.6	20.0
5	22.13	36.5 QP	69.5 QP	-33.00	1.00	295	14.4	22.1
6	24.11	35.8 QP	69.5 QP	-33.70	1.00	131	13.7	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

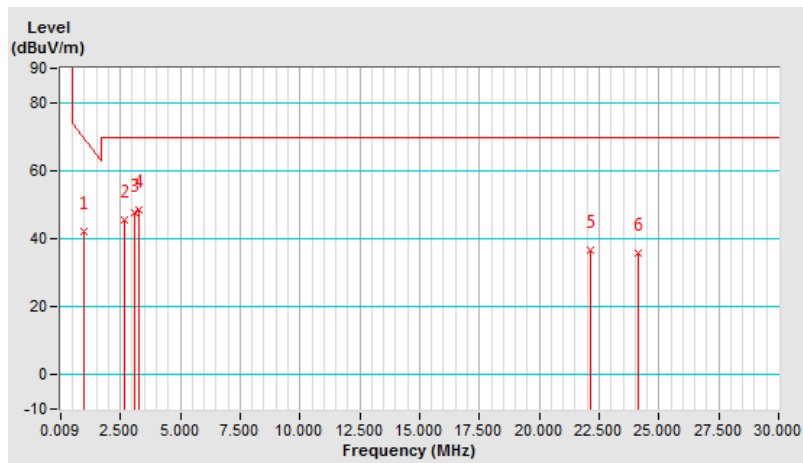


**Type F**

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A3		

Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.03	42.9 QP	67.3 QP	-24.4	1.00	13	23.1	19.8
2	1.39	42.0 QP	64.7 QP	-22.7	1.00	357	22.2	19.8
3	2.53	45.1 QP	69.5 QP	-24.4	1.00	15	25.2	19.9
4	3.19	50.3 QP	69.5 QP	-19.2	1.00	244	30.4	19.9
5	20.26	34.3 QP	69.5 QP	-35.2	1.00	59	12.2	22.1
6	22.13	35.4 QP	69.5 QP	-34.1	1.00	249	13.3	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

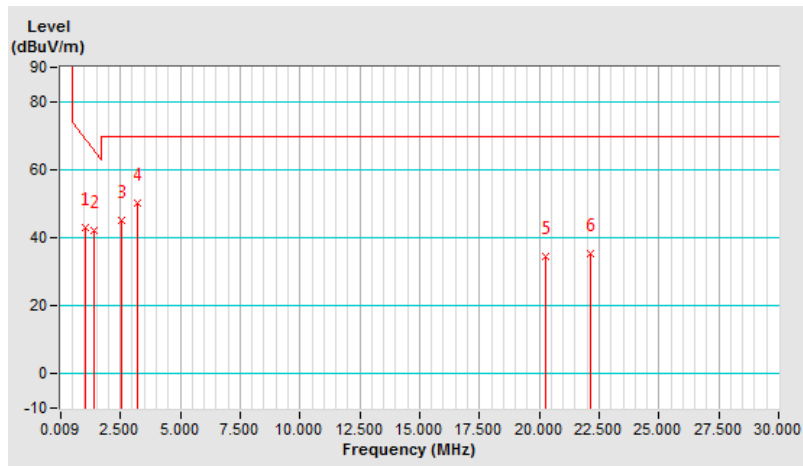


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A3		

Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.03	41.0 QP	67.3 QP	-26.3	1.00	302	21.2	19.8
2	2.53	45.4 QP	64.7 QP	-24.1	1.00	130	25.5	19.9
3	3.13	48.6 QP	69.5 QP	-20.9	1.00	293	28.7	19.9
4	11.07	33.9 QP	69.5 QP	-35.6	1.00	257	12.2	21.7
5	22.13	34.8 QP	69.5 QP	-34.7	1.00	133	12.7	22.1
6	25.07	33.3 QP	69.5 QP	-36.2	1.00	271	11.2	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

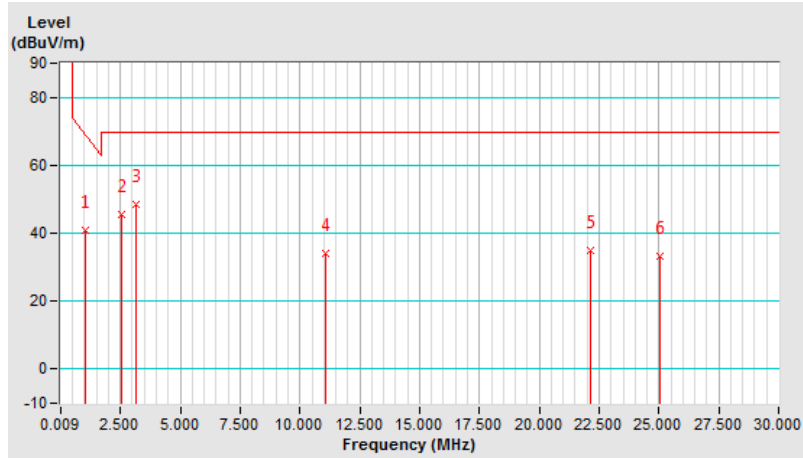


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A3		

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.33	40.6 QP	65.1 QP	-24.5	1.00	160	20.8	19.8
2	2.53	45.8 QP	69.5 QP	-23.7	1.00	71	25.9	19.9
3	3.25	47.2 QP	69.5 QP	-22.3	1.00	112	27.2	20.0
4	16.60	32.9 QP	69.5 QP	-36.6	1.00	215	11.0	21.9
5	20.32	36.4 QP	69.5 QP	-33.1	1.00	297	14.3	22.1
6	24.11	35.7 QP	69.5 QP	-33.8	1.00	184	13.6	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

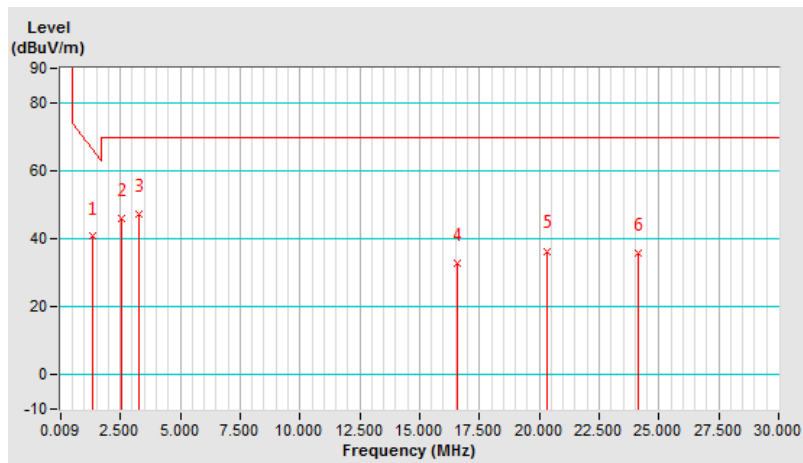


**Type V**

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A4		

Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.03	43.6 QP	67.3 QP	-23.7	1.00	311	23.80	19.80
2	1.33	43.4 QP	65.1 QP	-21.7	1.00	189	23.60	19.80
3	2.53	47.8 QP	69.5 QP	-21.7	1.00	229	27.90	19.90
4	3.13	51.6 QP	69.5 QP	-17.9	1.00	98	31.70	19.90
5	19.72	35.1 QP	69.5 QP	-34.4	1.00	29	13.00	22.10
6	22.13	35.2 QP	69.5 QP	-34.3	1.00	76	13.10	22.10

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

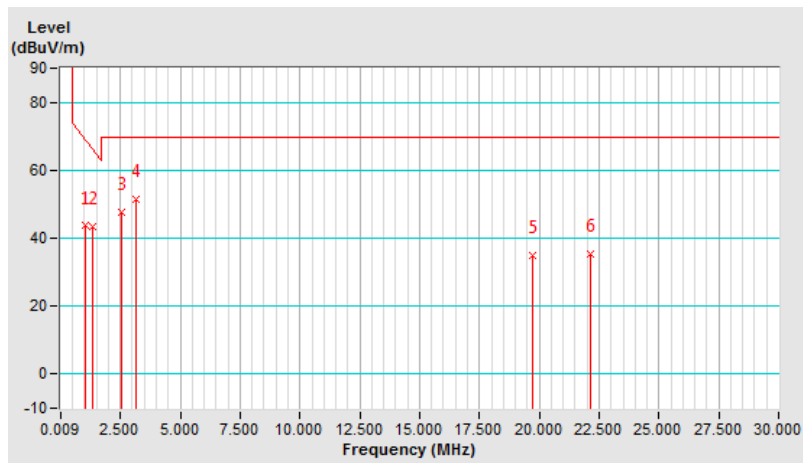


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A4		

Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.09	43.8 QP	66.8 QP	-23.0	1.00	225	24.00	19.80
2	2.53	48.4 QP	69.5 QP	-21.1	1.00	136	28.50	19.90
3	3.19	50.9 QP	69.5 QP	-18.6	1.00	80	31.00	19.90
4	5.90	37.0 QP	69.5 QP	-32.5	1.00	23	16.60	20.40
5	16.78	34.2 QP	69.5 QP	-35.3	1.00	17	12.20	22.00
6	20.38	35.0 QP	69.5 QP	-34.5	1.00	321	12.90	22.10

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

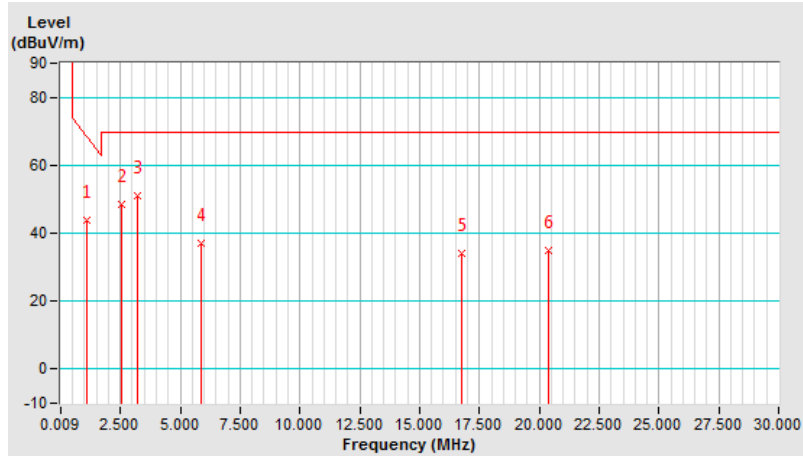


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 69% RH	Tested By	Wully Cheng
Test Mode	A4		

Antenna Polarity & Test Distance: Loop Antenna Ground Paralle At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.33	47.0 QP	65.1 QP	-18.1	1.00	357	27.20	19.80
2	2.47	47.2 QP	69.5 QP	-22.3	1.00	333	27.30	19.90
3	3.25	49.3 QP	69.5 QP	-20.2	1.00	15	29.30	20.00
4	4.76	37.0 QP	69.5 QP	-32.5	1.00	299	16.90	20.10
5	20.32	36.0 QP	69.5 QP	-33.5	1.00	190	13.90	22.10
6	22.13	36.9 QP	69.5 QP	-32.6	1.00	288	14.80	22.10

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

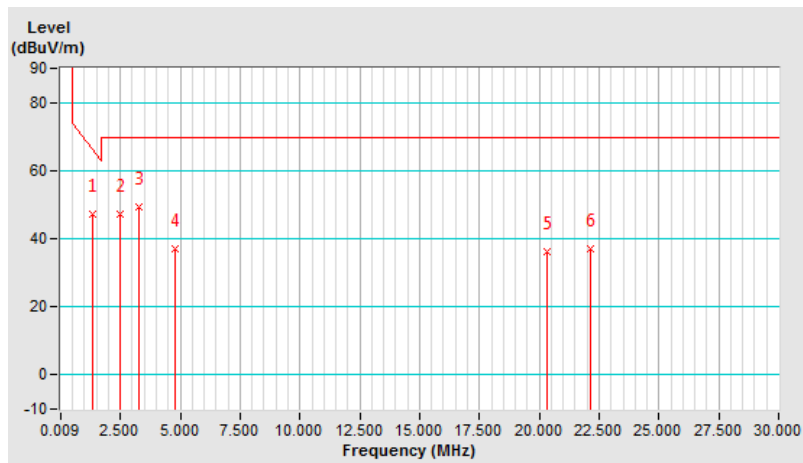

**Below 1000MHz**


**Type A**

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	A1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.8 QP	40.0	-13.2	1.99 H	102	36.9	-10.1
2	164.06	27.9 QP	43.5	-15.6	1.49 H	14	36.9	-9.0
3	243.77	36.5 QP	46.0	-9.5	1.00 H	233	45.9	-9.4
4	270.99	36.2 QP	46.0	-9.8	1.00 H	11	44.5	-8.3
5	298.21	44.7 QP	46.0	-1.3	1.00 H	225	52.2	-7.5
6	325.43	33.6 QP	46.0	-12.4	1.00 H	230	40.4	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

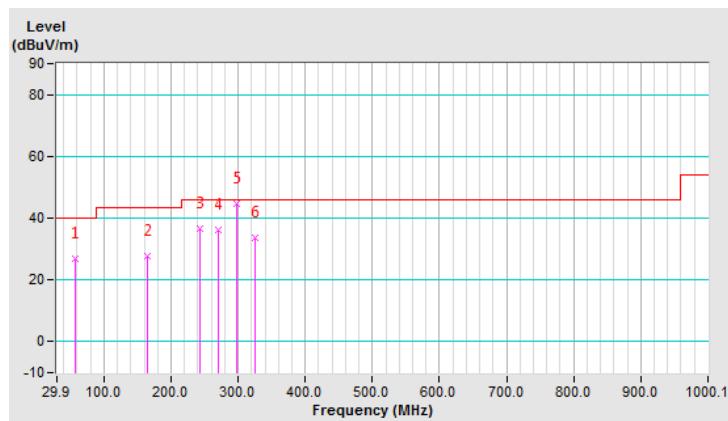




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	A1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.73	28.3 QP	40.0	-11.7	1.01 V	146	39.4	-11.1
2	72.67	24.4 QP	40.0	-15.6	1.01 V	147	36.9	-12.5
3	107.67	27.2 QP	43.5	-16.3	1.01 V	176	39.8	-12.6
4	243.77	32.5 QP	46.0	-13.5	1.01 V	278	41.9	-9.4
5	270.99	31.5 QP	46.0	-14.5	1.01 V	294	39.8	-8.3
6	298.21	36.2 QP	46.0	-9.8	1.01 V	283	43.7	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

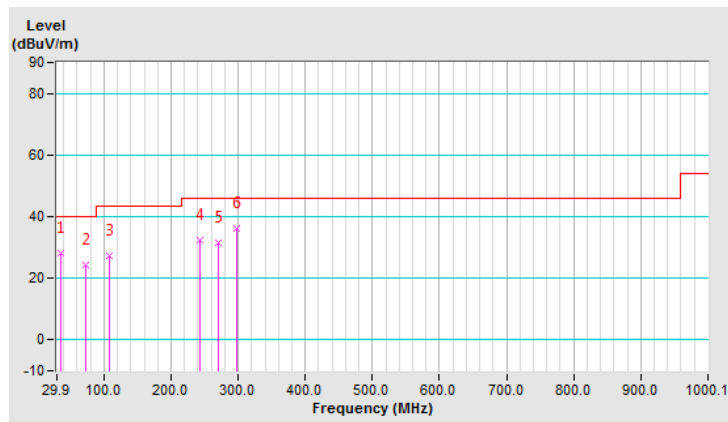


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	B1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.6 QP	40.0	-13.4	2.00 H	251	36.7	-10.1
2	169.89	26.5 QP	43.5	-17.0	1.51 H	5	35.9	-9.4
3	243.77	41.3 QP	46.0	-4.7	1.01 H	358	50.7	-9.4
4	270.99	38.3 QP	46.0	-7.7	1.01 H	3	46.6	-8.3
5	298.21	44.9 QP	46.0	-1.1	1.01 H	167	52.4	-7.5
6	325.43	32.8 QP	46.0	-13.2	1.01 H	162	39.6	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

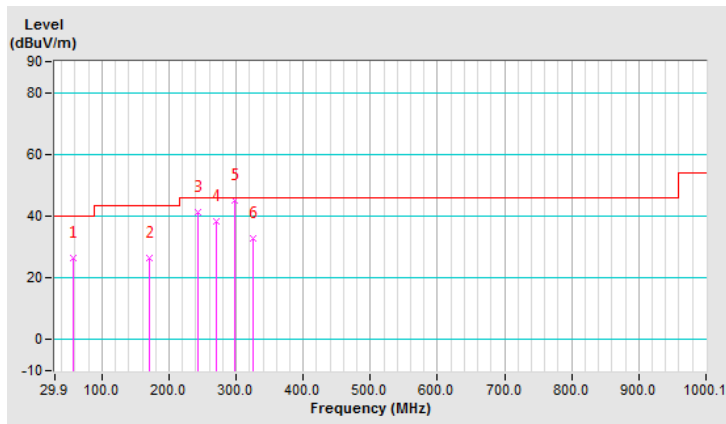


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	B1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.62	27.6 QP	40.0	-12.4	1.49 V	228	38.0	-10.4
2	57.12	24.8 QP	40.0	-15.2	1.00 V	320	34.9	-10.1
3	171.83	25.1 QP	43.5	-18.4	1.49 V	152	34.6	-9.5
4	243.77	32.7 QP	46.0	-13.3	1.49 V	282	42.1	-9.4
5	270.99	30.5 QP	46.0	-15.5	1.00 V	323	38.8	-8.3
6	298.21	34.7 QP	46.0	-11.3	1.00 V	302	42.2	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

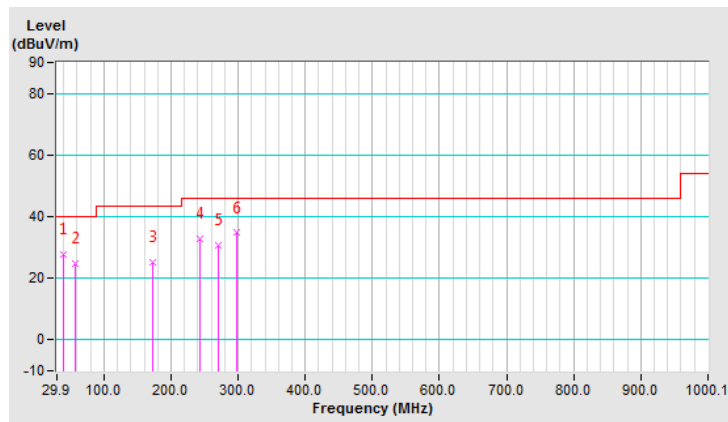


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	C1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	27.1 QP	40.0	-12.9	1.99 H	343	37.2	-10.1
2	243.77	39.1 QP	46.0	-6.9	1.01 H	4	48.5	-9.4
3	270.99	37.7 QP	46.0	-8.3	1.01 H	5	46.0	-8.3
4	298.21	42.4 QP	46.0	-3.6	1.01 H	146	49.9	-7.5
5	325.43	32.9 QP	46.0	-13.1	1.01 H	135	39.7	-6.8
6	836.78	32.3 QP	46.0	-13.7	1.01 H	59	29.6	2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

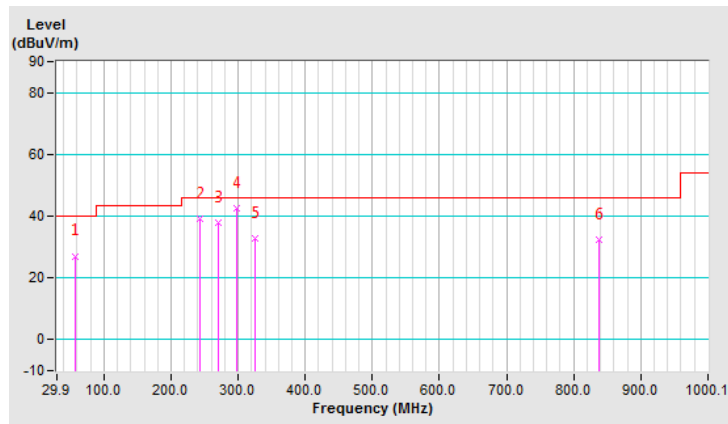


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	C1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.68	33.3 QP	40.0	-6.7	1.00 V	18	44.0	-10.7
2	82.40	27.4 QP	40.0	-12.6	1.49 V	354	41.7	-14.3
3	158.22	28.3 QP	43.5	-15.2	1.00 V	120	37.4	-9.1
4	243.77	31.8 QP	46.0	-14.2	1.49 V	283	41.2	-9.4
5	270.99	30.1 QP	46.0	-15.9	1.00 V	287	38.4	-8.3
6	298.21	35.2 QP	46.0	-10.8	1.99 V	164	42.7	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

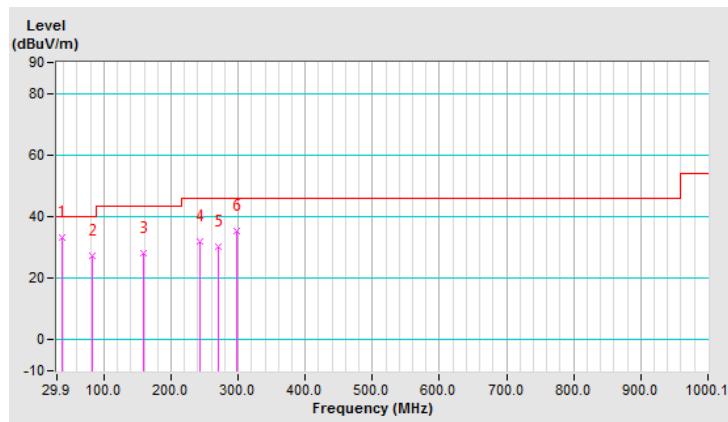


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	D1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	27.0 QP	40.0	-13.0	1.99 H	187	37.1	-10.1
2	197.11	30.2 QP	43.5	-13.3	1.49 H	16	41.4	-11.2
3	243.77	40.4 QP	46.0	-5.6	1.00 H	200	49.8	-9.4
4	270.99	39.5 QP	46.0	-6.5	1.00 H	355	47.8	-8.3
5	298.21	44.2 QP	46.0	-1.8	1.00 H	218	51.7	-7.5
6	325.43	35.1 QP	46.0	-10.9	1.00 H	222	41.9	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

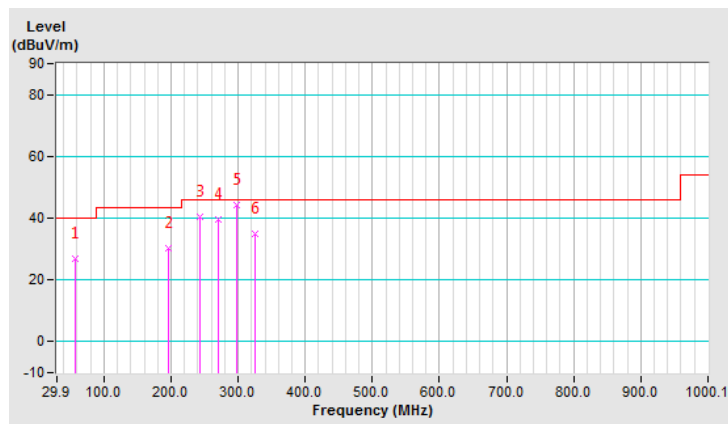


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	D1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.68	28.0 QP	40.0	-12.0	1.01 V	143	38.7	-10.7
2	103.78	26.5 QP	43.5	-17.0	1.51 V	108	39.6	-13.1
3	167.94	30.4 QP	43.5	-13.1	1.51 V	129	39.7	-9.3
4	243.77	31.0 QP	46.0	-15.0	1.01 V	287	40.4	-9.4
5	270.99	31.7 QP	46.0	-14.3	1.01 V	287	40.0	-8.3
6	298.21	35.3 QP	46.0	-10.7	1.51 V	78	42.8	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

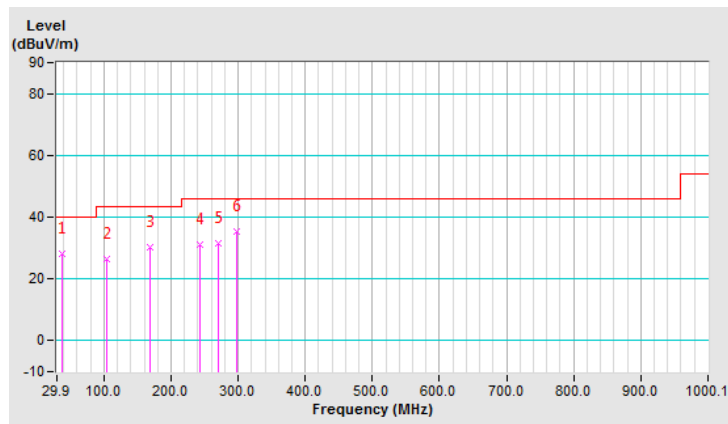


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	E1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.4 QP	40.0	-13.6	1.99 H	318	36.5	-10.1
2	70.73	23.3 QP	40.0	-16.7	1.99 H	175	35.3	-12.0
3	243.77	38.7 QP	46.0	-7.3	1.01 H	342	48.1	-9.4
4	270.99	36.5 QP	46.0	-9.5	1.01 H	331	44.8	-8.3
5	298.21	44.2 QP	46.0	-1.8	1.01 H	166	51.7	-7.5
6	325.43	32.2 QP	46.0	-13.8	1.01 H	161	39.0	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

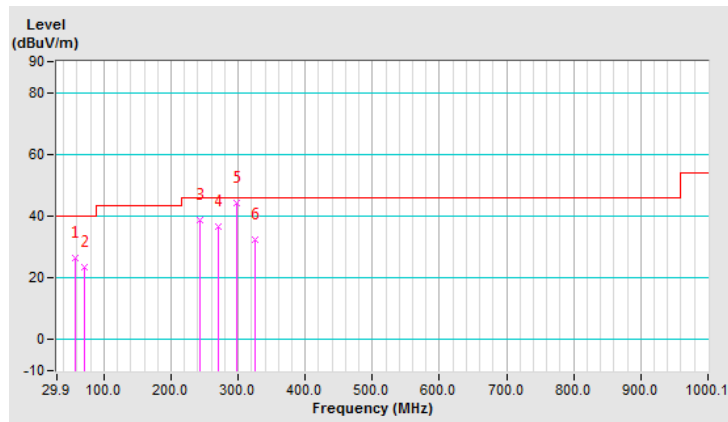




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	E1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.57	26.7 QP	40.0	-13.3	1.00 V	89	36.8	-10.1
2	243.77	33.8 QP	46.0	-12.2	1.00 V	166	43.2	-9.4
3	270.99	31.1 QP	46.0	-14.9	1.00 V	327	39.4	-8.3
4	298.21	35.5 QP	46.0	-10.5	1.00 V	310	43.0	-7.5
5	325.43	27.8 QP	46.0	-18.2	1.00 V	58	34.6	-6.8
6	681.24	28.1 QP	46.0	-17.9	1.99 V	304	28.2	-0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

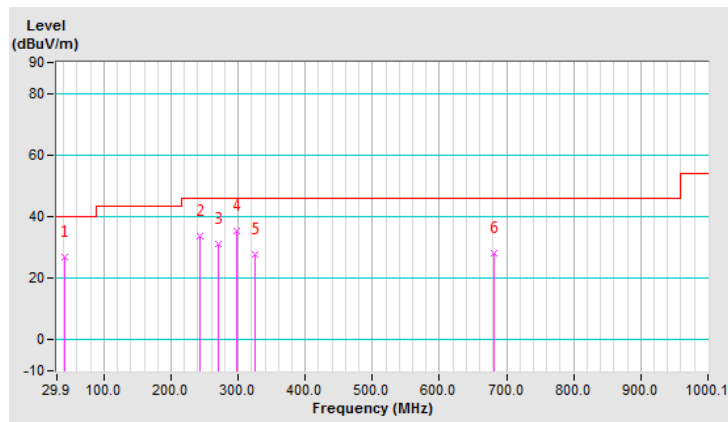


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	F1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.8 QP	40.0	-13.2	1.99 H	192	36.9	-10.1
2	216.55	29.0 QP	46.0	-17.0	1.00 H	321	39.9	-10.9
3	243.77	41.1 QP	46.0	-4.9	1.00 H	15	50.5	-9.4
4	270.99	35.9 QP	46.0	-10.1	1.00 H	331	44.2	-8.3
5	298.21	44.6 QP	46.0	-1.4	1.00 H	356	52.1	-7.5
6	325.43	32.3 QP	46.0	-13.7	1.00 H	163	39.1	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

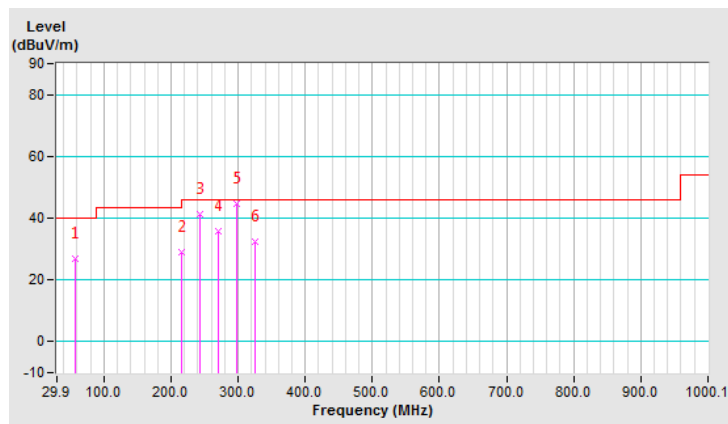


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	F1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.84	24.4 QP	40.0	-15.6	1.51 V	218	35.9	-11.5
2	175.72	26.9 QP	43.5	-16.6	1.00 V	100	36.8	-9.9
3	243.77	31.1 QP	46.0	-14.9	1.51 V	290	40.5	-9.4
4	270.99	30.5 QP	46.0	-15.5	1.99 V	15	38.8	-8.3
5	298.21	35.5 QP	46.0	-10.5	1.00 V	306	43.0	-7.5
6	325.43	27.2 QP	46.0	-18.8	1.51 V	53	34.0	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

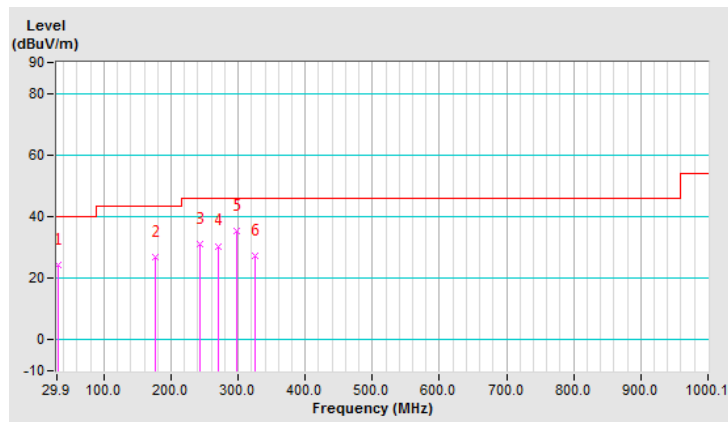


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	G1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.5 QP	40.0	-13.5	2.00 H	266	36.6	-10.1
2	70.73	24.0 QP	40.0	-16.0	2.00 H	312	36.0	-12.0
3	243.77	40.5 QP	46.0	-5.5	1.00 H	348	49.9	-9.4
4	270.99	38.3 QP	46.0	-7.7	1.00 H	346	46.6	-8.3
5	298.21	44.5 QP	46.0	-1.5	1.00 H	8	52.0	-7.5
6	325.43	30.9 QP	46.0	-15.1	1.00 H	17	37.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

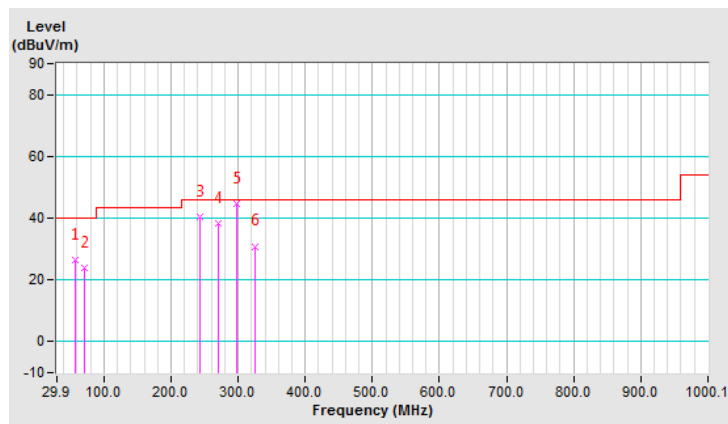


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	G1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	35.8 QP	40.0	-4.2	1.99 V	1	45.9	-10.1
2	74.62	32.4 QP	40.0	-7.6	1.49 V	165	45.2	-12.8
3	243.77	32.8 QP	46.0	-13.2	1.49 V	274	42.2	-9.4
4	270.99	31.2 QP	46.0	-14.8	1.49 V	258	39.5	-8.3
5	298.21	35.2 QP	46.0	-10.8	1.00 V	298	42.7	-7.5
6	325.43	27.2 QP	46.0	-18.8	1.99 V	150	34.0	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

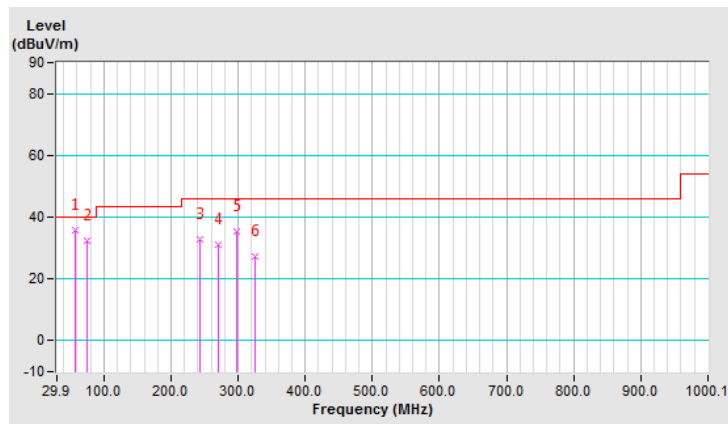


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	H1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.7 QP	40.0	-13.3	1.99 H	210	36.8	-10.1
2	123.23	28.1 QP	43.5	-15.4	1.49 H	61	39.3	-11.2
3	208.77	32.2 QP	43.5	-11.3	1.49 H	17	43.2	-11.0
4	243.77	40.4 QP	46.0	-5.6	1.00 H	23	49.8	-9.4
5	270.99	37.4 QP	46.0	-8.6	1.00 H	142	45.7	-8.3
6	298.21	43.8 QP	46.0	-2.2	1.00 H	165	51.3	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

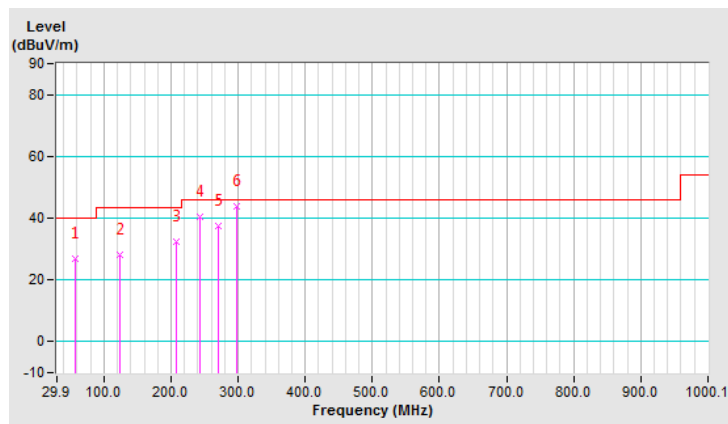


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	H1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.79	30.6 QP	40.0	-9.4	1.51 V	349	41.8	-11.2
2	71.61	16.2 QP	40.0	-23.8	1.00 V	186	28.4	-12.2
3	121.28	28.2 QP	43.5	-15.3	1.01 V	168	39.5	-11.3
4	243.77	31.8 QP	46.0	-14.2	1.51 V	289	41.2	-9.4
5	270.99	28.0 QP	46.0	-18.0	1.01 V	332	36.3	-8.3
6	298.21	35.2 QP	46.0	-10.8	1.01 V	300	42.7	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

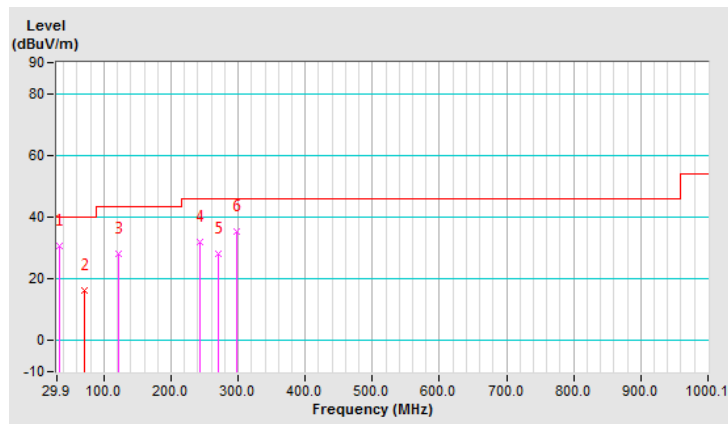


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	I1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	22.1 QP	40.0	-17.9	2.00 H	292	32.2	-10.1
2	167.94	24.3 QP	43.5	-19.2	1.00 H	3	33.6	-9.3
3	243.77	40.2 QP	46.0	-5.8	1.50 H	5	49.6	-9.4
4	270.99	36.4 QP	46.0	-9.6	1.00 H	137	44.7	-8.3
5	298.21	44.4 QP	46.0	-1.6	1.00 H	350	51.9	-7.5
6	325.43	32.2 QP	46.0	-13.8	1.00 H	157	39.0	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

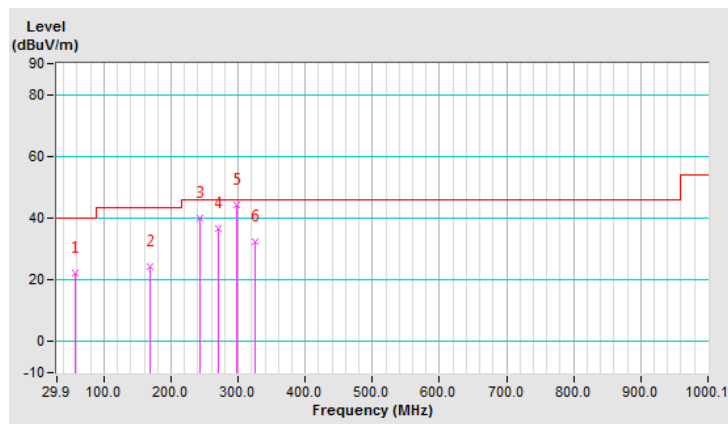




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	I1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.73	28.8 QP	40.0	-11.2	1.50 V	187	39.9	-11.1
2	78.51	31.0 QP	40.0	-9.0	1.00 V	272	44.7	-13.7
3	166.00	26.9 QP	43.5	-16.6	1.50 V	97	36.0	-9.1
4	243.77	30.2 QP	46.0	-15.8	1.00 V	267	39.6	-9.4
5	270.99	30.6 QP	46.0	-15.4	1.00 V	333	38.9	-8.3
6	298.21	35.9 QP	46.0	-10.1	1.00 V	298	43.4	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

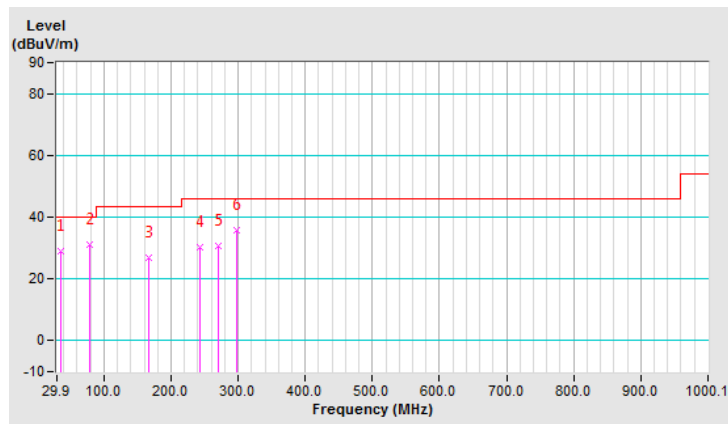


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	J1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.34	28.5 QP	43.5	-15.0	1.50 H	41	40.1	-11.6
2	142.67	40.3 QP	43.5	-3.2	1.99 H	207	49.7	-9.4
3	243.77	36.1 QP	46.0	-9.9	1.00 H	144	45.5	-9.4
4	270.99	36.5 QP	46.0	-9.5	1.00 H	7	44.8	-8.3
5	298.21	42.7 QP	46.0	-3.3	1.50 H	20	50.2	-7.5
6	325.43	32.1 QP	46.0	-13.9	1.00 H	159	38.9	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

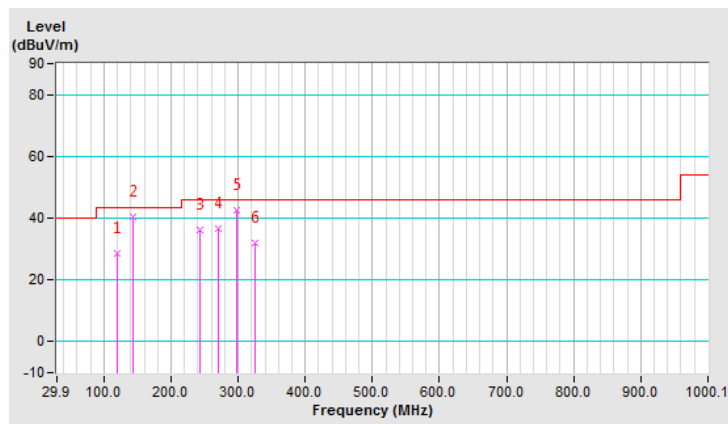


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	J1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.45	24.1 QP	40.0	-15.9	1.50 V	134	38.1	-14.0
2	152.39	37.5 QP	43.5	-6.0	1.00 V	302	46.7	-9.2
3	243.77	31.0 QP	46.0	-15.0	1.50 V	178	40.4	-9.4
4	270.99	30.3 QP	46.0	-15.7	1.00 V	308	38.6	-8.3
5	298.21	35.2 QP	46.0	-10.8	1.00 V	308	42.7	-7.5
6	325.43	25.9 QP	46.0	-20.1	2.00 V	65	32.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

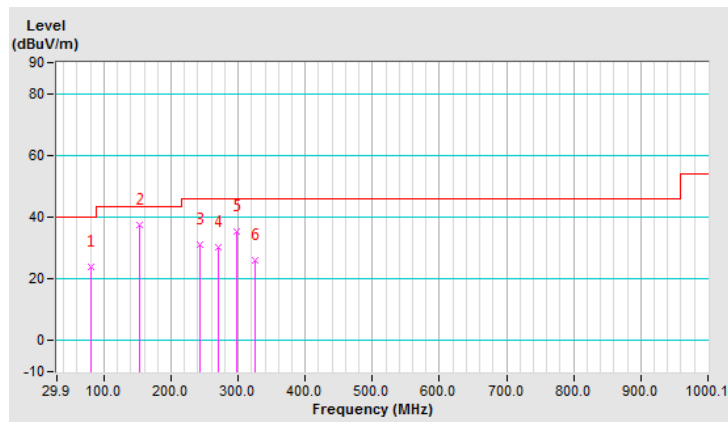


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	K1		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.34	23.5 QP	43.5	-20.0	1.51 H	57	35.1	-11.6
2	243.77	42.4 QP	46.0	-3.6	1.00 H	188	51.8	-9.4
3	270.99	39.9 QP	46.0	-6.1	1.00 H	186	48.2	-8.3
<b>4</b>	<b>298.21</b>	<b>45.3 QP</b>	<b>46.0</b>	<b>-0.7</b>	<b>1.00 H</b>	<b>1</b>	<b>52.8</b>	<b>-7.5</b>
5	325.43	37.1 QP	46.0	-8.9	1.00 H	204	43.9	-6.8
6	352.65	28.9 QP	46.0	-17.1	1.00 H	176	35.5	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

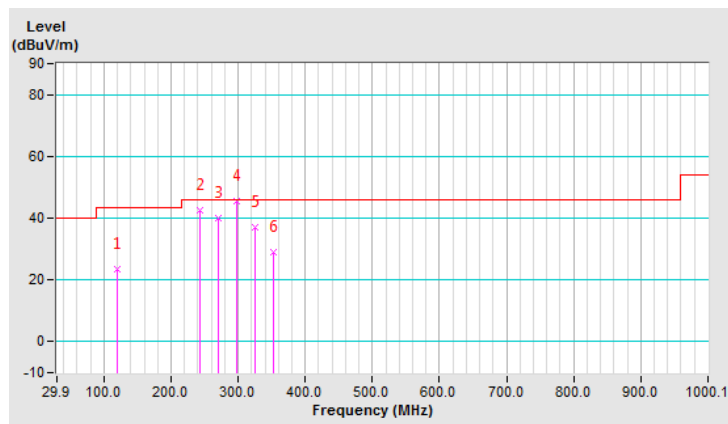


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	K1		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	136.84	25.3 QP	43.5	-18.2	1.50 V	228	35.3	-10.0
2	243.77	31.4 QP	46.0	-14.6	1.00 V	259	40.8	-9.4
3	270.99	29.4 QP	46.0	-16.6	1.50 V	282	37.7	-8.3
4	298.21	34.4 QP	46.0	-11.6	1.00 V	300	41.9	-7.5
5	325.43	30.6 QP	46.0	-15.4	1.50 V	286	37.4	-6.8
6	352.65	23.3 QP	46.0	-22.7	1.00 V	61	29.9	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

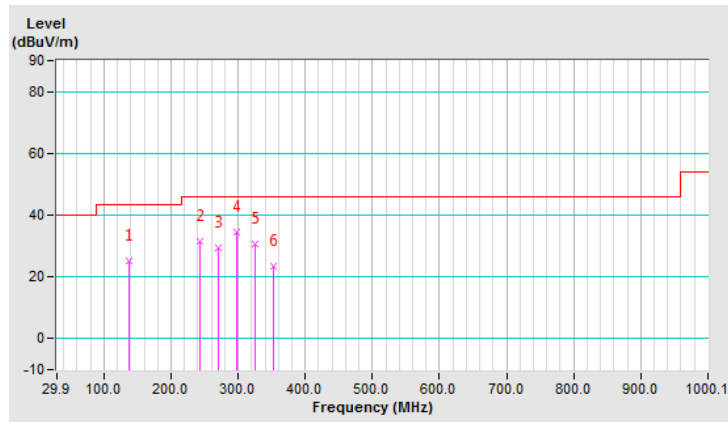


### Type B

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	A2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.57	26.1 QP	40.0	-13.9	1.49 H	59	36.2	-10.1
2	57.12	26.5 QP	40.0	-13.5	1.99 H	291	36.6	-10.1
3	243.77	37.5 QP	46.0	-8.5	1.49 H	15	46.9	-9.4
4	270.99	38.0 QP	46.0	-8.0	1.00 H	349	46.3	-8.3
5	298.21	44.2 QP	46.0	-1.8	1.00 H	359	51.7	-7.5
6	325.43	32.2 QP	46.0	-13.8	1.00 H	154	39.0	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

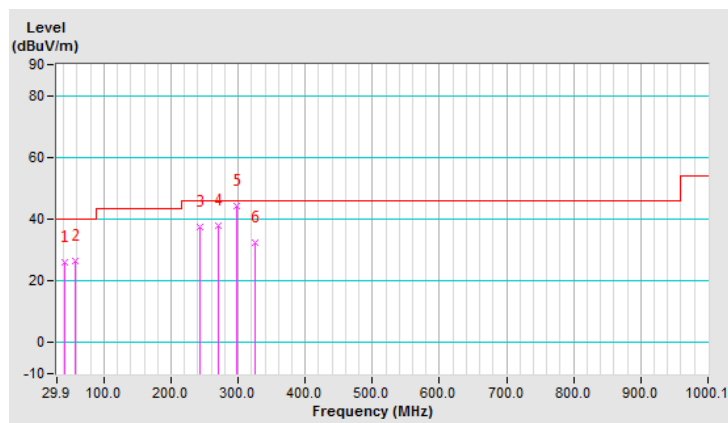


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	A2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.57	31.1 QP	40.0	-8.9	1.49 V	15	41.2	-10.1
2	70.73	24.8 QP	40.0	-15.2	2.00 V	13	36.8	-12.0
3	92.12	23.5 QP	43.5	-20.0	1.49 V	138	37.9	-14.4
4	156.28	29.8 QP	43.5	-13.7	1.49 V	15	38.9	-9.1
5	679.29	28.6 QP	46.0	-17.4	2.00 V	305	28.7	-0.1
6	904.83	36.6 QP	46.0	-9.4	2.00 V	349	32.3	4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

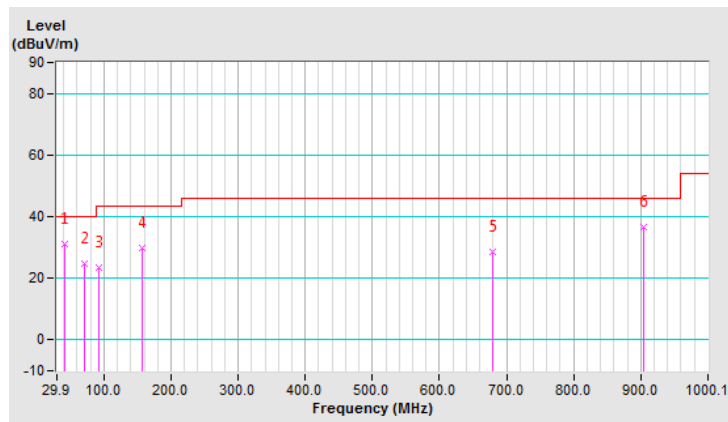


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	B2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	27.2 QP	40.0	-12.8	1.99 H	91	37.3	-10.1
2	171.83	25.1 QP	43.5	-18.4	1.01 H	15	34.6	-9.5
3	243.77	41.3 QP	46.0	-4.7	1.01 H	2	50.7	-9.4
4	270.99	38.6 QP	46.0	-7.4	1.01 H	2	46.9	-8.3
5	298.21	44.6 QP	46.0	-1.4	1.01 H	177	52.1	-7.5
6	325.43	33.0 QP	46.0	-13.0	1.01 H	161	39.8	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

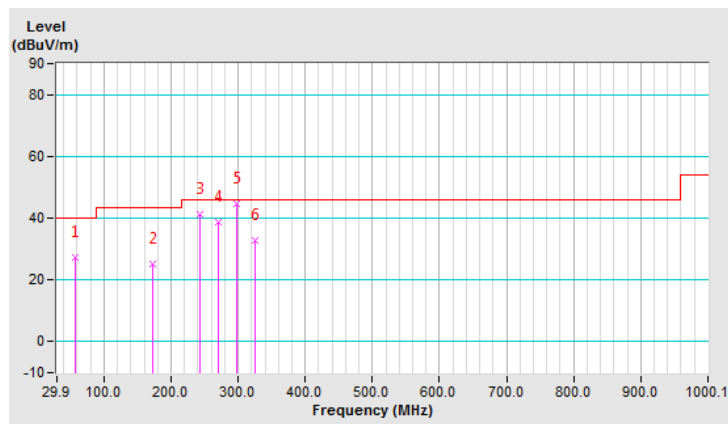




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	B2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.68	28.5 QP	40.0	-11.5	1.00 V	0	39.2	-10.7
2	171.83	26.1 QP	43.5	-17.4	1.00 V	115	35.6	-9.5
3	243.77	32.9 QP	46.0	-13.1	1.49 V	276	42.3	-9.4
4	270.99	30.6 QP	46.0	-15.4	1.00 V	309	38.9	-8.3
5	298.21	35.0 QP	46.0	-11.0	1.00 V	305	42.5	-7.5
6	714.29	29.5 QP	46.0	-16.5	1.00 V	128	28.8	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

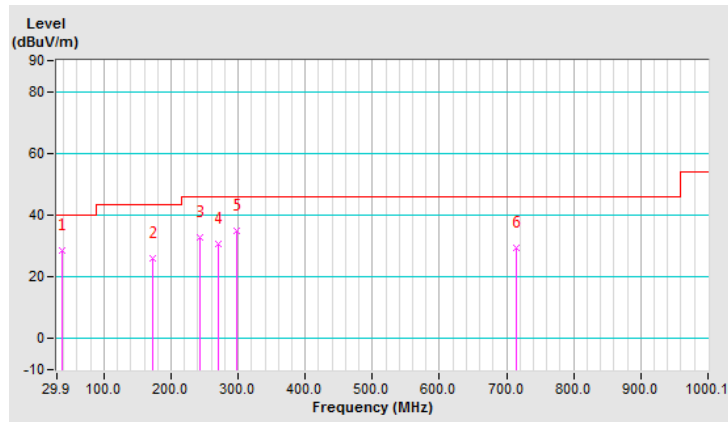


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	C2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	27.0 QP	40.0	-13.0	1.99 H	295	37.1	-10.1
2	158.22	27.2 QP	43.5	-16.3	1.49 H	187	36.3	-9.1
3	243.77	39.3 QP	46.0	-6.7	1.00 H	5	48.7	-9.4
4	270.99	37.8 QP	46.0	-8.2	1.00 H	5	46.1	-8.3
5	298.21	42.3 QP	46.0	-3.7	1.00 H	141	49.8	-7.5
6	325.43	33.0 QP	46.0	-13.0	1.00 H	141	39.8	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

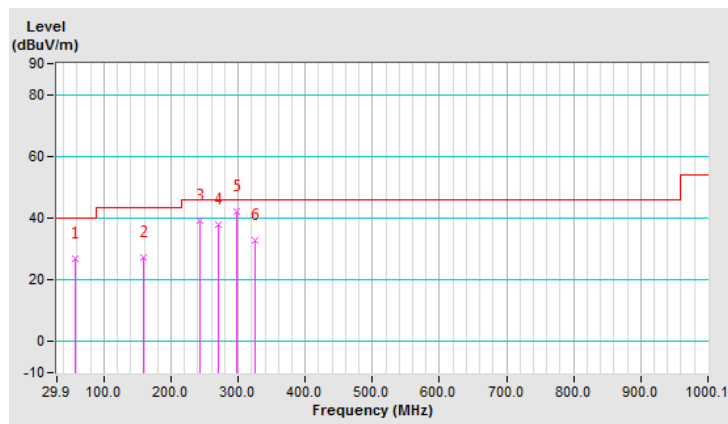


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	C2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.73	33.0 QP	40.0	-7.0	1.01 V	355	44.1	-11.1
2	158.22	27.9 QP	43.5	-15.6	1.01 V	125	37.0	-9.1
3	243.77	31.8 QP	46.0	-14.2	1.51 V	284	41.2	-9.4
4	270.99	30.2 QP	46.0	-15.8	1.01 V	301	38.5	-8.3
5	298.21	35.6 QP	46.0	-10.4	1.99 V	166	43.1	-7.5
6	652.07	27.5 QP	46.0	-18.5	1.99 V	231	28.0	-0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

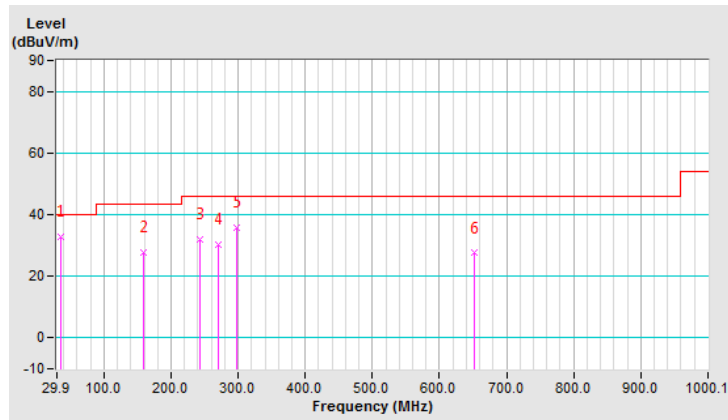


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	D2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.3 QP	40.0	-13.7	1.99 H	350	36.4	-10.1
2	197.11	31.9 QP	43.5	-11.6	1.01 H	359	43.1	-11.2
3	243.77	39.2 QP	46.0	-6.8	1.01 H	206	48.6	-9.4
4	270.99	39.1 QP	46.0	-6.9	1.01 H	357	47.4	-8.3
5	298.21	44.2 QP	46.0	-1.8	1.01 H	215	51.7	-7.5
6	325.43	35.9 QP	46.0	-10.1	1.01 H	221	42.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

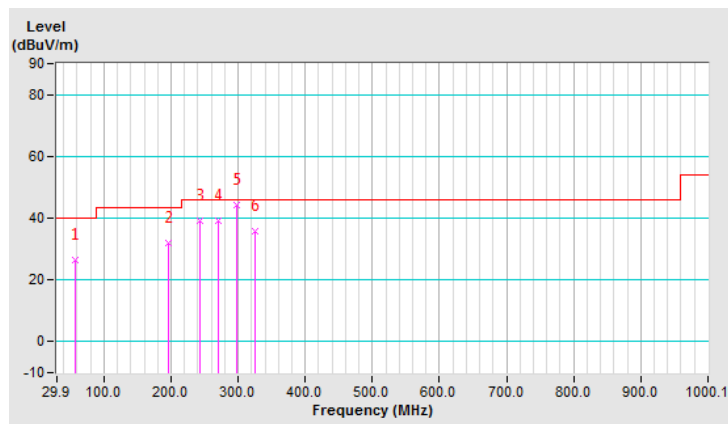


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	D2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.68	27.4 QP	40.0	-12.6	1.00 V	180	38.1	-10.7
2	166.00	28.8 QP	43.5	-14.7	1.00 V	147	37.9	-9.1
3	243.77	31.2 QP	46.0	-14.8	1.00 V	309	40.6	-9.4
4	270.99	31.6 QP	46.0	-14.4	1.00 V	288	39.9	-8.3
5	298.21	35.3 QP	46.0	-10.7	1.00 V	297	42.8	-7.5
6	325.43	28.9 QP	46.0	-17.1	1.49 V	87	35.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

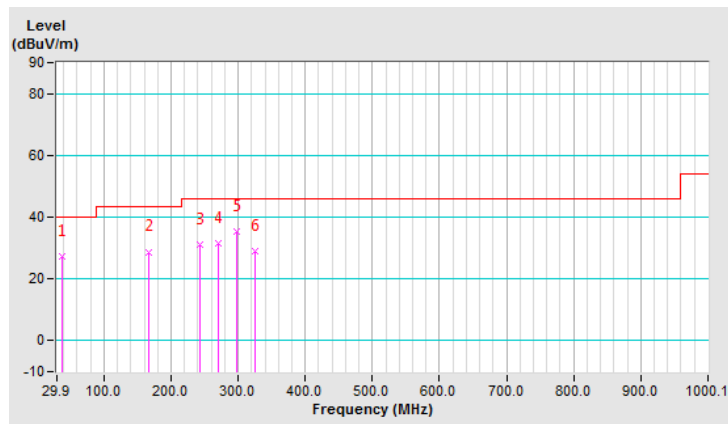


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	E2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	27.0 QP	40.0	-13.0	1.99 H	312	37.1	-10.1
2	243.77	37.7 QP	46.0	-8.3	1.00 H	342	47.1	-9.4
3	270.99	36.3 QP	46.0	-9.7	1.00 H	157	44.6	-8.3
4	298.21	44.1 QP	46.0	-1.9	1.00 H	169	51.6	-7.5
5	325.43	32.2 QP	46.0	-13.8	1.00 H	154	39.0	-6.8
6	904.83	32.0 QP	46.0	-14.0	1.99 H	349	27.7	4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

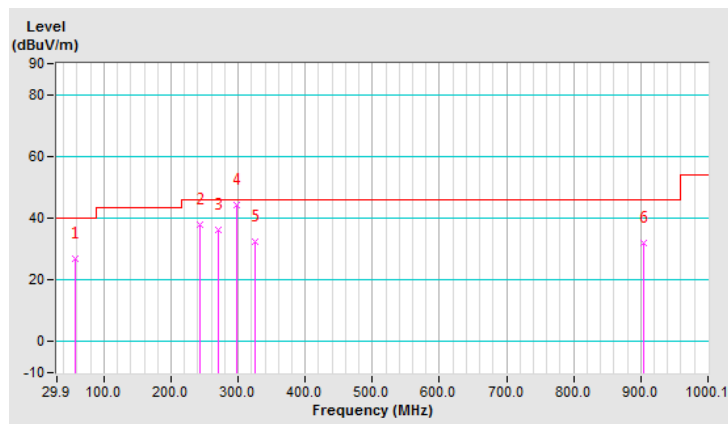


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	E2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.62	27.3 QP	40.0	-12.7	1.01 V	215	37.7	-10.4
2	57.12	24.4 QP	40.0	-15.6	1.01 V	207	34.5	-10.1
3	243.77	34.0 QP	46.0	-12.0	1.01 V	171	43.4	-9.4
4	270.99	31.3 QP	46.0	-14.7	1.01 V	335	39.6	-8.3
5	298.21	35.4 QP	46.0	-10.6	1.01 V	304	42.9	-7.5
6	325.43	27.8 QP	46.0	-18.2	1.51 V	64	34.6	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

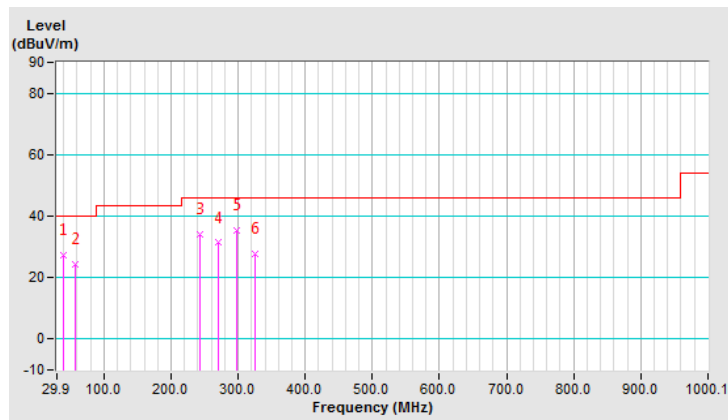


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	F2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.2 QP	40.0	-13.8	1.99 H	297	36.3	-10.1
2	216.55	30.6 QP	46.0	-15.4	1.01 H	343	41.5	-10.9
3	243.77	39.8 QP	46.0	-6.2	1.01 H	15	49.2	-9.4
4	270.99	35.6 QP	46.0	-10.4	1.01 H	144	43.9	-8.3
5	298.21	44.7 QP	46.0	-1.3	1.01 H	1	52.2	-7.5
6	325.43	32.9 QP	46.0	-13.1	1.01 H	153	39.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

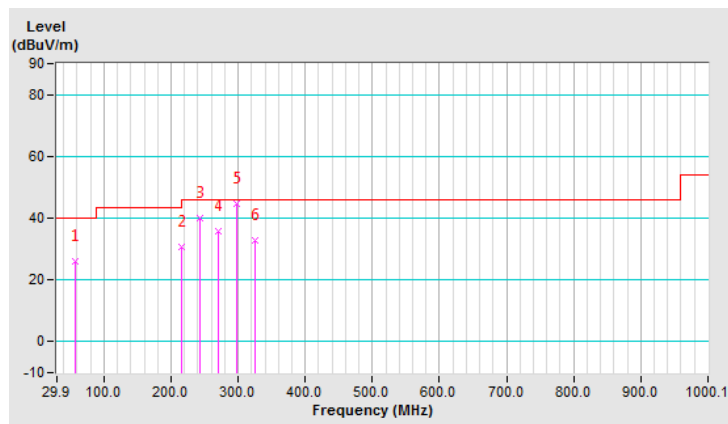




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	F2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	185.44	26.9 QP	43.5	-16.6	1.49 V	15	37.6	-10.7
2	243.77	30.5 QP	46.0	-15.5	1.49 V	283	39.9	-9.4
3	270.99	31.0 QP	46.0	-15.0	1.00 V	338	39.3	-8.3
4	298.21	35.5 QP	46.0	-10.5	1.00 V	310	43.0	-7.5
5	325.43	27.5 QP	46.0	-18.5	1.00 V	51	34.3	-6.8
6	729.84	34.6 QP	46.0	-11.4	1.49 V	318	33.4	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

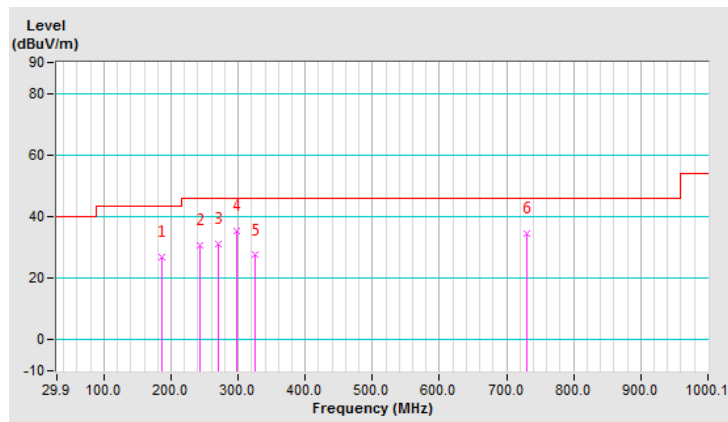


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	G2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	24.1 QP	40.0	-15.9	1.00 H	200	34.2	-10.1
2	70.73	20.1 QP	40.0	-19.9	2.00 H	12	32.1	-12.0
3	243.77	40.7 QP	46.0	-5.3	1.00 H	358	50.1	-9.4
4	270.99	38.6 QP	46.0	-7.4	1.00 H	5	46.9	-8.3
5	298.21	44.4 QP	46.0	-1.6	1.00 H	3	51.9	-7.5
6	325.43	30.9 QP	46.0	-15.1	1.00 H	5	37.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

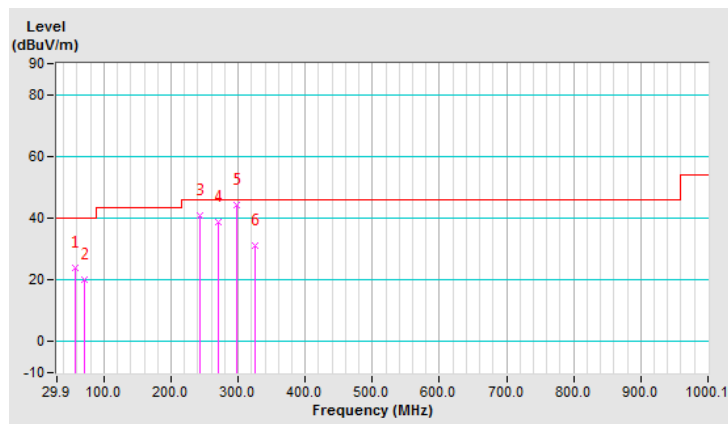


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	G2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.84	28.9 QP	40.0	-11.1	2.00 V	152	40.4	-11.5
2	49.34	23.5 QP	40.0	-16.5	1.50 V	314	33.2	-9.7
3	76.56	22.8 QP	40.0	-17.2	1.00 V	157	36.2	-13.4
4	243.77	31.9 QP	46.0	-14.1	1.50 V	266	41.3	-9.4
5	270.99	30.7 QP	46.0	-15.3	2.00 V	261	39.0	-8.3
6	298.21	34.1 QP	46.0	-11.9	1.50 V	289	41.6	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

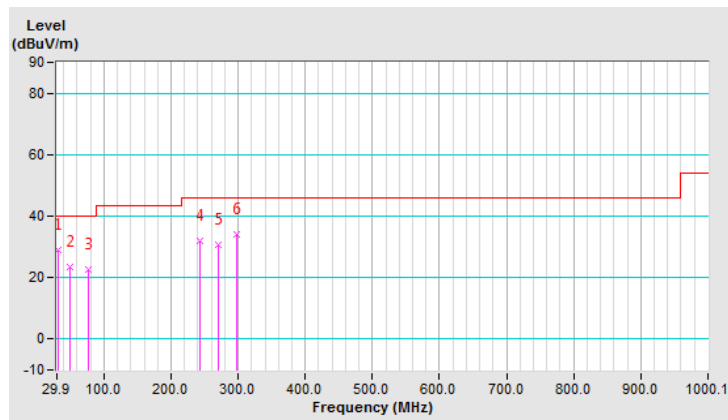


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	H2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	121.28	23.8 QP	43.5	-19.7	2.00 H	16	35.1	-11.3
2	202.94	28.0 QP	43.5	-15.5	1.00 H	197	39.1	-11.1
3	243.77	40.3 QP	46.0	-5.7	1.00 H	11	49.7	-9.4
4	270.99	37.1 QP	46.0	-8.9	1.00 H	150	45.4	-8.3
5	298.21	43.9 QP	46.0	-2.1	1.00 H	161	51.4	-7.5
6	325.43	32.8 QP	46.0	-13.2	1.50 H	163	39.6	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

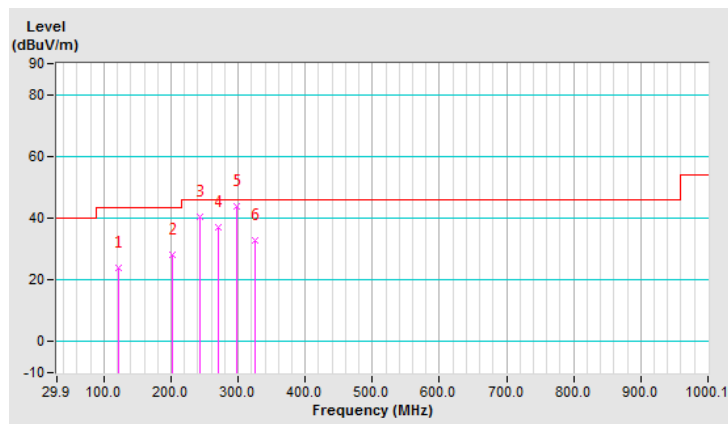


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	H2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.79	33.4 QP	40.0	-6.6	1.00 V	77	44.6	-11.2
2	68.79	33.2 QP	40.0	-6.8	1.00 V	353	45.0	-11.8
3	121.28	29.1 QP	43.5	-14.4	1.50 V	213	40.4	-11.3
4	243.77	30.2 QP	46.0	-15.8	1.00 V	261	39.6	-9.4
5	270.99	28.0 QP	46.0	-18.0	1.50 V	322	36.3	-8.3
6	298.21	35.3 QP	46.0	-10.7	1.00 V	297	42.8	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

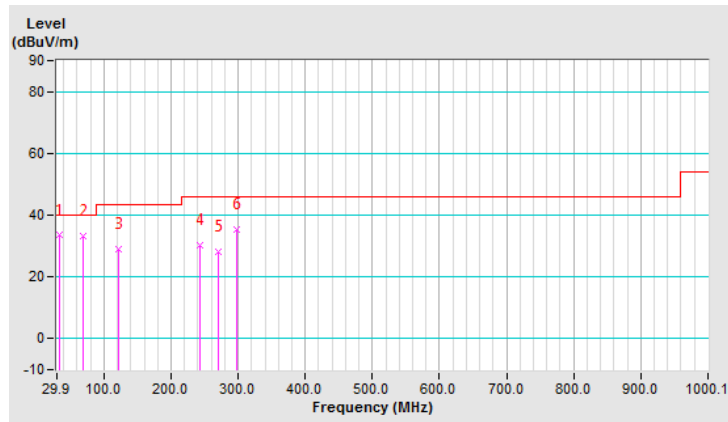


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	I2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	22.9 QP	40.0	-17.1	2.00 H	251	33.0	-10.1
2	166.00	24.3 QP	43.5	-19.2	1.00 H	5	33.4	-9.1
3	243.77	40.0 QP	46.0	-6.0	1.50 H	5	49.4	-9.4
4	270.99	36.3 QP	46.0	-9.7	1.00 H	134	44.6	-8.3
5	298.21	44.5 QP	46.0	-1.5	1.00 H	352	52.0	-7.5
6	325.43	32.4 QP	46.0	-13.6	1.00 H	146	39.2	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

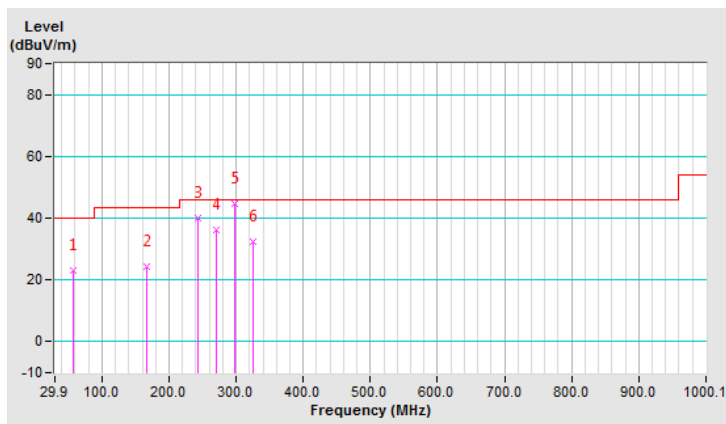


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	I2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.79	28.6 QP	40.0	-11.4	2.00 V	187	39.8	-11.2
2	92.12	31.7 QP	43.5	-11.8	2.00 V	148	46.1	-14.4
3	167.94	26.1 QP	43.5	-17.4	1.00 V	87	35.4	-9.3
4	243.77	30.4 QP	46.0	-15.6	1.50 V	266	39.8	-9.4
5	270.99	30.2 QP	46.0	-15.8	1.00 V	324	38.5	-8.3
6	298.21	35.9 QP	46.0	-10.1	1.00 V	296	43.4	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

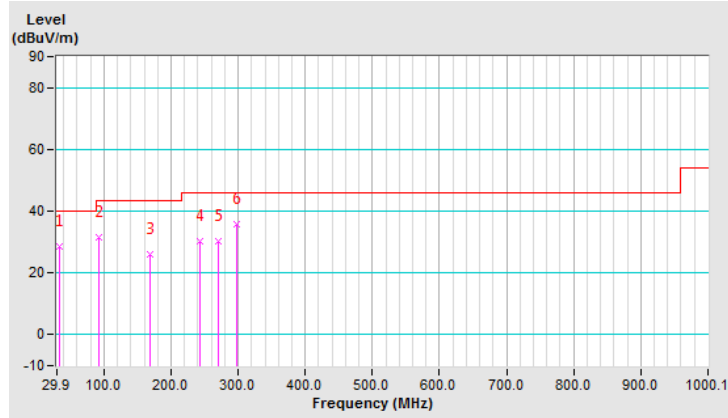


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	J2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	142.67	39.1 QP	43.5	-4.4	1.50 H	211	48.5	-9.4
2	160.17	37.0 QP	43.5	-6.5	1.00 H	181	46.0	-9.0
3	216.55	26.9 QP	46.0	-19.1	2.00 H	14	37.8	-10.9
4	243.77	36.0 QP	46.0	-10.0	1.00 H	147	45.4	-9.4
5	298.21	43.3 QP	46.0	-2.7	1.50 H	170	50.8	-7.5
6	325.43	32.2 QP	46.0	-13.8	1.00 H	154	39.0	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

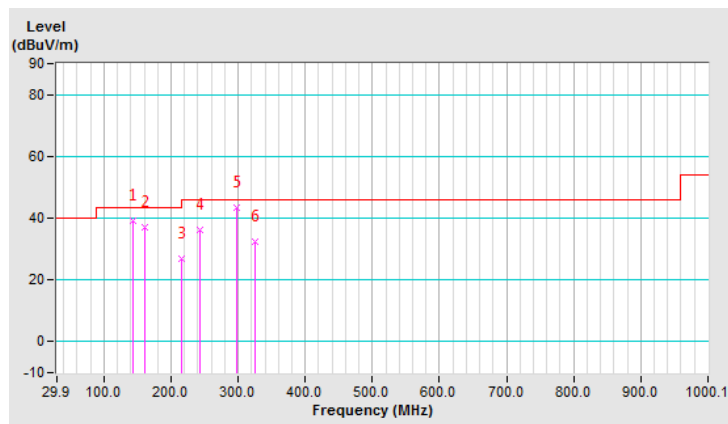




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	J2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	22.7 QP	40.0	-17.3	1.50 V	197	32.8	-10.1
2	154.33	37.7 QP	43.5	-5.8	1.00 V	289	46.7	-9.0
3	243.77	30.4 QP	46.0	-15.6	2.00 V	324	39.8	-9.4
4	270.99	30.5 QP	46.0	-15.5	1.00 V	307	38.8	-8.3
5	298.21	35.6 QP	46.0	-10.4	1.00 V	307	43.1	-7.5
6	325.43	26.4 QP	46.0	-19.6	1.50 V	58	33.2	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

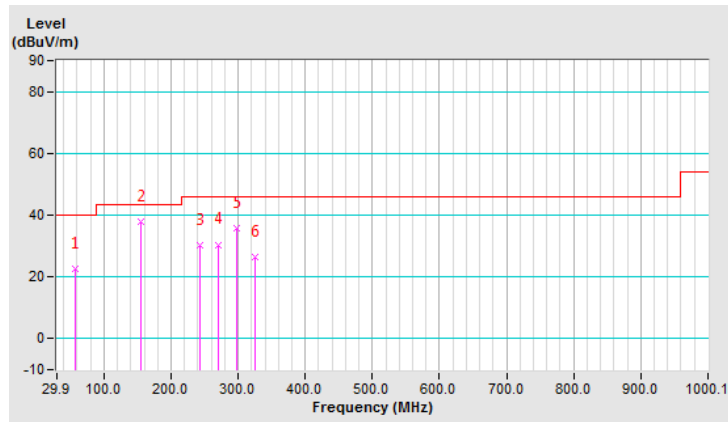


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	K2		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	121.28	21.5 QP	43.5	-22.0	1.50 H	209	32.8	-11.3
2	243.77	42.7 QP	46.0	-3.3	1.00 H	193	52.1	-9.4
3	270.99	39.6 QP	46.0	-6.4	2.00 H	170	47.9	-8.3
4	298.21	44.4 QP	46.0	-1.6	1.50 H	2	51.9	-7.5
5	325.43	37.1 QP	46.0	-8.9	1.00 H	199	43.9	-6.8
6	352.65	29.1 QP	46.0	-16.9	1.00 H	173	35.7	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

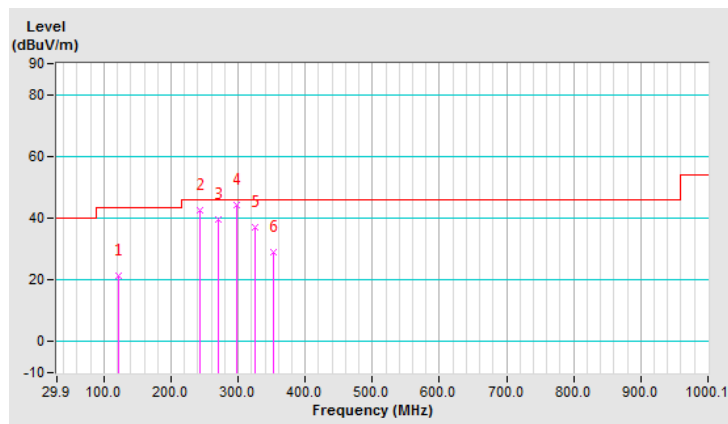


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	K2		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	129.06	26.3 QP	43.5	-17.2	2.00 V	170	37.0	-10.7
2	243.77	31.7 QP	46.0	-14.3	1.00 V	252	41.1	-9.4
3	270.99	30.1 QP	46.0	-15.9	1.00 V	309	38.4	-8.3
4	298.21	34.2 QP	46.0	-11.8	1.50 V	312	41.7	-7.5
5	325.43	30.2 QP	46.0	-15.8	1.00 V	275	37.0	-6.8
6	375.98	21.2 QP	46.0	-24.8	1.50 V	313	27.1	-5.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

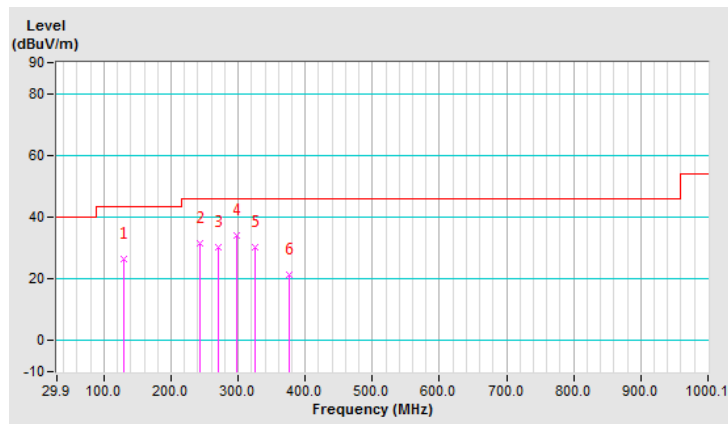


### Type F

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	A3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.57	29.1 QP	40.0	-10.9	2.00 H	242	39.2	-10.1
2	57.12	26.9 QP	40.0	-13.1	1.51 H	5	37.0	-10.1
3	243.77	36.6 QP	46.0	-9.4	1.01 H	8	46.0	-9.4
4	270.99	37.4 QP	46.0	-8.6	1.01 H	340	45.7	-8.3
5	298.21	44.1 QP	46.0	-1.9	1.01 H	2	51.6	-7.5
6	325.43	32.5 QP	46.0	-13.5	1.01 H	151	39.3	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

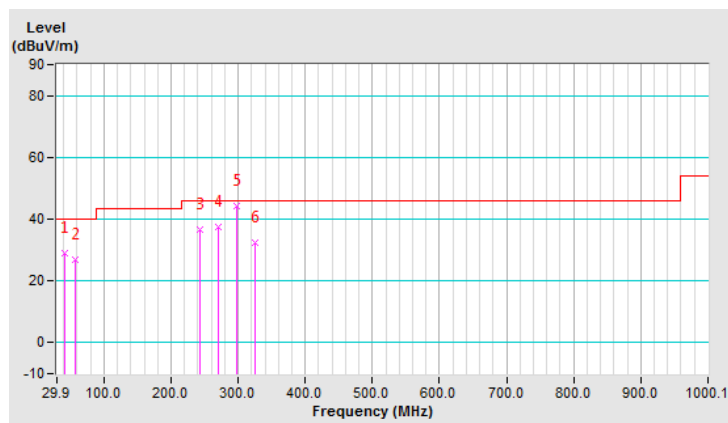


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	A3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.34	37.9 QP	40.0	-2.1	1.49 V	176	47.6	-9.7
2	82.40	28.8 QP	40.0	-11.2	1.00 V	259	43.1	-14.3
3	158.22	27.5 QP	43.5	-16.0	1.00 V	294	36.6	-9.1
4	243.77	28.2 QP	46.0	-17.8	1.99 V	160	37.6	-9.4
5	270.99	31.8 QP	46.0	-14.2	1.49 V	174	40.1	-8.3
6	298.21	35.1 QP	46.0	-10.9	1.00 V	316	42.6	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

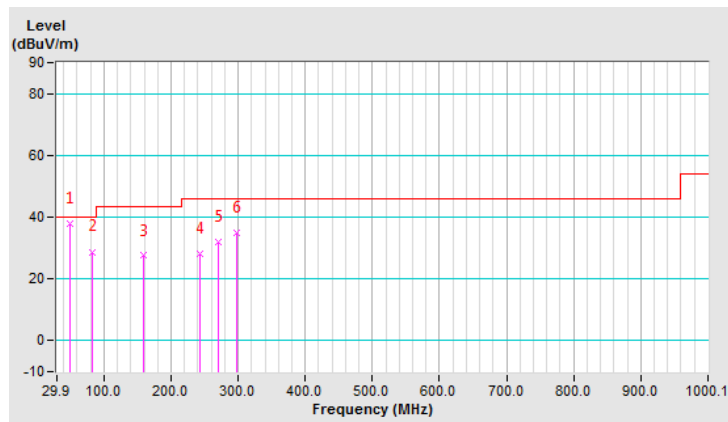


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	B3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.3 QP	40.0	-13.7	2.00 H	33	36.4	-10.1
2	171.83	25.7 QP	43.5	-17.8	1.00 H	333	35.2	-9.5
3	243.77	40.8 QP	46.0	-5.2	1.00 H	359	50.2	-9.4
4	270.99	38.0 QP	46.0	-8.0	1.00 H	354	46.3	-8.3
5	298.21	44.5 QP	46.0	-1.5	1.00 H	170	52.0	-7.5
6	325.43	32.5 QP	46.0	-13.5	1.00 H	141	39.3	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

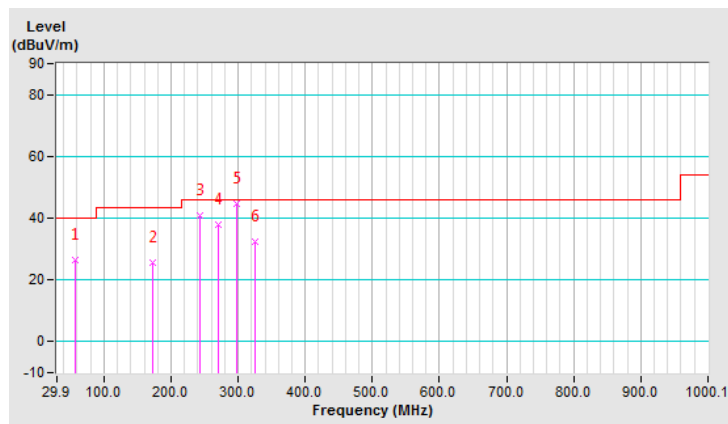


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	B3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.62	28.5 QP	40.0	-11.5	1.00 V	9	38.9	-10.4
2	57.12	24.1 QP	40.0	-15.9	1.00 V	214	34.2	-10.1
3	185.44	26.0 QP	43.5	-17.5	1.00 V	75	36.7	-10.7
4	243.77	33.1 QP	46.0	-12.9	1.50 V	282	42.5	-9.4
5	270.99	30.4 QP	46.0	-15.6	1.50 V	285	38.7	-8.3
6	298.21	34.6 QP	46.0	-11.4	1.00 V	294	42.1	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

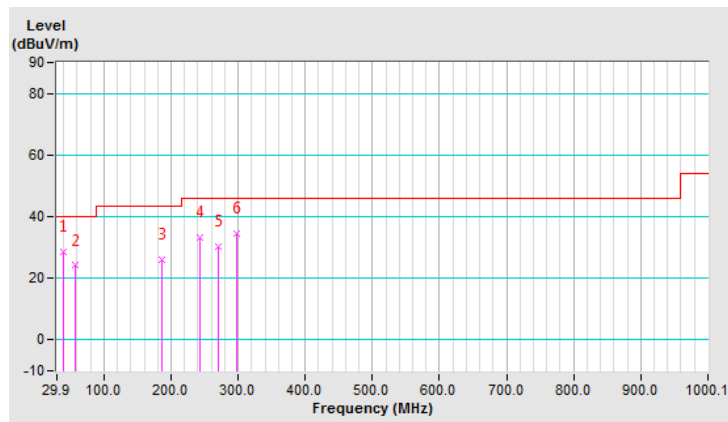


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	C3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.3 QP	40.0	-13.7	2.00 H	70	36.4	-10.1
2	162.11	27.8 QP	43.5	-15.7	1.51 H	182	36.8	-9.0
3	243.77	39.2 QP	46.0	-6.8	1.00 H	3	48.6	-9.4
4	270.99	37.9 QP	46.0	-8.1	1.00 H	10	46.2	-8.3
5	298.21	42.3 QP	46.0	-3.7	1.00 H	144	49.8	-7.5
6	325.43	34.1 QP	46.0	-11.9	1.00 H	238	40.9	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

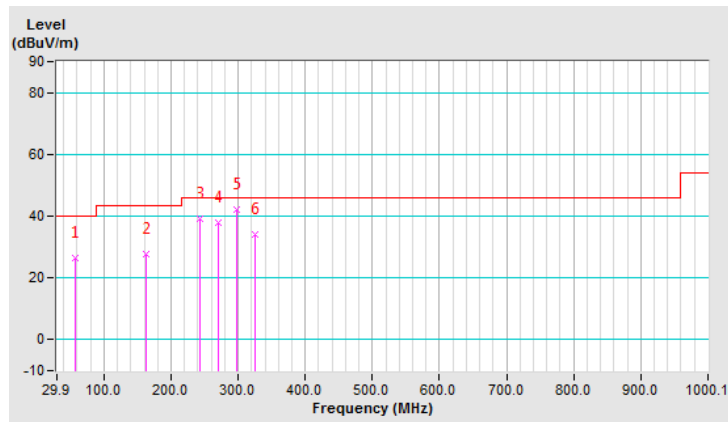




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	C3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.62	32.4 QP	40.0	-7.6	1.00 V	40	42.8	-10.4
2	80.45	26.5 QP	40.0	-13.5	1.00 V	19	40.5	-14.0
3	156.28	27.2 QP	43.5	-16.3	1.49 V	110	36.3	-9.1
4	243.77	32.1 QP	46.0	-13.9	1.49 V	286	41.5	-9.4
5	270.99	30.4 QP	46.0	-15.6	1.00 V	286	38.7	-8.3
6	298.21	35.9 QP	46.0	-10.1	1.99 V	164	43.4	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

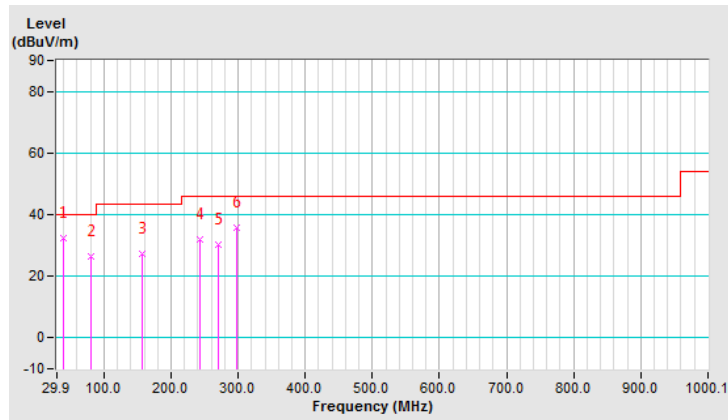


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	D3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.4 QP	40.0	-13.6	1.99 H	10	36.5	-10.1
2	197.11	28.9 QP	43.5	-14.6	1.99 H	68	40.1	-11.2
3	243.77	39.2 QP	46.0	-6.8	1.00 H	210	48.6	-9.4
4	270.99	39.1 QP	46.0	-6.9	1.00 H	9	47.4	-8.3
5	298.21	44.3 QP	46.0	-1.7	1.00 H	208	51.8	-7.5
6	325.43	35.4 QP	46.0	-10.6	1.00 H	224	42.2	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

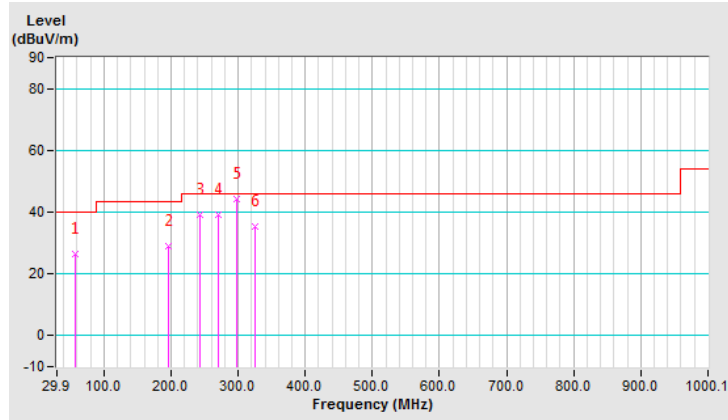


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	D3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.62	26.9 QP	40.0	-13.1	1.01 V	243	37.3	-10.4
2	167.94	30.0 QP	43.5	-13.5	1.01 V	105	39.3	-9.3
3	243.77	31.5 QP	46.0	-14.5	1.01 V	303	40.9	-9.4
4	270.99	31.7 QP	46.0	-14.3	1.01 V	292	40.0	-8.3
5	298.21	35.3 QP	46.0	-10.7	1.01 V	303	42.8	-7.5
6	325.43	29.1 QP	46.0	-16.9	1.51 V	99	35.9	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

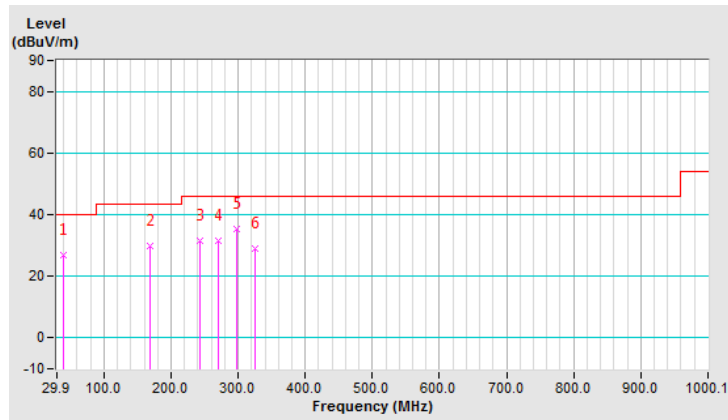


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	E3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.2 QP	40.0	-13.8	1.99 H	4	36.3	-10.1
2	243.77	37.8 QP	46.0	-8.2	1.01 H	1	47.2	-9.4
3	270.99	36.6 QP	46.0	-9.4	1.01 H	144	44.9	-8.3
4	298.21	44.2 QP	46.0	-1.8	1.01 H	167	51.7	-7.5
5	325.43	32.6 QP	46.0	-13.4	1.01 H	169	39.4	-6.8
6	613.19	28.2 QP	46.0	-17.8	1.01 H	246	29.1	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

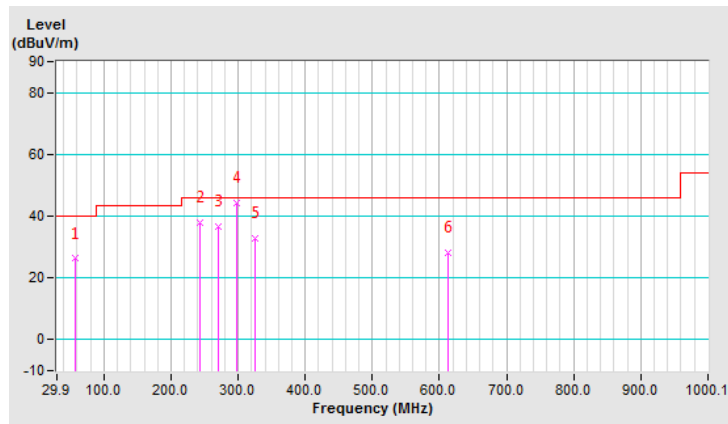


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	E3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.51	28.6 QP	40.0	-11.4	1.99 V	17	38.6	-10.0
2	57.12	24.1 QP	40.0	-15.9	1.00 V	280	34.2	-10.1
3	243.77	33.9 QP	46.0	-12.1	1.00 V	171	43.3	-9.4
4	270.99	30.7 QP	46.0	-15.3	1.00 V	336	39.0	-8.3
5	298.21	35.4 QP	46.0	-10.6	1.00 V	308	42.9	-7.5
6	541.25	26.2 QP	46.0	-19.8	1.00 V	12	29.2	-3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

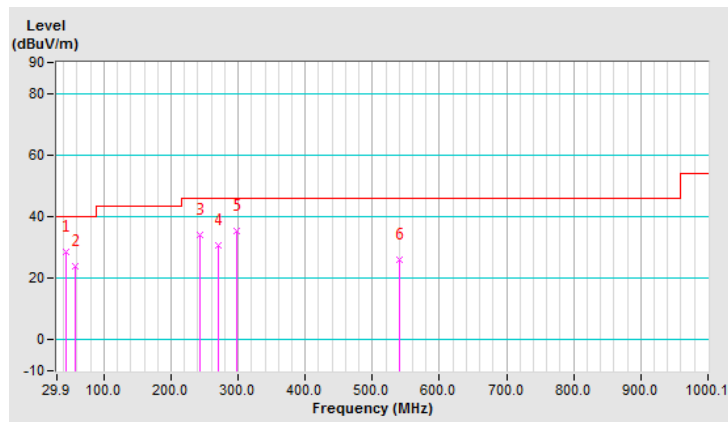


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	F3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.8 QP	40.0	-13.2	1.99 H	248	36.9	-10.1
2	216.55	29.8 QP	46.0	-16.2	1.00 H	7	40.7	-10.9
3	243.77	39.8 QP	46.0	-6.2	1.00 H	5	49.2	-9.4
4	270.99	35.6 QP	46.0	-10.4	1.00 H	141	43.9	-8.3
5	298.21	44.7 QP	46.0	-1.3	1.00 H	5	52.2	-7.5
6	325.43	33.4 QP	46.0	-12.6	1.00 H	159	40.2	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

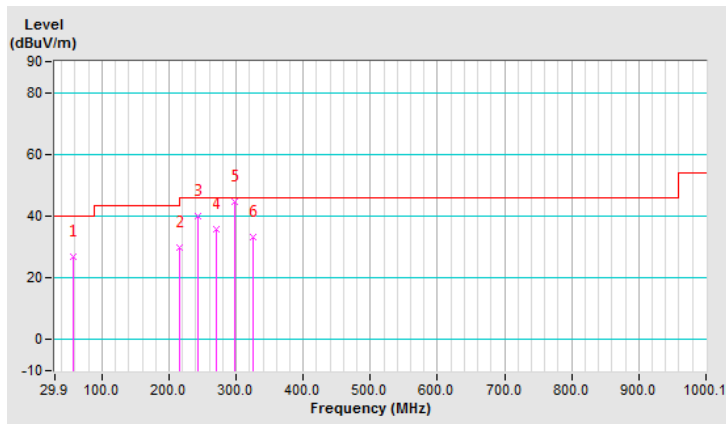


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	F3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.68	23.0 QP	40.0	-17.0	1.01 V	357	33.7	-10.7
2	183.50	27.5 QP	43.5	-16.0	1.01 V	16	38.1	-10.6
3	243.77	31.0 QP	46.0	-15.0	1.51 V	290	40.4	-9.4
4	270.99	30.7 QP	46.0	-15.3	1.51 V	14	39.0	-8.3
5	298.21	36.0 QP	46.0	-10.0	1.01 V	298	43.5	-7.5
6	325.43	27.2 QP	46.0	-18.8	1.51 V	51	34.0	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

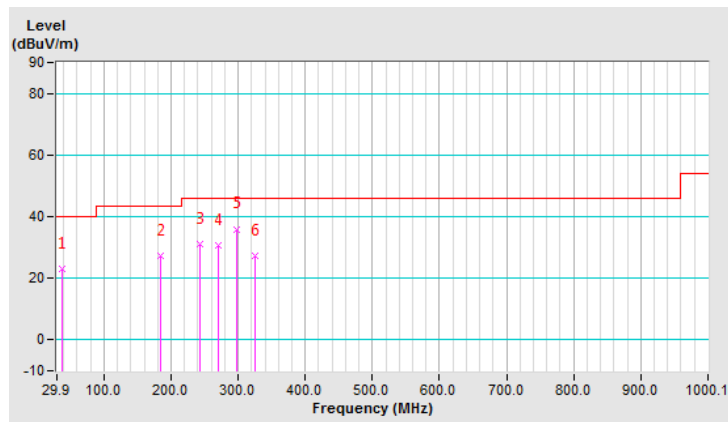


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	G3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	23.2 QP	40.0	-16.8	1.00 H	338	33.3	-10.1
2	243.77	40.9 QP	46.0	-5.1	2.00 H	347	50.3	-9.4
3	270.99	38.4 QP	46.0	-7.6	1.00 H	5	46.7	-8.3
4	298.21	44.4 QP	46.0	-1.6	1.00 H	1	51.9	-7.5
5	325.43	31.0 QP	46.0	-15.0	1.50 H	357	37.8	-6.8
6	352.65	25.4 QP	46.0	-20.6	1.00 H	134	32.0	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

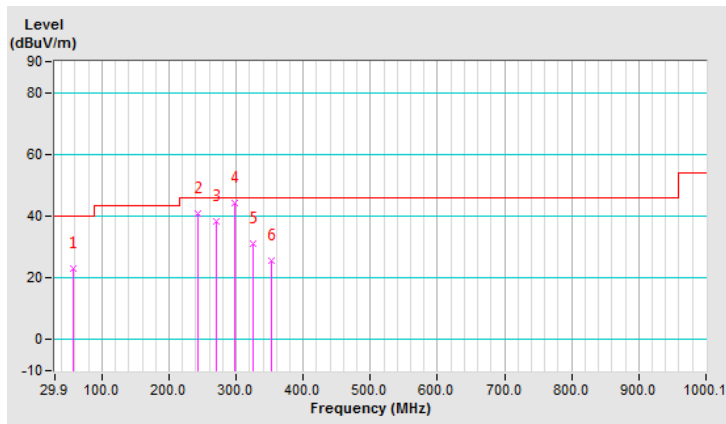




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	G3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.79	26.4 QP	40.0	-13.6	2.00 V	35	37.6	-11.2
2	72.67	28.1 QP	40.0	-11.9	1.50 V	232	40.6	-12.5
3	243.77	32.2 QP	46.0	-13.8	1.50 V	259	41.6	-9.4
4	270.99	31.1 QP	46.0	-14.9	1.50 V	274	39.4	-8.3
5	298.21	34.0 QP	46.0	-12.0	1.00 V	292	41.5	-7.5
6	385.70	26.4 QP	46.0	-19.6	1.50 V	18	32.2	-5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

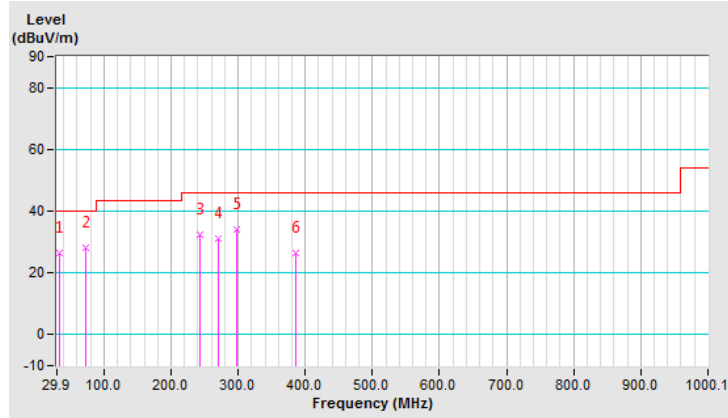


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	H3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	208.77	27.7 QP	43.5	-15.8	2.00 H	27	38.7	-11.0
2	243.77	40.2 QP	46.0	-5.8	1.00 H	4	49.6	-9.4
3	270.99	37.1 QP	46.0	-8.9	1.00 H	132	45.4	-8.3
4	298.21	43.9 QP	46.0	-2.1	1.00 H	168	51.4	-7.5
5	325.43	33.0 QP	46.0	-13.0	1.50 H	159	39.8	-6.8
6	613.19	27.7 QP	46.0	-18.3	1.00 H	260	28.6	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

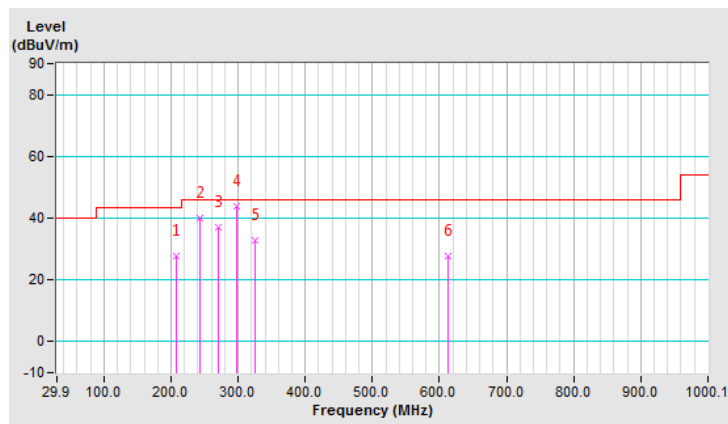


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	H3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.84	29.4 QP	40.0	-10.6	1.50 V	28	40.9	-11.5
2	121.28	27.4 QP	43.5	-16.1	1.50 V	164	38.7	-11.3
3	206.83	23.9 QP	43.5	-19.6	1.00 V	141	35.0	-11.1
4	243.77	30.4 QP	46.0	-15.6	1.00 V	277	39.8	-9.4
5	270.99	28.3 QP	46.0	-17.7	1.00 V	327	36.6	-8.3
6	298.21	35.4 QP	46.0	-10.6	1.00 V	308	42.9	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

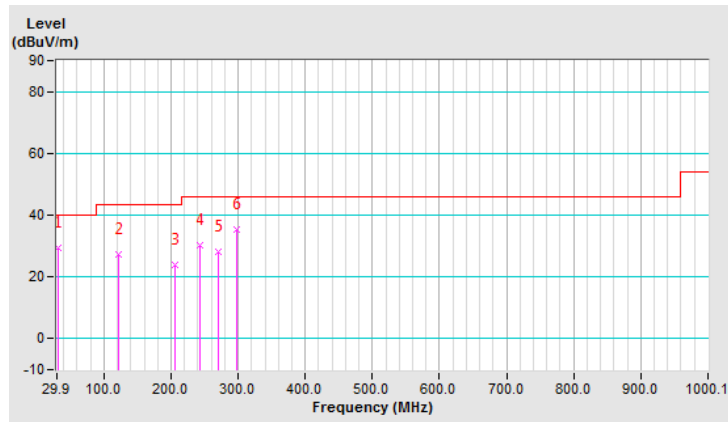


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	I3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.7 QP	40.0	-13.3	1.99 H	235	36.8	-10.1
2	166.00	26.2 QP	43.5	-17.3	1.51 H	170	35.3	-9.1
3	243.77	40.1 QP	46.0	-5.9	1.01 H	3	49.5	-9.4
4	270.99	36.2 QP	46.0	-9.8	1.01 H	138	44.5	-8.3
5	298.21	44.4 QP	46.0	-1.6	1.01 H	340	51.9	-7.5
6	325.43	31.9 QP	46.0	-14.1	1.01 H	167	38.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

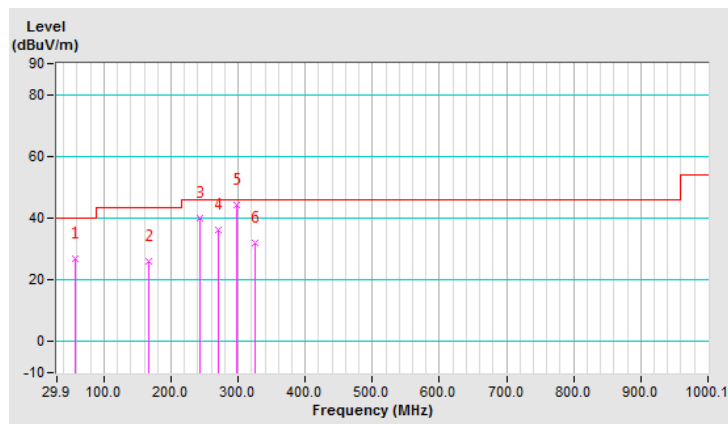


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	I3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.62	30.1 QP	40.0	-9.9	1.49 V	148	40.5	-10.4
2	78.51	36.1 QP	40.0	-3.9	1.49 V	194	49.8	-13.7
3	166.00	26.6 QP	43.5	-16.9	1.00 V	152	35.7	-9.1
4	243.77	32.0 QP	46.0	-14.0	1.49 V	282	41.4	-9.4
5	270.99	30.7 QP	46.0	-15.3	1.99 V	7	39.0	-8.3
6	298.21	35.8 QP	46.0	-10.2	1.00 V	300	43.3	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

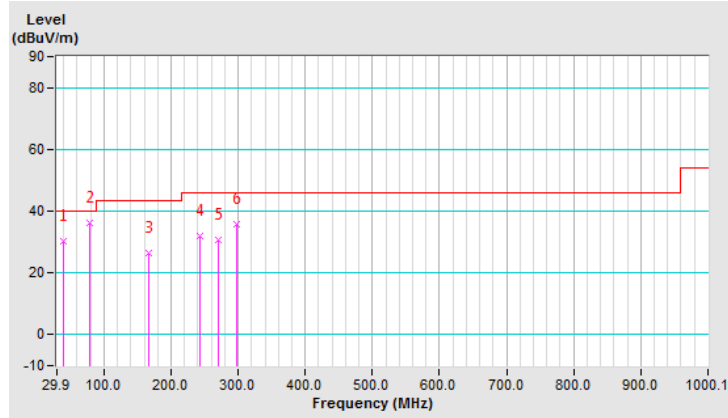


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	J3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	111.56	20.8 QP	43.5	-22.7	1.50 H	17	33.2	-12.4
2	142.67	39.9 QP	43.5	-3.6	1.00 H	186	49.3	-9.4
3	171.83	29.3 QP	43.5	-14.2	2.00 H	5	38.8	-9.5
4	243.77	36.1 QP	46.0	-9.9	1.00 H	145	45.5	-9.4
5	270.99	36.5 QP	46.0	-9.5	1.00 H	350	44.8	-8.3
6	298.21	42.5 QP	46.0	-3.5	2.00 H	3	50.0	-7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

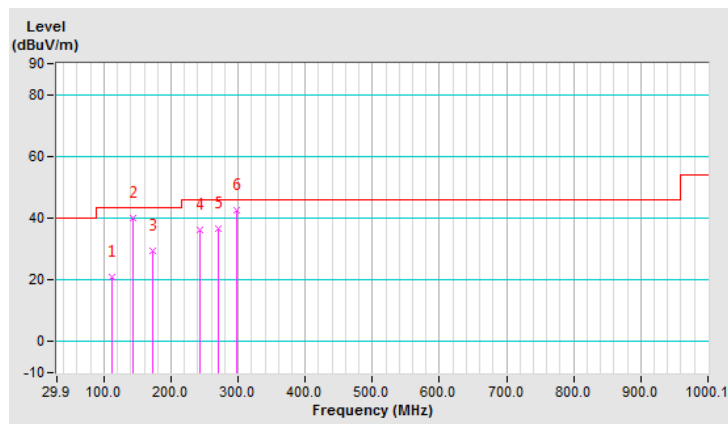


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	J3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	109.62	26.6 QP	43.5	-16.9	1.50 V	151	39.1	-12.5
2	216.55	24.1 QP	46.0	-21.9	1.00 V	15	35.0	-10.9
3	243.77	30.3 QP	46.0	-15.7	1.50 V	186	39.7	-9.4
4	270.99	30.3 QP	46.0	-15.7	1.00 V	300	38.6	-8.3
5	298.21	35.6 QP	46.0	-10.4	1.00 V	313	43.1	-7.5
6	325.43	26.0 QP	46.0	-20.0	1.50 V	61	32.8	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

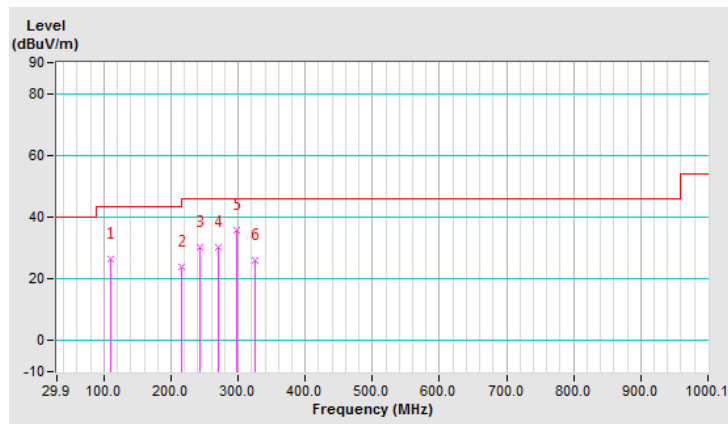


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	K3		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	121.28	21.6 QP	43.5	-21.9	1.50 H	213	32.9	-11.3
2	204.89	15.6 QP	43.5	-27.9	1.00 H	71	26.7	-11.1
3	216.55	24.6 QP	46.0	-21.4	1.50 H	202	35.5	-10.9
4	298.21	44.5 QP	46.0	-1.5	1.00 H	4	52.0	-7.5
5	325.43	36.9 QP	46.0	-9.1	1.00 H	211	43.7	-6.8
6	352.65	28.7 QP	46.0	-17.3	1.50 H	211	35.3	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

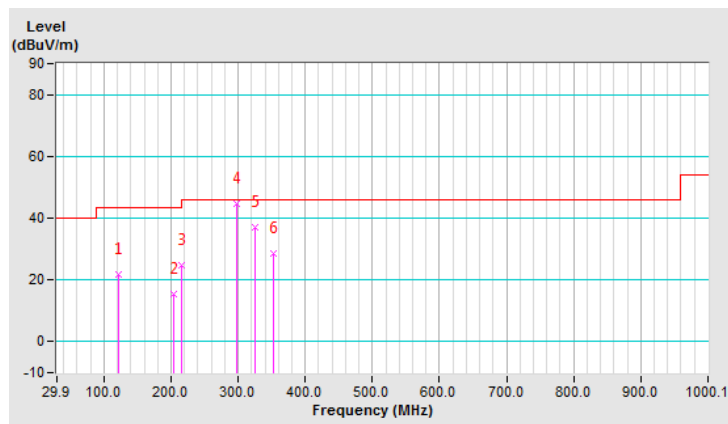




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	K3		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.57	24.7 QP	40.0	-15.3	2.00 V	6	34.8	-10.1
2	57.12	23.1 QP	40.0	-16.9	1.00 V	32	33.2	-10.1
3	129.06	26.2 QP	43.5	-17.3	1.50 V	189	36.9	-10.7
4	270.99	29.8 QP	46.0	-16.2	1.00 V	280	38.1	-8.3
5	298.21	34.1 QP	46.0	-11.9	2.00 V	308	41.6	-7.5
6	325.43	29.9 QP	46.0	-16.1	1.00 V	271	36.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

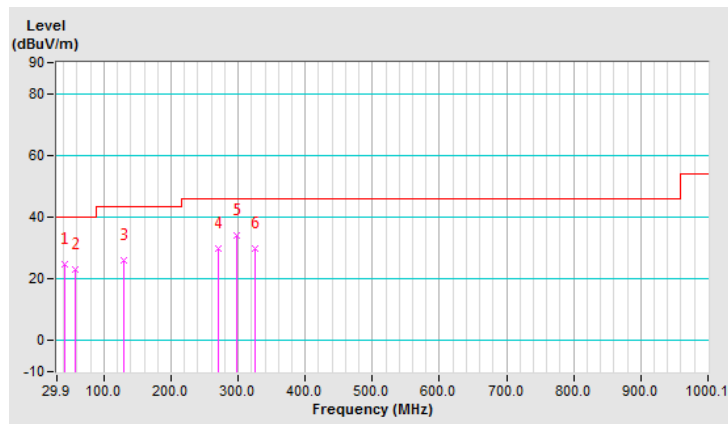


### Type V

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	A4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	26.8 QP	40.0	-13.2	1.99 H	7	36.9	-10.1
2	88.23	25.5 QP	43.5	-18.0	1.99 H	252	40.1	-14.6
3	171.83	26.8 QP	43.5	-16.7	1.49 H	30	36.3	-9.5
4	216.55	24.7 QP	46.0	-21.3	1.00 H	9	35.6	-10.9
5	298.21	44.6 QP	46.0	-1.4	1.00 H	9	52.1	-7.5
6	352.65	26.3 QP	46.0	-19.7	1.00 H	224	32.9	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

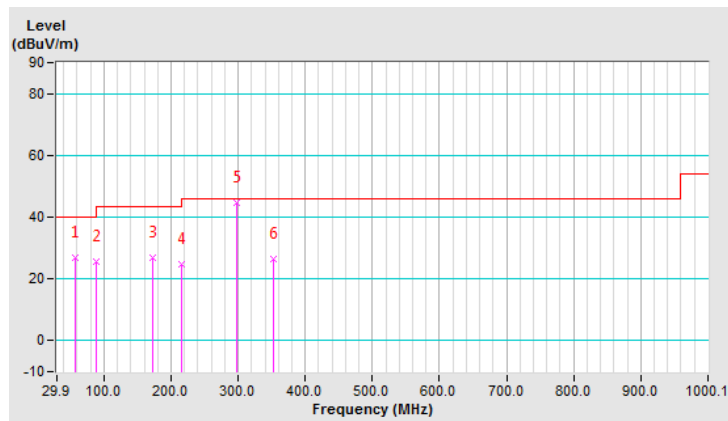


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	A4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.84	30.0 QP	40.0	-10.0	1.01 V	266	41.1	-11.1
2	113.50	23.7 QP	43.5	-19.8	1.01 V	92	35.8	-12.1
3	169.89	20.1 QP	43.5	-23.4	1.50 V	272	29.5	-9.4
4	243.77	31.5 QP	46.0	-14.5	1.01 V	301	40.9	-9.4
5	298.21	35.5 QP	46.0	-10.5	1.01 V	298	43.0	-7.5
6	325.43	26.3 QP	46.0	-19.7	1.50 V	155	33.1	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

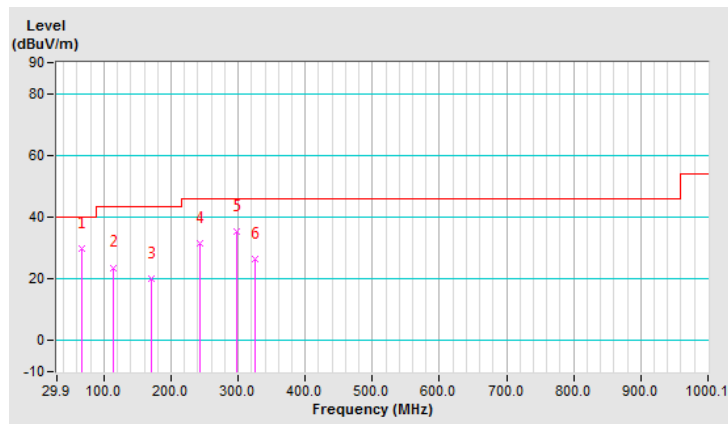


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	B4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	25.3 QP	40.0	-14.7	1.49 H	236	35.4	-10.1
2	74.62	23.8 QP	40.0	-16.2	1.00 H	156	36.6	-12.8
3	191.28	26.8 QP	43.5	-16.7	1.49 H	213	37.9	-11.1
4	243.77	40.7 QP	46.0	-5.3	1.00 H	2	50.1	-9.4
5	298.21	43.5 QP	46.0	-2.5	1.00 H	3	51.0	-7.5
6	325.43	31.5 QP	46.0	-14.5	1.00 H	126	38.3	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

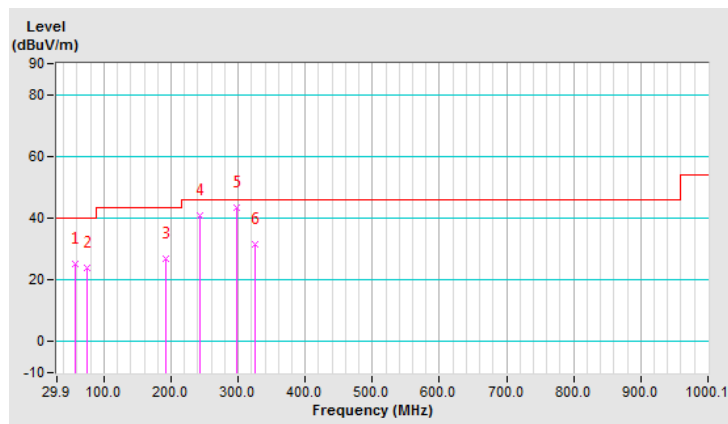


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	B4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	76.56	27.0 QP	40.0	-13.0	1.50 V	133	40.4	-13.4
2	173.78	29.2 QP	43.5	-14.3	1.00 V	117	38.9	-9.7
3	191.28	28.2 QP	43.5	-15.3	2.00 V	86	39.3	-11.1
4	243.77	32.2 QP	46.0	-13.8	1.00 V	282	41.6	-9.4
5	298.21	35.3 QP	46.0	-10.7	1.50 V	299	42.8	-7.5
6	325.43	25.1 QP	46.0	-20.9	1.00 V	294	31.9	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

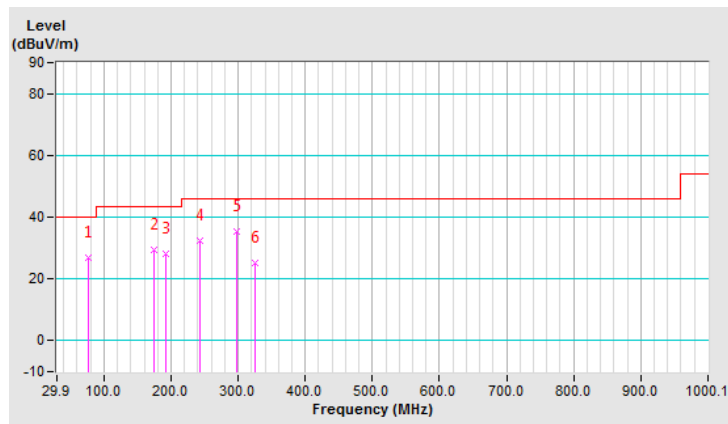


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	C4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	25.1 QP	40.0	-14.9	1.50 H	16	35.2	-10.1
2	175.72	27.3 QP	43.5	-16.2	1.50 H	16	37.2	-9.9
3	216.55	27.5 QP	46.0	-18.5	1.00 H	189	38.4	-10.9
4	270.99	36.2 QP	46.0	-9.8	1.00 H	353	44.5	-8.3
5	298.21	44.2 QP	46.0	-1.8	2.00 H	353	51.7	-7.5
6	325.43	32.8 QP	46.0	-13.2	1.50 H	127	39.6	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

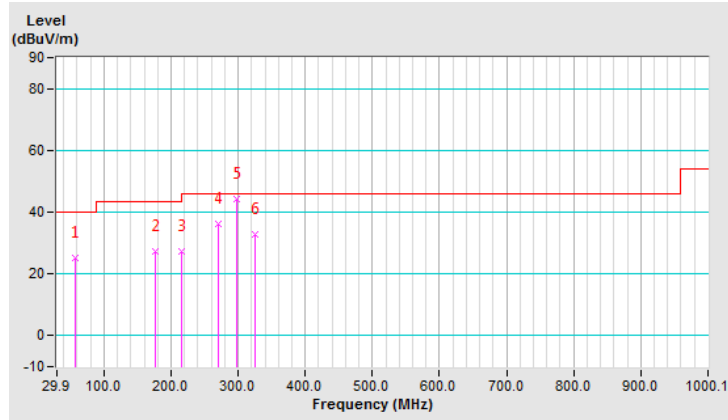


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	C4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.95	29.5 QP	40.0	-10.5	2.00 V	350	39.8	-10.3
2	214.61	23.8 QP	43.5	-19.7	1.00 V	171	34.7	-10.9
3	243.77	29.1 QP	46.0	-16.9	1.00 V	303	38.5	-9.4
4	298.21	35.3 QP	46.0	-10.7	1.49 V	74	42.8	-7.5
5	325.43	28.0 QP	46.0	-18.0	1.00 V	211	34.8	-6.8
6	368.21	27.5 QP	46.0	-18.5	1.49 V	140	33.7	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

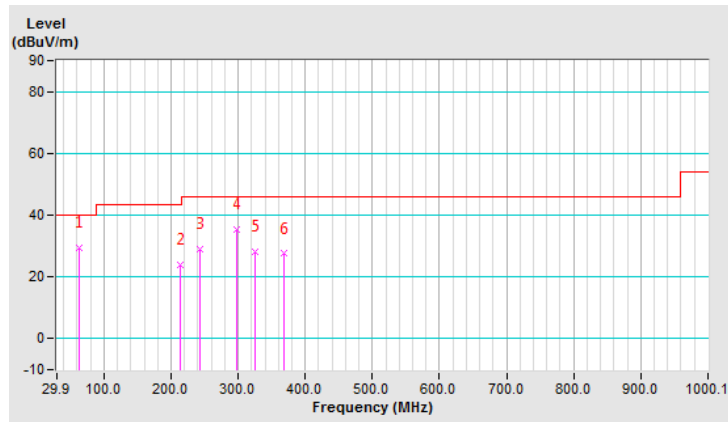


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	D4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.90	25.9 QP	40.0	-14.1	1.50 H	314	36.8	-10.9
2	101.84	26.5 QP	43.5	-17.0	2.00 H	121	39.9	-13.4
3	173.78	25.6 QP	43.5	-17.9	1.50 H	58	35.3	-9.7
4	270.99	31.6 QP	46.0	-14.4	1.50 H	252	39.9	-8.3
5	298.21	35.1 QP	46.0	-10.9	1.00 H	277	42.6	-7.5
6	325.43	27.6 QP	46.0	-18.4	1.50 H	164	34.4	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

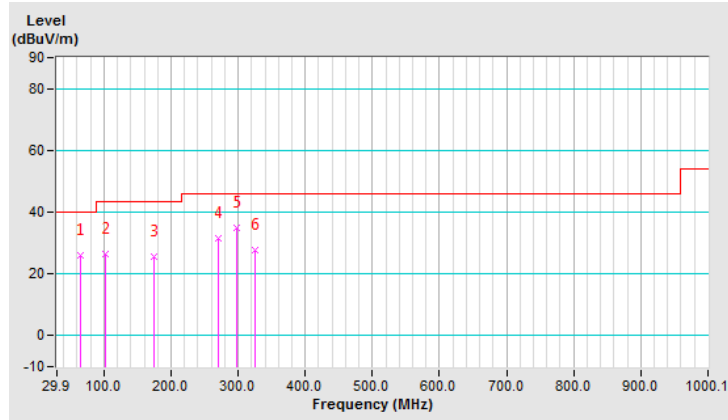




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	D4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	84.34	28.0 QP	40.0	-12.0	1.49 V	257	42.4	-14.4
2	105.73	25.5 QP	43.5	-18.0	1.49 V	121	38.4	-12.9
3	173.78	25.2 QP	43.5	-18.3	1.01 V	69	34.9	-9.7
4	243.77	31.2 QP	46.0	-14.8	1.01 V	284	40.6	-9.4
5	298.21	35.1 QP	46.0	-10.9	1.01 V	275	42.6	-7.5
6	325.43	26.9 QP	46.0	-19.1	1.49 V	165	33.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

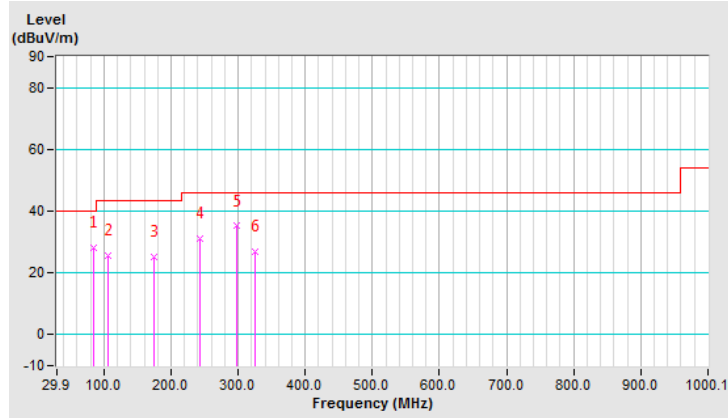


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	E4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.73	21.8 QP	40.0	-18.2	1.50 H	190	33.8	-12.0
2	216.55	24.9 QP	46.0	-21.1	1.00 H	214	35.8	-10.9
3	243.77	39.0 QP	46.0	-7.0	2.00 H	21	48.4	-9.4
4	298.21	44.2 QP	46.0	-1.8	1.00 H	347	51.7	-7.5
5	325.43	32.5 QP	46.0	-13.5	1.50 H	120	39.3	-6.8
6	352.65	25.7 QP	46.0	-20.3	1.00 H	226	32.3	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

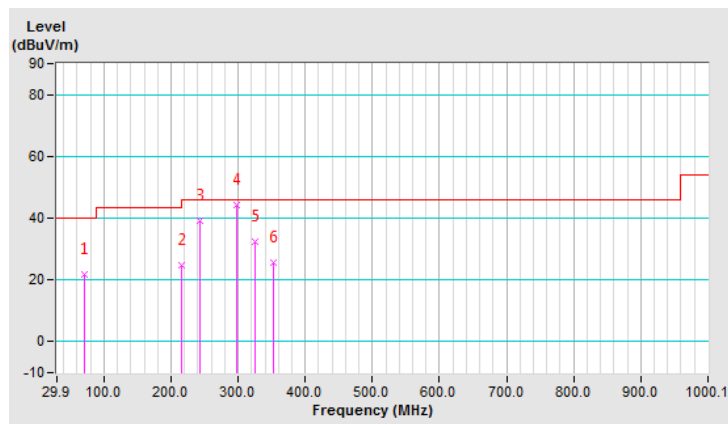


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	E4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.95	29.0 QP	40.0	-11.0	1.50 V	358	39.3	-10.3
2	76.56	28.3 QP	40.0	-11.7	1.00 V	172	41.7	-13.4
3	243.77	29.5 QP	46.0	-16.5	1.00 V	294	38.9	-9.4
4	270.99	29.4 QP	46.0	-16.6	2.00 V	295	37.7	-8.3
5	298.21	34.9 QP	46.0	-11.1	1.00 V	295	42.4	-7.5
6	325.43	26.3 QP	46.0	-19.7	1.50 V	307	33.1	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

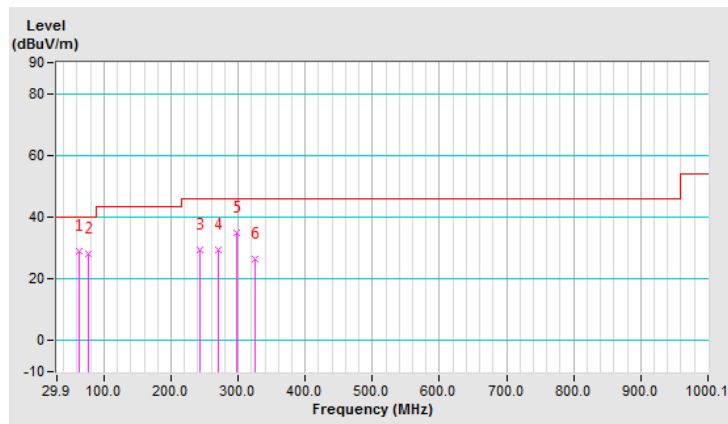


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	F4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	160.17	25.5 QP	43.5	-18.0	1.49 H	16	34.5	-9.0
2	164.06	28.4 QP	43.5	-15.1	1.49 H	18	37.4	-9.0
3	243.77	39.8 QP	46.0	-6.2	1.00 H	206	49.2	-9.4
4	270.99	37.1 QP	46.0	-8.9	1.00 H	199	45.4	-8.3
5	298.21	44.2 QP	46.0	-1.8	2.00 H	218	51.7	-7.5
6	325.43	32.6 QP	46.0	-13.4	1.00 H	132	39.4	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

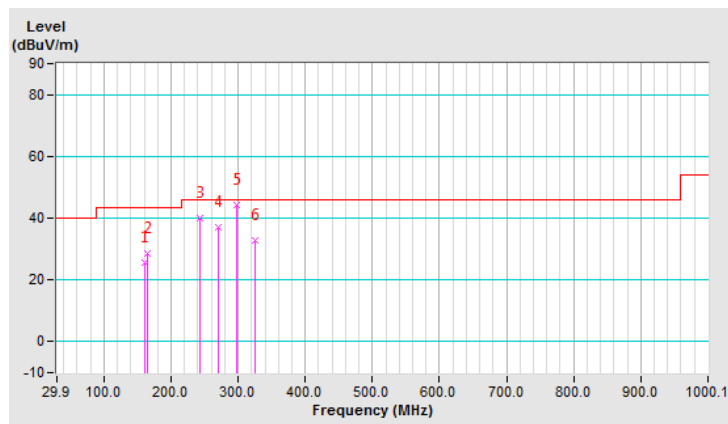


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Titan Hsu
Test Mode	F4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	23.0 QP	40.0	-17.0	1.50 V	348	33.1	-10.1
2	66.84	21.4 QP	40.0	-18.6	1.00 V	183	32.5	-11.1
3	243.77	31.6 QP	46.0	-14.4	2.00 V	273	41.0	-9.4
4	270.99	28.4 QP	46.0	-17.6	1.00 V	289	36.7	-8.3
5	298.21	32.9 QP	46.0	-13.1	1.50 V	73	40.4	-7.5
6	325.43	26.4 QP	46.0	-19.6	1.00 V	70	33.2	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

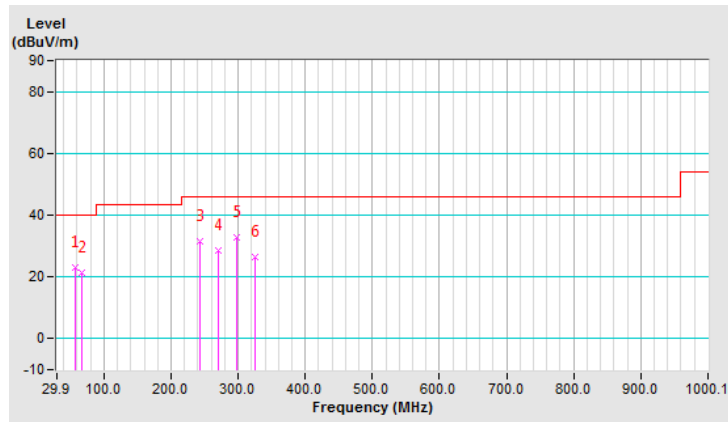


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	G4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	25.3 QP	40.0	-14.7	1.49 H	12	35.4	-10.1
2	216.55	27.4 QP	46.0	-18.6	1.00 H	211	38.3	-10.9
3	243.77	40.3 QP	46.0	-5.7	1.50 H	197	49.7	-9.4
4	270.99	39.5 QP	46.0	-6.5	1.00 H	179	47.8	-8.3
5	298.33	44.3 QP	46.0	-1.7	1.50 H	152	51.8	-7.5
6	352.65	28.0 QP	46.0	-18.0	2.00 H	227	34.6	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

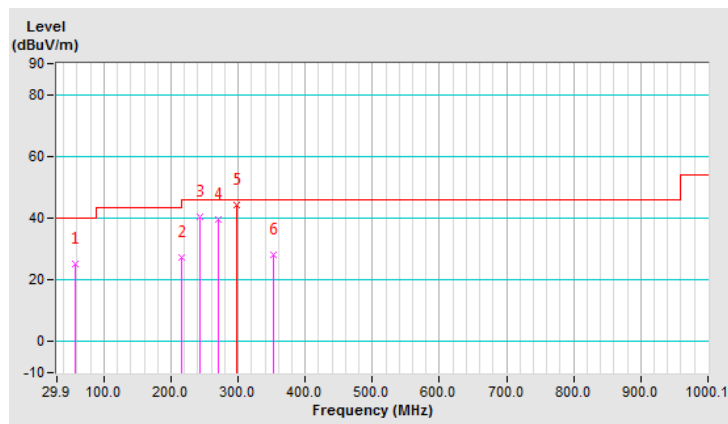


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	G4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.01	20.0 QP	40.0	-20.0	1.00 V	10	30.5	-10.5
2	243.77	31.6 QP	46.0	-14.4	1.00 V	237	41.0	-9.4
3	270.99	30.6 QP	46.0	-15.4	1.49 V	292	38.9	-8.3
4	298.21	36.2 QP	46.0	-9.8	1.49 V	69	43.7	-7.5
5	325.43	27.3 QP	46.0	-18.7	1.00 V	68	34.1	-6.8
6	352.65	22.9 QP	46.0	-23.1	1.00 V	91	29.5	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

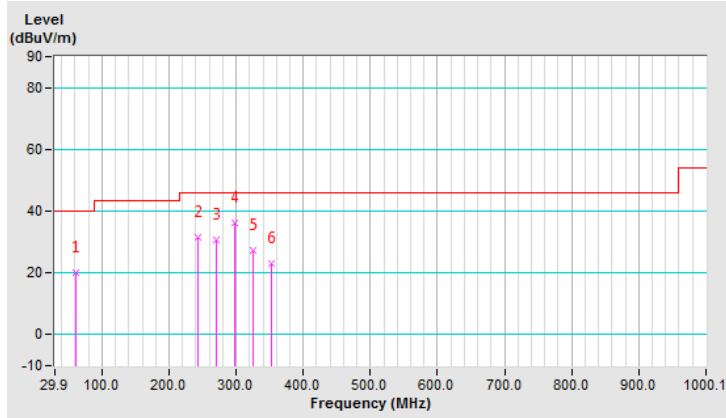


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	H4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.34	32.5 QP	43.5	-11.0	1.50 H	174	44.1	-11.6
2	197.11	33.2 QP	43.5	-10.3	1.01 H	16	44.4	-11.2
3	270.99	36.2 QP	46.0	-9.8	1.01 H	223	44.5	-8.3
4	298.21	43.4 QP	46.0	-2.6	2.00 H	231	50.9	-7.5
5	325.43	34.6 QP	46.0	-11.4	1.01 H	229	41.4	-6.8
6	352.65	26.9 QP	46.0	-19.1	1.50 H	229	33.5	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

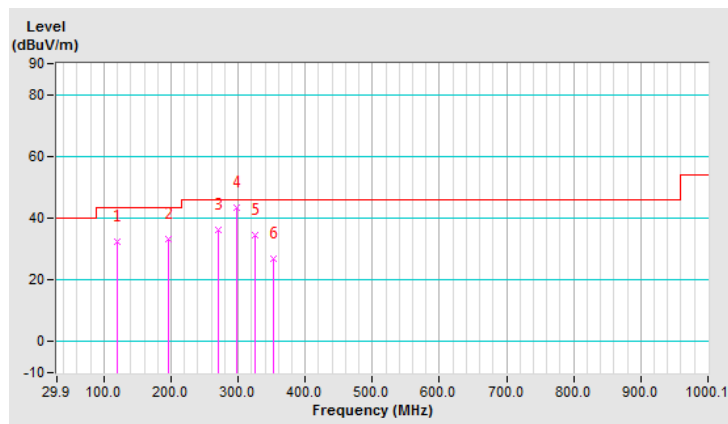




EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	H4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.90	26.5 QP	40.0	-13.5	1.50 V	262	37.4	-10.9
2	107.67	29.0 QP	43.5	-14.5	1.00 V	87	41.6	-12.6
3	193.22	30.3 QP	43.5	-13.2	2.00 V	89	41.5	-11.2
4	243.77	30.3 QP	46.0	-15.7	1.00 V	160	39.7	-9.4
5	298.21	34.8 QP	46.0	-11.2	1.50 V	89	42.3	-7.5
6	325.43	28.5 QP	46.0	-17.5	1.50 V	93	35.3	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

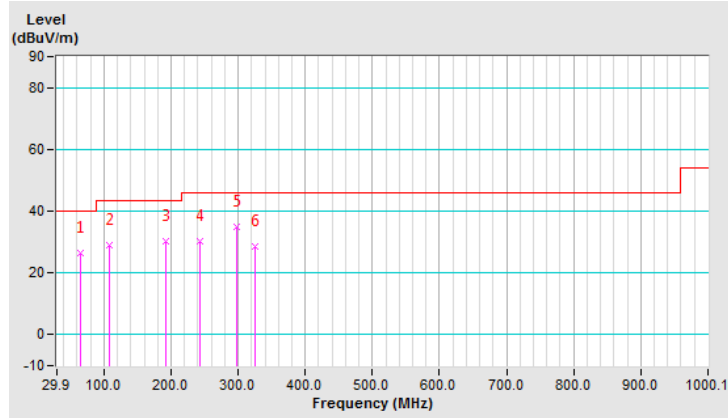


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	I4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	175.72	26.3 QP	43.5	-17.2	1.50 H	24	36.2	-9.9
2	243.77	38.4 QP	46.0	-7.6	1.00 H	13	47.8	-9.4
3	270.99	36.1 QP	46.0	-9.9	1.00 H	216	44.4	-8.3
4	298.21	44.4 QP	46.0	-1.6	2.00 H	226	51.9	-7.5
5	325.43	34.8 QP	46.0	-11.2	1.00 H	231	41.6	-6.8
6	352.65	27.9 QP	46.0	-18.1	1.50 H	214	34.5	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

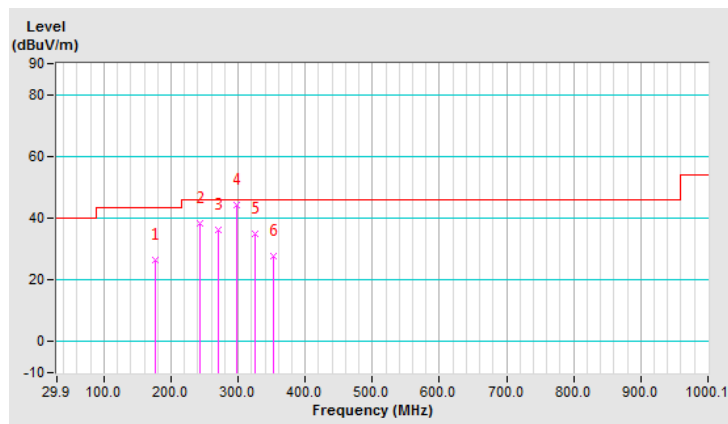


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	I4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	84.34	28.2 QP	40.0	-11.8	2.00 V	210	42.6	-14.4
2	243.77	31.4 QP	46.0	-14.6	1.00 V	308	40.8	-9.4
3	270.99	30.6 QP	46.0	-15.4	1.50 V	311	38.9	-8.3
4	298.21	33.8 QP	46.0	-12.2	1.00 V	316	41.3	-7.5
5	325.43	29.4 QP	46.0	-16.6	1.50 V	153	36.2	-6.8
6	352.65	23.8 QP	46.0	-22.2	1.50 V	160	30.4	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

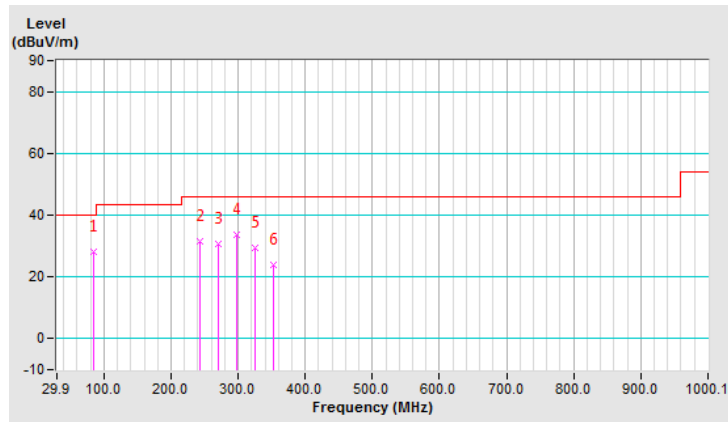


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	J4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	121.28	26.8 QP	43.5	-16.7	2.00 H	34	38.1	-11.3
2	158.22	37.8 QP	43.5	-5.7	1.00 H	183	46.9	-9.1
3	243.77	36.3 QP	46.0	-9.7	1.50 H	147	45.7	-9.4
4	270.99	36.8 QP	46.0	-9.2	1.00 H	350	45.1	-8.3
5	298.21	42.6 QP	46.0	-3.4	2.00 H	6	50.1	-7.5
6	352.65	25.1 QP	46.0	-20.9	1.00 H	165	31.7	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

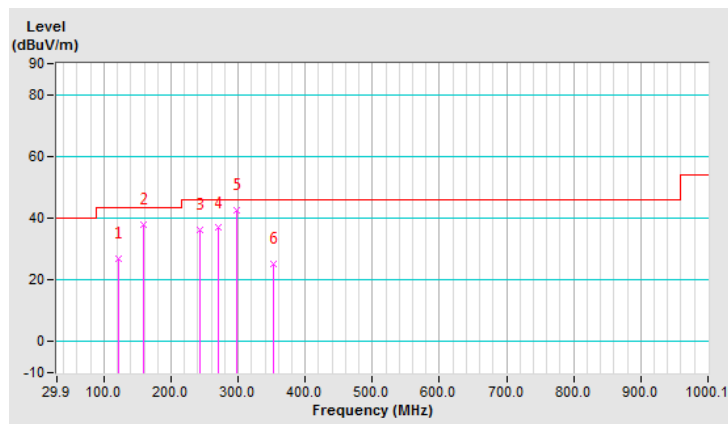


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	J4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.67	28.5 QP	40.0	-11.5	1.50 V	130	41.0	-12.5
2	169.89	31.8 QP	43.5	-11.7	1.00 V	148	41.2	-9.4
3	218.50	23.4 QP	46.0	-22.6	1.50 V	147	34.1	-10.7
4	270.99	30.9 QP	46.0	-15.1	1.00 V	319	39.2	-8.3
5	298.21	35.6 QP	46.0	-10.4	2.00 V	305	43.1	-7.5
6	325.43	26.4 QP	46.0	-19.6	1.00 V	56	33.2	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

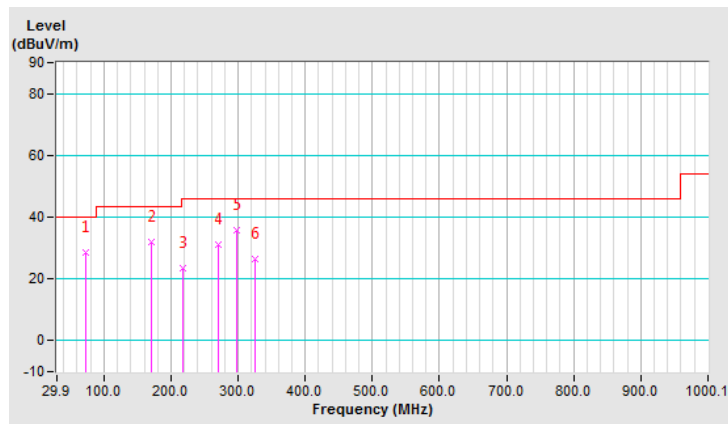


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	K4		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	216.55	24.4 QP	46.0	-21.6	2.00 H	208	35.3	-10.9
2	243.77	43.1 QP	46.0	-2.9	1.00 H	190	52.5	-9.4
3	270.99	39.8 QP	46.0	-6.2	1.00 H	172	48.1	-8.3
4	298.21	44.5 QP	46.0	-1.5	1.50 H	209	52.0	-7.5
5	325.43	37.5 QP	46.0	-8.5	1.50 H	209	44.3	-6.8
6	352.65	29.6 QP	46.0	-16.4	1.00 H	191	36.2	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

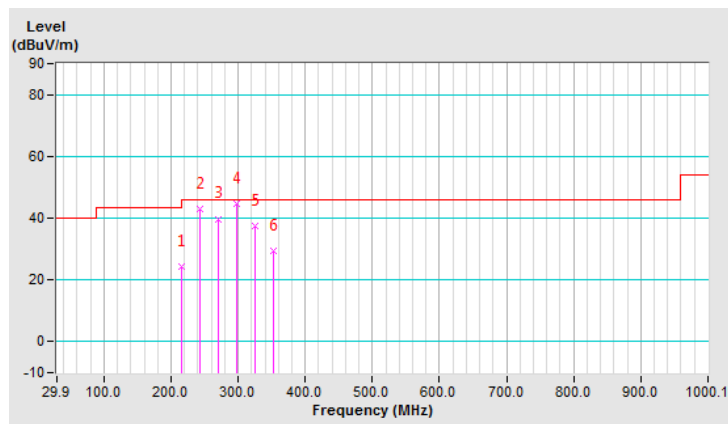


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	24 deg. C, 70% RH	Tested By	Wully Cheng
Test Mode	K4		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	24.1 QP	40.0	-15.9	1.50 V	18	34.2	-10.1
2	132.95	25.5 QP	43.5	-18.0	1.00 V	18	35.7	-10.2
3	243.77	31.6 QP	46.0	-14.4	1.50 V	247	41.0	-9.4
4	270.99	30.3 QP	46.0	-15.7	1.00 V	282	38.6	-8.3
5	298.21	34.3 QP	46.0	-11.7	1.00 V	305	41.8	-7.5
6	325.43	29.9 QP	46.0	-16.1	1.50 V	271	36.7	-6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

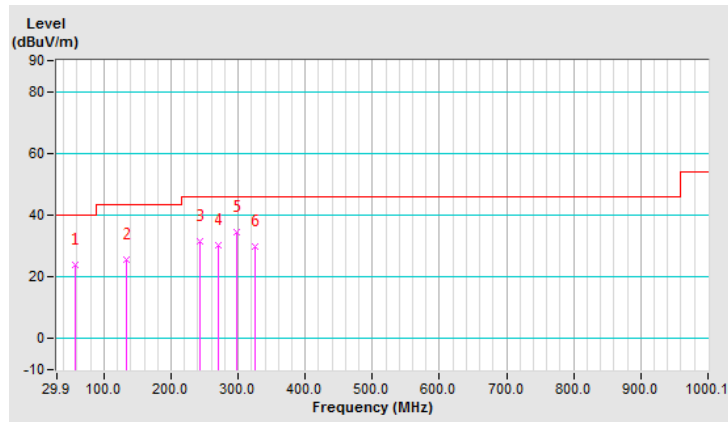

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

**Note:** 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS 30	100288	Jan. 03, 2019	Jan. 02, 2020
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2018	Sep. 04, 2019
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 19, 2018	Aug. 18, 2019
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1.  
 3. The VCCI Site Registration No. is C-12040.



#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

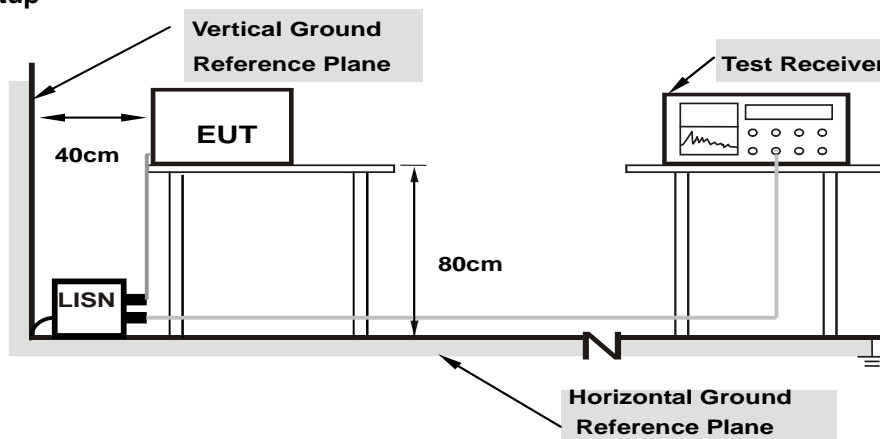

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

#### 4.2.7 Test Results


##### Type A

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.69	31.20	12.81	40.89	22.50	65.79
2	0.22434	9.68	21.30	3.34	30.98	13.02	62.66	52.66	-31.68	-39.64
3	0.26339	9.68	19.07	2.21	28.75	11.89	61.32	51.32	-32.57	-39.43
4	0.72868	9.67	19.80	19.55	29.47	29.22	56.00	46.00	-26.53	-16.78
5	13.56130	9.89	32.99	32.64	42.88	42.53	60.00	50.00	-17.12	-7.47
6	27.11727	9.94	1.31	0.06	11.25	10.00	60.00	50.00	-48.75	-40.00

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

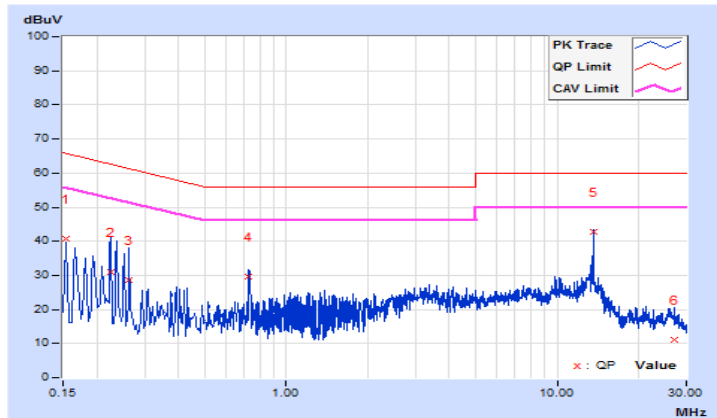


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16564	9.66	28.54	1.87	38.20	11.53	65.18
2	0.24384	9.66	20.12	2.45	29.78	12.11	61.96	51.96	-32.18	-39.85
3	0.72868	9.64	19.80	18.50	29.44	28.14	56.00	46.00	-26.56	-17.86
4	2.39825	9.68	12.32	3.16	22.00	12.84	56.00	46.00	-34.00	-33.16
5	13.56130	9.91	36.81	36.54	46.72	46.45	60.00	50.00	-13.28	-3.55
6	27.12118	10.03	14.40	9.15	24.43	19.18	60.00	50.00	-35.57	-30.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

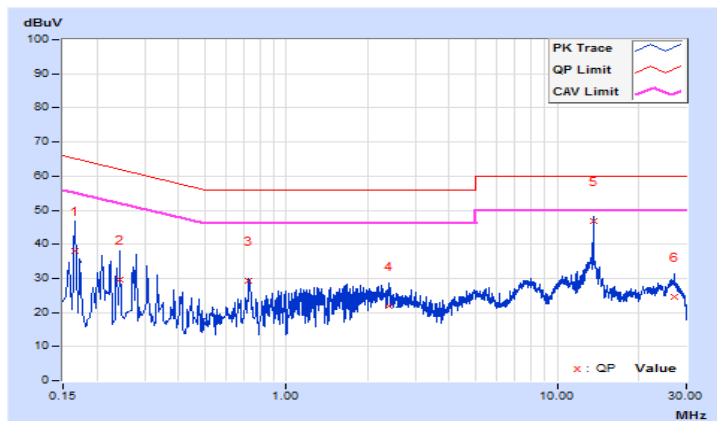


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16173	9.69	35.15	16.89	44.84	26.58	65.37
2	0.20474	9.68	29.52	16.66	39.20	26.34	63.42	53.42	-24.22	-27.08
3	3.27800	9.73	9.68	4.76	19.41	14.49	56.00	46.00	-36.59	-31.51
4	5.01404	9.77	19.74	12.54	29.51	22.31	60.00	50.00	-30.49	-27.69
5	13.56130	9.89	35.94	35.88	45.83	45.77	60.00	50.00	-14.17	-4.23
6	27.12118	9.94	9.48	6.86	19.42	16.80	60.00	50.00	-40.58	-33.20

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

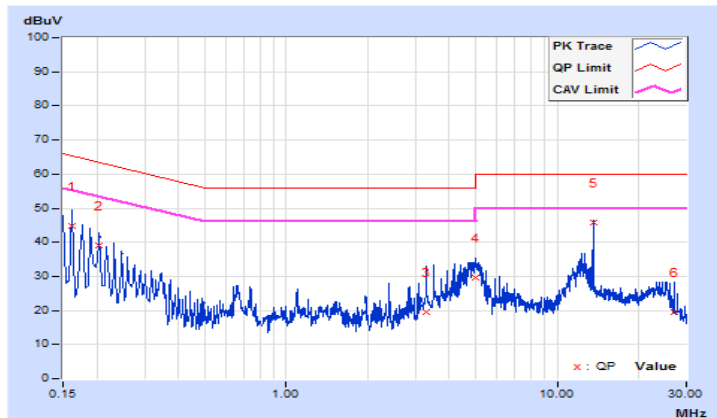


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16967	9.66	31.05	13.61	40.71	23.27	64.98
2	0.18519	9.66	31.71	14.57	41.37	24.23	64.25	54.25	-22.88	-30.02
3	0.64702	9.65	12.70	5.11	22.35	14.76	56.00	46.00	-33.65	-31.24
4	4.94757	9.74	17.57	9.85	27.31	19.59	56.00	46.00	-28.69	-26.41
5	13.56130	9.91	36.88	36.67	46.79	46.58	60.00	50.00	-13.21	-3.42
6	27.64903	10.03	7.16	0.22	17.19	10.25	60.00	50.00	-42.81	-39.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

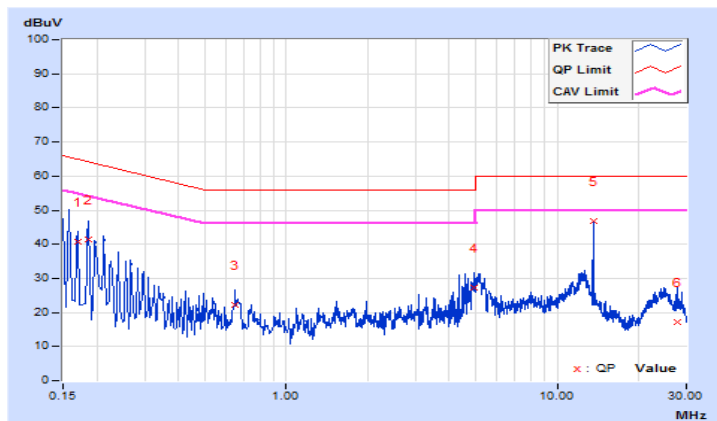


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15802	9.69	43.53	28.05	53.22	37.74	65.57
2	0.18903	9.68	38.43	21.98	48.11	31.66	64.08	54.08	-15.97	-22.42
3	0.21647	9.68	34.62	18.42	44.30	28.10	62.95	52.95	-18.65	-24.85
4	0.49799	9.68	13.05	3.45	22.73	13.13	56.03	46.03	-33.30	-32.90
5	13.56130	9.89	37.59	37.26	47.48	47.15	60.00	50.00	-12.52	-2.85
6	29.36552	9.95	11.24	6.13	21.19	16.08	60.00	50.00	-38.81	-33.92

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

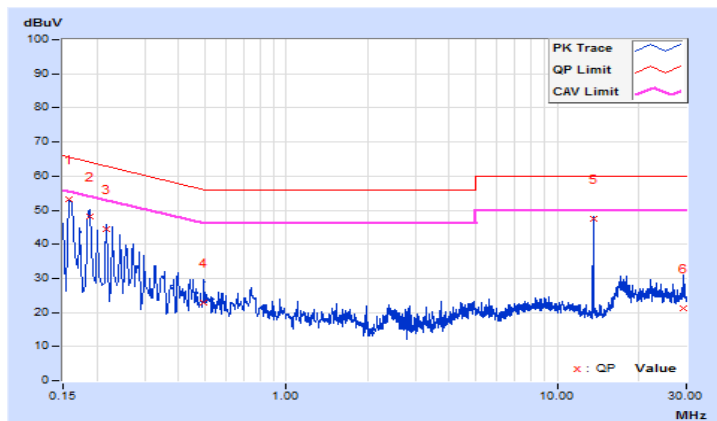


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	43.91	28.60	53.57	38.26	65.79
2	0.18128	9.66	40.03	24.38	49.69	34.04	64.43	54.43	-14.74	-20.39
3	0.35332	9.65	20.83	7.09	30.48	16.74	58.88	48.88	-28.40	-32.14
4	1.52632	9.66	11.88	2.80	21.54	12.46	56.00	46.00	-34.46	-33.54
5	13.56130	9.91	37.32	37.13	47.23	47.04	60.00	50.00	-12.77	-2.96
6	17.65507	9.97	15.30	10.41	25.27	20.38	60.00	50.00	-34.73	-29.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

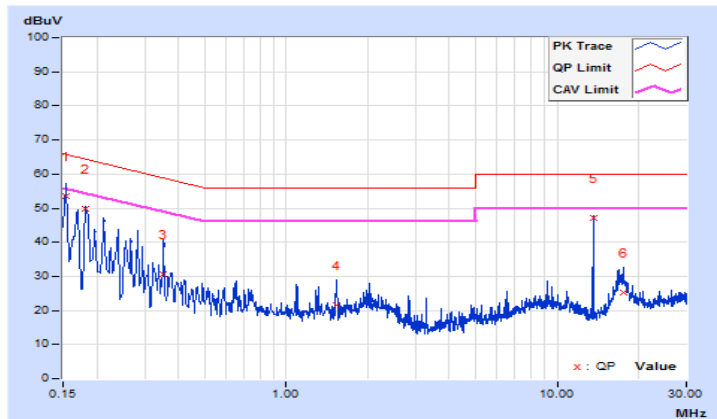


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.69	45.63	28.96	55.32	38.65	65.79
2	0.16564	9.69	43.34	28.32	53.03	38.01	65.18	55.18	-12.15	-17.17
3	0.18128	9.68	41.31	24.78	50.99	34.46	64.43	54.43	-13.44	-19.97
4	0.19305	9.68	39.34	23.25	49.02	32.93	63.90	53.90	-14.88	-20.97
5	0.33377	9.68	23.43	13.93	33.11	23.61	59.36	49.36	-26.25	-25.75
6	13.56130	9.89	37.36	37.21	47.25	47.10	60.00	50.00	-12.75	-2.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

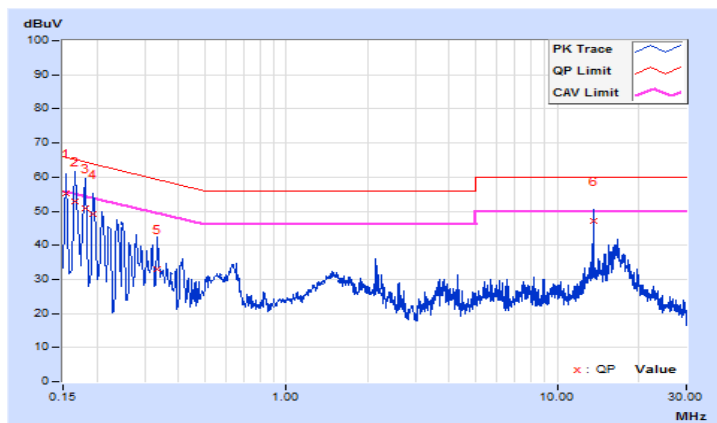




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16564	9.66	43.62	28.68	53.28	38.34	65.18
2	0.17744	9.66	41.34	25.11	51.00	34.77	64.60	54.60	-13.60	-19.83
3	0.23602	9.66	32.66	16.91	42.32	26.57	62.24	52.24	-19.92	-25.67
4	0.63484	9.65	25.56	19.63	35.21	29.28	56.00	46.00	-20.79	-16.72
5	13.56130	9.91	37.85	37.80	47.76	47.71	60.00	50.00	-12.24	-2.29
6	17.20933	9.96	21.78	15.32	31.74	25.28	60.00	50.00	-28.26	-24.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

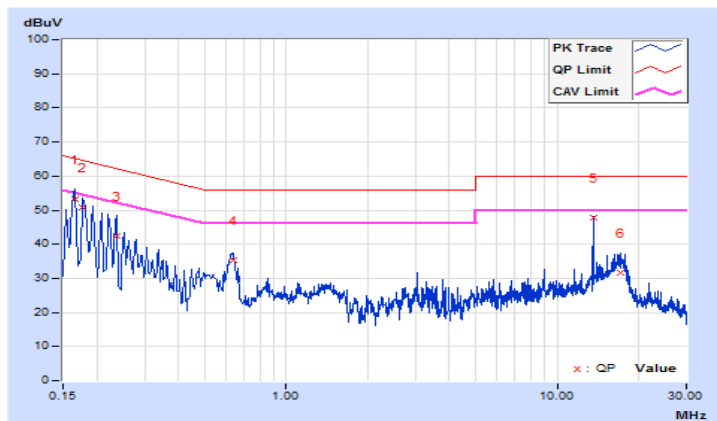


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	E1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17374	9.69	34.50	20.90	44.19	30.59	64.78
2	0.19301	9.68	32.19	20.94	41.87	30.62	63.91	53.91	-22.04	-23.29
3	0.44716	9.68	19.15	10.82	28.83	20.50	56.93	46.93	-28.10	-26.43
4	3.16070	9.73	7.14	1.83	16.87	11.56	56.00	46.00	-39.13	-34.44
5	4.61522	9.76	9.38	2.60	19.14	12.36	56.00	46.00	-36.86	-33.64
6	13.56130	9.89	35.91	35.74	45.80	45.63	60.00	50.00	-14.20	-4.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

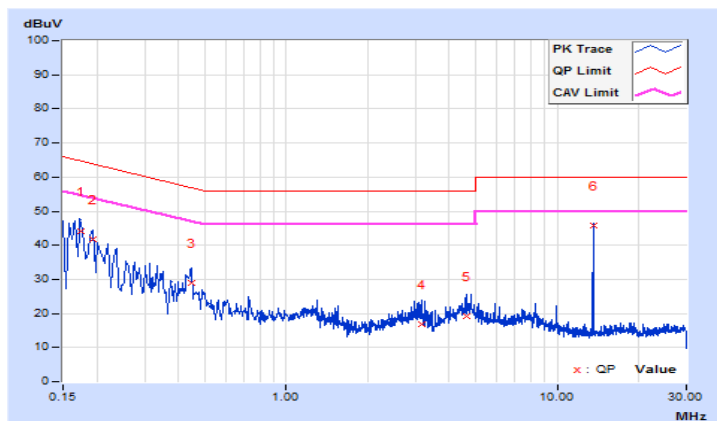


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	E1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	38.17	21.52	47.83	31.18	65.79
2	0.18519	9.66	33.07	17.74	42.73	27.40	64.25	54.25	-21.52	-26.85
3	0.29076	9.66	19.64	10.00	29.30	19.66	60.50	50.50	-31.20	-30.84
4	3.25845	9.70	8.79	1.40	18.49	11.10	56.00	46.00	-37.51	-34.90
5	6.57022	9.78	8.29	2.52	18.07	12.30	60.00	50.00	-41.93	-37.70
6	13.56130	9.91	36.53	36.34	46.44	46.25	60.00	50.00	-13.56	-3.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

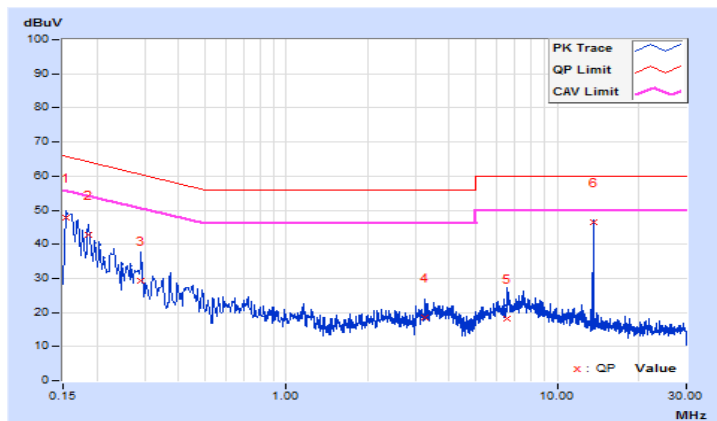


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	F1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.69	33.96	17.44	43.65	27.13	66.00
2	0.16181	9.69	32.30	16.94	41.99	26.63	65.37	55.37	-23.38	-28.74
3	0.17737	9.68	28.62	14.68	38.30	24.36	64.61	54.61	-26.31	-30.25
4	9.15864	9.85	15.52	7.64	25.37	17.49	60.00	50.00	-34.63	-32.51
5	13.56130	9.89	37.64	37.58	47.53	47.47	60.00	50.00	-12.47	-2.53
6	16.27875	9.91	9.30	0.91	19.21	10.82	60.00	50.00	-40.79	-39.18

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

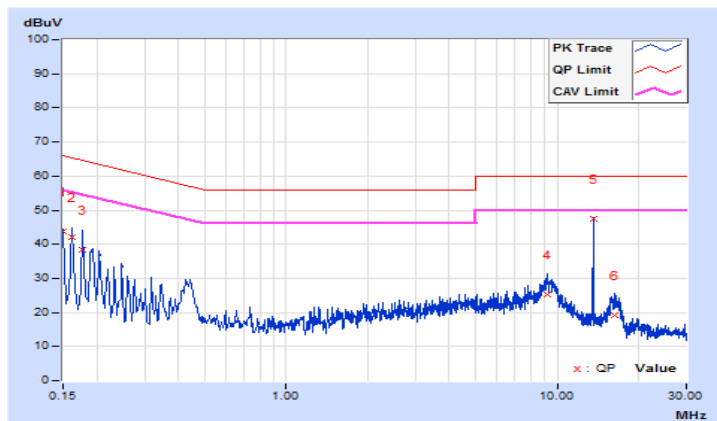


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	F1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	32.74	15.97	42.40	25.63	65.79
2	0.16569	9.66	31.39	15.66	41.05	25.32	65.17	55.17	-24.12	-29.85
3	0.43924	9.65	17.21	10.51	26.86	20.16	57.08	47.08	-30.22	-26.92
4	4.37671	9.73	9.35	0.89	19.08	10.62	56.00	46.00	-36.92	-35.38
5	6.12057	9.77	7.63	0.02	17.40	9.79	60.00	50.00	-42.60	-40.21
6	13.56130	9.91	37.10	36.97	47.01	46.88	60.00	50.00	-12.99	-3.12

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

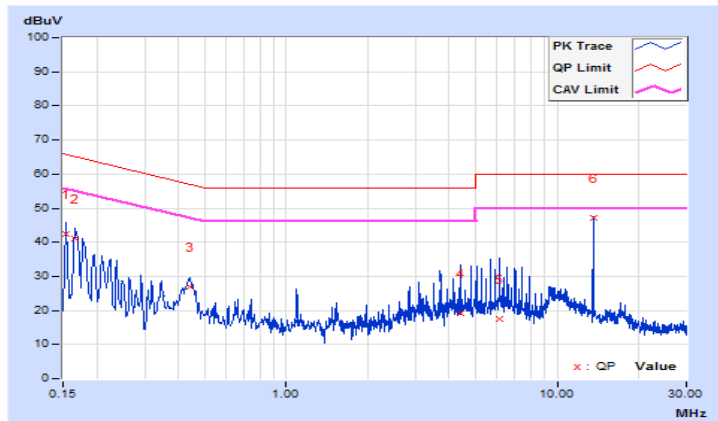


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	G1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17328	9.69	20.40	13.03	30.09	22.72	64.80
2	0.64657	9.68	14.28	10.20	23.96	19.88	56.00	46.00	-32.04	-26.12
3	1.08840	9.67	14.04	8.09	23.71	17.76	56.00	46.00	-32.29	-28.24
4	1.85085	9.70	18.62	14.11	28.32	23.81	56.00	46.00	-27.68	-22.19
5	13.56130	9.89	38.83	38.75	48.72	48.64	60.00	50.00	-11.28	-1.36
6	24.57577	9.94	14.14	13.93	24.08	23.87	60.00	50.00	-35.92	-26.13

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

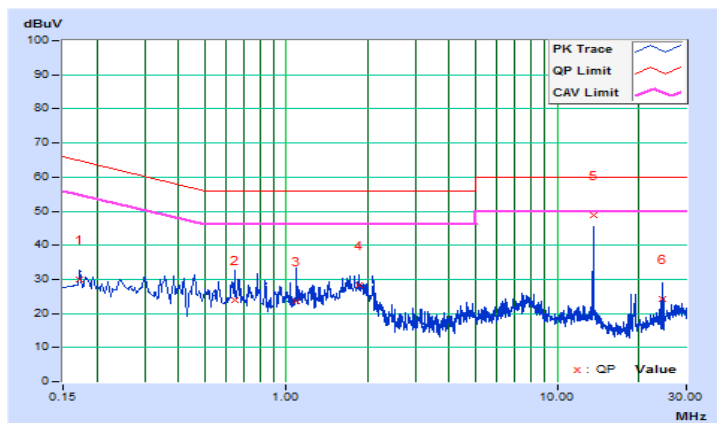


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	G1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.27480	9.66	15.83	10.32	25.49	19.98	60.97
2	0.83425	9.64	16.93	6.55	26.57	16.19	56.00	46.00	-29.43	-29.81
3	2.11282	9.67	15.54	11.03	25.21	20.70	56.00	46.00	-30.79	-25.30
<b>4</b>	<b>13.56000</b>	<b>9.91</b>	<b>40.72</b>	<b>39.95</b>	<b>50.63</b>	<b>49.86</b>	<b>60.00</b>	<b>50.00</b>	<b>-9.37</b>	<b>-0.14</b>
5	24.57577	10.02	16.53	16.36	26.55	26.38	60.00	50.00	-33.45	-23.62
6	27.12118	10.03	14.47	12.67	24.50	22.70	60.00	50.00	-35.50	-27.30

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

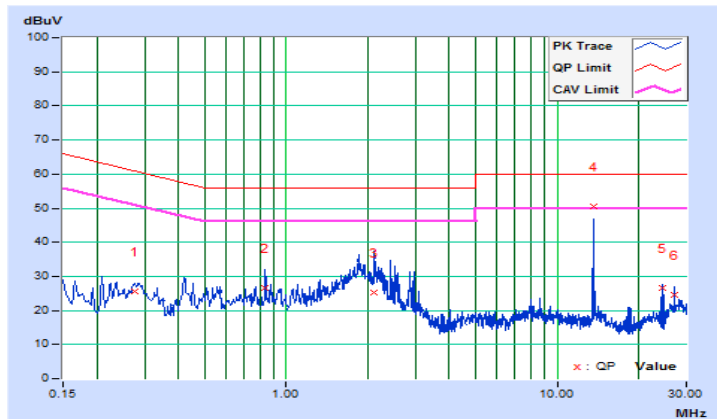


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	H1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17744	9.68	38.47	22.79	48.15	32.47	64.60
2	0.29076	9.68	26.74	8.23	36.42	17.91	60.50	50.50	-24.08	-32.59
3	0.40415	9.68	21.60	11.94	31.28	21.62	57.77	47.77	-26.49	-26.15
4	13.56130	9.89	39.92	39.89	49.81	49.78	60.00	50.00	-10.19	-0.22
5	22.30015	9.93	18.09	11.27	28.02	21.20	60.00	50.00	-31.98	-28.80
6	27.12118	9.94	16.22	14.80	26.16	24.74	60.00	50.00	-33.84	-25.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

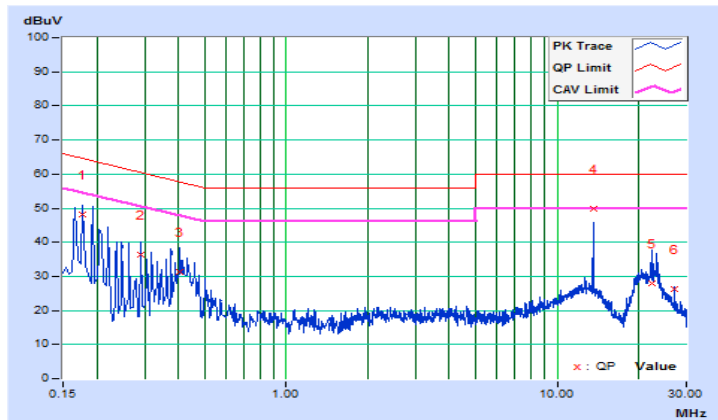




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	H1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.66	41.59	21.60	51.25	31.26	66.00
2	0.18519	9.66	37.72	19.94	47.38	29.60	64.25	54.25	-16.87	-24.65
3	0.31813	9.65	25.20	8.57	34.85	18.22	59.76	49.76	-24.91	-31.54
4	0.42761	9.65	23.80	15.74	33.45	25.39	57.30	47.30	-23.85	-21.91
5	13.56130	9.91	39.65	39.60	49.56	49.51	60.00	50.00	-10.44	-0.49
6	22.49565	10.01	18.17	11.78	28.18	21.79	60.00	50.00	-31.82	-28.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

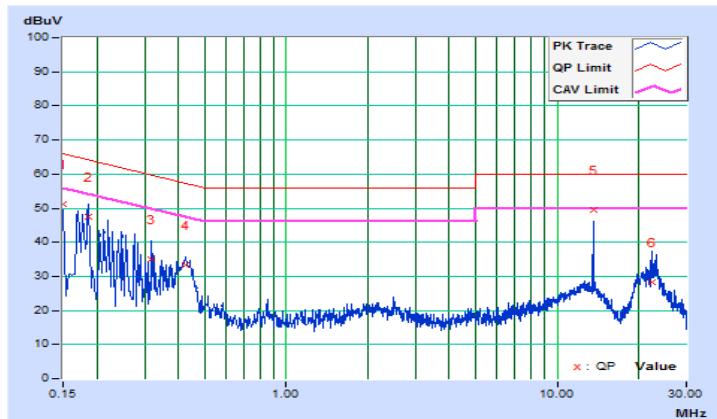


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	11		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.69	35.95	23.17	45.64	32.86	66.00
2	0.18903	9.68	30.53	17.20	40.21	26.88	64.08	54.08	-23.87	-27.20
3	0.44742	9.68	26.01	23.20	35.69	32.88	56.92	46.92	-21.23	-14.04
4	2.98475	9.72	16.90	12.01	26.62	21.73	56.00	46.00	-29.38	-24.27
5	13.56130	9.89	39.89	39.81	49.78	49.70	60.00	50.00	-10.22	-0.30
6	25.13099	9.94	9.72	3.84	19.66	13.78	60.00	50.00	-40.34	-36.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

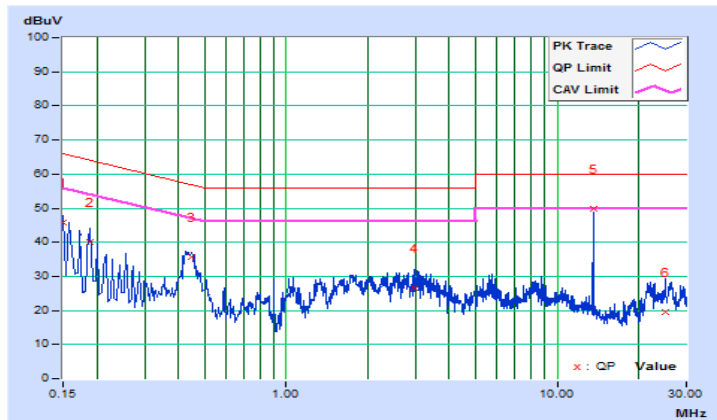


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	I1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	35.55	22.89	45.21	32.55	65.79
2	0.19692	9.66	29.04	17.38	38.70	27.04	63.74	53.74	-25.04	-26.70
3	0.42445	9.65	28.49	21.72	38.14	31.37	57.36	47.36	-19.22	-15.99
4	0.88899	9.64	18.62	13.67	28.26	23.31	56.00	46.00	-27.74	-22.69
5	13.56130	9.91	39.69	39.53	49.60	49.44	60.00	50.00	-10.40	-0.56
6	25.23265	10.02	9.15	4.03	19.17	14.05	60.00	50.00	-40.83	-35.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

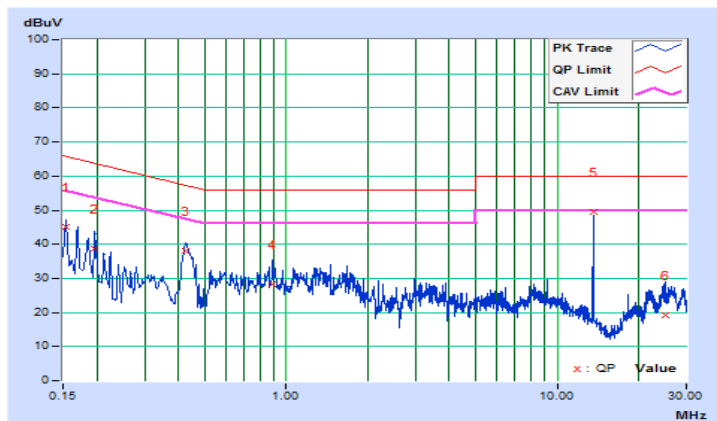


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	J1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15782	9.69	42.29	27.20	51.98	36.89	65.58
2	0.16955	9.69	39.25	22.50	48.94	32.19	64.98	54.98	-16.04	-22.79
3	0.38851	9.68	25.67	20.33	35.35	30.01	58.10	48.10	-22.75	-18.09
4	3.27018	9.73	13.53	6.04	23.26	15.77	56.00	46.00	-32.74	-30.23
5	13.56130	9.89	39.94	39.29	49.83	49.18	60.00	50.00	-10.17	-0.82
6	27.12118	9.94	15.70	14.38	25.64	24.32	60.00	50.00	-34.36	-25.68

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

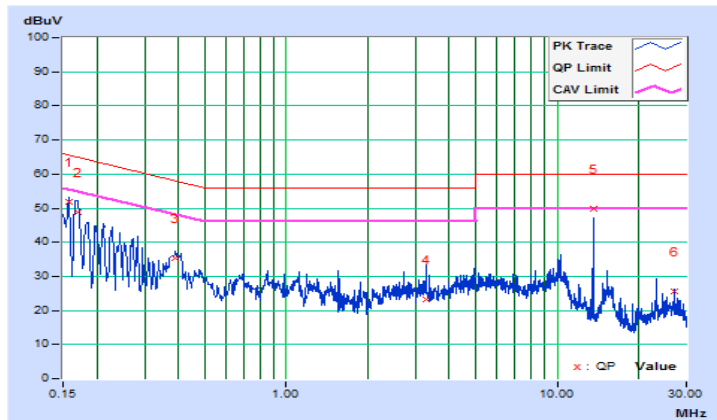


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	J1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.66	42.48	24.75	52.14	34.41	66.00
2	0.16054	9.66	41.39	25.91	51.05	35.57	65.44	55.44	-14.39	-19.87
3	0.19717	9.66	34.50	17.63	44.16	27.29	63.73	53.73	-19.57	-26.44
4	0.36913	9.65	22.46	12.71	32.11	22.36	58.52	48.52	-26.41	-26.16
5	13.56130	9.91	39.76	39.70	49.67	49.61	60.00	50.00	-10.33	-0.39
6	27.12118	10.03	15.75	14.38	25.78	24.41	60.00	50.00	-34.22	-25.59

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

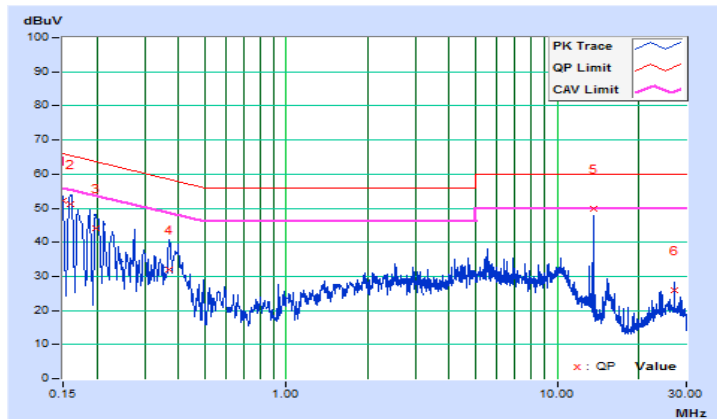


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	K1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.22820	9.85	15.00	6.67	24.85	16.52	62.51
2	0.81861	9.91	13.89	10.20	23.80	20.11	56.00	46.00	-32.20	-25.89
3	2.15583	9.96	4.54	2.24	14.50	12.20	56.00	46.00	-41.50	-33.80
4	2.44908	9.97	8.43	1.31	18.40	11.28	56.00	46.00	-37.60	-34.72
5	13.56130	10.20	38.76	38.13	48.96	48.33	60.00	50.00	-11.04	-1.67
6	25.86607	10.27	13.11	4.04	23.38	14.31	60.00	50.00	-36.62	-35.69

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

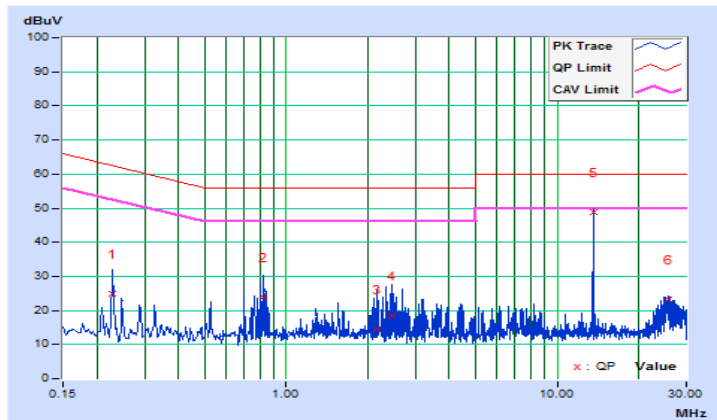


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	K1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16955	9.83	19.62	6.87	29.45	16.70	64.98
2	0.74432	9.88	8.92	1.57	18.80	11.45	56.00	46.00	-37.20	-34.55
3	1.06885	9.88	13.52	3.05	23.40	12.93	56.00	46.00	-32.60	-33.07
4	2.33178	9.94	14.40	2.18	24.34	12.12	56.00	46.00	-31.66	-33.88
5	13.56130	10.22	38.60	37.96	48.82	48.18	60.00	50.00	-11.18	-1.82
6	25.26002	10.34	15.63	5.84	25.97	16.18	60.00	50.00	-34.03	-33.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

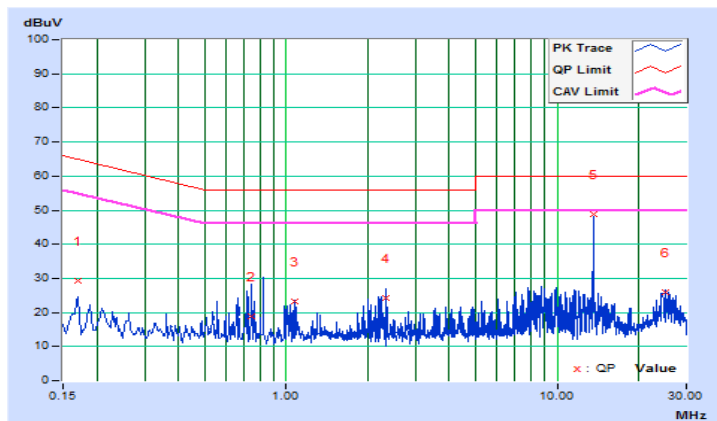


### Type B

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17737	9.68	28.94	14.02	38.62	23.70	64.61
2	0.20084	9.68	27.25	21.79	36.93	31.47	63.58	53.58	-26.65	-22.11
3	0.73040	9.67	18.66	18.13	28.33	27.80	56.00	46.00	-27.67	-18.20
4	3.95052	9.75	12.98	4.90	22.73	14.65	56.00	46.00	-33.27	-31.35
5	13.56130	9.89	16.03	5.73	25.92	15.62	60.00	50.00	-34.08	-34.38
6	27.12118	9.94	8.96	1.13	18.90	11.07	60.00	50.00	-41.10	-38.93

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

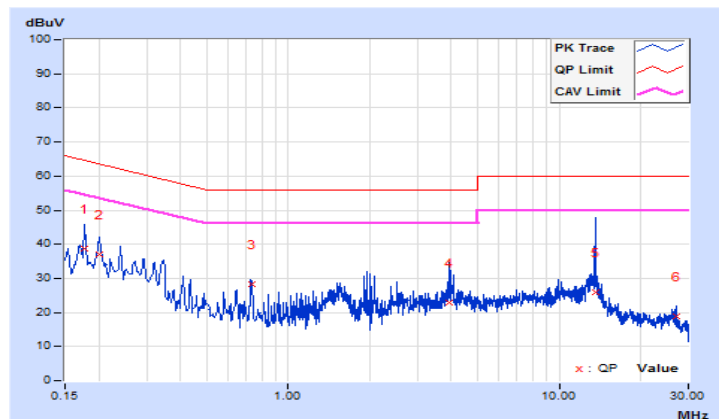




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17346	9.66	28.08	4.62	37.74	14.28	64.79
2	0.20084	9.66	24.85	10.20	34.51	19.86	63.58	53.58	-29.07	-33.72
3	0.73259	9.64	19.20	17.46	28.84	27.10	56.00	46.00	-27.16	-18.90
4	4.59567	9.73	12.62	4.73	22.35	14.46	56.00	46.00	-33.65	-31.54
5	13.56130	9.91	37.58	37.13	47.49	47.04	60.00	50.00	-12.51	-2.96
6	27.08208	10.03	14.55	9.29	24.58	19.32	60.00	50.00	-35.42	-30.68

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

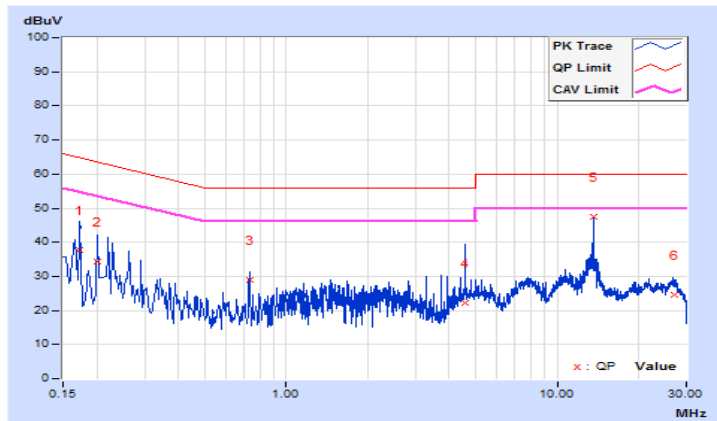


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18903	9.68	30.26	13.16	39.94	22.84	64.08	54.08	-24.14	-31.24
2	0.23216	9.68	25.86	9.85	35.54	19.53	62.37	52.37	-26.83	-32.84
3	4.83418	9.77	18.39	11.22	28.16	20.99	56.00	46.00	-27.84	-25.01
4	12.61508	9.89	19.14	11.03	29.03	20.92	60.00	50.00	-30.97	-29.08
5	13.56130	9.89	36.53	36.34	46.42	46.23	60.00	50.00	-13.58	-3.77
6	24.93158	9.94	11.35	3.75	21.29	13.69	60.00	50.00	-38.71	-36.31

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

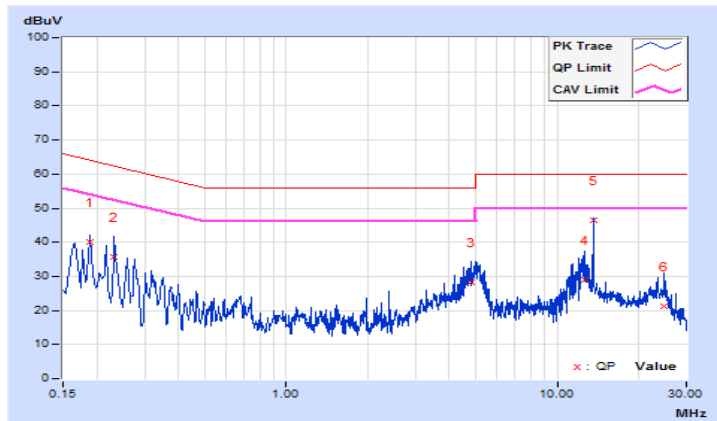


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15802	9.66	35.60	19.32	45.26	28.98	65.57
2	0.17744	9.66	32.91	17.80	42.57	27.46	64.60	54.60	-22.03	-27.14
3	1.09622	9.64	12.17	0.21	21.81	9.85	56.00	46.00	-34.19	-36.15
4	1.53023	9.66	8.52	2.54	18.18	12.20	56.00	46.00	-37.82	-33.80
5	13.56130	9.91	36.39	36.12	46.30	46.03	60.00	50.00	-13.70	-3.97
6	25.94036	10.02	9.72	3.56	19.74	13.58	60.00	50.00	-40.26	-36.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

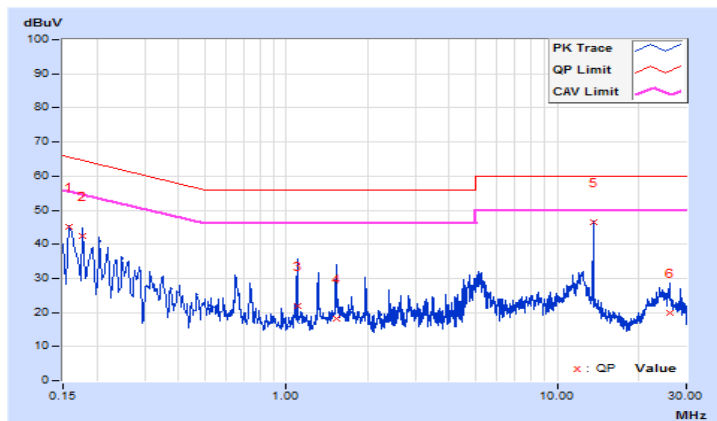


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.69	44.19	26.57	53.88	36.26	66.00
2	0.16569	9.69	43.07	24.15	52.76	33.84	65.17	55.17	-12.41	-21.33
3	0.18128	9.68	40.67	24.86	50.35	34.54	64.43	54.43	-14.08	-19.89
4	0.22434	9.68	33.90	16.26	43.58	25.94	62.66	52.66	-19.08	-26.72
5	13.56130	9.89	37.66	37.48	47.55	47.37	60.00	50.00	-12.45	-2.63
6	17.43220	9.92	15.96	10.43	25.88	20.35	60.00	50.00	-34.12	-29.65

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

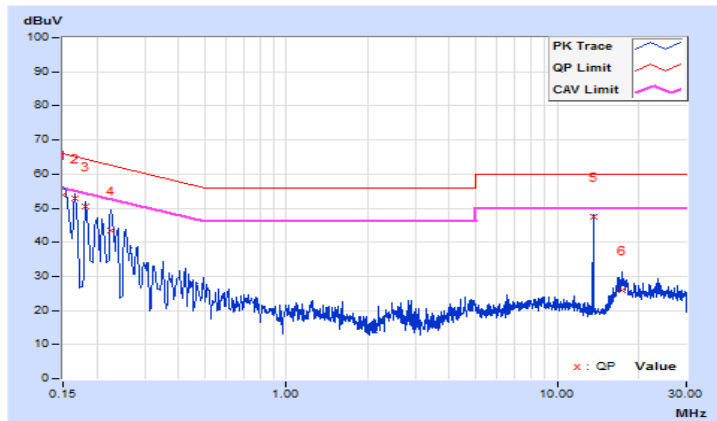


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	44.35	28.91	54.01	38.57	65.79
2	0.16967	9.66	41.98	20.03	51.64	29.69	64.98	54.98	-13.34	-25.29
3	0.18170	9.66	40.50	24.62	50.16	34.28	64.41	54.41	-14.25	-20.13
4	1.96815	9.67	11.50	5.94	21.17	15.61	56.00	46.00	-34.83	-30.39
5	13.56130	9.91	37.21	37.02	47.12	46.93	60.00	50.00	-12.88	-3.07
6	16.38823	9.95	13.14	7.95	23.09	17.90	60.00	50.00	-36.91	-32.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

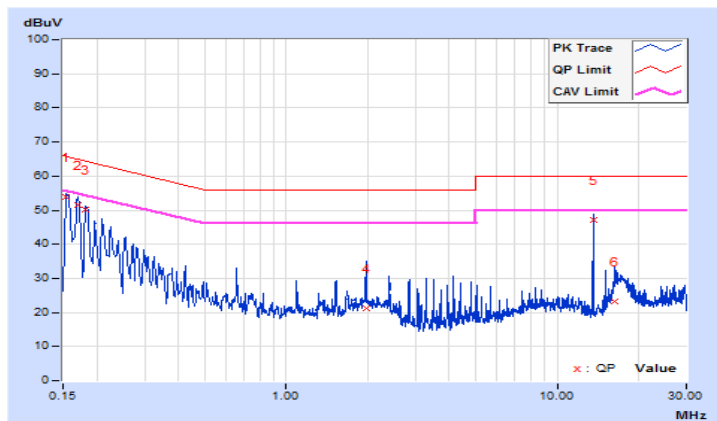


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16173	9.69	43.63	28.55	53.32	38.24	65.37
2	0.20474	9.68	36.51	21.97	46.19	31.65	63.42	53.42	-17.23	-21.77
3	0.29076	9.68	25.06	13.02	34.74	22.70	60.50	50.50	-25.76	-27.80
4	0.63093	9.68	21.47	15.86	31.15	25.54	56.00	46.00	-24.85	-20.46
5	13.56130	9.89	37.30	37.30	47.19	47.19	60.00	50.00	-12.81	-2.81
6	16.95518	9.91	19.19	12.84	29.10	22.75	60.00	50.00	-30.90	-27.25

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

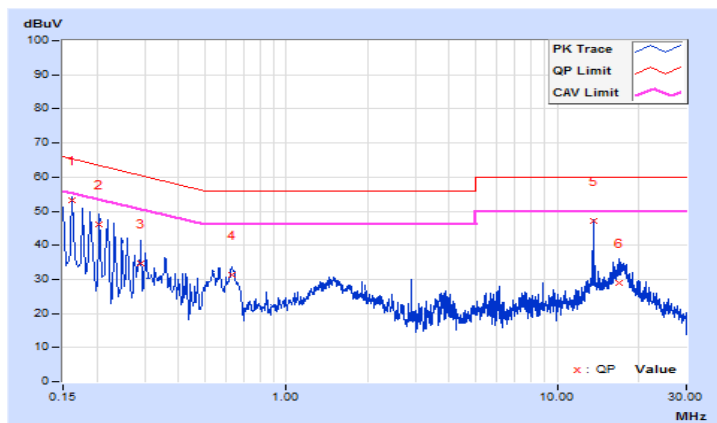


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.66	45.31	28.43	54.97	38.09	66.00
2	0.16181	9.66	44.46	29.34	54.12	39.00	65.37	55.37	-11.25	-16.37
3	0.17737	9.66	41.63	25.07	51.29	34.73	64.61	54.61	-13.32	-19.88
4	0.62689	9.65	25.78	19.76	35.43	29.41	56.00	46.00	-20.57	-16.59
5	13.56130	9.91	37.76	37.72	47.67	47.63	60.00	50.00	-12.33	-2.37
6	17.50649	9.97	21.27	14.48	31.24	24.45	60.00	50.00	-28.76	-25.55

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

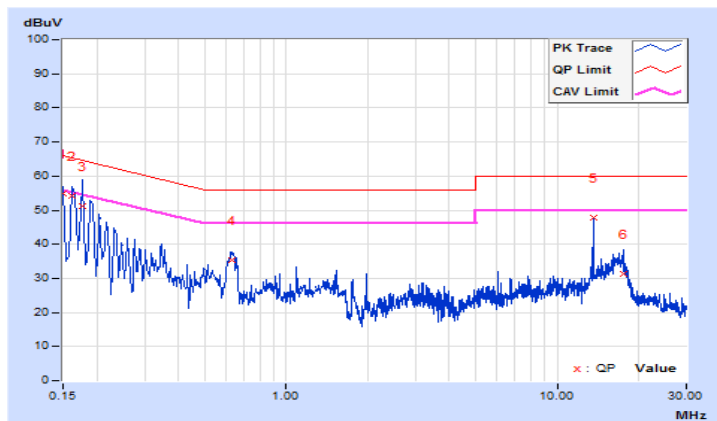


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	E2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16564	9.69	36.92	22.03	46.61	31.72	65.18
2	0.22038	9.68	27.61	14.06	37.29	23.74	62.80	52.80	-25.51	-29.06
3	0.41979	9.68	19.09	10.16	28.77	19.84	57.45	47.45	-28.68	-27.61
4	0.65830	9.68	7.58	1.24	17.26	10.92	56.00	46.00	-38.74	-35.08
5	4.87719	9.77	7.82	0.88	17.59	10.65	56.00	46.00	-38.41	-35.35
6	13.56130	9.89	35.84	35.67	45.73	45.56	60.00	50.00	-14.27	-4.44

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

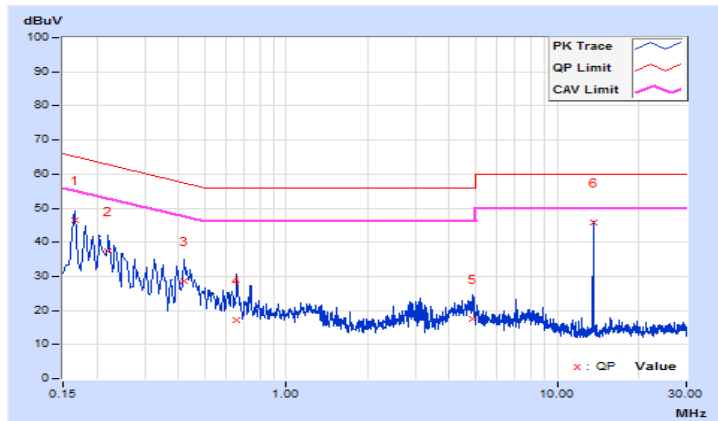




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	E2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	38.68	22.00	48.34	31.66	65.79
2	0.16569	9.66	36.39	21.91	46.05	31.57	65.17	55.17	-19.12	-23.60
3	0.19305	9.66	32.34	20.84	42.00	30.50	63.90	53.90	-21.90	-23.40
4	0.73814	9.64	14.80	3.37	24.44	13.01	56.00	46.00	-31.56	-32.99
5	3.19198	9.70	8.40	1.18	18.10	10.88	56.00	46.00	-37.90	-35.12
6	13.56130	9.91	36.57	36.39	46.48	46.30	60.00	50.00	-13.52	-3.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

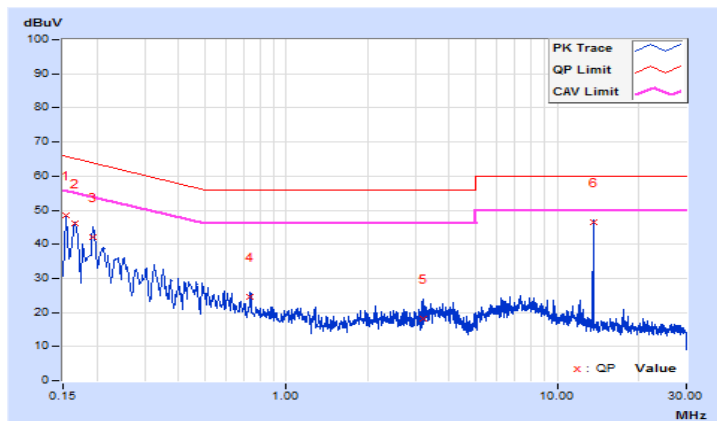


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	F2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15782	9.69	32.16	16.27	41.85	25.96	65.58
2	0.21226	9.68	22.26	9.88	31.94	19.56	63.12	53.12	-31.18	-33.56
3	0.44325	9.68	16.80	9.72	26.48	19.40	57.00	47.00	-30.52	-27.60
4	9.11563	9.85	16.05	7.93	25.90	17.78	60.00	50.00	-34.10	-32.22
5	13.56130	9.89	35.95	35.73	45.84	45.62	60.00	50.00	-14.16	-4.38
6	15.99332	9.91	8.58	0.18	18.49	10.09	60.00	50.00	-41.51	-39.91

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

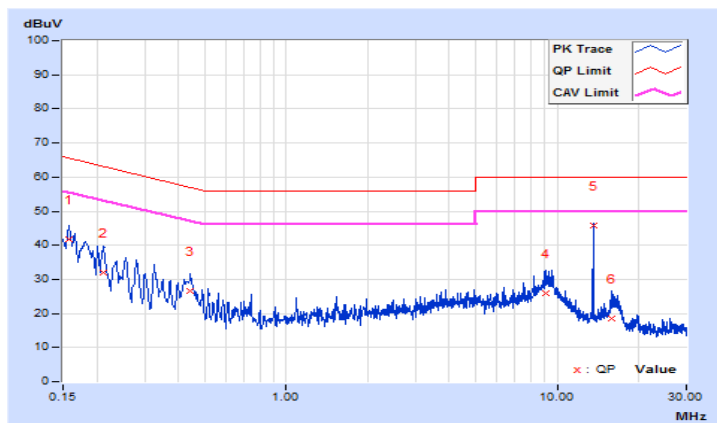


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	F2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	32.95	16.79	42.61	26.45	65.79
2	0.27918	9.66	15.43	4.98	25.09	14.64	60.84	50.84	-35.75	-36.20
3	1.09231	9.64	12.23	1.85	21.87	11.49	56.00	46.00	-34.13	-34.51
4	1.52632	9.66	10.68	1.13	20.34	10.79	56.00	46.00	-35.66	-35.21
5	1.96815	9.67	8.58	0.58	18.25	10.25	56.00	46.00	-37.75	-35.75
6	13.56130	9.91	37.11	37.03	47.02	46.94	60.00	50.00	-12.98	-3.06

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

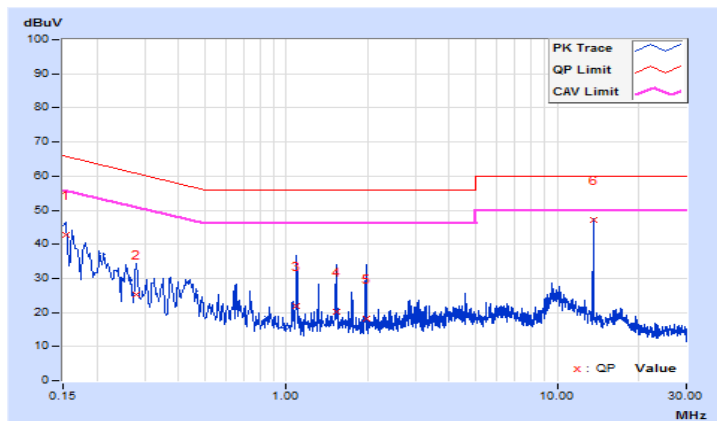


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	G2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16569	9.69	18.94	12.44	28.63	22.13	65.17
2	0.47453	9.68	21.91	10.90	31.59	20.58	56.43	46.43	-24.84	-25.85
3	1.71400	9.69	18.95	12.83	28.64	22.52	56.00	46.00	-27.36	-23.48
4	13.56130	9.89	38.84	38.16	48.73	48.05	60.00	50.00	-11.27	-1.95
5	24.57577	9.94	16.41	16.25	26.35	26.19	60.00	50.00	-33.65	-23.81
6	27.12118	9.94	14.10	12.37	24.04	22.31	60.00	50.00	-35.96	-27.69

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

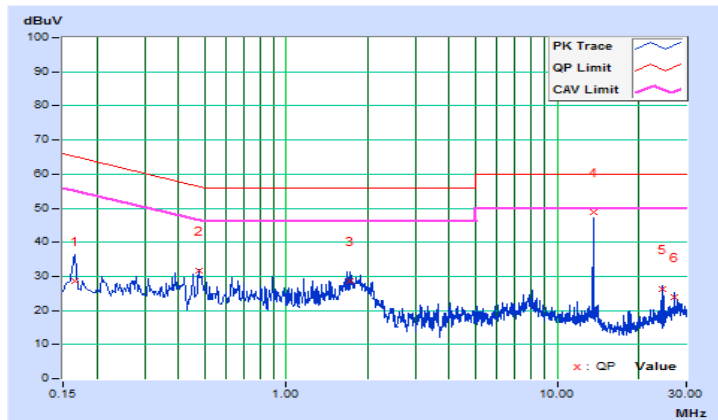


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	G2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.41588	9.65	20.28	13.10	29.93	22.75	57.53
2	0.58792	9.65	11.95	6.57	21.60	16.22	56.00	46.00	-34.40	-29.78
3	1.85085	9.67	19.33	16.25	29.00	25.92	56.00	46.00	-27.00	-20.08
4	13.56130	9.91	38.80	38.74	48.71	48.65	60.00	50.00	-11.29	-1.35
5	24.57577	10.02	16.50	16.42	26.52	26.44	60.00	50.00	-33.48	-23.56
6	27.12118	10.03	14.31	12.44	24.34	22.47	60.00	50.00	-35.66	-27.53

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

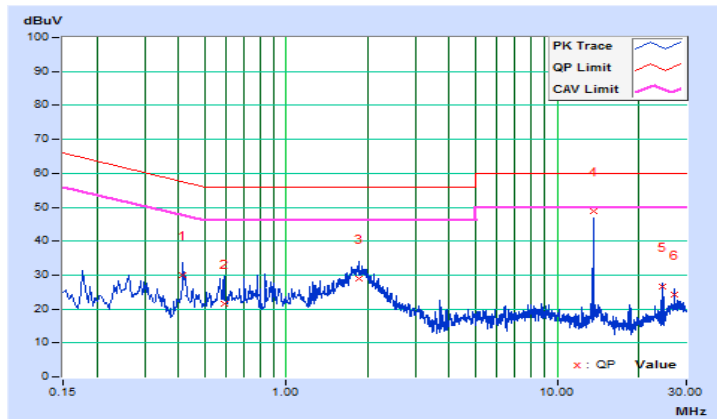


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	H2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18075	9.68	38.47	22.19	48.15	31.87	64.45
2	0.24796	9.68	29.71	11.70	39.39	21.38	61.83	51.83	-22.44	-30.45
3	0.43152	9.68	22.20	13.73	31.88	23.41	57.22	47.22	-25.34	-23.81
4	13.56130	9.89	39.62	38.78	49.51	48.67	60.00	50.00	-10.49	-1.33
5	23.28547	9.94	17.00	11.24	26.94	21.18	60.00	50.00	-33.06	-28.82
6	27.12118	9.94	16.25	14.81	26.19	24.75	60.00	50.00	-33.81	-25.25

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

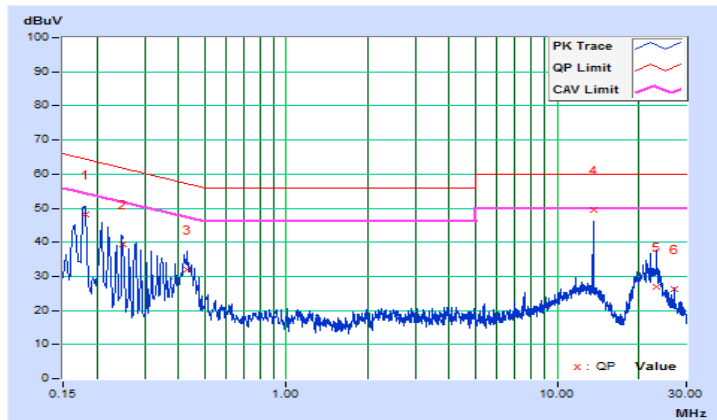


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	H2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16173	9.66	36.78	14.56	46.44	24.22	65.37
2	0.22024	9.66	30.83	10.17	40.49	19.83	62.81	52.81	-22.32	-32.98
3	0.41979	9.65	23.68	15.24	33.33	24.89	57.45	47.45	-24.12	-22.56
4	13.56130	9.91	38.77	38.61	48.68	48.52	60.00	50.00	-11.32	-1.48
5	21.87396	10.01	16.94	10.27	26.95	20.28	60.00	50.00	-33.05	-29.72
6	27.12118	10.03	16.07	14.53	26.10	24.56	60.00	50.00	-33.90	-25.44

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

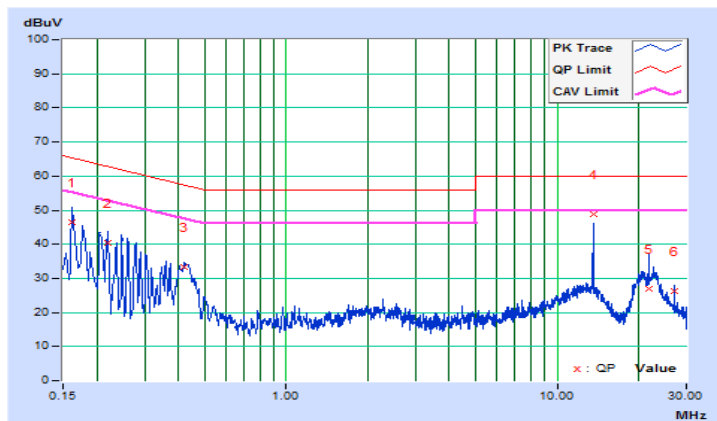


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	I2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15802	9.69	35.18	22.02	44.87	31.71	65.57
2	0.20474	9.68	28.48	15.47	38.16	25.15	63.42	53.42	-25.26	-28.27
3	0.42782	9.68	27.26	23.54	36.94	33.22	57.29	47.29	-20.35	-14.07
4	2.49600	9.71	16.74	12.81	26.45	22.52	56.00	46.00	-29.55	-23.48
5	13.56130	9.89	38.57	38.50	48.46	48.39	60.00	50.00	-11.54	-1.61
6	25.87780	9.94	11.74	6.94	21.68	16.88	60.00	50.00	-38.32	-33.12

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

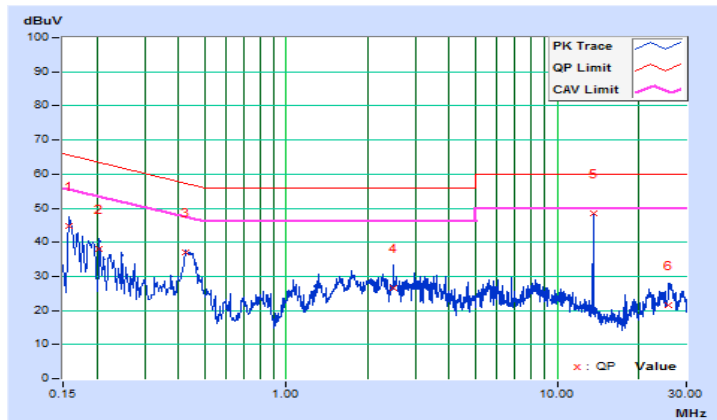




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	I2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.66	35.31	22.37	44.97	32.03	65.37
2	0.19301	9.66	29.61	18.13	39.27	27.79	63.91	53.91	-24.64	-26.12
3	0.43543	9.65	28.94	24.93	38.59	34.58	57.15	47.15	-18.56	-12.57
4	3.69637	9.71	13.75	5.24	23.46	14.95	56.00	46.00	-32.54	-31.05
5	13.56130	9.91	38.54	38.49	48.45	48.40	60.00	50.00	-11.55	-1.60
6	28.39193	10.03	9.88	4.40	19.91	14.43	60.00	50.00	-40.09	-35.57

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

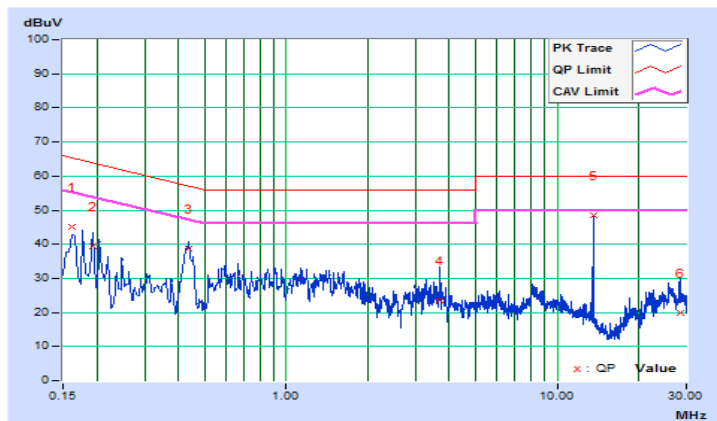


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	J2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.69	41.98	26.22	51.67	35.91	65.79
2	0.18508	9.68	36.81	22.30	46.49	31.98	64.25	54.25	-17.76	-22.27
3	0.38808	9.68	25.53	20.35	35.21	30.03	58.10	48.10	-22.89	-18.07
4	3.15679	9.73	12.87	6.33	22.60	16.06	56.00	46.00	-33.40	-29.94
5	13.56130	9.89	38.94	38.29	48.83	48.18	60.00	50.00	-11.17	-1.82
6	27.12118	9.94	15.73	14.36	25.67	24.30	60.00	50.00	-34.33	-25.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

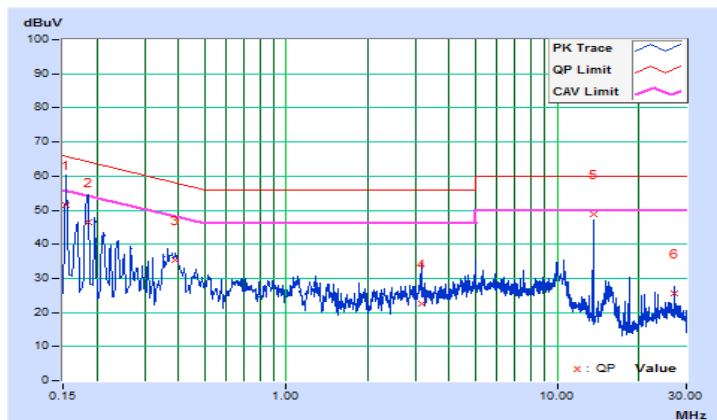


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	J2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.66	42.16	24.78	51.82	34.44	66.00
2	0.15802	9.66	41.76	26.20	51.42	35.86	65.57	55.57	-14.15	-19.71
3	0.18519	9.66	36.73	20.83	46.39	30.49	64.25	54.25	-17.86	-23.76
4	0.39635	9.65	26.39	21.72	36.04	31.37	57.93	47.93	-21.89	-16.56
5	13.56130	9.91	39.36	38.70	49.27	48.61	60.00	50.00	-10.73	-1.39
6	27.12118	10.03	15.82	14.41	25.85	24.44	60.00	50.00	-34.15	-25.56

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

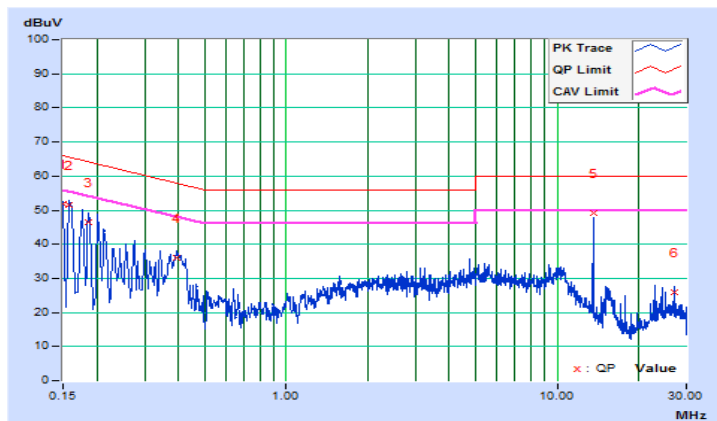


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	K2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.20031	9.85	18.01	5.55	27.86	15.40	63.60
2	0.40415	9.88	10.56	2.83	20.44	12.71	57.77	47.77	-37.33	-35.06
3	0.83816	9.91	11.70	1.01	21.61	10.92	56.00	46.00	-34.39	-35.08
4	2.35915	9.96	9.25	1.30	19.21	11.26	56.00	46.00	-36.79	-34.74
5	13.56130	10.20	38.74	38.11	48.94	48.31	60.00	50.00	-11.06	-1.69
6	25.28739	10.27	5.76	0.31	16.03	10.58	60.00	50.00	-43.97	-39.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

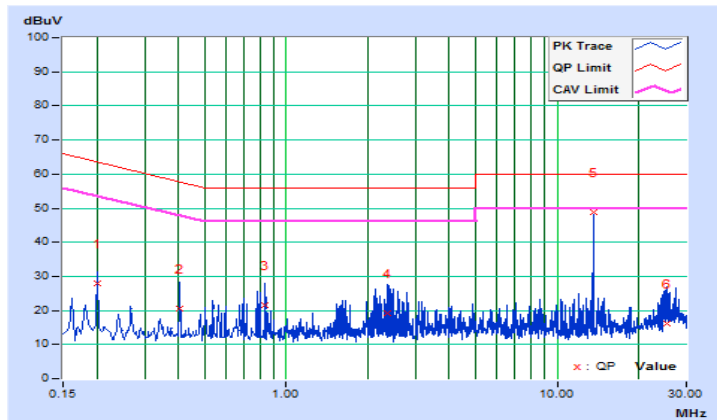


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	K2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17737	9.83	20.06	5.82	29.89	15.65	64.61
2	0.77951	9.88	11.85	0.68	21.73	10.56	56.00	46.00	-34.27	-35.44
3	2.24967	9.94	7.78	1.62	17.72	11.56	56.00	46.00	-38.28	-34.44
4	9.11172	10.14	10.25	0.78	20.39	10.92	60.00	50.00	-39.61	-39.08
5	13.56130	10.22	38.61	37.98	48.83	48.20	60.00	50.00	-11.17	-1.80
6	26.21015	10.34	5.29	0.07	15.63	10.41	60.00	50.00	-44.37	-39.59

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

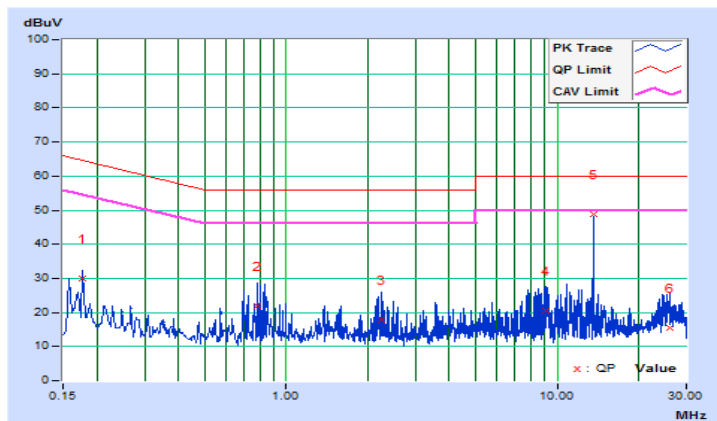


### Type F

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.69	16.29	9.52	25.98	19.21	65.37
2	0.23216	9.68	11.64	4.67	21.32	14.35	62.37	52.37	-41.05	-38.02
3	0.34941	9.68	12.76	12.06	22.44	21.74	58.98	48.98	-36.54	-27.24
4	1.42466	9.68	6.37	0.53	16.05	10.21	56.00	46.00	-39.95	-35.79
5	13.56130	9.89	37.47	37.21	47.36	47.10	60.00	50.00	-12.64	-2.90
6	27.12118	9.94	11.60	11.23	21.54	21.17	60.00	50.00	-38.46	-28.83

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

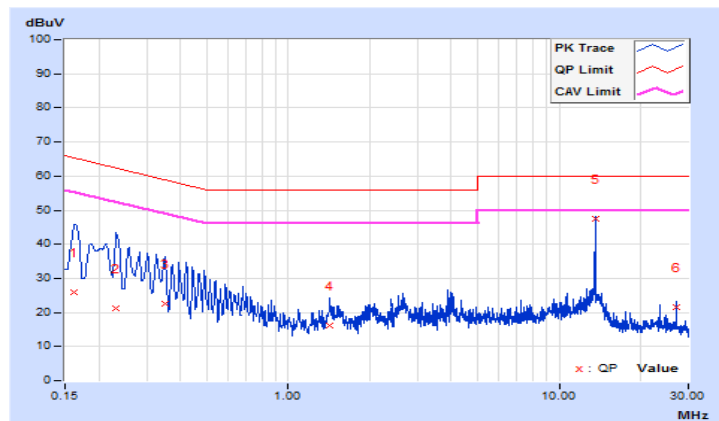


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.73650	9.64	14.56	0.78	24.20	10.42	56.00
2	1.70227	9.66	8.21	2.53	17.87	12.19	56.00	46.00	-38.13	-33.81
3	1.97206	9.67	12.10	0.09	21.77	9.76	56.00	46.00	-34.23	-36.24
4	11.87609	9.88	10.73	3.87	20.61	13.75	60.00	50.00	-39.39	-36.25
5	13.56130	9.91	36.24	35.96	46.15	45.87	60.00	50.00	-13.85	-4.13
6	27.12561	10.03	14.40	12.04	24.43	22.07	60.00	50.00	-35.57	-27.93

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

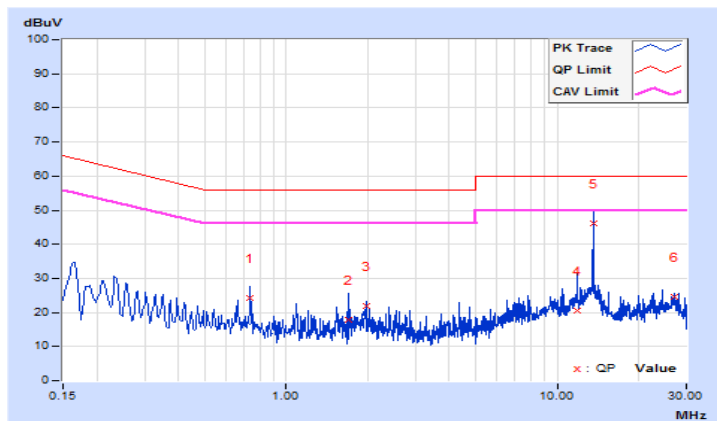


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16564	9.69	30.51	14.08	40.20	23.77	65.18
2	0.23586	9.68	24.69	9.28	34.37	18.96	62.24	52.24	-27.87	-33.28
3	4.88110	9.77	18.55	11.14	28.32	20.91	56.00	46.00	-27.68	-25.09
4	12.46650	9.89	20.41	12.09	30.30	21.98	60.00	50.00	-29.70	-28.02
5	13.56130	9.89	36.54	36.25	46.43	46.14	60.00	50.00	-13.57	-3.86
6	22.93748	9.94	11.23	5.64	21.17	15.58	60.00	50.00	-38.83	-34.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

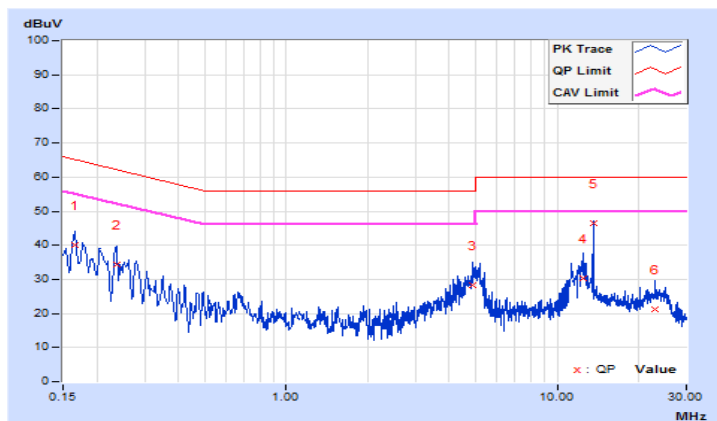




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15782	9.66	35.69	19.23	45.35	28.89	65.58
2	0.19717	9.66	29.25	14.75	38.91	24.41	63.73	53.73	-24.82	-29.32
3	0.66605	9.65	13.51	7.20	23.16	16.85	56.00	46.00	-32.84	-29.15
4	5.08442	9.74	16.98	8.82	26.72	18.56	60.00	50.00	-33.28	-31.44
5	13.56130	9.91	36.44	36.18	46.35	46.09	60.00	50.00	-13.65	-3.91
6	27.50827	10.03	7.48	0.98	17.51	11.01	60.00	50.00	-42.49	-38.99

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

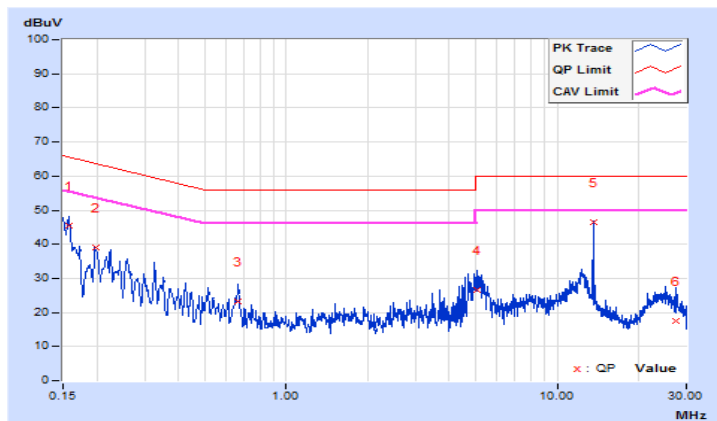


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.69	43.98	27.90	53.67	37.59	65.37
2	0.17737	9.68	41.05	24.77	50.73	34.45	64.61	54.61	-13.88	-20.16
3	0.20084	9.68	37.80	22.16	47.48	31.84	63.58	53.58	-16.10	-21.74
4	0.74041	9.67	15.43	5.14	25.10	14.81	56.00	46.00	-30.90	-31.19
5	13.56130	9.89	37.67	37.22	47.56	47.11	60.00	50.00	-12.44	-2.89
6	28.78684	9.95	10.72	5.79	20.67	15.74	60.00	50.00	-39.33	-34.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

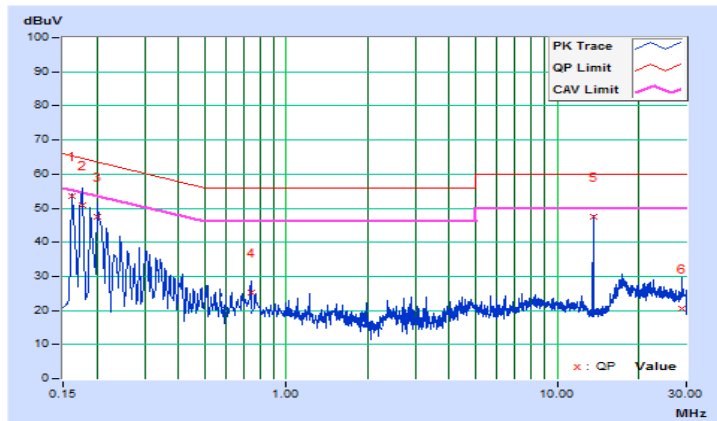


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	45.71	29.95	55.37	39.61	65.79
2	0.16173	9.66	44.38	28.19	54.04	37.85	65.37	55.37	-11.33	-17.52
3	2.84399	9.69	5.05	1.18	14.74	10.87	56.00	46.00	-41.26	-35.13
4	13.56130	9.91	37.50	37.23	47.41	47.14	60.00	50.00	-12.59	-2.86
5	17.29926	9.96	16.70	11.42	26.66	21.38	60.00	50.00	-33.34	-28.62
6	27.55519	10.03	10.18	4.97	20.21	15.00	60.00	50.00	-39.79	-35.00

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

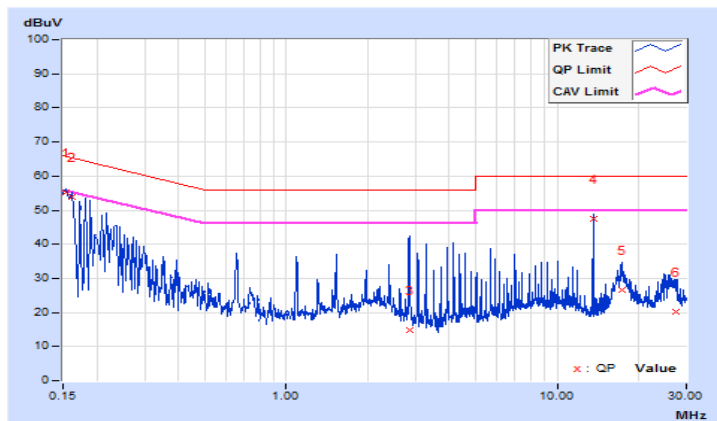


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.69	44.13	28.56	53.82	38.25	65.37
2	0.17346	9.69	41.53	25.42	51.22	35.11	64.79	54.79	-13.57	-19.68
3	0.22024	9.68	34.45	18.59	44.13	28.27	62.81	52.81	-18.68	-24.54
4	1.96815	9.70	14.46	9.14	24.16	18.84	56.00	46.00	-31.84	-27.16
5	13.56130	9.89	37.30	37.11	47.19	47.00	60.00	50.00	-12.81	-3.00
6	16.23965	9.91	18.20	11.45	28.11	21.36	60.00	50.00	-31.89	-28.64

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

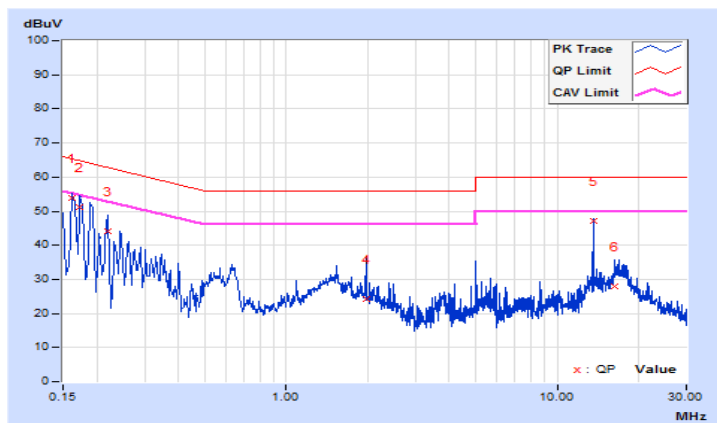


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.66	45.21	27.68	54.87	37.34	66.00
2	0.17346	9.66	41.22	25.44	50.88	35.10	64.79	54.79	-13.91	-19.69
3	0.20031	9.66	37.77	23.15	47.43	32.81	63.60	53.60	-16.17	-20.79
4	0.63020	9.65	26.06	20.01	35.71	29.66	56.00	46.00	-20.29	-16.34
5	13.56130	9.91	37.63	37.56	47.54	47.47	60.00	50.00	-12.46	-2.53
6	17.05293	9.96	21.23	14.80	31.19	24.76	60.00	50.00	-28.81	-25.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

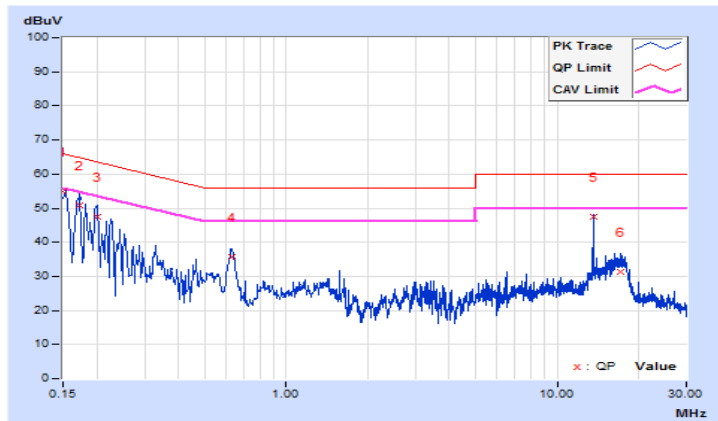


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	E3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16955	9.69	35.88	20.06	45.57	29.75	64.98
2	0.18519	9.68	33.01	17.80	42.69	27.48	64.25	54.25	-21.56	-26.77
3	0.43924	9.68	21.85	12.13	31.53	21.81	57.08	47.08	-25.55	-25.27
4	0.73426	9.67	12.98	2.90	22.65	12.57	56.00	46.00	-33.35	-33.43
5	4.77944	9.77	8.46	1.39	18.23	11.16	56.00	46.00	-37.77	-34.84
6	13.56130	9.89	35.83	35.43	45.72	46.08	60.00	50.00	-14.28	-3.92

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

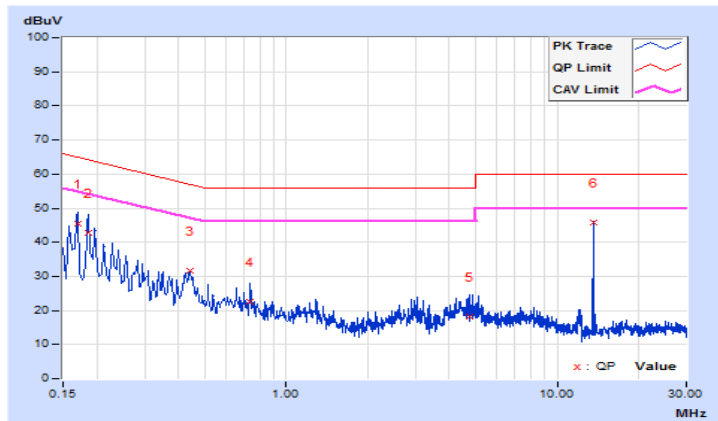


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	E3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15782	9.66	38.16	22.94	47.82	32.60	65.58
2	0.16569	9.66	36.49	21.63	46.15	31.29	65.17	55.17	-19.02	-23.88
3	0.18910	9.66	32.83	18.80	42.49	28.46	64.08	54.08	-21.59	-25.62
4	0.73650	9.64	15.15	3.34	24.79	12.98	56.00	46.00	-31.21	-33.02
5	7.14890	9.79	9.21	3.48	19.00	13.27	60.00	50.00	-41.00	-36.73
6	13.56130	9.91	36.48	36.05	46.39	45.96	60.00	50.00	-13.61	-4.04

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

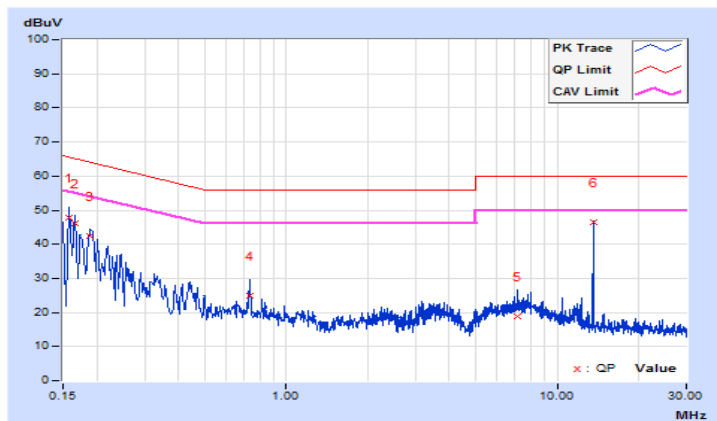


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	F3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.69	32.55	15.61	42.24	25.30	66.00
2	0.16955	9.69	29.55	13.28	39.24	22.97	64.98	54.98	-25.74	-32.01
3	0.23602	9.68	18.28	5.76	27.96	15.44	62.24	52.24	-34.28	-36.80
4	0.43543	9.68	16.90	9.60	26.58	19.28	57.15	47.15	-30.57	-27.87
5	9.46362	9.86	15.75	6.56	25.61	16.42	60.00	50.00	-34.39	-33.58
6	13.56130	9.89	35.92	35.83	45.81	45.72	60.00	50.00	-14.19	-4.28

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

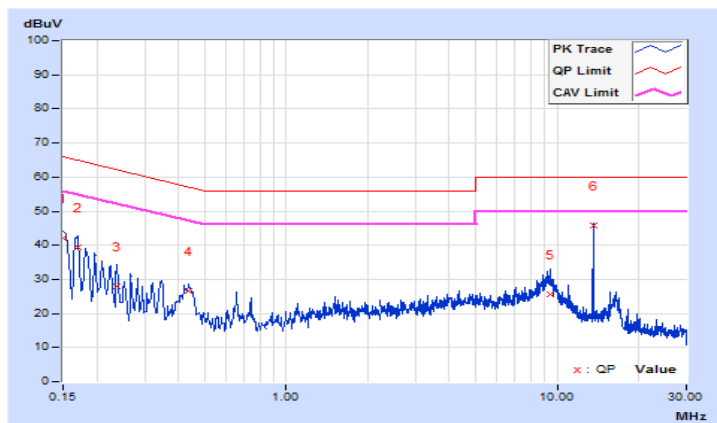




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	F3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16569	9.66	29.55	15.34	39.21	25.00	65.17
2	0.23586	9.66	18.22	7.63	27.88	17.29	62.24	52.24	-34.36	-34.95
3	0.32614	9.65	12.14	6.76	21.79	16.41	59.55	49.55	-37.76	-33.14
4	0.53709	9.65	3.80	0.58	13.45	10.23	56.00	46.00	-42.55	-35.77
5	9.62784	9.84	11.42	2.73	21.26	12.57	60.00	50.00	-38.74	-37.43
6	13.56130	9.91	36.44	36.19	46.35	46.10	60.00	50.00	-13.65	-3.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

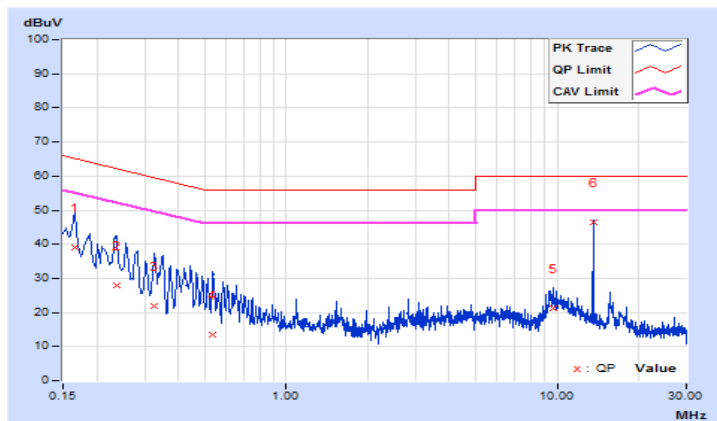


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	G3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.19692	9.68	16.29	11.12	25.97	20.80	63.74
2	0.88117	9.67	13.98	6.64	23.65	16.31	56.00	46.00	-32.35	-29.69
3	1.83130	9.69	21.81	14.51	31.50	24.20	56.00	46.00	-24.50	-21.80
4	13.56130	9.89	38.85	38.15	48.74	48.04	60.00	50.00	-11.26	-1.96
5	24.57577	9.94	16.40	16.24	26.34	26.18	60.00	50.00	-33.66	-23.82
6	27.12118	9.94	14.04	12.40	23.98	22.34	60.00	50.00	-36.02	-27.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

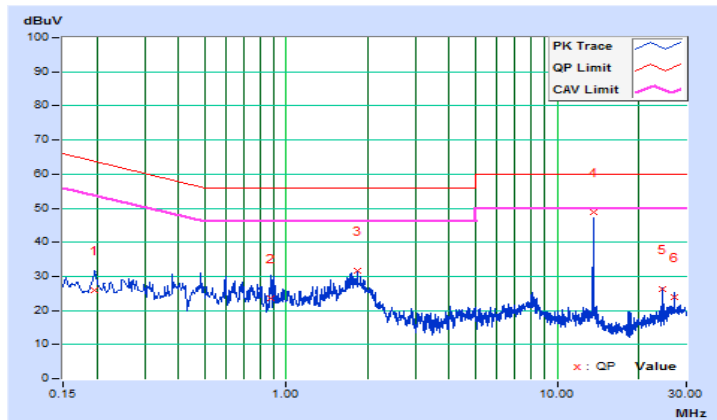


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	G3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.42000	9.65	23.03	18.65	32.68	28.30	57.45
2	1.17442	9.65	12.02	7.52	21.67	17.17	56.00	46.00	-34.33	-28.83
3	1.93687	9.67	19.76	16.11	29.43	25.78	56.00	46.00	-26.57	-20.22
4	13.56130	9.91	38.78	38.72	48.69	48.63	60.00	50.00	-11.31	-1.37
5	24.57577	10.02	16.53	16.40	26.55	26.42	60.00	50.00	-33.45	-23.58
6	27.12118	10.03	14.32	12.50	24.35	22.53	60.00	50.00	-35.65	-27.47

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

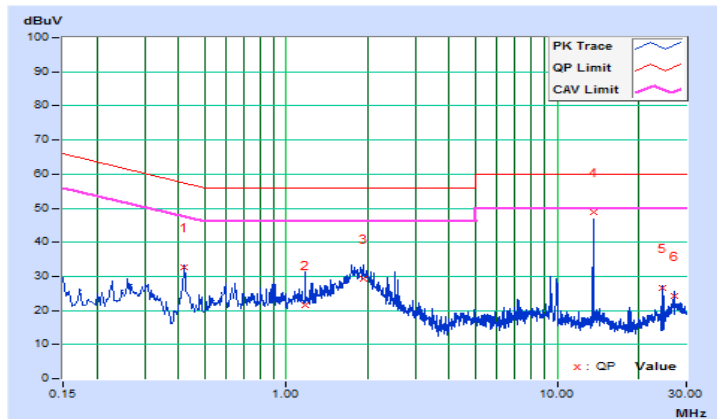


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	H3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18128	9.68	38.51	21.72	48.19	31.40	64.43
2	0.25166	9.68	28.97	10.62	38.65	20.30	61.70	51.70	-23.05	-31.40
3	0.39242	9.68	20.51	8.76	30.19	18.44	58.01	48.01	-27.82	-29.57
4	13.56130	9.89	39.69	38.86	49.58	48.75	60.00	50.00	-10.42	-1.25
5	22.70288	9.94	17.95	12.31	27.89	22.25	60.00	50.00	-32.11	-27.75
6	27.12118	9.94	16.12	14.74	26.06	24.68	60.00	50.00	-33.94	-25.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

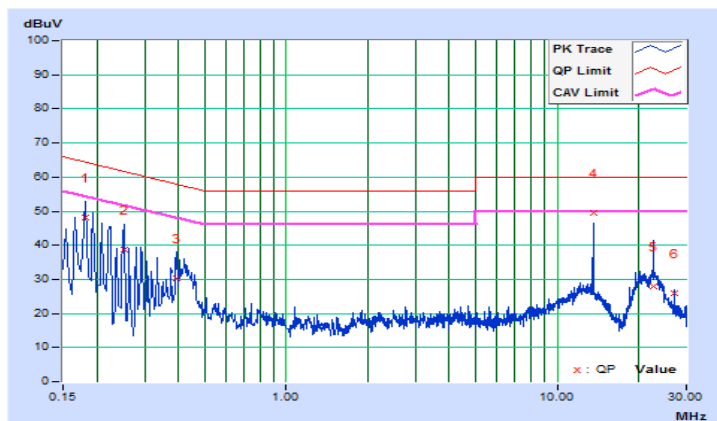


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	H3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.66	41.56	21.89	51.22	31.55	66.00
2	0.17346	9.66	37.59	22.06	47.25	31.72	64.79	54.79	-17.54	-23.07
3	0.41233	9.65	22.09	13.33	31.74	22.98	57.60	47.60	-25.86	-24.62
4	13.56130	9.91	39.50	38.63	49.41	48.54	60.00	50.00	-10.59	-1.46
5	21.39303	10.01	16.01	10.11	26.02	20.12	60.00	50.00	-33.98	-29.88
6	27.12118	10.03	16.01	14.52	26.04	24.55	60.00	50.00	-33.96	-25.45

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

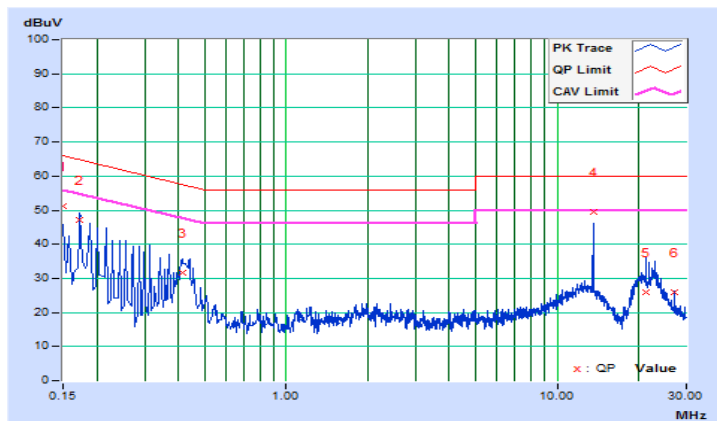


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	I3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16173	9.69	34.74	21.28	44.43	30.97	65.37
2	0.18910	9.68	29.99	17.09	39.67	26.77	64.08	54.08	-24.41	-27.31
3	0.43464	9.68	27.15	24.13	36.83	33.81	57.16	47.16	-20.33	-13.35
4	3.12942	9.73	16.26	9.31	25.99	19.04	56.00	46.00	-30.01	-26.96
5	13.56130	9.89	38.55	38.37	48.44	48.26	60.00	50.00	-11.56	-1.74
6	24.85338	9.94	9.67	2.07	19.61	12.01	60.00	50.00	-40.39	-37.99

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

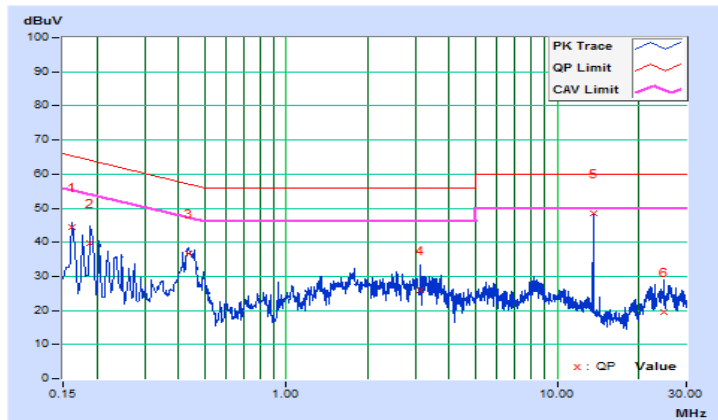


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	I3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15760	9.66	34.88	22.27	44.54	31.93	65.59
2	0.22820	9.66	25.11	13.94	34.77	23.60	62.51	52.51	-27.74	-28.91
3	0.43122	9.65	29.53	27.03	39.18	36.68	57.23	47.23	-18.05	-10.55
4	1.40511	9.65	19.21	14.55	28.86	24.20	56.00	46.00	-27.14	-21.80
5	13.56130	9.91	38.76	38.61	48.67	48.52	60.00	50.00	-11.33	-1.48
6	26.18278	10.02	13.12	7.11	23.14	17.13	60.00	50.00	-36.86	-32.87

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

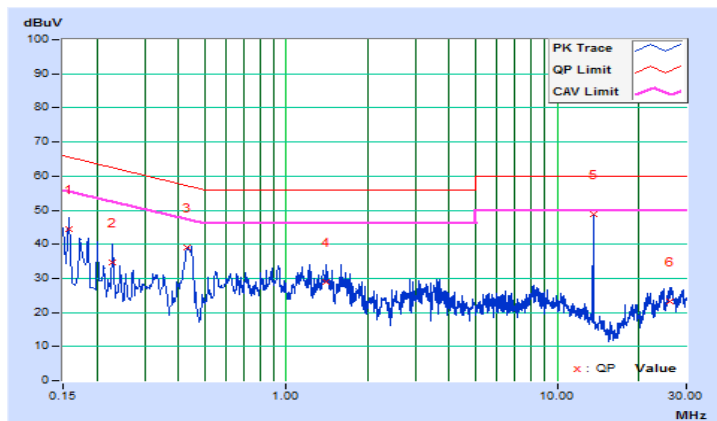


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	J3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15719	9.69	41.43	26.42	51.12	36.11	65.61
2	0.20084	9.68	32.87	17.39	42.55	27.07	63.58	53.58	-21.03	-26.51
3	0.38808	9.68	25.46	20.19	35.14	29.87	58.10	48.10	-22.96	-18.23
4	0.68958	9.68	16.63	10.24	26.31	19.92	56.00	46.00	-29.69	-26.08
5	13.56130	9.89	38.94	38.30	48.83	48.19	60.00	50.00	-11.17	-1.81
6	27.12118	9.94	15.80	14.38	25.74	24.32	60.00	50.00	-34.26	-25.68

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

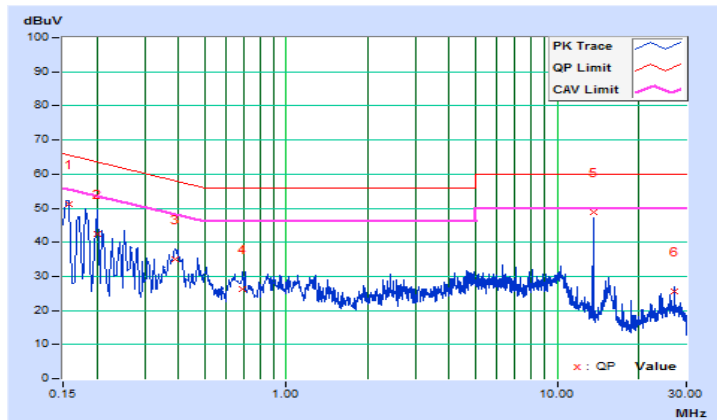




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	J3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16173	9.66	41.07	25.65	50.73	35.31	65.37
2	0.19301	9.66	35.25	18.94	44.91	28.60	63.91	53.91	-19.00	-25.31
3	0.39635	9.65	26.40	21.77	36.05	31.42	57.93	47.93	-21.88	-16.51
4	2.48036	9.68	17.10	11.32	26.78	21.00	56.00	46.00	-29.22	-25.00
5	13.56130	9.91	39.39	38.73	49.30	48.64	60.00	50.00	-10.70	-1.36
6	27.12118	10.03	15.58	14.37	25.61	24.40	60.00	50.00	-34.39	-25.60

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

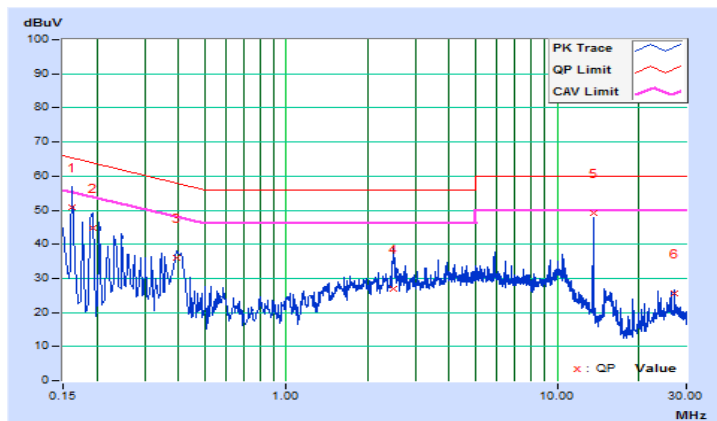


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	K3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17744	9.85	19.40	5.23	29.25	15.08	64.60
2	0.81079	9.91	12.85	0.30	22.76	10.21	56.00	46.00	-33.24	-35.79
3	2.40216	9.96	8.76	1.21	18.72	11.17	56.00	46.00	-37.28	-34.83
4	2.71887	9.98	6.35	1.60	16.33	11.58	56.00	46.00	-39.67	-34.42
5	13.56130	10.20	38.74	38.11	48.94	48.31	60.00	50.00	-11.06	-1.69
6	24.90812	10.26	6.35	0.84	16.61	11.10	60.00	50.00	-43.39	-38.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

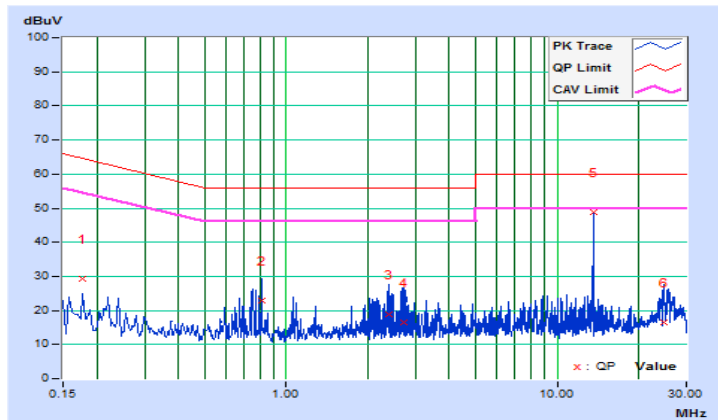


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	K3		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.18910	9.84	17.83	7.62	27.67	17.46	64.08
2	0.82643	9.88	13.52	0.37	23.40	10.25	56.00	46.00	-32.60	-35.75
3	2.23794	9.94	6.91	1.72	16.85	11.66	56.00	46.00	-39.15	-34.34
4	8.29062	10.11	8.94	0.90	19.05	11.01	60.00	50.00	-40.95	-38.99
5	13.56130	10.22	38.60	37.96	48.82	48.18	60.00	50.00	-11.18	-1.82
6	24.57577	10.33	13.75	13.73	24.08	24.06	60.00	50.00	-35.92	-25.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

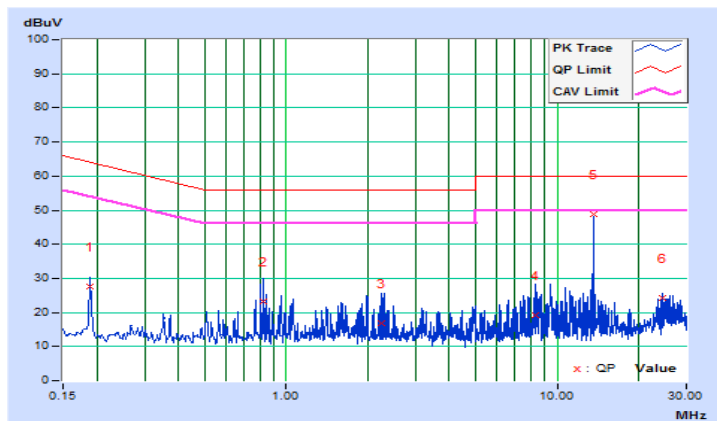


### Type V

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15719	9.69	19.97	6.60	29.66	16.29	65.61
2	0.73650	9.67	15.93	4.70	25.60	14.37	56.00	46.00	-30.40	-31.63
3	7.72367	9.82	10.77	3.61	20.59	13.43	60.00	50.00	-39.41	-36.57
4	11.21139	9.88	14.02	5.49	23.90	15.37	60.00	50.00	-36.10	-34.63
5	13.56130	9.89	35.83	35.80	45.72	45.69	60.00	50.00	-14.28	-4.31
6	20.92774	9.93	20.01	13.83	29.94	23.76	60.00	50.00	-30.06	-26.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

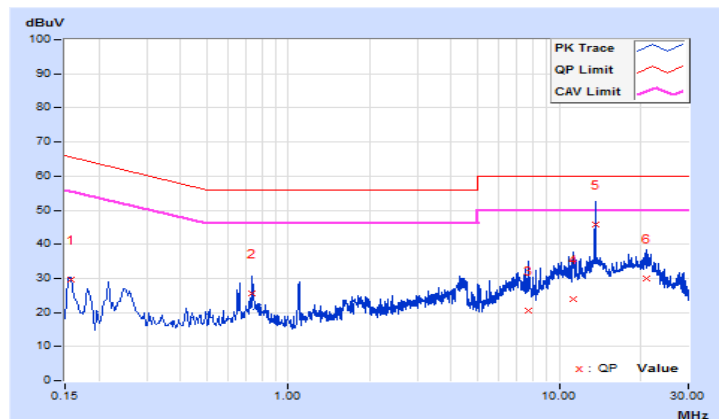


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	16.47	3.96	26.13	13.62	65.79
2	0.73650	9.64	15.79	5.18	25.43	14.82	56.00	46.00	-30.57	-31.18
3	1.75701	9.66	13.44	10.07	23.10	19.73	56.00	46.00	-32.90	-26.27
4	11.10973	9.87	14.60	8.91	24.47	18.78	60.00	50.00	-35.53	-31.22
5	13.56110	9.91	34.99	34.91	44.90	44.82	60.00	50.00	-15.10	-5.18
6	20.83390	10.00	24.72	18.49	34.72	28.49	60.00	50.00	-25.28	-21.51

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

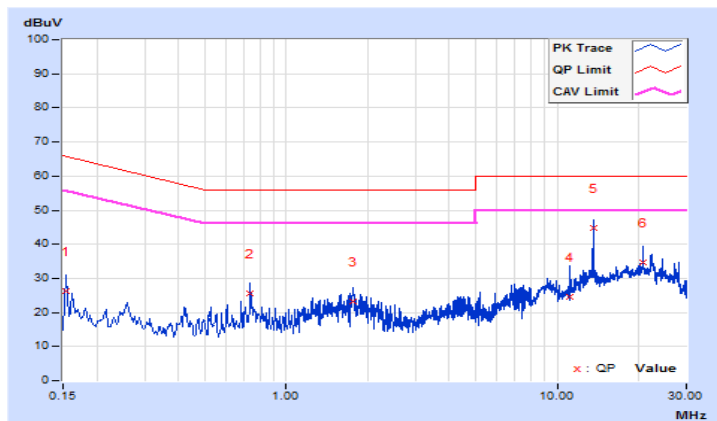


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.69	10.71	1.82	20.40	11.51	66.00
2	0.73650	9.67	15.75	3.84	25.42	13.51	56.00	46.00	-30.58	-32.49
3	9.24466	9.85	14.58	6.66	24.43	16.51	60.00	50.00	-35.57	-33.49
4	13.56130	9.89	35.47	35.42	45.36	45.31	60.00	50.00	-14.64	-4.69
5	18.32368	9.92	20.07	15.34	29.99	25.26	60.00	50.00	-30.01	-24.74
6	21.14670	9.93	19.06	13.12	28.99	23.05	60.00	50.00	-31.01	-26.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

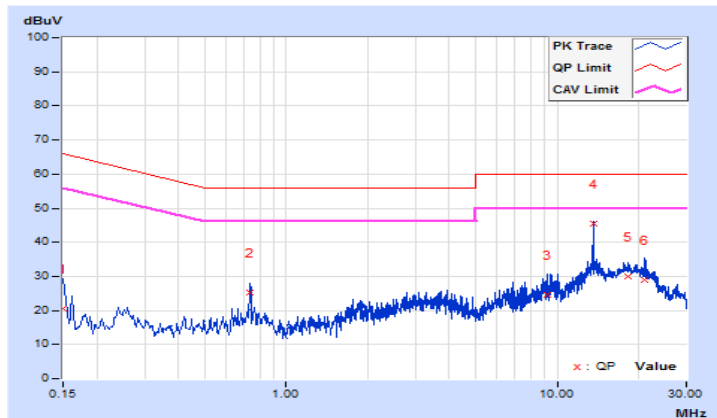


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	16.76	4.30	26.42	13.96	65.79
2	2.32787	9.68	7.80	0.03	17.48	9.71	56.00	46.00	-38.52	-36.29
3	5.26037	9.75	7.70	0.03	17.45	9.78	60.00	50.00	-42.55	-40.22
4	9.28767	9.83	15.11	9.54	24.94	19.37	60.00	50.00	-35.06	-30.63
5	13.56130	9.91	36.82	36.75	46.73	46.66	60.00	50.00	-13.27	-3.34
6	26.00292	10.02	17.38	9.21	27.40	19.23	60.00	50.00	-32.60	-30.77

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

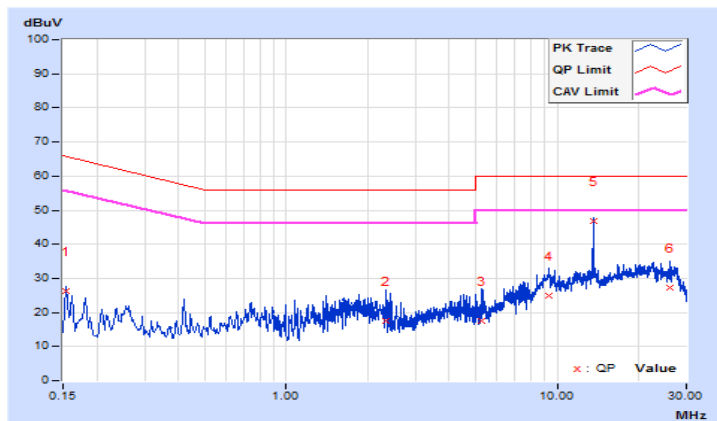


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.69	44.93	28.99	54.62	38.68	65.79
2	0.17744	9.68	41.17	24.38	50.85	34.06	64.60	54.60	-13.75	-20.54
3	0.19692	9.68	36.25	16.44	45.93	26.12	63.74	53.74	-17.81	-27.62
4	0.23961	9.68	32.91	16.18	42.59	25.86	62.11	52.11	-19.52	-26.25
5	13.56130	9.89	37.20	37.08	47.09	46.97	60.00	50.00	-12.91	-3.03
6	16.88480	9.91	16.91	11.70	26.82	21.61	60.00	50.00	-33.18	-28.39

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

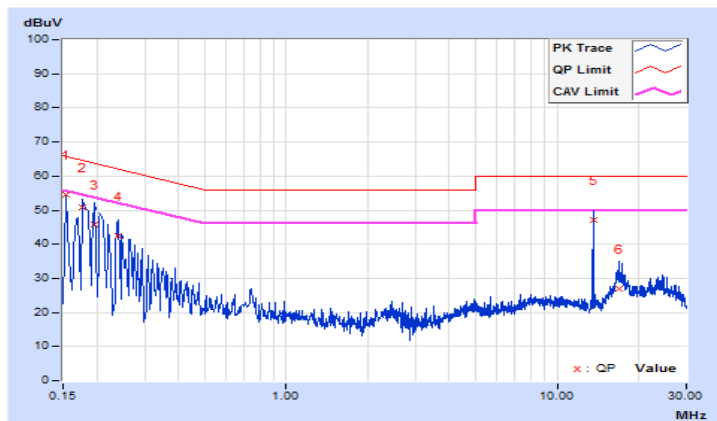




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16564	9.66	42.54	23.19	52.20	32.85	65.18
2	0.19305	9.66	38.68	19.22	48.34	28.88	63.90	53.90	-15.56	-25.02
3	0.26339	9.66	30.18	13.08	39.84	22.74	61.32	51.32	-21.48	-28.58
4	0.74432	9.64	14.11	5.61	23.75	15.25	56.00	46.00	-32.25	-30.75
5	13.56130	9.91	37.90	37.61	47.81	47.52	60.00	50.00	-12.19	-2.48
6	16.55245	9.95	18.04	12.71	27.99	22.66	60.00	50.00	-32.01	-27.34

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

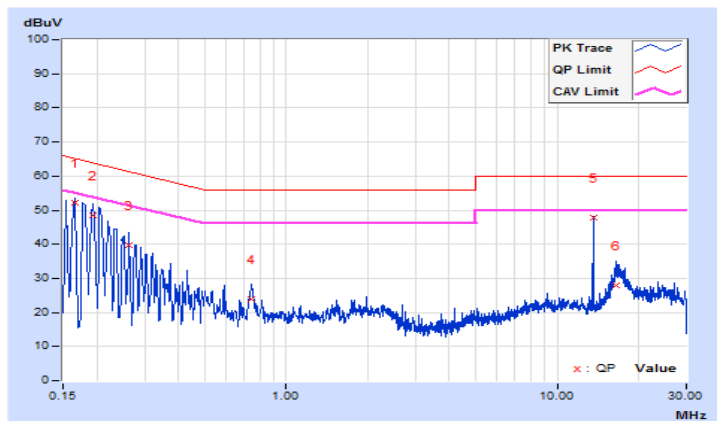


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.69	43.69	27.99	53.38	37.68	66.00
2	0.16139	9.69	43.40	28.54	53.09	38.23	65.39	55.39	-12.30	-17.16
3	0.17346	9.69	42.52	25.81	52.21	35.50	64.79	54.79	-12.58	-19.29
4	0.21647	9.68	35.05	18.79	44.73	28.47	62.95	52.95	-18.22	-24.48
5	1.46767	9.68	17.86	13.24	27.54	22.92	56.00	46.00	-28.46	-23.08
6	13.56130	9.89	38.68	38.16	48.57	48.05	60.00	50.00	-11.43	-1.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

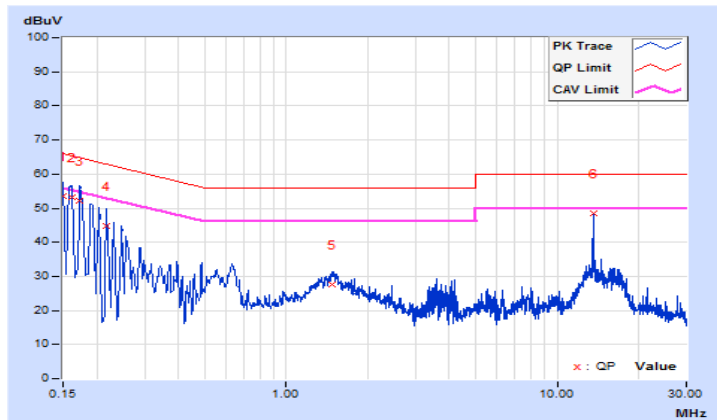


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16526	9.66	44.20	29.06	53.86	38.72	65.20
2	0.18122	9.66	42.22	25.37	51.88	35.03	64.43	54.43	-12.55	-19.40
3	0.19301	9.66	39.23	23.60	48.89	33.26	63.91	53.91	-15.02	-20.65
4	0.21647	9.66	35.42	19.56	45.08	29.22	62.95	52.95	-17.87	-23.73
5	0.62689	9.65	25.28	19.47	34.93	29.12	56.00	46.00	-21.07	-16.88
6	13.56130	9.91	38.51	38.43	48.42	48.34	60.00	50.00	-11.58	-1.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

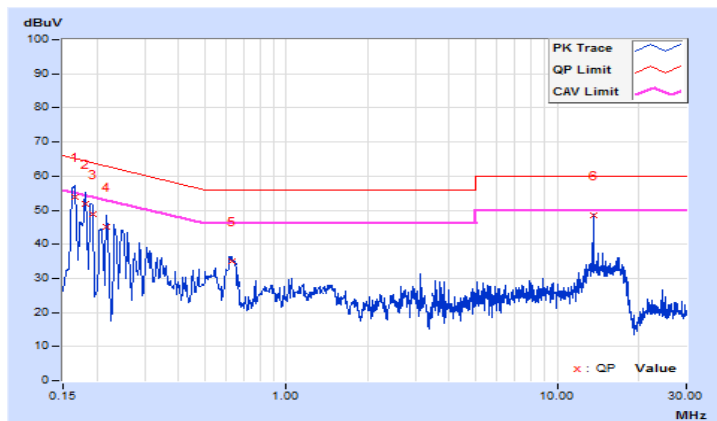


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	E4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.69	39.20	22.43	48.89	32.12	65.79
2	0.16173	9.69	37.62	23.98	47.31	33.67	65.37	55.37	-18.06	-21.70
3	0.21256	9.68	29.17	17.27	38.85	26.95	63.10	53.10	-24.25	-26.15
4	0.42761	9.68	19.40	9.73	29.08	19.41	57.30	47.30	-28.22	-27.89
5	4.61913	9.76	11.58	4.09	21.34	13.85	56.00	46.00	-34.66	-32.15
6	13.56130	9.89	36.60	36.48	46.49	46.37	60.00	50.00	-13.51	-3.63

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

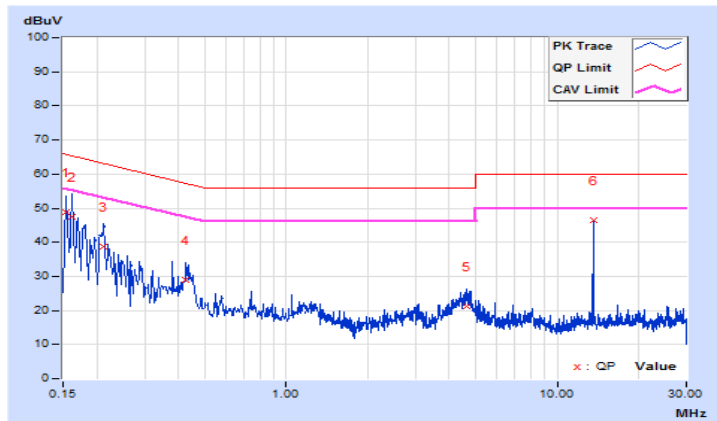


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	E4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.66	37.31	23.46	46.97	33.12	65.37
2	0.19717	9.66	31.75	18.74	41.41	28.40	63.73	53.73	-22.32	-25.33
3	0.22434	9.66	27.18	14.72	36.84	24.38	62.66	52.66	-25.82	-28.28
4	0.36505	9.65	15.18	4.49	24.83	14.14	58.61	48.61	-33.78	-34.47
5	7.97391	9.81	9.18	3.03	18.99	12.84	60.00	50.00	-41.01	-37.16
6	13.56130	9.91	36.39	36.18	46.30	46.09	60.00	50.00	-13.70	-3.91

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

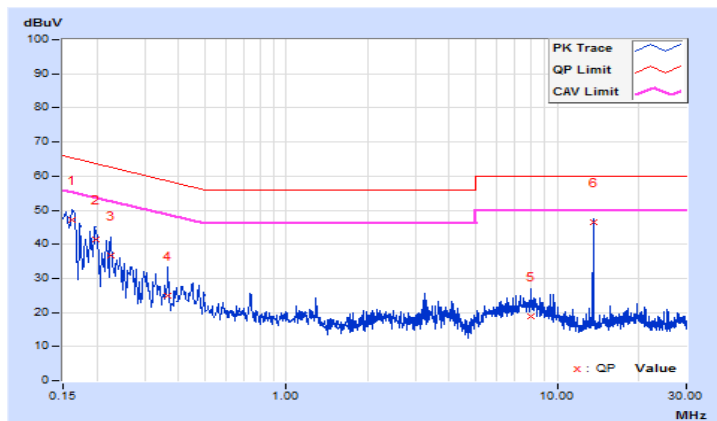


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	F4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16181	9.69	31.41	15.84	41.10	25.53	65.37
2	0.18953	9.68	26.19	10.53	35.87	20.21	64.06	54.06	-28.19	-33.85
3	0.43122	9.68	17.29	10.00	26.97	19.68	57.23	47.23	-30.26	-27.55
4	3.67682	9.74	9.73	1.69	19.47	11.43	56.00	46.00	-36.53	-34.57
5	9.30331	9.86	14.67	5.80	24.53	15.66	60.00	50.00	-35.47	-34.34
6	13.56130	9.89	37.20	37.06	47.09	46.95	60.00	50.00	-12.91	-3.05

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

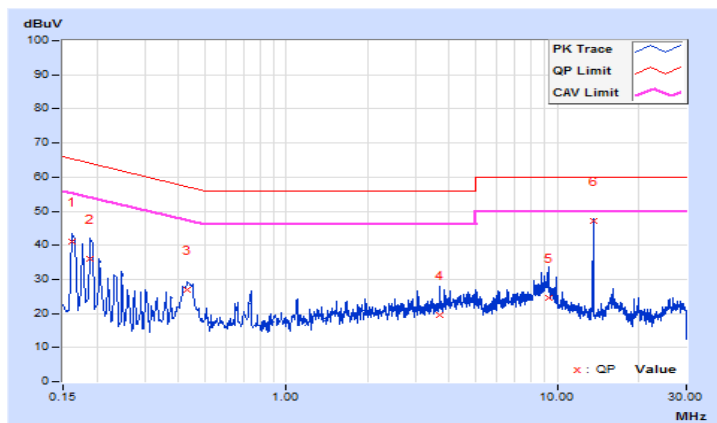


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	F4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	32.73	15.11	42.39	24.77	65.79
2	0.23602	9.66	18.43	2.57	28.09	12.23	62.24	52.24	-34.15	-40.01
3	0.42782	9.65	17.26	9.89	26.91	19.54	57.29	47.29	-30.38	-27.75
4	0.74041	9.64	15.79	1.64	25.43	11.28	56.00	46.00	-30.57	-34.72
5	9.65521	9.84	12.29	4.02	22.13	13.86	60.00	50.00	-37.87	-36.14
6	13.56130	9.91	37.41	37.35	47.32	47.26	60.00	50.00	-12.68	-2.74

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

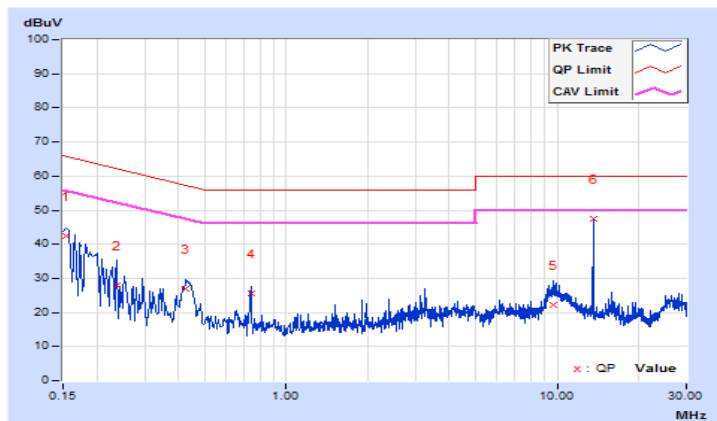


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	G4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17744	9.68	17.68	11.97	27.36	21.65	64.60
2	0.45498	9.68	18.38	10.11	28.06	19.79	56.78	46.78	-28.72	-26.99
3	1.72182	9.69	16.12	12.29	25.81	21.98	56.00	46.00	-30.19	-24.02
4	13.56130	9.89	38.75	38.07	48.64	47.96	60.00	50.00	-11.36	-2.04
5	24.57577	9.94	16.41	16.23	26.35	26.17	60.00	50.00	-33.65	-23.83
6	27.12118	9.94	14.05	12.39	23.99	22.33	60.00	50.00	-36.01	-27.67

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

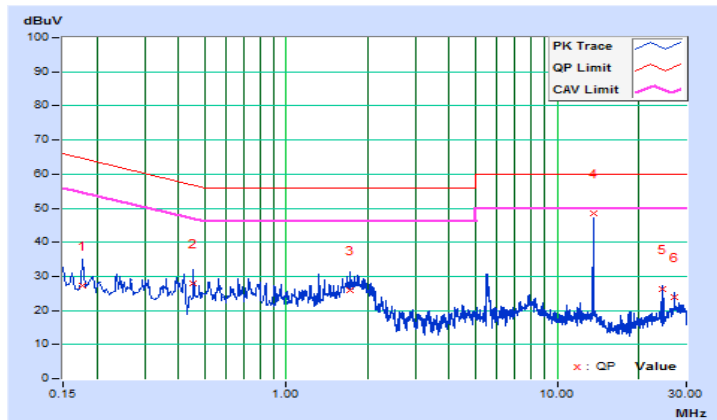




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	G4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15782	9.66	16.44	8.87	26.10	18.53	65.58
2	0.41197	9.65	15.88	8.31	25.53	17.96	57.61	47.61	-32.08	-29.65
3	1.87822	9.67	19.19	16.16	28.86	25.83	56.00	46.00	-27.14	-20.17
4	13.56130	9.91	37.73	37.67	47.64	47.58	60.00	50.00	-12.36	-2.42
5	24.57577	10.02	16.41	16.37	26.43	26.39	60.00	50.00	-33.57	-23.61
6	27.12118	10.03	14.29	12.48	24.32	22.51	60.00	50.00	-35.68	-27.49

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

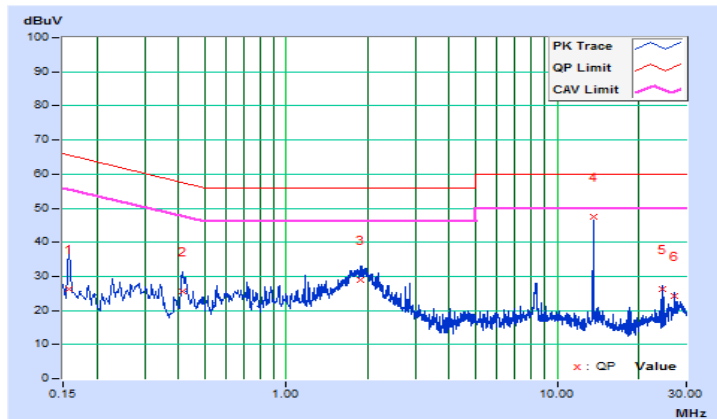


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	H4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16955	9.69	37.20	19.63	46.89	29.32	64.98
2	0.19665	9.68	32.08	10.19	41.76	19.87	63.75	53.75	-21.99	-33.88
3	0.43543	9.68	23.10	14.30	32.78	23.98	57.15	47.15	-24.37	-23.17
4	13.56130	9.89	39.91	39.04	49.80	48.93	60.00	50.00	-10.20	-1.07
5	21.60417	9.93	16.17	9.61	26.10	19.54	60.00	50.00	-33.90	-30.46
6	27.12118	9.94	16.19	14.75	26.13	24.69	60.00	50.00	-33.87	-25.31

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

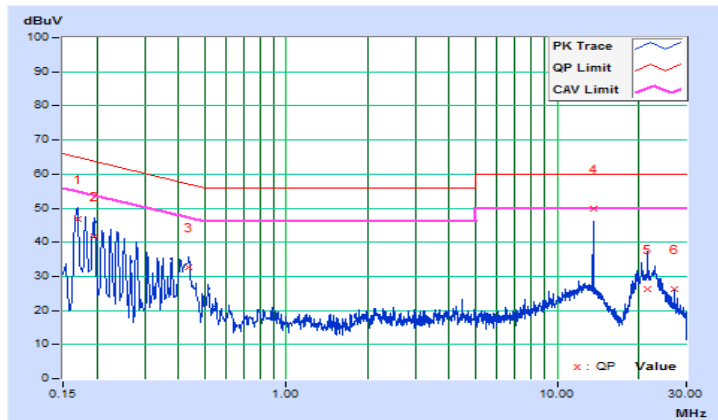


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	H4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16955	9.66	36.93	19.50	46.59	29.16	64.98
2	0.25166	9.66	29.30	10.69	38.96	20.35	61.70	51.70	-22.74	-31.35
3	0.42334	9.65	23.91	16.05	33.56	25.70	57.38	47.38	-23.82	-21.68
4	13.56130	9.91	38.70	38.64	48.61	48.55	60.00	50.00	-11.39	-1.45
5	22.64814	10.01	17.85	11.95	27.86	21.96	60.00	50.00	-32.14	-28.04
6	27.12118	10.03	16.03	14.46	26.06	24.49	60.00	50.00	-33.94	-25.51

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

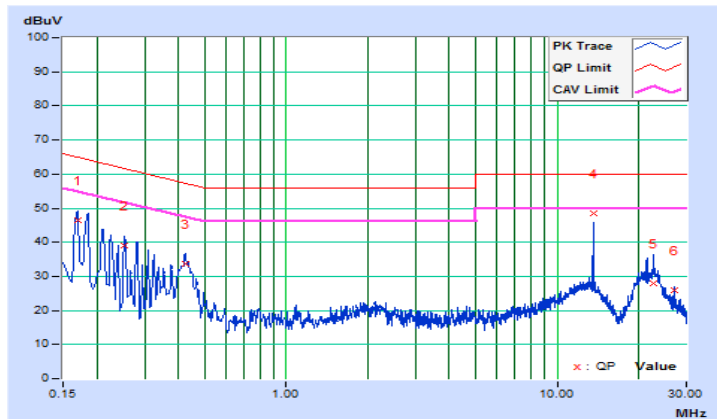


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	I4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15782	9.69	34.72	21.62	44.41	31.31	65.58
2	0.22038	9.68	24.70	13.57	34.38	23.25	62.80	52.80	-28.42	-29.55
3	0.42782	9.68	26.43	22.09	36.11	31.77	57.29	47.29	-21.18	-15.52
4	2.60939	9.72	15.22	9.93	24.94	19.65	56.00	46.00	-31.06	-26.35
5	13.56130	9.89	38.88	38.81	48.77	48.70	60.00	50.00	-11.23	-1.30
6	22.40572	9.93	10.72	4.13	20.65	14.06	60.00	50.00	-39.35	-35.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

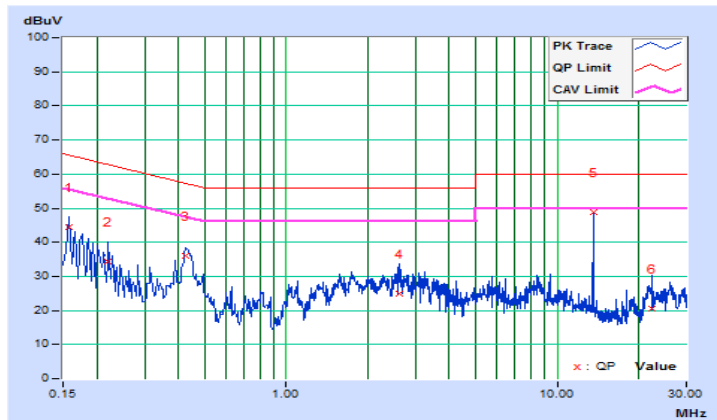


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	I4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.66	35.36	22.96	45.02	32.62	66.00
2	0.43924	9.65	27.08	22.00	36.73	31.65	57.08	47.08	-20.35	-15.43
3	0.60747	9.65	18.94	14.25	28.59	23.90	56.00	46.00	-27.41	-22.10
4	1.13532	9.64	19.94	15.11	29.58	24.75	56.00	46.00	-26.42	-21.25
5	13.56130	9.91	38.98	38.93	48.89	48.84	60.00	50.00	-11.11	-1.16
6	25.16227	10.02	10.37	5.41	20.39	15.43	60.00	50.00	-39.61	-34.57

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

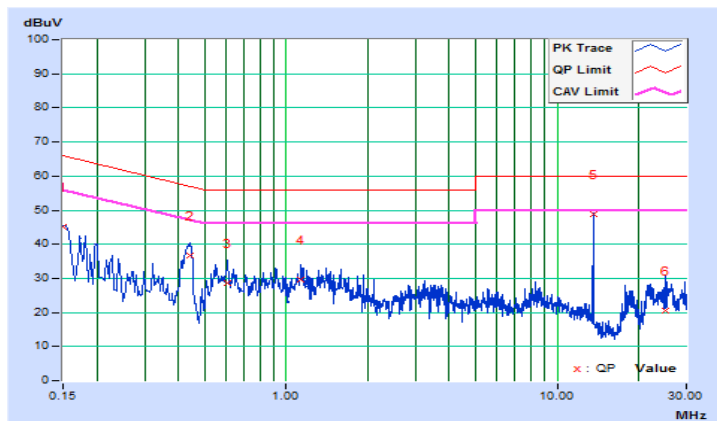


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	J4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.69	41.26	23.75	50.95	33.44	66.00
2	0.16173	9.69	40.02	25.05	49.71	34.74	65.37	55.37	-15.66	-20.63
3	0.22429	9.68	29.25	14.92	38.93	24.60	62.66	52.66	-23.73	-28.06
4	0.38851	9.68	25.66	20.37	35.34	30.05	58.10	48.10	-22.76	-18.05
5	5.44805	9.78	15.57	9.30	25.35	19.08	60.00	50.00	-34.65	-30.92
6	13.56130	9.89	38.96	38.31	48.85	48.20	60.00	50.00	-11.15	-1.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

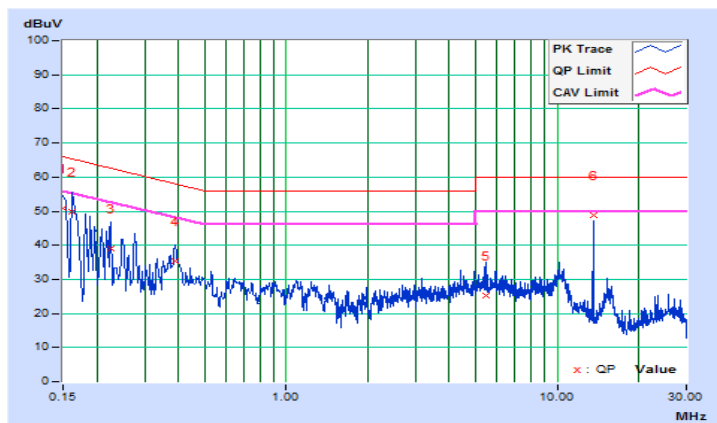


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	J4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.66	41.24	24.75	50.90	34.41	65.79
2	0.16564	9.66	39.80	22.68	49.46	32.34	65.18	55.18	-15.72	-22.84
3	0.27903	9.66	23.84	11.61	33.50	21.27	60.84	50.84	-27.34	-29.57
4	0.40055	9.65	26.12	20.99	35.77	30.64	57.84	47.84	-22.07	-17.20
5	4.93584	9.74	18.64	12.64	28.38	22.38	56.00	46.00	-27.62	-23.62
6	13.56130	9.91	39.38	38.72	49.29	48.63	60.00	50.00	-10.71	-1.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

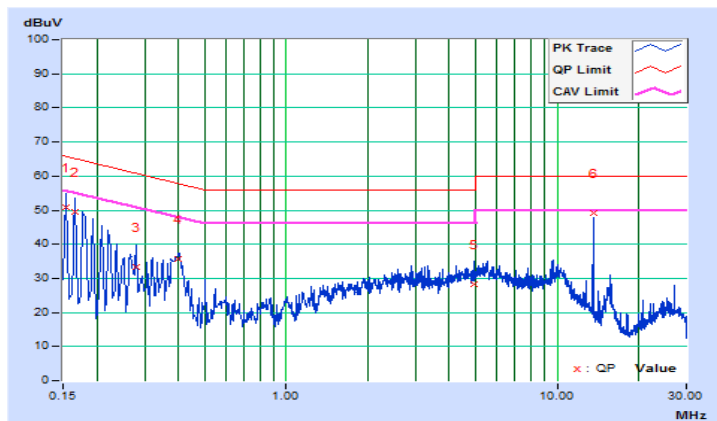


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	K4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15391	9.84	18.74	6.58	28.58	16.42	65.79
2	0.23216	9.85	14.27	8.99	24.12	18.84	62.37	52.37	-38.25	-33.53
3	0.81079	9.91	12.91	0.13	22.82	10.04	56.00	46.00	-33.18	-35.96
4	2.32005	9.96	8.99	1.38	18.95	11.34	56.00	46.00	-37.05	-34.66
5	13.56130	10.20	38.74	38.10	48.94	48.30	60.00	50.00	-11.06	-1.70
6	24.96286	10.26	14.96	9.29	25.22	19.55	60.00	50.00	-34.78	-30.45

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

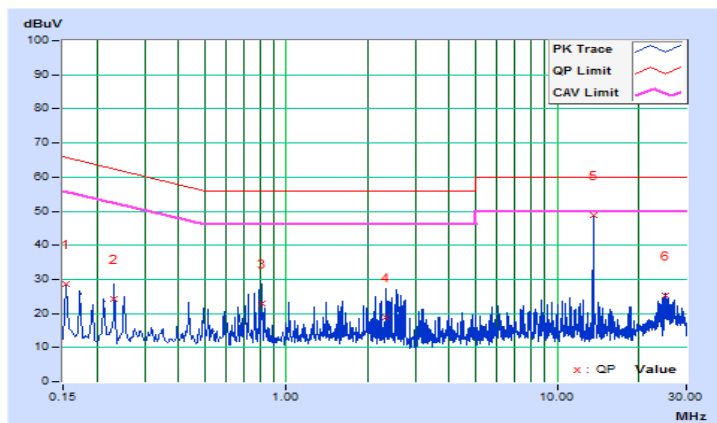




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	K4		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17737	9.83	19.50	4.95	29.33	14.78	64.61
2	0.29858	9.85	7.39	1.34	17.24	11.19	60.28	50.28	-43.04	-39.09
3	0.69349	9.87	7.23	1.81	17.10	11.68	56.00	46.00	-38.90	-34.32
4	2.22621	9.94	6.91	1.82	16.85	11.76	56.00	46.00	-39.15	-34.24
5	13.56130	10.22	38.59	37.95	48.81	48.17	60.00	50.00	-11.19	-1.83
6	24.57577	10.33	13.77	13.73	24.10	24.06	60.00	50.00	-35.90	-25.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

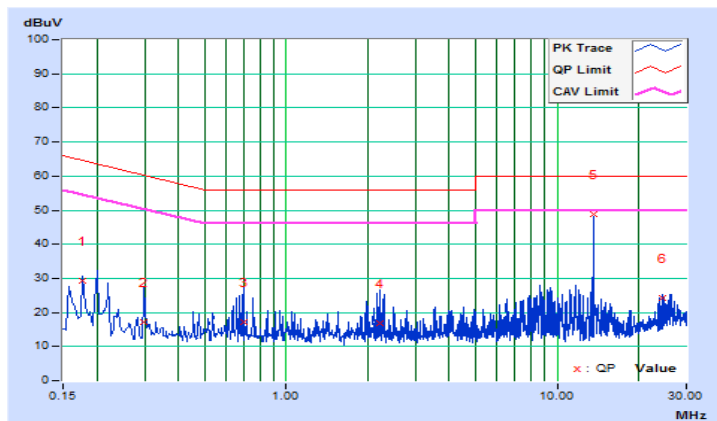


### 4.3 Frequency Stability

#### 4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

#### 4.3.2 Test Setup

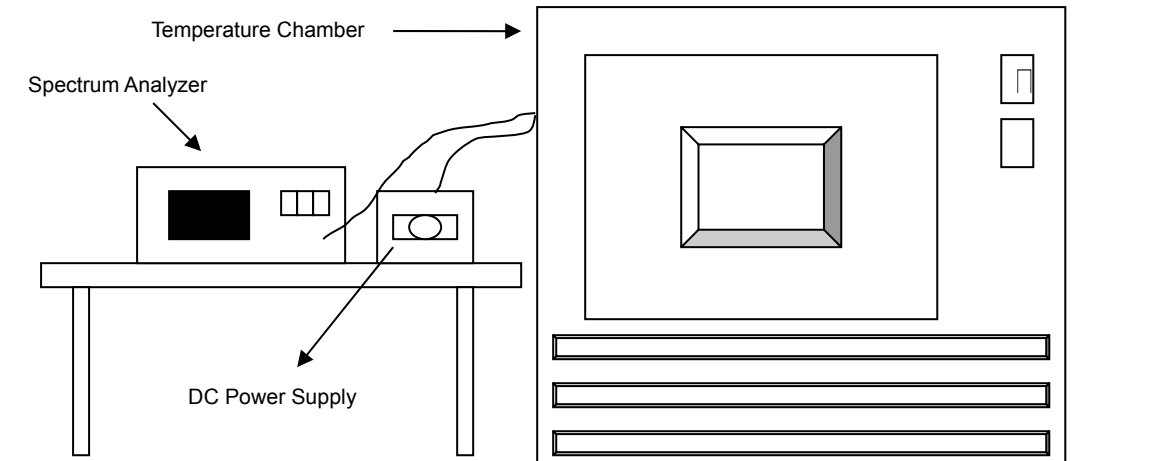

#### 4.3.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2019	Jun. 11, 2020
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 03, 2019	Jun. 02, 2020
Digital Multimeter Fluke	87-III	70360742	Jun. 27, 2019	Jun. 26, 2020
DC Power Supply Topward	6306A	727263	NA	NA

#### 4.3.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turned the EUT on and coupled its output to a spectrum analyzer.
- Turned the EUT off and set the chamber to the highest temperature specified.
- Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- Repeat step c and d with every 10 degrees reduction until the lowest temperature achieved.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

Same as Item 4.1.6.

#### 4.3.7 Test Result

Type A

Mode A1

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	20	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007
40	20	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007
30	20	13.56006	0.00044	13.56005	0.00037	13.56007	0.00052	13.56005	0.00037
20	20	13.55997	-0.00022	13.55997	-0.00022	13.55998	-0.00015	13.55997	-0.00022
10	20	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015	13.55998	-0.00015
0	20	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044
-10	20	13.55997	-0.00022	13.55996	-0.00029	13.55997	-0.00022	13.55996	-0.00029
-20	20	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007

Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	23	13.55997	-0.00022	13.55997	-0.00022	13.55998	-0.00015	13.55997	-0.00022
	20	13.55997	-0.00022	13.55997	-0.00022	13.55998	-0.00015	13.55997	-0.00022
	17	13.55997	-0.00022	13.55997	-0.00022	13.55998	-0.00015	13.55997	-0.00022

**Type B**  
**Mode A2**

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	20	13.56002	0.00015	13.56002	0.00015	13.56002	0.00015	13.56002	0.00015
40	20	13.56003	0.00022	13.56004	0.00029	13.56004	0.00029	13.56003	0.00022
30	20	13.56001	0.00007	13.56002	0.00015	13.56002	0.00015	13.56001	0.00007
20	20	13.55997	-0.00022	13.55996	-0.00029	13.55997	-0.00022	13.55996	-0.00029
10	20	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044
0	20	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022
-10	20	13.55995	-0.00037	13.55996	-0.00029	13.55997	-0.00022	13.55997	-0.00022
-20	20	13.56002	0.00015	13.56002	0.00015	13.56002	0.00015	13.56003	0.00022

Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	23	13.55997	-0.00022	13.55996	-0.00029	13.55997	-0.00022	13.55996	-0.00029
	20	13.55997	-0.00022	13.55996	-0.00029	13.55997	-0.00022	13.55996	-0.00029
	17	13.55997	-0.00022	13.55996	-0.00029	13.55997	-0.00022	13.55996	-0.00029

**Type F**  
**Mode A3**

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	20	13.55998	-0.00015	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015
40	20	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007
30	20	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007	13.55999	-0.00007
20	20	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044
10	20	13.56002	0.00015	13.56002	0.00015	13.56003	0.00022	13.56002	0.00015
0	20	13.55998	-0.00015	13.55997	-0.00022	13.55998	-0.00015	13.55998	-0.00015
-10	20	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007
-20	20	13.55998	-0.00015	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015

Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	23	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044
	20	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044
	17	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044	13.55994	-0.00044

**Type V**  
**Mode A4**

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	20	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044	13.56005	0.00037
40	20	13.55998	-0.00015	13.55998	-0.00015	13.55999	-0.00007	13.55998	-0.00015
30	20	13.56006	0.00044	13.56005	0.00037	13.56006	0.00044	13.56006	0.00044
20	20	13.55993	-0.00052	13.55993	-0.00052	13.55993	-0.00052	13.55994	-0.00044
10	20	13.55993	-0.00052	13.55993	-0.00052	13.55993	-0.00052	13.55994	-0.00044
0	20	13.56007	0.00052	13.56006	0.00044	13.56006	0.00044	13.56006	0.00044
-10	20	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037	13.56005	0.00037
-20	20	13.56004	0.00029	13.56003	0.00022	13.56003	0.00022	13.56002	0.00015


Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	23	13.55993	-0.00052	13.55993	-0.00052	13.55993	-0.00052	13.55994	-0.00044
	20	13.55993	-0.00052	13.55993	-0.00052	13.55993	-0.00052	13.55994	-0.00044
	17	13.55993	-0.00052	13.55993	-0.00052	13.55993	-0.00052	13.55994	-0.00044

#### 4.4 20dB Bandwidth

##### 4.4.1 Limits of 20dB Bandwidth Measurement

The 20dB bandwidth shall be specified in operating frequency band.

##### 4.4.2 Test Setup

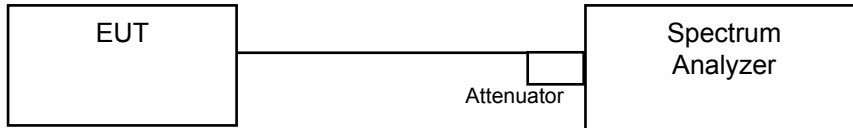

##### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.4 Test Procedures

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

##### 4.4.5 Deviation from Test Standard

No deviation.

##### 4.4.6 EUT Operating Conditions


Same as Item 4.1.6.

#### 4.4.7 Test Results

Type A

Mode A1


20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.55868000	13.561400000	13.553~13.567	Pass

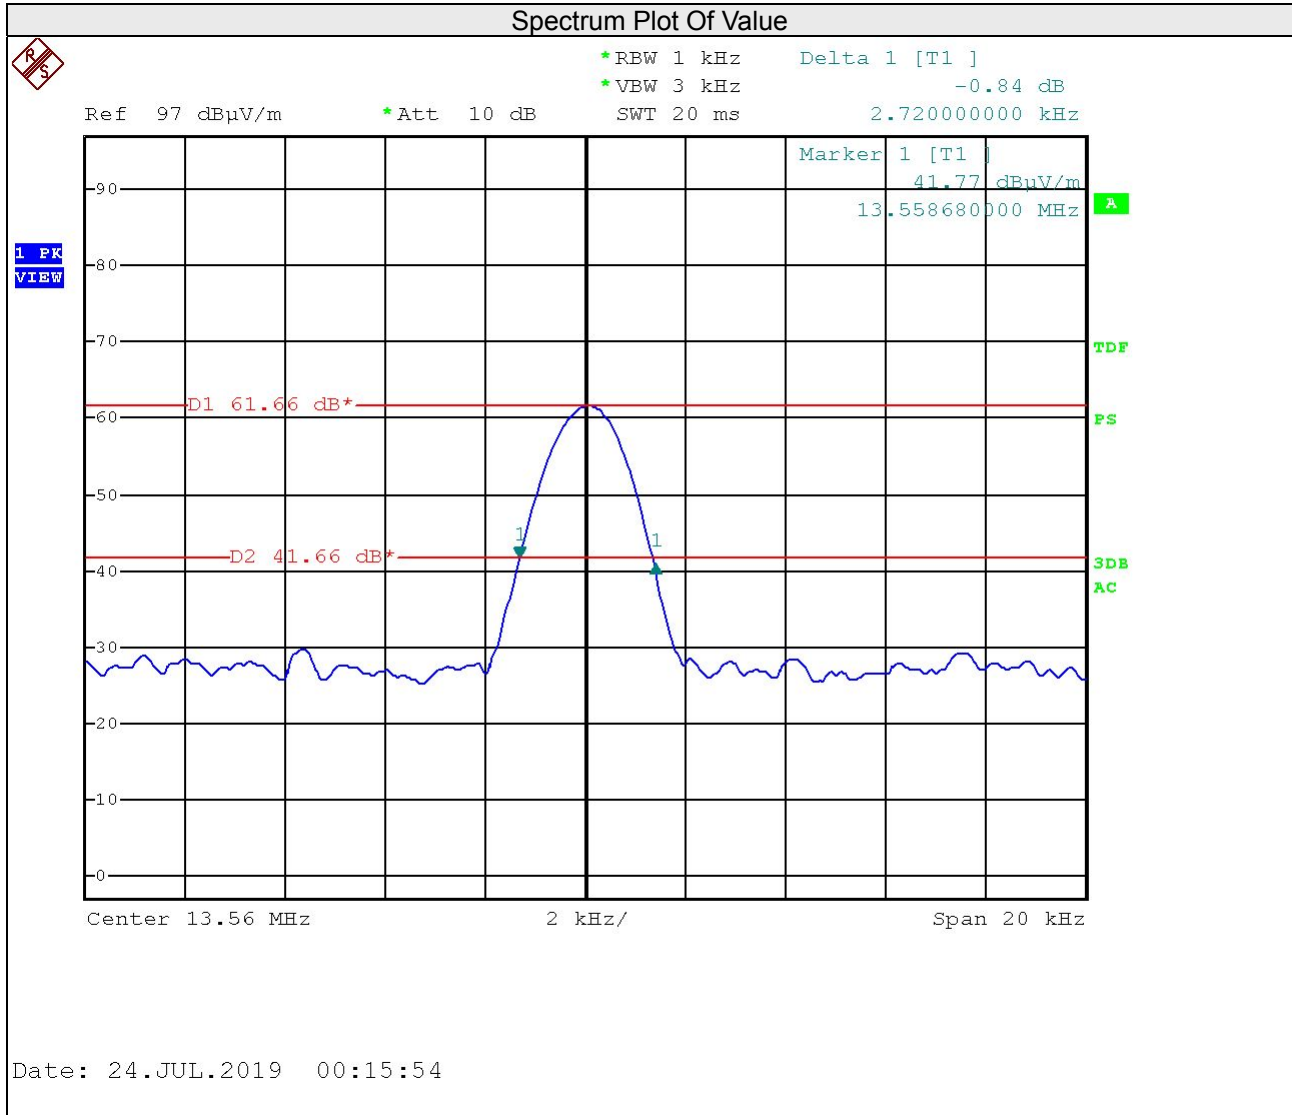




**Type B**  
**Mode A2**

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.55868000	13.561360000	13.553~13.567	Pass

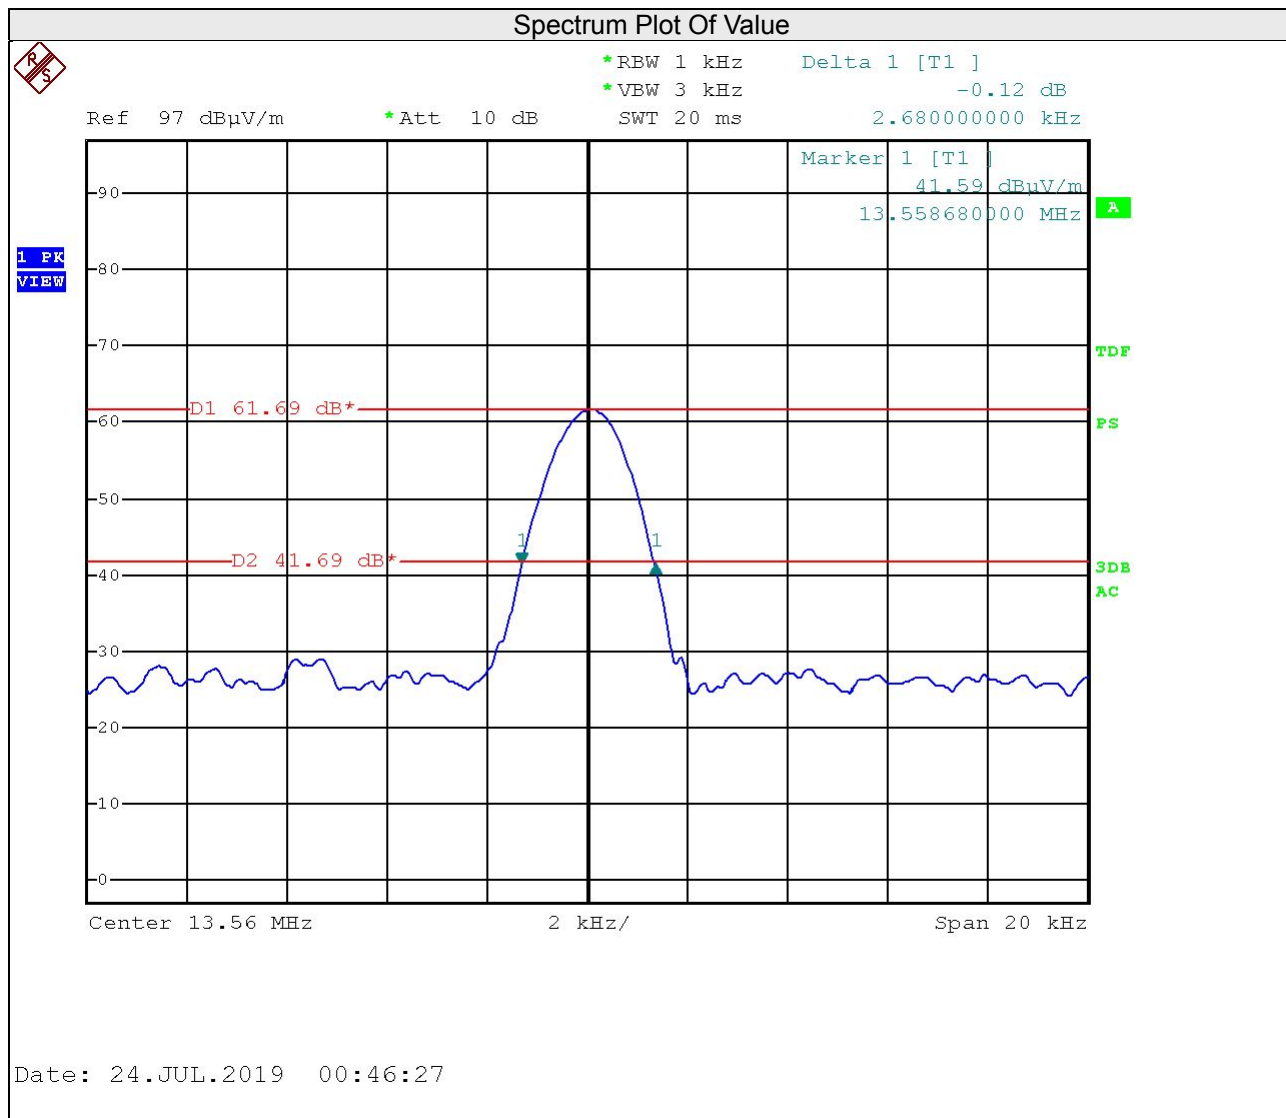

Type F  
Mode A3


20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.55868000	13.56140000	13.553~13.567	Pass

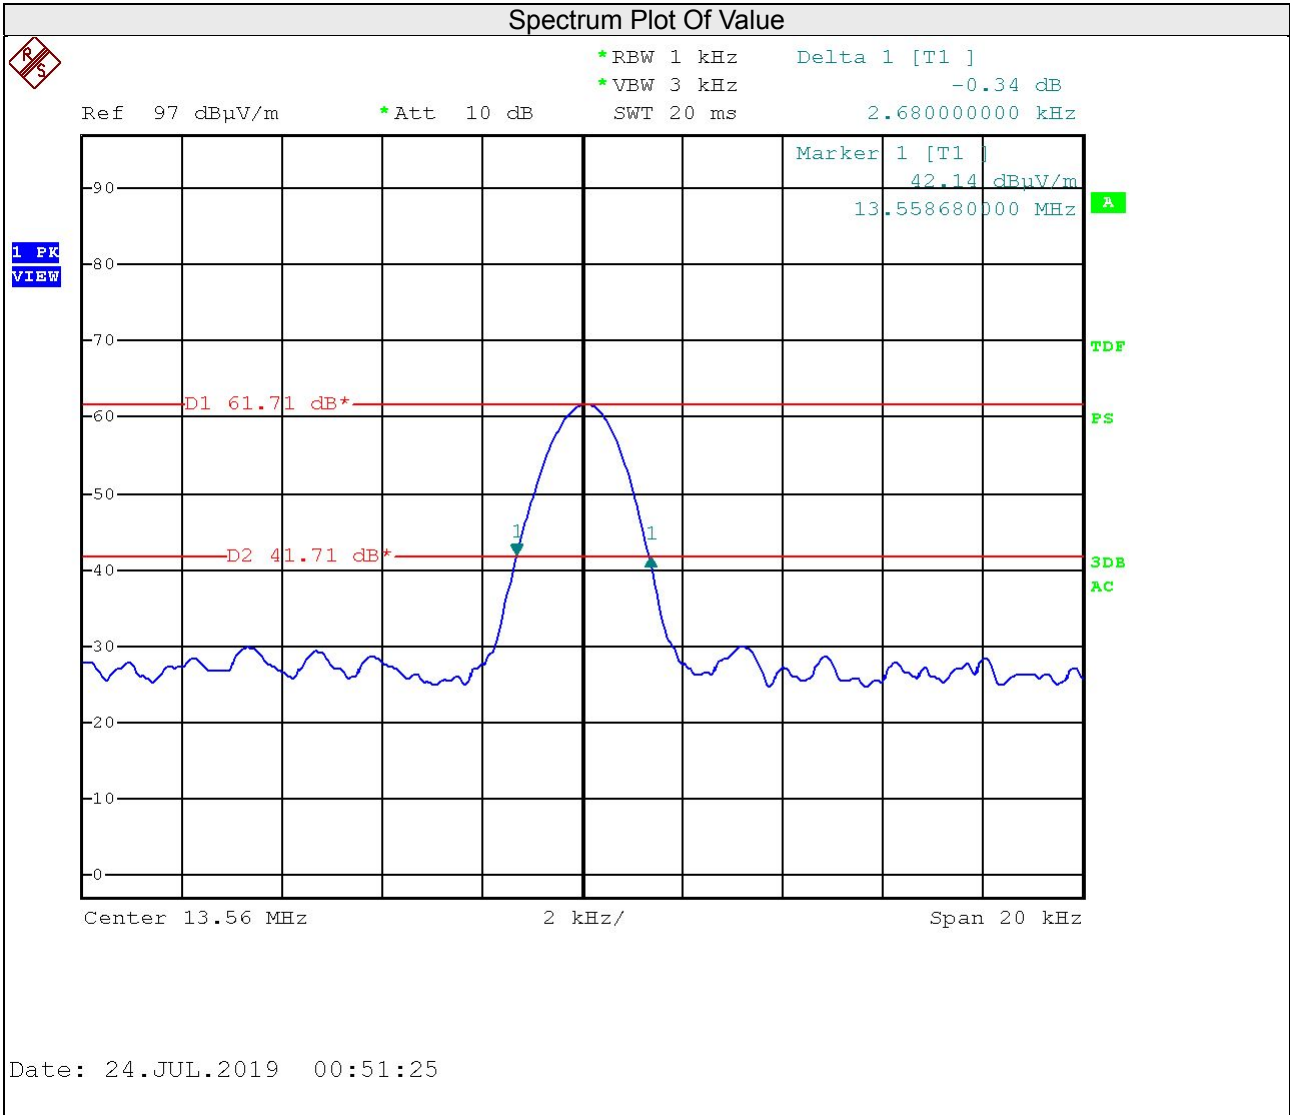

Type V

Mode A4

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.558720000	13.561400000	13.553~13.567	Pass

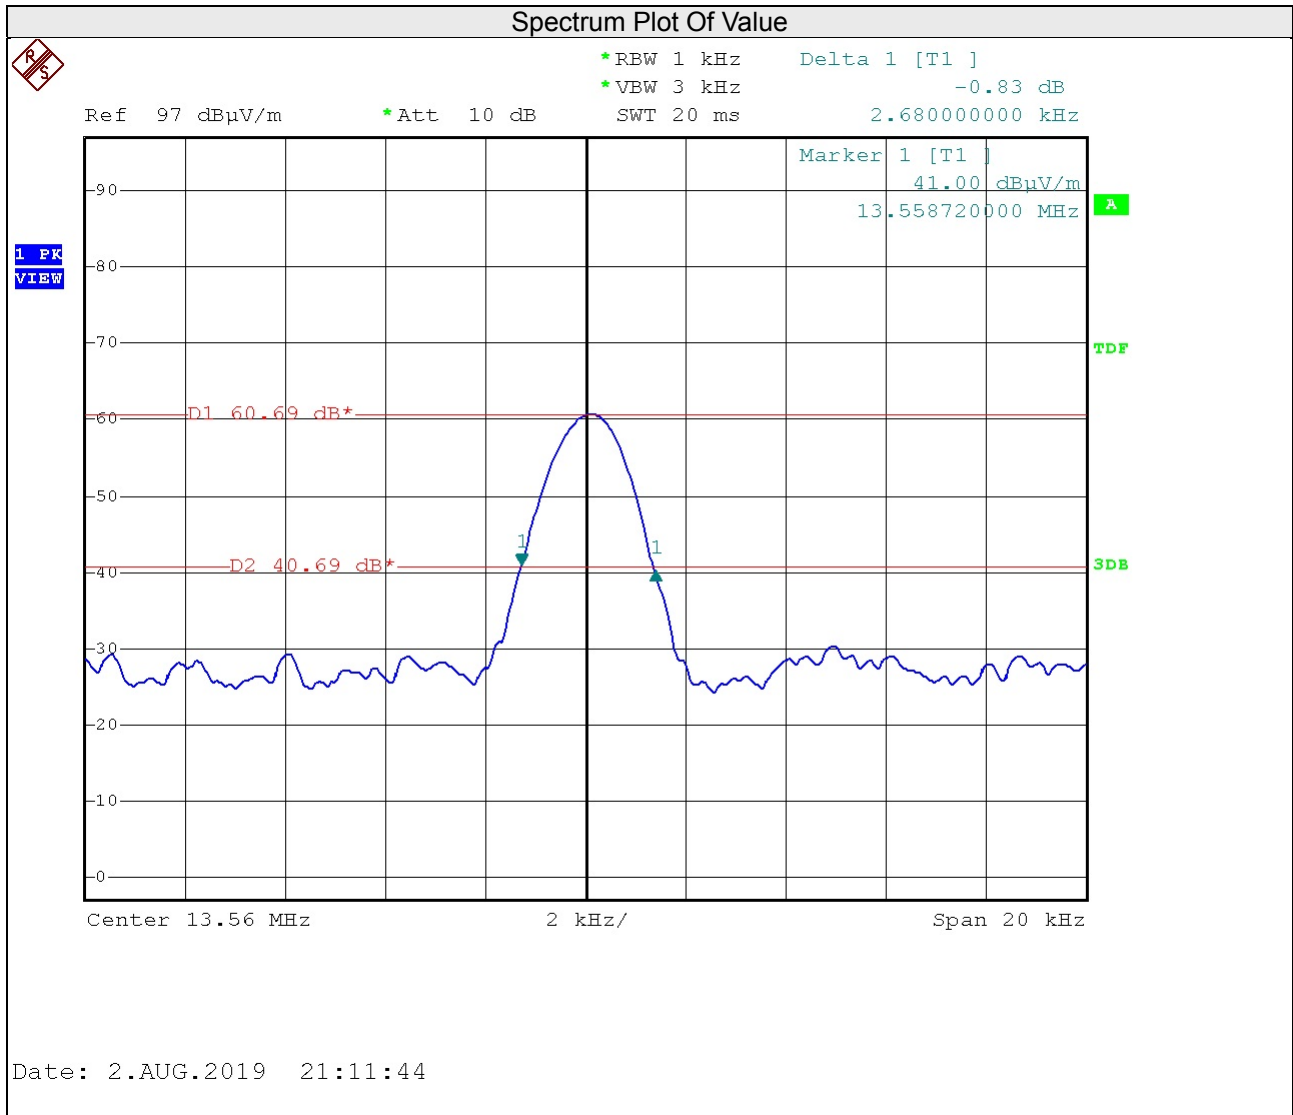

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---