

Tune-up Power (Full)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	10.5	10.5			
	40	5200	10.5	10.5			
	44	5220	10.5	10.5			
	48	5240	10.5	10.5			
802.11n HT20	36	5180	10.5	10.5	10.5	10.5	13.5
	40	5200	10.5	10.5	10.5	10.5	13.5
	44	5220	10.5	10.5	10.5	10.5	13.5
	48	5240	10.5	10.5	10.5	10.5	13.5
802.11n HT40	38	5190	10.5	10.5	10.5	10.5	13.5
	46	5230	10.5	10.5	10.5	10.5	13.5
802.11ac VHT80	42	5210	10.5	10.5	10.5	10.5	13.5
802.11ax HE20	36	5180	10.5	10.5	10.5	10.5	13.5
	40	5200	10.5	10.5	10.5	10.5	13.5
	44	5220	10.5	10.5	10.5	10.5	13.5
	48	5240	10.5	10.5	10.5	10.5	13.5
802.11ax HE40	38	5190	10.5	10.5	10.5	10.5	13.5
	46	5230	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	42	5210	10.5	10.5	10.5	10.5	13.5
802.11be HE20	36	5180	10.5	10.5	10.5	10.5	13.5
	40	5200	10.5	10.5	10.5	10.5	13.5
	44	5220	10.5	10.5	10.5	10.5	13.5
	48	5240	10.5	10.5	10.5	10.5	13.5
802.11be HE40	38	5190	10.5	10.5	10.5	10.5	13.5
	46	5230	10.5	10.5	10.5	10.5	13.5
802.11be HE80	42	5210	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Full)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	10.5	10.5			
	56	5280	10.5	10.5			
	60	5300	10.5	10.5			
	64	5320	10.5	10.5			
802.11n HT20	52	5260	10.5	10.5	10.5	10.5	13.5
	56	5280	10.5	10.5	10.5	10.5	13.5
	60	5300	10.5	10.5	10.5	10.5	13.5
	64	5320	10.5	10.5	10.5	10.5	13.5
802.11n HT40	54	5270	10.5	10.5	10.5	10.5	13.5
	62	5310	10.5	10.5	10.5	10.5	13.5
802.11ac VHT80	58	5290	10.5	10.5	10.5	10.5	13.5
802.11ac VHT160	50	5250	10.5	10.5	10.5	10.5	13.5
802.11ax HE20	52	5260	10.5	10.5	10.5	10.5	13.5
	56	5280	10.5	10.5	10.5	10.5	13.5
	60	5300	10.5	10.5	10.5	10.5	13.5
	64	5320	10.5	10.5	10.5	10.5	13.5
802.11ax HE40	54	5270	10.5	10.5	10.5	10.5	13.5
	62	5310	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	58	5290	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	50	5250	10.5	10.5	10.5	10.5	13.5
802.11be HE20	52	5260	10.5	10.5	10.5	10.5	13.5
	56	5280	10.5	10.5	10.5	10.5	13.5
	60	5300	10.5	10.5	10.5	10.5	13.5
	64	5320	10.5	10.5	10.5	10.5	13.5
802.11be HE40	54	5270	10.5	10.5	10.5	10.5	13.5
	62	5310	10.5	10.5	10.5	10.5	13.5
802.11be HE80	58	5290	10.5	10.5	10.5	10.5	13.5
802.11be HE160	50	5250	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Full)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	11.0	11.0			
	116	5580	11.0	11.0			
	120	5600	11.0	11.0			
	124	5620	11.0	11.0			
	132	5660	11.0	11.0			
	140	5700	11.0	11.0			
	144	5720	11.0	11.0			
802.11n HT20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11n HT40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11ac VHT160	114	5570	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11ax HE160	114	5570	11.0	11.0	11.0	11.0	14.0
802.11be HE20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
802.11be HE40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
802.11be HE80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11be HE160	114	5570	11.0	11.0	11.0	11.0	14.0

Tune-up Power (Full)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	11.5	11.5			
	153	5765	11.5	11.5			
	157	5785	11.5	11.5			
	161	5805	11.5	11.5			
	165	5825	11.5	11.5			
802.11n HT20	149	5745	11.5	11.5	11.5	11.5	14.5
	153	5765	11.5	11.5	11.5	11.5	14.5
	157	5785	11.5	11.5	11.5	11.5	14.5
	161	5805	11.5	11.5	11.5	11.5	14.5
	165	5825	11.5	11.5	11.5	11.5	14.5
802.11n HT40	151	5755	11.5	11.5	11.5	11.5	14.5
	159	5795	11.5	11.5	11.5	11.5	14.5
802.11ac VHT80	155	5775	11.5	11.5	11.5	11.5	14.5
802.11ax HE20	149	5745	11.5	11.5	11.5	11.5	14.5
	153	5765	11.5	11.5	11.5	11.5	14.5
	157	5785	11.5	11.5	11.5	11.5	14.5
	161	5805	11.5	11.5	11.5	11.5	14.5
	165	5825	11.5	11.5	11.5	11.5	14.5
802.11ax HE40	151	5755	11.5	11.5	11.5	11.5	14.5
	159	5795	11.5	11.5	11.5	11.5	14.5
802.11ax HE80	155	5775	11.5	11.5	11.5	11.5	14.5
802.11be HE20	149	5745	11.5	11.5	11.5	11.5	14.5
	153	5765	11.5	11.5	11.5	11.5	14.5
	157	5785	11.5	11.5	11.5	11.5	14.5
	161	5805	11.5	11.5	11.5	11.5	14.5
	165	5825	11.5	11.5	11.5	11.5	14.5
802.11be HE40	151	5755	11.5	11.5	11.5	11.5	14.5
	159	5795	11.5	11.5	11.5	11.5	14.5
802.11be HE80	155	5775	11.5	11.5	11.5	11.5	14.5

Tune-up Power (Full)							
WLAN 5.9GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	169	5845	12.0	12.0			
	173	5865	12.0	12.0			
	177	5885	12.0	12.0			
802.11n HT20	169	5845	12.0	12.0	12.0	12.0	15.0
	173	5865	12.0	12.0	12.0	12.0	15.0
	177	5885	12.0	12.0	12.0	12.0	15.0
802.11n HT40	167	5835	12.0	12.0	12.0	12.0	15.0
	175	5875	12.0	12.0	12.0	12.0	15.0
802.11ac VHT80	171	5855	12.0	12.0	12.0	12.0	15.0
802.11ac VHT160	163	5815	12.0	12.0	12.0	12.0	15.0
802.11ax HE20	169	5845	12.0	12.0	12.0	12.0	15.0
	173	5865	12.0	12.0	12.0	12.0	15.0
	177	5885	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	167	5835	12.0	12.0	12.0	12.0	15.0
	175	5875	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	171	5855	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	163	5815	12.0	12.0	12.0	12.0	15.0
802.11be HE20	169	5845	12.0	12.0	12.0	12.0	15.0
	173	5865	12.0	12.0	12.0	12.0	15.0
	177	5885	12.0	12.0	12.0	12.0	15.0
802.11be HE40	167	5835	12.0	12.0	12.0	12.0	15.0
	175	5875	12.0	12.0	12.0	12.0	15.0
802.11be HE80	171	5855	12.0	12.0	12.0	12.0	15.0
802.11be HE160	163	5815	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	12.0	12.0	12.0	12.0	15.0
	5	5975	12.0	12.0	12.0	12.0	15.0
	9	5995	12.0	12.0	12.0	12.0	15.0
	13	6015	12.0	12.0	12.0	12.0	15.0
	17	6035	12.0	12.0	12.0	12.0	15.0
	21	6055	12.0	12.0	12.0	12.0	15.0
	25	6075	12.0	12.0	12.0	12.0	15.0
	29	6095	12.0	12.0	12.0	12.0	15.0
	33	6115	12.0	12.0	12.0	12.0	15.0
	37	6135	12.0	12.0	12.0	12.0	15.0
	41	6155	12.0	12.0	12.0	12.0	15.0
	45	6175	12.0	12.0	12.0	12.0	15.0
	49	6195	12.0	12.0	12.0	12.0	15.0
	53	6215	12.0	12.0	12.0	12.0	15.0
	57	6235	12.0	12.0	12.0	12.0	15.0
	61	6255	12.0	12.0	12.0	12.0	15.0
	65	6275	12.0	12.0	12.0	12.0	15.0
	69	6295	12.0	12.0	12.0	12.0	15.0
	73	6315	12.0	12.0	12.0	12.0	15.0
	77	6335	12.0	12.0	12.0	12.0	15.0
	81	6355	12.0	12.0	12.0	12.0	15.0
	85	6375	12.0	12.0	12.0	12.0	15.0
	89	6395	12.0	12.0	12.0	12.0	15.0
	93	6415	12.0	12.0	12.0	12.0	15.0
802.11be HE20	1	5955	12.0	12.0	12.0	12.0	15.0
	5	5975	12.0	12.0	12.0	12.0	15.0
	9	5995	12.0	12.0	12.0	12.0	15.0
	13	6015	12.0	12.0	12.0	12.0	15.0
	17	6035	12.0	12.0	12.0	12.0	15.0
	21	6055	12.0	12.0	12.0	12.0	15.0
	25	6075	12.0	12.0	12.0	12.0	15.0
	29	6095	12.0	12.0	12.0	12.0	15.0
	33	6115	12.0	12.0	12.0	12.0	15.0
	37	6135	12.0	12.0	12.0	12.0	15.0
	41	6155	12.0	12.0	12.0	12.0	15.0
	45	6175	12.0	12.0	12.0	12.0	15.0
	49	6195	12.0	12.0	12.0	12.0	15.0
	53	6215	12.0	12.0	12.0	12.0	15.0
	57	6235	12.0	12.0	12.0	12.0	15.0
	61	6255	12.0	12.0	12.0	12.0	15.0
	65	6275	12.0	12.0	12.0	12.0	15.0
	69	6295	12.0	12.0	12.0	12.0	15.0
	73	6315	12.0	12.0	12.0	12.0	15.0
	77	6335	12.0	12.0	12.0	12.0	15.0
	81	6355	12.0	12.0	12.0	12.0	15.0
	85	6375	12.0	12.0	12.0	12.0	15.0
	89	6395	12.0	12.0	12.0	12.0	15.0
	93	6415	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE40	3	5965	12.0	12.0	12.0	12.0	15.0
	11	6005	12.0	12.0	12.0	12.0	15.0
	19	6045	12.0	12.0	12.0	12.0	15.0
	27	6085	12.0	12.0	12.0	12.0	15.0
	35	6125	12.0	12.0	12.0	12.0	15.0
	43	6165	12.0	12.0	12.0	12.0	15.0
	51	6205	12.0	12.0	12.0	12.0	15.0
	59	6245	12.0	12.0	12.0	12.0	15.0
	67	6285	12.0	12.0	12.0	12.0	15.0
	75	6325	12.0	12.0	12.0	12.0	15.0
	83	6365	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	91	6405	12.0	12.0	12.0	12.0	15.0
	7	5985	12.0	12.0	12.0	12.0	15.0
	23	6065	12.0	12.0	12.0	12.0	15.0
	39	6145	12.0	12.0	12.0	12.0	15.0
	55	6225	12.0	12.0	12.0	12.0	15.0
	71	6305	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	87	6385	12.0	12.0	12.0	12.0	15.0
	15	6025	12.0	12.0	12.0	12.0	15.0
	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0
802.11be HE40	3	5965	12.0	12.0	12.0	12.0	15.0
	11	6005	12.0	12.0	12.0	12.0	15.0
	19	6045	12.0	12.0	12.0	12.0	15.0
	27	6085	12.0	12.0	12.0	12.0	15.0
	35	6125	12.0	12.0	12.0	12.0	15.0
	43	6165	12.0	12.0	12.0	12.0	15.0
	51	6205	12.0	12.0	12.0	12.0	15.0
	59	6245	12.0	12.0	12.0	12.0	15.0
	67	6285	12.0	12.0	12.0	12.0	15.0
	75	6325	12.0	12.0	12.0	12.0	15.0
	83	6365	12.0	12.0	12.0	12.0	15.0
802.11be HE80	91	6405	12.0	12.0	12.0	12.0	15.0
	7	5985	12.0	12.0	12.0	12.0	15.0
	23	6065	12.0	12.0	12.0	12.0	15.0
	39	6145	12.0	12.0	12.0	12.0	15.0
	55	6225	12.0	12.0	12.0	12.0	15.0
	71	6305	12.0	12.0	12.0	12.0	15.0
802.11be HE160	87	6385	12.0	12.0	12.0	12.0	15.0
	15	6025	12.0	12.0	12.0	12.0	15.0
	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0
802.11be HE320	31	6105	12.0	12.0	12.0	12.0	15.0
	63	6265	12.0	12.0	12.0	12.0	15.0
	95	6425	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	12.0	12.0	12.0	12.0	15.0
	101	6455	12.0	12.0	12.0	12.0	15.0
	105	6475	12.0	12.0	12.0	12.0	15.0
	109	6495	12.0	12.0	12.0	12.0	15.0
	113	6515	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	99	6445	12.0	12.0	12.0	12.0	15.0
	107	6485	12.0	12.0	12.0	12.0	15.0
	115	6525	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	103	6465	12.0	12.0	12.0	12.0	15.0
	119	6545	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	111	6505	12.0	12.0	12.0	12.0	15.0
802.11be HE20	97	6435	12.0	12.0	12.0	12.0	15.0
	101	6455	12.0	12.0	12.0	12.0	15.0
	105	6475	12.0	12.0	12.0	12.0	15.0
	109	6495	12.0	12.0	12.0	12.0	15.0
	113	6515	12.0	12.0	12.0	12.0	15.0
802.11be HE40	99	6445	12.0	12.0	12.0	12.0	15.0
	107	6485	12.0	12.0	12.0	12.0	15.0
	115	6525	12.0	12.0	12.0	12.0	15.0
802.11be HE80	103	6465	12.0	12.0	12.0	12.0	15.0
	119	6545	12.0	12.0	12.0	12.0	15.0
802.11be HE160	111	6505	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	117	6535	12.0	12.0	12.0	12.0	15.0
	121	6555	12.0	12.0	12.0	12.0	15.0
	125	6575	12.0	12.0	12.0	12.0	15.0
	129	6595	12.0	12.0	12.0	12.0	15.0
	133	6615	12.0	12.0	12.0	12.0	15.0
	137	6635	12.0	12.0	12.0	12.0	15.0
	141	6655	12.0	12.0	12.0	12.0	15.0
	145	6675	12.0	12.0	12.0	12.0	15.0
	149	6695	12.0	12.0	12.0	12.0	15.0
	153	6715	12.0	12.0	12.0	12.0	15.0
	157	6735	12.0	12.0	12.0	12.0	15.0
	161	6755	12.0	12.0	12.0	12.0	15.0
	165	6775	12.0	12.0	12.0	12.0	15.0
	169	6795	12.0	12.0	12.0	12.0	15.0
	173	6815	12.0	12.0	12.0	12.0	15.0
	177	6835	12.0	12.0	12.0	12.0	15.0
	181	6855	12.0	12.0	12.0	12.0	15.0
	185	6875	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	123	6565	12.0	12.0	12.0	12.0	15.0
	131	6605	12.0	12.0	12.0	12.0	15.0
	139	6645	12.0	12.0	12.0	12.0	15.0
	147	6685	12.0	12.0	12.0	12.0	15.0
	155	6725	12.0	12.0	12.0	12.0	15.0
	163	6765	12.0	12.0	12.0	12.0	15.0
	171	6805	12.0	12.0	12.0	12.0	15.0
	179	6845	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	187	6885	12.0	12.0	12.0	12.0	15.0
	135	6625	12.0	12.0	12.0	12.0	15.0
	151	6705	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	167	6785	12.0	12.0	12.0	12.0	15.0
	183	6865	12.0	12.0	12.0	12.0	15.0
	143	6665	12.0	12.0	12.0	12.0	15.0
802.11be HE20	175	6825	12.0	12.0	12.0	12.0	15.0
	117	6535	12.0	12.0	12.0	12.0	15.0
	121	6555	12.0	12.0	12.0	12.0	15.0
	125	6575	12.0	12.0	12.0	12.0	15.0
	129	6595	12.0	12.0	12.0	12.0	15.0
	133	6615	12.0	12.0	12.0	12.0	15.0
	137	6635	12.0	12.0	12.0	12.0	15.0
	141	6655	12.0	12.0	12.0	12.0	15.0
	145	6675	12.0	12.0	12.0	12.0	15.0
	149	6695	12.0	12.0	12.0	12.0	15.0
	153	6715	12.0	12.0	12.0	12.0	15.0
	157	6735	12.0	12.0	12.0	12.0	15.0
	161	6755	12.0	12.0	12.0	12.0	15.0
	165	6775	12.0	12.0	12.0	12.0	15.0
	169	6795	12.0	12.0	12.0	12.0	15.0
	173	6815	12.0	12.0	12.0	12.0	15.0
	177	6835	12.0	12.0	12.0	12.0	15.0
	181	6855	12.0	12.0	12.0	12.0	15.0
802.11be HE40	185	6875	12.0	12.0	12.0	12.0	15.0
	123	6565	12.0	12.0	12.0	12.0	15.0
	131	6605	12.0	12.0	12.0	12.0	15.0
	139	6645	12.0	12.0	12.0	12.0	15.0
	147	6685	12.0	12.0	12.0	12.0	15.0
	155	6725	12.0	12.0	12.0	12.0	15.0
	163	6765	12.0	12.0	12.0	12.0	15.0
	171	6805	12.0	12.0	12.0	12.0	15.0
802.11be HE80	179	6845	12.0	12.0	12.0	12.0	15.0
	187	6885	12.0	12.0	12.0	12.0	15.0
	135	6625	12.0	12.0	12.0	12.0	15.0
802.11be HE160	151	6705	12.0	12.0	12.0	12.0	15.0
	167	6785	12.0	12.0	12.0	12.0	15.0
	183	6865	12.0	12.0	12.0	12.0	15.0
802.11be HE320	143	6665	12.0	12.0	12.0	12.0	15.0
	175	6825	12.0	12.0	12.0	12.0	15.0
802.11be HE320	127	6585	12.0	12.0	12.0	12.0	15.0
	159	6745	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	12.0	12.0	12.0	12.0	15.0
	193	6915	12.0	12.0	12.0	12.0	15.0
	197	6935	12.0	12.0	12.0	12.0	15.0
	201	6955	12.0	12.0	12.0	12.0	15.0
	205	6975	12.0	12.0	12.0	12.0	15.0
	209	6995	12.0	12.0	12.0	12.0	15.0
	213	7015	12.0	12.0	12.0	12.0	15.0
	217	7035	12.0	12.0	12.0	12.0	15.0
	221	7055	12.0	12.0	12.0	12.0	15.0
	225	7075	12.0	12.0	12.0	12.0	15.0
	229	7095	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	233	7115	12.0	12.0	12.0	12.0	15.0
	195	6925	12.0	12.0	12.0	12.0	15.0
	203	6965	12.0	12.0	12.0	12.0	15.0
	211	7005	12.0	12.0	12.0	12.0	15.0
	219	7045	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	227	7085	12.0	12.0	12.0	12.0	15.0
	199	6945	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	215	7025	12.0	12.0	12.0	12.0	15.0
802.11be HE20	207	6985	12.0	12.0	12.0	12.0	15.0
	189	6895	12.0	12.0	12.0	12.0	15.0
	193	6915	12.0	12.0	12.0	12.0	15.0
	197	6935	12.0	12.0	12.0	12.0	15.0
	201	6955	12.0	12.0	12.0	12.0	15.0
	205	6975	12.0	12.0	12.0	12.0	15.0
	209	6995	12.0	12.0	12.0	12.0	15.0
	213	7015	12.0	12.0	12.0	12.0	15.0
	217	7035	12.0	12.0	12.0	12.0	15.0
	221	7055	12.0	12.0	12.0	12.0	15.0
	225	7075	12.0	12.0	12.0	12.0	15.0
802.11be HE40	229	7095	12.0	12.0	12.0	12.0	15.0
	233	7115	12.0	12.0	12.0	12.0	15.0
	195	6925	12.0	12.0	12.0	12.0	15.0
	203	6965	12.0	12.0	12.0	12.0	15.0
	211	7005	12.0	12.0	12.0	12.0	15.0
802.11be HE80	219	7045	12.0	12.0	12.0	12.0	15.0
	227	7085	12.0	12.0	12.0	12.0	15.0
802.11be HE160	199	6945	12.0	12.0	12.0	12.0	15.0
	215	7025	12.0	12.0	12.0	12.0	15.0
802.11be HE320	207	6985	12.0	12.0	12.0	12.0	15.0
802.11be HE320	191	6905	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Tablet Mode)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	15.5	15.5			
	6	2437	15.5	15.5			
	11	2462	15.5	15.5			
	12	2467	15.5	15.5			
	13	2472	15.5	15.5			
802.11g	1	2412	15.5	15.5			
	6	2437	15.5	15.5			
	11	2462	15.5	15.5			
	12	2467	15.5	15.5			
	13	2472	15.5	15.5			
802.11n HT20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11n HT40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
802.11ax HE20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11ax HE40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
802.11be HE20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11be HE40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5

Tune-up Power (LPI)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	5.8	5.8	2.8	2.8	5.8
	5	5975	5.8	5.8	2.8	2.8	5.8
	9	5995	5.8	5.8	2.8	2.8	5.8
	13	6015	5.8	5.8	2.8	2.8	5.8
	17	6035	5.8	5.8	2.8	2.8	5.8
	21	6055	5.8	5.8	2.8	2.8	5.8
	25	6075	5.8	5.8	2.8	2.8	5.8
	29	6095	5.8	5.8	2.8	2.8	5.8
	33	6115	5.8	5.8	2.8	2.8	5.8
	37	6135	5.8	5.8	2.8	2.8	5.8
	41	6155	5.8	5.8	2.8	2.8	5.8
	45	6175	5.8	5.8	2.8	2.8	5.8
	49	6195	5.8	5.8	2.8	2.8	5.8
	53	6215	5.8	5.8	2.8	2.8	5.8
	57	6235	5.8	5.8	2.8	2.8	5.8
	61	6255	5.8	5.8	2.8	2.8	5.8
	65	6275	5.8	5.8	2.8	2.8	5.8
	69	6295	5.8	5.8	2.8	2.8	5.8
	73	6315	5.8	5.8	2.8	2.8	5.8
	77	6335	5.8	5.8	2.8	2.8	5.8
	81	6355	5.8	5.8	2.8	2.8	5.8
802.11ax HE40	85	6375	5.8	5.8	2.8	2.8	5.8
	89	6395	5.8	5.8	2.8	2.8	5.8
	93	6415	5.8	5.8	2.8	2.8	5.8
	3	5965	8.7	8.7	5.7	5.7	8.7
	11	6005	8.7	8.7	5.7	5.7	8.7
	19	6045	8.7	8.7	5.7	5.7	8.7
	27	6085	8.7	8.7	5.7	5.7	8.7
	35	6125	8.7	8.7	5.7	5.7	8.7
	43	6165	8.7	8.7	5.7	5.7	8.7
	51	6205	8.7	8.7	5.7	5.7	8.7
802.11ax HE80	59	6245	8.7	8.7	5.7	5.7	8.7
	67	6285	8.7	8.7	5.7	5.7	8.7
	75	6325	8.7	8.7	5.7	5.7	8.7
	83	6365	8.7	8.7	5.7	5.7	8.7
	91	6405	8.7	8.7	5.7	5.7	8.7
	7	5985	11.8	11.8	8.8	8.8	11.8
	23	6065	11.8	11.8	8.8	8.8	11.8
802.11ax HE160	39	6145	11.8	11.8	8.8	8.8	11.8
	55	6225	11.8	11.8	8.8	8.8	11.8
	71	6305	11.8	11.8	8.8	8.8	11.8
	87	6385	11.8	11.8	8.8	8.8	11.8
	15	6025	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0

Tune-up Power (LPI)							
802.11be HE20	1	5955	5.8	5.8	2.8	2.8	5.8
	5	5975	5.8	5.8	2.8	2.8	5.8
	9	5995	5.8	5.8	2.8	2.8	5.8
	13	6015	5.8	5.8	2.8	2.8	5.8
	17	6035	5.8	5.8	2.8	2.8	5.8
	21	6055	5.8	5.8	2.8	2.8	5.8
	25	6075	5.8	5.8	2.8	2.8	5.8
	29	6095	5.8	5.8	2.8	2.8	5.8
	33	6115	5.8	5.8	2.8	2.8	5.8
	37	6135	5.8	5.8	2.8	2.8	5.8
	41	6155	5.8	5.8	2.8	2.8	5.8
	45	6175	5.8	5.8	2.8	2.8	5.8
	49	6195	5.8	5.8	2.8	2.8	5.8
	53	6215	5.8	5.8	2.8	2.8	5.8
	57	6235	5.8	5.8	2.8	2.8	5.8
	61	6255	5.8	5.8	2.8	2.8	5.8
	65	6275	5.8	5.8	2.8	2.8	5.8
	69	6295	5.8	5.8	2.8	2.8	5.8
	73	6315	5.8	5.8	2.8	2.8	5.8
	77	6335	5.8	5.8	2.8	2.8	5.8
	81	6355	5.8	5.8	2.8	2.8	5.8
802.11be HE40	85	6375	5.8	5.8	2.8	2.8	5.8
	89	6395	5.8	5.8	2.8	2.8	5.8
	93	6415	5.8	5.8	2.8	2.8	5.8
	3	5965	8.7	8.7	5.7	5.7	8.7
	11	6005	8.7	8.7	5.7	5.7	8.7
	19	6045	8.7	8.7	5.7	5.7	8.7
	27	6085	8.7	8.7	5.7	5.7	8.7
	35	6125	8.7	8.7	5.7	5.7	8.7
	43	6165	8.7	8.7	5.7	5.7	8.7
	51	6205	8.7	8.7	5.7	5.7	8.7
	59	6245	8.7	8.7	5.7	5.7	8.7
802.11be HE80	67	6285	8.7	8.7	5.7	5.7	8.7
	75	6325	8.7	8.7	5.7	5.7	8.7
	83	6365	8.7	8.7	5.7	5.7	8.7
	91	6405	8.7	8.7	5.7	5.7	8.7
	7	5985	11.8	11.8	8.8	8.8	11.8
	23	6065	11.8	11.8	8.8	8.8	11.8
802.11be HE160	39	6145	11.8	11.8	8.8	8.8	11.8
	55	6225	11.8	11.8	8.8	8.8	11.8
	71	6305	11.8	11.8	8.8	8.8	11.8
	87	6385	11.8	11.8	8.8	8.8	11.8
802.11be HE320	15	6025	12.0	12.0	12.0	12.0	15.0
	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0
802.11be HE320	31	6105	12.0	12.0	12.0	12.0	15.0
	63	6265	12.0	12.0	12.0	12.0	15.0
	95	6425	12.0	12.0	12.0	12.0	15.0

Tune-up Power (LPI)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	5.7	5.7	2.7	2.7	5.7
	101	6455	5.7	5.7	2.7	2.7	5.7
	105	6475	5.7	5.7	2.7	2.7	5.7
	109	6495	5.7	5.7	2.7	2.7	5.7
	113	6515	5.7	5.7	2.7	2.7	5.7
802.11ax HE40	99	6445	8.6	8.6	5.6	5.6	8.6
	107	6485	8.6	8.6	5.6	5.6	8.6
	115	6525	8.6	8.6	5.6	5.6	8.6
802.11ax HE80	103	6465	11.7	11.7	8.7	8.7	11.7
	119	6545	11.7	11.7	8.7	8.7	11.7
802.11ax HE160	111	6505	12.0	12.0	12.0	12.0	15.0
802.11be HE20	97	6435	5.7	5.7	2.7	2.7	5.7
	101	6455	5.7	5.7	2.7	2.7	5.7
	105	6475	5.7	5.7	2.7	2.7	5.7
	109	6495	5.7	5.7	2.7	2.7	5.7
	113	6515	5.7	5.7	2.7	2.7	5.7
802.11be HE40	99	6445	8.6	8.6	5.6	5.6	8.6
	107	6485	8.6	8.6	5.6	5.6	8.6
	115	6525	8.6	8.6	5.6	5.6	8.6
802.11be HE80	103	6465	11.7	11.7	8.7	8.7	11.7
	119	6545	11.7	11.7	8.7	8.7	11.7
802.11be HE160	111	6505	12.0	12.0	12.0	12.0	15.0

Tune-up Power (LPI)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	117	6535	5.6	5.6	2.6	2.6	5.6
	121	6555	5.6	5.6	2.6	2.6	5.6
	125	6575	5.6	5.6	2.6	2.6	5.6
	129	6595	5.6	5.6	2.6	2.6	5.6
	133	6615	5.6	5.6	2.6	2.6	5.6
	137	6635	5.6	5.6	2.6	2.6	5.6
	141	6655	5.6	5.6	2.6	2.6	5.6
	145	6675	5.6	5.6	2.6	2.6	5.6
	149	6695	5.6	5.6	2.6	2.6	5.6
	153	6715	5.6	5.6	2.6	2.6	5.6
	157	6735	5.6	5.6	2.6	2.6	5.6
	161	6755	5.6	5.6	2.6	2.6	5.6
	165	6775	5.6	5.6	2.6	2.6	5.6
	169	6795	5.6	5.6	2.6	2.6	5.6
	173	6815	5.6	5.6	2.6	2.6	5.6
	177	6835	5.6	5.6	2.6	2.6	5.6
	181	6855	5.6	5.6	2.6	2.6	5.6
	185	6875	5.6	5.6	2.6	2.6	5.6
802.11ax HE40	123	6565	8.7	8.7	5.7	5.7	8.7
	131	6605	8.7	8.7	5.7	5.7	8.7
	139	6645	8.7	8.7	5.7	5.7	8.7
	147	6685	8.7	8.7	5.7	5.7	8.7
	155	6725	8.7	8.7	5.7	5.7	8.7
	163	6765	8.7	8.7	5.7	5.7	8.7
	171	6805	8.7	8.7	5.7	5.7	8.7
	179	6845	8.7	8.7	5.7	5.7	8.7
802.11ax HE80	187	6885	8.7	8.7	5.7	5.7	8.7
	135	6625	11.8	11.8	8.8	8.8	11.8
	151	6705	11.8	11.8	8.8	8.8	11.8
	167	6785	11.8	11.8	8.8	8.8	11.8
802.11ax HE160	183	6865	11.8	11.8	8.8	8.8	11.8
	143	6665	12.0	12.0	12.0	12.0	15.0
	175	6825	12.0	12.0	12.0	12.0	15.0
802.11be HE20	117	6535	5.6	5.6	2.6	2.6	5.6
	121	6555	5.6	5.6	2.6	2.6	5.6
	125	6575	5.6	5.6	2.6	2.6	5.6
	129	6595	5.6	5.6	2.6	2.6	5.6
	133	6615	5.6	5.6	2.6	2.6	5.6
	137	6635	5.6	5.6	2.6	2.6	5.6
	141	6655	5.6	5.6	2.6	2.6	5.6
	145	6675	5.6	5.6	2.6	2.6	5.6
	149	6695	5.6	5.6	2.6	2.6	5.6
	153	6715	5.6	5.6	2.6	2.6	5.6
	157	6735	5.6	5.6	2.6	2.6	5.6
	161	6755	5.6	5.6	2.6	2.6	5.6
	165	6775	5.6	5.6	2.6	2.6	5.6
	169	6795	5.6	5.6	2.6	2.6	5.6
	173	6815	5.6	5.6	2.6	2.6	5.6
	177	6835	5.6	5.6	2.6	2.6	5.6
	181	6855	5.6	5.6	2.6	2.6	5.6
	185	6875	5.6	5.6	2.6	2.6	5.6

Tune-up Power (LPI)							
802.11be HE40	123	6565	8.7	8.7	5.7	5.7	8.7
	131	6605	8.7	8.7	5.7	5.7	8.7
	139	6645	8.7	8.7	5.7	5.7	8.7
	147	6685	8.7	8.7	5.7	5.7	8.7
	155	6725	8.7	8.7	5.7	5.7	8.7
	163	6765	8.7	8.7	5.7	5.7	8.7
	171	6805	8.7	8.7	5.7	5.7	8.7
	179	6845	8.7	8.7	5.7	5.7	8.7
802.11be HE80	187	6885	8.7	8.7	5.7	5.7	8.7
	135	6625	11.8	11.8	8.8	8.8	11.8
	151	6705	11.8	11.8	8.8	8.8	11.8
	167	6785	11.8	11.8	8.8	8.8	11.8
802.11be HE160	183	6865	11.8	11.8	8.8	8.8	11.8
	143	6665	12.0	12.0	12.0	12.0	15.0
802.11be HE320	175	6825	12.0	12.0	12.0	12.0	15.0
	127	6585	12.0	12.0	12.0	12.0	15.0
	159	6745	12.0	12.0	12.0	12.0	15.0

Tune-up Power (LPI)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	5.7	5.7	2.7	2.7	5.7
	193	6915	5.7	5.7	2.7	2.7	5.7
	197	6935	5.7	5.7	2.7	2.7	5.7
	201	6955	5.7	5.7	2.7	2.7	5.7
	205	6975	5.7	5.7	2.7	2.7	5.7
	209	6995	5.7	5.7	2.7	2.7	5.7
	213	7015	5.7	5.7	2.7	2.7	5.7
	217	7035	5.7	5.7	2.7	2.7	5.7
	221	7055	5.7	5.7	2.7	2.7	5.7
	225	7075	5.7	5.7	2.7	2.7	5.7
	229	7095	5.7	5.7	2.7	2.7	5.7
	233	7115	5.7	5.7	2.7	2.7	5.7
802.11ax HE40	195	6925	8.8	8.8	5.8	5.8	8.8
	203	6965	8.8	8.8	5.8	5.8	8.8
	211	7005	8.8	8.8	5.8	5.8	8.8
	219	7045	8.8	8.8	5.8	5.8	8.8
	227	7085	8.8	8.8	5.8	5.8	8.8
802.11ax HE80	199	6945	12.0	12.0	9.0	9.0	12.0
	215	7025	12.0	12.0	9.0	9.0	12.0
802.11ax HE160	207	6985	12.0	12.0	12.0	12.0	15.0
802.11be HE20	189	6895	5.7	5.7	2.7	2.7	5.7
	193	6915	5.7	5.7	2.7	2.7	5.7
	197	6935	5.7	5.7	2.7	2.7	5.7
	201	6955	5.7	5.7	2.7	2.7	5.7
	205	6975	5.7	5.7	2.7	2.7	5.7
	209	6995	5.7	5.7	2.7	2.7	5.7
	213	7015	5.7	5.7	2.7	2.7	5.7
	217	7035	5.7	5.7	2.7	2.7	5.7
	221	7055	5.7	5.7	2.7	2.7	5.7
	225	7075	5.7	5.7	2.7	2.7	5.7
	229	7095	5.7	5.7	2.7	2.7	5.7
	233	7115	5.7	5.7	2.7	2.7	5.7
802.11be HE40	195	6925	8.8	8.8	5.8	5.8	8.8
	203	6965	8.8	8.8	5.8	5.8	8.8
	211	7005	8.8	8.8	5.8	5.8	8.8
	219	7045	8.8	8.8	5.8	5.8	8.8
	227	7085	8.8	8.8	5.8	5.8	8.8
802.11be HE80	199	6945	12.0	12.0	12.0	12.0	15.0
	215	7025	12.0	12.0	12.0	12.0	15.0
802.11be HE160	207	6985	12.0	12.0	12.0	12.0	15.0
802.11be HE320	191	6905	12.0	12.0	12.0	12.0	15.0

Appendix E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WCDMA Conducted Power (Full)

Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	23.83	24.06	24.26	24.23	24.30	24.26	23.89	23.77	23.66
HSDPA Subtest-1	23.78	23.81	23.81	23.46	23.52	23.49	23.54	23.42	23.31
HSDPA Subtest-2	23.76	23.69	23.79	23.47	23.54	23.51	23.52	23.40	23.29
HSDPA Subtest-3	23.44	23.17	23.47	23.14	23.21	23.18	23.20	23.08	22.97
HSDPA Subtest-4	23.39	23.12	23.43	23.13	23.19	23.16	23.15	23.03	22.92
DC-HSDPA Subtest-1	23.75	23.74	23.81	23.19	23.27	23.28	23.70	23.52	23.41
DC-HSDPA Subtest-2	23.73	23.10	23.99	23.11	23.21	23.23	23.67	23.49	23.38
DC-HSDPA Subtest-3	23.20	22.73	23.64	22.72	22.76	22.90	23.17	23.01	22.87
DC-HSDPA Subtest-4	23.11	22.72	23.38	22.89	22.93	22.82	23.15	22.99	22.86
HSUPA Subtest-1	23.62	23.35	23.55	23.43	23.50	23.47	23.38	23.26	23.15
HSUPA Subtest-2	22.19	21.91	22.11	21.94	22.00	21.98	21.94	21.97	21.71
HSUPA Subtest-3	22.86	22.58	22.78	22.58	22.65	22.62	22.61	23.00	22.38
HSUPA Subtest-4	22.15	21.87	22.07	21.95	22.01	22.00	21.90	21.99	21.67
HSUPA Subtest-5	23.54	23.27	23.47	23.40	23.46	23.43	23.30	23.18	23.07

LTE Conducted Power (Full)

LTE Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	23.11	23.16	23.14	0
		1	50	23.10	23.12	23.13	0
		1	99	23.09	23.09	23.07	0
		50	0	22.24	22.26	22.01	1
		50	25	22.20	22.22	22.22	1
		50	50	22.11	22.19	22.15	1
		100	0	22.08	22.13	22.10	1
20M	16QAM	1	0	22.24	22.27	22.08	1
		1	50	22.18	22.23	22.27	1
		1	99	22.17	22.21	22.21	1
		50	0	21.26	21.26	22.19	2
		50	25	21.20	21.23	21.20	2
		50	50	21.16	21.21	21.20	2
		100	0	21.09	21.09	21.14	2
20M	64QAM	1	0	21.12	21.19	21.09	2
		1	50	20.98	21.05	21.14	2
		1	99	20.95	21.04	21.02	2
		50	0	20.25	20.26	21.00	3
		50	25	20.20	20.21	20.17	3
		50	50	20.11	20.19	20.13	3
		100	0	20.15	20.22	20.10	3
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	23.02	23.12	23.09	0
		1	37	23.02	23.11	23.11	0
		1	74	23.05	23.06	23.00	0
		36	0	22.15	22.24	21.95	1
		36	19	22.11	22.19	22.15	1
		36	39	22.03	22.14	22.08	1
		75	0	22.06	22.07	22.00	1
15M	16QAM	1	0	22.23	22.22	22.08	1
		1	37	22.09	22.16	22.18	1
		1	74	22.15	22.14	22.12	1
		36	0	21.21	21.24	22.11	2
		36	19	21.12	21.15	21.10	2
		36	39	21.08	21.17	21.12	2
		75	0	21.09	21.06	21.07	2
15M	64QAM	1	0	21.08	21.10	21.05	2
		1	37	20.94	20.96	21.06	2
		1	74	20.88	21.01	20.93	2
		36	0	20.24	20.16	20.90	3
		36	19	20.18	20.19	20.10	3
		36	39	20.11	20.14	20.06	3
		75	0	20.10	20.16	20.07	3

LTE Conducted Power (Full)

LTE Band 2

BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	22.98	23.08	23.07	0
		1	24	23.01	23.07	23.06	0
		1	49	23.01	22.98	22.98	0
		25	0	22.13	22.17	21.91	1
		25	12	22.09	22.19	22.07	1
		25	25	22.01	22.10	22.03	1
		50	0	21.97	22.06	21.97	1
10M	16QAM	1	0	22.19	22.13	21.99	1
		1	24	22.00	22.15	22.16	1
		1	49	22.10	22.08	22.08	1
		25	0	21.19	21.16	22.02	2
		25	12	21.02	21.14	21.03	2
		25	25	21.07	21.12	21.09	2
		50	0	21.08	21.03	20.98	2
10M	64QAM	1	0	21.08	21.02	21.05	2
		1	24	20.84	20.89	20.96	2
		1	49	20.88	20.94	20.83	2
		25	0	20.17	20.11	20.89	3
		25	12	20.08	20.16	20.07	3
		25	25	20.08	20.14	20.00	3
		50	0	20.09	20.15	20.00	3
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	23.03	22.94	23.00	0
		1	12	23.06	23.01	22.99	0
		1	24	22.93	22.92	22.97	0
		12	0	22.17	22.10	21.84	1
		12	6	22.18	22.03	22.07	1
		12	13	22.09	21.93	21.93	1
		25	0	22.04	21.87	21.88	1
5M	16QAM	1	0	22.07	22.19	21.94	1
		1	12	22.15	21.98	22.10	1
		1	24	22.01	22.02	22.06	1
		12	0	21.12	21.17	21.99	2
		12	6	21.04	20.99	21.00	2
		12	13	21.08	20.98	21.04	2
		25	0	21.03	21.02	20.92	2
5M	64QAM	1	0	20.95	20.99	21.02	2
		1	12	20.86	20.77	20.95	2
		1	24	20.93	20.81	20.74	2
		12	0	20.01	20.16	20.79	3
		12	6	20.11	20.07	20.05	3
		12	13	20.10	20.06	19.95	3
		25	0	20.08	20.06	19.94	3

LTE Conducted Power (Full)

LTE Band 2

BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	22.95	23.03	22.91	0
		1	7	22.89	22.92	22.88	0
		1	14	22.95	22.89	22.87	0
		8	0	22.04	21.99	21.74	1
		8	3	21.99	22.09	21.99	1
		8	7	21.96	21.92	21.96	1
		15	0	21.82	21.86	21.80	1
3M	16QAM	1	0	22.10	22.11	21.84	1
		1	7	21.80	21.96	22.04	1
		1	14	21.98	21.98	21.93	1
		8	0	21.05	20.99	21.90	2
		8	3	20.87	21.05	20.85	2
		8	7	20.98	20.92	21.01	2
		15	0	20.96	20.89	20.90	2
3M	64QAM	1	0	20.86	20.89	21.03	2
		1	7	20.64	20.81	20.84	2
		1	14	20.85	20.86	20.69	2
		8	0	20.09	19.90	20.73	3
		8	3	19.86	20.10	19.99	3
		8	7	19.96	19.99	19.77	3
		15	0	19.99	20.05	19.81	3
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	23.02	22.94	22.90	0
		1	2	23.00	22.99	22.91	0
		1	5	22.91	22.83	22.97	0
		3	0	23.15	23.10	22.74	0
		3	1	23.14	22.96	23.00	0
		3	3	23.03	22.93	22.92	0
		6	0	22.04	21.80	21.85	1
1.4M	16QAM	1	0	22.03	22.09	21.92	1
		1	2	22.10	21.97	22.01	1
		1	5	21.92	21.96	22.06	1
		3	0	22.09	22.02	21.95	1
		3	1	21.95	21.98	21.93	1
		3	3	22.05	21.91	22.04	1
		6	0	20.96	20.94	20.92	2
1.4M	64QAM	1	0	20.89	20.95	20.97	2
		1	2	20.81	20.67	20.88	2
		1	5	20.91	20.74	20.71	2
		3	0	20.93	20.65	20.76	2
		3	1	20.87	20.63	20.71	2
		3	3	20.79	20.59	20.54	2
		6	0	20.04	20.01	19.88	3

LTE Conducted Power (Full)

LTE Band 4

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	23.50	23.55	23.49	0
		1	50	23.49	23.53	23.46	0
		1	99	23.43	23.46	23.36	0
		50	0	22.58	22.59	22.50	1
		50	25	22.49	22.57	22.43	1
		50	50	22.54	22.56	22.48	1
		100	0	22.54	22.56	22.54	1
20M	16QAM	1	0	22.50	22.76	22.42	1
		1	50	22.73	22.73	22.70	1
		1	99	22.70	22.71	22.67	1
		50	0	21.61	21.68	21.56	2
		50	25	21.62	21.65	21.53	2
		50	50	21.65	21.62	21.58	2
		100	0	21.60	21.63	21.53	2
20M	64QAM	1	0	21.60	21.67	21.52	2
		1	50	21.65	21.64	21.58	2
		1	99	21.55	21.61	21.47	2
		50	0	20.53	20.63	21.47	3
		50	25	20.59	20.63	20.49	3
		50	50	20.52	20.55	20.48	3
		100	0	20.53	20.57	20.51	3
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	23.41	23.52	23.46	0
		1	37	23.46	23.46	23.41	0
		1	74	23.34	23.41	23.32	0
		36	0	22.57	22.50	22.49	1
		36	19	22.42	22.49	22.33	1
		36	39	22.52	22.49	22.39	1
		75	0	22.47	22.51	22.53	1
15M	16QAM	1	0	22.44	22.66	22.42	1
		1	37	22.73	22.63	22.63	1
		1	74	22.68	22.61	22.65	1
		36	0	21.57	21.64	21.47	2
		36	19	21.52	21.57	21.46	2
		36	39	21.61	21.60	21.52	2
		75	0	21.52	21.56	21.51	2
15M	64QAM	1	0	21.54	21.67	21.46	2
		1	37	21.65	21.64	21.56	2
		1	74	21.52	21.55	21.43	2
		36	0	20.49	20.54	21.46	3
		36	19	20.51	20.56	20.47	3
		36	39	20.46	20.50	20.39	3
		75	0	20.45	20.54	20.43	3

LTE Conducted Power (Full)

LTE Band 4

BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	23.34	23.45	23.36	0
		1	24	23.43	23.41	23.41	0
		1	49	23.34	23.34	23.27	0
		25	0	22.54	22.40	22.42	1
		25	12	22.32	22.43	22.32	1
		25	25	22.50	22.45	22.33	1
		50	0	22.39	22.45	22.46	1
10M	16QAM	1	0	22.38	22.63	22.32	1
		1	24	22.64	22.55	22.54	1
		1	49	22.60	22.54	22.62	1
		25	0	21.57	21.64	21.42	2
		25	12	21.52	21.47	21.45	2
		25	25	21.56	21.56	21.43	2
		50	0	21.44	21.52	21.49	2
10M	64QAM	1	0	21.47	21.66	21.41	2
		1	24	21.55	21.56	21.51	2
		1	49	21.48	21.55	21.34	2
		25	0	20.42	20.50	21.45	3
		25	12	20.41	20.56	20.44	3
		25	25	20.41	20.43	20.34	3
		50	0	20.38	20.52	20.36	3
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	23.28	23.35	23.33	0
		1	12	23.34	23.43	23.30	0
		1	24	23.32	23.36	23.18	0
		12	0	22.54	22.55	22.36	1
		12	6	22.44	22.54	22.25	1
		12	13	22.34	22.38	22.38	1
		25	0	22.49	22.51	22.45	1
5M	16QAM	1	0	22.67	22.74	22.64	1
		1	12	22.52	22.65	22.62	1
		1	24	22.63	22.76	22.64	1
		12	0	21.30	21.53	21.48	2
		12	6	21.37	21.53	21.49	2
		12	13	21.22	21.50	21.32	2
		25	0	21.30	21.49	21.42	2
5M	64QAM	1	0	21.63	21.74	21.71	2
		1	12	21.54	21.67	21.56	2
		1	24	21.59	21.55	21.62	2
		12	0	20.49	20.47	20.51	3
		12	6	20.42	20.57	20.44	3
		12	13	20.44	20.47	20.35	3
		25	0	20.46	20.52	20.49	3

LTE Conducted Power (Full)

LTE Band 4

BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	23.17	23.23	23.25	0
		1	7	23.16	23.19	23.11	0
		1	14	23.10	23.19	23.21	0
		8	0	22.34	22.36	22.20	1
		8	3	22.26	22.33	22.31	1
		8	7	22.11	22.21	22.29	1
		15	0	22.18	22.24	22.25	1
3M	16QAM	1	0	22.52	22.53	22.53	1
		1	7	22.39	22.45	22.42	1
		1	14	22.43	22.47	22.51	1
		8	0	21.20	21.33	21.29	2
		8	3	21.09	21.36	21.16	2
		8	7	21.15	21.33	21.17	2
		15	0	21.07	21.27	21.29	2
3M	64QAM	1	0	21.48	21.54	21.45	2
		1	7	21.32	21.41	21.36	2
		1	14	21.40	21.27	21.28	2
		8	0	20.36	20.24	20.18	3
		8	3	20.31	20.22	20.27	3
		8	7	20.12	20.29	20.18	3
		15	0	20.24	20.31	20.28	3
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	23.13	23.12	23.15	0
		1	2	22.94	23.08	23.07	0
		1	5	23.02	23.03	22.99	0
		3	0	23.18	23.22	23.20	0
		3	1	23.18	23.22	23.20	0
		3	3	23.01	23.08	23.15	0
		6	0	22.15	22.14	22.10	1
1.4M	16QAM	1	0	22.36	22.49	22.51	1
		1	2	22.32	22.42	22.27	1
		1	5	22.23	22.29	22.32	1
		3	0	22.10	22.25	22.24	1
		3	1	22.04	22.15	22.14	1
		3	3	21.92	22.31	22.17	1
		6	0	21.10	21.24	21.15	2
1.4M	64QAM	1	0	21.33	21.36	21.38	2
		1	2	21.26	21.29	21.37	2
		1	5	21.27	21.21	21.33	2
		3	0	21.05	21.15	21.23	2
		3	1	21.21	21.15	21.15	2
		3	3	20.95	21.22	21.13	2
		6	0	20.08	20.19	20.17	3

LTE Conducted Power (Full)

LTE Band 5

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	24.19	24.16	24.22	0
		1	24	24.13	24.11	24.17	0
		1	49	24.01	23.99	24.05	0
		25	0	23.17	23.15	23.21	1
		25	12	23.15	23.13	23.19	1
		25	25	23.11	23.09	23.15	1
		50	0	23.14	23.12	23.18	1
10M	16QAM	1	0	23.46	23.44	23.50	1
		1	24	23.41	23.39	23.45	1
		1	49	23.29	23.27	23.33	1
		25	0	22.48	22.46	22.52	2
		25	12	22.46	22.44	22.50	2
		25	25	22.42	22.40	22.46	2
		50	0	22.45	22.43	22.49	2
10M	64QAM	1	0	22.29	22.28	22.34	2
		1	24	22.24	22.23	22.30	2
		1	49	22.13	22.12	22.19	2
		25	0	21.36	21.35	21.42	3
		25	12	21.35	21.34	21.41	3
		25	25	21.31	21.30	21.37	3
		50	0	21.34	21.33	21.40	3
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	24.10	24.07	24.13	0
		1	12	24.04	24.02	24.08	0
		1	24	23.92	23.90	23.96	0
		12	0	23.08	23.06	23.12	1
		12	6	23.06	23.04	23.10	1
		12	13	23.02	23.00	23.06	1
		25	0	23.05	23.03	23.09	1
5M	16QAM	1	0	23.37	23.35	23.41	1
		1	12	23.32	23.30	23.36	1
		1	24	23.20	23.18	23.24	1
		12	0	22.39	22.37	22.43	2
		12	6	22.37	22.35	22.41	2
		12	13	22.33	22.31	22.37	2
		25	0	22.36	22.34	22.40	2
5M	64QAM	1	0	22.20	22.19	22.25	2
		1	12	22.15	22.14	22.21	2
		1	24	22.04	22.03	22.10	2
		12	0	21.27	21.26	21.33	3
		12	6	21.26	21.25	21.32	3
		12	13	21.22	21.21	21.28	3
		25	0	21.25	21.24	21.31	3

LTE Conducted Power (Full)

LTE Band 5

BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	24.06	24.03	24.09	0
		1	7	24.00	23.98	24.04	0
		1	14	23.88	23.86	23.92	0
		8	0	23.04	23.02	23.08	1
		8	3	23.02	23.00	23.06	1
		8	7	22.98	22.96	23.02	1
		15	0	23.01	22.99	23.05	1
3M	16QAM	1	0	23.33	23.31	23.37	1
		1	7	23.28	23.26	23.32	1
		1	14	23.16	23.14	23.20	1
		8	0	22.35	22.33	22.39	2
		8	3	22.33	22.31	22.37	2
		8	7	22.29	22.27	22.33	2
		15	0	22.32	22.30	22.36	2
3M	64QAM	1	0	22.16	22.15	22.21	2
		1	7	22.11	22.10	22.17	2
		1	14	22.00	21.99	22.06	2
		8	0	21.23	21.22	21.29	3
		8	3	21.22	21.21	21.28	3
		8	7	21.18	21.17	21.24	3
		15	0	21.21	21.20	21.27	3
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	24.02	23.99	24.05	0
		1	2	23.96	23.94	24.00	0
		1	5	23.84	23.82	23.88	0
		3	0	23.90	23.88	23.94	0
		3	1	23.88	23.86	23.92	0
		3	3	23.84	23.82	23.88	0
		6	0	22.97	22.95	23.01	1
1.4M	16QAM	1	0	23.29	23.27	23.33	1
		1	2	23.24	23.22	23.28	1
		1	5	23.12	23.10	23.16	1
		3	0	22.71	22.69	22.75	1
		3	1	22.69	22.67	22.73	1
		3	3	22.65	22.63	22.69	1
		6	0	22.28	22.26	22.32	2
1.4M	64QAM	1	0	22.12	22.11	22.17	2
		1	2	22.07	22.06	22.13	2
		1	5	21.96	21.95	22.02	2
		3	0	21.59	21.58	21.65	2
		3	1	21.58	21.57	21.64	2
		3	3	21.54	21.53	21.60	2
		6	0	21.17	21.16	21.23	3

LTE Conducted Power (Full)

LTE Band 7

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	23.32	23.42	23.34	0
		1	50	23.28	23.39	23.31	0
		1	99	23.22	23.33	23.25	0
		50	0	22.44	22.55	22.47	1
		50	25	22.43	22.54	22.46	1
		50	50	22.42	22.53	22.45	1
		100	0	22.46	22.57	22.49	1
20M	16QAM	1	0	22.33	22.44	22.36	1
		1	50	22.57	22.68	22.60	1
		1	99	22.52	22.63	22.55	1
		50	0	21.32	21.43	21.35	2
		50	25	21.31	21.42	21.34	2
		50	50	21.40	21.51	21.43	2
		100	0	21.38	21.49	21.41	2
20M	64QAM	1	0	21.41	21.52	21.44	2
		1	50	21.34	21.45	21.37	2
		1	99	21.39	21.50	21.42	2
		50	0	20.35	20.46	20.38	3
		50	25	20.37	20.48	20.40	3
		50	50	20.34	20.42	20.36	3
		100	0	20.32	20.43	20.35	3
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	23.22	23.35	23.30	0
		1	37	23.25	23.30	23.30	0
		1	74	23.17	23.29	23.21	0
		36	0	22.35	22.47	22.45	1
		36	19	22.43	22.52	22.42	1
		36	39	22.33	22.43	22.39	1
		75	0	22.37	22.49	22.44	1
15M	16QAM	1	0	22.30	22.37	22.31	1
		1	37	22.56	22.66	22.54	1
		1	74	22.52	22.54	22.52	1
		36	0	21.32	21.42	21.30	2
		36	19	21.22	21.35	21.34	2
		36	39	21.36	21.49	21.33	2
		75	0	21.30	21.46	21.35	2
15M	64QAM	1	0	21.34	21.48	21.36	2
		1	37	21.27	21.41	21.36	2
		1	74	21.34	21.49	21.37	2
		36	0	20.29	20.44	20.37	3
		36	19	20.37	20.45	20.30	3
		36	39	20.24	20.34	20.33	3
		75	0	20.25	20.40	20.30	3

LTE Conducted Power (Full)

LTE Band 7

BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	23.15	23.34	23.29	0
		1	24	23.17	23.27	23.23	0
		1	49	23.17	23.21	23.13	0
		25	0	22.34	22.40	22.35	1
		25	12	22.38	22.51	22.36	1
		25	25	22.26	22.43	22.36	1
		50	0	22.28	22.47	22.36	1
10M	16QAM	1	0	22.28	22.31	22.23	1
		1	24	22.49	22.66	22.44	1
		1	49	22.48	22.49	22.43	1
		25	0	21.22	21.34	21.24	2
		25	12	21.12	21.33	21.27	2
		25	25	21.26	21.41	21.29	2
		50	0	21.20	21.38	21.28	2
10M	64QAM	1	0	21.28	21.40	21.33	2
		1	24	21.20	21.38	21.30	2
		1	49	21.28	21.39	21.29	2
		25	0	20.23	20.43	20.28	3
		25	12	20.30	20.41	20.27	3
		25	25	20.24	20.26	20.25	3
		50	0	20.18	20.39	20.26	3
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	23.13	23.30	23.27	0
		1	12	23.09	23.26	23.20	0
		1	24	23.15	23.19	23.09	0
		12	0	22.31	22.38	22.35	1
		12	6	22.38	22.45	22.33	1
		12	13	22.23	22.34	22.28	1
		25	0	22.19	22.42	22.32	1
5M	16QAM	1	0	22.19	22.30	22.22	1
		1	12	22.47	22.63	22.44	1
		1	24	22.45	22.39	22.41	1
		12	0	21.22	21.33	21.24	2
		12	6	21.12	21.23	21.21	2
		12	13	21.25	21.41	21.22	2
		25	0	21.20	21.31	21.25	2
5M	64QAM	1	0	21.28	21.39	21.28	2
		1	12	21.11	21.30	21.20	2
		1	24	21.26	21.32	21.24	2
		12	0	20.21	20.33	20.22	3
		12	6	20.27	20.40	20.21	3
		12	13	20.17	20.17	20.21	3
		25	0	20.14	20.37	20.19	3

LTE Conducted Power (Full)

LTE Band 12

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	24.12	24.09	24.14	0
		1	24	24.05	24.02	24.12	0
		1	49	24.02	24.06	24.11	0
		25	0	23.10	23.10	23.20	1
		25	12	23.11	23.12	23.19	1
		25	25	23.06	23.16	23.16	1
		50	0	23.12	23.13	23.14	1
10M	16QAM	1	0	23.40	23.40	23.47	1
		1	24	23.31	23.35	23.38	1
		1	49	23.25	23.25	23.33	1
		25	0	22.14	22.12	22.17	2
		25	12	22.11	22.13	22.13	2
		25	25	22.16	22.15	22.16	2
		50	0	22.11	22.14	22.16	2
10M	64QAM	1	0	22.43	22.42	22.43	2
		1	24	22.37	22.32	22.38	2
		1	49	22.29	22.34	22.34	2
		25	0	21.18	21.13	21.18	3
		25	12	21.11	21.08	21.13	3
		25	25	21.10	21.04	21.14	3
		50	0	21.15	21.13	21.18	3
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	24.05	24.04	24.09	0
		1	12	23.98	23.96	24.10	0
		1	24	23.99	24.08	24.08	0
		12	0	23.07	23.07	23.16	1
		12	6	23.03	23.11	23.12	1
		12	13	23.05	23.07	23.11	1
		25	0	23.06	23.13	23.07	1
5M	16QAM	1	0	23.35	23.40	23.40	1
		1	12	23.24	23.26	23.36	1
		1	24	23.19	23.17	23.27	1
		12	0	22.07	22.12	22.15	2
		12	6	22.09	22.08	22.09	2
		12	13	22.11	22.10	22.10	2
		25	0	22.07	22.13	22.10	2
5M	64QAM	1	0	22.37	22.39	22.43	2
		1	12	22.35	22.31	22.28	2
		1	24	22.22	22.24	22.28	2
		12	0	21.18	21.08	21.17	3
		12	6	21.04	20.99	21.11	3
		12	13	21.08	21.01	21.07	3
		25	0	21.10	21.08	21.08	3

LTE Conducted Power (Full)

LTE Band 12

BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	23.91	23.97	24.06	0
		1	7	23.88	23.91	23.97	0
		1	14	23.97	23.97	24.04	0
		8	0	23.07	22.94	23.19	1
		8	3	22.89	23.09	22.97	1
		8	7	23.04	23.03	23.01	1
		15	0	22.93	23.00	23.02	1
3M	16QAM	1	0	23.22	23.39	23.30	1
		1	7	23.24	23.17	23.36	1
		1	14	23.05	23.04	23.15	1
		8	0	22.00	22.12	22.09	2
		8	3	22.02	21.96	22.03	2
		8	7	21.97	21.95	22.09	2
		15	0	22.06	21.99	22.04	2
3M	64QAM	1	0	22.30	22.31	22.29	2
		1	7	22.23	22.30	22.25	2
		1	14	22.12	22.16	22.21	2
		8	0	21.16	21.00	21.08	3
		8	3	21.02	20.94	21.02	3
		8	7	21.07	20.97	20.96	3
		15	0	21.10	21.08	20.94	3
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	23.81	23.97	23.99	0
		1	2	23.87	23.90	23.96	0
		1	5	23.88	23.94	23.94	0
		3	0	23.80	23.87	23.62	0
		3	1	23.72	23.76	23.58	0
		3	3	23.66	23.72	23.56	0
		6	0	22.88	22.99	22.96	1
1.4M	16QAM	1	0	23.20	23.29	23.25	1
		1	2	23.16	23.09	23.30	1
		1	5	22.97	22.97	23.08	1
		3	0	22.88	22.81	22.86	1
		3	1	22.84	22.76	22.79	1
		3	3	22.73	22.74	22.75	1
		6	0	21.96	21.94	22.01	2
1.4M	64QAM	1	0	22.22	22.28	22.22	2
		1	2	22.22	22.25	22.18	2
		1	5	22.09	22.07	22.13	2
		3	0	22.06	22.02	22.07	2
		3	1	22.01	21.99	22.03	2
		3	3	21.92	21.96	22.07	2
		6	0	21.07	21.06	20.90	3

LTE Conducted Power (Full)

LTE Band 13

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		24.06		0
		1	24		24.03		0
		1	49		23.93		0
		25	0		23.19		1
		25	12		23.15		1
		25	25		23.07		1
		50	0		23.17		1
10M	16QAM	1	0		23.34		1
		1	24		23.33		1
		1	49		23.22		1
		25	0		22.21		2
		25	12		22.19		2
		25	25		22.12		2
		50	0		22.16		2
10M	64QAM	1	0		22.29		2
		1	24		22.27		2
		1	49		22.24		2
		25	0		21.23		3
		25	12		21.19		3
		25	25		21.11		3
		50	0		21.20		3
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	23.95	23.97	23.88	0
		1	12	23.89	23.99	23.94	0
		1	24	23.79	23.84	23.80	0
		12	0	23.11	23.06	23.11	1
		12	6	23.06	23.03	23.01	1
		12	13	22.90	22.99	22.89	1
		25	0	23.13	23.16	23.13	1
5M	16QAM	1	0	23.17	23.11	23.09	1
		1	12	23.14	23.10	23.08	1
		1	24	23.11	23.15	23.13	1
		12	0	22.10	22.19	22.10	2
		12	6	22.07	22.16	22.15	2
		12	13	22.00	22.07	21.98	2
		25	0	22.11	22.11	22.09	2
5M	64QAM	1	0	22.18	22.20	22.13	2
		1	12	22.21	22.22	22.12	2
		1	24	22.13	22.21	22.12	2
		12	0	21.17	21.21	21.18	3
		12	6	21.09	21.15	21.13	3
		12	13	21.07	21.11	21.06	3
		25	0	21.14	21.16	21.06	3

LTE Conducted Power (Full)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		24.15		0
		1	24		24.13		0
		1	49		24.11		0
		25	0		23.29		1
		25	12		23.26		1
		25	25		23.16		1
		50	0		23.24		1
10M	16QAM	1	0		23.33		1
		1	24		23.31		1
		1	49		23.30		1
		25	0		22.26		2
		25	12		22.23		2
		25	25		22.18		2
		50	0		22.42		2
10M	64QAM	1	0		22.27		2
		1	24		22.23		2
		1	49		22.31		2
		25	0		21.32		3
		25	12		21.23		3
		25	25		21.21		3
		50	0		21.21		3
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	24.04	24.11	24.06	0
		1	12	23.92	24.00	23.90	0
		1	24	24.03	24.08	24.06	0
		12	0	23.06	23.12	23.02	1
		12	6	23.08	23.17	23.12	1
		12	13	23.02	23.04	23.04	1
		25	0	23.11	23.17	23.09	1
5M	16QAM	1	0	23.18	23.27	23.19	1
		1	12	23.17	23.22	23.18	1
		1	24	23.01	23.11	23.03	1
		12	0	22.16	22.20	22.17	2
		12	6	22.08	22.09	22.08	2
		12	13	22.15	22.17	22.09	2
		25	0	22.17	22.27	22.19	2
5M	64QAM	1	0	21.99	22.09	22.03	2
		1	12	22.11	22.16	22.16	2
		1	24	22.20	22.25	22.18	2
		12	0	21.20	21.28	21.21	3
		12	6	21.08	21.14	21.06	3
		12	13	21.04	21.09	21.02	3
		25	0	21.14	21.16	21.08	3

LTE Conducted Power (Full)

LTE Band 25

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	23.09	23.08	23.00	0
		1	50	23.08	23.03	22.95	0
		1	99	23.03	23.03	22.94	0
		50	0	22.18	22.12	22.04	1
		50	25	22.16	22.10	22.05	1
		50	50	22.15	22.12	22.10	1
		100	0	22.25	22.23	22.18	1
20M	16QAM	1	0	22.35	22.34	22.32	1
		1	50	22.31	22.26	22.23	1
		1	99	22.29	22.31	22.23	1
		50	0	21.22	21.25	21.18	2
		50	25	21.19	21.19	21.14	2
		50	50	21.14	21.11	21.01	2
		100	0	21.32	21.30	21.22	2
20M	64QAM	1	0	21.35	21.31	21.27	2
		1	50	21.33	21.30	21.24	2
		1	99	21.28	21.26	21.21	2
		50	0	20.25	20.28	20.23	3
		50	25	20.24	20.23	20.15	3
		50	50	20.19	20.20	20.11	3
		100	0	20.22	20.25	20.20	3
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	23.04	23.03	22.87	0
		1	37	22.99	22.97	22.93	0
		1	74	22.96	22.98	22.92	0
		36	0	22.11	22.10	22.04	1
		36	19	22.14	22.03	22.01	1
		36	39	22.06	22.06	22.10	1
		75	0	22.18	22.20	22.08	1
15M	16QAM	1	0	22.31	22.31	22.23	1
		1	37	22.26	22.19	22.13	1
		1	74	22.27	22.30	22.14	1
		36	0	21.20	21.16	21.12	2
		36	19	21.18	21.13	21.04	2
		36	39	21.13	21.11	20.99	2
		75	0	21.25	21.30	21.17	2
15M	64QAM	1	0	21.30	21.25	21.20	2
		1	37	21.29	21.27	21.16	2
		1	74	21.26	21.26	21.15	2
		36	0	20.16	20.18	20.14	3
		36	19	20.20	20.23	20.10	3
		36	39	20.18	20.14	20.07	3
		75	0	20.17	20.19	20.14	3

LTE Conducted Power (Full)

LTE Band 25

BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	23.01	22.95	22.86	0
		1	24	22.90	22.96	22.91	0
		1	49	22.88	22.93	22.83	0
		25	0	22.03	22.00	21.99	1
		25	12	22.07	21.96	21.96	1
		25	25	22.01	22.01	22.05	1
		50	0	22.11	22.15	22.05	1
10M	16QAM	1	0	22.28	22.31	22.21	1
		1	24	22.19	22.18	22.04	1
		1	49	22.18	22.21	22.05	1
		25	0	21.20	21.07	21.07	2
		25	12	21.15	21.11	20.98	2
		25	25	21.03	21.09	20.98	2
		50	0	21.16	21.20	21.15	2
10M	64QAM	1	0	21.25	21.16	21.11	2
		1	24	21.29	21.26	21.13	2
		1	49	21.22	21.19	21.05	2
		25	0	20.12	20.17	20.08	3
		25	12	20.18	20.20	20.00	3
		25	25	20.16	20.11	20.06	3
		50	0	20.13	20.19	20.06	3
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	22.91	22.93	22.78	0
		1	12	22.87	22.89	22.86	0
		1	24	22.88	22.88	22.80	0
		12	0	21.97	21.96	21.92	1
		12	6	22.06	21.92	21.96	1
		12	13	21.93	21.93	22.05	1
		25	0	22.11	22.09	21.97	1
5M	16QAM	1	0	22.27	22.25	22.11	1
		1	12	22.12	22.18	21.97	1
		1	24	22.10	22.17	21.95	1
		12	0	21.15	20.97	21.07	2
		12	6	21.05	21.05	20.94	2
		12	13	20.95	21.02	20.93	2
		25	0	21.11	21.11	21.14	2
5M	64QAM	1	0	21.15	21.10	21.05	2
		1	12	21.27	21.18	21.05	2
		1	24	21.16	21.09	20.96	2
		12	0	20.09	20.09	20.01	3
		12	6	20.14	20.16	19.92	3
		12	13	20.06	20.07	20.01	3
		25	0	20.12	20.16	20.06	3

LTE Conducted Power (Full)

LTE Band 25

BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	22.85	22.90	22.75	0
		1	7	22.85	22.79	22.76	0
		1	14	22.78	22.88	22.80	0
		8	0	21.94	21.95	21.86	1
		8	3	22.02	21.84	21.95	1
		8	7	21.89	21.91	21.99	1
		15	0	22.08	22.04	21.95	1
3M	16QAM	1	0	22.23	22.25	22.06	1
		1	7	22.08	22.10	21.95	1
		1	14	22.09	22.07	21.94	1
		8	0	21.07	20.89	21.02	2
		8	3	20.96	21.02	20.89	2
		8	7	20.88	21.00	20.84	2
		15	0	21.09	21.03	21.12	2
3M	64QAM	1	0	21.09	21.07	21.01	2
		1	7	21.25	21.14	20.98	2
		1	14	21.11	20.99	20.93	2
		8	0	20.07	20.07	19.94	3
		8	3	20.09	20.13	19.92	3
		8	7	20.00	20.07	19.93	3
		15	0	20.04	20.16	20.00	3
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	22.81	22.87	22.72	0
		1	2	22.76	22.78	22.74	0
		1	5	22.70	22.80	22.78	0
		3	0	22.77	22.83	22.67	0
		3	1	22.84	22.68	22.77	0
		3	3	22.73	22.71	22.88	0
		6	0	22.05	22.01	21.92	1
1.4M	16QAM	1	0	22.18	22.25	22.04	1
		1	2	22.05	22.03	21.87	1
		1	5	22.05	22.00	21.84	1
		3	0	21.91	21.77	21.83	1
		3	1	21.86	21.91	21.77	1
		3	3	21.70	21.83	21.64	1
		6	0	21.04	20.93	21.07	2
1.4M	64QAM	1	0	21.00	20.97	20.91	2
		1	2	21.18	21.10	20.90	2
		1	5	21.01	20.99	20.91	2
		3	0	20.94	20.94	20.77	2
		3	1	20.99	21.00	20.80	2
		3	3	20.81	20.96	20.75	2
		6	0	20.00	20.16	19.98	3

LTE Conducted Power (Full)

LTE Band 26

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	24.11	24.32	24.07	0
		1	37	24.01	24.26	23.94	0
		1	74	23.93	24.24	23.83	0
		36	0	23.21	23.23	23.18	1
		36	19	23.18	23.22	23.15	1
		36	39	23.11	23.18	23.04	1
		75	0	23.15	23.17	23.04	1
15M	16QAM	1	0	23.35	23.33	23.30	1
		1	37	23.27	23.25	23.18	1
		1	74	23.26	23.22	23.20	1
		36	0	22.19	22.47	22.16	2
		36	19	22.14	22.45	22.05	2
		36	39	22.12	22.43	22.05	2
		75	0	22.15	22.38	22.04	2
15M	64QAM	1	0	22.23	22.28	22.18	2
		1	37	22.22	22.31	22.18	2
		1	74	22.18	22.30	22.10	2
		36	0	21.19	21.44	21.13	3
		36	19	21.17	21.34	21.12	3
		36	39	21.13	21.31	21.10	3
		75	0	21.15	21.44	21.11	3
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	24.02	24.23	23.98	0
		1	24	23.96	24.20	23.89	0
		1	49	23.84	24.24	23.77	0
		25	0	23.21	23.19	23.17	1
		25	12	23.10	23.19	23.09	1
		25	25	23.07	23.18	22.97	1
		50	0	23.08	23.14	22.98	1
10M	16QAM	1	0	23.31	23.32	23.27	1
		1	24	23.19	23.16	23.15	1
		1	49	23.25	23.13	23.18	1
		25	0	22.12	22.37	22.13	2
		25	12	22.10	22.41	22.02	2
		25	25	22.02	22.42	22.01	2
		50	0	22.13	22.30	21.96	2
10M	64QAM	1	0	22.22	22.19	22.12	2
		1	24	22.13	22.29	22.11	2
		1	49	22.15	22.23	22.03	2
		25	0	21.16	21.37	21.10	3
		25	12	21.13	21.29	21.04	3
		25	25	21.09	21.22	21.10	3
		50	0	21.11	21.44	21.10	3

LTE Conducted Power (Full)

LTE Band 26

BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	23.98	24.14	23.92	0
		1	12	23.95	24.13	23.87	0
		1	24	23.81	24.18	23.68	0
		12	0	23.18	23.12	23.15	1
		12	6	23.05	23.19	23.03	1
		12	13	23.01	23.17	22.91	1
		25	0	22.99	23.10	22.93	1
5M	16QAM	1	0	23.31	23.26	23.20	1
		1	12	23.10	23.13	23.08	1
		1	24	23.23	23.03	23.11	1
		12	0	22.04	22.30	22.10	2
		12	6	22.08	22.33	21.93	2
		12	13	22.01	22.40	21.93	2
		25	0	22.09	22.30	21.87	2
5M	64QAM	1	0	22.12	22.18	22.08	2
		1	12	22.07	22.28	22.11	2
		1	24	22.13	22.13	21.95	2
		12	0	21.15	21.27	21.08	3
		12	6	21.05	21.25	21.00	3
		12	13	21.02	21.18	21.01	3
		25	0	21.01	21.37	21.10	3
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	23.91	24.12	23.82	0
		1	7	23.90	24.05	23.81	0
		1	14	23.79	24.08	23.67	0
		8	0	23.17	23.08	23.13	1
		8	3	23.03	23.14	22.99	1
		8	7	22.93	23.14	22.81	1
		15	0	22.93	23.08	22.92	1
3M	16QAM	1	0	23.31	23.20	23.16	1
		1	7	23.00	23.05	23.00	1
		1	14	23.23	22.93	23.08	1
		8	0	21.96	22.23	22.10	2
		8	3	21.99	22.30	21.90	2
		8	7	21.93	22.35	21.86	2
		15	0	22.09	22.20	21.86	2
3M	64QAM	1	0	22.09	22.13	21.98	2
		1	7	22.03	22.21	22.10	2
		1	14	22.12	22.06	21.95	2
		8	0	21.08	21.25	21.00	3
		8	3	21.00	21.15	20.95	3
		8	7	20.97	21.14	20.95	3
		15	0	20.94	21.27	21.06	3

LTE Conducted Power (Full)

LTE Band 26

BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	23.90	24.10	23.81	0
		1	2	23.82	23.97	23.73	0
		1	5	23.71	24.04	23.65	0
		3	0	23.58	23.54	23.62	0
		3	1	23.58	23.62	23.57	0
		3	3	23.51	23.62	23.53	0
		6	0	22.83	23.00	22.87	1
1.4M	16QAM	1	0	23.31	23.20	23.08	1
		1	2	22.95	22.95	22.92	1
		1	5	23.23	22.84	23.03	1
		3	0	22.89	22.83	22.93	1
		3	1	22.86	22.80	22.88	1
		3	3	22.81	22.77	22.79	1
		6	0	22.03	22.16	21.83	2
1.4M	64QAM	1	0	22.00	22.12	21.90	2
		1	2	21.94	22.19	22.00	2
		1	5	22.10	22.06	21.92	2
		3	0	21.94	21.89	21.87	2
		3	1	21.92	21.85	21.84	2
		3	3	21.89	21.80	21.83	2
		6	0	20.86	21.20	21.05	3

LTE Conducted Power (Full)

LTE Band 38

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	23.31	23.13	23.17	0
		1	50	23.22	23.05	23.13	0
		1	99	23.09	22.99	23.01	0
		50	0	22.29	22.20	22.25	1
		50	25	22.27	22.21	22.25	1
		50	50	22.24	22.08	22.15	1
		100	0	22.29	22.10	22.19	1
20M	16QAM	1	0	22.26	22.22	22.22	1
		1	50	22.24	22.14	22.20	1
		1	99	22.22	22.12	22.18	1
		50	0	21.20	21.10	21.11	2
		50	25	21.19	21.08	21.13	2
		50	50	21.18	21.16	21.17	2
		100	0	21.22	21.12	21.12	2
20M	64QAM	1	0	21.03	20.97	21.01	2
		1	50	20.99	20.92	20.97	2
		1	99	20.98	20.91	20.98	2
		50	0	20.22	20.14	20.15	3
		50	25	20.21	20.09	20.12	3
		50	50	20.20	20.08	20.12	3
		100	0	20.21	20.05	20.13	3
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	23.21	23.04	23.11	0
		1	37	23.19	22.95	23.13	0
		1	74	23.02	22.97	22.98	0
		36	0	22.20	22.13	22.17	1
		36	19	22.27	22.21	22.21	1
		36	39	22.22	22.06	22.06	1
		75	0	22.19	22.00	22.14	1
15M	16QAM	1	0	22.15	22.14	22.13	1
		1	37	22.14	22.13	22.12	1
		1	74	22.15	22.08	22.09	1
		36	0	21.20	21.05	21.01	2
		36	19	21.10	21.01	21.08	2
		36	39	21.10	21.07	21.10	2
		75	0	21.14	21.07	21.06	2
15M	64QAM	1	0	20.93	20.88	20.94	2
		1	37	20.96	20.91	20.87	2
		1	74	20.92	20.87	20.92	2
		36	0	20.12	20.04	20.06	3
		36	19	20.18	20.03	20.02	3
		36	39	20.14	19.98	20.11	3
		75	0	20.15	19.97	20.10	3

LTE Conducted Power (Full)

LTE Band 38

BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	23.15	22.99	23.02	0
		1	24	23.18	22.92	23.12	0
		1	49	22.95	22.90	22.95	0
		25	0	22.19	22.10	22.10	1
		25	12	22.17	22.12	22.19	1
		25	25	22.12	21.96	21.99	1
		50	0	22.19	21.91	22.11	1
10M	16QAM	1	0	22.14	22.14	22.08	1
		1	24	22.17	22.09	22.15	1
		1	49	22.11	22.08	22.01	1
		25	0	21.19	21.00	20.91	2
		25	12	21.07	20.93	21.04	2
		25	25	21.04	21.00	21.05	2
		50	0	21.05	21.03	21.04	2
10M	64QAM	1	0	20.83	20.79	20.92	2
		1	24	20.89	20.88	20.83	2
		1	49	20.87	20.79	20.83	2
		25	0	20.09	20.04	19.98	3
		25	12	20.08	19.95	19.97	3
		25	25	20.04	19.94	20.01	3
		50	0	20.14	19.93	20.01	3
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	23.09	22.89	22.96	0
		1	12	23.08	22.89	23.04	0
		1	24	22.87	22.87	22.91	0
		12	0	22.09	22.03	22.04	1
		12	6	22.09	22.10	22.18	1
		12	13	22.07	21.95	21.95	1
		25	0	22.10	21.90	22.04	1
5M	16QAM	1	0	22.14	22.14	22.06	1
		1	12	22.10	22.07	22.07	1
		1	24	22.09	21.98	21.94	1
		12	0	21.15	20.94	20.83	2
		12	6	21.04	20.84	20.96	2
		12	13	20.97	20.98	21.01	2
		25	0	21.00	21.02	20.96	2
5M	64QAM	1	0	20.74	20.79	20.91	2
		1	12	20.85	20.87	20.79	2
		1	24	20.80	20.75	20.74	2
		12	0	20.04	19.98	19.89	3
		12	6	20.06	19.86	19.87	3
		12	13	20.03	19.84	20.00	3
		25	0	20.10	19.90	19.99	3

LTE Conducted Power (Full)

LTE Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	23.95	23.99	23.88	23.85	23.98	0
		1	50	23.94	23.97	23.86	23.83	23.95	0
		1	99	23.82	23.94	23.80	23.76	23.84	0
		50	0	22.89	22.99	22.77	22.72	22.87	1
		50	25	22.95	22.98	22.90	22.85	22.89	1
		50	50	22.92	22.96	22.82	22.80	22.89	1
		100	0	22.93	22.97	22.85	22.77	22.87	1
20M	16QAM	1	0	22.88	22.97	22.80	22.72	22.86	1
		1	50	22.89	22.96	22.86	22.79	22.91	1
		1	99	22.82	22.94	22.73	22.63	22.81	1
		50	0	21.92	21.99	21.83	21.76	21.88	2
		50	25	21.91	21.97	21.85	21.80	21.91	2
		50	50	21.89	21.96	21.85	21.81	21.90	2
		100	0	21.88	21.99	21.79	21.73	21.89	2
20M	64QAM	1	0	21.96	21.99	21.94	21.91	21.95	2
		1	50	21.93	21.96	21.81	21.75	21.88	2
		1	99	21.91	21.95	21.82	21.73	21.92	2
		50	0	20.88	20.99	20.81	20.71	20.84	3
		50	25	20.90	20.97	20.82	20.75	20.90	3
		50	50	20.94	20.96	20.84	20.78	20.93	3
		100	0	20.95	20.99	20.84	20.79	20.93	3
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	23.93	23.97	23.84	23.83	23.89	0
		1	37	23.91	23.91	23.80	23.82	23.92	0
		1	74	23.78	23.86	23.73	23.71	23.74	0
		36	0	22.81	22.94	22.76	22.62	22.85	1
		36	19	22.91	22.92	22.80	22.79	22.84	1
		36	39	22.90	22.90	22.77	22.74	22.83	1
		75	0	22.87	22.92	22.76	22.68	22.86	1
15M	16QAM	1	0	22.79	22.97	22.77	22.67	22.98	1
		1	37	22.79	22.96	22.81	22.78	22.95	1
		1	74	22.75	22.87	22.66	22.61	22.81	1
		36	0	21.90	21.90	21.78	21.68	21.81	2
		36	19	21.84	21.97	21.81	21.74	21.79	2
		36	39	21.83	21.87	21.78	21.79	21.79	2
		75	0	21.79	21.90	21.79	21.64	21.82	2
15M	64QAM	1	0	21.89	21.95	21.85	21.81	21.95	2
		1	37	21.91	21.95	21.80	21.74	21.94	2
		1	74	21.85	21.87	21.81	21.67	21.83	2
		36	0	20.87	20.95	20.76	20.69	20.87	3
		36	19	20.86	20.89	20.80	20.66	20.79	3
		36	39	20.93	20.91	20.83	20.73	20.89	3
		75	0	20.88	20.92	20.75	20.73	20.77	3

LTE Conducted Power (Full)

LTE Band 41

BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	23.85	23.90	23.83	23.75	23.83	0
		1	24	23.83	23.84	23.80	23.74	23.90	0
		1	49	23.78	23.84	23.71	23.69	23.74	0
		25	0	22.73	22.92	22.66	22.60	22.85	1
		25	12	22.85	22.88	22.71	22.76	22.84	1
		25	25	22.83	22.87	22.72	22.71	22.78	1
		50	0	22.79	22.92	22.76	22.65	22.83	1
10M	16QAM	1	0	22.76	22.95	22.70	22.59	22.89	1
		1	24	22.75	22.96	22.80	22.72	22.90	1
		1	49	22.66	22.85	22.58	22.58	22.65	1
		25	0	21.83	21.86	21.77	21.64	21.77	2
		25	12	21.80	21.90	21.78	21.65	21.80	2
		25	25	21.76	21.79	21.77	21.75	21.77	2
		50	0	21.78	21.80	21.78	21.58	21.76	2
10M	64QAM	1	0	21.86	21.91	21.82	21.78	21.89	2
		1	24	21.86	21.92	21.79	21.70	21.82	2
		1	49	21.80	21.79	21.72	21.64	21.64	2
		25	0	20.81	20.95	20.68	20.63	20.80	3
		25	12	20.85	20.79	20.79	20.65	20.80	3
		25	25	20.84	20.81	20.80	20.69	20.74	3
		50	0	20.84	20.82	20.74	20.72	20.85	3
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	23.83	23.85	23.82	23.65	23.79	0
		1	12	23.77	23.78	23.78	23.74	23.88	0
		1	24	23.71	23.84	23.69	23.62	23.72	0
		12	0	22.64	22.89	22.58	22.50	22.80	1
		12	6	22.83	22.80	22.64	22.71	22.82	1
		12	13	22.75	22.87	22.70	22.65	22.68	1
		25	0	22.70	22.86	22.72	22.56	22.74	1
5M	16QAM	1	0	22.67	22.86	22.64	22.53	22.79	1
		1	12	22.75	22.88	22.71	22.70	22.87	1
		1	24	22.62	22.76	22.54	22.51	22.71	1
		12	0	21.80	21.83	21.72	21.64	21.77	2
		12	6	21.79	21.89	21.76	21.56	21.75	2
		12	13	21.67	21.77	21.69	21.68	21.76	2
		25	0	21.78	21.72	21.74	21.52	21.79	2
5M	64QAM	1	0	21.82	21.90	21.81	21.68	21.82	2
		1	12	21.85	21.89	21.69	21.68	21.89	2
		1	24	21.75	21.73	21.72	21.62	21.67	2
		12	0	20.76	20.86	20.67	20.61	20.84	3
		12	6	20.76	20.69	20.69	20.55	20.74	3
		12	13	20.74	20.73	20.75	20.63	20.69	3
		25	0	20.76	20.81	20.64	20.68	20.77	3

LTE Conducted Power (Full)

LTE Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	21.72	21.33	21.41	21.43	0
		1	50	21.66	21.23	21.33	21.32	0
		1	99	21.61	21.25	21.25	21.28	0
		50	0	20.88	20.61	20.52	20.48	1
		50	25	20.86	20.45	20.51	20.52	1
		50	50	20.85	20.41	20.43	20.50	1
		100	0	20.84	20.44	20.44	20.44	1
20M	16QAM	1	0	20.75	20.32	20.40	20.50	1
		1	50	20.67	20.31	20.32	20.40	1
		1	99	20.66	20.26	20.26	20.33	1
		50	0	19.85	19.42	19.45	20.36	2
		50	25	19.83	19.41	19.41	19.51	2
		50	50	19.81	19.45	19.47	19.45	2
		100	0	19.79	19.39	19.44	19.50	2
20M	64QAM	1	0	19.35	18.94	18.98	19.43	2
		1	50	19.33	18.98	19.05	19.02	2
		1	99	19.31	18.87	18.87	19.07	2
		50	0	18.82	18.40	18.49	18.92	3
		50	25	18.79	18.41	18.41	18.46	3
		50	50	18.76	18.41	18.47	18.47	3
		100	0	18.76	18.33	18.41	18.46	3
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	21.63	21.26	21.39	21.37	0
		1	37	21.61	21.23	21.31	21.27	0
		1	74	21.52	21.19	21.22	21.23	0
		36	0	20.87	20.51	20.44	20.40	1
		36	19	20.77	20.36	20.47	20.47	1
		36	39	20.85	20.34	20.39	20.40	1
		75	0	20.79	20.44	20.42	20.43	1
15M	16QAM	1	0	20.67	20.23	20.35	20.47	1
		1	37	20.67	20.31	20.26	20.31	1
		1	74	20.65	20.19	20.17	20.27	1
		36	0	19.78	19.42	19.35	20.26	2
		36	19	19.83	19.32	19.35	19.46	2
		36	39	19.75	19.38	19.39	19.41	2
		75	0	19.69	19.34	19.40	19.49	2
15M	64QAM	1	0	19.26	18.86	18.91	19.43	2
		1	37	19.33	18.89	18.98	18.99	2
		1	74	19.27	18.80	18.79	18.98	2
		36	0	18.74	18.36	18.49	18.90	3
		36	19	18.74	18.37	18.36	18.36	3
		36	39	18.71	18.38	18.45	18.47	3
		75	0	18.68	18.24	18.39	18.42	3

LTE Conducted Power (Full)

LTE Band 48

BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	21.57	21.20	21.37	21.29	0
		1	24	21.52	21.19	21.25	21.21	0
		1	49	21.45	21.11	21.21	21.17	0
		25	0	20.80	20.51	20.39	20.36	1
		25	12	20.70	20.26	20.47	20.38	1
		25	25	20.80	20.33	20.33	20.33	1
		50	0	20.69	20.37	20.35	20.37	1
10M	16QAM	1	0	20.62	20.22	20.33	20.37	1
		1	24	20.61	20.29	20.24	20.21	1
		1	49	20.63	20.18	20.10	20.22	1
		25	0	19.72	19.32	19.29	20.25	2
		25	12	19.78	19.28	19.30	19.39	2
		25	25	19.66	19.29	19.36	19.36	2
		50	0	19.62	19.29	19.35	19.49	2
10M	64QAM	1	0	19.25	18.79	18.91	19.43	2
		1	24	19.29	18.87	18.92	18.97	2
		1	49	19.18	18.76	18.72	18.90	2
		25	0	18.74	18.35	18.47	18.90	3
		25	12	18.64	18.36	18.27	18.32	3
		25	25	18.69	18.37	18.37	18.37	3
		50	0	18.63	18.14	18.39	18.40	3
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	21.55	21.13	21.27	21.19	0
		1	12	21.46	21.19	21.17	21.17	0
		1	24	21.40	21.06	21.17	21.09	0
		12	0	20.71	20.47	20.32	20.26	1
		12	6	20.62	20.22	20.45	20.30	1
		12	13	20.71	20.29	20.28	20.31	1
		25	0	20.67	20.37	20.29	20.31	1
5M	16QAM	1	0	20.53	20.20	20.29	20.37	1
		1	12	20.55	20.22	20.20	20.18	1
		1	24	20.53	20.11	20.07	20.17	1
		12	0	19.71	19.25	19.27	20.16	2
		12	6	19.70	19.24	19.28	19.36	2
		12	13	19.63	19.29	19.30	19.30	2
		25	0	19.57	19.20	19.33	19.42	2
5M	64QAM	1	0	19.23	18.71	18.91	19.34	2
		1	12	19.28	18.83	18.83	18.94	2
		1	24	19.13	18.68	18.63	18.82	2
		12	0	18.65	18.30	18.44	18.87	3
		12	6	18.58	18.33	18.20	18.29	3
		12	13	18.61	18.37	18.32	18.29	3
		25	0	18.57	18.04	18.39	18.33	3

LTE Conducted Power (Full)

LTE Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	23.31	23.56	23.27	0
		1	50	23.30	23.49	23.26	0
		1	99	23.27	23.44	23.24	0
		50	0	22.47	22.64	22.44	1
		50	25	22.32	22.61	22.33	1
		50	50	22.38	22.59	22.34	1
		100	0	22.40	22.62	22.39	1
20M	16QAM	1	0	22.75	22.94	22.71	1
		1	50	22.67	22.91	22.69	1
		1	99	22.71	22.89	22.67	1
		50	0	21.58	21.74	21.54	2
		50	25	21.53	21.72	21.51	2
		50	50	21.45	21.68	21.46	2
		100	0	21.44	21.67	21.40	2
20M	64QAM	1	0	21.49	21.74	21.52	2
		1	50	21.47	21.68	21.46	2
		1	99	21.36	21.62	21.35	2
		50	0	20.46	20.63	20.43	3
		50	25	20.47	20.60	20.40	3
		50	50	20.43	20.58	20.38	3
		100	0	20.41	20.63	20.38	3
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	23.20	23.47	23.23	0
		1	37	23.25	23.40	23.21	0
		1	74	23.27	23.40	23.15	0
		36	0	22.41	22.55	22.37	1
		36	19	22.23	22.55	22.32	1
		36	39	22.36	22.52	22.24	1
		75	0	22.35	22.53	22.37	1
15M	16QAM	1	0	22.65	22.90	22.62	1
		1	37	22.58	22.89	22.63	1
		1	74	22.69	22.79	22.61	1
		36	0	21.51	21.70	21.52	2
		36	19	21.44	21.72	21.49	2
		36	39	21.41	21.65	21.36	2
		75	0	21.37	21.65	21.34	2
15M	64QAM	1	0	21.41	21.65	21.45	2
		1	37	21.42	21.67	21.37	2
		1	74	21.35	21.54	21.28	2
		36	0	20.39	20.63	20.35	3
		36	19	20.41	20.57	20.40	3
		36	39	20.41	20.50	20.30	3
		75	0	20.36	20.60	20.32	3

LTE Conducted Power (Full)

LTE Band 66

BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	23.11	23.42	23.21	0
		1	24	23.24	23.30	23.12	0
		1	49	23.26	23.32	23.10	0
		25	0	22.31	22.49	22.29	1
		25	12	22.20	22.50	22.24	1
		25	25	22.33	22.46	22.15	1
		50	0	22.29	22.46	22.32	1
10M	16QAM	1	0	22.62	22.81	22.57	1
		1	24	22.52	22.86	22.55	1
		1	49	22.66	22.77	22.61	1
		25	0	21.41	21.60	21.45	2
		25	12	21.35	21.63	21.48	2
		25	25	21.41	21.60	21.33	2
		50	0	21.30	21.63	21.27	2
10M	64QAM	1	0	21.33	21.65	21.38	2
		1	24	21.42	21.57	21.35	2
		1	49	21.33	21.54	21.28	2
		25	0	20.33	20.56	20.26	3
		25	12	20.34	20.51	20.32	3
		25	25	20.31	20.50	20.26	3
		50	0	20.26	20.57	20.30	3
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	23.03	23.38	23.20	0
		1	12	23.24	23.30	23.07	0
		1	24	23.19	23.29	23.03	0
		12	0	22.21	22.42	22.20	1
		12	6	22.14	22.45	22.15	1
		12	13	22.25	22.40	22.11	1
		25	0	22.19	22.44	22.32	1
5M	16QAM	1	0	22.55	22.74	22.47	1
		1	12	22.42	22.86	22.46	1
		1	24	22.63	22.76	22.51	1
		12	0	21.41	21.52	21.35	2
		12	6	21.34	21.63	21.45	2
		12	13	21.37	21.55	21.24	2
		25	0	21.22	21.61	21.20	2
5M	64QAM	1	0	21.27	21.58	21.31	2
		1	12	21.32	21.57	21.32	2
		1	24	21.25	21.51	21.27	2
		12	0	20.26	20.47	20.21	3
		12	6	20.29	20.45	20.23	3
		12	13	20.23	20.45	20.16	3
		25	0	20.19	20.50	20.30	3

LTE Conducted Power (Full)

LTE Band 66

BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	22.94	23.33	23.10	0
		1	7	23.16	23.28	23.07	0
		1	14	23.14	23.27	22.96	0
		8	0	22.17	22.39	22.11	1
		8	3	22.07	22.42	22.12	1
		8	7	22.24	22.38	22.10	1
		15	0	22.19	22.34	22.29	1
3M	16QAM	1	0	22.52	22.73	22.40	1
		1	7	22.37	22.85	22.38	1
		1	14	22.59	22.68	22.49	1
		8	0	21.39	21.43	21.28	2
		8	3	21.30	21.60	21.43	2
		8	7	21.33	21.47	21.16	2
		15	0	21.17	21.55	21.20	2
3M	64QAM	1	0	21.26	21.57	21.29	2
		1	7	21.32	21.56	21.27	2
		1	14	21.25	21.43	21.21	2
		8	0	20.20	20.45	20.20	3
		8	3	20.26	20.43	20.17	3
		8	7	20.20	20.42	20.15	3
		15	0	20.16	20.45	20.26	3
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	22.88	23.28	23.03	0
		1	2	23.13	23.22	22.99	0
		1	5	23.10	23.21	22.94	0
		3	0	23.17	23.36	23.03	0
		3	1	22.99	23.39	23.12	0
		3	3	23.15	23.30	23.05	0
		6	0	22.11	22.26	22.26	1
1.4M	16QAM	1	0	22.44	22.67	22.35	1
		1	2	22.34	22.79	22.35	1
		1	5	22.59	22.60	22.42	1
		3	0	22.34	22.43	22.23	1
		3	1	22.25	22.50	22.41	1
		3	3	22.27	22.42	22.08	1
		6	0	21.08	21.55	21.12	2
1.4M	64QAM	1	0	21.16	21.54	21.21	2
		1	2	21.24	21.54	21.21	2
		1	5	21.18	21.34	21.11	2
		3	0	21.11	21.44	21.20	2
		3	1	21.17	21.39	21.14	2
		3	3	21.11	21.37	21.14	2
		6	0	20.07	20.35	20.24	3

LTE Conducted Power (Full)

LTE Band 71

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	24.26	24.09	24.12	0
		1	50	24.23	24.07	24.09	0
		1	99	24.03	24.05	23.90	0
		50	0	23.09	22.81	22.96	1
		50	25	23.07	22.95	22.94	1
		50	50	23.03	22.86	22.98	1
		100	0	23.05	22.97	22.99	1
20M	16QAM	1	0	23.35	22.94	23.23	1
		1	50	23.33	23.13	23.26	1
		1	99	23.30	23.16	23.17	1
		50	0	22.13	23.07	22.02	2
		50	25	22.09	21.96	22.04	2
		50	50	22.04	21.95	21.99	2
		100	0	22.01	21.90	21.88	2
20M	64QAM	1	0	22.38	21.83	22.27	2
		1	50	22.35	22.19	22.20	2
		1	99	22.33	22.14	22.28	2
		50	0	21.04	22.25	20.95	3
		50	25	21.02	20.95	20.91	3
		50	50	21.01	20.86	20.93	3
		100	0	21.01	20.84	20.94	3
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	24.21	24.08	24.04	0
		1	37	24.18	23.99	24.06	0
		1	74	23.96	24.02	23.89	0
		36	0	23.07	22.77	22.92	1
		36	19	23.06	22.92	22.90	1
		36	39	22.93	22.78	22.89	1
		75	0	22.96	22.96	22.90	1
15M	16QAM	1	0	23.33	22.84	23.18	1
		1	37	23.33	23.06	23.20	1
		1	74	23.28	23.15	23.11	1
		36	0	22.05	22.97	21.98	2
		36	19	22.00	21.95	21.98	2
		36	39	21.96	21.95	21.91	2
		75	0	21.93	21.85	21.78	2
15M	64QAM	1	0	22.33	21.77	22.27	2
		1	37	22.25	22.13	22.15	2
		1	74	22.23	22.10	22.23	2
		36	0	21.01	22.24	20.90	3
		36	19	20.95	20.92	20.87	3
		36	39	20.98	20.80	20.89	3
		75	0	20.95	20.74	20.85	3

LTE Conducted Power (Full)

LTE Band 71

BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	24.17	24.07	23.98	0
		1	24	24.16	23.95	23.96	0
		1	49	23.93	23.97	23.84	0
		25	0	23.00	22.77	22.84	1
		25	12	23.06	22.92	22.82	1
		25	25	22.86	22.73	22.89	1
		50	0	22.93	22.88	22.87	1
10M	16QAM	1	0	23.25	22.76	23.17	1
		1	24	23.24	22.96	23.14	1
		1	49	23.28	23.10	23.10	1
		25	0	22.05	22.92	21.98	2
		25	12	21.97	21.89	21.97	2
		25	25	21.86	21.87	21.81	2
		50	0	21.86	21.83	21.74	2
10M	64QAM	1	0	22.30	21.74	22.19	2
		1	24	22.25	22.07	22.05	2
		1	49	22.23	22.07	22.18	2
		25	0	20.98	22.22	20.87	3
		25	12	20.93	20.92	20.86	3
		25	25	20.91	20.75	20.84	3
		50	0	20.93	20.71	20.78	3
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	24.16	23.97	23.90	0
		1	12	24.06	23.85	23.93	0
		1	24	23.88	23.89	23.82	0
		12	0	22.97	22.71	22.77	1
		12	6	22.98	22.92	22.75	1
		12	13	22.85	22.66	22.85	1
		25	0	22.89	22.83	22.85	1
5M	16QAM	1	0	23.23	22.72	23.13	1
		1	12	23.23	22.90	23.08	1
		1	24	23.21	23.01	23.02	1
		12	0	21.97	22.85	21.97	2
		12	6	21.87	21.80	21.91	2
		12	13	21.79	21.80	21.71	2
		25	0	21.78	21.75	21.74	2
5M	64QAM	1	0	22.20	21.68	22.16	2
		1	12	22.22	22.02	21.95	2
		1	24	22.18	22.05	22.10	2
		12	0	20.90	22.18	20.87	3
		12	6	20.90	20.89	20.76	3
		12	13	20.86	20.73	20.81	3
		25	0	20.91	20.70	20.74	3

WCDMA Conducted Power (Reduction)

Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	18.28	18.14	18.44	18.31	18.40	18.24	23.34	23.26	23.31
HSDPA Subtest-1	17.63	17.49	17.79	17.53	17.63	17.47	22.99	22.91	22.96
HSDPA Subtest-2	17.61	17.47	17.77	17.55	17.64	17.49	22.97	22.89	22.94
HSDPA Subtest-3	17.29	17.15	17.45	17.22	17.31	17.16	22.65	22.57	22.62
HSDPA Subtest-4	17.24	17.1	17.41	17.2	17.3	17.14	22.6	22.52	22.57
DC-HSDPA Subtest-1	17.33	17.12	17.39	17.28	17.36	17.26	23.09	23.07	23.06
DC-HSDPA Subtest-2	17.2	17.08	17.57	17.22	17.28	17.21	23.06	23.04	23.03
DC-HSDPA Subtest-3	17.05	16.71	17.22	16.77	16.89	16.88	22.58	22.54	22.52
DC-HSDPA Subtest-4	16.96	16.7	16.96	16.94	17.06	16.8	22.56	22.52	22.51
HSUPA Subtest-1	17.47	17.33	17.63	17.51	17.6	17.45	22.83	22.75	22.8
HSUPA Subtest-2	16.04	15.89	16.19	16.01	16.11	15.96	21.54	21.31	21.36
HSUPA Subtest-3	16.71	16.56	16.86	16.66	16.75	16.6	22.57	21.98	22.03
HSUPA Subtest-4	16	15.85	16.15	16.02	16.12	15.98	21.56	21.27	21.32
HSUPA Subtest-5	17.39	17.25	17.55	17.47	17.57	17.41	22.75	22.67	22.72

LTE Conducted Power (Reduction)

LTE Band 2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	16.47	16.49	16.48	0
		1	50	16.46	16.48	16.47	0
		1	99	16.45	16.47	16.46	0
		50	0	15.46	15.48	15.47	1
		50	25	15.43	15.45	15.44	1
		50	50	15.42	15.44	15.43	1
		100	0	15.40	15.42	15.41	1
20M	16QAM	1	0	15.35	15.37	15.36	1
		1	50	15.34	15.36	15.35	1
		1	99	15.33	15.35	15.34	1
		50	0	14.40	14.43	14.41	2
		50	25	14.38	14.41	14.39	2
		50	50	14.37	14.40	14.38	2
		100	0	14.35	14.38	14.36	2
20M	64QAM	1	0	14.40	14.43	14.41	2
		1	50	14.39	14.42	14.40	2
		1	99	14.38	14.41	14.39	2
		50	0	13.17	13.21	13.19	3
		50	25	13.45	13.48	13.47	3
		50	50	13.40	13.43	13.42	3
		100	0	13.46	13.49	13.48	3
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	16.44	16.46	16.45	0
		1	37	16.43	16.45	16.44	0
		1	74	16.42	16.44	16.43	0
		36	0	15.43	15.45	15.44	1
		36	19	15.40	15.42	15.41	1
		36	39	15.39	15.41	15.40	1
		75	0	15.37	15.39	15.38	1
15M	16QAM	1	0	15.32	15.34	15.33	1
		1	37	15.31	15.33	15.32	1
		1	74	15.30	15.32	15.31	1
		36	0	14.37	14.40	14.38	2
		36	19	14.35	14.38	14.36	2
		36	39	14.34	14.37	14.35	2
		75	0	14.32	14.35	14.33	2
15M	64QAM	1	0	14.37	14.40	14.38	2
		1	37	14.36	14.39	14.37	2
		1	74	14.35	14.38	14.36	2
		36	0	13.14	13.18	13.16	3
		36	19	13.42	13.45	13.44	3
		36	39	13.37	13.40	13.39	3
		75	0	13.43	13.46	13.45	3

LTE Conducted Power (Reduction)

LTE Band 2

BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	16.42	16.44	16.43	0
		1	24	16.41	16.43	16.42	0
		1	49	16.40	16.42	16.41	0
		25	0	15.41	15.43	15.42	1
		25	12	15.38	15.40	15.39	1
		25	25	15.37	15.39	15.38	1
		50	0	15.35	15.37	15.36	1
10M	16QAM	1	0	15.30	15.32	15.31	1
		1	24	15.29	15.31	15.30	1
		1	49	15.28	15.30	15.29	1
		25	0	14.35	14.38	14.36	2
		25	12	14.33	14.36	14.34	2
		25	25	14.32	14.35	14.33	2
		50	0	14.30	14.33	14.31	2
10M	64QAM	1	0	14.35	14.38	14.36	2
		1	24	14.34	14.37	14.35	2
		1	49	14.33	14.36	14.34	2
		25	0	13.12	13.16	13.14	3
		25	12	13.40	13.43	13.42	3
		25	25	13.35	13.38	13.37	3
		50	0	13.41	13.44	13.43	3
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	16.40	16.38	16.39	0
		1	12	16.39	16.37	16.38	0
		1	24	16.38	16.36	16.37	0
		12	0	15.39	15.37	15.38	1
		12	6	15.36	15.34	15.35	1
		12	13	15.35	15.33	15.34	1
		25	0	15.33	15.31	15.32	1
5M	16QAM	1	0	15.28	15.26	15.27	1
		1	12	15.27	15.25	15.26	1
		1	24	15.26	15.24	15.25	1
		12	0	14.34	14.31	14.32	2
		12	6	14.32	14.29	14.30	2
		12	13	14.31	14.28	14.29	2
		25	0	14.29	14.26	14.27	2
5M	64QAM	1	0	14.34	14.31	14.32	2
		1	12	14.33	14.30	14.31	2
		1	24	14.32	14.29	14.30	2
		12	0	13.12	13.08	13.10	3
		12	6	13.39	13.36	13.38	3
		12	13	13.34	13.31	13.33	3
		25	0	13.40	13.37	13.39	3

LTE Conducted Power (Reduction)

LTE Band 2

BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	16.34	16.36	16.35	0
		1	7	16.33	16.35	16.34	0
		1	14	16.32	16.34	16.33	0
		8	0	15.33	15.35	15.34	1
		8	3	15.30	15.32	15.31	1
		8	7	15.29	15.31	15.30	1
		15	0	15.27	15.29	15.28	1
3M	16QAM	1	0	15.22	15.24	15.23	1
		1	7	15.21	15.23	15.22	1
		1	14	15.20	15.22	15.21	1
		8	0	14.27	14.30	14.28	2
		8	3	14.25	14.28	14.26	2
		8	7	14.24	14.27	14.25	2
		15	0	14.22	14.25	14.23	2
3M	64QAM	1	0	14.27	14.30	14.28	2
		1	7	14.26	14.29	14.27	2
		1	14	14.25	14.28	14.26	2
		8	0	13.04	13.08	13.06	3
		8	3	13.32	13.35	13.34	3
		8	7	13.27	13.30	13.29	3
		15	0	13.33	13.36	13.35	3
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		185-0.7	1880	1909.3	
1.4M	QPSK	1	0	16.32	16.30	16.31	0
		1	2	16.31	16.29	16.30	0
		1	5	16.30	16.28	16.29	0
		3	0	16.21	16.19	16.20	0
		3	1	16.18	16.16	16.17	0
		3	3	16.17	16.15	16.16	0
		6	0	15.25	15.23	15.24	1
1.4M	16QAM	1	0	15.20	15.18	15.19	1
		1	2	15.19	15.17	15.18	1
		1	5	15.18	15.16	15.17	1
		3	0	14.26	14.23	14.24	1
		3	1	14.24	14.21	14.22	1
		3	3	14.23	14.20	14.21	1
		6	0	14.21	14.18	14.19	2
1.4M	64QAM	1	0	14.26	14.23	14.24	2
		1	2	14.25	14.22	14.23	2
		1	5	14.24	14.21	14.22	2
		3	0	13.04	13.00	13.02	2
		3	1	13.31	13.28	13.30	2
		3	3	13.26	13.23	13.25	2
		6	0	13.32	13.29	13.31	3

LTE Conducted Power (Reduction)

LTE Band 4

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	15.91	15.94	15.89	0
		1	50	15.9	15.93	15.87	0
		1	99	15.86	15.89	15.83	0
		50	0	14.96	14.99	14.93	1
		50	25	14.94	14.97	14.91	1
		50	50	14.92	14.95	14.89	1
		100	0	14.95	14.98	14.92	1
20M	16QAM	1	0	14.91	14.84	14.77	1
		1	50	14.9	14.83	14.96	1
		1	99	14.86	14.79	14.92	1
		50	0	13.99	13.93	13.96	2
		50	25	13.96	13.91	13.94	2
		50	50	13.92	13.89	13.92	2
		100	0	13.98	13.92	13.95	2
20M	64QAM	1	0	13.76	13.69	13.82	2
		1	50	13.75	13.68	13.81	2
		1	99	13.71	13.64	13.77	2
		50	0	12.92	12.85	12.98	3
		50	25	12.9	12.83	12.96	3
		50	50	12.88	12.81	12.94	3
		100	0	12.91	12.84	12.97	3
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	15.86	15.89	15.83	0
		1	37	15.82	15.83	15.81	0
		1	74	15.71	15.74	15.77	0
		36	0	14.91	14.94	15.72	1
		36	19	14.89	14.92	14.85	1
		36	39	14.87	14.84	14.83	1
		75	0	14.91	14.88	14.86	1
15M	16QAM	1	0	14.88	14.81	14.94	1
		1	37	14.87	14.80	14.93	1
		1	74	14.83	14.76	14.89	1
		36	0	13.97	13.90	14.03	2
		36	19	13.95	13.88	14.01	2
		36	39	13.93	13.86	13.99	2
		75	0	13.96	13.89	14.02	2
15M	64QAM	1	0	13.73	13.66	13.79	2
		1	37	13.72	13.65	13.78	2
		1	74	13.68	13.61	13.74	2
		36	0	12.89	12.82	12.95	3
		36	19	12.87	12.80	12.93	3
		36	39	12.85	12.78	12.91	3
		75	0	12.88	12.81	12.94	3

LTE Conducted Power (Reduction)

LTE Band 4

BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	15.84	15.87	15.81	0
		1	24	15.76	15.81	15.79	0
		1	49	15.69	15.76	15.75	0
		25	0	14.88	14.92	14.85	1
		25	12	14.83	14.85	14.83	1
		25	25	14.76	14.83	14.81	1
		50	0	14.83	14.91	14.84	1
10M	16QAM	1	0	14.86	14.79	14.92	1
		1	24	14.85	14.78	14.91	1
		1	49	14.81	14.74	14.87	1
		25	0	13.95	13.88	14.01	2
		25	12	13.93	13.86	13.99	2
		25	25	13.91	13.84	13.97	2
		50	0	13.94	13.87	14.00	2
10M	64QAM	1	0	13.71	13.64	13.77	2
		1	24	13.70	13.63	13.76	2
		1	49	13.66	13.59	13.72	2
		25	0	12.87	12.80	12.93	3
		25	12	12.85	12.78	12.91	3
		25	25	12.83	12.76	12.89	3
		50	0	12.86	12.79	12.92	3
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	15.50	15.43	15.57	0
		1	12	15.49	15.42	15.55	0
		1	24	15.45	15.38	15.51	0
		12	0	14.55	14.48	14.61	1
		12	6	14.53	14.46	14.59	1
		12	13	14.51	14.44	14.57	1
		25	0	14.54	14.47	14.60	1
5M	16QAM	1	0	14.82	14.75	14.88	1
		1	12	14.81	14.74	14.87	1
		1	24	14.77	14.70	14.83	1
		12	0	13.91	13.84	13.97	2
		12	6	13.89	13.82	13.95	2
		12	13	13.87	13.80	13.93	2
		25	0	13.90	13.83	13.96	2
5M	64QAM	1	0	13.67	13.60	13.73	2
		1	12	13.66	13.59	13.72	2
		1	24	13.62	13.55	13.68	2
		12	0	12.83	12.76	12.89	3
		12	6	12.81	12.74	12.87	3
		12	13	12.79	12.72	12.85	3
		25	0	12.82	12.75	12.88	3

LTE Conducted Power (Reduction)

LTE Band 4

BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	15.46	15.39	15.53	0
		1	7	15.45	15.38	15.51	0
		1	14	15.41	15.34	15.47	0
		8	0	14.51	14.44	14.57	1
		8	3	14.49	14.42	14.55	1
		8	7	14.47	14.40	14.53	1
		15	0	14.50	14.43	14.56	1
3M	16QAM	1	0	14.78	14.71	14.84	1
		1	7	14.77	14.70	14.83	1
		1	14	14.73	14.66	14.79	1
		8	0	13.87	13.80	13.93	2
		8	3	13.85	13.78	13.91	2
		8	7	13.83	13.76	13.89	2
		15	0	13.86	13.79	13.92	2
3M	64QAM	1	0	13.63	13.56	13.69	2
		1	7	13.62	13.55	13.68	2
		1	14	13.58	13.51	13.64	2
		8	0	12.79	12.72	12.85	3
		8	3	12.77	12.70	12.83	3
		8	7	12.75	12.68	12.81	3
		15	0	12.78	12.71	12.84	3
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		171-0.7	1732.5	1754.3	
1.4M	QPSK	1	0	15.42	15.35	15.49	0
		1	2	15.41	15.34	15.47	0
		1	5	15.37	15.30	15.43	0
		3	0	15.37	15.30	15.43	0
		3	1	15.35	15.28	15.41	0
		3	3	15.33	15.26	15.39	0
		6	0	14.46	14.39	14.52	1
1.4M	16QAM	1	0	14.74	14.67	14.80	1
		1	2	14.73	14.66	14.79	1
		1	5	14.69	14.62	14.75	1
		3	0	13.83	13.76	13.89	1
		3	1	13.81	13.74	13.87	1
		3	3	13.79	13.72	13.85	1
		6	0	13.82	13.75	13.88	2
1.4M	64QAM	1	0	13.59	13.52	13.65	2
		1	2	13.58	13.51	13.64	2
		1	5	13.54	13.47	13.60	2
		3	0	12.75	12.68	12.81	2
		3	1	12.73	12.66	12.79	2
		3	3	12.71	12.64	12.77	2
		6	0	12.74	12.67	12.80	3

LTE Conducted Power (Reduction)

LTE Band 5

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	21.61	21.58	21.64	0
		1	24	21.55	21.53	21.59	0
		1	49	21.43	21.41	21.47	0
		25	0	20.59	20.57	20.63	1
		25	12	20.57	20.55	20.61	1
		25	25	20.53	20.51	20.57	1
		50	0	20.56	20.54	20.6	1
10M	16QAM	1	0	20.88	20.86	20.92	1
		1	24	20.83	20.81	20.87	1
		1	49	20.71	20.69	20.75	1
		25	0	19.9	19.88	19.94	2
		25	12	19.88	19.86	19.92	2
		25	25	19.84	19.82	19.88	2
		50	0	19.87	19.85	19.91	2
10M	64QAM	1	0	19.71	19.70	19.76	2
		1	24	19.66	19.65	19.72	2
		1	49	19.55	19.54	19.61	2
		25	0	18.78	18.77	18.84	3
		25	12	18.77	18.76	18.83	3
		25	25	18.73	18.72	18.79	3
		50	0	18.76	18.75	18.82	3
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	21.52	21.49	21.55	0
		1	12	21.46	21.44	21.50	0
		1	24	21.34	21.32	21.38	0
		12	0	20.50	20.48	20.54	1
		12	6	20.48	20.46	20.52	1
		12	13	20.44	20.42	20.48	1
		25	0	20.47	20.45	20.51	1
5M	16QAM	1	0	20.79	20.77	20.83	1
		1	12	20.74	20.72	20.78	1
		1	24	20.62	20.60	20.66	1
		12	0	19.81	19.79	19.85	2
		12	6	19.79	19.77	19.83	2
		12	13	19.75	19.73	19.79	2
		25	0	19.78	19.76	19.82	2
5M	64QAM	1	0	19.62	19.61	19.67	2
		1	12	19.57	19.56	19.63	2
		1	24	19.46	19.45	19.52	2
		12	0	18.69	18.68	18.75	3
		12	6	18.68	18.67	18.74	3
		12	13	18.64	18.63	18.70	3
		25	0	18.67	18.66	18.73	3

LTE Conducted Power (Reduction)

LTE Band 5

BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	21.48	21.45	21.51	0
		1	7	21.42	21.40	21.46	0
		1	14	21.30	21.28	21.34	0
		8	0	20.46	20.44	20.50	1
		8	3	20.44	20.42	20.48	1
		8	7	20.40	20.38	20.44	1
		15	0	20.43	20.41	20.47	1
3M	16QAM	1	0	20.75	20.73	20.79	1
		1	7	20.70	20.68	20.74	1
		1	14	20.58	20.56	20.62	1
		8	0	19.77	19.75	19.81	2
		8	3	19.75	19.73	19.79	2
		8	7	19.71	19.69	19.75	2
		15	0	19.74	19.72	19.78	2
3M	64QAM	1	0	19.58	19.57	19.63	2
		1	7	19.53	19.52	19.59	2
		1	14	19.42	19.41	19.48	2
		8	0	18.65	18.64	18.71	3
		8	3	18.64	18.63	18.70	3
		8	7	18.60	18.59	18.66	3
		15	0	18.63	18.62	18.69	3
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	21.44	21.41	21.47	0
		1	2	21.38	21.36	21.42	0
		1	5	21.26	21.24	21.30	0
		3	0	21.32	21.30	21.36	0
		3	1	21.30	21.28	21.34	0
		3	3	21.26	21.24	21.30	0
		6	0	20.39	20.37	20.43	1
1.4M	16QAM	1	0	20.71	20.69	20.75	1
		1	2	20.66	20.64	20.70	1
		1	5	20.54	20.52	20.58	1
		3	0	19.73	19.71	19.77	1
		3	1	19.71	19.69	19.75	1
		3	3	19.67	19.65	19.71	1
		6	0	19.70	19.68	19.74	2
1.4M	64QAM	1	0	19.54	19.53	19.59	2
		1	2	19.49	19.48	19.55	2
		1	5	19.38	19.37	19.44	2
		3	0	18.61	18.60	18.67	2
		3	1	18.60	18.59	18.66	2
		3	3	18.56	18.55	18.62	2
		6	0	18.59	18.58	18.65	3

LTE Conducted Power (Reduction)

LTE Band 7

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	18.88	18.99	18.97	0
		1	50	18.85	18.95	18.93	0
		1	99	18.78	18.91	18.88	0
		50	0	17.5	17.53	17.42	1
		50	25	17.48	17.51	17.4	1
		50	50	17.44	17.47	17.36	1
		100	0	17.45	17.48	17.37	1
20M	16QAM	1	0	17.8	17.83	17.72	1
		1	50	17.75	17.78	17.67	1
		1	99	17.73	17.76	17.65	1
		50	0	16.88	16.91	16.8	2
		50	25	16.86	16.89	16.78	2
		50	50	16.82	16.87	16.74	2
		100	0	16.83	16.86	16.75	2
20M	64QAM	1	0	16.84	16.85	16.76	2
		1	50	16.79	16.82	16.7	2
		1	99	16.77	16.79	16.68	2
		50	0	15.78	15.96	15.84	3
		50	25	15.76	15.94	15.82	3
		50	50	15.73	15.92	15.8	3
		100	0	15.73	15.91	15.79	3
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	18.86	18.94	18.89	0
		1	37	18.81	18.89	18.84	0
		1	74	18.79	18.87	18.81	0
		36	0	17.21	17.24	17.33	1
		36	19	17.19	17.22	17.31	1
		36	39	17.15	17.18	17.27	1
		75	0	17.16	17.19	17.28	1
15M	16QAM	1	0	17.51	17.54	17.63	1
		1	37	17.46	17.49	17.58	1
		1	74	17.44	17.47	17.56	1
		36	0	16.59	16.62	16.71	2
		36	19	16.57	16.60	16.69	2
		36	39	16.53	16.56	16.65	2
		75	0	16.54	16.57	16.66	2
15M	64QAM	1	0	16.35	16.38	16.47	2
		1	37	16.30	16.33	16.41	2
		1	74	16.28	16.31	16.39	2
		36	0	15.49	15.52	15.60	3
		36	19	15.47	15.50	15.58	3
		36	39	15.46	15.48	15.57	3
		75	0	15.44	15.47	15.55	3

LTE Conducted Power (Reduction)

LTE Band 7

BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	18.85	18.89	18.86	0
		1	24	18.73	18.83	18.84	0
		1	49	18.75	18.84	18.77	0
		25	0	17.15	17.16	17.23	1
		25	12	17.14	17.13	17.26	1
		25	25	17.07	17.12	17.26	1
		50	0	17.08	17.16	17.19	1
10M	16QAM	1	0	17.48	17.54	17.62	1
		1	24	17.36	17.41	17.51	1
		1	49	17.38	17.37	17.46	1
		25	0	16.55	16.58	16.69	2
		25	12	16.49	16.50	16.67	2
		25	25	16.50	16.48	16.56	2
		50	0	16.44	16.49	16.62	2
10M	64QAM	1	0	16.28	16.33	16.40	2
		1	24	16.25	16.28	16.39	2
		1	49	16.21	16.21	16.38	2
		25	0	15.44	15.46	15.58	3
		25	12	15.45	15.48	15.48	3
		25	25	15.41	15.47	15.57	3
		50	0	15.36	15.43	15.51	3
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	18.75	18.84	18.77	0
		1	12	18.67	18.75	18.75	0
		1	24	18.72	18.74	18.68	0
		12	0	17.13	17.10	17.15	1
		12	6	17.08	17.07	17.16	1
		12	13	16.98	17.07	17.25	1
		25	0	16.98	17.06	17.12	1
5M	16QAM	1	0	17.38	17.44	17.54	1
		1	12	17.30	17.36	17.41	1
		1	24	17.29	17.27	17.36	1
		12	0	16.55	16.49	16.69	2
		12	6	16.48	16.47	16.66	2
		12	13	16.44	16.42	16.54	2
		25	0	16.34	16.40	16.52	2
5M	64QAM	1	0	16.23	16.28	16.35	2
		1	12	16.18	16.19	16.32	2
		1	24	16.12	16.14	16.32	2
		12	0	15.43	15.38	15.51	3
		12	6	15.35	15.40	15.38	3
		12	13	15.33	15.46	15.48	3
		25	0	15.32	15.33	15.47	3

LTE Conducted Power (Reduction)

LTE Band 12

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	21.43	21.48	21.49	0
		1	24	21.41	21.45	21.46	0
		1	49	21.36	21.39	21.45	0
		25	0	20.38	20.39	20.48	1
		25	12	20.42	20.41	20.45	1
		25	25	20.43	20.37	20.43	1
		50	0	20.32	20.31	20.41	1
10M	16QAM	1	0	20.46	20.38	20.48	1
		1	24	20.38	20.43	20.47	1
		1	49	20.35	20.42	20.43	1
		25	0	19.42	19.38	19.43	2
		25	12	19.39	19.3	19.39	2
		25	25	19.29	19.35	19.36	2
		50	0	19.32	19.26	19.35	2
10M	64QAM	1	0	19.23	19.27	19.31	2
		1	24	19.25	19.18	19.28	2
		1	49	19.21	19.26	19.26	2
		25	0	18.43	18.4	18.46	3
		25	12	18.42	18.4	18.45	3
		25	25	18.4	18.41	18.43	3
		50	0	18.38	18.3	18.39	3
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	21.34	21.42	21.40	0
		1	12	21.41	21.43	21.44	0
		1	24	21.28	21.29	21.40	0
		12	0	20.31	20.30	20.38	1
		12	6	20.39	20.33	20.45	1
		12	13	20.40	20.34	20.33	1
		25	0	20.22	20.28	20.41	1
5M	16QAM	1	0	20.37	20.30	20.45	1
		1	12	20.35	20.36	20.37	1
		1	24	20.35	20.39	20.35	1
		12	0	19.39	19.33	19.42	2
		12	6	19.34	19.28	19.36	2
		12	13	19.27	19.34	19.30	2
		25	0	19.24	19.16	19.33	2
5M	64QAM	1	0	19.16	19.18	19.28	2
		1	12	19.23	19.18	19.26	2
		1	24	19.18	19.16	19.16	2
		12	0	18.36	18.33	18.36	3
		12	6	18.42	18.32	18.44	3
		12	13	18.31	18.31	18.35	3
		25	0	18.32	18.23	18.31	3

LTE Conducted Power (Reduction)

LTE Band 12

BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		70-0.5	707.5	714.5	
3M	QPSK	1	0	21.33	21.35	21.32	0
		1	7	21.33	21.36	21.40	0
		1	14	21.27	21.26	21.37	0
		8	0	20.28	20.30	20.36	1
		8	3	20.37	20.30	20.40	1
		8	7	20.30	20.28	20.30	1
		15	0	20.22	20.23	20.35	1
3M	16QAM	1	0	20.33	20.22	20.45	1
		1	7	20.31	20.26	20.36	1
		1	14	20.26	20.35	20.27	1
		8	0	19.33	19.32	19.40	2
		8	3	19.26	19.21	19.33	2
		8	7	19.23	19.30	19.21	2
		15	0	19.23	19.14	19.26	2
3M	64QAM	1	0	19.07	19.13	19.21	2
		1	7	19.19	19.15	19.25	2
		1	14	19.18	19.07	19.10	2
		8	0	18.30	18.30	18.36	3
		8	3	18.33	18.27	18.34	3
		8	7	18.25	18.31	18.33	3
		15	0	18.25	18.23	18.27	3
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	21.25	21.34	21.27	0
		1	2	21.27	21.27	21.39	0
		1	5	21.25	21.21	21.36	0
		3	0	20.25	20.30	20.26	0
		3	1	20.27	20.21	20.32	0
		3	3	20.21	20.25	20.21	0
		6	0	20.18	20.21	20.25	1
1.4M	16QAM	1	0	20.33	20.22	20.43	1
		1	2	20.31	20.18	20.29	1
		1	5	20.25	20.31	20.22	1
		3	0	19.31	19.31	19.38	1
		3	1	19.19	19.19	19.26	1
		3	3	19.15	19.27	19.13	1
		6	0	19.22	19.09	19.17	2
1.4M	64QAM	1	0	19.00	19.03	19.15	2
		1	2	19.09	19.11	19.25	2
		1	5	19.11	18.99	19.07	2
		3	0	18.30	18.21	18.33	2
		3	1	18.28	18.24	18.26	2
		3	3	18.20	18.22	18.28	2
		6	0	18.23	18.18	18.25	3

LTE Conducted Power (Reduction)

LTE Band 13

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		20.49		0
		1	24		20.45		0
		1	49		20.41		0
		25	0		19.48		1
		25	12		19.47		1
		25	25		19.45		1
		50	0		19.49		1
10M	16QAM	1	0		19.45		1
		1	24		19.41		1
		1	49		19.43		1
		25	0		18.49		2
		25	12		18.46		2
		25	25		18.45		2
		50	0		18.41		2
10M	64QAM	1	0		18.39		2
		1	24		18.36		2
		1	49		18.38		2
		25	0		17.45		3
		25	12		17.43		3
		25	25		17.41		3
		50	0		17.44		3
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	20.22	20.31	20.25	0
		1	12	20.21	20.30	20.24	0
		1	24	20.17	20.26	20.20	0
		12	0	19.36	19.45	19.39	1
		12	6	19.34	19.43	19.37	1
		12	13	19.29	19.38	19.32	1
		25	0	19.34	19.43	19.37	1
5M	16QAM	1	0	19.28	19.37	19.31	1
		1	12	19.27	19.36	19.30	1
		1	24	19.23	19.32	19.26	1
		12	0	18.35	18.44	18.38	2
		12	6	18.34	18.43	18.37	2
		12	13	18.29	18.38	18.32	2
		25	0	18.34	18.43	18.37	2
5M	64QAM	1	0	18.29	18.38	18.32	2
		1	12	18.28	18.37	18.31	2
		1	24	18.24	18.33	18.27	2
		12	0	17.40	17.49	17.43	3
		12	6	17.38	17.47	17.41	3
		12	13	17.33	17.42	17.36	3
		25	0	17.38	17.47	17.41	3

LTE Conducted Power (Reduction)

LTE Band 14

BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		20.49		0
		1	24		20.48		0
		1	49		20.44		0
		25	0		19.48		1
		25	12		19.46		1
		25	25		19.41		1
		50	0		19.46		1
10M	16QAM	1	0		19.40		1
		1	24		19.39		1
		1	49		19.35		1
		25	0		18.47		2
		25	12		18.46		2
		25	25		18.41		2
		50	0		18.46		2
10M	64QAM	1	0		18.41		2
		1	24		18.4		2
		1	49		18.36		2
		25	0		17.48		3
		25	12		17.46		3
		25	25		17.45		3
		50	0		17.47		3
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	20.35	20.43	20.38	0
		1	12	20.31	20.39	20.34	0
		1	24	20.27	20.35	20.30	0
		12	0	19.45	19.49	19.48	1
		12	6	19.41	19.49	19.44	1
		12	13	19.39	19.47	19.42	1
		25	0	19.41	19.49	19.44	1
5M	16QAM	1	0	19.39	19.48	19.46	1
		1	12	19.35	19.43	19.39	1
		1	24	19.38	19.49	19.34	1
		12	0	18.42	18.50	18.45	2
		12	6	18.38	18.46	18.41	2
		12	13	18.37	18.45	18.40	2
		25	0	18.38	18.46	18.41	2
5M	64QAM	1	0	18.36	18.44	18.39	2
		1	12	18.32	18.40	18.35	2
		1	24	18.28	18.36	18.31	2
		12	0	17.44	17.49	17.47	3
		12	6	17.41	17.46	17.44	3
		12	13	17.39	17.43	17.42	3
		25	0	17.41	17.44	17.44	3

LTE Conducted Power (Reduction)

LTE Band 25

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	16.49	16.44	16.46	0
		1	50	16.47	16.34	16.39	0
		1	99	16.41	16.35	16.41	0
		50	0	15.46	15.35	15.39	1
		50	25	15.43	15.35	15.37	1
		50	50	15.45	15.44	15.45	1
		100	0	15.48	15.31	15.41	1
20M	16QAM	1	0	15.46	15.31	15.37	1
		1	50	15.44	15.35	15.39	1
		1	99	15.42	15.32	15.32	1
		50	0	14.39	14.35	14.36	2
		50	25	14.38	14.35	14.38	2
		50	50	14.36	14.3	14.31	2
		100	0	14.41	14.36	14.41	2
20M	64QAM	1	0	14.43	14.35	14.37	2
		1	50	14.41	14.32	14.36	2
		1	99	14.39	14.31	14.31	2
		50	0	13.36	13.25	13.34	3
		50	25	13.35	13.24	13.29	3
		50	50	13.33	13.17	13.26	3
		100	0	13.38	13.28	13.35	3
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	16.46	16.42	16.34	0
		1	37	16.44	16.41	16.33	0
		1	74	16.42	16.39	16.31	0
		36	0	15.39	15.36	15.28	1
		36	19	15.38	15.35	15.27	1
		36	39	15.36	15.33	15.25	1
		75	0	15.41	15.38	15.30	1
15M	16QAM	1	0	15.40	15.37	15.29	1
		1	37	15.39	15.36	15.28	1
		1	74	15.37	15.34	15.26	1
		36	0	14.40	14.37	14.29	2
		36	19	14.39	14.36	14.29	2
		36	39	14.37	14.34	14.27	2
		75	0	14.42	14.39	14.31	2
15M	64QAM	1	0	14.29	14.26	14.19	2
		1	37	14.28	14.25	14.18	2
		1	74	14.26	14.23	14.16	2
		36	0	13.36	13.33	13.26	3
		36	19	13.36	13.33	13.26	3
		36	39	13.34	13.31	13.24	3
		75	0	13.38	13.35	13.28	3

LTE Conducted Power (Reduction)

LTE Band 25

BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	16.46	16.41	16.38	0
		1	24	16.43	16.24	16.31	0
		1	49	16.39	16.27	16.39	0
		25	0	15.43	15.34	15.36	1
		25	12	15.41	15.26	15.31	1
		25	25	15.40	15.36	15.37	1
		50	0	15.39	15.23	15.32	1
10M	16QAM	1	0	15.36	15.25	15.29	1
		1	24	15.42	15.28	15.38	1
		1	49	15.38	15.32	15.28	1
		25	0	14.35	14.25	14.29	2
		25	12	14.36	14.26	14.38	2
		25	25	14.26	14.25	14.26	2
		50	0	14.34	14.33	14.31	2
10M	64QAM	1	0	14.38	14.28	14.35	2
		1	24	14.38	14.27	14.26	2
		1	49	14.31	14.24	14.27	2
		25	0	13.35	13.23	13.31	3
		25	12	13.32	13.22	13.19	3
		25	25	13.29	13.12	13.19	3
		50	0	13.34	13.20	13.31	3
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	16.42	16.39	16.36	0
		1	12	16.40	16.21	16.23	0
		1	24	16.36	16.18	16.36	0
		12	0	15.36	15.30	15.26	1
		12	6	15.38	15.22	15.28	1
		12	13	15.33	15.27	15.30	1
		25	0	15.34	15.22	15.29	1
5M	16QAM	1	0	15.28	15.19	15.23	1
		1	12	15.32	15.26	15.31	1
		1	24	15.31	15.24	15.28	1
		12	0	14.31	14.23	14.22	2
		12	6	14.36	14.22	14.37	2
		12	13	14.20	14.16	14.16	2
		25	0	14.29	14.25	14.29	2
5M	64QAM	1	0	14.35	14.21	14.30	2
		1	12	14.30	14.19	14.20	2
		1	24	14.27	14.19	14.17	2
		12	0	13.29	13.19	13.24	3
		12	6	13.32	13.14	13.12	3
		12	13	13.27	13.05	13.09	3
		25	0	13.27	13.20	13.28	3

LTE Conducted Power (Reduction)

LTE Band 25

BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	16.37	16.32	16.35	0
		1	7	16.32	16.12	16.18	0
		1	14	16.35	16.15	16.28	0
		8	0	15.33	15.30	15.24	1
		8	3	15.36	15.15	15.18	1
		8	7	15.31	15.23	15.30	1
		15	0	15.33	15.14	15.24	1
3M	16QAM	1	0	15.25	15.09	15.19	1
		1	7	15.31	15.25	15.24	1
		1	14	15.23	15.23	15.21	1
		8	0	14.23	14.22	14.21	2
		8	3	14.35	14.22	14.37	2
		8	7	14.12	14.13	14.07	2
		15	0	14.26	14.18	14.20	2
3M	64QAM	1	0	14.32	14.19	14.21	2
		1	7	14.23	14.14	14.14	2
		1	14	14.27	14.12	14.17	2
		8	0	13.28	13.11	13.22	3
		8	3	13.27	13.05	13.07	3
		8	7	13.17	12.96	13.09	3
		15	0	13.26	13.18	13.21	3
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		185-0.7	1882.5	1914.3	
1.4M	QPSK	1	0	16.36	16.26	16.25	0
		1	2	16.29	16.06	16.11	0
		1	5	16.25	16.11	16.23	0
		3	0	15.30	15.20	15.22	0
		3	1	15.36	15.13	15.10	0
		3	3	15.26	15.13	15.28	0
		6	0	15.31	15.08	15.18	1
1.4M	16QAM	1	0	15.25	15.03	15.17	1
		1	2	15.21	15.23	15.19	1
		1	5	15.17	15.22	15.11	1
		3	0	14.15	14.13	14.21	1
		3	1	14.25	14.18	14.33	1
		3	3	14.10	14.06	14.05	1
		6	0	14.19	14.18	14.12	2
1.4M	64QAM	1	0	14.26	14.09	14.14	2
		1	2	14.17	14.10	14.10	2
		1	5	14.26	14.03	14.15	2
		3	0	13.21	13.08	13.17	2
		3	1	13.22	13.01	13.02	2
		3	3	13.08	12.94	13.07	2
		6	0	13.18	13.18	13.21	3

LTE Conducted Power (Reduction)

LTE Band 26

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	21.88	21.94	21.82	0
		1	37	21.87	21.89	21.81	0
		1	74	21.78	21.85	21.79	0
		36	0	20.42	20.78	20.4	1
		36	19	20.41	20.73	20.37	1
		36	39	20.34	20.68	20.33	1
		75	0	20.4	20.73	20.45	1
15M	16QAM	1	0	20.43	20.68	20.44	1
		1	37	20.4	20.66	20.4	1
		1	74	20.3	20.61	20.27	1
		36	0	19.83	19.71	19.82	2
		36	19	19.72	19.66	19.82	2
		36	39	19.72	19.63	19.75	2
		75	0	19.67	19.61	19.73	2
15M	64QAM	1	0	19.67	19.58	19.63	2
		1	37	19.71	19.53	19.66	2
		1	74	19.56	19.51	19.65	2
		36	0	18.77	18.82	18.79	3
		36	19	18.76	18.75	18.69	3
		36	39	18.67	18.71	18.66	3
		75	0	18.73	18.74	18.79	3
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	21.82	21.87	21.72	0
		1	24	21.79	21.84	21.77	0
		1	49	21.68	21.81	21.79	0
		25	0	20.33	20.43	20.30	1
		25	12	20.39	20.39	20.31	1
		25	25	20.30	20.41	20.27	1
		50	0	20.38	20.38	20.35	1
10M	16QAM	1	0	20.33	20.41	20.34	1
		1	24	20.40	20.34	20.32	1
		1	49	20.26	20.27	20.22	1
		25	0	19.78	19.88	19.73	2
		25	12	19.72	19.81	19.79	2
		25	25	19.68	19.72	19.68	2
		50	0	19.64	19.67	19.65	2
10M	64QAM	1	0	19.57	19.67	19.53	2
		1	24	19.62	19.66	19.59	2
		1	49	19.50	19.60	19.64	2
		25	0	18.75	18.78	18.79	3
		25	12	18.66	18.69	18.64	3
		25	25	18.64	18.65	18.64	3
		50	0	18.72	18.76	18.72	3

LTE Conducted Power (Reduction)

LTE Band 26

BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	21.79	21.78	21.66	0
		1	12	21.75	21.83	21.72	0
		1	24	21.66	21.74	21.78	0
		12	0	20.27	20.43	20.25	1
		12	6	20.29	20.39	20.23	1
		12	13	20.22	20.33	20.19	1
		25	0	20.36	20.37	20.26	1
5M	16QAM	1	0	20.28	20.39	20.32	1
		1	12	20.37	20.25	20.30	1
		1	24	20.22	20.27	20.20	1
		12	0	19.70	19.82	19.68	2
		12	6	19.71	19.79	19.74	2
		12	13	19.63	19.66	19.67	2
		25	0	19.60	19.65	19.62	2
5M	64QAM	1	0	19.56	19.62	19.48	2
		1	12	19.55	19.64	19.58	2
		1	24	19.44	19.60	19.64	2
		12	0	18.71	18.68	18.74	3
		12	6	18.62	18.69	18.64	3
		12	13	18.59	18.64	18.64	3
		25	0	18.70	18.74	18.65	3
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	21.75	21.73	21.62	0
		1	7	21.67	21.78	21.64	0
		1	14	21.60	21.66	21.74	0
		8	0	20.20	20.40	20.19	1
		8	3	20.21	20.31	20.20	1
		8	7	20.20	20.31	20.10	1
		15	0	20.36	20.35	20.21	1
3M	16QAM	1	0	20.19	20.38	20.26	1
		1	7	20.32	20.17	20.29	1
		1	14	20.16	20.23	20.16	1
		8	0	19.66	19.77	19.62	2
		8	3	19.63	19.69	19.65	2
		8	7	19.60	19.56	19.67	2
		15	0	19.59	19.58	19.55	2
3M	64QAM	1	0	19.51	19.57	19.46	2
		1	7	19.49	19.63	19.52	2
		1	14	19.44	19.52	19.57	2
		8	0	18.69	18.64	18.65	3
		8	3	18.52	18.67	18.56	3
		8	7	18.55	18.58	18.63	3
		15	0	18.63	18.69	18.63	3

LTE Conducted Power (Reduction)

LTE Band 26

BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	21.73	21.69	21.56	0
		1	2	21.62	21.68	21.55	0
		1	5	21.50	21.66	21.73	0
		3	0	20.11	20.35	20.09	0
		3	1	20.17	20.27	20.15	0
		3	3	20.15	20.23	20.02	0
		6	0	20.33	20.28	20.15	1
1.4M	16QAM	1	0	20.11	20.34	20.20	1
		1	2	20.25	20.09	20.26	1
		1	5	20.09	20.22	20.14	1
		3	0	19.64	19.74	19.55	1
		3	1	19.61	19.64	19.60	1
		3	3	19.58	19.53	19.65	1
		6	0	19.49	19.55	19.53	2
1.4M	64QAM	1	0	19.44	19.56	19.38	2
		1	2	19.44	19.61	19.50	2
		1	5	19.36	19.45	19.54	2
		3	0	18.65	18.56	18.56	2
		3	1	18.49	18.61	18.56	2
		3	3	18.52	18.52	18.58	2
		6	0	18.62	18.63	18.62	3

LTE Conducted Power (Reduction)

LTE Band 38

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	20.75	20.71	20.73	0
		1	50	20.68	20.67	20.68	0
		1	99	20.59	20.61	20.66	0
		50	0	19.86	19.83	19.84	1
		50	25	19.85	19.82	19.79	1
		50	50	19.82	19.77	19.78	1
		100	0	19.77	19.75	19.73	1
20M	16QAM	1	0	19.71	19.69	19.75	1
		1	50	19.61	19.64	19.71	1
		1	99	19.63	19.63	19.68	1
		50	0	18.82	18.84	18.83	2
		50	25	18.81	18.83	18.82	2
		50	50	18.76	18.72	18.77	2
		100	0	18.68	18.72	18.76	2
20M	64QAM	1	0	18.62	18.64	18.72	2
		1	50	18.74	18.71	18.71	2
		1	99	18.59	18.6	18.66	2
		50	0	17.73	17.68	17.76	3
		50	25	17.73	17.68	17.72	3
		50	50	17.73	17.67	17.68	3
		100	0	17.72	17.72	17.71	3
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	20.69	20.70	20.69	0
		1	37	20.60	20.67	20.58	0
		1	74	20.58	20.55	20.56	0
		36	0	19.79	19.80	19.75	1
		36	19	19.82	19.81	19.71	1
		36	39	19.82	19.76	19.69	1
		75	0	19.74	19.69	19.65	1
15M	16QAM	1	0	19.69	19.61	19.66	1
		1	37	19.59	19.56	19.70	1
		1	74	19.59	19.59	19.62	1
		36	0	18.77	18.74	18.78	2
		36	19	18.78	18.78	18.74	2
		36	39	18.74	18.62	18.77	2
		75	0	18.59	18.71	18.75	2
15M	64QAM	1	0	18.61	18.57	18.64	2
		1	37	18.66	18.69	18.69	2
		1	74	18.51	18.50	18.62	2
		36	0	17.69	17.61	17.74	3
		36	19	17.70	17.68	17.70	3
		36	39	17.66	17.59	17.59	3
		75	0	17.63	17.64	17.68	3

LTE Conducted Power (Reduction)

LTE Band 38

BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	20.67	20.63	20.60	0
		1	24	20.60	20.59	20.51	0
		1	49	20.54	20.46	20.46	0
		25	0	19.76	19.74	19.68	1
		25	12	19.76	19.78	19.66	1
		25	25	19.73	19.74	19.60	1
		50	0	19.68	19.59	19.58	1
10M	16QAM	1	0	19.59	19.61	19.57	1
		1	24	19.53	19.55	19.65	1
		1	49	19.53	19.53	19.62	1
		25	0	18.71	18.74	18.71	2
		25	12	18.69	18.72	18.71	2
		25	25	18.69	18.62	18.68	2
		50	0	18.50	18.67	18.75	2
10M	64QAM	1	0	18.52	18.57	18.56	2
		1	24	18.62	18.69	18.68	2
		1	49	18.46	18.50	18.61	2
		25	0	17.63	17.60	17.69	3
		25	12	17.64	17.65	17.68	3
		25	25	17.65	17.50	17.49	3
		50	0	17.63	17.63	17.66	3
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	20.66	20.56	20.53	0
		1	12	20.51	20.50	20.49	0
		1	24	20.52	20.42	20.40	0
		12	0	19.68	19.72	19.68	1
		12	6	19.76	19.68	19.63	1
		12	13	19.70	19.66	19.52	1
		25	0	19.66	19.49	19.56	1
5M	16QAM	1	0	19.51	19.59	19.55	1
		1	12	19.49	19.52	19.61	1
		1	24	19.53	19.43	19.53	1
		12	0	18.66	18.64	18.65	2
		12	6	18.60	18.71	18.65	2
		12	13	18.67	18.62	18.63	2
		25	0	18.40	18.61	18.75	2
5M	64QAM	1	0	18.49	18.54	18.53	2
		1	12	18.61	18.63	18.60	2
		1	24	18.38	18.46	18.59	2
		12	0	17.58	17.51	17.62	3
		12	6	17.54	17.61	17.68	3
		12	13	17.57	17.48	17.40	3
		25	0	17.54	17.61	17.59	3

LTE Conducted Power (Reduction)

LTE Band 41

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	20.66	20.98	20.73	20.80	20.91	0
		1	50	20.61	20.93	20.69	20.79	20.83	0
		1	99	20.52	20.89	20.69	20.72	20.86	0
		50	0	19.6	19.99	19.78	19.83	19.97	1
		50	25	19.63	19.95	19.71	19.77	19.88	1
		50	50	19.6	19.93	19.71	19.81	19.89	1
		100	0	19.56	19.94	19.69	19.76	19.86	1
20M	16QAM	1	0	19.59	19.94	19.68	19.77	19.84	1
		1	50	19.61	19.91	19.71	19.72	19.88	1
		1	99	19.52	19.87	19.69	19.72	19.78	1
		50	0	18.6	18.92	18.66	18.82	18.91	2
		50	25	18.57	18.91	18.75	18.79	18.82	2
		50	50	18.54	18.86	18.7	18.7	18.84	2
		100	0	18.49	18.87	18.61	18.72	18.8	2
20M	64QAM	1	0	18.45	18.85	18.62	18.75	18.76	2
		1	50	18.51	18.83	18.6	18.69	18.73	2
		1	99	18.4	18.77	18.56	18.63	18.71	2
		50	0	17.59	17.89	17.63	17.75	17.79	3
		50	25	17.55	17.86	17.67	17.71	17.83	3
		50	50	17.43	17.83	17.61	17.68	17.77	3
		100	0	17.48	17.85	17.59	17.73	17.76	3
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	20.63	20.93	20.73	20.78	20.89	0
		1	37	20.60	20.83	20.63	20.73	20.80	0
		1	74	20.49	20.82	20.61	20.69	20.81	0
		36	0	19.52	19.90	19.74	19.78	19.94	1
		36	19	19.58	19.91	19.67	19.70	19.86	1
		36	39	19.59	19.89	19.70	19.75	19.87	1
		75	0	19.50	19.92	19.67	19.70	19.84	1
15M	16QAM	1	0	19.51	19.91	19.61	19.67	19.84	1
		1	37	19.56	19.82	19.70	19.67	19.84	1
		1	74	19.48	19.83	19.64	19.68	19.74	1
		36	0	18.60	18.86	18.59	18.81	18.91	2
		36	19	18.52	18.82	18.65	18.71	18.72	2
		36	39	18.47	18.81	18.70	18.68	18.83	2
		75	0	18.42	18.77	18.56	18.63	18.76	2
15M	64QAM	1	0	18.35	18.75	18.55	18.72	18.71	2
		1	37	18.42	18.74	18.57	18.67	18.73	2
		1	74	18.40	18.69	18.52	18.58	18.61	2
		36	0	17.58	17.81	17.54	17.72	17.73	3
		36	19	17.50	17.76	17.62	17.68	17.78	3
		36	39	17.33	17.81	17.58	17.58	17.67	3
		75	0	17.40	17.75	17.59	17.73	17.74	3

LTE Conducted Power (Reduction)

LTE Band 41

BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	20.56	20.83	20.73	20.75	20.79	0
		1	24	20.55	20.82	20.63	20.70	20.74	0
		1	49	20.40	20.78	20.51	20.68	20.72	0
		25	0	19.44	19.86	19.64	19.70	19.85	1
		25	12	19.55	19.81	19.62	19.70	19.76	1
		25	25	19.54	19.79	19.64	19.73	19.84	1
		50	0	19.49	19.87	19.57	19.63	19.78	1
10M	16QAM	1	0	19.44	19.83	19.53	19.66	19.81	1
		1	24	19.49	19.79	19.61	19.65	19.77	1
		1	49	19.40	19.77	19.59	19.60	19.73	1
		25	0	18.56	18.81	18.59	18.72	18.85	2
		25	12	18.42	18.73	18.59	18.69	18.71	2
		25	25	18.42	18.77	18.61	18.62	18.73	2
		50	0	18.36	18.72	18.52	18.54	18.75	2
10M	64QAM	1	0	18.26	18.71	18.51	18.71	18.68	2
		1	24	18.41	18.64	18.54	18.62	18.72	2
		1	49	18.38	18.61	18.48	18.55	18.60	2
		25	0	17.51	17.74	17.48	17.67	17.68	3
		25	12	17.41	17.67	17.58	17.68	17.73	3
		25	25	17.25	17.71	17.52	17.53	17.65	3
		50	0	17.39	17.66	17.52	17.63	17.65	3
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	20.47	20.82	20.65	20.73	20.75	0
		1	12	20.55	20.79	20.58	20.69	20.68	0
		1	24	20.32	20.71	20.46	20.67	20.63	0
		12	0	19.38	19.76	19.57	19.61	19.80	1
		12	6	19.45	19.78	19.60	19.62	19.68	1
		12	13	19.44	19.71	19.62	19.64	19.84	1
		25	0	19.40	19.82	19.54	19.53	19.71	1
5M	16QAM	1	0	19.43	19.73	19.43	19.62	19.72	1
		1	12	19.44	19.78	19.53	19.55	19.76	1
		1	24	19.40	19.73	19.52	19.52	19.69	1
		12	0	18.53	18.75	18.51	18.66	18.85	2
		12	6	18.40	18.72	18.54	18.62	18.70	2
		12	13	18.36	18.71	18.54	18.56	18.73	2
		25	0	18.26	18.66	18.43	18.53	18.65	2
5M	64QAM	1	0	18.24	18.66	18.50	18.63	18.66	2
		1	12	18.39	18.54	18.48	18.55	18.71	2
		1	24	18.37	18.56	18.38	18.52	18.51	2
		12	0	17.50	17.73	17.39	17.66	17.61	3
		12	6	17.40	17.59	17.55	17.65	17.73	3
		12	13	17.22	17.70	17.42	17.44	17.61	3
		25	0	17.32	17.57	17.48	17.61	17.57	3

LTE Conducted Power (Reduction)

LTE Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	21.45	21.21	21.32	21.35	0
		1	50	21.43	21.2	21.29	21.34	0
		1	99	21.39	21.17	21.23	21.33	0
		50	0	20.36	20.19	20.26	20.29	1
		50	25	20.31	20.08	20.16	20.23	1
		50	50	20.32	20.03	20.09	20.16	1
		100	0	20.23	20.01	20.09	20.15	1
20M	16QAM	1	0	20.26	20.01	20.08	20.11	1
		1	50	20.11	19.91	20.02	20.04	1
		1	99	20.1	19.9	20.02	20.02	1
		50	0	19.12	18.95	19	19.04	2
		50	25	19.09	18.8	18.93	19.02	2
		50	50	19.11	18.82	18.93	18.99	2
		100	0	19.07	18.89	18.93	18.95	2
20M	64QAM	1	0	19	18.71	18.85	18.93	2
		1	50	19.05	18.78	18.83	18.92	2
		1	99	18.93	18.61	18.73	18.81	2
		50	0	18.43	18.13	18.27	18.28	3
		50	25	18.37	18.06	18.2	18.26	3
		50	50	18.3	18.06	18.14	18.24	3
		100	0	18.33	18.08	18.2	18.25	3
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	21.41	21.20	21.23	21.27	0
		1	37	21.42	21.11	21.25	21.25	0
		1	74	21.38	21.08	21.13	21.23	0
		36	0	20.27	20.11	20.26	20.27	1
		36	19	20.29	20.07	20.14	20.18	1
		36	39	20.29	19.97	20.07	20.11	1
		75	0	20.23	20.01	19.99	20.05	1
15M	16QAM	1	0	20.22	19.95	20.07	20.02	1
		1	37	20.10	19.85	19.93	20.00	1
		1	74	20.04	19.83	19.92	19.95	1
		36	0	19.03	18.90	19.00	18.96	2
		36	19	19.00	18.75	18.84	18.99	2
		36	39	19.04	18.74	18.90	18.89	2
		75	0	19.04	18.84	18.92	18.90	2
15M	64QAM	1	0	18.91	18.62	18.85	18.87	2
		1	37	18.95	18.77	18.77	18.92	2
		1	74	18.92	18.55	18.72	18.78	2
		36	0	18.38	18.10	18.18	18.26	3
		36	19	18.36	17.99	18.16	18.23	3
		36	39	18.22	18.03	18.05	18.20	3
		75	0	18.31	18.00	18.15	18.21	3

LTE Conducted Power (Reduction)

LTE Band 48

BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	21.21	21.00	21.03	21.07	0
		1	24	21.22	20.91	21.05	21.05	0
		1	49	21.18	20.88	20.93	21.03	0
		25	0	20.07	19.91	20.06	20.07	1
		25	12	20.09	19.87	19.94	19.98	1
		25	25	20.09	19.77	19.87	19.91	1
		50	0	20.03	19.81	19.79	19.85	1
10M	16QAM	1	0	20.02	19.75	19.87	19.82	1
		1	24	19.90	19.65	19.73	19.80	1
		1	49	19.84	19.63	19.72	19.75	1
		25	0	18.83	18.70	18.80	18.76	2
		25	12	18.80	18.55	18.64	18.79	2
		25	25	18.84	18.54	18.70	18.69	2
		50	0	18.84	18.64	18.72	18.70	2
10M	64QAM	1	0	18.71	18.42	18.65	18.67	2
		1	24	18.75	18.57	18.57	18.72	2
		1	49	18.72	18.35	18.52	18.58	2
		25	0	18.18	17.90	17.98	18.06	3
		25	12	18.16	17.79	17.96	18.03	3
		25	25	18.02	17.83	17.85	18.00	3
		50	0	18.11	17.80	17.95	18.01	3
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	360-0.5	3649.5	3697.5	
5M	QPSK	1	0	21.06	20.85	20.88	20.92	0
		1	12	21.07	20.76	20.90	20.90	0
		1	24	21.03	20.73	20.78	20.88	0
		12	0	19.92	19.76	19.91	19.92	1
		12	6	19.94	19.72	19.79	19.83	1
		12	13	19.94	19.62	19.72	19.76	1
		25	0	19.88	19.66	19.64	19.70	1
5M	16QAM	1	0	19.87	19.60	19.72	19.67	1
		1	12	19.75	19.50	19.58	19.65	1
		1	24	19.69	19.48	19.57	19.60	1
		12	0	18.68	18.55	18.65	18.61	2
		12	6	18.65	18.40	18.49	18.64	2
		12	13	18.69	18.39	18.55	18.54	2
		25	0	18.69	18.49	18.57	18.55	2
5M	64QAM	1	0	18.56	18.27	18.50	18.52	2
		1	12	18.60	18.42	18.42	18.57	2
		1	24	18.57	18.20	18.37	18.43	2
		12	0	18.03	17.75	17.83	17.91	3
		12	6	18.01	17.64	17.81	17.88	3
		12	13	17.87	17.68	17.70	17.85	3
		25	0	17.96	17.65	17.80	17.86	3

LTE Conducted Power (Reduction)

LTE Band 66

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	15.81	15.89	15.85	0
		1	24	15.77	15.86	15.83	0
		1	49	15.8	15.75	15.79	0
		25	0	14.7	14.77	14.73	1
		25	12	14.7	14.70	14.72	1
		25	25	14.75	14.66	14.71	1
		50	0	14.76	14.79	14.76	1
20M	16QAM	1	0	14.79	14.71	14.75	1
		1	24	14.72	14.68	14.73	1
		1	49	14.68	14.73	14.69	1
		25	0	13.76	13.78	13.78	2
		25	12	13.77	13.77	13.75	2
		25	25	13.75	13.75	13.71	2
		50	0	13.68	13.73	13.69	2
20M	64QAM	1	0	13.66	13.70	13.65	2
		1	24	13.65	13.66	13.61	2
		1	49	13.59	13.6	13.59	2
		25	0	12.77	12.79	12.77	3
		25	12	12.69	12.73	12.75	3
		25	25	12.72	12.68	12.71	3
		50	0	12.7	12.76	12.73	3
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	15.76	15.83	15.77	0
		1	12	15.73	15.79	15.83	0
		1	24	15.79	15.74	15.72	0
		12	0	14.66	14.68	14.64	1
		12	6	14.63	14.65	14.67	1
		12	13	14.70	14.59	14.71	1
		25	0	14.66	14.72	14.67	1
15M	16QAM	1	0	14.77	14.67	14.71	1
		1	12	14.66	14.68	14.67	1
		1	24	14.60	14.70	14.60	1
		12	0	13.69	13.76	13.74	2
		12	6	13.71	13.72	13.71	2
		12	13	13.71	13.74	13.61	2
		25	0	13.64	13.64	13.62	2
15M	64QAM	1	0	13.63	13.65	13.63	2
		1	12	13.56	13.59	13.58	2
		1	24	13.52	13.59	13.53	2
		12	0	12.74	12.77	12.68	3
		12	6	12.62	12.63	12.67	3
		12	13	12.70	12.66	12.66	3
		25	0	12.60	12.66	12.70	3

LTE Conducted Power (Reduction)

LTE Band 66

BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	15.68	15.82	15.71	0
		1	7	15.72	15.71	15.80	0
		1	14	15.72	15.68	15.67	0
		8	0	14.64	14.63	14.59	1
		8	3	14.62	14.60	14.60	1
		8	7	14.63	14.58	14.66	1
		15	0	14.66	14.64	14.66	1
10M	16QAM	1	0	14.72	14.64	14.67	1
		1	7	14.64	14.59	14.59	1
		1	14	14.53	14.67	14.56	1
		8	0	13.68	13.69	13.70	2
		8	3	13.63	13.64	13.65	2
		8	7	13.62	13.65	13.61	2
		15	0	13.61	13.62	13.55	2
10M	64QAM	1	0	13.60	13.61	13.62	2
		1	7	13.46	13.56	13.53	2
		1	14	13.46	13.51	13.46	2
		8	0	12.68	12.69	12.60	3
		8	3	12.54	12.58	12.60	3
		8	7	12.70	12.57	12.64	3
		15	0	12.59	12.56	12.63	3
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	15.65	15.73	15.70	0
		1	2	15.62	15.66	15.79	0
		1	5	15.64	15.65	15.58	0
		3	0	14.55	14.53	14.56	1
		3	1	14.52	14.53	14.59	1
		3	3	14.54	14.52	14.56	1
		6	0	14.56	14.62	14.56	1
5M	16QAM	1	0	14.71	14.57	14.57	1
		1	2	14.60	14.52	14.53	1
		1	5	14.53	14.59	14.52	1
		3	0	13.58	13.62	13.69	2
		3	1	13.54	13.61	13.58	2
		3	3	13.58	13.62	13.52	2
		6	0	13.57	13.54	13.52	2
5M	64QAM	1	0	13.54	13.52	13.59	2
		1	2	13.36	13.47	13.45	2
		1	5	13.45	13.44	13.40	2
		3	0	12.60	12.64	12.50	3
		3	1	12.54	12.52	12.55	3
		3	3	12.63	12.57	12.62	3
		6	0	12.56	12.52	12.60	3

LTE Conducted Power (Reduction)

LTE Band 66

BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	15.55	15.70	15.68	0
		1	2	15.60	15.56	15.76	0
		1	5	15.64	15.58	15.51	0
		3	0	14.47	14.51	14.49	1
		3	1	14.43	14.49	14.56	1
		3	3	14.49	14.44	14.49	1
		6	0	14.50	14.54	14.53	1
3M	16QAM	1	0	14.71	14.48	14.47	1
		1	2	14.58	14.44	14.51	1
		1	5	14.53	14.51	14.42	1
		3	0	13.52	13.55	13.63	2
		3	1	13.48	13.57	13.56	2
		3	3	13.49	13.60	13.45	2
		6	0	13.55	13.54	13.44	2
3M	64QAM	1	0	13.54	13.43	13.53	2
		1	2	13.29	13.43	13.37	2
		1	5	13.36	13.42	13.32	2
		3	0	12.59	12.64	12.48	3
		3	1	12.51	12.47	12.46	3
		3	3	12.55	12.48	12.54	3
		6	0	12.54	12.52	12.58	3
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	15.45	15.68	15.67	0
		1	2	15.52	15.50	15.68	0
		1	5	15.54	15.49	15.42	0
		3	0	14.45	14.41	14.46	1
		3	1	14.33	14.42	14.49	1
		3	3	14.41	14.36	14.48	1
		6	0	14.46	14.46	14.49	1
1.4M	16QAM	1	0	14.68	14.38	14.44	1
		1	2	14.48	14.40	14.50	1
		1	5	14.53	14.48	14.36	1
		3	0	13.51	13.54	13.56	2
		3	1	13.44	13.51	13.46	2
		3	3	13.44	13.51	13.43	2
		6	0	13.55	13.44	13.35	2
1.4M	64QAM	1	0	13.45	13.37	13.46	2
		1	2	13.23	13.39	13.27	2
		1	5	13.36	13.41	13.32	2
		3	0	12.55	12.64	12.40	3
		3	1	12.48	12.41	12.43	3
		3	3	12.54	12.45	12.44	3
		6	0	12.54	12.52	12.50	3

LTE Conducted Power (Reduction)							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	23.49	23.46	23.48	0
		1	50	23.43	23.38	23.33	0
		1	99	23.38	23.3	23.36	0
		50	0	22.49	22.4	22.44	1
		50	25	22.41	22.35	22.34	1
		50	50	22.39	22.36	22.36	1
		100	0	22.43	22.38	22.42	1
20M	16QAM	1	0	22.41	22.32	22.35	1
		1	50	22.38	22.32	22.38	1
		1	99	22.35	22.34	22.29	1
		50	0	21.47	21.39	21.44	2
		50	25	21.46	21.39	21.38	2
		50	50	21.43	21.4	21.39	2
		100	0	21.42	21.36	21.33	2
20M	64QAM	1	0	21.39	21.38	21.36	2
		1	50	21.38	21.34	21.33	2
		1	99	21.33	21.24	21.32	2
		50	0	20.48	20.46	20.41	3
		50	25	20.46	20.36	20.39	3
		50	50	20.43	20.35	20.42	3
		100	0	20.45	20.42	20.43	3
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	23.43	23.39	23.40	0
		1	37	23.35	23.28	23.27	0
		1	74	23.31	23.30	23.35	0
		36	0	22.48	22.40	22.44	1
		36	19	22.41	22.35	22.26	1
		36	39	22.35	22.30	22.26	1
		75	0	22.34	22.34	22.41	1
15M	16QAM	1	0	22.39	22.26	22.31	1
		1	37	22.34	22.30	22.38	1
		1	74	22.34	22.25	22.27	1
		36	0	21.37	21.38	21.37	2
		36	19	21.40	21.33	21.33	2
		36	39	21.40	21.40	21.37	2
		75	0	21.32	21.29	21.31	2
15M	64QAM	1	0	21.32	21.33	21.34	2
		1	37	21.31	21.32	21.23	2
		1	74	21.31	21.24	21.25	2
		36	0	20.42	20.41	20.32	3
		36	19	20.42	20.29	20.38	3
		36	39	20.35	20.26	20.33	3
		75	0	20.45	20.38	20.34	3

LTE Conducted Power (Reduction)							
LTE Band 71							
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	23.39	23.30	23.31	0
		1	24	23.32	23.22	23.23	0
		1	49	23.22	23.26	23.26	0
		25	0	22.45	22.33	22.44	1
		25	12	22.33	22.25	22.18	1
		25	25	22.26	22.23	22.16	1
		50	0	22.28	22.27	22.39	1
10M	16QAM	1	0	22.29	22.20	22.21	1
		1	24	22.32	22.28	22.28	1
		1	49	22.26	22.21	22.25	1
		25	0	21.27	21.29	21.36	2
		25	12	21.31	21.23	21.29	2
		25	25	21.30	21.35	21.31	2
		50	0	21.28	21.25	21.23	2
10M	64QAM	1	0	21.26	21.26	21.31	2
		1	24	21.24	21.24	21.20	2
		1	49	21.24	21.20	21.21	2
		25	0	20.42	20.41	20.23	3
		25	12	20.34	20.27	20.36	3
		25	25	20.28	20.21	20.26	3
		50	0	20.36	20.35	20.25	3
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	23.37	23.21	23.24	0
		1	12	23.27	23.16	23.23	0
		1	24	23.22	23.18	23.22	0
		12	0	22.38	22.28	22.36	1
		12	6	22.31	22.24	22.11	1
		12	13	22.25	22.22	22.09	1
		25	0	22.25	22.18	22.31	1
5M	16QAM	1	0	22.21	22.12	22.16	1
		1	12	22.30	22.26	22.27	1
		1	24	22.26	22.20	22.20	1
		12	0	21.26	21.19	21.30	2
		12	6	21.29	21.14	21.22	2
		12	13	21.29	21.32	21.23	2
		25	0	21.23	21.19	21.19	2
5M	64QAM	1	0	21.18	21.22	21.22	2
		1	12	21.16	21.16	21.20	2
		1	24	21.19	21.20	21.19	2
		12	0	20.33	20.32	20.20	3
		12	6	20.26	20.24	20.31	3
		12	13	20.21	20.19	20.25	3
		25	0	20.31	20.31	20.19	3

Uplink Carrier Aggregation Scenarios Conducted Power_Full

Configure	Combination	PCC							SCC							Measurement Power		
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)
																		Total
Intra Band Contiguous	5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	99	20549	838.9	24.19	0-8.5	17.62
					1	49						1	0			24.01	0	23.71
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	99	20575	841.5	24.13	0-8.5	17.48
					1	49						1	0			23.91	0	23.67
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	99	20600	844	24.08	0-8.5	17.57
					1	49						1	0			23.95	0	23.59
	7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	23.32	0-8.5	16.64
					1	99						1	0			23.22	0	22.71
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	23.27	0-8.5	16.70
					1	99						1	0			23.12	0	22.81
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	23.22	0-8.5	16.66
					1	99						1	0			23.16	0	22.77
	41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	23.95	0-8.5	17.19
					1	99						1	0			23.82	0	23.43
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	23.92	0-8.5	17.25
					1	99						1	0			23.79	0	23.42
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	23.87	0-8.5	17.30
					1	99						1	0			23.73	0	23.45
	48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	21.72	0-8.5	14.24
					1	99						1	0			21.61	0	21.24
		48	20	QPSK	1	0	55891	3615.1	48	20	QPSK	1	99	56089	3634.9	21.69	0-8.5	14.23
					1	99						1	0			21.56	0	21.21
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	21.64	0-8.5	14.17
					1	99						1	0			21.53	0	21.19

Uplink Carrier Aggregation Scenarios Conducted Power_Reduction

Configure	Combination	PCC							SCC							Measurement Power		
		Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Band	BW (MHz)	Modulation	RB Size	RB Offset	UL Channel	UL Frequency (MHz)	Single Carrier Tx Power without UL-CA Active (dBm)	MPR Level (dB)	Tx Power with UL-CA Active (dBm)
																		Total
Intra Band Contiguous	5B	5	10	QPSK	1	0	20450	829	5	10	QPSK	1	99	20549	838.9	21.61	0-8.5	14.37
					1	49						1	0			21.43	0	20.47
		5	10	QPSK	1	0	20476	831.6	5	10	QPSK	1	99	20575	841.5	21.52	0-8.5	14.25
					1	49						1	0			21.45	0	20.43
		5	10	QPSK	1	0	20501	834.1	5	10	QPSK	1	99	20600	844	21.55	0-8.5	14.34
					1	49						1	0			21.39	0	20.40
	7C	7	20	QPSK	1	0	20850	2510	7	20	QPSK	1	99	21048	2529.8	18.88	0-8.5	11.38
					1	99						1	0			18.78	0	17.46
		7	20	QPSK	1	0	21001	2525.1	7	20	QPSK	1	99	21199	2544.9	18.85	0-8.5	10.15
					1	99						1	0			18.73	0	17.54
		7	20	QPSK	1	0	21152	2540.2	7	20	QPSK	1	99	21350	2560	18.81	0-8.5	11.42
					1	99						1	0			18.69	0	17.51
	41C	41	20	QPSK	1	0	39750	2506	41	20	QPSK	1	99	39948	2525.8	20.66	0-8.5	14.07
					1	99						1	0			20.52	0	20.25
		41	20	QPSK	1	0	40521	2583.1	41	20	QPSK	1	99	40719	2602.9	20.63	0-8.5	14.08
					1	99						1	0			20.47	0	20.22
		41	20	QPSK	1	0	41292	2660.2	41	20	QPSK	1	99	41490	2680	20.59	0-8.5	14.15
					1	99						1	0			20.43	0	20.28
	48C	48	20	QPSK	1	0	55340	3560	48	20	QPSK	1	99	55538	3579.8	21.45	0-8.5	13.94
					1	99						1	0			21.39	0	20.80
		48	20	QPSK	1	0	55891	3615.1	48	20	QPSK	1	99	56089	3634.9	21.38	0-8.5	13.90
					1	99						1	0			21.32	0	20.73
		48	20	QPSK	1	0	56442	3670.2	48	20	QPSK	1	99	56640	3690	21.41	0-8.5	13.85
					1	99						1	0			21.36	0	20.69

Conducted Power (Full)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	13.89
	6	2437	13.97
	11	2462	13.75
	12	2467	13.88
	13	2472	13.96
802.11g	1	2412	13.66
	6	2437	13.89
	11	2462	13.73
	12	2467	13.76
	13	2472	13.71
802.11n HT20	1	2412	13.84
	6	2437	13.78
	11	2462	13.78
	12	2467	13.88
	13	2472	13.83
802.11n HT40	3	2422	13.73
	6	2437	13.73
	9	2452	13.79
	10	2457	13.69
	11	2462	13.87
802.11ax HE20	1	2412	13.74
	6	2437	13.75
	11	2462	13.78
	12	2467	13.71
	13	2472	13.75
802.11ax HE40	3	2422	13.82
	6	2437	13.74
	9	2452	13.66
	10	2457	13.79
	11	2462	13.74
802.11be HE20	1	2412	13.82
	6	2437	13.82
	11	2462	13.75
	12	2467	13.75
	13	2472	13.86
802.11be HE40	3	2422	13.66
	6	2437	13.77
	9	2452	13.79
	10	2457	13.72
	11	2462	13.64

Conducted Power (Full)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	13.82
	6	2437	13.98
	11	2462	13.91
	12	2467	13.88
	13	2472	13.81
802.11g	1	2412	13.74
	6	2437	13.78
	11	2462	13.8
	12	2467	13.73
	13	2472	13.67
802.11n HT20	1	2412	13.73
	6	2437	13.78
	11	2462	13.75
	12	2467	13.83
	13	2472	13.76
802.11n HT40	3	2422	13.79
	6	2437	13.77
	9	2452	13.8
	10	2457	13.7
	11	2462	13.81
802.11ax HE20	1	2412	13.8
	6	2437	13.69
	11	2462	13.78
	12	2467	13.83
	13	2472	13.78
802.11ax HE40	3	2422	13.74
	6	2437	13.72
	9	2452	13.69
	10	2457	13.69
	11	2462	13.67
802.11be HE20	1	2412	13.7
	6	2437	13.76
	11	2462	13.76
	12	2467	13.83
	13	2472	13.84
802.11be HE40	3	2422	13.8
	6	2437	13.77
	9	2452	13.76
	10	2457	13.78
	11	2462	13.72

Conducted Power (Full)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11g	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11n HT20	1	2412	13.73	13.77	16.76
	6	2437	13.77	13.8	16.80
	11	2462	13.89	13.69	16.80
	12	2467	13.66	13.75	16.72
	13	2472	13.72	13.75	16.75
802.11n HT40	3	2422	13.91	13.95	16.94
	6	2437	13.97	13.95	16.97
	9	2452	13.95	13.93	16.95
	10	2457	13.95	13.83	16.90
	11	2462	13.75	13.97	16.87
802.11ax HE20	1	2412	13.77	13.83	16.81
	6	2437	13.81	13.71	16.77
	11	2462	13.74	13.76	16.76
	12	2467	13.76	13.83	16.81
	13	2472	13.88	13.76	16.83
802.11ax HE40	3	2422	13.71	13.76	16.75
	6	2437	13.73	13.72	16.74
	9	2452	13.8	13.82	16.82
	10	2457	13.78	13.74	16.77
	11	2462	13.78	13.75	16.78
802.11be HE20	1	2412	13.72	13.84	16.79
	6	2437	13.85	13.77	16.82
	11	2462	13.76	13.8	16.79
	12	2467	13.83	13.8	16.83
	13	2472	13.8	13.71	16.77
802.11be HE40	3	2422	13.75	13.76	16.77
	6	2437	13.89	13.72	16.82
	9	2452	13.7	13.74	16.73
	10	2457	13.77	13.77	16.78
	11	2462	13.65	13.79	16.73

Conducted Power (Full)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	10.87
	39	2441	10.95
	78	2480	10.93
LE	0	2402	6.81
	19	2440	6.8
	39	2480	6.83

Conducted Power (Full)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	10.23
	40	5200	10.28
	44	5220	10.31
	48	5240	10.34
802.11n HT20	36	5180	10.33
	40	5200	10.19
	44	5220	10.19
	48	5240	10.21
802.11n HT40	38	5190	10.24
	46	5230	10.29
802.11ac VHT80	42	5210	10.46
802.11ax HE20	36	5180	10.23
	40	5200	10.27
	44	5220	10.3
	48	5240	10.25
802.11ax HE40	38	5190	10.38
	46	5230	10.31
802.11ax HE80	42	5210	10.24
802.11be HE20	36	5180	10.34
	40	5200	10.28
	44	5220	10.27
	48	5240	10.29
802.11be HE40	38	5190	10.28
	46	5230	10.29
802.11be HE80	42	5210	10.32

Conducted Power (Full)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	10.26
	40	5200	10.23
	44	5220	10.28
	48	5240	10.3
802.11n HT20	36	5180	10.26
	40	5200	10.3
	44	5220	10.31
	48	5240	10.25
802.11n HT40	38	5190	10.24
	46	5230	10.22
802.11ac VHT80	42	5210	10.47
802.11ax HE20	36	5180	10.34
	40	5200	10.25
	44	5220	10.29
	48	5240	10.33
802.11ax HE40	38	5190	10.34
	46	5230	10.25
802.11ax HE80	42	5210	10.32
802.11be HE20	36	5180	10.24
	40	5200	10.26
	44	5220	10.26
	48	5240	10.2
802.11be HE40	38	5190	10.28
	46	5230	10.26
802.11be HE80	42	5210	10.28

Conducted Power (Full)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180			
	40	5200			
	44	5220			
	48	5240			
802.11n HT20	36	5180	10.31	10.25	13.29
	40	5200	10.18	10.24	13.22
	44	5220	10.27	10.35	13.32
	48	5240	10.22	10.26	13.25
802.11n HT40	38	5190	10.3	10.27	13.3
	46	5230	10.2	10.35	13.29
802.11ac VHT80	42	5210	10.43	10.43	13.44
802.11ax HE20	36	5180	10.21	10.34	13.29
	40	5200	10.25	10.32	13.3
	44	5220	10.21	10.31	13.27
	48	5240	10.31	10.27	13.3
802.11ax HE40	38	5190	10.38	10.19	13.3
	46	5230	10.31	10.23	13.28
802.11ax HE80	42	5210	10.28	10.37	13.34
802.11be HE20	36	5180	10.3	10.25	13.29
	40	5200	10.37	10.34	13.37
	44	5220	10.31	10.2	13.27
	48	5240	10.18	10.23	13.22
802.11be HE40	38	5190	10.22	10.22	13.23
	46	5230	10.25	10.37	13.32
802.11be HE80	42	5210	10.22	10.24	13.24

Conducted Power (Full)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	10.21
	56	5280	10.32
	60	5300	10.23
	64	5320	10.3
802.11n HT20	52	5260	10.27
	56	5280	10.27
	60	5300	10.3
	64	5320	10.26
802.11n HT40	54	5270	10.32
	62	5310	10.26
802.11ac VHT80	58	5290	10.21
802.11ac VHT160	50	5250	10.43
802.11ax HE20	52	5260	10.26
	56	5280	10.39
	60	5300	10.24
	64	5320	10.36
802.11ax HE40	54	5270	10.24
	62	5310	10.29
802.11ax HE80	58	5290	10.28
802.11ax HE160	50	5250	10.29
802.11be HE20	52	5260	10.25
	56	5280	10.32
	60	5300	10.25
	64	5320	10.2
802.11be HE40	54	5270	10.24
	62	5310	10.31
802.11be HE80	58	5290	10.28
802.11be HE160	50	5250	10.3

Conducted Power (Full)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	10.2
	56	5280	10.29
	60	5300	10.28
	64	5320	10.34
802.11n HT20	52	5260	10.23
	56	5280	10.38
	60	5300	10.35
	64	5320	10.32
802.11n HT40	54	5270	10.24
	62	5310	10.25
802.11ac VHT80	58	5290	10.3
802.11ac VHT160	50	5250	10.48
802.11ax HE20	52	5260	10.3
	56	5280	10.17
	60	5300	10.28
	64	5320	10.36
802.11ax HE40	54	5270	10.21
	62	5310	10.24
802.11ax HE80	58	5290	10.35
802.11ax HE160	50	5250	10.31
802.11be HE20	52	5260	10.35
	56	5280	10.3
	60	5300	10.25
	64	5320	10.31
802.11be HE40	54	5270	10.36
	62	5310	10.28
802.11be HE80	58	5290	10.2
802.11be HE160	50	5250	10.25

Conducted Power (Full)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260			
	56	5280			
	60	5300			
	64	5320			
802.11n HT20	52	5260	10.25	10.31	13.29
	56	5280	10.38	10.27	13.34
	60	5300	10.29	10.24	13.28
	64	5320	10.31	10.3	13.32
802.11n HT40	54	5270	10.26	10.24	13.26
	62	5310	10.46	10.38	13.43
802.11ac VHT80	58	5290	10.29	10.26	13.29
802.11ac VHT160	50	5250	10.49	10.44	13.48
802.11ax HE20	52	5260	10.34	10.3	13.33
	56	5280	10.28	10.32	13.31
	60	5300	10.23	10.35	13.3
	64	5320	10.28	10.36	13.33
802.11ax HE40	54	5270	10.37	10.24	13.32
	62	5310	10.22	10.29	13.27
802.11ax HE80	58	5290	10.3	10.33	13.33
802.11ax HE160	50	5250	10.32	10.3	13.32
802.11be HE20	52	5260	10.26	10.32	13.3
	56	5280	10.22	10.3	13.27
	60	5300	10.17	10.28	13.24
	64	5320	10.33	10.25	13.3
802.11be HE40	54	5270	10.21	10.27	13.25
	62	5310	10.27	10.32	13.31
802.11be HE80	58	5290	10.22	10.32	13.28
802.11be HE160	50	5250	10.27	10.35	13.32

Conducted Power (Full)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	10.81
	116	5580	10.74
	120	5600	10.66
	124	5620	10.71
	132	5660	10.78
	140	5700	10.79
	144	5720	10.81
802.11n HT20	100	5500	10.77
	116	5580	10.77
	120	5600	10.66
	124	5620	10.71
	132	5660	10.73
	140	5700	10.88
	144	5720	10.8
802.11n HT40	102	5510	10.8
	110	5550	10.7
	118	5590	10.84
	126	5630	10.74
	134	5670	10.87
	142	5710	10.8
802.11ac VHT80	106	5530	10.94
	122	5610	10.91
	138	5690	10.83
802.11ac VHT160	114	5570	10.95
802.11ax HE20	100	5500	10.8
	116	5580	10.87
	120	5600	10.86
	124	5620	10.71
	132	5660	10.79
	140	5700	10.8
	144	5720	10.82
802.11ax HE40	102	5510	10.69
	110	5550	10.73
	118	5590	10.76
	126	5630	10.7
	134	5670	10.86
	142	5710	10.76
802.11ax HE80	106	5530	10.81
	122	5610	10.8
	138	5690	10.86
802.11ax HE160	114	5570	10.68
802.11be HE20	100	5500	10.73
	116	5580	10.71
	120	5600	10.9
	124	5620	10.72
	132	5660	10.88
	140	5700	10.79
	144	5720	10.73
802.11be HE40	102	5510	10.8
	110	5550	10.71
	118	5590	10.85
	126	5630	10.82
	134	5670	10.73
	142	5710	10.78
802.11be HE80	106	5530	10.75
	122	5610	10.87
	138	5690	10.83
802.11be HE160	114	5570	10.76

Conducted Power (Full)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	10.72
	116	5580	10.84
	120	5600	10.71
	124	5620	10.68
	132	5660	10.72
	140	5700	10.74
	144	5720	10.8
802.11n HT20	100	5500	10.77
	116	5580	10.78
	120	5600	10.67
	124	5620	10.76
	132	5660	10.68
	140	5700	10.8
	144	5720	10.83
802.11n HT40	102	5510	10.77
	110	5550	10.65
	118	5590	10.83
	126	5630	10.77
	134	5670	10.75
	142	5710	10.65
802.11ac VHT80	106	5530	10.91
	122	5610	10.81
	138	5690	10.86
802.11ac VHT160	114	5570	10.93
802.11ax HE20	100	5500	10.82
	116	5580	10.83
	120	5600	10.84
	124	5620	10.68
	132	5660	10.84
	140	5700	10.83
	144	5720	10.87
802.11ax HE40	102	5510	10.72
	110	5550	10.68
	118	5590	10.79
	126	5630	10.7
	134	5670	10.8
	142	5710	10.8
802.11ax HE80	106	5530	10.73
	122	5610	10.83
	138	5690	10.78
802.11ax HE160	114	5570	10.75
802.11be HE20	100	5500	10.81
	116	5580	10.7
	120	5600	10.82
	124	5620	10.81
	132	5660	10.8
	140	5700	10.8
	144	5720	10.71
802.11be HE40	102	5510	10.75
	110	5550	10.85
	118	5590	10.81
	126	5630	10.74
	134	5670	10.76
	142	5710	10.69
802.11be HE80	106	5530	10.86
	122	5610	10.75
	138	5690	10.76
802.11be HE160	114	5570	10.81

Conducted Power (Full)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500			
	116	5580			
	120	5600			
	124	5620			
	132	5660			
	140	5700			
	144	5720			
802.11n HT20	100	5500	10.78	10.72	13.76
	116	5580	10.8	10.81	13.82
	120	5600	10.74	10.8	13.78
	124	5620	10.87	10.73	13.81
	132	5660	10.75	10.76	13.77
	140	5700	10.77	10.69	13.74
	144	5720	10.74	10.84	13.8
802.11n HT40	102	5510	10.69	10.74	13.73
	110	5550	10.74	10.79	13.78
	118	5590	10.81	10.75	13.79
	126	5630	10.72	10.71	13.73
	134	5670	10.83	10.77	13.81
	142	5710	10.72	10.8	13.77
802.11ac VHT80	106	5530	10.88	10.9	13.9
	122	5610	10.89	10.89	13.9
	138	5690	10.83	10.78	13.82
802.11ac VHT160	114	5570	10.91	10.88	13.91
802.11ax HE20	100	5500	10.76	10.69	13.74
	116	5580	10.73	10.71	13.73
	120	5600	10.79	10.81	13.81
	124	5620	10.73	10.76	13.76
	132	5660	10.8	10.69	13.76
	140	5700	10.71	10.69	13.71
	144	5720	10.74	10.73	13.75
802.11ax HE40	102	5510	10.74	10.69	13.73
	110	5550	10.69	10.66	13.69
	118	5590	10.76	10.71	13.75
	126	5630	10.74	10.81	13.79
	134	5670	10.73	10.74	13.75
	142	5710	10.78	10.8	13.8
802.11ax HE80	106	5530	10.81	10.78	13.81
	122	5610	10.74	10.68	13.72
	138	5690	10.81	10.73	13.78
802.11ax HE160	114	5570	10.72	10.83	13.79
802.11be HE20	100	5500	10.69	10.78	13.75
	116	5580	10.69	10.71	13.71
	120	5600	10.75	10.75	13.76
	124	5620	10.82	10.76	13.8
	132	5660	10.89	10.89	13.9
	140	5700	10.76	10.77	13.78
	144	5720	10.8	10.84	13.83
802.11be HE40	102	5510	10.82	10.73	13.79
	110	5550	10.87	10.8	13.85
	118	5590	10.83	10.7	13.78
	126	5630	10.79	10.78	13.8
	134	5670	10.7	10.82	13.77
	142	5710	10.72	10.73	13.74
802.11be HE80	106	5530	10.84	10.84	13.85
	122	5610	10.83	10.82	13.84
	138	5690	10.77	10.75	13.77
802.11be HE160	114	5570	10.76	10.83	13.81

Conducted Power (Full)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	11.31
	153	5765	11.39
	157	5785	11.37
	161	5805	11.33
	165	5825	11.28
802.11n HT20	149	5745	11.3
	153	5765	11.19
	157	5785	11.31
	161	5805	11.26
	165	5825	11.33
802.11n HT40	151	5755	11.36
	159	5795	11.32
802.11ac VHT80	155	5775	11.5
802.11ax HE20	149	5745	11.29
	153	5765	11.37
	157	5785	11.31
	161	5805	11.29
	165	5825	11.35
802.11ax HE40	151	5755	11.29
	159	5795	11.31
802.11ax HE80	155	5775	11.21
802.11be HE20	149	5745	11.35
	153	5765	11.33
	157	5785	11.3
	161	5805	11.32
	165	5825	11.27
802.11be HE40	151	5755	11.21
	159	5795	11.33
802.11be HE80	155	5775	11.33

Conducted Power (Full)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	11.22
	153	5765	11.32
	157	5785	11.29
	161	5805	11.34
	165	5825	11.19
802.11n HT20	149	5745	11.26
	153	5765	11.3
	157	5785	11.39
	161	5805	11.16
	165	5825	11.34
802.11n HT40	151	5755	11.23
	159	5795	11.37
802.11ac VHT80	155	5775	11.48
802.11ax HE20	149	5745	11.34
	153	5765	11.28
	157	5785	11.35
	161	5805	11.36
	165	5825	11.23
802.11ax HE40	151	5755	11.31
	159	5795	11.33
802.11ax HE80	155	5775	11.33
802.11be HE20	149	5745	11.21
	153	5765	11.23
	157	5785	11.27
	161	5805	11.29
	165	5825	11.3
802.11be HE40	151	5755	11.3
	159	5795	11.33
802.11be HE80	155	5775	11.28

Conducted Power (Full)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745			
	153	5765			
	157	5785			
	161	5805			
	165	5825			
802.11n HT20	149	5745	11.16	11.3	14.24
	153	5765	11.22	11.21	14.23
	157	5785	11.21	11.25	14.24
	161	5805	11.17	11.15	14.17
	165	5825	11.32	11.22	14.28
802.11n HT40	151	5755	11.23	11.29	14.27
	159	5795	11.34	11.34	14.35
802.11ac VHT80	155	5775	11.49	11.43	14.47
802.11ax HE20	149	5745	11.21	11.26	14.25
	153	5765	11.19	11.31	14.26
	157	5785	11.29	11.33	14.32
	161	5805	11.39	11.31	14.36
	165	5825	11.32	11.27	14.31
802.11ax HE40	151	5755	11.22	11.32	14.28
	159	5795	11.27	11.28	14.29
802.11ax HE80	155	5775	11.21	11.22	14.23
802.11be HE20	149	5745	11.39	11.34	14.38
	153	5765	11.31	11.37	14.35
	157	5785	11.34	11.34	14.35
	161	5805	11.27	11.36	14.33
	165	5825	11.3	11.19	14.26
802.11be HE40	151	5755	11.37	11.29	14.34
	159	5795	11.25	11.33	14.3
802.11be HE80	155	5775	11.28	11.23	14.27

Conducted Power (Full)			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	11.87
	173	5865	11.8
	177	5885	11.75
802.11n HT20	169	5845	11.71
	173	5865	11.71
	177	5885	11.76
802.11n HT40	167	5835	11.81
	175	5875	11.8
802.11ac VHT80	171	5855	11.74
802.11ac VHT160	163	5815	12
802.11ax HE20	169	5845	11.81
	173	5865	11.71
	177	5885	11.77
802.11ax HE40	167	5835	11.77
	175	5875	11.8
802.11ax HE80	171	5855	11.71
802.11ax HE160	163	5815	11.84
802.11be HE20	169	5845	11.79
	173	5865	11.72
	177	5885	11.85
802.11be HE40	167	5835	11.89
	175	5875	11.8
802.11be HE80	171	5855	11.81
802.11be HE160	163	5815	11.8

Conducted Power (Full)			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	11.77
	173	5865	11.83
	177	5885	11.69
802.11n HT20	169	5845	11.73
	173	5865	11.82
	177	5885	11.85
802.11n HT40	167	5835	11.89
	175	5875	11.81
802.11ac VHT80	171	5855	11.81
802.11ac VHT160	163	5815	11.93
802.11ax HE20	169	5845	11.69
	173	5865	11.69
	177	5885	11.68
802.11ax HE40	167	5835	11.75
	175	5875	11.78
802.11ax HE80	171	5855	11.8
802.11ax HE160	163	5815	11.79
802.11be HE20	169	5845	11.69
	173	5865	11.75
	177	5885	11.87
802.11be HE40	167	5835	11.79
	175	5875	11.78
802.11be HE80	171	5855	11.82
802.11be HE160	163	5815	11.71

Conducted Power (Full)					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845			
	173	5865			
	177	5885			
802.11n HT20	169	5845	11.75	11.69	14.73
	173	5865	11.71	11.77	14.75
	177	5885	11.68	11.81	14.76
802.11n HT40	167	5835	11.74	11.88	14.82
	175	5875	11.89	11.84	14.88
802.11ac VHT80	171	5855	11.81	11.77	14.8
802.11ac VHT160	163	5815	11.98	11.96	14.98
802.11ax HE20	169	5845	11.78	11.84	14.82
	173	5865	11.73	11.83	14.79
	177	5885	11.72	11.78	14.76
802.11ax HE40	167	5835	11.79	11.74	14.78
	175	5875	11.82	11.8	14.82
802.11ax HE80	171	5855	11.79	11.85	14.83
802.11ax HE160	163	5815	11.76	11.84	14.81
802.11be HE20	169	5845	11.69	11.71	14.71
	173	5865	11.73	11.83	14.79
	177	5885	11.75	11.77	14.77
802.11be HE40	167	5835	11.77	11.86	14.83
	175	5875	11.73	11.69	14.72
802.11be HE80	171	5855	11.82	11.71	14.78
802.11be HE160	163	5815	11.75	11.71	14.74

Conducted Power (Full)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	11.76
	5	5975	11.71
	9	5995	11.8
	13	6015	11.83
	17	6035	11.82
	21	6055	11.76
	25	6075	11.75
	29	6095	11.86
	33	6115	11.75
	37	6135	11.85
	41	6155	11.8
	45	6175	11.72
	49	6195	11.77
	53	6215	11.82
	57	6235	11.82
	61	6255	11.73
	65	6275	11.89
	69	6295	11.74
	73	6315	11.77
	77	6335	11.78
802.11be HE20	81	6355	11.73
	85	6375	11.73
	89	6395	11.85
	93	6415	11.8
	1	5955	11.79
	5	5975	11.8
	9	5995	11.8
	13	6015	11.78
	17	6035	11.73
	21	6055	11.75
	25	6075	11.76
	29	6095	11.74
	33	6115	11.75
	37	6135	11.76
	41	6155	11.72
	45	6175	11.84
	49	6195	11.79
	53	6215	11.79
	57	6235	11.83
	61	6255	11.74
	65	6275	11.88
	69	6295	11.78
	73	6315	11.71
	77	6335	11.82
	81	6355	11.78
	85	6375	11.8
	89	6395	11.69
	93	6415	11.72

Conducted Power (Full)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	11.75
	5	5975	11.7
	9	5995	11.73
	13	6015	11.77
	17	6035	11.76
	21	6055	11.71
	25	6075	11.81
	29	6095	11.76
	33	6115	11.82
	37	6135	11.76
	41	6155	11.79
	45	6175	11.74
	49	6195	11.83
	53	6215	11.79
	57	6235	11.79
	61	6255	11.76
	65	6275	11.84
	69	6295	11.83
	73	6315	11.76
	77	6335	11.76
802.11be HE20	81	6355	11.75
	85	6375	11.75
	89	6395	11.86
	93	6415	11.71
	1	5955	11.73
	5	5975	11.75
	9	5995	11.79
	13	6015	11.82
	17	6035	11.83
	21	6055	11.71
	25	6075	11.7
	29	6095	11.85
	33	6115	11.83
	37	6135	11.76
	41	6155	11.71
	45	6175	11.82
	49	6195	11.72
	53	6215	11.72
	57	6235	11.75
	61	6255	11.82
	65	6275	11.75
	69	6295	11.77
	73	6315	11.69
	77	6335	11.7
	81	6355	11.88
	85	6375	11.79
	89	6395	11.71
	93	6415	11.7

Conducted Power (Full)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	11.72	11.72	14.73
	5	5975	11.82	11.79	14.82
	9	5995	11.77	11.77	14.78
	13	6015	11.79	11.82	14.82
	17	6035	11.73	11.67	14.71
	21	6055	11.82	11.84	14.84
	25	6075	11.85	11.79	14.83
	29	6095	11.73	11.88	14.82
	33	6115	11.85	11.78	14.83
	37	6135	11.8	11.88	14.85
	41	6155	11.82	11.75	14.80
	45	6175	11.76	11.78	14.78
	49	6195	11.76	11.71	14.75
	53	6215	11.79	11.66	14.74
	57	6235	11.83	11.76	14.81
	61	6255	11.72	11.84	14.79
	65	6275	11.78	11.84	14.82
	69	6295	11.69	11.81	14.76
	73	6315	11.8	11.85	14.84
	77	6335	11.72	11.72	14.73
	81	6355	11.68	11.73	14.72
	85	6375	11.84	11.75	14.81
	89	6395	11.88	11.74	14.82
	93	6415	11.73	11.75	14.75
802.11be HE20	1	5955	11.72	11.8	14.77
	5	5975	11.82	11.86	14.85
	9	5995	11.78	11.78	14.79
	13	6015	11.8	11.85	14.84
	17	6035	11.75	11.76	14.77
	21	6055	11.74	11.82	14.79
	25	6075	11.87	11.77	14.83
	29	6095	11.84	11.75	14.81
	33	6115	11.73	11.84	14.80
	37	6135	11.71	11.82	14.78
	41	6155	11.83	11.7	14.78
	45	6175	11.83	11.89	14.87
	49	6195	11.8	11.76	14.79
	53	6215	11.71	11.81	14.77
	57	6235	11.88	11.76	14.83
	61	6255	11.72	11.74	14.74
	65	6275	11.74	11.8	14.78
	69	6295	11.72	11.7	14.72
	73	6315	11.84	11.75	14.81
	77	6335	11.66	11.75	14.72
	81	6355	11.83	11.83	14.84
	85	6375	11.83	11.87	14.86
	89	6395	11.68	11.75	14.73
	93	6415	11.73	11.82	14.79

Conducted Power (Full)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE40	3	5965	11.72
	11	6005	11.71
	19	6045	11.82
	27	6085	11.66
	35	6125	11.78
	43	6165	11.7
	51	6205	11.76
	59	6245	11.83
	67	6285	11.82
	75	6325	11.76
	83	6365	11.86
802.11ax HE80	91	6405	11.69
	7	5985	11.8
	23	6065	11.79
	39	6145	11.81
	55	6225	11.69
	71	6305	11.85
802.11ax HE160	87	6385	11.68
	15	6025	11.83
	47	6185	11.74
802.11be HE40	79	6345	11.73
	3	5965	11.81
	11	6005	11.7
	19	6045	11.84
	27	6085	11.74
	35	6125	11.85
	43	6165	11.81
	51	6205	11.78
	59	6245	11.8
	67	6285	11.76
	75	6325	11.71
802.11be HE80	83	6365	11.74
	91	6405	11.74
	7	5985	11.8
	23	6065	11.77
	39	6145	11.8
	55	6225	11.77
802.11be HE160	71	6305	11.79
	87	6385	11.71
	15	6025	11.73
802.11be HE320	47	6185	11.76
	79	6345	11.83
	31	6105	11.94
	63	6265	11.99
	95	6425	11.95

Conducted Power (Full)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE40	3	5965	11.7
	11	6005	11.69
	19	6045	11.84
	27	6085	11.74
	35	6125	11.77
	43	6165	11.81
	51	6205	11.81
	59	6245	11.79
	67	6285	11.7
	75	6325	11.86
	83	6365	11.86
	91	6405	11.72
802.11ax HE80	7	5985	11.68
	23	6065	11.79
	39	6145	11.77
	55	6225	11.69
	71	6305	11.87
	87	6385	11.81
802.11ax HE160	15	6025	11.79
	47	6185	11.68
	79	6345	11.33
802.11be HE40	3	5965	11.72
	11	6005	11.7
	19	6045	11.89
	27	6085	11.82
	35	6125	11.77
	43	6165	11.82
	51	6205	11.82
	59	6245	11.89
	67	6285	11.81
	75	6325	11.78
	83	6365	11.74
	91	6405	11.8
802.11be HE80	7	5985	11.78
	23	6065	11.78
	39	6145	11.71
	55	6225	11.82
	71	6305	11.86
	87	6385	11.69
802.11be HE160	15	6025	11.73
	47	6185	11.71
	79	6345	11.74
802.11be HE320	31	6105	11.9
	63	6265	11.95
	95	6425	11.89

Conducted Power (Full)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE40	3	5965	11.75	11.84	14.81
	11	6005	11.82	11.77	14.81
	19	6045	11.68	11.81	14.76
	27	6085	11.75	11.75	14.76
	35	6125	11.84	11.82	14.84
	43	6165	11.79	11.76	14.79
	51	6205	11.79	11.84	14.83
	59	6245	11.74	11.84	14.8
	67	6285	11.83	11.75	14.8
	75	6325	11.79	11.65	14.73
	83	6365	11.78	11.8	14.8
802.11ax HE80	91	6405	11.8	11.67	14.75
	7	5985	11.76	11.77	14.78
	23	6065	11.84	11.85	14.86
	39	6145	11.76	11.83	14.81
	55	6225	11.72	11.76	14.75
	71	6305	11.73	11.8	14.78
802.11ax HE160	87	6385	11.86	11.87	14.88
	15	6025	11.7	11.77	14.75
	47	6185	11.81	11.88	14.86
802.11be HE40	79	6345	11.86	11.82	14.85
	3	5965	11.7	11.79	14.76
	11	6005	11.86	11.75	14.82
	19	6045	11.68	11.78	14.74
	27	6085	11.69	11.82	14.77
	35	6125	11.86	11.85	14.87
	43	6165	11.79	11.85	14.83
	51	6205	11.82	11.72	14.78
	59	6245	11.86	11.76	14.82
	67	6285	11.8	11.75	14.79
	75	6325	11.81	11.76	14.8
802.11be HE80	83	6365	11.72	11.68	14.71
	91	6405	11.79	11.86	14.84
	7	5985	11.83	11.83	14.84
	23	6065	11.72	11.69	14.72
	39	6145	11.86	11.87	14.88
	55	6225	11.77	11.79	14.79
802.11be HE160	71	6305	11.85	11.77	14.82
	87	6385	11.82	11.89	14.87
	15	6025	11.82	11.68	14.76
802.11be HE320	47	6185	11.79	11.82	14.82
	79	6345	11.81	11.8	14.82
	31	6105	11.96	11.92	14.95
	63	6265	11.94	11.97	14.97
	95	6425	11.9	11.84	14.88

Conducted Power (Full)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	11.8
	101	6455	11.75
	105	6475	11.77
	109	6495	11.73
	113	6515	11.79
802.11ax HE40	99	6445	11.67
	107	6485	11.74
	115	6525	11.8
802.11ax HE80	103	6465	11.68
	119	6545	11.74
802.11ax HE160	111	6505	11.91
802.11be HE20	97	6435	11.78
	101	6455	11.85
	105	6475	11.77
	109	6495	11.81
	113	6515	11.77
802.11be HE40	99	6445	11.69
	107	6485	11.85
	115	6525	11.8
802.11be HE80	103	6465	11.73
	119	6545	11.8
802.11be HE160	111	6505	11.75

Conducted Power (Full)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	11.8
	101	6455	11.83
	105	6475	11.72
	109	6495	11.76
	113	6515	11.68
802.11ax HE40	99	6445	11.77
	107	6485	11.81
	115	6525	11.83
802.11ax HE80	103	6465	11.69
	119	6545	11.73
802.11ax HE160	111	6505	11.92
802.11be HE20	97	6435	11.75
	101	6455	11.77
	105	6475	11.81
	109	6495	11.89
	113	6515	11.83
802.11be HE40	99	6445	11.87
	107	6485	11.66
	115	6525	11.82
802.11be HE80	103	6465	11.79
	119	6545	11.8
802.11be HE160	111	6505	11.86

Conducted Power (Full)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	11.78	11.72	14.76
	101	6455	11.73	11.78	14.77
	105	6475	11.8	11.88	14.85
	109	6495	11.7	11.75	14.74
	113	6515	11.71	11.85	14.79
802.11ax HE40	99	6445	11.73	11.74	14.75
	107	6485	11.76	11.83	14.81
	115	6525	11.72	11.8	14.77
802.11ax HE80	103	6465	11.78	11.76	14.78
	119	6545	11.8	11.79	14.81
802.11ax HE160	111	6505	11.91	11.98	14.96
802.11be HE20	97	6435	11.74	11.76	14.76
	101	6455	11.77	11.85	14.82
	105	6475	11.75	11.77	14.77
	109	6495	11.7	11.82	14.77
	113	6515	11.68	11.68	14.69
802.11be HE40	99	6445	11.79	11.75	14.78
	107	6485	11.68	11.81	14.76
	115	6525	11.86	11.75	14.82
802.11be HE80	103	6465	11.79	11.72	14.77
	119	6545	11.74	11.74	14.75
802.11be HE160	111	6505	11.74	11.78	14.77

Conducted Power (Full)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	117	6535	11.75
	121	6555	11.77
	125	6575	11.8
	129	6595	11.71
	133	6615	11.69
	137	6635	11.8
	141	6655	11.71
	145	6675	11.74
	149	6695	11.83
	153	6715	11.65
	157	6735	11.71
	161	6755	11.88
	165	6775	11.69
	169	6795	11.75
	173	6815	11.84
	177	6835	11.8
802.11ax HE40	181	6855	11.77
	185	6875	11.87
	123	6565	11.76
	131	6605	11.77
	139	6645	11.75
	147	6685	11.83
	155	6725	11.81
	163	6765	11.67
802.11ax HE80	171	6805	11.77
	179	6845	11.73
	187	6885	11.7
802.11ax HE160	135	6625	11.84
	151	6705	11.84
	167	6785	11.72
802.11be HE20	183	6865	11.77
	143	6665	11.85
	175	6825	11.67
	117	6535	11.76
	121	6555	11.79
	125	6575	11.74
	129	6595	11.81
	133	6615	11.76
	137	6635	11.7
	141	6655	11.84
	145	6675	11.77
	149	6695	11.76
	153	6715	11.73
	157	6735	11.84
	161	6755	11.84
	165	6775	11.74
802.11be HE40	169	6795	11.8
	173	6815	11.75
	177	6835	11.69
	181	6855	11.86
	185	6875	11.76
	123	6565	11.71
	131	6605	11.66
	139	6645	11.71
802.11be HE80	147	6685	11.72
	155	6725	11.76
	163	6765	11.7
802.11be HE160	171	6805	11.75
	179	6845	11.87
	187	6885	11.76
802.11be HE320	135	6625	11.77
	151	6705	11.69
	167	6785	11.8
	183	6865	11.84
	143	6665	11.8
	175	6825	11.87
	127	6585	11.9
	159	6745	11.91

Conducted Power (Full)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	117	6535	11.75
	121	6555	11.77
	125	6575	11.8
	129	6595	11.71
	133	6615	11.69
	137	6635	11.8
	141	6655	11.71
	145	6675	11.74
	149	6695	11.83
	153	6715	11.65
	157	6735	11.71
	161	6755	11.88
	165	6775	11.69
	169	6795	11.75
	173	6815	11.84
	177	6835	11.8
802.11ax HE40	181	6855	11.77
	185	6875	11.87
	123	6565	11.76
	131	6605	11.77
	139	6645	11.75
	147	6685	11.83
	155	6725	11.81
	163	6765	11.67
802.11ax HE80	171	6805	11.77
	179	6845	11.73
	187	6885	11.7
802.11ax HE160	135	6625	11.84
	151	6705	11.84
	167	6785	11.72
802.11be HE20	183	6865	11.77
	143	6665	11.85
	175	6825	11.67
	117	6535	11.76
	121	6555	11.79
	125	6575	11.74
	129	6595	11.81
	133	6615	11.76
	137	6635	11.7
	141	6655	11.84
	145	6675	11.77
	149	6695	11.76
	153	6715	11.73
	157	6735	11.84
	161	6755	11.84
	165	6775	11.74
802.11be HE40	169	6795	11.8
	173	6815	11.75
	177	6835	11.69
	181	6855	11.86
	185	6875	11.76
	123	6565	11.71
	131	6605	11.66
	139	6645	11.71
802.11be HE80	147	6685	11.72
	155	6725	11.76
	163	6765	11.7
802.11be HE160	171	6805	11.75
	179	6845	11.87
	187	6885	11.76
802.11be HE320	135	6625	11.77
	151	6705	11.69
	167	6785	11.8
	183	6865	11.84
	143	6665	11.8
	175	6825	11.87
	127	6585	11.9
	159	6745	11.91

Conducted Power (Full)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	117	6535	11.75	11.8	14.79
	121	6555	11.77	11.86	14.83
	125	6575	11.8	11.82	14.82
	129	6595	11.71	11.8	14.77
	133	6615	11.69	11.69	14.7
	137	6635	11.8	11.88	14.85
	141	6655	11.71	11.68	14.71
	145	6675	11.74	11.78	14.77
	149	6695	11.83	11.8	14.83
	153	6715	11.65	11.77	14.72
	157	6735	11.71	11.82	14.78
	161	6755	11.88	11.81	14.86
	165	6775	11.69	11.8	14.76
	169	6795	11.75	11.78	14.78
	173	6815	11.84	11.81	14.84
	177	6835	11.8	11.73	14.78
	181	6855	11.77	11.76	14.78
	185	6875	11.87	11.72	14.81
802.11ax HE40	123	6565	11.76	11.75	14.77
	131	6605	11.77	11.72	14.76
	139	6645	11.75	11.8	14.79
	147	6685	11.83	11.81	14.83
	155	6725	11.81	11.8	14.82
	163	6765	11.67	11.77	14.73
	171	6805	11.77	11.7	14.75
	179	6845	11.73	11.73	14.74
802.11ax HE80	187	6885	11.7	11.79	14.76
	135	6625	11.84	11.71	14.79
	151	6705	11.84	11.74	14.8
802.11ax HE160	167	6785	11.72	11.77	14.76
	183	6865	11.77	11.74	14.77
	143	6665	11.85	11.79	14.83
802.11be HE20	175	6825	11.67	11.68	14.69
	117	6535	11.76	11.83	14.81
	121	6555	11.79	11.69	14.75
	125	6575	11.74	11.71	14.74
	129	6595	11.81	11.83	14.83
	133	6615	11.76	11.8	14.79
	137	6635	11.7	11.77	14.75
	141	6655	11.84	11.74	14.8
	145	6675	11.77	11.87	14.83
	149	6695	11.76	11.86	14.82
	153	6715	11.73	11.79	14.77
	157	6735	11.84	11.8	14.83
	161	6755	11.84	11.83	14.85
	165	6775	11.74	11.69	14.73
	169	6795	11.8	11.78	14.8
	173	6815	11.75	11.72	14.75
	177	6835	11.69	11.68	14.7
	181	6855	11.86	11.81	14.85
802.11be HE40	185	6875	11.76	11.79	14.79
	123	6565	11.71	11.75	14.74
	131	6605	11.66	11.74	14.71
	139	6645	11.71	11.75	14.74
	147	6685	11.72	11.78	14.76
	155	6725	11.76	11.78	14.78
	163	6765	11.7	11.78	14.75
	171	6805	11.75	11.7	14.74
802.11be HE80	179	6845	11.87	11.84	14.87
	187	6885	11.76	11.83	14.81
	135	6625	11.77	11.81	14.8
	151	6705	11.69	11.81	14.76
802.11be HE160	167	6785	11.8	11.85	14.84
	183	6865	11.84	11.77	14.82
	143	6665	11.8	11.72	14.77
802.11be HE320	175	6825	11.87	11.88	14.89
	127	6585	11.9	11.85	14.89
	159	6745	11.91	11.88	14.91

Conducted Power (Full)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	11.8
	193	6915	11.86
	197	6935	11.82
	201	6955	11.8
	205	6975	11.69
	209	6995	11.88
	213	7015	11.68
	217	7035	11.78
	221	7055	11.8
	225	7075	11.77
	229	7095	11.82
802.11ax HE40	233	7115	11.81
	195	6925	11.8
	203	6965	11.78
	211	7005	11.81
	219	7045	11.73
802.11ax HE80	227	7085	11.76
	199	6945	11.72
802.11ax HE160	215	7025	11.75
	207	6985	11.72
802.11be HE20	189	6895	11.81
	193	6915	11.8
	197	6935	11.77
	201	6955	11.7
	205	6975	11.73
	209	6995	11.79
	213	7015	11.71
	217	7035	11.74
	221	7055	11.77
	225	7075	11.74
	229	7095	11.79
802.11be HE40	233	7115	11.68
	195	6925	-3.21
	203	6965	11.83
	211	7005	11.69
	219	7045	11.71
802.11be HE80	227	7085	11.83
	199	6945	11.8
802.11be HE160	215	7025	11.77
	207	6985	11.74
802.11be HE320	191	6905	11.96

Conducted Power (Full)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	11.88
	193	6915	11.88
	197	6935	11.76
	201	6955	11.87
	205	6975	11.76
	209	6995	11.82
	213	7015	11.87
	217	7035	11.8
	221	7055	11.71
	225	7075	11.68
	229	7095	11.68
802.11ax HE40	233	7115	11.79
	195	6925	11.75
	203	6965	11.74
	211	7005	11.72
	219	7045	11.74
802.11ax HE80	227	7085	11.79
	199	6945	11.81
802.11ax HE160	215	7025	11.73
	207	6985	11.78
802.11be HE20	189	6895	11.81
	193	6915	11.77
	197	6935	11.72
	201	6955	11.74
	205	6975	11.77
	209	6995	11.69
	213	7015	11.76
	217	7035	11.82
	221	7055	11.77
	225	7075	11.74
	229	7095	11.8
802.11be HE40	233	7115	11.8
	195	6925	11.81
	203	6965	11.78
	211	7005	11.79
	219	7045	11.74
802.11be HE80	227	7085	11.81
	199	6945	11.67
802.11be HE160	215	7025	11.77
	207	6985	11.79
802.11be HE320	191	6905	11.91

Conducted Power (Full)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	11.71	11.77	14.75
	193	6915	11.83	11.73	14.79
	197	6935	11.84	11.86	14.86
	201	6955	11.71	11.82	14.78
	205	6975	11.82	11.83	14.84
	209	6995	11.77	11.71	14.75
	213	7015	11.88	11.72	14.81
	217	7035	11.82	11.74	14.79
	221	7055	11.76	11.81	14.8
	225	7075	11.74	11.69	14.73
	229	7095	11.85	11.72	14.8
	233	7115	11.7	11.72	14.72
802.11ax HE40	195	6925	11.9	11.72	14.82
	203	6965	11.79	11.73	14.77
	211	7005	11.86	11.76	14.82
	219	7045	11.75	11.81	14.79
	227	7085	11.75	11.77	14.77
802.11ax HE80	199	6945	11.74	11.83	14.8
	215	7025	11.74	11.81	14.79
802.11ax HE160	207	6985	11.79	11.78	14.8
802.11be HE20	189	6895	11.76	11.74	14.76
	193	6915	11.85	11.79	14.83
	197	6935	11.85	11.69	14.78
	201	6955	11.85	11.77	14.82
	205	6975	11.83	11.79	14.82
	209	6995	11.69	11.86	14.79
	213	7015	11.66	11.7	14.69
	217	7035	11.78	11.83	14.82
	221	7055	11.86	11.78	14.83
	225	7075	11.78	11.82	14.81
	229	7095	11.76	11.75	14.77
	233	7115	11.81	11.69	14.76
802.11be HE40	195	6925	11.75	11.73	14.75
	203	6965	11.84	11.75	14.81
	211	7005	11.76	11.84	14.81
	219	7045	11.79	11.65	14.73
	227	7085	11.77	11.76	14.78
802.11be HE80	199	6945	11.8	11.81	14.82
	215	7025	11.77	11.72	14.76
802.11be HE160	207	6985	11.8	11.66	14.74
802.11be HE320	191	6905	11.94	11.95	14.96

Conducted Power (Tablet Mode)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	15.34
	6	2437	15.49
	11	2462	15.47
	12	2467	15.44
	13	2472	15.3
802.11g	1	2412	15.27
	6	2437	15.18
	11	2462	15.18
	12	2467	15.19
	13	2472	15.21
802.11n HT20	1	2412	15.2
	6	2437	15.29
	11	2462	15.35
	12	2467	15.22
	13	2472	15.22
802.11n HT40	3	2422	15.33
	6	2437	15.21
	9	2452	15.26
	10	2457	15.28
	11	2462	15.2
802.11ax HE20	1	2412	15.28
	6	2437	15.33
	11	2462	15.39
	12	2467	15.35
	13	2472	15.18
802.11ax HE40	3	2422	15.26
	6	2437	15.26
	9	2452	15.23
	10	2457	15.35
	11	2462	15.27
802.11be HE20	1	2412	15.26
	6	2437	15.32
	11	2462	15.22
	12	2467	15.27
	13	2472	15.37
802.11be HE40	3	2422	15.39
	6	2437	15.29
	9	2452	15.34
	10	2457	15.24
	11	2462	15.27

Conducted Power (Tablet Mode)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	15.37
	6	2437	15.48
	11	2462	15.43
	12	2467	15.45
	13	2472	15.4
802.11g	1	2412	15.33
	6	2437	15.3
	11	2462	15.26
	12	2467	15.23
	13	2472	15.21
802.11n HT20	1	2412	15.29
	6	2437	15.32
	11	2462	15.27
	12	2467	15.2
	13	2472	15.32
802.11n HT40	3	2422	15.3
	6	2437	15.28
	9	2452	15.25
	10	2457	15.22
	11	2462	15.32
802.11ax HE20	1	2412	15.24
	6	2437	15.17
	11	2462	15.33
	12	2467	15.31
	13	2472	15.28
802.11ax HE40	3	2422	15.23
	6	2437	15.34
	9	2452	15.33
	10	2457	15.35
	11	2462	15.29
802.11be HE20	1	2412	15.21
	6	2437	15.24
	11	2462	15.35
	12	2467	15.33
	13	2472	15.27
802.11be HE40	3	2422	15.34
	6	2437	15.24
	9	2452	15.25
	10	2457	15.2
	11	2462	15.28

Conducted Power (Tablet Mode)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11g	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11n HT20	1	2412	15.29	15.29	18.30
	6	2437	15.33	15.3	18.33
	11	2462	15.36	15.28	18.33
	12	2467	15.18	15.34	18.27
	13	2472	15.24	15.24	18.25
802.11n HT40	3	2422	15.45	15.4	18.44
	6	2437	15.46	15.42	18.45
	9	2452	15.35	15.46	18.42
	10	2457	15.34	15.39	18.38
	11	2462	15.34	15.26	18.31
802.11ax HE20	1	2412	15.24	15.3	18.28
	6	2437	15.34	15.35	18.36
	11	2462	15.3	15.3	18.31
	12	2467	15.24	15.3	18.28
	13	2472	15.18	15.19	18.20
802.11ax HE40	3	2422	15.26	15.28	18.28
	6	2437	15.32	15.33	18.34
	9	2452	15.25	15.25	18.26
	10	2457	15.27	15.2	18.25
	11	2462	15.25	15.25	18.26
802.11be HE20	1	2412	15.28	15.31	18.31
	6	2437	15.32	15.29	18.32
	11	2462	15.24	15.32	18.29
	12	2467	15.33	15.34	18.35
	13	2472	15.32	15.4	18.37
802.11be HE40	3	2422	15.29	15.39	18.35
	6	2437	15.32	15.22	18.28
	9	2452	15.39	15.25	18.33
	10	2457	15.28	15.33	18.32
	11	2462	15.32	15.23	18.29

Conducted Power (Tablet Mode)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	10.87
	39	2441	10.95
	78	2480	10.93
LE	0	2402	6.81
	19	2440	6.8
	39	2480	6.83

Conducted Power (Tablet Mode)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	10.23
	40	5200	10.28
	44	5220	10.31
	48	5240	10.34
802.11n HT20	36	5180	10.33
	40	5200	10.19
	44	5220	10.19
	48	5240	10.21
802.11n HT40	38	5190	10.24
	46	5230	10.29
802.11ac VHT80	42	5210	10.46
802.11ax HE20	36	5180	10.23
	40	5200	10.27
	44	5220	10.3
	48	5240	10.25
802.11ax HE40	38	5190	10.38
	46	5230	10.31
802.11ax HE80	42	5210	10.24
802.11be HE20	40	5200	10.28
	44	5220	10.27
	48	5240	10.29
802.11be HE40	38	5190	10.28
	46	5230	10.29
802.11be HE80	42	5210	10.32

Conducted Power (Tablet Mode)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	10.26
	40	5200	10.23
	44	5220	10.28
	48	5240	10.3
802.11n HT20	36	5180	10.26
	40	5200	10.3
	44	5220	10.31
	48	5240	10.25
802.11n HT40	38	5190	10.24
	46	5230	10.22
802.11ac VHT80	42	5210	10.47
802.11ax HE20	36	5180	10.34
	40	5200	10.25
	44	5220	10.29
	48	5240	10.33
802.11ax HE40	38	5190	10.34
	46	5230	10.25
802.11ax HE80	42	5210	10.32
802.11be HE20	40	5200	10.26
	44	5220	10.26
	48	5240	10.2
802.11be HE40	38	5190	10.28
	46	5230	10.26
802.11be HE80	42	5210	10.28

Conducted Power (Tablet Mode)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180			
	40	5200			
	44	5220			
	48	5240			
802.11n HT20	36	5180	10.31	10.25	13.29
	40	5200	10.18	10.24	13.22
	44	5220	10.27	10.35	13.32
	48	5240	10.22	10.26	13.25
802.11n HT40	38	5190	10.3	10.27	13.3
	46	5230	10.2	10.35	13.29
802.11ac VHT80	42	5210	10.43	10.43	13.44
802.11ax HE20	36	5180	10.21	10.34	13.29
	40	5200	10.25	10.32	13.3
	44	5220	10.21	10.31	13.27
	48	5240	10.31	10.27	13.3
802.11ax HE40	38	5190	10.38	10.19	13.3
	46	5230	10.31	10.23	13.28
802.11ax HE80	42	5210	10.28	10.37	13.34
802.11be HE20	40	5200	10.37	10.34	13.37
	44	5220	10.31	10.2	13.27
	48	5240	10.18	10.23	13.22
802.11be HE40	38	5190	10.22	10.22	13.23
	46	5230	10.25	10.37	13.32
802.11be HE80	42	5210	10.22	10.24	13.24

Conducted Power (Tablet Mode)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	10.21
	56	5280	10.32
	60	5300	10.23
	64	5320	10.3
802.11n HT20	52	5260	10.27
	56	5280	10.27
	60	5300	10.3
	64	5320	10.26
802.11n HT40	54	5270	10.32
	62	5310	10.26
802.11ac VHT80	58	5290	10.21
802.11ac VHT160	50	5250	10.43
802.11ax HE20	52	5260	10.26
	56	5280	10.39
	60	5300	10.24
	64	5320	10.36
802.11ax HE40	54	5270	10.24
	62	5310	10.29
802.11ax HE80	58	5290	10.28
802.11ax HE160	50	5250	10.29
802.11be HE20	52	5260	10.25
	56	5280	10.32
	60	5300	10.25
	64	5320	10.2
802.11be HE40	54	5270	10.24
	62	5310	10.31
802.11be HE80	58	5290	10.28
802.11be HE160	50	5250	10.3

Conducted Power (Tablet Mode)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	10.2
	56	5280	10.29
	60	5300	10.28
	64	5320	10.34
802.11n HT20	52	5260	10.23
	56	5280	10.38
	60	5300	10.35
	64	5320	10.32
802.11n HT40	54	5270	10.24
	62	5310	10.25
802.11ac VHT80	58	5290	10.3
802.11ac VHT160	50	5250	10.48
802.11ax HE20	52	5260	10.3
	56	5280	10.17
	60	5300	10.28
	64	5320	10.36
802.11ax HE40	54	5270	10.21
	62	5310	10.24
802.11ax HE80	58	5290	10.35
802.11ax HE160	50	5250	10.31
802.11be HE20	52	5260	10.35
	56	5280	10.3
	60	5300	10.25
	64	5320	10.31
802.11be HE40	54	5270	10.36
	62	5310	10.28
802.11be HE80	58	5290	10.2
802.11be HE160	50	5250	10.25

Conducted Power (Tablet Mode)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260			
	56	5280			
	60	5300			
	64	5320			
802.11n HT20	52	5260	10.25	10.31	13.29
	56	5280	10.38	10.27	13.34
	60	5300	10.29	10.24	13.28
	64	5320	10.31	10.3	13.32
802.11n HT40	54	5270	10.26	10.24	13.26
	62	5310	10.46	10.38	13.43
802.11ac VHT80	58	5290	10.29	10.26	13.29
802.11ac VHT160	50	5250	10.49	10.44	13.48
802.11ax HE20	52	5260	10.34	10.3	13.33
	56	5280	10.28	10.32	13.31
	60	5300	10.23	10.35	13.3
	64	5320	10.28	10.36	13.33
802.11ax HE40	54	5270	10.37	10.24	13.32
	62	5310	10.22	10.29	13.27
802.11ax HE80	58	5290	10.3	10.33	13.33
802.11ax HE160	50	5250	10.32	10.3	13.32
802.11be HE20	52	5260	10.26	10.32	13.3
	56	5280	10.22	10.3	13.27
	60	5300	10.17	10.28	13.24
	64	5320	10.33	10.25	13.3
802.11be HE40	54	5270	10.21	10.27	13.25
	62	5310	10.27	10.32	13.31
802.11be HE80	58	5290	10.22	10.32	13.28
802.11be HE160	50	5250	10.27	10.35	13.32

Conducted Power (Tablet Mode)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	10.81
	116	5580	10.74
	120	5600	10.66
	124	5620	10.71
	132	5660	10.78
	140	5700	10.79
	144	5720	10.81
802.11n HT20	100	5500	10.77
	116	5580	10.77
	120	5600	10.66
	124	5620	10.71
	132	5660	10.73
	140	5700	10.88
	144	5720	10.8
802.11n HT40	102	5510	10.8
	110	5550	10.7
	118	5590	10.84
	126	5630	10.74
	134	5670	10.87
	142	5710	10.8
802.11ac VHT80	106	5530	10.94
	122	5610	10.91
	138	5690	10.83
802.11ac VHT160	114	5570	10.95
802.11ax HE20	100	5500	10.8
	116	5580	10.87
	120	5600	10.86
	124	5620	10.71
	132	5660	10.79
	140	5700	10.8
	144	5720	10.82
802.11ax HE40	102	5510	10.69
	110	5550	10.73
	118	5590	10.76
	126	5630	10.7
	134	5670	10.86
	142	5710	10.76
802.11ax HE80	106	5530	10.81
	122	5610	10.8
	138	5690	10.86
802.11ax HE160	114	5570	10.68
802.11be HE20	100	5500	10.73
	116	5580	10.71
	120	5600	10.9
	124	5620	10.72
	132	5660	10.88
	140	5700	10.79
	144	5720	10.73
802.11be HE40	102	5510	10.8
	110	5550	10.71
	118	5590	10.85
	126	5630	10.82
	134	5670	10.73
	142	5710	10.78
802.11be HE80	106	5530	10.75
	122	5610	10.87
	138	5690	10.83
802.11be HE160	114	5570	10.76

Conducted Power (Tablet Mode)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	10.72
	116	5580	10.84
	120	5600	10.71
	124	5620	10.68
	132	5660	10.72
	140	5700	10.74
	144	5720	10.8
802.11n HT20	100	5500	10.77
	116	5580	10.78
	120	5600	10.67
	124	5620	10.76
	132	5660	10.68
	140	5700	10.8
	144	5720	10.83
802.11n HT40	102	5510	10.77
	110	5550	10.65
	118	5590	10.83
	126	5630	10.77
	134	5670	10.75
	142	5710	10.65
802.11ac VHT80	106	5530	10.91
	122	5610	10.81
	138	5690	10.86
802.11ac VHT160	114	5570	10.93
802.11ax HE20	100	5500	10.82
	116	5580	10.83
	120	5600	10.84
	124	5620	10.68
	132	5660	10.84
	140	5700	10.83
	144	5720	10.87
802.11ax HE40	102	5510	10.72
	110	5550	10.68
	118	5590	10.79
	126	5630	10.7
	134	5670	10.8
	142	5710	10.8
802.11ax HE80	106	5530	10.73
	122	5610	10.83
	138	5690	10.78
802.11ax HE160	114	5570	10.75
802.11be HE20	100	5500	10.81
	116	5580	10.7
	120	5600	10.82
	124	5620	10.81
	132	5660	10.8
	140	5700	10.8
	144	5720	10.71
802.11be HE40	102	5510	10.75
	110	5550	10.85
	118	5590	10.81
	126	5630	10.74
	134	5670	10.76
	142	5710	10.69
802.11be HE80	106	5530	10.86
	122	5610	10.75
	138	5690	10.76
802.11be HE160	114	5570	10.81

Conducted Power (Tablet Mode)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500			
	116	5580			
	120	5600			
	124	5620			
	132	5660			
	140	5700			
	144	5720			
802.11n HT20	100	5500	10.78	10.72	13.76
	116	5580	10.8	10.81	13.82
	120	5600	10.74	10.8	13.78
	124	5620	10.87	10.73	13.81
	132	5660	10.75	10.76	13.77
	140	5700	10.77	10.69	13.74
	144	5720	10.74	10.84	13.8
802.11n HT40	102	5510	10.69	10.74	13.73
	110	5550	10.74	10.79	13.78
	118	5590	10.81	10.75	13.79
	126	5630	10.72	10.71	13.73
	134	5670	10.83	10.77	13.81
	142	5710	10.72	10.8	13.77
802.11ac VHT80	106	5530	10.88	10.92	13.91
	122	5610	10.89	10.89	13.9
	138	5690	10.83	10.78	13.82
802.11ac VHT160	114	5570	10.91	10.88	13.91
802.11ax HE20	100	5500	10.76	10.69	13.74
	116	5580	10.73	10.71	13.73
	120	5600	10.79	10.81	13.81
	124	5620	10.73	10.76	13.76
	132	5660	10.8	10.69	13.76
	140	5700	10.71	10.69	13.71
	144	5720	10.74	10.73	13.75
802.11ax HE40	102	5510	10.74	10.69	13.73
	110	5550	10.69	10.66	13.69
	118	5590	10.76	10.71	13.75
	126	5630	10.74	10.81	13.79
	134	5670	10.73	10.74	13.75
	142	5710	10.78	10.8	13.8
802.11ax HE80	106	5530	10.81	10.78	13.81
	122	5610	10.74	10.68	13.72
	138	5690	10.81	10.73	13.78
802.11ax HE160	114	5570	10.72	10.83	13.79
802.11be HE20	100	5500	10.69	10.78	13.75
	116	5580	10.69	10.71	13.71
	120	5600	10.75	10.75	13.76
	124	5620	10.82	10.76	13.8
	132	5660	10.89	10.89	13.9
	140	5700	10.76	10.77	13.78
	144	5720	10.8	10.84	13.83
802.11be HE40	102	5510	10.82	10.73	13.79
	110	5550	10.87	10.8	13.85
	118	5590	10.83	10.7	13.78
	126	5630	10.79	10.78	13.8
	134	5670	10.7	10.82	13.77
	142	5710	10.72	10.73	13.74
802.11be HE80	106	5530	10.84	10.84	13.85
	122	5610	10.83	10.82	13.84
	138	5690	10.77	10.75	13.77
802.11be HE160	114	5570	10.76	10.83	13.81

Conducted Power (Tablet Mode)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	11.31
	153	5765	11.39
	157	5785	11.37
	161	5805	11.33
	165	5825	11.28
802.11n HT20	149	5745	11.3
	153	5765	11.19
	157	5785	11.31
	161	5805	11.26
	165	5825	11.33
802.11n HT40	151	5755	11.36
	159	5795	11.32
802.11ac VHT80	155	5775	11.5
802.11ax HE20	149	5745	11.29
	153	5765	11.37
	157	5785	11.31
	161	5805	11.29
	165	5825	11.35
802.11ax HE40	151	5755	11.29
	159	5795	11.31
802.11ax HE80	155	5775	11.21
802.11be HE20	149	5745	11.35
	153	5765	11.33
	157	5785	11.3
	161	5805	11.32
	165	5825	11.27
802.11be HE40	151	5755	11.21
	159	5795	11.33
802.11be HE80	155	5775	11.33

Conducted Power (Tablet Mode)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	11.22
	153	5765	11.32
	157	5785	11.29
	161	5805	11.34
	165	5825	11.19
802.11n HT20	149	5745	11.26
	153	5765	11.3
	157	5785	11.39
	161	5805	11.16
	165	5825	11.34
802.11n HT40	151	5755	11.23
	159	5795	11.37
802.11ac VHT80	155	5775	11.48
802.11ax HE20	149	5745	11.34
	153	5765	11.28
	157	5785	11.35
	161	5805	11.36
	165	5825	11.23
802.11ax HE40	151	5755	11.31
	159	5795	11.33
802.11ax HE80	155	5775	11.33
802.11be HE20	149	5745	11.21
	153	5765	11.23
	157	5785	11.27
	161	5805	11.29
	165	5825	11.3
802.11be HE40	151	5755	11.3
	159	5795	11.33
802.11be HE80	155	5775	11.28

Conducted Power (Tablet Mode)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745			
	153	5765			
	157	5785			
	161	5805			
	165	5825			
802.11n HT20	149	5745	11.16	11.3	14.24
	153	5765	11.22	11.21	14.23
	157	5785	11.21	11.25	14.24
	161	5805	11.17	11.15	14.17
	165	5825	11.32	11.22	14.28
802.11n HT40	151	5755	11.23	11.29	14.27
	159	5795	11.34	11.34	14.35
802.11ac VHT80	155	5775	11.49	11.43	14.47
802.11ax HE20	149	5745	11.21	11.26	14.25
	153	5765	11.19	11.31	14.26
	157	5785	11.29	11.33	14.32
	161	5805	11.39	11.31	14.36
	165	5825	11.32	11.27	14.31
802.11ax HE40	151	5755	11.22	11.32	14.28
	159	5795	11.27	11.28	14.29
802.11ax HE80	155	5775	11.21	11.22	14.23
802.11be HE20	149	5745	11.39	11.34	14.38
	153	5765	11.31	11.37	14.35
	157	5785	11.34	11.34	14.35
	161	5805	11.27	11.36	14.33
	165	5825	11.3	11.19	14.26
802.11be HE40	151	5755	11.37	11.29	14.34
	159	5795	11.25	11.33	14.3
802.11be HE80	155	5775	11.28	11.23	14.27

Conducted Power (Tablet Mode)			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	11.87
	173	5865	11.8
	177	5885	11.75
802.11n HT20	169	5845	11.71
	173	5865	11.71
	177	5885	11.76
802.11n HT40	167	5835	11.81
	175	5875	11.8
802.11ac VHT80	171	5855	11.74
802.11ac VHT160	163	5815	12
802.11ax HE20	169	5845	11.81
	173	5865	11.71
	177	5885	11.77
802.11ax HE40	167	5835	11.77
	175	5875	11.8
802.11ax HE80	171	5855	11.71
802.11ax HE160	163	5815	11.84
802.11be HE20	169	5845	11.79
	173	5865	11.72
	177	5885	11.85
802.11be HE40	167	5835	11.89
	175	5875	11.8
802.11be HE80	171	5855	11.81
802.11be HE160	163	5815	11.8

Conducted Power (Tablet Mode)			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	11.77
	173	5865	11.83
	177	5885	11.69
802.11n HT20	169	5845	11.73
	173	5865	11.82
	177	5885	11.85
802.11n HT40	167	5835	11.89
	175	5875	11.81
802.11ac VHT80	171	5855	11.81
802.11ac VHT160	163	5815	11.93
802.11ax HE20	169	5845	11.69
	173	5865	11.69
	177	5885	11.68
802.11ax HE40	167	5835	11.75
	175	5875	11.78
802.11ax HE80	171	5855	11.8
802.11ax HE160	163	5815	11.79
802.11be HE20	169	5845	11.69
	173	5865	11.75
	177	5885	11.87
802.11be HE40	167	5835	11.79
	175	5875	11.78
802.11be HE80	171	5855	11.82
802.11be HE160	163	5815	11.71

Conducted Power (Tablet Mode)					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845			
	173	5865			
	177	5885			
802.11n HT20	169	5845	11.75	11.69	14.73
	173	5865	11.71	11.77	14.75
	177	5885	11.68	11.81	14.76
802.11n HT40	167	5835	11.74	11.88	14.82
	175	5875	11.89	11.84	14.88
802.11ac VHT80	171	5855	11.81	11.77	14.8
802.11ac VHT160	163	5815	11.98	11.96	14.98
802.11ax HE20	169	5845	11.78	11.84	14.82
	173	5865	11.73	11.83	14.79
	177	5885	11.72	11.78	14.76
802.11ax HE40	167	5835	11.79	11.74	14.78
	175	5875	11.82	11.8	14.82
802.11ax HE80	171	5855	11.79	11.85	14.83
802.11ax HE160	163	5815	11.76	11.84	14.81
802.11be HE20	169	5845	11.69	11.71	14.71
	173	5865	11.73	11.83	14.79
	177	5885	11.75	11.77	14.77
802.11be HE40	167	5835	11.77	11.86	14.83
	175	5875	11.73	11.69	14.72
802.11be HE80	171	5855	11.82	11.71	14.78
802.11be HE160	163	5815	11.75	11.71	14.74

Conducted Power (Tablet Mode)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	11.76
	5	5975	11.71
	9	5995	11.8
	13	6015	11.83
	17	6035	11.82
	21	6055	11.76
	25	6075	11.75
	29	6095	11.86
	33	6115	11.75
	37	6135	11.85
	41	6155	11.8
	45	6175	11.72
	49	6195	11.77
	53	6215	11.82
	57	6235	11.82
	61	6255	11.73
	65	6275	11.89
	69	6295	11.74
	73	6315	11.77
	77	6335	11.78
802.11be HE20	81	6355	11.73
	85	6375	11.73
	89	6395	11.85
	93	6415	11.8
	1	5955	11.79
	5	5975	11.8
	9	5995	11.8
	13	6015	11.78
	17	6035	11.73
	21	6055	11.75
	25	6075	11.76
	29	6095	11.74
	33	6115	11.75
	37	6135	11.76
	41	6155	11.72
	45	6175	11.84
	49	6195	11.79
	53	6215	11.79
	57	6235	11.83
	61	6255	11.74
	65	6275	11.88
	69	6295	11.78
	73	6315	11.71
	77	6335	11.82
	81	6355	11.78
	85	6375	11.8
	89	6395	11.69
	93	6415	11.72

Conducted Power (Tablet Mode)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE40	3	5965	11.72
	11	6005	11.71
	19	6045	11.82
	27	6085	11.66
	35	6125	11.78
	43	6165	11.7
	51	6205	11.76
	59	6245	11.83
	67	6285	11.82
	75	6325	11.76
	83	6365	11.86
802.11ax HE80	91	6405	11.69
	7	5985	11.8
	23	6065	11.79
	39	6145	11.81
	55	6225	11.69
	71	6305	11.85
802.11ax HE160	87	6385	11.68
	15	6025	11.83
	47	6185	11.74
802.11be HE40	79	6345	11.73
	3	5965	11.81
	11	6005	11.7
	19	6045	11.84
	27	6085	11.74
	35	6125	11.85
	43	6165	11.81
	51	6205	11.78
	59	6245	11.8
	67	6285	11.76
	75	6325	11.71
802.11be HE80	83	6365	11.74
	91	6405	11.74
	7	5985	11.8
	23	6065	11.77
	39	6145	11.8
	55	6225	11.77
802.11be HE160	71	6305	11.79
	87	6385	11.71
	15	6025	11.73
802.11be HE320	47	6185	11.76
	79	6345	11.83
	31	6105	11.94
	63	6265	11.99
	95	6425	11.95

Conducted Power (Tablet Mode)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	11.8
	101	6455	11.75
	105	6475	11.77
	109	6495	11.73
	113	6515	11.79
	117	6535	11.81
802.11ax HE40	99	6445	11.67
	107	6485	11.74
	115	6525	11.8
802.11ax HE80	103	6465	11.68
	119	6545	11.74
802.11ax HE160	111	6505	11.91
802.11be HE20	97	6435	11.78
	101	6455	11.85
	105	6475	11.77
	109	6495	11.81
	113	6515	11.77
	117	6535	11.75
802.11be HE40	99	6445	11.69
	107	6485	11.85
	115	6525	11.8
802.11be HE80	103	6465	11.73
	119	6545	11.8
802.11be HE160	111	6505	11.75

Conducted Power (Tablet Mode)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	117	6535	11.75
	121	6555	11.77
	125	6575	11.8
	129	6595	11.71
	133	6615	11.69
	137	6635	11.8
	141	6655	11.71
	145	6675	11.74
	149	6695	11.83
	153	6715	11.65
	157	6735	11.71
	161	6755	11.88
	165	6775	11.69
	169	6795	11.75
	173	6815	11.84
	177	6835	11.8
802.11ax HE40	181	6855	11.77
	185	6875	11.87
	123	6565	11.76
	131	6605	11.77
	139	6645	11.75
	147	6685	11.83
	155	6725	11.81
	163	6765	11.67
802.11ax HE80	171	6805	11.77
	179	6845	11.73
	187	6885	11.7
802.11ax HE160	135	6625	11.84
	151	6705	11.84
	167	6785	11.72
802.11be HE20	183	6865	11.77
	143	6665	11.85
	175	6825	11.67
	117	6535	11.76
	121	6555	11.79
	125	6575	11.74
	129	6595	11.81
	133	6615	11.76
	137	6635	11.7
	141	6655	11.84
	145	6675	11.77
	149	6695	11.76
	153	6715	11.73
	157	6735	11.84
	161	6755	11.84
	165	6775	11.74
802.11be HE40	169	6795	11.8
	173	6815	11.75
	177	6835	11.69
	181	6855	11.86
	185	6875	11.76
	123	6565	11.71
	131	6605	11.66
	139	6645	11.71
802.11be HE80	147	6685	11.72
	155	6725	11.76
	163	6765	11.7
802.11be HE160	171	6805	11.75
	179	6845	11.87
	187	6885	11.76
802.11be HE320	135	6625	11.77
	151	6705	11.69
	167	6785	11.8
	183	6865	11.84
	143	6665	11.8
	175	6825	11.87
	127	6585	11.9
	159	6745	11.91

Conducted Power (Tablet Mode)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	11.8
	193	6915	11.86
	197	6935	11.82
	201	6955	11.8
	205	6975	11.69
	209	6995	11.88
	213	7015	11.68
	217	7035	11.78
	221	7055	11.8
	225	7075	11.77
	229	7095	11.82
802.11ax HE40	233	7115	11.81
	195	6925	11.8
	203	6965	11.78
	211	7005	11.81
	219	7045	11.73
802.11ax HE80	227	7085	11.76
	199	6945	11.72
802.11ax HE160	215	7025	11.75
	207	6985	11.72
802.11be HE20	189	6895	11.81
	193	6915	11.8
	197	6935	11.77
	201	6955	11.7
	205	6975	11.73
	209	6995	11.79
	213	7015	11.71
	217	7035	11.74
	221	7055	11.77
	225	7075	11.74
	229	7095	11.79
802.11be HE40	233	7115	11.68
	195	6925	11.86
	203	6965	11.83
	211	7005	11.69
	219	7045	11.71
802.11be HE80	227	7085	11.83
	199	6945	11.8
802.11be HE160	215	7025	11.77
	207	6985	11.74
802.11be HE320	191	6905	11.96

Conducted Power (Tablet Mode)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	11.75
	5	5975	11.7
	9	5995	11.73
	13	6015	11.77
	17	6035	11.76
	21	6055	11.71
	25	6075	11.81
	29	6095	11.76
	33	6115	11.82
	37	6135	11.76
	41	6155	11.79
	45	6175	11.74
	49	6195	11.83
	53	6215	11.79
	57	6235	11.79
	61	6255	11.76
	65	6275	11.84
	69	6295	11.83
	73	6315	11.76
	77	6335	11.76
802.11be HE20	81	6355	11.75
	85	6375	11.75
	89	6395	11.86
	93	6415	11.71
	1	5955	11.73
	5	5975	11.75
	9	5995	11.79
	13	6015	11.82
	17	6035	11.83
	21	6055	11.71
	25	6075	11.7
	29	6095	11.85
	33	6115	11.83
	37	6135	11.76
	41	6155	11.71
	45	6175	11.82
	49	6195	11.72
	53	6215	11.72
	57	6235	11.75
	61	6255	11.82
	65	6275	11.75
	69	6295	11.77
	73	6315	11.69
	77	6335	11.7
	81	6355	11.88
	85	6375	11.79
	89	6395	11.71
	93	6415	11.7

Conducted Power (Tablet Mode)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE40	3	5965	11.7
	11	6005	11.69
	19	6045	11.84
	27	6085	11.74
	35	6125	11.77
	43	6165	11.81
	51	6205	11.81
	59	6245	11.79
	67	6285	11.7
	75	6325	11.86
	83	6365	11.86
	91	6405	11.72
802.11ax HE80	7	5985	11.68
	23	6065	11.79
	39	6145	11.77
	55	6225	11.69
	71	6305	11.87
	87	6385	11.81
802.11ax HE160	15	6025	11.79
	47	6185	11.68
	79	6345	11.33
802.11be HE40	3	5965	11.72
	11	6005	11.7
	19	6045	11.89
	27	6085	11.82
	35	6125	11.77
	43	6165	11.82
	51	6205	11.82
	59	6245	11.89
	67	6285	11.81
	75	6325	11.78
	83	6365	11.74
	91	6405	11.8
802.11be HE80	7	5985	11.78
	23	6065	11.78
	39	6145	11.71
	55	6225	11.82
	71	6305	11.86
	87	6385	11.69
802.11be HE160	15	6025	11.73
	47	6185	11.71
	79	6345	11.74
802.11be HE160	31	6105	11.9
	63	6265	11.95
	95	6425	11.89

Conducted Power (Tablet Mode)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	11.8
	101	6455	11.83
	105	6475	11.72
	109	6495	11.76
	113	6515	11.68
	117	6535	11.81
802.11ax HE40	99	6445	11.77
	107	6485	11.81
	115	6525	11.83
802.11ax HE80	103	6465	11.69
	119	6545	11.73
802.11ax HE160	111	6505	11.92
802.11be HE20	97	6435	11.75
	101	6455	11.77
	105	6475	11.81
	109	6495	11.89
	113	6515	11.83
	117	6535	11.76
802.11be HE40	99	6445	11.87
	107	6485	11.66
	115	6525	11.82
802.11be HE80	103	6465	11.79
	119	6545	11.8
802.11be HE160	111	6505	11.86

Conducted Power (Tablet Mode)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	117	6535	11.75
	121	6555	11.77
	125	6575	11.8
	129	6595	11.71
	133	6615	11.69
	137	6635	11.8
	141	6655	11.71
	145	6675	11.74
	149	6695	11.83
	153	6715	11.65
	157	6735	11.71
	161	6755	11.88
	165	6775	11.69
	169	6795	11.75
	173	6815	11.84
	177	6835	11.8
802.11ax HE40	181	6855	11.77
	185	6875	11.87
	123	6565	11.76
	131	6605	11.77
	139	6645	11.75
	147	6685	11.83
	155	6725	11.81
	163	6765	11.67
802.11ax HE80	171	6805	11.77
	179	6845	11.73
	187	6885	11.7
802.11ax HE160	135	6625	11.84
	151	6705	11.84
	167	6785	11.72
802.11be HE20	183	6865	11.77
	143	6665	11.85
	175	6825	11.67
	117	6535	11.76
	121	6555	11.79
	125	6575	11.74
	129	6595	11.81
	133	6615	11.76
	137	6635	11.7
	141	6655	11.84
	145	6675	11.77
	149	6695	11.76
	153	6715	11.73
	157	6735	11.84
	161	6755	11.84
	165	6775	11.74
802.11be HE40	169	6795	11.8
	173	6815	11.75
	177	6835	11.69
	181	6855	11.86
	185	6875	11.76
	123	6565	11.71
	131	6605	11.66
	139	6645	11.71
802.11be HE80	147	6685	11.72
	155	6725	11.76
	163	6765	11.7
802.11be HE160	171	6805	11.75
	179	6845	11.87
	187	6885	11.76
802.11be HE320	135	6625	11.77
	151	6705	11.69
	167	6785	11.8
	183	6865	11.84
	143	6665	11.8
	175	6825	11.87
	127	6585	11.9
	159	6745	11.91

Conducted Power (Tablet Mode)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	11.88
	193	6915	11.88
	197	6935	11.76
	201	6955	11.87
	205	6975	11.76
	209	6995	11.82
	213	7015	11.87
	217	7035	11.8
	221	7055	11.71
	225	7075	11.68
	229	7095	11.68
802.11ax HE40	233	7115	11.79
	195	6925	11.75
	203	6965	11.74
	211	7005	11.72
	219	7045	11.74
802.11ax HE80	227	7085	11.79
	199	6945	11.81
802.11ax HE160	215	7025	11.73
	207	6985	11.78
802.11be HE20	189	6895	11.81
	193	6915	11.77
	197	6935	11.72
	201	6955	11.74
	205	6975	11.77
	209	6995	11.69
	213	7015	11.76
	217	7035	11.82
	221	7055	11.77
	225	7075	11.74
	229	7095	11.8
802.11be HE40	233	7115	11.8
	195	6925	11.81
	203	6965	11.78
	211	7005	11.79
	219	7045	11.74
802.11be HE80	227	7085	11.81
	199	6945	11.67
802.11be HE160	215	7025	11.77
	207	6985	11.79
802.11be HE320	191	6905	11.91

Conducted Power (Tablet Mode)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	11.72	11.72	14.73
	5	5975	11.82	11.79	14.82
	9	5995	11.77	11.77	14.78
	13	6015	11.79	11.82	14.82
	17	6035	11.73	11.67	14.71
	21	6055	11.82	11.84	14.84
	25	6075	11.85	11.79	14.83
	29	6095	11.73	11.88	14.82
	33	6115	11.85	11.78	14.83
	37	6135	11.8	11.88	14.85
	41	6155	11.82	11.75	14.80
	45	6175	11.76	11.78	14.78
	49	6195	11.76	11.71	14.75
	53	6215	11.79	11.66	14.74
	57	6235	11.83	11.76	14.81
	61	6255	11.72	11.84	14.79
	65	6275	11.78	11.84	14.82
	69	6295	11.69	11.81	14.76
	73	6315	11.8	11.85	14.84
	77	6335	11.72	11.72	14.73
	81	6355	11.68	11.73	14.72
	85	6375	11.84	11.75	14.81
	89	6395	11.88	11.74	14.82
	93	6415	11.73	11.75	14.75
802.11be HE20	1	5955	11.72	11.8	14.77
	5	5975	11.82	11.86	14.85
	9	5995	11.78	11.78	14.79
	13	6015	11.8	11.85	14.84
	17	6035	11.75	11.76	14.77
	21	6055	11.74	11.82	14.79
	25	6075	11.87	11.77	14.83
	29	6095	11.84	11.75	14.81
	33	6115	11.73	11.84	14.80
	37	6135	11.71	11.82	14.78
	41	6155	11.83	11.7	14.78
	45	6175	11.83	11.89	14.87
	49	6195	11.8	11.76	14.79
	53	6215	11.71	11.81	14.77
	57	6235	11.88	11.76	14.83
	61	6255	11.72	11.74	14.74
	65	6275	11.74	11.8	14.78
	69	6295	11.72	11.7	14.72
	73	6315	11.84	11.75	14.81
	77	6335	11.66	11.75	14.72
	81	6355	11.83	11.83	14.84
	85	6375	11.83	11.87	14.86
	89	6395	11.68	11.75	14.73
	93	6415	11.73	11.82	14.79

Conducted Power (Tablet Mode)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE40	3	5965	11.75	11.84	14.81
	11	6005	11.82	11.77	14.81
	19	6045	11.68	11.81	14.76
	27	6085	11.75	11.75	14.76
	35	6125	11.84	11.82	14.84
	43	6165	11.79	11.76	14.79
	51	6205	11.79	11.84	14.83
	59	6245	11.74	11.84	14.8
	67	6285	11.83	11.75	14.8
	75	6325	11.79	11.65	14.73
	83	6365	11.78	11.8	14.8
802.11ax HE80	91	6405	11.8	11.67	14.75
	7	5985	11.76	11.77	14.78
	23	6065	11.84	11.85	14.86
	39	6145	11.76	11.83	14.81
	55	6225	11.72	11.76	14.75
	71	6305	11.73	11.8	14.78
802.11ax HE160	87	6385	11.86	11.87	14.88
	15	6025	11.7	11.77	14.75
	47	6185	11.81	11.88	14.86
802.11be HE40	79	6345	11.86	11.82	14.85
	3	5965	11.7	11.79	14.76
	11	6005	11.86	11.75	14.82
	19	6045	11.68	11.78	14.74
	27	6085	11.69	11.82	14.77
	35	6125	11.86	11.85	14.87
	43	6165	11.79	11.85	14.83
	51	6205	11.82	11.72	14.78
	59	6245	11.86	11.76	14.82
	67	6285	11.8	11.75	14.79
	75	6325	11.81	11.76	14.8
802.11be HE80	83	6365	11.72	11.68	14.71
	91	6405	11.79	11.86	14.84
	7	5985	11.83	11.83	14.84
	23	6065	11.72	11.69	14.72
	39	6145	11.86	11.87	14.88
	55	6225	11.77	11.79	14.79
802.11be HE160	71	6305	11.85	11.77	14.82
	87	6385	11.82	11.89	14.87
	15	6025	11.82	11.68	14.76
802.11be HE160	47	6185	11.79	11.82	14.82
	79	6345	11.81	11.8	14.82
	31	6105	11.96	11.92	14.95
802.11be HE160	63	6265	11.94	11.97	14.97
	95	6425	11.9	11.84	14.88

Conducted Power (Tablet Mode)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	11.78	11.72	14.76
	101	6455	11.73	11.78	14.77
	105	6475	11.8	11.88	14.85
	109	6495	11.7	11.75	14.74
	113	6515	11.71	11.85	14.79
	117	6535	11.87	11.8	14.85
802.11ax HE40	99	6445	11.73	11.74	14.75
	107	6485	11.76	11.83	14.81
	115	6525	11.72	11.8	14.77
802.11ax HE80	103	6465	11.78	11.76	14.78
	119	6545	11.8	11.79	14.81
802.11ax HE160	111	6505	11.91	11.98	14.96
802.11be HE20	97	6435	11.74	11.76	14.76
	101	6455	11.77	11.85	14.82
	105	6475	11.75	11.77	14.77
	109	6495	11.7	11.82	14.77
	113	6515	11.68	11.68	14.69
	117	6535	11.82	11.85	14.85
802.11be HE40	99	6445	11.79	11.75	14.78
	107	6485	11.68	11.81	14.76
	115	6525	11.86	11.75	14.82
802.11be HE80	103	6465	11.79	11.72	14.77
	119	6545	11.74	11.74	14.75
802.11be HE160	111	6505	11.74	11.78	14.77

Conducted Power (Tablet Mode)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	117	6535	11.75	11.8	14.79
	121	6555	11.77	11.86	14.83
	125	6575	11.8	11.82	14.82
	129	6595	11.71	11.8	14.77
	133	6615	11.69	11.69	14.7
	137	6635	11.8	11.88	14.85
	141	6655	11.71	11.68	14.71
	145	6675	11.74	11.78	14.77
	149	6695	11.83	11.8	14.83
	153	6715	11.65	11.77	14.72
	157	6735	11.71	11.82	14.78
	161	6755	11.88	11.81	14.86
	165	6775	11.69	11.8	14.76
	169	6795	11.75	11.78	14.78
	173	6815	11.84	11.81	14.84
	177	6835	11.8	11.73	14.78
	181	6855	11.77	11.76	14.78
	185	6875	11.87	11.72	14.81
802.11ax HE40	123	6565	11.76	11.75	14.77
	131	6605	11.77	11.72	14.76
	139	6645	11.75	11.8	14.79
	147	6685	11.83	11.81	14.83
	155	6725	11.81	11.8	14.82
	163	6765	11.67	11.77	14.73
	171	6805	11.77	11.7	14.75
	179	6845	11.73	11.73	14.74
802.11ax HE80	187	6885	11.7	11.79	14.76
	135	6625	11.84	11.71	14.79
	151	6705	11.84	11.74	14.8
802.11ax HE160	167	6785	11.72	11.77	14.76
	183	6865	11.77	11.74	14.77
	143	6665	11.85	11.79	14.83
802.11be HE20	175	6825	11.67	11.68	14.69
	117	6535	11.76	11.83	14.81
	121	6555	11.79	11.69	14.75
	125	6575	11.74	11.71	14.74
	129	6595	11.81	11.83	14.83
	133	6615	11.76	11.8	14.79
	137	6635	11.7	11.77	14.75
	141	6655	11.84	11.74	14.8
	145	6675	11.77	11.87	14.83
	149	6695	11.76	11.86	14.82
	153	6715	11.73	11.79	14.77
	157	6735	11.84	11.8	14.83
	161	6755	11.84	11.83	14.85
	165	6775	11.74	11.69	14.73
	169	6795	11.8	11.78	14.8
	173	6815	11.75	11.72	14.75
	177	6835	11.69	11.68	14.7
	181	6855	11.86	11.81	14.85
802.11be HE40	185	6875	11.76	11.79	14.79
	123	6565	11.71	11.75	14.74
	131	6605	11.66	11.74	14.71
	139	6645	11.71	11.75	14.74
	147	6685	11.72	11.78	14.76
	155	6725	11.76	11.78	14.78
	163	6765	11.7	11.78	14.75
	171	6805	11.75	11.7	14.74
802.11be HE80	179	6845	11.87	11.84	14.87
	187	6885	11.76	11.83	14.81
	135	6625	11.77	11.81	14.8
802.11be HE160	151	6705	11.69	11.81	14.76
	167	6785	11.8	11.85	14.84
	183	6865	11.84	11.77	14.82
802.11be HE320	143	6665	11.8	11.72	14.77
	175	6825	11.87	11.88	14.89
	127	6585	11.9	11.85	14.89
	159	6745	11.91	11.88	14.91

Conducted Power (Tablet Mode)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	11.71	11.77	14.75
	193	6915	11.83	11.73	14.79
	197	6935	11.84	11.86	14.86
	201	6955	11.71	11.82	14.78
	205	6975	11.82	11.83	14.84
	209	6995	11.77	11.71	14.75
	213	7015	11.88	11.72	14.81
	217	7035	11.82	11.74	14.79
	221	7055	11.76	11.81	14.8
	225	7075	11.74	11.69	14.73
	229	7095	11.85	11.72	14.8
	233	7115	11.7	11.72	14.72
802.11ax HE40	195	6925	11.9	11.72	14.82
	203	6965	11.79	11.73	14.77
	211	7005	11.86	11.76	14.82
	219	7045	11.75	11.81	14.79
	227	7085	11.75	11.77	14.77
802.11ax HE80	199	6945	11.74	11.83	14.8
	215	7025	11.74	11.81	14.79
802.11ax HE160	207	6985	11.79	11.78	14.8
802.11be HE20	189	6895	11.76	11.74	14.76
	193	6915	11.85	11.79	14.83
	197	6935	11.85	11.69	14.78
	201	6955	11.85	11.77	14.82
	205	6975	11.83	11.79	14.82
	209	6995	11.69	11.86	14.79
	213	7015	11.66	11.7	14.69
	217	7035	11.78	11.83	14.82
	221	7055	11.86	11.78	14.83
	225	7075	11.78	11.82	14.81
	229	7095	11.76	11.75	14.77
	233	7115	11.81	11.69	14.76
802.11be HE40	195	6925	11.75	11.73	14.75
	203	6965	11.84	11.75	14.81
	211	7005	11.76	11.84	14.81
	219	7045	11.79	11.65	14.73
	227	7085	11.77	11.76	14.78
802.11be HE80	199	6945	11.8	11.81	14.82
	215	7025	11.77	11.72	14.76
802.11be HE160	207	6985	11.8	11.66	14.74
802.11be HE320	191	6905	11.94	11.95	14.96

Conducted Power (LPI)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	5.61
	5	5975	5.51
	9	5995	5.49
	13	6015	5.67
	17	6035	5.49
	21	6055	5.59
	25	6075	5.57
	29	6095	5.61
	33	6115	5.59
	37	6135	5.68
	41	6155	5.6
	45	6175	5.73
	49	6195	5.6
	53	6215	5.61
	57	6235	5.57
	61	6255	5.54
	65	6275	5.6
	69	6295	5.58
	73	6315	5.64
	77	6335	5.46
802.11be HE20	81	6355	5.53
	85	6375	5.49
	89	6395	5.51
	93	6415	5.46
	1	5955	5.6
	5	5975	5.45
	9	5995	5.45
	13	6015	5.52
	17	6035	5.59
	21	6055	5.35
	25	6075	5.35
	29	6095	5.52
	33	6115	5.37
	37	6135	5.59
	41	6155	5.56
	45	6175	5.73
	49	6195	5.49
	53	6215	5.33
	57	6235	5.52
	61	6255	5.59
	65	6275	5.46
	69	6295	5.45
	73	6315	5.52
	77	6335	5.45
	81	6355	5.51
	85	6375	5.62
	89	6395	5.38
	93	6415	5.37

Conducted Power (LPI)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE40	3	5965	8.56
	11	6005	8.39
	19	6045	8.47
	27	6085	8.45
	35	6125	8.52
	43	6165	8.63
	51	6205	8.44
	59	6245	8.63
	67	6285	8.54
	75	6325	8.37
	83	6365	8.48
802.11ax HE80	91	6405	8.48
	7	5985	11.44
	23	6065	11.71
	39	6145	11.48
	55	6225	11.45
	71	6305	11.5
802.11ax HE160	87	6385	11.69
	15	6025	11.91
	47	6185	11.57
802.11be HE40	79	6345	11.79
	3	5965	8.57
	11	6005	8.5
	19	6045	8.45
	27	6085	8.48
	35	6125	8.33
	43	6165	8.56
	51	6205	8.33
	59	6245	8.33
	67	6285	8.4
	75	6325	8.35
802.11be HE80	83	6365	8.34
	91	6405	8.4
	7	5985	11.55
	23	6065	11.54
	39	6145	11.47
	55	6225	11.36
802.11be HE160	71	6305	11.56
	87	6385	11.68
	15	6025	11.79
802.11be HE320	47	6185	11.69
	79	6345	11.86
	31	6105	11.92
	63	6265	11.95
	95	6425	11.92

Conducted Power (LPI)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	5.55
	5	5975	5.6
	9	5995	5.44
	13	6015	5.62
	17	6035	5.44
	21	6055	5.45
	25	6075	5.56
	29	6095	5.65
	33	6115	5.61
	37	6135	5.67
	41	6155	5.66
	45	6175	5.63
	49	6195	5.72
	53	6215	5.56
	57	6235	5.48
	61	6255	5.48
	65	6275	5.6
	69	6295	5.61
	73	6315	5.7
	77	6335	5.55
802.11be HE20	81	6355	5.56
	85	6375	5.53
	89	6395	5.57
	93	6415	5.49
	1	5955	5.63
	5	5975	5.41
	9	5995	5.47
	13	6015	5.58
	17	6035	5.63
	21	6055	5.3
	25	6075	5.4
	29	6095	5.54
	33	6115	5.34
	37	6135	5.59
	41	6155	5.61
	45	6175	5.75
	49	6195	5.59
	53	6215	5.38
	57	6235	5.57
	61	6255	5.45
	65	6275	5.45
	69	6295	5.47
	73	6315	5.53
	77	6335	5.47
	81	6355	5.48
	85	6375	5.54
	89	6395	5.3
	93	6415	5.49

Conducted Power (LPI)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE40	3	5965	8.48
	11	6005	8.45
	19	6045	8.47
	27	6085	8.45
	35	6125	8.46
	43	6165	8.63
	51	6205	8.34
	59	6245	8.51
	67	6285	8.56
	75	6325	8.44
	83	6365	8.46
802.11ax HE80	91	6405	8.51
	7	5985	11.4
	23	6065	11.67
	39	6145	11.47
	55	6225	11.42
	71	6305	11.53
802.11ax HE160	87	6385	11.7
	15	6025	11.83
	47	6185	11.57
802.11be HE40	79	6345	11.76
	3	5965	8.55
	11	6005	8.43
	19	6045	8.41
	27	6085	8.51
	35	6125	8.44
	43	6165	8.6
	51	6205	8.44
	59	6245	8.31
	67	6285	8.3
	75	6325	8.29
802.11be HE80	83	6365	8.45
	91	6405	8.52
	7	5985	11.44
	23	6065	11.51
	39	6145	11.49
	55	6225	11.37
802.11be HE160	71	6305	11.49
	87	6385	11.75
	15	6025	11.86
802.11be HE320	47	6185	11.73
	79	6345	11.86
	31	6105	11.92
	63	6265	11.95
	95	6425	11.89

Conducted Power (LPI)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	2.45	2.48	5.48
	5	5975	2.44	2.36	5.41
	9	5995	2.33	2.31	5.33
	13	6015	2.25	2.33	5.3
	17	6035	2.44	2.41	5.44
	21	6055	2.4	2.42	5.42
	25	6075	2.43	2.34	5.4
	29	6095	2.47	2.41	5.45
	33	6115	2.33	2.42	5.39
	37	6135	2.4	2.36	5.39
	41	6155	2.32	2.33	5.34
	45	6175	2.51	2.55	5.54
	49	6195	2.33	2.32	5.34
	53	6215	2.45	2.39	5.43
	57	6235	2.31	2.36	5.35
	61	6255	2.3	2.35	5.34
	65	6275	2.28	2.34	5.32
	69	6295	2.42	2.46	5.45
	73	6315	2.36	2.31	5.35
	77	6335	2.4	2.26	5.34
802.11be HE20	81	6355	2.35	2.34	5.36
	85	6375	2.35	2.38	5.38
	89	6395	2.31	2.42	5.38
	93	6415	2.29	2.33	5.32
	1	5955	2.36	2.38	5.38
	5	5975	2.39	2.3	5.36
	9	5995	2.29	2.32	5.32
	13	6015	2.25	2.33	5.3
	17	6035	2.21	2.34	5.29
	21	6055	2.29	2.21	5.26
	25	6075	2.22	2.26	5.25
	29	6095	2.3	2.3	5.31
	33	6115	2.36	2.33	5.36
	37	6135	2.26	2.29	5.29
	41	6155	2.32	2.21	5.28
	45	6175	2.56	2.64	5.61
	49	6195	2.34	2.38	5.37
	53	6215	2.32	2.26	5.3
	57	6235	2.25	2.29	5.28
	61	6255	2.24	2.18	5.22
	65	6275	2.26	2.33	5.31
	69	6295	2.35	2.29	5.33
	73	6315	2.23	2.33	5.29
	77	6335	2.27	2.2	5.25
	81	6355	2.27	2.25	5.27
	85	6375	2.25	2.23	5.25
	89	6395	2.23	2.25	5.25
	93	6415	2.35	2.41	5.39

Conducted Power (LPI)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE40	3	5965	5.25	5.31	8.29
	11	6005	5.27	5.24	8.27
	19	6045	5.34	5.34	8.35
	27	6085	5.3	5.25	8.29
	35	6125	5.29	5.25	8.28
	43	6165	5.47	5.43	8.46
	51	6205	5.28	5.19	8.25
	59	6245	5.47	5.39	8.44
	67	6285	5.33	5.44	8.4
	75	6325	5.17	5.21	8.2
	83	6365	5.38	5.38	8.39
802.11ax HE80	91	6405	5.23	5.21	8.23
	7	5985	8.48	8.57	11.54
	23	6065	8.5	8.45	11.49
	39	6145	8.68	8.59	11.65
	55	6225	8.76	8.79	11.79
	71	6305	8.75	8.69	11.73
802.11ax HE160	87	6385	8.76	8.6	11.69
	15	6025	11.8	11.74	14.78
	47	6185	11.87	11.78	14.84
802.11be HE40	79	6345	11.84	11.8	14.83
	3	5965	4.95	5.01	7.99
	11	6005	4.82	4.81	7.83
	19	6045	4.8	4.7	7.76
	27	6085	4.69	4.72	7.72
	35	6125	4.71	4.65	7.69
	43	6165	4.56	4.62	7.6
	51	6205	4.75	4.81	7.79
	59	6245	4.66	4.78	7.73
	67	6285	4.67	4.79	7.74
	75	6325	4.8	4.71	7.77
802.11be HE80	83	6365	4.71	4.8	7.77
	91	6405	4.87	4.84	7.87
	7	5985	8.65	8.55	11.61
	23	6065	8.4	8.41	11.42
	39	6145	8.57	8.59	11.59
	55	6225	8.4	8.37	11.4
802.11be HE160	71	6305	8.46	8.46	11.47
	87	6385	8.43	8.42	11.44
	15	6025	11.76	11.78	14.78
802.11be HE320	47	6185	11.88	11.75	14.83
	79	6345	11.79	11.79	14.8
	31	6105	11.96	11.9	14.94
	63	6265	11.97	11.95	14.97
	95	6425	11.91	11.83	14.88

Conducted Power (LPI)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	5.08
	101	6455	5.46
	105	6475	5.49
	109	6495	5.43
	113	6515	5.56
802.11ax HE40	99	6445	8.37
	107	6485	8.56
	115	6525	8.38
802.11ax HE80	103	6465	11.43
	119	6545	11.59
802.11ax HE160	111	6505	11.74
802.11be HE20	97	6435	5.13
	101	6455	5.16
	105	6475	5.39
	109	6495	5.18
	113	6515	5.67
802.11be HE40	99	6445	8.42
	107	6485	8.53
	115	6525	8.41
802.11be HE80	103	6465	11.48
	119	6545	11.62
802.11be HE160	111	6505	11.92

Conducted Power (LPI)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	5.11
	101	6455	5.45
	105	6475	5.43
	109	6495	5.42
	113	6515	5.56
802.11ax HE40	99	6445	8.49
	107	6485	8.54
	115	6525	8.41
802.11ax HE80	103	6465	11.43
	119	6545	11.58
802.11ax HE160	111	6505	11.69
802.11be HE20	97	6435	5.15
	101	6455	5.13
	105	6475	5.37
	109	6495	5.26
	113	6515	5.54
802.11be HE40	99	6445	8.42
	107	6485	8.57
	115	6525	8.37
802.11be HE80	103	6465	11.43
	119	6545	11.66
802.11be HE160	111	6505	11.84

Conducted Power (LPI)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	2.25	2.28	5.28
	101	6455	2.38	2.36	5.38
	105	6475	2.42	2.34	5.39
	109	6495	2.43	2.35	5.4
	113	6515	2.45	2.51	5.49
802.11ax HE40	99	6445	5.45	5.41	8.44
	107	6485	5.25	5.35	8.31
	115	6525	5.49	5.53	8.52
802.11ax HE80	103	6465	8.64	8.56	11.61
	119	6545	8.55	8.65	11.61
802.11ax HE160	111	6505	11.69	11.7	14.71
802.11be HE20	97	6435	2.21	2.3	5.27
	101	6455	2.37	2.27	5.33
	105	6475	2.44	2.32	5.39
	109	6495	2.23	2.11	5.18
	113	6515	2.49	2.46	5.49
802.11be HE40	99	6445	5.48	5.43	8.47
	107	6485	5.3	5.34	8.33
	115	6525	5.39	5.53	8.47
802.11be HE80	103	6465	8.55	8.6	11.59
	119	6545	8.62	8.67	11.66
802.11be HE160	111	6505	11.85	11.84	14.86

Conducted Power (LPI)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	117	6535	5.44
	121	6555	5.49
	125	6575	5.32
	129	6595	5.32
	133	6615	5.25
	137	6635	5.49
	141	6655	5.47
	145	6675	5.27
	149	6695	5.49
	153	6715	5.54
	157	6735	5.39
	161	6755	5.32
	165	6775	5.56
	169	6795	5.48
	173	6815	5.33
	177	6835	5.58
802.11ax HE40	181	6855	5.59
	185	6875	5.35
	123	6565	8.57
	131	6605	8.37
	139	6645	8.38
	147	6685	8.46
	155	6725	8.49
	163	6765	8.57
802.11ax HE80	171	6805	8.4
	179	6845	8.57
	187	6885	8.48
	135	6625	11.58
802.11ax HE160	151	6705	11.65
	167	6785	11.57
	183	6865	11.29
802.11be HE20	143	6665	11.82
	175	6825	11.71
	117	6535	5.16
	121	6555	5.3
	125	6575	5.41
	129	6595	5.28
	133	6615	5.4
	137	6635	5.47
	141	6655	5.49
	145	6675	5.52
	149	6695	5.57
	153	6715	5.36
	157	6735	5.31
	161	6755	5.29
	165	6775	5.35
	169	6795	5.25
802.11be HE40	173	6815	5.26
	177	6835	5.4
	181	6855	5.53
	185	6875	5.38
	123	6565	8.32
	131	6605	8.32
	139	6645	8.37
	147	6685	8.46
802.11be HE80	155	6725	8.55
	163	6765	8.24
	171	6805	8.33
	179	6845	8.65
802.11be HE160	187	6885	8.44
	135	6625	11.58
	151	6705	11.48
	167	6785	11.67
802.11be HE320	183	6865	11.37
	143	6665	11.79
	175	6825	11.8
	127	6585	11.85
	159	6745	11.91

Conducted Power (LPI)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	117	6535	5.57
	121	6555	5.41
	125	6575	5.35
	129	6595	5.27
	133	6615	5.27
	137	6635	5.38
	141	6655	5.47
	145	6675	5.31
	149	6695	5.55
	153	6715	5.46
	157	6735	5.31
	161	6755	5.33
	165	6775	5.43
	169	6795	5.4
	173	6815	5.39
	177	6835	5.48
802.11ax HE40	181	6855	5.49
	185	6875	5.42
	123	6565	8.54
	131	6605	8.32
	139	6645	8.47
	147	6685	8.36
	155	6725	8.39
	163	6765	8.55
802.11ax HE80	171	6805	8.36
	179	6845	8.6
	187	6885	8.57
	135	6625	11.45
802.11ax HE160	151	6705	11.62
	167	6785	11.65
	183	6865	11.39
802.11be HE20	143	6665	11.83
	175	6825	11.68
	117	6535	5.15
	121	6555	5.23
	125	6575	5.3
	129	6595	5.37
	133	6615	5.46
	137	6635	5.38
	141	6655	5.36
	145	6675	5.45
	149	6695	5.59
	153	6715	5.34
	157	6735	5.27
	161	6755	5.31
	165	6775	5.38
	169	6795	5.33
802.11be HE40	173	6815	5.26
	177	6835	5.45
	181	6855	5.46
	185	6875	5.41
	123	6565	8.37
	131	6605	8.36
	139	6645	8.38
	147	6685	8.39
802.11be HE80	155	6725	8.49
	163	6765	8.37
	171	6805	8.31
	179	6845	8.69
802.11be HE160	187	6885	8.55
	135	6625	11.49
	151	6705	11.54
802.11be HE320	167	6785	11.66
	183	6865	11.3
	143	6665	11.83
	175	6825	11.82
	127	6585	11.92
	159	6745	11.93

Conducted Power (LPI)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	117	6535	2.32	2.37	5.36
	121	6555	2.13	2.37	5.26
	125	6575	2.2	2.31	5.27
	129	6595	2.13	2.3	5.23
	133	6615	2.24	2.3	5.28
	137	6635	2.19	2.29	5.25
	141	6655	2.16	2.34	5.26
	145	6675	2.25	2.4	5.34
	149	6695	2.28	2.25	5.28
	153	6715	2.26	2.43	5.36
	157	6735	2.2	2.3	5.26
	161	6755	2.28	2.37	5.34
	165	6775	2.1	2.35	5.24
	169	6795	2.18	2.21	5.21
	173	6815	2.16	2.26	5.22
	177	6835	2.2	2.4	5.31
	181	6855	2.49	2.38	5.45
	185	6875	2.32	2.4	5.37
802.11ax HE40	123	6565	5.37	5.58	8.49
	131	6605	5.5	5.62	8.57
	139	6645	5.41	5.64	8.54
	147	6685	5.67	5.71	8.7
	155	6725	5.37	5.53	8.46
	163	6765	5.4	5.69	8.56
	171	6805	5.32	5.46	8.4
	179	6845	5.46	5.45	8.47
802.11ax HE80	187	6885	5.42	5.49	8.47
	135	6625	8.5	8.44	11.48
	151	6705	8.53	8.45	11.5
802.11ax HE160	167	6785	8.74	8.71	11.74
	183	6865	8.6	8.6	11.61
	143	6665	11.69	11.74	14.73
802.11be HE20	175	6825	11.74	11.68	14.72
	117	6535	2.31	2.32	5.33
	121	6555	2.17	2.13	5.16
	125	6575	2.2	2.2	5.21
	129	6595	2.15	2.13	5.15
	133	6615	2.3	2.24	5.28
	137	6635	2.14	2.19	5.18
	141	6655	2.21	2.16	5.2
	145	6675	2.11	2.25	5.19
	149	6695	2.25	2.28	5.28
	153	6715	2.16	2.26	5.22
	157	6735	2.1	2.2	5.16
	161	6755	2.21	2.28	5.26
	165	6775	2.19	2.1	5.16
	169	6795	2.24	2.18	5.22
	173	6815	2.25	2.16	5.22
	177	6835	2.2	2.2	5.21
	181	6855	2.47	2.49	5.49
802.11be HE40	185	6875	2.31	2.32	5.33
	123	6565	5.36	5.37	8.38
	131	6605	5.54	5.5	8.53
	139	6645	5.53	5.41	8.48
	147	6685	5.6	5.67	8.65
	155	6725	5.26	5.37	8.33
	163	6765	5.32	5.4	8.37
	171	6805	5.4	5.32	8.37
802.11be HE80	179	6845	5.6	5.46	8.54
	187	6885	5.45	5.42	8.45
	135	6625	8.46	8.5	11.49
	151	6705	8.58	8.53	11.57
802.11be HE160	167	6785	8.79	8.74	11.78
	183	6865	8.58	8.6	11.6
	143	6665	11.68	11.69	14.7
802.11be HE320	175	6825	11.73	11.74	14.75
	127	6585	11.87	11.98	14.94
	159	6745	11.93	11.97	14.96

Conducted Power (LPI)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	5.5
	193	6915	5.48
	197	6935	5.48
	201	6955	5.44
	205	6975	5.53
	209	6995	5.4
	213	7015	5.59
	217	7035	5.54
	221	7055	5.53
	225	7075	5.43
	229	7095	5.43
802.11ax HE40	233	7115	5.46
	195	6925	8.46
	203	6965	8.54
	211	7005	8.48
	219	7045	8.4
802.11ax HE80	227	7085	8.51
	199	6945	11.77
802.11ax HE160	215	7025	11.7
	207	6985	11.84
802.11be HE20	189	6895	5.58
	193	6915	5.22
	197	6935	5.41
	201	6955	5.44
	205	6975	5.49
	209	6995	5.5
	213	7015	5.45
	217	7035	5.28
	221	7055	5.36
	225	7075	5.43
	229	7095	5.44
802.11be HE40	233	7115	5.54
	195	6925	8.47
	203	6965	8.41
	211	7005	8.36
	219	7045	8.37
802.11be HE80	227	7085	8.62
	199	6945	11.77
802.11be HE160	215	7025	11.75
	207	6985	11.79
802.11be HE320	191	6905	11.9

Conducted Power (LPI)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	5.44
	193	6915	5.4
	197	6935	5.4
	201	6955	5.43
	205	6975	5.55
	209	6995	5.33
	213	7015	5.49
	217	7035	5.57
	221	7055	5.48
	225	7075	5.5
	229	7095	5.54
802.11ax HE40	233	7115	5.46
	195	6925	8.55
	203	6965	8.53
	211	7005	8.47
	219	7045	8.44
802.11ax HE80	227	7085	8.54
	199	6945	11.78
802.11ax HE160	215	7025	11.71
	207	6985	11.87
802.11be HE20	189	6895	5.49
	193	6915	5.23
	197	6935	5.41
	201	6955	5.35
	205	6975	5.36
	209	6995	5.51
	213	7015	5.42
	217	7035	5.27
	221	7055	5.35
	225	7075	5.42
	229	7095	5.46
802.11be HE40	233	7115	5.47
	195	6925	8.43
	203	6965	8.41
	211	7005	8.38
	219	7045	8.41
802.11be HE80	227	7085	8.51
	199	6945	11.81
802.11be HE160	215	7025	11.85
	207	6985	11.8
802.11be HE320	191	6905	11.96

Conducted Power (LPI)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	2.58	2.5	5.55
	193	6915	2.55	2.59	5.58
	197	6935	2.47	2.57	5.53
	201	6955	2.53	2.51	5.53
	205	6975	2.37	2.51	5.45
	209	6995	2.49	2.5	5.51
	213	7015	2.58	2.59	5.6
	217	7035	2.4	2.52	5.47
	221	7055	2.51	2.53	5.53
	225	7075	2.55	2.54	5.56
	229	7095	2.57	2.63	5.61
	233	7115	2.42	2.49	5.47
802.11ax HE40	195	6925	5.72	5.71	8.73
	203	6965	5.57	5.61	8.6
	211	7005	5.73	5.79	8.77
	219	7045	5.6	5.62	8.62
	227	7085	5.77	5.72	8.76
802.11ax HE80	199	6945	8.87	8.82	11.86
	215	7025	8.87	8.81	11.85
802.11ax HE160	207	6985	11.85	11.84	14.86
802.11be HE20	189	6895	2.32	2.34	5.34
	193	6915	2.4	2.35	5.39
	197	6935	2.33	2.35	5.35
	201	6955	2.42	2.41	5.43
	205	6975	2.39	2.39	5.4
	209	6995	2.5	2.54	5.53
	213	7015	2.51	2.45	5.49
	217	7035	2.5	2.35	5.44
	221	7055	2.44	2.54	5.5
	225	7075	2.42	2.43	5.44
	229	7095	2.66	2.68	5.68
	233	7115	2.34	2.26	5.31
802.11be HE40	195	6925	5.53	5.45	8.5
	203	6965	5.67	5.52	8.61
	211	7005	5.51	5.5	8.52
	219	7045	5.62	5.5	8.57
	227	7085	5.72	5.7	8.72
802.11be HE80	199	6945	11.79	11.87	14.84
	215	7025	11.82	11.87	14.86
802.11be HE160	207	6985	11.8	11.73	14.78
802.11be HE320	191	6905	11.95	11.95	14.96

Appendix F. SAR and APD / Incident Power Density Test Result

SAR Results for Body / Bystander Exposure Condition.

Note:

1. SAR testing for WLAN / BT was performed on the maximum power mode.
2. SAR testing for LTE / NR was performed on the maximum power mode.
3. The "< 0.001" means there is no SAR value or the SAR is too low to be measured.

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA II	RMC12.2K	Rear Face	0	9538	Speed	Ant 0	-	1.00	25.00	24.26	1.19	0.04	0.107	0.13
	WCDMA II	RMC12.2K	Left Side	0	9538	Speed	Ant 0	-	1.00	25.00	24.26	1.19	0	<0.001	0.00
	WCDMA II	RMC12.2K	Right Side	0	9538	Speed	Ant 0	-	1.00	25.00	24.26	1.19	-0.13	0.026	0.03
	WCDMA II	RMC12.2K	Top Side	16	9538	Speed	Ant 0	-	1.00	25.00	24.26	1.19	0.1	0.059	0.07
	WCDMA II	RMC12.2K	Bottom Side	0	9538	Speed	Ant 0	-	1.00	25.00	24.26	1.19	0	<0.001	0.00
	WCDMA II	RMC12.2K	Top Side	0	9538	Speed	Ant 0	-	1.00	18.50	18.44	1.01	0.15	0.843	0.85
1	WCDMA II	RMC12.2K	Top Side	0	9262	Speed	Ant 0	-	1.00	18.50	18.28	1.05	0.01	0.96	1.01
	WCDMA II	RMC12.2K	Top Side	0	9400	Speed	Ant 0	-	1.00	18.50	18.14	1.09	0.14	0.894	0.97
	WCDMA II	RMC12.2K	Top Side	0	9262	WNC	Ant 0	-	1.00	18.50	18.28	1.05	0.05	0.946	0.99
	WCDMA II	RMC12.2K	Top Side	0	9262	Auden	Ant 0	-	1.00	18.50	18.28	1.05	0.06	0.933	0.98
	WCDMA II	RMC12.2K	Top Side	0	9262	Speed	Ant 0	-	1.00	18.50	18.28	1.05	0.03	0.944	0.99
	-	-	-	-	-	-	-	-	1.00	-	-	1	-	-	-
	WCDMA IV	RMC12.2K	Rear Face	0	1413	Speed	Ant 0	-	1.00	25.00	24.30	1.17	0	0.178	0.21
	WCDMA IV	RMC12.2K	Left Side	0	1413	Speed	Ant 0	-	1.00	25.00	24.30	1.17	0.19	<0.001	0.00
	WCDMA IV	RMC12.2K	Right Side	0	1413	Speed	Ant 0	-	1.00	25.00	24.30	1.17	0.18	0.15	0.18
	WCDMA IV	RMC12.2K	Top Side	16	1413	Speed	Ant 0	-	1.00	25.00	24.30	1.17	0.05	0.324	0.38
	WCDMA IV	RMC12.2K	Bottom Side	0	1413	Speed	Ant 0	-	1.00	25.00	24.30	1.17	-0.09	0.163	0.19
	WCDMA IV	RMC12.2K	Top Side	0	1413	Speed	Ant 0	-	1.00	18.50	18.40	1.02	-0.12	0.95	0.97
	WCDMA IV	RMC12.2K	Top Side	0	1312	Speed	Ant 0	-	1.00	18.50	18.31	1.04	0.06	0.8	0.83
2	WCDMA IV	RMC12.2K	Top Side	0	1513	Speed	Ant 0	-	1.00	18.50	18.24	1.06	-0.01	1.11	1.18
	WCDMA IV	RMC12.2K	Top Side	0	1513	WNC	Ant 0	-	1.00	18.50	18.24	1.06	-0.09	0.102	0.11
	WCDMA IV	RMC12.2K	Top Side	0	1513	Auden	Ant 0	-	1.00	18.50	18.24	1.06	-0.06	1	1.06
	WCDMA IV	RMC12.2K	Top Side	0	1513	Speed	Ant 0	-	1.00	18.50	18.24	1.06	-0.05	1.03	1.09
	-	-	-	-	-	-	-	-	1.00	-	-	1	-	-	-
	WCDMA V	RMC12.2K	Rear Face	0	4132	Speed	Ant 0	-	1.00	25.00	23.89	1.29	0	<0.001	0.00
	WCDMA V	RMC12.2K	Left Side	0	4132	Speed	Ant 0	-	1.00	25.00	23.89	1.29	0	<0.001	0.00
	WCDMA V	RMC12.2K	Right Side	0	4132	Speed	Ant 0	-	1.00	25.00	23.89	1.29	0	<0.001	0.00
	WCDMA V	RMC12.2K	Top Side	16	4132	Speed	Ant 0	-	1.00	25.00	23.89	1.29	-0.01	0.568	0.73
	WCDMA V	RMC12.2K	Bottom Side	0	4132	Speed	Ant 0	-	1.00	25.00	23.89	1.29	0	<0.001	0.00
3	WCDMA V	RMC12.2K	Top Side	0	4132	Speed	Ant 0	-	1.00	24.50	23.34	1.31	-0.01	0.602	0.79
	WCDMA V	RMC12.2K	Top Side	0	4182	Speed	Ant 0	-	1.00	24.50	23.26	1.33	-0.01	0.46	0.61
	WCDMA V	RMC12.2K	Top Side	0	4233	Speed	Ant 0	-	1.00	24.50	23.31	1.32	0.07	0.574	0.76
	WCDMA V	RMC12.2K	Top Side	0	4132	WNC	Ant 0	-	1.00	24.50	23.34	1.31	0.06	0.585	0.77
	WCDMA V	RMC12.2K	Top Side	0	4132	Auden	Ant 0	-	1.00	24.50	23.34	1.31	0.05	0.569	0.75
	-	-	-	-	-	-	-	-	1.00	-	-	1	-	-	-

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Rear Face	0	18900	Speed	Ant 0	-	1.00	24.50	23.16	1.36	-0.12	0.227	0.31
	LTE 2	QPSK20M	Left Side	0	18900	Speed	Ant 0	-	1.00	24.50	23.16	1.36	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	0	18900	Speed	Ant 0	-	1.00	24.50	23.16	1.36	0.06	0.334	0.45
	LTE 2	QPSK20M	Top Side	16	18900	Speed	Ant 0	-	1.00	24.50	23.16	1.36	0.15	0.437	0.59
	LTE 2	QPSK20M	Bottom Side	0	18900	Speed	Ant 0	-	1.00	24.50	23.16	1.36	0	<0.001	0.00
	LTE 2	QPSK20M	Rear Face	0	18900	Speed	Ant 0	-	1.00	23.50	22.26	1.33	-0.15	0.206	0.27
	LTE 2	QPSK20M	Left Side	0	18900	Speed	Ant 0	-	1.00	23.50	22.26	1.33	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	0	18900	Speed	Ant 0	-	1.00	23.50	22.26	1.33	0.07	0.316	0.42
	LTE 2	QPSK20M	Top Side	16	18900	Speed	Ant 0	-	1.00	23.50	22.26	1.33	-0.13	0.413	0.55
	LTE 2	QPSK20M	Bottom Side	0	18900	Speed	Ant 0	-	1.00	23.50	22.26	1.33	0	<0.001	0.00
4	LTE 2	QPSK20M	Top Side	0	18900	Speed	Ant 0	-	1.00	16.50	16.49	1.00	0.04	0.703	0.70
	LTE 2	QPSK20M	Top Side	0	18900	Speed	Ant 0	-	1.00	15.50	15.48	1.00	-0.08	0.627	0.63
	LTE 2	QPSK20M	Top Side	0	18700	Speed	Ant 0	-	1.00	16.50	16.47	1.01	0.19	0.608	0.61
	LTE 2	QPSK20M	Top Side	0	19100	Speed	Ant 0	-	1.00	16.50	16.48	1.00	-0.09	0.675	0.68
	LTE 2	QPSK20M	Top Side	0	18900	WNC	Ant 0	-	1.00	16.50	16.49	1.00	0.04	0.684	0.68
	LTE 2	QPSK20M	Top Side	0	18900	Auden	Ant 0	-	1.00	16.50	16.49	1.00	0.02	0.665	0.67
		-						-	1.00	-	-	1		-	-
	LTE 4	QPSK20M	Rear Face	0	20175	Speed	Ant 0	-	1.00	24.50	23.55	1.24	0.13	0.168	0.21
	LTE 4	QPSK20M	Left Side	0	20175	Speed	Ant 0	-	1.00	24.50	23.55	1.24	0	<0.001	0.00
	LTE 4	QPSK20M	Right Side	0	20175	Speed	Ant 0	-	1.00	24.50	23.55	1.24	0.09	0.132	0.16
	LTE 4	QPSK20M	Top Side	16	20175	Speed	Ant 0	-	1.00	24.50	23.55	1.24	-0.05	0.273	0.34
	LTE 4	QPSK20M	Bottom Side	0	20175	Speed	Ant 0	-	1.00	24.50	23.55	1.24	0	<0.001	0.00
	LTE 4	QPSK20M	Rear Face	0	20175	Speed	Ant 0	-	1.00	23.50	22.59	1.23	-0.19	0.152	0.19
	LTE 4	QPSK20M	Left Side	0	20175	Speed	Ant 0	-	1.00	23.50	22.59	1.23	0	<0.001	0.00
	LTE 4	QPSK20M	Right Side	0	20175	Speed	Ant 0	-	1.00	23.50	22.59	1.23	0.01	0.128	0.16
	LTE 4	QPSK20M	Top Side	16	20175	Speed	Ant 0	-	1.00	23.50	22.59	1.23	0.01	0.245	0.30
	LTE 4	QPSK20M	Bottom Side	0	20175	Speed	Ant 0	-	1.00	23.50	22.59	1.23	0	<0.001	0.00
	LTE 4	QPSK20M	Top Side	0	20175	Speed	Ant 0	-	1.00	16.00	15.94	1.01	-0.02	0.497	0.50
	LTE 4	QPSK20M	Top Side	0	20175	Speed	Ant 0	-	1.00	15.00	14.99	1.00	0.06	0.46	0.46
	LTE 4	QPSK20M	Top Side	0	20050	Speed	Ant 0	-	1.00	16.00	15.91	1.02	-0.11	0.414	0.42
5	LTE 4	QPSK20M	Top Side	0	20300	Speed	Ant 0	-	1.00	16.00	15.89	1.03	0.02	0.517	0.53
	LTE 4	QPSK20M	Top Side	0	Worst	WNC	Ant 0	-	1.00	16.00	15.89	1.03	0	0.48	0.49
	LTE 4	QPSK20M	Top Side	0	Worst	Auden	Ant 0	-	1.00	16.00	15.89	1.03	0.04	0.498	0.51
		-						-	1.00	-	-	1		-	-

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 5	QPSK10M	Rear Face	0	20600	Speed	Ant 0	-	1.00	25.50	24.22	1.34	0	<0.001	0.00
	LTE 5	QPSK10M	Left Side	0	20600	Speed	Ant 0	-	1.00	25.50	24.22	1.34	0	<0.001	0.00
	LTE 5	QPSK10M	Right Side	0	20600	Speed	Ant 0	-	1.00	25.50	24.22	1.34	0	<0.001	0.00
	LTE 5	QPSK10M	Top Side	16	20600	Speed	Ant 0	-	1.00	25.50	24.22	1.34	0.06	0.076	0.10
	LTE 5	QPSK10M	Bottom Side	0	20600	Speed	Ant 0	-	1.00	25.50	24.22	1.34	0	<0.001	0.00
	LTE 5	QPSK10M	Rear Face	0	20600	Speed	Ant 0	-	1.00	24.50	23.21	1.35	0	<0.001	0.00
	LTE 5	QPSK10M	Left Side	0	20600	Speed	Ant 0	-	1.00	24.50	23.21	1.35	0	<0.001	0.00
	LTE 5	QPSK10M	Right Side	0	20600	Speed	Ant 0	-	1.00	24.50	23.21	1.35	0	<0.001	0.00
	LTE 5	QPSK10M	Top Side	16	20600	Speed	Ant 0	-	1.00	24.50	23.21	1.35	-0.19	0.069	0.09
	LTE 5	QPSK10M	Bottom Side	0	20600	Speed	Ant 0	-	1.00	24.50	23.21	1.35	0	<0.001	0.00
6	LTE 5	QPSK10M	Top Side	0	20600	Speed	Ant 0	-	1.00	22.00	21.64	1.09	0.03	0.477	0.52
	LTE 5	QPSK10M	Top Side	0	20600	Speed	Ant 0	-	1.00	21.00	20.63	1.09	0.1	0.399	0.43
	LTE 5	QPSK10M	Top Side	0	20450	Speed	Ant 0	-	1.00	22.00	21.61	1.09	-0.17	0.449	0.49
	LTE 5	QPSK10M	Top Side	0	20525	Speed	Ant 0	-	1.00	22.00	21.58	1.10	-0.09	0.423	0.47
	LTE 5	QPSK10M	Top Side	0	PCC: 20450 SCC: 20549	Speed	Ant 0	-	1.00	22.00	20.47	1.42	-0.02	0.357	0.51
	LTE 5	QPSK10M	Top Side	0	20600	WNC	Ant 0	-	1.00	22.00	21.64	1.09	0.11	0.443	0.48
	LTE 5	QPSK10M	Top Side	0	20600	Auden	Ant 0	-	1.00	22.00	21.64	1.09	-0.01	0.448	0.49
		-						-	1.00	-	-	1		-	-
	LTE 7	QPSK20M	Rear Face	0	21100	Speed	Ant 0	-	1.00	24.50	23.42	1.28	0.11	0.099	0.13
	LTE 7	QPSK20M	Left Side	0	21100	Speed	Ant 0	-	1.00	24.50	23.42	1.28	0	<0.001	0.00
	LTE 7	QPSK20M	Right Side	0	21100	Speed	Ant 0	-	1.00	24.50	23.42	1.28	0.07	0.226	0.29
	LTE 7	QPSK20M	Top Side	16	21100	Speed	Ant 0	-	1.00	24.50	23.42	1.28	-0.03	0.133	0.17
	LTE 7	QPSK20M	Bottom Side	0	21100	Speed	Ant 0	-	1.00	24.50	23.42	1.28	0	<0.001	0.00
	LTE 7	QPSK20M	Rear Face	0	21100	Speed	Ant 0	-	1.00	23.50	22.55	1.24	0.08	0.103	0.13
	LTE 7	QPSK20M	Left Side	0	21100	Speed	Ant 0	-	1.00	23.50	22.55	1.24	0	<0.001	0.00
	LTE 7	QPSK20M	Right Side	0	21100	Speed	Ant 0	-	1.00	23.50	22.55	1.24	-0.02	0.216	0.27
	LTE 7	QPSK20M	Top Side	16	21100	Speed	Ant 0	-	1.00	23.50	22.55	1.24	0.08	0.054	0.07
	LTE 7	QPSK20M	Bottom Side	0	21100	Speed	Ant 0	-	1.00	23.50	22.55	1.24	0	<0.001	0.00
7	LTE 7	QPSK20M	Top Side	0	21100	Speed	Ant 0	-	1.00	19.00	18.99	1.00	0.04	0.726	0.73
	LTE 7	QPSK20M	Top Side	0	21100	Speed	Ant 0	-	1.00	18.00	17.53	1.11	-0.06	0.628	0.70
	LTE 7	QPSK20M	Top Side	0	20850	Speed	Ant 0	-	1.00	19.00	18.88	1.03	0.06	0.392	0.40
	LTE 7	QPSK20M	Top Side	0	21350	Speed	Ant 0	-	1.00	19.00	18.97	1.01	-0.18	0.406	0.41
	LTE 7	QPSK20M	Top Side	0	PCC: 21001 SCC: 21199	Speed	Ant 0	-	1.00	19.00	17.54	1.40	0.09	0.509	0.71
	LTE 7	QPSK20M	Top Side	0	21100	WNC	Ant 0	-	1.00	19.00	18.99	1.00	-0.01	0.663	0.66
	LTE 7	QPSK20M	Top Side	0	21100	Auden	Ant 0	-	1.00	19.00	18.99	1.00	0.11	0.632	0.63
		-						-	1.00	-	-	1		-	-

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 12	QPSK10M	Rear Face	0	23130	Speed	Ant 0	-	1.00	25.50	24.14	1.37	0	<0.001	0.00
	LTE 12	QPSK10M	Left Side	0	23130	Speed	Ant 0	-	1.00	25.50	24.14	1.37	0	<0.001	0.00
	LTE 12	QPSK10M	Right Side	0	23130	Speed	Ant 0	-	1.00	25.50	24.14	1.37	0	<0.001	0.00
	LTE 12	QPSK10M	Top Side	16	23130	Speed	Ant 0	-	1.00	25.50	24.14	1.37	0	<0.001	0.00
	LTE 12	QPSK10M	Bottom Side	0	23130	Speed	Ant 0	-	1.00	25.50	24.14	1.37	0	<0.001	0.00
	LTE 12	QPSK10M	Rear Face	0	23130	Speed	Ant 0	-	1.00	24.50	23.20	1.35	0	<0.001	0.00
	LTE 12	QPSK10M	Left Side	0	23130	Speed	Ant 0	-	1.00	24.50	23.20	1.35	0	<0.001	0.00
	LTE 12	QPSK10M	Right Side	0	23130	Speed	Ant 0	-	1.00	24.50	23.20	1.35	0	<0.001	0.00
	LTE 12	QPSK10M	Top Side	16	23130	Speed	Ant 0	-	1.00	24.50	23.20	1.35	0	<0.001	0.00
	LTE 12	QPSK10M	Bottom Side	0	23130	Speed	Ant 0	-	1.00	24.50	23.20	1.35	0	<0.001	0.00
8	LTE 12	QPSK10M	Top Side	0	23130	Speed	Ant 0	-	1.00	21.50	21.49	1.00	0.13	0.289	0.29
	LTE 12	QPSK10M	Top Side	0	23130	Speed	Ant 0	-	1.00	20.50	20.48	1.00	-0.15	0.222	0.22
	LTE 12	QPSK10M	Top Side	0	23060	Speed	Ant 0	-	1.00	21.50	21.43	1.02	-0.08	0.256	0.26
	LTE 12	QPSK10M	Top Side	0	23095	Speed	Ant 0	-	1.00	21.50	21.48	1.00	0.04	0.25	0.25
	LTE 12	QPSK10M	Top Side	0	23130	WNC	Ant 0	-	1.00	21.50	21.49	1.00	0.09	0.279	0.28
	LTE 12	QPSK10M	Top Side	0	23130	Auden	Ant 0	-	1.00	21.50	21.49	1.00	-0.14	0.284	0.28
	LTE 13	QPSK10M	Rear Face	0	23230	Speed	Ant 0	-	1.00	25.50	24.06	1.39	0	<0.001	0.00
	LTE 13	QPSK10M	Left Side	0	23230	Speed	Ant 0	-	1.00	25.50	24.06	1.39	0	<0.001	0.00
	LTE 13	QPSK10M	Right Side	0	23230	Speed	Ant 0	-	1.00	25.50	24.06	1.39	0	<0.001	0.00
	LTE 13	QPSK10M	Top Side	16	23230	Speed	Ant 0	-	1.00	25.50	24.06	1.39	0	<0.001	0.00
	LTE 13	QPSK10M	Bottom Side	0	23230	Speed	Ant 0	-	1.00	25.50	24.06	1.39	0	<0.001	0.00
	LTE 13	QPSK10M	Front Face	0	23230	Speed	Ant 0	-	1.00	24.50	23.19	1.35	0	<0.001	0.00
	LTE 13	QPSK10M	Rear Face	0	23230	Speed	Ant 0	-	1.00	24.50	23.19	1.35	0	<0.001	0.00
	LTE 13	QPSK10M	Left Side	0	23230	Speed	Ant 0	-	1.00	24.50	23.19	1.35	0	<0.001	0.00
	LTE 13	QPSK10M	Right Side	0	23230	Speed	Ant 0	-	1.00	24.50	23.19	1.35	0	<0.001	0.00
	LTE 13	QPSK10M	Top Side	16	23230	Speed	Ant 0	-	1.00	24.50	23.19	1.35	0	<0.001	0.00
	LTE 13	QPSK10M	Bottom Side	0	23230	Speed	Ant 0	-	1.00	24.50	23.19	1.35	0	<0.001	0.00
9	LTE 13	QPSK10M	Top Side	0	23230	Speed	Ant 0	-	1.00	20.50	20.49	1.00	0.03	0.25	0.25
	LTE 13	QPSK10M	Top Side	0	23230	Speed	Ant 0	-	1.00	19.50	19.48	1.00	0.11	0.221	0.22
	LTE 13	QPSK10M	Top Side	0	23230	WNC	Ant 0	-	1.00	20.50	20.49	1.00	0	0.227	0.23
	LTE 13	QPSK10M	Top Side	0	23230	Auden	Ant 0	-	1.00	20.50	20.49	1.00	0	0.224	0.22

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 14	QPSK10M	Rear Face	0	23330	Speed	Ant 0	-	1.00	25.50	24.15	1.36	0	<0.001	0.00
	LTE 14	QPSK10M	Left Side	0	23330	Speed	Ant 0	-	1.00	25.50	24.15	1.36	0	<0.001	0.00
	LTE 14	QPSK10M	Right Side	0	23330	Speed	Ant 0	-	1.00	25.50	24.15	1.36	-0.07	0.098	0.13
	LTE 14	QPSK10M	Top Side	16	23330	Speed	Ant 0	-	1.00	25.50	24.15	1.36	0	<0.001	0.00
	LTE 14	QPSK10M	Bottom Side	0	23330	Speed	Ant 0	-	1.00	25.50	24.15	1.36	0	<0.001	0.00
	LTE 14	QPSK10M	Rear Face	0	23330	Speed	Ant 0	-	1.00	24.50	23.29	1.32	0	<0.001	0.00
	LTE 14	QPSK10M	Left Side	0	23330	Speed	Ant 0	-	1.00	24.50	23.29	1.32	0	<0.001	0.00
	LTE 14	QPSK10M	Right Side	0	23330	Speed	Ant 0	-	1.00	24.50	23.29	1.32	0	<0.001	0.00
	LTE 14	QPSK10M	Top Side	16	23330	Speed	Ant 0	-	1.00	24.50	23.29	1.32	0	<0.001	0.00
	LTE 14	QPSK10M	Bottom Side	0	23330	Speed	Ant 0	-	1.00	24.50	23.29	1.32	0	<0.001	0.00
10	LTE 14	QPSK10M	Top Side	0	23330	Speed	Ant 0	-	1.00	20.50	20.49	1.00	0.02	0.307	0.31
	LTE 14	QPSK10M	Top Side	0	23330	Speed	Ant 0	-	1.00	19.50	19.48	1.00	0.15	0.281	0.28
	LTE 14	QPSK10M	Top Side	0	23330	WNC	Ant 0	-	1.00	20.50	20.49	1.00	-0.08	0.293	0.29
	LTE 14	QPSK10M	Top Side	0	23330	Auden	Ant 0	-	1.00	20.50	20.49	1.00	0.05	0.287	0.29
	LTE 25	QPSK20M	Rear Face	0	26140	Speed	Ant 0	-	1.00	24.50	23.09	1.38	-0.02	0.217	0.30
	LTE 25	QPSK20M	Left Side	0	26140	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0	<0.001	0.00
	LTE 25	QPSK20M	Right Side	0	26140	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0.06	0.479	0.66
	LTE 25	QPSK20M	Top Side	16	26140	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0.06	0.488	0.67
	LTE 25	QPSK20M	Bottom Side	0	26140	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0	<0.001	0.00
	LTE 25	QPSK20M	Rear Face	0	26140	Speed	Ant 0	-	1.00	23.50	22.18	1.36	0.11	0.106	0.14
	LTE 25	QPSK20M	Left Side	0	26140	Speed	Ant 0	-	1.00	23.50	22.18	1.36	0	<0.001	0.00
	LTE 25	QPSK20M	Right Side	0	26140	Speed	Ant 0	-	1.00	23.50	22.18	1.36	0.06	0.399	0.54
	LTE 25	QPSK20M	Top Side	16	26140	Speed	Ant 0	-	1.00	23.50	22.18	1.36	0.11	0.381	0.52
	LTE 25	QPSK20M	Bottom Side	0	26140	Speed	Ant 0	-	1.00	23.50	22.18	1.36	0	<0.001	0.00
11	LTE 25	QPSK20M	Top Side	0	26140	Speed	Ant 0	-	1.00	16.50	16.49	1.00	0.01	0.736	0.74
	LTE 25	QPSK20M	Top Side	0	26140	Speed	Ant 0	-	1.00	15.50	15.46	1.01	-0.04	0.683	0.69
	LTE 25	QPSK20M	Top Side	0	26365	Speed	Ant 0	-	1.00	16.50	16.44	1.01	-0.08	0.655	0.66
	LTE 25	QPSK20M	Top Side	0	26590	Speed	Ant 0	-	1.00	16.50	16.46	1.01	0.15	0.605	0.61
	LTE 25	QPSK20M	Top Side	0	26140	WNC	Ant 0	-	1.00	16.50	16.49	1.00	-0.15	0.694	0.69
	LTE 25	QPSK20M	Top Side	0	26140	Auden	Ant 0	-	1.00	16.50	16.49	1.00	-0.02	0.717	0.72

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 26	QPSK15M	Rear Face	0	26865	Speed	Ant 0	-	1.00	25.50	24.32	1.31	0	<0.001	0.00
	LTE 26	QPSK15M	Left Side	0	26865	Speed	Ant 0	-	1.00	25.50	24.32	1.31	0	<0.001	0.00
	LTE 26	QPSK15M	Right Side	0	26865	Speed	Ant 0	-	1.00	25.50	24.32	1.31	0.05	0.112	0.15
	LTE 26	QPSK15M	Top Side	16	26865	Speed	Ant 0	-	1.00	25.50	24.32	1.31	-0.11	0.043	0.06
	LTE 26	QPSK15M	Bottom Side	0	26865	Speed	Ant 0	-	1.00	25.50	24.32	1.31	0	<0.001	0.00
	LTE 26	QPSK15M	Rear Face	0	26865	Speed	Ant 0	-	1.00	24.50	23.23	1.34	0	<0.001	0.00
	LTE 26	QPSK15M	Left Side	0	26865	Speed	Ant 0	-	1.00	24.50	23.23	1.34	0	<0.001	0.00
	LTE 26	QPSK15M	Right Side	0	26865	Speed	Ant 0	-	1.00	24.50	23.23	1.34	-0.03	0.115	0.15
	LTE 26	QPSK15M	Top Side	16	26865	Speed	Ant 0	-	1.00	24.50	23.23	1.34	-0.1	0.035	0.05
	LTE 26	QPSK15M	Bottom Side	0	26865	Speed	Ant 0	-	1.00	24.50	23.23	1.34	0	<0.001	0.00
12	LTE 26	QPSK15M	Top Side	0	26865	Speed	Ant 0	-	1.00	22.00	21.94	1.01	0.03	0.394	0.40
	LTE 26	QPSK15M	Top Side	0	26865	Speed	Ant 0	-	1.00	21.00	20.78	1.05	-0.04	0.337	0.35
	LTE 26	QPSK15M	Top Side	0	26765	Speed	Ant 0	-	1.00	22.00	21.88	1.03	-0.1	0.366	0.38
	LTE 26	QPSK15M	Top Side	0	26965	Speed	Ant 0	-	1.00	22.00	21.82	1.04	-0.06	0.375	0.39
	LTE 26	QPSK15M	Top Side	0	26865	WNC	Ant 0	-	1.00	22.00	21.94	1.01	0	0.368	0.37
	LTE 26	QPSK15M	Top Side	0	26865	Auden	Ant 0	-	1.00	22.00	21.94	1.01	-0.1	0.359	0.36
	LTE 38	QPSK20M	Rear Face	0	37850	Speed	Ant 0	-	1.00	24.50	23.31	1.32	-0.14	0.043	0.06
	LTE 38	QPSK20M	Left Side	0	37850	Speed	Ant 0	-	1.00	24.50	23.31	1.32	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side	0	37850	Speed	Ant 0	-	1.00	24.50	23.31	1.32	0.02	0.088	0.12
	LTE 38	QPSK20M	Top Side	16	37850	Speed	Ant 0	-	1.00	24.50	23.31	1.32	0.13	0.062	0.08
	LTE 38	QPSK20M	Bottom Side	0	37850	Speed	Ant 0	-	1.00	24.50	23.31	1.32	0	<0.001	0.00
	LTE 38	QPSK20M	Rear Face	0	37850	Speed	Ant 0	-	1.00	23.50	22.29	1.32	0.15	0.034	0.04
	LTE 38	QPSK20M	Left Side	0	37850	Speed	Ant 0	-	1.00	23.50	22.29	1.32	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side	0	37850	Speed	Ant 0	-	1.00	23.50	22.29	1.32	0.17	0.068	0.09
	LTE 38	QPSK20M	Top Side	16	37850	Speed	Ant 0	-	1.00	23.50	22.29	1.32	-0.16	0.053	0.07
	LTE 38	QPSK20M	Bottom Side	0	37850	Speed	Ant 0	-	1.00	23.50	22.29	1.32	0	<0.001	0.00
13	LTE 38	QPSK20M	Top Side	0	37850	Speed	Ant 0	-	1.00	21.00	20.75	1.06	0.01	0.509	0.54
	LTE 38	QPSK20M	Top Side	0	37850	Speed	Ant 0	-	1.00	20.00	19.86	1.03	-0.16	0.503	0.52
	LTE 38	QPSK20M	Top Side	0	38000	Speed	Ant 0	-	1.00	21.00	20.71	1.07	0.19	0.454	0.49
	LTE 38	QPSK20M	Top Side	0	38150	Speed	Ant 0	-	1.00	21.00	20.73	1.06	-0.15	0.44	0.47
	LTE 38	QPSK20M	Top Side	0	37850	WNC	Ant 0	-	1.00	21.00	20.75	1.06	-0.16	0.436	0.46
	LTE 38	QPSK20M	Top Side	0	37850	Auden	Ant 0	-	1.00	21.00	20.75	1.06	-0.15	0.428	0.45

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 41	QPSK20M	Rear Face	0	40185	Speed	Ant 0	-	1.00	24.50	23.99	1.12	0	<0.001	0.00
	LTE 41	QPSK20M	Left Side	0	40185	Speed	Ant 0	-	1.00	24.50	23.99	1.12	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side	0	40185	Speed	Ant 0	-	1.00	24.50	23.99	1.12	-0.06	0.463	0.52
	LTE 41	QPSK20M	Top Side	16	40185	Speed	Ant 0	-	1.00	24.50	23.99	1.12	0.03	0.639	0.72
	LTE 41	QPSK20M	Bottom Side	0	40185	Speed	Ant 0	-	1.00	24.50	23.99	1.12	0	<0.001	0.00
	LTE 41	QPSK20M	Rear Face	0	40185	Speed	Ant 0	-	1.00	23.50	22.99	1.12	0	<0.001	0.00
	LTE 41	QPSK20M	Left Side	0	40185	Speed	Ant 0	-	1.00	23.50	22.99	1.12	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side	0	40185	Speed	Ant 0	-	1.00	23.50	22.99	1.12	-0.16	0.342	0.38
	LTE 41	QPSK20M	Top Side	16	40185	Speed	Ant 0	-	1.00	23.50	22.99	1.12	0	0.052	0.06
	LTE 41	QPSK20M	Bottom Side	0	40185	Speed	Ant 0	-	1.00	23.50	22.99	1.12	0	<0.001	0.00
14	LTE 41	QPSK20M	Top Side	0	40185	Speed	Ant 0	-	1.00	21.00	20.98	1.00	0.03	0.736	0.74
	LTE 41	QPSK20M	Top Side	0	40185	Speed	Ant 0	-	1.00	20.00	19.99	1.00	0.17	0.429	0.43
	LTE 41	QPSK20M	Top Side	0	39750	Speed	Ant 0	-	1.00	21.00	20.66	1.08	-0.19	0.646	0.70
	LTE 41	QPSK20M	Top Side	0	40620	Speed	Ant 0	-	1.00	21.00	20.73	1.06	0.16	0.477	0.51
	LTE 41	QPSK20M	Top Side	0	41055	Speed	Ant 0	-	1.00	21.00	20.80	1.05	-0.1	0.474	0.50
	LTE 41	QPSK20M	Top Side	0	41490	Speed	Ant 0	-	1.00	21.00	20.91	1.02	-0.03	0.488	0.50
	LTE 41	QPSK20M	Top Side	0	PCC: 41292 SCC: 41490	Speed	Ant 0	-	1.00	21.00	20.28	1.18	-0.08	0.603	0.71
	LTE 41	QPSK20M	Top Side	0	40185	WNC	Ant 0	-	1.00	21.00	20.98	1.00	0.13	0.683	0.68
	LTE 41	QPSK20M	Top Side	0	40185	Auden	Ant 0	-	1.00	21.00	20.98	1.00	-0.03	0.678	0.68
	LTE 48	QPSK20M	Rear Face	0	55340	Speed	Ant 0	-	1.00	22.00	21.72	1.07	0	<0.001	0.00
	LTE 48	QPSK20M	Left Side	0	55340	Speed	Ant 0	-	1.00	22.00	21.72	1.07	0	<0.001	0.00
	LTE 48	QPSK20M	Right Side	0	55340	Speed	Ant 0	-	1.00	22.00	21.72	1.07	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	16	55340	Speed	Ant 0	-	1.00	22.00	21.72	1.07	-0.13	0.01	0.01
	LTE 48	QPSK20M	Bottom Side	0	55340	Speed	Ant 0	-	1.00	22.00	21.72	1.07	0	<0.001	0.00
	LTE 48	QPSK20M	Rear Face	0	55340	Speed	Ant 0	-	1.00	21.00	20.88	1.03	0	<0.001	0.00
	LTE 48	QPSK20M	Left Side	0	55340	Speed	Ant 0	-	1.00	21.00	20.88	1.03	0	<0.001	0.00
	LTE 48	QPSK20M	Right Side	0	55340	Speed	Ant 0	-	1.00	21.00	20.88	1.03	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	16	55340	Speed	Ant 0	-	1.00	21.00	20.88	1.03	-0.02	0.01	0.01
	LTE 48	QPSK20M	Bottom Side	0	55340	Speed	Ant 0	-	1.00	21.00	20.88	1.03	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	0	55340	Speed	Ant 0	-	1.00	21.50	21.45	1.01	-0.06	0.167	0.17
	LTE 48	QPSK20M	Top Side	0	55340	Speed	Ant 0	-	1.00	20.50	20.36	1.03	-0.11	0.136	0.14
	LTE 48	QPSK20M	Top Side	0	55780	Speed	Ant 0	-	1.00	21.50	21.21	1.07	-0.06	0.164	0.18
	LTE 48	QPSK20M	Top Side	0	56210	Speed	Ant 0	-	1.00	21.50	21.32	1.04	0.01	0.181	0.19
15	LTE 48	QPSK20M	Top Side	0	56640	Speed	Ant 0	-	1.00	21.50	21.35	1.04	0.01	0.191	0.20
	LTE 48	QPSK20M	Top Side	0	PCC: 55340 SCC: 55538	Speed	Ant 0	-	1.00	21.50	20.80	1.17	0.01	0.152	0.18
	LTE 48	QPSK20M	Top Side	0	56640	WNC	Ant 0	-	1.00	21.50	21.35	1.04	0.04	0.16	0.17
	LTE 48	QPSK20M	Top Side	0	56640	Auden	Ant 0	-	1.00	21.50	21.35	1.04	0.09	0.165	0.17

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 66	QPSK20M	Rear Face	0	132322	Speed	Ant 0	-	1.00	24.50	23.56	1.24	0.04	0.231	0.29
	LTE 66	QPSK20M	Left Side	0	132322	Speed	Ant 0	-	1.00	24.50	23.56	1.24	0	<0.001	0.00
	LTE 66	QPSK20M	Right Side	0	132322	Speed	Ant 0	-	1.00	24.50	23.56	1.24	-0.16	0.256	0.32
	LTE 66	QPSK20M	Top Side	16	132322	Speed	Ant 0	-	1.00	24.50	23.56	1.24	-0.02	0.387	0.48
	LTE 66	QPSK20M	Bottom Side	0	132322	Speed	Ant 0	-	1.00	24.50	23.56	1.24	0	<0.001	0.00
	LTE 66	QPSK20M	Rear Face	0	132322	Speed	Ant 0	-	1.00	23.50	22.64	1.22	-0.13	0.208	0.25
	LTE 66	QPSK20M	Left Side	0	132322	Speed	Ant 0	-	1.00	23.50	22.64	1.22	0	<0.001	0.00
	LTE 66	QPSK20M	Right Side	0	132322	Speed	Ant 0	-	1.00	23.50	22.64	1.22	0.19	0.227	0.28
	LTE 66	QPSK20M	Top Side	16	132322	Speed	Ant 0	-	1.00	23.50	22.64	1.22	-0.02	0.32	0.39
	LTE 66	QPSK20M	Bottom Side	0	132322	Speed	Ant 0	-	1.00	23.50	22.64	1.22	0	<0.001	0.00
16	LTE 66	QPSK20M	Top Side	0	132322	Speed	Ant 0	-	1.00	16.00	15.89	1.03	0.02	0.625	0.64
	LTE 66	QPSK20M	Top Side	0	132322	Speed	Ant 0	-	1.00	15.00	14.77	1.05	0.06	0.553	0.58
	LTE 66	QPSK20M	Top Side	0	132072	Speed	Ant 0	-	1.00	16.00	15.81	1.04	-0.08	0.549	0.57
	LTE 66	QPSK20M	Top Side	0	132572	Speed	Ant 0	-	1.00	16.00	15.85	1.04	-0.16	0.575	0.60
	LTE 66	QPSK20M	Top Side	0	132322	WNC	Ant 0	-	1.00	16.00	15.89	1.03	0.07	0.568	0.59
	LTE 66	QPSK20M	Top Side	0	132322	Auden	Ant 0	-	1.00	16.00	15.89	1.03	-0.17	0.56	0.58
	LTE 71	QPSK20M	Rear Face	0	133222	Speed	Ant 0	-	1.00	25.50	24.26	1.33	0	<0.001	0.00
	LTE 71	QPSK20M	Left Side	0	133222	Speed	Ant 0	-	1.00	25.50	24.26	1.33	0	<0.001	0.00
	LTE 71	QPSK20M	Right Side	0	133222	Speed	Ant 0	-	1.00	25.50	24.26	1.33	0	<0.001	0.00
	LTE 71	QPSK20M	Top Side	16	133222	Speed	Ant 0	-	1.00	25.50	24.26	1.33	0	<0.001	0.00
	LTE 71	QPSK20M	Bottom Side	0	133222	Speed	Ant 0	-	1.00	25.50	24.26	1.33	0	<0.001	0.00
	LTE 71	QPSK20M	Rear Face	0	133222	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0	<0.001	0.00
	LTE 71	QPSK20M	Left Side	0	133222	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0	<0.001	0.00
	LTE 71	QPSK20M	Right Side	0	133222	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0	<0.001	0.00
	LTE 71	QPSK20M	Top Side	16	133222	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0	<0.001	0.00
	LTE 71	QPSK20M	Bottom Side	0	133222	Speed	Ant 0	-	1.00	24.50	23.09	1.38	0	<0.001	0.00
17	LTE 71	QPSK20M	Top Side	0	133222	Speed	Ant 0	-	1.00	23.50	23.49	1.00	0.03	0.474	0.47
	LTE 71	QPSK20M	Top Side	0	133222	Speed	Ant 0	-	1.00	22.50	22.49	1.00	0.07	0.384	0.38
	LTE 71	QPSK20M	Top Side	0	133297	Speed	Ant 0	-	1.00	23.50	23.46	1.01	0	0.445	0.45
	LTE 71	QPSK20M	Top Side	0	133372	Speed	Ant 0	-	1.00	23.50	23.48	1.00	0.04	0.459	0.46
	LTE 71	QPSK20M	Top Side	0	133222	WNC	Ant 0	-	1.00	23.50	23.49	1.00	0.12	0.43	0.43
	LTE 71	QPSK20M	Top Side	0	133222	Auden	Ant 0	-	1.00	23.50	23.49	1.00	-0.03	0.443	0.44

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	Speed	Ant 0	97.00	1.03	14.00	13.97	1.01	-0.07	0.36	0.37
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	Speed	Ant 1	97.10	1.03	14.00	13.98	1.00	0.12	0.754	0.78
20	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6	Speed	Ant 0+1	98.20	1.02	17.00	16.97	1.01	-0.02	0.823	0.85
	WLAN2.4G	802.11b	Rear Face	0	6	Speed	Ant 0	97.00	1.03	15.50	15.49	1.00	0.05	0.483	0.50
	WLAN2.4G	802.11b	Left Side	0	6	Speed	Ant 0	97.00	1.03	15.50	15.49	1.00	0.13	0.056	0.06
	WLAN2.4G	802.11b	Right Side	0	6	Speed	Ant 0	97.00	1.03	15.50	15.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side	0	6	Speed	Ant 0	97.00	1.03	15.50	15.49	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	0	6	Speed	Ant 0	97.00	1.03	15.50	15.49	1.00	0.14	0.09	0.09
	WLAN2.4G	802.11b	Rear Face	0	6	Speed	Ant 1	97.10	1.03	15.50	15.48	1.00	-0.11	0.802	0.83
	WLAN2.4G	802.11b	Left Side	0	6	Speed	Ant 1	97.10	1.03	15.50	15.48	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	6	Speed	Ant 1	97.10	1.03	15.50	15.48	1.00	-0.05	0.201	0.21
	WLAN2.4G	802.11b	Top Side	0	6	Speed	Ant 1	97.10	1.03	15.50	15.48	1.00	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	0	6	Speed	Ant 1	97.10	1.03	15.50	15.48	1.00	0.12	0.261	0.27
	WLAN2.4G	802.11n HT40	Rear Face	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.45	1.01	-0.03	0.702	0.72
	WLAN2.4G	802.11n HT40	Left Side	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.45	1.01	0.09	0.071	0.07
	WLAN2.4G	802.11n HT40	Right Side	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.45	1.01	0.03	0.173	0.18
	WLAN2.4G	802.11n HT40	Top Side	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.45	1.01	0	<0.001	0.00
	WLAN2.4G	802.11n HT40	Bottom Side	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.45	1.01	-0.03	0.306	0.32
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	3	Speed	Ant 0+1	98.20	1.02	17.00	16.94	1.01	0.14	0.581	0.60
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	9	Speed	Ant 0+1	98.20	1.02	17.00	16.95	1.01	-0.11	0.645	0.66
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	10	Speed	Ant 0+1	98.20	1.02	17.00	16.90	1.02	-0.13	0.613	0.64
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	11	Speed	Ant 0+1	98.20	1.02	17.00	16.87	1.03	-0.13	0.708	0.74
	WLAN2.4G	802.11b	Rear Face	0	1	Speed	Ant 1	97.10	1.03	14.00	13.82	1.04	-0.06	0.566	0.61
	WLAN2.4G	802.11b	Rear Face	0	11	Speed	Ant 1	97.10	1.03	14.00	13.91	1.02	-0.06	0.597	0.63
	WLAN2.4G	802.11b	Rear Face	0	12	Speed	Ant 1	97.10	1.03	14.00	13.88	1.03	0.05	0.628	0.67
	WLAN2.4G	802.11b	Rear Face	0	13	Speed	Ant 1	97.10	1.03	14.00	13.81	1.04	0.02	0.689	0.74
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6	Auden	Ant 0+1	98.20	1.02	17.00	16.97	1.01	-0.06	0.812	0.84
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	3	Auden	Ant 0+1	98.20	1.02	17.00	16.94	1.01	-0.18	0.573	0.59
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	9	Auden	Ant 0+1	98.20	1.02	17.00	16.95	1.01	0.06	0.637	0.66
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	10	Auden	Ant 0+1	98.20	1.02	17.00	16.90	1.02	0.14	0.605	0.63
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	11	Auden	Ant 0+1	98.20	1.02	17.00	16.87	1.03	-0.15	0.699	0.73
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6	HB	Ant 0+1	98.20	1.02	17.00	16.97	1.01	-0.18	0.806	0.83
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	3	HB	Ant 0+1	98.20	1.02	17.00	16.94	1.01	0.15	0.6	0.62
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	9	HB	Ant 0+1	98.20	1.02	17.00	16.95	1.01	-0.15	0.569	0.59
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	10	HB	Ant 0+1	98.20	1.02	17.00	16.90	1.02	0.08	0.631	0.66
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	11	HB	Ant 0+1	98.20	1.02	17.00	16.87	1.03	-0.08	0.693	0.73
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6	Speed	Ant 0+1	98.20	1.02	17.00	16.97	1.01	0.05	0.814	0.84

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50	Speed	Ant 0	95.30	1.05	10.50	10.43	1.02	0.08	0.468	0.50
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.08	0.583	0.61
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.48	1.00	0.13	0.541	0.60
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	Speed	Ant 0	95.30	1.05	10.50	10.43	1.02	-0.19	0.573	0.61
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Speed	Ant 0	95.30	1.05	10.50	10.43	1.02	-0.05	0.033	0.04
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Speed	Ant 0	95.30	1.05	10.50	10.43	1.02	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Speed	Ant 0	95.30	1.05	10.50	10.43	1.02	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Speed	Ant 0	95.30	1.05	10.50	10.43	1.02	-0.1	0.139	0.15
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	0.02	0.586	0.62
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.12	0.057	0.06
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.03	0.084	0.09
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.09	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.19	0.367	0.39
21	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.48	1.00	-0.03	0.733	0.81
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.48	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.48	1.00	-0.1	0.074	0.08
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.48	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.48	1.00	-0.02	0.329	0.37
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	Auden	Ant 0+1	90.20	1.11	13.50	13.48	1.00	-0.03	0.674	0.75
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	HB	Ant 0+1	90.20	1.11	13.50	13.48	1.00	-0.14	0.703	0.78
	WLAN5.3G	802.11ac VHT160	Rear Face	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.48	1.00	0.12	0.715	0.79
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	-0.19	0.293	0.31
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114	Speed	Ant 1	94.80	1.05	11.00	10.93	1.02	-0.06	0.273	0.29
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.91	1.02	0.14	0.321	0.36
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	-0.06	0.813	0.86
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	-0.13	0.045	0.05
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	-0.16	0.197	0.21
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	Speed	Ant 1	94.80	1.05	11.00	10.93	1.02	0.01	0.345	0.37
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Speed	Ant 1	94.80	1.05	11.00	10.93	1.02	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Speed	Ant 1	94.80	1.05	11.00	10.93	1.02	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Speed	Ant 1	94.80	1.05	11.00	10.93	1.02	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Speed	Ant 1	94.80	1.05	11.00	10.93	1.02	0.09	0.104	0.11
22	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.91	1.02	-0.04	0.922	1.04
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.91	1.02	0.16	0.045	0.05
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.91	1.02	-0.08	0.037	0.04
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.91	1.02	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.91	1.02	0.15	0.205	0.23
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	Auden	Ant 0+1	90.20	1.11	14.00	13.91	1.02	-0.03	0.837	0.95
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	HB	Ant 0+1	90.20	1.11	14.00	13.91	1.02	-0.1	0.873	0.99
	WLAN5.6G	802.11ac VHT160	Rear Face	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.91	1.02	0.17	0.897	1.02

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155	Speed	Ant 0	97.50	1.03	11.50	11.50	1.00	0.02	0.658	0.68
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155	Speed	Ant 1	97.20	1.03	11.50	11.48	1.00	-0.03	0.727	0.75
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.47	1.01	-0.08	0.778	0.83
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	Speed	Ant 0	97.50	1.03	11.50	11.50	1.00	0.16	0.932	0.96
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Speed	Ant 0	97.50	1.03	11.50	11.50	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Speed	Ant 0	97.50	1.03	11.50	11.50	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Speed	Ant 0	97.50	1.03	11.50	11.50	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Speed	Ant 0	97.50	1.03	11.50	11.50	1.00	-0.17	0.182	0.19
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	Speed	Ant 1	97.20	1.03	11.50	11.48	1.00	0.12	0.829	0.85
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Speed	Ant 1	97.20	1.03	11.50	11.48	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Speed	Ant 1	97.20	1.03	11.50	11.48	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Speed	Ant 1	97.20	1.03	11.50	11.48	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Speed	Ant 1	97.20	1.03	11.50	11.48	1.00	-0.16	0.304	0.31
23	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.47	1.01	-0.07	0.935	1.00
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.47	1.01	-0.14	0.066	0.07
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.47	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.47	1.01	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.47	1.01	0.11	0.293	0.31
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	Auden	Ant 0+1	94.60	1.06	14.50	14.47	1.01	0.19	0.901	0.96
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	HB	Ant 0+1	94.60	1.06	14.50	14.47	1.01	0.06	0.864	0.92
	WLAN5.8G	802.11ac VHT80	Rear Face	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.47	1.01	-0.02	0.921	0.99
	WLAN5.9G	802.11ac VHT160	Bottom for Laptop	0	163	Speed	Ant 0	95.30	1.05	12.00	12.00	1.00	-0.01	0.608	0.64
	WLAN5.9G	802.11ac VHT160	Bottom for Laptop	0	163	Speed	Ant 1	94.80	1.05	12.00	11.93	1.02	-0.16	0.746	0.80
	WLAN5.9G	802.11ac VHT160	Bottom for Laptop	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.98	1.00	0.01	0.788	0.87
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Speed	Ant 0	95.30	1.05	12.00	12.00	1.00	-0.17	0.775	0.81
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Speed	Ant 0	95.30	1.05	12.00	12.00	1.00	0.04	0.05	0.05
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Speed	Ant 0	95.30	1.05	12.00	12.00	1.00	-0.02	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Speed	Ant 0	95.30	1.05	12.00	12.00	1.00	0.13	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Speed	Ant 0	95.30	1.05	12.00	12.00	1.00	0	0.119	0.12
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Speed	Ant 1	94.80	1.05	12.00	11.93	1.02	0.03	0.627	0.67
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Speed	Ant 1	94.80	1.05	12.00	11.93	1.02	-0.03	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Speed	Ant 1	94.80	1.05	12.00	11.93	1.02	-0.11	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Speed	Ant 1	94.80	1.05	12.00	11.93	1.02	-0.12	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Speed	Ant 1	94.80	1.05	12.00	11.93	1.02	0.15	0.287	0.31
24	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.98	1.00	-0.04	0.893	0.99
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.98	1.00	-0.06	0.056	0.06
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.98	1.00	-0.12	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.98	1.00	-0.08	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.98	1.00	0.1	0.226	0.25
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Auden	Ant 0+1	90.20	1.11	15.00	14.98	1.00	-0.05	0.843	0.94
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	HB	Ant 0+1	90.20	1.11	15.00	14.98	1.00	0.19	0.865	0.96
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.98	1.00	0.19	0.879	0.98

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
25	BT	BDR	Bottom for Laptop	0	39	Speed	Ant 1	76.35	1.31	11.00	10.95	1.01	-0.03	0.232	0.31
	BT	BDR	Rear Face	0	39	Speed	Ant 1	76.35	1.31	11.00	10.95	1.01	0.02	0.139	0.18
	BT	BDR	Left Side	0	39	Speed	Ant 1	76.35	1.31	11.00	10.95	1.01	0	<0.001	0.00
	BT	BDR	Right Side	0	39	Speed	Ant 1	76.35	1.31	11.00	10.95	1.01	0.12	0.03	0.04
	BT	BDR	Top Side	0	39	Speed	Ant 1	76.35	1.31	11.00	10.95	1.01	0	<0.001	0.00
	BT	BDR	Bottom Side	0	39	Speed	Ant 1	76.35	1.31	11.00	10.95	1.01	-0.14	0.065	0.09
	BT	BDR	Bottom for Laptop	0	0	Speed	Ant 1	76.35	1.31	11.00	10.87	1.03	-0.06	0.217	0.29
	BT	BDR	Bottom for Laptop	0	78	Speed	Ant 1	76.35	1.31	11.00	10.93	1.02	0.02	0.203	0.27
	BT	BDR	Bottom for Laptop	0	39	Auden	Ant 1	76.35	1.31	11.00	10.95	1.01	0.04	0.199	0.26
	BT	BDR	Bottom for Laptop	0	39	HB	Ant 1	76.35	1.31	11.00	10.95	1.01	0.17	0.216	0.29
27	RFID	ASK	Bottom for Laptop	0	13.56	Speed	Ant 1	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Rear Face	0	13.56	Speed	Ant 1	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Left Side	0	13.56	Speed	Ant 1	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Right Side	0	13.56	Speed	Ant 1	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Top Side	0	13.56	Speed	Ant 1	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Bottom Side	0	13.56	Speed	Ant 1	-	1.00	-	-	1	0	<0.001	0.00
	RFID	ASK	Bottom for Laptop	0	13.56	HB	Ant 1	-	1.00	-	-	1	0	<0.001	0.00

SAR and APD Test Result																										
System & Position						DUT Configuration			SAR								Power Density									
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Power Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Grid Step [λ]	iPD [W/m2]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm2]	Power Drift [dB]	Normal psPD [W/m2]	Scaled Normal psPD [W/m2]	Total psPD [W/m2]	Scaled Total psPD [W/m2]	
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.99	1.00	-0.01	0.4	0.41										
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.95	1.01	-0.12	0.311	0.32										
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	-0.18	0.303	0.32										
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.99	1.00	0.12	0.362	0.37										
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.99	1.00	0.04	0.033	0.03										
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.99	1.00	0	<0.001	0.00										
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.99	1.00	0	<0.001	0.00										
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.99	1.00	0.04	0.032	0.03										
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.95	1.01	0.16	0.657	0.68										
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.95	1.01	0	<0.001	0.00										
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.95	1.01	0.17	0.103	0.11										
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.95	1.01	0	<0.001	0.00										
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.95	1.01	-0.02	0.227	0.23										
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	0.01	0.813	0.85	0.0522	12.71	1.545	4.00	-0.03	1.57	2.5	3.43	5.51	
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	-0.1	0.038	0.04										
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	-0.07	0.117	0.12										
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	0	<0.001	0.00										
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	0.17	0.275	0.29										
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.95	1.01	-0.02	0.4	0.42										
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.95	1.01	-0.11	0.311	0.32										
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	-0.17	0.303	0.32										
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.95	1.01	-0.19	0.362	0.38										
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.95	1.01	-0.02	0.033	0.03										
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.95	1.01	0	<0.001	0.00										
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.95	1.01	0	<0.001	0.00										
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.95	1.01	-0.01	0.032	0.03										
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.95	1.01	-0.06	0.657	0.68										
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.95	1.01	0	<0.001	0.00										
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.95	1.01	-0.01	0.103	0.11										
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.95	1.01	0	<0.001	0.00										
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.95	1.01	-0.05	0.227	0.23										
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	-0.12	0.813	0.85										
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	-0.08	0.038	0.04										
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	0.12	0.117	0.12										
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	0	<0.001	0.00										
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	-0.03	0.275	0.29										
	UNII-5	802.11be HE320	Rear Face	0	31	Speed	Ant 0+1	-	96.70	1.03	15.00	14.95	1.01	-0.12	0.77	0.80										
	UNII-5	802.11be HE320	Rear Face	0	95	Speed	Ant 0+1	-	96.70	1.03	15.00	14.88	1.03	-0.17	0.819	0.87	0.0535	13.33	1.545	4.00	0.08	1.61	2.56	3.44	5.64	
	UNII-6	802.11ax HE160	Rear Face	0	111	Speed	Ant 0+1	-	96.70	1.03	15.00	14.96	1.01	0.1	0.765	0.80										
	UNII-7	802.11be HE320	Rear Face	0	127	Speed	Ant 0+1	-	96.70	1.03	15.00	14.89	1.03	0.13	0.813	0.86	0.0562	13.11	1.545	4.00	0.11	1.59	2.53	3.38	5.54	
	UNII-7	802.11be HE320	Rear Face	0	159	Speed	Ant 0+1	-	96.70	1.03	15.00	14.91	1.02	0.11	0.786	0.83	0.0575	12.22	1.545	4.00	0.05	1.48	2.36	3.36	5.45	
26	UNII-8	802.11be HE320	Rear Face	0	191	Speed	Ant 0+1	-	96.70	1.03	15.00	14.96	1.01	0.13	0.846	0.88	0.0575	13.40	1.545	4.00	-0.04	1.62	2.58	3.53	5.67	
	UNII-8	802.11be HE320	Rear Face	0	191	Auden	Ant 0+1	-	96.70	1.03	15.00	14.96	1.01	-0.05	0.722	0.75										
	UNII-8	802.11be HE320	Rear Fcae	0	191	HB	Ant 0+1	-	96.70	1.03	15.00	14.96	1.01	0.18	0.662	0.69										
	UNII-8	802.11be HE320	Rear Face	0	191	Speed	Ant 0+1	-	96.70	1.03	15.00	14.96	1.01	0.02	0.813	0.85	0.0575	12.64	1.545	4.00	-0.06	1.57	2.5	3.41	5.48	
									-	1.00	-	-	1		-	-										

Appendix G. SAR Measurement Variability

SAR repeated measurement are shown as below.

Repeated SAR							
Plot	Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio
R01	WCDMA II	RMC12.2K	Top Side	9262	0.96	0.944	1.02
R02	WCDMA IV	RMC12.2K	Top Side	1513	1.11	1.03	1.08
R20	WLAN2.4G	802.11n HT40	Bottom for Laptop	6	0.823	0.814	1.01
R22	WLAN5.6G	802.11ac VHT160	Rear Face	114	0.922	0.897	1.03
R23	WLAN5.8G	802.11ac VHT80	Rear Face	155	0.935	0.921	1.02
R26	UNII-8	802.11be HE320	Rear Face	191	0.846	0.813	1.04

Appendix H. Analysis of Simultaneous Transmission.

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WWAN + WLAN 2.4G_Ant 0	Yes
B	WWAN + WLAN 2.4G_Ant 1	Yes
C	WWAN + WLAN 2.4G_Ant 0+1	Yes
D	WWAN + WLAN 5G_Ant 0	Yes
E	WWAN + WLAN 5G_Ant 1	Yes
F	WWAN + WLAN 5G_Ant 0+1	Yes
G	WWAN + BT	Yes
H	WWAN + WLAN 2.4G_Ant 0+BT_Ant1	Yes
I	WWAN + WLAN 5G_Ant 0+BT_Ant1	Yes
J	WWAN + WLAN 5G_Ant 0+1+BT_Ant1	Yes
K	WWAN + WLAN 6G_Ant 0	Yes
L	WWAN + WLAN 6G_Ant 1	Yes
M	WWAN + WLAN 6G_Ant 0+1	Yes
N	WWAN + WLAN 6G_Ant 0+BT_Ant1	Yes
O	WWAN + WLAN 6G_Ant 0+1+BT	Yes

Notes

1. The WLAN 2.4G and WLAN 5G and WLAN6G cannot transmit simultaneously.
2. Simultaneous Tx Combination A can be covered by H
3. Simultaneous Tx Combination D can be covered by I
4. Simultaneous Tx Combination F can be covered by J
5. Simultaneous Tx Combination G can be covered by H
6. Simultaneous Tx Combination K can be covered by N
7. Simultaneous Tx Combination M can be covered by O

Simultaneous Transmission SAR Evaluation (Body)																						
Band	Position	1	2	3	4	5	6	7	8	9	10	11	12	B(1+3+12)	C(1+4+12)	E(1+6+12)	H(1+2+11+12)	I(1+5+11+12)	J(1+7+11+12)	L(1+9+12)	N(1+8+11+12)	O(1+10+11+12)
		MAX WWAN	WLAN 2.4GHz Ant	WLAN 2.4GHz Ant	WLAN 2.4GHz Ant	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 0+1	Max BT Ant 1	RFID	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg	Summimg result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg								
WCDMA II	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.13	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.96	0.85	0.98	0.81	1.27	1.35	0.81	0.69	1.19
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.03	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.24	0.21	0.12	0.07	0.07	0.15	0.14	0.07	0.19
	Top Side	1.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.01	1.01	1.01	1.01	1.01	1.01	1.01	1.01	1.01
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
WCDMA IV	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.21	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	1.04	0.93	1.06	0.89	1.35	1.43	0.89	0.77	1.27
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.18	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.39	0.36	0.27	0.22	0.22	0.30	0.29	0.22	0.34
	Top Side	1.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.18	1.18	1.18	1.18	1.18	1.18	1.18	1.18	1.18
	Bottom Side	0.19	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.46	0.51	0.58	0.37	0.49	0.65	0.42	0.31	0.57
WCDMA V	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.21	0.18	0.09	0.04	0.04	0.12	0.11	0.04	0.16
	Top Side	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.79
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 2	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.31	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	1.14	1.03	1.16	0.99	1.45	1.53	0.99	0.87	1.37
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.45	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.66	0.63	0.54	0.49	0.49	0.57	0.56	0.49	0.61
	Top Side	0.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 4	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.21	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	1.04	0.93	1.06	0.89	1.35	1.43	0.89	0.77	1.27
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.16	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.37	0.34	0.25	0.20	0.20	0.28	0.27	0.20	0.32
	Top Side	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 5	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.21	0.18	0.09	0.04	0.04	0.12	0.11	0.04	0.16
	Top Side	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.52
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 7	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.13	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.96	0.85	0.98	0.81	1.27	1.35	0.81	0.69	1.19
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.29	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.50	0.47	0.38	0.33	0.33	0.41	0.40	0.33	0.45
	Top Side	0.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 12	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.21	0.18	0.09	0.04	0.04	0.12	0.11	0.04	0.16
	Top Side	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.29
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 13	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.21	0.18	0.09	0.04	0.04	0.12	0.11	0.04	0.16
	Top Side	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38

Simultaneous Transmission SAR Evaluation (Body)																						
Band	Position	1	2	3	4	5	6	7	8	9	10	11	12	B(1+3+12)	C(1+4+12)	E(1+6+12)	H(1+2+11+12)	I(1+5+11+12)	J(1+7+11+12)	L(1+9+12)	N(1+8+11+12)	O(1+10+11+12)
		MAX WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 1	Max BT Ant 1	RFID	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg									
LTE 14	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.13	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.34	0.31	0.22	0.17	0.17	0.25	0.24	0.17	0.29
	Top Side	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31	0.31
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 25	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.30	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	1.13	1.02	1.15	0.98	1.44	1.52	0.98	0.86	1.36
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.66	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.87	0.84	0.75	0.70	0.70	0.78	0.77	0.70	0.82
	Top Side	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 26	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.15	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.36	0.33	0.24	0.19	0.19	0.27	0.26	0.19	0.31
	Top Side	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 38	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.06	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.89	0.78	0.91	0.74	1.20	1.28	0.74	0.62	1.12
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.12	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.33	0.30	0.21	0.16	0.16	0.24	0.23	0.16	0.28
	Top Side	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54	0.54
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 41	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.52	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.73	0.70	0.61	0.56	0.56	0.64	0.63	0.56	0.68
	Top Side	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74	0.74
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 48	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.21	0.18	0.09	0.04	0.04	0.12	0.11	0.04	0.16
	Top Side	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 66	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.29	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	1.12	1.01	1.14	0.97	1.43	1.51	0.97	0.85	1.35
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.32	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.53	0.50	0.41	0.36	0.36	0.44	0.43	0.36	0.48
	Top Side	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38
LTE 71	Bottom for Laptop	0.00	0.37	0.78	0.85	0.68	0.80	0.87	0.42	0.32	0.32	0.31	0.00	0.78	0.85	0.80	0.68	0.99	1.18	0.32	0.73	0.63
	Rear Face	0.00	0.50	0.83	0.72	0.96	0.85	1.04	0.38	0.68	0.88	0.18	0.00	0.83	0.72	0.85	0.68	1.14	1.22	0.68	0.56	1.06
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.07	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.07	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.08	0.00	0.11	0.12	0.04	0.00	0.21	0.18	0.09	0.04	0.04	0.12	0.11	0.04	0.16
	Top Side	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	0.47	0.47	0.47	0.47	0.47	0.47	0.47	0.47
	Bottom Side	0.00	0.09	0.27	0.32	0.21	0.39	0.37	0.03	0.23	0.29	0.09	0.00	0.27	0.32	0.39	0.18	0.30	0.46	0.23	0.12	0.38

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
K	WWAN + WLAN 6G_Ant 0	Yes
L	WWAN + WLAN 6G_Ant 1	Yes
M	WWAN + WLAN 6G_Ant 0+1	Yes
N	WWAN + WLAN 6G_Ant 0+BT_Ant1	Yes
O	WWAN + WLAN 6G_Ant 0+1+BT	Yes

Notes

1. The WLAN 2.4G and WLAN 5G and WLAN6G cannot transmit simultaneously.
- 2.Simultaneous Tx Combination K can be covered by N
- 3.Simultaneous Tx Combination M can be covered by O

Total Exposure Ratio (Body)									
Band	Position	1	8	9	10	11	L(1+9+12)	N(1+8+11+12)	O(1+10+11+12)
		MAX WWAN	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
		1g SAR W/kg	4cm ² W/m ²	4cm ² W/m ²	4cm ² W/m ²	1g SAR W/kg			
WCDMA II	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.13	0.00	0.00	5.67	0.18	0.08	0.19	0.76
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.03	0.00	0.00	0.00	0.00	0.02	0.02	0.02
	Top Side	1.01	0.00	0.00	0.00	0.00	0.63	0.63	0.63
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WCDMA IV	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.21	0.00	0.00	5.67	0.18	0.13	0.24	0.81
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.18	0.00	0.00	0.00	0.00	0.11	0.11	0.11
	Top Side	1.18	0.00	0.00	0.00	0.00	0.74	0.74	0.74
	Bottom Side	0.19	0.00	0.00	0.00	0.00	0.12	0.12	0.12
WCDMA V	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.79	0.00	0.00	0.00	0.00	0.49	0.49	0.49
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 2	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.31	0.00	0.00	5.67	0.18	0.19	0.31	0.87
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.45	0.00	0.00	0.00	0.00	0.28	0.28	0.28
	Top Side	0.70	0.00	0.00	0.00	0.00	0.44	0.44	0.44
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 4	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.21	0.00	0.00	5.67	0.18	0.13	0.24	0.81
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.16	0.00	0.00	0.00	0.00	0.10	0.10	0.10
	Top Side	0.53	0.00	0.00	0.00	0.00	0.33	0.33	0.33
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 5	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.52	0.00	0.00	0.00	0.00	0.33	0.33	0.33
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 7	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.13	0.00	0.00	5.67	0.18	0.08	0.19	0.76
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.29	0.00	0.00	0.00	0.00	0.18	0.18	0.18
	Top Side	0.73	0.00	0.00	0.00	0.00	0.46	0.46	0.46
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 12	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.29	0.00	0.00	0.00	0.00	0.18	0.18	0.18
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 13	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.25	0.00	0.00	0.00	0.00	0.16	0.16	0.16
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Total Exposure Ratio (Body)									
Band	Position	1	8	9	10	11	L(1+9+12)	N(1+8+11+12)	O(1+10+11+12)
		MAX WWAN	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	Total Exposure Ratio	Total Exposure Ratio	Total Exposure Ratio
		1g SAR W/kg	4cm ² W/m ²	4cm ² W/m ²	4cm ² W/m ²	1g SAR W/kg			
LTE 14	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.13	0.00	0.00	0.00	0.00	0.08	0.08	0.08
	Top Side	0.31	0.00	0.00	0.00	0.00	0.19	0.19	0.19
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 25	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.30	0.00	0.00	5.67	0.18	0.19	0.30	0.87
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.66	0.00	0.00	0.00	0.00	0.41	0.41	0.41
	Top Side	0.74	0.00	0.00	0.00	0.00	0.46	0.46	0.46
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 26	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.15	0.00	0.00	0.00	0.00	0.09	0.09	0.09
	Top Side	0.40	0.00	0.00	0.00	0.00	0.25	0.25	0.25
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 38	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.06	0.00	0.00	5.67	0.18	0.04	0.15	0.72
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.12	0.00	0.00	0.00	0.00	0.08	0.08	0.08
	Top Side	0.54	0.00	0.00	0.00	0.00	0.34	0.34	0.34
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 41	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.52	0.00	0.00	0.00	0.00	0.33	0.33	0.33
	Top Side	0.74	0.00	0.00	0.00	0.00	0.46	0.46	0.46
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 48	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.20	0.00	0.00	0.00	0.00	0.13	0.13	0.13
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 66	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.29	0.00	0.00	5.67	0.18	0.18	0.29	0.86
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.32	0.00	0.00	0.00	0.00	0.20	0.20	0.20
	Top Side	0.64	0.00	0.00	0.00	0.00	0.40	0.40	0.40
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LTE 71	Bottom for Laptop	0.00	0.00	0.00	0.00	0.31	0.00	0.19	0.19
	Rear Face	0.00	0.00	0.00	5.67	0.18	0.00	0.11	0.68
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.47	0.00	0.00	0.00	0.00	0.29	0.29	0.29
	Bottom Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Appendix J. Calibration of Test Equipment List

Calibration of Test Equipment List are shown as below.

Equipment for SAR Test

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	CLA13	1018	Mar. 19, 2024	1 Year
System Validation Dipole	SPEAG	D750V3	1013	Aug. 21, 2023	1 Year
System Validation Dipole	SPEAG	D835V2	4d121	Aug. 21, 2023	1 Year
System Validation Dipole	SPEAG	D1750V2	1055	Sep. 21, 2023	1 Year
System Validation Dipole	SPEAG	D1900V2	5d036	Feb. 19, 2024	1 Year
System Validation Dipole	SPEAG	D2450V2	737	Feb. 19, 2024	1 Year
System Validation Dipole	SPEAG	D2600V2	1020	Aug. 18, 2023	1 Year
System Validation Dipole	SPEAG	D3500V2	1007	Jan. 23, 2024	1 Year
System Validation Dipole	SPEAG	D3700V2	1017	Feb. 15, 2024	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1019	Feb. 13, 2024	1 Year
System Validation Dipole	SPEAG	D6.5GHzV2	1008	Sep. 21, 2023	1 Year
System Verification Source	SPEAG	5G Verification Source 10 GHz	1025	Jan. 18, 2024	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7720	Mar. 19, 2024	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7778	Nov. 22, 2023	1 Year
E-Field Probe	SPEAG	EUmmWV4	9615	Jul. 10, 2023	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1698	Nov. 17, 2023	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1589	Apr. 22, 2024	1 Year
Universal Radio Communication Tester	Anritsu	MT8821C	6201381727	Aug. 09, 2023	1 Year
Analog Signal Generator	R&S	SMA100B	104417	Oct. 23, 2023	1 Year
Mini-Circuits Wideband Amplifier	Mini-Circuits	ZVA-183-S+	434502031A	Jul. 07, 2023	1 Year
Power Meter	Anritsu	ML2495A	1218009	Jul. 03, 2023	1 Year
Power Sensor	Anritsu	MA2411B	1207252	Jul. 03, 2023	1 Year
Thermometer	YFE	YF-160A	120702369	Aug. 08, 2023	1 Year
Dielectric Assessment Kit	SPEAG	DAKS-3.5	1151	Jul. 17, 2023	1 Year
Powersource1	SPEAG	SE_UMS_160 BA	4010	Aug. 15, 2023	1 Year


Appendix K. Considerations Related to Bluetooth for Setup and Testing

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the EUT was set to DH5 mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.

The duty factor of Bluetooth signal are shown as below.

<Time-domain plot for Bluetooth transmission signal>

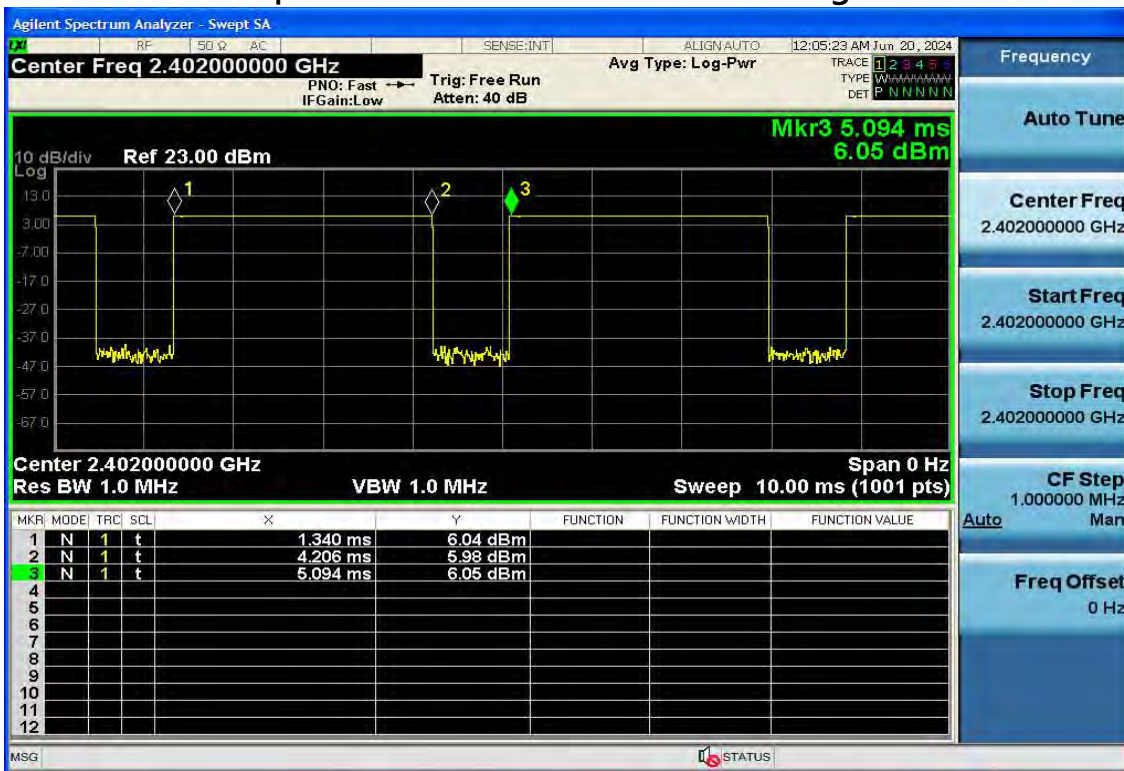

Time-domain plot for Bluetooth transmission signal

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = (4.206 - 1.34) / (5.094 - 1.34) = 76.35\%$$

Appendix L. Verifying the Mechanism Operation of Gravity-sensor



BUREAU
VERITAS

The power verified by LCD angle changed are shown as below..

<Power Reduction by LCD Angle Changed and Verifying Power Level of operating Laptop and Tablet mode on Setp A ~ G>

Test Band : 802.11b ch.6 Ant 0 for WLAN 2.4G as Representative Verify																																						
Summary	<A> From lid closed when LCD is 0° which power is subject to Laptop user mode, opening the screen side in 10° each step until the power of Tablet mode is obtained.																																					
	Degrees	0	10	20	30	40	50											150	160	170	180	190	200															
	Power (dBm)	13.8	13.5	13.7	13.3	13.7	13.5											13.2	13.8	13.8	13.8	13.8	14.9															
The Power level changed by LCD Triggering Angle is 190°	 Close the screen side in 5° each step from Step A, the power of Laptop mode is reobtained.																																					
	Degrees											185	190	195	200																							
	Power (dBm)											13.2	13.7	15.0	14.7																							
	<C> Verfyng the power changed in 1° at each step.																																					
	Degrees											198	199	190	191	192																						
	Power (dBm)											13.3	13.2	13.2	15.3	14.9																						
	<D>Then Keep opening the screen side in 10° each step until fully open when LCD angle.																																					
	Degrees	0	10	20	30	40	50											180	190	200	210	220																
	Power (dBm)	13.2	13.7	13.7	13.5	13.5	13.3											13.3	13.5	14.9	15.3	15																
	<E> From fully open when LCD is 360° which the operating mode is Tablet, closing the screen side in 10° each step until the power subject to operating Laptop mode is obtained.																																					
	Degrees	360	350	340	330	320	310											200	190	180																		
	Power (dBm)	14.7	14.7	14.7	15	14.9	15.2											15	13.2	13.7																		
	<F> From fully open when LCD is 360° which the operating mode is Tablet, closing the screen side in 5° each step until fully closed.																																					
	Degrees	360	355	350	345	340	335	330	325	320	315	310											195	190	185													
	Power (dBm)	15.3	14.7	15.3	14.8	15.1	14.9	14.7	15.2	14.7	15	15.1											15.2	13.2	13.4													
<G> Closing the screen side in 1° each step until the power subject to operating Laptop mode is obtained and keep closing until fully closed.																																						
Degrees	360	359	358	357	356	355	354	353	352	351	350											192	191	190	199	198	199	198										
Power (dBm)	14.9	14.7	14.7	14.8	14.7	15	14.9	15.1	15.1	14.8	14.7											15.2	14.7	13.3	13.6	13.4	13.8	13.8										
Test Band : 802.11ac ch.50 Ant 0 for WLAN 5.3G as Representative Verify																																						
Summary	<A> From lid closed when LCD is 0° which power is subject to Laptop user mode, opening the screen side in 10° each step until the power of Tablet mode is obtained.																																					
	Degrees	0	10	20	30	40	50											150	160	170	180	190	200															
	Power (dBm)	11.5	11.6	11.5	11.3	11.8	11.6											11.8	11.8	11.2	11.6	11.2	10.1															
The Power level changed by LCD Triggering Angle is 190°	 Close the screen side in 5° each step from Step A, the power of Laptop mode is reobtained.																																					
	Degrees											185	190	195	200																							
	Power (dBm)											11.8	11.2	10.3	10.0																							
	<C> Verfyng the power changed in 1° at each step.																																					
	Degrees											198	199	190	191	192																						
	Power (dBm)											11.7	11.8	11.2	10.3	9.7																						
	<D>Then Keep opening the screen side in 10° each step until fully open when LCD angle.																																					
	Degrees	0	10	20	30	40	50											180	190	200	210	220																
	Power (dBm)	11.7	11.6	11.7	11.7	11.5	11.6											11.5	11.5	10.0	9.7	10.1																
	<E> From fully open when LCD is 360° which the operating mode is Tablet, closing the screen side in 10° each step until the power subject to operating Laptop mode is obtained.																																					
	Degrees	360	350	340	330	320	310											200	190	180																		
	Power (dBm)	10.2	10	10	9.7	9.9	9.8											325	11.4	11.8																		
	<F> From fully open when LCD is 360° which the operating mode is Tablet, closing the screen side in 5° each step until fully closed.																																					
	Degrees	360	355	350	345	340	335	330	325	320	315	310											195	190	185													
	Power (dBm)	9.9	10.1	10.2	9.8	10.3	9.8	10.1	10.1	9.8	10.3	9.7											9.7	11.8	11.7													
<G> Closing the screen side in 1° each step until the power subject to operating Laptop mode is obtained and keep closing until fully closed.																																						
Degrees	360	359	358	357	356	355	354	353	352	351	350											192	191	190	199	198	199	198										
Power (dBm)	10.2	9.7	10.2	9.7	10	10	10.2	9.8	9.7	9.7	9.7											9.8	9.7	11.4	11.6	11.5	11.2	11.2										