

# Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.)

Remove Intel references and make this your own document)

Platform information											
Brand	ODM	****End product model name	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)						
Dell	Compal	P166G	YES	Convertible NB.	NB mode : w/bumper: 3.52 mm NB mode : w/o bumper: 2.43 mm Tablet mode : 2mm						
****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.											
Antenna information											
Vendor		Type	Antenna Part number (Main)				Antenna Part number (Aux)				
Wistron NeWeb Corporation		PIFA	81ELA715.G83 DC33002RJ3L (Compal)				81ELA715.G83 DC33002RJ3L (Compal)				
NB mode Peak gain w/ cable loss (dBi)*											
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	2.76	2.51	2.68	3.71	3.35	3.23	4.13	4.03	3.99	3.98	
Aux	2.43	2.43	1.92	0.94	2.02	2.23	2.77	2.99	4.32	3.76	
TB mode Peak gain w/ cable loss (dBi)*											
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	-1.07	2.14	2.61	1.36	1.07	0.50	1.20	0.24	0.71	0.12	
Aux	-1.54	0.75	0.00	0.09	0.41	1.35	1.32	1.54	1.54	1.02	
Intel Reference Gain/Type/ Separation distance											
Antenna Type	Antenna Peak gain (In dBi)*										Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	Generic: refer to modular FCC SAR report
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Mid-power: ≥ 8 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59	Low power: ≥ 5 mm
Dipole	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)											
* SAR minimum separation (mm)											
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)											
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)											
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)											
* 3D Peak Antenna gain should be equal or greater than -2 dBi											
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.											

# Antenna Information

## Section 1. Antenna Assembly Specifications (NB Mode)

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
Main Antenna WNC P/N 81ELA715.G83 Compal P/N DC33002RJ3L	WNC	PIFA	50 ohm Coaxial length: 278.5mm Diameter: 1.13mm	2400-2483.5	2.76	3.53	3.0	0.77
				5150-5250	2.51	3.66	3.0	1.15
				5250-5350	2.68	3.84	3.0	1.16
				5470-5725	3.71	4.90	3.0	1.19
				5725-5850	3.35	4.55	3.0	1.20
				5850-5895	3.23	4.44	3.0	1.21
				5925-6425	4.13	5.38	3.0	1.25
				6425-6525	4.03	5.32	3.0	1.29
				6525-6875	3.99	5.31	3.0	1.32
6875-7125	3.98	5.34	3.0	1.36				
Aux Antenna WNC P/N 81ELA715.G83 Compal P/N DC33002RJ3L	WNC	PIFA	50 ohm Coaxial length: 396mm Diameter: 1.13mm	2400-2483.5	2.43	3.53	3.0	1.10
				5150-5250	2.43	4.06	3.0	1.63
				5250-5350	1.92	3.57	3.0	1.65
				5470-5725	0.94	2.63	3.0	1.69
				5725-5850	2.02	3.73	3.0	1.71
				5850-5895	2.23	3.95	3.0	1.72
				5925-6425	2.77	4.55	3.0	1.78
				6425-6525	2.99	4.82	3.0	1.83
				6525-6875	4.32	6.20	3.0	1.88
6875-7125	3.76	5.69	3.0	1.93				

- 3D Antenna Peak Gain required being test in system basis.

TB Mode


1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
Main Antenna WNC P/N 81ELA715.G83 Compal P/N DC33002RJ3L	WNC	PIFA	50 ohm Coaxial length: 278.5mm  Diameter: 1.13mm	2400-2483.5	-1.07	-0.30	3.0	0.77
				5150-5250	2.14	3.29	3.0	1.15
				5250-5350	2.61	3.77	3.0	1.16
				5470-5725	1.36	2.55	3.0	1.19
				5725-5850	1.07	2.27	3.0	1.20
				5850-5895	0.50	1.71	3.0	1.21
				5925-6425	1.20	2.45	3.0	1.25
				6425-6525	0.24	1.53	3.0	1.29
				6525-6875	0.71	2.03	3.0	1.32
6875-7125	0.12	1.48	3.0	1.36				
Aux Antenna WNC P/N 81ELA715.G83 Compal P/N DC33002RJ3L	WNC	PIFA	50 ohm Coaxial length: 396mm  Diameter: 1.13mm	2400-2483.5	-1.54	-0.44	3.0	1.10
				5150-5250	0.75	2.38	3.0	1.63
				5250-5350	0.00	1.65	3.0	1.65
				5470-5725	0.09	1.78	3.0	1.69
				5725-5850	0.41	2.12	3.0	1.71
				5850-5895	1.35	3.07	3.0	1.72
				5925-6425	1.32	3.10	3.0	1.78
				6425-6525	1.54	3.37	3.0	1.83
				6525-6875	1.54	3.42	3.0	1.88
6875-7125	1.02	2.95	3.0	1.93				

- 3D Antenna Peak Gain required being test in system basis.



Include the dimensioned photo and drawing of Aux antenna here.

Aux Antenna Drawing:

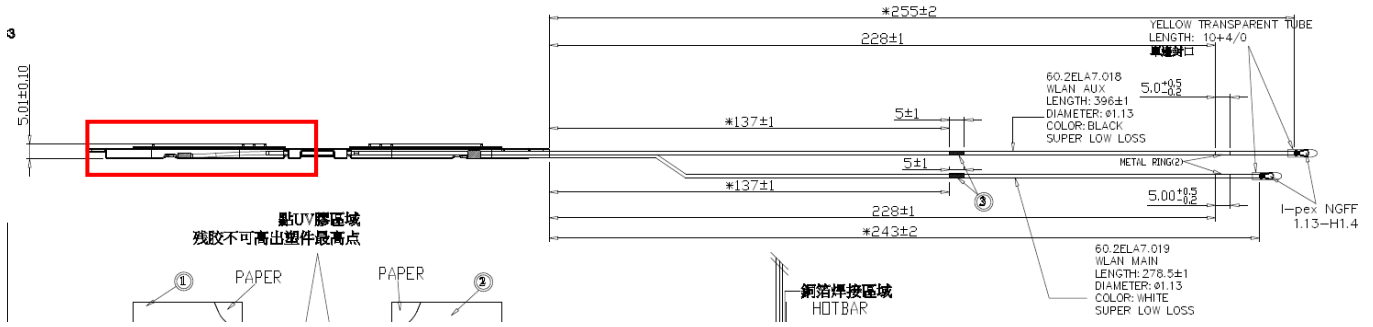


## Section 3. Radiation characteristics of antenna loaded in Host Platform

### NB mode Main Antenna


#### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.76

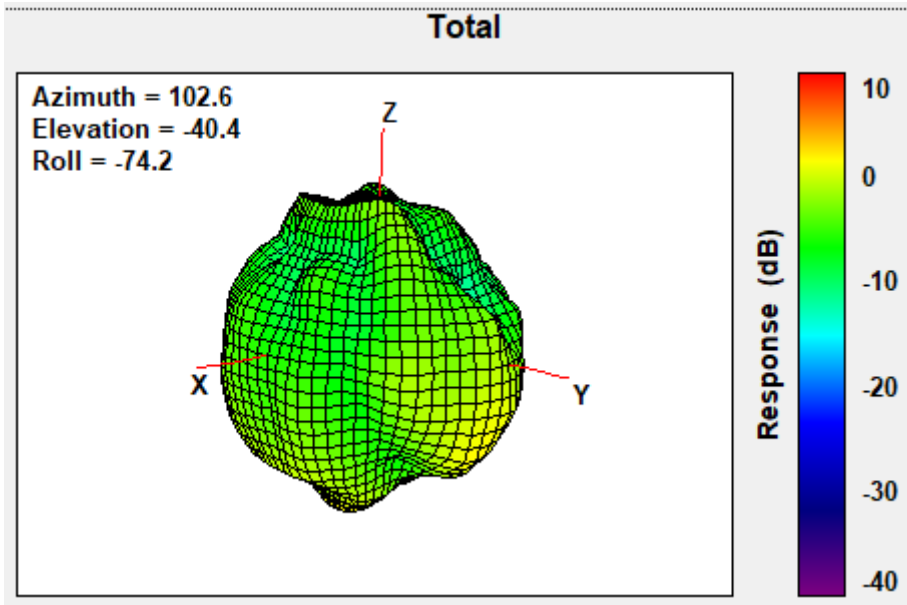


#### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.51

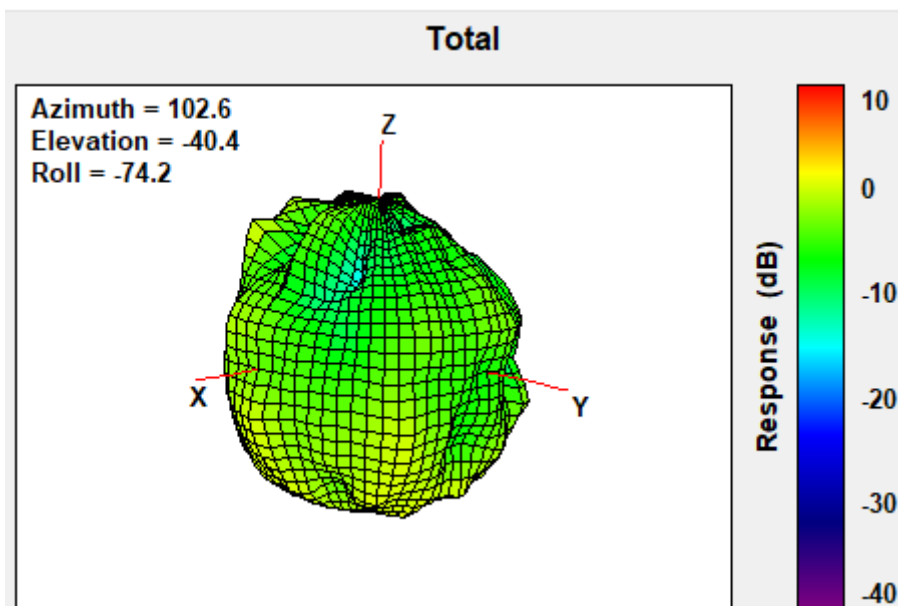


### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.68

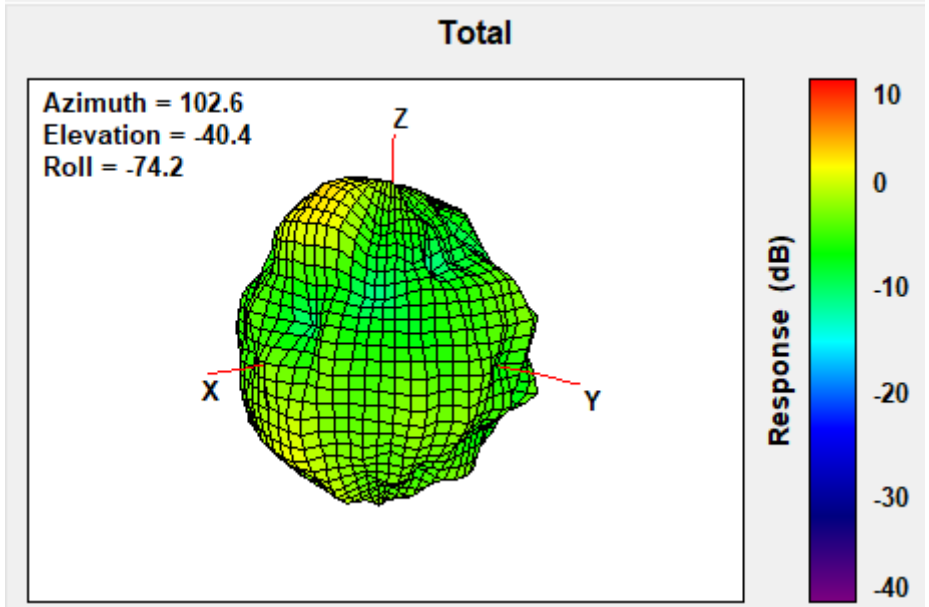


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	3.71

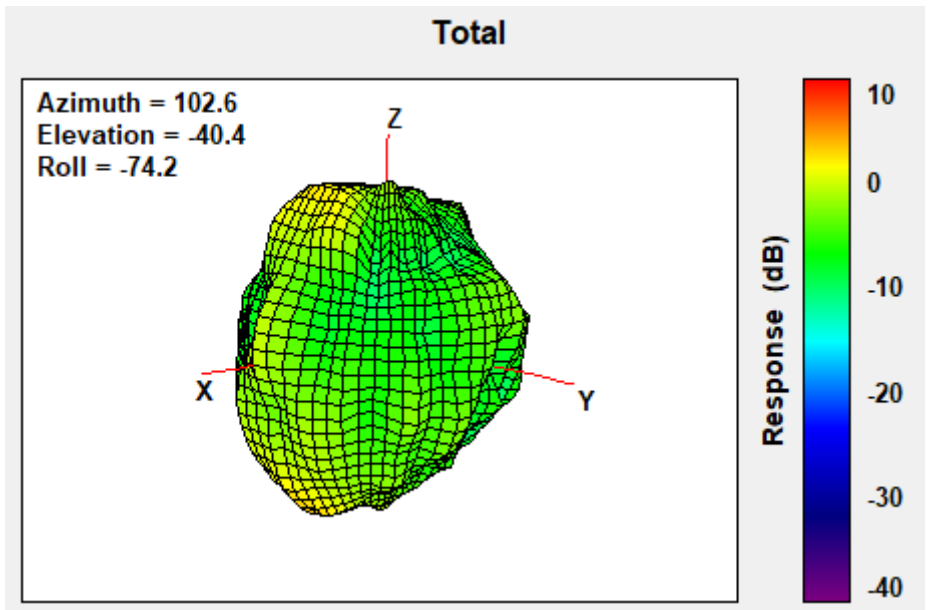


### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.35

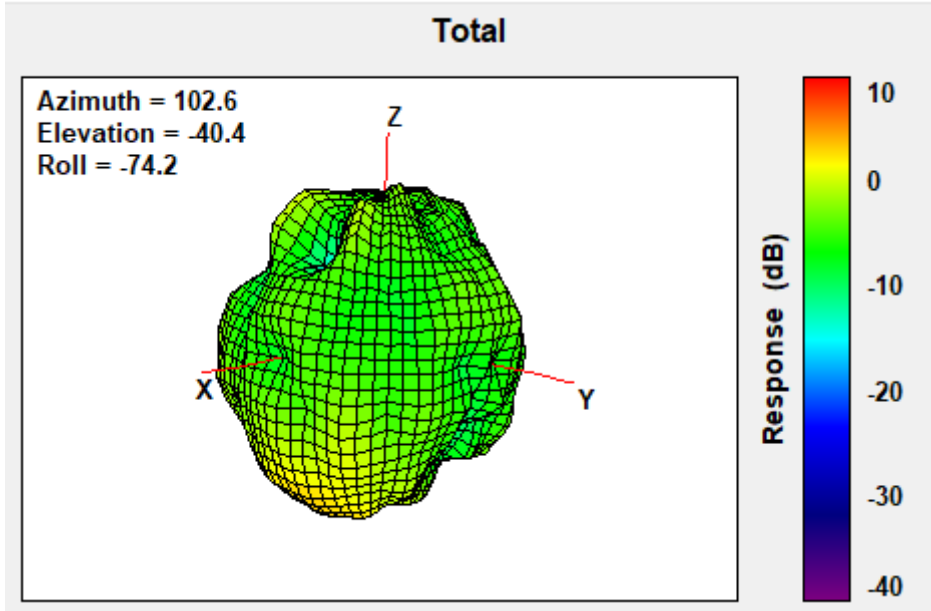

### Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.23

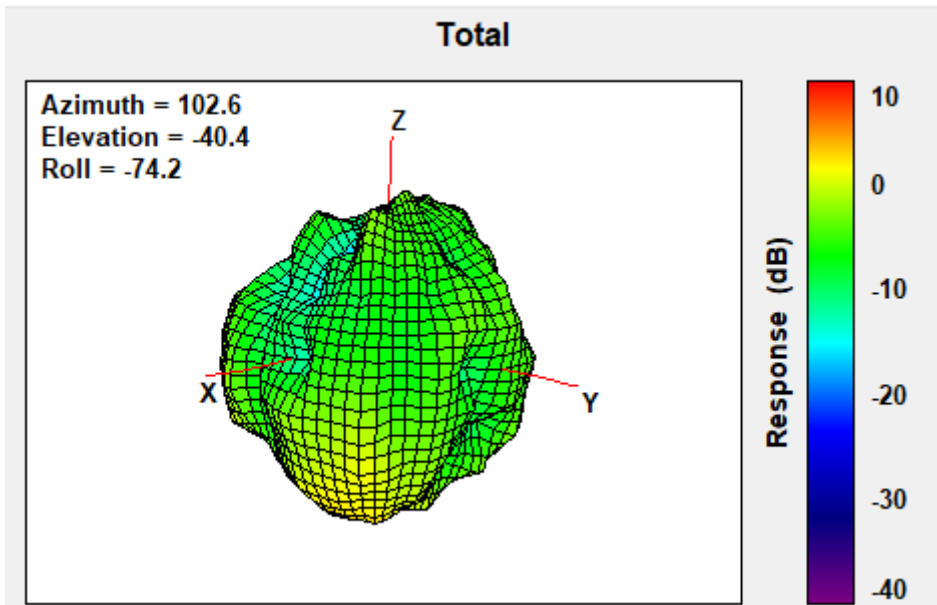




### Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	4.13

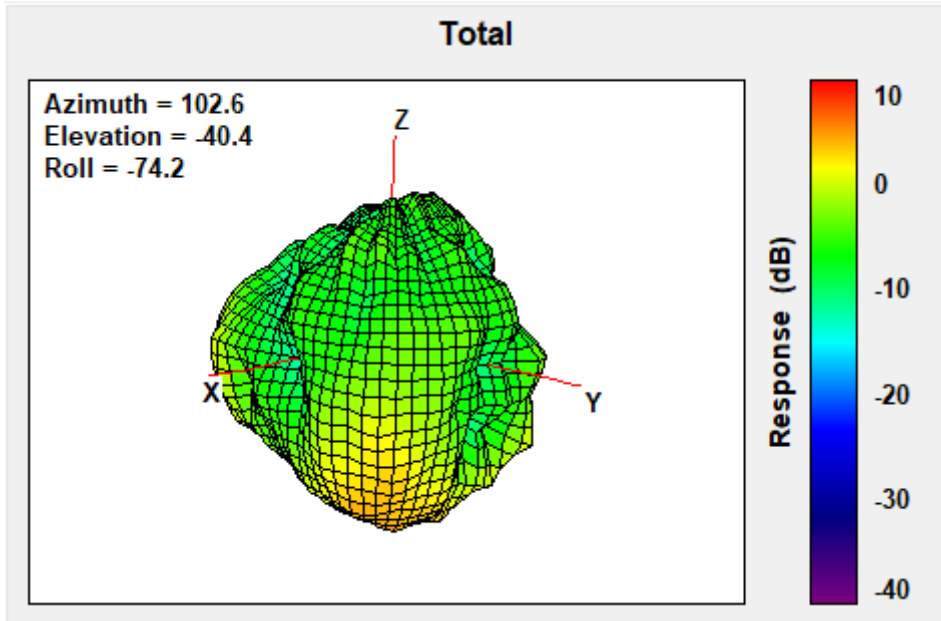


### Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	4.03

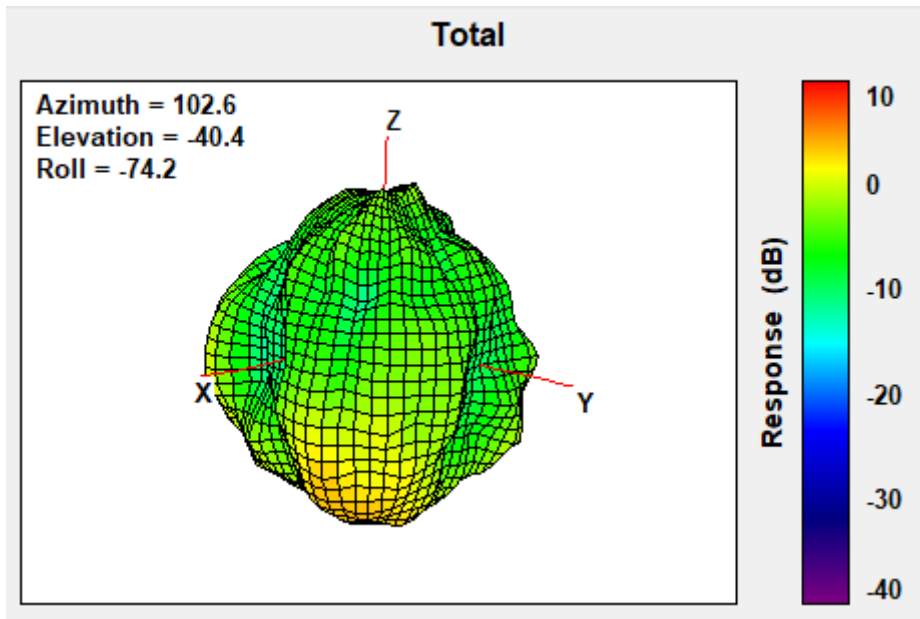


### Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.99

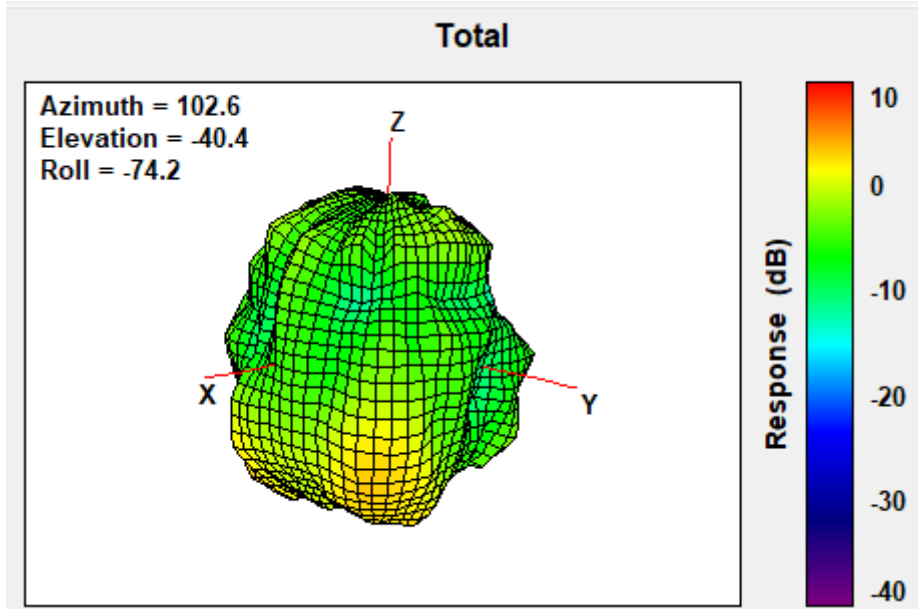

### Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.98

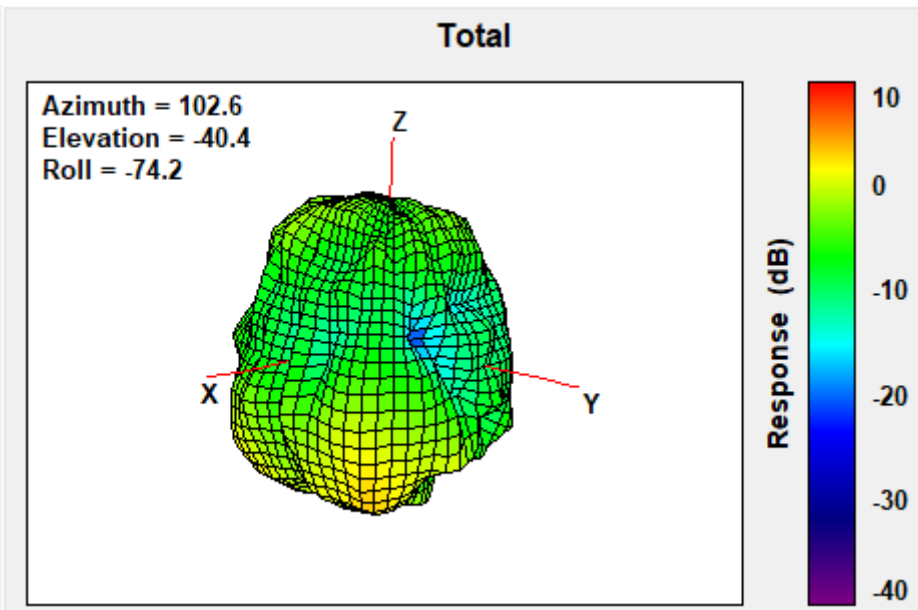

## NB mode Auxiliary Antenna


### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.43

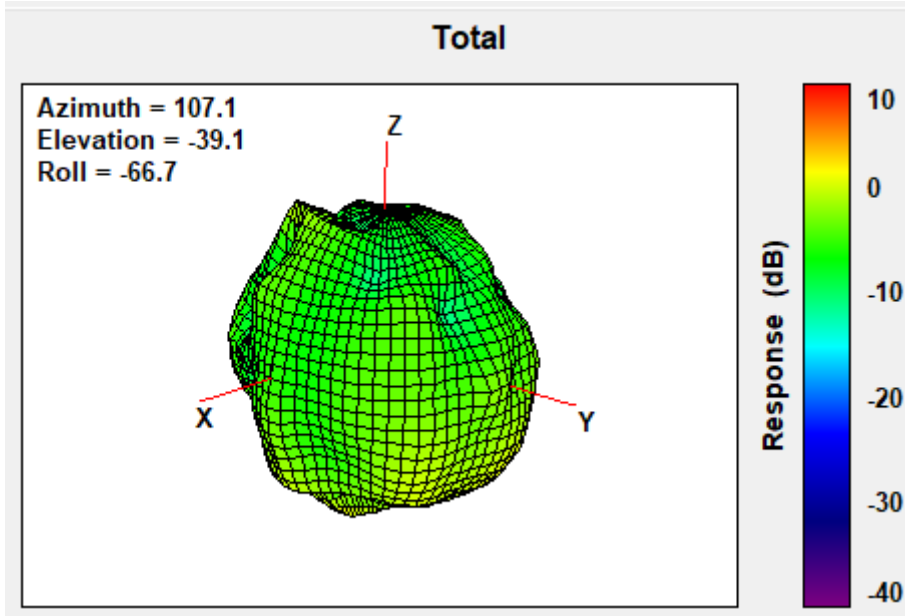


### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.43

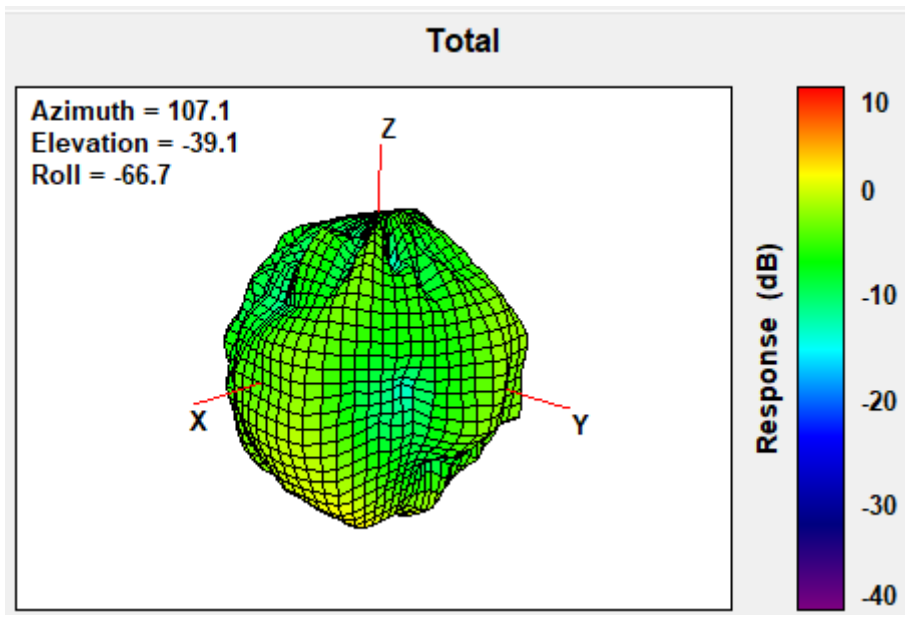


### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.92

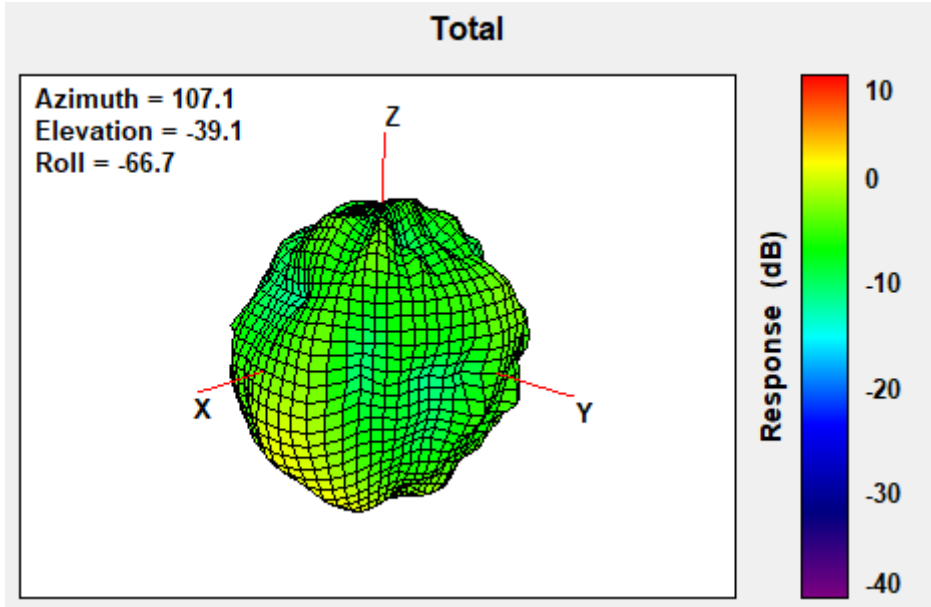


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.94

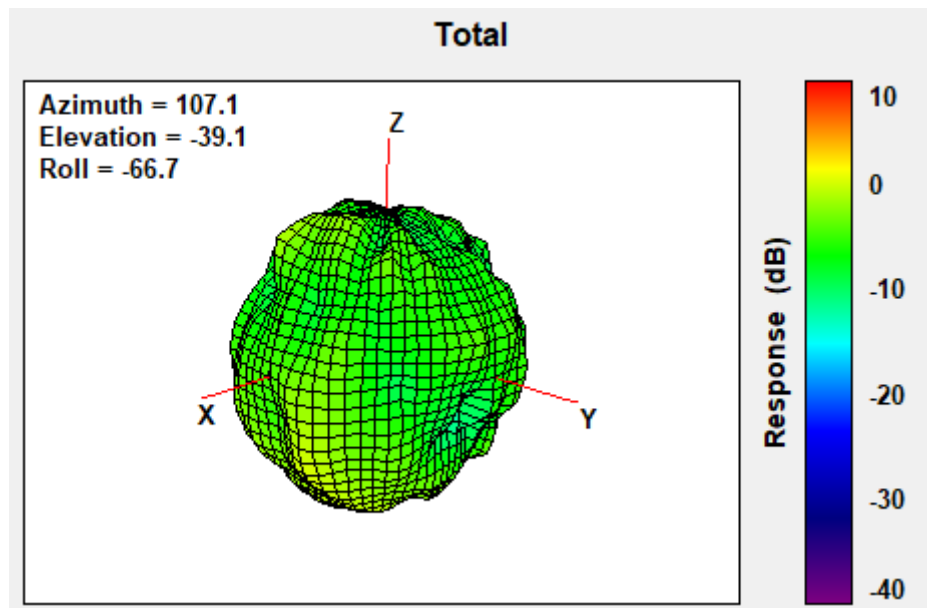


### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.02

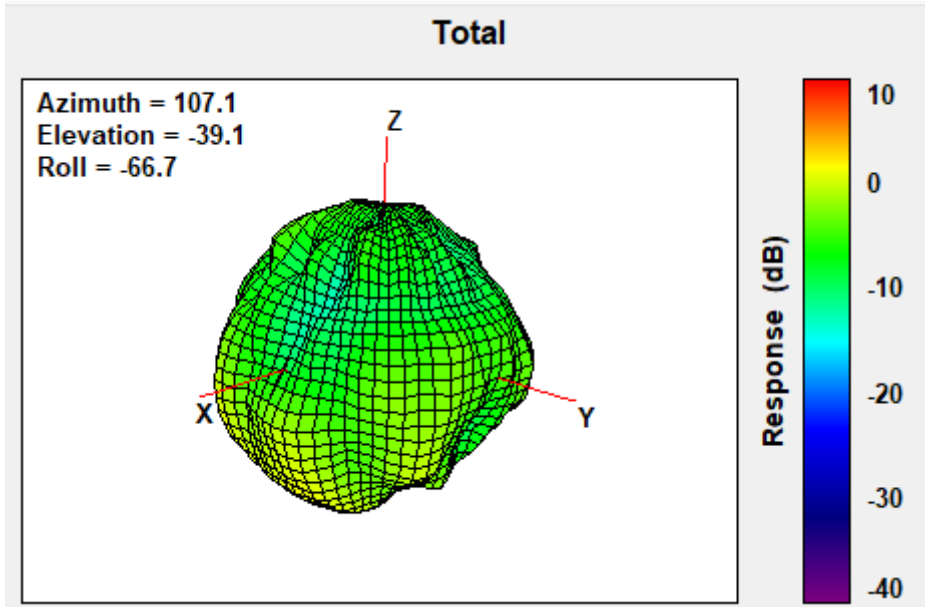


### Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.23

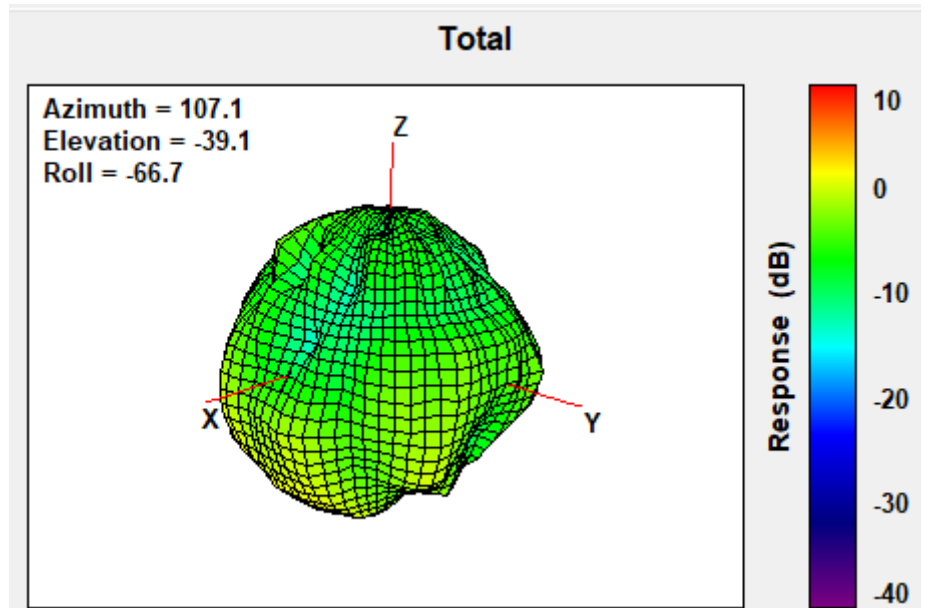


### Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.77

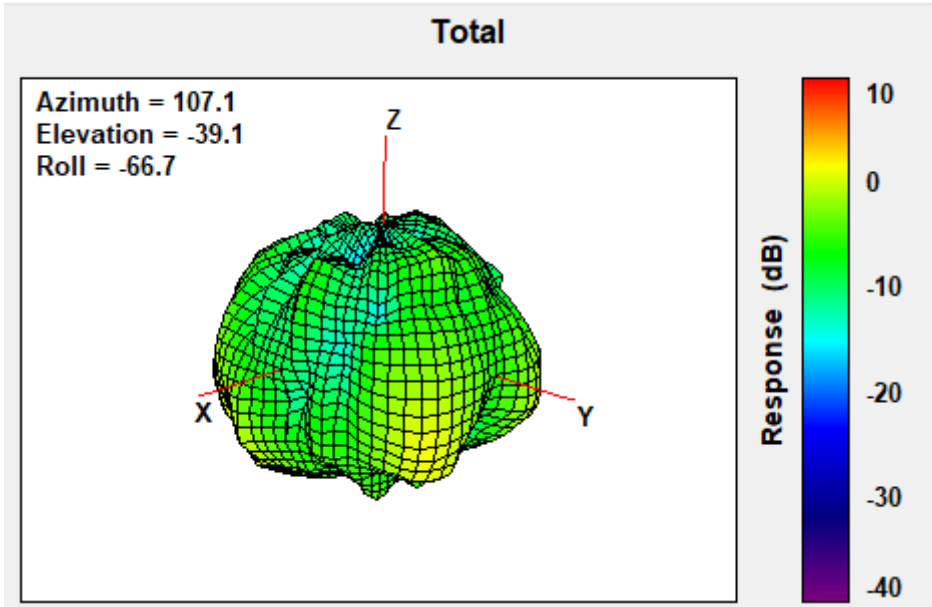


### Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.99

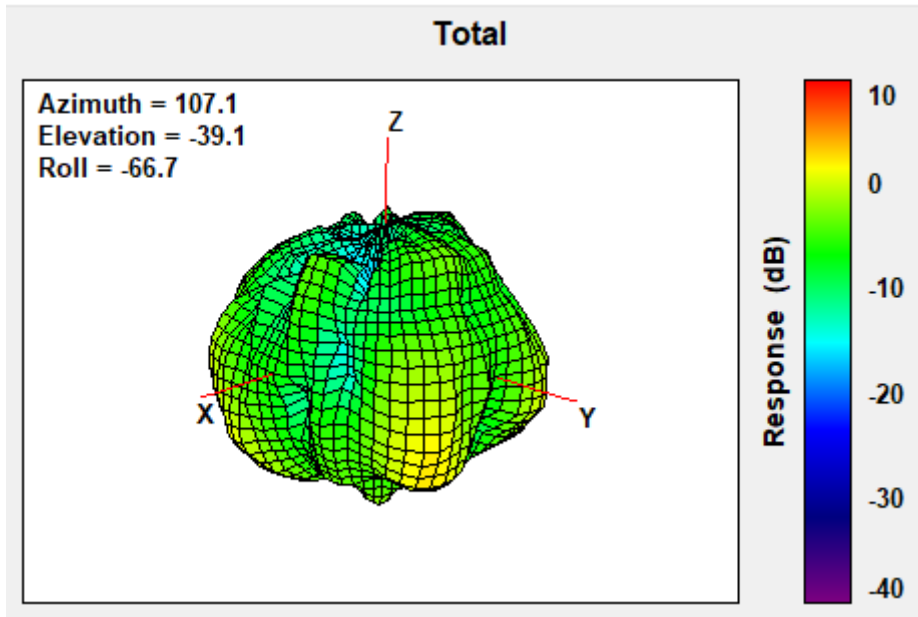


### Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	4.32

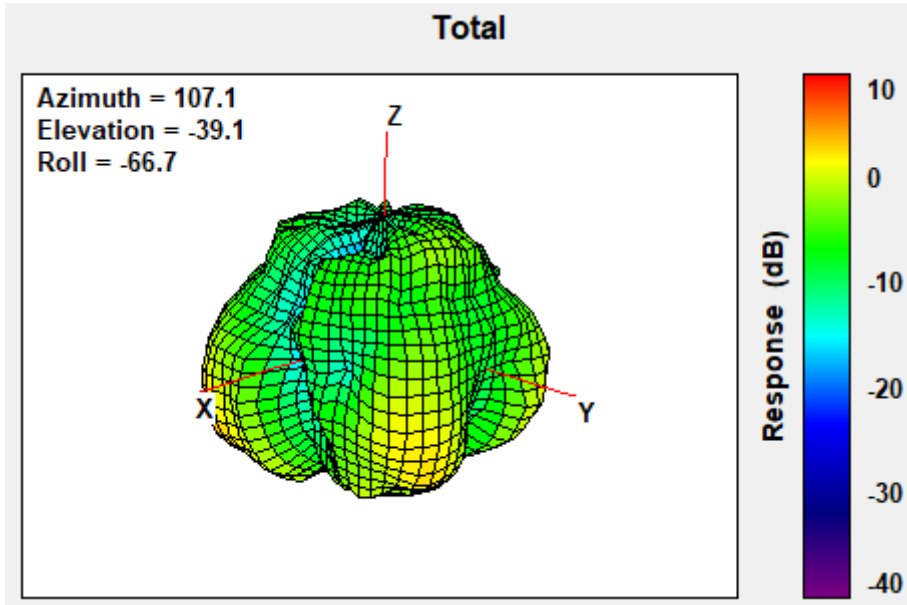

### Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.76

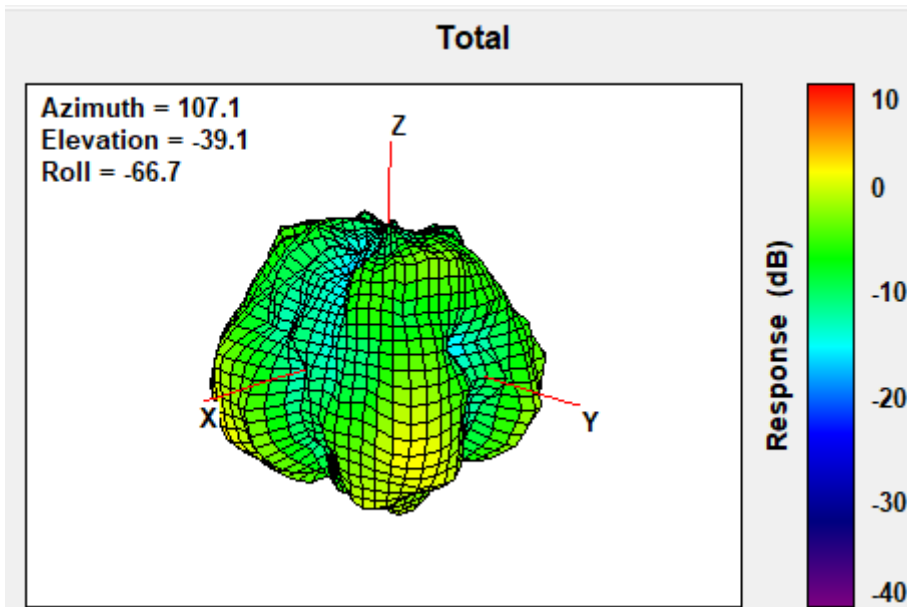

## TB mode Main Antenna


### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	-1.07

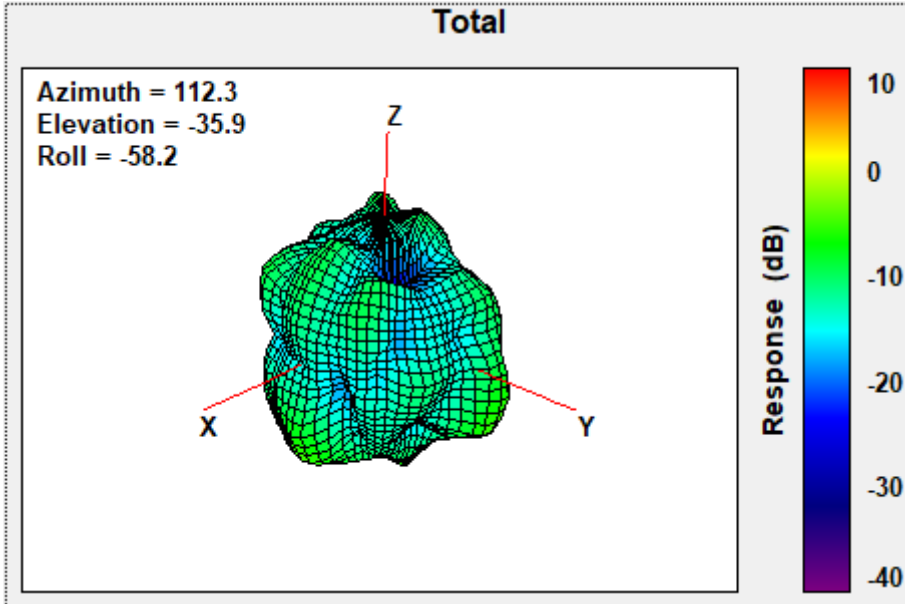

### Max Antenna 3D Radiation Pattern 5150-5250 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.14

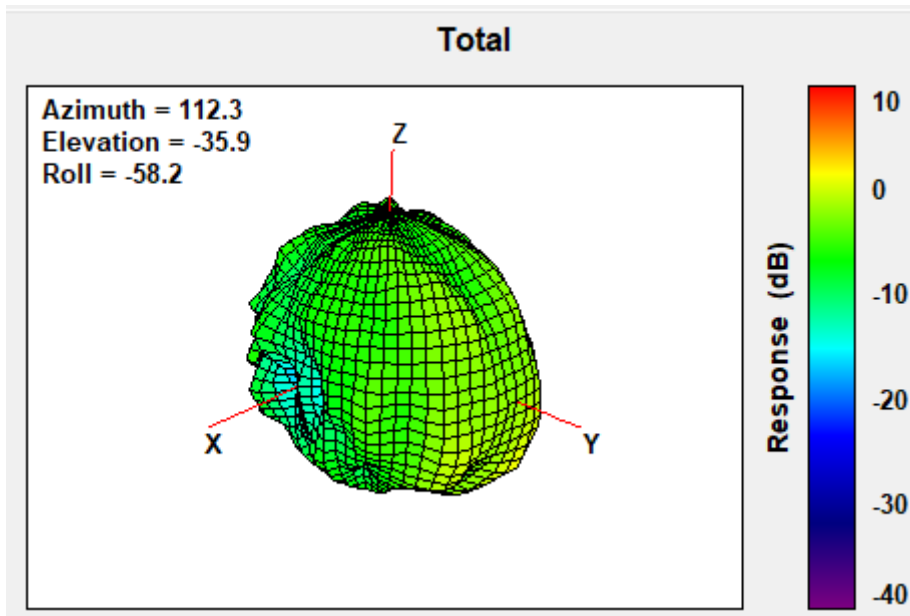




### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.61

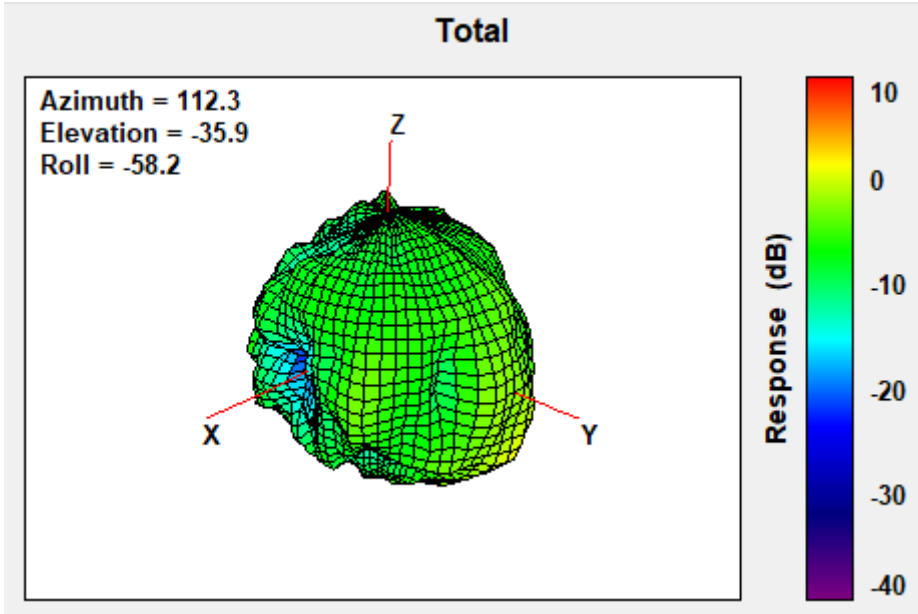


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.36

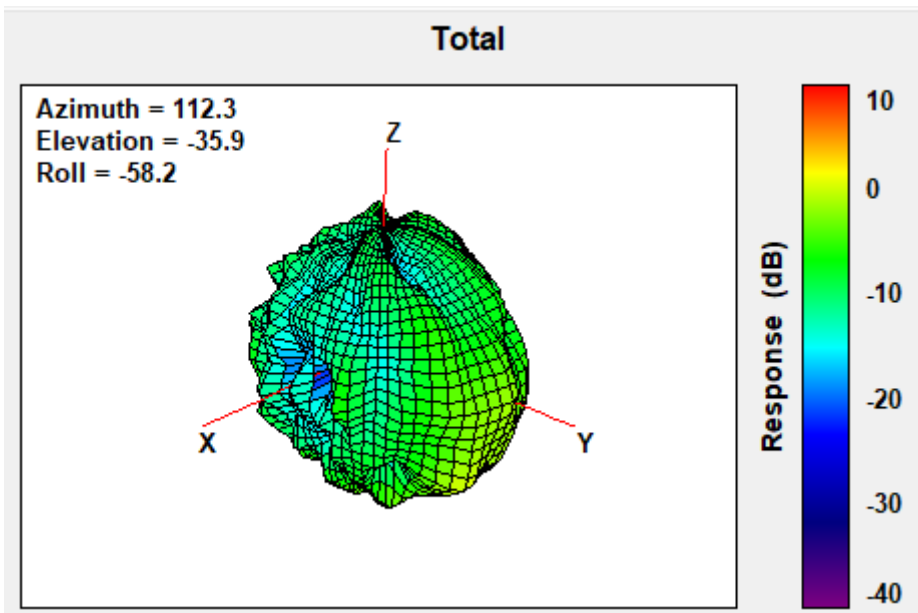


### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.07

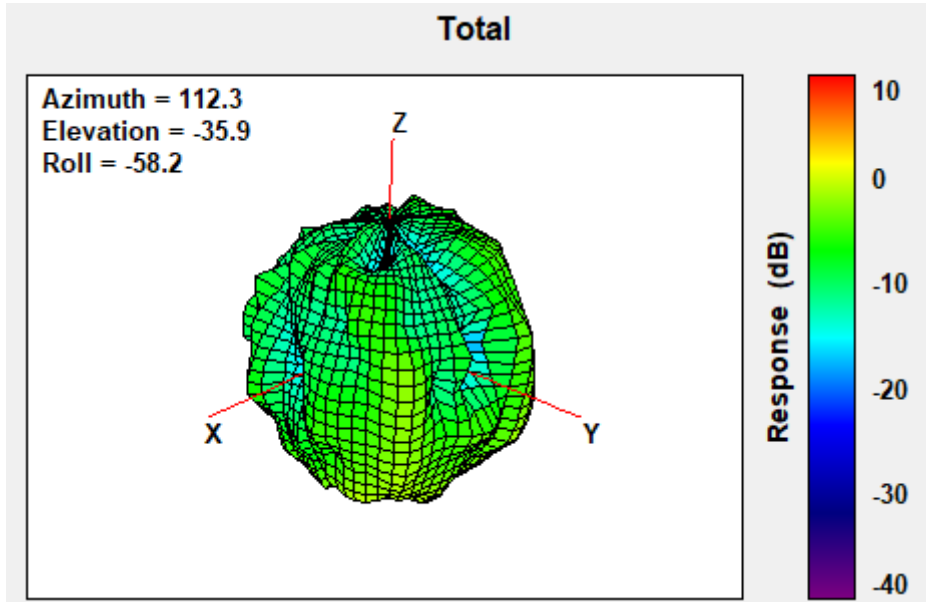


### Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	0.50

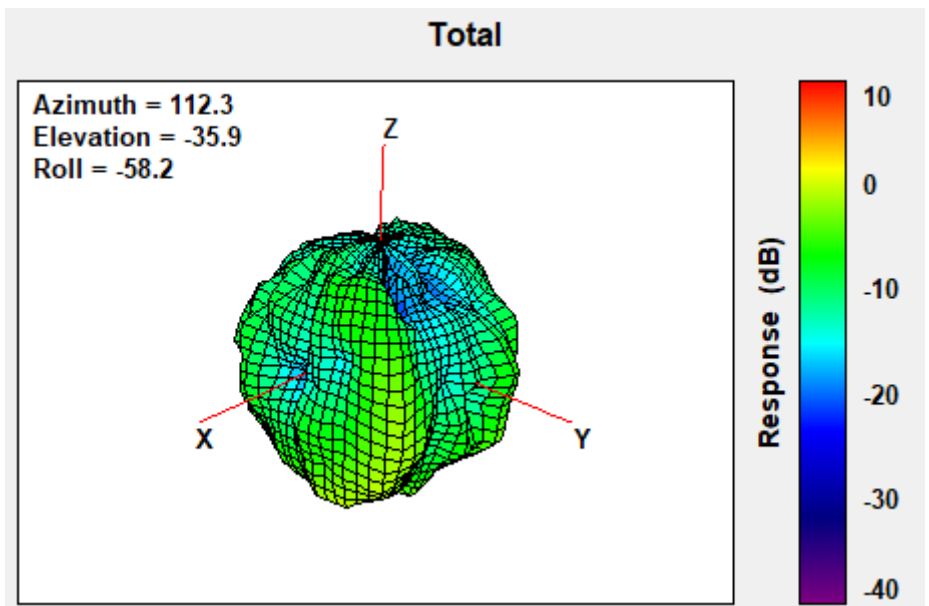


### Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	1.20

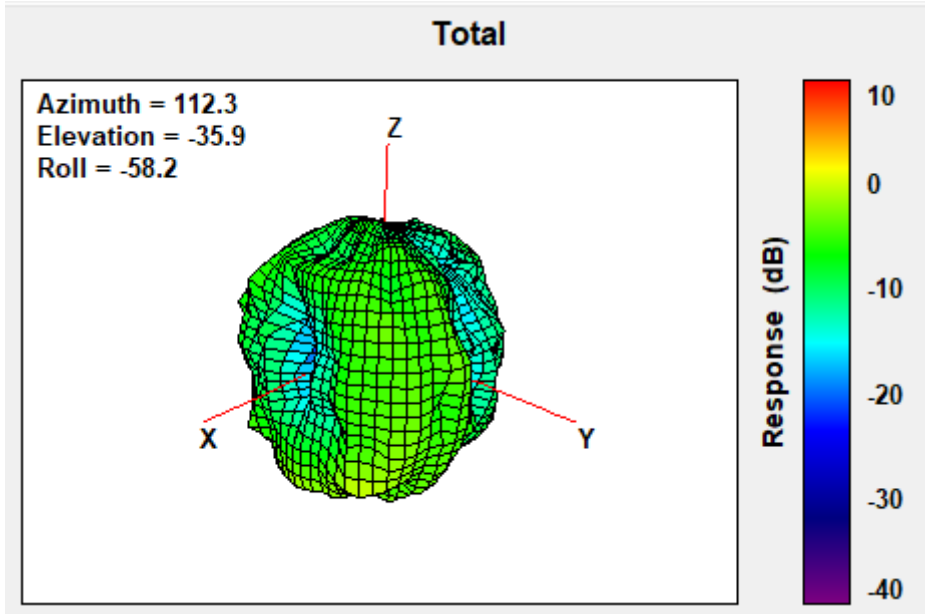


### Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	0.24

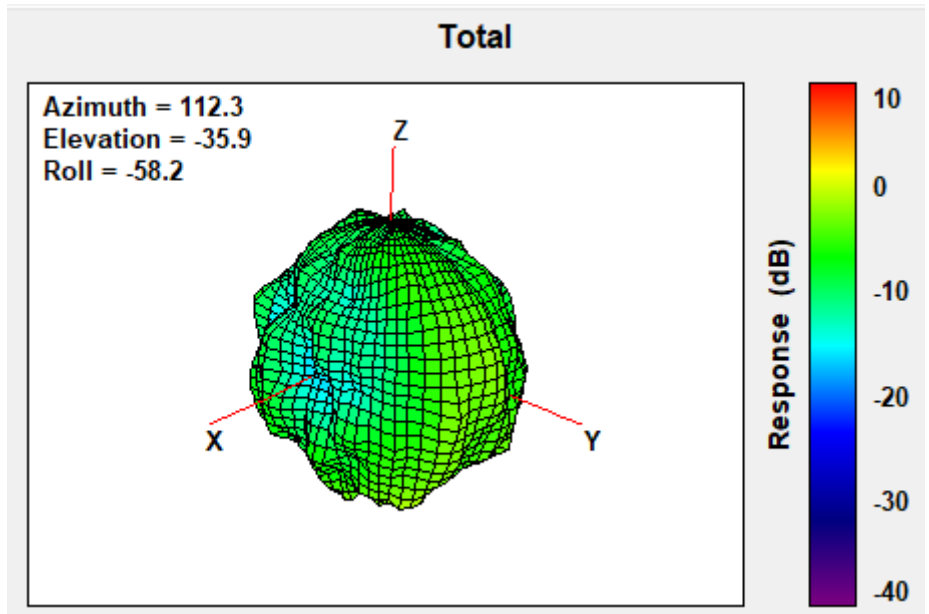


### Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	0.71

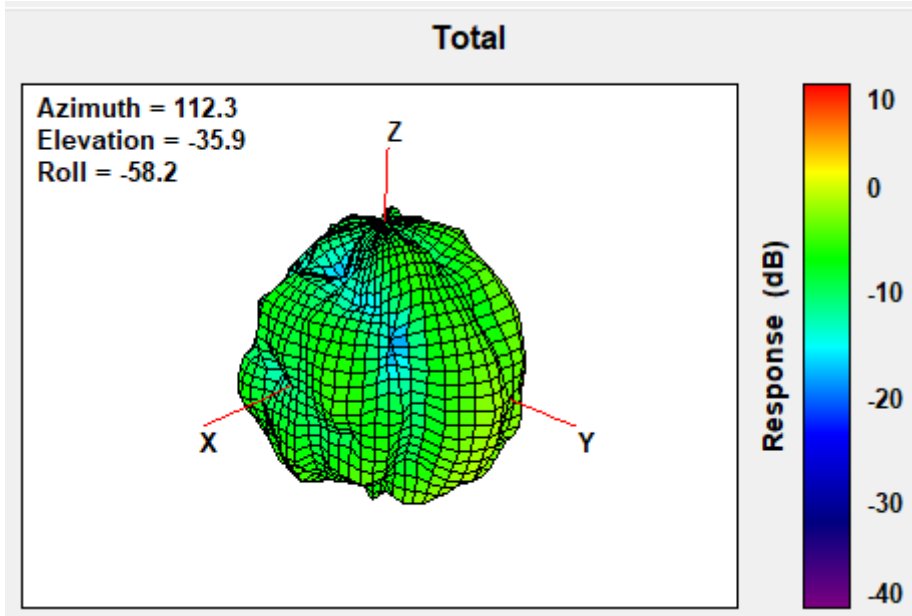

### Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	0.12

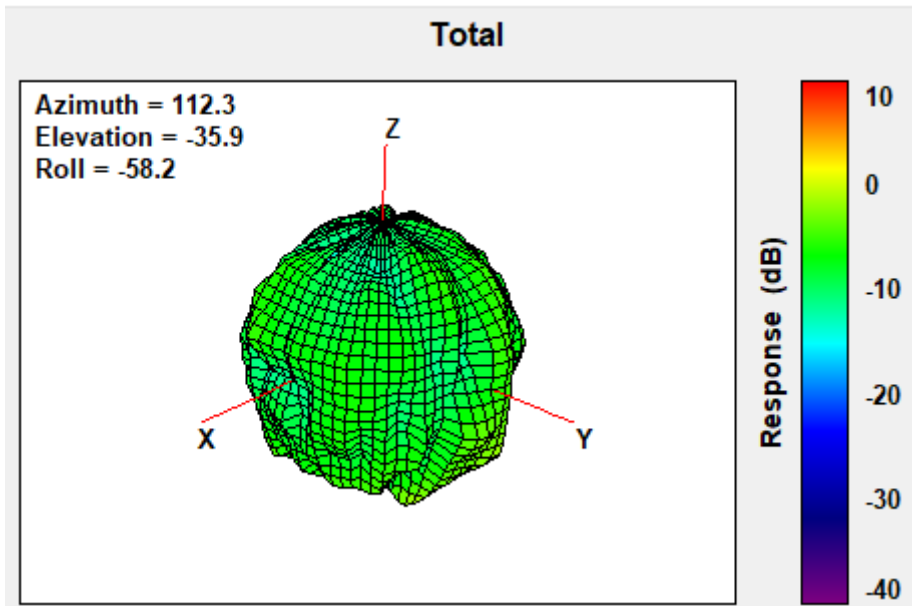

## TB mode Auxiliary Antenna


### Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	-1.54

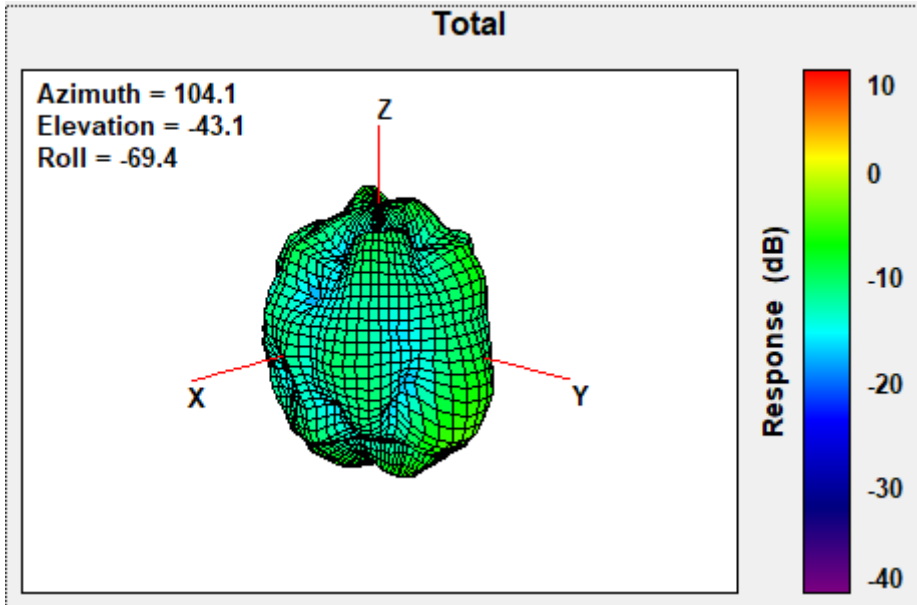


### Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	0.75

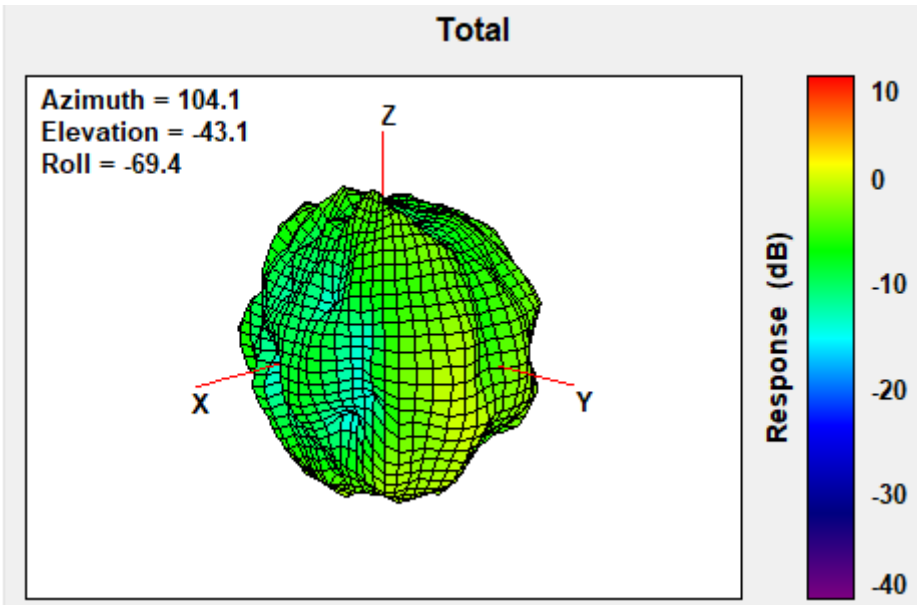


### Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	0.00

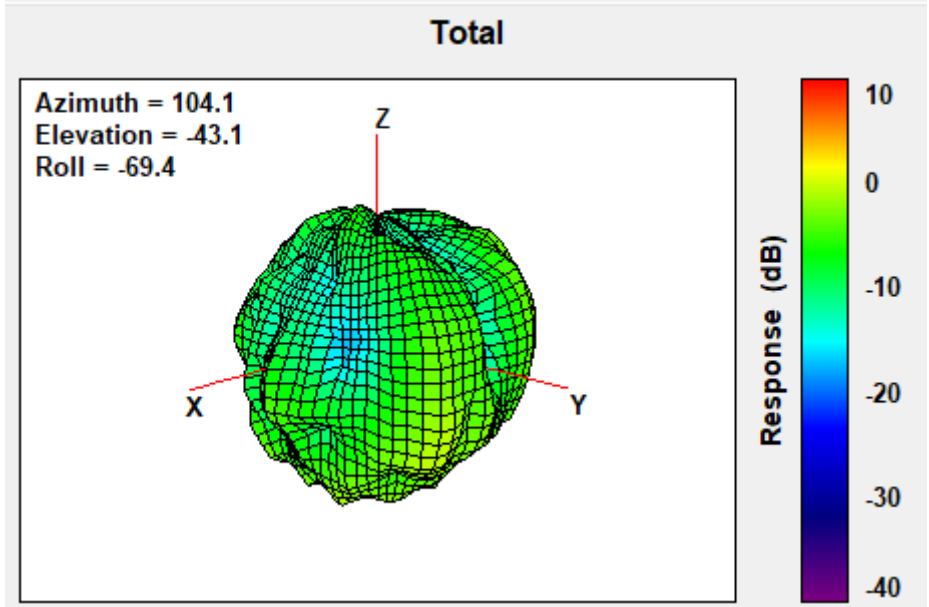


### Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.09

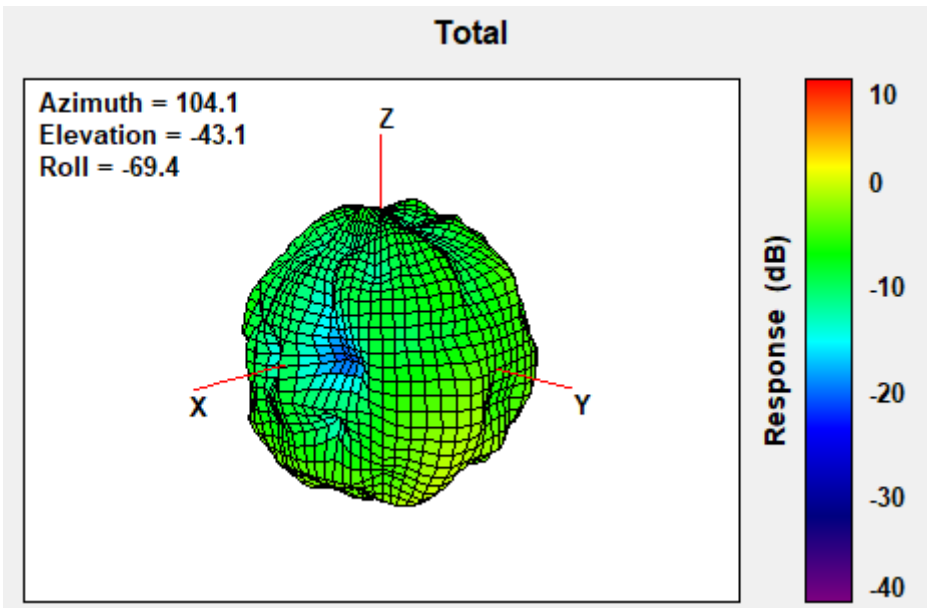


### Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.41

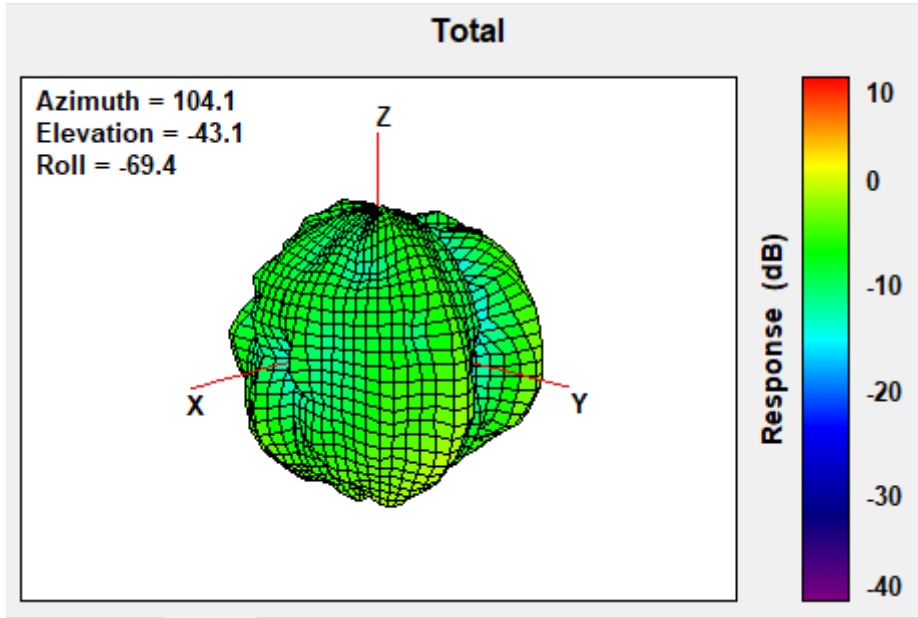


### Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.35

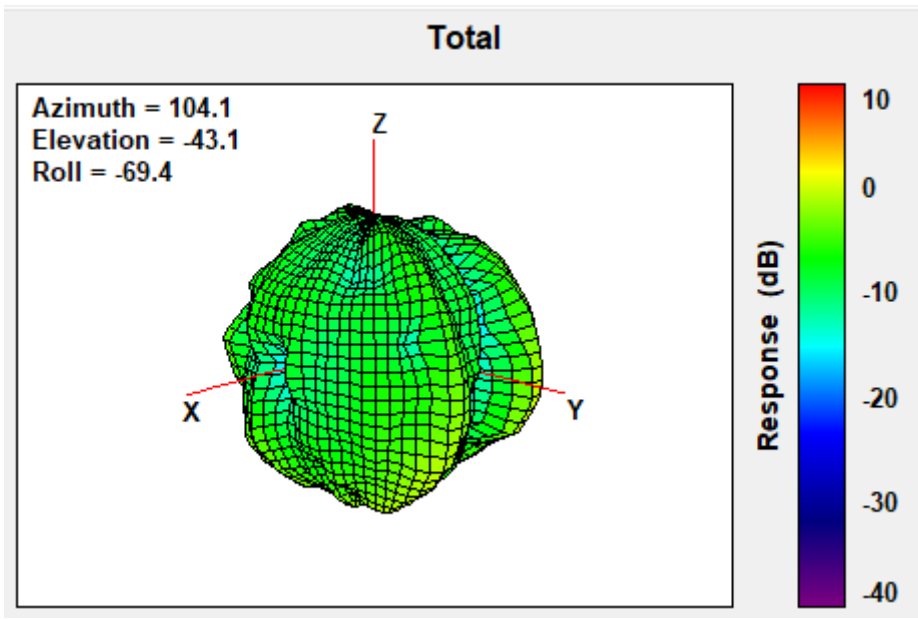


### Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	1.32

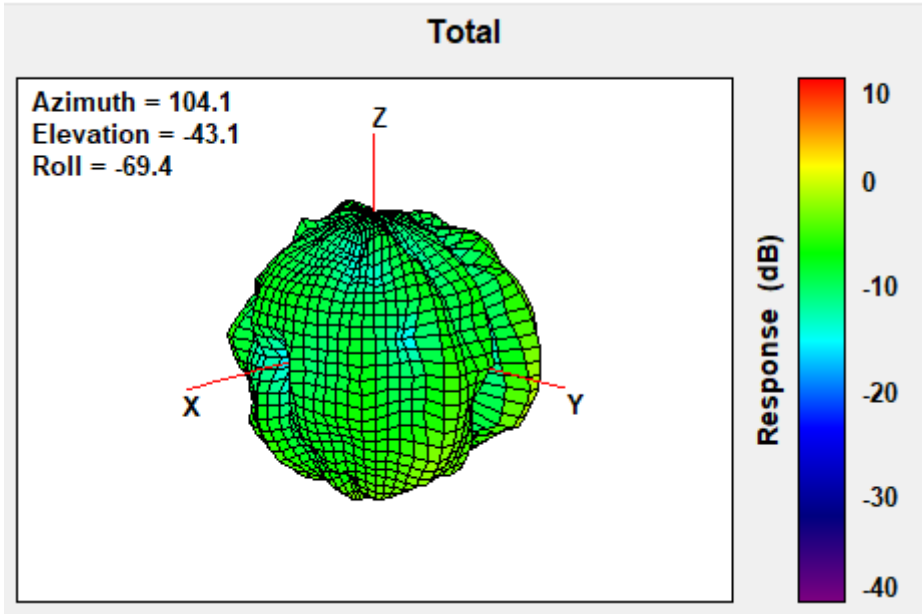

### Max Antenna 3D Radiation Pattern 6425-6525 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.54

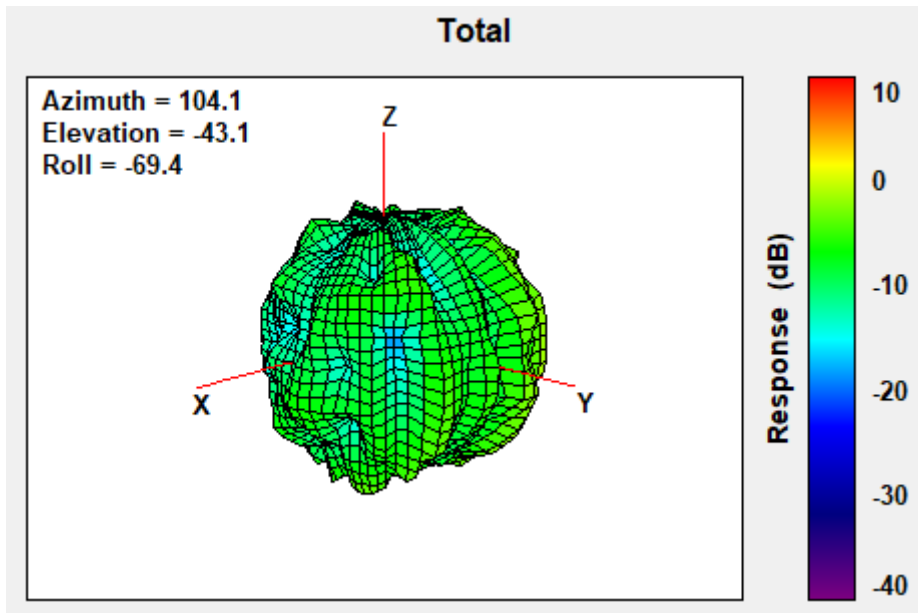




### Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.54

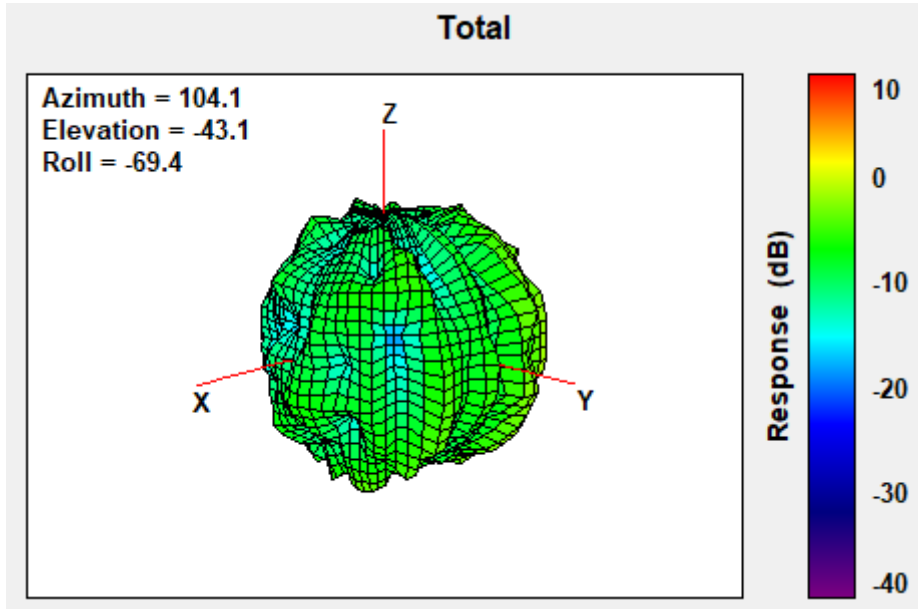

### Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	1.02

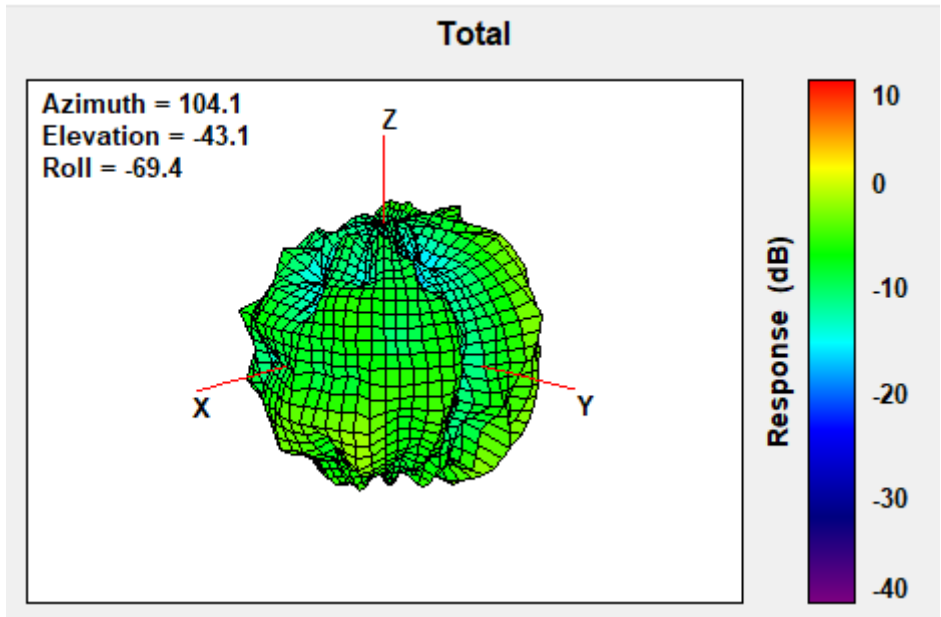


## Section 4. Antenna Host Platform Location Information

Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.


Minimum Separation Distance			
Item	Antenna	Position	Distance (mm)
A	WLAN-Main	To top	320
B	WLAN-Main	To left	98
C	WLAN-Main	To right	177
D	WLAN-Main	To bottom	8
E	WLAN-Main	Main antenna length	45
F	Main-Aux	Main to Aux	45
G	WLAN-Aux	To top	320
H	WLAN-Aux	To left	176
I	WLAN-Aux	To right	103
J	WLAN-Aux	To bottom	8
K	WLAN-Aux	Aux antenna length	45
L	NB	Bumper thickness	3
X	WLAN-Main	To user	17
Y	WLAN-Aux	To user	17
Z	NB	Keyboard depth	210

Minimum Separation Distance			
Item	Antenna	Position	Distance (mm)
M	WLAN-Main	To front	5
N	WLAN-Main	To rear	2.5
O	WLAN-Aux	To front	5
P	WLAN-Aux </tr		

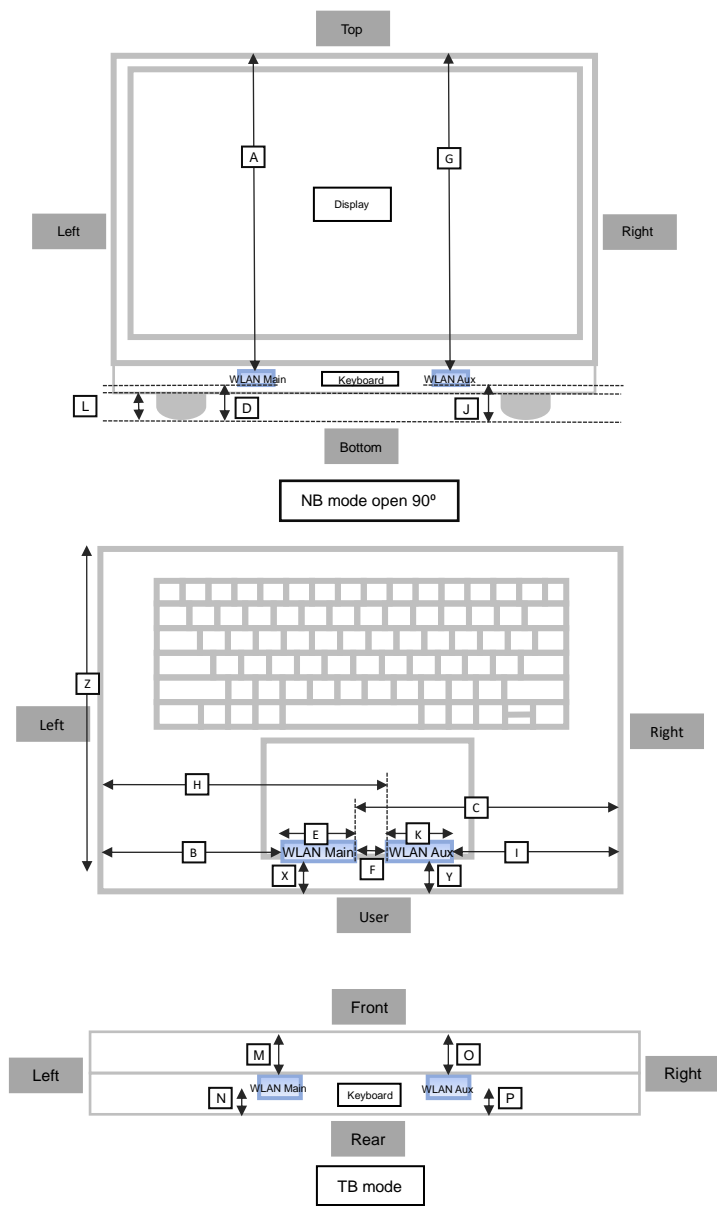

## Section 5. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

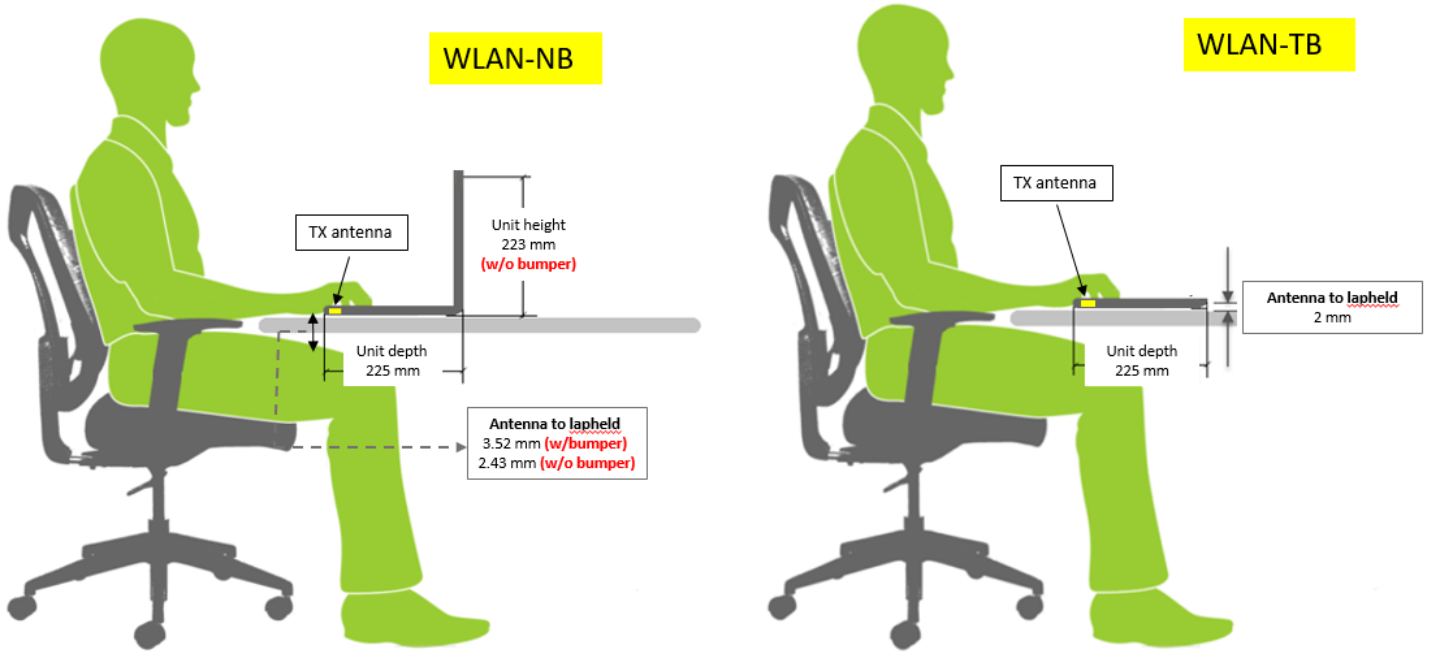

## Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between **all WLAN transmit antennas** and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

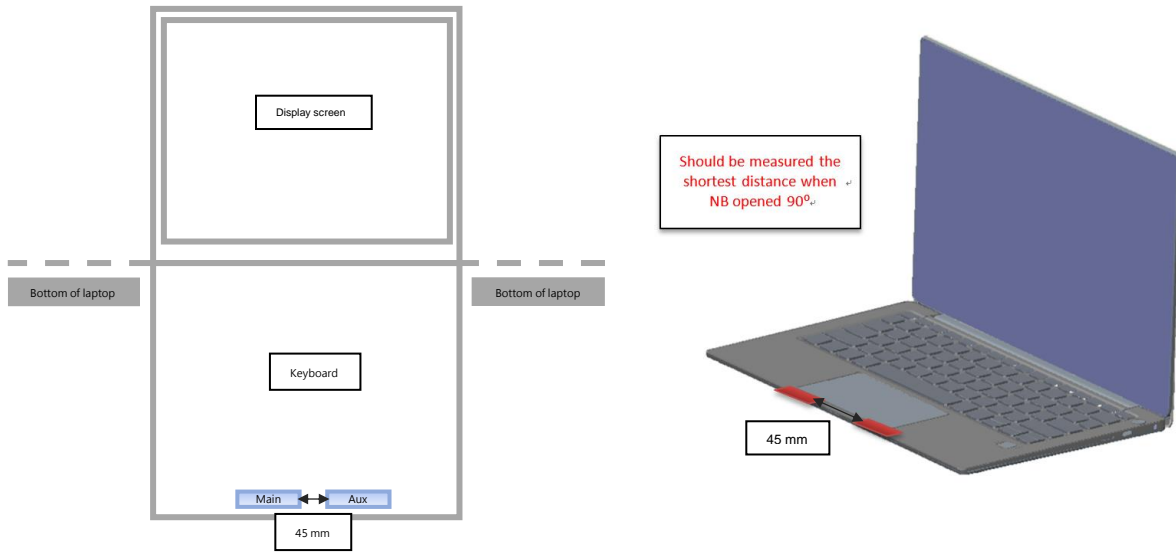

## Revision History

Revision	Description	Date
10.3	<u>Page2-5</u> Add Applicable test method, Test & System Description and Setup photo	July 24, 2022
10.4	<u>Cover page</u> Add Intel 5.9GHz reference antenna gain <u>Cover page/Section1/Section3</u> Add 5.9GHz antenna gain information	September 15, 2022