

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information											
Brand	ODM	****End product model name	Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)	*SAR minimum separation (mm)						
DELL	Compal	P115F	Yes	Regular NB	w/ bumper: 6.24 mm w/o bumper: 5.14 mm						
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.											
Antenna information											
Vendor	Type	Antenna Part number (Main)			Antenna Part number (Aux)						
WNC	PIFA	DC33002SL0L (81ELA715.G99)			DC33002SL1L (81ELA715.GA1)						
Peak gain w/ cable loss (dBi)*											
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	1.36	1.32	1.15	2.06	2.06	1.78	2.77	1.32	1.92	2.39	
Aux	0.60	-0.40	0.11	0.65	0.65	0.54	1.09	0.16	2.63	2.43	
Intel Reference Gain/Type/ Separation distance											
Antenna Type	Antenna Peak gain (In dBi)*										Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59	
Dipole	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)											
* SAR minimum separation (mm)											
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)											
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)											
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)											
* 3D Peak Antenna gain should be equal or greater than -2 dBi											
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.											

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list

3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)


[Section 6. Diagram Example of Co-Location Antenna Separation](#)

1. Applicable test methods

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

2. Test & System Description

a. Test setup

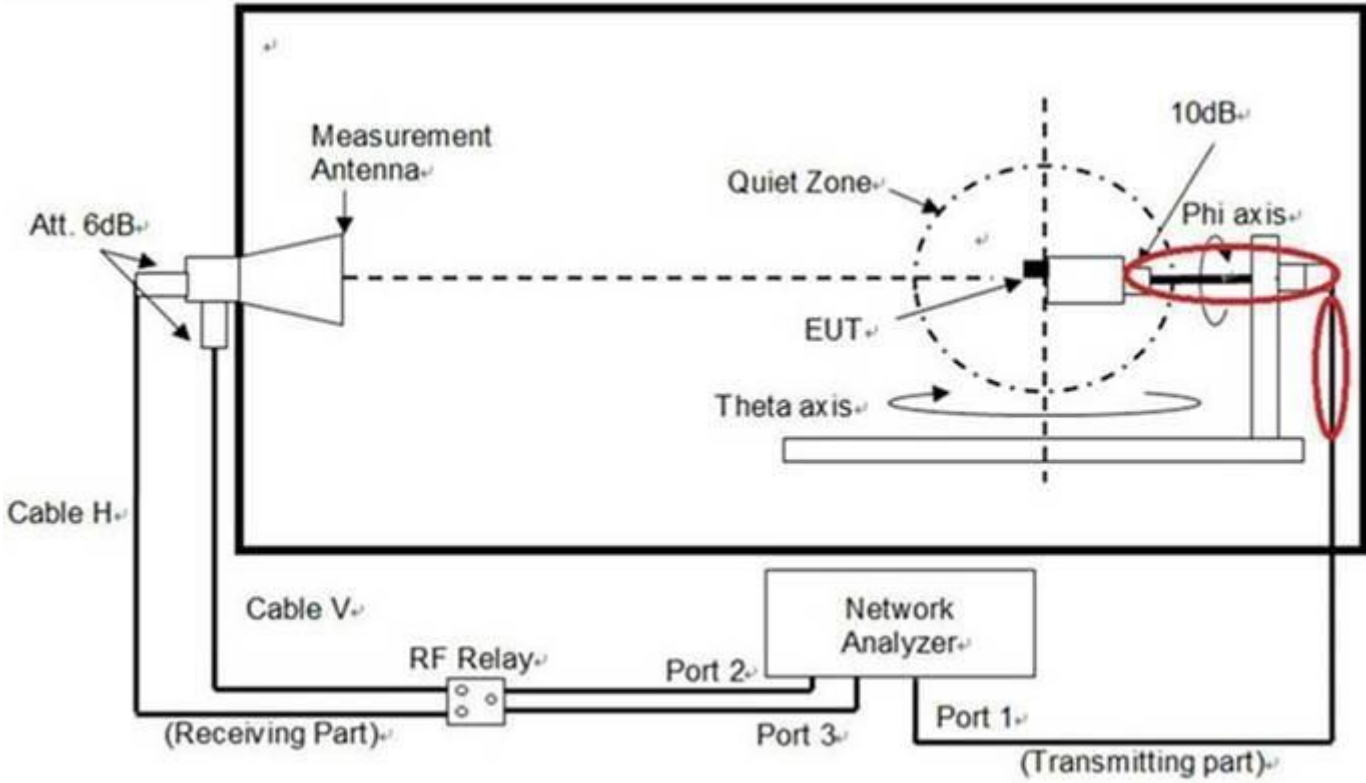

b. Equipment list

<insert test diagram here for test site utilized>

Name	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
ENA Series Network Analyzer	Keysight	E5080B	MY59101211	2022/5/23	2023/5/22
RF Switch	Keysight	3499A	MY42000955	NCR	NCR
Multi-Axis Positioner Controller	ETS-Lindgren	2090	N/A	NCR	NCR
Medium-Duty Positioner	ETS-Lindgren	2015	N/A	NCR	NCR
Measurement Horn Antenna	EMCO	3164-08	00086722	NCR	NCR
Anechoic chamber	ETS-Lindgren	AMS-8500	N/A	2022/6/15	2023/6/14

Name	Manufacturer	Type/Model	Serial Number
12GHz SMA(M)-SMA(M)+20core for 60cm RG316DS Cable Assembly	Woken Technology Inc.	RG316DS	N/A
12GHz SMA(M)-SMA(M)+30core for 300cm RG316DS Cable Assembly	Woken Technology Inc.	RG316DS	N/A

Note: Chamber calibration included full set of implement

Antenna Information

Section 1. Antenna Assembly Specifications


1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
P/N: DC33002SL0L (81ELA715.G99) Main Antenna	WNC	PIFA	50 ohm Coaxial length: 361.5 mm diameter: 1.37 mm Connector : IPEX	2400-2483.5	1.36	1.77	3	0.41
				5150-5250	1.32	1.96	3	0.64
				5250-5350	1.15	1.79	3	0.64
				5470-5725	2.06	2.72	3	0.66
				5725-5850	2.06	2.74	3	0.68
				5850-5895	1.78	2.48	3	0.70
				5925-6425	2.77	3.47	3	0.70
				6425-6525	1.32	2.05	3	0.73
				6525-6875	1.92	2.67	3	0.75
				6875-7125	2.39	3.17	3	0.78
P/N: DC33002SL1L (81ELA715.GA1) Aux Antenna	WNC	PIFA	50 ohm Coaxial length:157.5mm diameter: 1.37 mm Connector : IPEX	2400-2483.5	0.60	0.78	3	0.18
				5150-5250	-0.40	-0.12	3	0.28
				5250-5350	0.11	0.39	3	0.28
				5470-5725	0.65	0.94	3	0.29
				5725-5850	0.65	0.95	3	0.30
				5850-5895	0.54	0.84	3	0.30
				5925-6425	1.09	1.39	3	0.30
				6425-6525	0.16	0.48	3	0.32
				6525-6875	2.63	2.96	3	0.33
				6875-7125	2.43	2.77	3	0.34

- 3D Antenna Peak Gain required being test in system basis.

Section 2. Dimensioned Photos and Drawings of Antennas


Include the dimensioned photo and drawing of Main antenna here.

Main Antenna Drawing:

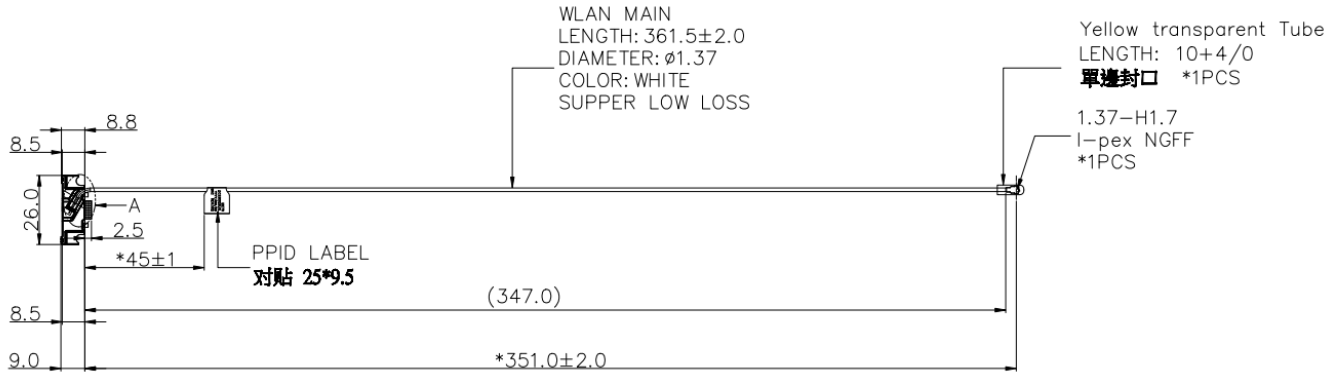

Include the dimensioned photo and drawing of Aux antenna here.

Aux Antenna Drawing:

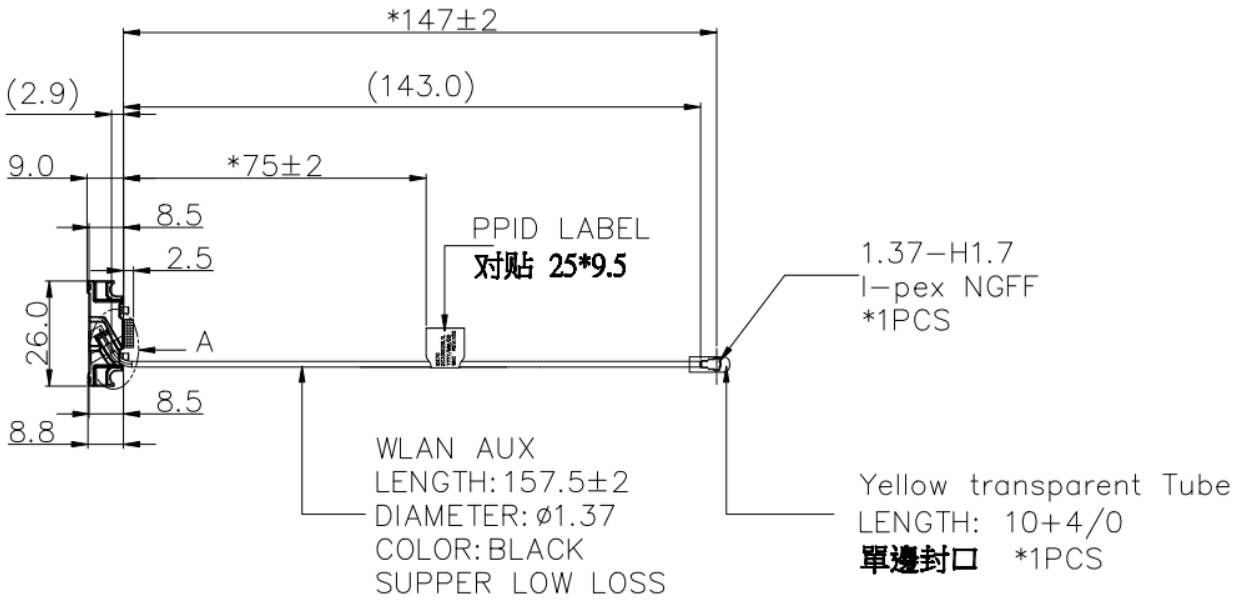

Section 3. Radiation characteristics of antenna loaded in Host Platform


Main Antenna

Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.36

Main antenna : 2484MHz


XY



XZ



YZ



Max Antenna 3D Radiation Pattern 5150-5250 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.32

Main antenna : 5150MHz

XY

XZ

YZ

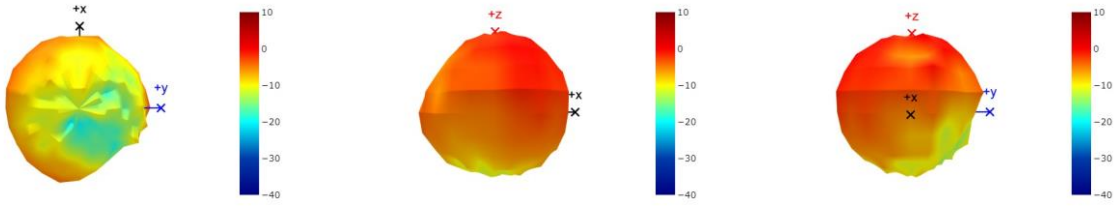


Max Antenna 3D Radiation Pattern 5250-5350 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.15

Main antenna : 5350MHz


XY



XZ

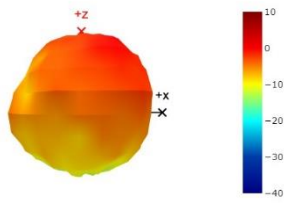

YZ




Max Antenna 3D Radiation Pattern 5470-5725 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.06

Main antenna : 5725MHz


XY



XZ



YZ




Max Antenna 3D Radiation Pattern 5725-5850 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.06

Main antenna : 5725MHz


XY



XZ



YZ




Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.78

Main antenna : 5875MHz


XY



XZ



YZ



Max Antenna 3D Radiation Pattern 5925-6425 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.77

Main antenna : 6215MHz

XY

XZ

YZ

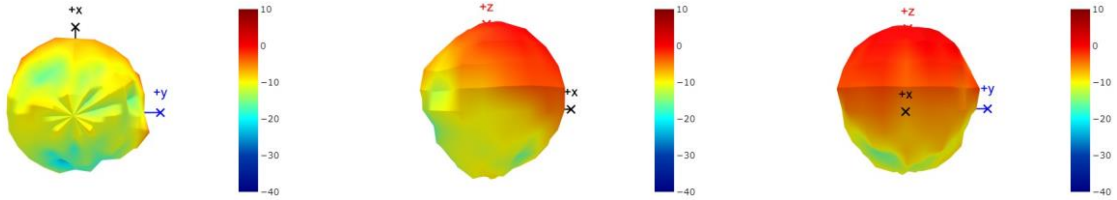

Max Antenna 3D Radiation Pattern 6425-6525 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.32

Main antenna : 6455MHz

XY

XZ

YZ

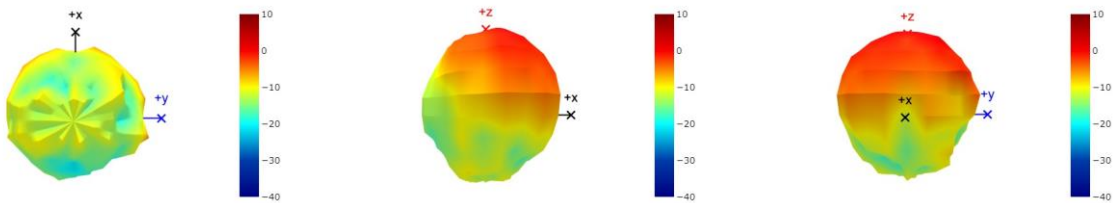

Max Antenna 3D Radiation Pattern 6525-6875 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.92

Main antenna : 6695MHz

XY

XZ

YZ

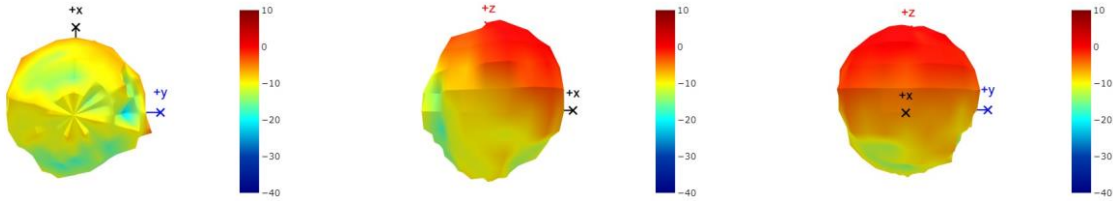

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.39

Main antenna : 6935MHz

XY

XZ

YZ

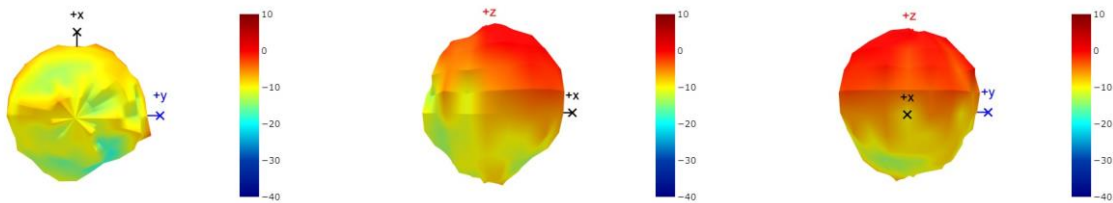


Auxiliary Antenna

Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.60

Aux antenna : 2484MHz


XY



XZ



YZ




Max Antenna 3D Radiation Pattern 5150-5250 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	-0.40

Aux antenna : 5250MHz


XY



XZ



YZ



Max Antenna 3D Radiation Pattern 5250-5350 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	0.11

Aux antenna : 5320MHz

XY

XZ

YZ

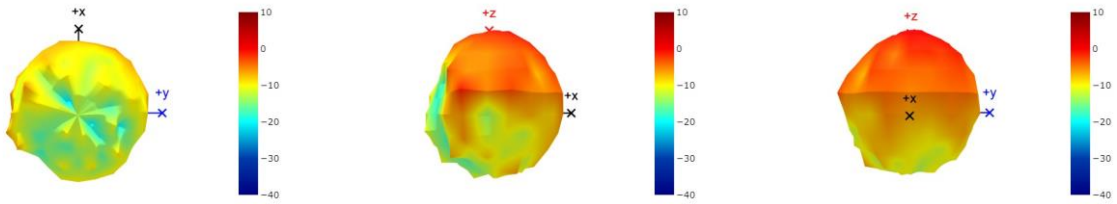

Max Antenna 3D Radiation Pattern 5470-5725 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.65

Aux antenna : 5725MHz

XY

XZ

YZ

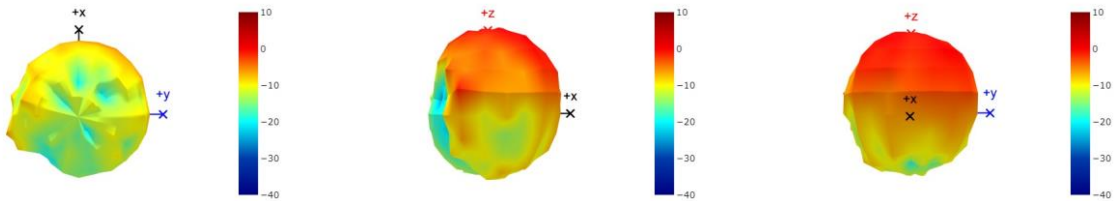


Max Antenna 3D Radiation Pattern 5725-5850 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.65

Aux antenna : 5725MHz


XY



XZ



YZ




Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	0.54

Aux antenna : 5875MHz


XY



XZ



YZ




Max Antenna 3D Radiation Pattern 5925-6425 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	1.09

Aux antenna : 6295MHz


XY



XZ



YZ




Max Antenna 3D Radiation Pattern 6425-6525 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	0.16

\Aux antenna : 6455MHz


XY



XZ



YZ



Max Antenna 3D Radiation Pattern 6525-6875 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.63

Aux antenna : 6855MHz

XY

XZ

YZ

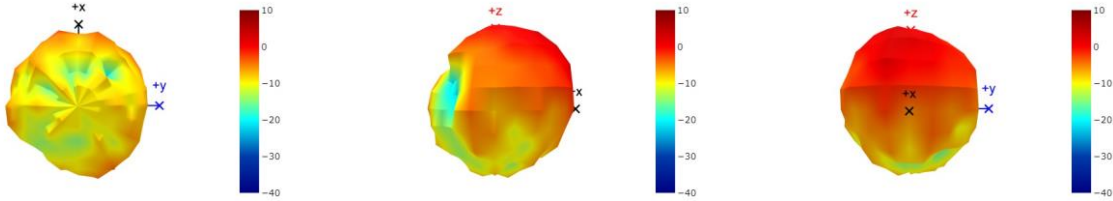

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.43

Aux antenna : 6935MHz

XY

XZ


YZ

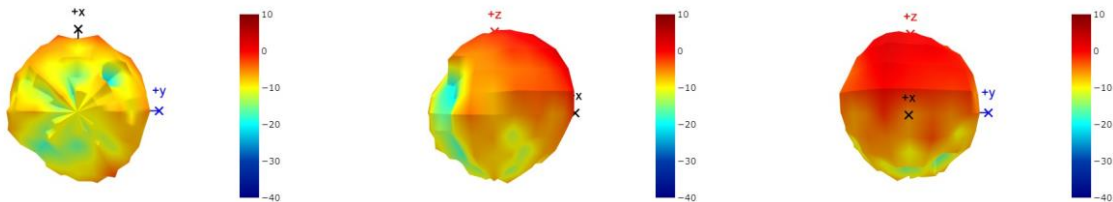

Section 4. Antenna Host Platform Location Information


Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

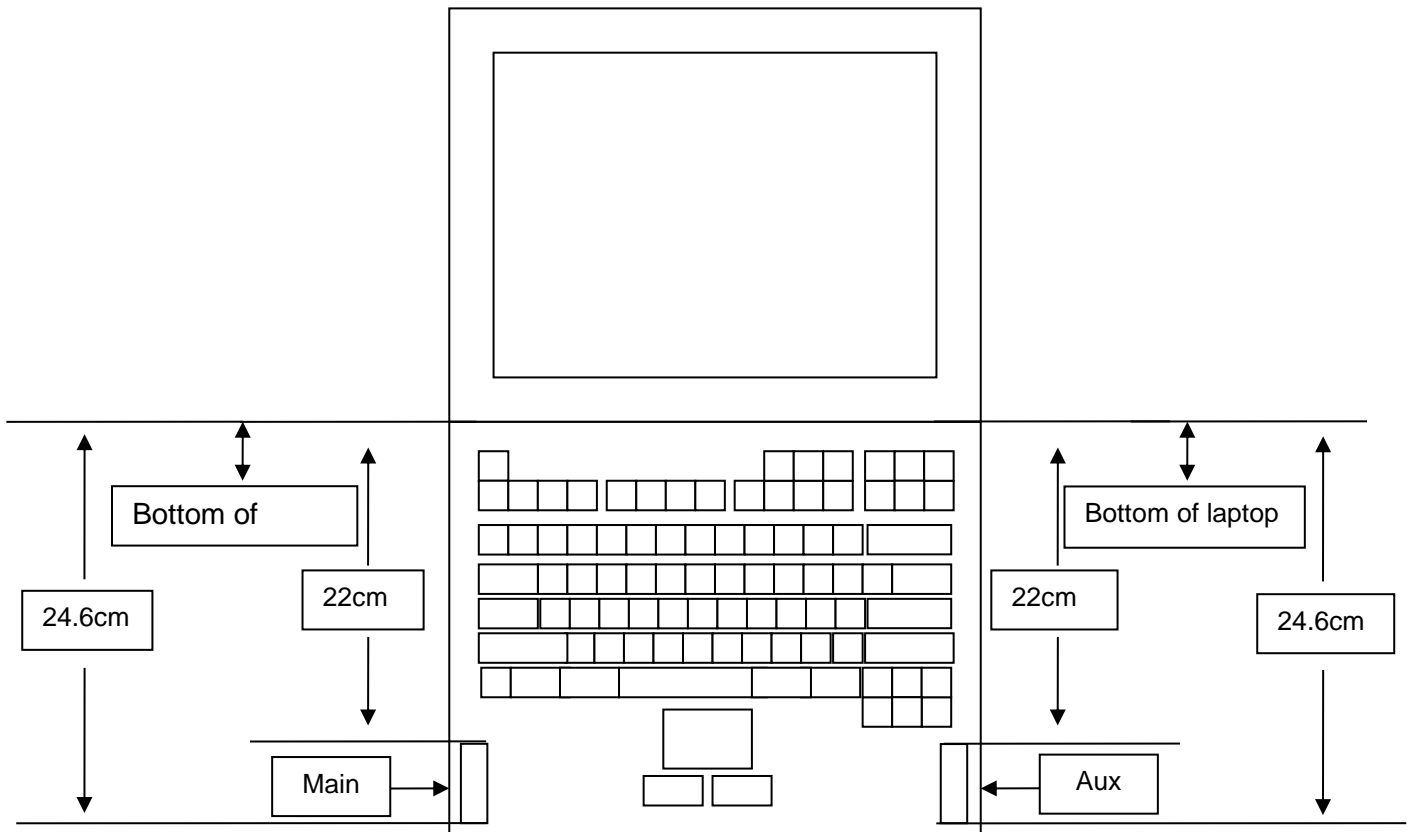

Section 5. Antenna dimensional information for SAR evaluation


Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

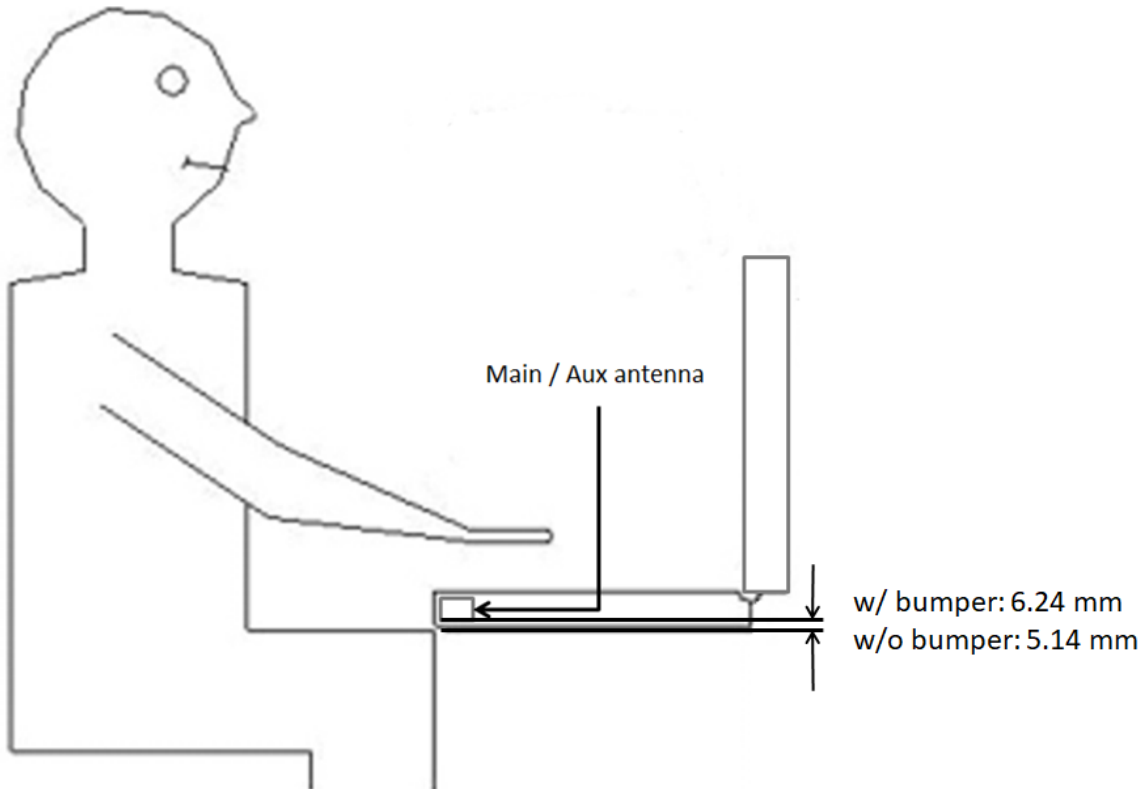

Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

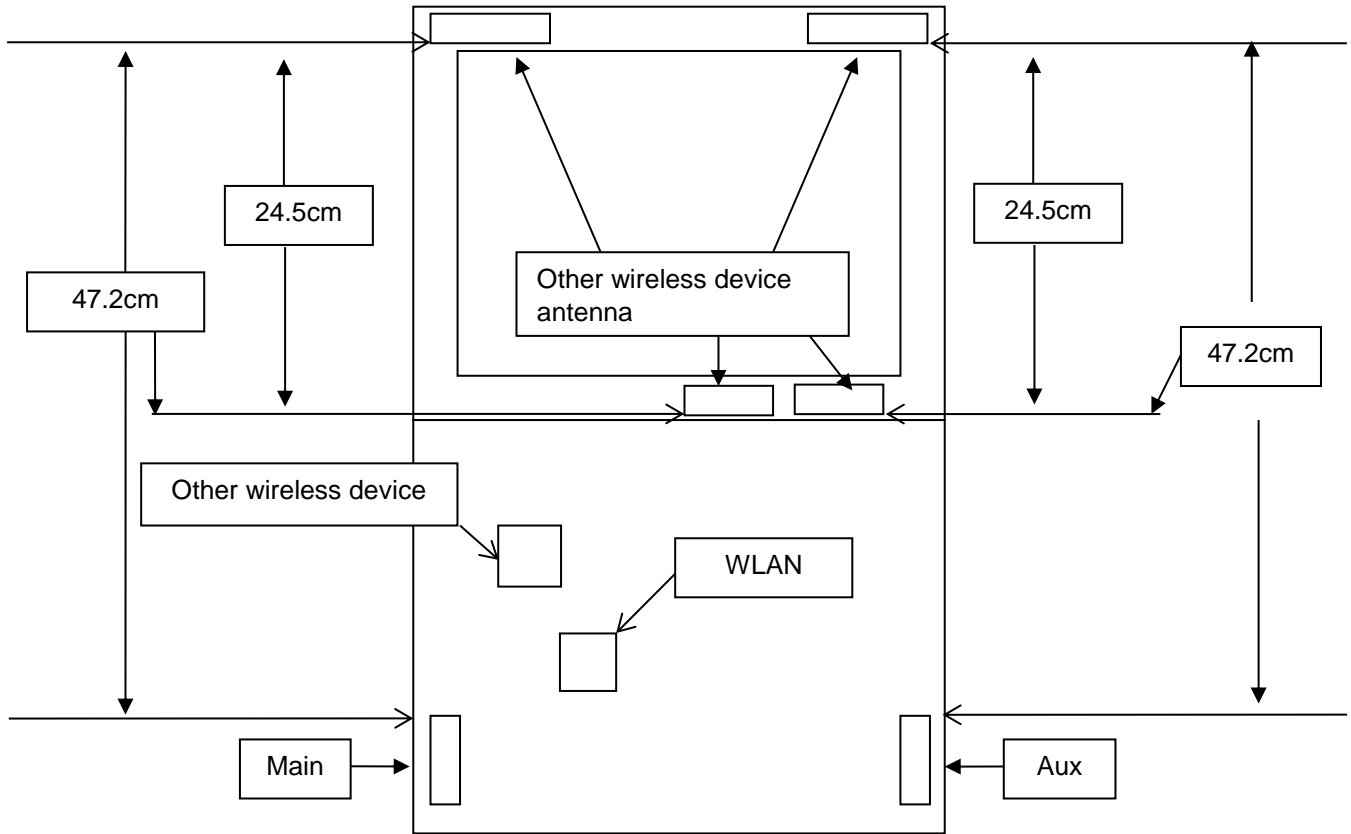

Revision History

Revision	Description	Date
10.3	<u>Page2-5</u> Add Applicable test method, Test & System Description and Setup photo	July 24, 2022
10.4	<u>Cover page</u> Add Intel 5.9GHz reference antenna gain <u>Cover page/Section1/Section3</u> Add 5.9GHz antenna gain information	September 15, 2022