

# **TEST REPORT**

APPLICANT :	1	Nortek Security	&	Control LLC
-------------	---	-----------------	---	-------------

- **PRODUCT NAME** : Edge Panel
- MODEL NAME : 2GIG-EDG-NA-A
- BRAND NAME : 2GIG
- **FCC ID** : EF400216
- STANDARD(S) : 47 CFR Part 15 Subpart C
- **RECEIPT DATE** : 2020-12-24
- **TEST DATE** : 2021-01-11 to 2021-01-17
- **ISSUE DATE** : 2021-02-04

Edited by:

ong /Viz

Peng Mi (Rapporteur)

Approved by:

Peng Huarui (Supervisor)

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn



E-mail: service@morlab.cn



# DIRECTORY

1. Technical Information
1.1. Applicant and Manufacturer Information
1.2. Equipment Under Test (EUT) Description
1.3. Modulation Type and Data Rate of EUT
1.4. The Channel Number and Frequency
1.5. Test Standards and Results
1.6. Environmental Conditions
2. 47 CFR Part 15C Requirements 8
2.1. Antenna Requirement 8
2.2. Duty Cycle of Test Signal
2.3. Maximum Peak and Average Conducted Output Power12
2.4. Bandwidth ·······1
2.5. Conducted Spurious Emissions and Band Edge
2.6. Power Spectral Density (PSD)
2.7. Conducted Emission
2.8. Restricted Frequency Bands43
2.9. Radiated Emission53
Annex A Test Uncertainty
Annex B Testing Laboratory Information

Change History			
Version Date Reason for change			
1.0 2021-02-04		First edition	





# **1. Technical Information**

Note: Provide by applicant.

# **1.1. Applicant and Manufacturer Information**

Applicant:	Nortek Security & Control LLC	
Applicant Address:	5919 Sea Otter Place, Carlsbad, CA 92010, United States	
Manufacturer: Flextronics Electronics Technology (Shenzhen) Co., Ltd		
Manufacturer Address: 89 Yong Fu Road, Tong Fu Yu Industrial Park, Fu Yong Towr		
Manufacturer Address.	An District, Shenzhen, Guangdong, 518103, China	

# **1.2. Equipment Under Test (EUT) Description**

Product Name:	Edge Panel			
Serial No.:	(N/A, marked #1 by	test site)		
Hardware Version:	A			
Software Version:	0			
Equipment Type:	WLAN2.4G			
Modulation Type:	DSSS, OFDM			
Operating Frequency Range:	802.11b/g/ n(HT20):	2.412GHz - 2.462GHz		
Antenna Type:	FPC Antenna			
Antenna Gain:	3.13dBi			
	Battery			
	Brand Name:	Highpower		
	Model No.:	115150		
	Serial No.:	(N/A, marked #1 by test site)		
Accessory Information:	Capacity:	4020mAh		
	Rated Voltage:	3.8V		
	Charge Limit:	4.4V		
	Manufacturer:	Huizhou Highpower Technology Co.,LTD.		





	Adaptor		
	Brand Name:	ZBPOWER	
	Model No.:	ZB-H140017	
Accessory Information:	Serial No.:	(N/A, marked #1 by test site)	
	Rated Output:	14.00V=1.70A	
	Rated Input:	100-240V~50/60Hz, Max 0.6A	
	Manufacturer:	Huizhou Zhong bang electronics co., ltd.	

**Note1:** We use the dedicated software to control the EUT continuous transmission.

**Note2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

# **1.3. Modulation Type and Data Rate of EUT**

Modulation technology	Modulation Type	Data Rate (Mbps) <sub>Note1</sub>
	DBPSK	1
DSSS (802.11b)	DQPSK	2
	CCK	5.5/ 11
	BPSK	<b>6</b> / 9
OFDM (802.11g)	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
	BPSK	6.5
OFDM	QPSK	13/19.5
(802.11n-20MHz)	16QAM	26/39
	64QAM	52/58.5/65

**Note1:** The worst-case mode(bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.





# **1.4. The Channel Number and Frequency**

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
	1	2412	8	2447
	2	2417	9	2452
902 11b/a/	3	2422	10	2457
802.11b/g/	4	2427	11	2462
n(HT20)	5	2432		
	6	2437		
	7	2442		

**Note1:** The Lowest Channel (1), Middle Channel (6) and Highest Channel (11) was selected test for 802.11b/g/n(HT20) mode.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



# 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

N	o. Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Jan 12, 2021	Liu Bo	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Jan 12, 2021	Liu Bo	PASS	No deviation
4	15.247(a)	Bandwidth	Jan 12, 2021	Liu Bo	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Jan 12, 2021	Liu Bo	PASS	No deviation
6	15.247(e)	Power spectral density (PSD)	Jan 12, 2021	Liu Bo	PASS	No deviation
7	15.207	Conducted Emission	Jan 17, 2021	Huang Zhiye	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Jan 16, 2021	Peng Xuewei	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Jan 11, 2021	Peng Xuewei	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 11.5dB contains two parts that cable loss 1.5dB and Attenuator 10dB.





**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.


**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

# **1.6. Environmental Conditions**

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106







# 2.47 CFR Part 15C Requirements

# 2.1. Antenna Requirement

# 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### 2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.





# 2.2. Duty Cycle of Test Signal


# 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be nonconstant.

### 2.2.2. Test Description

### **Test Setup:**



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.






### 2.2.3. Test Result

#### A. Test Verdict:

Test Mode	Duty Cycle(%) (D)	Duty Factor (10*lg[1/D])
802.11b	98.42	0.07
802.11g	93.00	0.32
802.11n(HT20)	92.55	0.34

#### B. Test Plot:

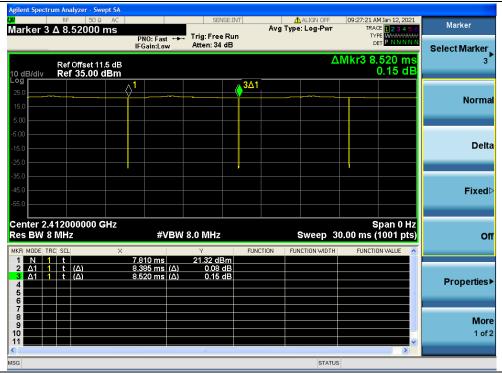

(Channel 1, 2412MHz, 802.11b)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Agilent Spectrum Analyzer - Swept SA					
Marker 3 Δ 1.50000 ms		SENSE:INT Avg	ALIGN OFF Type: Log-Pwr	09:26:05 AM Jan 12, 2021 TRACE 1 2 3 4 5 6	Marker
		Free Run n:34 dB		TYPE WWWWWW DET PNNNNN	Select Marker
Ref Offset 11.5 dB 10 dB/div Ref 35.00 dBm			Δ	Mkr3 1.500 ms -0.09 dB	
25.0 15.0 5.00	1 Summer mework and a second		ntrimativitationentativitati	warrang programme	Normal
-5.00 -15.0 -25.0					Delta
-35.0 -45.0 -55.0					Fixed⊳
Center 2.412000000 GHz Res BW 8 MHz	#VBW 8.0 N		Sweep 5.	Span 0 Hz 000 ms (1001 pts)	Off
1 N 1 t 2 Δ1 1 t (Δ)	1.420 ms 19.8 1.395 ms (∆)	31 dBm 1.07 dB 0.09 dB			Properties▶
7 8 9 10 11				~	More 1 of 2
MSG			STATUS		

# (Channel 1, 2412MHz,802.11g)

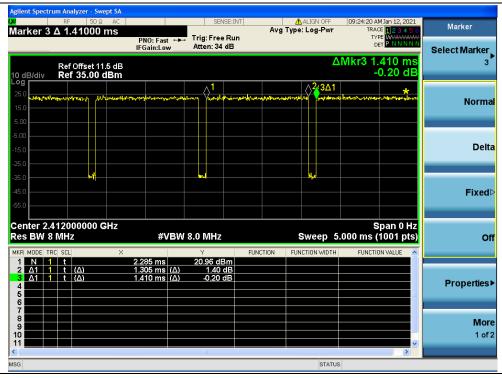

# (Channel 1, 2412MHz, 802.11n(HT20))

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn



# 2.3. Maximum Peak and Average Conducted Output Power


# 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed1 Watt.

### 2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

# Test Setup:



The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.





# 2.3.3. Test Result

# Maximum Peak Conducted Output Power

#### 802.11b Test Mode

Channel Frequency (MHz)		Measured C	utput Peak Power	Limit	Verdict	
Channel		dBm	W	dBm	W	verdict
1	2412	21.26	0.134			PASS
6	2437	21.32	0.136	30	1	PASS
11	2462	21.56	0.143			PASS

# 802.11g Test mode

Channel	Channel Frequency (MHz)		output Peak Power	Limi	Verdict	
Channel		dBm	W	dBm	W	verdict
1	2412	23.71	0.235			PASS
6	2437	23.87	0.244	30	1	PASS
11	2462	23.89	0.245			PASS

# 802.11n(HT20) Test mode

Channel Frequency (MHz)		Measured Output Peak Power		Limi	Verdict	
Channel	Frequency (IVIEZ)	dBm	W	dBm	W	verdict
1	2412	23.76	0.238			PASS
6	2437	23.88	0.244	30	1	PASS
11	2462	24.03	0.253			PASS







#### Maximum Average Conducted Output Power

#### 802.11b Test Mode

	Fraguanay	Average Power				Limit		Vardiat
Channel	Frequency (MHz)	Measured	Duty	Duty factor Calculated		LITTIL		Verdict
		dBm	Factor	dBm	W	dBm	W	
1	2412	18.20		18.27	0.067			PASS
6	2437	18.32	0.07	18.39	0.069	30	1	PASS
11	2462	18.37		18.44	0.070			PASS

### 802.11g Test mode

	Fraguanay	Average Power				Limit		Verdict
Channel	Frequency (MHz)	Measured	Duty	Duty factor Calculated		LITIIL		verdict
	(IVITZ)	dBm	Factor	dBm	W	dBm	W	
1	2412	17.95		18.27	0.067			PASS
6	2437	18.19	0.32	18.51	0.071	30	1	PASS
11	2462	18.23		18.55	0.072			PASS

# 802.11n(HT20) Test mode

	Fraguanay	Average Power				Limit		Verdict
Channel	Frequency (MHz)	Measured	Duty	Duty factor Calculated				verdict
		dBm	Factor	dBm	W	dBm	W	
1	2412	18.45		18.79	0.076			PASS
6	2437	18.60	0.34	18.94	0.078	30	1	PASS
11	2462	18.77		19.11	0.081			PASS






# 2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.4.2. Test Description

#### Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### 2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.





### 2.4.4. Test Result

#### 802.11b Test mode

#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	8.03	≥500	PASS
6	2437	8.04	≥500	PASS
11	2462	8.02	≥500	PASS


#### B. Test Plot:



(Channel 1, 802.11b)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







#### (Channel 6, 802.11b)



#### (Channel 11, 802.11b)

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn



#### 802.11g Test mode

#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	14.13	≥500	PASS
6	2437	15.19	≥500	PASS
11	2462	15.17	≥500	PASS


#### B. Test Plot:




(Channel 1, 802.11g)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





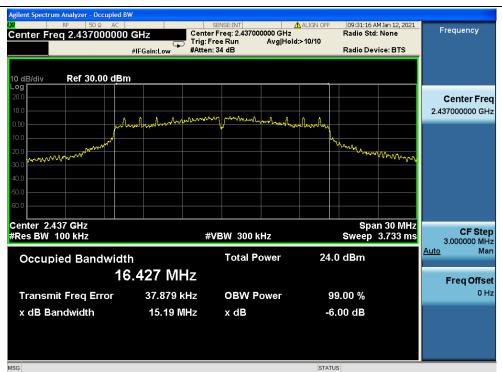

#### (Channel 6, 802.11g)



#### (Channel 11, 802.11g)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel:
 86-755-36698555
 Fax:
 86-75

 Http://www.morlab.cn
 E-mail:
 set

Fax: 86-755-36698525 E-mail: service@morlab.cn



# 802.11n(HT20) Test mode

#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	15.14	≥500	PASS
6	2437	15.18	≥500	PASS
11	2462	15.15	≥500	PASS


#### B. Test Plot:

Agilent Spectrum Analyzer - Occupied B	W						
Center Freq 2.41200000	GHz C	SENSE:INT enter Freq: 2.412000	0000 GHz	OFF 09:32:25 A Radio Std	M Jan 12, 2021 None	Trace	Detector
		rig: Free Run Atten: 34 dB	Avg Hold:>10/10	) Radio Dev	ice: BTS		
	WI Gam.cow						
10 dB/div Ref 30.00 dBr	n						
20.0							
10.0						С	lear Write
0.00	monthinghander	month partition	moundment	hay			
-10.0				······································			
-20.0 Whyper and wether the				many	WWWWWWW		Average
-30.0							
-40.0							
-60.0							Max Hold
Center 2.412 GHz #Res BW 100 kHz		#VBW 300 k	<b>U</b> 7		n 30 MHz 3.733 ms		
		#VDVV JUUK	n2	Sweep	3.7 33 IIIS		Min Hold
Occupied Bandwidt	h	Total Po	ower	24.1 dBm			
17	7.627 MHz						Detector
Transmit Freg Error	45.511 kHz		01110F	99.00 %		A 4 -	Average ► Man
			ower			<u>Auto</u>	wan
x dB Bandwidth	15.14 MHz	x dB		-6.00 dB			
MSG			5	STATUS			

# (Channel 1, 802.11n(HT20))



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







#### (Channel 6, 802.11n(HT20))



#### (Channel 11, 802.11n(HT20))

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn




# 2.5. Conducted Spurious Emissions and Band Edge

### 2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2. Test Description

#### Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### 2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.






# 2.5.4. Test Result

### 802.11b Test mode

#### A. Test Verdict:

		Measured Max. Out	Limit	t (dBm)	
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
1	2412	-39.53	6.70	-13.30	PASS
6	2437	-39.21	9.23	-10.77	PASS
11	2462	39.76	8.44	-11.56	PASS


#### B. Test Plot:

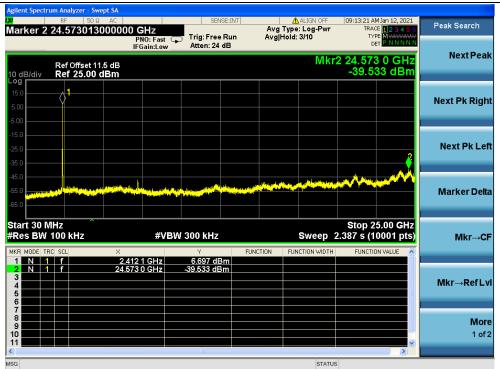


(Channel = 1, 30MHz to 25GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





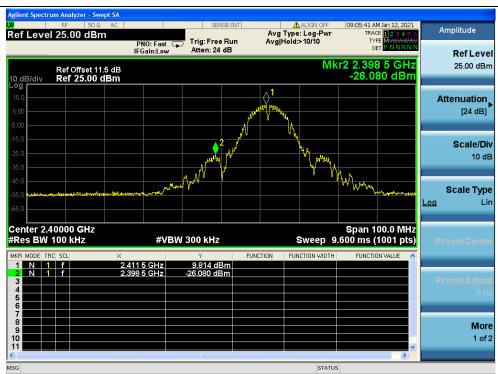

(Band Edge, Channel = 1)

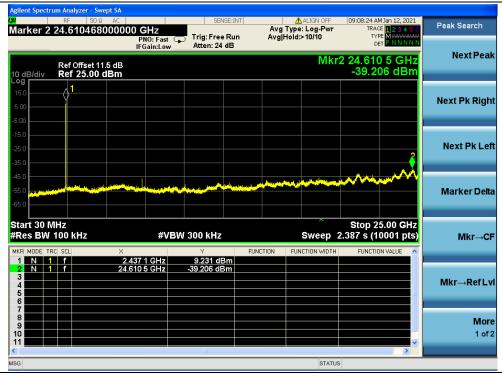

(Channel = 6, 30MHz to 25GHz)

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn





						nalyzer - Swept SA	
Peak Search	09:06:56 AM Jan 12, 2021 TRACE 1 2 3 4 5 6 TYPE M	ALIGN OFF Type: Log-Pwr Hold: 4/10	Run Av		00 GHz PNO: Fast G	F 50Ω AC .9987030000	
Next Peak	2 23.998 7 GHz -39.761 dBm	Mkr				ef Offset 11.5 dB ef 25.00 dBm	dB/div R
Next Pk Right						)1	
Next Pk Left	2						5.0 5.0 5.0
Marker Delta	~~~~			in the second		na shiring a sa s	5.0 5.0 5.0
Mkr→CF	Stop 25.00 GHz .387 s (10001 pts)	Sweep 2	FUNCTION	W 300 kHz		D KHZ	art 30 MHz Res BW 100 R MODE TRC SC
Mkr→RefLvl				8.442 dE -39.761 dB	.462 1 GHz .998 7 GHz		1 N 1 f 2 N 1 f 3
More 1 of 2	>						
		STATUS					3

(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



#### 802.11g Test mode

#### A. Test Verdict:

	Measured Max. Out		Limi		
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
1	2412	-39.09	6.21	-13.79	PASS
6	2437	-38.83	5.06	-14.94	PASS
11	2462	-39.69	6.95	-13.05	PASS

#### B. Test Plot:



(Channel = 1, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





# (Band Edge, Channel = 1)



#### (Channel = 6, 30MHz to 25GHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Agilent Spectrum Analyzer - Swept SA				
Marker 2 24.657911000000 GHz	SENSE:INT	Avg Type: Log-Pwr	09:16:13 AM Jan 12, 2021 TRACE 1 2 3 4 5 6	Peak Search
PNO: Fast IFGain:Lov		Avg Hold: 2/10	TYPE MWWWWW DET PNNNNN	
Ref Offset 11.5 dB 10 dB/div Ref 25.00 dBm		Mkr	2 24.657 9 GHz -39.689 dBm	Next Peak
Log 15.0 5.00 -5.00				Next Pk Right
-15.0 -25.0 -35.0			3	Next Pk Left
-45.0 -55.0 -65.0			and the second state	Marker Delta
Start 30 MHz #Res BW 100 kHz #V	/BW 300 kHz	Sweep 2	Stop 25.00 GHz 2.387 s (10001 pts)	Mkr→CF
I         N         I         F         2.462 1 GHz           2         N         1         f         2.462 1 GHz           3         4         5         6         6	6.950 dBm -39.689 dBm			Mkr→RefLvl
7 8 9 10 11			~	More 1 of 2
MSG		STATUS		

(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



#### 802.11n(HT20) Test mode

#### A. Test Verdict:

		Measured Max. Out	Limi	t (dBm)	
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
1	2412	-41.08	6.72	-13.28	PASS
6	2437	-40.23	7.09	-12.91	PASS
11	2462	-40.33	6.49	-13.51	PASS


#### B. Test Plot:



(Channel = 1, 30MHz to 25GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







(Band Edge, Channel = 1)



(Channel = 6, 30MHz to 25GHz)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



Agilent Spectr	r <mark>um Analyzer - Swe</mark> RF 50 Q		SENSE	-INT	ALIGN OFF	09:20:59 AM Jan 12, 202	91
Marker 2		000000 GHz PNO: Fast		Avg	Type: Log-Pwr Hold: 5/10	TRACE	Peak Search
		IFGain:Low		в		DET PNNN	Next Deck
10 dB/div Log	Ref Offset 11. Ref 25.00 c				Mkr	2 24.061 1 GH -40.332 dBr	Z
15.0 5.00	1						Next Pk Right
-15.0						2	Next Pk Left
-35.0 -45.0 -55.0 -65.0							Marker Delta
Start 30 M #Res BW	100 kHz	#V ×	BW 300 kHz	FUNCTION	Sweep 2	Stop 25.00 GH 2.387 s (10001 pt FUNCTION VALUE	
1 N 1 2 N 1 3 4 5 5	f	2.462 1 GHz 24.061 1 GHz	6.494 dBn -40.332 dBn	n		FUNCTION VALUE	Mkr→RefLvl
7 8 9 10 11							More 1 of 2
MSG					STATUS	\$	

(Channel = 11, 30MHz to 25GHz)



### (Band Edge, Channel = 11)

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn




# 2.6. Power Spectral Density (PSD)

#### 2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 2.6.2. Test Description

#### Test Setup:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

#### 2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.





#### 2.6.4. Test Result

### 802.11b Test mode

#### A. Test Verdict:

Spectral power density (dBm/3kHz)								
Channel	Frequency	Macourod DCD (dDm/2kHz)	Limit	Verdict				
Channel	(MHz)	Measured PSD (dBm/3kHz)	(dBm/3kHz)	verdict				
1	2412	-4.81	8	PASS				
6	2437	-5.02	8	PASS				
11	2462	-3.80	8	PASS				


#### B. Test Plot:



(Channel = 1, 802.11b)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China







(Channel = 6, 802.11b)



(Channel = 11, 802.11b)

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn Http://www.morlab.cn



#### 802.11g Test mode

#### A. Test Verdict:

Spectral power density (dBm/3kHz)								
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict				
1	2412	-5.32	8	PASS				
6	2437	-4.59	8	PASS				
11	2462	-4.38	8	PASS				

#### B. Test Plot:



(Channel = 1, 802.11g)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





#### (Channel = 6, 802.11g)



(Channel = 11, 802.11g)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



#### 802.11n(HT20) Test mode

#### A. Test Verdict:

	S	pectral power density (dBm/3kHz)			
Channel	Frequency	Measured PSD (dBm/3kHz)	Limit	Verdict	
Channel	(MHz)	Measured FSD (dBII/SKHZ)	(dBm/3kHz)	veruici	
1	2412	-4.18	8	PASS	
6	2437	-4.36	8	PASS	
11	2462	-3.91	8	PASS	

#### B. Test Plot:



(Channel = 1, 802.11n(HT20))



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





(Channel = 6, 802.11n(HT20))




(Channel = 11, 802.11n(HT20))

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





# 2.7. Conducted Emission

## 2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range	Conducted Limit (dBµV)						
(MHz)	Quai-peak	Average					
0.15 - 0.50	66 to 56	56 to 46					
0.50 - 5	56	46					
5 - 30	60	50					


NOTE:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

## 2.7.2. Test Description

#### Test Setup:

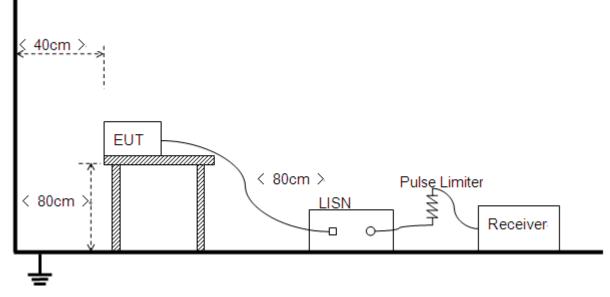

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.

MORLAB



## 2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hzwere considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode1: <u>EUT+ADAPTER+ WIFI TX</u> Test Voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB $\mu$ V] =U<sub>R</sub> + L<sub>Cable loss</sub> [dB] + A<sub>Factor</sub> U<sub>R</sub>: Receiver Reading A<sub>Factor</sub>: Voltage division factor of LISN





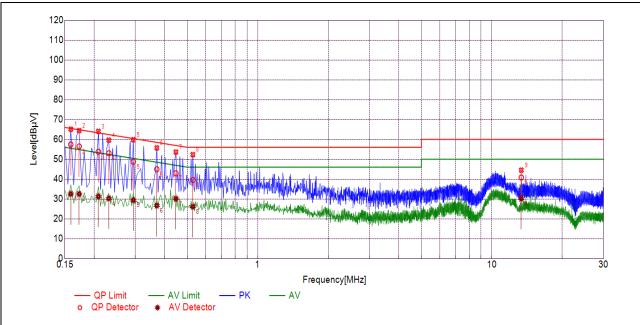


(L Phase)	
-----------	--

NO.	Fre.	Emission L	.evel (dBµV)	Limit (	dBµV)	Power-line	Verdict	
	(MHz)	Quai-peak	Average	Quai-peak	Average			
1	0.1589	57.43	32.53	65.52	55.52		PASS	
2	0.1726	56.46	32.48	64.83	54.83		PASS	
3	0.2084	53.76	31.26	63.27	53.27		PASS	
4	0.2312	53.01	30.26	62.41	52.41		PASS	
5	0.2941	48.74	29.39	60.41	50.41	Line	PASS	
6	0.3704	44.96	26.65	58.49	48.49		PASS	
7	0.4473	42.92	30.07	56.92	46.92		PASS	
8	0.5282	39.56	26.09	56.00	46.00		PASS	
9	13.3567	40.82	30.15	60.00	50.00		PASS	



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn




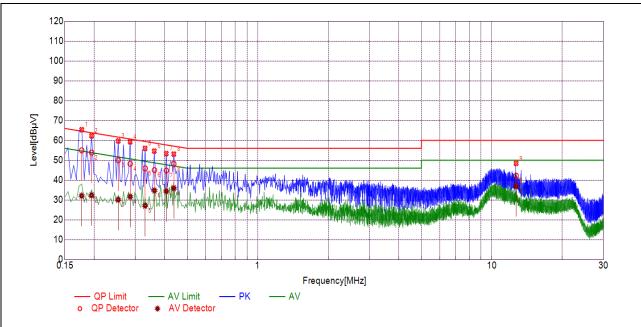

(N	Phase)
----	--------

NO.	Fre.	Emission L	evel (dBµV)	Limit (c	dΒμV)	Power-line	Verdict	
	. (MHz)	Quai-peak	Average	Quai-peak	Average			
1	0.1769	54.99	32.11	64.63	54.63		PASS	
2	0.1950	53.87	32.33	63.82	53.82		PASS	
3	0.2535	49.99	30.12	61.64	51.64		PASS	
4	0.2851	48.20	31.67	60.67	50.67		PASS	
5	0.3303	45.90	27.10	59.44	49.44	Neutral	PASS	
6	0.3618	45.05	34.79	58.69	48.69		PASS	
7	0.4065	44.80	34.44	57.72	47.72		PASS	
8	0.4379	48.18	35.93	57.10	47.10		PASS	
9	12.7050	42.16	36.96	60.00	50.00		PASS	








## 2.8. Restricted Frequency Bands

## 2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

#### 2.8.2. Test Description

#### Test Setup

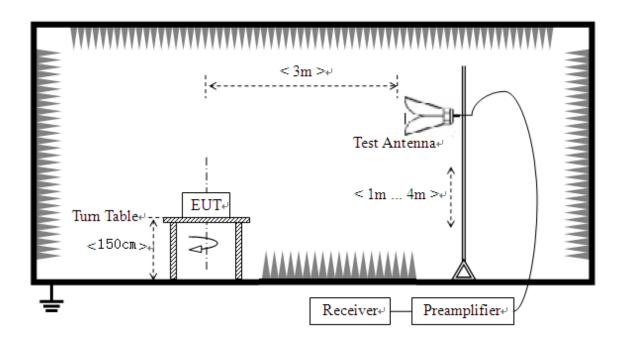

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.





## 2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

## 2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

## 802.11b Test mode

## A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict	
	(MHz)	PK/ AV	U <sub>R</sub> (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)		
1	2390.00	PK	26.14	6.74	27.20	60.08	74	PASS	
1	2390.00	AV	13.87	6.74	27.20	47.81	54	PASS	
11	2486.05	PK	25.28	6.74	27.20	59.22	74	PASS	
11	2483.74	AV	15.18	6.74	27.20	49.12	54	PASS	



## B. Test Plot:

📕 Keysight Spectrum Analyzer - Swept SA - F :42 AM Jan 12, 2021 TRACE 1 2 3 4 5 6 TYPE MWWWW DET P P N N N N Aug Type: Voltage Avg|Hold:>100/100 Marker 1 2.373112000000 GHz PRO: Fast PREAMP PREAMP PREAMP PREAMP PRO: Fast F D Marker Select Marker Mkr1 2.373 11 GHz 25.427 dBµV 10 dB/div -og Ref 86.99 dBµV Normal Delta ▲1 <mark>^2</mark> **Fixed** Start 2.30000 GHz #Res BW (CISPR) 1 MHz Stop 2.41200 GHz Sweep 1.000 ms (1001 pts) #VBW 3.0 MHz Off FUNCTION FUNC 2.373 11 GHz 2.390 00 GHz 25.427 dBµV 26.135 dBµV N 1 f N 1 f **Properties** More 1 of 2

(PEAK,Channel = 1, 802.11b)



(AVG,Channel = 1, 802.11b)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn

E-mail: service@morlab.cn



💓 Keysight Sp 🗶 RL	pectrum Analyzer - Swept SA RF PRESEL 50 Ω DC		SENSE:	INT	ALIGN OFF	06:20:46 AM Jan 12, 2021	
	2 2.4860540000			#Avg	Type: Voltage Hold:>100/100	TRACE 1 2 3 4 5 TYPE MWWWW DET P N N N N	6 Marker
	PREAMP	IFGain:Low	#Atten: 10 dl	3			Select Marker
10 dB/div	Ref 86.99 dBµ	V			Mkr2	2.486 054 GH 25.275 dBµ\	2
<b>Log</b> 77.0 67.0	~						Normal
57.0 47.0 37.0				<u>∧1</u> <u>∧</u> 2			Delta
27.0 17.0 6.99				and and and and	Addenter name of the state	การแหล่งเหรือน่างให้มีให้การกระแห่งไหล่มหา	Fixed⊳
	6200 GHz					Stop 2.50000 GH	
#Res BW		#VE	3W 3.0 MHz Y	FUNCTION	Sweep 1	.000 ms (1001 pts	
1 N 2 N 3 4 5 6		.483 614 GHz .486 054 GHz	24.850 dBµV 25.275 dBµV				Properties►
7 8 9 10 11							More 1 of 2
MSG			III		STATUS	S	

### (PEAK,Channel = 11, 802.11b)



#### (AVG,Channel = 11, 802.11b)

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



## 802.11g Test mode

#### A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading A <sub>T</sub>		A <sub>Factor</sub>	Max. Emission	Limit	Verdict	
Channel	(MHz)	PK/ AV	U <sub>R</sub> (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdict	
1	2390.00	PK	29.60	6.74	27.20	63.54	74	PASS	
1	2390.00	AV	16.06	6.74	27.20	50.00	54	PASS	
11	2484.57	PK	29.71	6.74	27.20	63.65	74	PASS	
11	2483.66	AV	15.23	6.74	27.20	49.17	54	PASS	

#### B. Test Plot:

E Keysight S R L	pectrum Analyzer - S RF PRESEL 50			SEN	SE:INT		ALIGN OFF	09:13:27 PM	I Jan 18, 2021	- 2
larker '	1 2.3876960 PREAMP	000000 GH	Z O: Fast 📮 ain:Low		Run		e: Voltage	TRAC	E 123456 E MAWWW T P P N N N N	Marker Select Marker
0 dB/div	Ref 86.99						Mkr	1 2.387 29.43	70 GHz 9 dBµV	Select Marker
.og										Norma
67.0 57.0									m	
47.0 37.0								12 ~~~		Delt
27.0	the and a second second	An and the second s	The office of the	Andrew and a second	anter la constante a const	(Al-Table) و معرفه معرفه	non-harrowyalla			Fixed
6.99 3.01										Fixed
	10000 GHz (CISPR) 1 N	IHz	#VBV	V 3.0 MHz			Sweep 1	Stop 2.41 .000 ms (′	200 GHz 1001 pts)	o
	TRC SCL 1 f 1 f	× 2.387 70 2.390 00		Y 29.439 dBj 29.597 dBj		TION FUN	ICTION WIDTH	FUNCTIO	N VALUE	
3 4 5									=	Properties
6 7 8 9										Mor
10				III						1 of
SG							STATU	3		

#### (PEAK,Channel = 1, 802.11g)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



📜 Keysight Sp	ectrum Analyzer - RF PRESEL 5			SENS	E-INT	ALIGN OFF	09:14:05 PM Jan 1	9 2021	
		2000000 G			#Av	g Type: Voltage		3456	Marker
1	PREAMP		PNO: Fast G Gain:Low	#Atten: 10			DET A P	NNNN	Select Marker
10 dB/div	Ref 86.9	9 dBµV				Mk	1 2.389 71 15.909 d	GHz ΒμV	1
<b>Log</b> 77.0 67.0									Normal
57.0 47.0 37.0							ſ		Delta
27.0 17.0 6.99							1		Fixed⊳
	0000 GHz CISPR) 1 I	MHz	#VBV	V 3.0 MHz*		Sweep	Stop 2.41200 16.58 s (1001	GHz 1 pts)	Off
MKR MODE T 1 N 2 N 3 4 5 6		× 2.389 2.390	71 GHz 00 GHz	ү 15.909 dBµ 16.058 dBµ		FUNCTION WIDTH	FUNCTION VAL	UE	Properties▶
7 8 9 10 11				II				- -	More 1 of 2
MSG						STATU	s		

## (AVG,Channel = 1, 802.11g)



(PEAK,Channel = 11, 802.11g)





⊂ ∂ ×	5 6	M Jan 18, 20 E 1 2 3 4 E M WWW T A P N N	TRAC	ALIGN OFF e: Voltage >100/100	lun	SENSE	<b>−Z</b> NO: Fast G	DC 00000 GI	Analyzer - Sw SEL 50 ຊ 336580	RF PF	RL
Select Marker	<b>HZ</b>		2.483 6	Mkr2	iΒ	#Atten: 10 c	Gain:Low	IF	амр f 86.99		dB/c
Normal											<b>7.0</b> 7.0
Delta					0						7.0 7.0 7.0 7.0
Fixed⊳					 						7.0
Off	Hz ts)	0000 GH 1001 pt	Stop 2.50 5.625 s (	Sweep	FUNC	3.0 MHz*	#VBW	lz ×	R) 1 M	2.46200 N (CIS	es B
Properties►		JN VALUE	TONCH		/	15.209 dBµ\ 15.231 dBµ\	0 GHz 8 GHz	2.483 50 2.483 65		1 f	1 N 2 N 3 4 5 6
More 1 of 2	-	•									7 8 9 0
			;	STATUS							3

(AVG,Channel = 11,802.11g)





## 802.11n(HT20) Test mode

#### A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U <sub>R</sub> (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	
1	2390.00	PK	28.97	6.74	27.20	62.91	74	PASS
1	2390.00	AV	16.07	6.74	27.20	50.01	54	PASS
11	2484.76	PK	32.98	6.74	27.20	66.92	74	PASS
11	2483.50	AV	17.04	6.74	27.20	50.98	54	PASS

#### B. Test Plot:



(PEAK,Channel = 1, 802.11n(HT20))



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



LXI RL	pectrum Analyzer RF PRESEL	50 Ω DC		SEN	SE:INT		ALIGN OFF		M Jan 18, 2021	Marker
Marker '	1 2.38971 PREAMP	2000000	PNO: Fast G IFGain:Low	Trig: Free #Atten: 10		#Avg Typ Avg Hold	e: Voltage :>100/100	TY	CE 1 2 3 4 5 6 PE MA WWWW A P N N N N	Select Marker
10 dB/div	Ref 86.9	99 dBµV					Mkr	1 2.389 15.95	71 GHz 6 dBµV	
277.0										Normal
57.0										_
47.0 37.0									$\int$	Delta
27.0								<b>1</b>		
6.99										Fixed⊳
	0000 GHz							Stop 2.4	1200 GHz	
	(CISPR) 1		#VBV	V 3.0 MHz*	FUNC			16.58 s (	1001 pts)	Off
1 N 2 N	1 f 1 f	2.38	9 71 GHz 0 00 GHz	15.956 dBi 16.067 dBi	JV			TONCT		
3 4 5										Properties►
6 7 8 9										More
9 10 11									•	1 of 2
MSG							STATUS	5	,	

#### (AVG,Channel = 1, 802.11n(HT20))



(PEAK,Channel = 11, 802.11n(HT20))

**MORLAB** 

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

E-mail: service@morlab.cn



□ @ <mark>●</mark> Marker	56	I Jan 18, 20 E <b>1 2 3 4</b> E M₩₩₩ T A P N N	09:00:19 P TRAC TYI	ALIGN OFF e: Voltage :>100/100			ense:		Z IO: Fast	DC 0000 GI	nalyzer - Swe EL 50 Ω <b>369600</b>	RF PRE	L	( <mark>R</mark>
Select Marker 2	12	96 GI	2.483 6 16.93	Mkr2		В	10 dl	#Atten:	Gain:Low	IF	мр 86.99 d	PRE/	B/div	
Norm														. <b>og</b> 77.0 67.0
Deli														57.0 47.0 37.0 27.0
Fixed						\$ <sup>2</sup>								17.0 17.0 5.99 3.01
c	Hz ts)	1001 pi	Stop 2.50 5.625 s (			^		10 Hz*	#VBV		GHz R) 1 MH		BW	es
Properties	Ê	ON VALUE	FUNCTION	ICTION WIDTH	TION FUI			Y 17.043 dl 16.939 dl		× 2.483 50 2.483 69		TRC SCL 1 f 1 f 1 f	N N N	1 2 3 4 5
н Мо 1 о														6 7 8 9
		•	3	STATUS				ш						11 <b>.</b>

(AVG,Channel = 11, 802.11n(HT20))





## 2.9. Radiated Emission

#### 2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2**: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).







## 2.9.2. Test Description

#### **Test Setup:**

1) For radiated emissions from 9kHz to 30MHz

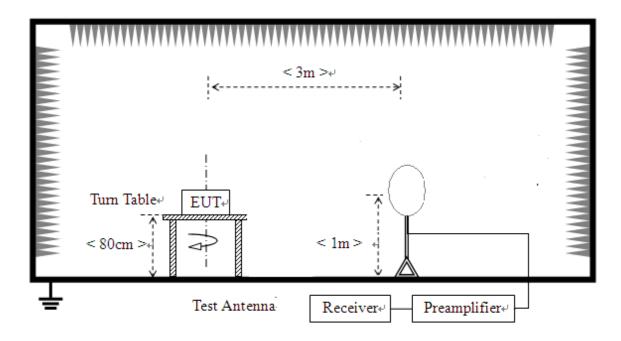

2) For radiated emissions from 30MHz to1GHz

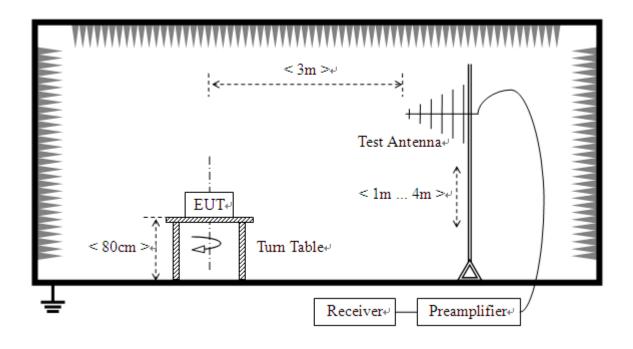




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China 
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3) For radiated emissions above 1GHz

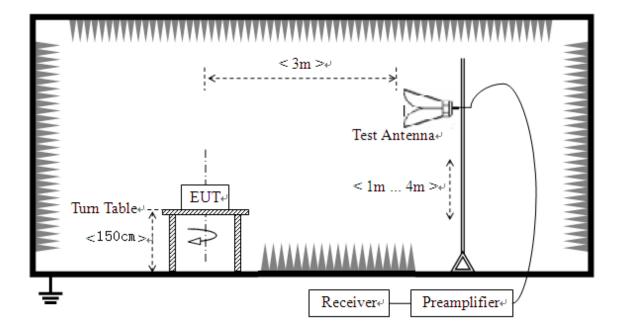

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz.The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.





## 2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:  $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$   $A_T$ : Total correction Factor except Antenna  $U_R$ : Receiver Reading  $G_{preamp}$ : Preamplifier Gain  $A_{Factor}$ : Antenna Factor at 3m During the test, the total correction Factor  $A_T$  and  $A_{Factor}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**Note3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






#### 802.11b Test mode

#### Plot for Channel 1

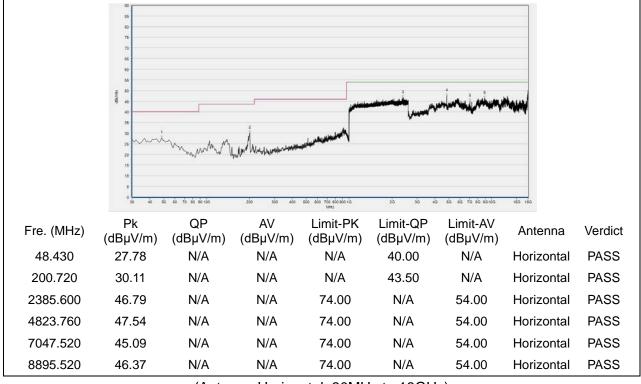

(Antenna Horizontal, 30MHz to 18GHz)

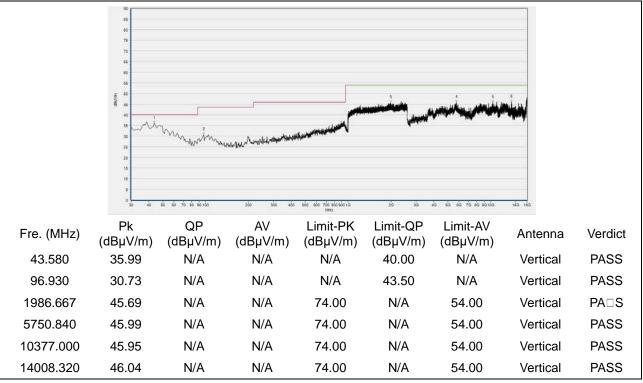

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525


E-mail: service@morlab.cn



#### Plot for Channel 6

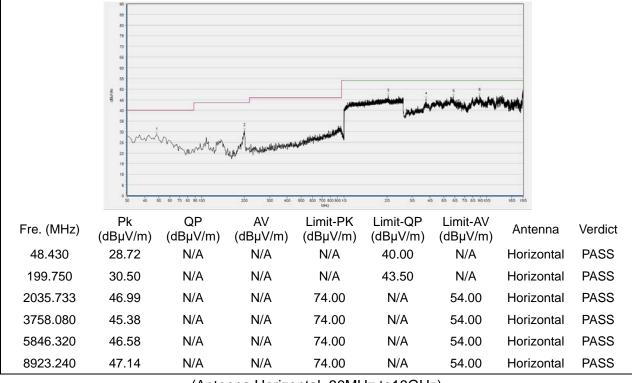

(Antenna Horizontal, 30MHz to18GHz)

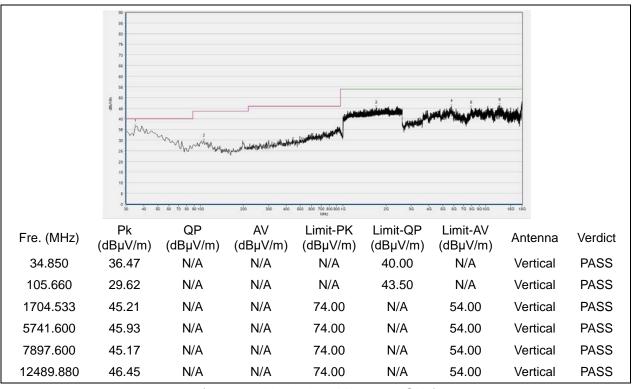

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn


Page 58 of 69



#### Plot for Channel 11

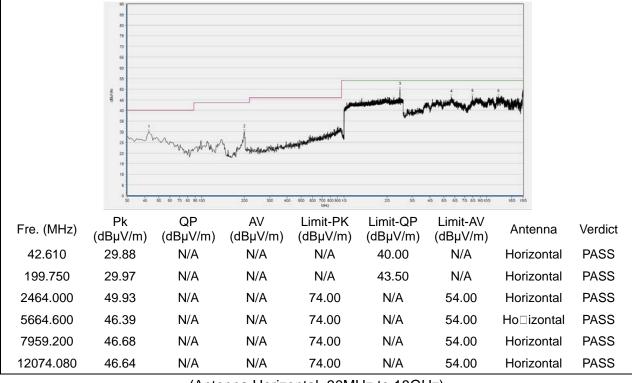

(Antenna Horizontal, 30MHz to 18GHz)

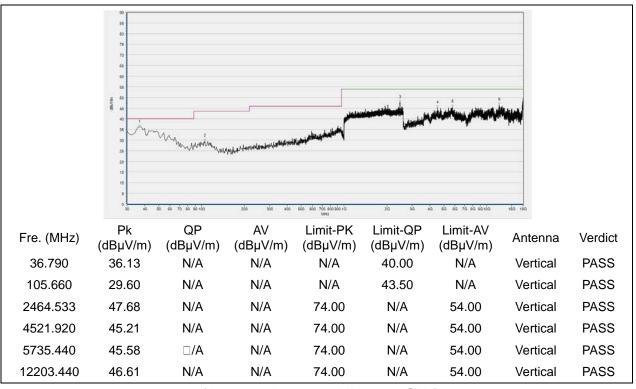


(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn




## 802.11g Test mode



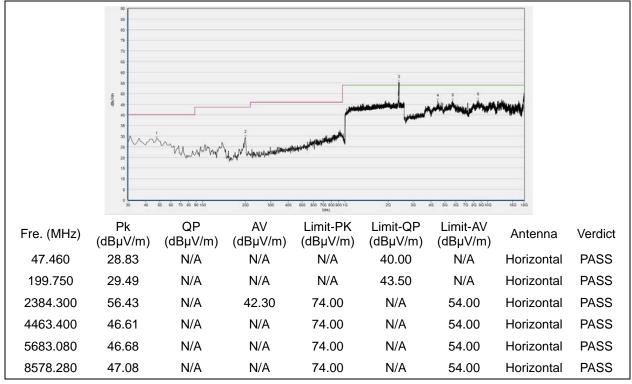

(Antenna Horizontal, 30MHz to 18GHz)

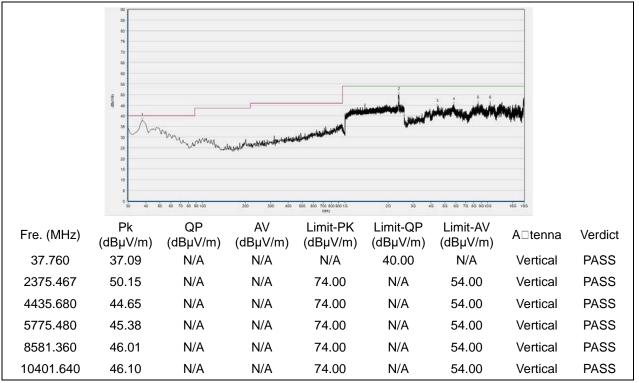

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525


E-mail: service@morlab.cn



#### Plot for Channel 6

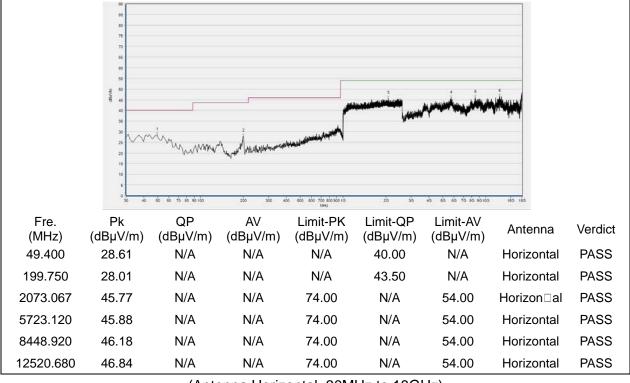

(Antenna Horizontal, 30MHz to 18GHz)

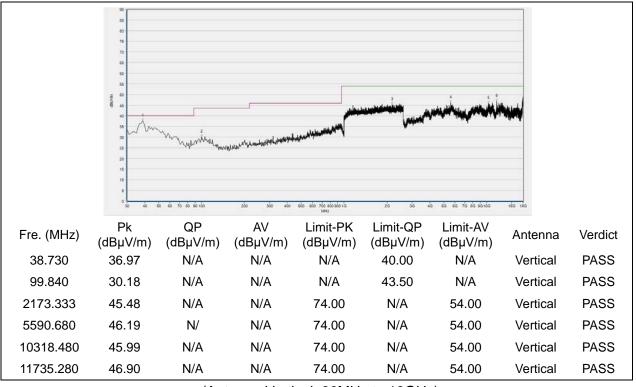

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn


Fax: 86-755-36698525 E-mail: service@morlab.cn



#### Plot for Channel 11

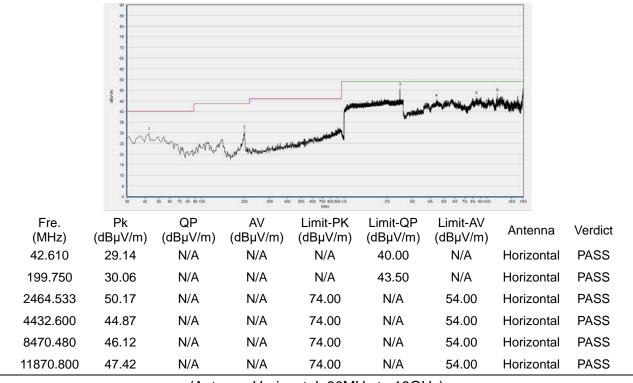

(Antenna Horizontal, 30MHz to 18GHz)

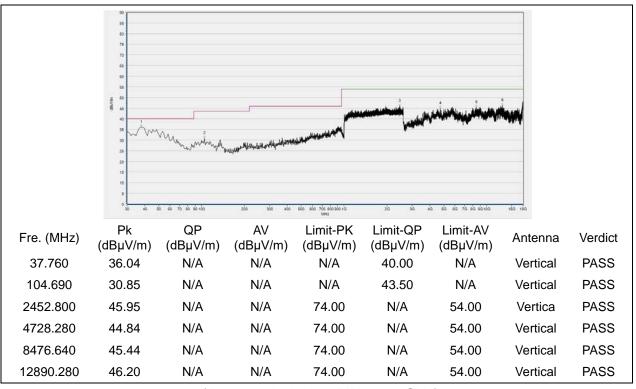

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn


Page 62 of 69



#### 802.11n(HT20) Test mode

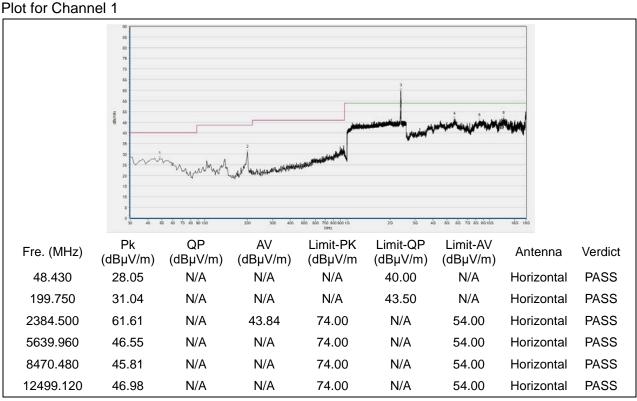

(Antenna Horizontal, 30MHz to 18GHz)

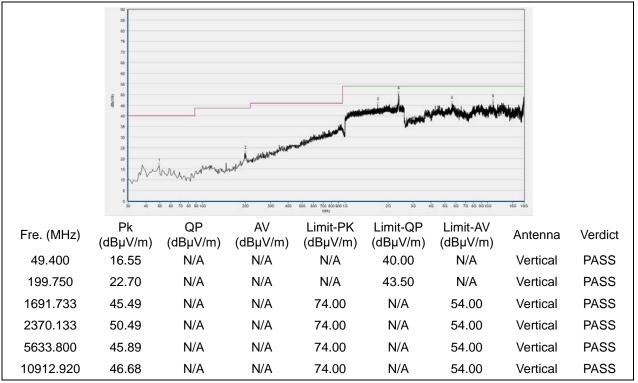

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525

E-mail: service@morlab.cn






#### Plot for Channel 6

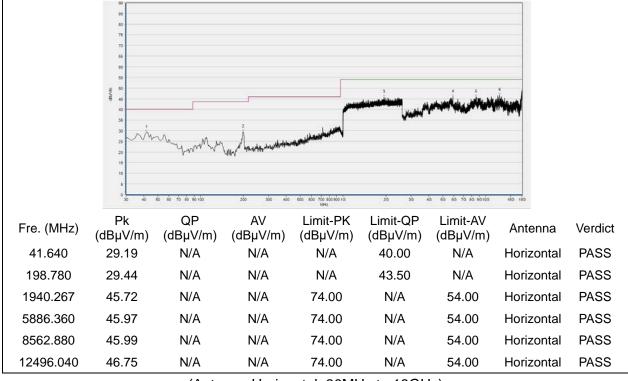

(Antenna Horizontal, 30MHz to 18GHz)

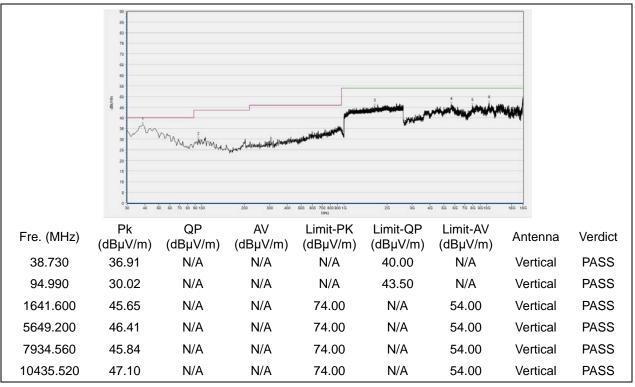

(Antenna Vertical, 30MHz to 18GHz)




SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn


Fax: 86-755-36698525 E-mail: service@morlab.cn



#### Plot for Channel 11

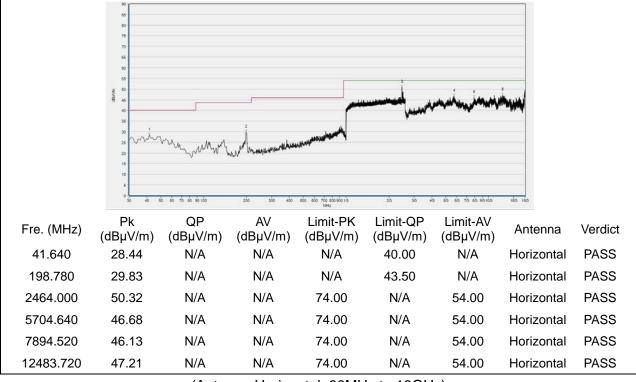

(Antenna Horizontal, 30MHz to 18GHz)

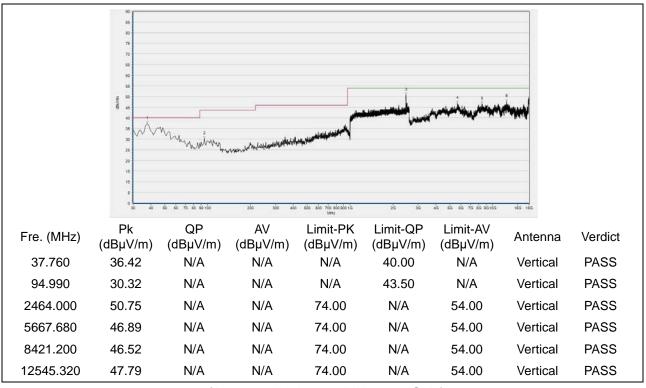

(Antenna Vertical, 30MHz to 18GHz)



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn

Page 65 of 69



# **Annex A Test Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd. FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



# **Annex B Testing Laboratory Information**

#### 1. Identification of the Responsible Testing Laboratory

Laboratory Nama	Shenzhen Morlab Communications Technology Co., Ltd.			
Laboratory Name:	Morlab Laboratory			
	FL.3, Building A, FeiYang Science Park, No.8 LongChang			
Laboratory Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong			
	Province, P. R. China			
Telephone:	+86 755 36698555			
Facsimile:	+86 755 36698525			

#### 2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory		
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China		

#### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013and CISPR Publication 22; the FCC designation number is CN1192,the test firm registration number is 226174.





## 4. Test Equipments Utilized

#### **4.1 Conducted Test Equipments**

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Attenuator 1	(N/A.)	10dB	Resent	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

#### 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	8127449	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
Adapter	NA	HA-190501 00UU	HONGGUAN GDE	N/A	N/A

#### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Townsend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0





## 4.4Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.05.24	2022.05.23
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

\_\_\_\_\_ END OF REPORT \_

