

# **TEST REPORT**

Product Name :		BLUETOOTH WIRELESS HEADPHONES CO-B48, M1 – B48				
Model Number :						
FCC ID	:	EMOB48A				
Prepared for Address	:	SDI Technologies Inc. 1299, Main Street, Rahway, NJ 07065, U.S.A.				
Prepared by Address	:	EMTEK (DONGGUAN) CO., LTD. -1&2/F.,Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China				
		TEL: +86-0769-22807078 FAX: +86-0769-22807079				
Report Number Date(s) of Tests	:	EDG2206280241E00401R June 28, 2022 to July 14, 2022				

Date of issue : July 14, 2022

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -1&2/F , Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



# **Table of Contents**

1	TEST	RESULT CERTIFICATION	3
2	EUT	FECHNICAL DESCRIPTION	5
3	SUM	MARY OF TEST RESULT	7
4	TEST	METHODOLOGY	8
	4.1 4.2 4.3	GENERAL DESCRIPTION OF APPLIED STANDARDS MEASUREMENT EQUIPMENT USED DESCRIPTION OF TEST MODES	8
5	FACIL	ITIES AND ACCREDITATIONS	10
	5.1 5.2 5.3	FACILITIES EQUIPMENT LABORATORY ACCREDITATIONS AND LISTINGS	
6	TEST	SYSTEM UNCERTAINTY	11
7	SETU	IP OF EQUIPMENT UNDER TEST	12
	7.1 7.2 7.3 7.4 7.5	RADIO FREQUENCY TEST SETUP 1 RADIO FREQUENCY TEST SETUP 2 CONDUCTED EMISSION TEST SETUP BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM SUPPORT EQUIPMENT	
8	FREG	QUENCY HOPPING SYSTEM REQUIREMENTS	-
	8.1 8.2 8.3 8.4	STANDARD APPLICABLE EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE EQUAL HOPPING FREQUENCY USE FREQUENCY HOPPING SYSTEM	16 17
9	TEST	REQUIREMENTS	
	9.1 9.2 9.3 9.4 9.5 9.6 9.7	20DB&99%BANDWIDTH CARRIER FREQUENCY SEPARATION NUMBER OF HOPPING FREQUENCIES AVERAGE TIME OF OCCUPANCY (DWELL TIME) MAXIMUM PEAK CONDUCTED OUTPUT POWER CONDUCTED SUPRIOUS EMISSION RADIATED SPURIOUS EMISSION	29 40 43 48 54
	9.8 9.9	CONDUCTED EMISSION TEST ANTENNA APPLICATION	
	0.0		

 
 东莞市信測科技有限公司
 歩地:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F ,,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,
 Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



# **1 TEST RESULT CERTIFICATION**

Applicant	: SDI Technologies Inc.
Address	: 1299, Main Street, Rahway, NJ 07065, U.S.A.
Manufacturer	: eKids, LLC. / KIDDESIGNS INC.
Address	: 1299, Main Street, Rahway, NJ 07065, U.S.A.
EUT	: BLUETOOTH WIRELESS HEADPHONES
Model Name	CO-B48, M1 – B48 M2M3M4M5M6M7M8M9M10 (M1 – M10, please refer to model no. table)
Trademark	: eKids / iHome

# Measurement Procedure Used:

APPLICABLE STANDARDS						
STANDARD TEST RESU						
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS					
IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 2(02-2017)	PASS					

The above equipment was tested by EMTEK(DONGGUAN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247, IC RSS-247 Issue 2 and IC RSS-GEN, Issue 5.

The test results of this report relate only to the tested sample identified in this report

Date of Test :	June 28, 2022 to July 14, 2022
Prepared by :	film Kang
	Xia Yang /Editor
	Tim Dong
Reviewer :	V
	Tim Dong/ Supervisor
	TESTING COLLEGE
Approve & Authorized Signer :	Sam Lv / Manager

 东莞市信測科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.

 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,
 Dongguan, Guangdong,China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



# **Modified History**

Version	Report No.	Revision Date	Summary
	EDG2206280241E00401R	1	Original Report



东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -1&2/F , Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 2 **EUT TECHNICAL DESCRIPTION**

Characteristics	Description
Product:	BLUETOOTH WIRELESS HEADPHONES
Model Number:	CO-B48, M1 – B48 M2M3M4M5M6M7M8M9M10 (M1 – M10, please refer to model no. table) All products are the same, only the model number and color of appearance are different Here we selected CO-B48 for all the test
Sample:	1#
Device Type:	Bluetooth V5.0
Data Rate:	1Mbps for GFSK modulation 2Mbps for π/4-DQPSK modulation 3Mbps for 8DPSK modulation
Modulation:	GFSK, π/4-DQPSK, 8DPSK
Operating Frequency Range(s) :	2402-2480MHz
Number of Channels:	79 channels
Transmit Power Max:	-1.47 dBm
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi
Power supply:	DC 5V from UCB, DC 3.7V from battery
Product SW/HW version:	HW: V1.4 SW: V3.0.6
Radio SW/HW version:	HW: V1.4 SW: V3.0.6
Temperature Range:	-10°C ~ +60°C

Note: for more details, please refer to the User's manual of the EUT.

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层
 网址:Http://www.emtek.com.cn
 邮箱:E-mail: project@emtek.com.cn

 EMTEK(Dongguan) Co., Ltd.
 Add: -182/F , Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9; Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



# Model: $M_1 - B48 M_2 M_3 M_4 M_5 M_6 M_7 M_8 M_9 M_{10}$ ( $M_2 - M_{10}$ , please refer to model no. table)

Model no. table

Part of model #	Mı	M <sub>2</sub>	M <sub>3</sub>	M4	M5	Мs	M7	Mε	Mg	M10
Number of digit(s)	2 to 3	2	1	1	1 to 2	1	1 to 3	1 to 4	2	1
Description	2 to 3 digits alphabets combination by "a" – "Z" for brand	1 to 2 digits alphabets combination by "a" – "2" special character version Or blank	or blank	"U" for Europe version Or blank	"E" for English content Or "F" for English & French Or "3" for 3 language version Or "5" for 5 languages version Or "11" for Europe version with 11 languages	or sound effect Or "M" for sound chip with Music	Or "V9" – "V99" for year version	version brand Or	"AK" for Walmart exclusive Or "AP" for Apple exclusive Or "KS" for Kohl's exclusive Or "TG" for Target exclusive Or blank	"i" for inner carton required Or "z" for direct to consumer on-line packaging Or "OL" for Amazon packaging Or blank

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层
 网址:Http://www.emtek.com.cn
 邮箱:E-mail: project@emtek.com.cn

 EMTEK(Dongguan) Co., Ltd.
 Add: -182/F , Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9; Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



FCC Part Clause	IC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	RSS-247.5.1 RSS-Gen.6.7	Emission Bandwidth	PASS	
15.247(a)(1)	RSS-247.5.1	Carrier Frequency Separation	PASS	
15.247(a)(1)	RSS-247.5.1	Number of Hopping Frequencies	PASS	
15.247(a)(1)	RSS-247.5.1	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	RSS-247.5.4 RSS-Gen 6.12	Maximum Peak Conducted Output Power	PASS	
15.247(d)	RSS-247 5.5	Conducted Spurious Emissions	PASS	
15.247(d) 15.209 15.205	RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13 RSS-247 3.3 RSS-247 5.5	Radiated Spurious Emissions	PASS	
15.207	RSS-Gen 8.8	Conducted Emission	PASS	
15.203 15.247(b)	RSS-Gen 6.8 RSS-247 5.4	Antenna Application	PASS	
15.247 (a) (1)/g/h	-	Frequency Hopping System	PASS	

### SUMMARY OF TEST RESULT 3

NOTE1: N/A (Not Applicable)

NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

# RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: EMOB48A filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层.第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F , Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 4 **TEST METHODOLOGY**

# 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 2(02-2017) FCC KDB 558074 D01 15.247 Meas Guidance v05r02

# 4.2 MEASUREMENT EQUIPMENT USED

# **Conducted Emission Test Equipment**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Test Receiver	Rohde& Schwarz	ESCI	100137	2022/5/19	1Year
L.I.S.N.	Rohde& Schwarz	ENV216	101209	2022/5/19	1Year
RF Switching Unit	CDS	RSU-M2	38401	2022/5/19	1Year

# For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101415	2022/5/19	1Year
Power Amplifier	HP	8447F	OPTH64	2022/5/19	1Year
Bilog Antenna	Schwarzbeck	VULB9163	141	2022/5/22	1Year
Horn antenna	Schwarzbeck	BBHA9120D	1272	2022/5/22	1Year
Power Amplifier	LUNAR EM	LNA1G18-40	J1010000081	2022/5/19	1Year
Loop Antenna	Schwarzbeck	FMZB1513	1513-60	2022/05/22	2 Year
Signal Analyzer	R&S	FSV30	103039	2022/5/19	1Year
Bilog Antenna	Schwarzbeck	VULB9163	141	2022/5/22	1Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400- 2485MHz)	2	2022/05/20	1 Year

# For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wireless Connectivity Tester	R&S	CMW270	102543	2022/6/21	1Year
Automatic Control Unit	Tonscend	JS0806-2	2118060480	2022/6/21	1Year
Signal Analyzer	KEYSIGHT	N9010B	MY60242456	2022/6/21	1Year
Analog Signal Generator	KEYSIGHT	N5173B	MY61252625	2022/6/21	1Year
UP/DOWN-Converter	R&S	CMW-Z800A	100274	2022/6/21	1Year
Vector Signal Generator	KEYSIGHT	N5182B	MY61252674	2022/6/21	1Year
Frequency Extender	KEYSIGHT	N5182BX07	MY59362541	2022/6/21	1Year
Temperature&Humidity test chamber	ESPEC	EL-02KA	12107166	2022/6/21	1 Year

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层.第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F , Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



# 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation(DH5); 2Mbps for π/4-DQPSK modulation(2DH5); 3Mbps for 8DPSK modulation(3DH5);)were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)				
0	2402	39	2441						
1	2403	40	2442	76	2478				
2	2404	41	2443	77	2479				
				78	2480				
Note: fc=2402MHz+(k-1)×1MHz k=1 to 79									

Test Frequency and channel for Bluetooth

Lowest F	Lowest Frequency		Middle Frequency		st Frequency
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0 2402		39 2441		78 2480	

EMTEK (Dongguan) Co., Ltd.

**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层:第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail:project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### FACILITIES AND ACCREDITATIONS 5

# 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (DONGGUAN) CO., LTD.

-1&2/F.,Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

# 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

# 5.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description	
EMC Lab. :	Accredited by CNAS, 2020.08.27 The certificate is valid until 2024.07.05 The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2018 The Certificate Registration Number is L3150
	Accredited by FCC Designation Number: CN1300 Test Firm Registration Number: 945551
	Accredited by A2LA, April 05, 2021 The Certificate Registration Number is 4321.02
	Accredited by Industry Canada The Certificate Registration Number is CN0113
Name of Firm :	EMTEK (DONGGUAN) CO., LTD.
Site Location :	-1&2/F.,Building 2, Zone A, Zhongda Marine Biotechnology Reserch and Development Base, No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China

EMTEK (Dongguan) Co., Ltd.

充豪市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ...Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 6 **TEST SYSTEM UNCERTAINTY**

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Parameter	Measurement Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	<b>±0.5</b> ℃
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%


**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F "Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Rase No.9. Xincheng Avenue Scopekaphy High technology Industrial Development Zame Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 7 SETUP OF EQUIPMENT UNDER TEST

# 7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



# 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

# Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


# Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

# Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).




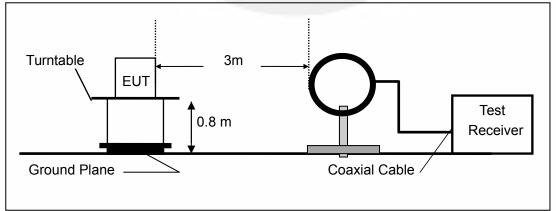

ITEK (Dongguan) Co., Ltd.


**东要市信调料按有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F .. Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



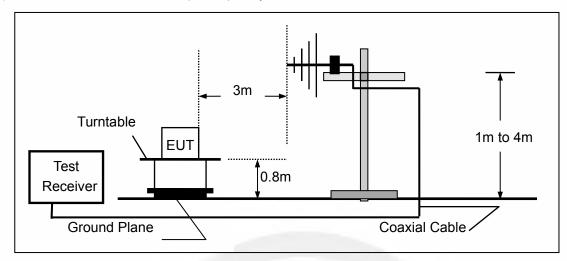

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

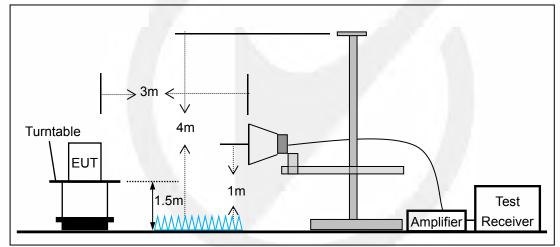

 东莞市信測科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层

 网址:Http://www.emtek.com.cn

 EMTEK(Dongguan) Co., Ltd.

 Add: -182/F
 ,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,
 Dongguan, Guangdong,China Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn




# 7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

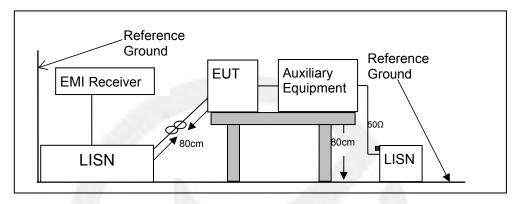


EMTEK (Dongguan) Co., Ltd.

**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地∆区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F .. Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



# 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

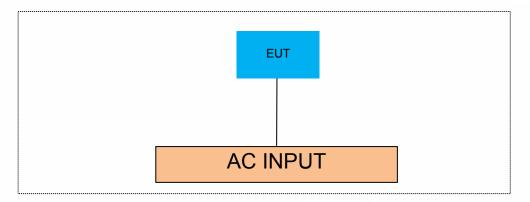

# 7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB cable	0.5	1	/

Auxiliary Cable List and Details							
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite				
1	/	/	1				

Auxiliary Equipment List and Details							
Description Manufacturer Model Serial Number							
Notebook	Lenovo	E46L	11S168003748Z0LR06E0HG				
adaptor apple / /							

# Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### FREQUENCY HOPPING SYSTEM REQUIREMENTS 8

# 8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

# 8.2 EUT Pseudorandom Frequency Hopping Sequence


The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: 29-1 = 511 bits Longest sequence of zeros: 8 (non-inverted signal)



# Linear Feedback Shift Register for Generation of the PRBS sequence

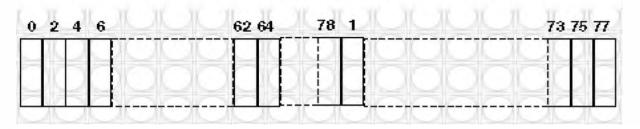

TEK (Dongquan) Co., Ltd.

**东要市信调料按有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F .. Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

# 8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode: 35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53 Each Frequency used equally on the average by each transmitter

# 8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

EMTEK (Dongquan) Co., Ltd.

**东要市信调料按有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ...Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 9 TEST REQUIREMENTS

# 9.1 20DB&99%BANDWIDTH

### 9.1.1 **Applicable Standard**

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1 and RSS-Gen.6.7

### 9.1.2 **Conformance Limit**

No limit requirement.

### 9.1.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

### 9.1.4 **Test Procedure**

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

# **Test Results**

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

EMTEK (Dongguan) Co., Ltd.

**东要市信调料按有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ...Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 20dB Emission Bandwidth

	on Banama						
TestMode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
		2402	0.939	2401.466	2402.405		
DH5	Ant1	2441	0.945	2440.463	2441.408		
		2480	0.933	2479.466	2480.399		
		2402	1.326	2401.259	2402.585		
2DH5	Ant1	2441	1.269	2440.292	2441.561		
		2480	1.287	2479.289	2480.576		
		2402	1.284	2401.277	2402.561		
3DH5	Ant1	2441	1.269	2440.277	2441.546		
		2480	1.272	2479.277	2480.549		



 东莞市信测科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F , Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,


 Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn





**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层:第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn







东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层.第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail:project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn





**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层:第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn





#Video BW 100 kHz

X Y 2.479 277 GHz -26.11 dBm 2.479 757 GHz -6.159 dBm 1.272 MHz (Δ) 0.2562 dB

Center 2.480000 GHz Res BW 30 kHz

Mode Trace Scale

**手うでご?** Jul 01, 2022 (10:26:38 AM)

6

Span 3.000 MHz Sweep 1.07 ms (1001 pts)

Function Function Width Function Value

CF Step 300.000 kHz Auto Man

req Offse

X Axis Scale

Log Lin

Signal Track

X

Local

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



# Occupied Channel Bandwidth

	lunner Dunu	WIGUI					
TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
		2402	0.86405	2401.487	2402.351		
DH5	Ant1	2441	0.86442	2440.486	2441.351		
		2480	0.86885	2479.482	2480.351		
		2402	1.1869	2401.330	2402.517		
2DH5	Ant1	2441	1.1884	2440.329	2441.518		
		2480	1.1883	2479.327	2480.515		
		2402	1.1883	2401.328	2402.516		
3DH5	Ant1	2441	1.1913	2440.327	2441.518		
		2480	1.1822	2479.330	2480.512		



 东莞市信测科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F , Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn






 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Access to the World

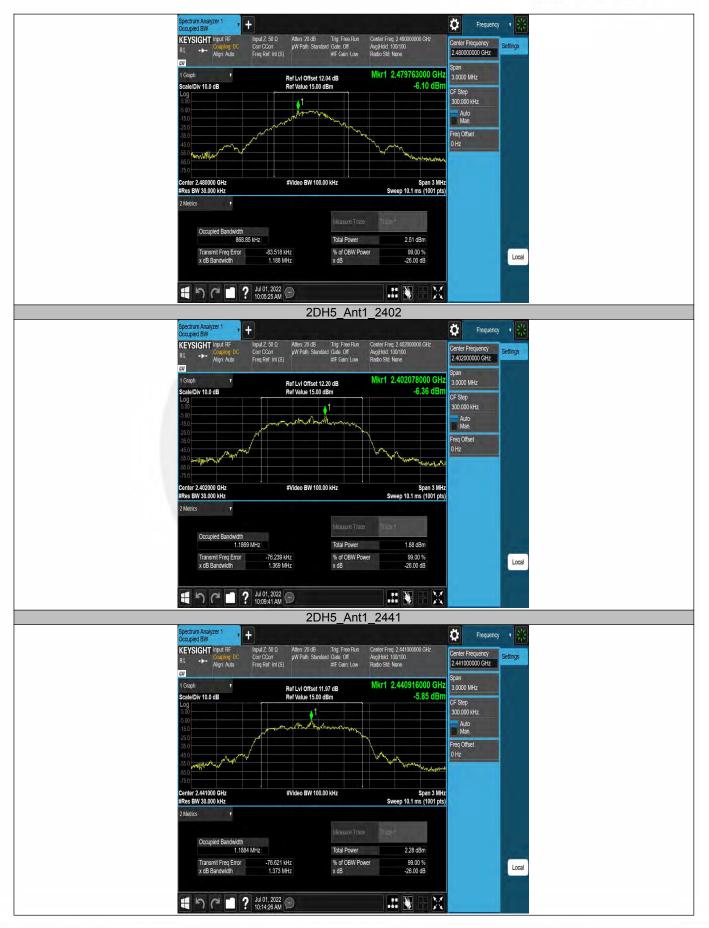

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn




2DH5\_Ant1\_2480 + Q, Frequency ctrum Analyzer upied BW Atten 20 dB Trig: Free Run µW Path: Standard Gate: Off #IF Gain: Low KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) Center Freq: 2.480 Avg|Hold: 100/100 Radio Std: None Center Frequency 2.480000000 GHz Align: Auto LNI Mkr1 2.480090000 GHz Graph Ref LvI Offset 12.04 dB Ref Value 15.00 dBm -6.90 dB cale/Div 10.0 dB CF Step 300.000 kHz ١ Auto Man Freq Offset Span 3 MHz Sweep 10.1 ms (1001 pts) Center 2.480000 GHz #Res BW 30.000 kHz #Video BW 100.00 kHz Metrics Occupied Bandwidth 1.1883 MHz Total Power 1.94 dBm Transmit Freq Error x dB Bandwidth -79.087 kHz 1.375 MHz % of OBW Power x dB 99.00 % -26.00 dB Local 日のでご? Jul 01, 2022 の 10:16:05 AM H 🖏 – 💥 3DH5 Ant1 2402 pectrum Analyzer 1 ccupied BW Ö + Frequency Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) Atten: 20 dB Trig: Free Run µW Path: Standard Gate: Off #IF Gain: Low Center Freq: 2.402000000 GHz Avg|Hold: 100/100 Radio Std: None KEYSIGHT Input RF Center Frequency 2.402000000 GHz ettings Align: Auto Mkr1 2.401916000 GHz Ref LvI Offset 12.20 dB Ref Value 15.00 dBm le/Div 10.0 dB -6.35 dE CF Step 300.000 kHz 止 Auto Man Freq Offset Center 2.402000 GHz #Res BW 30.000 kHz Span 3 MHz Sweep 10.1 ms (1001 pts) #Video BW 100.00 kHz Metrics Occupied Bandwidth 1.1883 MHz Total Power 1.96 dBm Transmit Freq Error x dB Bandwidth -77.859 kHz 1.359 MHz % of OBW Power x dB 99.00 % -26.00 dB Local ・ つ C 「 ? Jul 01, 2022 10:20:36 AM の X 3DH5\_Ant1\_2441

EMTEK (Dongguan) Co., Ltd.

**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层:第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -182/F , Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn







**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层:第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



# 9.2 CARRIER FREQUENCY SEPARATION

#### 9.2.1 **Applicable Standard**

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

#### 9.2.2 **Conformance Limit**

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

#### 9.2.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

### 9.2.4 **Test Procedure**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set VBW =300kHz. Set the RBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

# **Test Results**

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: For Limit = 20dB bandwidth \* 2/3

EMTEK (Dongguan) Co., Ltd.

充豪市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ...Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



TestMode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
		Hop_2402	1.012	≥0.025	PASS
DH1	Ant1	Hop_2441	1.162	≥0.025	PASS
		Hop_2480	1.186	≥0.025	PASS
		Нор	0.998	≥0.948	PASS
DUE	A pt1	Hop_2402	0.84	≥0.632	PASS
DH5	Ant1	Hop_2441	0.795	≥0.632	PASS
		Hop_2480	1.024	≥0.948	PASS
	Ant1	Hop_2402	1	≥0.025	PASS
2DH1		Hop_2441	0.964	≥0.025	PASS
		Hop_2480	1.002	≥0.025	PASS
		Нор	1.268	≥0.886	PASS
2DH5	Ant1	Hop_2402	1.32	≥0.886	PASS
2000		Hop_2441	1.008	≥0.886	PASS
		Hop_2480	0.958	≥0.886	PASS
		Hop_2402	1.006	≥0.025	PASS
3DH1	Ant1	Hop_2441	0.994	≥0.025	PASS
		Hop_2480	1.006	≥0.025	PASS
		Нор	1.014	≥0.870	PASS
3DH5	Ant1	Hop_2402	0.998	≥0.870	PASS
CUUS	AILI	Hop_2441	0.984	≥0.870	FAIL
		Hop_2480	1.304	≥0.870	PASS

Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn





 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn




Ö ectrum A ept SA + Frequency Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 20 dB PNO. Best Wide µW Path. Standard Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Power (RMS 1 2 3 4 5 Trig: Free Run KEYSIGHT Input RF Center Frequency Align: Auto 2 479500000 GHz PPPPP DU ΔMkr2 1.186 MHz Spectrum 2.00000000 MHz Ref LvI Offset 12.04 dB Ref Level 15.00 dBm 0.30 dB cale/Div 10 dB Swept Span Zero Span Full Span •2∆1 Start Freq 2.478500000 GHz MMM Amm Stop Freq 2.480500000 GHz AUTO TUNE CF Step 200.000 kHz Auto Man Freq Offset Local X Axis Scal Stop 2.480500 GHz Sweep 1.00 ms (1001 pts) #Video BW 300 kHz tart 2.478500 GHz Log Lin Res BW 100 kHz DH5 Ant1 Hop ectrum Analyzer 1 wept SA Q, + Frequency Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) PNO Best Wide #Avg Type Power (RMS 1 2 3 4 J Gale: Off Trig: Free Run MWWWW IF Gain: Low Sig Track: Off P P P P KEYSIGHT Input RF #Atten: 20 dB µW Path: Stands Center Frequency 2.441500000 GHz Settings Align: Auto рррррр L)(I AMkr2 998 kHz Spectrum Ref LvI Offset 11.97 dB Ref Level 15.00 dBm 2.00000000 MHz 0.05 d cale/Div 10 dB Swept Span Zero Span Full Span 2∆1 Start Freq 2.440500000 GHz Stop Freq 2.442500000 GHz AUTO TUNE CF Step 200.000 kHz Auto Man Freq Offse Local X Axis Scale Start 2.440500 GHz ≉Res BW 300 kHz #Video BW 300 kHz Stop 2.442500 GHz Sweep 1.00 ms (1001 pts) Log Lin **手う ペ I ?** Jun 29, 2022 🗩 DH5\_Ant1\_Hop\_2402 pectrum Analyzer 1 wept SA + Ö Frequency KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 20 dB PNO. Best Wide #Avg Type: Power (RMS 1 2 3 4 5 µW Path: Standard Gate: Off Trig: Free Run Center Freq uency ttings RL 🕞 Align Auto 2.402500000 GHz IF Gain Low Sig Track: Off рррррр LNI | ΔMkr2 840 kHz Spectrum Ref LvI Offset 12.12 dB Ref Level 15.00 dBm 3.00000000 MHz ale/Div 10 dB 0.28 dE Swept Span Zero Span 2∆1 Start Freq 2.401000000 GHz Stop Freq 2.404000000 GHz AUTO TUNE CF Step 300.000 kHz Auto Man Freq Offset Local X Axis Sc #Video BW 300 kHz Start 2.401000 GHz #Res BW 100 kHz Stop 2.404000 GHz Sweep 1.00 ms (1001 pts) Log Lin 手 ら C<sup>a</sup> II ? Jun 29, 2022 💭 10:45:07 PM 💭 .:: 🔖 X

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层.第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail:project@emtek.com.cn Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



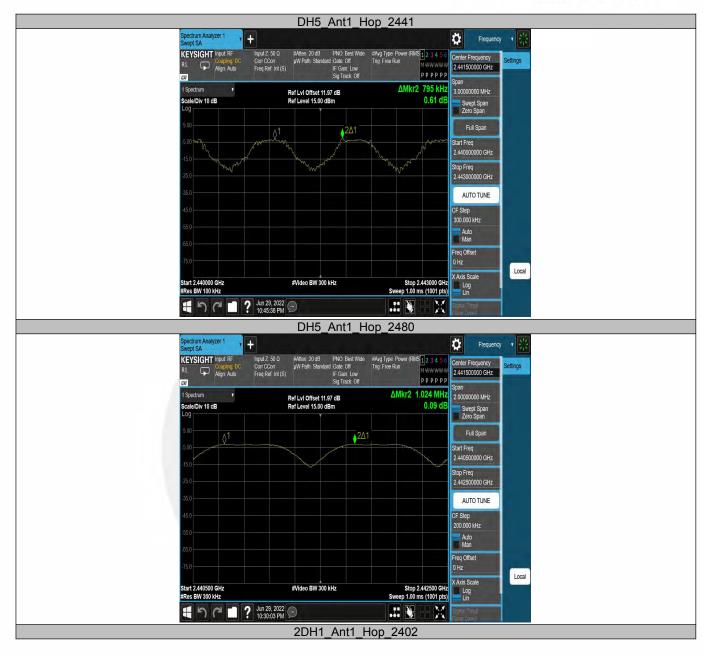

**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层:第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn







东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层.第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail:project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



2DH5\_Ant1\_Hop ectrum Ar ept SA + Q, Frequency KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 20 dB µW Path: Standa PNO: Best Wide I Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Power (RMS 1 2 3 4 1 Center Frequency 2.441500000 GHz ettings Align: Auto PPPPPP LNI ΔMkr2 1.268 MHz 1 Spectrum Ref LvI Offset 11.97 dB Ref Level 15.00 dBm 2.00000000 MHz -0.23 dE cale/Div 10 dB Swept Span Zero Span Full Span ≬1 ♦2∆1 Start Freq 2.440500000 GHz Stop Freq 2.442500000 GHz AUTO TUNE CF Step 200.000 kHz Auto Man Freq Offset Local X Axis Scale Start 2.440500 GHz #Video BW 300 kHz Stop 2.442500 GHz Sweep 1.00 ms (1001 pts) Log Lin #Res BW 300 kHz 手 ら C 🔳 ? Jun 29, 2022 🗩  $-\mathbf{M}$ 2DH5 Ant1 Hop 2402 pectrum Analyzer 1 wept SA Ö + Frequency Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten 20 dB PNO Best Wide #Avg Type Power (RMS 1 2 3 d 5 µW Path Standard Cate Off Trig Free Run M WWW WW IF Gein Low Sig Track. Off P P P P P KEYSIGHT Input RF Center Frequency 2.441500000 GHz Settings Align: Auto рррррр LNI ΔMkr2 1.320 MHz Spectrum Ref LvI Offset 11.97 dB Ref Level 15.00 dBm 2.00000000 MHz 0.05 d ale/Div 10 dB Swept Span Zero Span 2Δ1 Start Freq 2.440500000 GHz Stop Freq 2.442500000 GHz AUTO TUNE CF Step 200.000 kHz Auto Man Freq Offset 0 Hz Local X Axis Scale Start 2.440500 GHz #Res BW 300 kHz #Video BW 300 kHz Stop 2.442500 GHz Sweep 1.00 ms (1001 pts) Log Lin モッペロ? Jun 29, 2022 🗩 X 2DH5\_Ant1\_Hop\_2441

EMTEK (Dongguan) Co., Ltd.

**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层:第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn









东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层.第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail:project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



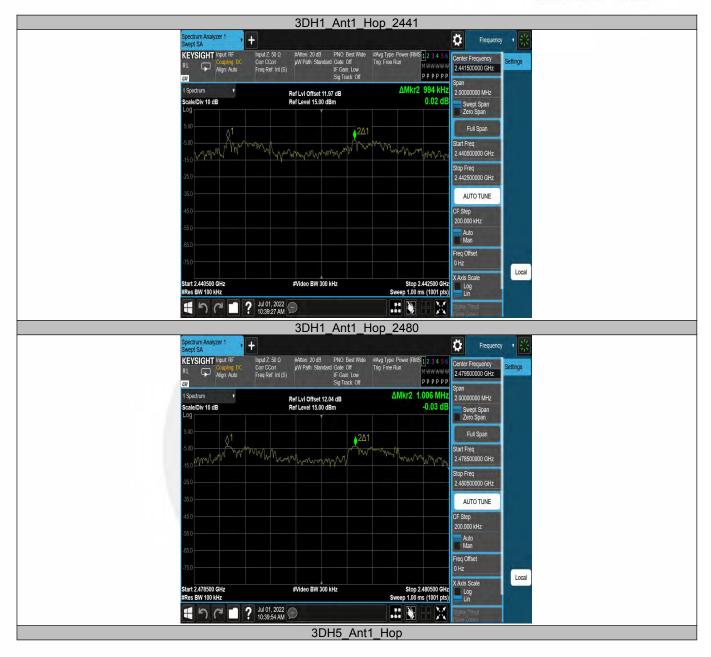



Access to the World

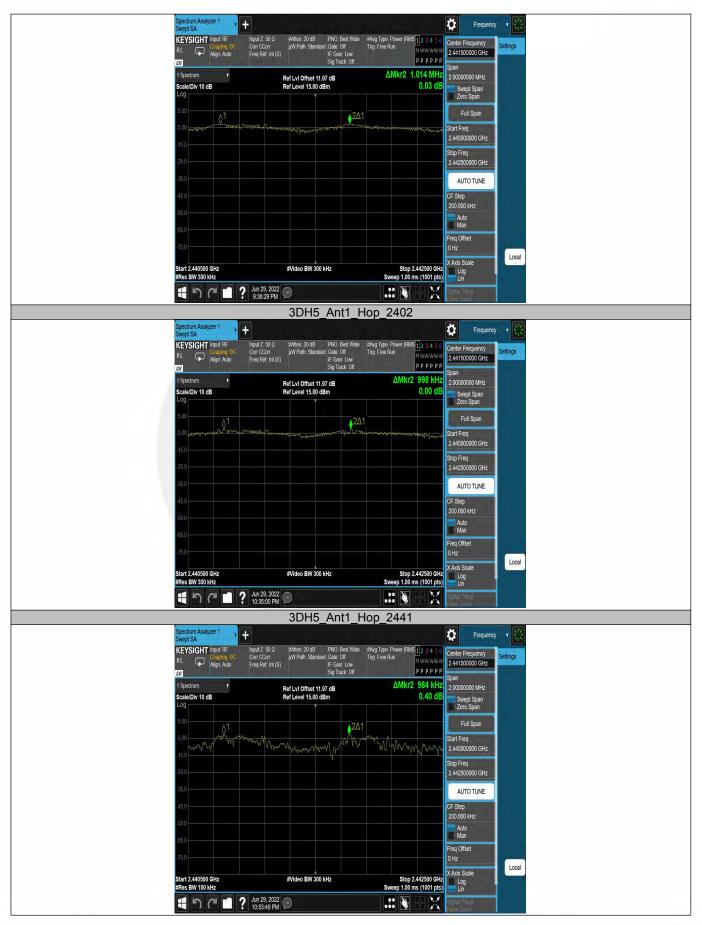

EMTEK (Dongguan) Co., Ltd.



	3DH5_Ant1_H	lop_2480	
Spectrum Analyzer 1			Frequency •
DI Coupling: DC Co	out Z: 50 Ω #Atten: 20 dB PNO. Best Wide vr CCorr μW Path: Standard Gate: Off eq Ref. Int (S) IF Gain: Low Sig Track: Off		Center Frequency 2.441500000 GHz
t Spectrum v Scale Div 10 dB Log	Ref LvI Offset 11.97 dB Ref Level 15.00 dBm	∆Mkr2 1.304 MHz 0.03 dB	Span 2.0000000 MHz
5.00	and the constraint of the cons	2D1	Full Span Start Freq 2.44050000 GHz
-15.0			2.44050000 GHz Stop Freq 2.442500000 GHz
45.0			AUTO TUNE CF: Step 20.000 HHz
-55.0			Auto Man Nan Free Offset
-75.0 Start 2.440500 GHz	#Video BW 300 kHz	Stop 2.442500 GHz	0 Hz X Avis Scale
#Res BW 300 kHz	un 29, 2022 0:33:52 PM	Sweep 1.00 ms (1001 pts)	Signal Trech Fisiar (2001)



Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 9.3 NUMBER OF HOPPING FREQUENCIES

### 9.3.1 **Applicable Standard**

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

#### 9.3.2 **Conformance Limit**

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

### 9.3.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

### 9.3.4 **Test Procedure**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = the frequency band of operation (2400-2483.5MHz) RBW = 300 KHzVBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

### **Test Results**


Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

TestMode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Нор	79	≥15	PASS
2DH5	Ant1	Нор	79	≥15	PASS
3DH5	Ant1	Нор	79	≥15	PASS

EMTEK (Dongguan) Co., Ltd.



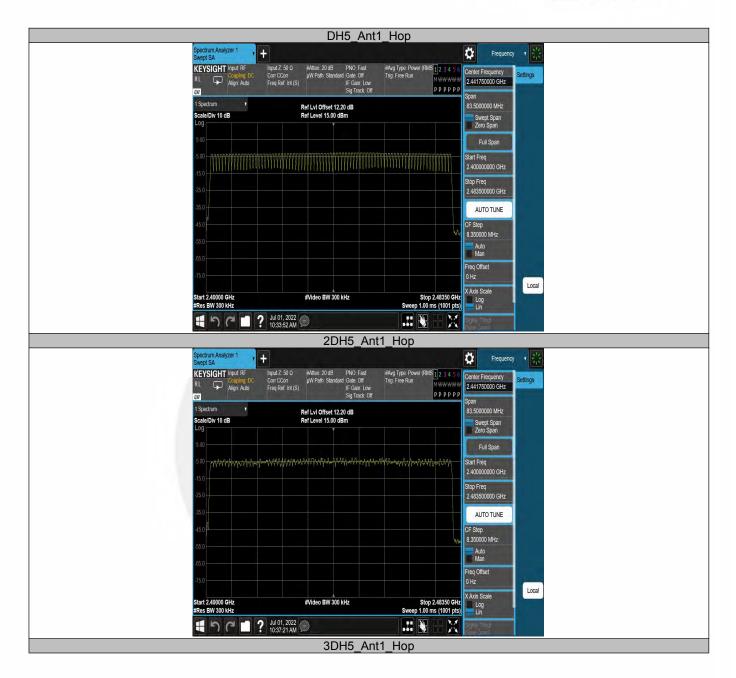


 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



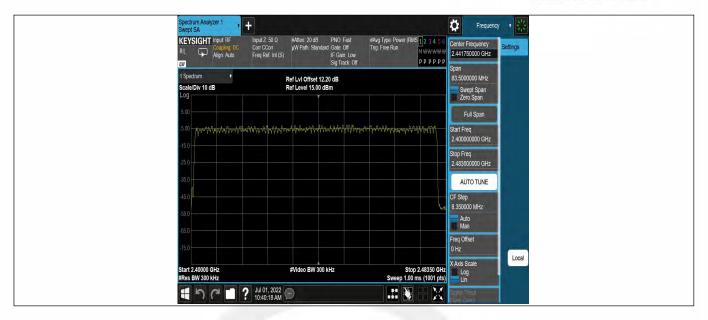



**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F , Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base No.9. Xincheng Avenue Songshaphy High-technology Industrial Development Zong Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

#### 9.4.1 **Applicable Standard**

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

#### 9.4.2 **Conformance Limit**

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

#### 9.4.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

### 9.4.4 **Test Procedure**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

 $VBW \ge RBW$ 

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value

varies with different modes of operation (e.g., data rate, modulation format, etc.),

repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.

#### 9.4.5 **Test Results**


Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: TotalHops(DH1)=(1600/2/79)\*31.6 TotalHops(DH3)=(1600/4/79)\*31.6 TotalHops(DH5)=(1600/6/79)\*31.6 Dwell Time= BurstWidth\* TotalHops

TestMode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Нор	0.36	320	0.115	≤0.4	PASS
DH3	Ant1	Нор	1.62	160	0.259	≤0.4	PASS
DH5	Ant1	Нор	2.86	106.67	0.305	≤0.4	PASS
2DH1	Ant1	Нор	0.36	320	0.115	≤0.4	PASS
2DH3	Ant1	Нор	1.62	160	0.259	≤0.4	PASS
2DH5	Ant1	Нор	2.87	106.67	0.306	≤0.4	PASS
3DH1	Ant1	Нор	0.36	320	0.115	≤0.4	PASS
3DH3	Ant1	Нор	1.61	160	0.258	≤0.4	PASS
3DH5	Ant1	Нор	2.87	106.67	0.306	≤0.4	PASS

EMTEK (Dongguan) Co., Ltd.



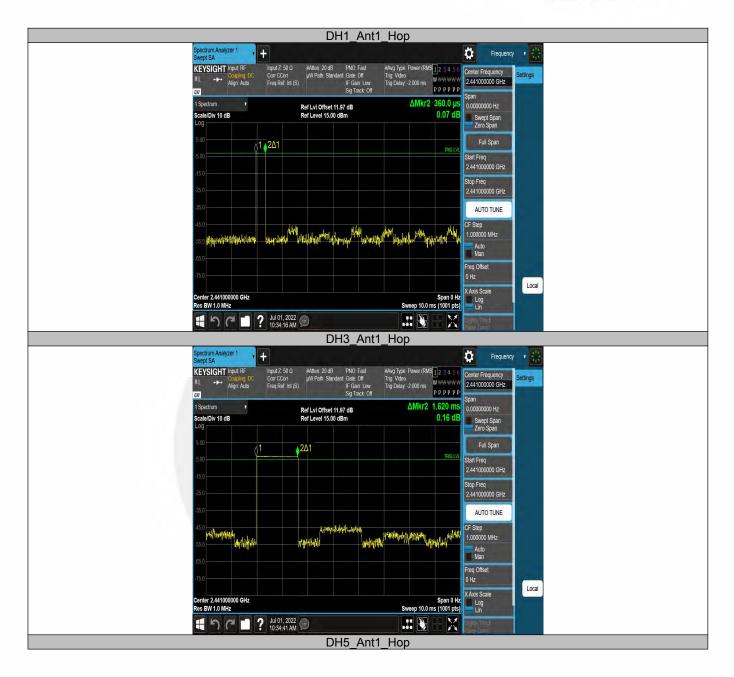

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Ö Frequency ectrum A ept SA + Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 20 dB PNO: Fast µW Path Standard Gate: Off IF Gain Low Sig Track Off #Avg Type: Power (RMS 1 2 3 4 5 Trig: Video Trig Delay: -2.000 ms KEYSIGHT Input RF nter Frequency Align: Auto ₩₩₩₩₩ ₽₽₽₽₽₽ 2 441000000 GHz LNI ΔMkr2 2.860 ms 0.00 dB 1 Spectrum 0.00000000 Hz Ref LvI Offset 11.97 dB Ref Level 15.00 dBm cale/Div 10 dB Swept Span Zero Span Full Span ▲2∆1 art Freq 2.441000000 GHz Stop Freq 2.441000000 GHz AUTO TUNE CF Step 1.000000 MHz algeddyddiadae <sub>edd</sub>daest enderstability of the second of the second Auto Man req Offset Local X Axis Sc nter 2.441000000 GHz Span 0 Hz Sweep 10.0 ms (1001 pts) Log Lin Res BW 1.0 MHz X 2DH1 Ant1 Hop ectrum Analyzer 1 vept SA + Ö Frequency Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) #Atten: 20 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Power (RMS 1 2 3 4 5 Trig: Video Trig Delay: -2.000 ms KEYSIGHT Input RF nter Frequency ttings Align: Auto W\*\*\*\*\*\* 2.441000000 GHz LNI | Spectrum ΔMkr2 360.0 μ .00000000 Hz Ref LvI Offset 11.97 dB Ref Level 15.00 dBm ale/Div 10 dB -0.25 dE Swept Span Zero Span 01 02∆1 tart Freq 2 441000000 GHz Stop Freq 2.441000000 GHz AUTO TUNE home of a the second of the colorest and the second of the color Without 1.000000 MHz Jacks. Magel. Auto Man req Offset Local X Axis Sca Center 2.441000000 GHz Res BW 1.0 MHz Span 0 Hz Sweep 10.0 ms (1001 pts) Log Lin リロロ 2022 01,2022 00 10:37:43 AM X # 2DH3\_Ant1\_Hop ectrum Analyzer ept SA Ö + Frequency v #Avg Type Power (RMS 1 2 3 4 5 6 Trig. Video Trig Delay -2.000 ms Input Z' 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 20 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off KEYSIGHT Input RF nter Frequency tings Align: Auto 2.441000000 GHz PPPPP LNI AMkr2 1.620 ms Spectrum 0.00000000 Hz Ref LvI Offset 11.97 dB Ref Level 15.00 dBm Scale/Div 10 dB -0.29 dB Swept Span Zero Span Full Span ▲2∆1 art Freq 2.441000000 GHz Stop Freq 2.441000000 GHz AUTO TUNE = Step ny dialignmental promised production and participations with help-thomas and a provide 1 000000 MHz Auto Man req Offsel Local X Axis Sc Log Lin ter 2.441000000 GHz Span 0 Hz Sweep 10.0 ms (1001 pts) Res BW 1.0 MHz 手り C\* I ? Jul 01, 2022 💬 .: 🔖

EMTEK (Dongguan) Co., Ltd.



2DH5\_Ant1\_Hop + Ö Frequency ctrum A KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 20 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Power (R/ Trig: Video Trig Delay: -2.000 ms er (RMS 1 2 3 4 5 Center Frequency 2.441000000 GHz ttings Align: Auto **PPPPP** LNI oan ΔMkr2 2.870 ms Spectrum Ref LvI Offset 11.97 dB Ref Level 15.00 dBm 0.00000000 Hz 0.35 dB cale/Div 10 dB Swept Span Zero Span 2∆1 Full Span Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz AUTO TUNE CF Step 1.000000 MHz when the provide the leaders nyin dhadaa in adda an a faharaita dha a shi ta Auto Man req Offse Local X Axis Scale Center 2.441000000 GHz Res BW 1.0 MHz Span 0 Hz Sweep 10.0 ms (1001 pts) Log Lin 手り (~ **「**? Jul 01, 2022 🗩 M 3DH1\_Ant1\_Hop ectrum Analyzer 1 ept SA + Ö Frequency #Avg Type: Power (RMS 1 2 3 4 5 Trig: Video Trig Delay: -2.000 ms Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 20 dB PNO: Fast μW Path: Standard Gate: Off IF Gain: Low Sig Track: Off KEYSIGHT Input RF nter Frequency ettings Align: Auto W\*\*\*\*\*\* 2.441000000 GHz LNI. ΔMkr2 360.0 μ Spectrum Ref LvI Offset 11.97 dB Ref Level 15.00 dBm .00000000 Hz -0.06 dB cale/Div 10 dB Swept Span Zero Span Full Span ∆1<mark>₀</mark>2∆1 tart Freq 2.441000000 GHz Stop Freq 2.441000000 GHz AUTO TUNE CF Step o Hand Hand grad and upplainterstand and the operation of the particular of the provident of the second operation of the 1.000000 MHz Auto Man req Offsel 0 Hz Local X Axis Scale Center 2.441000000 GHz Res BW 1.0 MHz Span 0 Hz Sweep 10.0 ms (1001 pts) Log 日のでご? Jul 01, 2022 の 10:40:38 AM X 3DH3 Ant1 Hop

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Spectrum Analyzer 1			Frequency V 🔆	
KEYSIGHT Input RF RL ↔ Coupling: DC Align: Auto	Input Z: 50 Ω #Atten: 20 dB PNO: Fast Corr CCorr μW Path: Standard Gate: Off Freq Ref. Int (S) Sig Track: Of Sig Track: Of		Center Frequency 2.441000000 GHz Settings	
1 Spectrum   Scale/Div 10 dB Log	Ref Lvi Offset 11.97 dB Ref Level 15.00 dBm	ΔMkr2 1.610 ms 0.28 dB	Span 0.00000000 Hz Swept Span Zero Span	
5.00	2Δ1	TRIG LVL	Full Span Start Freg	
-15.0			2.441000000 GHz Stop Freq 2.441000000 GHz	
-35.0			AUTO TUNE CF Step	
-55 0 Hythur Authorite	aldrawn prathyddi nearnap yydr	sentenyinposisisinnakohemisi	1.000000 MHz Auto Man	
-75.0			Freq Offset 0 Hz	
Center 2.441000000 GHz Res BW 1.0 MHz	Jul 01, 2022	Span 0 Hz Sweep 10.0 ms (1001 pts)	X Axis Scale	
	10:41:00 AM 2 3DH5_Ar		Saen Zooni	
Spectrum Analyzer 1			Frequency 🔹 💥	
KEYSIGHT Input RF RL ++ Align: Auto	Input Z:50 Ω #Atten: 20 dB PNO Fast Corr CCorr μW Path: Standard Gate: Off Freq Ref. Int (S) IF Gain: Low Sig Track: Of	#Avg Type: Power (RMS 1 2 3 4 5 6 Trig: Video Trig Delay -2.000 ms P P P P P P	Center Frequency 2.441000000 GHz	
1 Spectrum   Scale/Div 10 dB Log	Ref LvI Offset 11.97 dB Ref Level 15.00 dBm	ΔMkr2 2.870 ms 7.70 dB	Span 0.00000000 Hz Swept Span Zero Span	
5.00	201	TRIG LVL	Full Span	
=15.0			2.441000000 GHz Stop Freq	
-35.0			2.441000000 GHz	
-45.0 -55.0 4947444041444444444444444444444444444444	within the second s	unionidation of the second statements	CF Step 1.000000 MHz	
-85.0			Man Freq Offset 0 Hz	
Center 2.441000000 GHz Res BW 1.0 MHz		Span 0 Hz Sweep 10.0 ms (1001 pts)	X Axis Scale Log Lin	
- 50-?	Jul 01, 2022 10:41:21 AM	# 🚯 🗕 🔀	Signal Track ISaen Zoomi	

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn



### 9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

#### 9.5.1 **Applicable Standard**

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.4 and RSS-Gen 6.12

#### 9.5.2 **Conformance Limit**

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### 9.5.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

#### 9.5.4 **Test Procedure**

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 8MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW ≥ RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

### **Test Results**

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A


EMTEK (Dongguan) Co., Ltd.



Test Mode	Antenna	Freq(MHz)	Conducted Peak Powert[dBm]	Conducted Limit[dBm]	Verdict
		2402	-3.22	≤20.97	PASS
DH5	Ant1	2441	-2.8	≤20.97	PASS
		2480	-3.28	≤20.97	PASS
		2402	-2.42	≤20.97	PASS
2DH5	Ant1	2441	-1.9	≤20.97	PASS
		2480	-2.36	≤20.97	PASS
		2402	-1.95	≤20.97	PASS
3DH5	Ant1	2441	-1.47	≤20.97	PASS
		2480	-1.85	≤20.97	PASS





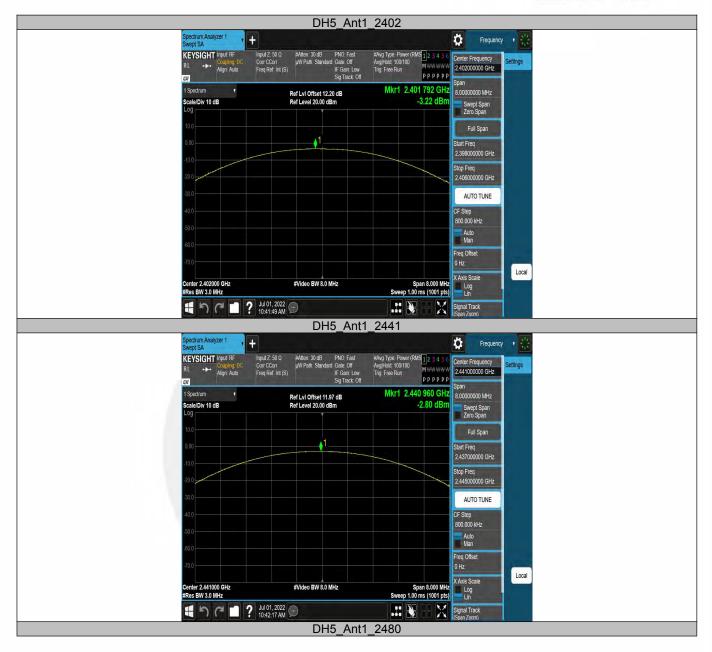

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Ö Frequency ectrum A ept SA + #Avg Type: Power (RMS 1 2 3 4 5 Avg|Hold: 100/100 Trig: Free Run KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 30 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off nter Frequency Align: Auto 2 480000000 GHz P P P P P P DU Mkr1 2.479 904 GHz 1 Spectrum 8.00000000 MHz Ref LvI Offset 12.04 dB Ref Level 20.00 dBm -3.28 dBr cale/Div 10 dB Swept Span Zero Span • art Freq 2.476000000 GHz Stop Freq 2.484000000 GHz AUTO TUNE CF Step 800.000 kHz Auto Man req Offset Local X Axis Sc #Video BW 8.0 MHz Span 8.000 MHz Sweep 1.00 ms (1001 pts) ter 2.480000 GHz Log Lin #Res BW 3.0 MHz X モッペロ? Jul 01, 2022 🗩 Signal Track 2DH5 Ant1 2402 ectrum Analyzer 1 wept SA Ö + Frequency #Avg Type: Power (RMS 1 2 3 4 5 Avg|Hold: 100/100 Trig: Free Run Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) #Atten: 30 dB PNO Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off KEYSIGHT Input RF nter Frequency ttings Align: Auto 2.402000000 GHz рррррр LXI Spectrum Mkr1 2.402 016 GH 3.00000000 MHz Ref LvI Offset 12.20 dB Ref Level 20.00 dBm ale/Div 10 dB -2.42 dB Swept Span Zero Span 1 tart Freq 2 398000000 GHz Stop Freq 2.406000000 GHz AUTO TUNE 800.000 kHz Auto Man req Offset Local X Axis Sca Span 8.000 MHz Sweep 1.00 ms (1001 pts) #Video BW 8.0 MHz Center 2.402000 GHz #Res BW 3.0 MHz Log Lin X 手う ペ 🖬 ? Jul 01, 2022 🗩 Signal Track 2DH5\_Ant1\_2441 ectrum Analyzer 1 wept SA Ö + Frequency v #Avg Type: Power (RMS 1 2 3 4 5 6 Avg|Hold 100/100 Trig: Free Run #Atten: 30 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) KEYSIGHT Input RF nter Frequency tings 2.441000000 GHz Align: Auto PPPPP LNI Spectrum Mkr1 2.441 016 GHz 8.00000000 MHz Ref LvI Offset 11.97 dB Ref Level 20.00 dBm Scale/Div 10 dB -1.90 dB Swept Span Zero Span art Freq 2.437000000 GHz Stop Freq 2.445000000 GHz AUTO TUNE CF Step 800.000 kHz Auto Man req Offset Local X Axis Sc Log Lin #Video BW 8.0 MHz Span 8.000 MHz Sweep 1.00 ms (1001 pts) nter 2.441000 GHz #Res BW 3.0 MHz 手り C<sup>4</sup> **1** ? Jul 01, 2022 🗩 X .:: 🔖 anal Trac

EMTEK (Dongguan) Co., Ltd.



2DH5\_Ant1\_2480 ectrum Ar ept SA + Ö Frequency KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 30 dB PNO: Fast μW Path: Standard Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Power Avg|Hold: 100/100 Trig: Free Run (RMS 1 2 3 4 5 Center Frequency 2.480000000 GHz ettings Align: Auto PPPPPP LNI oan Mkr1 2.480 088 GHz Spectrum Ref LvI Offset 12.04 dB Ref Level 20.00 dBm 8.00000000 MHz -2.36 dBr Scale/Div 10 dB Swept Span Zero Span Full Span 1 Start Freq 2.476000000 GHz Stop Freq 2.484000000 GHz AUTO TUNE CF Step 800.000 kHz Auto Man req Offsel Local Span 8.000 MHz Sweep 1.00 ms (1001 pts) X Axis Scale Center 2.480000 GHz #Res BW 3.0 MHz #Video BW 8.0 MHz 手う C\* 🖬 ? Jul 01, 2022 🗩 M # 😽 Signal Track 3DH5\_Ant1\_2402 ectrum Analyzer 1 ept SA + Ö Frequency #Atten: 30 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Avg Type: Power (RMS 1 2 3 4 5 Avg|Hold: 100/100 Trig: Free Run KEYSIGHT Input RF nter Frequency ettings Align: Auto м<del>~~~</del>~~~~~ 2.402000000 GHz LNI. Mkr1 2.401 840 GH Spectrum .00000000 MHz Ref LvI Offset 12.20 dB Ref Level 20.00 dBm -1.95 dBr cale/Div 10 dB Swept Span Zero Span 1 Start Freq 2.398000000 GHz Stop Freq 2.406000000 GHz AUTO TUNE CF Step 800.000 kHz Auto Man req Offset 0 Hz Local X Axis Scale Center 2.402000 GHz #Res BW 3.0 MHz Span 8.000 MHz Sweep 1.00 ms (1001 pts) #Video BW 8.0 MHz Log Lin 日う ペ ロ ? Jul 01, 2022 の X Signal Track 3DH5 Ant1 2441

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



+ Ö Frequency ectrum Ar ept SA #Avg Type Power (RMS 1 2 3 4 5 Avg|Hold 100/100 Trig Free Run KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 30 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off nter Frequency RL Align: Auto м<del>\*\*\*</del>\*\*\*\* 2 441000000 GHz DU Mkr1 2.440 896 GHz 1 Spectrum 8.00000000 MHz Ref LvI Offset 11.97 dB Ref Level 20.00 dBm -1.47 dBr cale/Div 10 dB Swept Span Zero Span Full Span 1 art Freq 2.437000000 GHz Stop Freq 2.445000000 GHz AUTO TUNE CF Step 800.000 kHz Auto Man Freq Offset Local X Axis Scal Center 2.441000 GHz #Res BW 3.0 MHz #Video BW 8.0 MHz Span 8.000 MHz Sweep 1.00 ms (1001 pts) Log Lin X 目り C\* II ? Jul 01, 2022 🗩 Signal Track 3DH5 Ant1 2480 ectrum Analyzer 1 wept SA Ö + Frequency #Avg Type: Power (RMS 1 2 3 4 5 Avg|Hold 100/100 Trig: Free Run Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) #Atten: 30 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off KEYSIGHT Input RF nter Frequency tings Align: Auto м<del>~~~</del> 2.480000000 GHz LNI Spectrum Mkr1 2.479 840 GH 8.00000000 MHz Ref LvI Offset 12.04 dB Ref Level 20.00 dBm ale/Div 10 dB -1.85 dB Swept Span Zero Span 1 itart Freq 2.47600000 GHz Stop Freq 2.484000000 GHz AUTO TUNE CF Step 800.000 kHz Auto Man req Offset Local X Axis Scale Log Lin #Video BW 8.0 MHz Center 2.480000 GHz #Res BW 3.0 MHz Span 8.000 MHz Sweep 1.00 ms (1001 pts) モッペロ? Jul 01, 2022 🗩 X Signal Track

EMTEK (Dongguan) Co., Ltd.



### 9.6 CONDUCTED SUPRIOUS EMISSION

### 9.6.1 **Applicable Standard**

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247 5.5

### 9.6.2 **Conformance Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.6.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

### 9.6.4 **Test Procedure**

The transmitter output (antenna port) was connected to the spectrum analyzer

### **Reference level measurement**

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW  $\ge$  3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

### **Band-edge measurement**

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq$  1% of the span=100kHz Set VBW  $\geq$  3 x RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

### **Emission level measurement**

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW  $\geq$  RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

EMTEK (Dongguan) Co., Ltd.



### 9.6.5 Test Results

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar


### Note: N/A

Band edge measurements

Т	[estMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
			Low	2402	-4.21	-50.11	≤-24.21	PASS
	DH5 Ant1	Apt1	High	2480	-3.62	-55.04	≤-23.62	PASS
		Low	Hop_2402	-1.65	-41.16	≤-21.65	PASS	
		High	Hop_2480	-0.89	-51.75	≤-20.89	PASS	





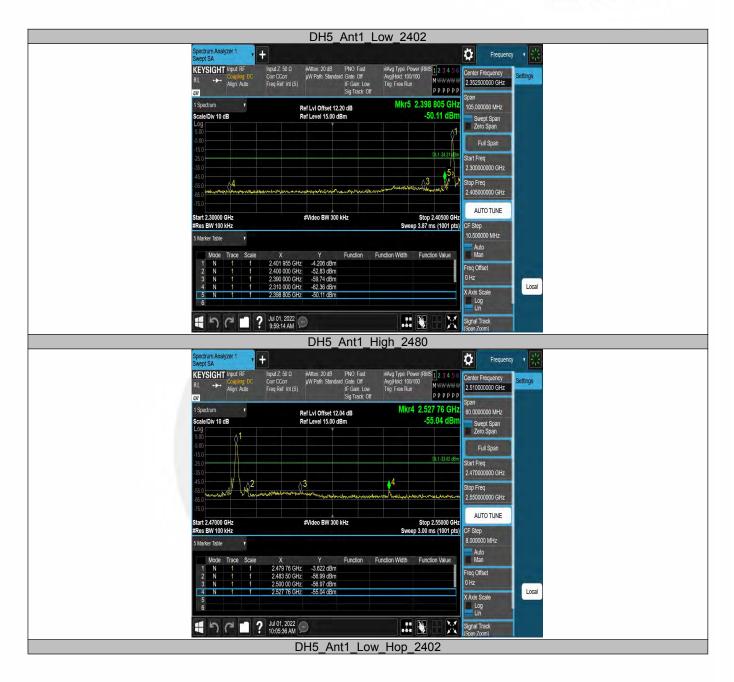

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn










TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
			Reference	-4.30	-4.30		PASS
		2402	30~1000	-4.30	-60.15	≤-24.3	PASS
			1000~26500	-4.30	-49.6	≤-24.3	PASS
		Ant1 2441 2480	Reference	-3.81	-3.81		PASS
DH5	Ant1		30~1000	-3.81	-59.4	≤-23.81	PASS
			1000~26500	-3.81	-49.56	≤-23.81	PASS
			Reference	-3.79	-3.79		PASS
			30~1000	-3.79	-57.8	≤-23.79	PASS
			1000~26500	-3.79	-48.27	≤-23.79	PASS





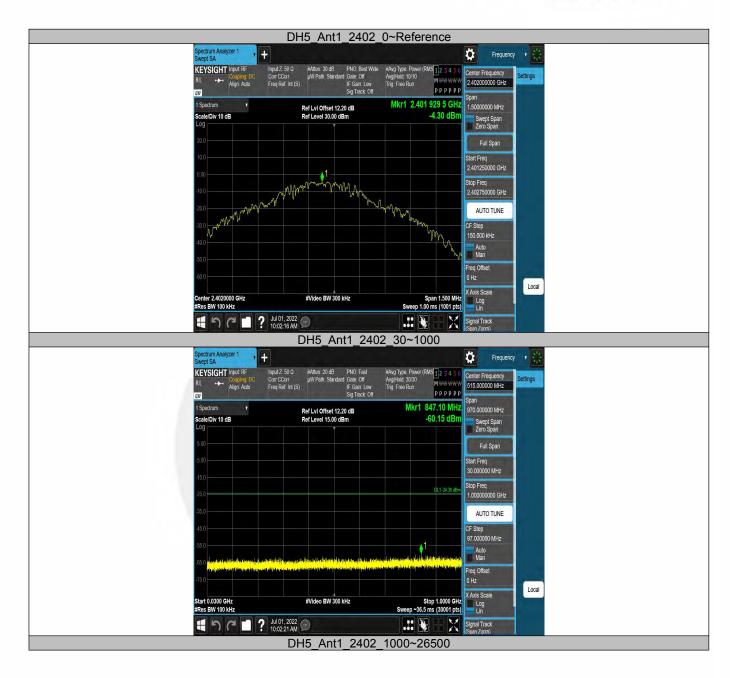

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Ö Frequency ectrum A ept SA + Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) PNO: Fast d Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Pov Avg|Hold: 30/30 Trig: Free Run KEYSIGHT Input RF #Atten: 20 dB µW Path: Stands RMS 1 2 3 4 5 nter Frequency Align: Auto 13 750000000 GHz PPPPPP LNI Mkr2 26.129 40 GHz Spectrum 25.5000000 GHz Ref LvI Offset 12.20 dB Ref Level 15.00 dBm -49.60 dB ale/Div 10 dB Swept Span Zero Span Full Span DL1-24.30 d art Freq 1.00000000 GHz Stop Freq 26.50000 000 GHz AUTO TUNE Start 1.00 GHz #Res BW 100 kHz Stop 26.50 GHz Sweep ~943 ms (30001 pts) #Video BW 300 kHz Step 2.550000000 GHz Marker Table Auto Man Y -4.211 dBm -49.60 dBm Function Function Width Function Value Trace Scale X 2.401 65 GHz 26.129 40 GHz req Offsel Local X Axis Scal Log Lin 手っ ペ I ? Jul 01, 2022 🗩 X Signal Track DH5 Ant1 2441 0~Reference ectrum Analyzer 1 wept SA Ö + Frequency Input Z 50 Ω #Atten: 30 dB PNO: Best Wide corr CCorr μW Path Standard Gate: Off Freq Ref. Int (S) Standard Gate: Off Sig Track: Off #Avg Type Power (RMS 1 2 3 4 5 Avg|Hold 10/10 Trig. Free Run KEYSIGHT Input RF nter Frequency tings Align: Auto 2.441000000 GHz рррррр LNI Spectrum Mkr1 2.440 782 5 GH .50000000 MHz Ref LvI Offset 11.97 dB Ref Level 30.00 dBm ale/Div 10 dB -3.81 dB Swept Span Zero Span tart Freq 2 440250000 GHz man have been and the second Stop Freq 2.441750000 GHz NWN mm m AUTO TUNE 150.000 kH Auto Man req Offsel Local X Axis Sca Center 2.4410000 GHz #Res BW 100 kHz #Video BW 300 kHz Span 1.500 MHz Sweep 1.00 ms (1001 pts) Log Lin X Signal Track .:: 💦 DH5 Ant1 2441 30~1000 ectrum Analyzer 1 ept SA Ö + Frequency v #Avg Type: Power (RMS 1 2 3 4 5 6 Avg|Hold: 30/30 Trig: Free Run #Atten: 20 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z' 50 Ω Corr CCorr Freq Ref. Int (S) KEYSIGHT Input RF nter Frequency tings Align: Auto 515.000000 MHz PPPPPP LNI Span 970.000000 MHz Mkr1 944.94 MHz Spectrum Ref LvI Offset 11.97 dB Ref Level 15.00 dBm -59.40 dB Scale/Div 10 dB Swept Span Zero Span Start Freq 30.000000 MHz Stop Freq 1.000000000 GHz DL1-23.81 d AUTO TUNE F Step 97 000000 MHz Auto Man req Offse Local X Axis So #Video BW 300 kHz Stop 1.0000 GHz Sweep ~36.5 ms (30001 pts) Start 0.0300 GHz Log Lin #Res BW 100 kHz Jul 01, 2022
 Jul 01, 202
 Jul 01, 20
 Jul 01, nal Trac

EMTEK (Dongguan) Co., Ltd.



DH5\_Ant1\_2441\_1000~26500 + Ö Frequency ctrum A KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Avg Type: Pov Avg|Hold: 30/30 Trig: Free Run S12345 ter Frequency Align: Auto 13,750000000 GHz IF Gain: Low Sig Track: Off PPPPPP L)(I Mkr2 26.185 50 GHz Spectrum Ref LvI Offset 11.97 dB Ref Level 15.00 dBm 25.5000000 GHz -49.56 dB cale/Div 10 dB Swept Span Zero Span Full Span tart Freq 1.000000000 GHz Stop Freq 26.50000000 GHz AUTO TUNE Start 1.00 GHz #Res BW 100 kHz #Video BW 300 kHz Stop 26.50 GHz Sweep ~943 ms (30001 pts) CF Step 2.550000000 GHz Auto Man Y -3.978 dBm -49.56 dBm Mode Trace Scale X 2.440 75 GHz 26.185 50 GHz Function Function Width Function Value req Offse Local X Axis Scale Log Lin 1 つ ペ ロ ? Jul 01, 2022 の M Signal Track DH5\_Ant1\_2480\_0~Reference ectrum Analyzer 1 ept SA + Ö Frequency #Avg Type: Powe Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB PNO: Best Wide µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) KEYSIGHT Input RF r (RMS 1 2 3 4 5 nter Frequency ettings Align: Auto MWWWWW PPPPP 2.480000000 GHz LNI. Mkr1 2.479 775 0 GH Spectrum Ref LvI Offset 12.04 dB Ref Level 30.00 dBm .50000000 MHz cale/Div 10 dB -3.79 dB Swept Span Zero Span Full Span 10 maring and more and the second tart Freq 2.479250000 GHz www.www.www.w Stop Freq 2.480750000 GHz AUTO TUNE CF Step 150.000 kHz Auto Man req Offsel Local X Axis Scal Center 2.4800000 GHz #Res BW 100 kHz #Video BW 300 kHz Span 1.500 MHz Sweep 1.00 ms (1001 pts) Log Lin Signal Track X DH5 Ant1 2480 30~1000

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



+ Ö Frequency ectrum A ept SA KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) PNO: Fast d Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Pov Avg|Hold: 30/30 Trig: Free Run #Atten: 20 dB µW Path: Standar (RMS 1 2 3 4 5 nter Frequency RL Align: Auto 515 000000 MHz м<del>\*\*\*\*\*\*</del> DU Mkr1 945.07 MH: -57.80 dBn Span 970.000000 MHz 1 Spectrum Ref LvI Offset 12.04 dB Ref Level 15.00 dBm cale/Div 10 dB Swept Span Zero Span Full Span tart Freq 30.000000 MHz Stop Freq 1.000000000 GHz AUTO TUNE CF Step 97.000000 MHz 1 Auto Man req Offset Local X Axis Scal #Video BW 300 kHz Stop 1.0000 GHz Sweep ~36.5 ms (30001 pts) art 0.0300 GHz Log Lin #Res BW 100 kHz X 手り C<sup>4</sup> **1** ? Jul 01, 2022 🗩 Signal Track DH5 Ant1 2480 1000~26500 ectrum Analyzer 1 wept SA Ö + Frequency #Avg Type: Power (RMS 1 2 3 4 5 Avg|Hold 30/30 Trig: Free Run Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 20 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off KEYSIGHT Input RF ter Frequency tings Align: Auto м<del>~~~</del> рррррр 13.750000000 GHz LNI | Spectrum Mkr2 26.160 00 GH 25.5000000 GHz Ref LvI Offset 12.04 dB Ref Level 15.00 dBm -48.27 dB ale/Div 10 dB Swept Span Zero Span Full Span tart Freq 1.000000000 GHz Stop Freq 26.500000000 GHz AUTO TUNE Start 1.00 GHz #Res BW 100 kHz #Video BW 300 kHz Stop 26.50 GHz Sweep ~943 ms (30001 pts) Step 2.55000000 GHz Marker Table Auto Man X 2.479 85 GHz Y -4.224 dBm Function Function Width Function Value Trace req Offsel Local X Axis Scale Log Lin 手り (~ **「**? Jul 01, 2022 🗩 X Signal Track

EMTEK (Dongguan) Co., Ltd.



### 9.7 RADIATED SPURIOUS EMISSION

### 9.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-Gen and RSS-247

### 9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.	According to FCC Part15.205, Restricted bands							
MHz	MHz	MHz	GHz					
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15					
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46					
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75					
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5					
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2					
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5					
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7					
6.26775-6.26825	123-138	2200-2300	14.47-14.5					
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2					
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4					
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12					
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0					
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8					
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5					
12.57675-12.57725	322-335.4	3600-4400	(2)					
13.36-13.41								

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

 $\mathsf{VBW} \geq \mathsf{RBW}$ 

Sweep = auto

 东赛市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F , Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn



Detector function = peak Trace = max hold For Below 1GHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 100 kHz for  $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 30MHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 9kHz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 150KHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 200Hz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 9.7.5 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	22° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Freq.	Ant.Pol.	-	ssion BuV/m)	Limit 3m	(dBuV/m)	Over(dB)	
(MHz)	H/V			PK	AV	PK	AV

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)( dB); Limit line=Specific limits(dBuV) + distance extrapolation factor

 余葉市信測科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F "Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Spurious Emission Above 1GHz (1GHz to 25GHz) 

All the antenna(Antenna 1&2) and modes(GFSK, π/4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1&2, GFSK) result recorded was report as below:

Test mode:	GFS	K	Freque	Frequency: Channel 0: 2402MHz					
Freq. (MHz)	Ant.Pol.	Emis Level(d	ssion BuV/m)	Limit 3m(	(dBuV/m)	Over(dB)			
(11112)	H/V	PK	AV	PK	AV	PK	AV		
7766	V	58.43	44.06	74.00	54.00	-15.57	-9.94		
10724	V	58.30	43.88	74.00	54.00	-15.70	-10.12		
14736	V	58.13	43.63	74.00	54.00	-15.87	-10.37		
8310	Н	56.80	42.16	74.00	54.00	-17.20	-11.84		
10724	Н	57.60	42.97	74.00	54.00	-16.40	-11.03		
12356	Н	57.53 43.11		74.00	54.00	-16.47	-10.89		

Channel 39: 2441MHz Test mode: **GFSK** Frequency: Ant.Pol. Emission Level(dBuV/m) Limit 3m(dBuV/m) Over(dB) Freq. (MHz) H/V PK AV PK AV ΡK AV V 57.78 43.23 74.00 54.00 -16.22 -10.77 8378 -16.59 10758 V 57.41 42.97 74.00 54.00 -11.03 V 57.70 43.24 74.00 54.00 -10.76 12390 -16.30 74.00 7052 Н 57.19 42.58 54.00 -16.81 -11.42

42.70

43.44

Test mode: GFSK

Н

Н

8922

10656

57.13

57.90

Frequency:

74.00

74.00

54.00

54.00

Channel 78: 2480MHz

-16.87

-16.10

-11.30

-10.56

Freq.	Ant.Pol.	Emission Lev	el(dBuV/m)	Limit 3m	(dBuV/m)	Over(dB)		
(MHz)	H/V	PK	AV	PK	AV	PK	AV	
9908	V	57.58	43.22	74.00	54.00	-16.42	-10.78	
11234	V	57.76	43.32	74.00	54.00	-16.24	-10.68	
13308	V	57.16	42.87	74.00	54.00	-16.84	-11.13	
9840	Н	58.82	44.48	74.00	54.00	-15.18	-9.52	
13308	Н	59.65	45.20	74.00	54.00	-14.35	-8.80	
14804	Н	59.39	44.92	74.00	54.00	-14.61	-9.08	

Note:

(1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor.

(3) Correct Factor= Ant\_F + Cab\_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

EMTEK (Dongguan) Co., Ltd.



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1&2) and modes(GFSK, π/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst(Antenna 1&2, GFSK, Hopping) result recorded was report as below:

Test mode: GFSK		Frequenc	cy: Ch	Channel 0: 2402MHz			
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)		
2387.280	Н	47.75	74.00	33.54	54.00		
2386.640	V	47.14	74.00	33.77	54.00		

Test mode: GFSK		Frequenc	cy: Ch	nannel 78: 2480MHz		
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	
2484.160	Н	45.67	74.00	32.30	54.00	
2484.622	V	46.46	74.00	32.59	54.00	

Test mode:	GFSK	Frequenc			
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2396.260	Н	49.66	74.00	35.07	54.00
2400.000	н	49.39	74.00	34.85	54.00
2483.500	Н	51.64	74.00	37.19	54.00
2393.600	V	50.02	74.00	35.60	54.00
2400.000	V	48.84	74.00	34.46	54.00
2483.500	V	47.30	74.00	32.85	54.00

Note:

(1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor.

(3) Correct Factor= Ant\_F + Cab\_L - Preamp


(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

EMTEK (Dongguan) Co., Ltd.




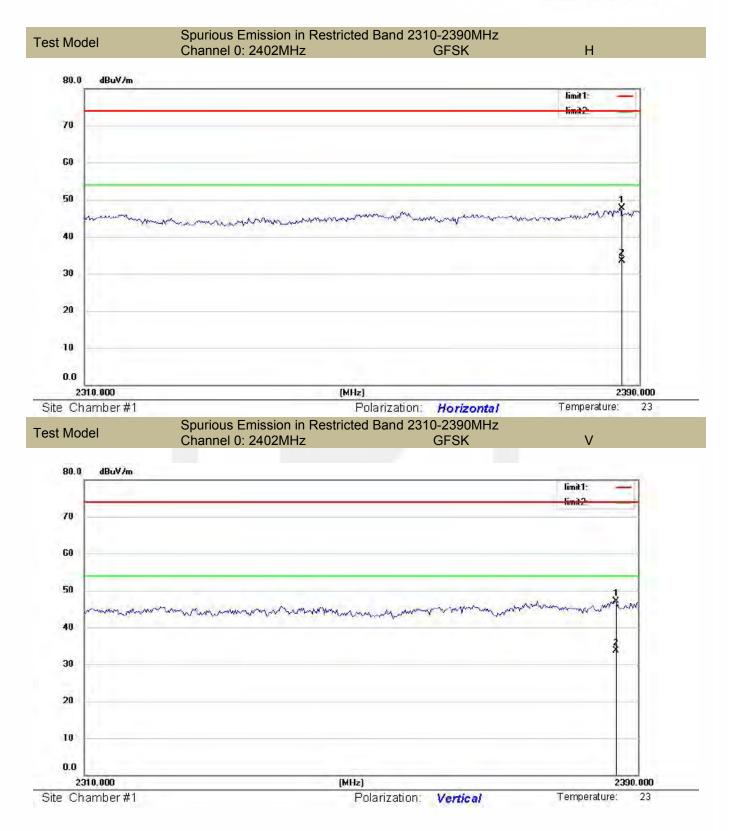



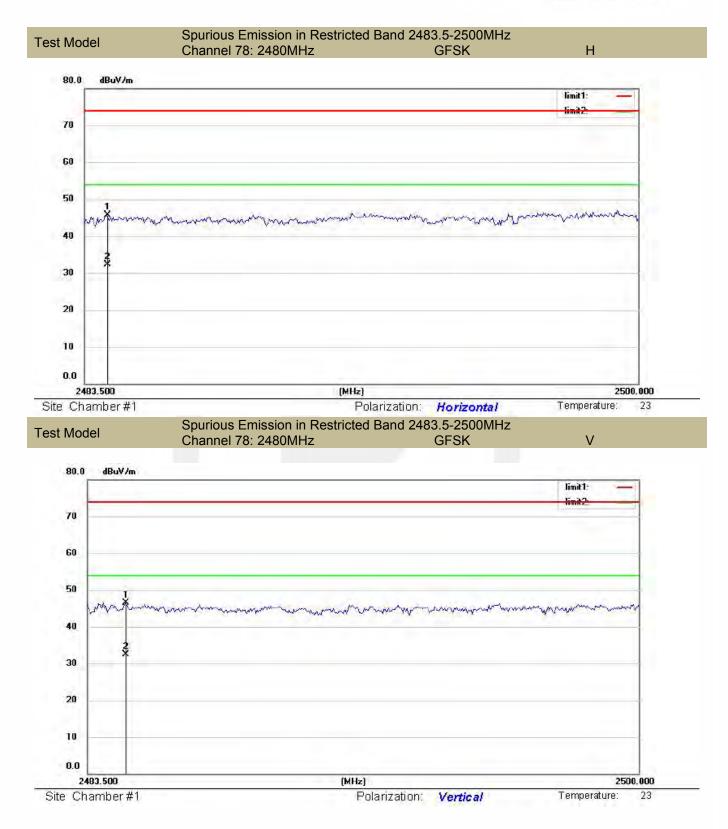




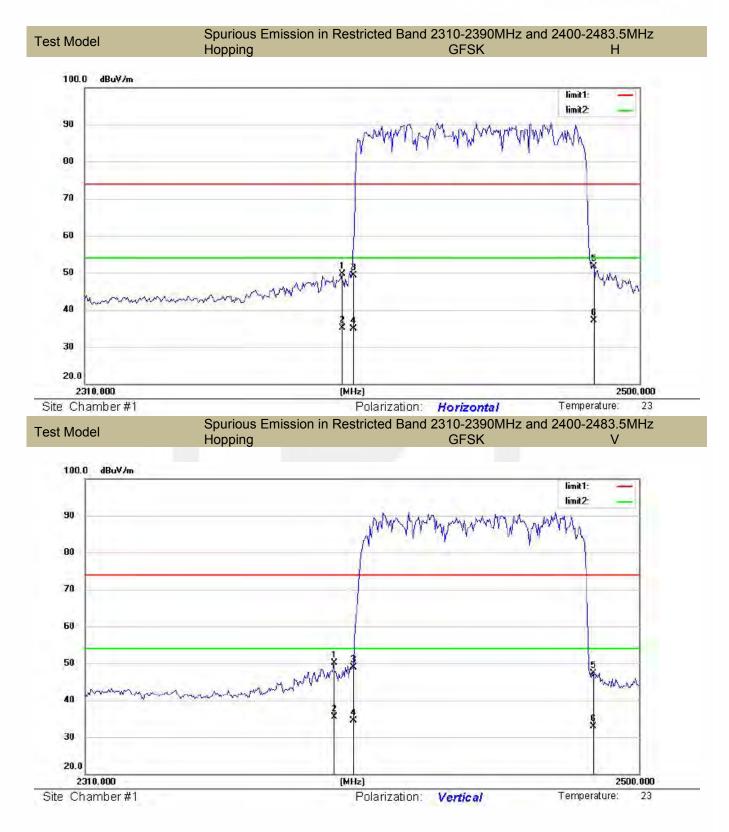



Spurious Emission below 1GHz (30MHz to 1GHz) 


All the antenna(Antenna 1&2) and modes(GFSK, π/4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1, 8DPSK) result recorded was report as below:

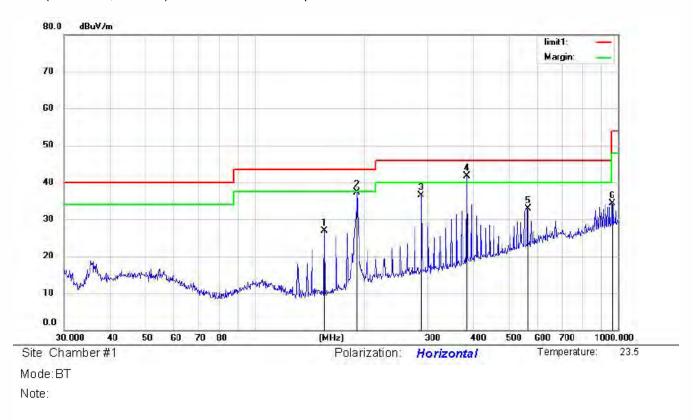

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		155.9101	46.39	-19.44	26.95	43.50	-16.55	QP			
2		191.7450	53.82	-16.47	37.35	43.50	-6.15	QP			
3		287.9904	49.44	-12.95	36.49	46.00	-9.51	QP			
4	*	383.9318	52.26	-10.59	41.67	46.00	-4.33	QP			
5		564.6390	39.87	-6.93	32.94	46.00	-13.06	QP			
6		962.1623	35.11	-0.86	34.25	54.00	-19.75	QP			

EMTEK (Dongguan) Co., Ltd.



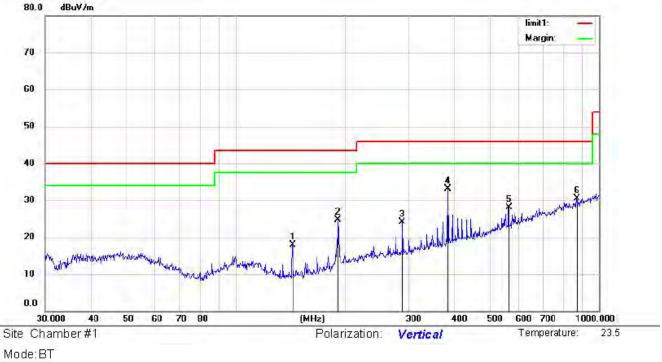

Note:

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		143.3261	38.05	-20.09	17.96	43.50	-25.54	QP			
2		191.7450	41.20	-16.47	24.73	43.50	-18.77	QP			
3		287.9904	37.14	-12.95	24.19	46.00	-21.81	QP			
4	*	383.9318	43.65	-10.59	33.06	46.00	-12.94	QP			
5	5	564.6390	34.97	-6.93	28.04	46.00	-17.96	QP			
6		866.0880	32.92	-2.44	30.48	46.00	-15.52	QP			



### 9.8 CONDUCTED EMISSION TEST

#### 9.8.1 **Applicable Standard**

According to FCC Part 15.207 According to IC RSS-Gen 8.8

#### 9.8.2 **Conformance Limit**

Conducted Emission Limit								
Frequency(MHz) Quasi-peak Average								
0.15-0.5	66-56	56-46						
0.5-5.0	56	46						
5.0-30.0 60 50								

Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 9.8.3 **Test Configuration**

Test according to clause 7.3 conducted emission test setup

### 9.8.4 **Test Procedure**

The EUT was placed on a table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Repeat above procedures until all frequency measured were complete.


#### 9.8.5 **Test Results**

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

EMTEK (Dongguan) Co., Ltd.



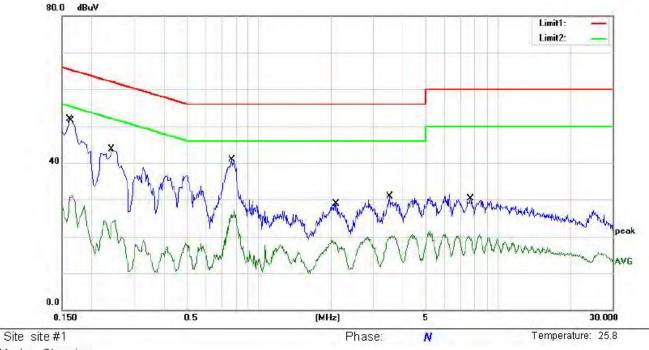

Mode: Charging Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dÐ	Detector	Comment
1	*	0.1620	41.34	10.52	51.86	65.36	-13.50	QP	
2		0.1660	20.62	10.51	31.13	55.16	-24.03	AVG	
3		0.2420	33.21	10.43	43.64	62.03	-18.39	QP	
4		0.2420	14.02	10.43	24.45	52.03	-27.58	AVG	
5		0.7700	30.75	10.13	40.88	56.00	-15.12	QP	
6		0.7700	16.73	10.13	26.86	46.00	-19.14	AVG	
7		2.1020	18.81	10.10	28.91	56.00	-27.09	QP	
8		2.1020	8.86	10.10	18.96	46.00	-27.04	AVG	
9		3.5100	20.89	10.08	30.97	56.00	-25.03	QP	
10		3.5100	10.28	10.08	20.36	46.00	-25.64	AVG	
11		7.6500	20.25	10.05	30.30	60.00	-29.70	QP	
12		7.6500	11.26	10.05	21.31	50.00	-28.69	AVG	


\*:Maximum data

x:Over limit l:over margin Comment: Factor build in receiver.

Operator: TIM

**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -1&2/F "Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base .No.9. Xincheng Avenue.Songshanhu High-technology Industrial Development Zone Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



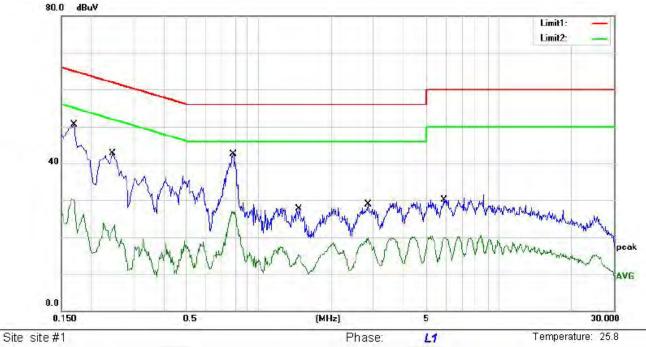

Mode: Charging Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	39.89	10.51	50.40	64.96	-14.56	QP	
2		0.1700	19.69	10.51	30.20	54.96	-24.76	AVG	
3		0.2460	32.31	10.42	42.73	61.89	-19.16	QP	
4		0.2460	16.57	10.42	26.99	51.89	-24.90	AVG	
5	*	0.7820	32.46	10.12	42.58	56.00	-13.42	QP	
6		0.7820	7.39	10.12	17.51	46.00	-28.49	AVG	
7		1.4660	17.60	10.11	27.71	56.00	-28.29	QP	
8		1.4660	8.37	10.11	18.48	46.00	-27.52	AVG	
9		2.8420	18.81	10.09	28.90	56.00	-27.10	QP	
10		2.8420	9.80	10.09	19.89	46.00	-26.11	AVG	
11		5.8740	20.11	10.05	30.16	60.00	-29.84	QP	
12		5.8740	10.33	10.05	20.38	50.00	-29.62	AVG	

\*:Maximum data

x:Over limit l:over margin Comment: Factor build in receiver.

Operator: TIM

**东莞市信测科技有限公司** 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -1&2/F "Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base .No.9. Xincheng Avenue.Songshanhu High-technology Industrial Development Zone Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



### 9.9 ANTENNA APPLICATION

#### 9.9.1 **Antenna Requirement**

Standard	Requirement				
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.				
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.				
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.				
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.				

### 9.9.2 Result

PASS.

Note:

- $\checkmark$ Antenna use a permanently attached antenna which is not replaceable.
  - Not using a standard antenna jack or electrical connector for antenna replacement
  - The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.



Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	/	20.8
1	20.9	0.15	/	21.05
10	20.1	0.28	/	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

### Detail of factor for radiated emission

\*\*\* End of Report \*\*\*

Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



# 声 明

## Statement

### 1. 本报告无授权批准人签字及"检验检测专用章"无效;

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制;

This report shall not be copied partly without authorization.

### 3. 本报告的检测结果仅对送测样品有效,委托方对样品的代表性和资料的真实性负责;

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内,仅作为客户委托、科研、教学或内部 质量控制等目的使用;

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定,未考虑不确定度所带来的风险,本实验室不承担相关责任,特别约定、标准或规范中有明确规定的除外;

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议,请于收到报告之日起 20 日内提出;

Objections shall be raised within 20 days from the date receiving the report.

 东赛市信测科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F , Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn