

TEST REPORT

FCC PART 15 SUBPART C 15.247

Test report On Behalf of Timex Group USA Inc. For iConnect by Timex Active Model No.: M05A FCC ID: EP9-TMXM05A

Prepared for : Timex Group USA Inc 555 Christian Road, Middlebury, CT 06762, USA

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd. 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

Date of Test: Jun 19, 2019 ~ July 05, 2019

Date of Report: July 05, 2019

Report Number: HK1906181355--E



TEST RESULT CERTIFICATION

Applicant's name	Timex Group USA Inc
Address	555 Christian Road, Middlebury, CT 06762, USA
Manufacture's Name	DIGILINK GROUP CO.,LTD.
Address	1F,Block B3,Hengfeng Industrial Park,Bao`an District,Shenzhen, China
Product description	
Trade Mark:	iConnect
Product name	iConnect by Timex Active
Model and/or type reference:	M05A
Standards	47 CFR FCC Part 15 Subpart C 15.247

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Prepared by:

Jan Wian

Project Engineer

Reviewed by:

Project Supervisor

ames 2

Approved by:

Technical Director



Contents

			Page
С	ONTENTS	; 	3
1	TEST	SUMMARY	5
	1.1 TE	ST DESCRIPTION	5
	1.2 ME	ASUREMENT UNCERTAINTY	6
2	TEST	FACILITY	7
3	GENE	RAL INFORMATION	7
	3.1 Ge	NERAL DESCRIPTION OF EUT	7
		SCRIPTION OF TEST CONDITIONS	
		SCRIPTION OF TEST SETUP	
4		MENTS LIST FOR ALL TEST ITEMS	
5		RESULT	
J			
	5.1.1	Standard requirement	
	5.1.2 5.2 Co	EUT Antenna NDUCTION EMISSIONS MEASUREMENT	
	5.2 00	Applied procedures / Limit	
	5.2.1	Test procedure	
	5.2.2	Test setup	
	5.2.4	Test results	
	-	DIATED EMISSIONS MEASUREMENT	
	5.3.1	Applied procedures / Limit	
	5.3.2	Test setup	
	5.3.3	Test Result	
	5.4 MA	XIMUM OUTPUT POWER MEASUREMENT	
	5.4.1	Limit	
	5.4.2	Test procedure	
	5.4.3	Deviation from standard	
	5.4.4	Test setup	
	5.4.5	Test results	
		WER SPECTRAL DENSITY	
	5.5.1	Limit	
	5.5.2	Test procedure	
	5.5.3	Deviation from standard	
	5.5.4	Test setup	
	5.5.5	Test results	
	5.6 6DI 5.6.1	B BANDWIDTH	
	5.6.1 5.6.2	Limit	
	5.6.3	Deviation from standard	
	5.6.4	Test setup	
	5.6.5	Test result	



5.7	Occ	CUPIED BANDWIDTH	32
5	5.7.1	Test procedure	32
5	5.7.2	Deviation from standard	32
5	5.7.3	Test setup	32
5	5.7.4	Test result	32
5.8	BAN	D EDGE	35
5	5.8.1	Limit	35
5	5.8.2	Test procedure	35
5	5.8.3	Deviation from standard	35
5	5.8.4	Test setup	35
5	5.8.5	Test results	36
5.9	CON	IDUCTED SPURIOUS EMISSIONS	37
5	5.9.1	Applied procedures / Limit	37
5	5.9.2	Test procedure	37
5	5.9.3	Deviation from standard	37
5	5.9.4	Test setup	37
5	5.9.5	Test results	38
6 1		ЕТИР РНОТО	43
7 F	рното	S OF THE EUT	44



1 Test Summary

1.1 Test Description

Test Item	Test Requirement	Result
Antenna Requirement	§15.203/§15.247 (c)	PASS
Conducted Emission	FCC Part 15.207	PASS
Radiated Emissions	FCC Part 15.205/15.209	PASS
Maximum Peak Output Power	FCC Part 15.247(b)	PASS
Power Spectral Density	FCC Part 15.247 (e)	PASS
6dB Bandwidth & 99% Bandwidth	FCC Part 15.247(a)(1)(i)	PASS
Spurious RF Conducted Emission	FCC Part 15.247(d)	PASS
Band Edge	FCC Part 15.247(d)	PASS



1.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties. The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device. The maximum value of the uncertainty as below:

No.	Item	Uncertainty
1	Conducted Emission Test	1.20dB
2	Radiated Emission Test	3.30dB



2 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

Address of the test laboratory

Shenzhen HUAK Testing Technology Co., Ltd. Add.:1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, China Designation Number: CN1229 Test Firm Registration Number: 616276

3 General Information

3.1 General Description of EUT

Manufacturer:	DIGILINK GROUP CO.,LTD.					
Manufacturer Address:	1F,Block B3,Hengfeng Industrial Park,Bao`an District,Shenzhen,China					
EUT Name:	iConnect by Timex Active					
Model No:	M05A					
Serial No:	N/A					
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: M05A					
Brand Name:	iConnect					
Operation frequency:	2402 MHz to 2480 MHz					
Channel separation:	2MHz					
NUMBER OF CHANNEL:	40					
Modulation Technology:	GFSK					
Hardware Version:	N/A					
Software Version:	N/A					
Antenna Type:	PCB Antenna					
Antenna Gain:	0dBi					
Power Supply:	DC3.7V By Battery or DC 5V from USB					
Note:	Note:					
1.For a more detailed features User's Manual.	1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.					



	Description of Channel:						
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
0	2402	14	2430	28	2458		
1	2404	15	2432	29	2460		
2	2406	16	2434	30	2462		
3	2408	17	2436	31	2464		
4	2410	18	2438	32	2466		
5	2412	19	2440	33	2468		
6	2414	20	2442	34	2470		
7	2416	21	2444	35	2472		
8	2418	22	2446	36	2474		
9	2420	23	2448	37	2476		
10	2422	24	2450	38	2478		
11	2424	25	2452	39	2480		
12	2426	26	2454				
13	2428	27	2456				



3.2 Description of Test conditions

(1) E.U.T. test conditions:

For intentional radiators, measurements of the variation of the input power or the adiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

- (2) Frequency range of radiated measurements:The test range will be up to the tenth harmonic of the highest fundamental frequency.
- (3) Pre-test the EUT in all transmitting mode at the lowest (2402 MHz), middle (2440 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode,

only the worst-case results are recorded in this report.

(4) The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.3 DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation testing:

AC Main		
	PC	EUT

Operation of EUT Above1GHz Radiation testing:



 PC information Model: TP00067A Input: DC20V, 2.25-3.25A Output: 5VDC, 0.5A



4 Equipments List for All Test Items

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 27, 2018	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2018	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2018	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 27, 2018	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 27, 2018	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 27, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 27, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 27, 2018	1 Year
10.	Horn Antenna	Schewarzbeck	9120D	HKE-013	Dec. 27, 2018	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 27, 2018	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 27, 2018	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 27, 2018	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2018	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 27, 2018	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 27, 2018	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 27, 2018	3 Year
19	Hf antenna	Schwarzbeck	LB-180400-K F	HKE-031	Dec. 27, 2018	1 Year



5 Test Result

5.1 Antenna Requirement

5.1.1 Standard requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 0dBi.

5.1.2 EUT Antenna

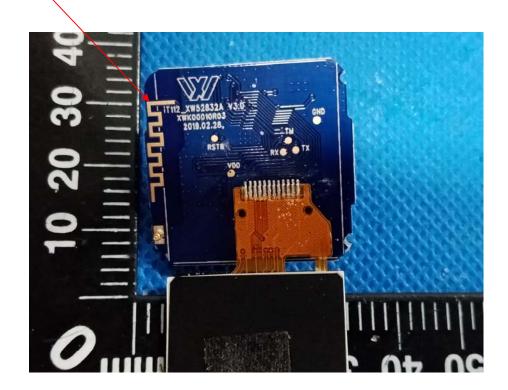



5.2 Conduction Emissions Measurement

5.2.1 Applied procedures / Limit

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

	Limit (d	BuV)
Frequency range (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

5.2.2 Test procedure

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
- 2. Support equipment, if needed, was placed as per ANSI C63.10:2013
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
- 4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipments received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.




5.2.3 Test setup

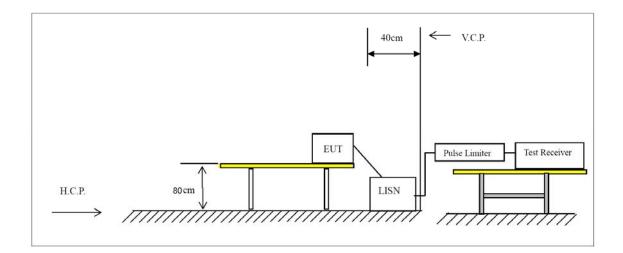



5.2.4 Test results

Test Specification: Line

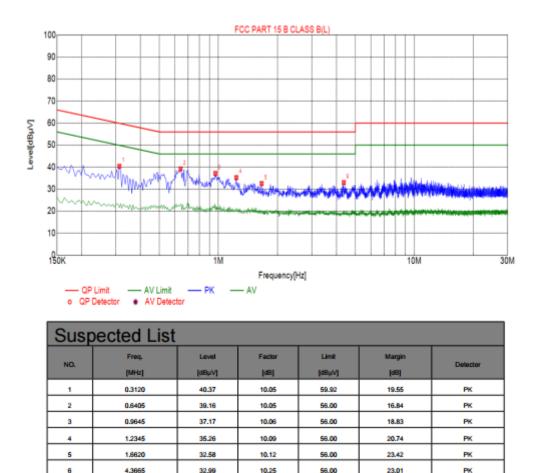


Remark: Margin = Limit – Level

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



Test Specification: Neutral

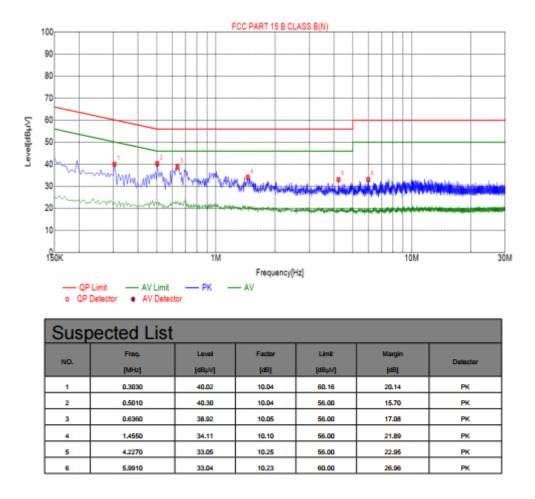

Remark: Margin = Limit – Level

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss.

If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

5.3 Radiated Emissions Measurement

5.3.1 Applied procedures / Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Except when the requirements applicable to a given device state otherwise, emissions from licence exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.


	T d d			
Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)	
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)	
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)	
1.705-30	3	20log(30)+ 40log(30/3)	30	
30-88	3	40.0	100	
88-216	3	43.5	150	
216-960	3	46.0	200	
Above 960	3	54.0	500	

Radiated emission limits

5.3.2 Test setup


Test Configuration:

1) 9 kHz to 30 MHz emissions:

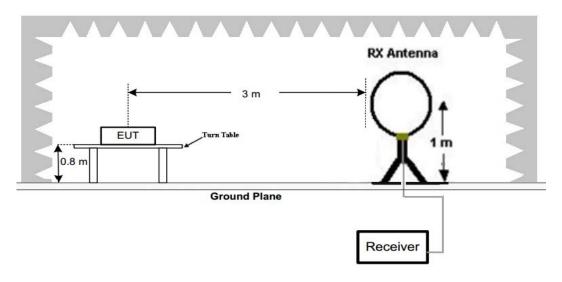




2) 30 MHz to 1 GHz emissions:

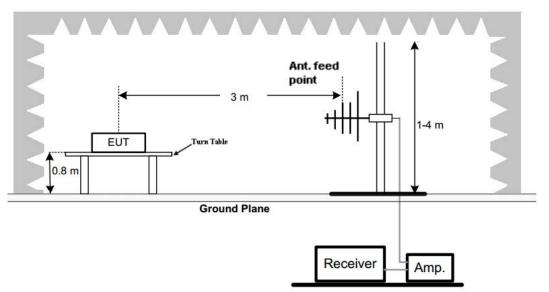

3)

1 GHz to 25 GHz emissions:

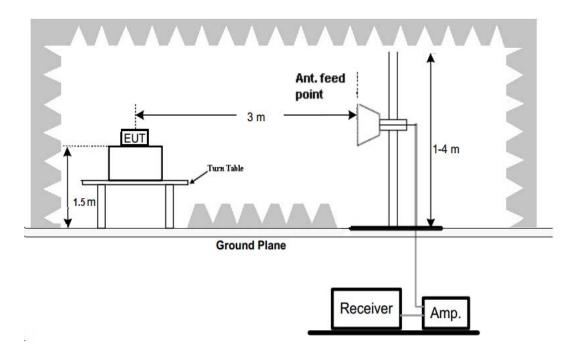


Test Procedure

- 1. The EUT was placed on turn table which is 0.8m above ground plane for below 1GHz test, and on a low permittivity and low loss tangent turn table which is 1.5m above ground plane for above 1GHz test.
- 2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measurements have been completed.



5.3.3 Test Result

Below 1GHz Test Results: Antenna polarity: H

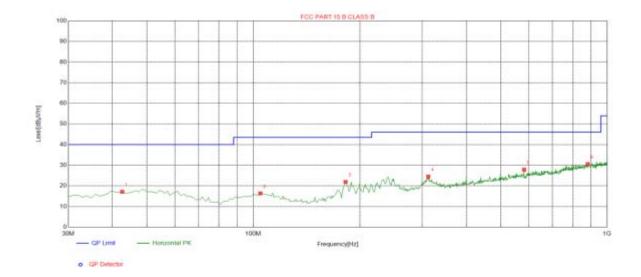


Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.6100	17.14	-14.08	40.00	22.86	100	59	Horizontal
2	104.690	16.32	-15.41	43.50	27.18	100	281	Horizontal
3	182.290	21.90	-16.66	43.50	21.60	100	59	Horizontal
4	312.270	24.50	-12.49	46.00	21.50	100	98	Horizontal
5	582.900	27.84	-6.65	46.00	18.16	100	19	Horizontal
6	881.660	30.60	-2.03	46.00	15.40	100	54	Horizontal

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



Antenna polarity: V

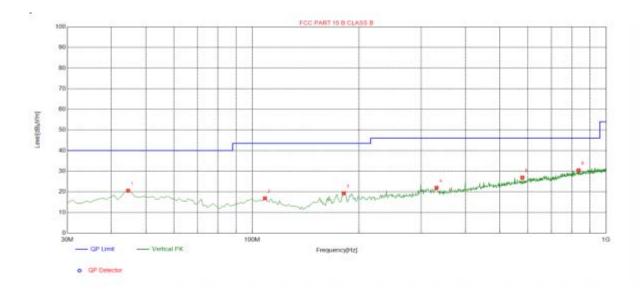

Susp	Suspected List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	44.5500	20.56	-13.73	40.00	19.44	100	189	Vertica		
2	108.570	16.88	-15.43	43.50	26.62	100	10	Vertical		
3	181.320	19.33	-16.74	43.50	24.17	100	225	Vertical		
4	331.670	22.00	-11.60	46.00	24.00	100	42	Vertical		
5	579.990	26.92	-6.59	46.00	19.08	100	220	Vertica		
6	836.070	30.50	-2.51	46.00	15.50	100	2	Vertical		

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Remark :

(1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in

provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.



For 1GHz to 25GHz

CH Low (2402MHz) Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type			
4804	57.94	-3.65	54.29	74.00	-19.71	peak			
4804	45.84	-3.65	42.19	54.00	-11.81	AVG			
7206	53.52	-0.95	52.57	74.00	-21.43	peak			
7206	42.89	-0.95	41.94	54.00	-12.06	AVG			
Remark: Facto	Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4804	56.73	-3.65	53.08	74.00	-20.92	peak
4804	44.57	-3.65	40.92	54.00	-13.08	AVG
7206	54.59	-0.95	53.64	74.00	-20.36	peak
7206	40.59	-0.95	39.64	54.00	-14.36	AVG
Remark: Facto	or = Antenna Fac	tor + Cable Lo	ss – Pre-amplifier.			



CH Middle (2440MHz) Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4880.00	56.49	-3.54	52.95	74.00	-21.05	peak
4880.00	43.40	-3.54	39.86	54.00	-14.14	AVG
7320.00	56.72	-0.81	55.91	74.00	-18.09	peak
7320.00	43.50	-0.81	42.69	54.00	-11.31	AVG
Remark: Facto	or = Antenna Fac	tor + Cable Lo	ss – Pre-amplifier.			

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4880.00	56.28	-3.54	52.74	74.00	-21.26	peak
4880.00	46.99	-3.54	43.45	54.00	-10.55	AVG
7320.00	53.29	-0.81	52.48	74.00	-21.52	peak
7320.00	39.34	-0.81	38.53	54.00	-15.47	AVG
Remark: Facto	or = Antenna Fac	ctor + Cable Lo	ss – Pre-amplifier.			



CH High (2480MHz) Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Datastar
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4960	55.75	-3.43	52.32	74.00	-21.68	peak
4960	44.09	-3.44	40.65	54.00	-13.35	AVG
7440	55.70	-0.77	54.93	74.00	-19.07	peak
7440	40.52	-0.77	39.75	54.00	-14.25	AVG
Remark: Facto	or = Antenna Fac	tor + Cable Lo	ss – Pre-amplifier.			

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Detector Type
4960	54.84	-3.43	51.41	74.00	-22.59	peak
4960	45.43	-3.44	41.99	54.00	-12.01	AVG
7440	56.51	-0.77	55.74	74.00	-18.26	peak
7440	37.49	-0.77	36.72	54.00	-17.28	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz $_{\circ}$

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.

(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak

detection at frequency above 1GHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed. (7)All modes of operation were investigated and the worst-case emissions are reported.



Radiated Band Edge Test:

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case):

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2310.00	60.02	-5.81	54.21	74	-19.79	peak
2310.00	/	-5.81	/	54	1	AVG
2390.00	56.36	-5.84	50.52	74	-23.48	peak
2390.00	/	-5.84	/	54	1	AVG
2400.00	57.48	-5.84	51.64	74	-22.36	peak
2400.00	1	-5.84	/	54	1	AVG
Remark: Facto	or = Antenna Fa	ctor + Cable Lo	ss – Pre-amplifier.			

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
2310.00	58.76	-5.81	52.95	74	-21.05	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.97	-5.84	49.13	74	-24.87	peak
2390.00	/	-5.84	/	54	1	AVG
2400.00	57.66	-5.84	51.82	74	-22.18	peak
2400.00	/	-5.84	/	54	1	AVG
Remark: Facto	or = Antenna Fac	ctor + Cable Lo	ss – Pre-amplifier.			



Operation Mode: TX CH High (2480MHz) Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
2483.50	55.77	-5.81	49.96	74	-24.04	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	53.33	-6.06	47.27	74	-26.73	peak
2500.00	1	-6.06	/	54	/	AVG
Remark: Facto	or = Antenna Fac	tor + Cable Lo	ss – Pre-amplifier.			-

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре		
2483.50	54.1	-5.81	48.29	74	-25.71	peak		
2483.50	/	-5.81	/	54	/	AVG		
2500.00	54.58	-6.06	48.52	74	-25.48	peak		
2500.00	1	-6.06	/	54	1	AVG		
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								
Remark: All th	e other emission	s not reported	were too low to re	ad and deemed to	comply with	FCC limit.		



5.4 Maximum Output Power Measurement

5.4.1 Limit

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 Test procedure


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple derector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

5.4.3 Deviation from standard

No deviation.

5.4.4 Test setup

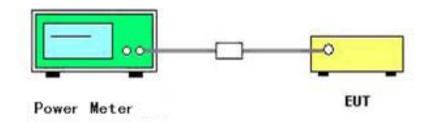

5.4.5 Test results

Channel	Channel frequency (MHz)	Output power (dBm)	Limit (dBm)	Result
Low	2402	-2.426		Pass
Middle	2440	-2.947	30	Pass
High	2480	-3.588		Pass



5.5 Power Spectral Density

5.5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.5.2 Test procedure


Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

Set the RBW =3 kHz. Set the VBW =10 KHz. Set the span to 1.5 times the DTS channel bandwidth. Detector = peak. Sweep time = auto couple. Trace mode = max hold. Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level. If measured value exceeds limit, reduce RBW(no less than 3 kHz)and repeat. The resulting peak PSD level must be 8 dBm.

5.5.3 Deviation from standard


No deviation.

5.5.4 Test setup



5.5.5 Test results

Channel	Channel frequency (MHz)	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
Low	2402	-23.91		Pass
Middle	2440	-23.45	8.00	Pass
High	2480	-23.24		Pass

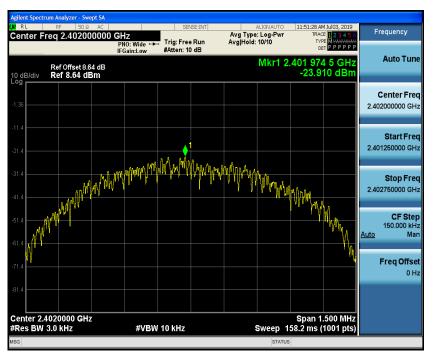

CH 00


CH 19







CH 3	39
------	----

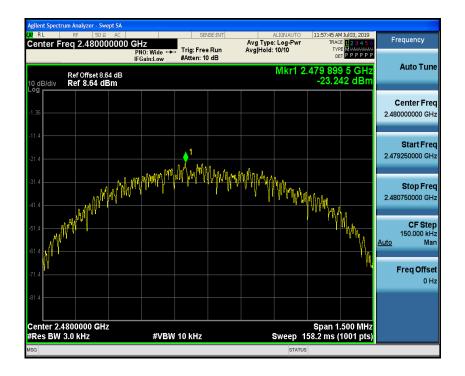



5.6 6dB Bandwidth

5.6.1 Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.6.2 Test procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

- 1. Set RBW = 100 kHz.
- 2. Set the video bandwidth (VBW) \geq 3 RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.

7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.6.3 Deviation from standard

No deviation.

5.6.4 Test setup




5.6.5 Test result

Channel	Channel frequency (MHz)	6dB Bandwidth (MHz)	Limit (KHz)	Result
Low	2402	0.7106		Pass
Middle	2440	0.7096	≥500	Pass
High	2480	0.7010		Pass

CH 00

Agilent Spectrum Analyzer - Occupied B	W	OF LOS IN T			AN COME A	M 1 100 0010	
Center Freq 2.402000000		SENSE:INT Center Freq: 2.4020	000000 GHz	ALIGN AUTO	Radio Std	M Jul 03, 2019 : None	Frequency
	+++ #IFGain:Low	Trig: Free Run #Atten: 30 dB	Avg Hold	>1/1	Radio Dev	rice: BTS	
Ref Offset 8.64 dl			•	Mkr1		93 GHz 04 dBm	
Log 10.0 0.00		1-					Center Free 2.402000000 GH;
-10.0							
-40.0 -50.0 -60.0	www.www.w.		M	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	6.**** \ *^*va	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	
-70.0							
Center 2.402 GHz #Res BW 100 kHz		#VBW 300	kHz			an 6 MHz 1.067 ms	CF Stej 600.000 kH
Occupied Bandwidt	h	Total I	Power	-2.34	dBm		<u>Auto</u> Ma
1.	0526 MF	z					Freq Offse
Transmit Freq Error	1.640 k	Hz OBW	Power	99	.00 %		он
x dB Bandwidth	710.6 k	Hz xdB		-6.0	00 dB		
ISG				STATUS			



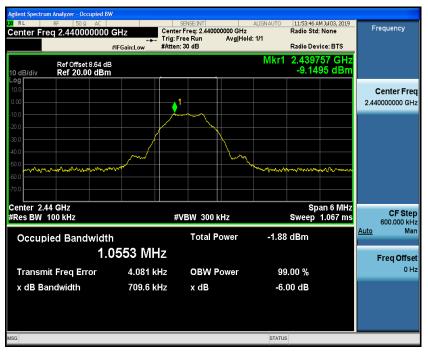



Page 31 of 44 CH 39

Agilent Spectrum Analyzer - Occupied BW						
Center Freq 2.480000000 C	SHz	SENSE:INT Center Freq: 2.480	000000 GHz	F	11:56:55 AM Jul 03, 2019 Radio Std: None	Frequency
	+→+ IFGain:Low	Trig: Free Run #Atten: 30 dB	Avg Hold		Radio Device: BTS	
Ref Offset 8.64 dB 10 dB/div Ref 20.00 dBm				Mkr1	2.480252 GH -8.7177 dBr	
Log 10.0 0.00		1-				Center Fr 2.480000000 G
-10.0			\			
-30.0	mus					
-50.0				and a second	www.www.	W
Center 2.48 GHz					Span 6 MH	7
#Res BW 100 kHz		#VBW 300	kHz	ę	Sweep 1.067 m	CF Sto 600,000 k
Occupied Bandwidth		Total	Power	-1.52 c	iBm	<u>Auto</u> M
1.0	563 MH	Iz				Freq Offs
Transmit Freq Error	3.583 k	Hz OBW	Power	99.0	00 %	0
x dB Bandwidth	701.0 ki	Hz xdB		-6.00) dB	
MSG				STATUS		



5.7 Occupied Bandwidth


5.7.1 Test procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth: RBW=1% to 5% of the OBW VBW=approximately 3 X RBW Detector=Peak Trace Mode: Max Hold Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recorded.

5.7.2 Deviation from standard

No deviation.

5.7.3 Test setup



5.7.4 Test result


Channel	Channel frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (KHz)	Result
Low	2402	1.229	1.0558		Pass
Middle	2440	1.227	1.0544	≥500	Pass
High	2480	1.227	1.0507		Pass



CH 00





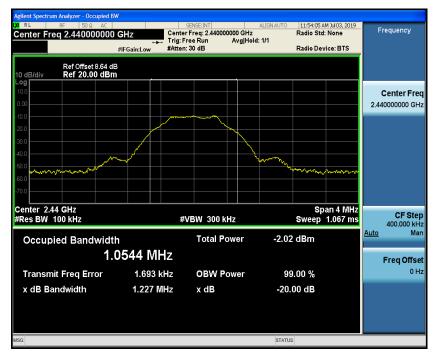









5.8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section (b)(3) of RSS 5.4(4), the attenuation required shall be 30 dB instead of 20 dB.

5.8.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation, RBW ≥ 1% of the span, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold

5.8.3 Deviation from standard


No deviation.

5.8.4 Test setup





5.8.5 Test results

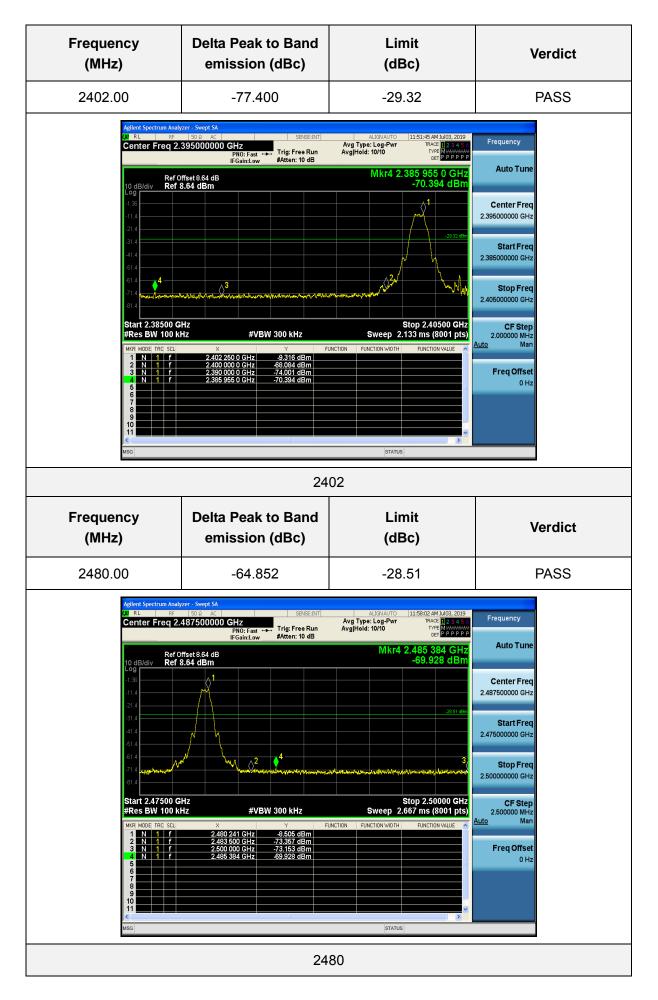



5.9 Conducted Spurious Emissions

5.9.1 Applied procedures / Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section (b)(3) of RSS 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. For below 30MHz,For 9KHz-150kHz,150K-10MHz,We use the RBW 1KHz,10KHz, So the limit need to

calculated by "10lg(BW1/BW2)". for example For9KHz-150kHz,RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.

5.9.2 Test procedure


a.The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b.Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation, RBW \ge 1% of the span, VBW \ge RBW, Sweep = auto, Detector function = peak, Trace = max hold

5.9.3 Deviation from standard

No deviation.

5.9.4 Test setup





5.9.5 Test results



CH 00

tart 30.0 Res BW	MHz 100 kHz		#VBW	/ 300 kHz			Sweep 9		000 GHz 8001 pts)	
51.4										
<mark>htelader</mark>	den di din ta batan bi bi	n talah si ang sa Pangan sa	a di mana di m Mana di mana di	da, bu di da da Mayer di katala	de de billende. P ^{arte} de secto	d material and define to operational and a sec			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Freq Offs 0
41.4										97.000000 M <u>Auto</u> M
31.4									-29.51 dBm	CF St
11.4										Stop Fr 1.000000000 G
.36										Start Fr 30.000000 M
3.64										515.000000 N
og	Rei 28.04									Center Fi
0 dB/div	Ref Offset 8. Ref 28.64	54 dB	Gam.Eow				M		02 MHz 67 dBm	Auto Tu
	req 515.00	0000 MH	Z PNO:Fast ↔ Gain:Low		Run	Avg Typ Avg Hold	e: Log-Pwr	TRAC	E 123456 MWWWWWW T P P P P P P	Frequency
RL	RF 50 Ω	AC		SEI	VSE:INT		ALIGN AUTO	11:52:13 AM	1 Jul 03, 2019	



Agilent S <mark>X/</mark> RL Cente		RF	50 Q		0 GI	-iz			ENSE:INT		Avg Type	ALIGN AUTO :: Log-Pwr	TR	. AM Jul 03, 2019 ACE 1 2 3 4 5 6	Frequency
10 dB/c		Ref O	ffset 8. 2 8.6 4	64 dB	PN	0: Fast ain:Low		Trig: Fre #Atten: 3			Avg Hold:		kr2 24.	367 GHz	Auto Tuno
18.6															Center Free 13.000000000 GH
1.36	^1														Start Free 1.000000000 GH
-11.4															Stop Fre 25.000000000 GH
31.4 41.4 —														-29.51 dBm	CF Stej 2.400000000 GH <u>Auto</u> Ma
i i i		i i i i i i i i i i i i i i i i i i i	n an	i del pro	Ŵ	u Wile	<mark>i u</mark>		Had Madia	<i>/</i> //	and the second sec	بالموالل المراجع			Freq Offse 0 H
Start 1			47			#\/	BIA	300 kH	7			Sween	Stop	25.00 GHz (8001 pts)	
SG		00 141	12			<i>n</i> v 1		500 KH	2			STATUS	_	(0001 pts)	

CH 19





RL	RF 50 Ω		SEI	VSE:INT	ALIGN AU		1 Jul 03, 2019	Frequency
enter F	req 515.0000	00 MHz PNO: Fa IFGain:L	ast 🛶 Trig:Free	Run .	Avg Type: Log-P Avg Hold: 10/10	TYP	E 123456 E MWWWWWWW T P P P P P P	Frequency
) dB/div	Ref Offset 8.64 Ref 28.64 dB	dB m				Mkr1 462. -50.4	26 MHz 05 dBm	Auto Tur
8.6								Center Fre 515.000000 MH
36								Start Fr 30.000000 MI
1.4								Stop Fre 1.000000000 GF
11.4							-29.12 dBm	CF Ste 97.000000 Mi Auto Mi
i1.4			↓ 1			e nii area area area		Freq Offs
ital politi ta diplot 1.4	layert dige fan fyskillinger fan syntaert Mangen yn ferster yn fan de generaerte	a konstal il popular antiko di Porta (instan porta) posta di	an para da mandaran ina da mana da man Mana da mana da	and an an a state of the state	an an a the second standing of the second second A second	n an	an mena di pan Mana di katan	01
tart 30.0 Res BW	MHz 100 kHz		¢VBW 300 kHz		Sweet	Stop 1.0 92.80 ms (i	000 GHz 8001 pts)	

	rum Analyzer - Swep									
Center F	RF 50 Ω req 13.00000		Hz NO: Fast ↔	. Trig: Free			ALIGN AUTO : Log-Pwr 5/10	TRAC	M Jul 03, 2019 E 1 2 3 4 5 6 M M M M M M M M M M M M M M M M M M M	Frequency
10 dB/div	Ref Offset 8.64 Ref 28.64 di	dB	Gain:Low	#Atten: 30) dB		М	kr2 24.2	71 GHz 68 dBm	Auto Tune
18.6										Center Free 13.000000000 GH
1.36	<u>1</u>									Start Fre 1.000000000 GH
21.4	>									Stop Fre 25.000000000 GH
41.4									-29.12 dBm	CF Ste 2.400000000 GH <u>Auto</u> Ma
51.4 ar 197	handi da ya shi ka	i de la compañía de l	i de la composition d	tin di sinda	and a second	hat the first of the second		n an		Freq Offse 0 H
61.4 Start 1.00 #Res BW			#VBW	300 kHz			Sween	Stop 2	5.00 GHz 8001 pts)	
ISG			(d.) - 1 A	o o o ninz			STATUS	-	ovo r proj	







Agilent Spectr X/ RL	rum Analyzer - Swept SA RF 50 Ω AC		SENSE:INT	ALIGN AUTO	11:58:30 AM Jul 03, 2019	_
Center Fi	req 515.00000	PNO: Fast ↔ IFGain:Low	. Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Hold: 10/10	TRACE 123456 TYPE MWWWW DET PPPPP	Frequency
0 dB/div	Ref Offset 8.64 dB Ref 28.64 dBm			MI	kr1 917.07 MHz -50.350 dBm	Auto Tune
18.6						Center Free 515.000000 MH:
1.36						Start Free 30.000000 MH
11.4 —— 21.4 ——						Stop Fre 1.000000000 GH
11.4					-28.70 dBm	CF Ste 97.000000 M⊢ <u>Auto</u> Ma
51.4	at a sub a l		1	ener in Friederich and an and a sector of the sector of th		Freq Offse
a pail a d _a alta 61.4	i Gan Yangan Yangan (1997) Mangan Yangan (1997) Mangan Yangan (1997)	and and the barrier of the second	a na an	i general de la constante de l Esperante de la constante de la c	ta shuriyya Millar ya furya baasaya ad	0 Н
tart 30.0 Res BW		#VBW	300 kHz	Sweep 9	Stop 1.0000 GHz 2.80 ms (8001 pts)	
#Res BW		#VBW	300 kHz	Sweep 9	2.80 ms (8001 pts)	




enter F	req 13.0000	000000 G	Hz NO: Fast ↔ Gain:Low				ALIGNAUTO :: Log-Pwr 5/10	TRAC	4 Jul 03, 2019 E <mark>1 2 3 4 5 6</mark> M M M M M M M M M M M M M M M M M M M	Frequency
0 dB/div	Ref Offset 8.6 Ref 28.64 (64 dB	Gain:Low	#Atten: 50			Μ	kr2 24.7	06 GHz 61 dBm	Auto Tun
18.6										Center Fre 13.000000000 GH
1.36	 ∂ ¹									Start Fre 1.000000000 G⊢
21.4	Y									Stop Fre 25.000000000 GH
31.4									-28.70 dBm	CF Ste 2.400000000 G⊢ <u>Auto</u> Ma
51.4				in in deite	11. A.	i ala di kangangan kangang kangang kang kang kan	n de la construcción de la construc	a Anna		Freq Offse 0 H
61.4) GHz							Stop 2	5.00 GHz	



6 Test setup photo



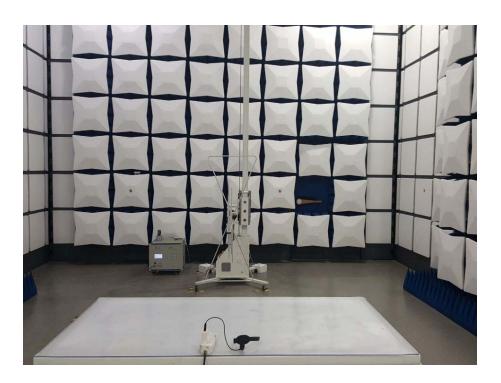





7 PHOTOS OF THE EUT

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos

-----End of test report------