



TEST REPORT

APPLICANT	: Crestron Electronics Inc.
PRODUCT NAME	: Crestron Video Bar
MODEL NAME	: M202108007
BRAND NAME	: CRESTRON
FCC ID	: EROM202108007
STANDARD(S)	: 47 CFR Part 15 Subpart C
RECEIPT DATE	: 2023-05-16
TEST DATE	: 2023-05-24 to 2023-08-25
ISSUE DATE	: 2023-09-07



Edited by:

Yong Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn





DIRECTORY

1. S	Summary of Test Result ······· 4
1.1.	Testing Applied Standards 5
1.2.	Test Equipment List ······ 6
1.3.	Measurement Uncertainty 8
1.4.	Testing Laboratory 8
2. 0	Seneral Description ·······9
2.1.	Information of Applicant and Manufacturer9
2.2.	Information of EUT
2.3.	Channel List of EUT ······10
2.4.	Test Configuration of EUT ······11
2.5.	Test Conditions11
2.6.	Test Setup Layout Diagram ······11
3. T	est Results ······14
3.1.	Antenna Requirement ······14
3.2.	Duty Cycle of Test Signal15
3.3.	Maximum Peak Conducted Output Power ······16
3.4.	Maximum Average Conducted Output Power ······17
3.5.	6 dB Bandwidth ······18
3.6.	Conducted Spurious Emissions and Band Edge19
3.7.	Power Spectral Density ······20
3.8.	Conducted Emission ······21
3.9.	Restricted Frequency Bands22
3.10	Radiated Emission ······23
Ann	ex A Test Data and Result ······25





Change History				
Version	Date	Reason for change		
1.0 2023-09-07		First edition		



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	May 31, 2023	Zhong Yanshan	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	May 31, 2023	Zhong Yanshan	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	May 31, 2023	Zhong Yanshan	PASS	No deviation
5	15.247(a)	Bandwidth	May 31, 2023	Zhong Yanshan	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	May 31, 2023	Zhong Yanshan	PASS	No deviation
7	15.247(e)	Power Spectral Density	May 31, 2023	Zhong Yanshan	PASS	No deviation
8	15.207	Conducted Emission	Jun. 20, 2023	Fan Zehang	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Aug. 23, 2023	Li Hanbin	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Aug. 25, 2023	Li Hanbin	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.





1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter	VTSD 9561	VTSD	Cobyyorzhooly	2022.07.06	2023.07.05
(10dB)	F-B #206	9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0






1.2.4 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
			A 11 1	2022.07.06	2023.07.05
Receiver	MY54130016	N9038A	N9038A Agilent -		2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier	46732	S10M100L38	LUCIX CORP.	2022.07.08	2023.07.07
(10MHz-6GHz)	40732	02		2023.06.27	2024.06.26
Preamplifier	61171/61172	S020180L32	LUCIX CORP.	2022.07.08	2023.07.07
(2GHz-18GHz)	01171/01172	03		2023.06.27	2024.06.26
Preamplifier	DS77209	DCLNA0118-	Decentest	2022.07.23	2023.07.22
(18GHz-40GHz)	0311203	40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable			Destarnesk	2022.07.08	2023.07.07
(DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable		01.1.140		2022.07.08	2023.07.07
(DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable		01.1.140	Destances	2022.07.08	2023.07.07
(DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable	22200045	QA360-40-K	Overheiden	2022.07.08	2023.07.07
(DC-40GHz)	22290045	K-0.5	Qualwave	2023.06.27	2024.06.26
RF Coaxial Cable	22200040	QA360-40-K	Overheiden	2022.07.08	2023.07.07
(DC-40GHz)	22290046	KF-2	Qualwave	2023.06.27	2024.06.26
RF Coaxial Cable	00400404	QA500-18-N	Quelucite	2022.07.08	2023.07.07
(DC-18GHz)	22120181	N-5	Qualwave	2023.06.27	2024.06.26
Notob Filtor	NI/A	WRCG-2400-	Mainwright	2022.07.08	2023.07.07
Notch Filter	N/A	2483.5-60SS	Wainwright	2023.06.27	2024.06.26
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525





1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
	FL.3, Building A, FeiYang Science Park, No.8 LongChang
Laboratory Address	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm	226174
Registration Number	220174





2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Crestron Electronics Inc.	
Applicant Address	licant Address 15 Volvo Drive, Rockleigh, NJ 07647, USA	
Manufacturer	Crestron Electronics Inc.	
Manufacturer Address	15 Volvo Drive, Rockleigh, NJ 07647, USA	

2.2. Information of EUT

Product Name:	Crestron Video Bar		
Sample No.:	1#		
Hardware Version:	V0.2		
Software Version:	QCS8250.LA.1.1	-00057-STD.PROD-1_asci_2023-07-06	
Equipment Type:	Bluetooth LE		
Bluetooth Version:	5.2		
Modulation Type:	GFSK		
Data Rate:	1Mbps, 2Mbps		
Operating Frequency Range:	2402MHz-2480MHz		
Antenna Type:	FPC Antenna		
Antenna Gain:	1.43dBi		
	AC Adapter		
	Brand Name:	Huntkey	
	Model No.:	HKA06519034-6K	
Accessory Information:	Serial No.:	N/A	
	Rated Output:	19V=3.42A	
	Rated Input:	100-240V~50/60Hz, 1.5A	
	Manufacturer:	Shenzhen Huntkey Electric Co., Ltd.	

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86

Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn



2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1.Conducted Measurement



2.6.2.Conducted Emission Measurement

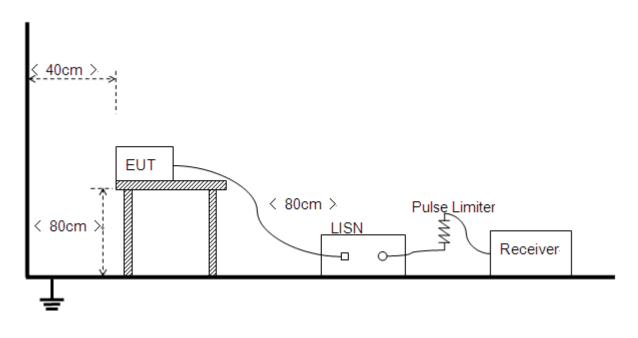



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

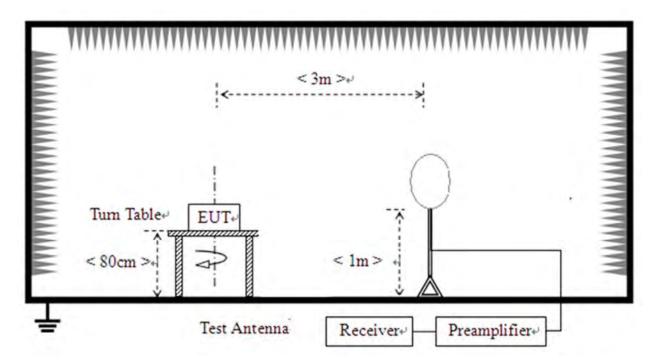

2) For radiated emissions from 30MHz to1GHz

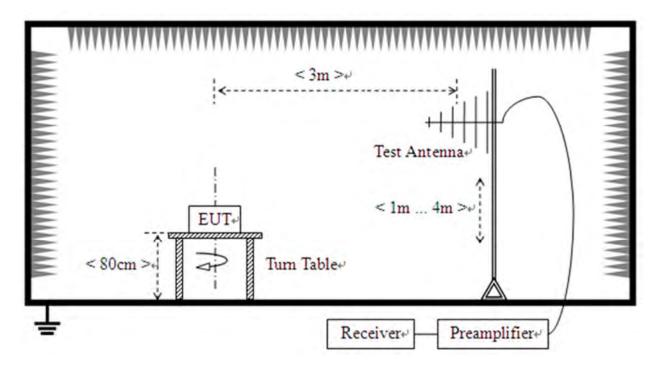




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3) For radiated emissions above 1GHz

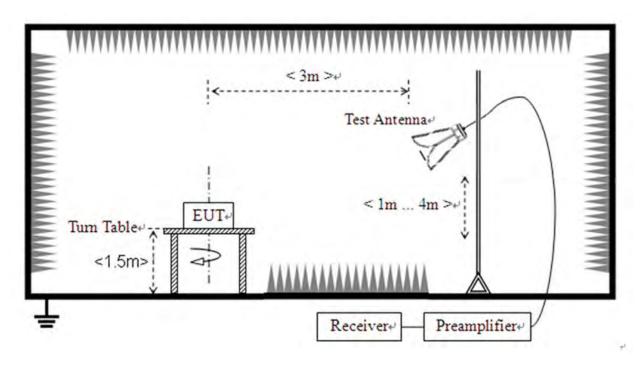



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



3.1. Antenna Requirement

3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2.Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn

Page 14 of 72



3.2. Duty Cycle of Test Signal

3.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2.Test Result

Refer to Annex A.1 in this report.





3.3. Maximum Peak Conducted Output Power

3.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2.Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4.Test Result

Refer to Annex A.2 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 8

Fax: 86-755-36698525

Http://www.morlab.cn



3.4. Maximum Average Conducted Output Power

3.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4.Test Result

Refer to Annex A.3 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn

Fax: 86-755-36698525

Http://www.morlab.cn





3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \geq 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result


Refer to Annex A.4 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





3.6. Conducted Spurious Emissions and Band Edge

3.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2.Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4.Test Result

Refer to Annex A.5 and A.6 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



3.7. Power Spectral Density

3.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2.Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize

i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4.Test Result

Refer to Annex A.7 in this report.





3.8. Conducted Emission

3.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/ 50Ω line impedance stabilization network (LISN).

Frequency Penge (MHz)	Conducted Limit (dBµV)				
Frequency Range (MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4.Test Result

Refer to Annex A.8 in this report.





3.9. Restricted Frequency Bands

3.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1GHz

VBW = 3 MHz Sweep = auto Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.8 in this report.





3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).





3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result

Refer to Annex A.9 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.9	2.08	2.56
NVNT	BLE 1M	2440	Ant1	62.9	2.01	2.56
NVNT	BLE 1M	2480	Ant1	62.9	2.01	2.56
NVNT	BLE 2M	2402	Ant1	33.33	4.77	4.76
NVNT	BLE 2M	2440	Ant1	33.33	4.77	4.76
NVNT	BLE 2M	2480	Ant1	32.26	4.91	5




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



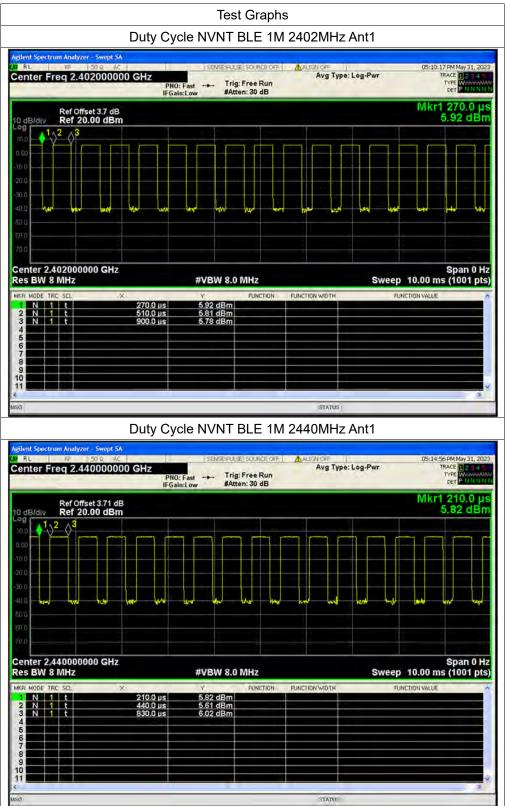


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



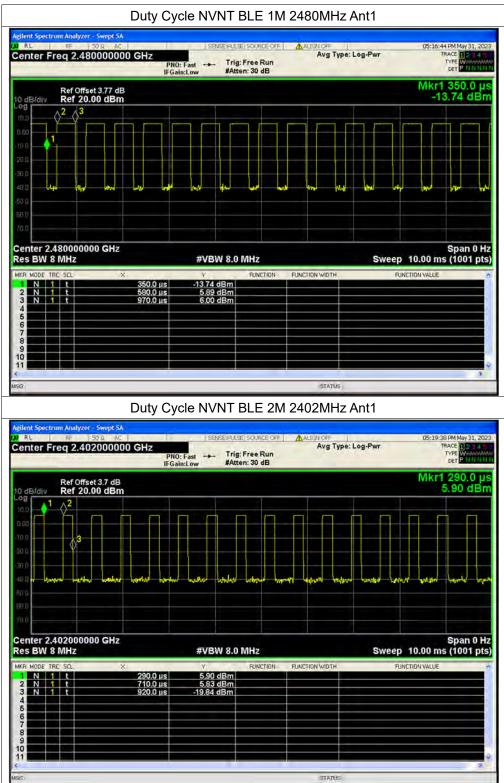




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



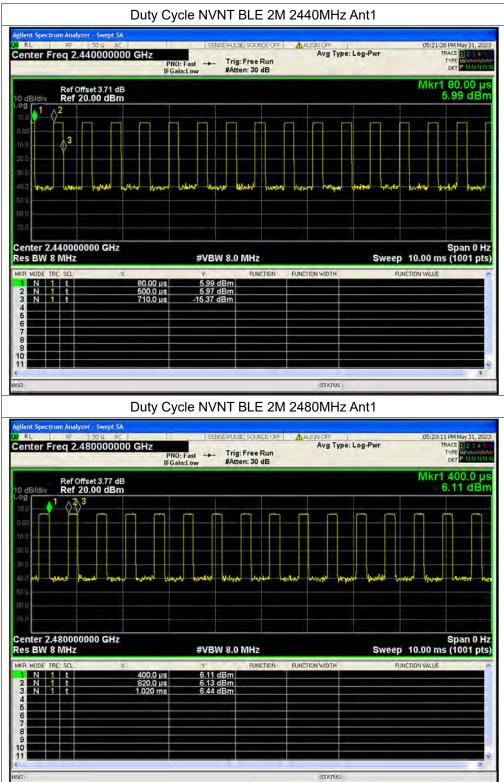



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (mW)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	5.98	0	5.98	3.97	30	Pass
NVNT	BLE 1M	2440	Ant1	6.09	0	6.09	4.07	30	Pass
NVNT	BLE 1M	2480	Ant1	6.16	0	6.16	4.13	30	Pass
NVNT	BLE 2M	2402	Ant1	6.04	0	6.04	4.01	30	Pass
NVNT	BLE 2M	2440	Ant1	6.17	0	6.17	4.14	30	Pass
NVNT	BLE 2M	2480	Ant1	6.26	0	6.26	4.23	30	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




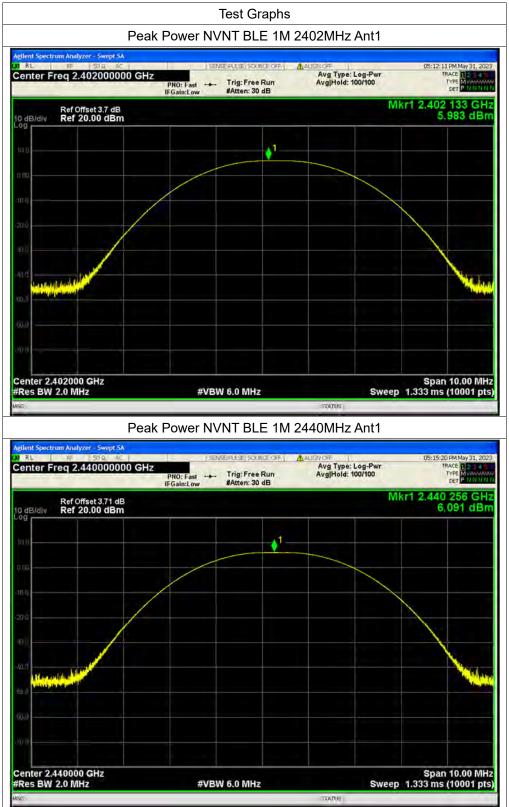



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



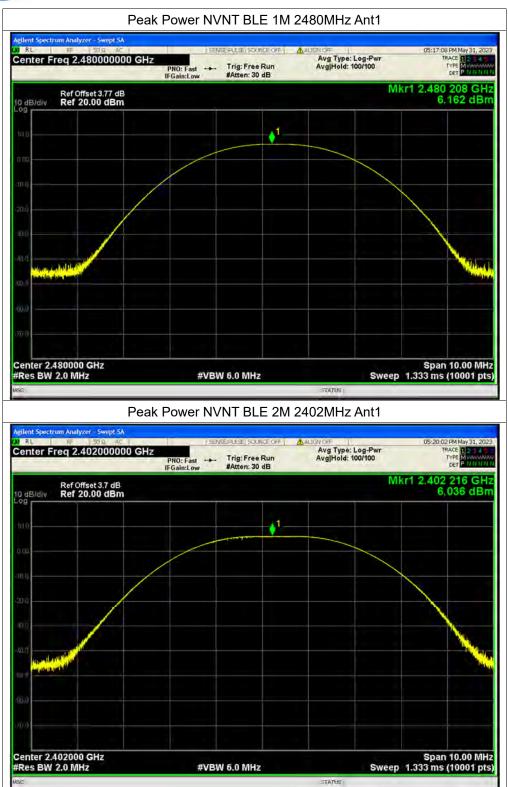


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn




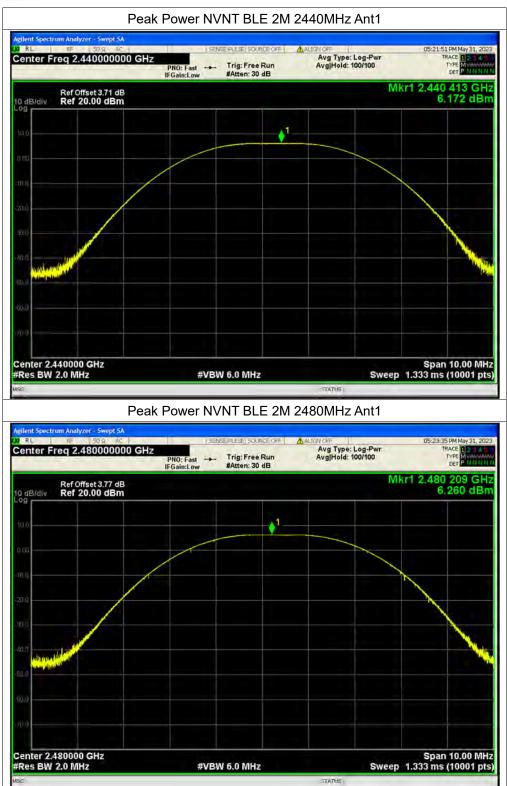

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (mW)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	3.01	2.08	5.09	3.23	30	Pass
NVNT	BLE 1M	2440	Ant1	3.3	2.01	5.31	3.4	30	Pass
NVNT	BLE 1M	2480	Ant1	3.26	2.01	5.27	3.36	30	Pass
NVNT	BLE 2M	2402	Ant1	0.75	4.77	5.52	3.56	30	Pass
NVNT	BLE 2M	2440	Ant1	0.97	4.77	5.74	3.75	30	Pass
NVNT	BLE 2M	2480	Ant1	1.05	4.91	5.96	3.95	30	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525

Http://www.morlab.cn







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



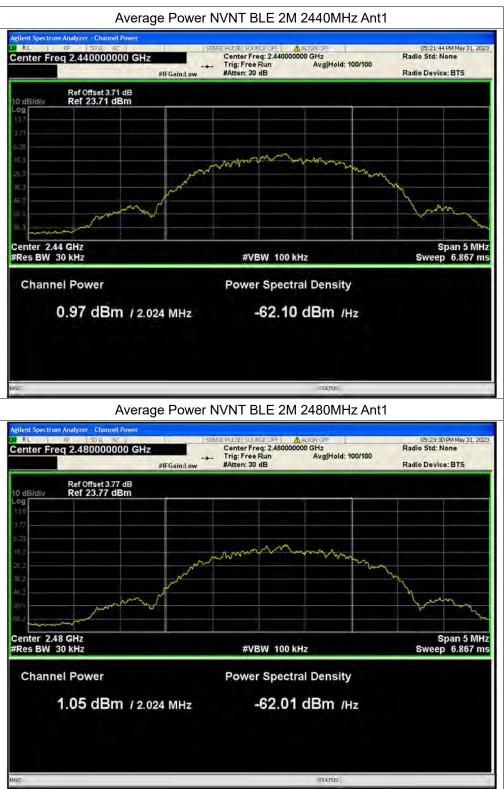



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



A.4. 6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.669	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.661	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.662	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.238	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.096	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.145	0.5	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525








Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



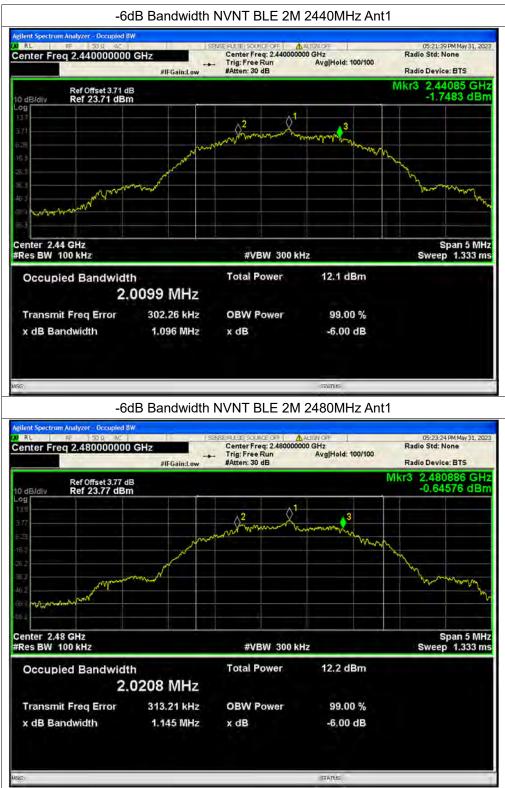

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-44.1	-20	Pass
NVNT	BLE 1M	2440	Ant1	-42.84	-20	Pass
NVNT	BLE 1M	2480	Ant1	-43.8	-20	Pass
NVNT	BLE 2M	2402	Ant1	-43.16	-20	Pass
NVNT	BLE 2M	2440	Ant1	-43.18	-20	Pass
NVNT	BLE 2M	2480	Ant1	-43.84	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



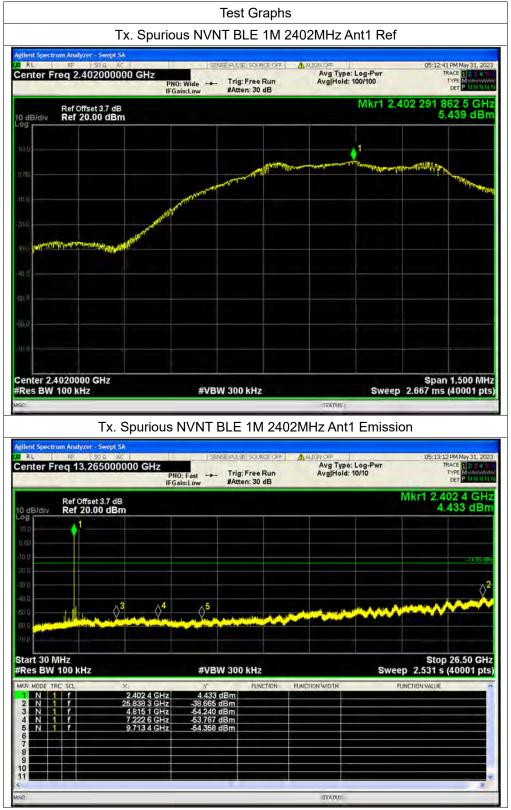






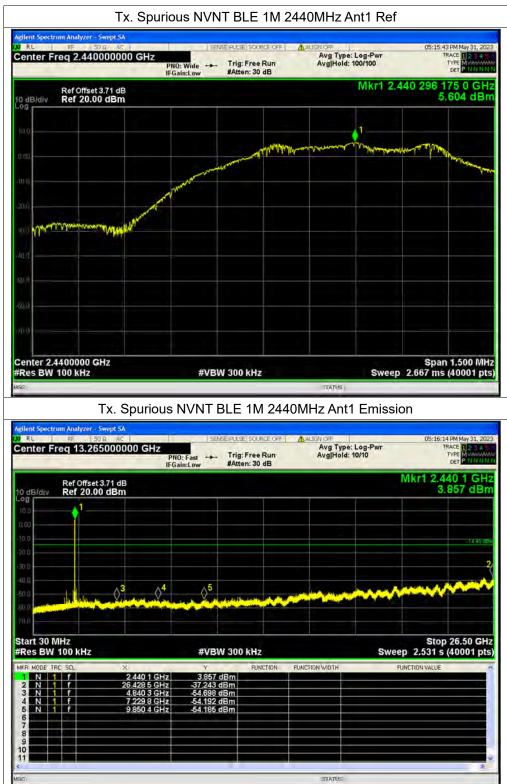





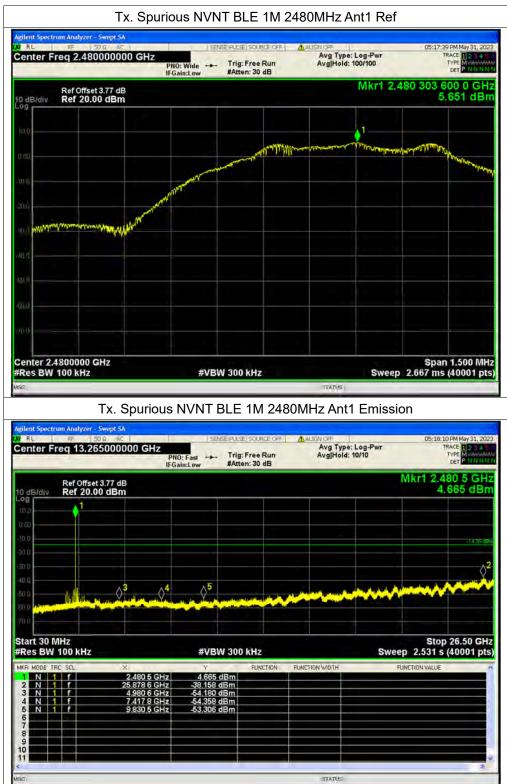

Shenzhen Morlab Communications Technology Co., Ltd.

FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,


Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-Http://www.morlab.cn E-mail: s

Fax: 86-755-36698525


monap.cn E-m



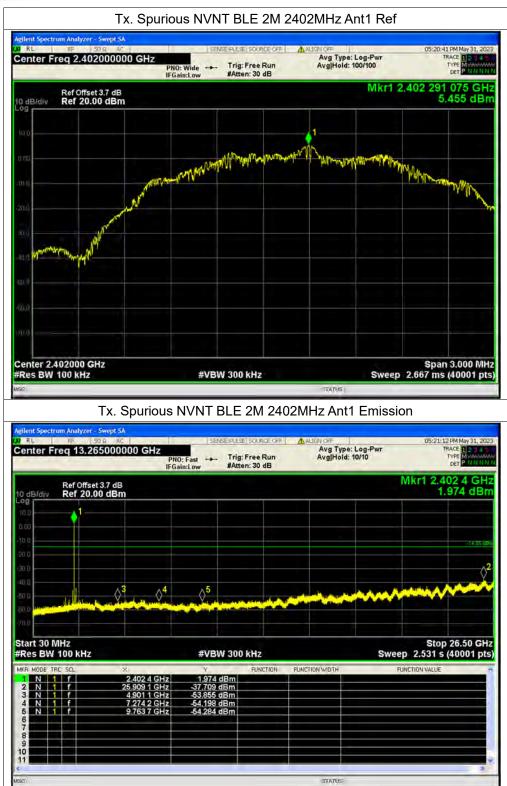






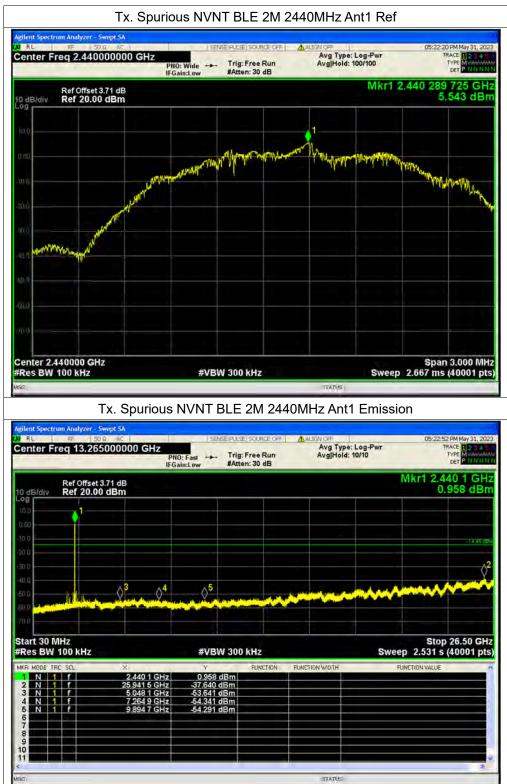





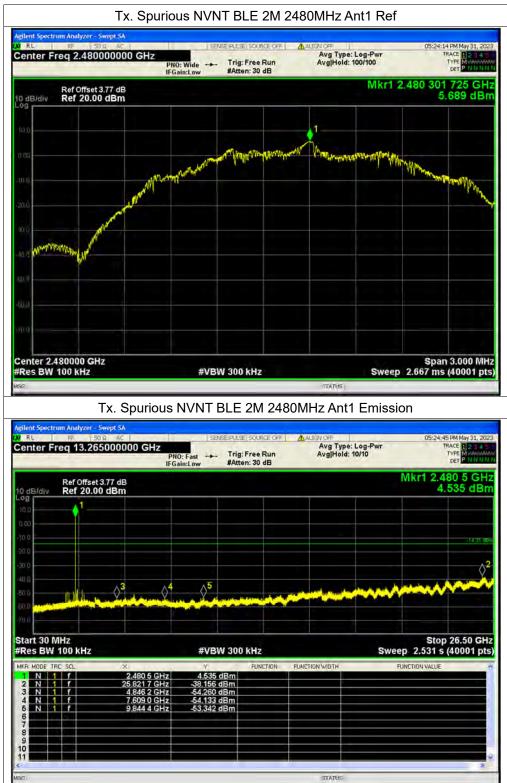





A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-52.64	-20	Pass
NVNT	BLE 1M	2480	Ant1	-61.22	-20	Pass
NVNT	BLE 2M	2402	Ant1	-49.07	-20	Pass
NVNT	BLE 2M	2480	Ant1	-59.97	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn




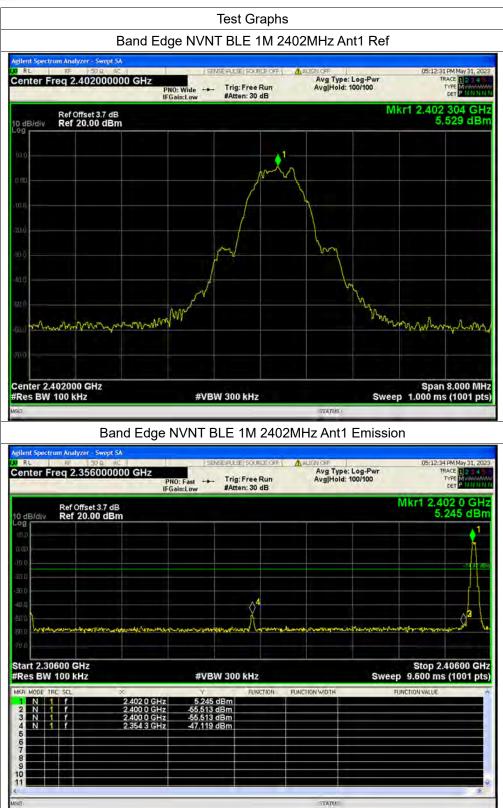








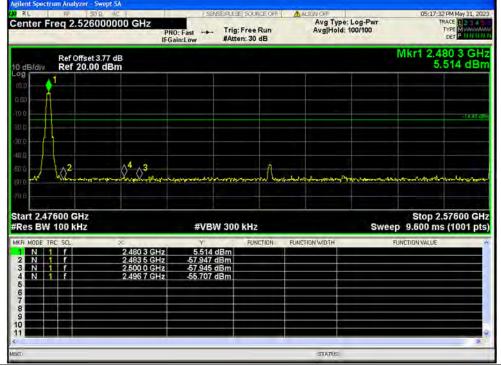





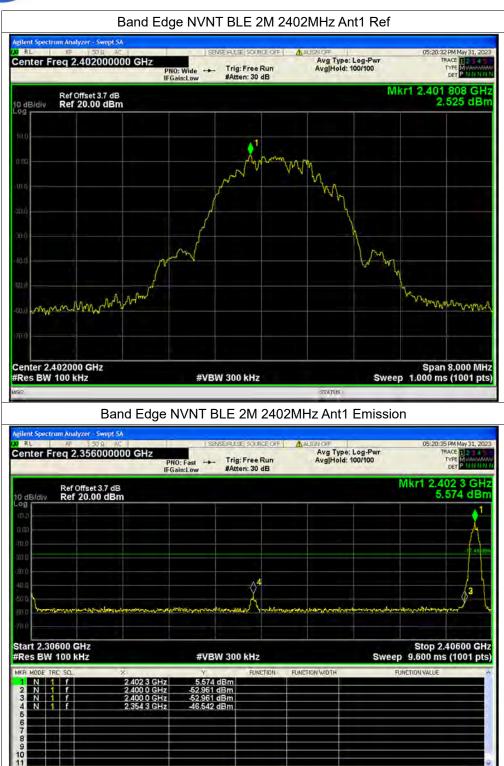


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China STATUS





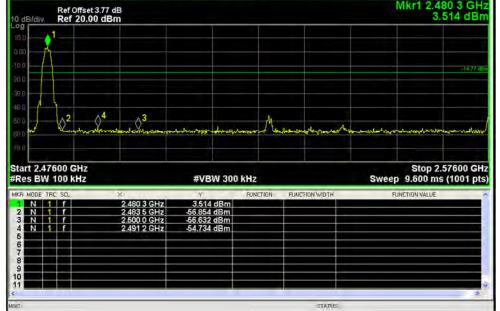





A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-8.71	0	-8.71	8	Pass
NVNT	BLE 1M	2440	Ant1	-8.57	0	-8.57	8	Pass
NVNT	BLE 1M	2480	Ant1	-8.51	0	-8.51	8	Pass
NVNT	BLE 2M	2402	Ant1	-11.59	0	-11.59	8	Pass
NVNT	BLE 2M	2440	Ant1	-11.39	0	-11.39	8	Pass
NVNT	BLE 2M	2480	Ant1	-11.35	0	-11.35	8	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



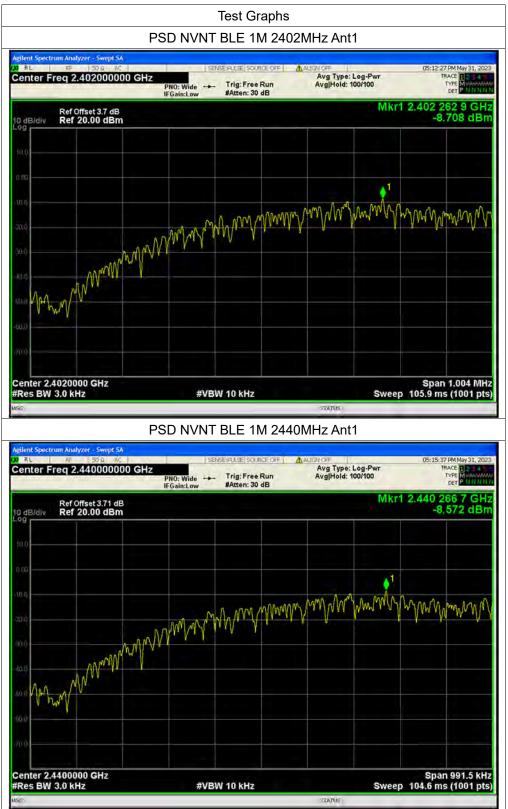





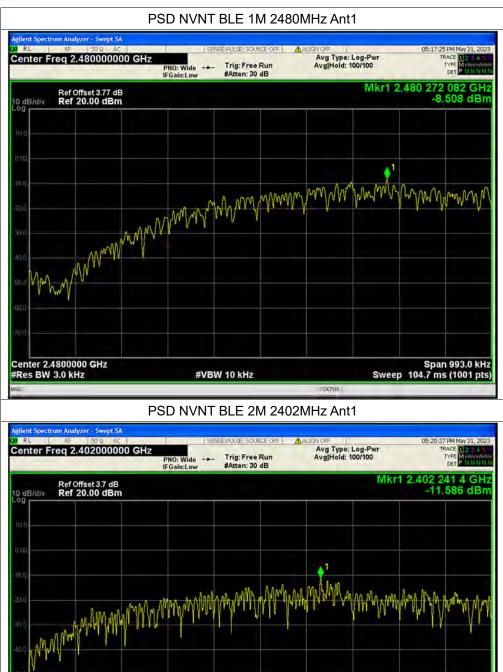



Center 2.4020000 GHz #Res BW 3.0 kHz

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


#VBW 10 kHz

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

Span 1.857 MHz Sweep 195.9 ms (1001 pts)

STATUS



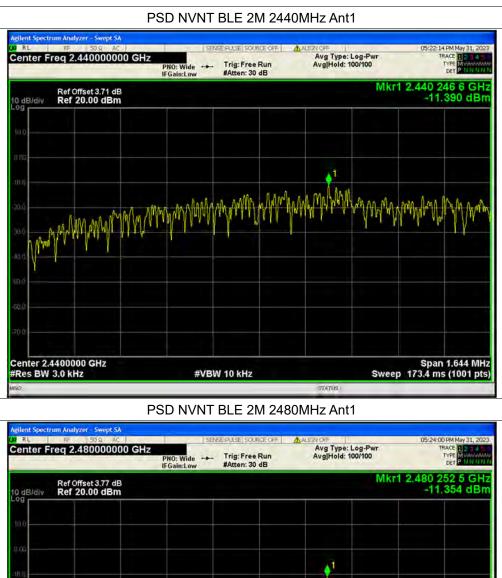





Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


A. Test Setup:

Test Mode: <u>EUT + Adapter + PC + USB Cable + HDMI Cable + Display screen + BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB μ V] =U_R + L_{Cable loss} [dB] + A_{Factor} U_R: Receiver Reading A_{Factor}: Voltage division factor of LISN





B. Test Plot:

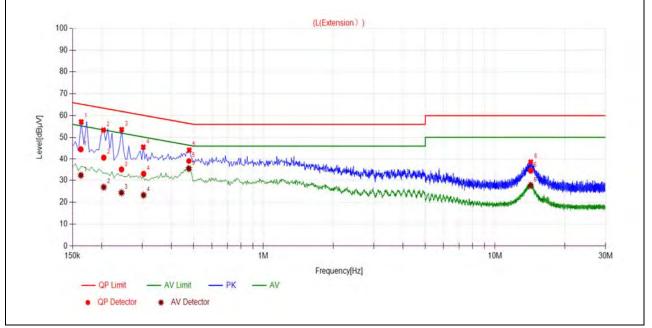


(L Phase)

No.	Fre.	Emission Level (dBµV)		Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1629	44.50	32.34	65.32	55.32		PASS
2	0.2045	40.67	26.90	63.43	53.43		PASS
3	0.2440	35.03	24.36	61.96	51.96	Line	PASS
4	0.3040	33.02	23.23	60.13	50.13	Line	PASS
5	0.4767	39.02	35.37	56.40	46.40		PASS
6	14.2552	34.45	27.79	60.00	50.00		PASS





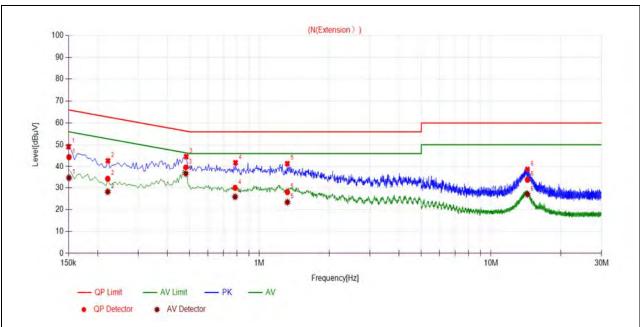

(N	Phase)
----	--------

No.	Fre.	Emission L	evel (dBµV)	Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1507	44.35	34.62	65.96	55.96		PASS
2	0.2215	34.19	28.20	62.76	52.76		PASS
3	0.4810	39.56	36.57	56.32	46.32	Noutral	PASS
4	0.7856	30.01	25.88	56.00	46.00	Neutral	PASS
5	1.3211	28.04	23.40	56.00	46.00		PASS
6	14.3531	33.70	27.02	60.00	50.00		PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Channel	Frequency	Detector	Receiver Reading	AT	AFactor	Max. Emission	Limit	Verdict	
ondriner	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)) Verdict	
0	2325.38	PK	23.79	6.74	27.20	57.73	74	PASS	
0	2387.15	AV	13.78	6.74	27.20	47.72	54	PASS	
39	2483.52	PK	28.30	6.74	27.20	62.24	74	PASS	
39	2483.52	AV	12.96	6.74	27.20	46.90	54	PASS	

1Mbps



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



100.000		08:38:04 PM	ALIGN OFF	T I	SENSE:1/		Ω DC	RESEL 50	RF	tL.
Marker	123456 M PPNNNN	TYPE	Type: Voltage fold:>100/100		Trig: Free Run #Atten: 6 dB	NO: Fast	000000 G	825376		ker
Select Marker	76 GHz 2 dBµV	2.325 37	Mkr2		Witten. 0 dD	Gamicow		ef 82.99		B/di
Norm										
Del		Q ¹	L. A M. Marker	hilan di digangka mpilikan ing	witchierstown		2-	america da se	مەلەر يەرەپ	
Fixed										
C	001 pts)	Stop 2.40 000 ms (1	Sweep 1.	FUNCTION	3.0 MHz	#VBW	MHz	0 GHz SPR) 1		es B
Properties		r dive hor	PORCHOR HOUSE	PORCHON	21.573 dBµV 23.792 dBµV	0 GHz 6 GHz	2.390 0 2.325 3			N
Mo 1 of										

(PEAK, Channel 0)

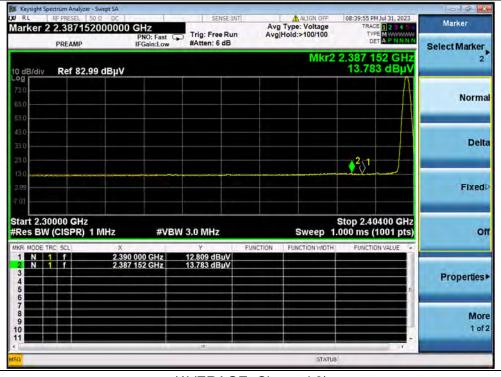

(AVERAGE, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525 E-mail: service@morlab.cn



	08:44:32 PM Jul 31, 2023	ALIGN OFF	T	SENSE:1/			PRESEL 5		
Marker	TRACE 1 2 3 4 5 6	Type: Voltage	Avg		GHz	2000000 G			ker
Select Marke	DET P P N N N	Hold:>100/100	Avg	Trig: Free Run #Atten: 6 dB	PNO: Fast G FGain:Low		REAMP	Р	
-	2.483 522 GHz 28.302 dBµV	Mkr2				9 dBµV	Ref 82.9	v :	B/di
Norm								\int	
De		نىرىدە دەرىپا بىرا ^{رىر} ارىر	بر بر بر بر بر بر بر بر بر	and the second second	wednesda	when the particular to the par			
Fixed									
c	Stop 2.50000 GHz 000 ms (1001 pts)	Sweep 1.	FUNCTION	/ 3.0 MHz	#VB	MHz	0 GHz ISPR) 1		s B
Propertie	POWLTON VALUE	FONCTION WIDTA	PONCTION	28.261 dBµV 28.302 dBµV	500 GHz 522 GHz	2.483 5	fi internet interne		N
Mo 1 o									

(PEAK, Channel 39)



(AVERAGE, Channel 39)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525



2Mbps

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channel	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	verdict
0	2365.31	PK	26.22	6.74	27.20	60.16	74	PASS
0	2389.86	AV	14.23	6.74	27.20	48.17	54	PASS
39	2483.63	PK	30.72	6.74	27.20	64.66	74	PASS
39	2483.50	AV	18.74	6.74	27.20	52.68	54	PASS



(PEAK, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



Marker	09:02:38 PM Jul 31, 2023 TRACE 1 2 3 4 5 6	ALIGN OFF		SENSE:IN	CH7	6000000	PRESEL 50		RL
Select Marker		Hold:>100/100		Trig: Free Run #Atten: 6 dB	PNO: Fast IFGain:Low		PREAMP		ante
2	2.389 856 GHz 14.226 dBµV	Mkr2				9 dBµV	Ref 82.9	dív	dB/d
Norm	=								9 g 30 30
Del	2								3 D
Fixed				***					9 0 99
c	Stop 2.40400 GHz .000 ms (1001 pts)		FUNCTION	3.0 MHz	#VBW	I MHz X	00 GHz CISPR) 1		Res I
Properties	POINT HOW VALUE	FORC NOR YOU'R	PONCTION	I3.550 dBµV I4.226 dBµV		2.390	f f		1 N 2 N 3 4 5
Mo 1 of									6 7 8 9 0
		STATUS					-		

(AVERAGE, Channel 0)



(PEAK, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn



RL RF PRESEL 50 0 DC rker 2 2.483522000000) GHz	SENSE:INT		ALIGN OFF	08:54:30 PM Jul 31, 20 TRACE 1 2 3 4	
PREAMP	PNO: Fast G	Trig: Free Run #Atten: 6 dB	Avg	Hold:>100/100	DET A P N N	WW
dB/div Ref 82.99 dBµV				Mkr2	2.483 522 GH 18.240 dBp	
						Norm
	2					Del
0				~~~~~		Fixed
art 2.47800 GHz es BW (CISPR) 1 MHz	#VBW	3.0 MHz		Sweep 1	Stop 2.50000 GI 000 ms (1001 pt	HZ (S) O
MODE TRC SCL X	3 500 GHz	Υ 18.737 dBμV 18.240 dBμV	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	i –
N 1 2.90	5 522 GHZ	18.240 0604				Processo and
						Properties
						Properties Mo 1 o

(AVERAGE, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 E-mail: service@morlab.cn

Fax: 86-755-36698525

Http://www.morlab.cn

Page 65 of 72



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.





Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn




1Mbps



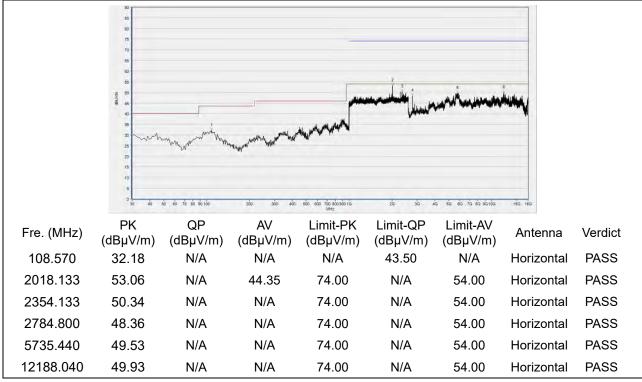

(Antenna Horizontal, 30MHz to 18GHz)

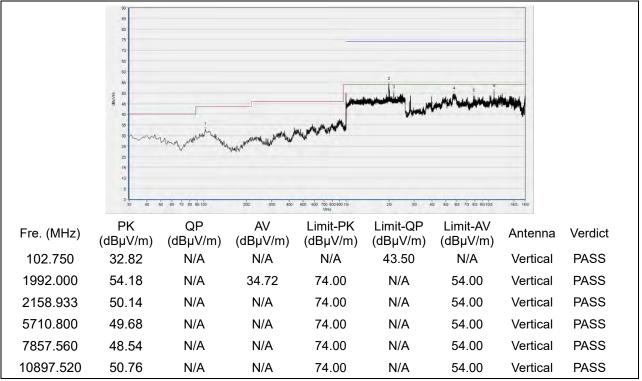

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



Plot for Channel 19

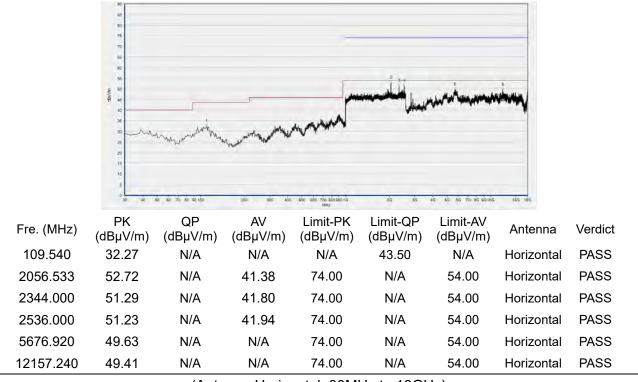

(Antenna Horizontal, 30MHz to 18GHz)

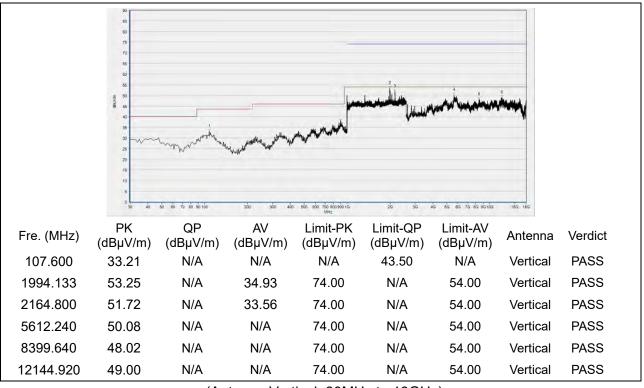

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



Plot for Channel 39

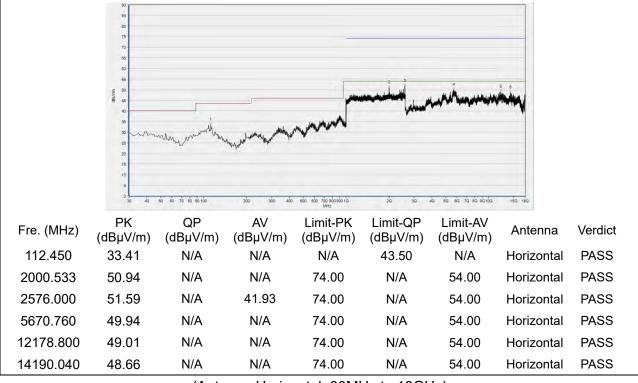

(Antenna Horizontal, 30MHz to 18GHz)

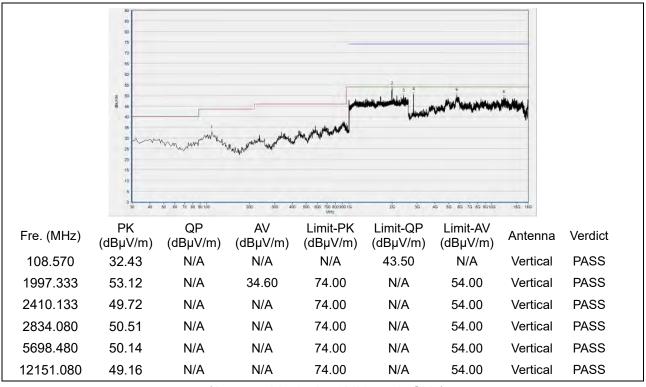

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




2Mbps



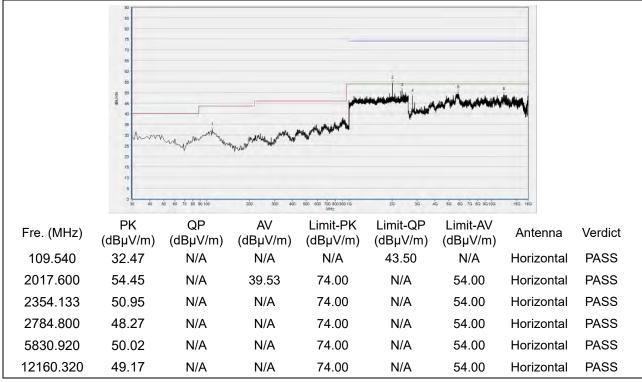

(Antenna Horizontal, 30MHz to 18GHz)

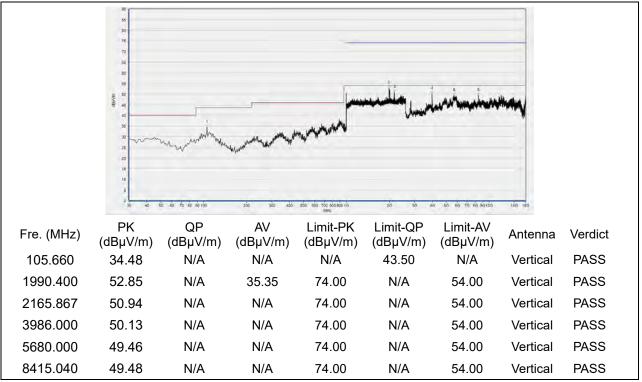

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 19

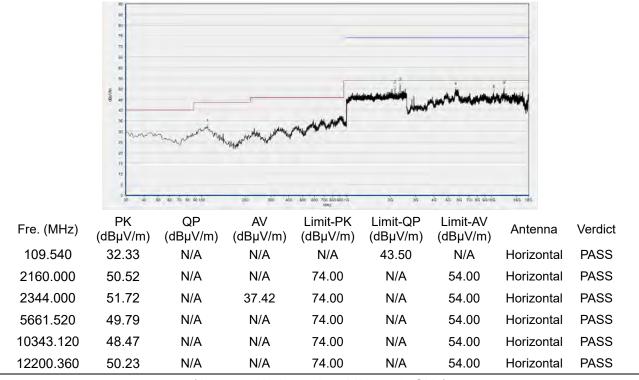

(Antenna Horizontal, 30MHz to 18GHz)

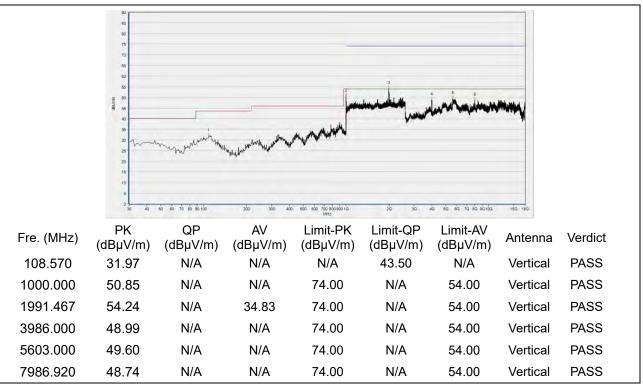


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn






Plot for Channel 39

	80 時 時 70 10 80 80 80 80 80 80 80 80 80 80 80 80 80	it my www.	no so so o	o do do rite statolio	n se se	Autor do station into	Y	
Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
109.540	32.45	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2000.000	50.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2576.000	51.13	N/A	39.24	74.00	N/A	54.00	Horizontal	PASS
2960.360	46.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5683.080	50.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12157.240	48.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

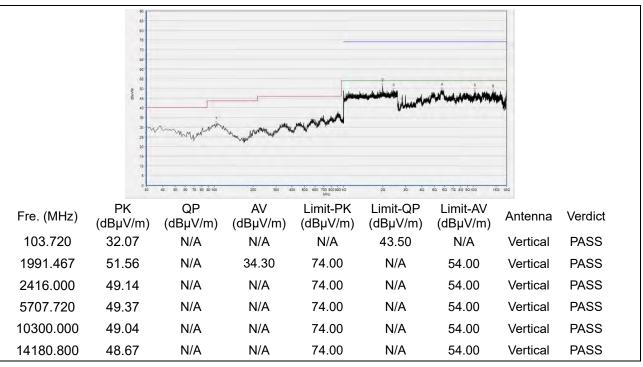

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525