


1. Bar code System: Code 128
2. Material: white ART paper
3. Printing color: Black and Pantone 8001 C (8001 C := 75% 877 C + 25% 874 C).
The pink color content must be printed on the assembly line.
The green color content must be pre-printed in the label factory.
4. Tolerance: ±0.2mm
5. SIZE: 56.5(W)X36.0(H)mm
6. Print content: Use „DIN Next LT Pro“ as font for pre-printing in the label factory (font files are provided by snom)
 - A. Revision: RnX (provided by snom with PO), Printing Color: Black
R:= indicates revision number (fixed information)
n:=1st revision index (major changes) (numeric)
X:=2nd revision index (minor changes) (capital letter)
e.g. R3A
 - B. Barcode: Serial No. (16 digits) (Code 128), Printing Color: Black
XXX:= Country of Origin - ISO 3166-1 alpha-3 (3 digits)
YY:= Product of factory abbreviation - provided by snom (2 digits)
888888:= DDMMYY day, month, year (only last two digits)
99999:= Serial Number (5 digits, numeric)
 - C. Barcode: MAC Address (Code 128), Printing Color: Black
 - D. Year of production, Printing Color: Pantone 8001 C
 - E. UL manufacturer number, Printing Color: Pantone 8001 C
 - F. Country of Origin (English name), Printing Color: Pantone 8001 C
 - G. Internal Label Revision (YMZZ), set by Snom Staff
Y := Year of label creating or editing, represented by one digit. The Year of creating/editing this label indicates the year counting from within each new decade, with 2000 as the starting point. For example 2010 is indicated by 0, 2011 by 1, 2012 by 2, and so forth.
M := Month of label creating or editing, represented by a single alpha-numeric character. The next alphanumeric character represents the month of creating/editing this label. The month indicates the month within a given year with January as the starting point. The first nine months are designated sequentially from 1 to 9. The last three months of the year, October, November and December are designated as 0 (the number zero), A and B respectively.
Therefore the range of the month is from 1 to 9 then 0, then A then B.
ZZ := Sequential numeric revision no. 2 digits with a leading zero. Has to match with the listed revision no. of this document below and the file name of this document.
7. Attach onto the backside of the phone enclosure
8. Do not rip off the label and never re-use it!

company	Snom Technology GmbH	revision	12	PS No.	-	ERP No.	-	scale	1:1	total pages	1	page	1
model	snom D765												
product	Type Label	prepared by	Martin Taube (martin.taube@snom.com)										
filename	snom_D765_type_label_rev12.pdf	checked by	-										
created	2014-07-02	approved by	-										
last saved	2017-11-14	status	-										



Stick the „FCC label“ on the left inner side of the connection area on phone.

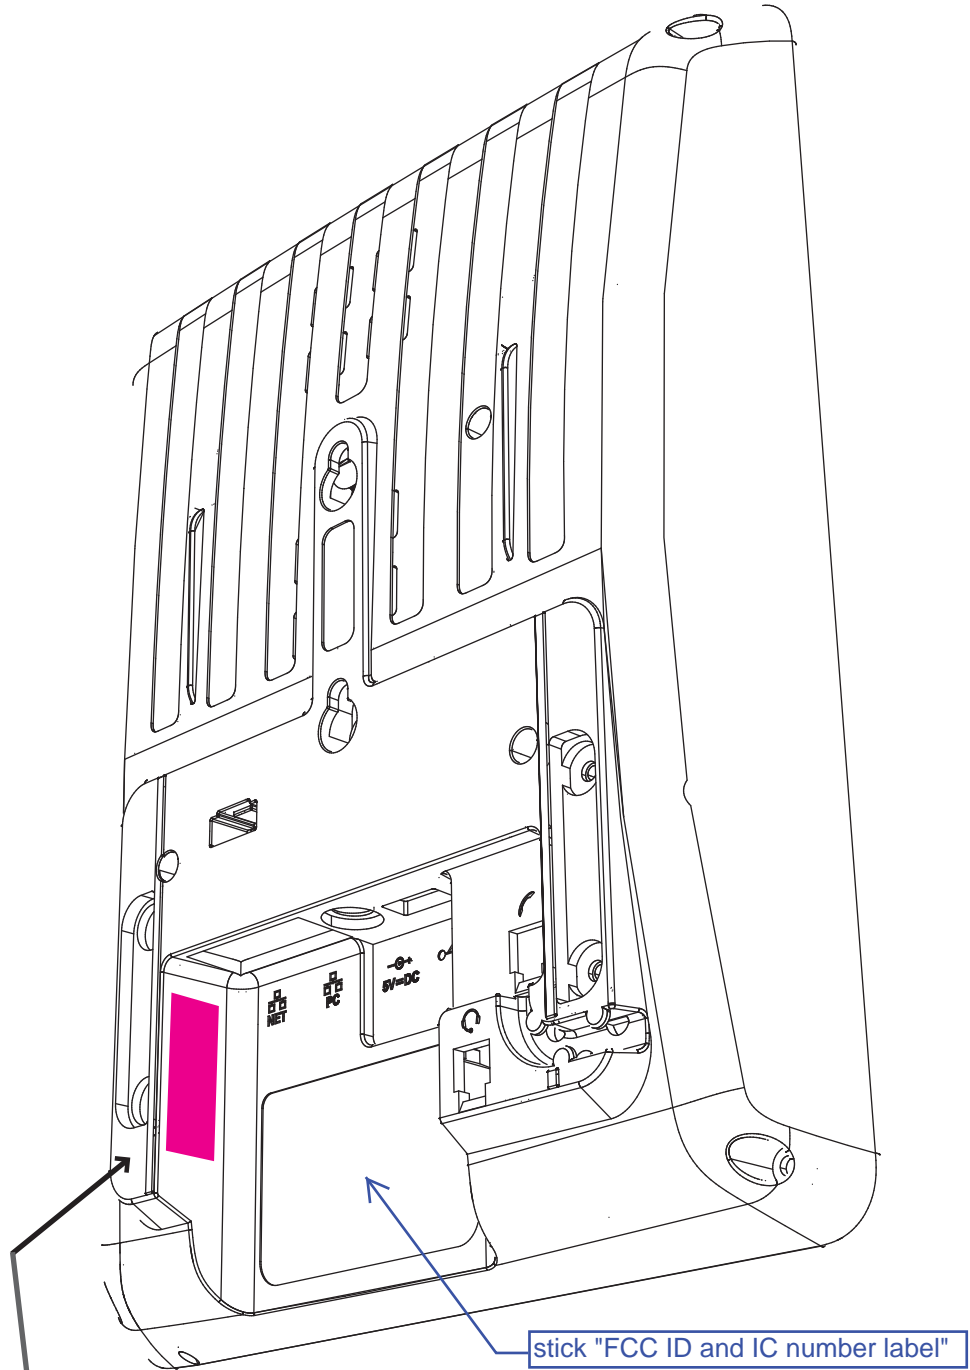