

Test Report

Report No.: MTi230921033-05E2

Date of issue: 2023-11-08

Applicant: Shenzhen hnlife lighting technology co., LTD

Product: IPSTUBE Nixie Tube

Model(s): HN-H401

FCC ID: 2A5J2-H401

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1 General Description	5
1.1 Description of the EUT	5
1.2 Description of test modes	5
1.3 Environmental Conditions	7
1.4 Description of support units	7
1.5 Measurement uncertainty	7
2 Summary of Test Result	8
3 Test Facilities and accreditations	9
3.1 Test laboratory	9
4 List of test equipment	10
5 Evaluation Results (Evaluation)	11
5.1 Antenna requirement	11
6 Radio Spectrum Matter Test Results (RF)	12
6.1 Conducted Emission at AC power line	12
6.2 Occupied Bandwidth	15
6.3 Maximum Conducted Output Power	16
6.4 Power Spectral Density	17
6.5 RF conducted spurious emissions and band edge measurement	18
6.6 Band edge emissions (Radiated)	19
6.7 Radiated emissions (below 1GHz)	36
6.8 Radiated emissions (above 1GHz)	40
Photographs of the test setup	47
Photographs of the EUT	48
Appendix A: DTS Bandwidth	50
Appendix B: Maximum conducted output power	55
Appendix C: Maximum power spectral density	56
Appendix D: Band edge measurements	61
Appendix E: Conducted Spurious Emission	64
Appendix F: Duty Cycle	76

Test Result Certification	
Applicant:	Shenzhen hnlife lighting technology co., LTD
Address:	6rd flr, 4th bld, E area of xinyongfeng factory, shilong RD, shuitian, shiyan, Bao'an, shenzhen, Guangdong
Manufacturer:	Shenzhen hnlife lighting technology co., LTD
Address:	6rd flr, 4th bld, E area of xinyongfeng factory, shilong RD, shuitian, shiyan, Bao'an, shenzhen, Guangdong
Product description	
Product name:	IPSTUBE Nixie Tube
Trademark:	IPSTUBE
Model name:	HN-H401
Series Model:	N/A
Standards:	47 CFR Part 15.247
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2023-10-13 to 2023-11-08
Test result:	Pass

Test Engineer	:	<i>Letter. Lan.</i>
		<i>(Letter Lan)</i>
Reviewed By	:	<i>Leon Chen</i>
		<i>(Leon Chen)</i>
Approved By	:	<i>Tom Xue</i>
		<i>(Tom Xue)</i>



1 General Description

1.1 Description of the EUT

Product name:	IPSTUBE Nixie Tube
Model name:	HN-H401
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Input: DC 5V
Accessories:	Cable: USB-A to Type-C cable (1.5m)
Hardware version:	HN-203X31-HG-ESD-B
Software version:	V1.0
Test sample(s) number:	MTi230921033-05S1001
RF specification	
Operating frequency range:	802.11b/g/n20:2412~2462 MHz 802.11n40:2422~2452 MHz
Modulation type:	IEEE 802.11b : DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna(s) type:	PCB Antenna
Antenna(s) gain:	2dBi

1.2 Description of test modes

No.	Emission test modes
Mode1	TX-802.11b
Mode2	TX-802.11g
Mode3	TX-802.11N20
Mode4	TX-802.11N40

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442	/	/
3	2422	8	2447	/	/
4	2427	9	2452	/	/
5	2432	10	2457	/	/

Test Channel List

Operation Band: 2400-2483.5 MHz

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	2412	2437	2462
40	2422	2437	2452

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software: EspRFTestTool

For power setting, refer to below table.

Mode	2412MHz	2437MHz	2462MHz
802.11b	30	30	30
802.11g	30	30	30
802.11n20	30	30	30
Mode	2422MHz	2437MHz	2452MHz
802.11n40	30	30	30

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Adapter	EQ-24BCN	/	Huizhou Dongyang Yienbi Electronics Co., Ltd.
Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
3	Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(1)	Pass
4	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
5	Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
6	RF conducted spurious emissions and band edge measurement	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
7	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
9	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093



4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2023-04-26	2024-04-25
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2023-05-05	2024-05-04
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2023-06-03	2024-06-02
Occupied Bandwidth Maximum Conducted Output Power Power Spectral Density						
RF conducted spurious emissions and band edge measurement						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Band edge emissions (Radiated) Radiated emissions (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-06-26	2024-06-25
4	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04
Radiated emissions (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2023-06-11	2025-06-10
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-06-26	2024-06-25
5	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

5.1.1 Conclusion:

The antenna of the EUT is permanently attached.

The EUT complies with the requirement of FCC PART 15.203.



6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).																	
Test Limit:	<table border="1"> <thead> <tr> <th>Frequency of emission (MHz)</th> <th colspan="2">Conducted limit (dBμV)</th> </tr> <tr> <th></th> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency of emission (MHz)	Conducted limit (dB μ V)			Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency of emission (MHz)	Conducted limit (dB μ V)																	
	Quasi-peak	Average																
0.15-0.5	66 to 56*	56 to 46*																
0.5-5	56	46																
5-30	60	50																
	*Decreases with the logarithm of the frequency.																	
Test Method:	ANSI C63.10-2013 section 6.2																	
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices																	

6.1.1 E.U.T. Operation:

Operating Environment:				
Temperature:	25.9 °C	Humidity:	57 %	Atmospheric Pressure:
Pre test mode:	Mode1, Mode2, Mode3, Mode4			
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report			


6.1.2 Test Setup Diagram:

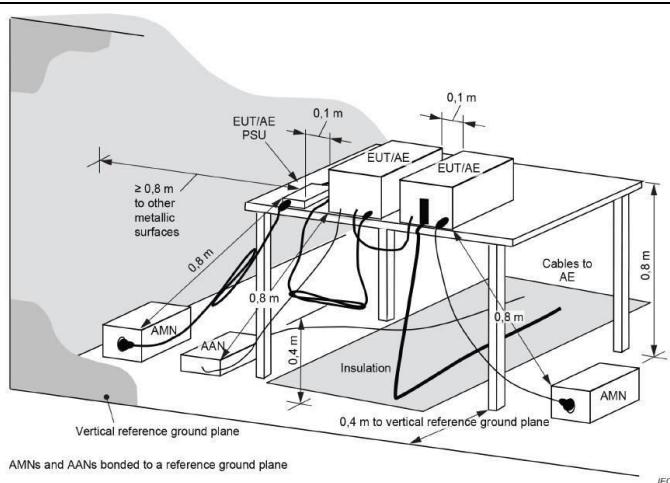



6.1.3 Test Data:


Mode1 / Line / Band: 2400-2483.5 MHz / BW: 20 / CH: L

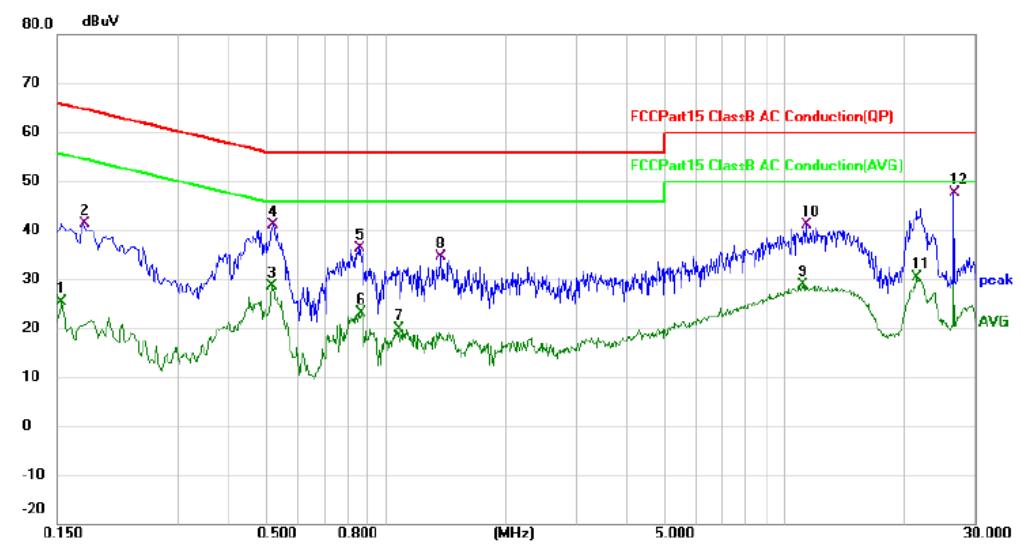

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
MHz		dBuV	dB		dBuV	dB			
1	0.1539	15.06	10.28	25.34	55.79	-30.45		AVG	
2	0.1740	31.05	10.28	41.33	64.77	-23.44		QP	
3	0.5180	17.28	11.36	28.64	46.00	-17.36		AVG	
4	0.5220	29.87	11.36	41.23	56.00	-14.77		QP	
5	0.8580	24.39	12.11	36.50	56.00	-19.50		QP	
6	0.8700	11.12	12.13	23.25	46.00	-22.75		AVG	
7	1.0780	7.27	12.54	19.81	46.00	-26.19		AVG	
8	1.3779	21.58	13.01	34.59	56.00	-21.41		QP	
9	11.1340	18.35	10.43	28.78	50.00	-21.22		AVG	
10	11.3540	30.64	10.43	41.07	60.00	-18.93		QP	
11	21.5740	19.58	10.69	30.27	50.00	-19.73		AVG	
12 *	26.6740	36.89	10.81	47.70	60.00	-12.30		QP	



Mode1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: L

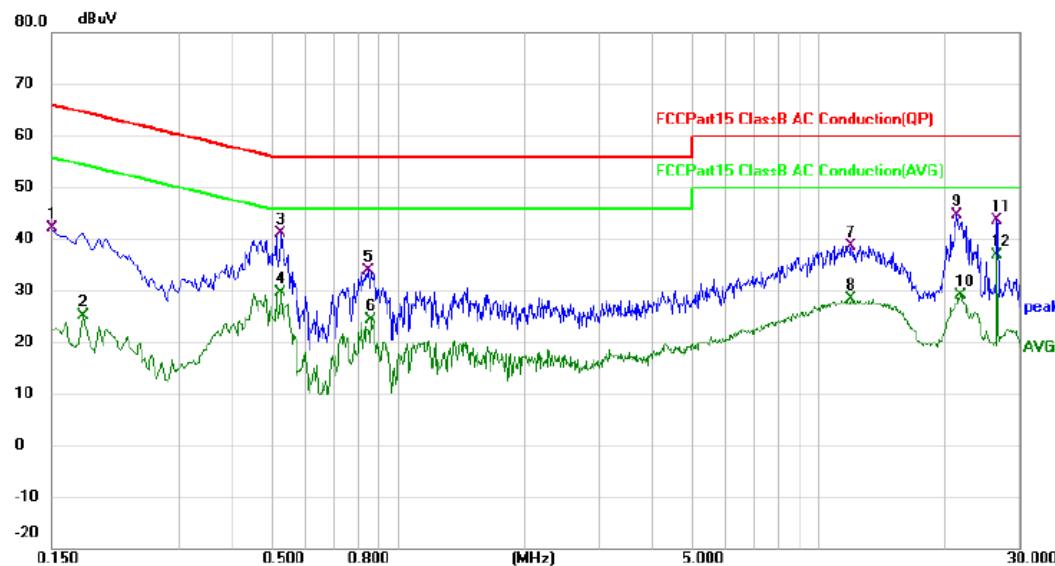

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	dB	Over Detector	Comment
1		0.1500	31.80	10.29	42.09	66.00	-23.91	QP	
2		0.1780	14.98	10.24	25.22	54.58	-29.36	AVG	
3		0.5260	29.79	11.39	41.18	56.00	-14.82	QP	
4		0.5260	18.29	11.39	29.68	46.00	-16.32	AVG	
5		0.8500	21.71	12.06	33.77	56.00	-22.23	QP	
6		0.8660	12.27	12.10	24.37	46.00	-21.63	AVG	
7		11.9700	28.35	10.38	38.73	60.00	-21.27	QP	
8		11.9700	17.99	10.38	28.37	50.00	-21.63	AVG	
9		21.3380	33.99	10.72	44.71	60.00	-15.29	QP	
10		21.7580	18.32	10.72	29.04	50.00	-20.96	AVG	
11		26.6980	32.86	10.81	43.67	60.00	-16.33	QP	
12 *		26.6980	26.16	10.81	36.97	50.00	-13.03	AVG	


6.2 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.1 E.U.T. Operation:

Operating Environment:			
Temperature:	33.3 °C	Humidity:	49.5 %
Pre test mode:	Mode1, Mode2, Mode3, Mode4		
Final test mode:	Mode1, Mode2, Mode3, Mode4		

6.2.2 Test Setup Diagram:

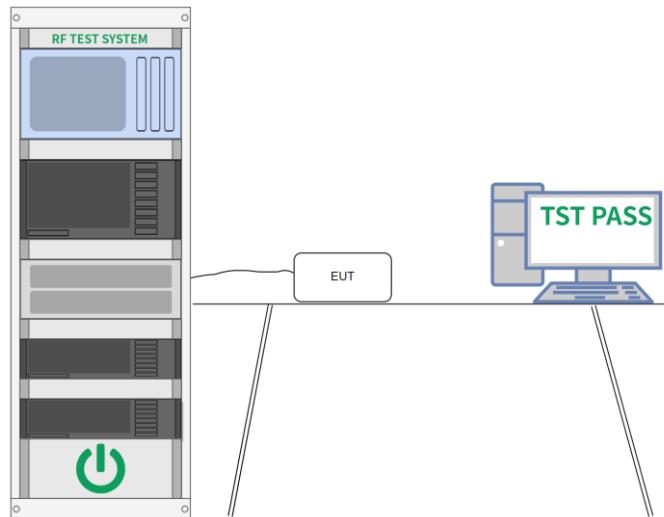

6.2.3 Test Data:

Please Refer to Appendix for Details.


6.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

6.3.1 E.U.T. Operation:

Operating Environment:				
Temperature:	33.3 °C	Humidity:	49.5 %	Atmospheric Pressure: 98 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4			
Final test mode:	Mode1, Mode2, Mode3, Mode4			

6.3.2 Test Setup Diagram:

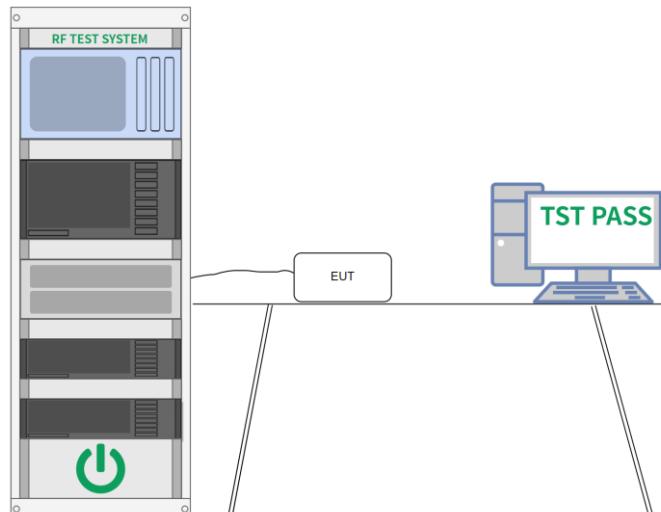

6.3.3 Test Data:

Please Refer to Appendix for Details.


6.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission

6.4.1 E.U.T. Operation:

Operating Environment:			
Temperature:	33.3 °C	Humidity:	49.5 %
Pre test mode:	Mode1, Mode2, Mode3, Mode4		
Final test mode:	Mode1, Mode2, Mode3, Mode4		

6.4.2 Test Setup Diagram:

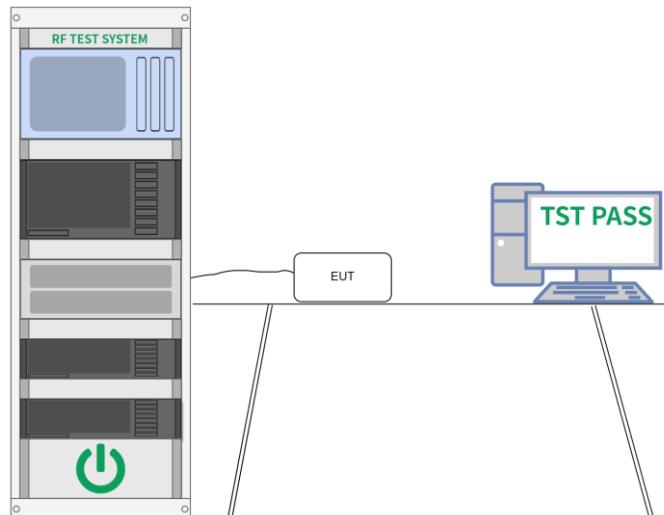

6.4.3 Test Data:

Please Refer to Appendix for Details.


6.5 RF conducted spurious emissions and band edge measurement

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:				
Temperature:	33.3 °C	Humidity:	49.5 %	Atmospheric Pressure: 98 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4			
Final test mode:	Mode1, Mode2, Mode3, Mode4			

6.5.2 Test Setup Diagram:

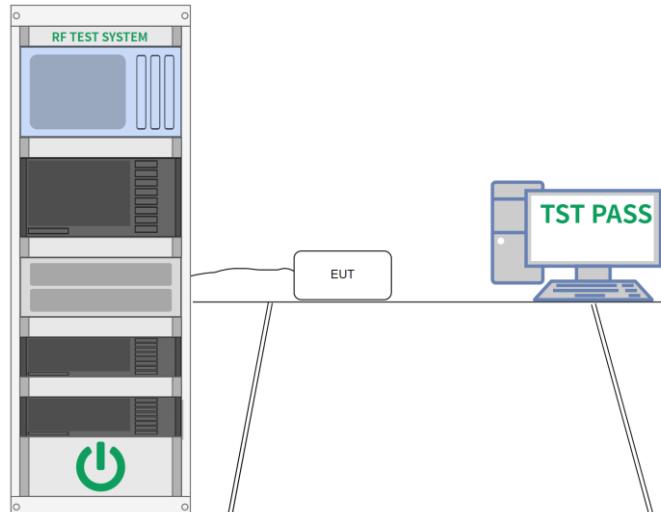

6.5.3 Test Data:

Please Refer to Appendix for Details.



6.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d). In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.


In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

| Test Method: | ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02 | | |
| Procedure: | ANSI C63.10-2013 section 6.10.5.2 | | |

6.6.1 E.U.T. Operation:

Operating Environment:				
Temperature:	25 °C	Humidity:	57 %	Atmospheric Pressure:
Pre test mode:	Mode1, Mode2, Mode3, Mode4			
Final test mode:	Mode1, Mode2, Mode3, Mode4			
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.				

6.6.2 Test Setup Diagram:

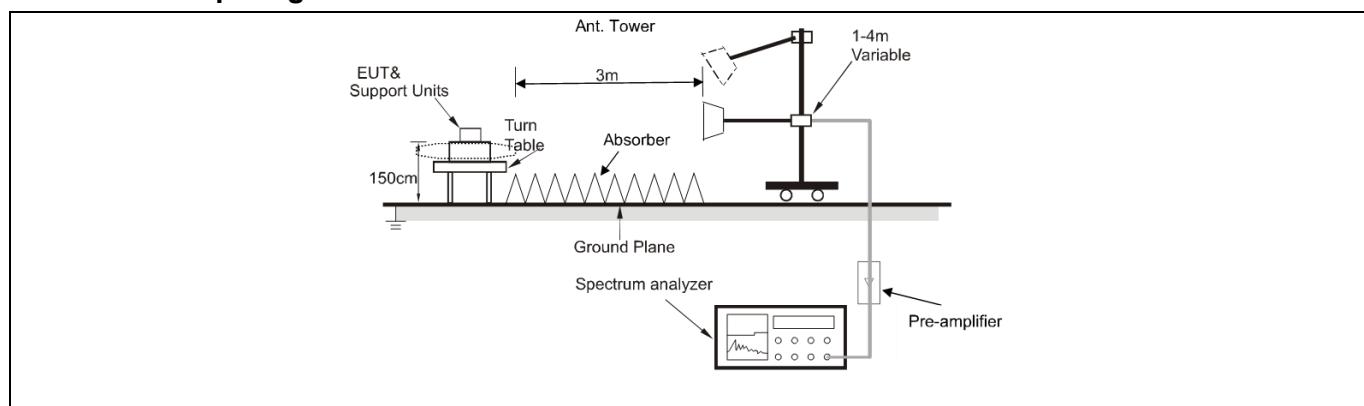

6.6.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		2310.000	41.97	-2.66	39.31	74.00	-34.69	peak
2		2310.000	32.39	-2.66	29.73	54.00	-24.27	AVG
3		2390.000	42.07	-2.03	40.04	74.00	-33.96	peak
4	*	2390.000	32.49	-2.03	30.46	54.00	-23.54	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	42.38	-2.66	39.72	74.00	-34.28	peak
2		2310.000	32.51	-2.66	29.85	54.00	-24.15	AVG
3		2390.000	41.64	-2.03	39.61	74.00	-34.39	peak
4	*	2390.000	32.46	-2.03	30.43	54.00	-23.57	AVG

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.78	-1.91	44.87	74.00	-29.13	peak
2		2483.500	37.37	-1.91	35.46	54.00	-18.54	AVG
3		2500.000	47.73	-1.80	45.93	74.00	-28.07	peak
4	*	2500.000	37.63	-1.80	35.83	54.00	-18.17	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.80	-1.91	44.89	74.00	-29.11	peak
2		2483.500	37.36	-1.91	35.45	54.00	-18.55	AVG
3		2500.000	47.92	-1.80	46.12	74.00	-27.88	peak
4	*	2500.000	37.86	-1.80	36.06	54.00	-17.94	AVG



Mode2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	41.15	-2.66	38.49	74.00	-35.51	peak
2		2310.000	32.25	-2.66	29.59	54.00	-24.41	AVG
3		2390.000	41.30	-2.03	39.27	74.00	-34.73	peak
4	*	2390.000	32.59	-2.03	30.56	54.00	-23.44	AVG

Mode2 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	42.31	-2.66	39.65	74.00	-34.35	peak
2		2310.000	32.51	-2.66	29.85	54.00	-24.15	AVG
3		2390.000	41.68	-2.03	39.65	74.00	-34.35	peak
4	*	2390.000	32.65	-2.03	30.62	54.00	-23.38	AVG

Mode2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.61	-1.91	44.70	74.00	-29.30	peak
2		2483.500	37.65	-1.91	35.74	54.00	-18.26	AVG
3		2500.000	47.19	-1.80	45.39	74.00	-28.61	peak
4	*	2500.000	37.76	-1.80	35.96	54.00	-18.04	AVG



Mode2 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.50	-1.91	44.59	74.00	-29.41	peak
2		2483.500	37.68	-1.91	35.77	54.00	-18.23	AVG
3		2500.000	47.07	-1.80	45.27	74.00	-28.73	peak
4	*	2500.000	37.71	-1.80	35.91	54.00	-18.09	AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	42.29	-2.66	39.63	74.00	-34.37	peak
2		2310.000	32.48	-2.66	29.82	54.00	-24.18	AVG
3		2390.000	42.59	-2.03	40.56	74.00	-33.44	peak
4	*	2390.000	32.97	-2.03	30.94	54.00	-23.06	AVG



Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	42.44	-2.66	39.78	74.00	-34.22 peak
2		2310.000	32.43	-2.66	29.77	54.00	-24.23 AVG
3		2390.000	43.18	-2.03	41.15	74.00	-32.85 peak
4	*	2390.000	33.07	-2.03	31.04	54.00	-22.96 AVG

Mode3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	45.84	-1.91	43.93	74.00	-30.07	peak
2	*	2483.500	37.51	-1.91	35.60	54.00	-18.40	AVG
3		2500.000	46.11	-1.80	44.31	74.00	-29.69	peak
4		2500.000	37.38	-1.80	35.58	54.00	-18.42	AVG

Mode3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2483.500	47.19	-1.91	45.28	74.00	-28.72 peak
2		2483.500	37.36	-1.91	35.45	54.00	-18.55 AVG
3		2500.000	48.74	-1.80	46.94	74.00	-27.06 peak
4	*	2500.000	37.64	-1.80	35.84	54.00	-18.16 AVG

Mode4 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 40 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2310.000	41.23	-2.66	38.57	74.00	-35.43 peak
2		2310.000	32.40	-2.66	29.74	54.00	-24.26 AVG
3		2390.000	41.74	-2.03	39.71	74.00	-34.29 peak
4	*	2390.000	33.04	-2.03	31.01	54.00	-22.99 AVG

Mode4 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 40 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	41.47	-2.66	38.81	74.00	-35.19	peak
2		2310.000	32.41	-2.66	29.75	54.00	-24.25	AVG
3		2390.000	42.17	-2.03	40.14	74.00	-33.86	peak
4	*	2390.000	32.79	-2.03	30.76	54.00	-23.24	AVG



Mode4 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 40 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		2483.500	46.91	-1.91	45.00	74.00	-29.00
2	*	2483.500	37.95	-1.91	36.04	54.00	-17.96
3		2500.000	45.93	-1.80	44.13	74.00	-29.87
4		2500.000	37.74	-1.80	35.94	54.00	-18.06



Mode4 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 40 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB	Detector
1		2483.500	45.98	-1.91	44.07	74.00	-29.93 peak
2		2483.500	37.68	-1.91	35.77	54.00	-18.23 AVG
3		2500.000	47.12	-1.80	45.32	74.00	-28.68 peak
4	*	2500.000	37.86	-1.80	36.06	54.00	-17.94 AVG



6.7 Radiated emissions (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.


In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.


| Test Method: | ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02 | | |
| Procedure: | ANSI C63.10-2013 section 6.6.4 | | |

6.7.1 E.U.T. Operation:

Operating Environment:				
Temperature:	25 °C	Humidity:	57 %	Atmospheric Pressure:
Pre test mode:	Mode1, Mode2, Mode3, Mode4			
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report			
<p>Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.</p>				


6.7.2 Test Setup Diagram:

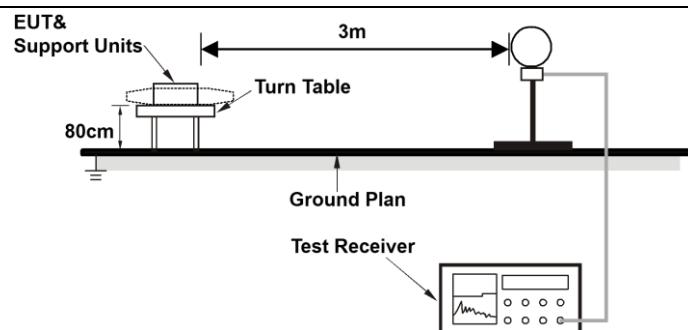

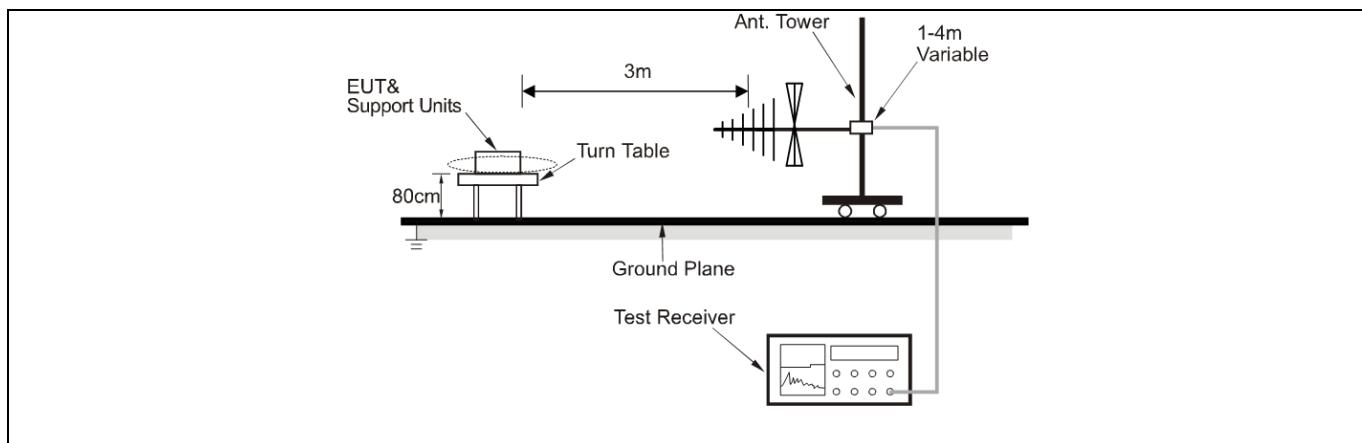

6.7.3 Test Data:


Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

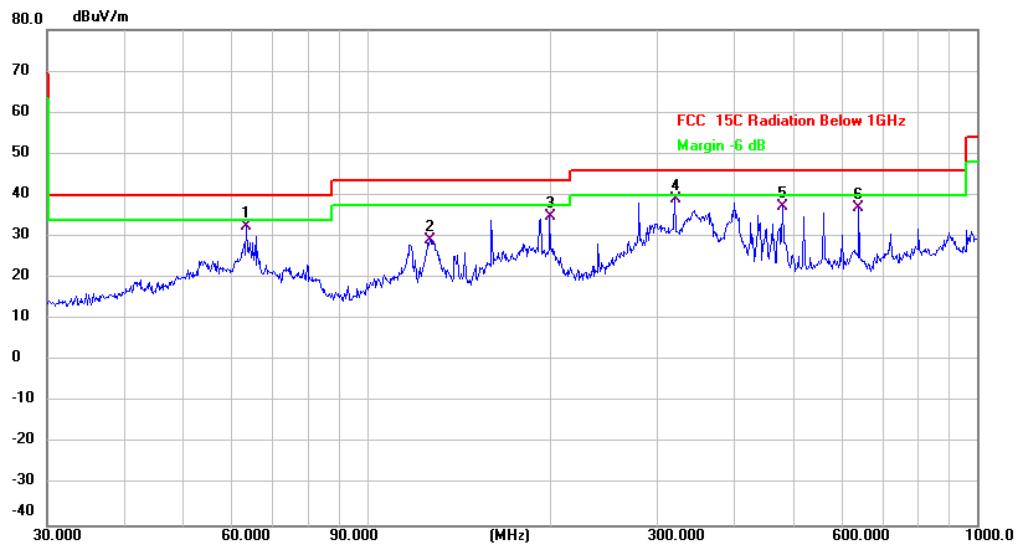

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	63.5356	42.42	-10.00	32.42	40.00	-7.58	QP		
2	126.7723	41.17	-11.93	29.24	43.50	-14.26	QP		
3	199.9856	40.93	-6.09	34.84	43.50	-8.66	QP		
4 *	319.9370	45.09	-6.15	38.94	46.00	-7.06	QP		
5	480.5276	40.99	-3.71	37.28	46.00	-8.72	QP		
6	640.6110	37.58	-0.53	37.05	46.00	-8.95	QP		



Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

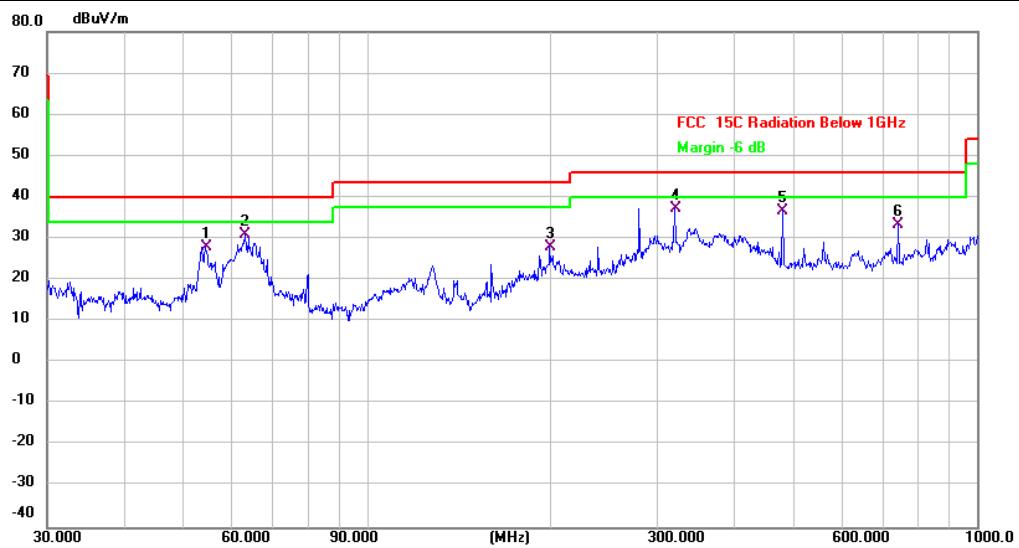

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		54.4516	35.95	-7.97	27.98	40.00	-12.02	QP	
2		63.3132	40.95	-9.92	31.03	40.00	-8.97	QP	
3		199.9856	34.05	-6.09	27.96	43.50	-15.54	QP	
4	*	319.9370	43.38	-6.15	37.23	46.00	-8.77	QP	
5		480.5276	40.26	-3.71	36.55	46.00	-9.45	QP	
6		742.2587	34.56	-1.22	33.34	46.00	-12.66	QP	



6.8 Radiated emissions (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.


In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

| Test Method: | ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02 | | |
| Procedure: | ANSI C63.10-2013 section 6.6.4 | | |

6.8.1 E.U.T. Operation:

Operating Environment:				
Temperature:	25 °C	Humidity:	57 %	Atmospheric Pressure:
Pre test mode:	Mode1, Mode2, Mode3, Mode4			
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report			
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.				

6.8.2 Test Setup Diagram:

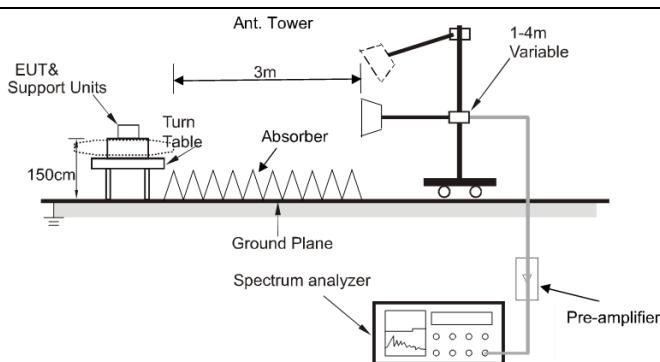

6.8.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		4824.000	49.66	2.81	52.47	74.00	-21.53	peak
2	*	4824.000	45.48	2.81	48.29	54.00	-5.71	AVG
3		7236.000	38.87	9.10	47.97	74.00	-26.03	peak
4		7236.000	32.28	9.10	41.38	54.00	-12.62	AVG
5		9648.000	41.65	10.98	52.63	74.00	-21.37	peak
6		9648.000	35.43	10.98	46.41	54.00	-7.59	AVG



Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	46.60	2.81	49.41	74.00	-24.59	peak
2		4824.000	41.45	2.81	44.26	54.00	-9.74	AVG
3		7236.000	40.39	9.10	49.49	74.00	-24.51	peak
4		7236.000	34.25	9.10	43.35	54.00	-10.65	AVG
5		9648.000	41.34	10.98	52.32	74.00	-21.68	peak
6	*	9648.000	35.22	10.98	46.20	54.00	-7.80	AVG



Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	50.71	3.02	53.73	74.00	-20.27	peak
2	*	4874.000	46.11	3.02	49.13	54.00	-4.87	AVG
3		7311.000	39.44	8.97	48.41	74.00	-25.59	peak
4		7311.000	33.08	8.97	42.05	54.00	-11.95	AVG
5		9748.000	42.05	11.95	54.00	74.00	-20.00	peak
6		9748.000	35.64	11.95	47.59	54.00	-6.41	AVG



Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	47.10	3.02	50.12	74.00	-23.88	peak
2		4874.000	43.03	3.02	46.05	54.00	-7.95	AVG
3		7311.000	40.56	8.97	49.53	74.00	-24.47	peak
4		7311.000	34.36	8.97	43.33	54.00	-10.67	AVG
5		9748.000	41.75	11.95	53.70	74.00	-20.30	peak
6	*	9748.000	35.34	11.95	47.29	54.00	-6.71	AVG



Mode1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	51.28	3.27	54.55	74.00	-19.45	peak
2	*	4924.000	46.93	3.27	50.20	54.00	-3.80	AVG
3		7386.000	41.48	9.16	50.64	74.00	-23.36	peak
4		7386.000	35.26	9.16	44.42	54.00	-9.58	AVG
5		9848.000	41.16	11.50	52.66	74.00	-21.34	peak
6		9848.000	34.89	11.50	46.39	54.00	-7.61	AVG

Mode1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	45.54	3.27	48.81	74.00	-25.19	peak
2		4924.000	41.08	3.27	44.35	54.00	-9.65	AVG
3		7386.000	39.51	9.16	48.67	74.00	-25.33	peak
4		7386.000	33.13	9.16	42.29	54.00	-11.71	AVG
5		9848.000	41.60	11.50	53.10	74.00	-20.90	peak
6	*	9848.000	35.58	11.50	47.08	54.00	-6.92	AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos

Photographs of the EUT

Refer to Appendix - EUT Photos

Appendix

Appendix A: DTS Bandwidth




Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.520	0.5	PASS
		2437	8.880	0.5	PASS
		2462	9.120	0.5	PASS
11G	Ant1	2412	16.520	0.5	PASS
		2437	16.440	0.5	PASS
		2462	16.480	0.5	PASS
11N20SISO	Ant1	2412	17.160	0.5	PASS
		2437	17.360	0.5	PASS
		2462	17.080	0.5	PASS
11N40SISO	Ant1	2422	33.600	0.5	PASS
		2437	33.280	0.5	PASS
		2452	33.200	0.5	PASS



Test Graphs



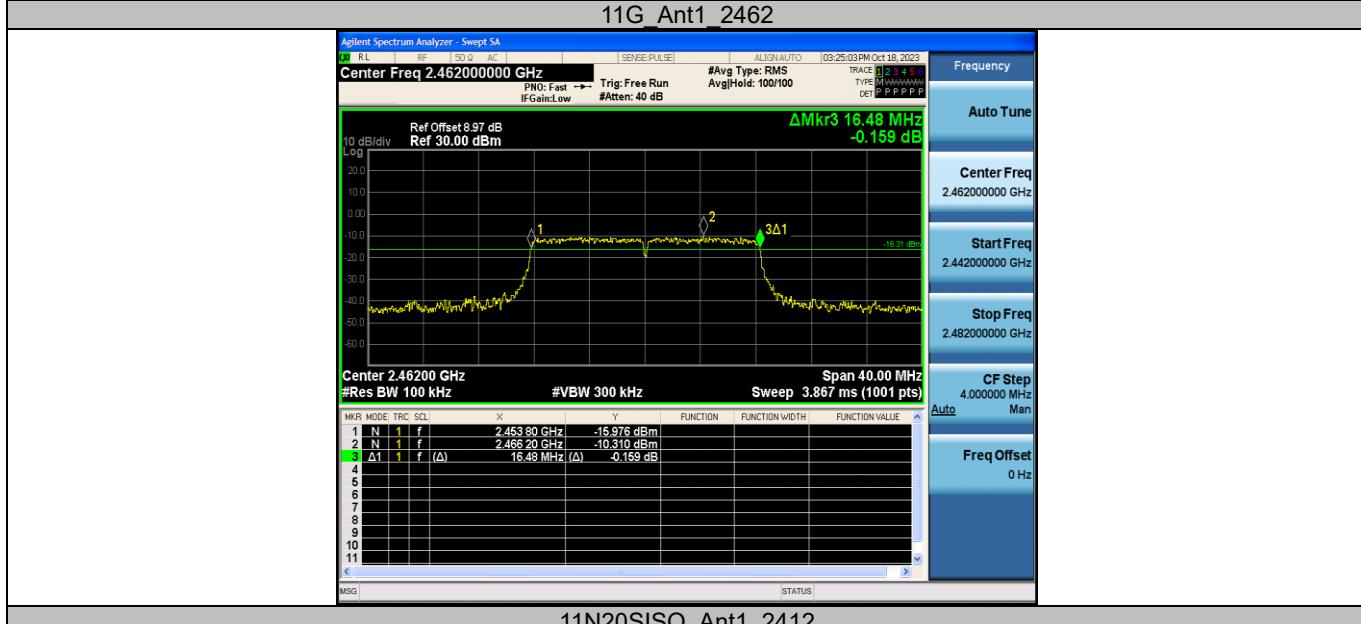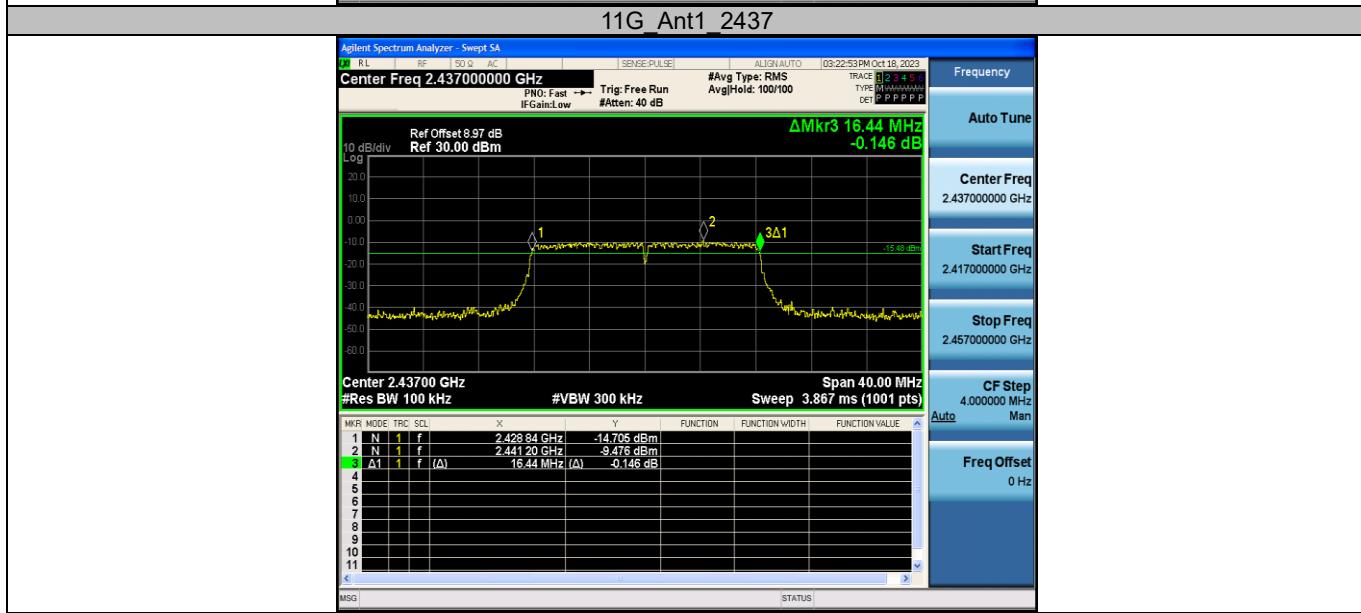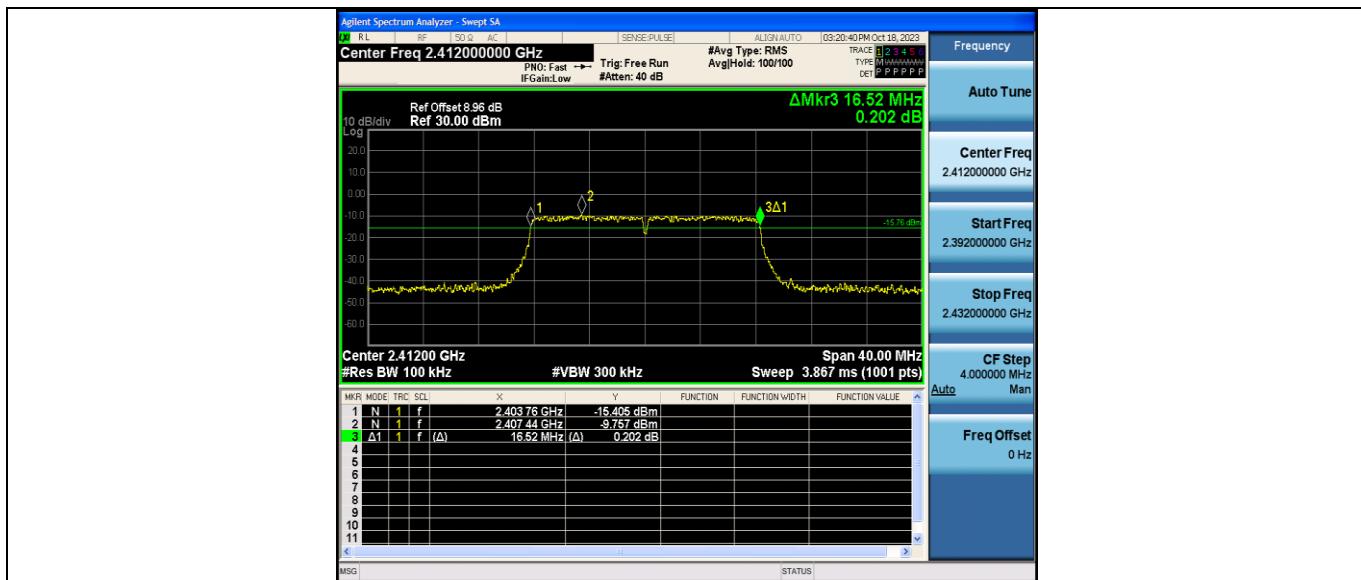




11N20SISO_Ant1_2437



11N20SISO_Ant1_2462



11N40SISO_Ant1_2422

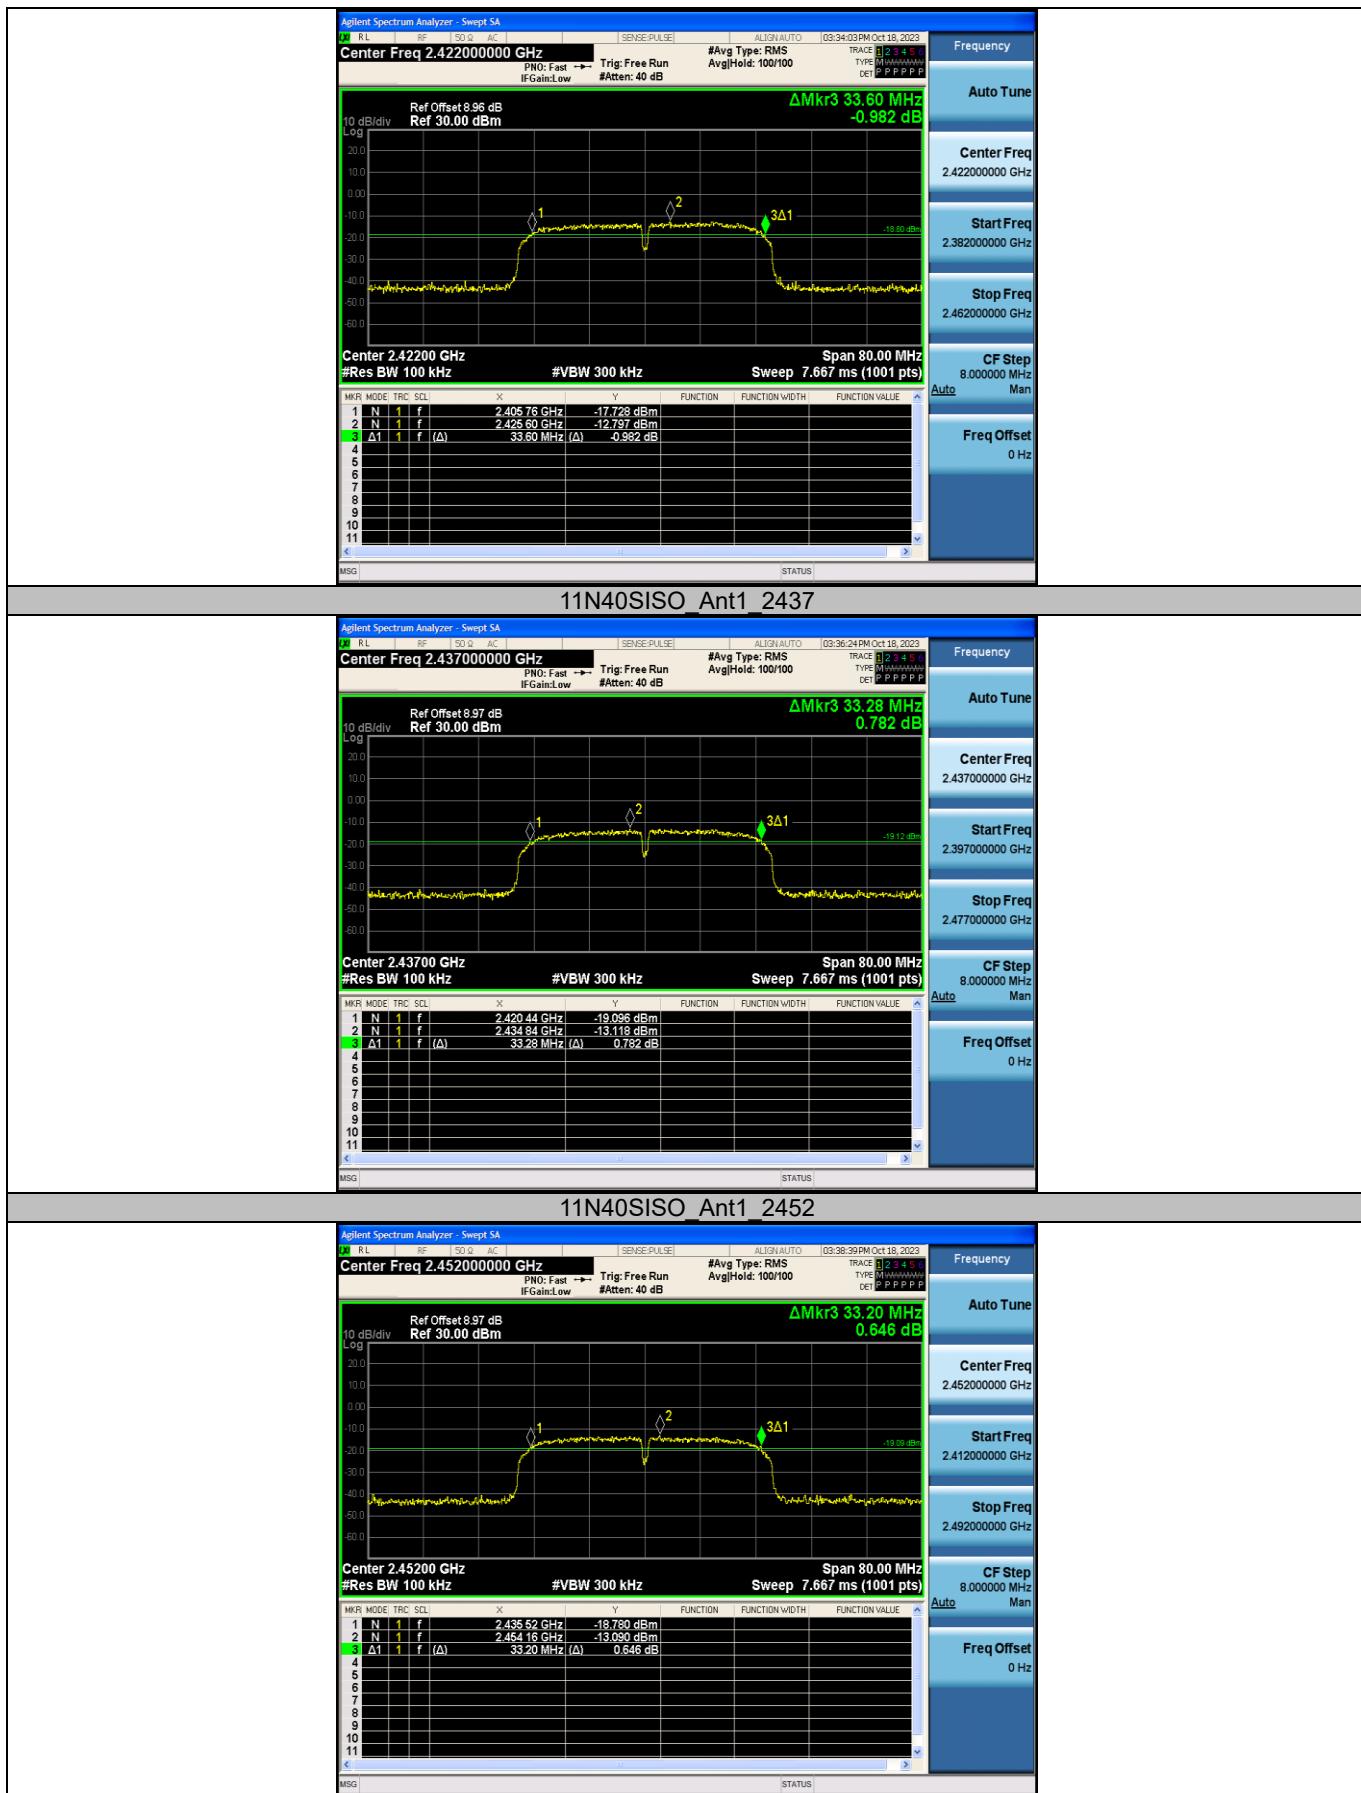

Appendix B: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	12.92	≤30.00	PASS
		2437	12.66	≤30.00	PASS
		2462	11.70	≤30.00	PASS
11G	Ant1	2412	11.79	≤30.00	PASS
		2437	11.47	≤30.00	PASS
		2462	10.76	≤30.00	PASS
11N20SISO	Ant1	2412	12.00	≤30.00	PASS
		2437	11.79	≤30.00	PASS
		2462	11.08	≤30.00	PASS
11N40SISO	Ant1	2422	11.02	≤30.00	PASS
		2437	10.65	≤30.00	PASS
		2452	10.59	≤30.00	PASS


Appendix C: Maximum power spectral density



Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-7.12	≤8.00	PASS
		2437	-7.37	≤8.00	PASS
		2462	-8.3	≤8.00	PASS
11G	Ant1	2412	-12.55	≤8.00	PASS
		2437	-12.6	≤8.00	PASS
		2462	-13.5	≤8.00	PASS
11N20SISO	Ant1	2412	-12.21	≤8.00	PASS
		2437	-11.87	≤8.00	PASS
		2462	-12.86	≤8.00	PASS
11N40SISO	Ant1	2422	-15.29	≤8.00	PASS
		2437	-15.24	≤8.00	PASS
		2452	-16.02	≤8.00	PASS



Test Graphs

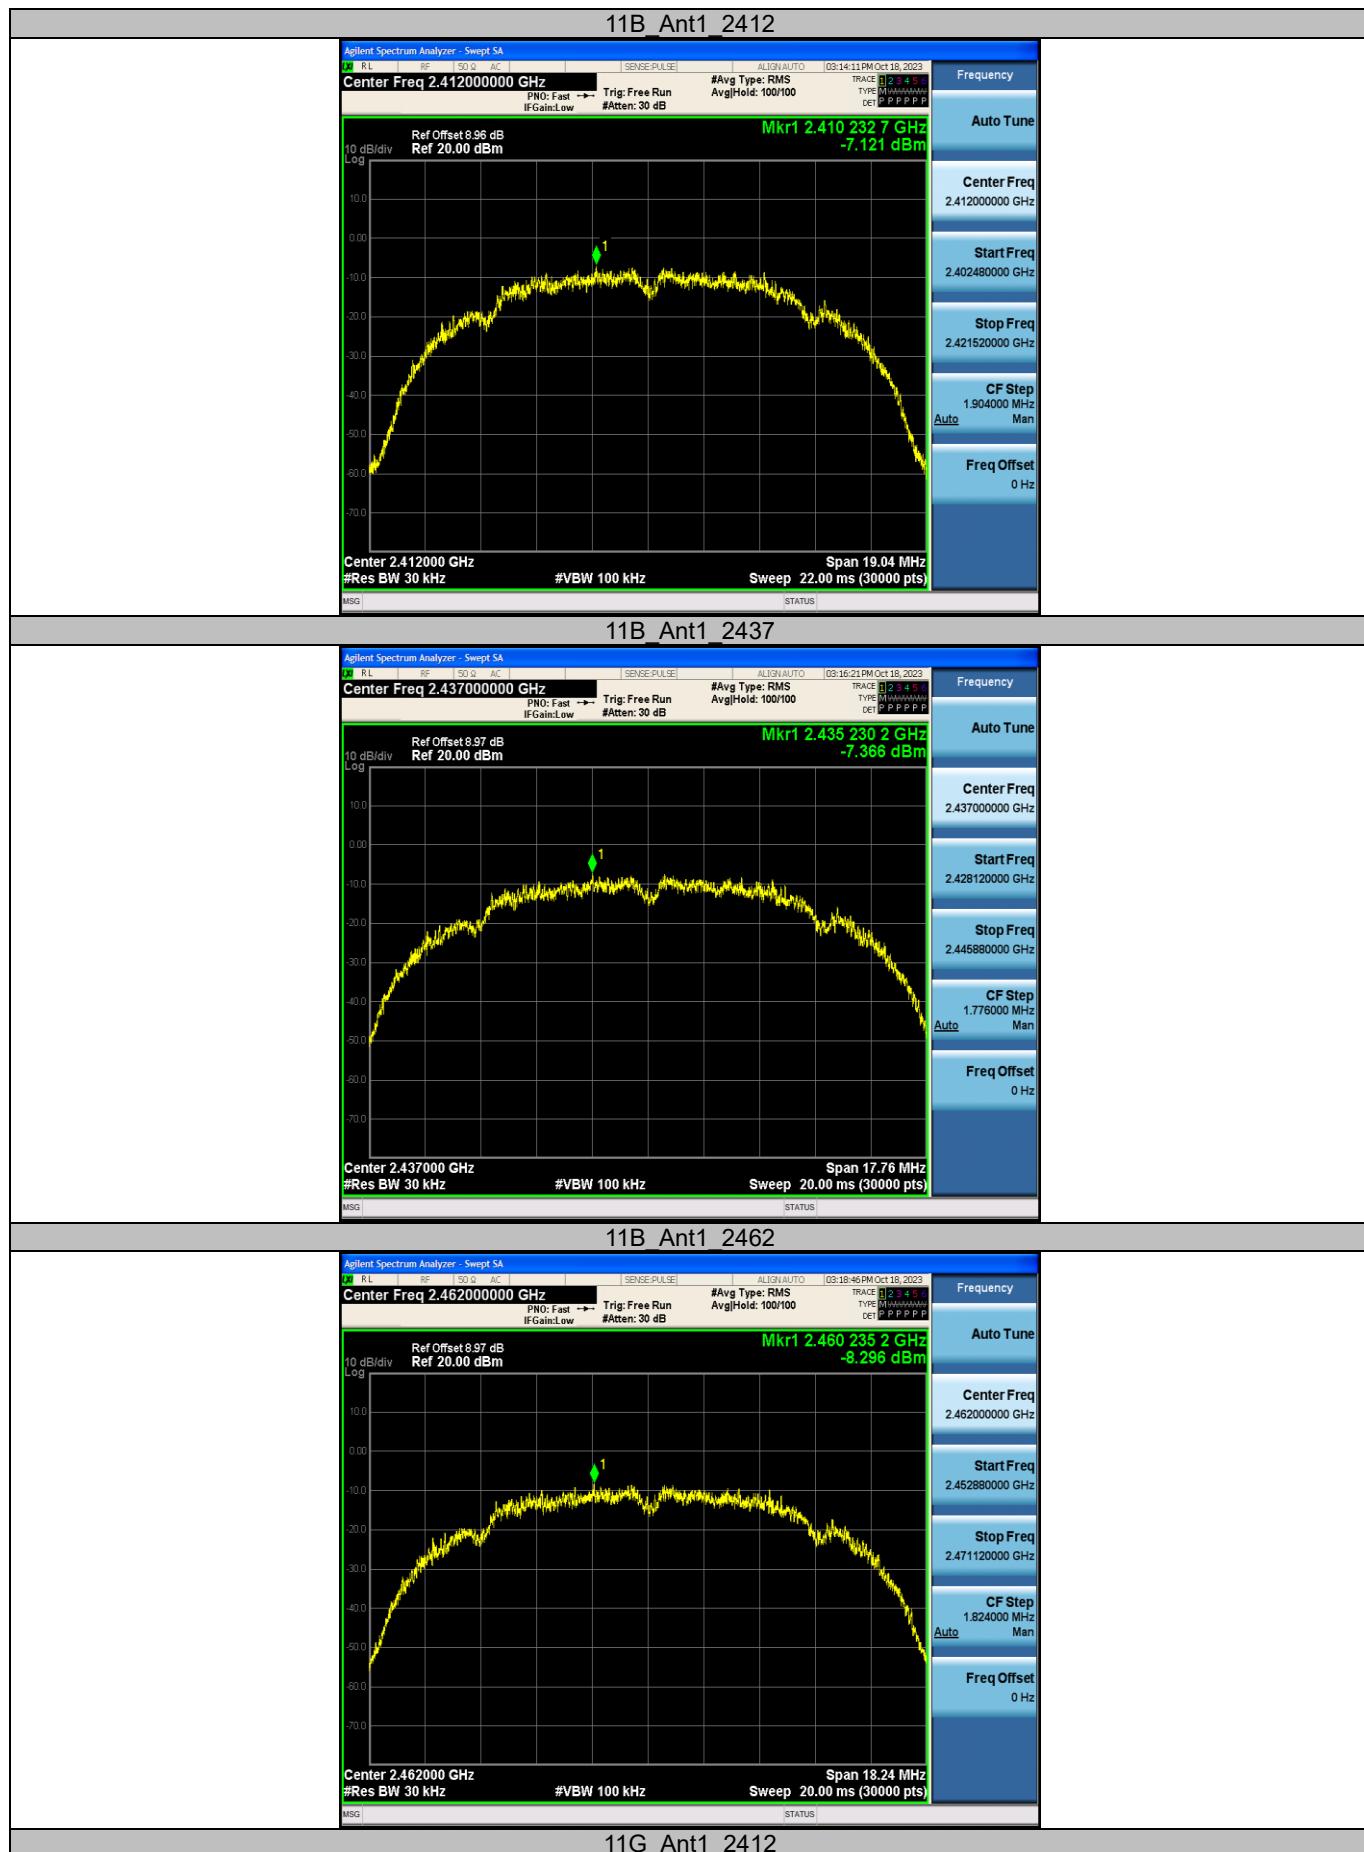

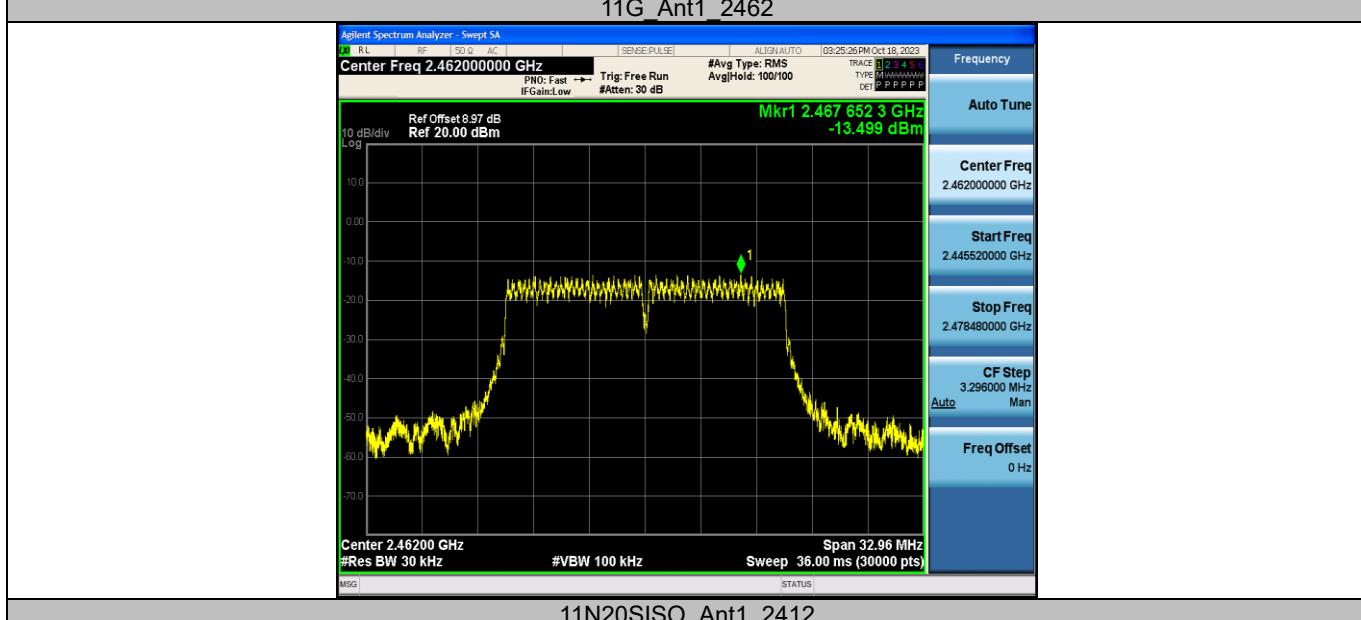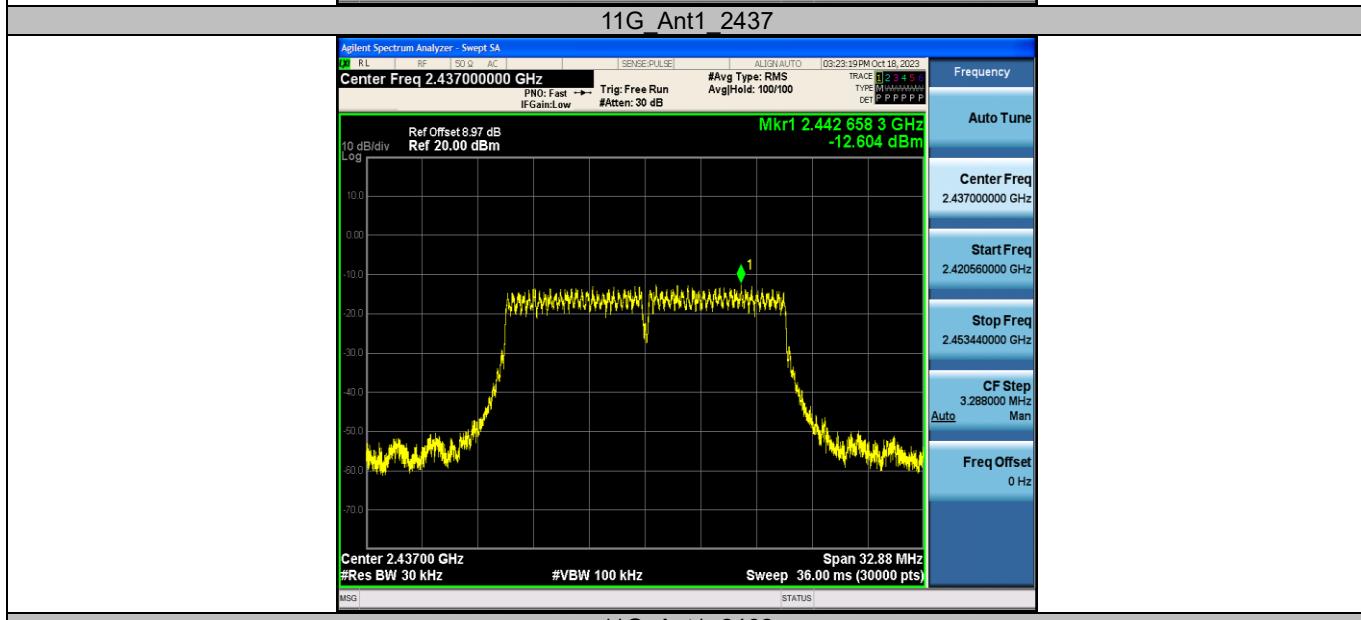



11N20SISO Ant1_2437



11N20SISO Ant1_2462



11N40SISO Ant1_2422

