

DONGGUAN KIMCHEN INDUSTYR INTL
LIMITED



Product specification

Shenzhen JEDI Technology Co.,LTD

CUSTOMER : _____

Samsung Watch coil -12MM

CUST P/N: _____

K C P/N: _____

13.9*24.6*0.06*65P*15TS*12MM

D E S E : _____

2023.5.10

D A T E : _____

A.0

VERSION : _____

The customer acknowledges acceptance of the seal

fictiones	merchandiser	ENGINEER CHECKED BY	PRODUCTION CHECKDED BY	APPROVED BY
Wang yun fan	蓝春林 5.12	胡志军 5/11	2 胡志军	东莞市金赞智能科技有限公司 工程专用章

Address: No. 2 Xisha Road,
Shijie Town, Dongguan City
[Http://www.jzcoil.com](http://www.jzcoil.com)

Tel: 86-76986018114

Fax: 86-76986015646

File No: KC-JZ-08-020

Version Change History

Mode:1 2MM

13. 9*24. 6*0. 06*65P*15TS*
KC DESE

[illegible]

PRODUCTION CHECKED BY

Wang Yunfan

胡志军

李鴻章

Fax: 86-76986015646

FilNo: KC-JZ-08-020

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED


Specification

CUST P/N

KC DESE

13.9*24.6*0.06*65P*15TS*
12MM

1. (OVERALL DIMENSIONS OF PRODUCTS) :

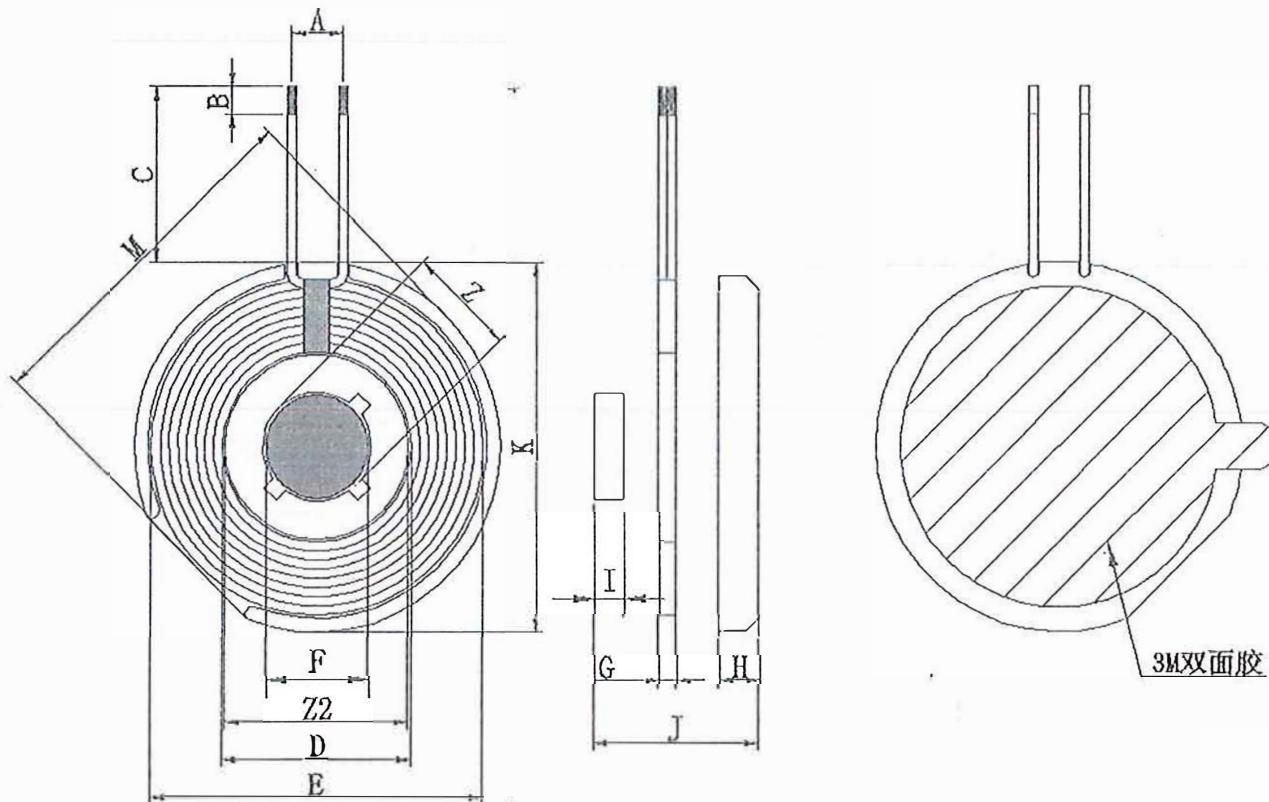

(Unit):(mm)

A	B	C	D	E	F	G
4±1	3±1	12+2/-0	13.9±0.5	24.6±1	7.8±0.15	1.45±0.1
II	I	J	Z	Z2	K	M
2.73±0.15	3±0.15	3.5±0.3	8.0±0.5	13.2±0.5	27±1	26±1

Reference data: Line circle 1.35H (excluding incoming line); Tape: 0.15H (double layer at the interface); Glue: 0.12H: double-sided tape: 0.15 disk degree 1.73; Total material thickness; 3.59H (excluding gaps and inlet lines)

PS: 1.C is the length of the magnetic outer lead; 8TS attached disk; F is the outer diameter of the magnet; Magnets press N pole up, S pole down

PREPARED BY

ENGINEER CHECKED BY

PRODUCTION CHECKED BY

王云帆

胡志军

陈伟

Address: No. 2 Xisha Road, Shijie Town, Dongguan

Tel: 86-76986018114

Fax: 86-76986015646

CityHttp://www.jzcoil.com

FilNo: KC-JZ-08-020

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

Specification

CUST P/N

KC DESE

13.9*24.6*0.06*65P*15TS*
12MM

Turns	Wire Dia.	Wdg. Type Spred/Close	Wdg. Direction	Intersect Yes/Not	Coil Positive/Anti Paste
15(7+8) TS	0.06*65P (Silk-Cov ered Wire)	(Close)	(Anticlockwise)	(Yes)	8 Gate sticker diskette

All materials are required to be ROHS compliant

2. (ELECTRICAL CHARACTERISTICS):

TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, RELATIVE HUMIDITY: $65 \pm 10\%$

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND	S-F	Coil: $5.3 \mu\text{H} \pm 10\%$	100kHz/V	LCZ METER 1062
2	IND	S-F	Coil and diskette: $10.5 \mu\text{H} \pm 5\%$	100kHz/V	LCZ METER 1062

(BILL OF MATERIALS):

number	Material name	Description	Material Code	Vendor code
1	wire rod	0.06*65P silk-covered wire	SBX-2U-F-0047	ZY
2	Threaded diskette	P27*26* 2.73 Inner hole 8.0 (with hole and notch)	GCP-Y-0054	HQK
3	magnetite	7.8*3.0H Force C3500GS, center value LAN 3400GS)	GCP-T-00118	YY
4	3M double-sided tape	22* 0.15H (no holes and dot) release paper white background blue characters	SMJ-3M-00061	WY
5	adhesive plaster	Golden Finger 3 Han (strong viscosity)	-	-

PREPARED BY

ENGINEER CHECKED BY

PRODUCTION CHECKED BY

Wang Yunfan

胡志军

高海林

Address: No. 2 Xisha Road, Shijie Town, Dongguan

Tel: 86-76986018114

Fax: 86-76986015646

CityHttp://www.jzcoil.com

FilNo: KC-JZ-08-020