

# FCC Part 15 EMI TEST REPORT

of

E.U.T. : Bluetooth Dongle  
Model : BTH-830T, BTH-830R  
FCC ID : G4RBTH-830T

for

APPLICANT : TAIWAN CAROL ELECTRONICS CO., LTD.  
ADDRESS : NO.202 TUNG KUANG ROAD, TAICHUNG,  
TAIWAN

Test Performed by

## **ELECTRONICS TESTING CENTER, TAIWAN**

NO. 34. LIN 5, DINGFU VIL., LINKOU DIST.,  
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel:(02)26023052 Fax:(02)26010910  
<http://www.etc.org.tw> ; e-mail : [emc@etc.org.tw](mailto:emc@etc.org.tw)

Report Number : 16-08-RBF-037-01

# TEST REPORT CERTIFICATION

Applicant : TAIWAN CAROL ELECTRONICS CO., LTD.  
 NO.202 TUNG KUANG ROAD, TAICHUNG, TAIWAN

Manufacture : TAIWAN CAROL ELECTRONICS CO., LTD.  
 NO.202 TUNG KUANG ROAD, TAICHUNG, TAIWAN

Description of Device :

a) Type of EUT : Bluetooth Dongle

b) Trade Name : CAROL

c) Model No. : BTH-830T, BTH-830R

d) Power Supply : DC5V/1A USB  
 DC 3.7V Battery

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.  
 2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

## Summary of Tests

Test	Results
Radiated Emission	<b>Pass</b>
Conducted Emission	<b>Pass</b>
Hopping Channel Separation	<b>Pass</b>
Number of Hopping frequencies used	<b>Pass</b>
Hopping Channel Bandwidth	<b>Pass</b>
Dwell Time of each frequency	<b>Pass</b>
Output Power Requirement	<b>Pass</b>
100 kHz Bandwidth of Frequency Band Edges Requirement	<b>Pass</b>
Out-of-Band Conducted Emission Requirement	<b>Pass</b>
Duty Cycle	<b>N.A.</b>

Date Test Item Received : Aug. 23, 2016

Date Test Campaign Completed : Nov. 15, 2016

Date of Issue : Nov. 23, 2016

Test Engineer

:

*Kazuma Ho*

(Kazuma Ho, Engineer )

Approve & Authorized

:

*S. S. Liou*

S. S. Liou, Section Manager

EMC Dept. II of ELECTRONICS

TESTING CENTER, TAIWAN

<b>Table of Contents</b>	<b>Page</b>
<b>1 GENERAL INFORMATION.....</b>	<b>1</b>
1.1 Product Description.....	1
1.2 Test Methodology .....	1
1.3 Test Facility.....	1
<b>2 PROVISIONS APPLICABLE.....</b>	<b>2</b>
2.1 Definition .....	2
2.2 Requirement for Compliance .....	3
2.3 Restricted Bands of Operation .....	5
2.4 Labeling Requirement.....	6
2.5 User Information .....	6
<b>3 SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
3.1 Justification .....	7
3.2 Devices for Tested System.....	7
<b>4 RADIATED EMISSION MEASUREMENT .....</b>	<b>8</b>
4.1 Applicable Standard .....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument .....	10
4.4 Radiated Emission Data .....	11
4.5 Field Strength Calculation.....	43
4.6 Photos of Radiation Measuring Setup.....	44
<b>5 CONDUCTED EMISSION MEASUREMENT.....</b>	<b>56</b>
5.1 Standard Applicable .....	56
5.2 Measurement Procedure.....	56
5.3 Conducted Emission Data .....	57
5.4 Result Data Calculation.....	61
5.5 Conducted Measurement Equipment .....	61
5.6 Photos of Conduction Measuring Setup.....	62
<b>6 ANTENNA REQUIREMENT .....</b>	<b>64</b>
6.1 Standard Applicable .....	64
6.2 Antenna Construction.....	64
<b>7 HOPPING CHANNEL SEPARATION.....</b>	<b>65</b>
7.1 Standard Applicable .....	65
7.2 Measurement Procedure.....	65
7.3 Measurement Equipment .....	66
7.4 Measurement Data .....	66

**8 NUMBER OF HOPPING FREQUENCY USED ..... 73**

8.1 Standard Applicable ..... 73

8.2 Measurement Procedure ..... 73

8.3 Measurement Equipment ..... 73

8.4 Measurement Data ..... 74

**9 CHANNEL BANDWIDTH ..... 81**

9.1 Standard Applicable ..... 81

9.2 Measurement Procedure ..... 81

9.3 Measurement Equipment ..... 82

9.4 Measurement Data ..... 82

**10 DWELL TIME ON EACH CHANNEL ..... 89**

10.1 Standard Applicable ..... 89

10.2 Measurement Procedure ..... 89

10.3 Measurement Equipment ..... 89

10.4 Measurement Data ..... 90

**11 OUTPUT POWER MEASUREMENT ..... 112**

11.1 Standard Applicable ..... 112

11.2 Measurement Procedure ..... 112

11.3 Measurement Equipment ..... 112

11.4 Measurement Data ..... 113

**12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT ..... 120**

12.1 Standard Applicable ..... 120

12.2 Measurement Procedure ..... 120

12.3 Measurement Equipment ..... 121

12.4 Measurement Data ..... 121

**13 CONDUCTED SPURIOUS EMISSION MEASUREMENT ..... 130**

13.1 Standard Applicable ..... 130

13.2 Measurement Procedure ..... 130

13.3 Measurement Equipment ..... 131

13.4 Measurement Data ..... 131

**14. DUTY CYCLE ..... 144**

14.1 Standard Applicable ..... 144

14.2 Measurement Equipment ..... 144

14.3 Measurement Data ..... 144

## 1 GENERAL INFORMATION

### 1.1 Product Description

- a) Type of EUT : Bluetooth Dongle
- b) Trade Name : CAROL
- c) Model No. : BTH-830T, BTH-830R
- d) Power Supply : DC5V/1A USB  
DC 3.7V Battery
- e) Model Difference : Only non-RF function different, the circuit design and PCB layout is identical.

### 1.2 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details.

Measurement Software

Software	Version	Note
e3	Version 6.100618b	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

### 1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

This site is FCC 2.948 listed and accepted in a letter dated Jan. 29, 2014.

Registration Number: 90589

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency MHz	Quasi Peak dB $\mu$ V	Average dB $\mu$ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\* Decreases with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

### (2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB $\mu$ V/m	Radiated $\mu$ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.



### **(3) Antenna Requirement**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **(4) Hopping Channel Separation**

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **(5) Number of Hopping frequencies used**

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### **(6) Hopping Channel Bandwidth**

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

### **(7) Dwell Time of each frequency**

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### **(8) Output Power Requirement**

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### **(9) 100 kHz Bandwidth of Frequency Band Edges Requirement**

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the

transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### (10) Out-of-Band Conducted Emission Requirement

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

## 2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3 SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT (if applicable) to maximize the emission from EUT.

For conducted and radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of emissions from digital circuits is performed with the highest, middle and the lowest channel by transmitting mode.

The following modes were investigated and the worst cases (mode 1 and 3) were chosen for final test.

1. Basic Rate (BR) 1 Mbps uses GFSK modulation
2. Enhanced Data Rate (EDR) 2Mbps uses pi/4-DQPSK modulation
3. Enhanced Data Rate (EDR) 3Mbps uses 8DPSK modulation

For RF conducted test, both BTH-830T and BTH-830R were pretested. BTH-830T was found the worst case and the test result was recorded.

#### 3.2 Devices for Tested System

Device	Manufacture	Model / FCC ID.	Description
Bluetooth Dongle *	TAIWAN CAROL ELECTRONICS CO., LTD.	BTH-830T,BTH-830R/ G4RBTH-830T	---
Notebook	Lenovo	TP00037A	1.0mUnshielded AC Power Cord
iPod	Apple	1285	1.0m Unshielded Line

Remark “\*” means equipment under test.

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

### 4.2 Measurement Procedure

#### A. Preliminary Measurement For Portable Devices

For portable devices, the following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

#### B. Final Measurement

1. Setup the configuration per figure 1(a), 1(b) and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables (if any) associated with EUT to obtain the worst case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


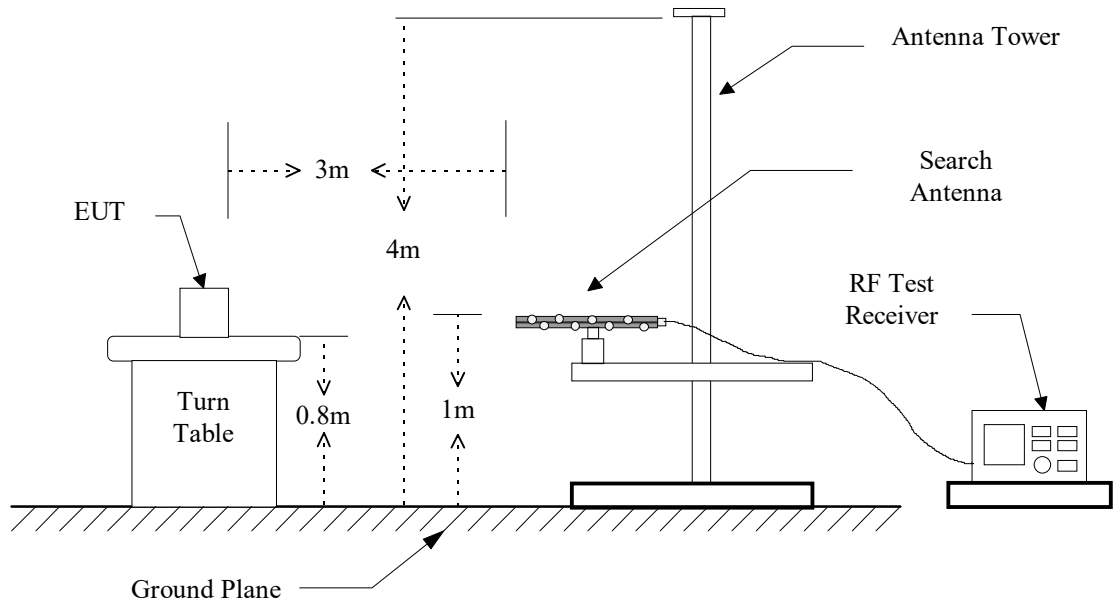


Figure 2 : Frequencies measured above 1 GHz configuration

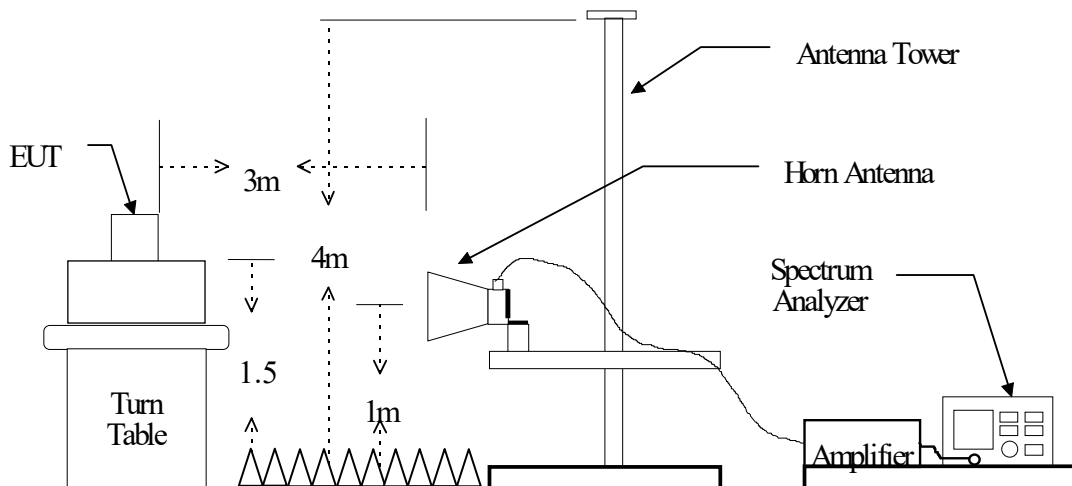

### 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESCI	2016/09/07	2017/09/06
Bi-Log Antenna	ETC	MCTD 2786	2016/07/15	2017/07/14
Log-periodic Antenna	EMCO	3146	2015/11/17	2016/11/16
Biconical Antenna	EMCO	3110	2015/11/17	2016/11/16
Horn Antenna	EMCO	3115	2015/10/08	2016/10/07
Horn Antenna	EMCO	3115	2016/10/05	2017/10/04
Horn Antenna	EMCO	3116	2015/10/12	2016/10/11
Horn Antenna	EMCO	3116	2016/10/05	2017/10/04
Spectrum Amplifier	R&S	FSP3	2015/12/21	2016/12/20
Amplifier	HP	8447D	2015/12/17	2016/12/16
EMI Test Receiver	Rohde & Schwarz	ESU 40	2015/10/07	2016/10/06
EMI Test Receiver	Rohde & Schwarz	ESU 40	2016/11/10	2017/11/09
Amplifier	HP	83051A	2016/07/18	2017/07/17
LOOP Antenna	EMCO	6512	2015/10/01	2016/09/30

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:

VBW = 10 Hz, when the duty cycle is no less than 98%.


VBW  $\geq 1/T$ , when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 4.4 Radiated Emission Data

#### 4.4.1 Tx Portion

A. Bluetooth BR

Test Date : Sep.12, 2016      Temperature : 24 °C      Humidity : 57 %

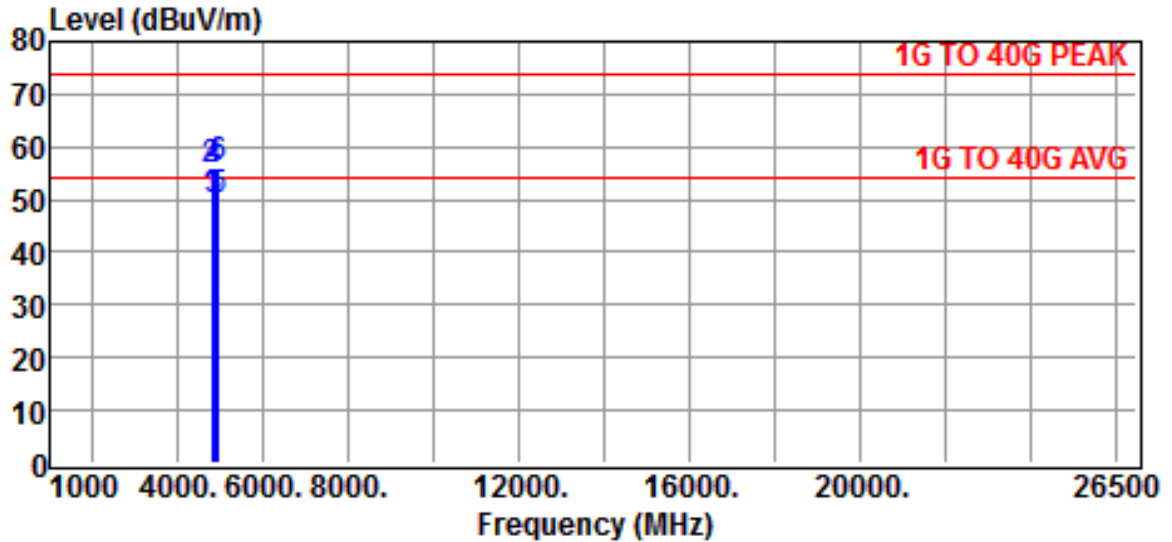


Site	:CHAMBER #2	Date	:2016-09-12
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:24 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:BR		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	48.56	1.16	49.72	54.00	-4.28	Average
4804.0000	54.52	1.16	55.68	74.00	-18.32	Peak
4882.0000	48.35	1.38	49.73	54.00	-4.27	Average
4882.0000	54.35	1.38	55.73	74.00	-18.27	Peak
4960.0000	48.24	1.64	49.88	54.00	-4.12	Average
4960.0000	54.17	1.64	55.81	74.00	-18.19	Peak

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result



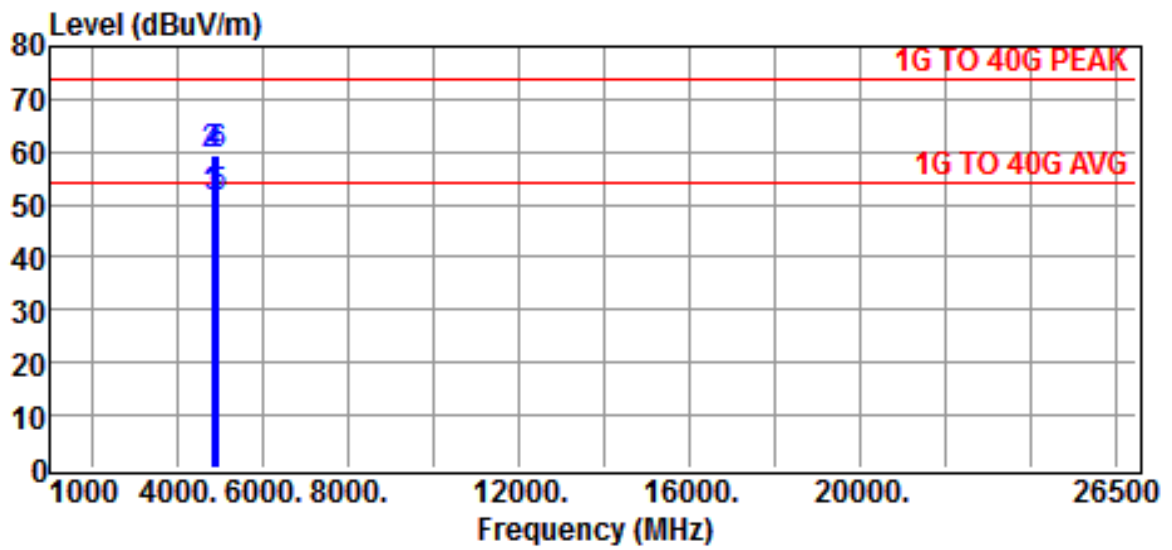

Site	:CHAMBER #2	Date	:2016-09-12
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:24 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:BR		
Test Mode	:EUT put on table horizontally (worst case)		


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	50.01	1.16	51.17	54.00	-2.83	Average
4804.0000	58.19	1.16	59.35	74.00	-14.65	Peak
4882.0000	49.84	1.38	51.22	54.00	-2.78	Average
4882.0000	58.06	1.38	59.44	74.00	-14.56	Peak
4960.0000	49.73	1.64	51.37	54.00	-2.63	Average
4960.0000	57.88	1.64	59.52	74.00	-14.48	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

B. Bluetooth EDR

Test Date : Sep.12, 2016      Temperature : 24 °C      Humidity : 57 %

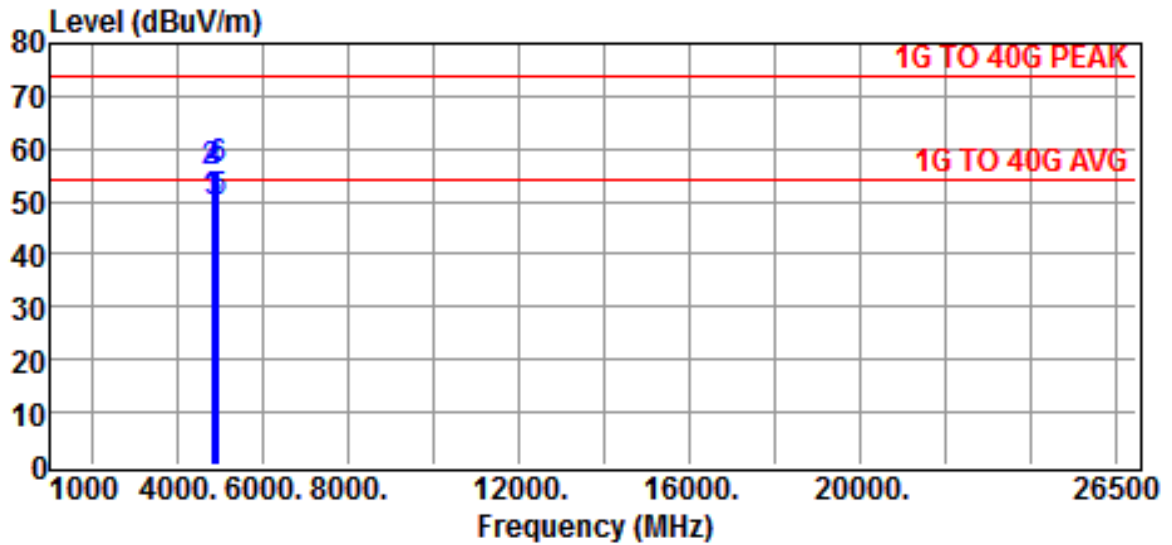


Site	:CHAMBER #2	Date	:2016-09-12
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:24 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:EDR		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	48.58	1.16	49.74	54.00	-4.26	Average
4804.0000	54.55	1.16	55.71	74.00	-18.29	Peak
4882.0000	48.38	1.38	49.76	54.00	-4.24	Average
4882.0000	54.37	1.38	55.75	74.00	-18.25	Peak
4960.0000	48.28	1.64	49.92	54.00	-4.08	Average
4960.0000	54.22	1.64	55.86	74.00	-18.14	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

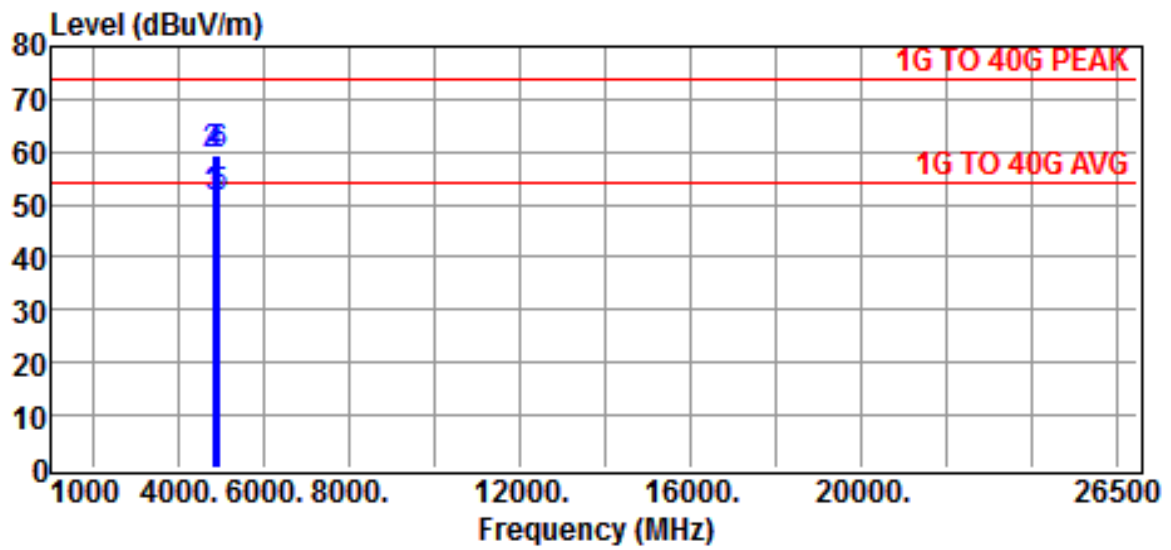

Site	:CHAMBER #2	Date	:2016-09-12
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:24 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:EDR		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	50.07	1.16	51.23	54.00	-2.77	Average
4804.0000	58.28	1.16	59.44	74.00	-14.56	Peak
4882.0000	49.92	1.38	51.30	54.00	-2.70	Average
4882.0000	58.13	1.38	59.51	74.00	-14.49	Peak
4960.0000	49.80	1.64	51.44	54.00	-2.56	Average
4960.0000	57.95	1.64	59.59	74.00	-14.41	Peak


Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result

### 4.4.2 Radiated Emissions in Restricted Bands

A. Bluetooth BR

Test Date : Sep.12, 2016      Temperature : 24 °C      Humidity : 57 %

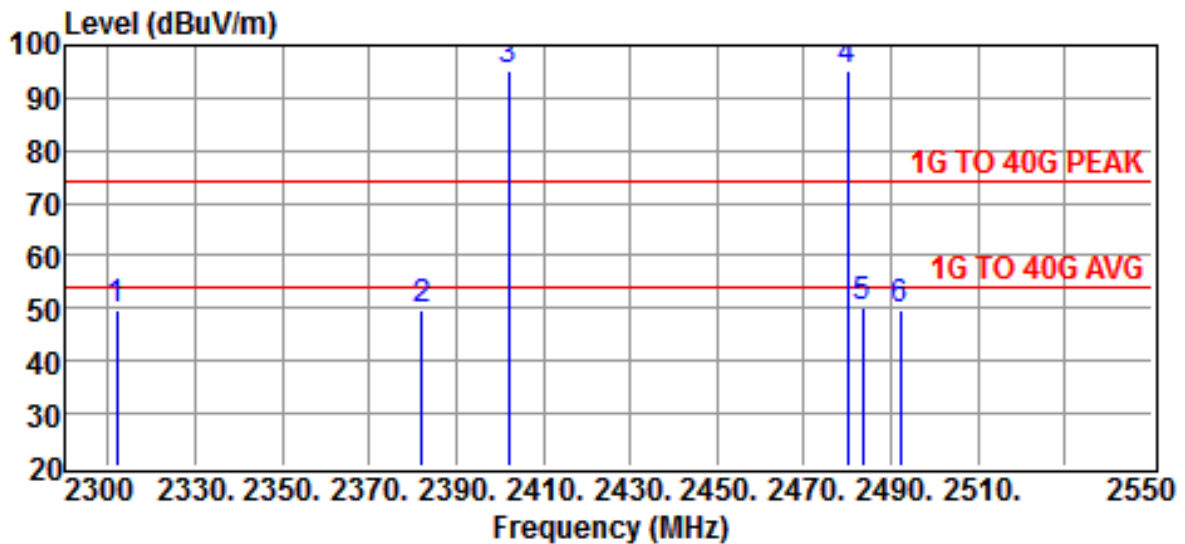


Site	:CHAMBER #2	Date	:2016-09-12
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:24 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:BR		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2312.0000	55.70	-5.95	49.75	54.00	-4.25	Peak
2382.0000	55.55	-5.83	49.72	54.00	-4.28	Peak
2402.0000	101.04	-5.81	95.23	---	---	Peak
2480.0000	100.85	-5.66	95.19	---	---	Peak
2483.5000	55.75	-5.66	50.09	54.00	-3.91	Peak
2492.0000	55.44	-5.63	49.81	54.00	-4.19	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

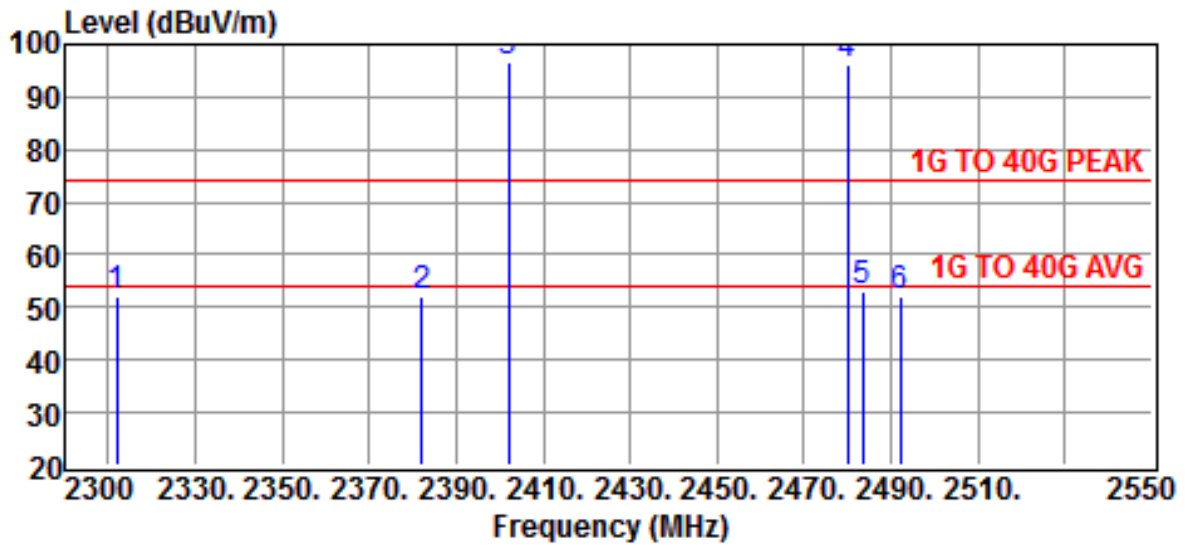

Site	:CHAMBER #2	Date	:2016-09-12
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:24 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:BR		
Test Mode	:EUT put on table horizontally (worst case)		


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2312.0000	58.08	-5.95	52.13	54.00	-1.87	Peak
2382.0000	57.93	-5.83	52.10	54.00	-1.90	Peak
2402.0000	102.33	-5.81	96.52	---	---	Peak
2480.0000	101.87	-5.66	96.21	---	---	Peak
2483.5000	58.87	-5.66	53.21	54.00	-0.79	Peak
2492.0000	57.82	-5.63	52.19	54.00	-1.81	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

B. Bluetooth EDR

Test Date : Sep.12, 2016      Temperature : 24 °C      Humidity : 57 %

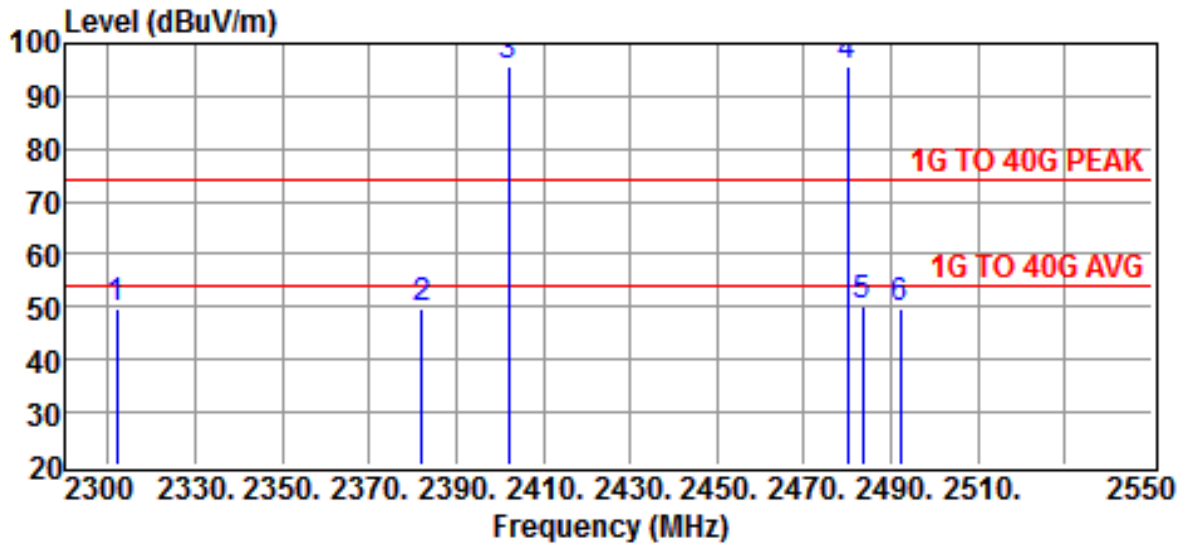


Site	:CHAMBER #2	Date	:2016-09-12
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:24 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:EDR		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2312.0000	55.67	-5.95	49.72	54.00	-4.28	Peak
2382.0000	55.51	-5.83	49.68	54.00	-4.32	Peak
2402.0000	101.67	-5.81	95.86	---	---	Peak
2480.0000	101.41	-5.66	95.75	---	---	Peak
2483.5000	55.77	-5.66	50.11	54.00	-3.89	Peak
2492.0000	55.52	-5.63	49.89	54.00	-4.11	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

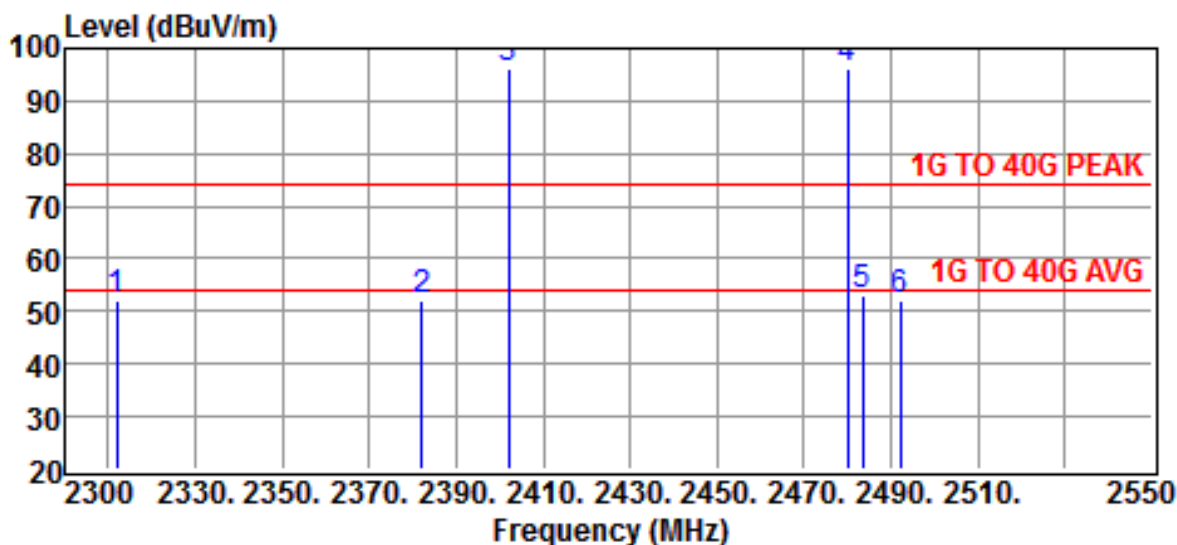

Site	:CHAMBER #2	Date	:2016-09-12
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:24 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:EDR		
Test Mode	:EUT put on table horizontally (worst case)		


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
2312.0000	58.10	-5.95	52.15	54.00	-1.85	Peak
2382.0000	57.94	-5.83	52.11	54.00	-1.89	Peak
2402.0000	102.18	-5.81	96.37	---	---	Peak
2480.0000	101.95	-5.66	96.29	---	---	Peak
2483.5000	58.85	-5.66	53.19	54.00	-0.81	Peak
2492.0000	57.80	-5.63	52.17	54.00	-1.83	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

### 4.4.3 Other Emissions

#### a) Emission frequencies below 1 GHz

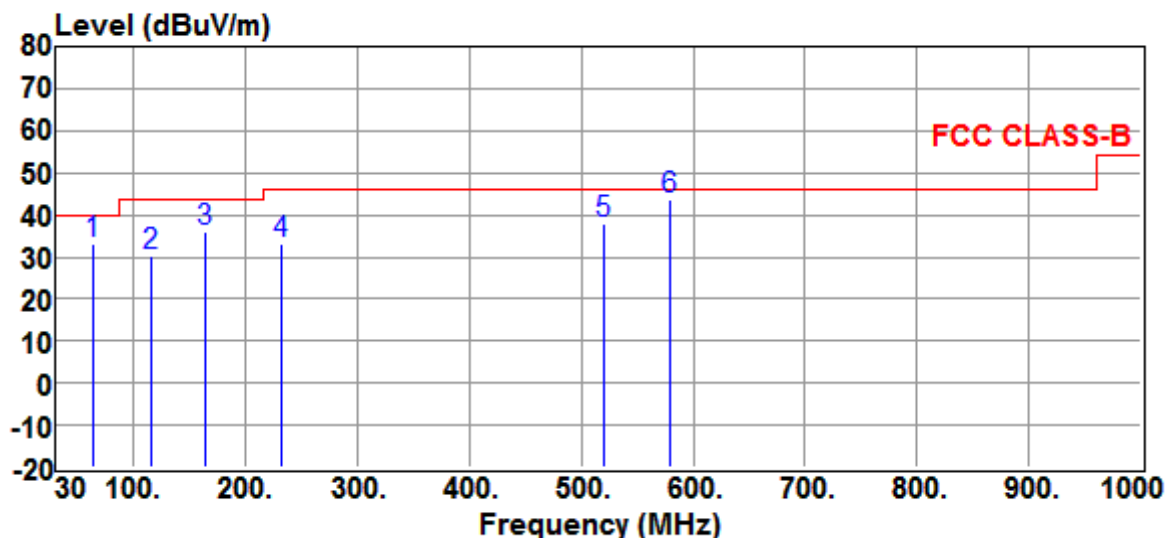


Site	:CHAMBER #2	Date	:2016-09-08
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:Charging Mode		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
63.9500	46.7	-13.4	33.3	40.0	-6.7	QP
115.3600	38.3	-8.1	30.2	43.5	-13.3	QP
164.8300	44.2	-8.0	36.2	43.5	-7.3	QP
231.7600	40.7	-7.5	33.2	46.0	-12.8	QP
520.8200	38.5	-0.4	38.1	46.0	-7.9	QP
579.0200	43.2	0.3	43.5	46.0	-2.5	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result



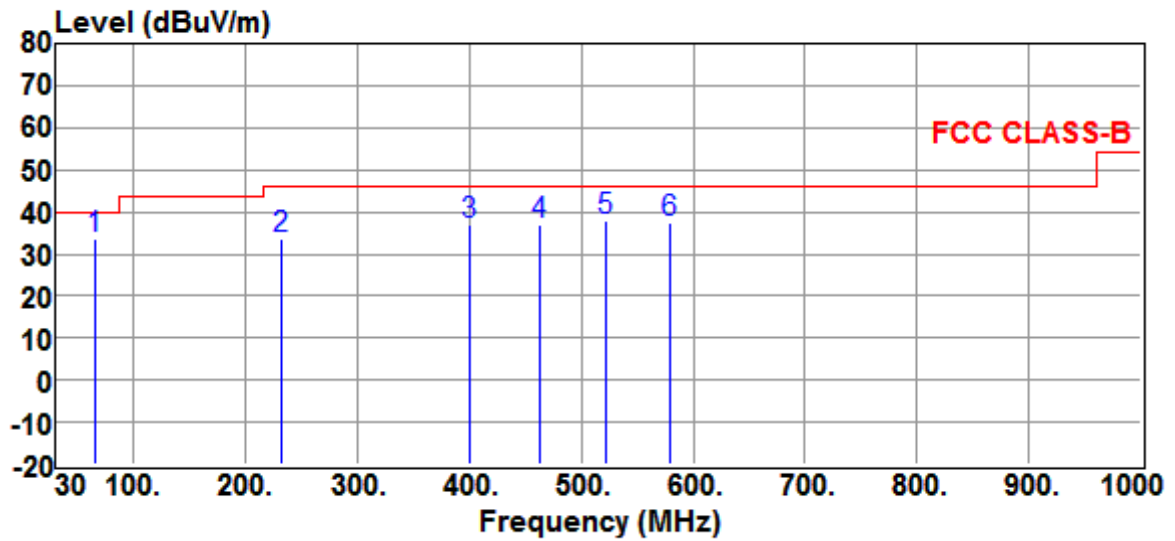


Site	:CHAMBER #2	Date	:2016-09-08
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:Charging Mode		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
65.8900	46.9	-13.3	33.6	40.0	-6.4	QP
231.7600	41.3	-7.5	33.8	46.0	-12.2	QP
399.5700	38.7	-1.7	37.0	46.0	-9.0	QP
463.5900	38.1	-1.1	37.0	46.0	-9.0	QP
522.7600	38.1	-0.4	37.7	46.0	-8.3	QP
579.0200	37.2	0.3	37.5	46.0	-8.5	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

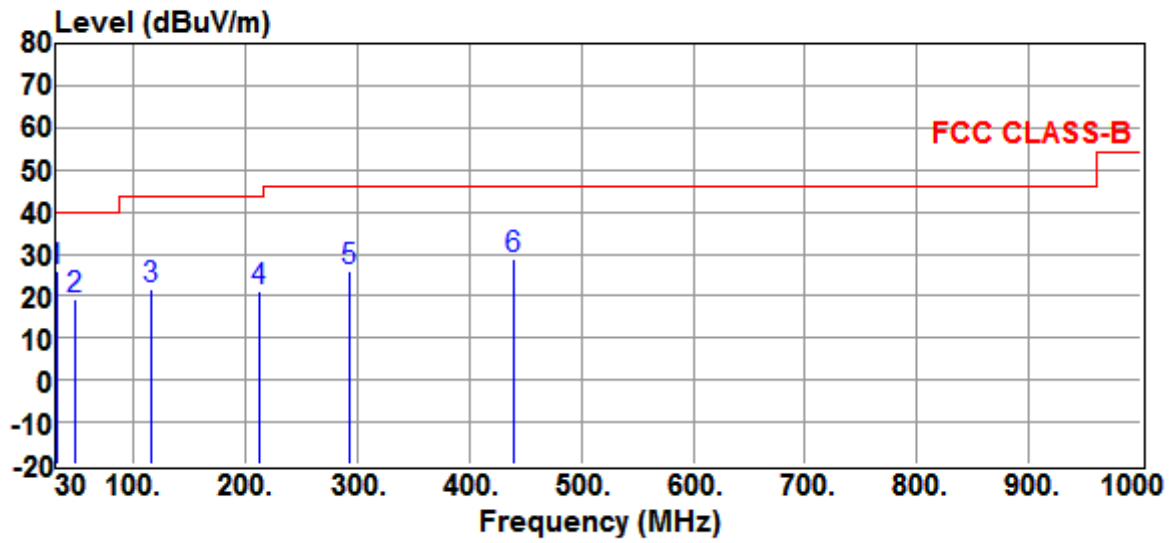


Site	:CHAMBER #2	Date	:2016-09-08
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:BT Operation Mode (Battery Powered)		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
31.9400	29.0	-3.1	25.9	40.0	-14.1	QP
48.4300	28.9	-9.5	19.4	40.0	-20.6	QP
115.3600	29.7	-8.1	21.6	43.5	-21.9	QP
212.3600	28.3	-6.9	21.4	43.5	-22.1	QP
293.8400	30.1	-3.9	26.2	46.0	-19.8	QP
440.3100	30.2	-1.5	28.7	46.0	-17.3	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

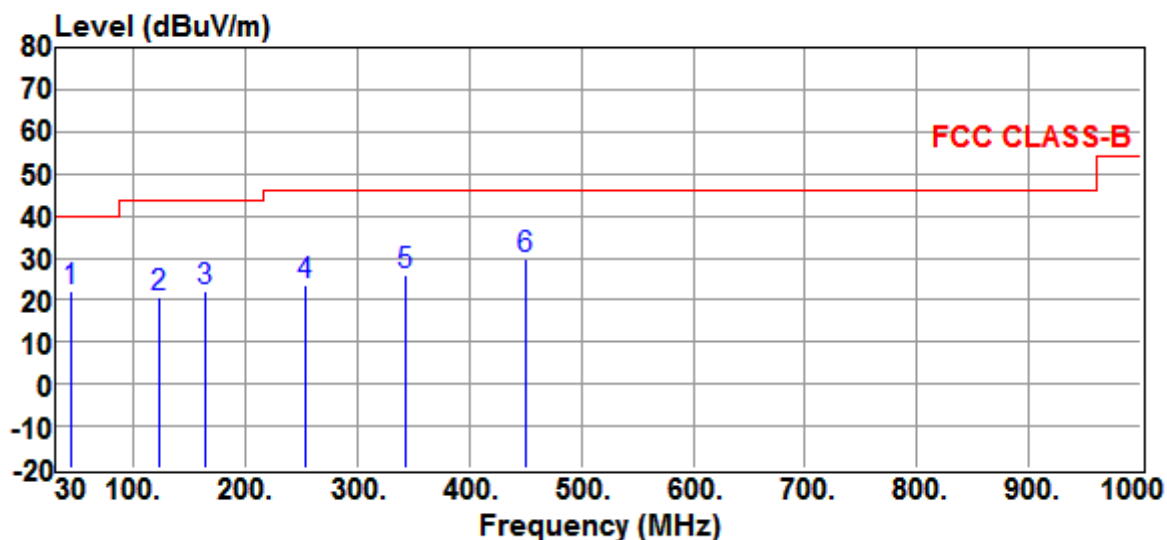


Site	:CHAMBER #2	Date	:2016-09-08
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:BT Operation Mode (Battery Powered)		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
43.5800	28.9	-6.7	22.2	40.0	-17.8	QP
123.1200	28.7	-7.9	20.8	43.5	-22.7	QP
163.8600	29.8	-7.9	21.9	43.5	-21.6	QP
254.0700	28.4	-5.1	23.3	46.0	-22.7	QP
342.3400	29.0	-3.0	26.0	46.0	-20.0	QP
450.9800	31.1	-1.5	29.6	46.0	-16.4	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

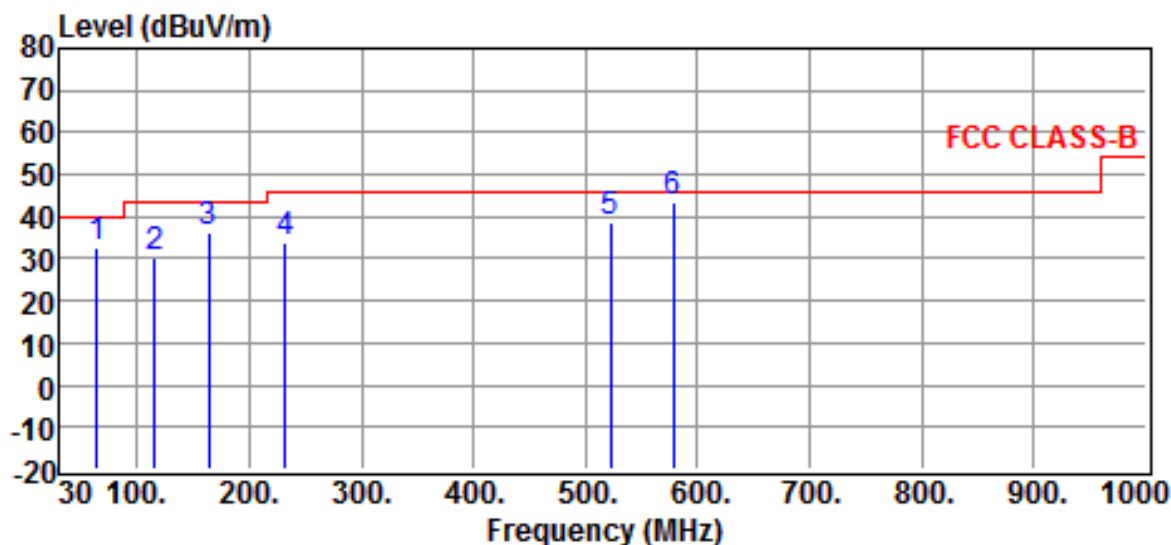


Site	:CHAMBER #2	Date	:2016-11-15
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	: Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:60 %
Test Mode	:BT Operation + Charging		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
63.9200	47.03	-14.23	32.80	40.00	-7.20	QP
115.2100	39.56	-9.46	30.10	43.50	-13.40	QP
164.2100	45.84	-9.54	36.30	43.50	-7.20	QP
231.7500	43.46	-9.36	34.10	46.00	-11.90	QP
522.3200	41.78	-3.28	38.50	46.00	-7.50	QP
578.0000	46.18	-2.78	43.40	46.00	-2.60	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

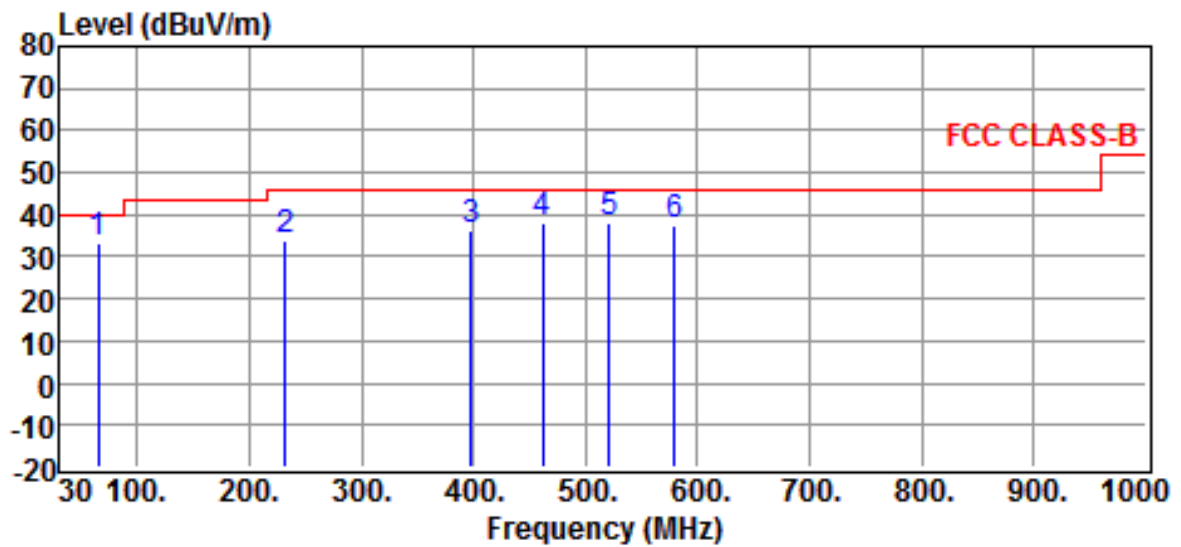


Site	:CHAMBER #2	Date	:2016-11-15
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	: Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:60 %
Test Mode	:BT Operation + Charging		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
65.7500	47.77	-14.27	33.50	40.00	-6.50	QP
232.2100	43.10	-9.36	33.74	46.00	-12.26	QP
398.4500	40.84	-4.34	36.50	46.00	-9.50	QP
462.2200	42.08	-3.98	38.10	46.00	-7.90	QP
521.5200	41.19	-3.29	37.90	46.00	-8.10	QP
578.9200	40.36	-2.76	37.60	46.00	-8.40	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

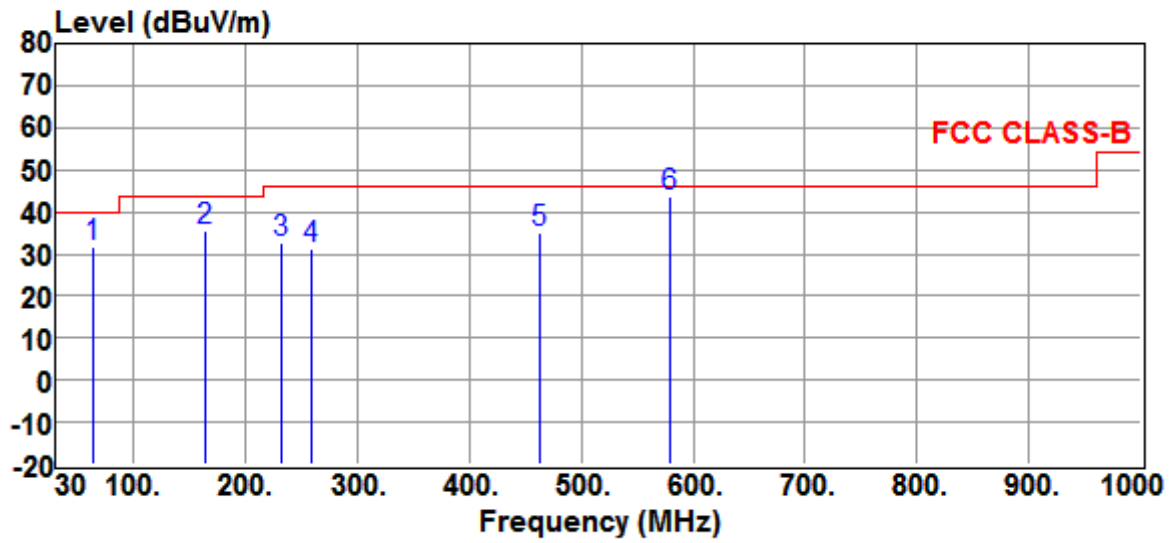


Site	:CHAMBER #2	Date	:2016-09-08
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:Charging Mode		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
63.9500	45.0	-13.4	31.6	40.0	-8.4	QP
164.8300	43.7	-8.0	35.7	43.5	-7.8	QP
231.7600	40.0	-7.5	32.5	46.0	-13.5	QP
259.8900	36.3	-5.0	31.3	46.0	-14.7	QP
463.5900	36.0	-1.1	34.9	46.0	-11.1	QP
579.0200	43.2	0.3	43.5	46.0	-2.5	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

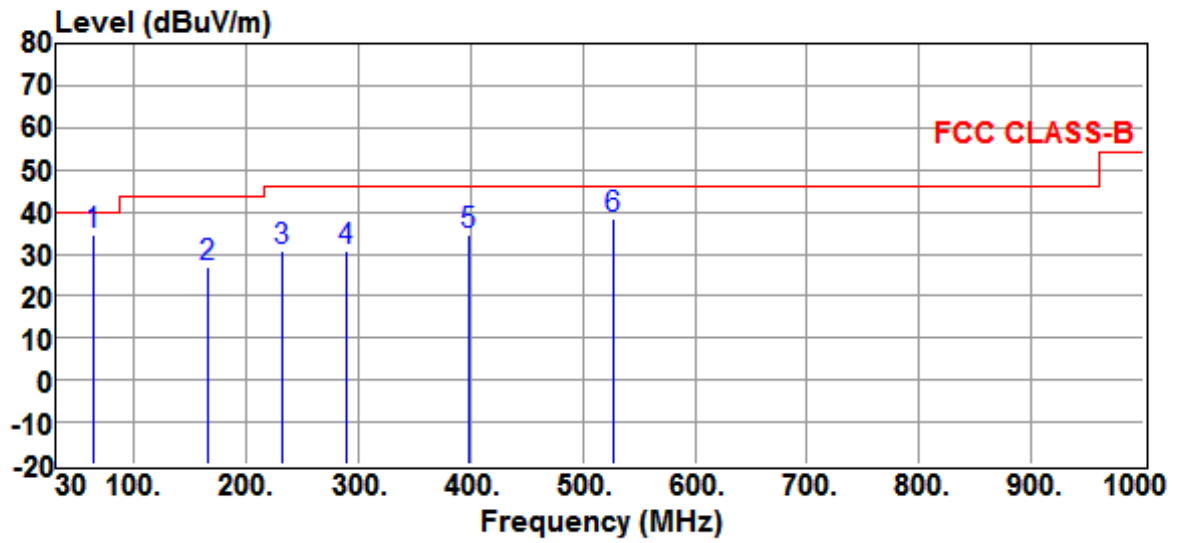


Site	:CHAMBER #2	Date	:2016-09-08
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:Charging Mode		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
63.9500	47.7	-13.4	34.3	40.0	-5.7	QP
166.7700	34.9	-8.1	26.8	43.5	-16.7	QP
231.7600	38.3	-7.5	30.8	46.0	-15.2	QP
289.9600	35.0	-4.0	31.0	46.0	-15.0	QP
398.6000	36.3	-1.7	34.6	46.0	-11.4	QP
527.6100	38.6	-0.2	38.4	46.0	-7.6	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

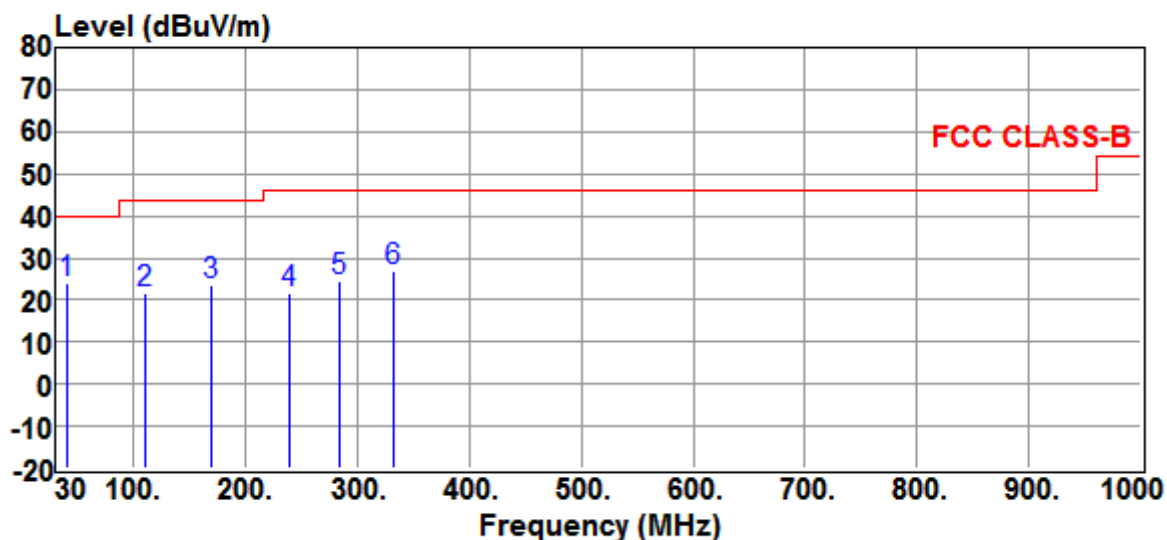


Site	:CHAMBER #2	Date	:2016-09-08
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:DC3.7V Battery	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:BT Operation Mode (Battery Powered)		
Test Mode	:EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
40.6700	30.4	-6.4	24.0	40.0	-16.0	QP
110.5100	30.2	-8.3	21.9	43.5	-21.6	QP
169.6800	32.0	-8.3	23.7	43.5	-19.8	QP
238.5500	28.6	-6.7	21.9	46.0	-24.1	QP
283.1700	29.1	-4.4	24.7	46.0	-21.3	QP
332.6400	30.1	-3.0	27.1	46.0	-18.9	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result



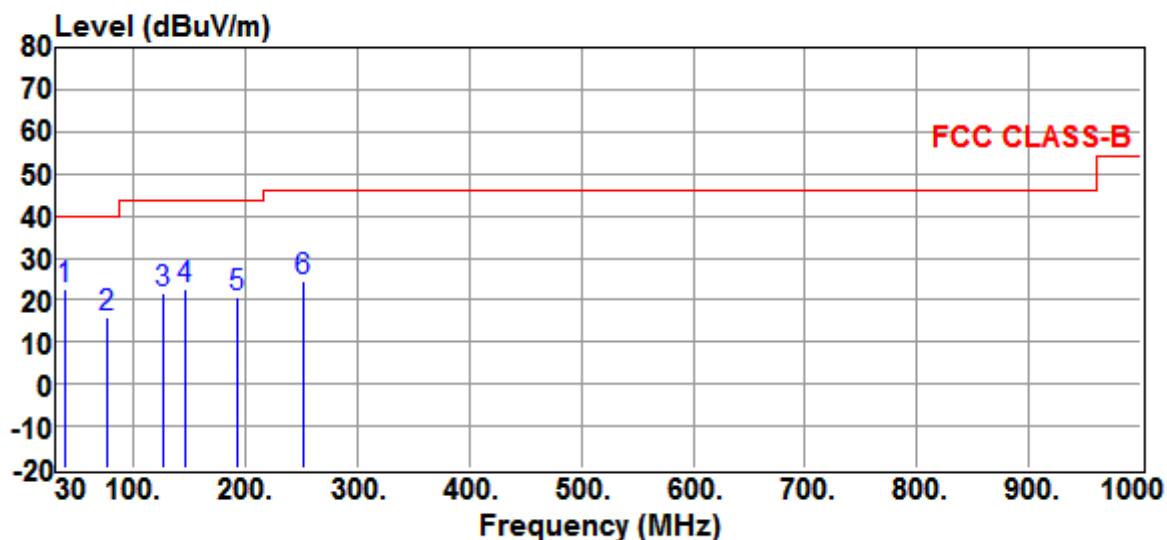


Site	:CHAMBER #2	Date	:2016-09-08
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:DC3.7V Battery	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:57 %
Test Mode	:BT Operation Mode (Battery Powered)		
Test Mode	:EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
38.7300	28.5	-5.8	22.7	40.0	-17.3	QP
76.5600	29.0	-12.9	16.1	40.0	-23.9	QP
126.0300	29.4	-7.8	21.6	43.5	-21.9	QP
145.4300	29.5	-7.1	22.4	43.5	-21.1	QP
191.9900	30.1	-9.5	20.6	43.5	-22.9	QP
251.1600	29.6	-5.1	24.5	46.0	-21.5	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

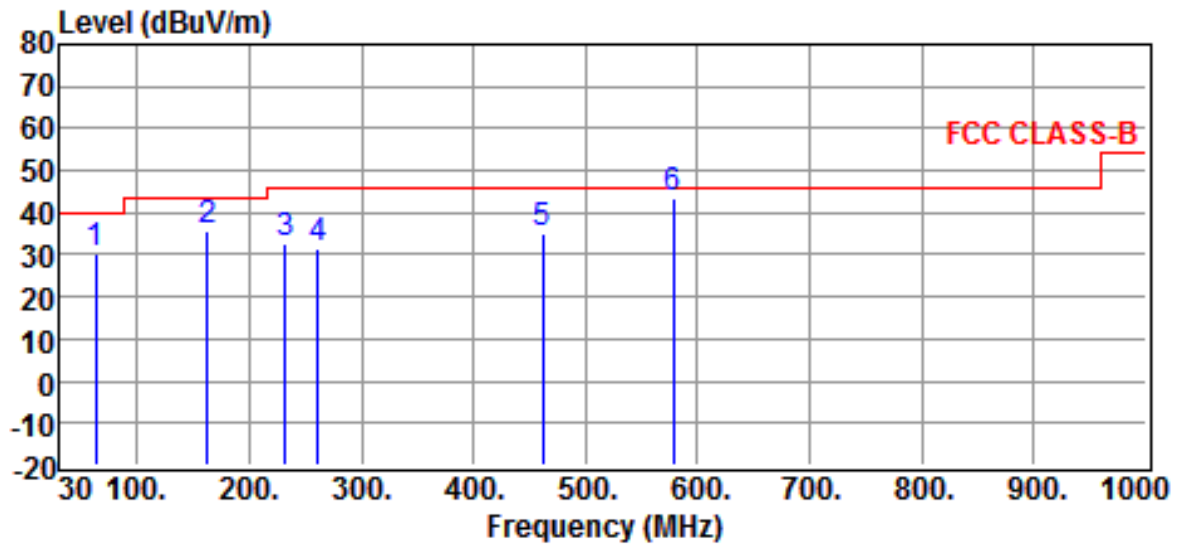


Site	:CHAMBER #2	Date	:2016-11-15
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:60 %
Test Mode	:BT Operation + Charging		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
62.8500	44.72	-14.22	30.50	40.00	-9.50	QP
163.2200	44.99	-9.49	35.50	43.50	-8.00	QP
232.5200	41.85	-9.25	32.60	46.00	-13.40	QP
261.2900	38.40	-7.00	31.40	46.00	-14.60	QP
462.2500	39.18	-3.98	35.20	46.00	-10.80	QP
578.2300	45.98	-2.78	43.20	46.00	-2.80	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

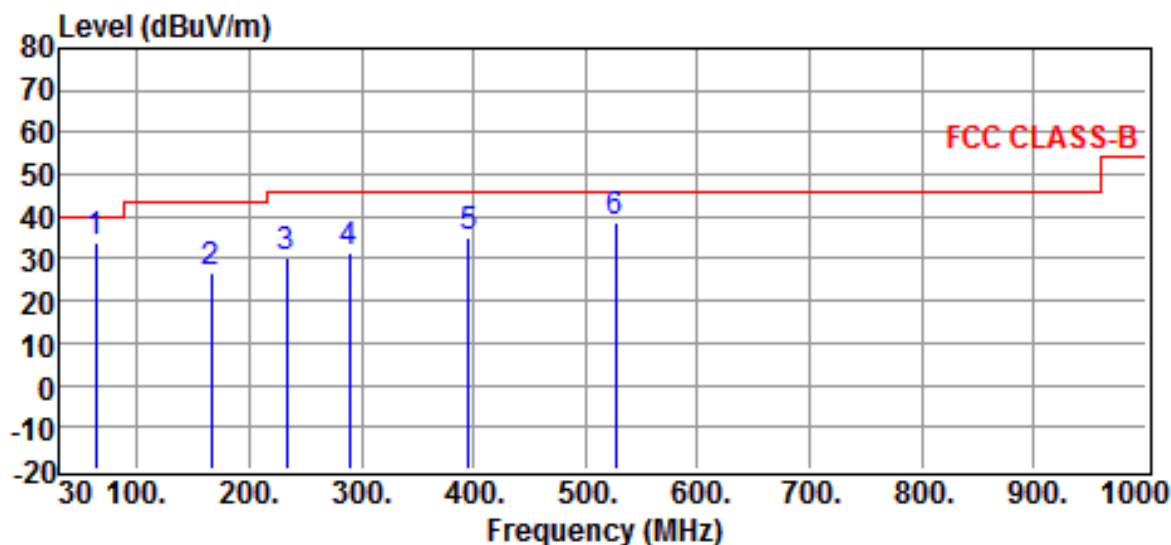


Site	:CHAMBER #2	Date	:2016-11-15
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:60 %
Test Mode	:BT Operation + Charging		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
62.6000	48.12	-14.22	33.90	40.00	-6.10	QP
165.8200	36.56	-9.66	26.90	43.50	-16.60	QP
232.8100	39.75	-9.25	30.50	46.00	-15.50	QP
289.3500	37.73	-6.13	31.60	46.00	-14.40	QP
395.7900	39.49	-4.39	35.10	46.00	-10.90	QP
526.9500	41.86	-3.26	38.60	46.00	-7.40	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

**b) Emission frequencies above 1 GHz**

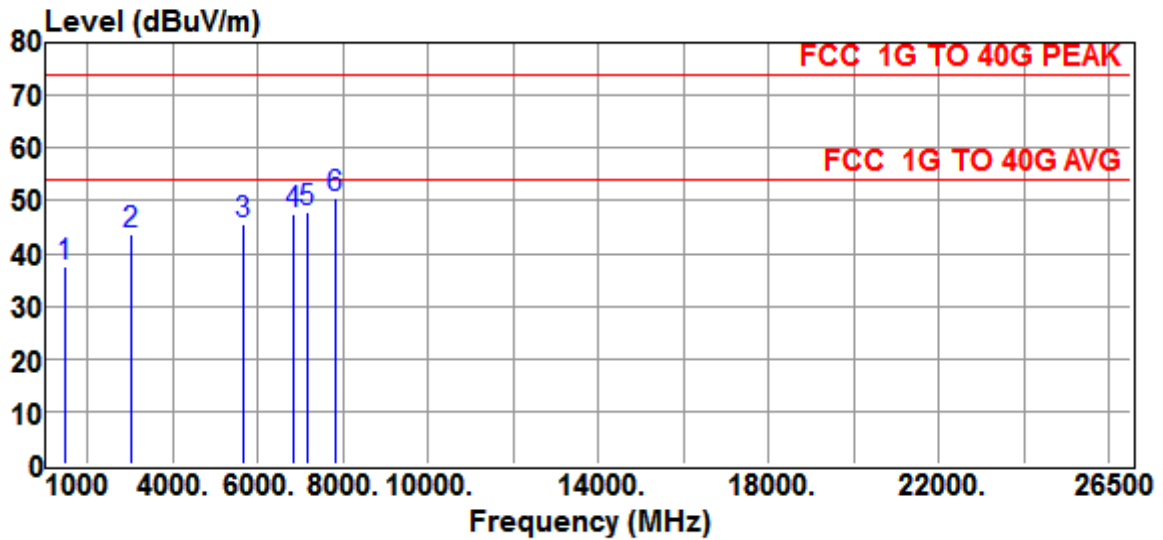


Site	:CHAMBER #2	Date	:2016-09-14
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:Power from PC	Temp.	:26 °C
Engineer	: Kazuma Ho	Humi.	:59 %
Test Mode	:Charging Mode		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1484.5000	47.3	-9.9	37.4	54.0	-16.6	Peak
3040.0000	46.9	-3.3	43.6	54.0	-10.4	Peak
5666.5000	42.5	3.1	45.6	54.0	-8.4	Peak
6814.0000	43.0	4.5	47.5	54.0	-6.5	Peak
7171.0000	42.6	5.4	48.0	54.0	-6.0	Peak
7834.0000	43.5	6.9	50.4	54.0	-3.6	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

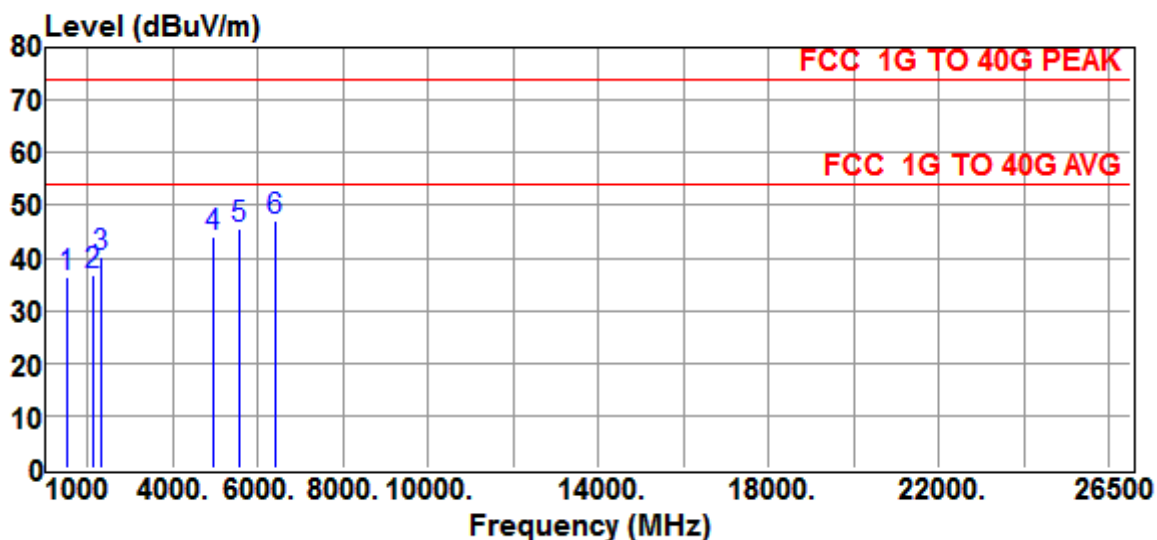


Site	:CHAMBER #2	Date	:2016-09-14
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:Power from PC	Temp.	:26 °C
Engineer	: Kazuma Ho	Humi.	:59 %
Test Mode	:Charging Mode		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1510.0000	46.0	-9.5	36.5	54.0	-17.5	Peak
2122.0000	43.2	-6.3	36.9	54.0	-17.1	Peak
2300.5000	45.9	-5.9	40.0	54.0	-14.0	Peak
4927.0000	42.6	1.5	44.1	54.0	-9.9	Peak
5539.0000	42.7	3.0	45.7	54.0	-8.3	Peak
6431.5000	43.3	3.8	47.1	54.0	-6.9	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

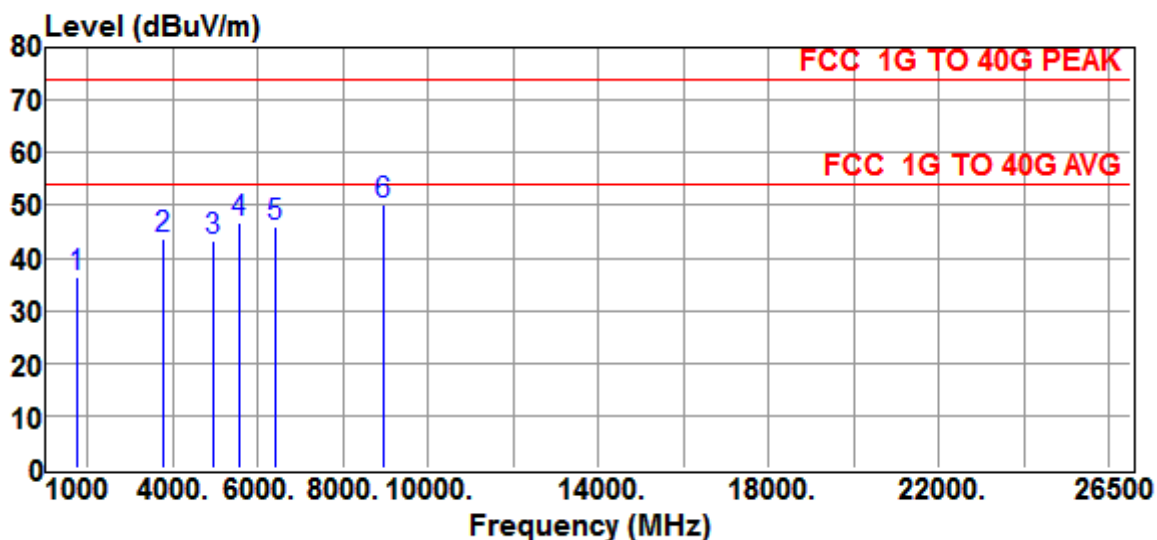


Site	:CHAMBER #2	Date	:2016-09-14
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:26 °C
Engineer	: Kazuma Ho	Humi.	:59 %
Test Mode	:BT Operation Mode (Battery Powered)		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1739.5000	44.7	-8.1	36.6	54.0	-17.4	Peak
3779.5000	44.4	-0.9	43.5	54.0	-10.5	Peak
4927.0000	41.9	1.5	43.4	54.0	-10.6	Peak
5539.0000	43.7	3.0	46.7	54.0	-7.3	Peak
6406.0000	42.3	3.8	46.1	54.0	-7.9	Peak
8930.5000	41.3	8.9	50.2	54.0	-3.8	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

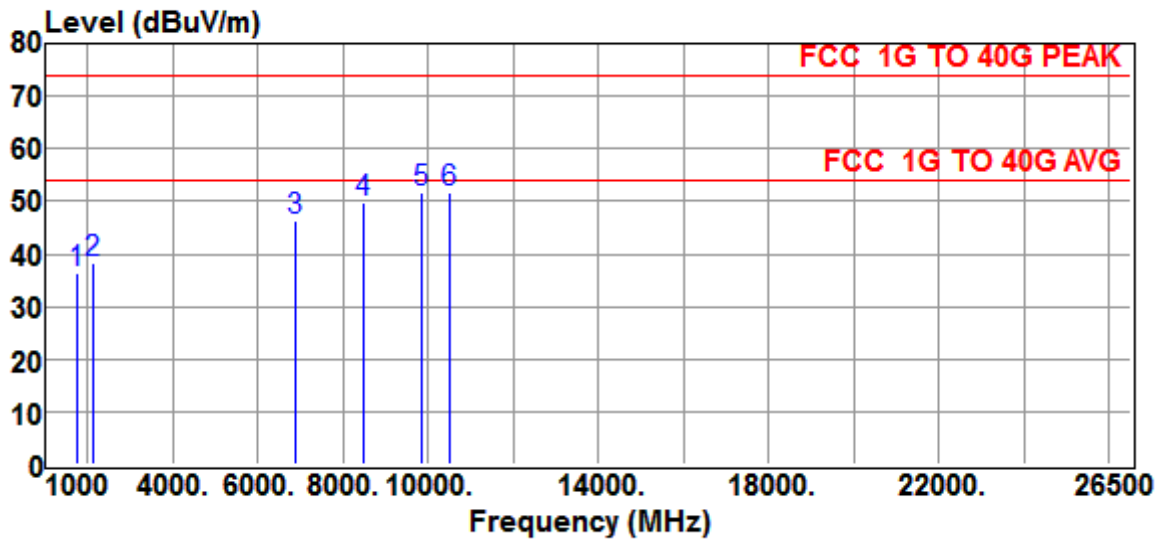


Site	:CHAMBER #2	Date	:2016-09-14
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	:DC3.7V Battery	Temp.	:26 °C
Engineer	: Kazuma Ho	Humi.	:59 %
Test Mode	:BT Operation Mode (Battery Powered)		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1739.5000	44.7	-8.1	36.6	54.0	-17.4	Peak
2147.5000	44.5	-6.1	38.4	54.0	-15.6	Peak
6865.0000	41.5	4.7	46.2	54.0	-7.8	Peak
8471.5000	41.9	8.0	49.9	54.0	-4.1	Peak
9823.0000	42.6	9.1	51.7	54.0	-2.3	Peak
10486.0000	42.0	9.7	51.7	54.0	-2.3	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

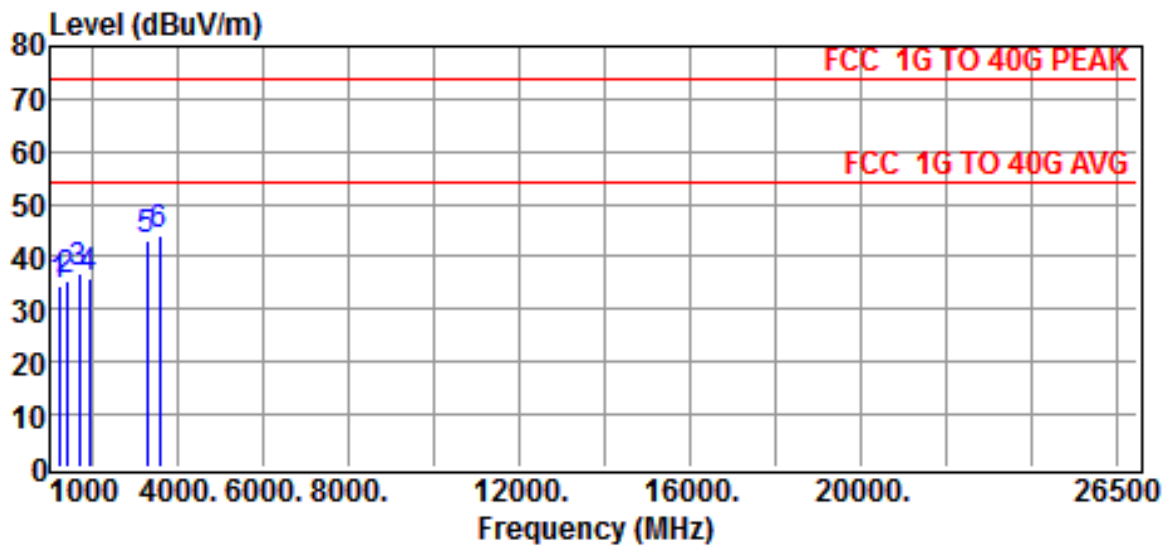


Site :CHAMBER #2 Date :2016-11-15  
 Limit :FCC 1G TO 40G PEAK Ant. Pol. :HORIZONTAL  
 EUT : Bluetooth Dongle Model :BTH-830T  
 Power Rating : Power from PC Temp. :25 °C  
 Engineer : Kazuma Ho Humi. :60 %  
 Test Mode :BT Operation + Charging  
 Test Mode :EUT put on table horizontally (worst case)

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1235.0000	45.3	-10.6	34.7	54.0	-19.3	Peak
1395.0000	45.4	-10.1	35.3	54.0	-18.7	Peak
1680.0000	45.5	-8.6	36.9	54.0	-17.1	Peak
1915.0000	43.0	-7.0	36.0	54.0	-18.0	Peak
3280.0000	45.9	-2.6	43.3	54.0	-10.7	Peak
3590.0000	45.7	-1.5	44.2	54.0	-9.8	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.



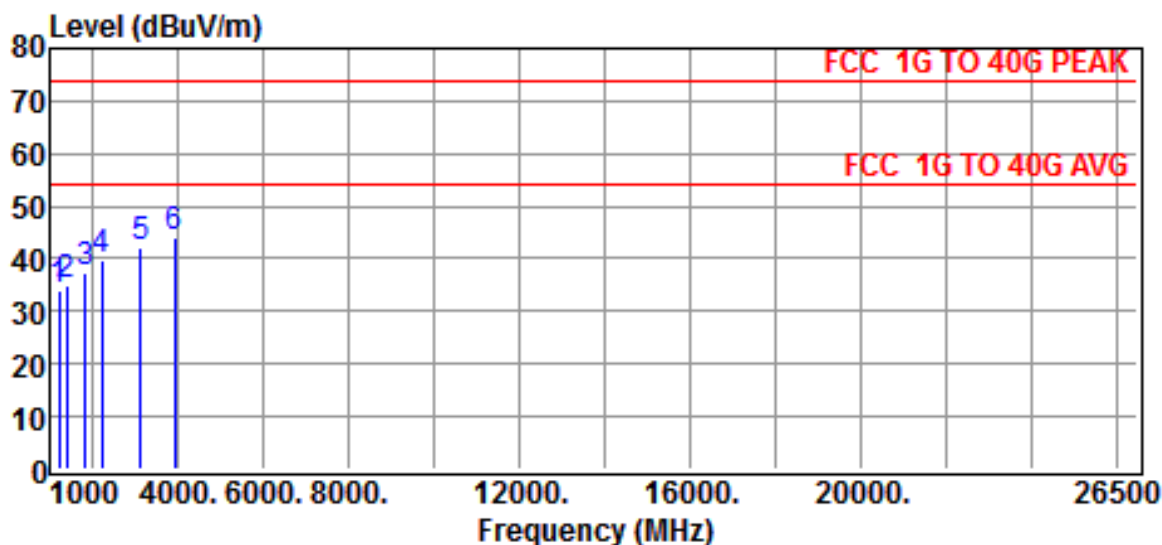


Site	:CHAMBER #2	Date	:2016-11-15
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830T
Power Rating	: Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:60 %
Test Mode	:BT Operation + Charging		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1210.0000	44.6	-10.7	33.9	54.0	-20.1	Peak
1395.0000	45.1	-10.1	35.0	54.0	-19.0	Peak
1840.0000	44.8	-7.6	37.2	54.0	-16.8	Peak
2230.0000	45.8	-6.0	39.8	54.0	-14.2	Peak
3145.0000	45.1	-3.1	42.0	54.0	-12.0	Peak
3930.0000	44.4	-0.4	44.0	54.0	-10.0	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

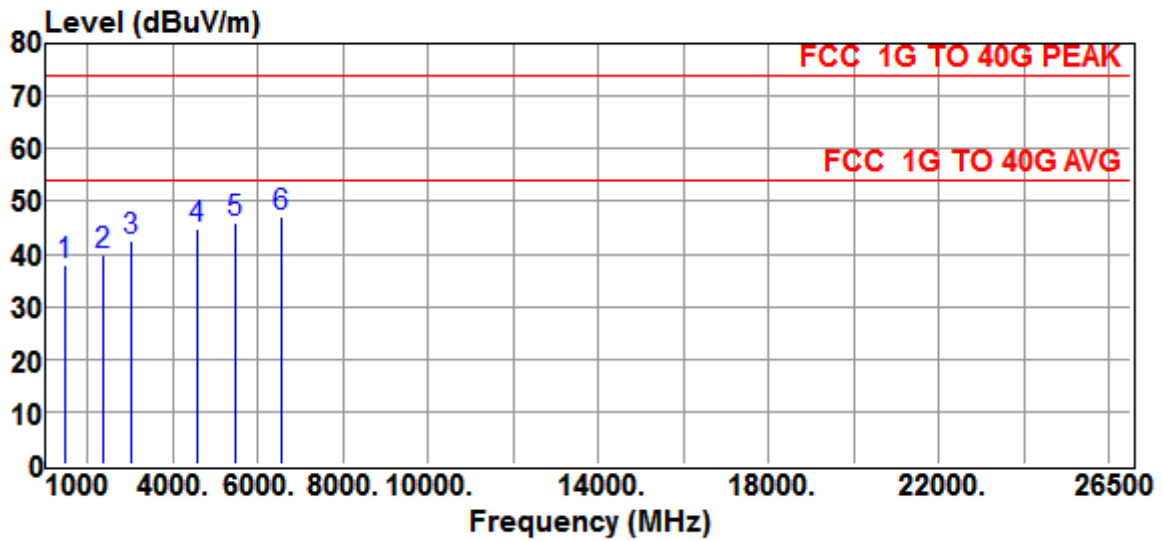


Site	:CHAMBER #2	Date	:2016-09-14
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:Power from PC	Temp.	:26 °C
Engineer	: Kazuma Ho	Humi.	:59 %
Test Mode	:Charging Mode		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1484.5000	47.8	-9.9	37.9	54.0	-16.1	Peak
2377.0000	45.7	-5.9	39.8	54.0	-14.2	Peak
3040.0000	45.9	-3.3	42.6	54.0	-11.4	Peak
4595.5000	44.3	0.4	44.7	54.0	-9.3	Peak
5488.0000	43.1	3.0	46.1	54.0	-7.9	Peak
6559.0000	43.2	3.9	47.1	54.0	-6.9	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

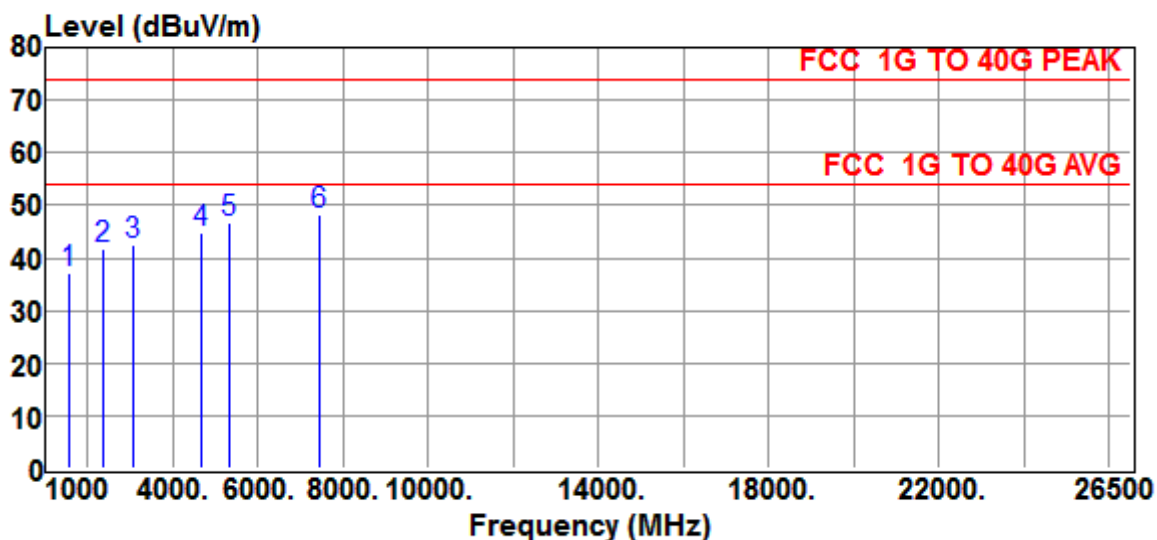


Site	:CHAMBER #2	Date	:2016-09-14
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:Power from PC	Temp.	:26 °C
Engineer	: Kazuma Ho	Humi.	:59 %
Test Mode	:Charging Mode		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1561.0000	46.6	-9.3	37.3	54.0	-16.7	Peak
2377.0000	47.5	-5.9	41.6	54.0	-12.4	Peak
3091.0000	45.6	-3.2	42.4	54.0	-11.6	Peak
4646.5000	44.3	0.6	44.9	54.0	-9.1	Peak
5335.0000	43.9	2.6	46.5	54.0	-7.5	Peak
7451.5000	42.0	6.3	48.3	54.0	-5.7	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

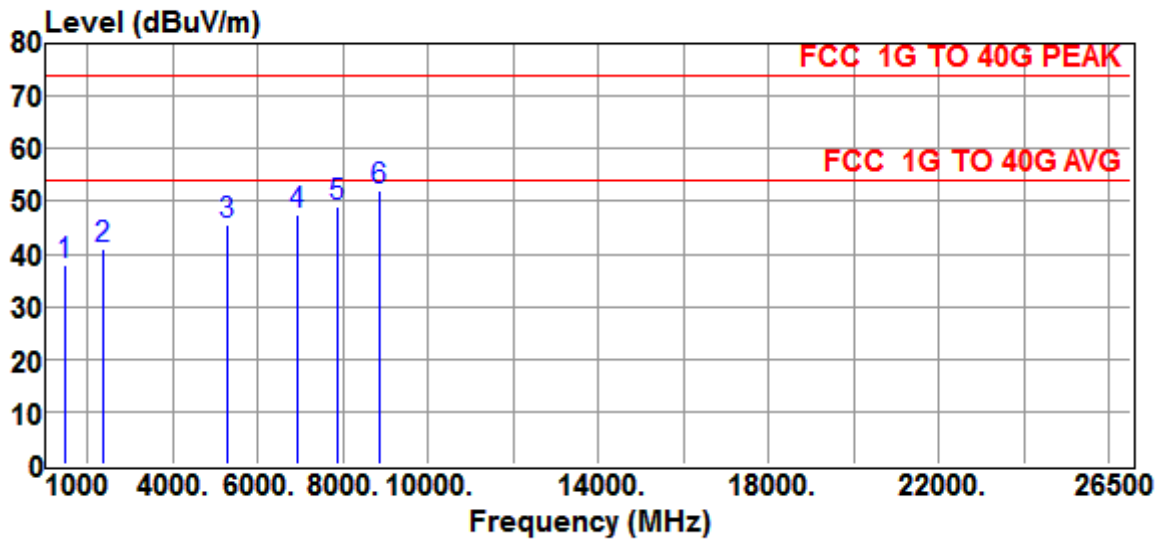


Site	:CHAMBER #2	Date	:2016-09-14
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:DC3.7V Battery	Temp.	:26 °C
Engineer	: Kazuma Ho	Humi.	:59 %
Test Mode	:BT Operation Mode (Battery Powered)		
Test Mode	:EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1459.0000	47.7	-9.9	37.8	54.0	-16.2	Peak
2351.5000	47.0	-5.9	41.1	54.0	-12.9	Peak
5258.5000	43.2	2.3	45.5	54.0	-8.5	Peak
6916.0000	42.6	4.7	47.3	54.0	-6.7	Peak
7859.5000	41.8	7.0	48.8	54.0	-5.2	Peak
8854.0000	43.4	8.7	52.1	54.0	-1.9	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

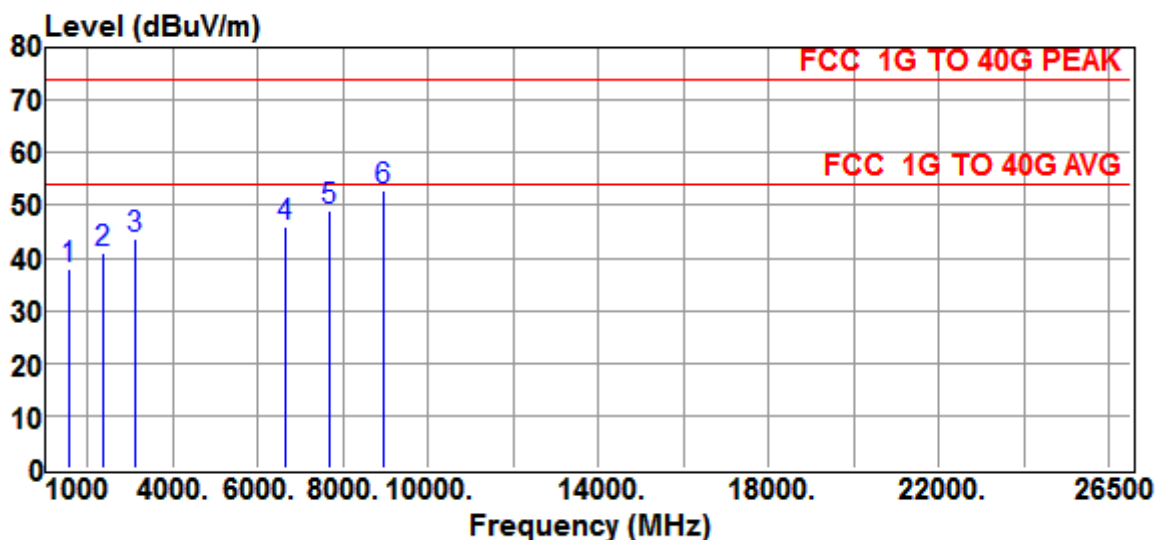


Site	:CHAMBER #2	Date	:2016-09-14
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	:DC3.7V Battery	Temp.	:26 °C
Engineer	: Kazuma Ho	Humi.	:59 %
Test Mode	:BT Operation Mode (Battery Powered)		
Test Mode	:EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1561.0000	47.4	-9.3	38.1	54.0	-15.9	Peak
2377.0000	46.7	-5.9	40.8	54.0	-13.2	Peak
3116.5000	46.7	-3.1	43.6	54.0	-10.4	Peak
6635.5000	42.0	4.1	46.1	54.0	-7.9	Peak
7655.5000	42.3	6.7	49.0	54.0	-5.0	Peak
8930.5000	44.1	8.9	53.0	54.0	-1.0	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

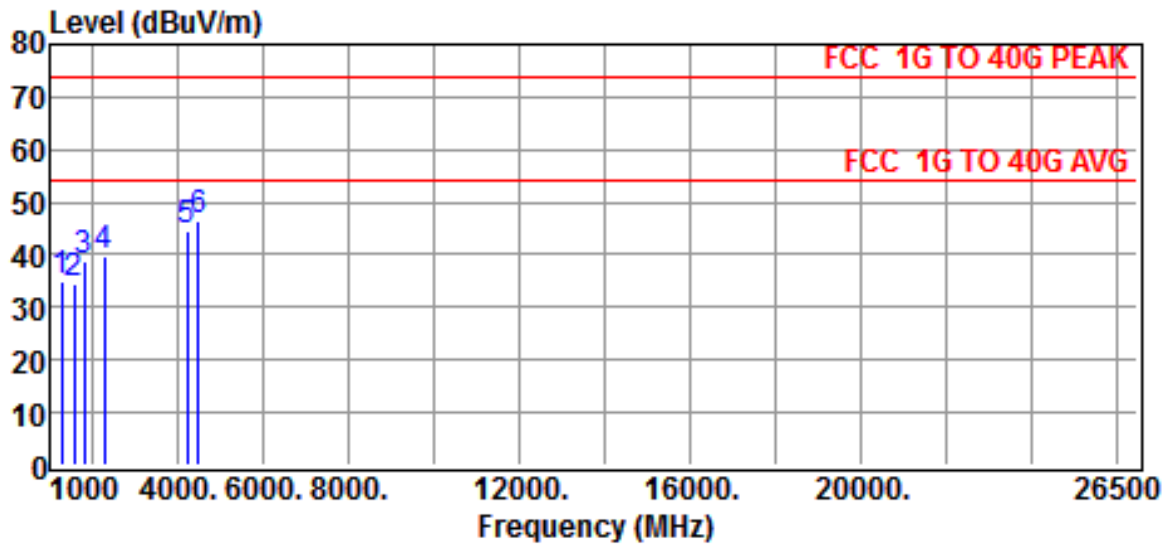


Site	:CHAMBER #2	Date	:2016-11-15
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	: Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:60 %
Test Mode	:BT Operation + Charging		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1290.0000	45.4	-10.4	35.0	54.0	-19.0	Peak
1575.0000	44.0	-9.3	34.7	54.0	-19.3	Peak
1810.0000	46.5	-7.7	38.8	54.0	-15.2	Peak
2285.0000	45.4	-5.8	39.6	54.0	-14.4	Peak
4220.0000	44.7	0.0	44.7	54.0	-9.3	Peak
4480.0000	46.2	0.2	46.4	54.0	-7.6	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

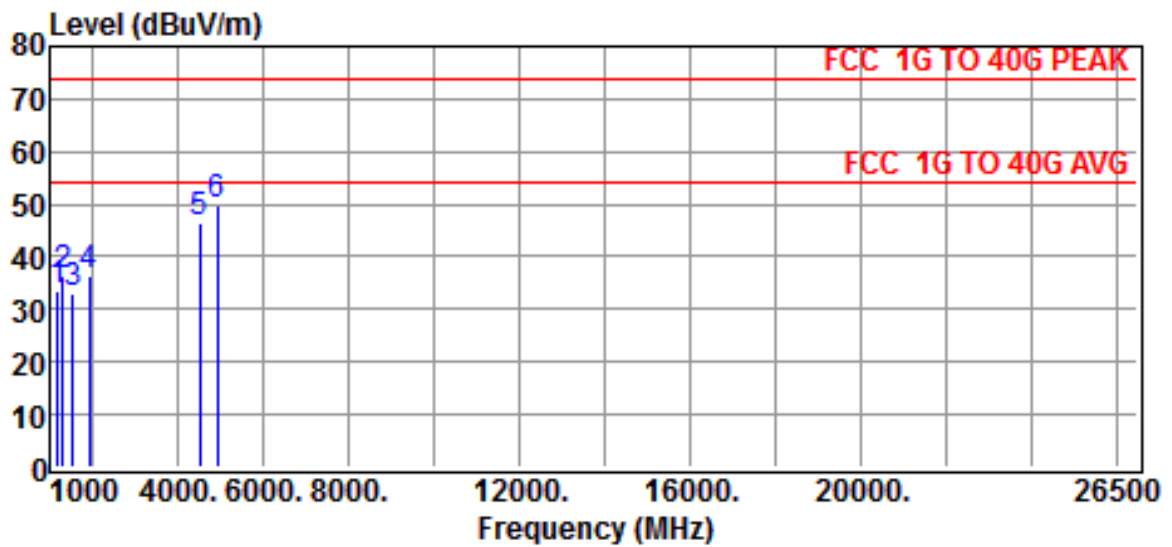

Site	:CHAMBER #2	Date	:2016-11-15
Limit	:FCC 1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: Bluetooth Dongle	Model	:BTH-830R
Power Rating	: Power from PC	Temp.	:25 °C
Engineer	: Kazuma Ho	Humi.	:60 %
Test Mode	:BT Operation + Charging		
Test Mode	:EUT put on table horizontally (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1185.0000	44.1	-10.7	33.4	54.0	-20.6	Peak
1315.0000	46.8	-10.3	36.5	54.0	-17.5	Peak
1550.0000	42.7	-9.5	33.2	54.0	-20.8	Peak
1915.0000	43.6	-7.0	36.6	54.0	-17.4	Peak
4510.0000	46.1	0.3	46.4	54.0	-7.6	Peak
4925.0000	48.2	1.6	49.8	54.0	-4.2	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

## c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emission were detected from 9kHz to 30MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

## 4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\mathbf{Result = Reading + Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$





## 4.6 Photos of Radiation Measuring Setup



(Below 1GHz)  
BTH-830T Charging Mode



**BTH-830T Operation Mode**

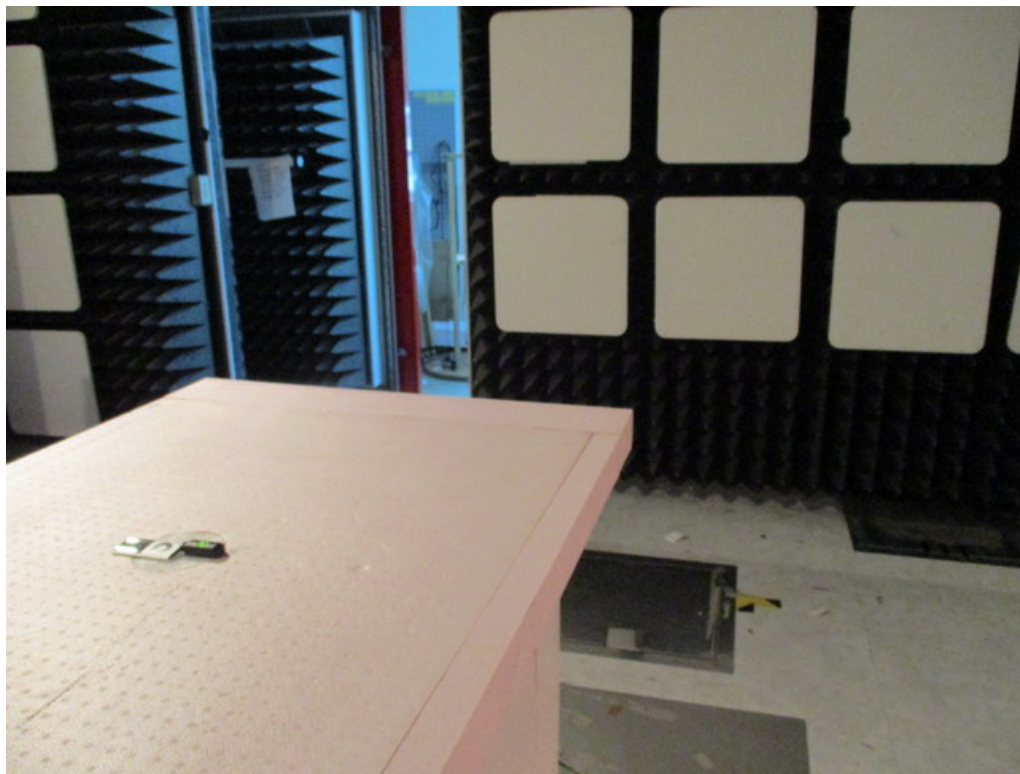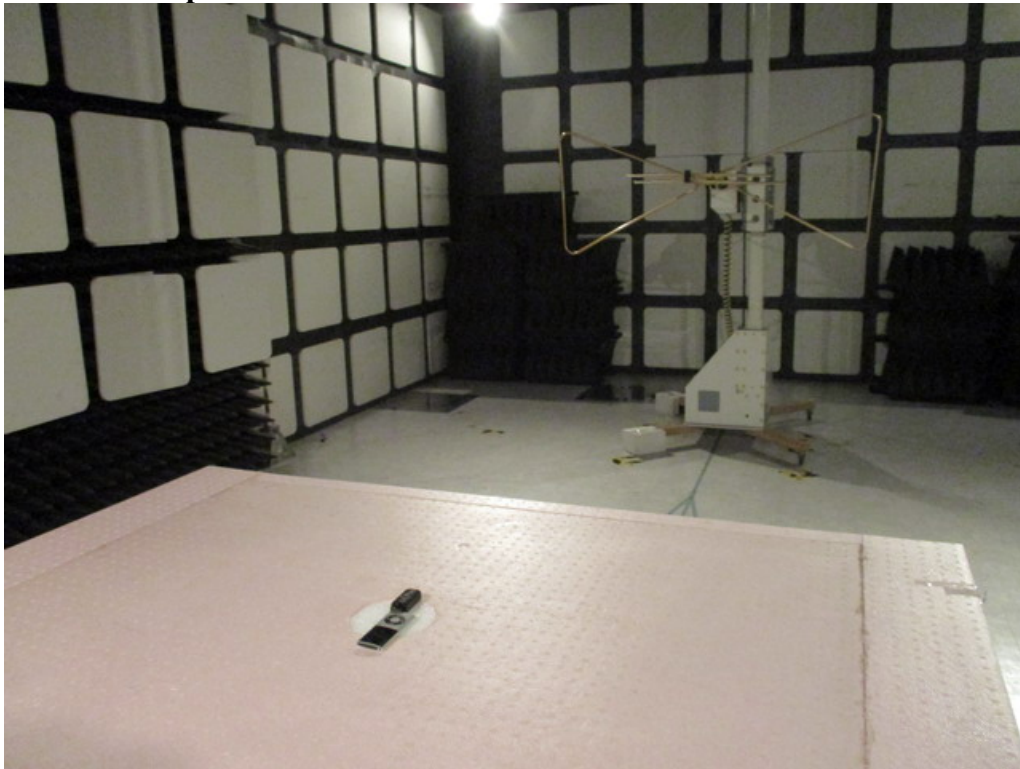


**BTH-830T BT Operation + Charging Mode**

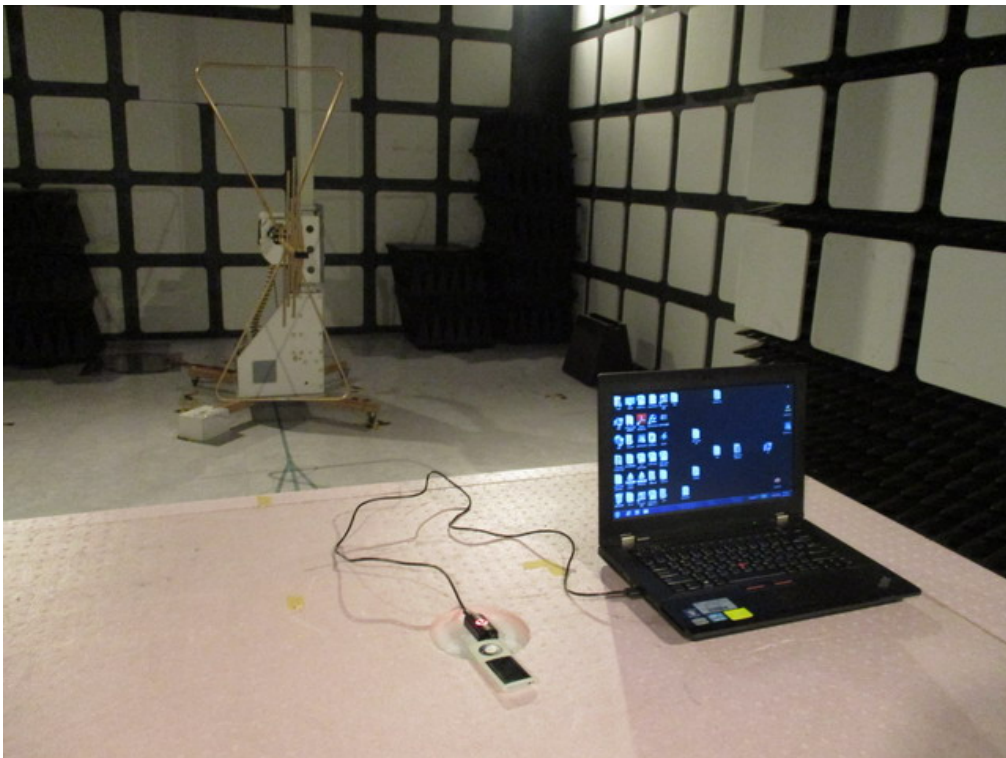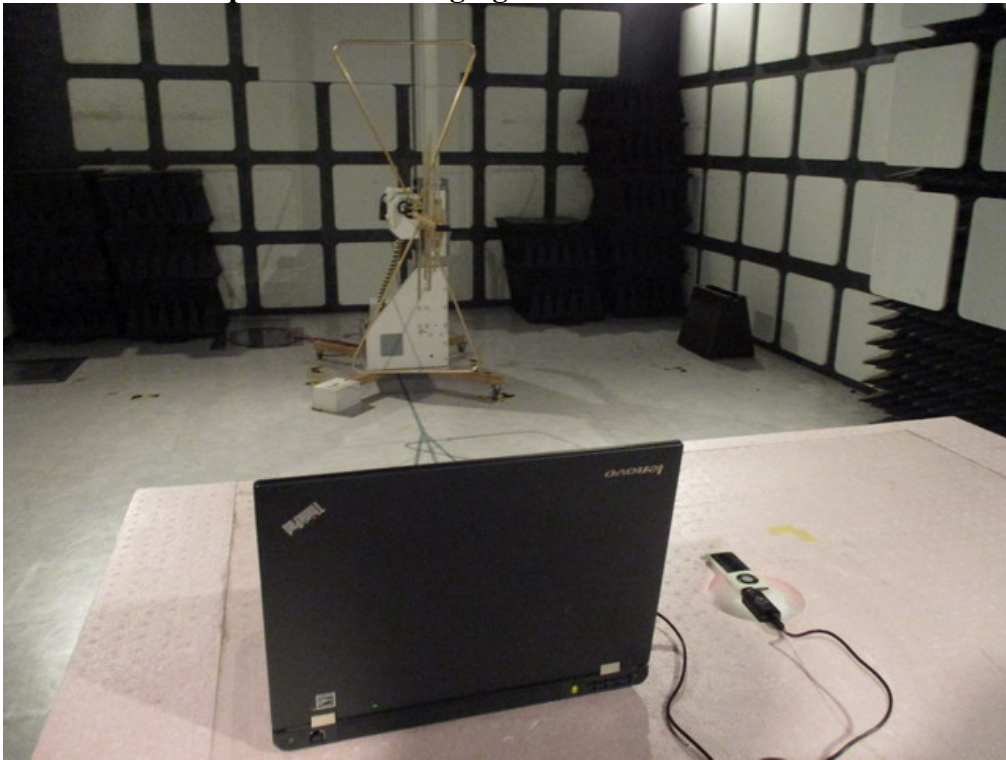

**BTH-830R Charging Mode**



**BTH-830R Operation Mode**

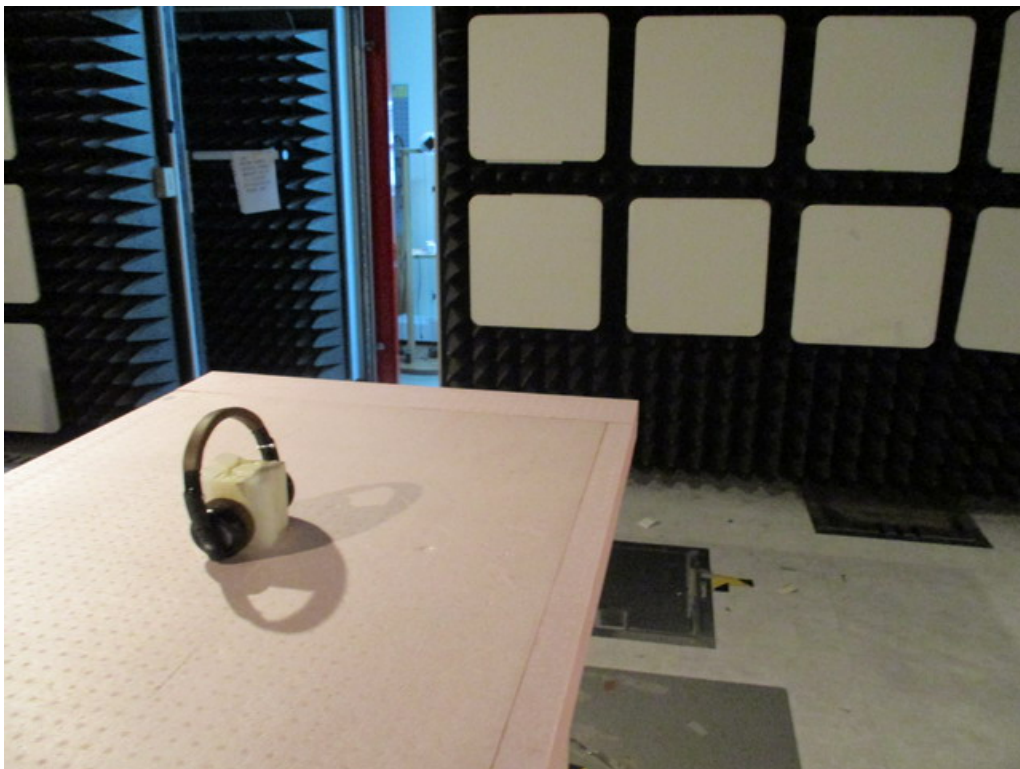

**BTH-830R BT Operation + Charging Mode**



**(Above 1GHz)  
BTH-830T Charging Mode**



**BTH-830T Operation Mode**







**BTH-830T BT Operation + Charging Mode**




**BTH-830R Charging Mode**

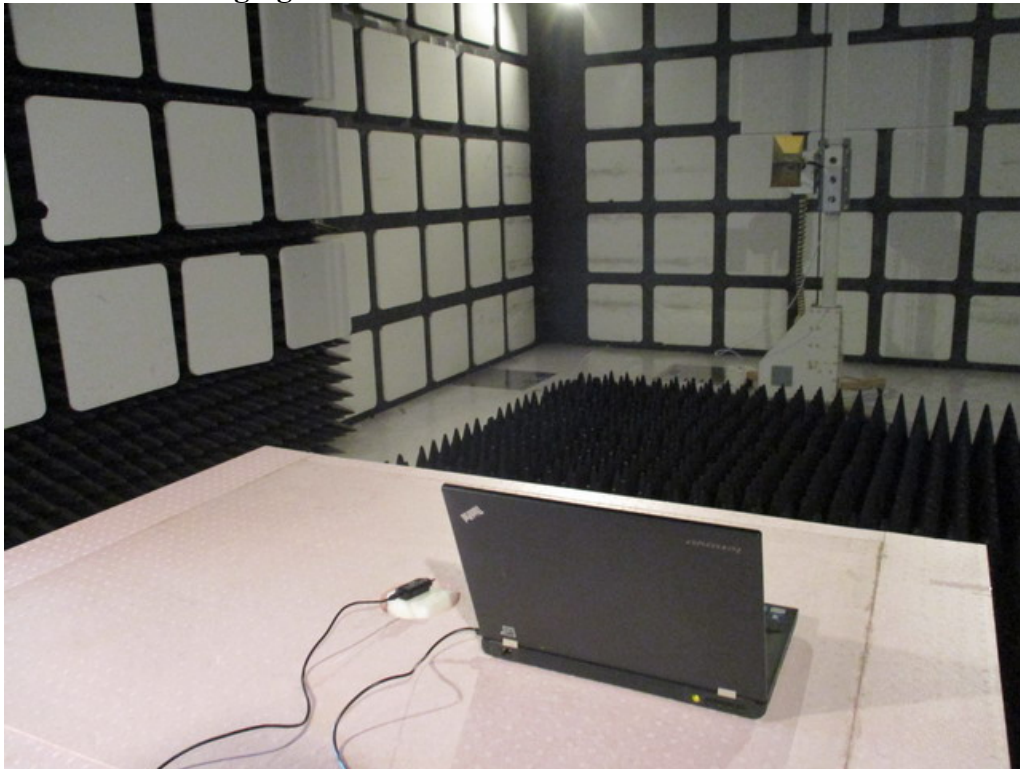

**BTH-830R Operation Mode**

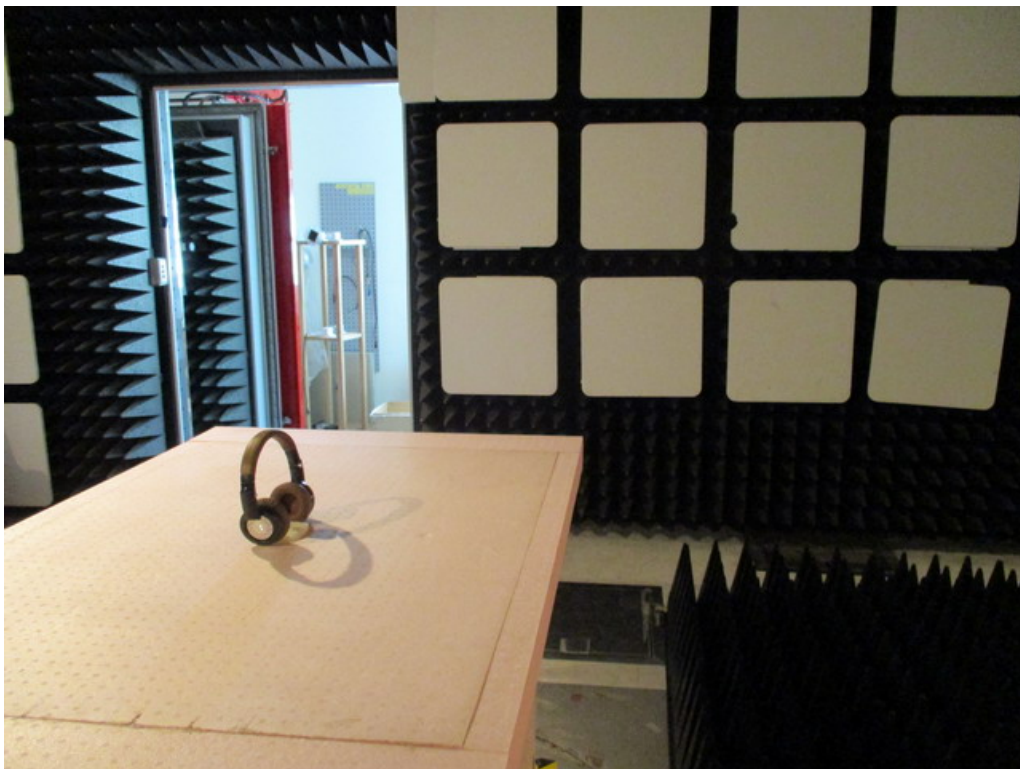

**BTH-830R BT Operation + Charging Mode**

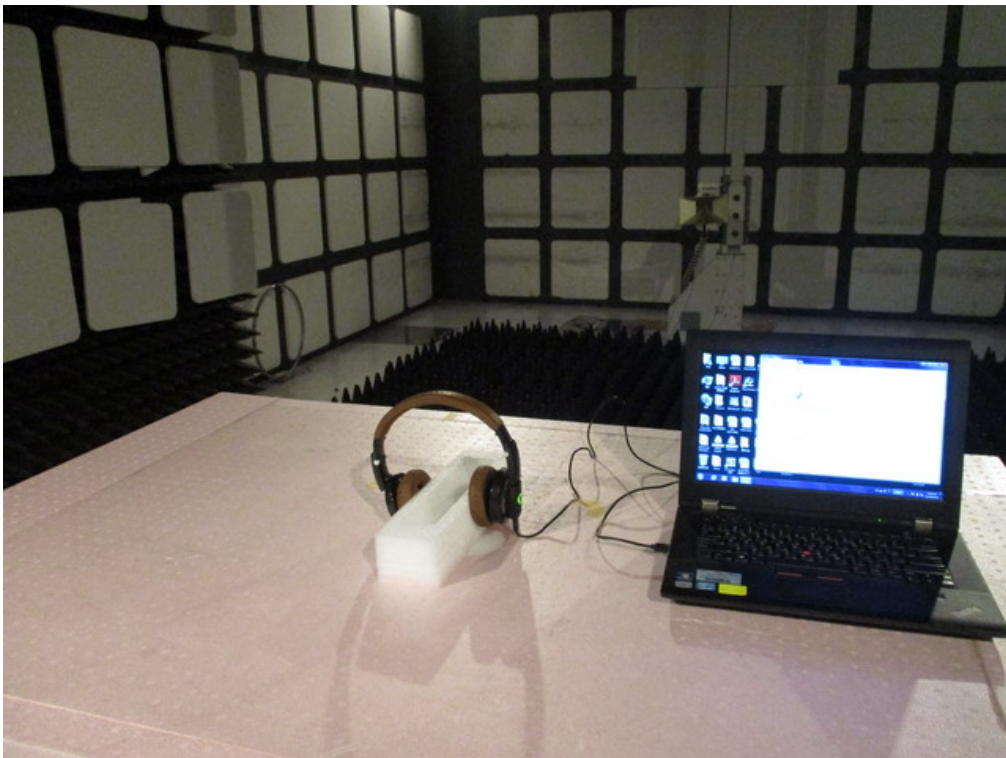

## 5 CONDUCTED EMISSION MEASUREMENT


### 5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.


### 5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

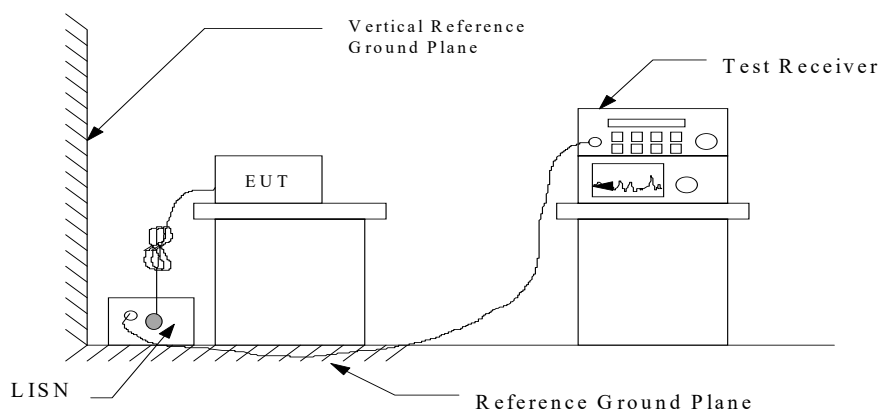

### 5.3 Conducted Emission Data

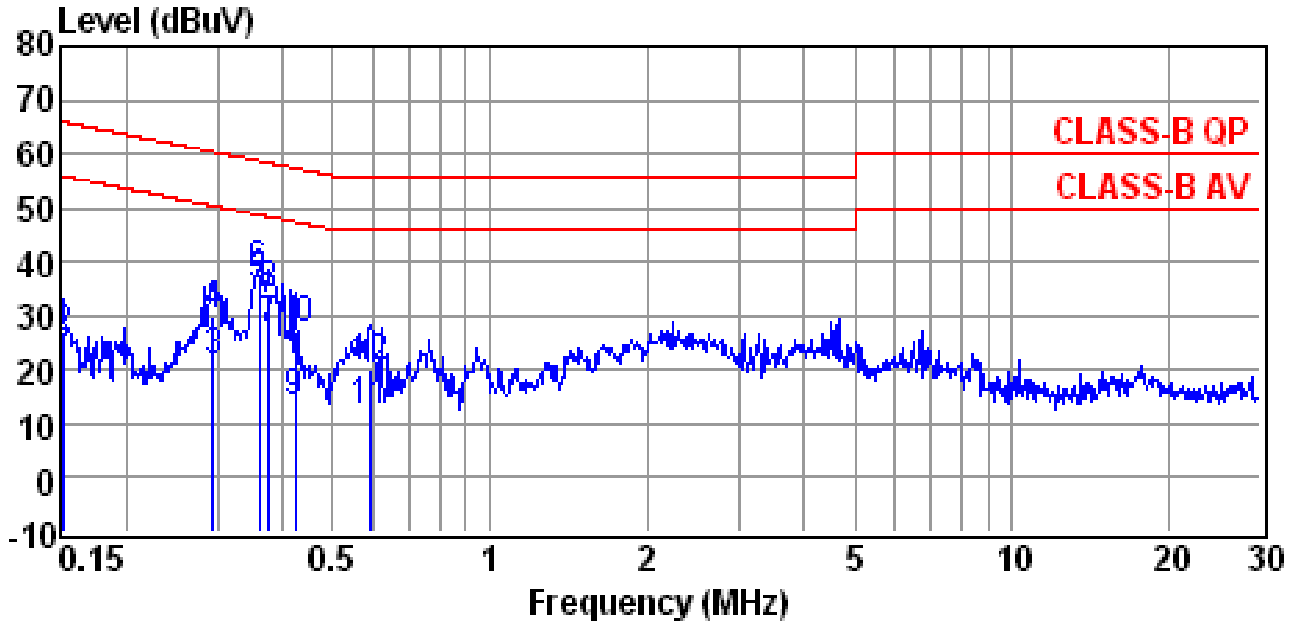


Site : conducted #1 Date : 09-08-2016  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 28 °C / 52% Test Mode : Charging mode  
 EUT : Bluetooth Dongle Power Rating: AC120V 60Hz  
 Memo : BTH-830T

Freq (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Remark
0.1524	9.75	10.19	19.94	55.87	-35.93	Average
0.1524	15.55	10.19	25.74	65.87	-40.13	QP
0.2955	11.02	10.20	21.22	50.37	-29.15	Average
0.2955	19.56	10.20	29.76	60.37	-30.61	QP
0.3615	25.32	10.22	35.54	48.69	-13.15	Average
0.3615	27.34	10.22	37.56	58.69	-21.13	QP
0.3771	16.86	10.22	27.08	48.34	-21.26	Average
0.3771	23.60	10.22	33.82	58.34	-24.52	QP
0.4237	3.69	10.22	13.91	47.37	-33.46	Average
0.4237	17.16	10.22	27.38	57.37	-29.99	QP
0.5885	1.83	10.24	12.07	46.00	-33.93	Average
0.5885	9.70	10.24	19.94	56.00	-36.06	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

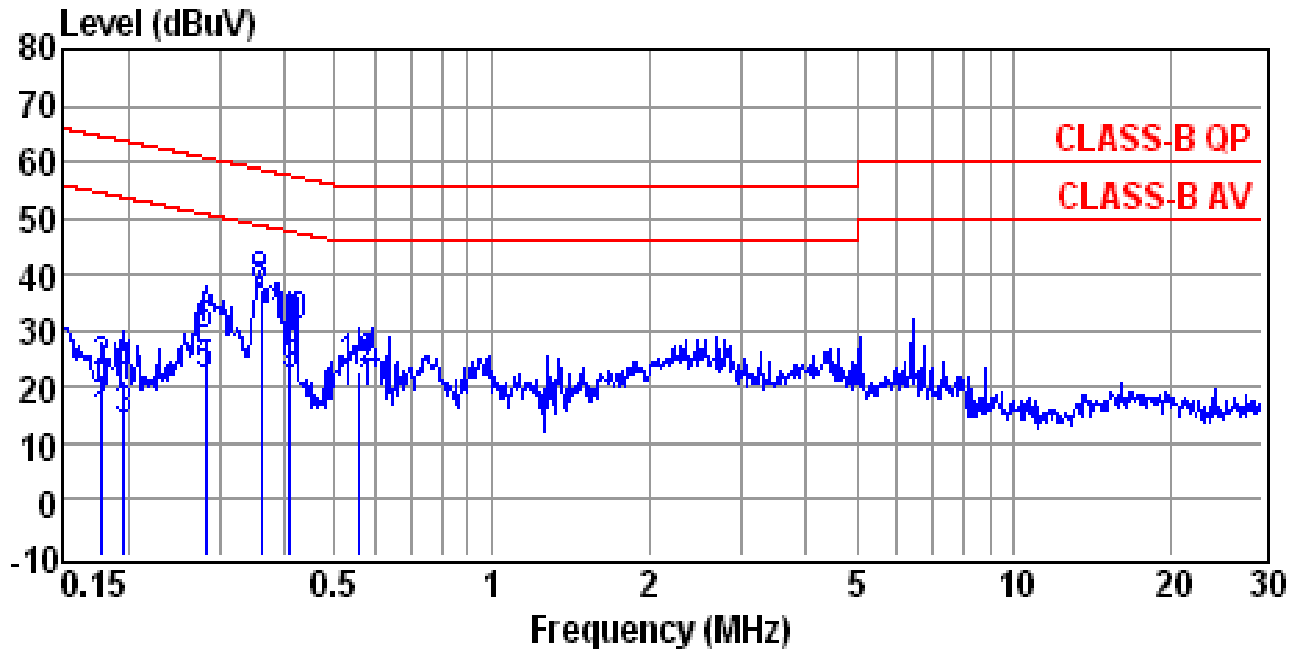


Site : conducted #1 Date : 09-08-2016  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 28 °C / 52% Test Mode : Charging mode  
 EUT : Bluetooth Dongle Power Rating: AC120V 60Hz  
 Memo : BTH-830T

Freq (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Remark
0.1787	3.12	10.20	13.32	54.55	-41.23	Average
0.1787	12.29	10.20	22.49	64.55	-42.06	QP
0.1965	3.77	10.20	13.97	53.76	-39.79	Average
0.1965	11.05	10.20	21.25	63.76	-42.51	QP
0.2833	11.33	10.21	21.54	50.72	-29.18	Average
0.2833	18.73	10.21	28.94	60.72	-31.78	QP
0.3615	25.35	10.23	35.58	48.69	-13.11	Average
0.3615	27.25	10.23	37.48	58.69	-21.21	QP
0.4105	11.78	10.23	22.01	47.64	-25.63	Average
0.4105	20.42	10.23	30.65	57.64	-26.99	QP
0.5581	8.13	10.24	18.37	46.00	-27.63	Average
0.5581	12.63	10.24	22.87	56.00	-33.13	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

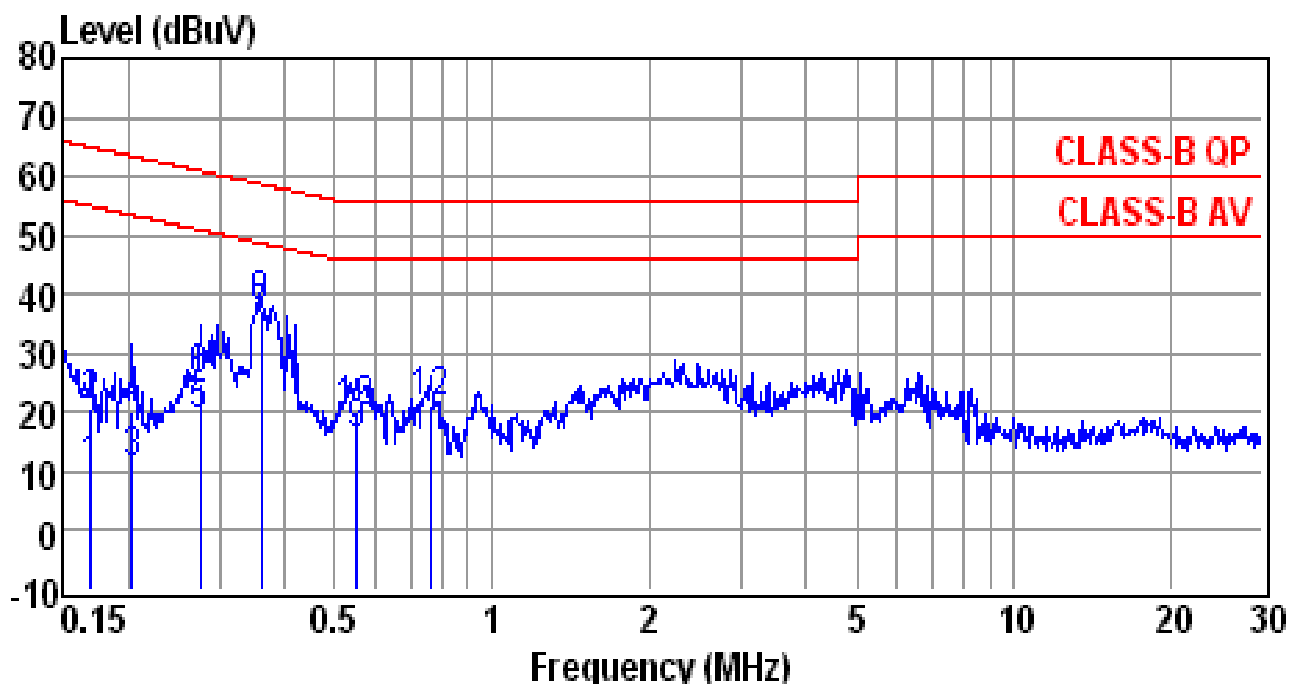


Site : conducted #1 Date : 09-08-2016  
 Condition : CLASS-B QP LISN : NEUTRAL  
 Tem / Hum : 28 °C / 52% Test Mode : Charging mode  
 EUT : Bluetooth Dongle Power Rating: AC120V 60Hz  
 Memo : BTH-830R

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1703	-0.12	10.19	10.07	54.94	-44.87	Average
0.1703	10.73	10.19	20.92	64.94	-44.02	QP
0.2040	0.92	10.19	11.11	53.45	-42.34	Average
0.2040	9.80	10.19	19.99	63.45	-43.46	QP
0.2759	8.83	10.20	19.03	50.94	-31.91	Average
0.2759	14.68	10.20	24.88	60.94	-36.06	QP
0.3615	25.06	10.22	35.28	48.69	-13.41	Average
0.3615	27.40	10.22	37.62	58.69	-21.07	QP
0.5493	5.61	10.23	15.84	46.00	-30.16	Average
0.5493	9.42	10.23	19.65	56.00	-36.35	QP
0.7670	5.16	10.25	15.41	46.00	-30.59	Average
0.7670	10.80	10.25	21.05	56.00	-34.95	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss



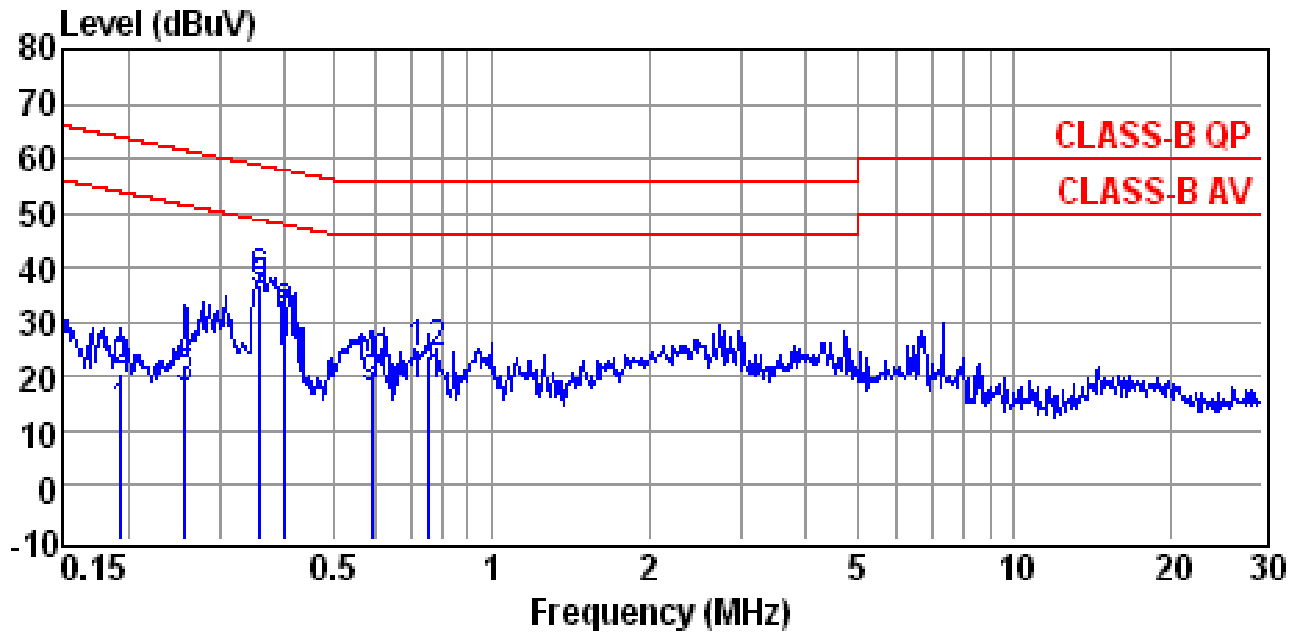

Site : conducted #1 Date : 09-08-2016  
 Condition : CLASS-B QP LISN : LINE  
 Tem / Hum : 28 °C / 52% Test Mode : Charging mode  
 EUT : Bluetooth Dongle Power Rating: AC120V 60Hz  
 Memo : BTH-830R

Freq (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Remark
0.1945	2.57	10.20	12.77	53.84	-41.07	Average
0.1945	10.45	10.20	20.65	63.84	-43.19	QP
0.2575	7.48	10.21	17.69	51.51	-33.82	Average
0.2575	11.71	10.21	21.92	61.51	-39.59	QP
0.3596	25.16	10.23	35.39	48.74	-13.35	Average
0.3596	26.80	10.23	37.03	58.74	-21.71	QP
0.3997	19.10	10.23	29.33	47.86	-18.53	Average
0.3997	20.15	10.23	30.38	57.86	-27.48	QP
0.5885	7.18	10.24	17.42	46.00	-28.58	Average
0.5885	11.22	10.24	21.46	56.00	-34.54	QP
0.7589	7.79	10.25	18.04	46.00	-27.96	Average
0.7589	13.62	10.25	23.87	56.00	-32.13	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

## 5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{RESULT = READING + LISN FACTOR}$$

Assume a receiver reading of 22.5 dB  $\mu$  V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB  $\mu$  V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

## 5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .


Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2015/12/05	2016/12/04
LISN	Shibasoku	563	2016/05/16	2017/05/15
LISN	Rohde & Schwarz	ESH2-Z5	2016/05/05	2017/05/04

## 5.6 Photos of Conduction Measuring Setup

### BTH-830T



**BTH-830R**

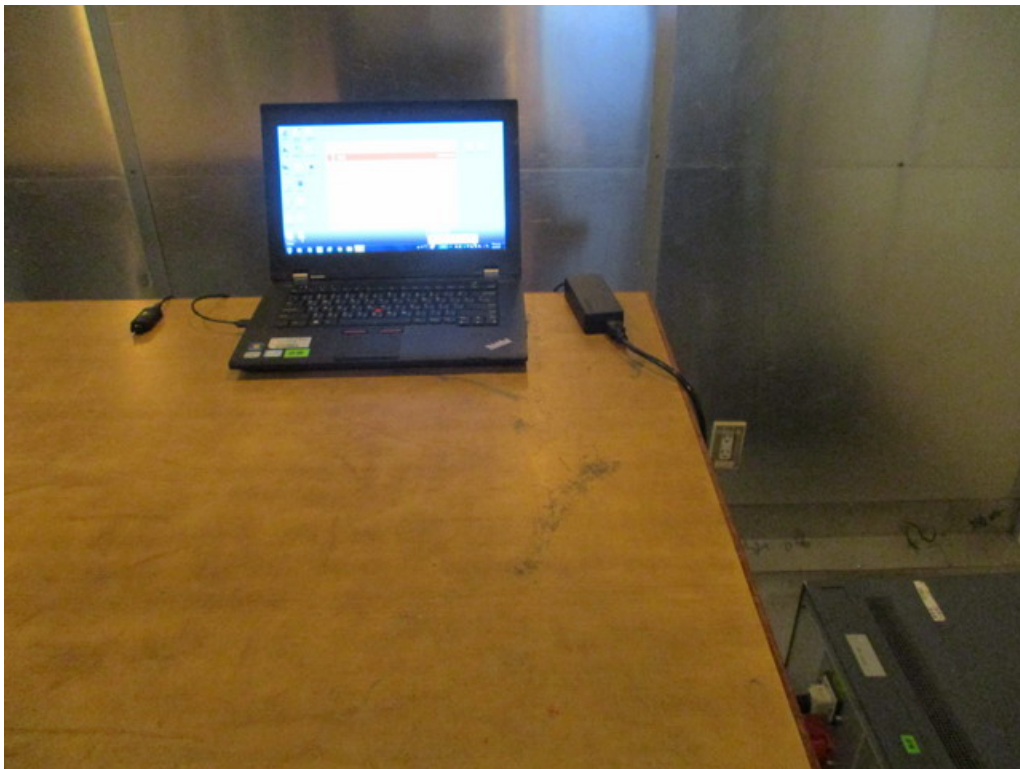

## **6 ANTENNA REQUIREMENT**

### **6.1 Standard Applicable**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2 Antenna Construction**

The antenna is permanently mounted on main PCB, no consideration of replacement. Please see internal photos and the antenna specifications.

## 7 HOPPING CHANNEL SEPARATION


### 7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peaks of two adjacent channels
  - Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span
  - Video (or Average) Bandwidth (VBW)  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.



### 7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13
Attenuator	MINI-CIRCUITS	BW-S10W2+	2015/10/07	2016/10/06

### 7.4 Measurement Data

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

**Mode: Bluetooth BR**

- a) Channel Low : Adjacent Hopping Channel Separation is 1.000 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1.000 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 1.000 MHz

**Mode: Bluetooth EDR**

- a) Channel Low : Adjacent Hopping Channel Separation is 1.002 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1.002 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 1.002 MHz

*Note : The expanded uncertainty: frequency  $\times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).*

**Mode: Bluetooth BR**

**Channel Low**




\*RBW 30 kHz    Delta 1 [T1 ]  
VBW 100 kHz    0.42 dB  
SWT 2.5 ms    1.000000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

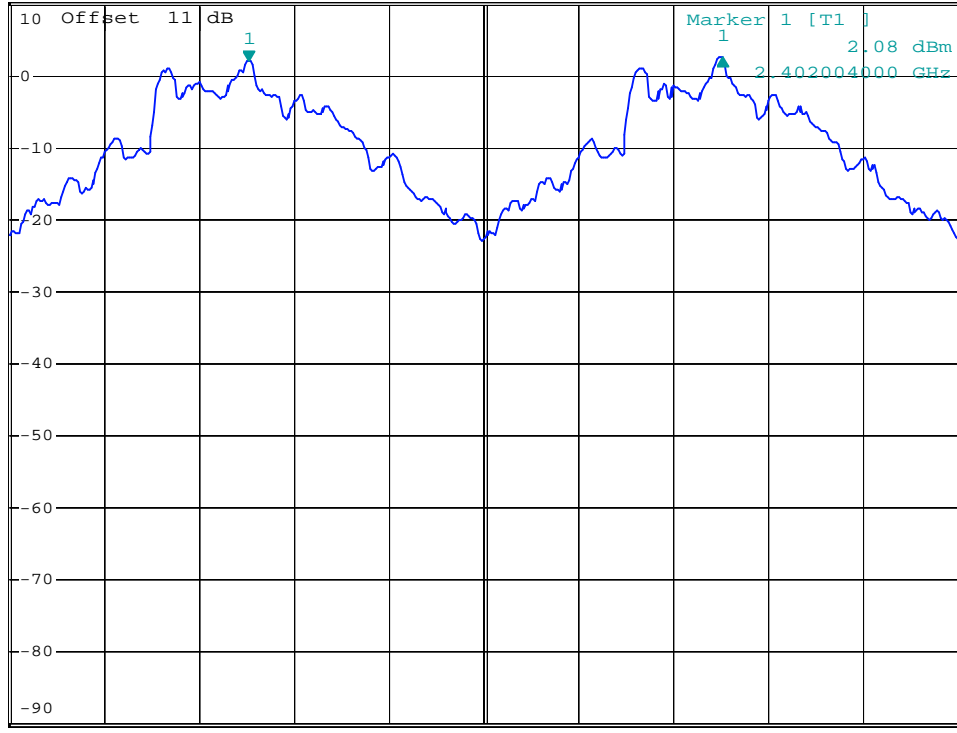

Center 2.4025 GHz    200 kHz/    Span 2 MHz



### Channel Middle




\*RBW 30 kHz    Delta 1 [T1 ]  
VBW 100 kHz    -0.43 dB  
SWT 2.5 ms    1.000000000 MHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

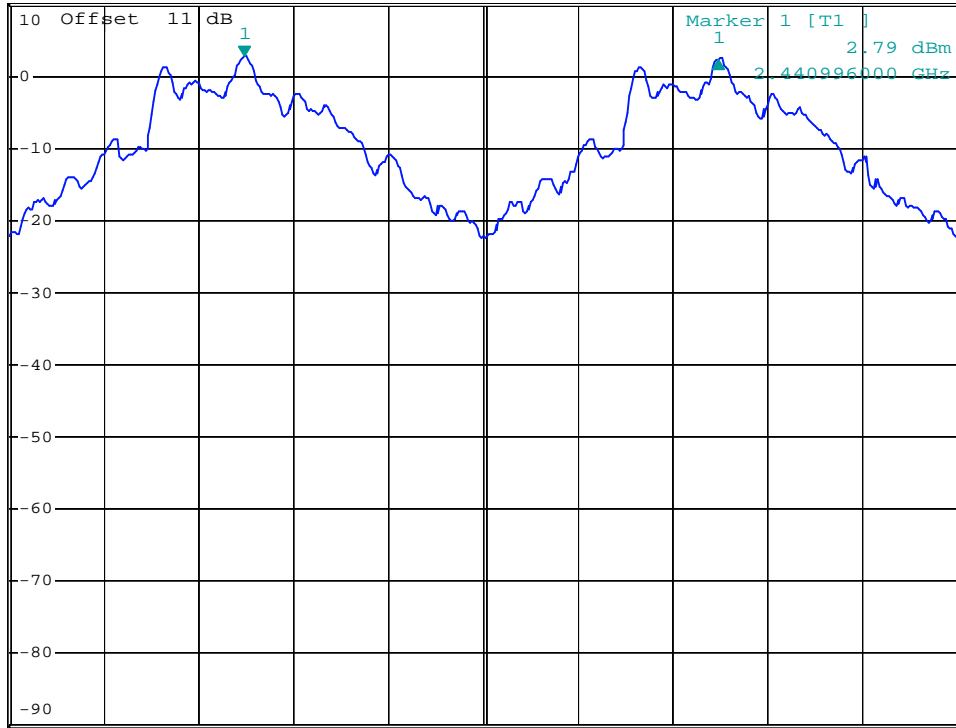

Center 2.4415 GHz

200 kHz/

Span 2 MHz


### Channel High



\*RBW 30 kHz    Delta 1 [T1 ]  
VBW 100 kHz    -0.02 dB  
SWT 2.5 ms    1.000000000 MHz

Ref 10 dBm

Att 30 dB

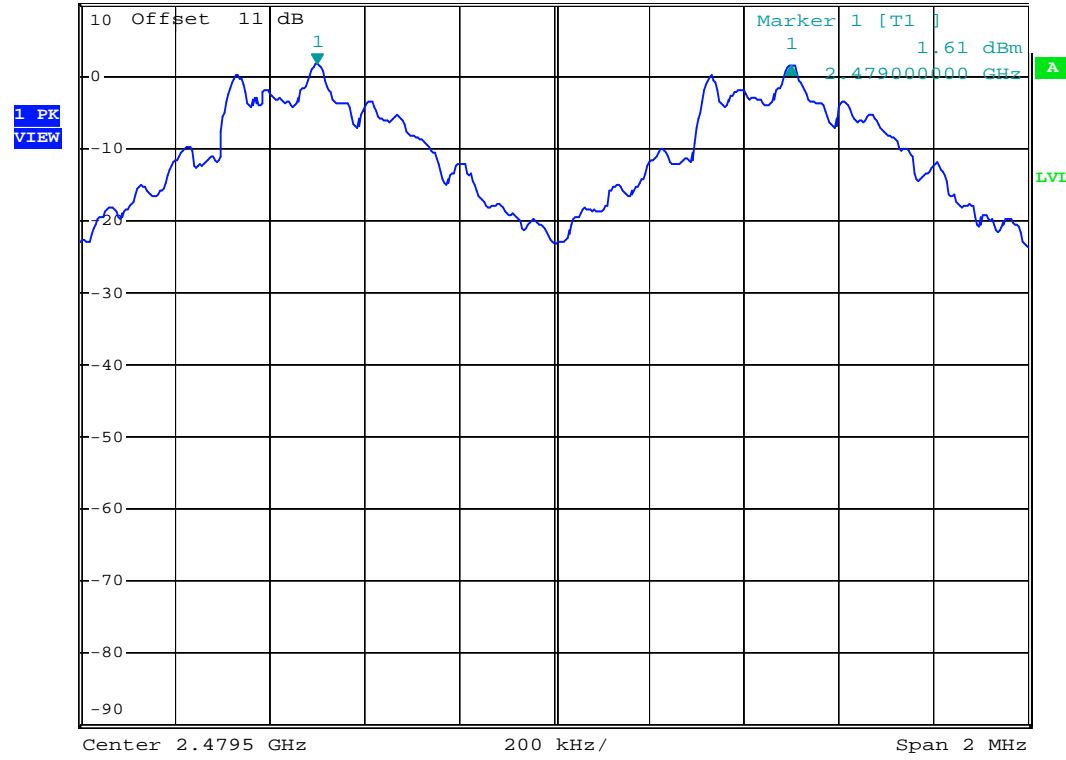

**Mode: Bluetooth EDR**


**Channel Low**



\*RBW 30 kHz    Delta 1 [T2 ]  
VBW 100 kHz    -0.07 dB  
SWT 5 ms        1.002000000 MHz

Ref 10 dBm

Att 30 dB

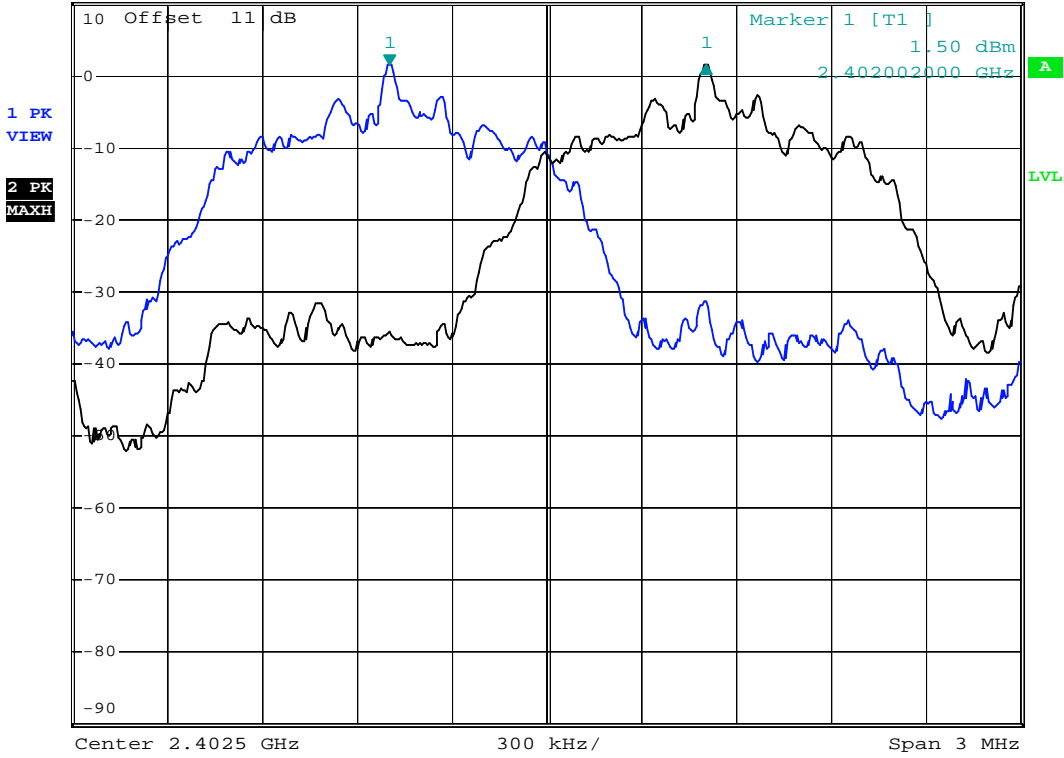


### Channel Middle



\*RBW 30 kHz    Delta 1 [T2 ]  
VBW 100 kHz                    -0.03 dB  
SWT 5 ms                         1.002000000 MHz

Ref 10 dBm

Att 30 dB

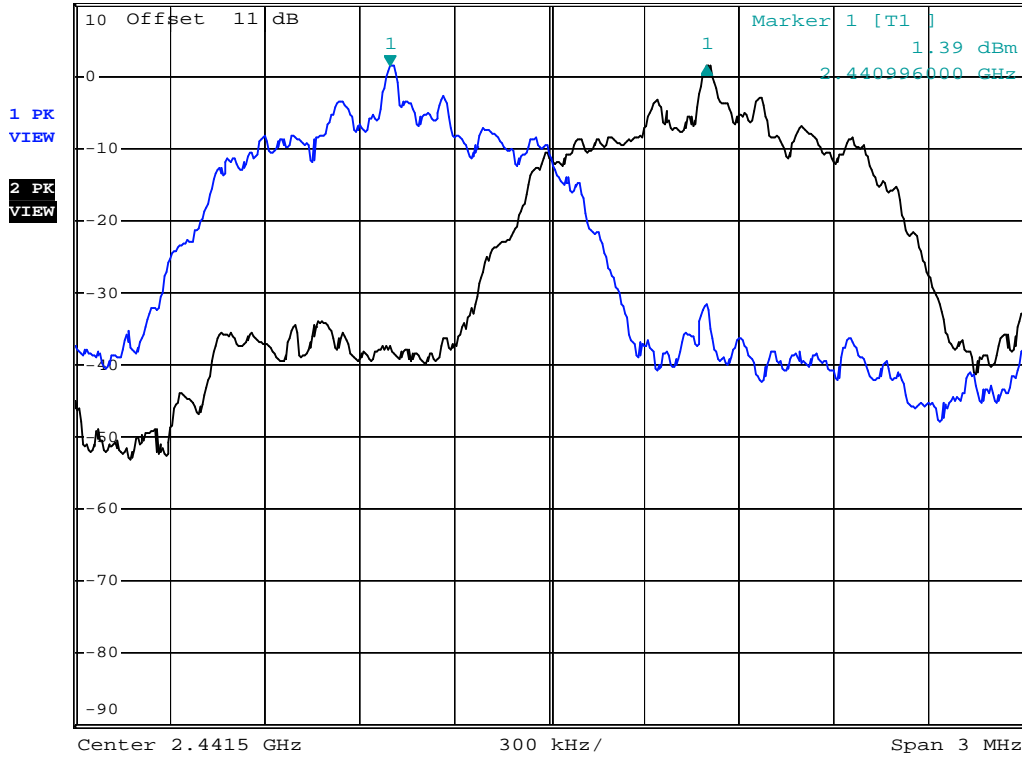


### Channel High



\*RBW 30 kHz    Delta 1 [T2 ]  
VBW 100 kHz                    -0.03 dB  
SWT 5 ms                        1.002000000 MHz

Ref 10 dBm

Att 30 dB

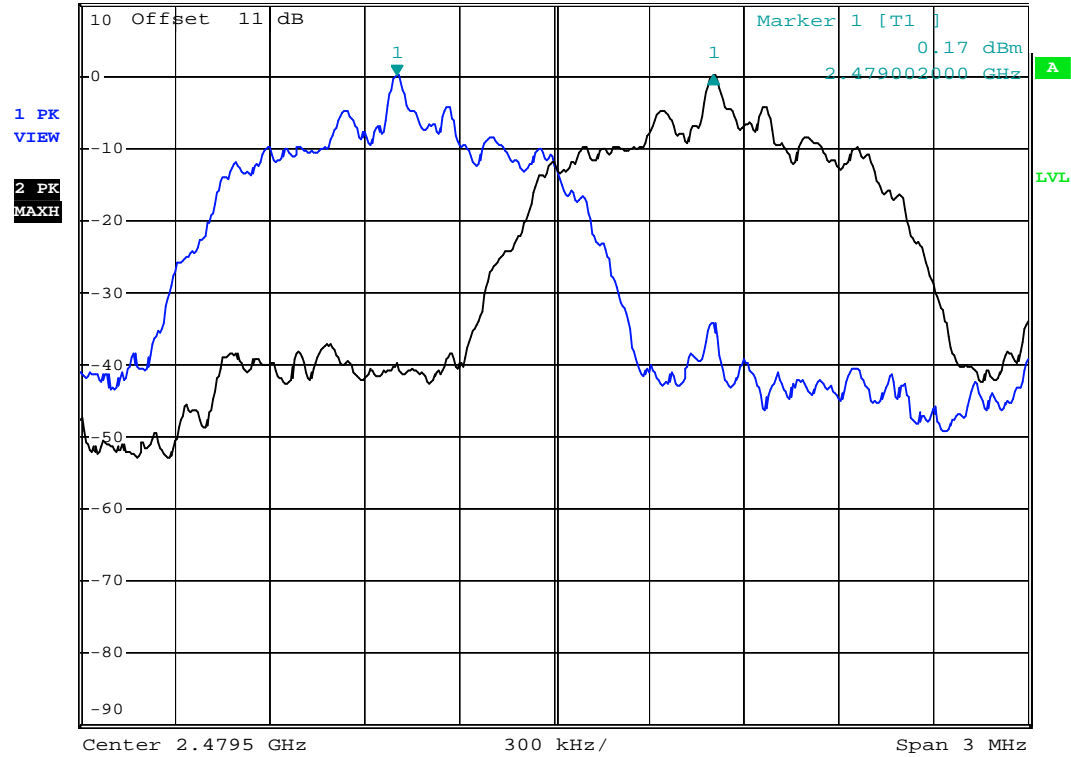

## 8 NUMBER OF HOPPING FREQUENCY USED

### 8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
  - Span = the frequency band of operation
  - RBW  $\geq$  1% of the span
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13
Attenuator	MINI-CIRCUITS	BW-S10W2+	2015/10/07	2016/10/06

## 8.4 Measurement Data

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

A. Bluetooth BR

There are 79 hopping frequencies used.

B. Bluetooth EDR

There are 79 hopping frequencies used.

### **Justification on AFH mode:**

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may be reduced in AFH mode but at least 15 channels will be used, normally AFH mode has 20 channels.

*Note : The expanded uncertainty: frequency  $\times 1.65 \times 10^{-6}$  (1 GHz  $< f \leq$  18 GHz).*

**Mode: Bluetooth BR**




\*RBW 300 kHz  
VBW 1 MHz  
SWT 2.5 ms

Ref 10 dBm

Att 30 dB

SWT 2.5 ms

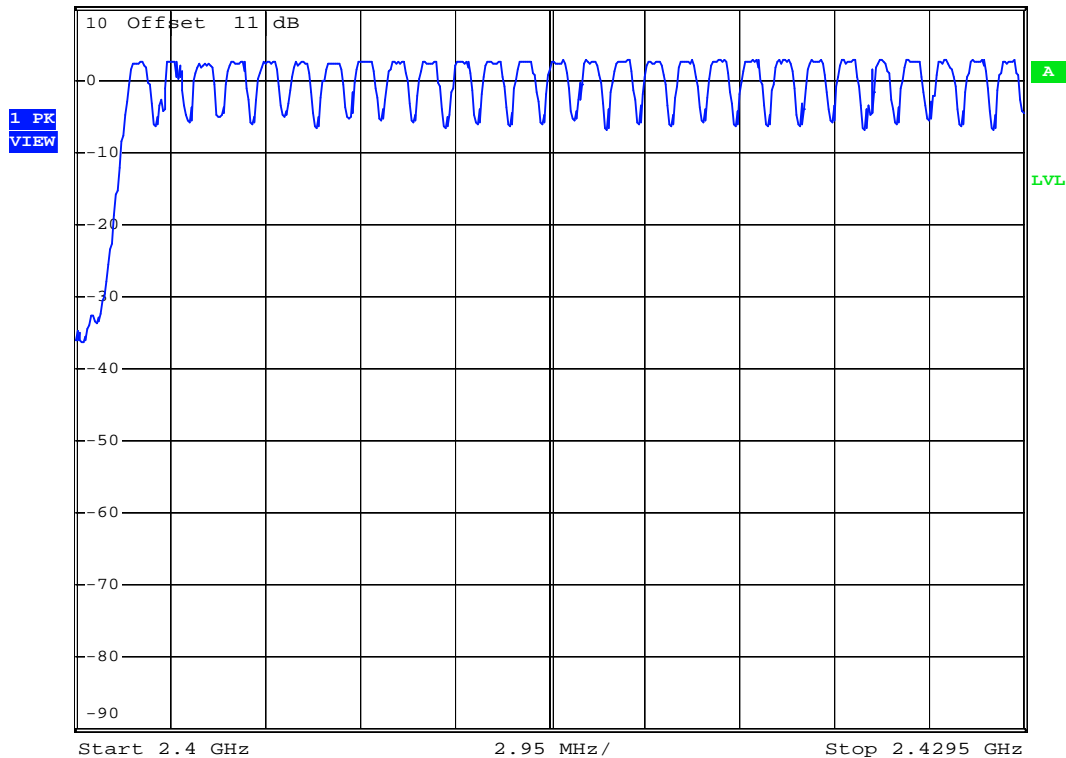






\*RBW 300 kHz  
VBW 1 MHz  
SWT 2.5 ms

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

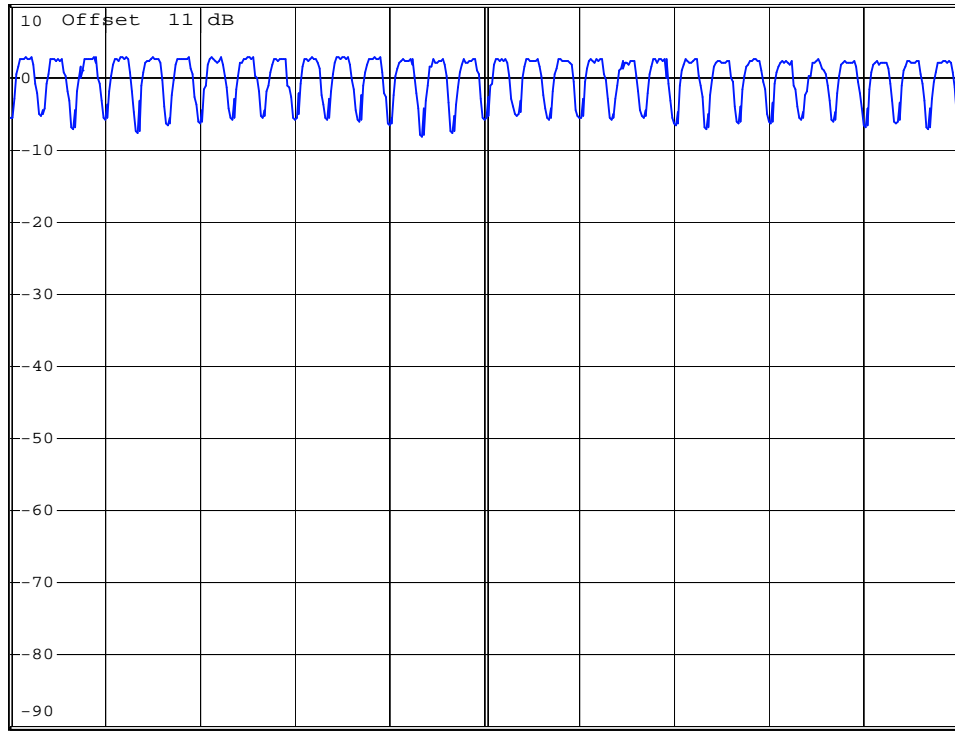

Start 2.4295 GHz

3 MHz/

Stop 2.4595 GHz




\*RBW 300 kHz  
VBW 1 MHz  
SWT 2.5 ms

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

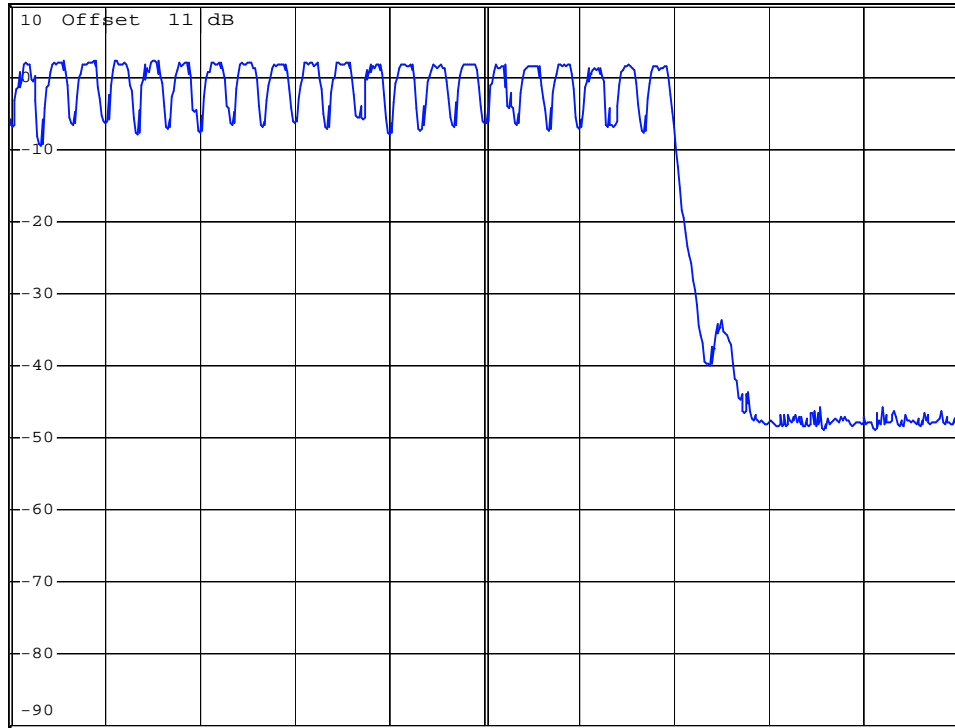

Start 2.4595 GHz

3 MHz/

Stop 2.4895 GHz

### Mode: Bluetooth EDR




\*RBW 300 kHz  
VBW 1 MHz  
SWT 2.5 ms

Ref 10 dBm

Att 30 dB

SWT 2.5 ms

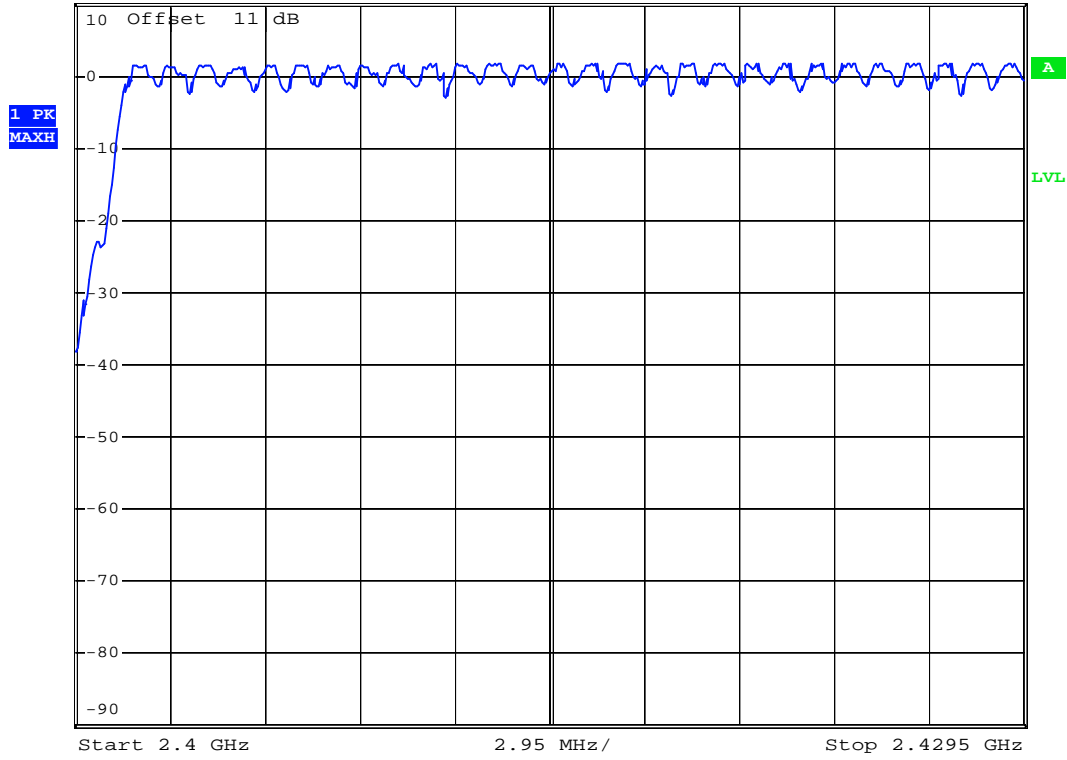




\*RBW 300 kHz  
VBW 1 MHz  
SWT 2.5 ms

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

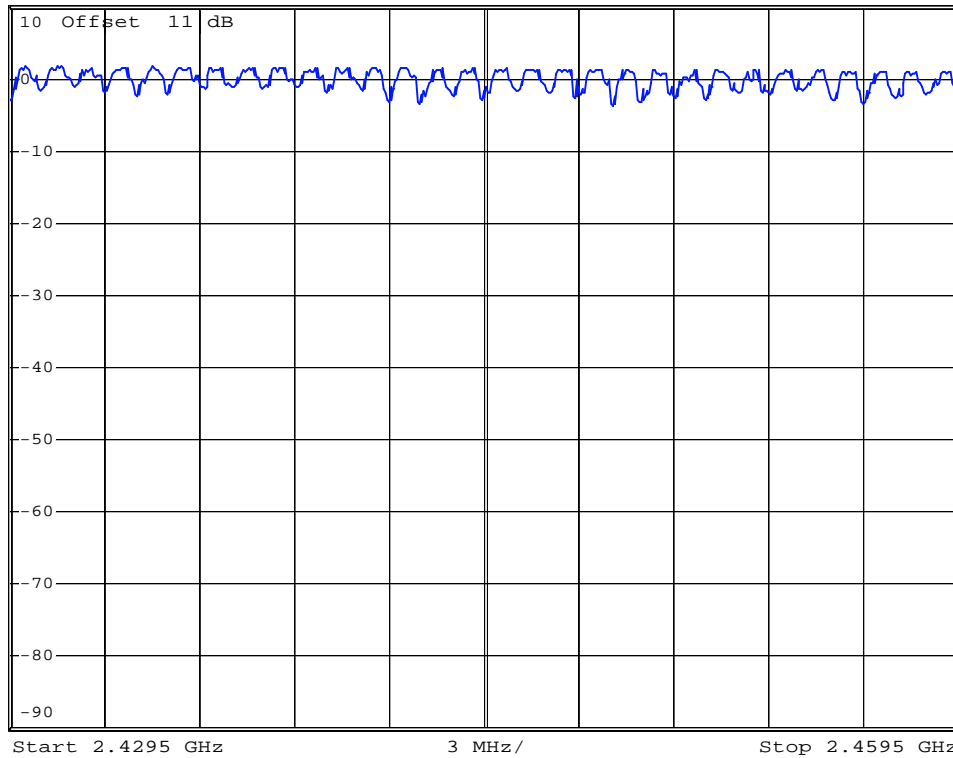



\*RBW 300 kHz


VBW 1 MHz

SWT 2.5 ms

Ref 10 dBm

Att 30 dB

1 PK  
MAXH

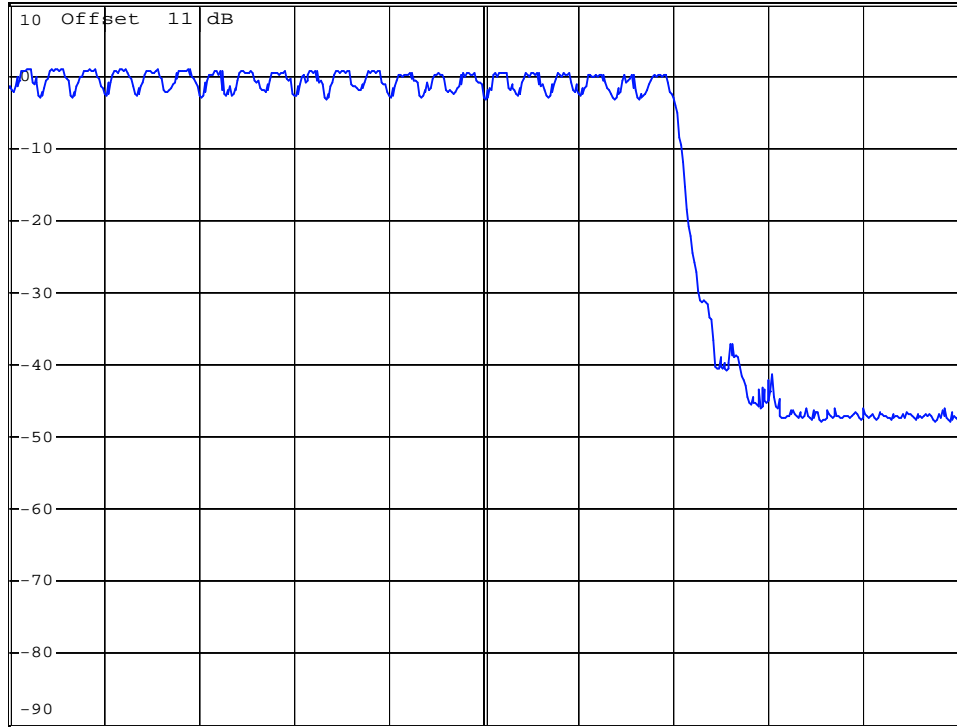

## 9 CHANNEL BANDWIDTH

### 9.1 Standard Applicable

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
  - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
  - RBW  $\geq$  1% of the 20 dB bandwidth
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13
Attenuator	MINI-CIRCUITS	BW-S10W2+	2015/10/07	2016/10/06

### 9.4 Measurement Data

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

#### Mode: Bluetooth BR

- a) Channel Low : Channel Bandwidth is 0.764 MHz
- b) Channel Middle : Channel Bandwidth is 0.796 MHz
- c) Channel High : Channel Bandwidth is 0.764 MHz

#### Mode: Bluetooth EDR

- a) Channel Low : Channel Bandwidth is 1.204 MHz
- b) Channel Middle : Channel Bandwidth is 1.200 MHz
- c) Channel High : Channel Bandwidth is 1.204 MHz

*Note : The expanded uncertainty: frequency  $\times 1.65 \times 10^{-6}$  ( $1 \text{ GHz} < f \leq 18 \text{ GHz}$ ).*


### Mode:Bluetooth BR

#### Channel Low



Ref 10 dBm      Att 30 dB      \*RBW 30 kHz      Marker 1 [T1]      VBW 100 kHz      2.57 dBm      2.402004000 GHz      SWT 2.5 ms

1 PK  
VIEW

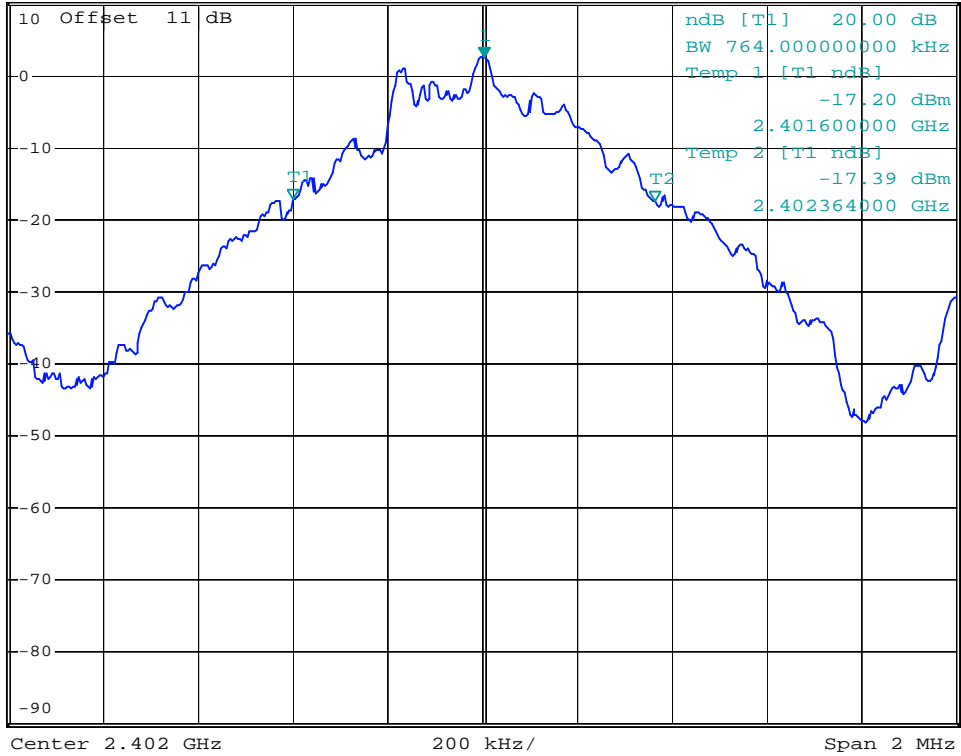




### Channel Middle



\*RBW 30 kHz    Marker 1 [T1 ]  
VBW 100 kHz                    2.73 dBm  
Ref 10 dBm                    Att 30 dB                    SWT 2.5 ms                    2.441000000 GHz

1 PK  
VIEW

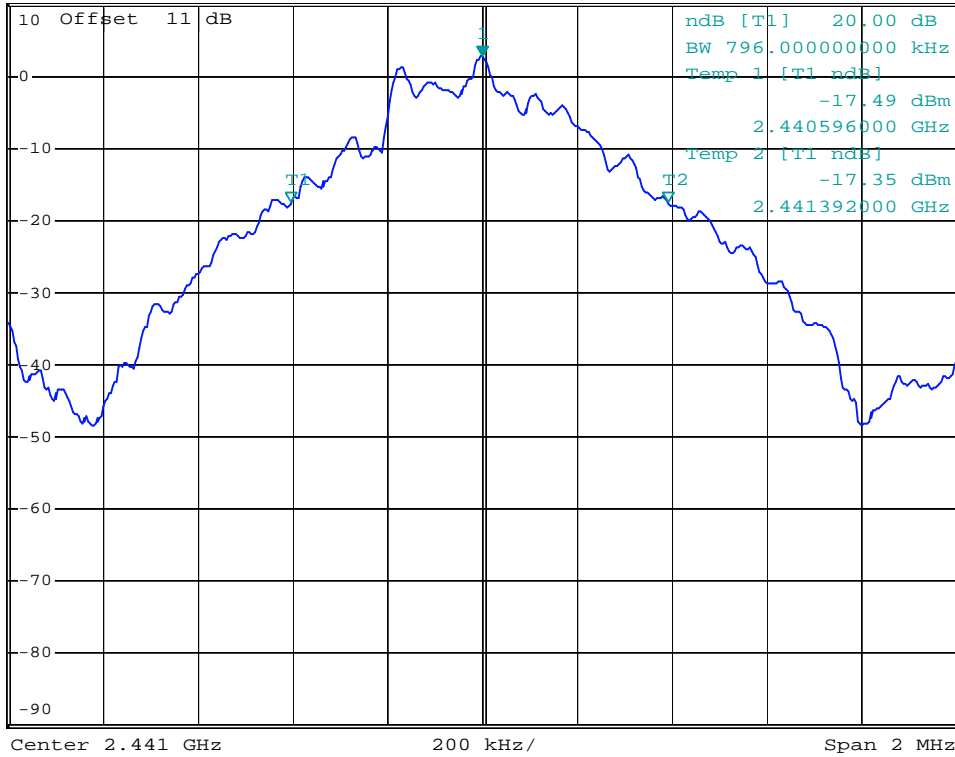


### Channel High



\*RBW 30 kHz    Marker 1 [T1 ]  
VBW 100 kHz                    1.60 dBm  
Ref 10 dBm                    Att 30 dB                    SWT 2.5 ms                    2.480000000 GHz

1 PK  
VIEW

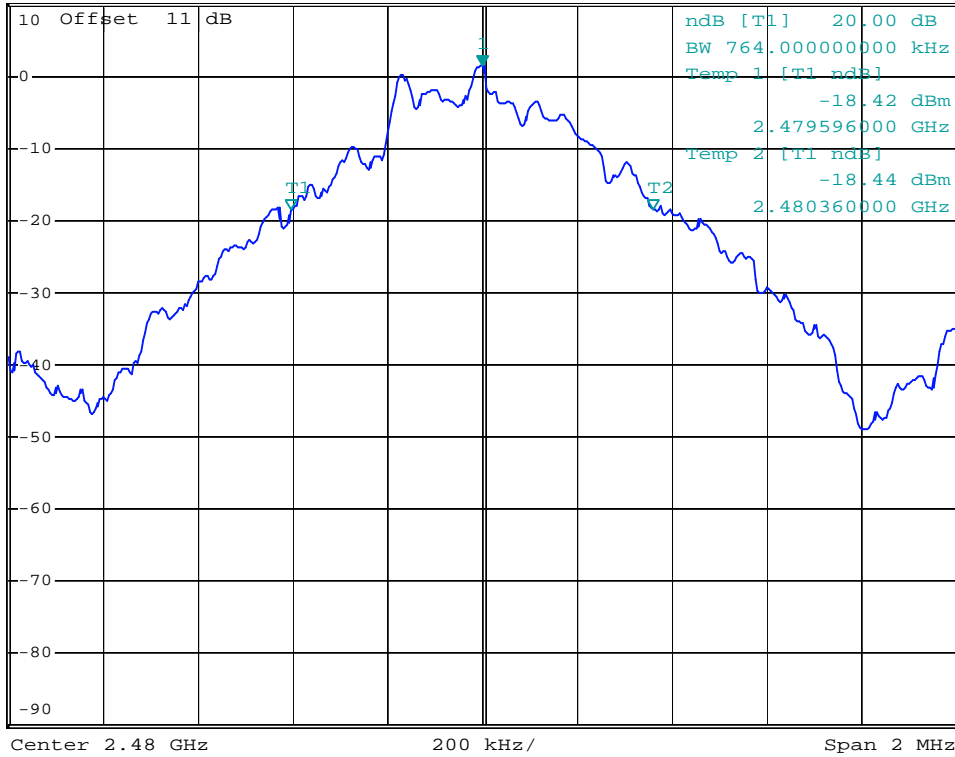


**Mode: Bluetooth EDR**

**Channel Low**




Ref 10 dBm      Att 30 dB      \*RBW 30 kHz      Marker 1 [T1]      VBW 100 kHz      1.69 dBm      2.402000000 GHz  
SWT 2.5 ms

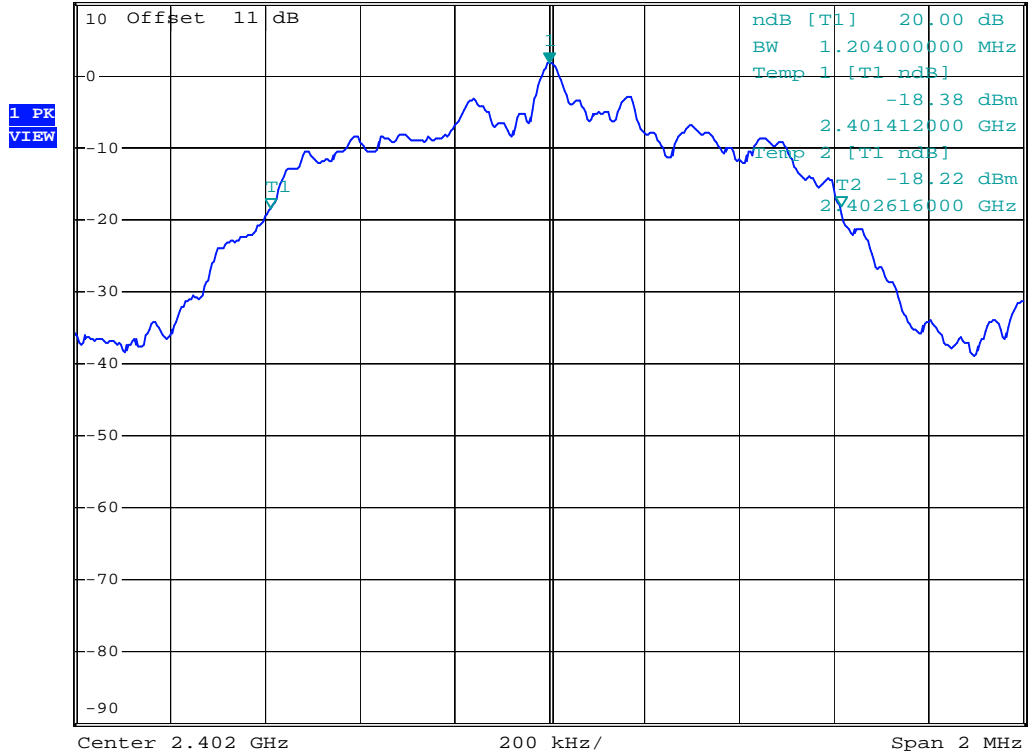

### Channel Middle



\*RBW 30 kHz    Marker 1 [T1 ]  
VBW 100 kHz                    1.69 dBm  
Ref 10 dBm                    Att 30 dB                    SWT 2.5 ms                    2.441000000 GHz

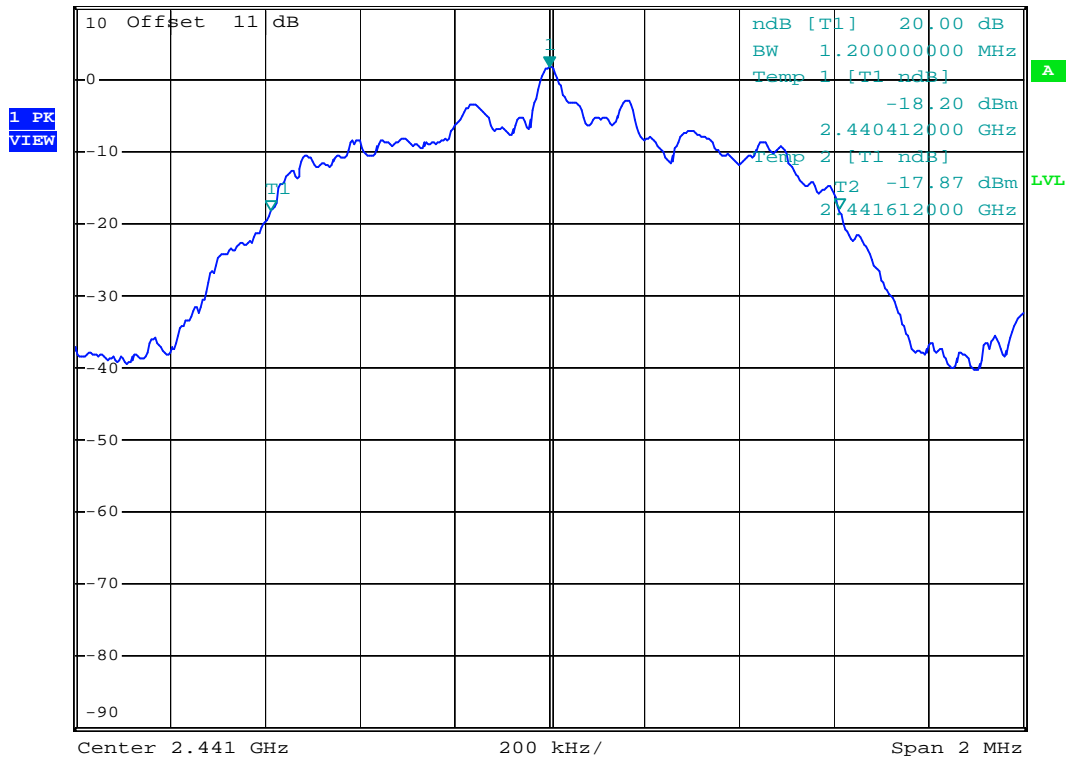

### Channel High




\*RBW 30 kHz    Marker 1 [T1 ]  
VBW 100 kHz                    0.25 dBm  
SWT 2.5 ms                      2.480004000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

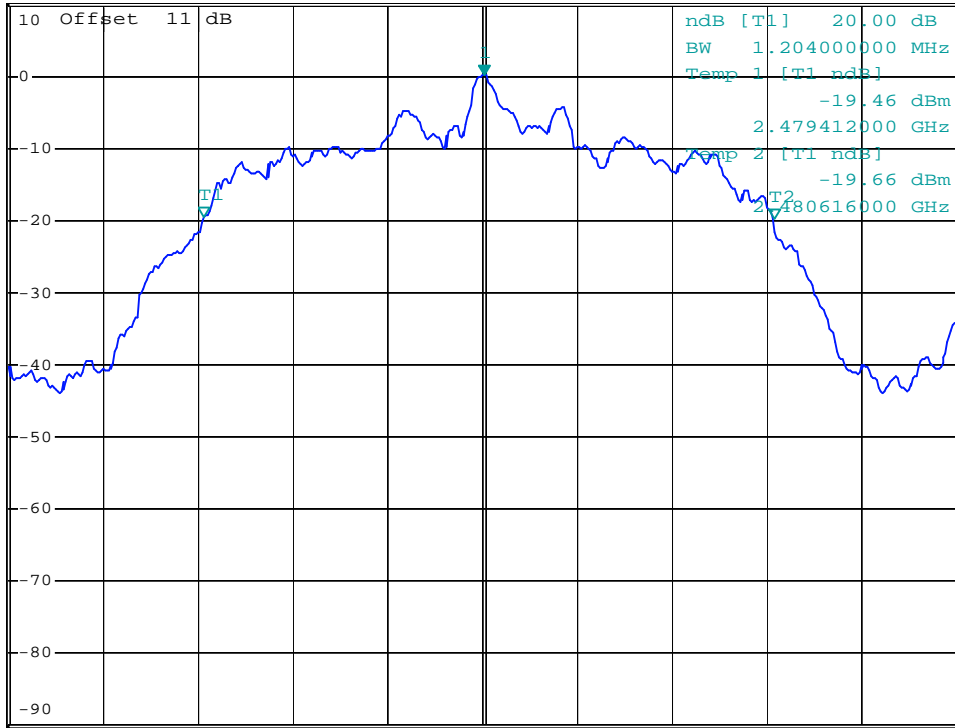

## 10 DWELL TIME ON EACH CHANNEL

### 10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
  - Span = zero span, centered on a hopping channel
  - RBW = 1 MHz
  - VBW  $\geq$  RBW
  - Sweep = as necessary to capture the entire dwell time per hopping channel
  - Detector function = peak
  - Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

#### Justification on AFH mode:

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may be reduced in AFH mode but at least 15 channels will be used, normally AFH mode has 20 channels.

### 10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13
Attenuator	MINI-CIRCUITS	BW-S10W2+	2015/10/07	2016/10/06

## 10.4 Measurement Data

### Test Mode: Bluetooth BR

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

$$\text{Period} = 0.4(\text{seconds}) \times 79(\text{channels}) = 31.6 \text{ seconds}$$

#### A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $1600/(1+1) = 800$  transmissions per second. In one period for each particular channel there are  $10.13 \times 31.6 = 320.1$  times of transmissions.

- a) Channel Low : the dwell time is 0.53 ms x 320.1 = 169.653 ms
- b) Channel Middle : the dwell time is 0.53 ms x 320.1 = 169.653 ms
- c) Channel High : the dwell time is 0.53 ms x 320.1 = 169.653 ms

The maximum time of occupancy for a particular channel is 169.653ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

#### B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $1600/(3+1) = 400$  transmissions per second. In one period for each particular channel there are  $5.06 \times 31.6 = 159.9$  times of transmissions.

- a) Channel Low : the dwell time is 1.80 ms x 159.9 = 287.82 ms
- b) Channel Middle : the dwell time is 1.80 ms x 159.9 = 287.82 ms
- c) Channel High : the dwell time is 1.80 ms x 159.9 = 287.82 ms

The maximum time of occupancy for a particular channel is 287.820ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

#### C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $1600/(5+1) = 266.7$  transmissions per second. In one period for each particular channel there are  $3.38 \times 31.6 = 106.81$  times of transmissions.

- a) Channel Low : the dwell time is 3.05 ms x 106.81 = 325.770 ms
- b) Channel Middle : the dwell time is 3.05 ms x 106.81 = 325.770 ms
- c) Channel High : the dwell time is 3.05 ms x 106.81 = 325.770 ms

The maximum time of occupancy for a particular channel is 325.770ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

**Test Mode: Bluetooth BR (AFH mode)**

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

**Period = 0.4(seconds) x 20(channels) = 8 seconds**

**A. DH1 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $800/(1+1) = 400$  transmissions per second. In one period for each particular channel there are  $20 \times 8 = 160$  times of transmissions.

- a) Channel Low : the dwell time is  $0.53\text{ms} \times 160 = 84.8$  ms
- b) Channel Middle : the dwell time is  $0.53\text{ms} \times 160 = 84.8$  ms
- c) Channel Hi : the dwell time is  $0.53\text{ms} \times 160 = 84.8$  ms

The maximum time of occupancy for a particular channel is 84.8ms in any 8 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

**B. DH3 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $800/(3+1) = 200$  transmissions per second. In one period for each particular channel there are  $10 \times 8 = 80$  times of transmissions.

- a) Channel Low : the dwell time is  $1.80\text{ms} \times 80 = 144$  ms
- b) Channel Middle : the dwell time is  $1.80\text{ms} \times 80 = 144$  ms
- c) Channel Hi : the dwell time is  $1.80\text{ms} \times 80 = 144$  ms

The maximum time of occupancy for a particular channel is 144ms in any 8 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**C. DH5 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $800/(5+1) = 133.3$  transmissions per second. In one period for each particular channel there are  $6.665 \times 8 = 53.32$  times of transmissions.

- a) Channel Low : the dwell time is  $3.05\text{ms} \times 53.32 = 162.626$  ms
- b) Channel Middle : the dwell time is  $3.05\text{ms} \times 53.32 = 162.626$  ms
- c) Channel Hi : the dwell time is  $3.05\text{ms} \times 53.32 = 162.626$  ms

The maximum time of occupancy for a particular channel is 159.96ms in any 8 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

***Note : The expanded uncertainty of dwell time on each channel tests is 2dB.***



**Test Mode:Bluetooth EDR**

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

**Period = 0.4(seconds) x 79(channels) = 31.6 seconds**

**A. DH1 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $1600/(1+1) = 800$  transmissions per second. In one period for each particular channel there are  $10.13 \times 31.6 = 320.1$  times of transmissions.

- a) Channel Low : the dwell time is 0.53 ms x 320.1 = 169.653 ms
- b) Channel Middle : the dwell time is 0.53 ms x 320.1 = 169.653 ms
- c) Channel High : the dwell time is 0.53 ms x 320.1 = 169.653 ms

The maximum time of occupancy for a particular channel is 147.246ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

**B. DH3 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $1600/(3+1) = 400$  transmissions per second. In one period for each particular channel there are  $5.06 \times 31.6 = 159.9$  times of transmissions.

- a) Channel Low : the dwell time is 1.80 ms x 159.9 = 287.82 ms
- b) Channel Middle : the dwell time is 1.80 ms x 159.9 = 287.82 ms
- c) Channel High : the dwell time is 1.80 ms x 159.9 = 287.82 ms

The maximum time of occupancy for a particular channel is 287.820ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**C. DH5 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $1600/(5+1) = 266.7$  transmissions per second. In one period for each particular channel there are  $3.38 \times 31.6 = 106.81$  times of transmissions.

- a) Channel Low : the dwell time is 3.05 ms x 106.81 = 325.771 ms
- b) Channel Middle : the dwell time is 3.05 ms x 106.81 = 325.771 ms
- c) Channel High : the dwell time is 3.05 ms x 106.81 = 325.771 ms

The maximum time of occupancy for a particular channel is 341.792ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

**Test Mode:Bluetooth EDR(AFH mode)**

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

**Period = 0.4(seconds) x 20(channels) = 8 seconds**

**A. DH1 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $800/(1+1) = 400$  transmissions per second. In one period for each particular channel there are  $20 \times 8 = 160$  times of transmissions.

- a) Channel Low : the dwell time is    0.53    ms x 160 =        84.8 ms
- b) Channel Middle : the dwell time is    0.53    ms x 160 =        84.8 ms
- c) Channel High : the dwell time is    0.53    ms x 160 =        84.8 ms

The maximum time of occupancy for a particular channel is 75.2ms in any 8 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

**B. DH3 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $800/(3+1) = 200$  transmissions per second. In one period for each particular channel there are  $10 \times 8 = 80$  times of transmissions.

- a) Channel Low : the dwell time is    1.80    ms x 80 =        144 ms
- b) Channel Middle : the dwell time is    1.80    ms x 80 =        144 ms
- c) Channel High : the dwell time is    1.80    ms x 80 =        144 ms

The maximum time of occupancy for a particular channel is 139.200ms in any 8 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**C. DH5 Mode**

The Bluetooth system hops at a rate of 800 times per second. This means there are 800 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $800/(5+1) = 133.3$  transmissions per second. In one period for each particular channel there are  $6.665 \times 8 = 53.32$  times of transmissions.

- a) Channel Low : the dwell time is    3.05    ms x 53.32 =        162.626 ms
- b) Channel Middle : the dwell time is    3.05    ms x 53.32 =        162.626 ms
- c) Channel High : the dwell time is    3.05    ms x 53.32 =        162.626 ms

The maximum time of occupancy for a particular channel is 162.092ms in any 8 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.


**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

Mode: Bluetooth BR


Channel Low; DHI




Ref 10 dBm      \*Att 20 dB      RBW 1 MHz      Delta 1 [T1 ]      1.38 dB  
\*VBW 3 MHz      SWT 5 ms      530.000000 μs

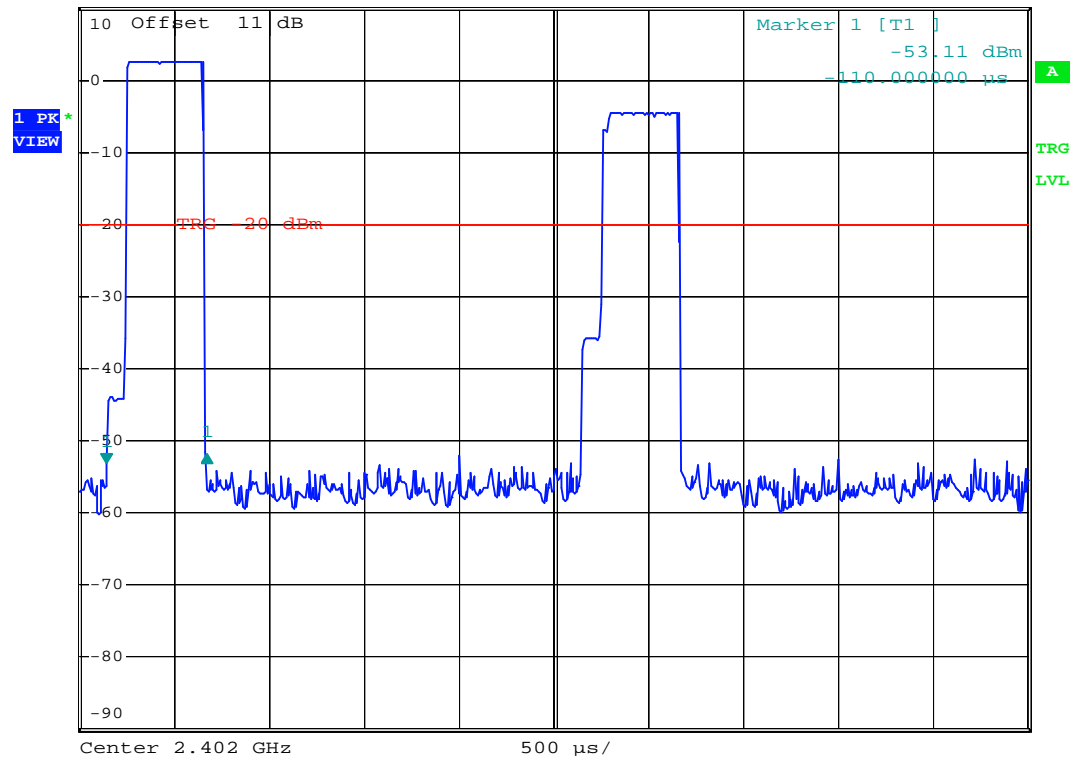

### Channel Middle; DH1

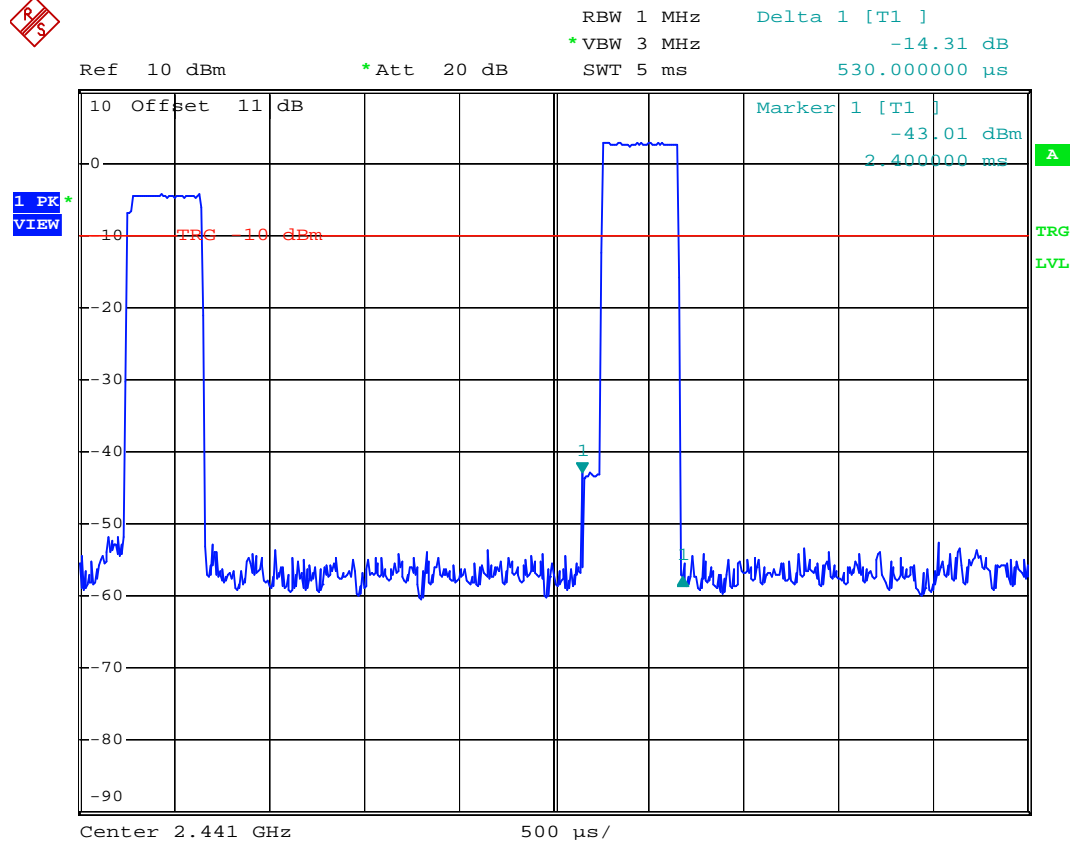


### Channel High; DH1

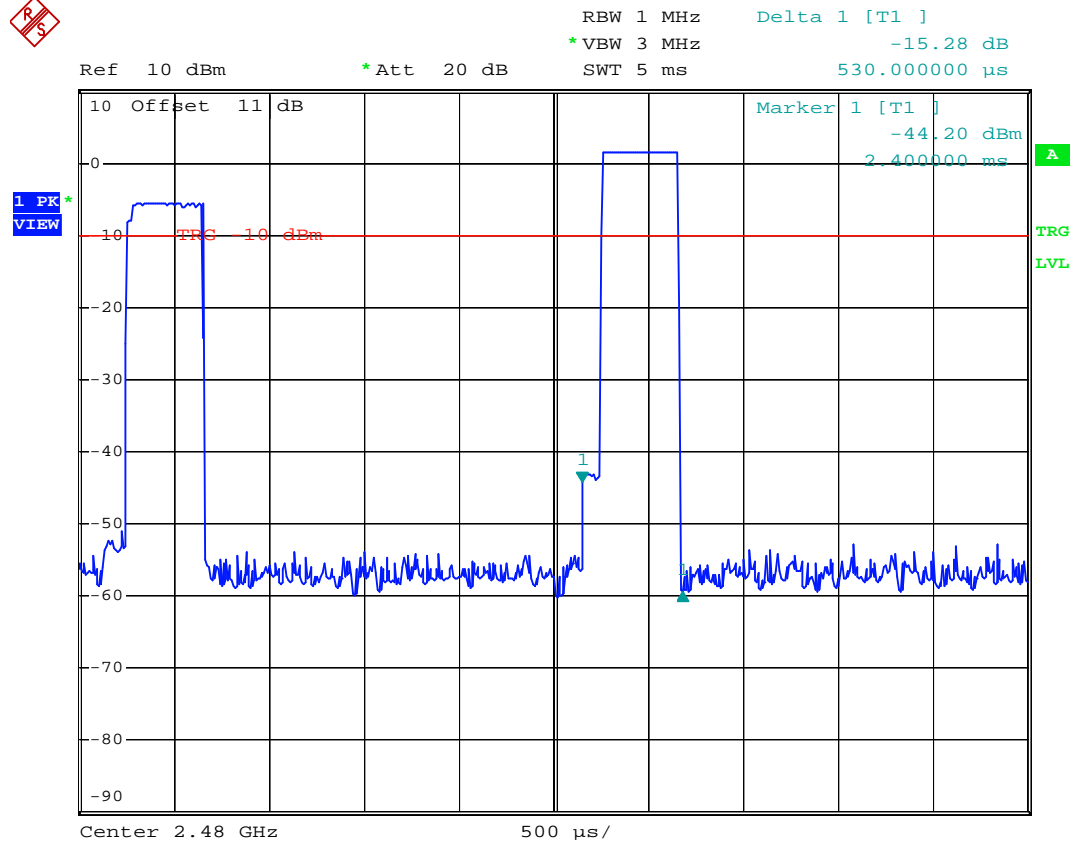


### Channel Low; DH3




RBW 1 MHz    Delta 1 [T1 ]  
\*VBW 3 MHz    -1.35 dB  
Ref 10 dBm    \*Att 20 dB    SWT 5 ms    1.800000 ms

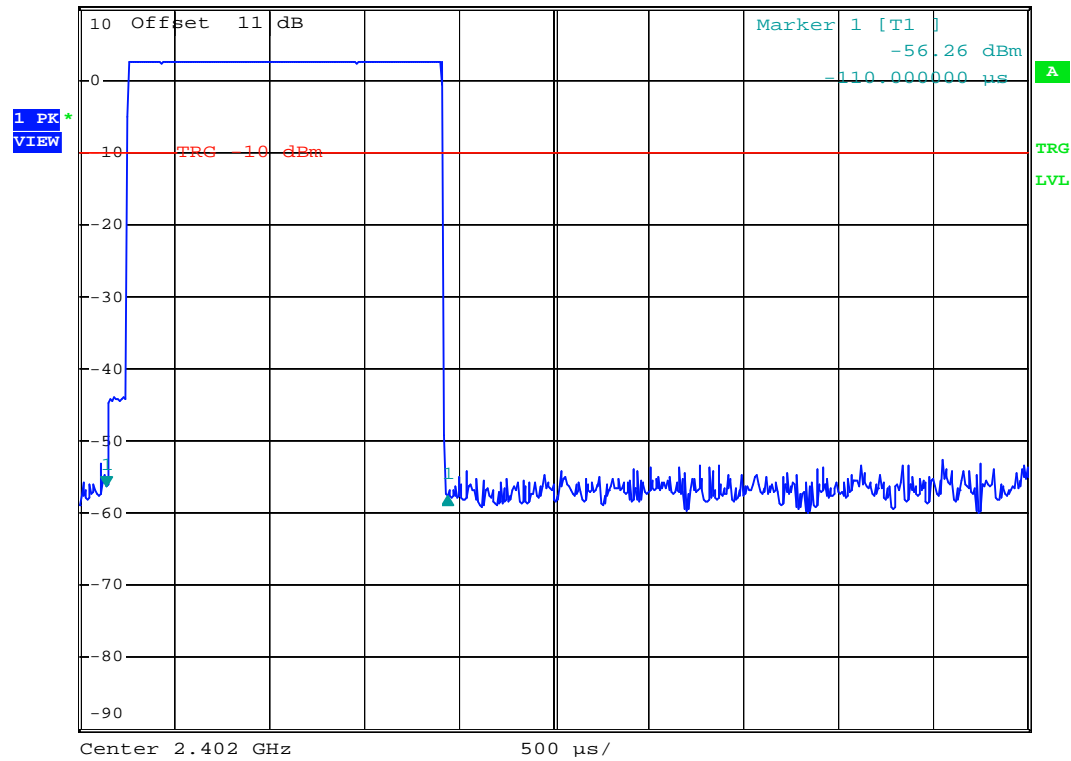

### Channel Middle; DH3

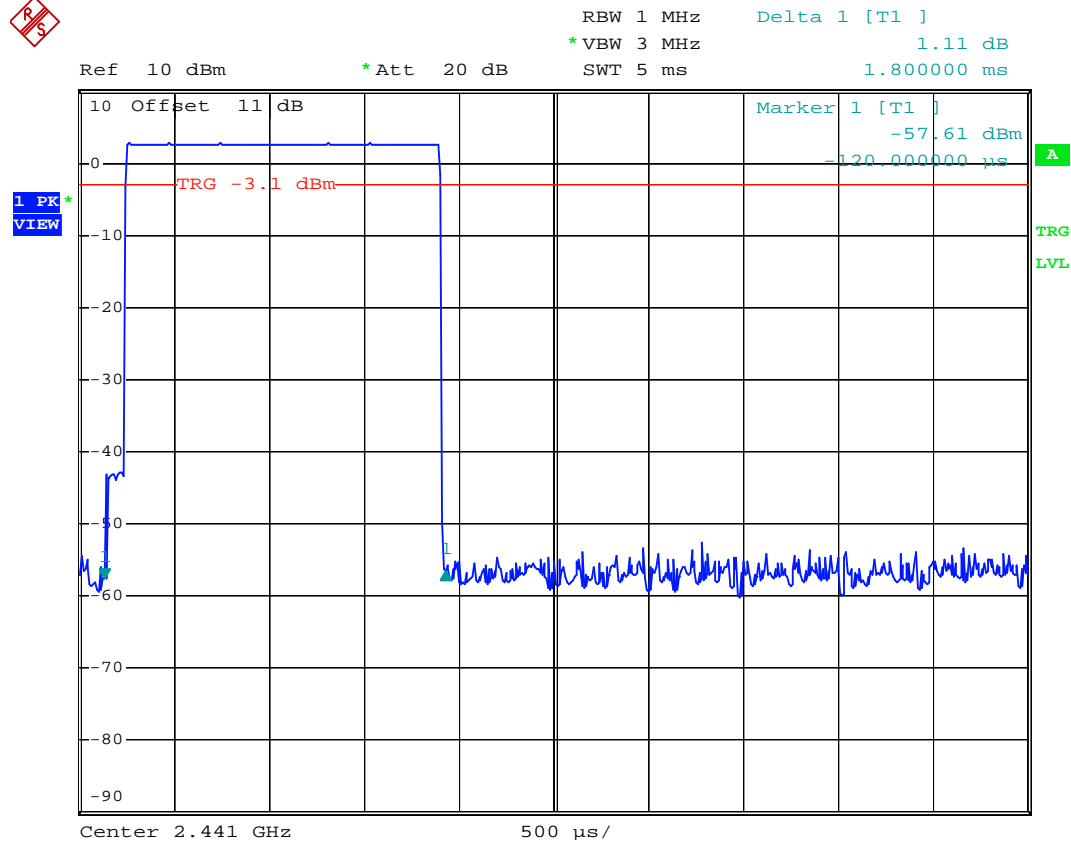

### Channel High; DH3

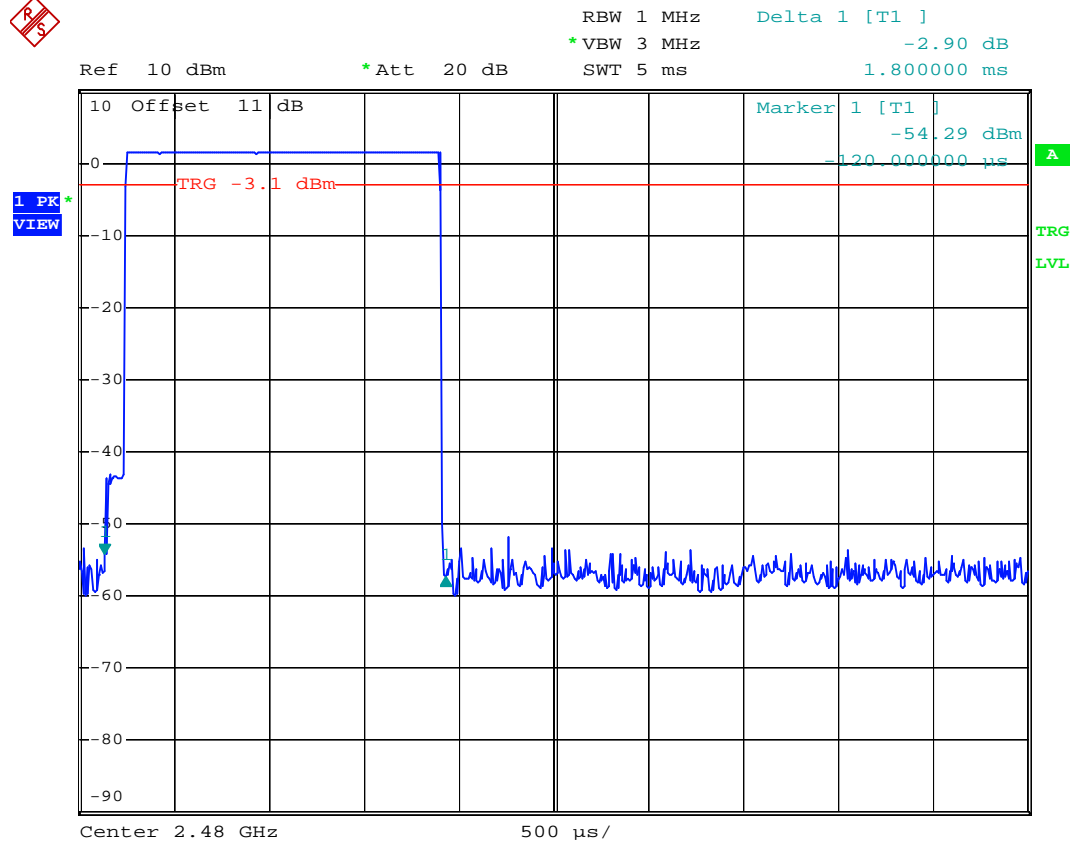





### Channel Low; DH5




Ref 10 dBm      \*Att 20 dB      RBW 1 MHz      Delta 1 [T1 ]  
\*VBW 3 MHz      -11.38 dB  
SWT 5 ms      3.050000 ms

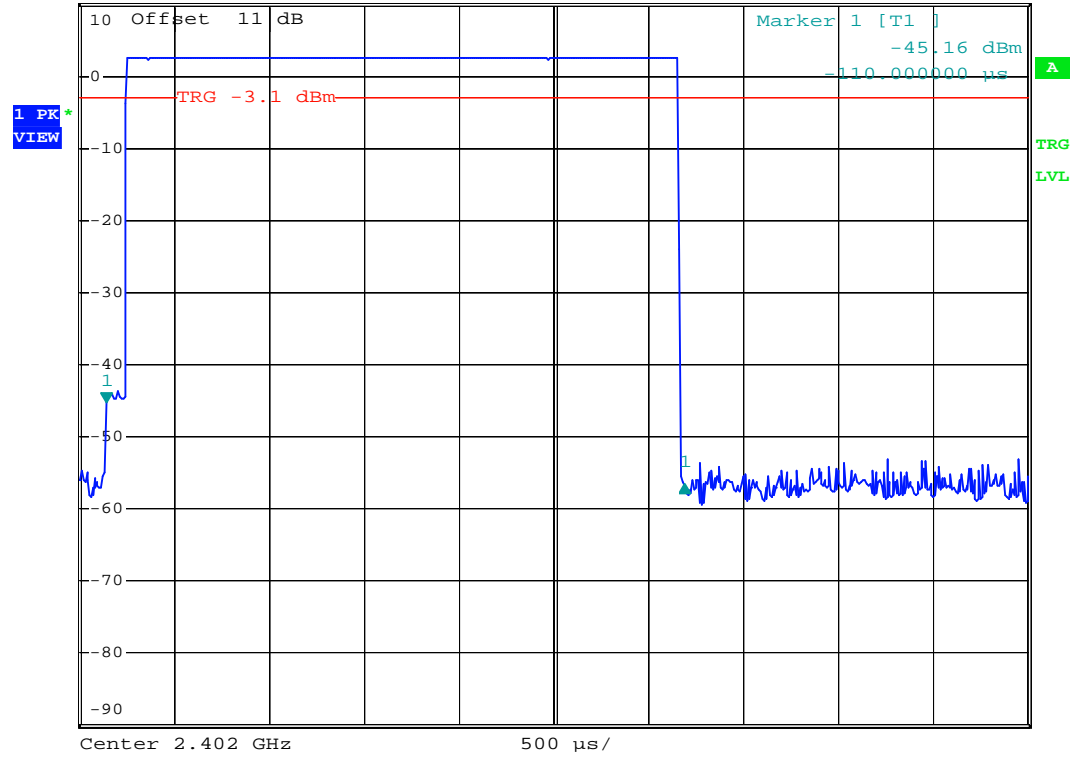

### Channel Middle; DH5

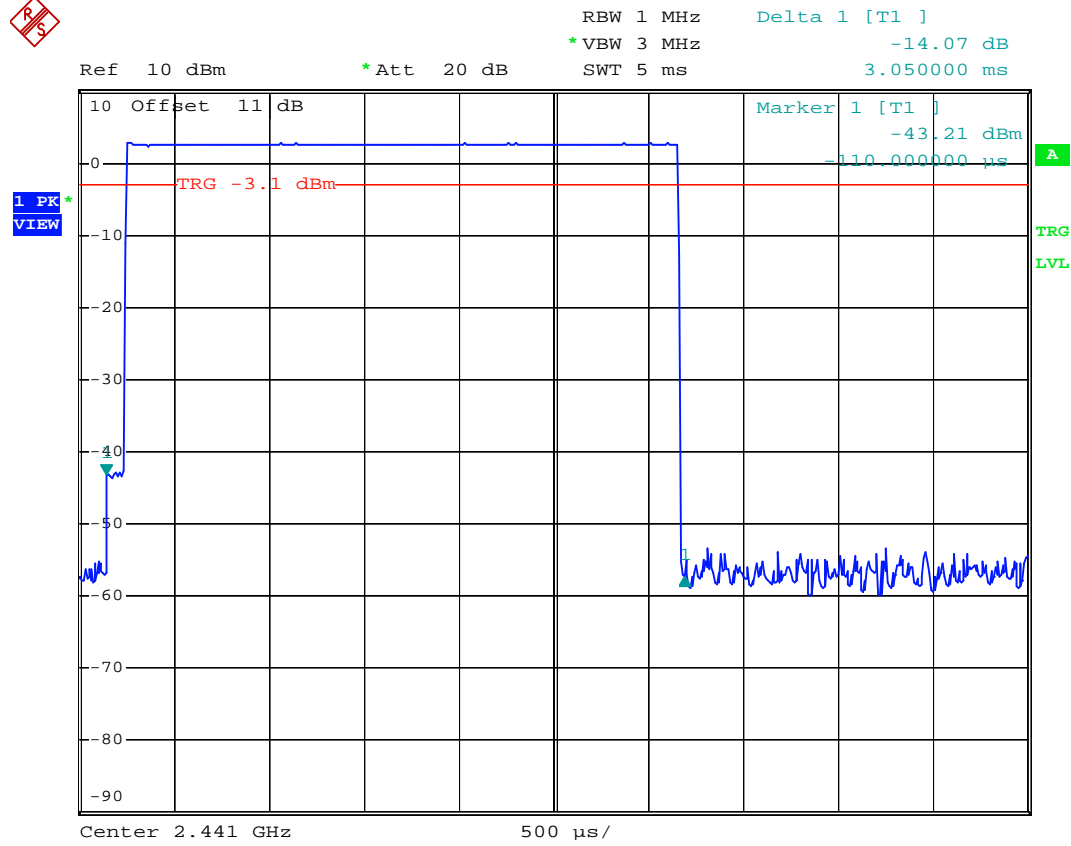

### Channel High; DH5

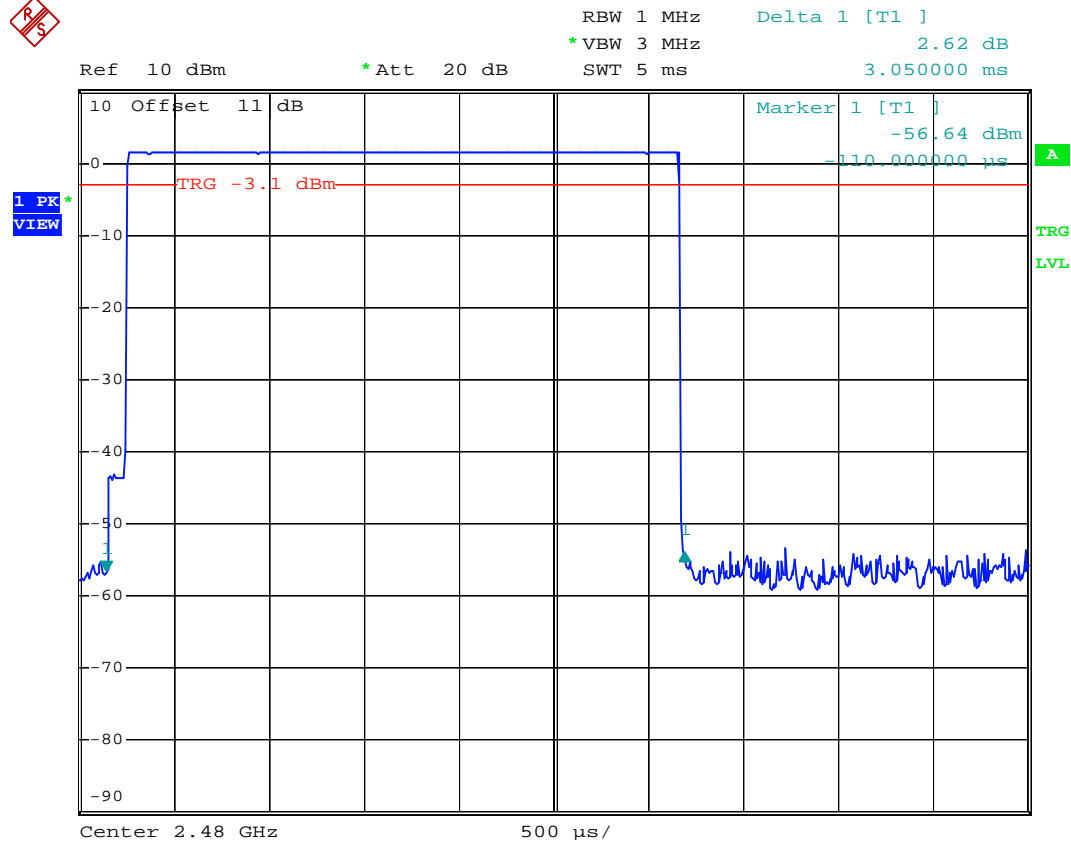


Mode: Bluetooth EDR


Channel Low; DHI




Ref 10 dBm      \*Att 20 dB      RBW 1 MHz      Delta 1 [T1 ]      -5.91 dB  
\*VBW 3 MHz      SWT 5 ms      530.000000  $\mu$ s

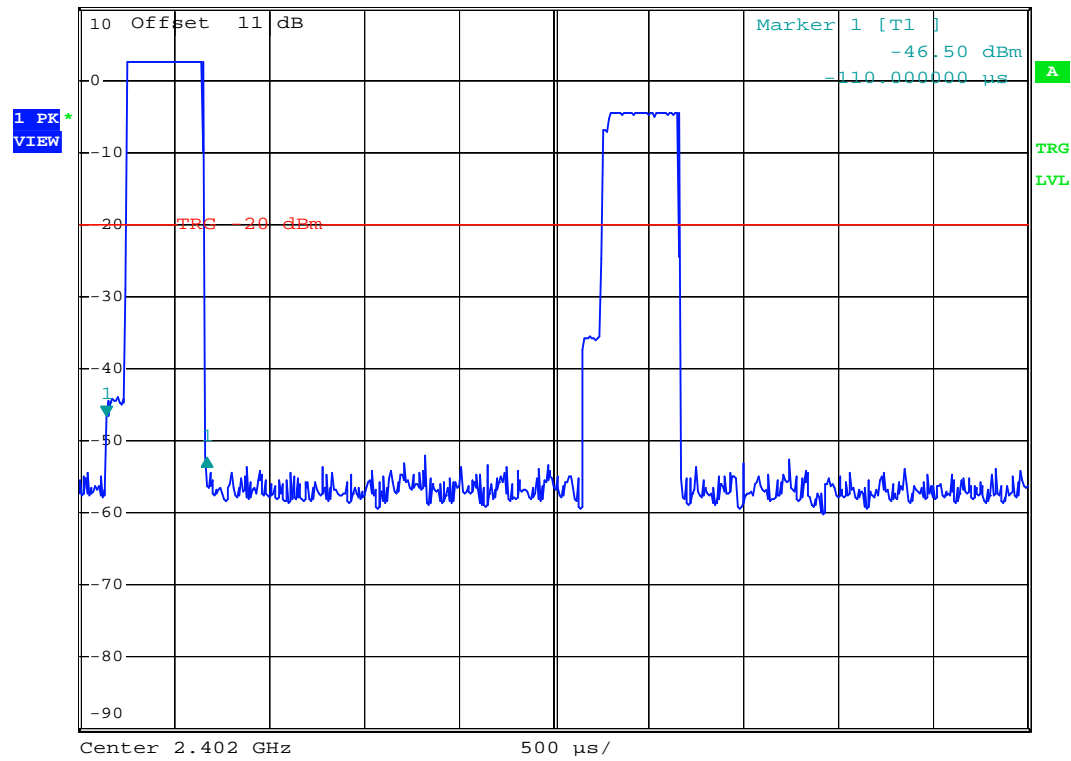

### Channel Middle; DH1

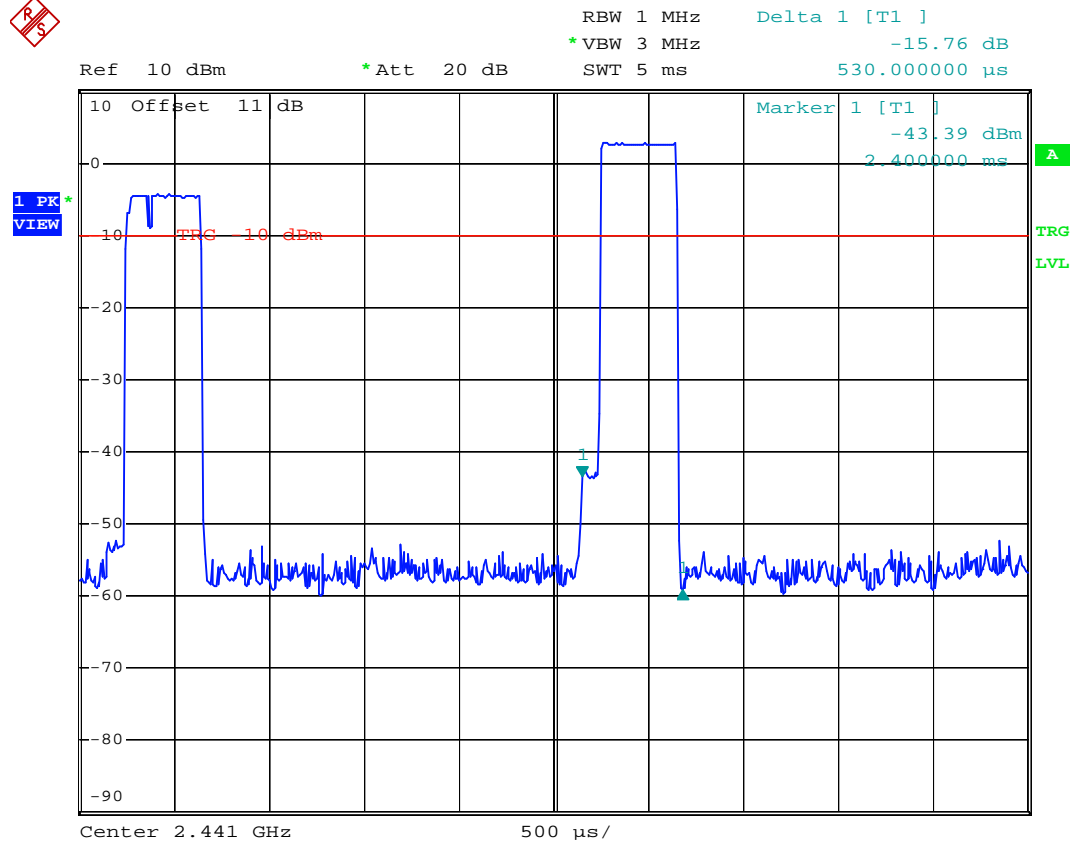


### Channel High; DH1

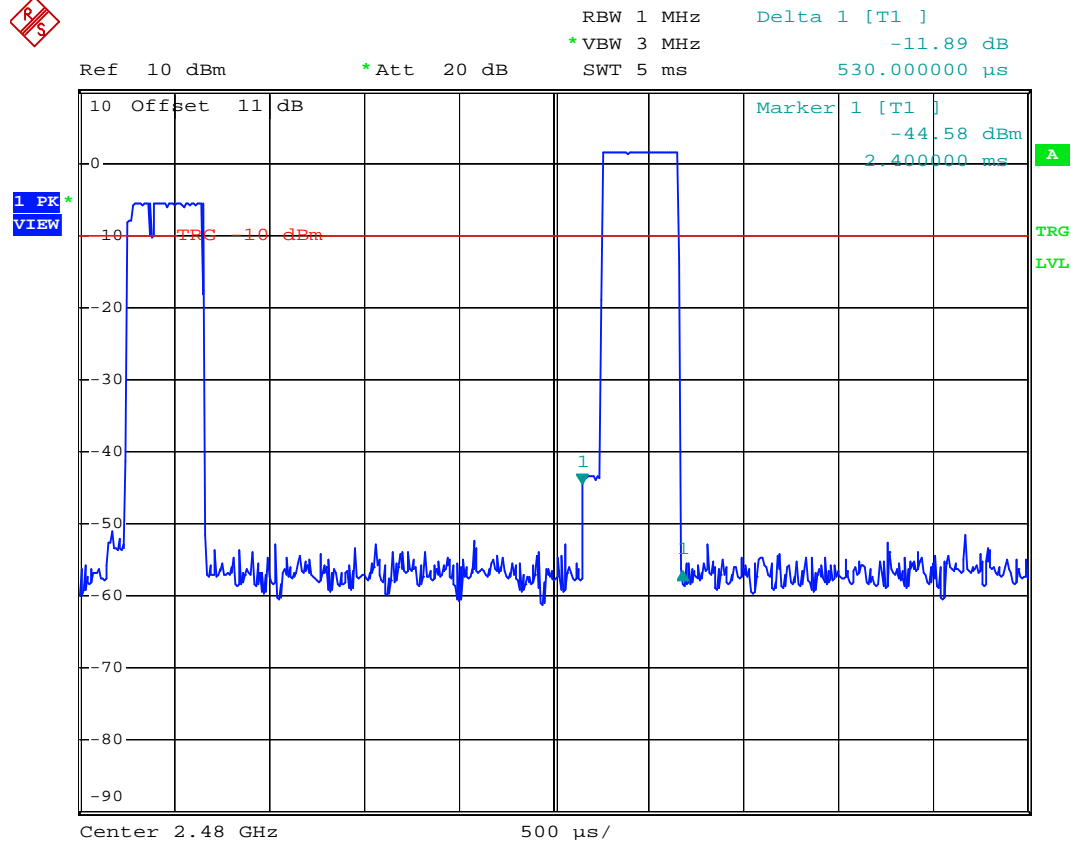


### Channel Low; DH3



Ref 10 dBm      \*Att 20 dB      RBW 1 MHz      Delta 1 [T1 ]  
\*VBW 3 MHz      0.76 dB  
SWT 5 ms      1.800000 ms

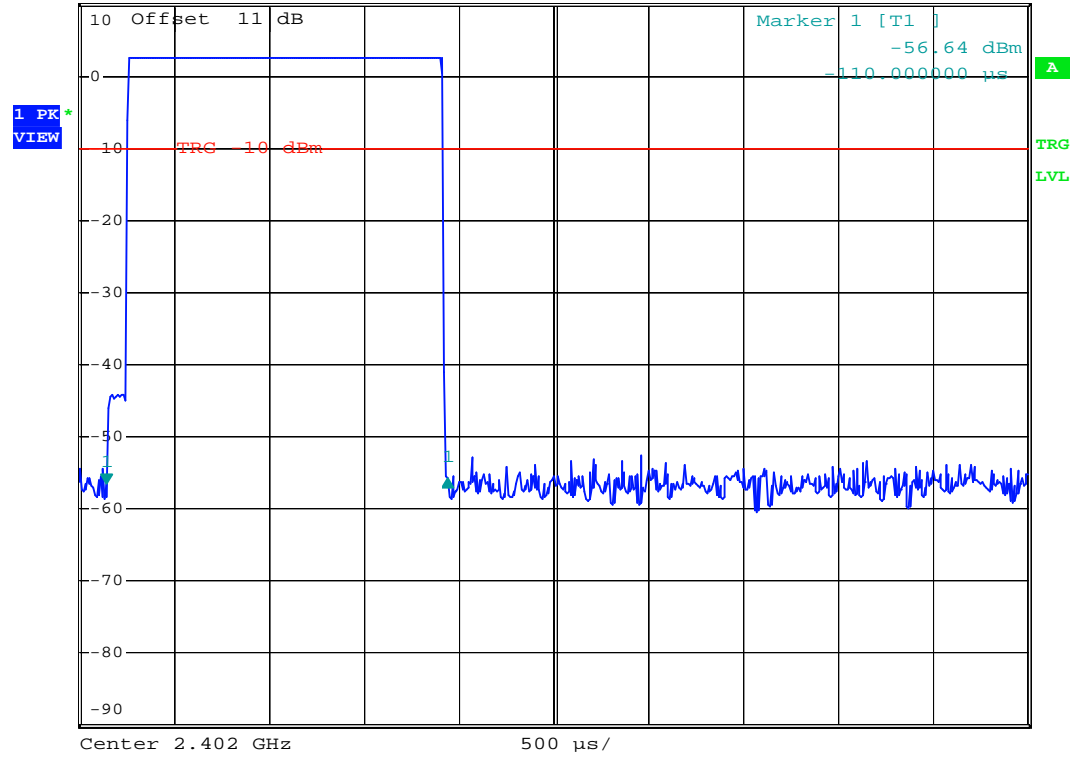


### Channel Middle; DH3

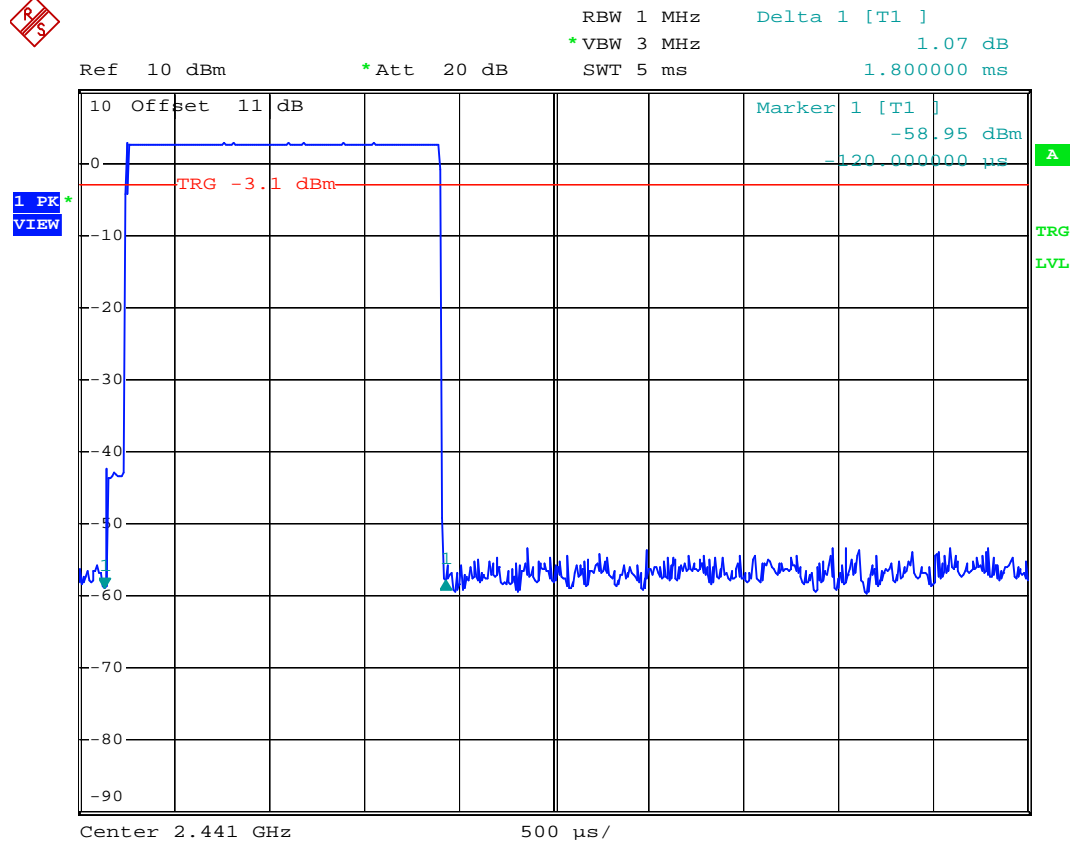





### Channel High; DH3

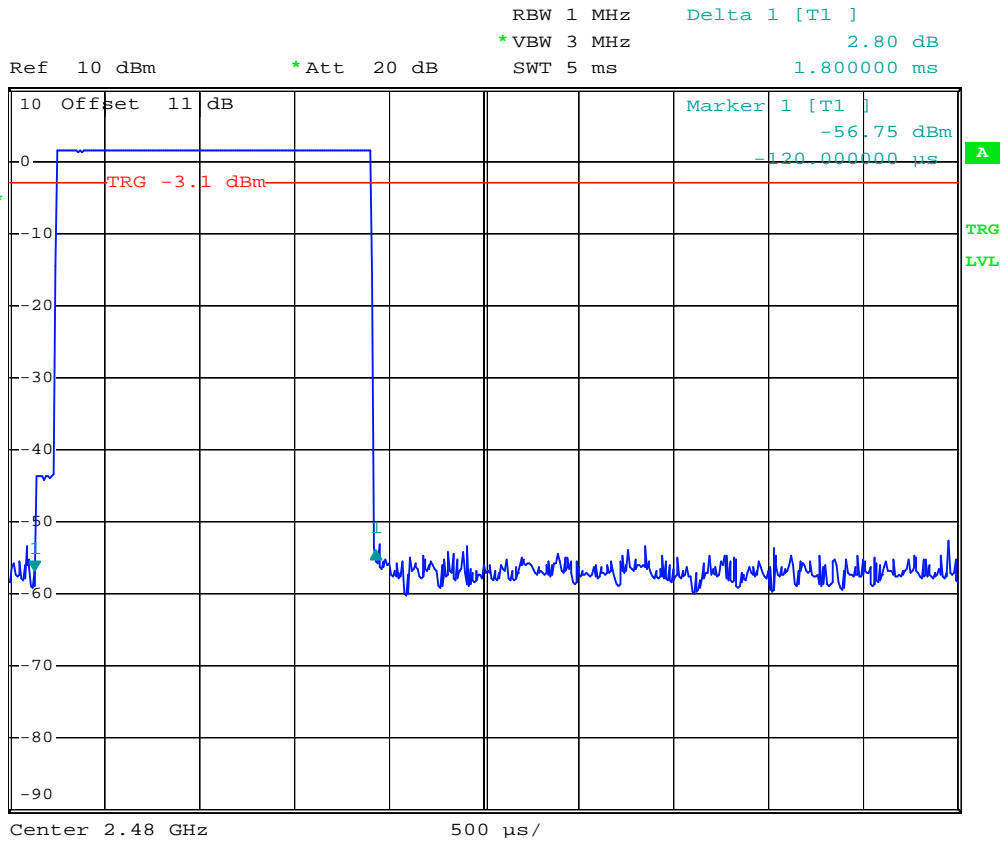


### Channel Low; DH5

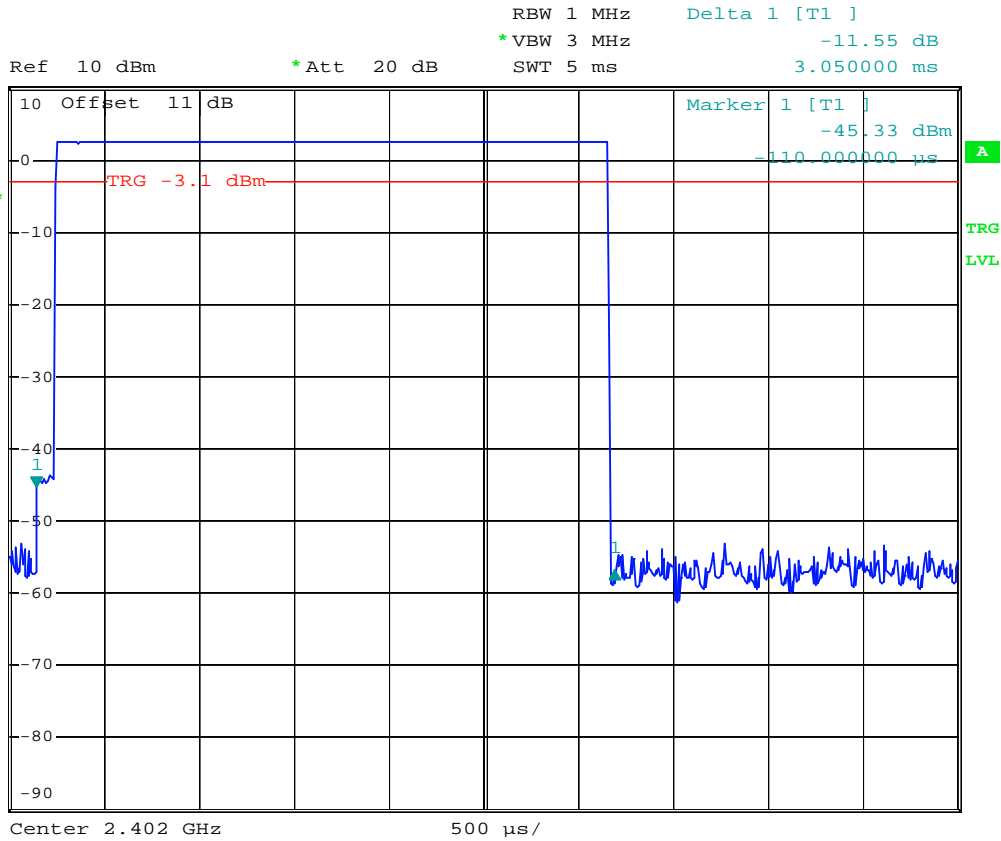

### Channel Middle; DH5

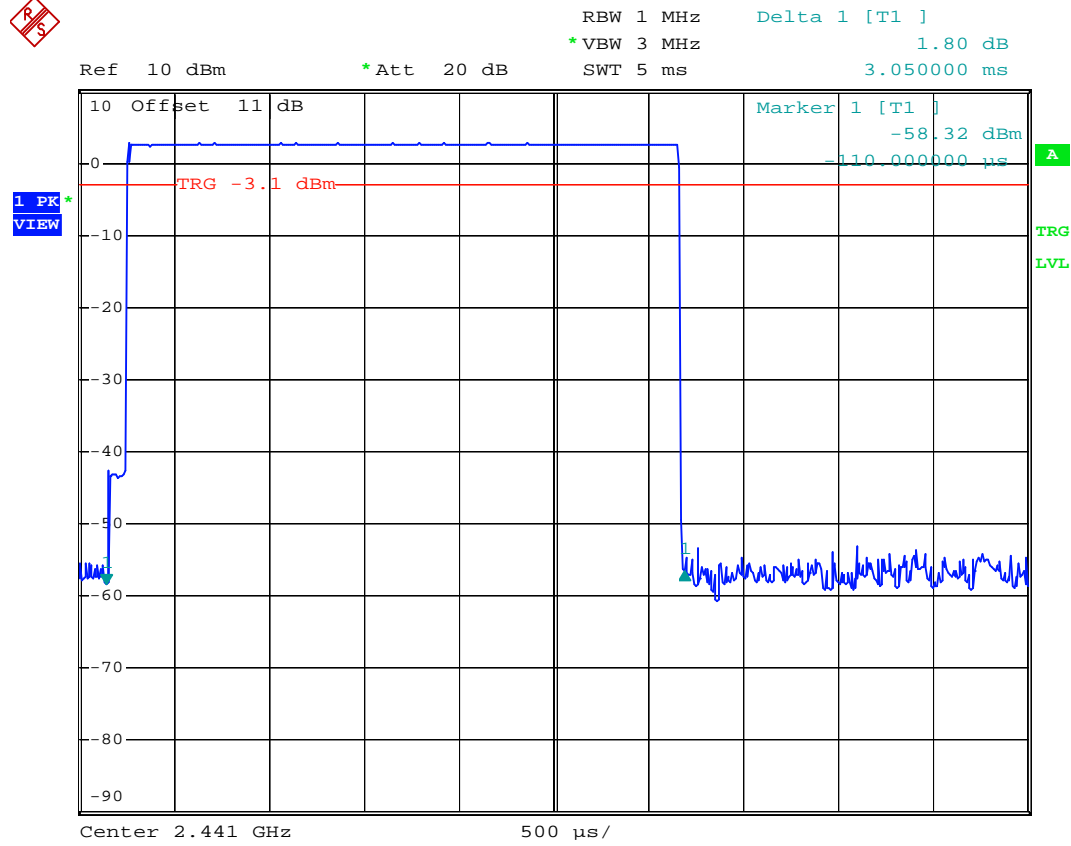

### Channel High; DH5

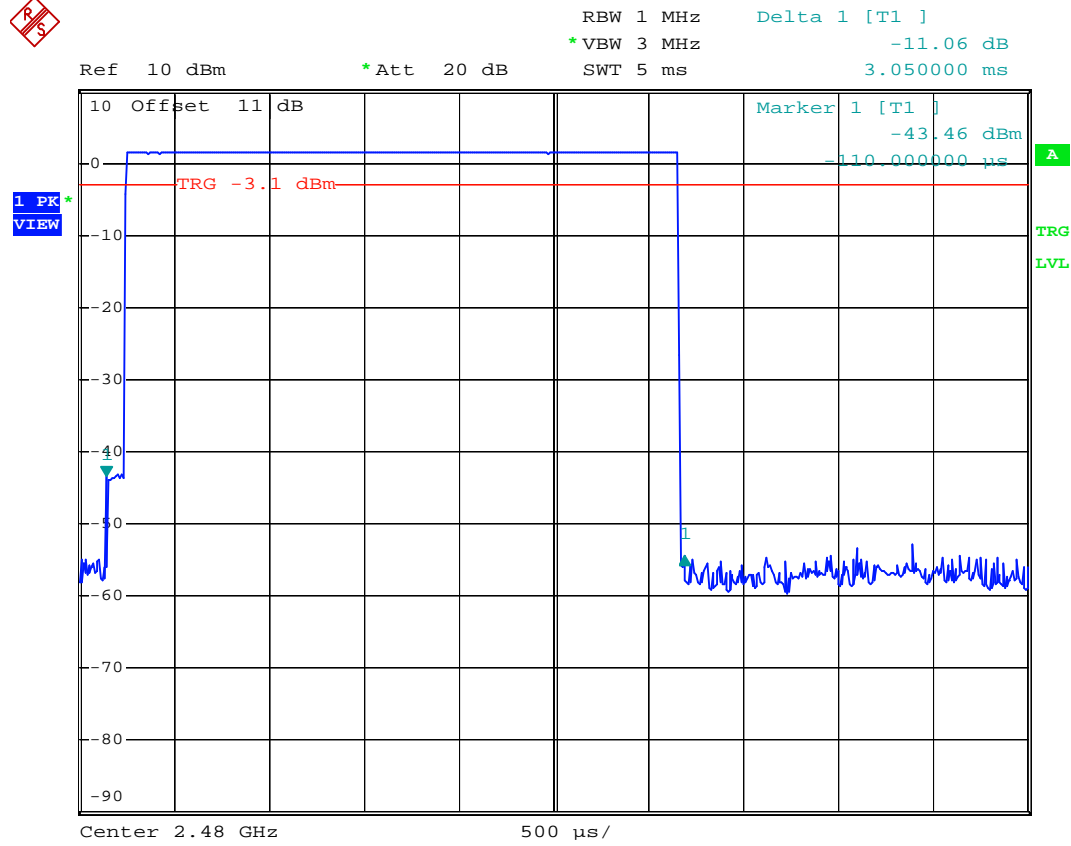

## 11 OUTPUT POWER MEASUREMENT

### 11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
  - RBW > the 20 dB bandwidth of the emission being measured
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13
Attenuator	MINI-CIRCUITS	BW-S10W2+	2015/10/07	2016/10/06

## 11.4 Measurement Data

Test Date : Aug. 25, 2016      Temperature : 26 °C      Humidity : 60 %

### Mode: Bluetooth BR

- a) Channel Low : Output Peak Power is 2.56 dBm or 1.803 mW ◦
- b) Channel Middle : Output Peak Power is 2.67 dBm or 1.849 mW ◦
- c) Channel High : Output Peak Power is 1.54 dBm or 1.426 mW ◦

### Mode: Bluetooth EDR

- a) Channel Low : Output Peak Power is 2.45 dBm or 1.758 mW ◦
- b) Channel Middle : Output Peak Power is 2.48 dBm or 1.770 mW ◦
- c) Channel High : Output Peak Power is 1.16 dBm or 1.306 mW ◦

### Justification on AFH mode:

Adaptive Frequency Hopping (AFH) means that a device can hop over a reduced set of frequencies. The frequencies hopped may be reduced in AFH mode but at least 15 channels will be used. Hence the output power limit is 125mW.


*Note : The expanded uncertainty: 2dB.*

**Mode: Bluetooth BR**

**Channel Low**



\*RBW 1 MHz    Marker 1 [T1 ]  
VBW 3 MHz    2.56 dBm  
SWT 2.5 ms    2.402010000 GHz

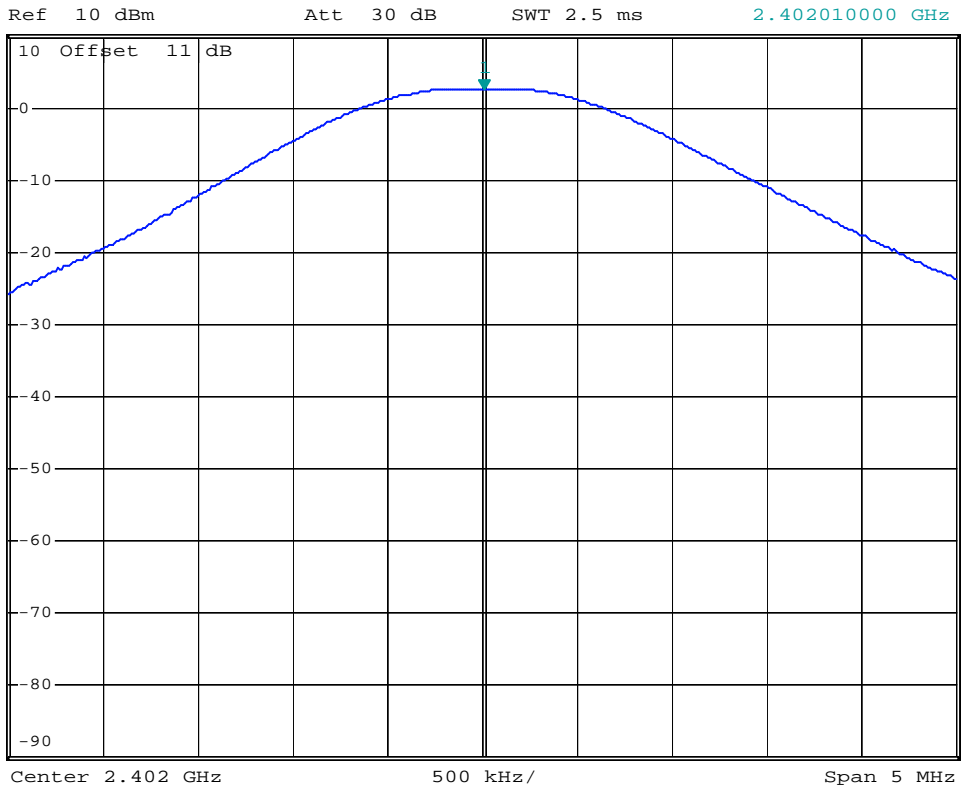

### Channel Middle




\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      2.67 dBm  
SWT 2.5 ms      2.441090000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

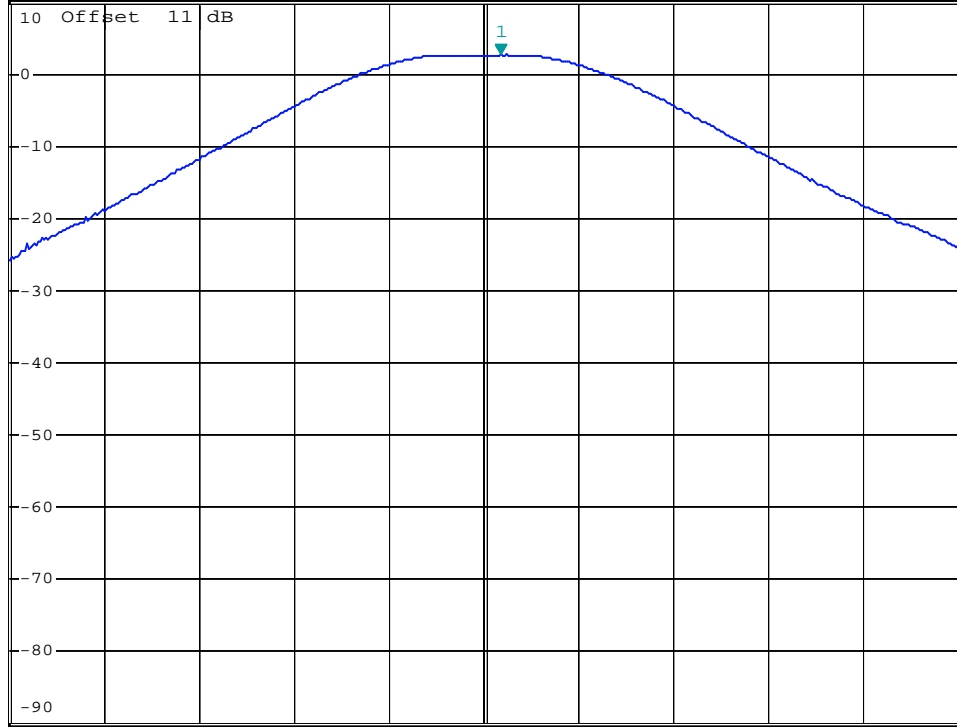



### Channel High




\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      1.54 dBm  
SWT 2.5 ms      2.480170000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

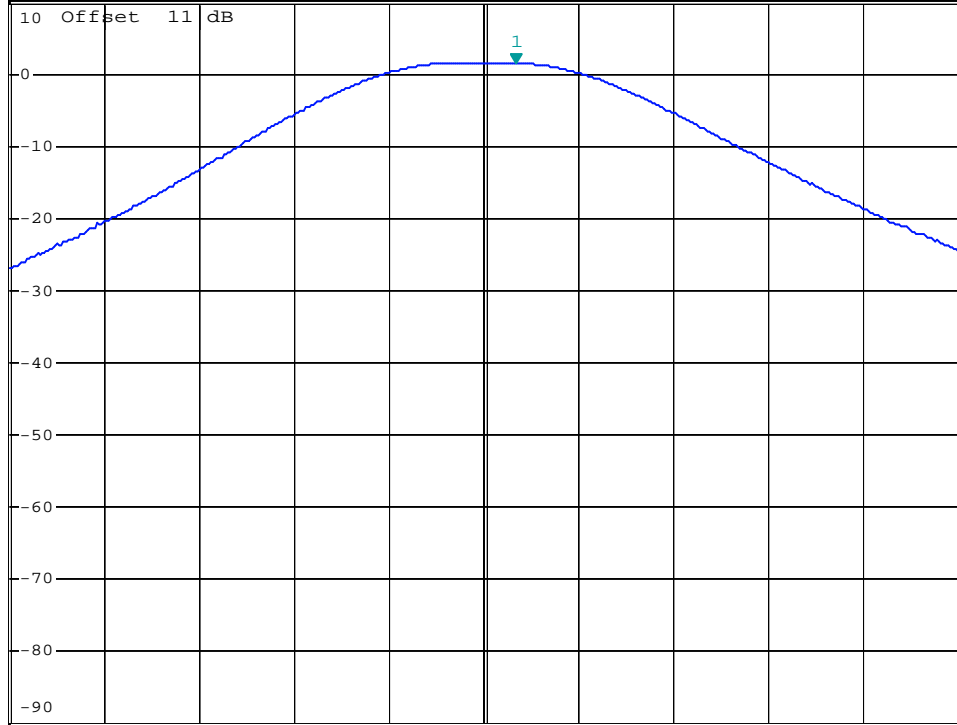

Center 2.48 GHz

500 kHz/

Span 5 MHz

A


LVL

**Mode: Bluetooth EDR**

**Channel Low**



\*RBW 3 MHz    Marker 1 [T1 ]  
VBW 10 MHz    2.45 dBm  
SWT 2.5 ms    2.401740000 GHz

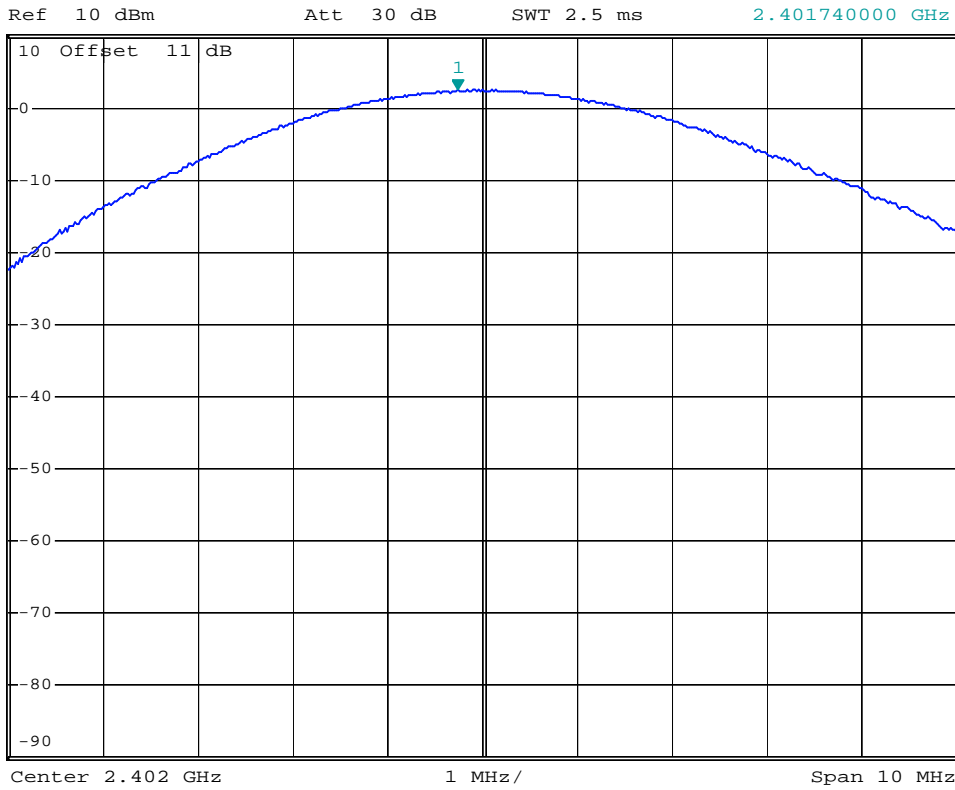

### Channel Middle




\*RBW 3 MHz      Marker 1 [T1 ]  
VBW 10 MHz      2.48 dBm  
SWT 2.5 ms      2.440940000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

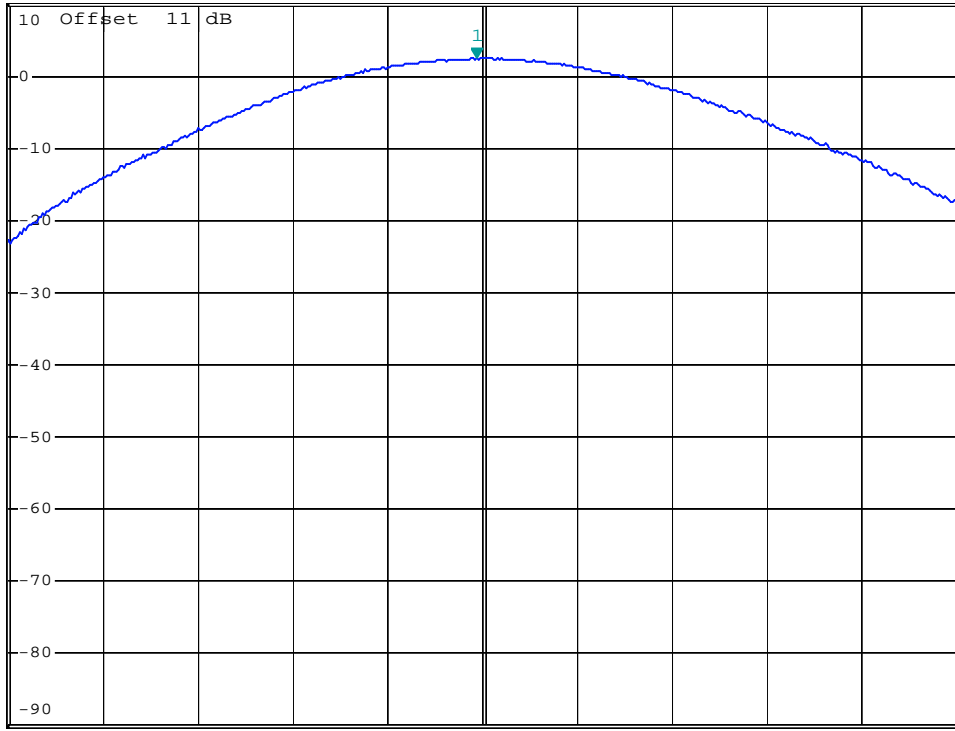

### Channel High




\*RBW 3 MHz      Marker 1 [T1 ]  
VBW 10 MHz      1.16 dBm  
SWT 2.5 ms      2.479920000 GHz

Ref 10 dBm

Att 30 dB

1 PK  
VIEW

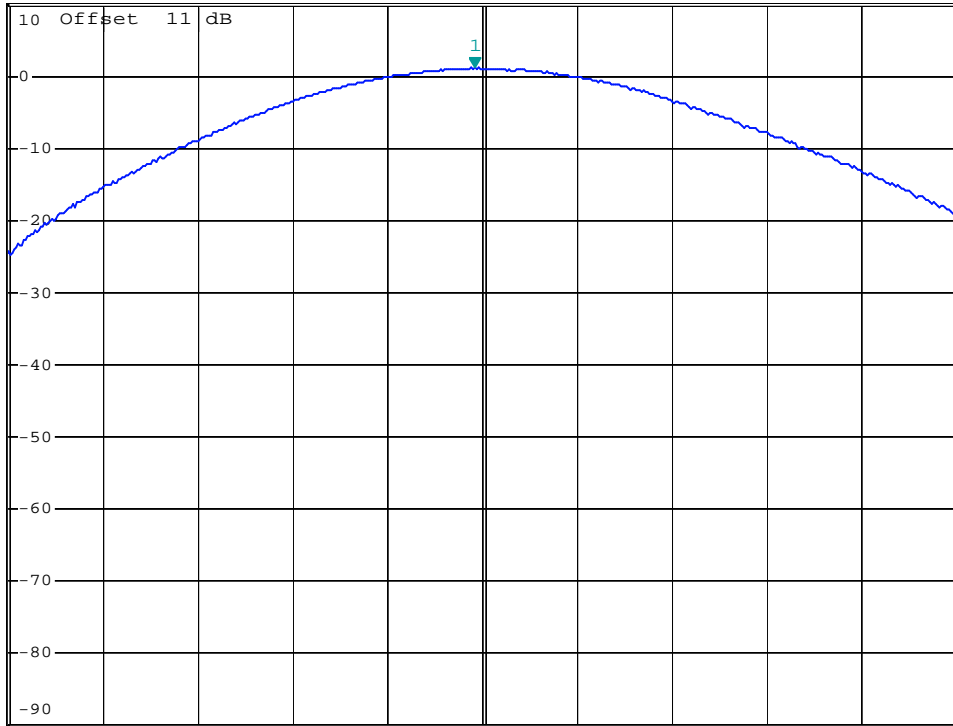

## 12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 12.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the BLUETOOTH DONGLE frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### 12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
  - RBW  $\geq$  1% of the span
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13
Attenuator	MINI-CIRCUITS	BW-S10W2+	2015/10/07	2016/10/06

### 12.4 Measurement Data

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

**Mode: Bluetooth BR**

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

**Mode: Bluetooth EDR**

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.


**Note : The expanded uncertainty: 2dB.**

**Mode: Bluetooth BR**

**Lower Band Edge (Hoppin off)**




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    -36.13 dBm  
SWT 2.5 ms                      2.399520000 GHz

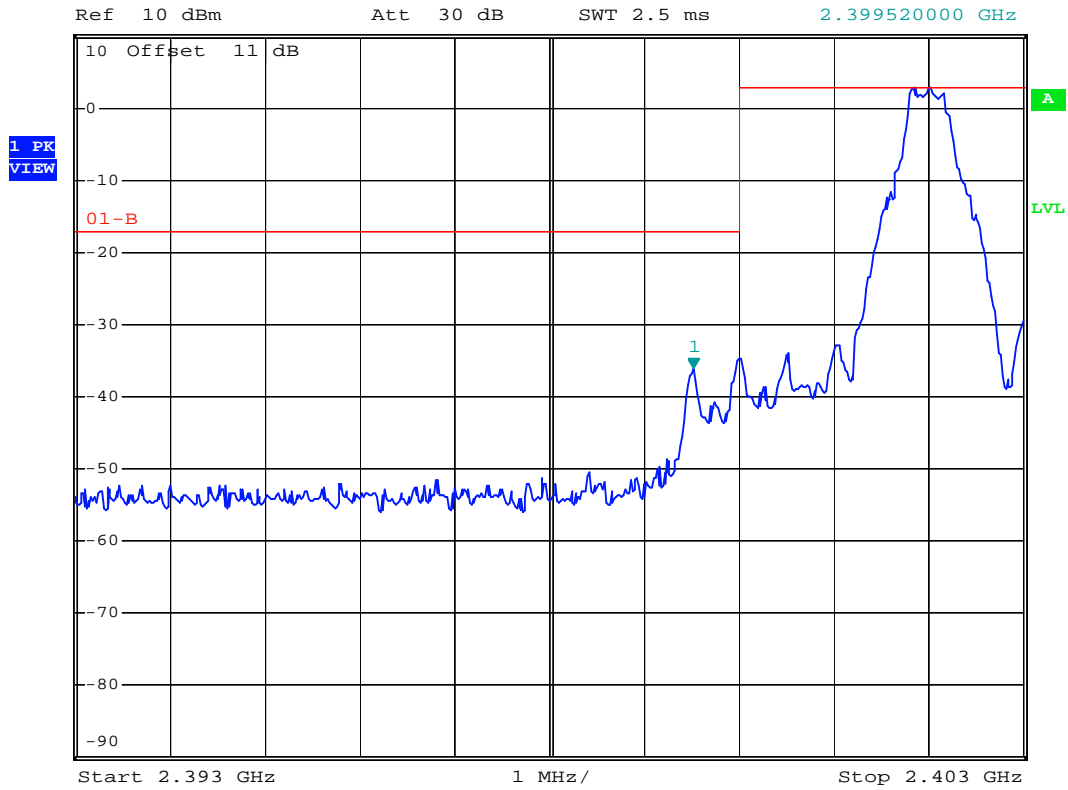

### Upper Band Edge (Hoppin off)



\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -50.27 dBm  
SWT 2.5 ms 2.484200000 GHz

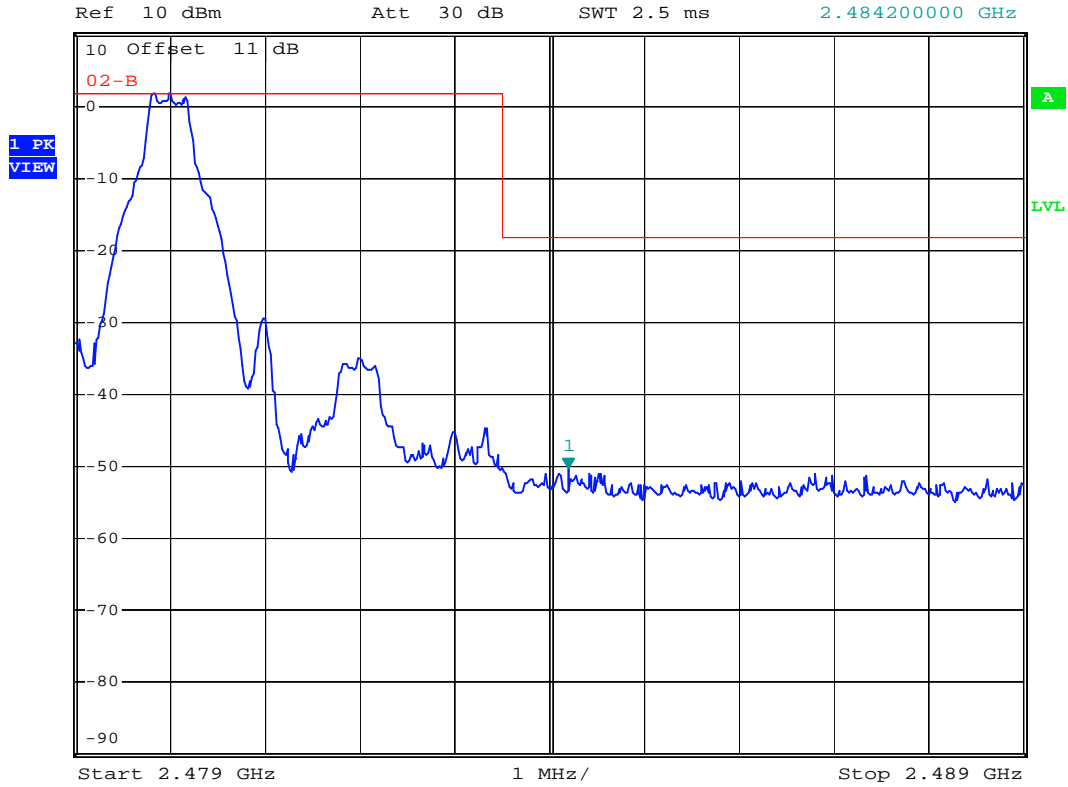




### Lower Band Edge (Hoppin on)




Ref 10 dBm      Att 30 dB      \*RBW 100 kHz      Marker 1 [T1]      VBW 300 kHz      -37.09 dBm  
SWT 2.5 ms      2.399500000 GHz

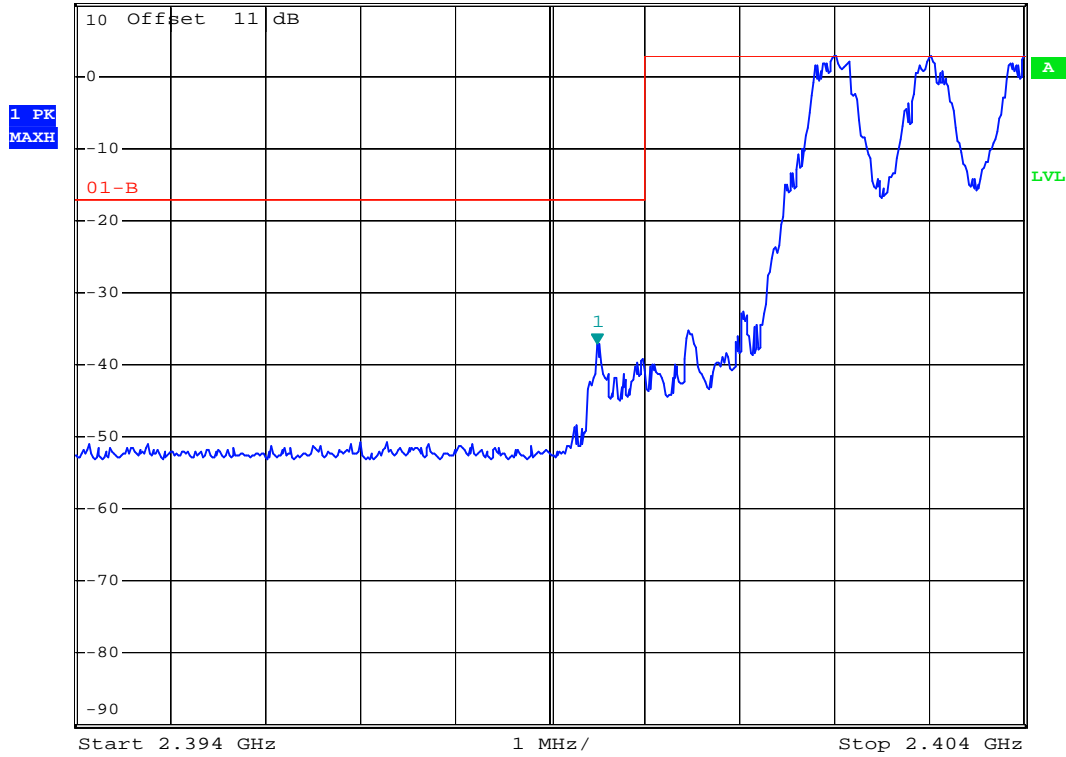

### Upper Band Edge (Hoppin on)



Ref 10 dBm Att 30 dB \*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -50.51 dBm  
SWT 2.5 ms 2.484880000 GHz

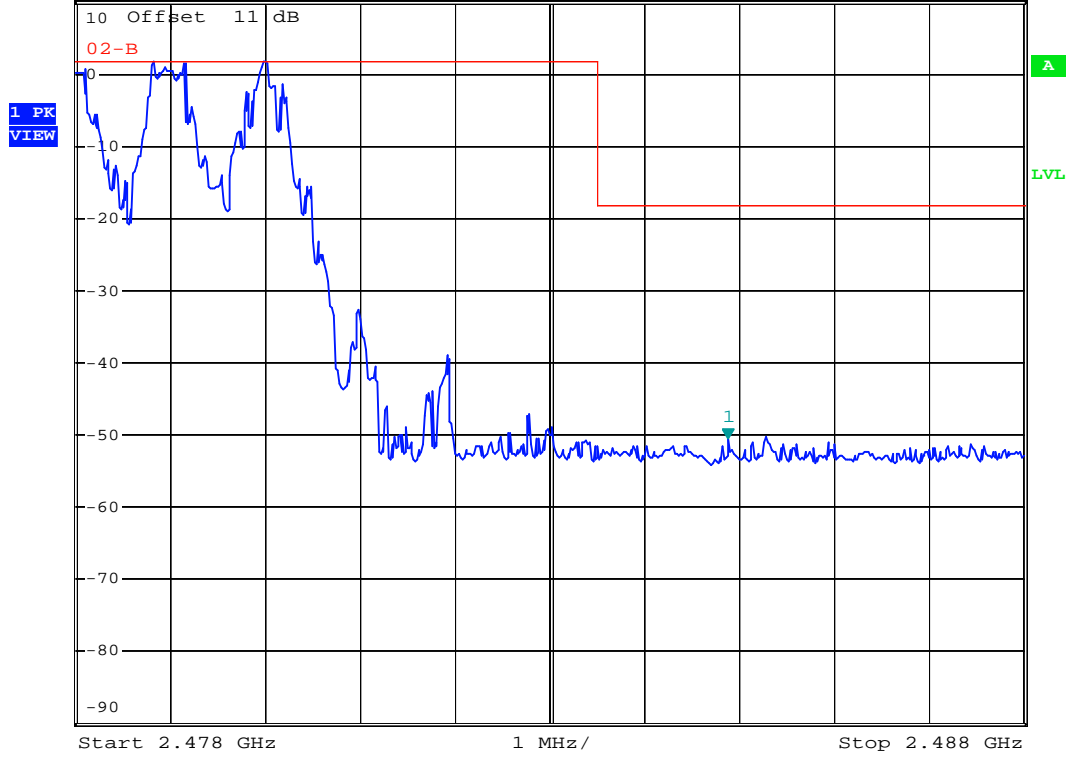


**Mode: Bluetooth EDR**

***Lower Band Edge (Hoppin off)***




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    -43.28 dBm  
SWT 2.5 ms                      2.399520000 GHz

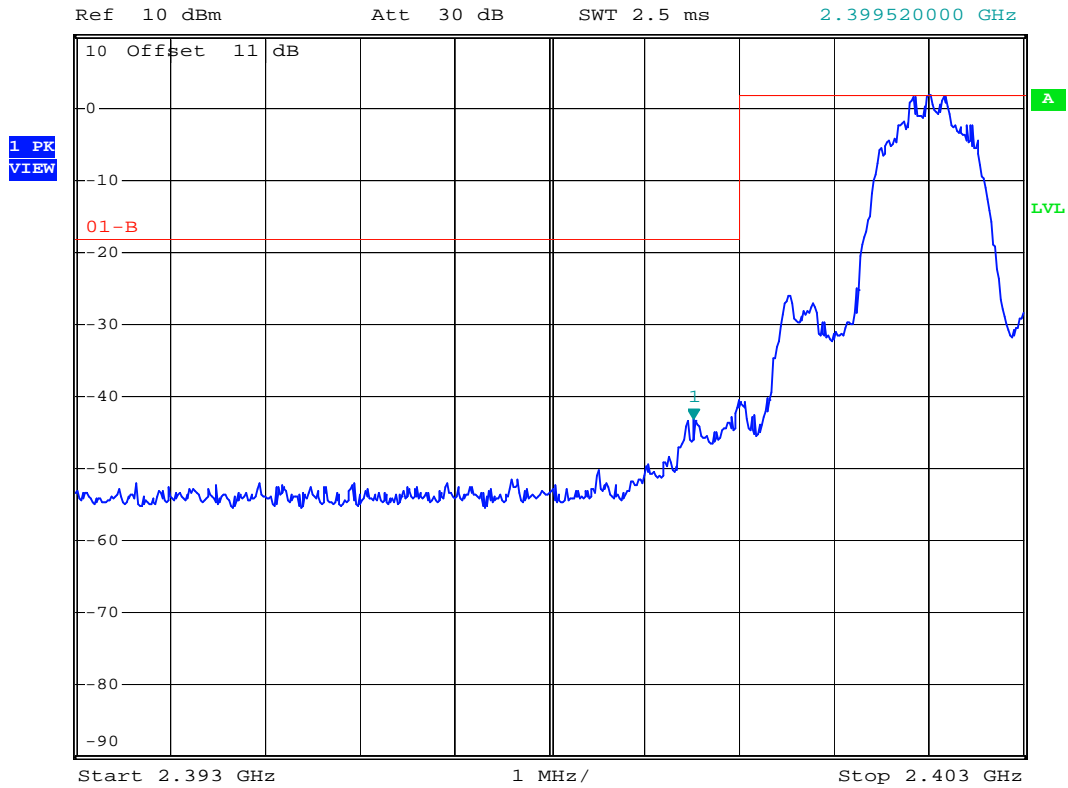

### Upper Band Edge (Hoppin off)



\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz        -51.12 dBm  
SWT 2.5 ms         2.484800000 GHz

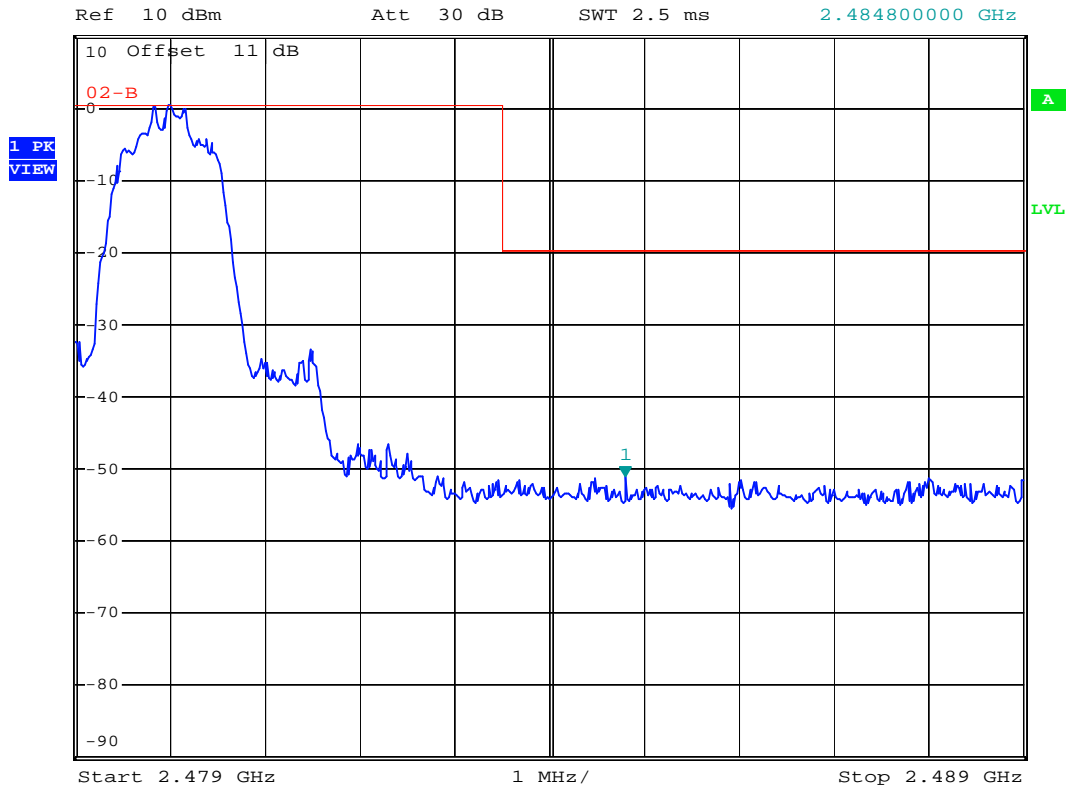


**Lower Band Edge (Hoppin on)**



\*RBW 100 kHz Marker 1 [T1 ]  
 VBW 300 kHz -43.58 dBm  
 SWT 2.5 ms 2.399540000 GHz

Ref 10 dBm


Att 30 dB

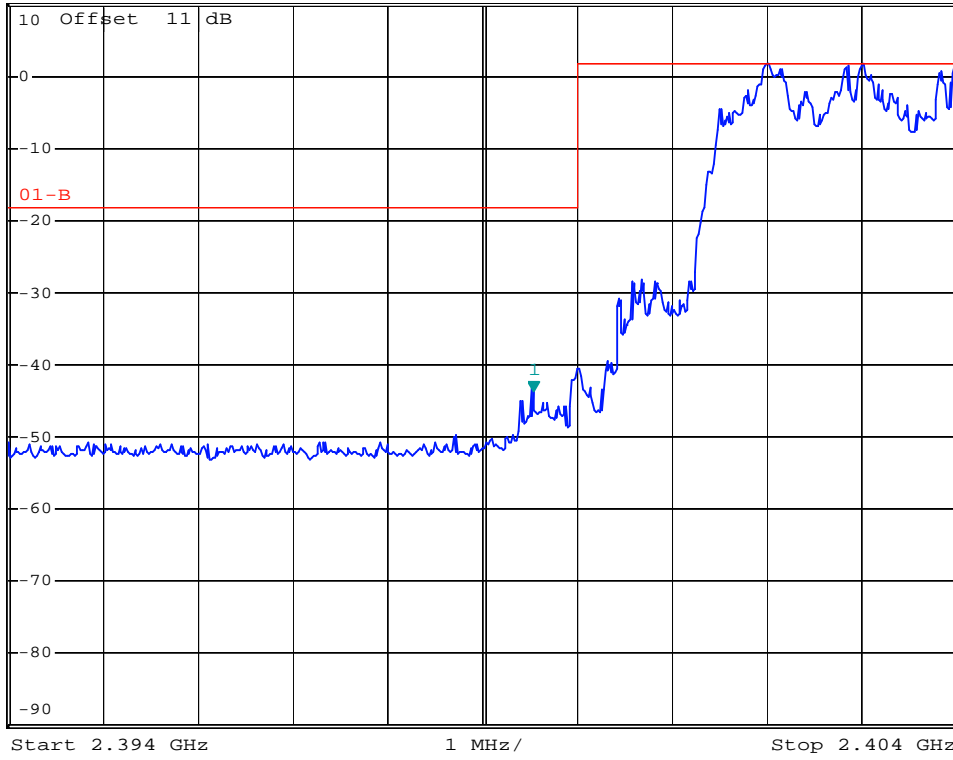

**Upper Band Edge (Hoppin on)**



\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz         -48.87 dBm  
SWT 2.5 ms            2.483680000 GHz

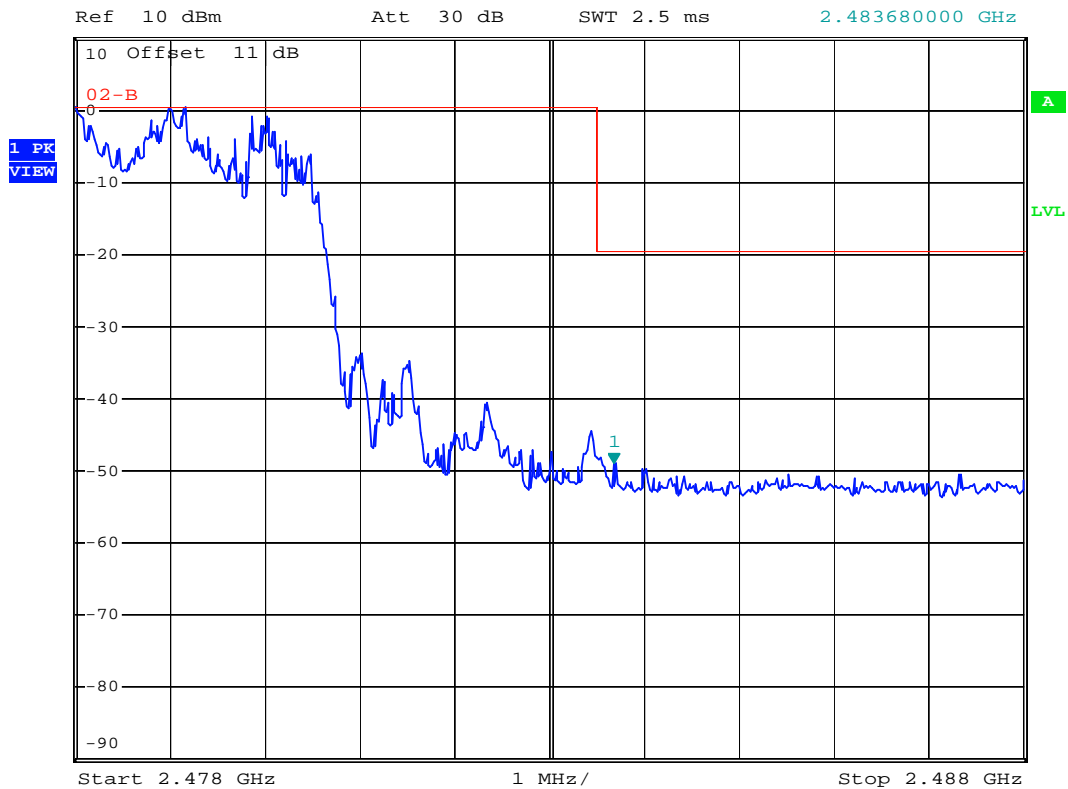

## 13 CONDUCTED SPURIOUS EMISSION MEASUREMENT

### 13.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the BLUETOOTH DONGLE frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### 13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
  - RBW = 100 kHz
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold.
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 13.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13
Attenuator	MINI-CIRCUITS	BW-S10W2+	2015/10/07	2016/10/06

### 13.4 Measurement Data

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

**Mode: Bluetooth BR**

**Mode : Low Channel/ Mid Channel/ Hi Channel**

- a) 1 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

**Mode: Bluetooth EDR**

**Mode : Low Channel/ Mid Channel/ Hi Channel**

- a) 1 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

***Note : The expanded uncertainty: 2dB.***



**Mode: Bluetooth BR**

**Mode : Low Channel**




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    2.09 dBm  
SWT 300 ms                    2.406000000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

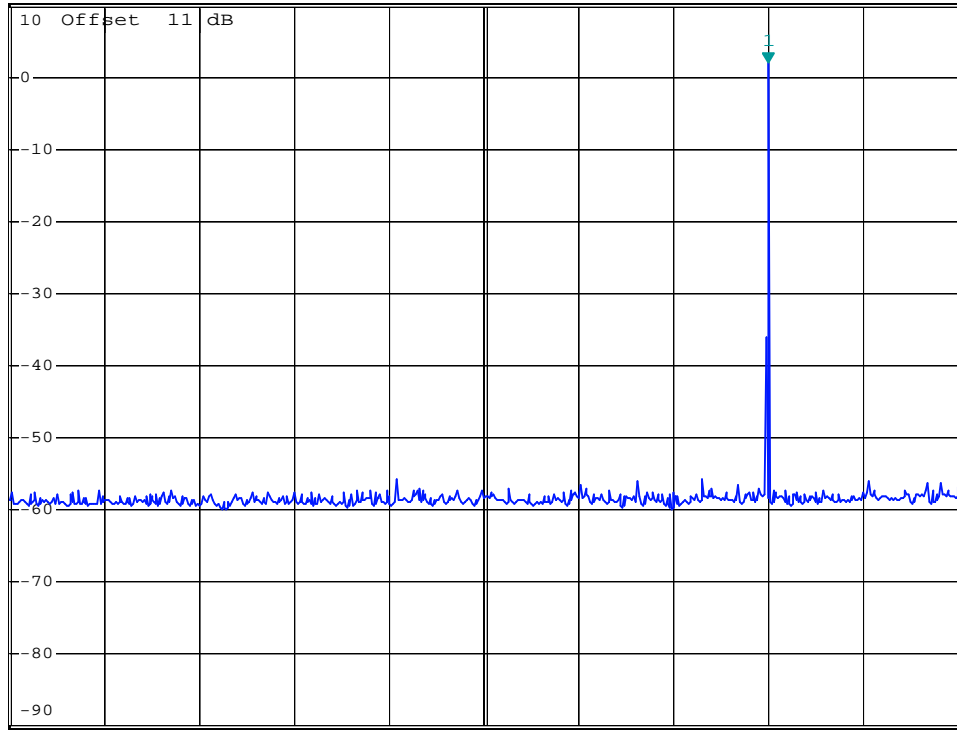


Start 30 MHz

297 MHz/

Stop 3 GHz



Ref 10 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 1 [T1 ]  
VBW 300 kHz      -43.53 dBm  
SWT 2.2 s      20.292000000 GHz

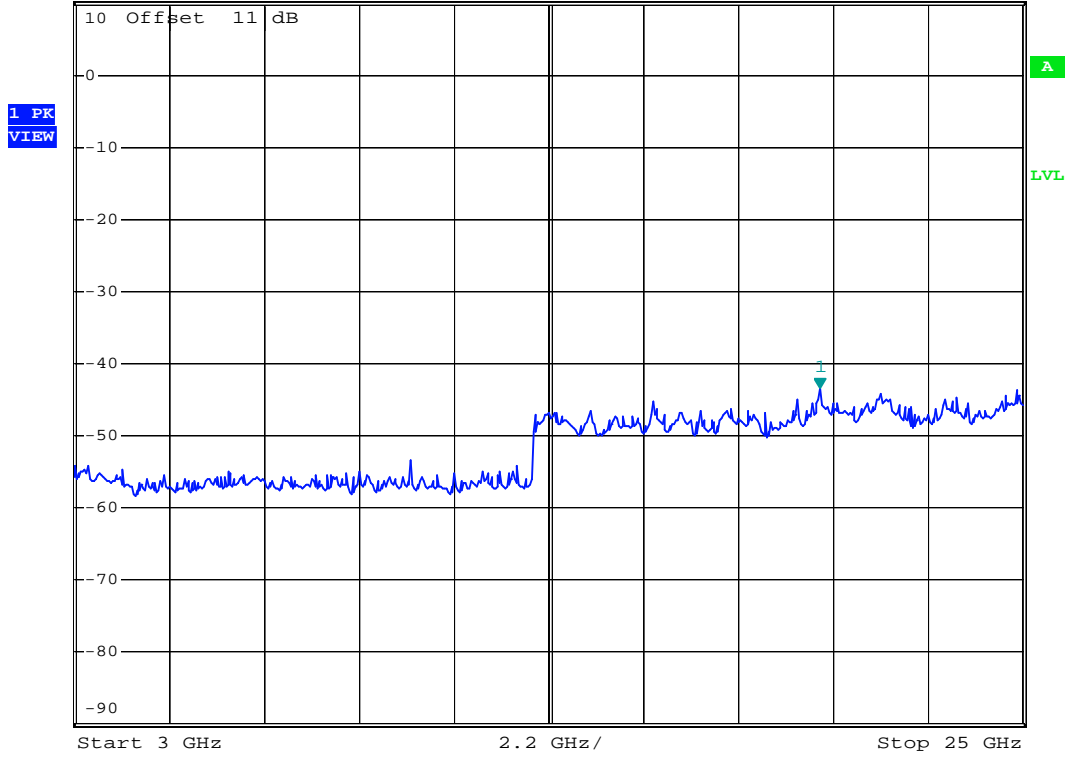

### Mode : Mid Channel




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    1.82 dBm  
SWT 300 ms                    2.441640000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

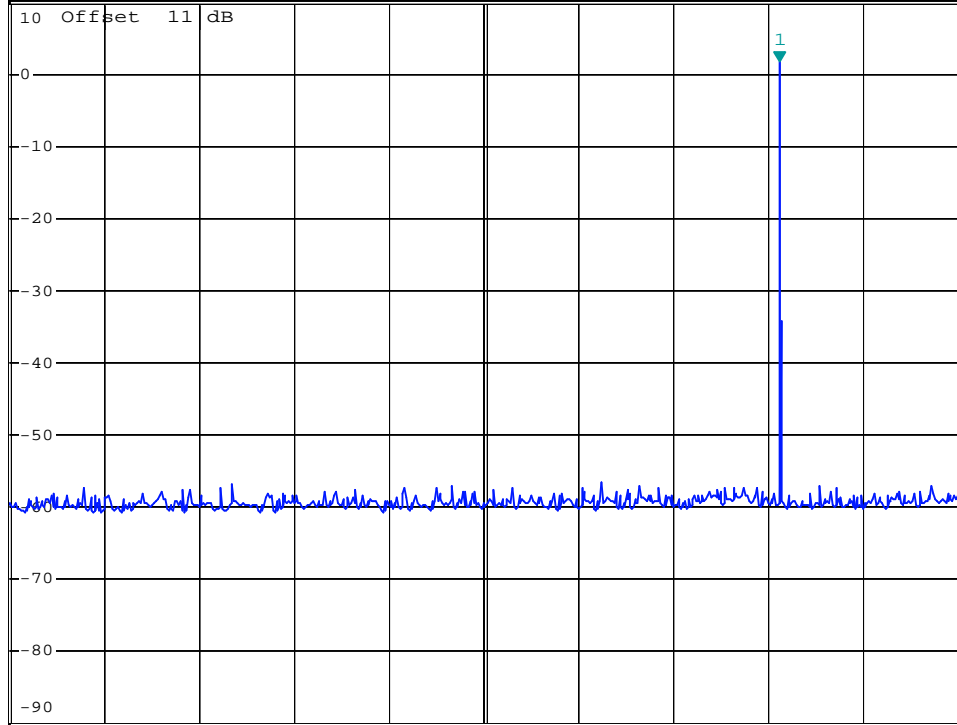


A

IVL



Ref 10 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 1 [T1 ]  
VBW 300 kHz      -43.39 dBm  
SWT 2.2 s      25.000000000 GHz

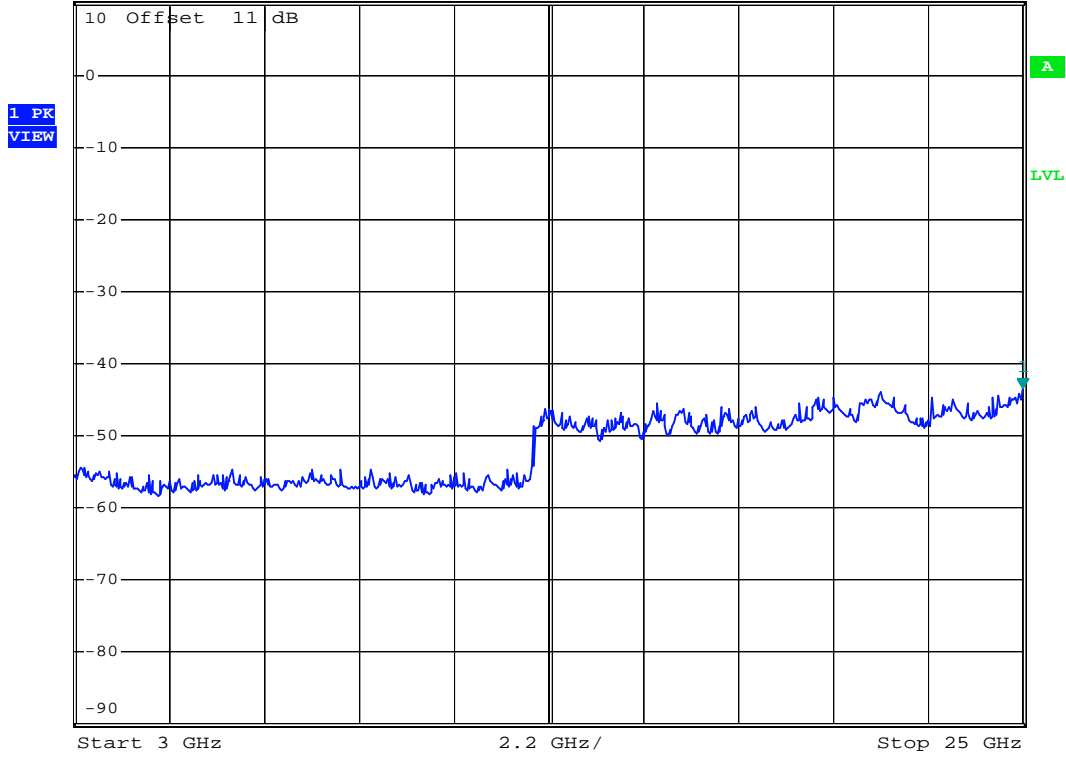

### Mode : Hi Channel




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    0.09 dBm  
SWT 300 ms                    2.483220000 GHz

Ref 10 dBm


\*Att 20 dB

1 PK  
VIEW

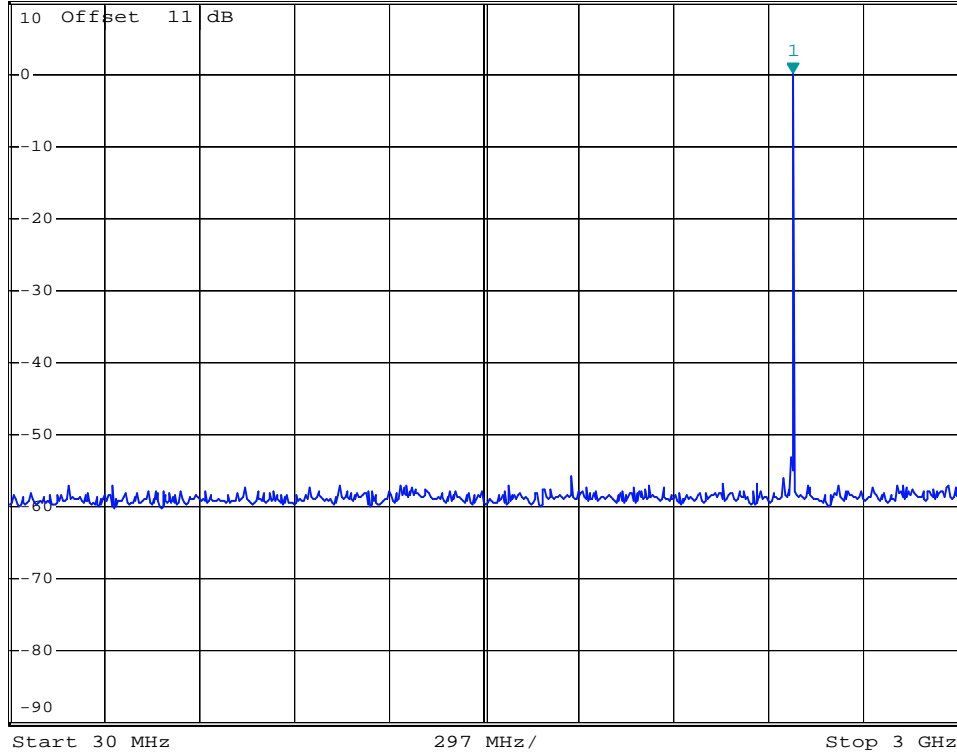



Ref 10 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 1 [T1 ]  
VBW 300 kHz      -44.01 dBm  
SWT 2.2 s      21.920000000 GHz

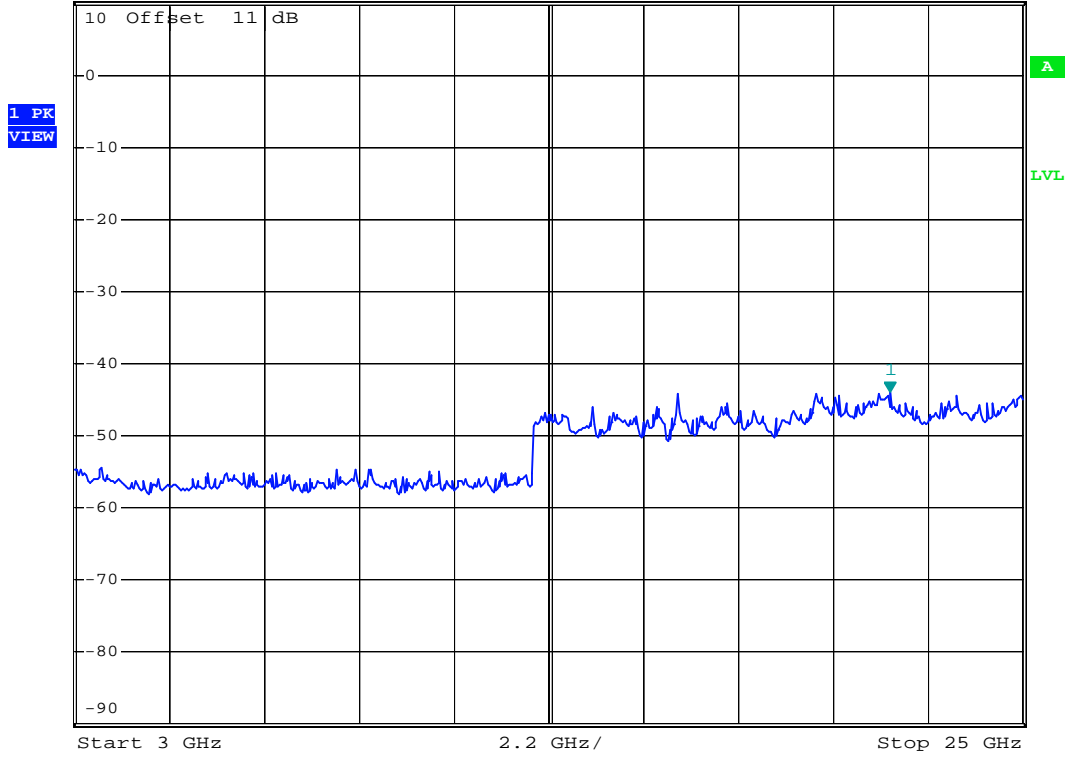

**Mode: Bluetooth EDR**

**Mode : Low Channel**




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    1.44 dBm  
SWT 300 ms                    2.406000000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

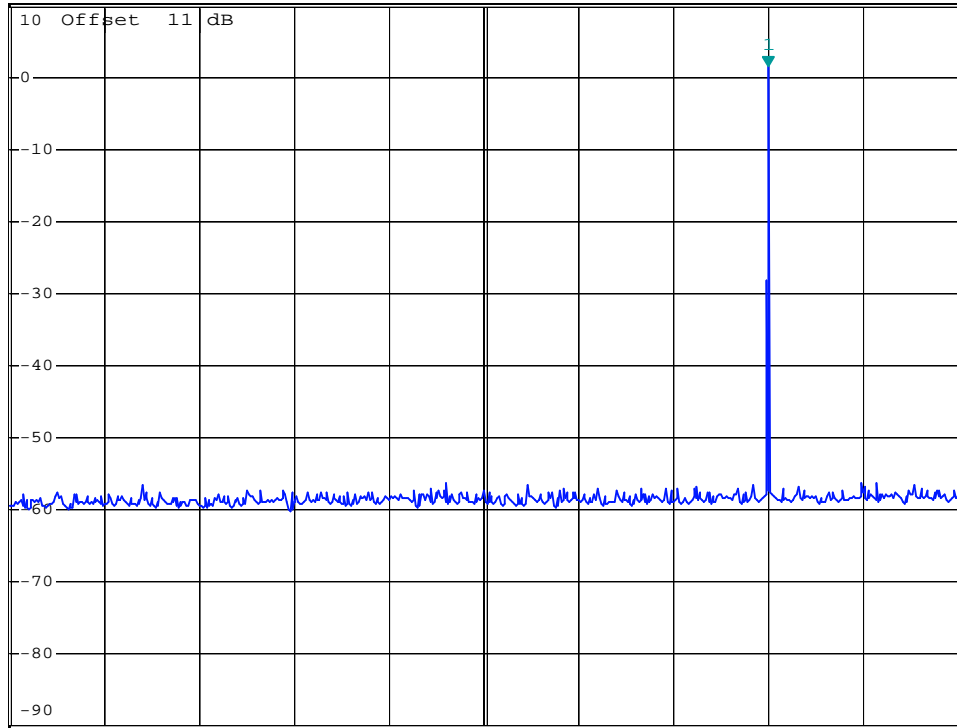


Start 30 MHz

297 MHz/

Stop 3 GHz



Ref 10 dBm      \*Att 20 dB      \*RBW 100 kHz      Marker 1 [T1 ]  
VBW 300 kHz      -43.33 dBm  
SWT 2.2 s      24.956000000 GHz

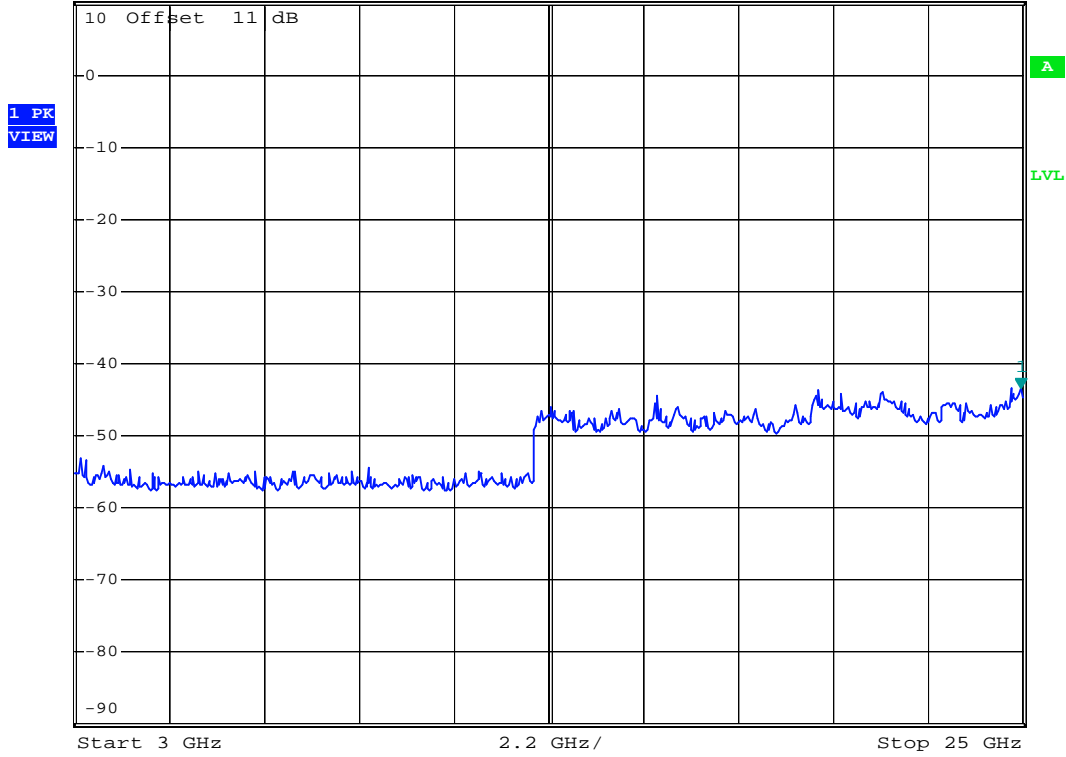



### Mode : Mid Channel




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    1.78 dBm  
SWT 300 ms                    2.441640000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

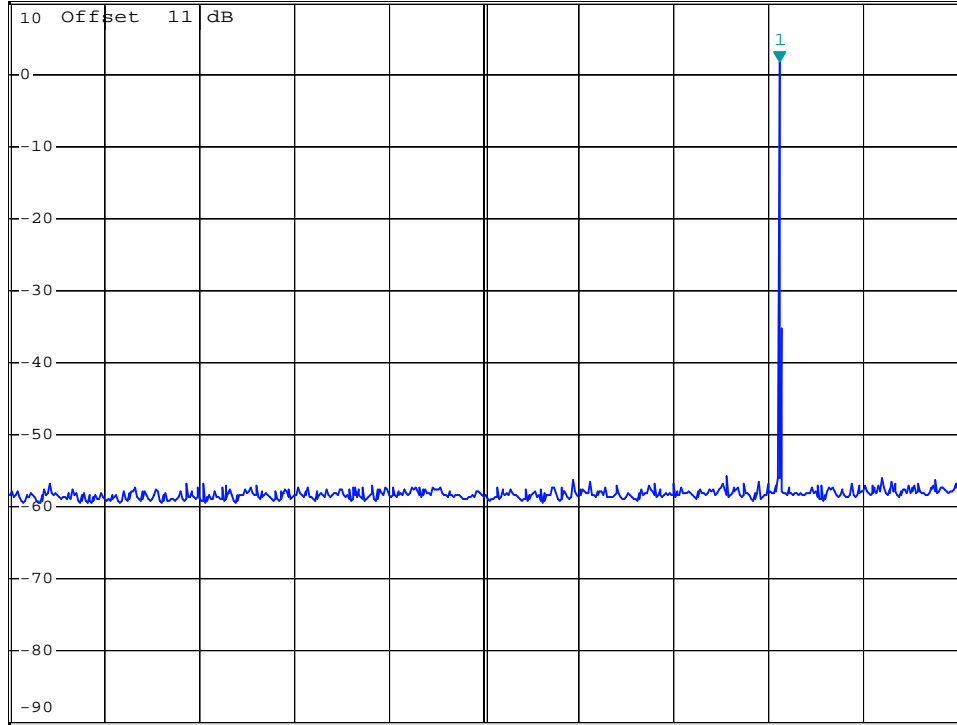




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    -43.57 dBm  
SWT 2.2 s                        24.956000000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

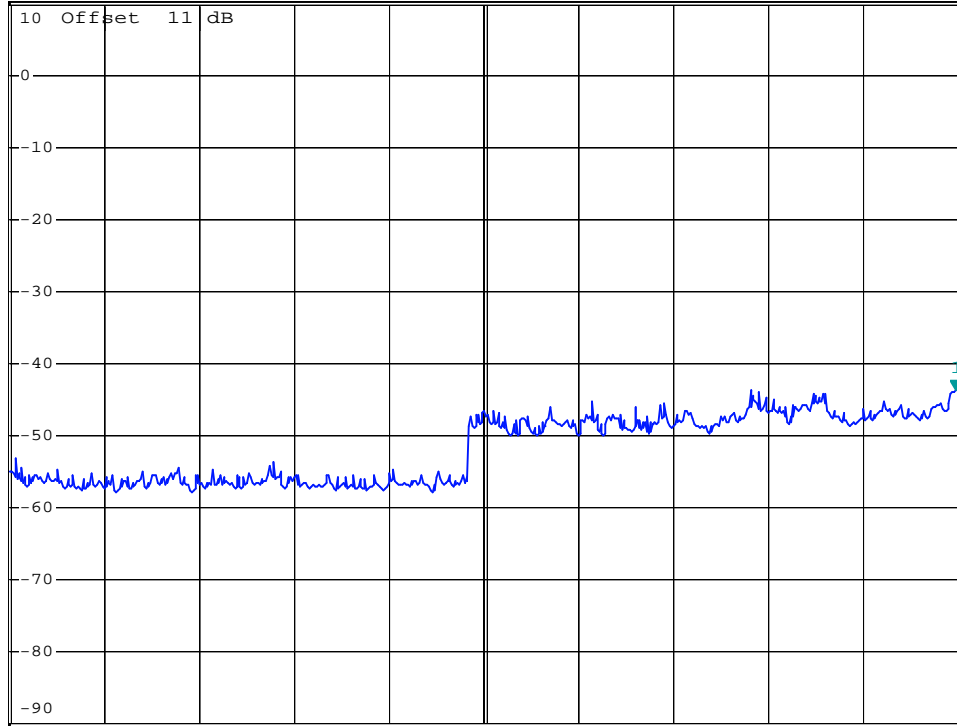

Start 3 GHz

2.2 GHz/

Stop 25 GHz

### Mode : Hi Channel




\*RBW 100 kHz    Marker 1 [T1 ]  
VBW 300 kHz                    -0.05 dBm  
SWT 300 ms                    2.483220000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

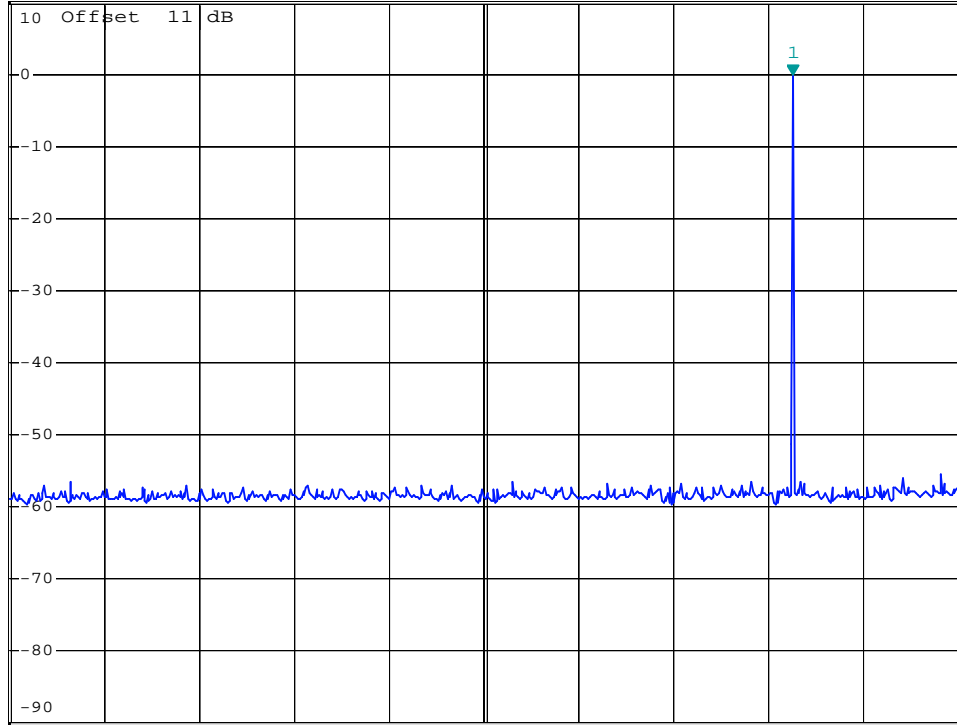




\*RBW 100 kHz Marker 1 [T1 ]  
VBW 300 kHz -42.53 dBm  
SWT 2.2 s 21.568000000 GHz

Ref 10 dBm

\*Att 20 dB

1 PK  
VIEW

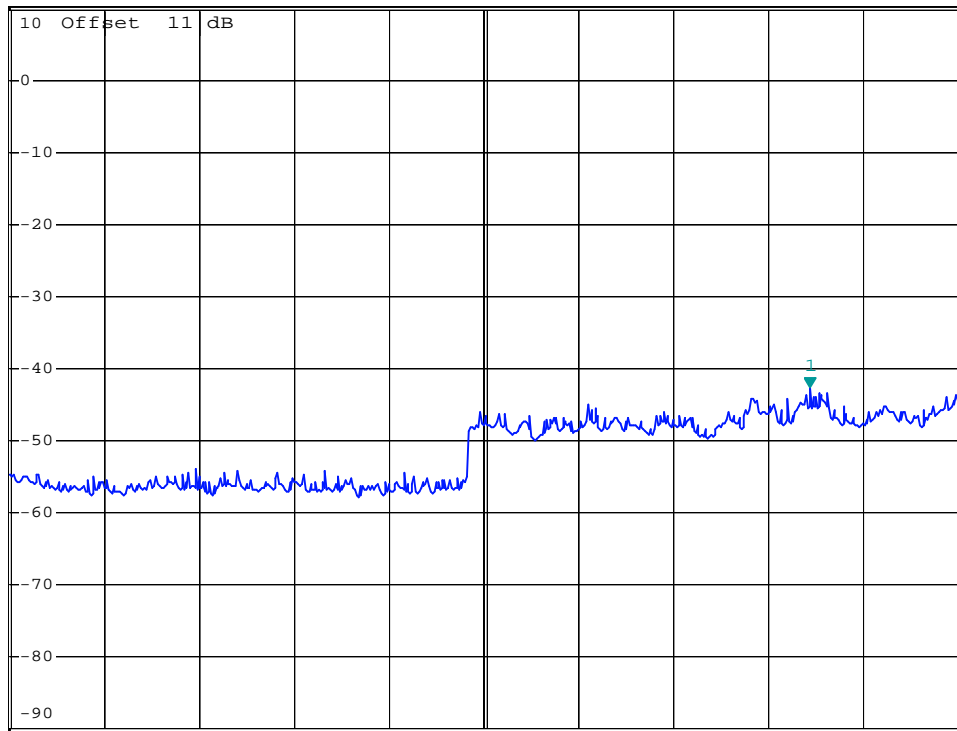

Start 3 GHz

2.2 GHz/

Stop 25 GHz

## 14. DUTY CYCLE

### 14.1 Standard Applicable

None. Reference only.

### 14.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU	2015/12/14	2016/12/13
Attenuator	MINI-CIRCUITS	BW-S10W2+	2015/10/07	2016/10/06

### 14.3 Measurement Data

Test Date : Aug. 25, 2016      Temperature : 27 °C      Humidity : 53 %

#### Duty Cycle Calculation

Mode	Period (ms)	Transmission duration (T) (ms)	Duty Cycle (%)	1/T (kHz)	VBW setting (kHz)
BR / DH5	3.76	3.12	83.0	0.321	1
EDR / DH5	3.80	3.12	82.1	0.321	1


Note:

1. DH5 has the highest duty cycle worst case and is reported.
2. When the duty cycle is less than 98%, for the average measurement of the radiated emission test, the VBW setting is  $>1/T$  where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Refer to the following page for data plots.

### BR / DH5

#### Period

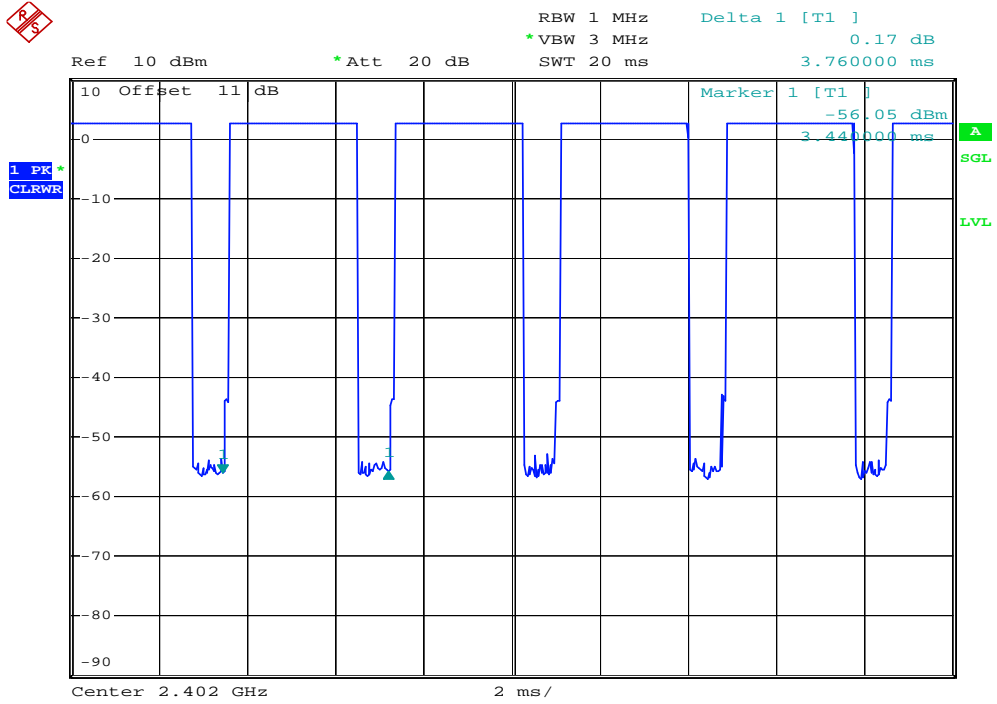


#### Transmission duration (T)

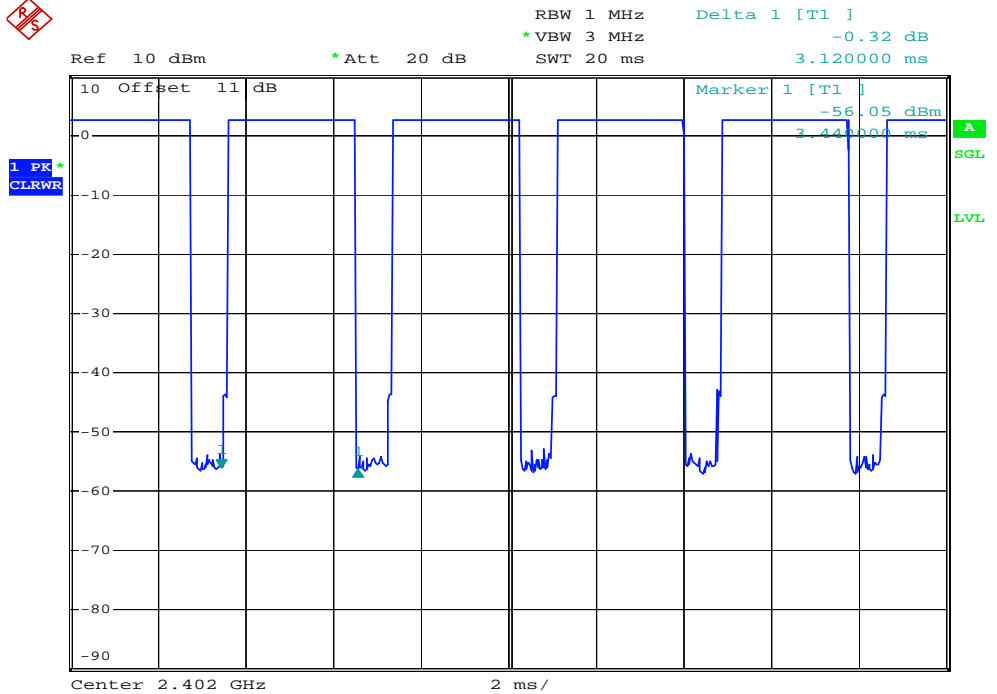

### EDR / DH5

Period

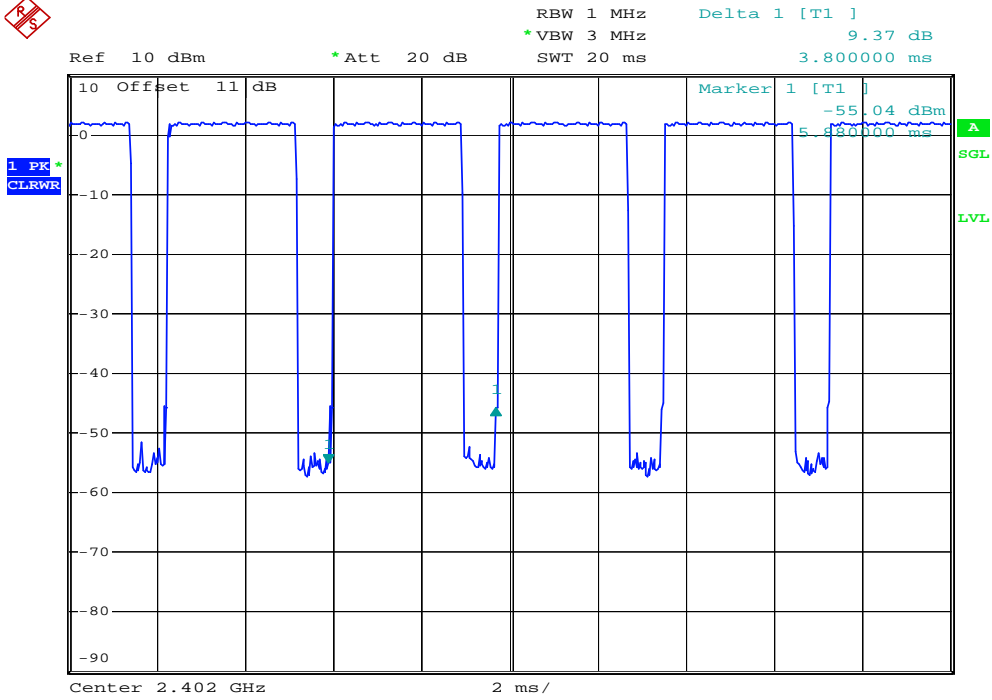

### Transmission duration (T)

