



FCC RF TEST REPORT

APPLICANT : Technicolor Connected Home USA LLC
EQUIPMENT : DOCSIS 3.1 Residential Voice Gateway
BRAND NAME : Technicolor
MODEL NAME : CGA437TTCH4, CGA437TXXXXX (where X can be alphanumeric, -, or blank)
FCC ID : G95-CGA437T
Standard : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Indoor Access Point (6ID)
TEST DATE(S) : Oct. 18, 2022 ~ Dec. 17, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

- 1 General Description 5**
 - 1.1 Applicant 5
 - 1.2 Manufacturer 5
 - 1.3 Product Feature of Equipment Under Test 5
 - 1.4 Product Specification of Equipment Under Test 5
 - 1.5 Modification of EUT 6
 - 1.6 Specification of Accessory 6
 - 1.7 Testing Location 7
 - 1.8 Test Software 7
 - 1.9 Applicable Standards 7
- 2 Test Configuration of Equipment Under Test 8**
 - 2.1 Carrier Frequency and Channel 8
 - 2.2 Test Mode 10
 - 2.3 Connection Diagram of Test System 13
 - 2.4 Support Unit used in test configuration and system 14
 - 2.5 EUT Operation Test Setup 14
- 3 Test Result 15**
 - 3.1 26dB & 99% Occupied Bandwidth Measurement 15
 - 3.2 Fundamental Maximum EIRP Measurement 16
 - 3.3 Fundamental Power Spectral Density Measurement 18
 - 3.4 In-Band Emissions (Channel Mask) 20
 - 3.5 Contention Based Protocol 22
 - 3.6 Unwanted Emissions Measurement 30
 - 3.7 AC Conducted Emission Measurement 34
 - 3.8 Antenna Requirements 36
- 4 List of Measuring Equipment 37**
- 5 Uncertainty of Evaluation 39**
- Appendix A. Conducted Test Results**
- Appendix B. Test Result of Maximum EIRP & Power Spectral Density**
- Appendix C. AC Conducted Emission Test Result**
- Appendix D. Radiated Spurious Emission**
- Appendix E. Radiated Spurious Emission Plots**
- Appendix F. Duty Cycle Plots**
- Appendix G. Setup Photographs**



History of this test report

Report No.	Version	Description	Issued Date
FR202817D	01	Initial issue of report	Dec. 23, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i) 15.407(a)(10)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)(5)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(5)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	-
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 0.39 dB at 7125.00 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 4.27 dB at 0.505 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Technicolor Connected Home USA LLC
4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092

1.2 Manufacturer

Technicolor Connected Home USA LLC
4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	DOCSIS 3.1 Residential Voice Gateway
Brand Name	Technicolor
Model Name	CGA437TTCH4, CGA437TXXXXX (where X can be alphanumeric, -, or blank)
FCC ID	G95-CGA437T
SN	Conducted: CGA437TTCH4Lab2B038 Conduction: CGA437TTCH4lab2B030 Radiation: CGA437TTCH4lab2B020 Contention Based Protocol: CGA437TTCH3lab2B030
HW Version	1.0.0
SW Version	RG21.3-CGA437TTCH3-TCH_CORE-21.2P1_WLAN
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
Maximum EIRP	MIMO Ant.1+2+3+4: <5925 MHz ~ 7125 MHz > 802.11ax HE20 : 17.91 dBm / 0.0618 W 802.11ax HE40 : 21.13 dBm / 0.1297 W 802.11ax HE80 : 23.33 dBm / 0.2153 W 802.11ax HE160 : 25.55 dBm / 0.3589 W
99% Occupied Bandwidth	802.11ax HE20 : 19.380 MHz 802.11ax HE40 : 38.361 MHz 802.11ax HE80 : 77.442 MHz 802.11ax HE160 : 157.522 MHz
Type of Modulation	802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)
Antenna Type	Murphy Antenna



Antenna Function Description		Ant. 1	Ant. 2	Ant. 3	Ant. 4
	802.11ax SISO	V	V	V	V
	802.11ax CDD 1S4T	V	V	V	V
	802.11ax Tx Beamforming 1S4T	V	V	V	V

Remark:

1. The device type is indoor access point.
2. For SISO&MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher EIRP power.
3. The EUT does not support channel puncturing mode.
4. The device does not support partial RU tone for 802.11ax mode
5. The device supports 1S4T(CDD&TXBF) mode; 1S4T: NSS=1, MIMO 4Tx.
6. The following information was declared by manufacturer. Please refer to the antenna report for the Max/Min Antenna Gain.

Frequency Band	Maximum Antenna Gain (dBi)				Minimum Antenna Gain (dBi)			
	ANT1	ANT2	ANT3	ANT4	ANT1	ANT2	ANT3	ANT4
6GHz UNII-5	2.94	4.83	3.99	5.02	1.88	4.55	2.55	3.20
6GHz UNII-6	2.44	4.83	3.22	3.91	1.88	4.34	2.55	3.09
6GHz UNII-7	4.11	5.05	3.63	5.25	2.29	4.45	2.98	3.09
6GHz UNII-8	4.29	4.92	4.53	5.25	4.11	4.23	3.49	4.79

CBP test with antenna path of minimum gain (Antenna 1, Minimum gain= 1.88 dBi)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	HONOTO	Model Name	ADS-50FKI-12 12048EPCU-L
AC Adapter 2	Brand Name	HONOTO	Model Name	ADS-50FKI-12 12048EPG



1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS 03CH06-KS TH01-KS DFS01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	03CH06-KS	AUDIX	E3	6.2009-8-24al
3.	CO01-KS	AUDIX	E3	6.2009-8-24
4.	DFS01-KS	Sporton	DFS & Adaptivity Test Tools	1.0

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D03 MIMO Antenna Gain Measurement v01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	2	1	5	9	13	17	21	25	29	
	Freq. (MHz)	5935	5955	5975	5995	6015	6035	6055	6075	6095	
BW 40M	Channel	3			11		19		27		
	Freq. (MHz)	5965			6005		6045		6085		
BW 80M	Channel	7					23				
	Freq. (MHz)	5985					6065				
BW 160M	Channel	15									
	Freq. (MHz)	6025									
BW 20M	Channel	33	37	41	45	49	53	57	61		
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255		
BW 40M	Channel	35			43		51		59		
	Freq. (MHz)	6125			6165		6205		6245		
BW 80M	Channel	39					55				
	Freq. (MHz)	6145					6225				
BW 160M	Channel	47									
	Freq. (MHz)	6185									
BW 20M	Channel	65	69	73	77	81	85	89	93		
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415		
BW 40M	Channel	67			75		83		91		
	Freq. (MHz)	6285			6325		6365		6405		
BW 80M	Channel	71					87				
	Freq. (MHz)	6305					6385				
BW 160M	Channel	79									
	Freq. (MHz)	6345									



BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225		229		233			
	Freq. (MHz)	7075		7095		7115			
BW 40M	Channel	227							
	Freq. (MHz)	7085							



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11ax HE20 CDD 1S4T	MCS0
802.11ax HE40 CDD 1S4T	MCS0
802.11ax HE80 CDD 1S4T	MCS0
802.11ax HE160 CDD 1S4T	MCS0
802.11ax HE20 TX BF 1S4T	MCS0
802.11ax HE40 TX BF 1S4T	MCS0
802.11ax HE80 TX BF 1S4T	MCS0
802.11ax HE160 TX BF 1S4T	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WLAN Link(6G) + Power from Adapter 1
Remark:	
<ol style="list-style-type: none"> For Radiated Test Cases, The tests were performance with Adapter 1. All test modes of the Radiated Spurious Emission (RSE) were tested; only the worst test data of each bandwidth were reported, the test modes are referred to Appendix D. 	

Mode	Non-Beamforming Power setting	Beamforming Power setting
802.11ax HEW20_Nss1,(MCS0)_4TX	-	-
5935MHz	-4	-9
5955MHz	13	10
6175MHz	12	11
6415MHz	10	9.5
6435MHz	10	9.5
6475MHz	10	8
6515MHz	10	8.5
6535MHz	10	7
6695MHz	10	8
6855MHz	11	10
6875MHz	11	9.5
6895MHz	11	10
6995MHz	10	9
7095MHz	10	8.5



7115MHz	-7	-14
802.11ax HEW40_Nss1,(MCS0)_4TX	-	-
5965MHz	15	13
6165MHz	15	14.5
6405MHz	13	12
6445MHz	12	12.5
6485MHz	13	12
6525MHz	12	11
6565MHz	12	11
6685MHz	13	12
6845MHz	14	14
6885MHz	15	14
6925MHz	13	14
7005MHz	13	11.5
7085MHz	13	11
802.11ax HEW80_Nss1,(MCS0)_4TX	-	-
5985MHz	18	15.5
6145MHz	19	17
6385MHz	16	14.5
6465MHz	15	14.5
6545MHz	15.5	14.5
6625MHz	18	14.5
6705MHz	16	14
6785MHz	16	16
6865MHz	17	16
6945MHz	17	16
7025MHz	16	16
802.11ax HEW160_Nss1,(MCS0)_4TX	-	-
6025MHz	19	20.5
6185MHz	22	21
6345MHz	20	20
6505MHz	20	18
6665MHz	19	19
6825MHz	19	20
6985MHz	18.5	18



Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE20	802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	002/001	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229/233
Straddle		-	-	-	185

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	003	099	123	195
M	Middle	043	-	147	211
H	High	091	107	179	227
Straddle		-	115	-	187


Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	007	103	135	199
M	Middle	039		151	-
H	High	087		167	215
Straddle		-	119	183	-

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE160	802.11ax HE160	802.11ax HE160	802.11ax HE160
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-


Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max EIRP power.

2.3 Connection Diagram of Test System

For Conducted Emission:

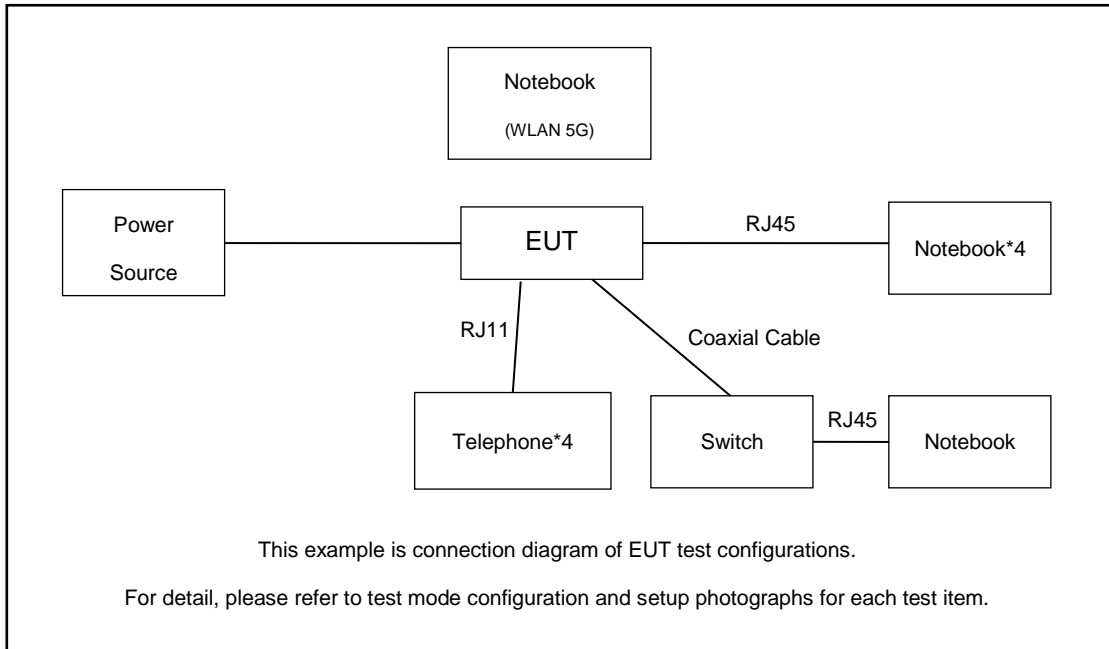

For Radiated Emission:

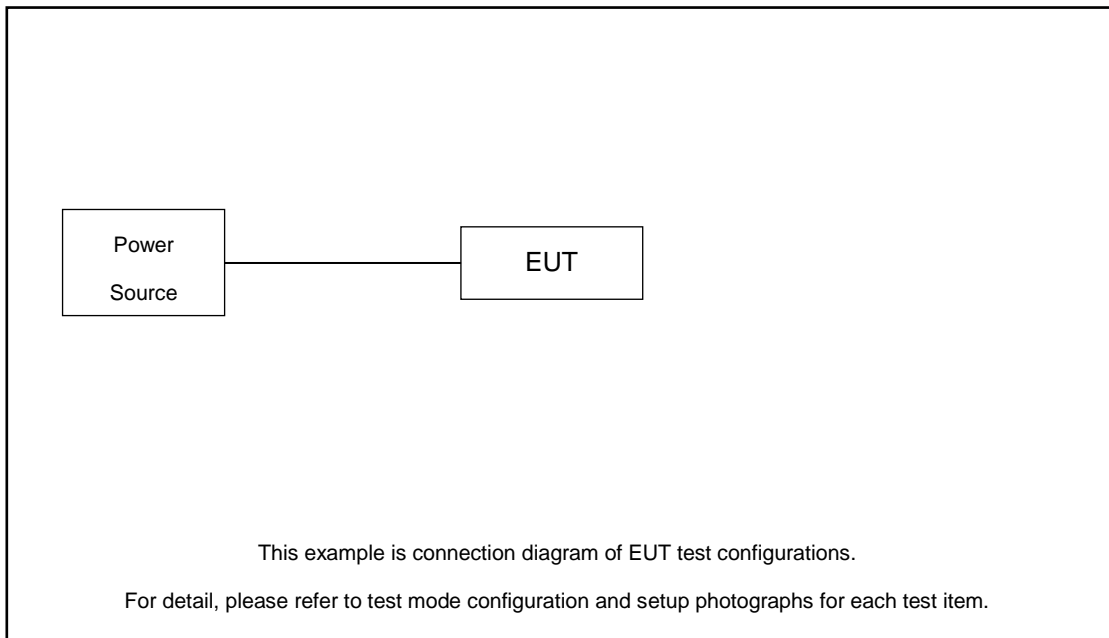



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook*4	Lenovo	G480	QDS-BRCM1050I	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
2.	Notebook	Acer	N20C5	N/A	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
3.	Telephone*4	bubugao	HCD007(6082)TSD	N/A	N/A	N/A
4.	Switch	CISCO	NPE-G2	N/A	N/A	N/A
5.	RJ45 Cable	N/A	N/A	N/A	N/A	N/A
6.	RJ11 Cable	N/A	N/A	N/A	N/A	N/A
7.	U disk	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT function) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC 14-30 CFR 15.407>

(a)(10) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

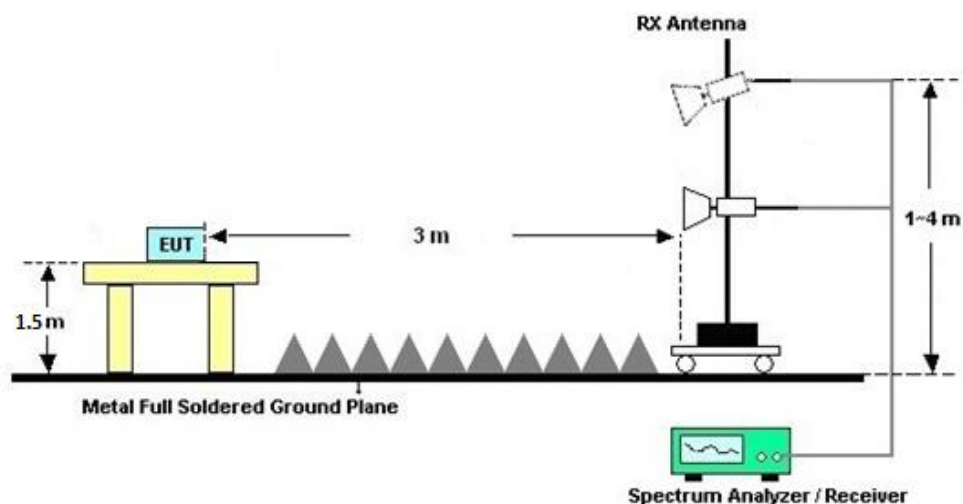

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.



3.2 Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(5) For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):

1. Measure the duty cycle, x , of the transmitter output signal as described in II.B.
2. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal
3. Set RBW = 1 MHz
4. Set VBW \geq 3 MHz
5. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto
7. Detector = power averaging (rms), if available. Otherwise, use sample detector mode
8. Allow the sweep to "free run."
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter
10. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times
11. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.

3.2.4 Test Setup

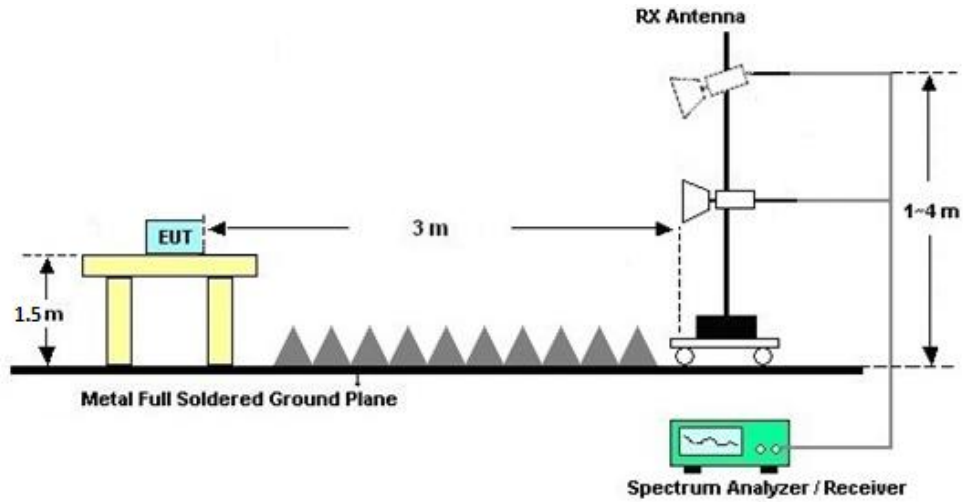

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix B.

Note:

$$\text{EIRP(dBm)} = \text{Final Level(dB}\mu\text{V/m)} - 95.2$$

$$\text{Final Level(dB}\mu\text{V/m)} = \text{Read Level(dB}\mu\text{V/m)} + \text{Path Loss(dB)} + \text{DT Factor}$$

$$\text{Path Loss(dB)} = \text{Antenna Factor(dB}\mu\text{V/m)} + \text{Cable Loss(dB)} - \text{Preamplifier Factor(dB)}$$



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(5) For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):

1. Measure the duty cycle, x , of the transmitter output signal as described in II.B.
2. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal
3. Set RBW = 1 MHz
4. Set VBW \geq 3 MHz
5. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto
7. Detector = power averaging (rms), if available. Otherwise, use sample detector mode
8. Allow the sweep to "free run."
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter
10. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times

The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.

3.3.4 Test Setup

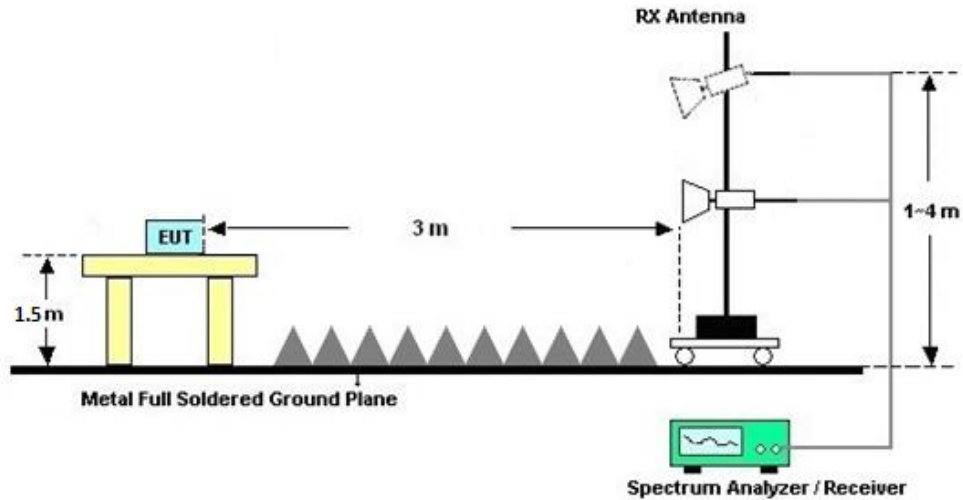

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix B.

Note :

$$\text{EIRP PSD(dBm/MHz)} = \text{Final Level(dB}\mu\text{V/m)} - 95.2$$

$$\text{Final Level(dB}\mu\text{V/m)} = \text{Read Level(dB}\mu\text{V/m)} + \text{Path Loss(dB)} + \text{DT Factor}$$

$$\text{Path Loss(dB)} = \text{Antenna Factor(dB}\mu\text{V/m)} + \text{Cable Loss(dB)} - \text{Preamp Factor(dB)}$$



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.

- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

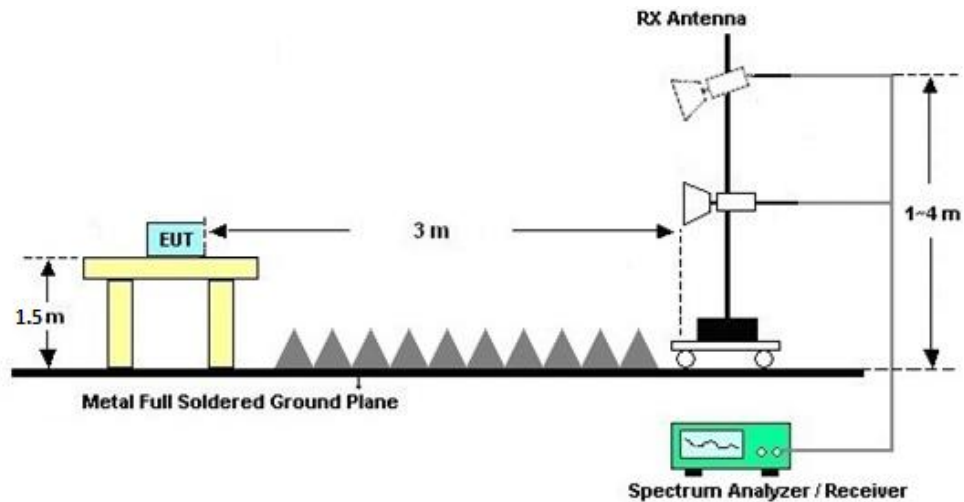

3.4.5 Test Result

Please refer to Appendix A.



3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

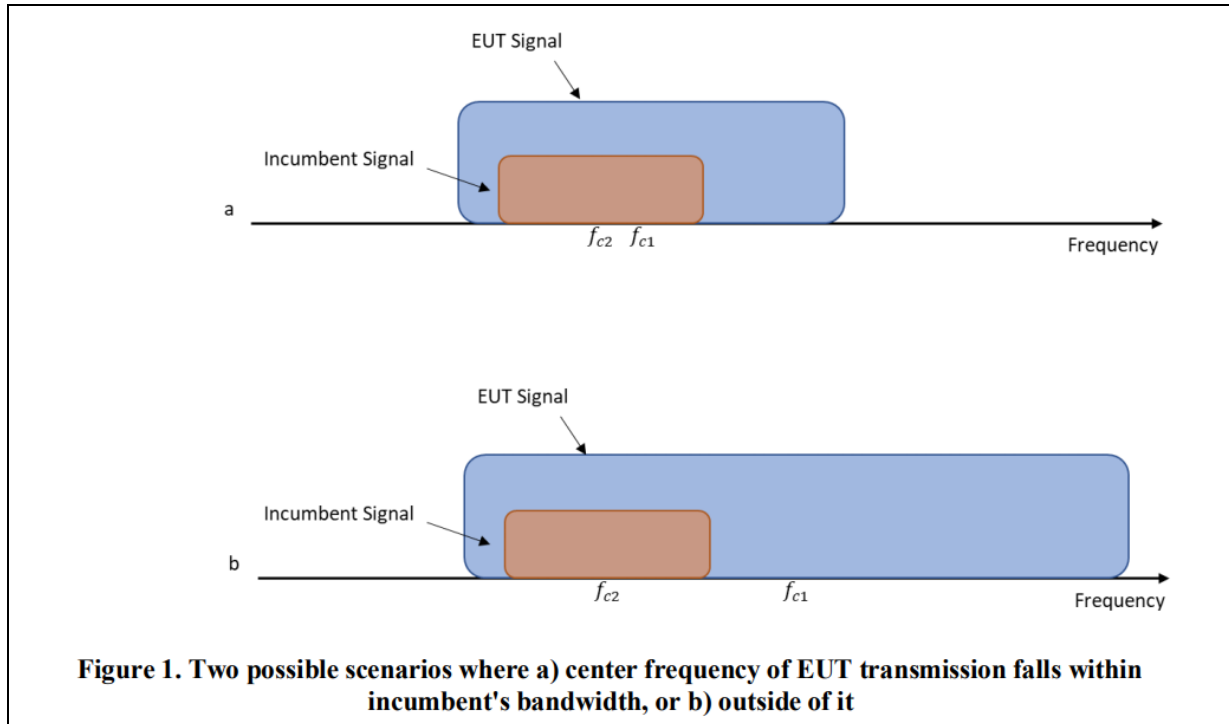

3.5.2 Measuring Instruments


See list of measuring equipment of this test report.

3.5.3 Test Procedures

Refer to KDB 987594 D02 v01r01.

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center frequency for the AWGN signal and repeat the process.

3.5.4 Test Setup

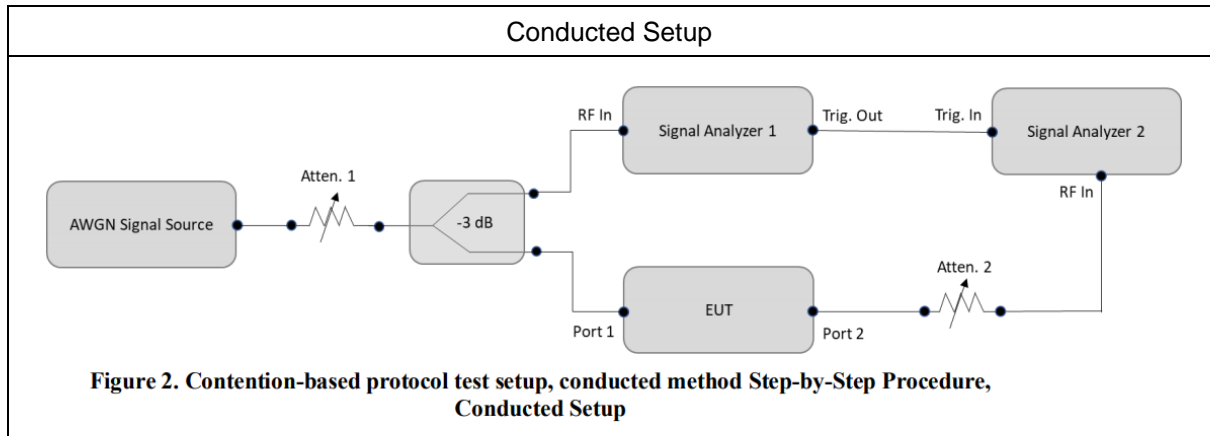

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
Signal Generator	Keysight	5172B/5172BX07	9KHz~7.2GHz
Spectrum Analyzer	Rohde & Schwarz	FSV30	9KHz~30GHz
Terminal (NB Server)	DELL	P78G	LAN



3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 5	6135	20	6135	-61.74	100	-62	-63.62	1.62		
				Result: Stop Transmission						
				-62.74	< 90	-62	-64.62	2.62		
				Result: Minimal Operation						
				-64.53	0	-62	-66.41	4.41		
				Result: Normal Operation						
	6185	160	6110	-61.46	100	-62	-63.34	1.34		
				Result: Stop Transmission						
				-62.46	< 90	-62	-64.34	2.34		
				Result: Minimal Operation						
				-63.88	0	-62	-65.76	3.76		
				Result: Normal Operation						
			6185	160	6185	-61.09	100	-62	-62.97	0.97
						Result: Stop Transmission				
						-62.09	< 90	-62	-63.97	1.97
						Result: Minimal Operation				
						-64.73	0	-62	-66.61	4.61
						Result: Normal Operation				
6260	160	6260	-62.92	100	-62	-64.8	2.8			
			Result: Stop Transmission							
			-63.92	< 90	-62	-65.8	3.8			
			Result: Minimal Operation							
-65.74	0	-62	-67.62	5.62						
Result: Normal Operation										

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 1, gain = 1.88 dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 6	6455	20	6455	-61.12	100	-62	-63	1		
				Result: Stop Transmission						
				-62.12	< 90	-62	-64	2		
				Result: Minimal Operation						
				-65.31	0	-62	-67.19	5.19		
				Result: Normal Operation						
	6505	160	6430	-62.73	100	-62	-64.61	2.61		
				Result: Stop Transmission						
				-63.73	< 90	-62	-65.61	3.61		
				Result: Minimal Operation						
				-65.06	0	-62	-66.94	4.94		
				Result: Normal Operation						
			6580	160	6505	-61.75	100	-62	-63.63	1.63
						Result: Stop Transmission				
						-62.75	< 90	-62	-64.63	2.63
						Result: Minimal Operation				
						-64.55	0	-62	-66.43	4.43
						Result: Normal Operation				
	6580	160	6580	-62.07	100	-62	-63.95	1.95		
				Result: Stop Transmission						
				-63.07	< 90	-62	-64.95	2.95		
				Result: Minimal Operation						
				-64.6	0	-62	-66.48	4.48		
				Result: Normal Operation						

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 1, gain = 1.88 dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)		
UNII Band 7	6695	20	6695	-61.08	100	-62	-62.96	0.96		
				Result: Stop Transmission						
				-62.08	< 90	-62	-63.96	1.96		
				Result: Minimal Operation						
				-64.75	0	-62	-66.63	4.63		
				Result: Normal Operation						
	6665	160	6590	-60.83	100	-62	-62.71	0.71		
				Result: Stop Transmission						
				-61.83	< 90	-62	-63.71	1.71		
				Result: Minimal Operation						
				-64.72	0	-62	-66.6	4.6		
				Result: Normal Operation						
			6740	160	6665	-62.06	100	-62	-63.94	1.94
						Result: Stop Transmission				
						-63.06	< 90	-62	-64.94	2.94
						Result: Minimal Operation				
						-64.83	0	-62	-66.71	4.71
						Result: Normal Operation				
	6740	160	6740	-60.69	100	-62	-62.57	0.57		
				Result: Stop Transmission						
				-61.69	< 90	-62	-63.57	1.57		
				Result: Minimal Operation						
				-63.97	0	-62	-65.85	3.85		
				Result: Normal Operation						

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 1, gain = 1.88 dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power




Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)			
UNII Band 8	7015	20	7015	-60.45 (worst)	100	-62	-62.33	0.33			
				Result: Stop Transmission							
				-61.45	< 90	-62	-63.33	1.33			
				Result: Minimal Operation							
				-62.93	0	-62	-64.81	2.81			
				Result: Normal Operation							
				6985	160	6910	-60.88	100	-62	-62.76	0.76
							Result: Stop Transmission				
							-61.88	< 90	-62	-63.76	1.76
	Result: Minimal Operation										
	-62.7	0	-62				-64.58	2.58			
	Result: Normal Operation										
	7060	160	7060				-61.41	100	-62	-63.29	1.29
							Result: Stop Transmission				
							-62.41	< 90	-62	-64.29	2.29
				Result: Minimal Operation							
				-64.09	0	-62	-65.97	3.97			
				Result: Normal Operation							
	7060	160	7060	-61.11	100	-62	-62.99	0.99			
				Result: Stop Transmission							
				-62.11	< 90	-62	-63.99	1.99			
	Result: Minimal Operation										
	-64.07	0	-62	-65.95	3.95						
	Result: Normal Operation										

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna 1, gain = 1.88 dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power

3.5.7 Worst Case Plots of Contention Based Protocol

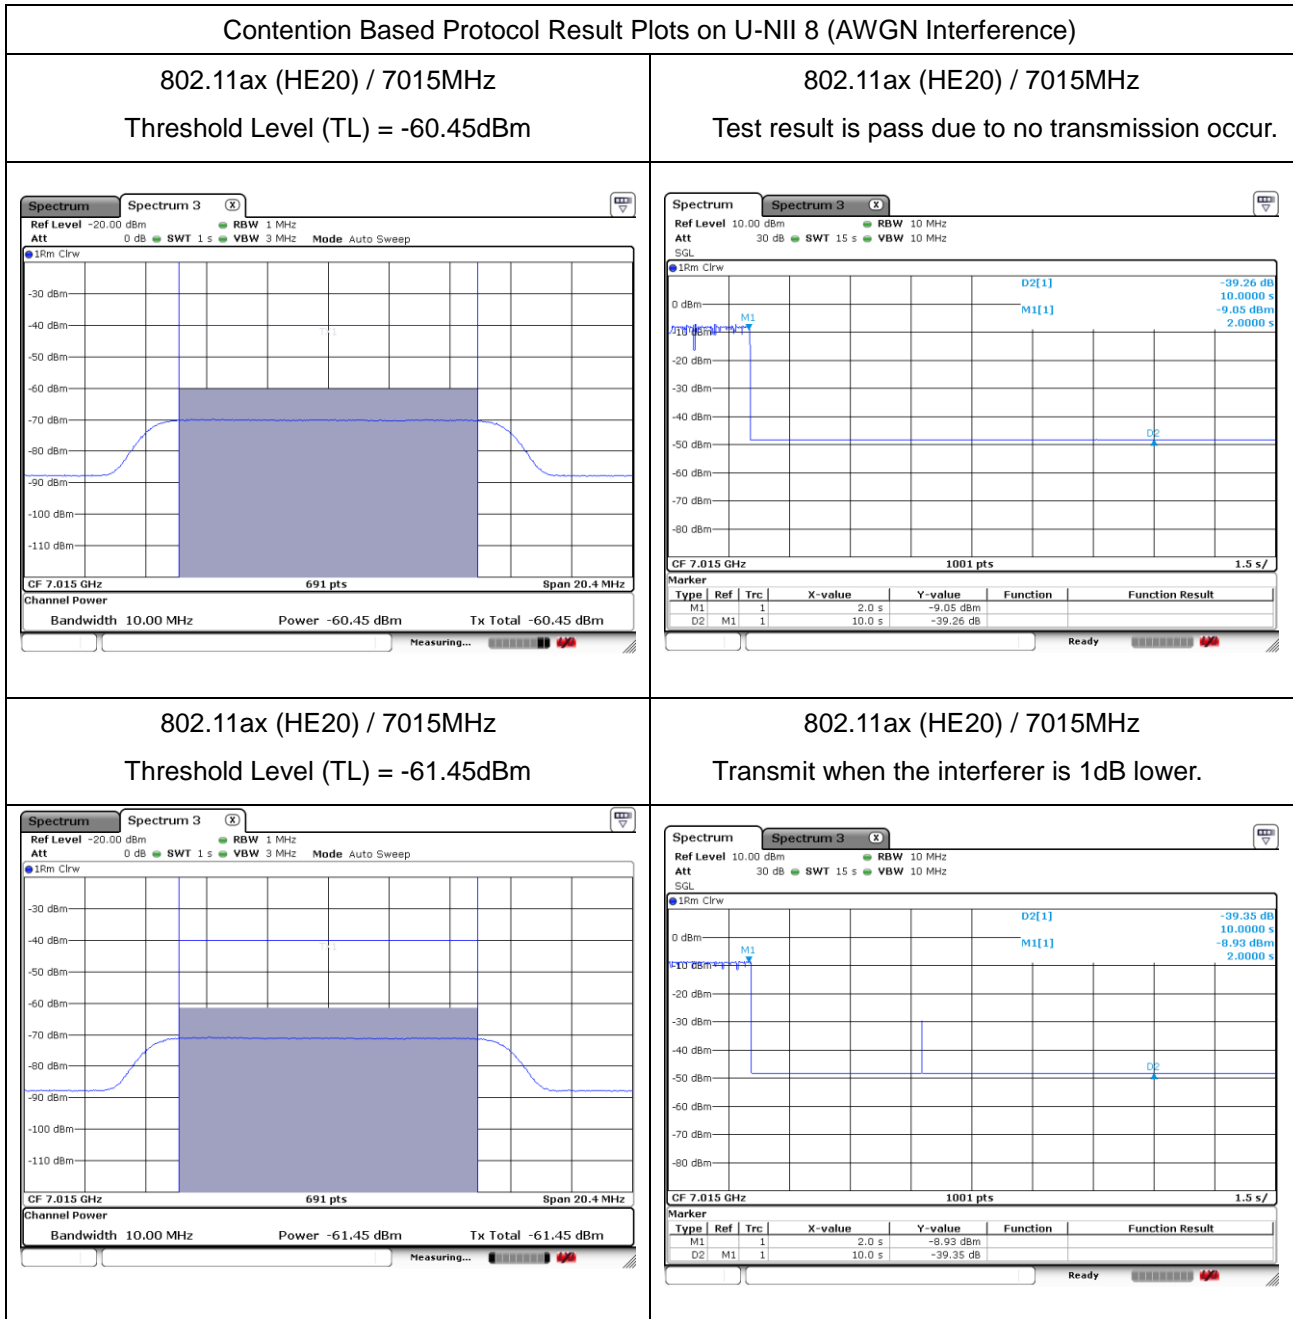

Remark: M1: Injection of AWGN signal, D2: Removal of AWGN signal



3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

According 987594 D02 U-NII 6GHz EMC Measurement v01r01 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

- 1. The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- 2. Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m(20 x log (standard distance/ test distance) = 20log(3/1) = 9.54dB.

EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.



3.6.2 Measuring Instruments


See list of measuring equipment of this test report.

3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - The duty factor has been compensated in the graph for TXBF mode.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

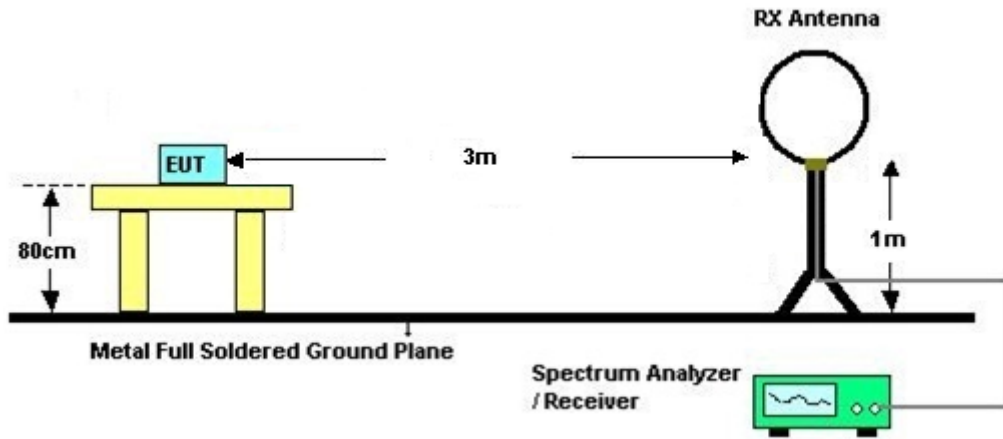


For radiated emissions from 30MHz to 1GHz

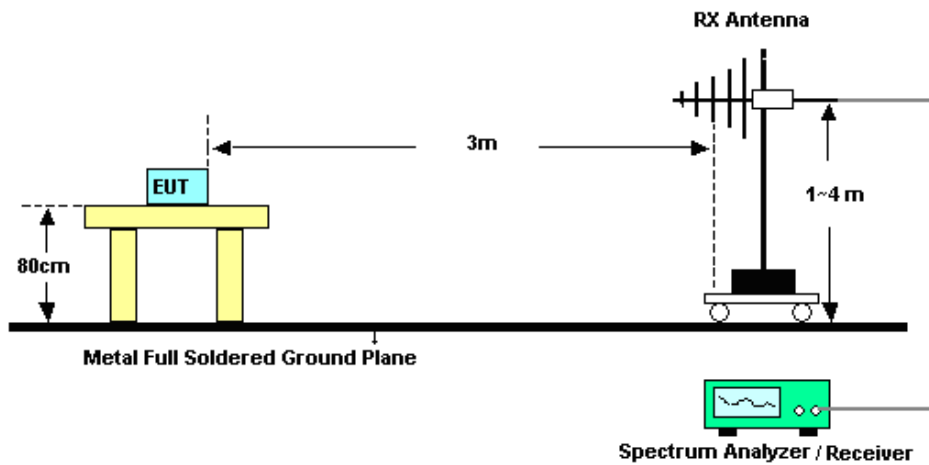

For radiated emissions 1GHz~18G

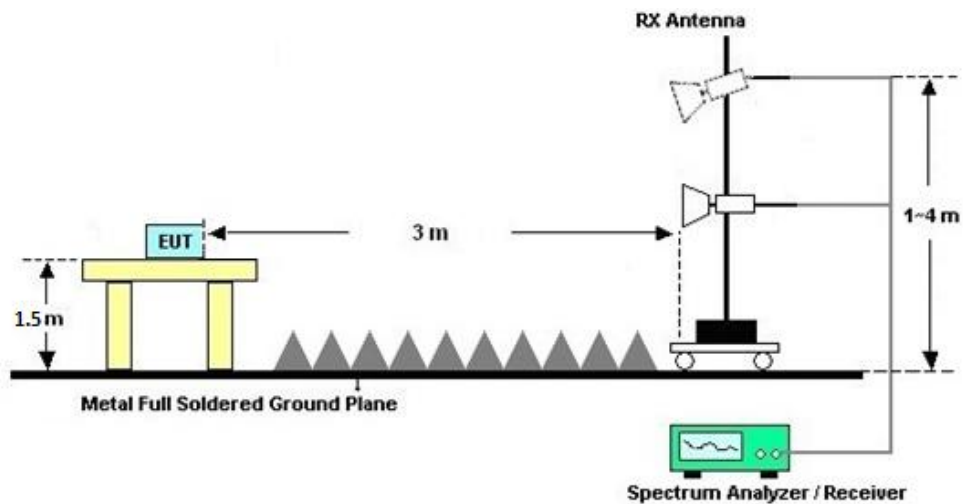

For radiated emissions above 18G

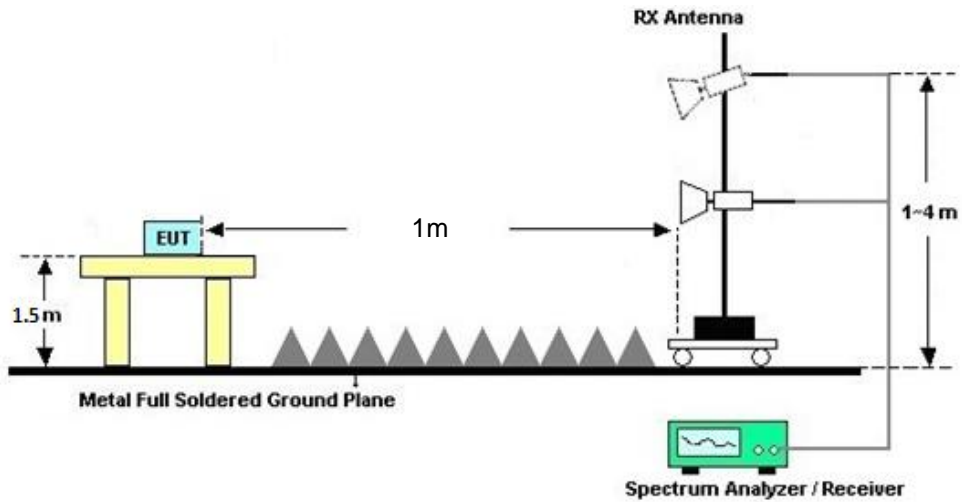

3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix D&E.

3.6.7 Duty Cycle

Please refer to Appendix F.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix D&E.



3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

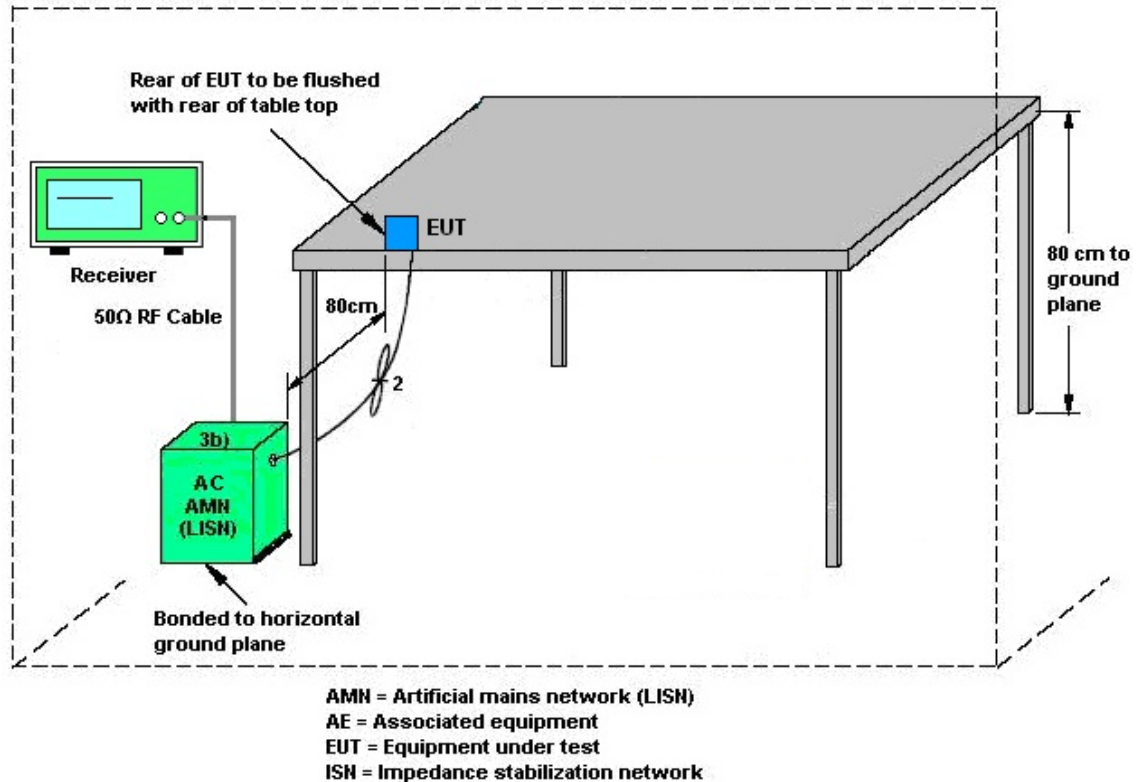

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix C.



3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

The following information was declared by manufacturer. Please refer to the antenna report for the Max/Min Antenna Gain.

Frequency Band	Maximum Antenna Gain (dBi)				Minimum Antenna Gain (dBi)			
	ANT1	ANT2	ANT3	ANT4	ANT1	ANT2	ANT3	ANT4
6GHz UNII-5	2.94	4.83	3.99	5.02	1.88	4.55	2.55	3.20
6GHz UNII-6	2.44	4.83	3.22	3.91	1.88	4.34	2.55	3.09
6GHz UNII-7	4.11	5.05	3.63	5.25	2.29	4.45	2.98	3.09
6GHz UNII-8	4.29	4.92	4.53	5.25	4.11	4.23	3.49	4.79

For Power/PSD testing, the radiated method is selected, including the antenna gain, and no need to calculate direction gain using formula according to KDB 662911 . Refer to the appendix for the test results.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Oct. 18, 2022~ Oct. 30, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Oct. 18, 2022~ Oct. 30, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Oct. 18, 2022~ Oct. 30, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Dec. 06, 2022~ Dec. 07, 2022	Oct. 12, 2023	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44GHz,MAX 30dB	Mar. 24, 2022	Dec. 06, 2022~ Dec. 07, 2022	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Dec. 06, 2022~ Dec. 07, 2022	Oct. 15, 2023	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 24, 2022	Dec. 06, 2022~ Dec. 07, 2022	May 23, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 18, 2022	Dec. 06, 2022~ Dec. 07, 2022	Apr. 17, 2023	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Dec. 06, 2022~ Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 11, 2022	Dec. 06, 2022~ Dec. 07, 2022	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Dec. 06, 2022~ Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Oct. 12, 2022	Dec. 06, 2022~ Dec. 07, 2022	Oct. 11, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 05, 2022	Dec. 06, 2022~ Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Dec. 06, 2022~ Dec. 07, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 06, 2022~ Dec. 07, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 06, 2022~ Dec. 07, 2022	NCR	Radiation (03CH05-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Dec. 06, 2022~ Dec. 07, 2022	Oct. 12, 2023	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY602421 26	10Hz~44GHz	Oct. 13, 2022	Dec. 06, 2022~ Dec. 07, 2022	Oct. 12, 2023	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Dec. 06, 2022~ Dec. 07, 2022	Oct. 15, 2023	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 24, 2022	Dec. 06, 2022~ Dec. 07, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 18, 2022	Dec. 06, 2022~ Dec. 07, 2022	Apr. 17, 2023	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Dec. 06, 2022~ Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 11, 2022	Dec. 06, 2022~ Dec. 07, 2022	Jul. 10, 2023	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Dec. 06, 2022~ Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz~18Ghz	Jan. 05, 2022	Dec. 06, 2022~ Dec. 07, 2022	Jan. 05, 2023	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY532703 19	500MHz~26.5GHz	Oct. 12, 2022	Dec. 06, 2022~ Dec. 07, 2022	Oct. 12, 2023	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Dec. 06, 2022~ Dec. 07, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 06, 2022~ Dec. 07, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 06, 2022~ Dec. 07, 2022	NCR	Radiation (03CH06-KS)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Nov. 23, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Nov. 23, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Nov. 23, 2022	Oct. 11, 2023	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 12, 2022	Dec. 17, 2022	Apr. 11, 2023	CBP (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY562004 17 /MY59360 210	9kHz~7.2GHz	May 24, 2022	Dec. 17, 2022	May 23, 2023	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 06, 2022	Dec. 17, 2022	Jan. 05, 2023	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Dec. 17, 2022	NCR	CBP (DFS01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78dB
---	--------

03CH05-KS

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

03CH06-KS

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH	
Test Date: 2022.10.18~2022.10.30	Test Engineer: Henry Li

<CDD 1S4T Mode>

Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11AX20MIMO	Total	5935	21.778	5924.16	5945.93	---	---
	Total	5955	21.279	5944.21	5965.49	---	---
	Total	6175	21.129	6164.46	6185.58	---	---
	Total	6415	21.429	6404.31	6425.73	---	---
	Total	6435	21.379	6424.16	6445.53	---	---
	Total	6475	21.379	6464.41	6485.78	---	---
	Total	6515	21.429	6504.36	6525.78	---	---
	Total	6535	20.979	6524.31	6545.29	---	---
	Total	6695	21.279	6684.46	6705.73	---	---
	Total	6855	21.329	6844.21	6865.53	---	---
	Total	6875	20.979	6864.61	6885.58	---	---
	Total	6895	21.329	6884.21	6905.53	---	---
	Total	6995	21.279	6984.31	7005.58	---	---
	Total	7095	21.279	7084.21	7105.49	---	---
Total	7115	21.279	7104.26	7125.53	---	---	
11AX40MIMO	Total	5965	40.01	5944.95	5984.96	---	---
	Total	6165	39.92	6145.04	6184.96	---	---
	Total	6405	39.83	6385.04	6424.87	---	---
	Total	6445	39.92	6425.04	6464.96	---	---
	Total	6485	39.92	6465.04	6504.96	---	---
	Total	6525	40.1	6504.95	6545.05	---	---
	Total	6565	40.01	6544.95	6584.96	---	---
	Total	6685	40.01	6664.95	6704.96	---	---
	Total	6845	40.37	6824.77	6865.14	---	---
	Total	6885	40.1	6864.77	6904.87	---	---
	Total	6925	40.28	6904.77	6945.05	---	---
	Total	7005	39.92	6985.04	7024.96	---	---
	Total	7085	39.92	7064.95	7104.87	---	---



11AX80MIMO	Total	5985	80.88	5944.56	6025.44	---	---
	Total	6145	80.88	6104.56	6185.44	---	---
	Total	6385	81.52	6344.24	6425.76	---	---
	Total	6465	81.68	6424.24	6505.92	---	---
	Total	6545	81.36	6504.08	6585.44	---	---
	Total	6625	81.36	6584.56	6665.92	---	---
	Total	6705	81.68	6664.08	6745.76	---	---
	Total	6785	81.52	6744.08	6825.6	---	---
	Total	6865	81.2	6824.4	6905.6	---	---
	Total	6945	81.2	6904.56	6985.76	---	---
11AX160MIMO	Total	7025	81.68	6984.08	7065.76	---	---
	Total	6025	164.64	5942.84	6107.48	---	---
	Total	6185	164.64	6102.84	6267.48	---	---
	Total	6345	164.64	6263.16	6427.8	---	---
	Total	6505	164.96	6422.2	6587.16	---	---
	Total	6665	164	6582.84	6746.84	---	---
	Total	6825	164.32	6742.84	6907.16	---	---
Total	6985	164.96	6902.52	7067.48	---	---	



Test Graphs

