

RF Exposure Report

Report No.: SA161129C10A

FCC ID: G95-DWA1230

Equipment Name: Wireless .11ac Smart Ultra Broadband Gateway

Trade Name: technicolor

Model Number: DWA1230

Product Code: DSLYBA123GP, DSLYBA123WA

Received Date: Nov. 29, 2016

Test Date: Feb. 10 ~ Mar. 24, 2017

Issued Date: Mar. 24, 2017

Applicant: Technicolor Connected Home USA LLC

Address: 5030 Sugarloaf Parkway Building Lawrenceville Georgia United States
30044

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record.....	3
1 Certificate of Conformity.....	4
2 RF Exposure.....	5
2.1 Limits for Maximum Permissible Exposure (MPE).....	5
2.2 MPE Calculation Formula	5
2.3 Classification	5
2.4 Antenna Gain	6
3 Calculation Result of Maximum Conducted Power.....	11

Release Control Record

Issue No.	Description	Date Issued
SA161129C10A	Original release.	Mar. 24, 2017

1 Certificate of Conformity

Equipment Name: Wireless .11ac Smart Ultra Broadband Gateway

Trade Name: technicolor

Test Model: DWA1230

Product Code: DSLYBA123GP, DSLYBA123WA

Sample Status: Product Unit

Applicant: Technicolor Connected Home USA LLC

Test Date: Feb. 10 ~ Mar. 24, 2017


Standards: FCC Part 2 (Section 2.1091)

KDB 447498 D01 General RF Exposure Guidance v06

IEEE C95.1

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

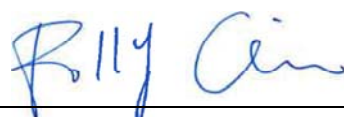

Date:

Mar. 24, 2017

Polly Chien / Specialist

Approved by :



Date:

Mar. 24, 2017

Ken Liu / Senior Manager

2 RF Exposure

2.1 Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
Limits For General Population / Uncontrolled Exposure				
300-1500	F/1500	30
1500-100,000	1.0	30

F = Frequency in MHz

2.2 MPE Calculation Formula

$$P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot r^2)$$

where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

2.3 Classification

The antenna of this product, under normal use condition, is at least 20cm away from the body of the user. So, this device is classified as **Mobile Device**.


2.4 Antenna Gain

For WLAN – 2.4GHz:

Ant.	Brand	Model Name	Antenna Type	Connector
1	WHAYU	C107-511315-A	PCB	I-Pex
2	WHAYU	C107-511314-A	PCB	I-Pex
3	WHAYU	C107-511316-A	PCB	I-Pex

Antenna & Bandwidth for 2400~2483.5MHz

Antenna	1st (TX)		2nd (TX)		3rd (TX)	
Bandwidth Mode	20 MHz	40 MHz	20 MHz	40 MHz	20 MHz	40 MHz
802.11b	V	X	X	X	X	X
802.11g	V	X	X	X	X	X
802.11n	V	V	V	V	V	V

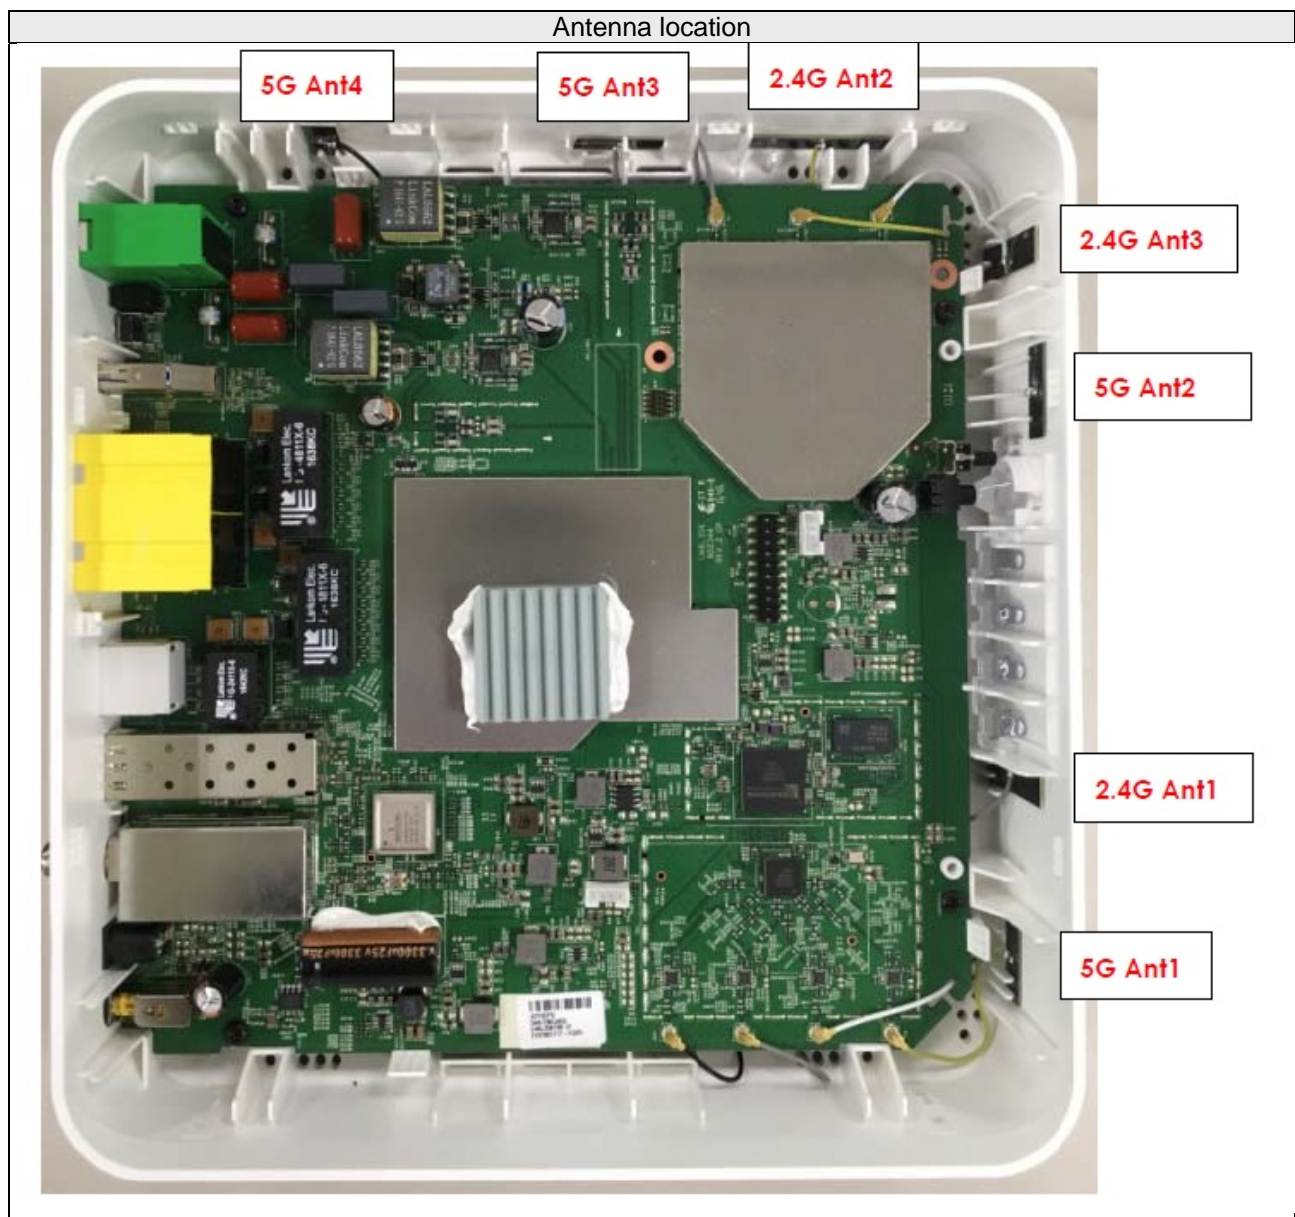

For 2400~2483.5MHz

Frequency	Antenna Gain (dBi)					
	Ant. 1 (WJ1)		Ant. 2 (WJ2)		Ant. 3 (WJ3)	
	20 MHz	40 MHz	20 MHz	40 MHz	20 MHz	40 MHz
2412MHz	2.11	-	2.81	-	3.37	-
2422MHz	-	2.08	-	2.94	-	3.30
2437MHz	2.23	2.23	2.73	2.73	3.16	3.16
2452MHz	-	2.58	-	3.12	-	3.29
2462MHz	2.93	-	3.30	-	2.98	-

Frequency	Maximum Gain (dBi) for SDM mode			
	SDM mode (2 Stream 2 TX) for Power & PSD Gain (KDB 662911 Option 2)		SDM mode (3 Stream 3 TX) for Power & PSD Gain (KDB 662911 Option 2)	
	20 MHz	40 MHz	20 MHz	40 MHz
2412MHz	1.88	-	1.86	-
2422MHz	-	1.86	-	1.74
2437MHz	1.39	1.39	1.38	1.38
2452MHz	-	1.41	-	1.65
2462MHz	1.79	-	1.90	-

Note:

1. Antenna Gain refer to "DWA1230 antenna table_V1.08.xlsx" files
2. Maximum Uncorrelated Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
3. Maximum Uncorrelated Directional Gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi


For WLAN – 5GHz:

Ant.	Brand	Model Name	Antenna Type	Connector
1	WHAYU	C107-511313-A	PCB	I-Pex
2	WHAYU	C107-511312-A	PCB	I-Pex
3	WHAYU	C107-511311-A	PCB	I-Pex
4	WHAYU	C107-511310-A	PCB	I-Pex

Antenna & Bandwidth

Antenna	1st (TX)			2nd (TX)			3rd (TX)			4th (TX)		
Bandwidth Mode	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz	20 MHz	40 MHz	80 MHz
802.11a	V	X	X	V	X	X	V	X	X	V	X	X
802.11n	V	V	X	V	V	X	V	V	X	V	V	X
802.11ac	V	V	V	V	V	V	V	V	V	V	V	V

Antenna location

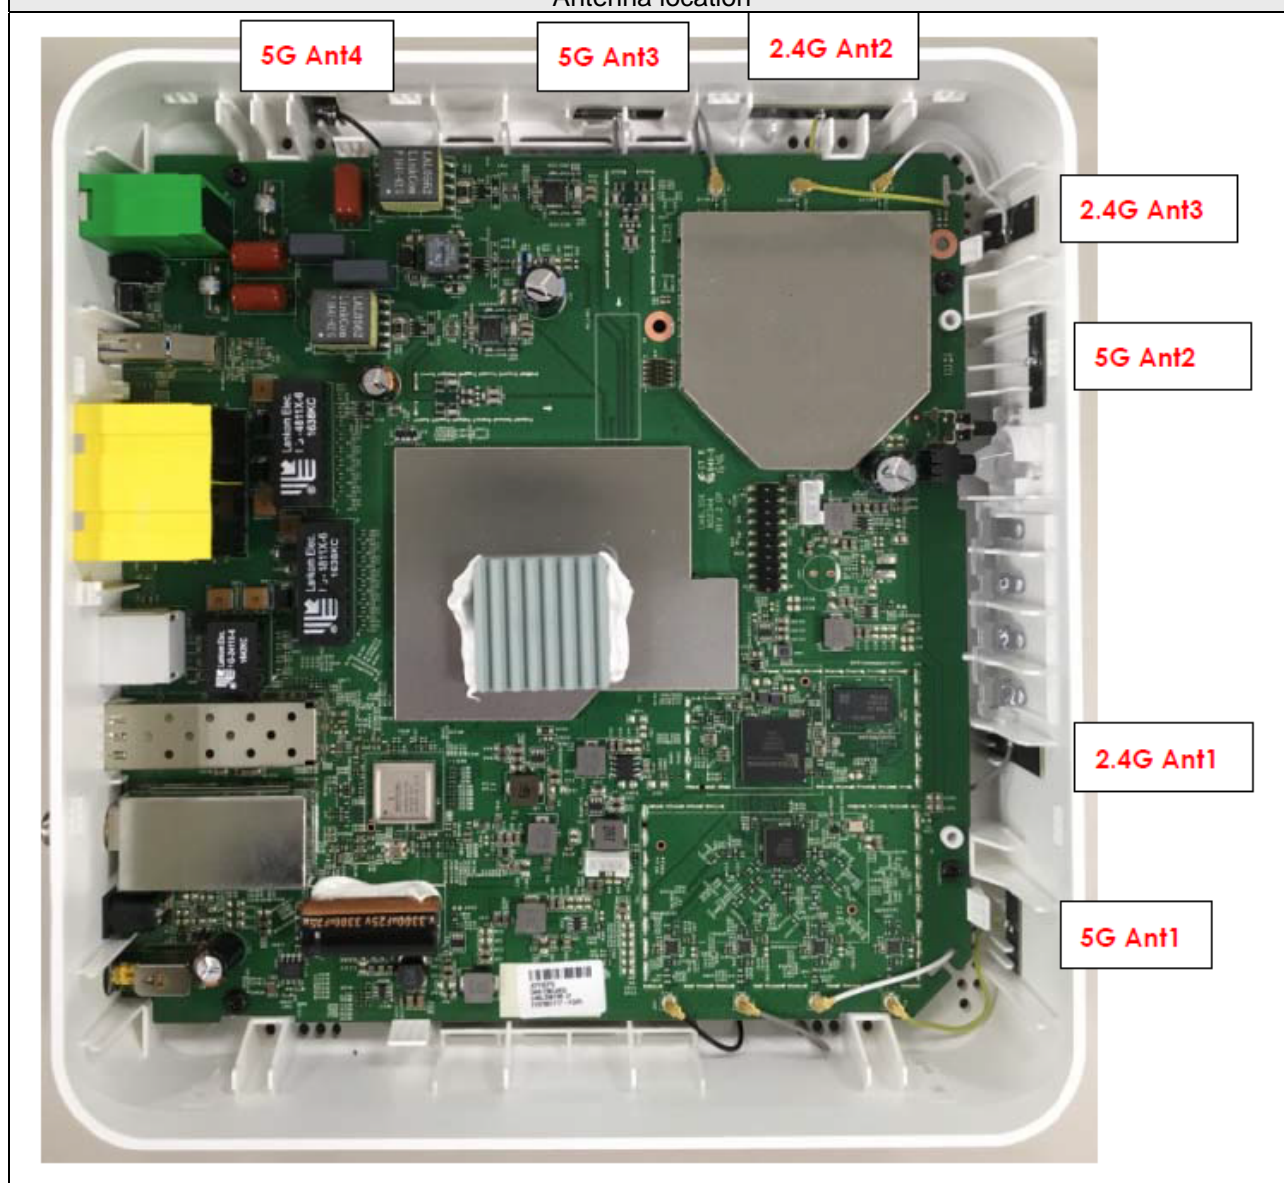

Frequency	Maximum Gain (dBi) for CDD mode					
	CDD mode (1 Stream 4 TX) for Power Gain			CDD mode (1 Stream 4 TX) for PSD Gain		
	20 MHz	40 MHz	80MHz	20 MHz	40 MHz	80MHz
5180MHz	3.27			6.89		
5190MHz		3.37			6.99	
5200MHz	3.34			6.94		
5210MHz			3.47			6.73
5230MHz		3.09			6.25	
5240MHz	3.07			6.38		
5260MHz	3.21			6.44		
5270MHz		4.14			6.61	
5290MHz			3.52			6.65
5300MHz	3.64			6.44		
5310MHz		3.94			6.48	
5320MHz	3.48			6.28		
5500MHz	2.98			6.13		
5510MHz		3.35			6.29	
5530MHz			3.71			6.71
5550MHz		3.43			6.33	
5580MHz	3.62			6.56		
5610MHz			3.50			6.13
5620MHz	4.02			6.63		
5630MHz		3.87			6.09	
5670MHz		3.37			6.06	
5690MHz			4.21			6.58
5700MHz	3.41			6.29		
5710MHz		3.85			6.18	
5720MHz	4.01			6.25		
5745MHz	4.02			6.31		
5755MHz		4.96			7.08	
5775MHz			4.34			6.49
5785MHz	3.64			5.92		
5795MHz		3.47			5.89	
5825MHz	3.90			6.22		

Note:

1. Antenna Gain refer to "DWA1230 antenna table_V1.08.xlsx" files
2. Maximum Correlated Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] \text{ dBi}$
3. Maximum Uncorrelated Directional Gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}] \text{ dBi}$

Frequency	Maximum Gain (dBi) for TXBF mode					
	TXBF mode (1 Stream 4 TX) for Power Gain			TXBF mode (1 Stream 4 TX) for PSD Gain		
	20 MHz	40 MHz	80MHz	20 MHz	40 MHz	80MHz
5180MHz	6.89			6.89		
5190MHz		6.99			6.99	
5200MHz	6.94			6.94		
5210MHz			6.73			6.73
5230MHz		6.25			6.25	
5240MHz	6.38			6.38		
5260MHz	6.44			6.44		
5270MHz		6.61			6.61	
5290MHz			6.65			6.65
5300MHz	6.44			6.44		
5310MHz		6.48			6.48	
5320MHz	6.28			6.28		
5500MHz	6.13			6.13		
5510MHz		6.29			6.29	
5530MHz			6.71			6.71
5550MHz		6.33			6.33	
5580MHz	6.56			6.56		
5610MHz			6.13			6.13
5620MHz	6.63			6.63		
5630MHz		6.09			6.09	
5670MHz		6.06			6.06	
5690MHz			6.58			6.58
5700MHz	6.29			6.29		
5710MHz		6.18			6.18	
5720MHz	6.25			6.25		
5745MHz	6.31			6.31		
5755MHz		7.08			7.08	
5775MHz			6.49			6.49
5785MHz	5.92			5.92		
5795MHz		5.89			5.89	
5825MHz	6.22			6.22		

Note:

1. Antenna Gain refer to "DWA1230 antenna table_V1.08.xlsx" files
2. Maximum Correlated Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
3. Maximum Uncorrelated Directional Gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N_{ANT}]$ dBi

3 Calculation Result of Maximum Conducted Power

For WLAN – 2.4GHz: 11n 40 MHz MCS16, 3S3T SDM, Ant. 1+2+3

Frequency (MHz)	Max Conducted Power (mW)	Directional Gain (dBi)	Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)
2437	548.277	1.38	20	0.14987	1

Note:

1. $P_{out} \cdot G = \text{EIRP Power} = \text{Max Conducted Power (mW)} \cdot \text{Gain (numeric)}$
2. $\text{Gain (dBi)} \text{ to } \text{Gain (numeric)} = 10^{(1.38/10)} = 1.3740$
3. Distance (cm) = r = declare by manufacture = 20 cm
4. $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot r^2) = (548.277 \cdot 1.3740) / (4 \cdot 3.1416 \cdot 20^2) = 0.14987 \text{ (mW/cm}^2\text{)}$

For WLAN – 5GHz_ U-NII-1: 11ac 20MHz MCS0, 1S4T TxBF, Ant. 1+2+3+4

Frequency (MHz)	Max Conducted Power (mW)	Directional Gain (dBi)	Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)
5180	466.659	6.89	20	0.45366	1

Note:

1. $P_{out} \cdot G = \text{EIRP Power} = \text{Max Conducted Power (mW)} \cdot \text{Gain (numeric)}$
2. $\text{Gain (dBi)} \text{ to } \text{Gain (numeric)} = 10^{(6.89/10)} = 4.8865$
3. Distance (cm) = r = declare by manufacture = 20 cm
4. $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot r^2) = (466.659 \cdot 4.8865) / (4 \cdot 3.1416 \cdot 20^2) = 0.45366 \text{ (mW/cm}^2\text{)}$

For WLAN – 5GHz_ U-NII-2A: 11ac 40MHz MCS0, 1S4T CDD, Ant. 1+2+3+4

Frequency (MHz)	Max Conducted Power (mW)	Directional Gain (dBi)	Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)
5270	242.661	6.61	20	0.221171	1

Note:

1. $P_{out} \cdot G = \text{EIRP Power} = \text{Max Conducted Power (mW)} \cdot \text{Gain (numeric)}$
2. $\text{Gain (dBi)} \text{ to } \text{Gain (numeric)} = 10^{(6.61/10)} = 4.5814$
3. Distance (cm) = r = declare by manufacture = 20 cm
4. $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot r^2) = (242.661 \cdot 4.5814) / (4 \cdot 3.1416 \cdot 20^2) = 0.221171 \text{ (mW/cm}^2\text{)}$

For WLAN – 5GHz_ U-NII-2C: 11ac (40MHz) 1S4T CDD, Ant. 1+2+3+4

Frequency (MHz)	Max Conducted Power (mW)	Directional Gain (dBi)	Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)
5670	248.886	6.06	20	0.199861	1

Note:

1. $P_{out} \cdot G = \text{EIRP Power} = \text{Max Conducted Power (mW)} \cdot \text{Gain (numeric)}$
2. $\text{Gain (dBi)} \text{ to } \text{Gain (numeric)} = 10^{(6.06/10)} = 4.03345$
3. Distance (cm) = r = declare by manufacture = 20 cm
4. $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot r^2) = (248.886 \cdot 4.03345) / (4 \cdot 3.1416 \cdot 20^2) = 0.199861 \text{ (mW/cm}^2\text{)}$

For WLAN – 5GHz U-NII-3: 11ac 40MHz MCS0, 1S4T TxBF, Ant. 1+2+3+4

Frequency (MHz)	Max Conducted Power (mW)	Directional Gain (dBi)	Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)
5755	468.813	7.08	20	0.47613	1

Note:

1. $P_{out} * G = \text{EIRP Power} = \text{Max Conducted Power (mW)} * \text{Gain (numeric)}$
2. $\text{Gain (dBi) to Gain (numeric)} = 10^{(7.08/10)} = 5.1051$
3. $\text{Distance (cm)} = r = \text{declare by manufacture} = 20 \text{ cm}$
4. $P_d = (P_{out} * G) / (4 * \pi * r^2) = (468.813 * 5.1051) / (4 * 3.1416 * 20^2) = 0.47613 \text{ (mW/cm}^2\text{)}$

Conclusion:

The formula of calculated the MPE is:

$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$

CPD = Calculation power density

LPD = Limit of power density

$\text{WLAN 2.4GHz} + \text{WLAN 5GHz} = 0.14987 / 1 + 0.47613 / 1 = 0.62600$

Therefore all the maximum calculations of above situations are less than the “1” limit.

--- END ---