



FCC RF Test Report

APPLICANT : Technicolor Connected Home USA LLC
EQUIPMENT : Wireless router
BRAND NAME : Technicolor
MODEL NAME : OWA0111TCH1, OWA0111TCH2, OWA0111XXXXX
(where X can be alphanumeric, -, or blank)
FCC ID : G95OWA0111
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Nov. 22, 2022 ~ Jan. 09, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Specification of Accessory 7

 1.5 Product Specification of Equipment Under Test 5

 1.6 Modification of EUT 7

 1.7 Testing Location 8

 1.8 Test Software 8

 1.9 Applicable Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System 12

 2.4 Support Unit used in test configuration and system 13

 2.5 EUT Operation Test Setup 13

 2.6 Measurement Results Explanation Example 13

3 TEST RESULT 14

 3.1 26dB & 99% Occupied Bandwidth Measurement 14

 3.2 Maximum Conducted Output Power Measurement 16

 3.3 Power Spectral Density Measurement 19

 3.4 Unwanted Emissions Measurement 23

 3.5 AC Conducted Emission Measurement 29

 3.6 Antenna Requirements 31

4 LIST OF MEASURING EQUIPMENT 33

5 UNCERTAINTY OF EVALUATION 34

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS

APPENDIX F. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2N0411B	Rev. 01	Initial issue of report	Jan. 12, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Report only	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm for UNII-1, and 24 dBm for UNII-2A/2C	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 17 dBm/MHz for UNII-1, and 11 dBm/MHz for UNII-2A/2C	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 0.43 dB at 5725.480 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 16.48 dB at 0.469 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Technicolor Connected Home USA LLC
4855 Peachtree Industrial Blvd. Suite 200 Norcross, Georgia 30092

1.2 Manufacturer

Cal-Comp Electronics (Thailand) Public Co.,Ltd
138 MOO 4 Petchkasem Road, Sapang,Khaoyoi,Petchburi 76140, THAILAND

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless router
Brand Name	Technicolor
Model Name	OWA0111TCH1, OWA0111TCH2, OWA0111XXXXX (where X can be alphanumeric, -, or blank)
FCC ID	G95OWA0111
HW Version	FGR
SW Version	17.10.188.6401 (r808804)
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<p><MIMO Ant.1+2> <5180 MHz ~ 5240 MHz> 802.11a : 29.20 dBm / 0.8318 W 802.11n HT20 : 29.00 dBm / 0.7943 W 802.11n HT40 : 27.42 dBm / 0.5521 W 802.11ac VHT20: 29.11 dBm / 0.8147 W 802.11ac VHT40: 27.45 dBm / 0.5559 W 802.11ac VHT80 : 21.96 dBm / 0.1570 W 802.11ax HE20: 29.19 dBm / 0.8299 W 802.11ax HE40: 27.47 dBm / 0.5585 W 802.11ax HE80: 22.03 dBm / 0.1596 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 22.85 dBm / 0.1928 W 802.11n HT20 : 23.24 dBm / 0.2109 W 802.11n HT40 : 23.52 dBm / 0.2249 W 802.11ac VHT20: 23.37 dBm / 0.2173 W</p>



	<p>802.11ac VHT40: 23.55 dBm / 0.2265 W 802.11ac VHT80 : 23.75 dBm / 0.2371 W 802.11ac VHT160 : 19.24 dBm / 0.0839 W 802.11ax HE20: 23.43 dBm / 0.2203 W 802.11ax HE40: 23.56 dBm / 0.2270 W 802.11ax HE80: 23.83 dBm / 0.2415 W 802.11ax HE160: 19.37 dBm / 0.0865 W <5500 MHz ~ 5720 MHz > 802.11a : 22.62 dBm / 0.1828 W 802.11n HT20 : 22.89 dBm / 0.1945 W 802.11n HT40 : 23.79 dBm / 0.2404 W 802.11ac VHT20: 23.04 dBm / 0.2014 W 802.11ac VHT40: 23.85 dBm / 0.2427 W 802.11ac VHT80 : 23.65 dBm / 0.2317 W 802.11ax HE20: 23.10 dBm / 0.2042 W 802.11ax HE40: 23.87 dBm / 0.2438 W 802.11ax HE80: 23.73 dBm / 0.2360 W <5745 MHz ~ 5825 MHz> 802.11a : 29.27 dBm / 0.8453 W 802.11n HT20 : 29.22 dBm / 0.8356 W 802.11n HT40 : 29.37 dBm / 0.8650 W 802.11ac VHT20: 29.35 dBm / 0.8610 W 802.11ac VHT40: 29.43 dBm / 0.8770 W 802.11ac VHT80: 29.16 dBm / 0.8241 W 802.11ax HE20: 29.40 dBm / 0.8710 W 802.11ax HE40: 29.52 dBm / 0.8954 W 802.11ax HE80: 29.23 dBm / 0.8375 W</p>
<p>99% Occupied Bandwidth</p>	<p><MIMO Ant.1+2> <5180 MHz ~ 5240 MHz> 802.11a : 18.901 MHz 802.11ax HE20: 19.66 MHz 802.11ax HE40: 38.042 MHz 802.11ax HE80: 77.522 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.942 MHz 802.11ax HE20: 19.381 MHz 802.11ax HE40: 37.882 MHz 802.11ax HE80: 77.522 MHz 802.11ax HE160: 157.283 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.982 MHz 802.11ax HE20: 19.421 MHz 802.11ax HE40: 37.882 MHz 802.11ax HE80: 77.522 MHz <5745 MHz ~ 5825 MHz> 802.11a : 25.055 MHz 802.11ax HE20: 24.535 MHz 802.11ax HE40: 52.827 MHz 802.11ax HE80: 84.236 MHz</p>
<p>Antenna Type</p>	<p>Offboard pcb antenna with coaxial RF cable</p>
<p>Type of Modulation</p>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)</p>



Antenna Function Description		Ant. 1	Ant. 2
	802.11 a/n/ac/ax SISO	V	V
	802.11 a/n/ac/ax CDD 1S2T	V	V
	802.11 n/ac/ax Tx Beamforming 1S2T	V	V

Note:

1. The manufacturer declares that the device does not support TDWR (5600 MHz ~ 5650 MHz).
2. For 802.11n HT20 / ac VHT20 / ax HE20 and 802.11n HT40 / ac VHT40 / ax HE40mode and 802.11 ac VHT80 / ax HE80 mode and 802.11 ac VHT160 / ax HE160, the whole testing have assessed only 802.11 ax HE20/HE40/HE80/HE160 by referring to their maximum conducted power.
3. The device does not support partial RU tone and channel puncturing function for 802.11ax mode.
4. The device supports 1S2T(CDD&TXBF) mode; 1S2T: NSS=1, MIMO 2Tx.
5. Please refer to the antenna report for the maximum Single antenna gain and CDD (Cyclic Delay Diversity) directional gain and TXBF (Tx Beamforming) directional gain.

Frequency Band	Max Single Antenna gain (dBi)		CDD DG (dBi)		TXBF DG (dBi)	
	ANT1	ANT2	For Power	For PSD	For Power	For PSD
5GHz UNII-1	5.25	3.85	5.25	6.39	6.39	6.39
5GHz UNII-2A	5.30	3.69	5.30	6.39	6.39	6.39
5GHz UNII-2C	5.79	4.21	5.79	6.41	6.41	6.41
5GHz UNII-3	5.81	4.21	5.81	6.47	6.47	6.47

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Honor	Model Name	ADS-12HG-12 12012EPCU
AC Adapter 2	Brand Name	Masspower	Model Name	E012-1O120100VU



1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	50 ²	5250
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142 [*]	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80 and 802.11ax HE80.
3. The above Frequency and Channel in "2n" were 802.11ac VHT160 and 802.11ax HE160.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode (CDD 1S2T)

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

TXBF Mode (1S2T)

Modulation	Data Rate
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Co-location

WLAN 5G 802.11ax HE20 CH140 Tx + WLAN 2.4G 802.11g CH10 Tx

Test Cases

AC Conducted Emission	Test Cases
	Mode 1 : WLAN Link(5G) + Power From Adapter 1
Remark: For Radiated Test Cases, The tests were performance with Adapter 1	



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11a	802.11a	802.11a	802.11a
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ax HE20	802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-
Straddle		-	-	138	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		802.11ax HE160	802.11ax HE160	802.11ax HE160	802.11ax HE160
M	Middle	50		-	-

2.3 Connection Diagram of Test System

For Conducted Emission:

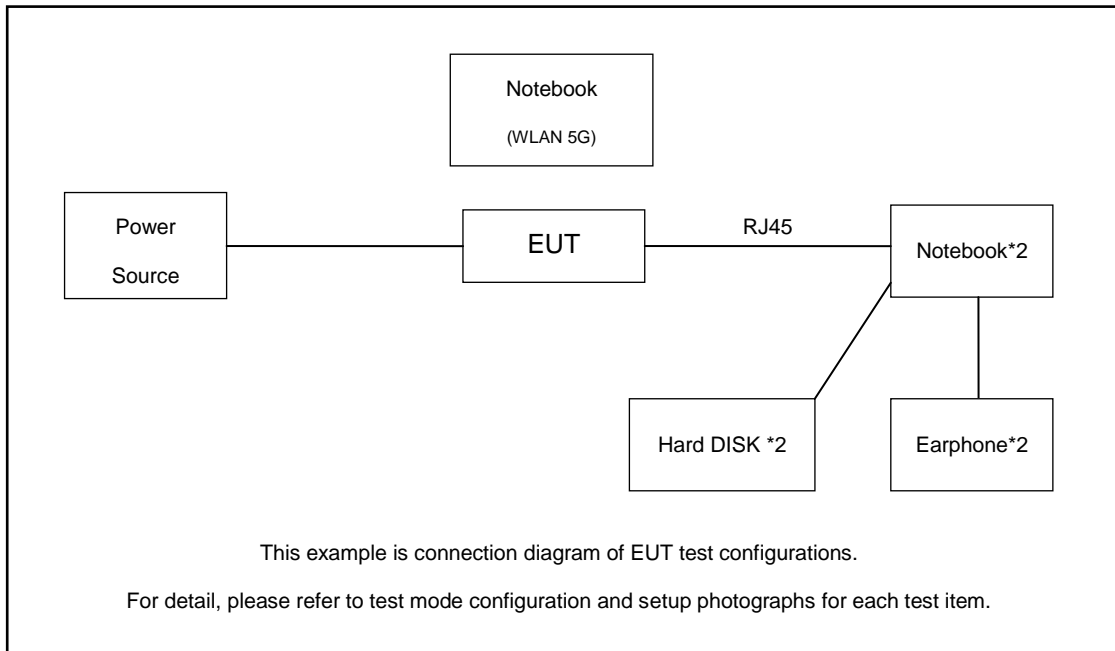

For Radiated Emission:

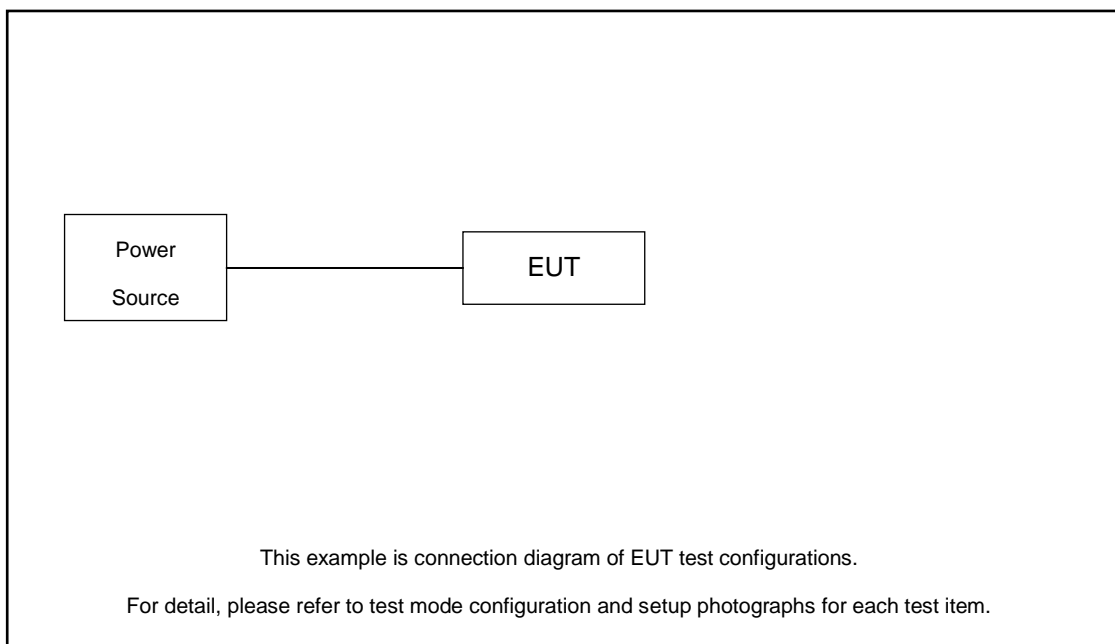

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
2.	Notebook	Lenovo	V130-14IKB004	N/A	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
3.	Earphone	Lenovo	P121	N/A	N/A	Unshielded, 1.2m
4.	Hard Disk	WD	C6B	N/A	N/A	N/A
5.	RJ45 Cable	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.71 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.71 + 10 = 16.71 \text{ (dB)} \end{aligned}$$



3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> 1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. 7. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> 1. Set RBW = 100kHz. 2. Set the VBW ≥ 3 x RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

<TXBF Modes>



The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 for TXBF modes.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

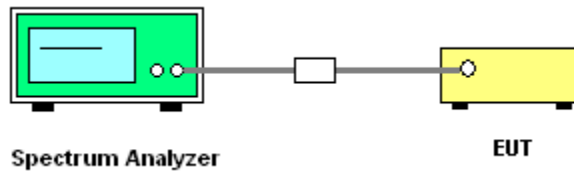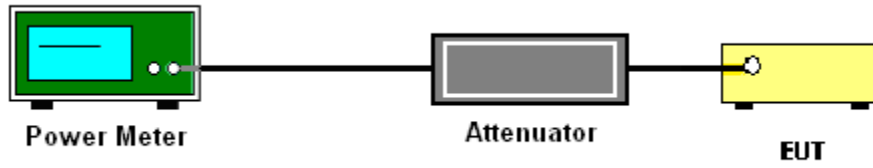

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

<TXBF Modes>

Method SA-3

(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time \leq (number of points in sweep) \times T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- Detector = power averaging (rms).
- Trace mode = max hold.
- Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.



For devices operating in the band 5.725 - 5.85 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

<TXBF Modes>

Method SA-3

(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time \leq (number of points in sweep) \times T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- Detector = power averaging (rms).
- Trace mode = max hold.
- Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add $10 \log(N_{ANT})$ dB, where N_{ANT} is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit.

3.3.4 Test Setup

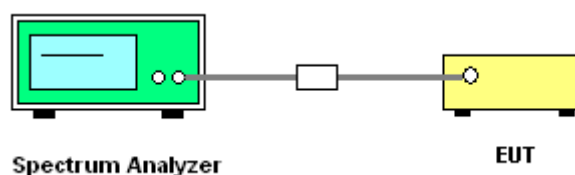

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) -104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

For average measurement (for CDD & SISO):

- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

For average measurement (for TXBF):

- RBW = 1 MHz
- VBW = 3 MHz
- The correction factor shall be offset is 10 log (1/x), where x is the duty cycle;
- Correction factors are compensated in the data.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the

maximum reading.

6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


3.4.4 Test Setup

For radiated emissions below 30MHz

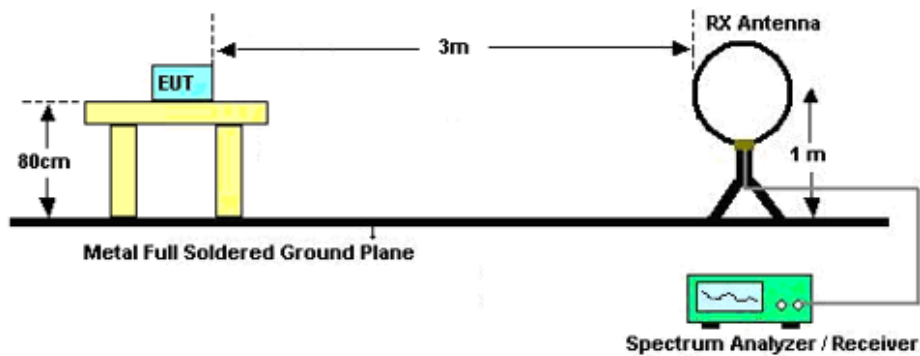


For radiated emissions from 30MHz to 1GHz

<CDD Mode>

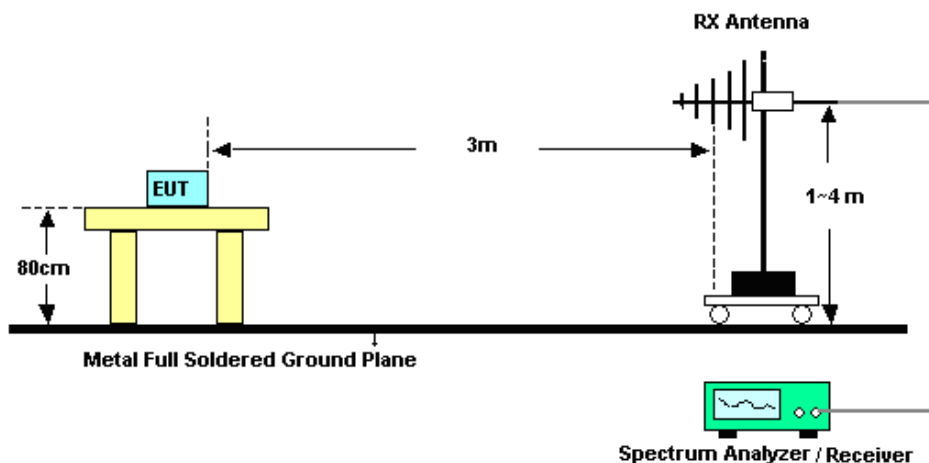


<TXBF Modes>

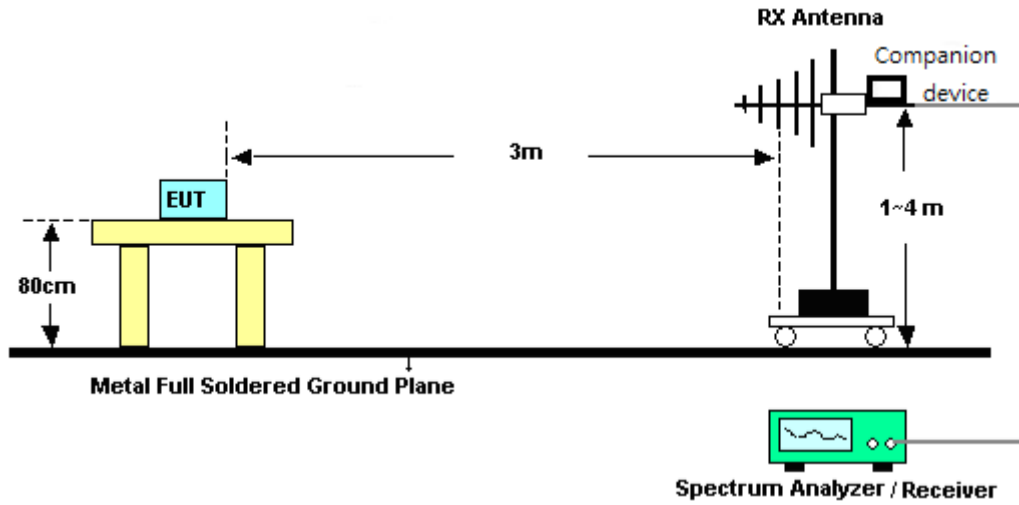


For radiated emissions above 1GHz

<CDD Mode>

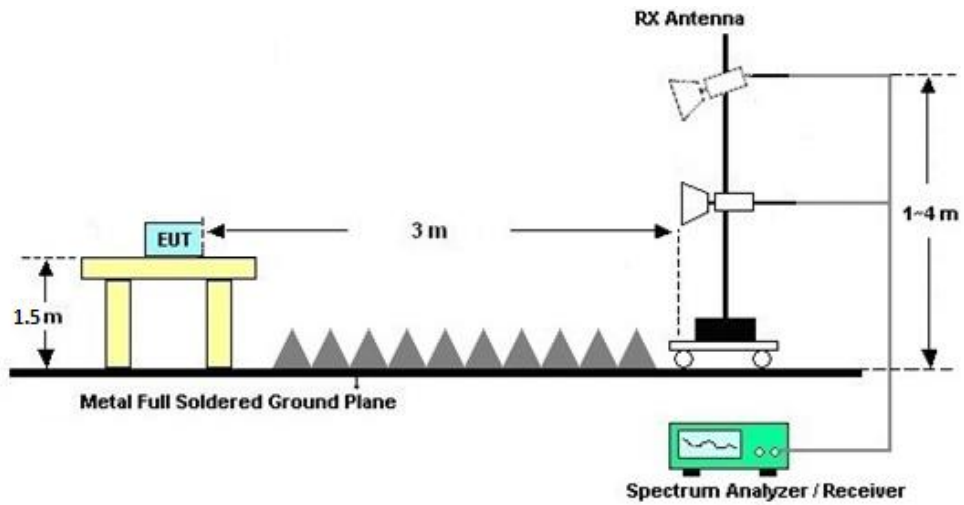

<TXBF Modes>

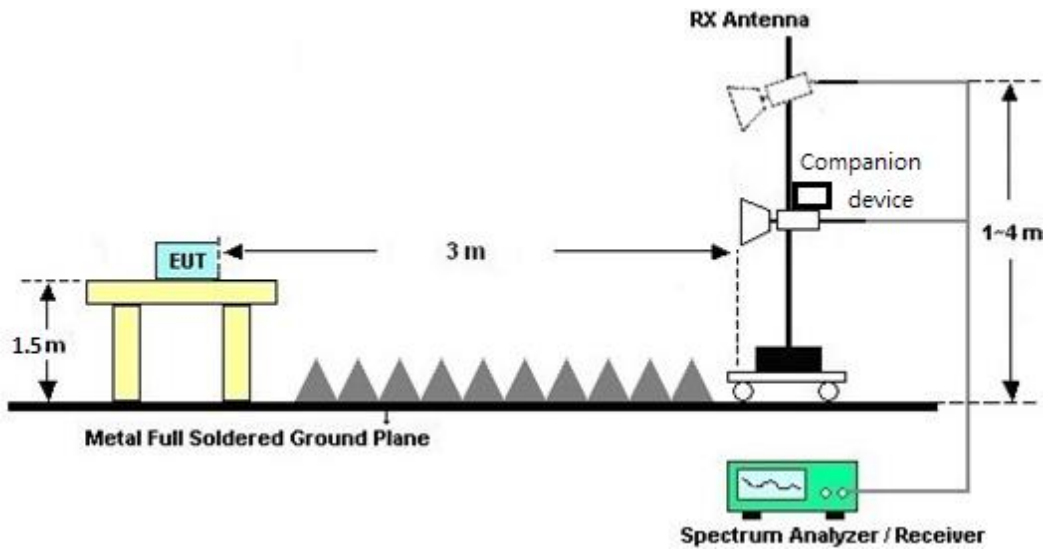

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C&D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C&D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

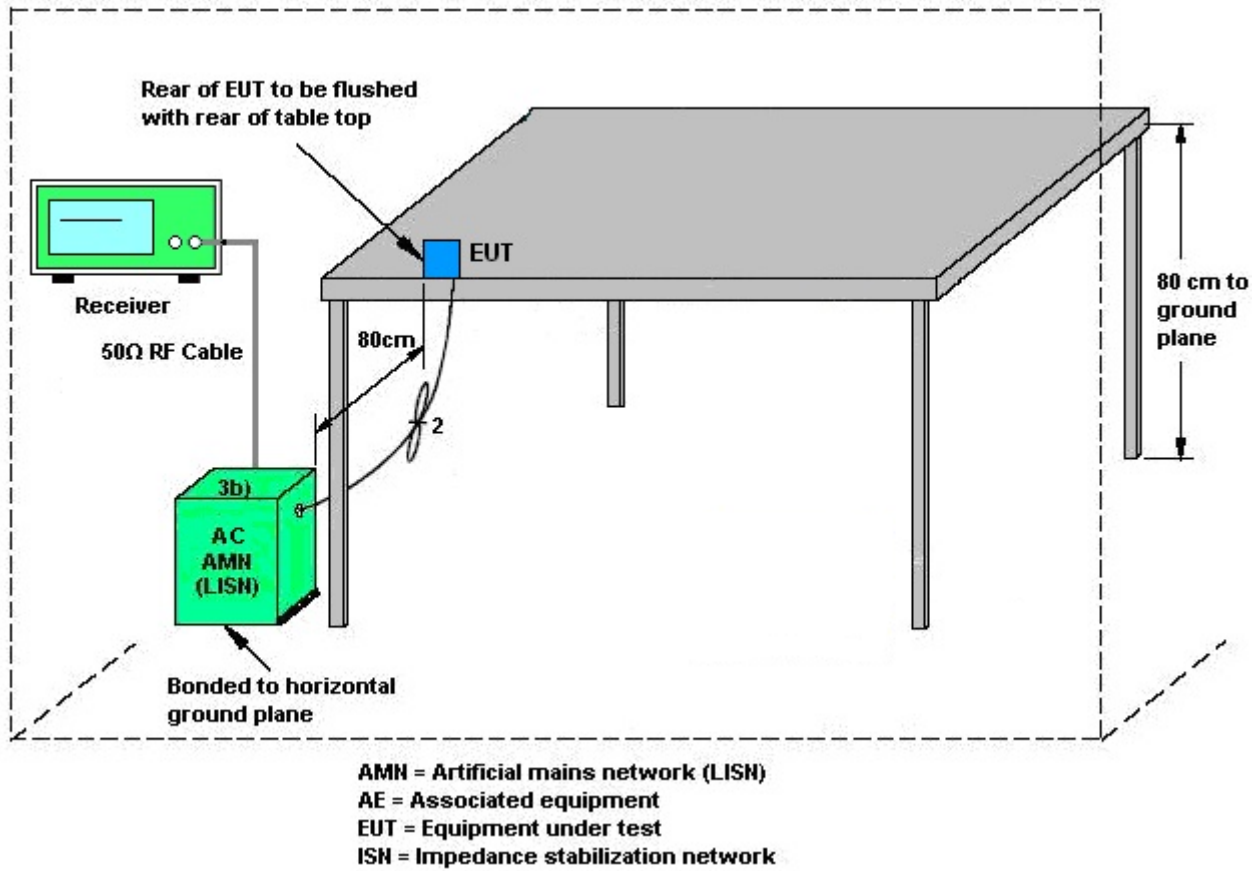

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

The EUT supports CDD for 802.11b/g/n/ac/ax modes

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii).

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For TXBF transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$



where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;

G_k is the gain in dBi of the k th antenna.

The EUT supports beamforming for 802.11n/ac/ax modes.

The directional gain calculation is following F)2)e)ii).

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is as following table.

Frequency Band	Max Single Antenna gain (dBi)		CDD DG (dBi)		TXBF DG (dBi)	
	ANT1	ANT2	For Power	For PSD	For Power	For PSD
5GHz UNII-1	5.25	3.85	5.25	6.39	6.39	6.39
5GHz UNII-2A	5.30	3.69	5.30	6.39	6.39	6.39
5GHz UNII-2C	5.79	4.21	5.79	6.41	6.41	6.41
5GHz UNII-3	5.81	4.21	5.81	6.47	6.47	6.47

Note:

1. Please refer to the antenna report for the maximum Single antenna gain and CDD (Cyclic Delay Diversity) directional gain and TXBF (Tx Beamforming) directional gain.
2. The device supports 1S2T(CDD&TXBF) mode;
1S2T: NSS=1, MIMO 2Tx



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Dec.15, 2022~Jan. 09, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Dec.15, 2022~Jan. 09, 2023	Jan. 04, 2023	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 04, 2023		Jan. 03, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Dec.15, 2022~Jan. 09, 2023	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 04, 2023		Jan. 03, 2024	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Dec.15, 2022~Jan. 09, 2023	Jul. 14, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Jan. 09, 2023	Oct. 12, 2023	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Mar. 24, 2022	Jan. 09, 2023	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Jan. 09, 2023	Oct. 15, 2023	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 24, 2022	Jan. 09, 2023	May 23, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 18, 2022	Jan. 09, 2023	Apr. 17, 2023	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 04, 2023	Jan. 09, 2023	Jan. 03, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 11, 2022	Jan. 09, 2023	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 04, 2023	Jan. 09, 2023	Jan. 03, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Oct. 12, 2022	Jan. 09, 2023	Oct. 11, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 04, 2023	Jan. 09, 2023	Jan. 03, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jan. 09, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 09, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 09, 2023	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 24, 2022	Nov. 22, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Nov. 22, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Nov. 22, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Nov. 22, 2022	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.10 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2022.12.15~2023.1.9	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	22.30	23.16	25.76	30.00			5.25	Pass
11a	6Mbps	2	40	5200	25.49	26.35	28.95	30.00			5.25	Pass
11a	6Mbps	2	44	5220	25.87	26.48	29.20	30.00			5.25	Pass
11a	6Mbps	2	48	5240	24.92	25.62	28.30	30.00			5.25	Pass
HT20	MCS0	2	36	5180	22.75	23.44	26.12	30.00			5.25	Pass
HT20	MCS0	2	40	5200	25.23	26.04	28.66	30.00			5.25	Pass
HT20	MCS0	2	44	5220	25.46	26.46	29.00	30.00			5.25	Pass
HT20	MCS0	2	48	5240	25.26	25.83	28.56	30.00			5.25	Pass
HT40	MCS0	2	38	5190	19.22	19.97	22.62	30.00			5.25	Pass
HT40	MCS0	2	46	5230	24.05	24.74	27.42	30.00			5.25	Pass
VHT20	MCS0	2	36	5180	22.85	23.57	26.24	30.00			5.25	Pass
VHT20	MCS0	2	40	5200	25.27	26.14	28.74	30.00			5.25	Pass
VHT20	MCS0	2	44	5220	25.57	26.57	29.11	30.00			5.25	Pass
VHT20	MCS0	2	48	5240	25.38	25.93	28.67	30.00			5.25	Pass
VHT40	MCS0	2	38	5190	19.26	20.04	22.67	30.00			5.25	Pass
VHT40	MCS0	2	46	5230	24.09	24.77	27.45	30.00			5.25	Pass
VHT80	MCS0	2	42	5210	18.61	19.26	21.96	30.00			5.25	Pass

Power Setting	
Ant 1	Ant 2
	23.5
	27
	27
	26
	24
	27
	27
	26.5
	20
	25
	24
	27
	27
	26.5
	20
	25
	19.5

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	36	5180	Full	22.93	23.61	26.29	30.00	5.25			Pass
HE20	MCS0	2	40	5200	Full	25.36	26.25	28.84	30.00	5.25			Pass
HE20	MCS0	2	44	5220	Full	25.67	26.64	29.19	30.00	5.25			Pass
HE20	MCS0	2	48	5240	Full	25.47	25.98	28.74	30.00	5.25			Pass
HE40	MCS0	2	38	5190	Full	19.24	20.03	22.66	30.00	5.25			Pass
HE40	MCS0	2	46	5230	Full	24.11	24.78	27.47	30.00	5.25			Pass
HE80	MCS0	2	42	5210	Full	18.68	19.33	22.03	30.00	5.25			Pass

Power Setting	
Ant 1	Ant 2
	24
	27
	27
	26.5
	20
	25
	19.5

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	52	5260	19.76	19.77	22.78	23.98		5.30	30	Pass	
11a	6Mbps	2	60	5300	19.72	19.92	22.83	23.98		5.30	30	Pass	
11a	6Mbps	2	64	5320	19.74	19.94	22.85	23.98		5.30	30	Pass	
HT20	MCS0	2	52	5260	19.61	19.92	22.77	23.98		5.30	30	Pass	
HT20	MCS0	2	60	5300	19.52	19.80	22.67	23.98		5.30	30	Pass	
HT20	MCS0	2	64	5320	20.10	20.37	23.24	23.98		5.30	30	Pass	
HT40	MCS0	2	54	5270	20.21	20.76	23.50	23.98		5.30	30	Pass	
HT40	MCS0	2	62	5310	20.33	20.68	23.52	23.98		5.30	30	Pass	
VHT20	MCS0	2	52	5260	19.75	20.01	22.89	23.98		5.30	30	Pass	
VHT20	MCS0	2	60	5300	19.65	19.94	22.81	23.98		5.30	30	Pass	
VHT20	MCS0	2	64	5320	20.22	20.50	23.37	23.98		5.30	30	Pass	
VHT40	MCS0	2	54	5270	20.27	20.79	23.54	23.98		5.30	30	Pass	
VHT40	MCS0	2	62	5310	20.39	20.70	23.55	23.98		5.30	30	Pass	
VHT80	MCS0	2	58	5290	20.51	20.96	23.75	23.98		5.30	30	Pass	
VHT160	MCS0	2	50	5250	16.48	15.96	19.24	23.98		5.30	30	Pass	

Power Setting	
Ant 1	Ant 2
	20.5
	20.5
	20.5
	20.5
	21
	21
	20.5
	20.5
	21
	21
	21.5
	15

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	52	5260	Full	19.86	20.08	22.98	23.98	5.30	30	Pass		
HE20	MCS0	2	60	5300	Full	19.73	19.98	22.87	23.98	5.30	30	Pass		
HE20	MCS0	2	64	5320	Full	20.29	20.55	23.43	23.98	5.30	30	Pass		
HE40	MCS0	2	54	5270	Full	20.27	20.78	23.54	23.98	5.30	30	Pass		
HE40	MCS0	2	62	5310	Full	20.39	20.70	23.56	23.98	5.30	30	Pass		
HE80	MCS0	2	58	5290	Full	20.56	21.06	23.83	23.98	5.30	30	Pass		
HE160	MCS0	2	50	5250	Full	16.64	16.07	19.37	23.98	5.30	30	Pass		

Power Setting	
Ant 1	Ant 2
20.5	
20.5	
21	
21	
21.5	
15	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	5500	19.37	19.83	22.62	23.98	5.79	30	Pass		
11a	6Mbps	2	116	5580	19.49	19.46	22.49	23.98	5.79	30	Pass		
11a	6Mbps	2	140	5700	19.12	18.92	22.03	23.98	5.79	30	Pass		
HT20	MCS0	2	100	5500	19.27	19.59	22.44	23.98	5.79	30	Pass		
HT20	MCS0	2	116	5580	19.86	19.91	22.89	23.98	5.79	30	Pass		
HT20	MCS0	2	140	5700	18.59	18.49	21.55	23.98	5.79	30	Pass		
HT40	MCS0	2	102	5510	20.63	20.89	23.77	23.98	5.79	30	Pass		
HT40	MCS0	2	110	5550	20.66	20.89	23.79	23.98	5.79	30	Pass		
HT40	MCS0	2	134	5670	20.53	20.82	23.69	23.98	5.79	30	Pass		
VHT20	MCS0	2	100	5500	19.42	19.71	22.58	23.98	5.79	30	Pass		
VHT20	MCS0	2	116	5580	20.00	20.06	23.04	23.98	5.79	30	Pass		
VHT20	MCS0	2	140	5700	18.72	18.65	21.70	23.98	5.79	30	Pass		
VHT40	MCS0	2	102	5510	20.71	20.96	23.84	23.98	5.79	30	Pass		
VHT40	MCS0	2	110	5550	20.75	20.94	23.85	23.98	5.79	30	Pass		
VHT40	MCS0	2	134	5670	20.66	20.90	23.79	23.98	5.79	30	Pass		
VHT80	MCS0	2	106	5530	18.85	18.96	21.91	23.98	5.79	30	Pass		

Power Setting	
Ant 1	Ant 2
20	20
20	20
19	19
20	20
20.5	20.5
18.5	18.5
21	21
21	21
21	21
20	20
20.5	20.5
18.5	18.5
21	21
21	21
21	21
19.5	19.5

FCC U-NII-2C straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	144	5720	19.63	19.56	22.61	23.98	5.79	30	Pass		
HT20	MCS0	2	144	5720	19.51	19.26	22.39	23.98	5.79	30	Pass		
HT40	MCS0	2	142	5710	20.61	20.98	23.81	23.98	5.79	30	Pass		
VHT20	MCS0	2	144	5720	19.67	19.39	22.54	23.98	5.79	30	Pass		
VHT40	MCS0	2	142	5710	20.64	21.01	23.84	23.98	5.79	30	Pass		
VHT80	MCS0	2	138	5690	20.50	20.77	23.65	23.98	5.79	30	Pass		

Power Setting	
Ant 1	Ant 2
20	20
20	20
21	21
20	20
21	21
21	21

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	100	5500	Full	19.51	19.77	22.65	23.98		5.79		30	Pass
HE20	MCS0	2	116	5580	Full	20.08	20.11	23.10	23.98		5.79		30	Pass
HE20	MCS0	2	140	5700	Full	18.85	18.68	21.78	23.98		5.79		30	Pass
HE40	MCS0	2	102	5510	Full	20.70	20.98	23.85	23.98		5.79		30	Pass
HE40	MCS0	2	110	5550	Full	20.73	20.98	23.87	23.98		5.79		30	Pass
HE40	MCS0	2	134	5670	Full	20.64	20.87	23.77	23.98		5.79		30	Pass
HE80	MCS0	2	106	5530	Full	18.94	19.04	22.00	23.98		5.79		30	Pass

Power Setting	
Ant 1	Ant 2
20	
20.5	
18.5	
21	
21	
21	
19.5	

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	144	5720	Full	19.71	19.45	22.59	23.98		5.79		30	Pass
HE40	MCS0	2	142	5710	Full	20.67	21.02	23.86	23.98		5.79		30	Pass
HE80	MCS0	2	138	5690	Full	20.57	20.85	23.73	23.98		5.79		30	Pass

Power Setting	
Ant 1	Ant 2
20	
21	
21	

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HT20	MCS0	2	36	5180	20.81	21.45	24.15	29.61		6.39		Pass
HT20	MCS0	2	40	5200	25.23	26.04	28.66	29.61		6.39		Pass
HT20	MCS0	2	44	5220	25.51	26.49	29.03	29.61		6.39		Pass
HT20	MCS0	2	48	5240	25.32	25.88	28.62	29.61		6.39		Pass
HT40	MCS0	2	38	5190	18.48	19.27	21.90	29.61		6.39		Pass
HT40	MCS0	2	46	5230	22.79	23.55	26.20	29.61		6.39		Pass
VHT20	MCS0	2	36	5180	20.87	21.51	24.21	29.61		6.39		Pass
VHT20	MCS0	2	40	5200	25.27	26.14	28.74	29.61		6.39		Pass
VHT20	MCS0	2	44	5220	25.57	26.58	29.11	29.61		6.39		Pass
VHT20	MCS0	2	48	5240	25.38	25.93	28.67	29.61		6.39		Pass
VHT40	MCS0	2	38	5190	18.58	19.40	22.02	29.61		6.39		Pass
VHT40	MCS0	2	46	5230	22.91	23.66	26.31	29.61		6.39		Pass
VHT80	MCS0	2	42	5210	18.04	18.71	21.40	29.61		6.39		Pass

Power Setting	
Ant 1	Ant 2
	22
	27
	27
	26.5
	19.5
	24
	22
	27
	27
	26.5
	19.5
	24
	19

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	36	5180	Full	20.95	21.55	24.27	29.61		6.39		Pass
HE20	MCS0	2	40	5200	Full	25.36	26.25	28.84	29.61		6.39		Pass
HE20	MCS0	2	44	5220	Full	25.67	26.64	29.19	29.61		6.39		Pass
HE20	MCS0	2	48	5240	Full	25.47	25.98	28.74	29.61		6.39		Pass
HE40	MCS0	2	38	5190	Full	18.68	19.48	22.11	29.61		6.39		Pass
HE40	MCS0	2	46	5230	Full	23.03	23.73	26.40	29.61		6.39		Pass
HE80	MCS0	2	42	5210	Full	18.13	18.80	21.49	29.61		6.39		Pass

Power Setting	
Ant 1	Ant 2
	22
	27
	27
	26.5
	19.5
	24
	19

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HT20	MCS0	2	52	5260	19.66	19.90	22.79	23.59	6.39	30	30	Pass	
HT20	MCS0	2	60	5300	19.61	19.83	22.73	23.59	6.39	30	30	Pass	
HT20	MCS0	2	64	5320	20.16	20.45	23.31	23.59	6.39	30	30	Pass	
HT40	MCS0	2	54	5270	20.00	20.55	23.29	23.59	6.39	30	30	Pass	
HT40	MCS0	2	62	5310	18.09	18.44	21.28	23.59	6.39	30	30	Pass	
VHT20	MCS0	2	52	5260	19.75	20.00	22.89	23.59	6.39	30	30	Pass	
VHT20	MCS0	2	60	5300	19.67	19.92	22.81	23.59	6.39	30	30	Pass	
VHT20	MCS0	2	64	5320	20.22	20.50	23.37	23.59	6.39	30	30	Pass	
VHT40	MCS0	2	54	5270	20.14	20.67	23.42	23.59	6.39	30	30	Pass	
VHT40	MCS0	2	62	5310	18.22	18.54	21.39	23.59	6.39	30	30	Pass	
VHT80	MCS0	2	58	5290	19.95	20.48	23.23	23.59	6.39	30	30	Pass	
VHT160	MCS0	2	50	5250	14.61	13.86	17.26	23.59	6.39	30	30	Pass	

Power Setting	
Ant 1	Ant 2
20.5	20.5
21	21
19	19
20.5	20.5
21	21
19	19
21	21
13	13

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	52	5260	Full	19.86	20.08	22.98	23.59		6.39		30	Pass
HE20	MCS0	2	60	5300	Full	19.73	19.98	22.87	23.59		6.39		30	Pass
HE20	MCS0	2	64	5320	Full	20.29	20.55	23.43	23.59		6.39		30	Pass
HE40	MCS0	2	54	5270	Full	20.27	20.78	23.54	23.59		6.39		30	Pass
HE40	MCS0	2	62	5310	Full	18.30	18.67	21.50	23.59		6.39		30	Pass
HE80	MCS0	2	58	5290	Full	20.02	20.55	23.31	23.59		6.39		30	Pass
HE160	MCS0	2	50	5250	Full	14.70	14.01	17.38	23.59		6.39		30	Pass

Power Setting	
Ant 1	Ant 2
20.5	20.5
21	21
19	19
21	21
13	13

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HT20	MCS0	2	100	5500	19.35	19.65	22.51	23.57		6.41		30	Pass
HT20	MCS0	2	116	5580	19.92	19.98	22.96	23.57		6.41		30	Pass
HT20	MCS0	2	140	5700	19.15	19.04	22.10	23.57		6.41		30	Pass
HT40	MCS0	2	102	5510	19.87	20.27	23.09	23.57		6.41		30	Pass
HT40	MCS0	2	110	5550	19.97	20.25	23.12	23.57		6.41		30	Pass
HT40	MCS0	2	134	5670	19.84	20.19	23.03	23.57		6.41		30	Pass
VHT20	MCS0	2	100	5500	19.41	19.71	22.57	23.57		6.41		30	Pass
VHT20	MCS0	2	116	5580	20.00	20.04	23.03	23.57		6.41		30	Pass
VHT20	MCS0	2	140	5700	19.23	19.13	22.19	23.57		6.41		30	Pass
VHT40	MCS0	2	102	5510	20.03	20.40	23.23	23.57		6.41		30	Pass
VHT40	MCS0	2	110	5550	20.07	20.40	23.24	23.57		6.41		30	Pass
VHT40	MCS0	2	134	5670	19.99	20.30	23.15	23.57		6.41		30	Pass
VHT80	MCS0	2	106	5530	19.92	20.52	23.24	23.57		6.41		30	Pass

Power Setting	
Ant 1	Ant 2
	20
	20.5
	19
	20.5
	20.5
	20.5
	20
	20.5
	19
	20.5
	20.5
	20.5
	20.5
	21

FCC U-NII-2C straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	144	5720	19.63	19.56	22.61	23.57		6.41		30	Pass
HT20	MCS0	2	144	5720	19.57	19.30	22.44	23.57		6.41		30	Pass
HT40	MCS0	2	142	5710	19.97	20.33	23.16	23.57		6.41		30	Pass
VHT20	MCS0	2	144	5720	19.64	19.41	22.54	23.57		6.41		30	Pass
VHT40	MCS0	2	142	5710	20.09	20.43	23.27	23.57		6.41		30	Pass
VHT80	MCS0	2	138	5690	19.99	20.30	23.16	23.57		6.41		30	Pass

Power Setting	
Ant 1	Ant 2
	20
	20
	20.5
	20
	20.5
	20.5

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	100	5500	Full	19.51	19.77	22.65	23.57		6.41		30	Pass
HE20	MCS0	2	116	5580	Full	20.08	20.11	23.10	23.57		6.41		30	Pass
HE20	MCS0	2	140	5700	Full	19.32	19.21	22.28	23.57		6.41		30	Pass
HE40	MCS0	2	102	5510	Full	20.13	20.48	23.32	23.57		6.41		30	Pass
HE40	MCS0	2	110	5550	Full	20.18	20.51	23.36	23.57		6.41		30	Pass
HE40	MCS0	2	134	5670	Full	20.08	20.42	23.26	23.57		6.41		30	Pass
HE80	MCS0	2	106	5530	Full	19.97	20.60	23.31	23.57		6.41		30	Pass

Power Setting	
Ant 1	Ant 2
20	
20.5	
19	
20.5	
20.5	
20.5	
21	

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	144	5720	Full	19.71	19.45	22.59	23.57		6.41		30	Pass
HE40	MCS0	2	142	5710	Full	20.19	20.53	23.37	23.57		6.41		30	Pass
HE80	MCS0	2	138	5690	Full	20.05	20.38	23.23	23.57		6.41		30	Pass

Power Setting	
Ant 1	Ant 2
20	
20.5	
20.5	

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HT20	MCS0	2	149	5745	26.31	25.95	29.14	29.53	6.47	6.47	Pass	
HT20	MCS0	2	157	5785	26.34	26.23	29.29	29.53	6.47	6.47	Pass	
HT20	MCS0	2	165	5825	26.24	26.21	29.23	29.53	6.47	6.47	Pass	
HT40	MCS0	2	151	5755	24.29	25.68	28.05	29.53	6.47	6.47	Pass	
HT40	MCS0	2	159	5795	25.99	26.35	29.18	29.53	6.47	6.47	Pass	
VHT20	MCS0	2	149	5745	26.31	26.06	29.20	29.53	6.47	6.47	Pass	
VHT20	MCS0	2	157	5785	26.40	26.28	29.35	29.53	6.47	6.47	Pass	
VHT20	MCS0	2	165	5825	26.31	26.20	29.27	29.53	6.47	6.47	Pass	
VHT40	MCS0	2	151	5755	25.13	25.56	28.36	29.53	6.47	6.47	Pass	
VHT40	MCS0	2	159	5795	26.09	26.65	29.39	29.53	6.47	6.47	Pass	
VHT80	MCS0	2	155	5775	22.60	22.70	25.66	29.53	6.47	6.47	Pass	

Power Setting	
Ant 1	Ant 2
27	27
27	27
27	27
26	27
27	27
27	27
27	27
26	27
27	27
23.5	23.5

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting	
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		Ant 1	Ant 2
HE20	MCS0	2	149	5745	Full	26.38	26.12	29.26	29.53	29.53	6.47	6.47	Pass	27	27
HE20	MCS0	2	157	5785	Full	26.47	26.31	29.40	29.53	29.53	6.47	6.47	Pass	27	27
HE20	MCS0	2	165	5825	Full	26.42	26.26	29.35	29.53	29.53	6.47	6.47	Pass	27	27
HE40	MCS0	2	151	5755	Full	25.22	25.68	28.46	29.53	29.53	6.47	6.47	Pass	26	26
HE40	MCS0	2	159	5795	Full	26.22	26.79	29.52	29.53	29.53	6.47	6.47	Pass	27	27
HE80	MCS0	2	155	5775	Full	22.66	22.75	25.72	29.53	29.53	6.47	6.47	Pass	23.5	23.5



CDD 1S2T

Emission Bandwidth

Test Result



TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant1	5180	21.64	5169.24	5190.88	---	---
	Ant2	5180	22.04	5169.28	5191.32	---	---
	Ant1	5200	23.60	5188.40	5212.00	---	---
	Ant2	5200	32.00	5184.64	5216.64	---	---
	Ant1	5220	22.64	5208.48	5231.12	---	---
	Ant2	5220	23.40	5208.36	5231.76	---	---
	Ant1	5240	21.52	5229.32	5250.84	---	---
	Ant2	5240	21.40	5229.40	5250.80	---	---
	Ant1	5260	21.48	5249.24	5270.72	---	---
	Ant2	5260	21.76	5248.92	5270.68	---	---
	Ant1	5300	21.24	5289.40	5310.64	---	---
	Ant2	5300	21.64	5289.20	5310.84	---	---
	Ant1	5320	21.76	5309.24	5331.00	---	---
	Ant2	5320	21.84	5308.92	5330.76	---	---
	Ant1	5500	21.60	5489.40	5511.00	---	---
	Ant2	5500	21.48	5489.32	5510.80	---	---
	Ant1	5580	21.60	5569.24	5590.84	---	---
	Ant2	5580	21.68	5569.20	5590.88	---	---
	Ant1	5700	21.16	5689.56	5710.72	---	---
	Ant2	5700	20.88	5689.64	5710.52	---	---
	Ant1	5720	21.76	5709.20	5730.96	---	---
	Ant2	5720	21.40	5709.44	5730.84	---	---
	Ant1	5745	36.40	5727.12	5763.52	---	---
	Ant2	5745	38.48	5726.20	5764.68	---	---
	Ant1	5785	34.52	5767.68	5802.20	---	---
	Ant2	5785	39.60	5765.28	5804.88	---	---
	Ant1	5825	36.16	5806.68	5842.84	---	---
	Ant2	5825	37.16	5806.08	5843.24	---	---
11AX20MIMO	Ant1	5180	22.12	5168.80	5190.92	---	---
	Ant2	5180	22.48	5168.80	5191.28	---	---
	Ant1	5200	28.40	5185.44	5213.84	---	---
	Ant2	5200	33.64	5183.64	5217.28	---	---
	Ant1	5220	30.28	5203.20	5233.48	---	---
	Ant2	5220	29.32	5205.84	5235.16	---	---
	Ant1	5240	22.44	5228.84	5251.28	---	---
	Ant2	5240	22.08	5228.88	5250.96	---	---
	Ant1	5260	21.68	5249.12	5270.80	---	---
	Ant2	5260	22.12	5248.76	5270.88	---	---
	Ant1	5300	21.84	5289.00	5310.84	---	---
	Ant2	5300	22.20	5288.80	5311.00	---	---
	Ant1	5320	22.16	5308.84	5331.00	---	---
	Ant2	5320	22.04	5308.84	5330.88	---	---
	Ant1	5500	22.44	5488.80	5511.24	---	---
	Ant2	5500	22.16	5488.80	5510.96	---	---
	Ant1	5580	22.12	5568.84	5590.96	---	---
	Ant2	5580	22.00	5568.92	5590.92	---	---
	Ant1	5700	21.36	5689.36	5710.72	---	---
	Ant2	5700	21.16	5689.44	5710.60	---	---





	Ant1	5720	22.24	5708.76	5731.00	---	---
	Ant2	5720	22.20	5708.72	5730.92	---	---
	Ant1	5745	39.92	5725.04	5764.96	---	---
	Ant2	5745	39.56	5725.32	5764.88	---	---
	Ant1	5785	37.28	5765.12	5802.40	---	---
	Ant2	5785	39.92	5765.04	5804.96	---	---
	Ant1	5825	39.92	5805.04	5844.96	---	---
	Ant2	5825	39.76	5805.04	5844.80	---	---
11AX40MIMO	Ant1	5190	41.12	5169.60	5210.72	---	---
	Ant2	5190	41.76	5169.44	5211.20	---	---
	Ant1	5230	41.52	5209.76	5251.28	---	---
	Ant2	5230	43.84	5208.56	5252.40	---	---
	Ant1	5270	40.80	5249.76	5290.56	---	---
	Ant2	5270	41.04	5249.44	5290.48	---	---
	Ant1	5310	40.88	5289.76	5330.64	---	---
	Ant2	5310	41.52	5289.28	5330.80	---	---
	Ant1	5510	41.04	5489.76	5530.80	---	---
	Ant2	5510	40.88	5489.84	5530.72	---	---
	Ant1	5550	41.04	5529.52	5570.56	---	---
	Ant2	5550	40.56	5529.84	5570.40	---	---
	Ant1	5670	40.64	5649.76	5690.40	---	---
	Ant2	5670	40.48	5649.84	5690.32	---	---
	Ant1	5710	41.76	5689.44	5731.20	---	---
	Ant2	5710	40.80	5689.52	5730.32	---	---
	Ant1	5755	77.04	5716.20	5793.24	---	---
	Ant2	5755	79.84	5715.08	5794.92	---	---
Ant1	5795	63.92	5761.72	5825.64	---	---	
Ant2	5795	79.84	5755.08	5834.92	---	---	
11AX80MIMO	Ant1	5210	85.44	5167.44	5252.88	---	---
	Ant2	5210	83.20	5169.68	5252.88	---	---
	Ant1	5290	83.04	5248.08	5331.12	---	---
	Ant2	5290	83.20	5248.08	5331.28	---	---
	Ant1	5530	84.32	5488.40	5572.72	---	---
	Ant2	5530	83.36	5489.20	5572.56	---	---
	Ant1	5690	81.76	5649.36	5731.12	---	---
	Ant2	5690	81.60	5649.52	5731.12	---	---
	Ant1	5775	138.08	5700.28	5838.36	---	---
	Ant2	5775	157.76	5695.32	5853.08	---	---
11AX160MIMO	Ant1	5250	165.12	5167.76	5332.88	---	---
	Ant2	5250	164.48	5168.08	5332.56	---	---




Test Graphs

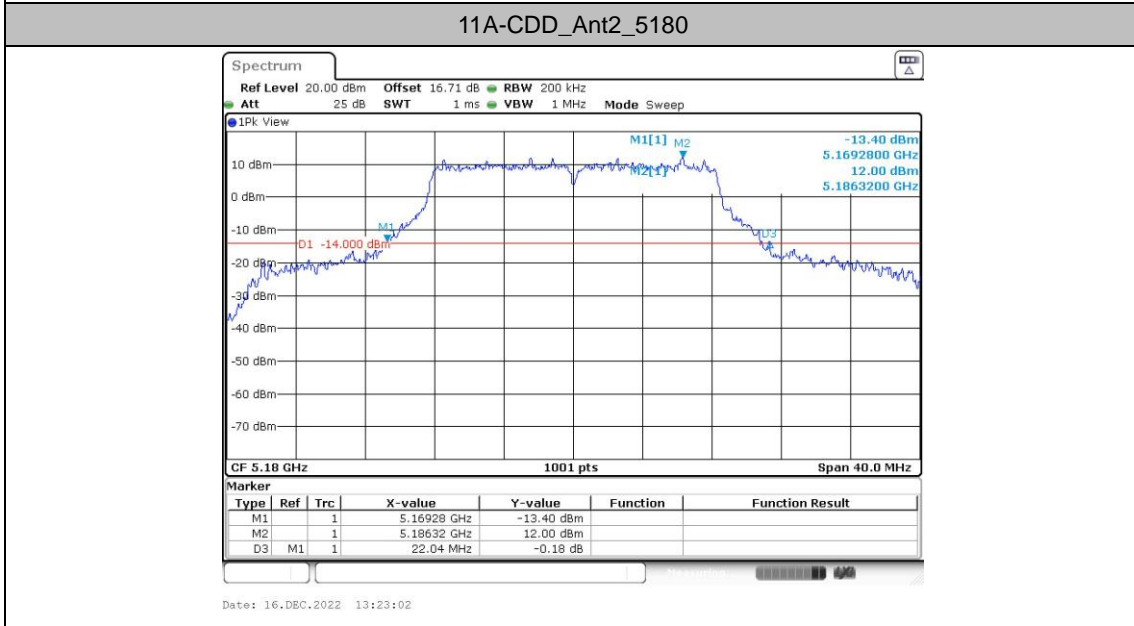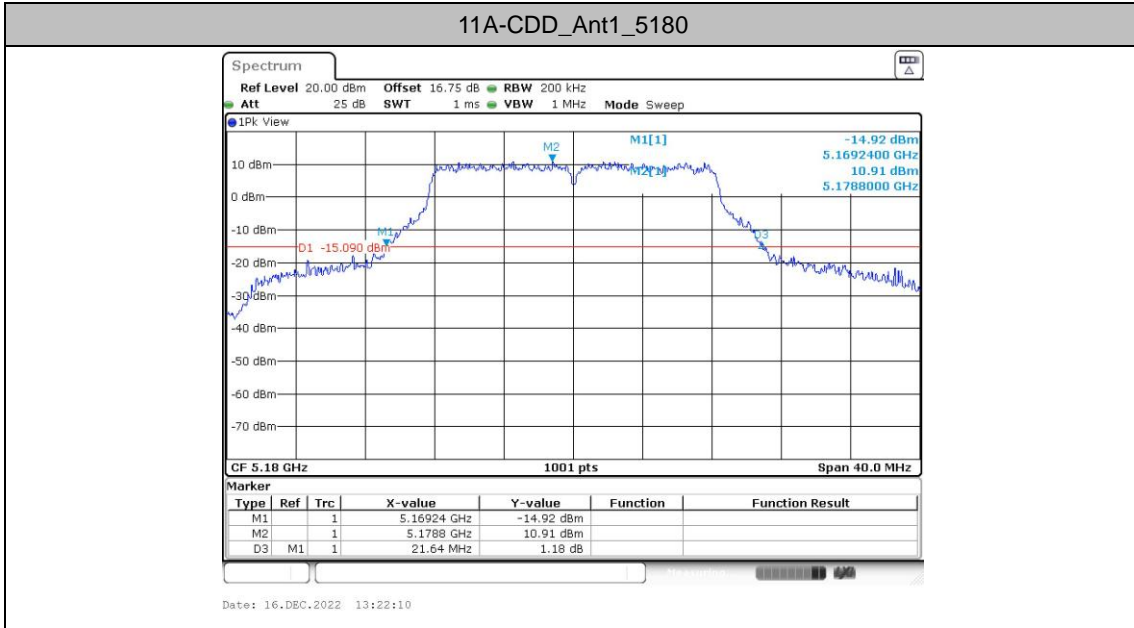

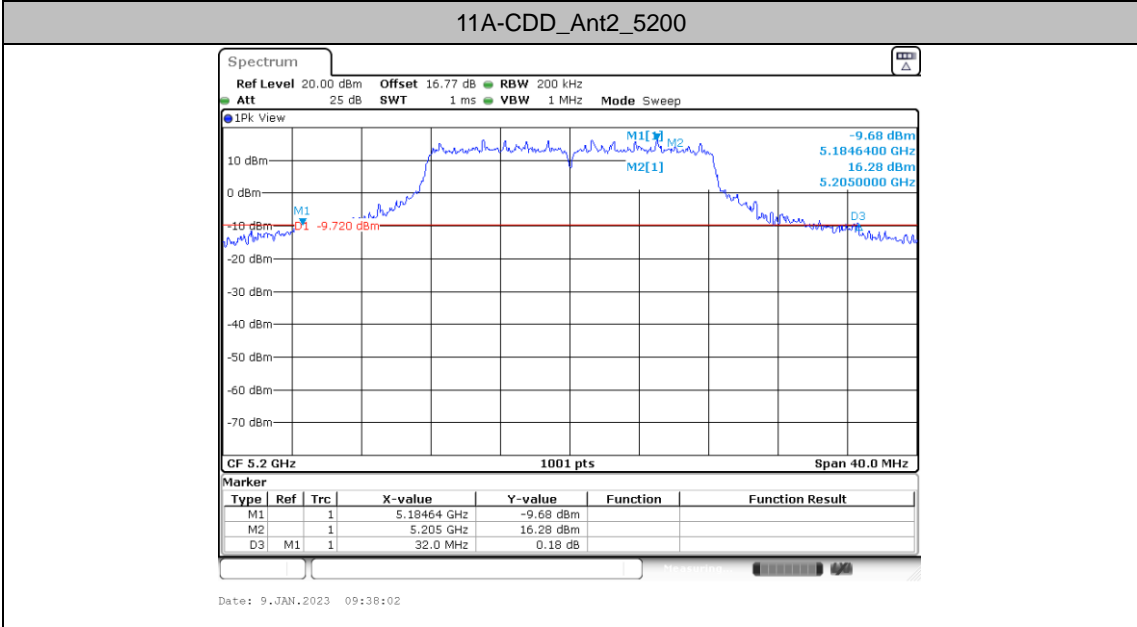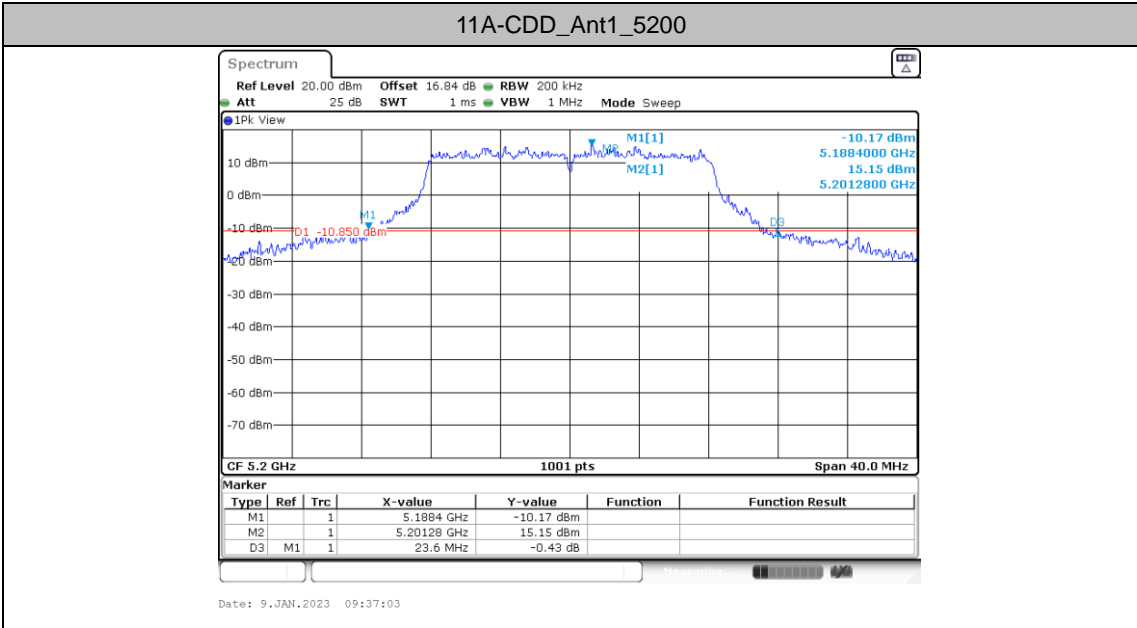




11A-CDD_Ant1_5220

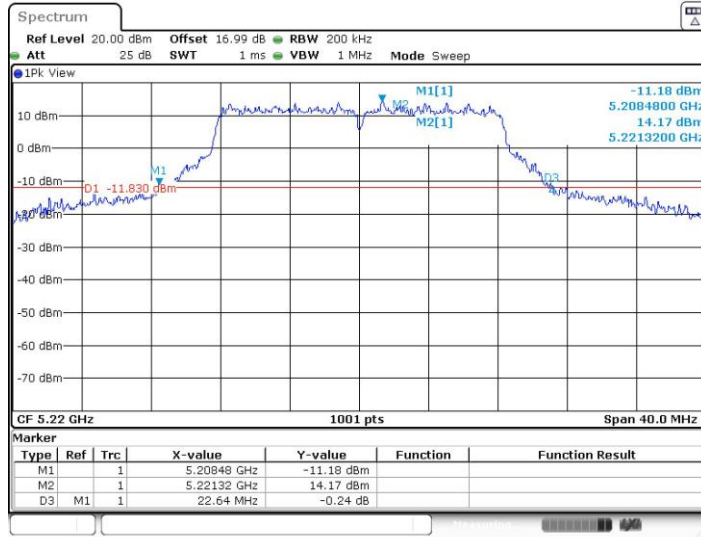

Date: 16.DEC.2022 13:38:27


11A-CDD_Ant2_5220

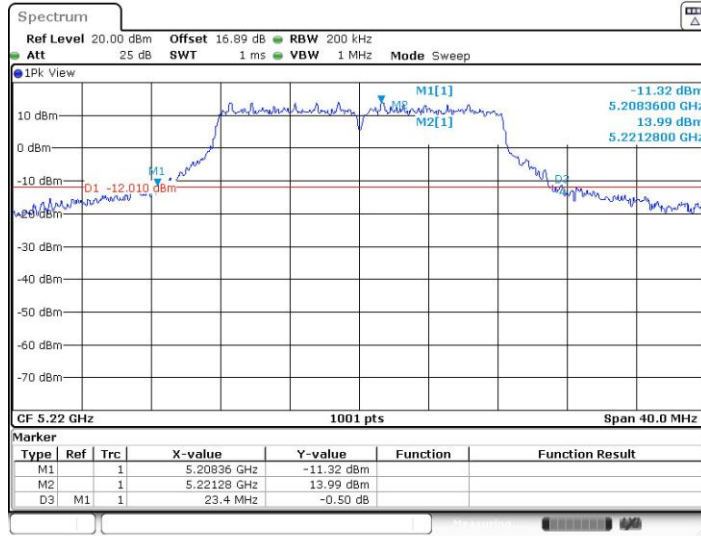

Date: 16.DEC.2022 13:39:19




11A-CDD_Ant1_5240

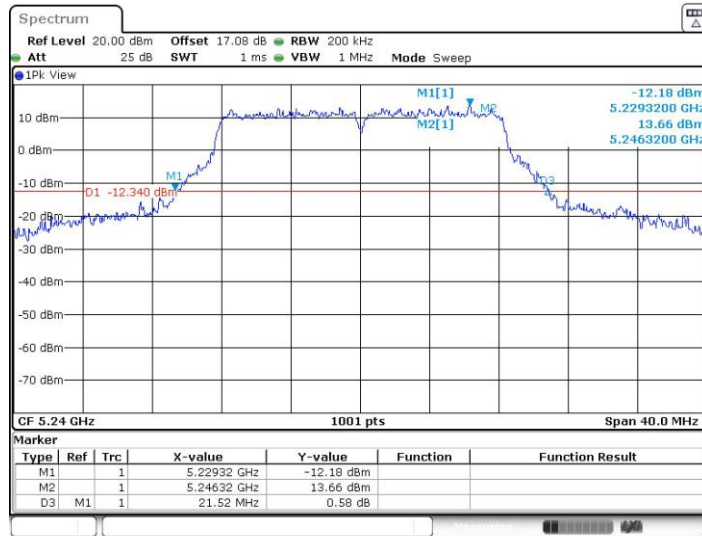

Date: 16.DEC.2022 13:44:18


11A-CDD_Ant2_5240

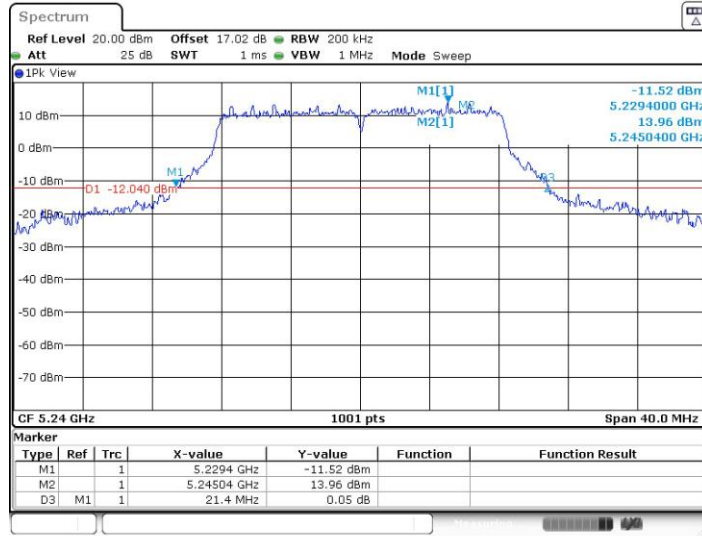

Date: 16.DEC.2022 13:45:12




11A-CDD_Ant1_5260

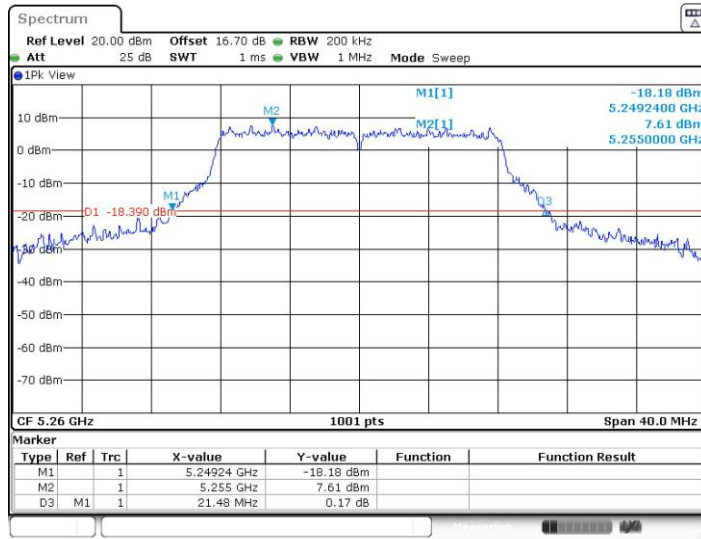

Date: 16.DEC.2022 07:40:50


11A-CDD_Ant2_5260

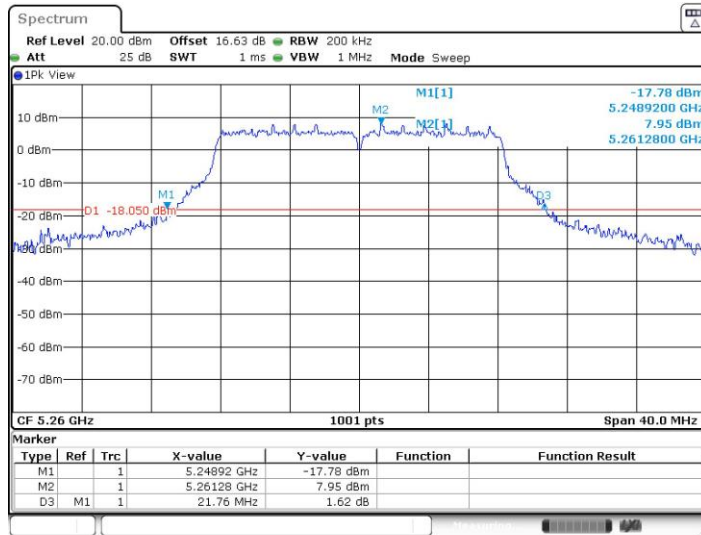

Date: 16.DEC.2022 07:41:11




11A-CDD_Ant1_5300

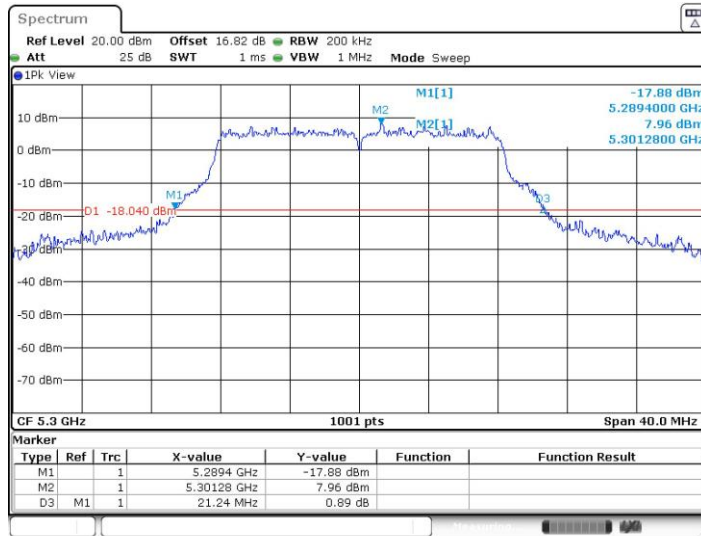

Date: 16.DEC.2022 07:42:04


11A-CDD_Ant2_5300

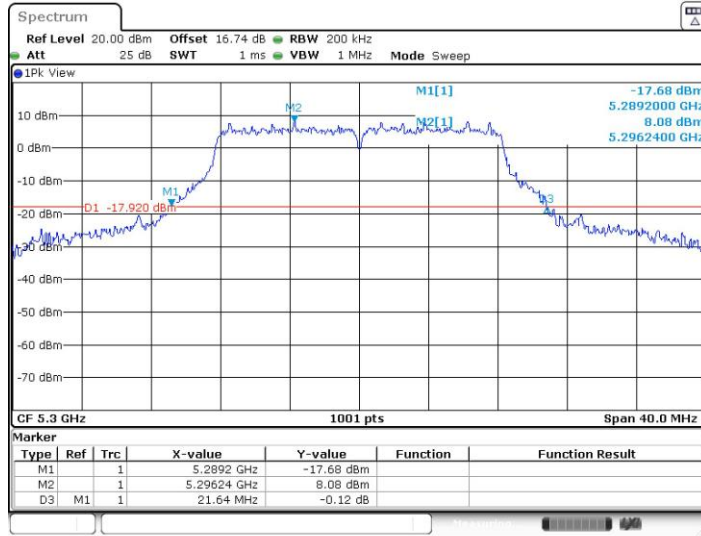

Date: 16.DEC.2022 07:42:53




11A-CDD_Ant1_5320

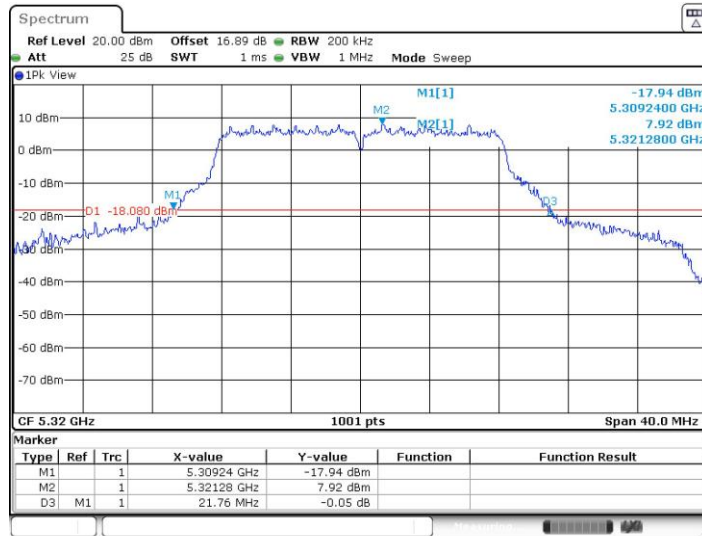

Date: 16.DEC.2022 07:44:45


11A-CDD_Ant2_5320

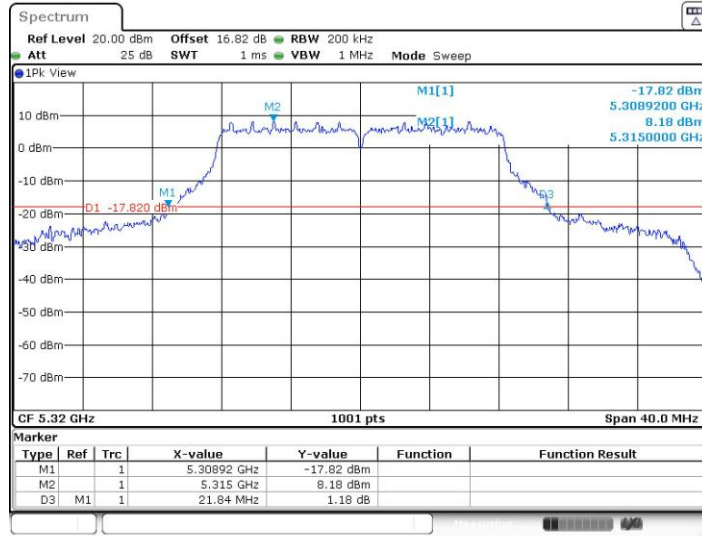

Date: 16.DEC.2022 07:45:40




11A-CDD_Ant1_5500

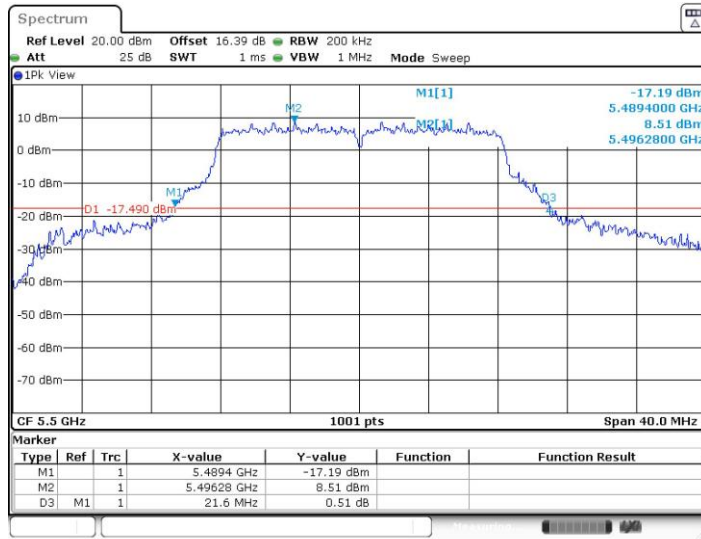

Date: 16.DEC.2022 07:49:15


11A-CDD_Ant2_5500

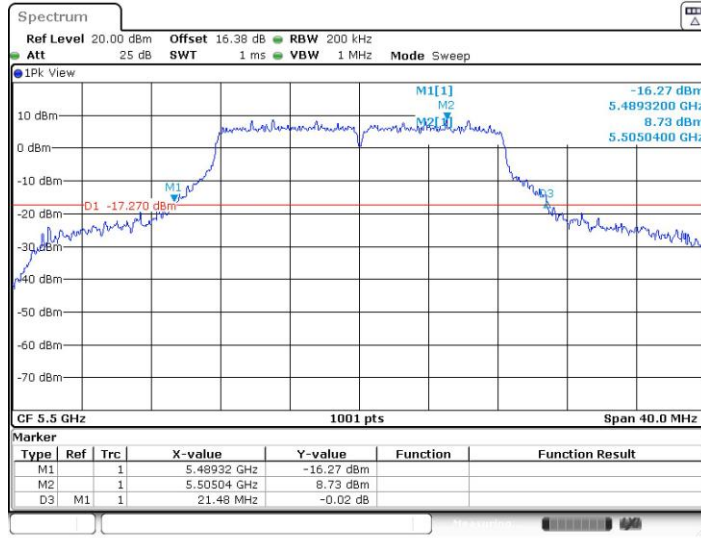

Date: 16.DEC.2022 07:50:12




11A-CDD_Ant1_5580

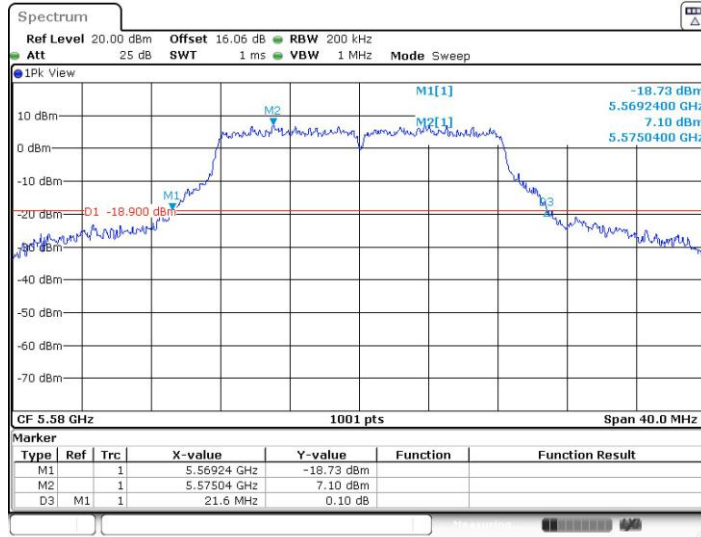

Date: 16.DEC.2022 07:56:54


11A-CDD_Ant2_5580

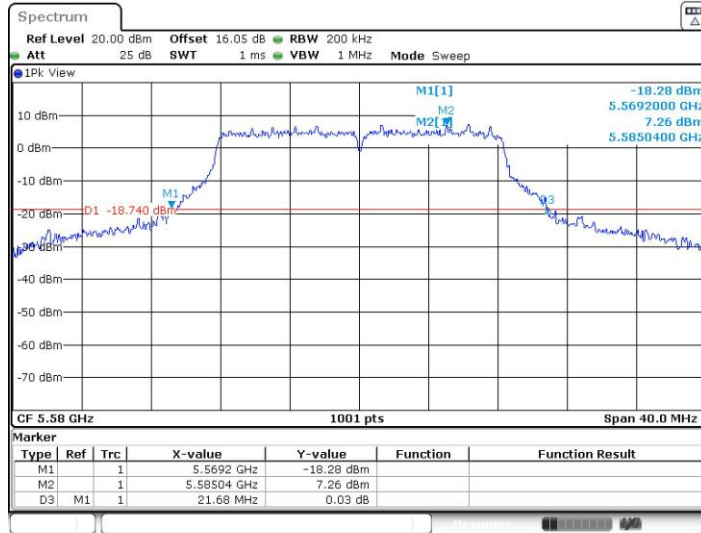

Date: 16.DEC.2022 07:57:54




11A-CDD_Ant1_5700

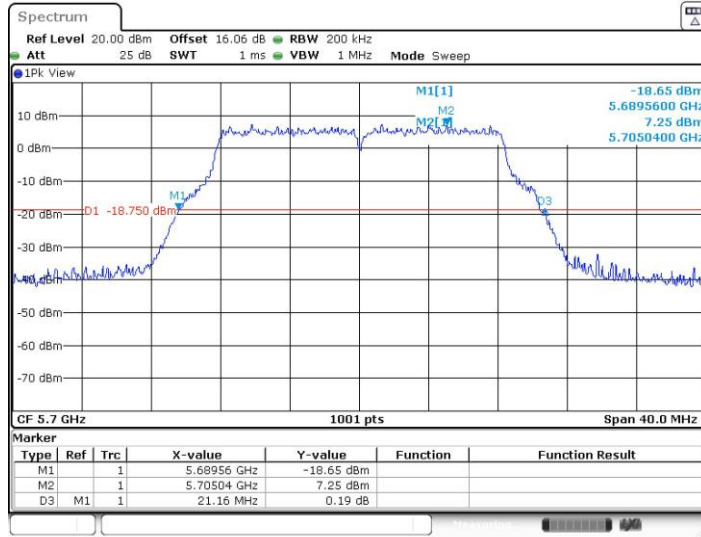

Date: 16.DEC.2022 08:02:21


11A-CDD_Ant2_5700

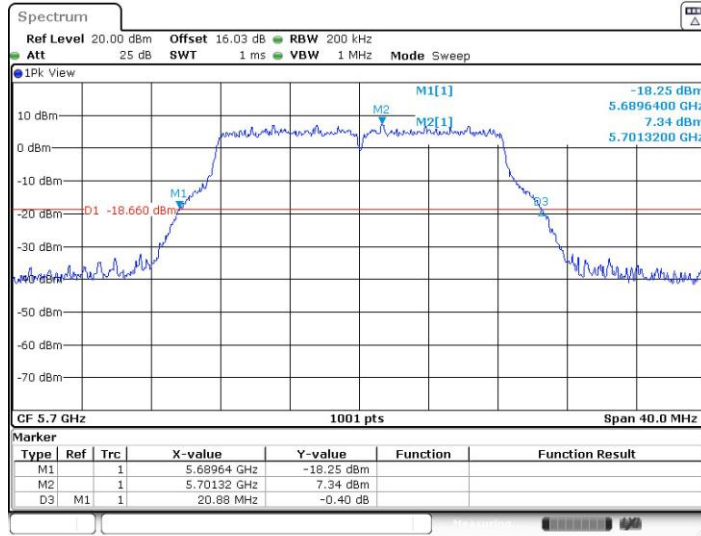

Date: 16.DEC.2022 08:03:17




11A-CDD_Ant1_5720

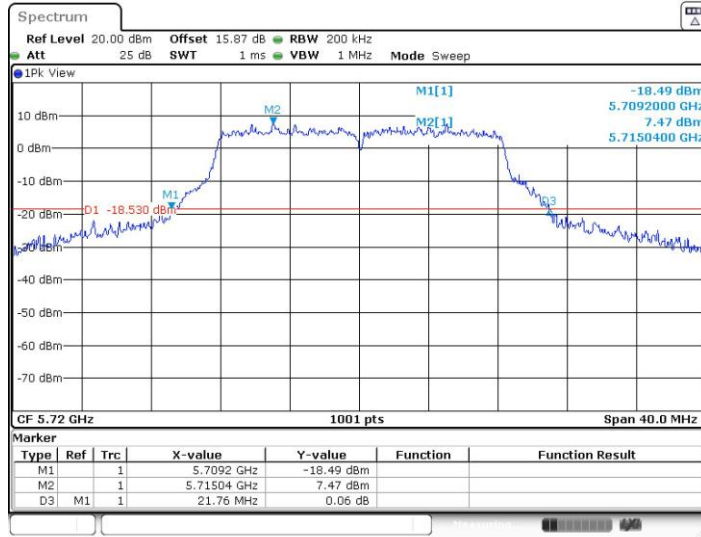

Date: 16.DEC.2022 08:05:40


11A-CDD_Ant2_5720

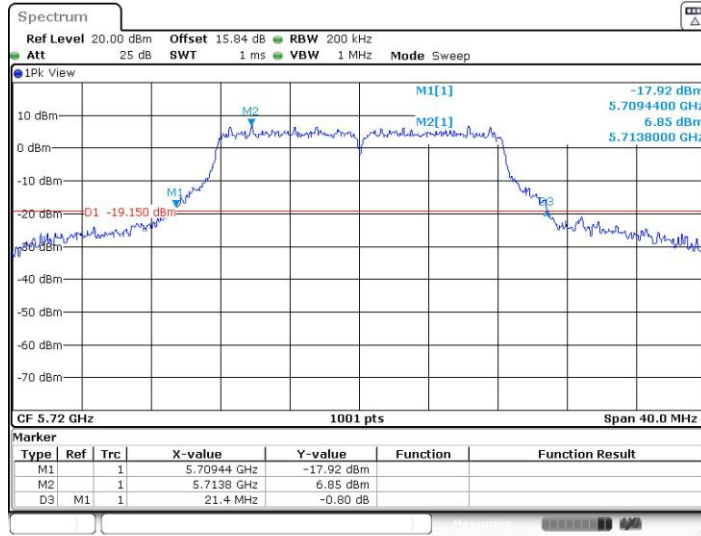

Date: 16.DEC.2022 08:06:49




11A-CDD_Ant1_5745

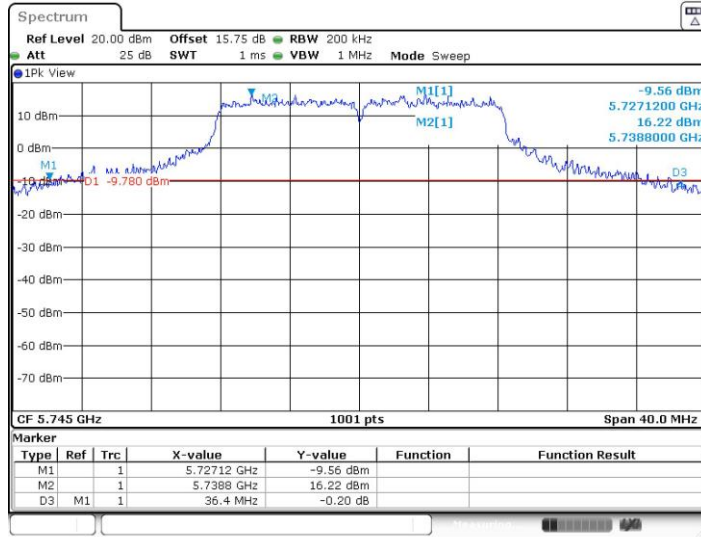

Date: 16.DEC.2022 08:23:42


11A-CDD_Ant2_5745

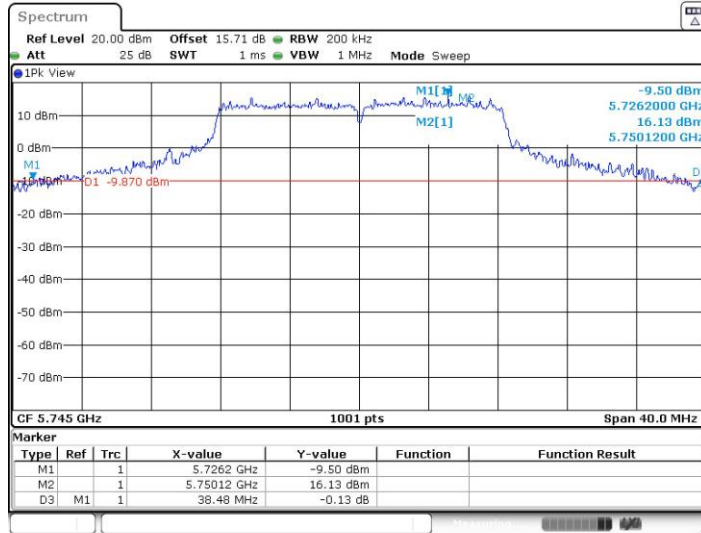

Date: 16.DEC.2022 08:24:57




11A-CDD_Ant1_5785

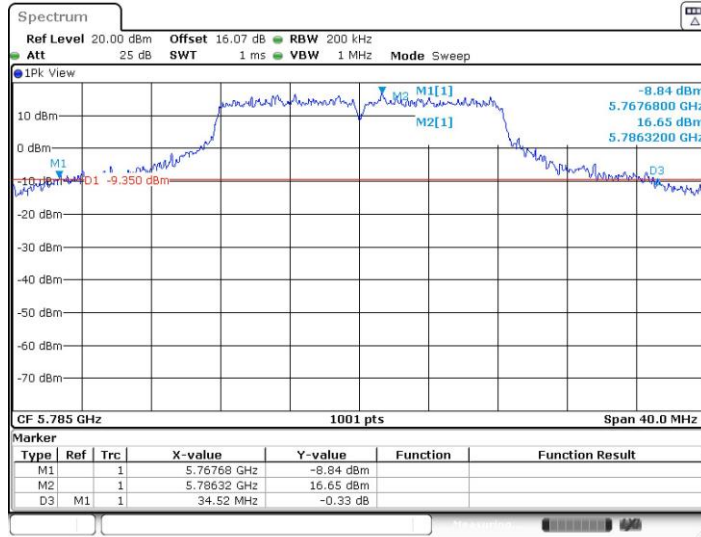

Date: 16.DEC.2022 08:32:06


11A-CDD_Ant2_5785

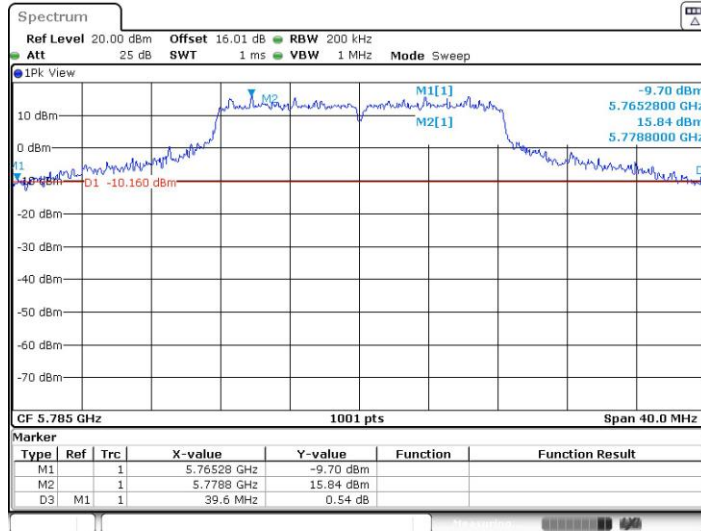

Date: 16.DEC.2022 08:33:22




11A-CDD_Ant1_5825

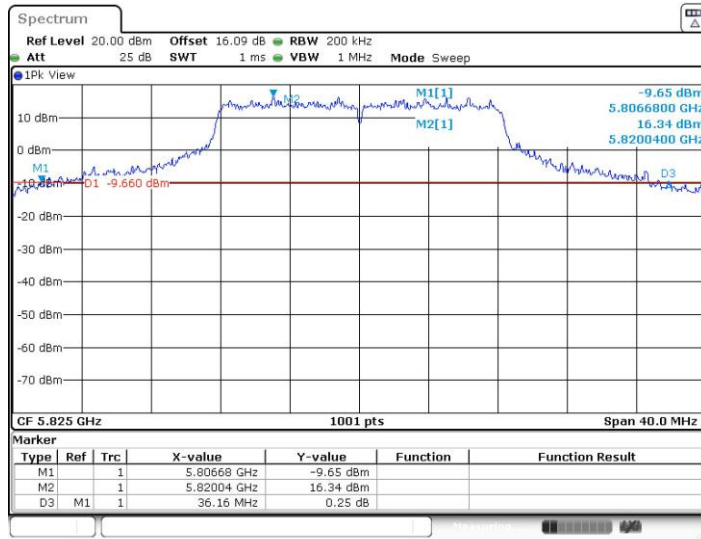

Date: 16.DEC.2022 08:37:24


11A-CDD_Ant2_5825

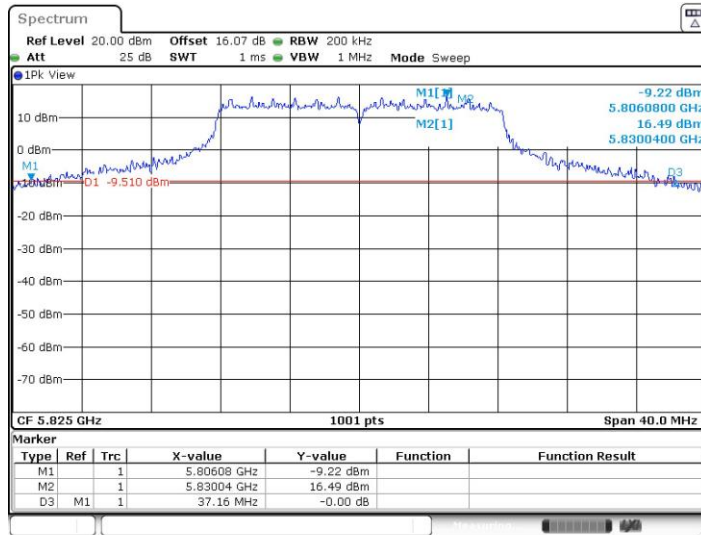


Date: 16.DEC.2022 08:38:34



11AX20MIMO_Ant1_5180

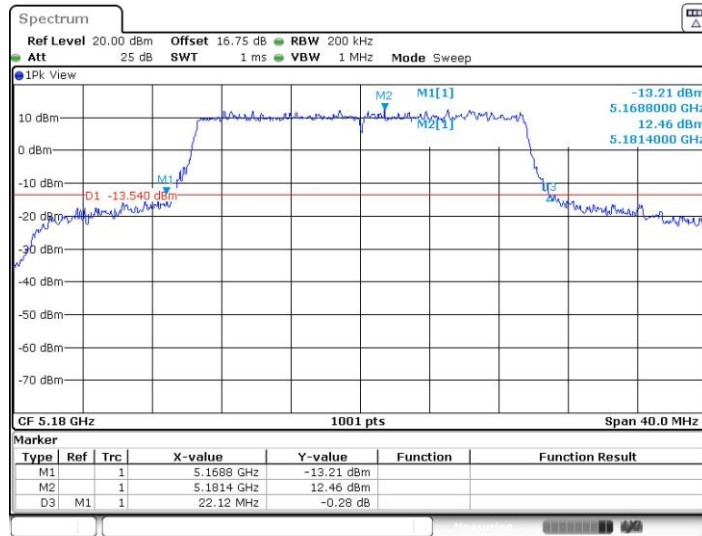


11AX20MIMO_Ant2_5180

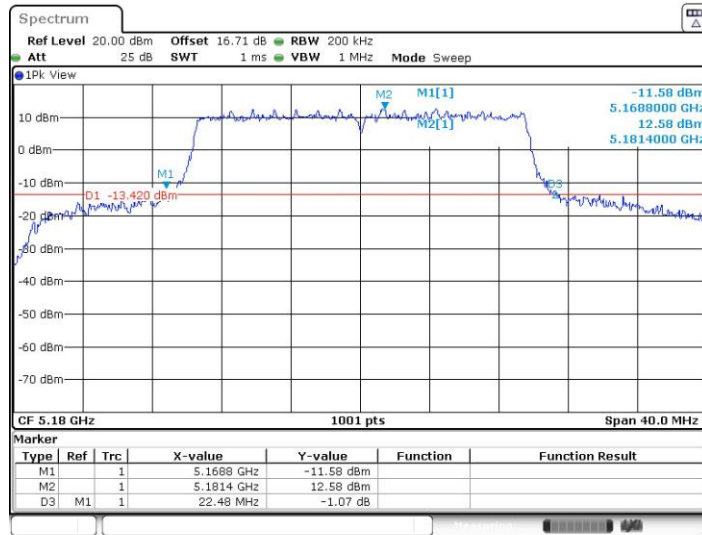




11AX20MIMO_Ant1_5200

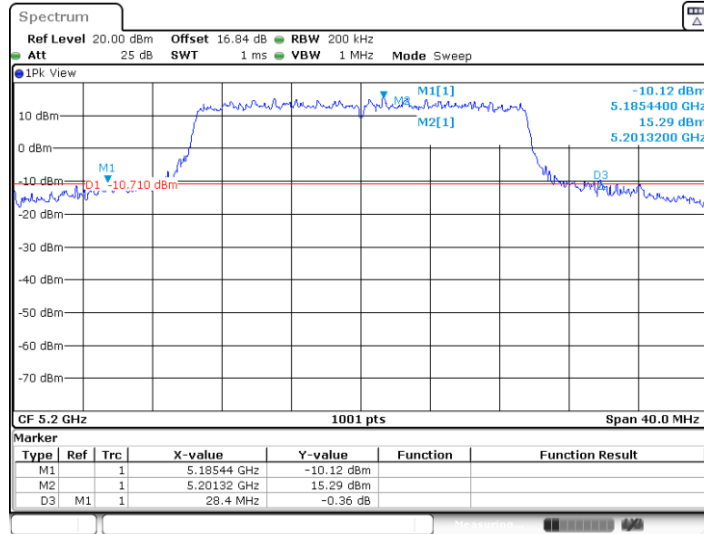

Date: 9.JAN.2023 09:42:52


11AX20MIMO_Ant2_5200

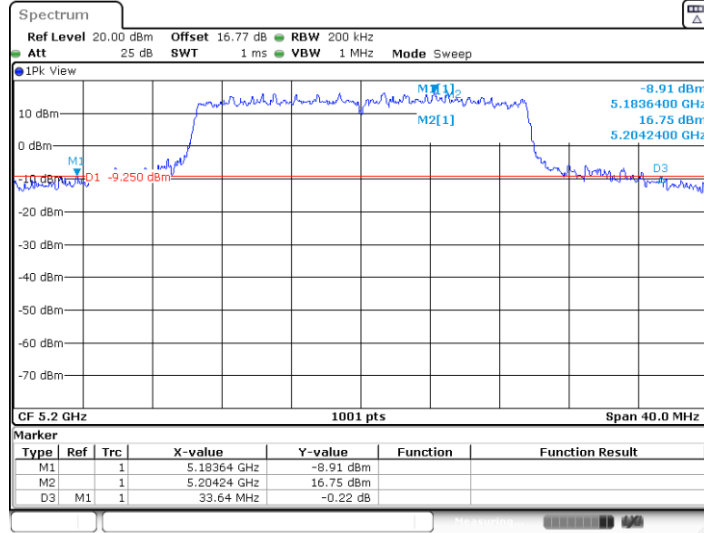

Date: 9.JAN.2023 09:44:04




11AX20MIMO_Ant1_5220

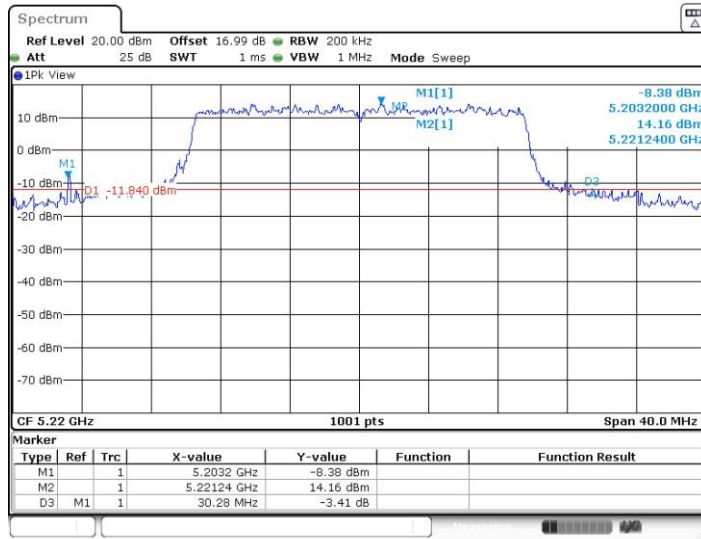

Date: 16.DEC.2022 13:56:22


11AX20MIMO_Ant2_5220

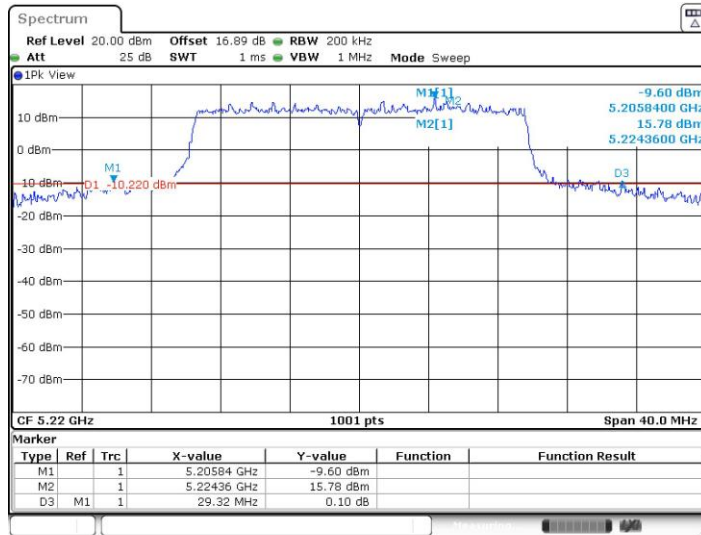

Date: 16.DEC.2022 13:57:13




11AX20MIMO_Ant1_5240

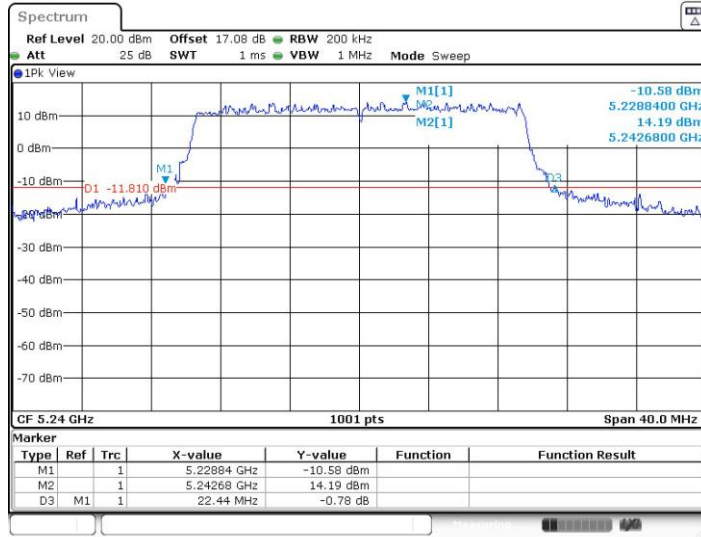

Date: 16.DEC.2022 14:03:53


11AX20MIMO_Ant2_5240

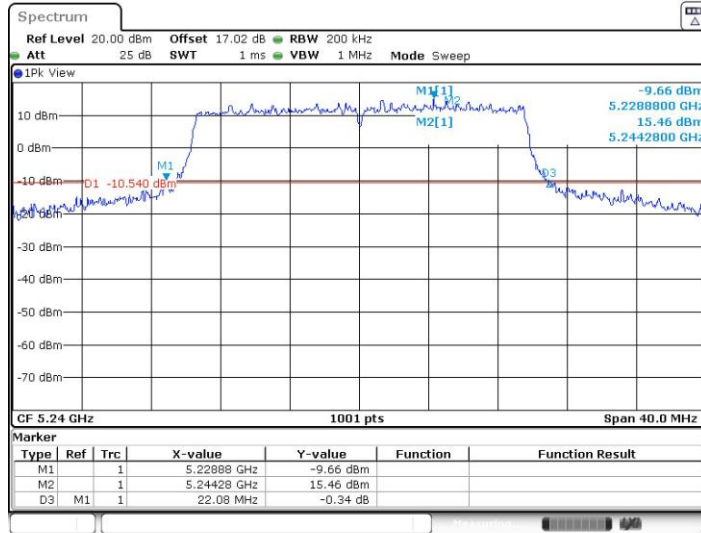

Date: 16.DEC.2022 14:04:49




11AX20MIMO_Ant1_5260

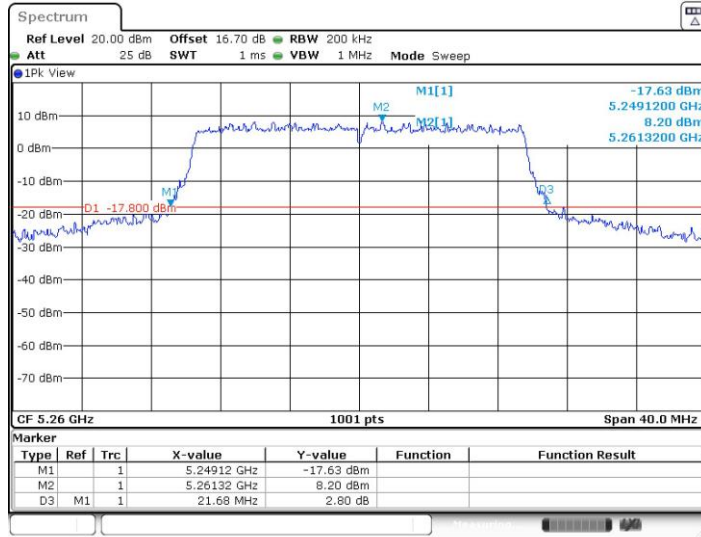

Date: 16.DEC.2022 09:06:08


11AX20MIMO_Ant2_5260

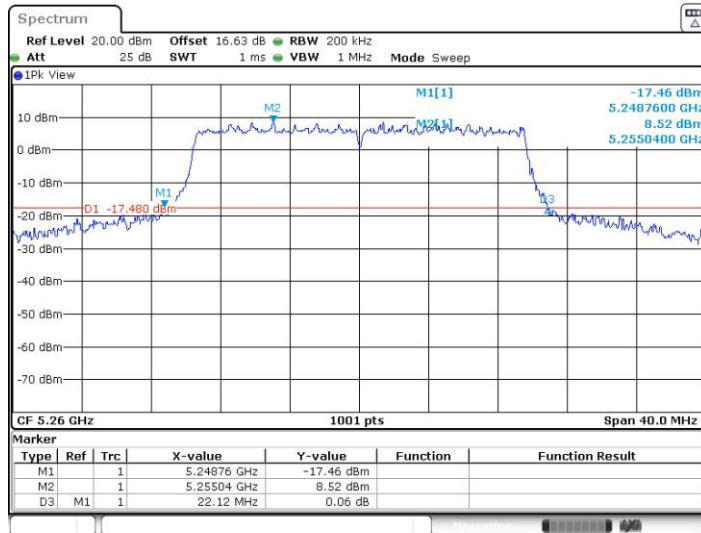

Date: 16.DEC.2022 09:07:03




11AX20MIMO_Ant1_5300

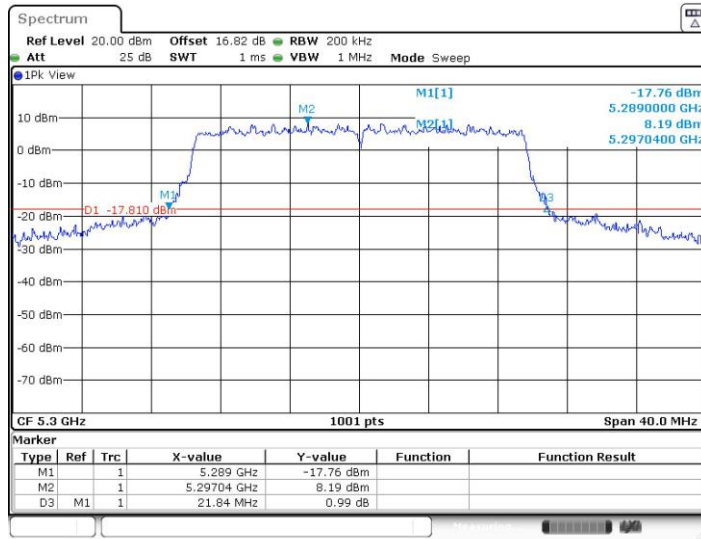

Date: 16.DEC.2022 09:08:34


11AX20MIMO_Ant2_5300

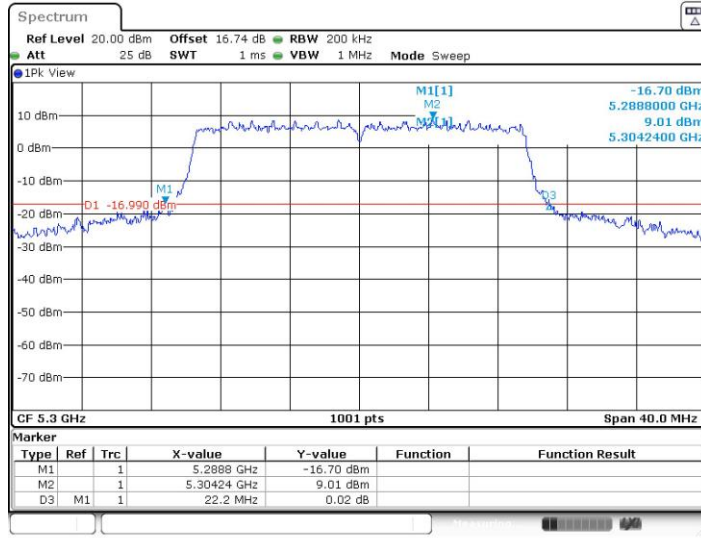

Date: 16.DEC.2022 09:09:29




11AX20MIMO_Ant1_5320

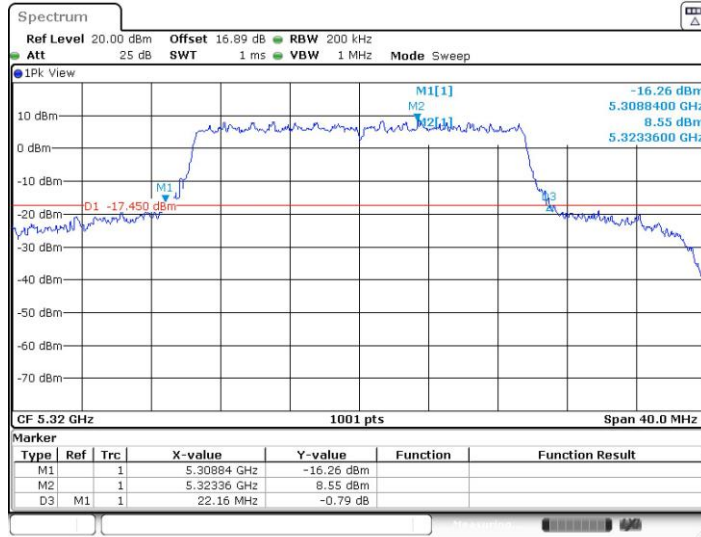

Date: 16.DEC.2022 09:10:48


11AX20MIMO_Ant2_5320

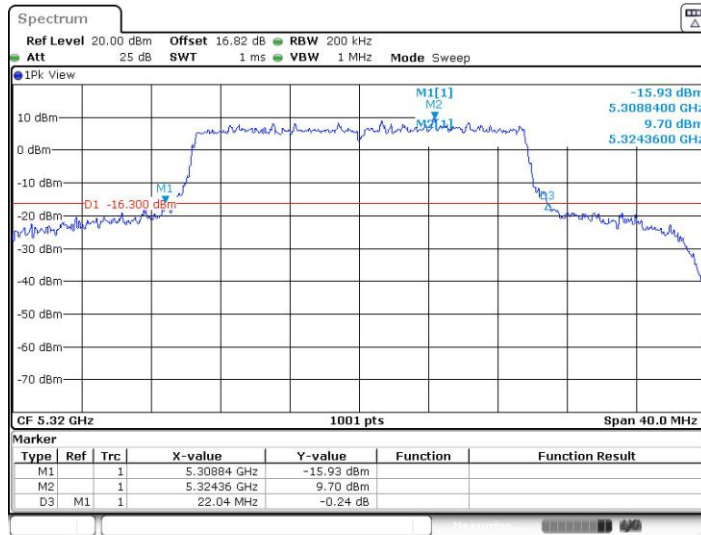

Date: 16.DEC.2022 09:11:49




11AX20MIMO_Ant1_5500

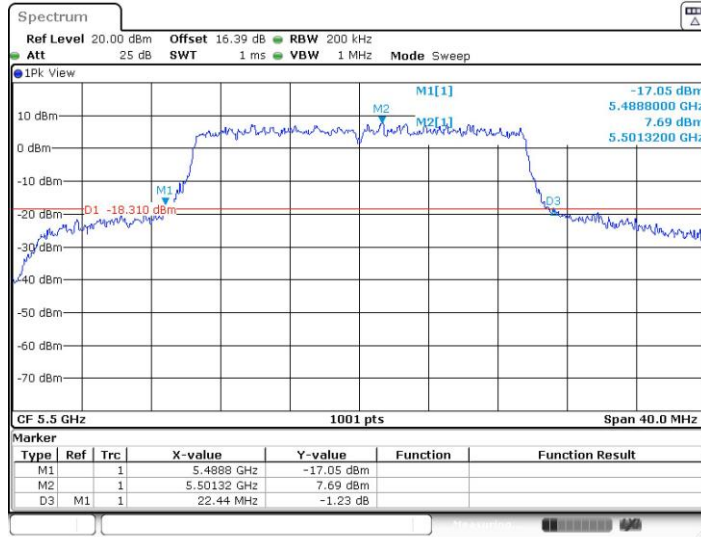

Date: 16.DEC.2022 09:14:26


11AX20MIMO_Ant2_5500

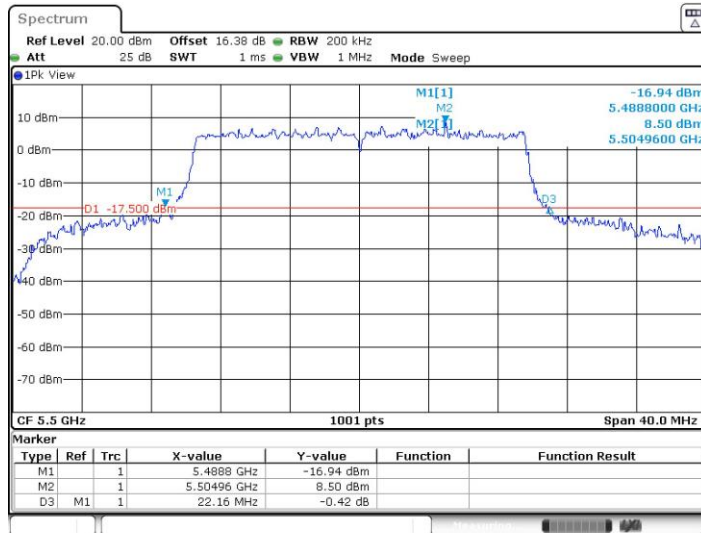

Date: 16.DEC.2022 09:15:17




11AX20MIMO_Ant1_5580

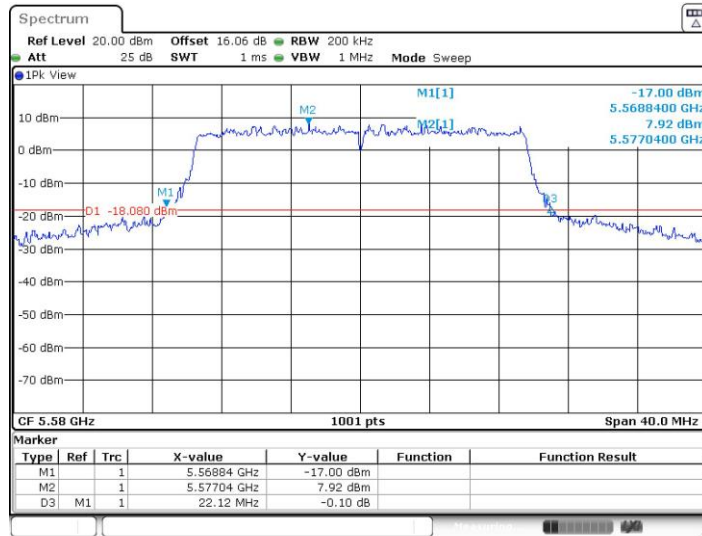

Date: 16.DEC.2022 09:17:27


11AX20MIMO_Ant2_5580

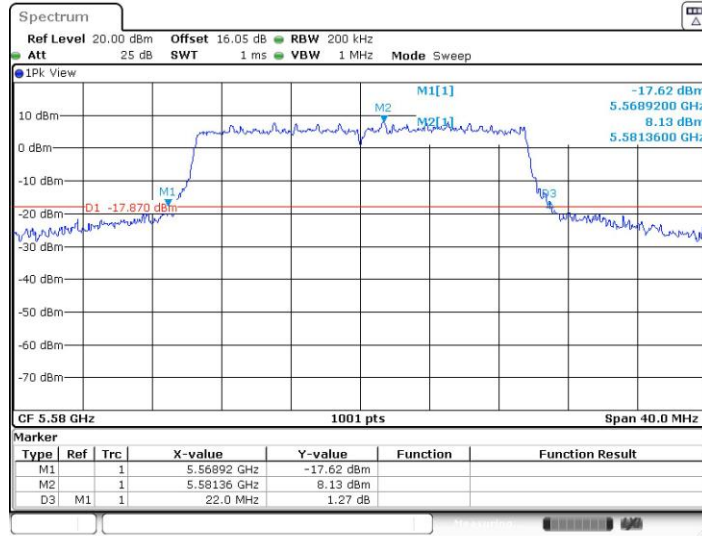

Date: 16.DEC.2022 09:18:24




11AX20MIMO_Ant1_5700

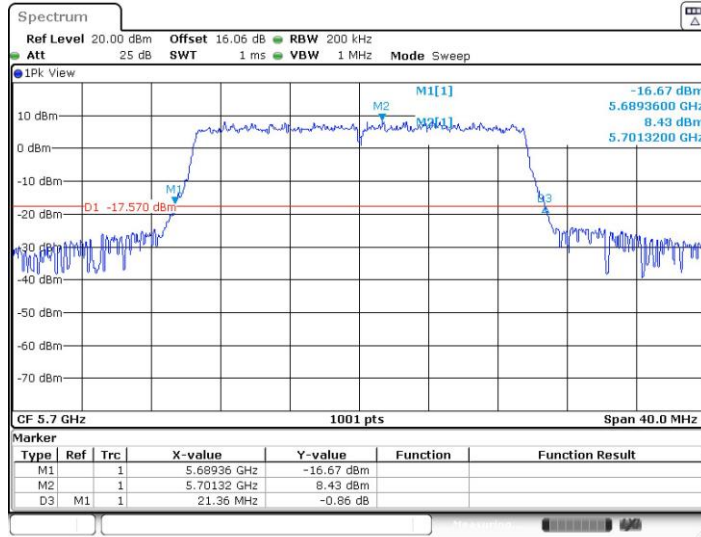

Date: 16.DEC.2022 09:19:53


11AX20MIMO_Ant2_5700

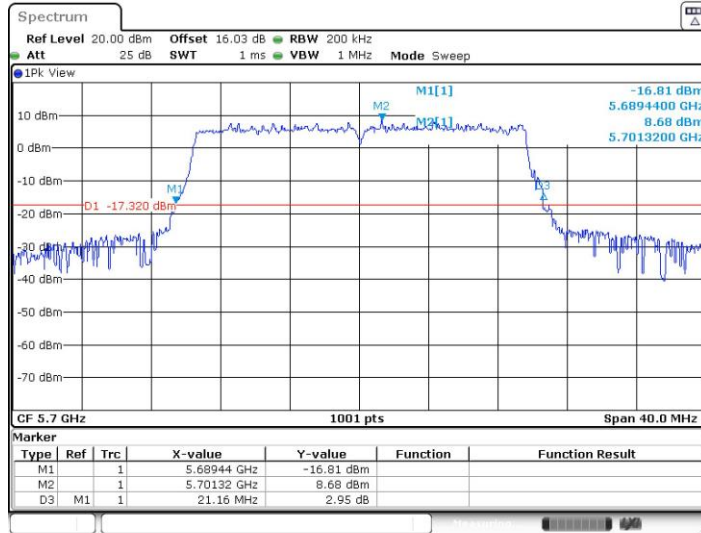

Date: 16.DEC.2022 09:20:53




11AX20MIMO_Ant1_5720

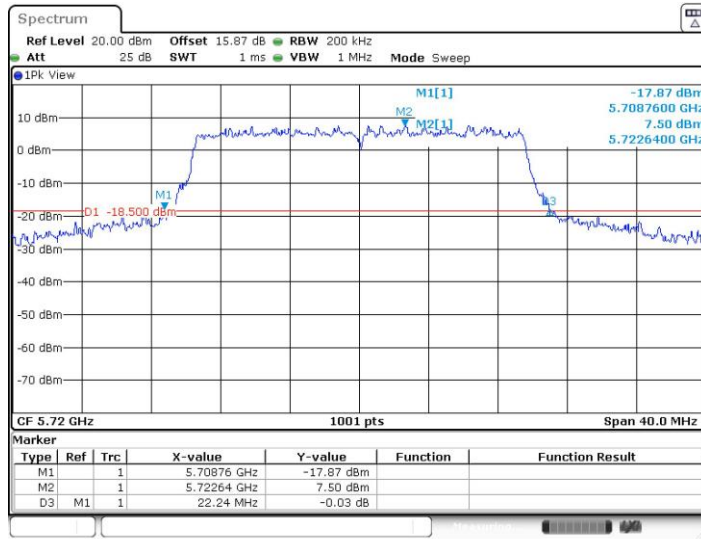

Date: 16.DEC.2022 09:24:17


11AX20MIMO_Ant2_5720

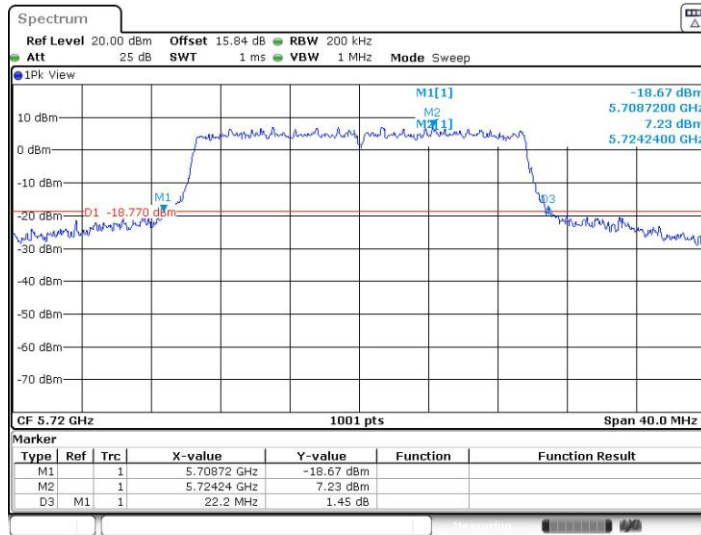

Date: 16.DEC.2022 09:25:27




11AX20MIMO_Ant1_5745

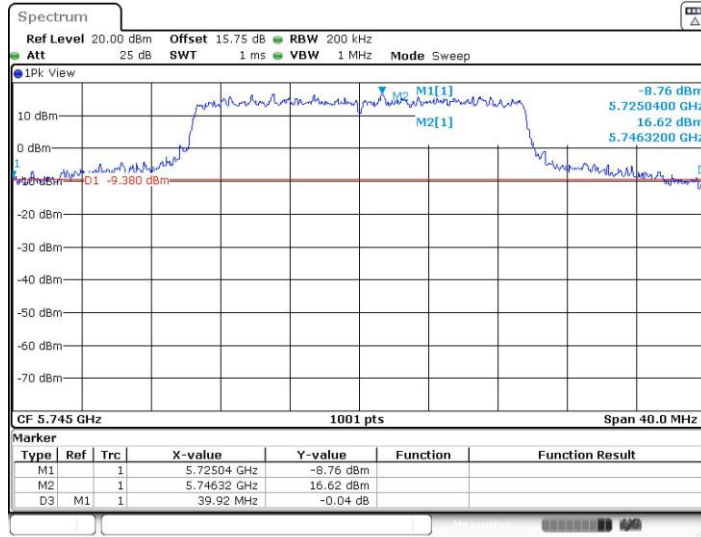

Date: 16.DEC.2022 14:06:31


11AX20MIMO_Ant2_5745

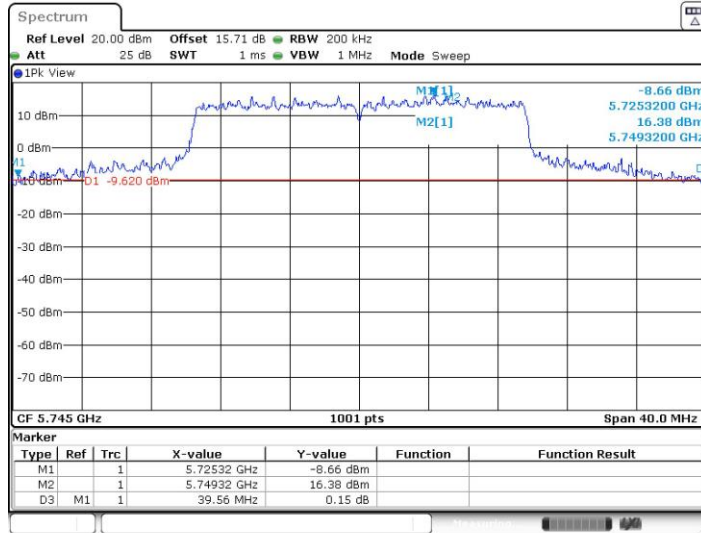

Date: 16.DEC.2022 14:07:43




11AX20MIMO_Ant1_5785

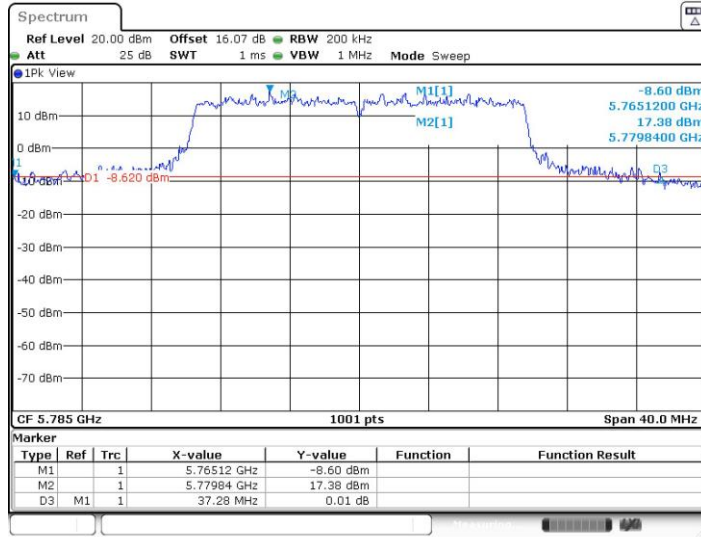

Date: 16.DEC.2022 14:09:17


11AX20MIMO_Ant2_5785

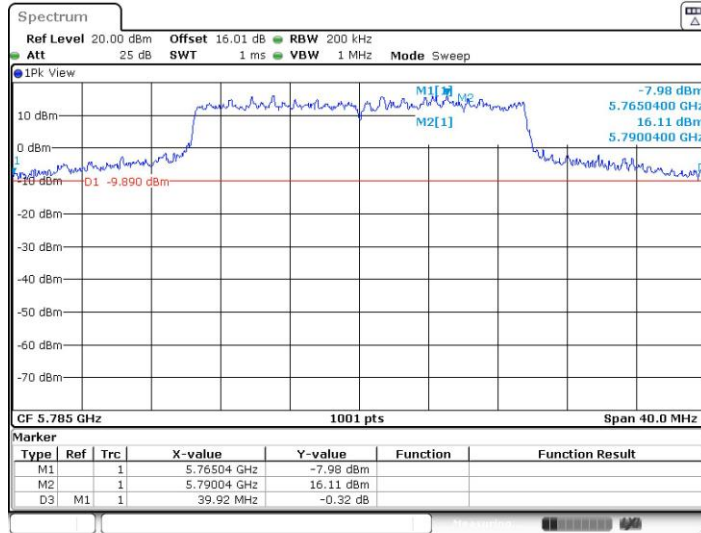

Date: 16.DEC.2022 14:10:32




11AX20MIMO_Ant1_5825

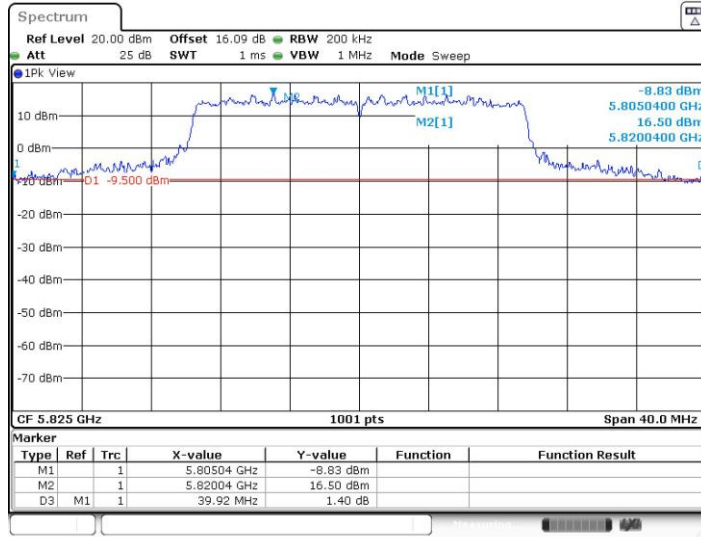

Date: 16.DEC.2022 14:12:04

11AX20MIMO_Ant2_5825

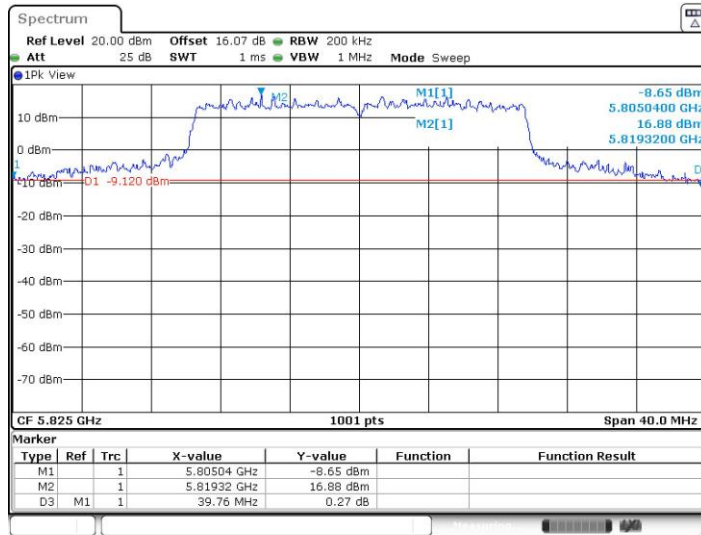

Date: 16.DEC.2022 14:13:12