


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

Horizontal

130 dBuV/m

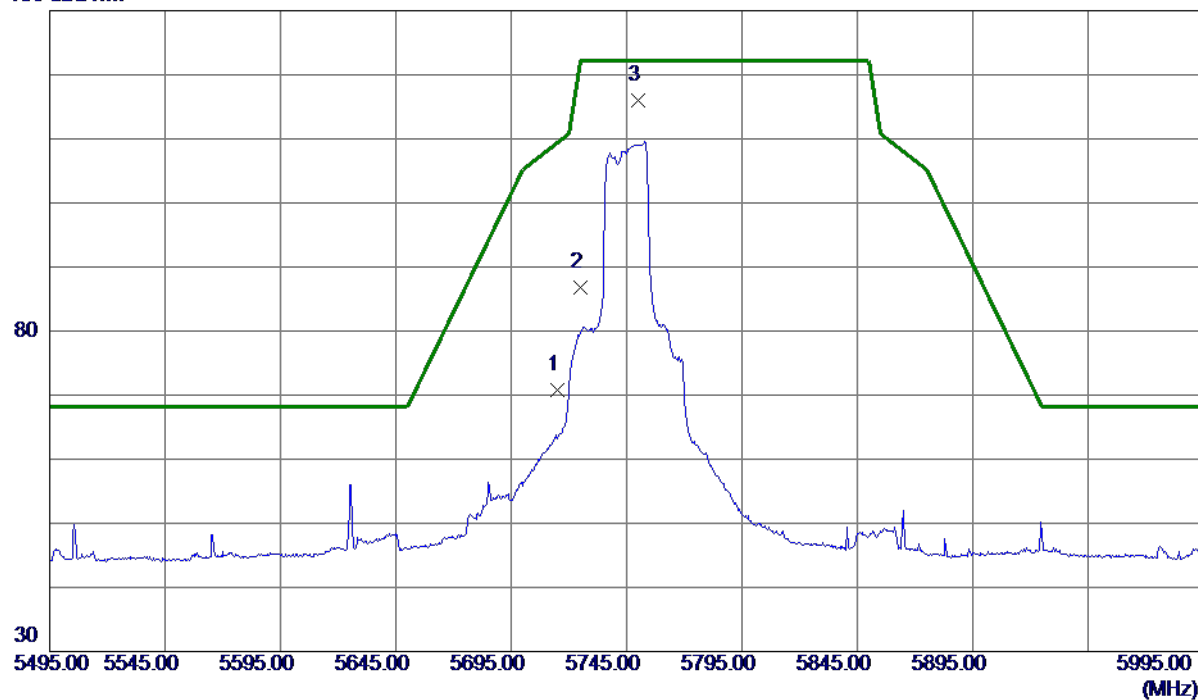

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	55.15	15.65	70.80	109.40	-38.60	Peak	
2	5725.0000	71.03	15.68	86.71	122.20	-35.49	Peak	
3 *	5750.0000	100.25	15.74	115.99	122.20	-6.21	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

Horizontal

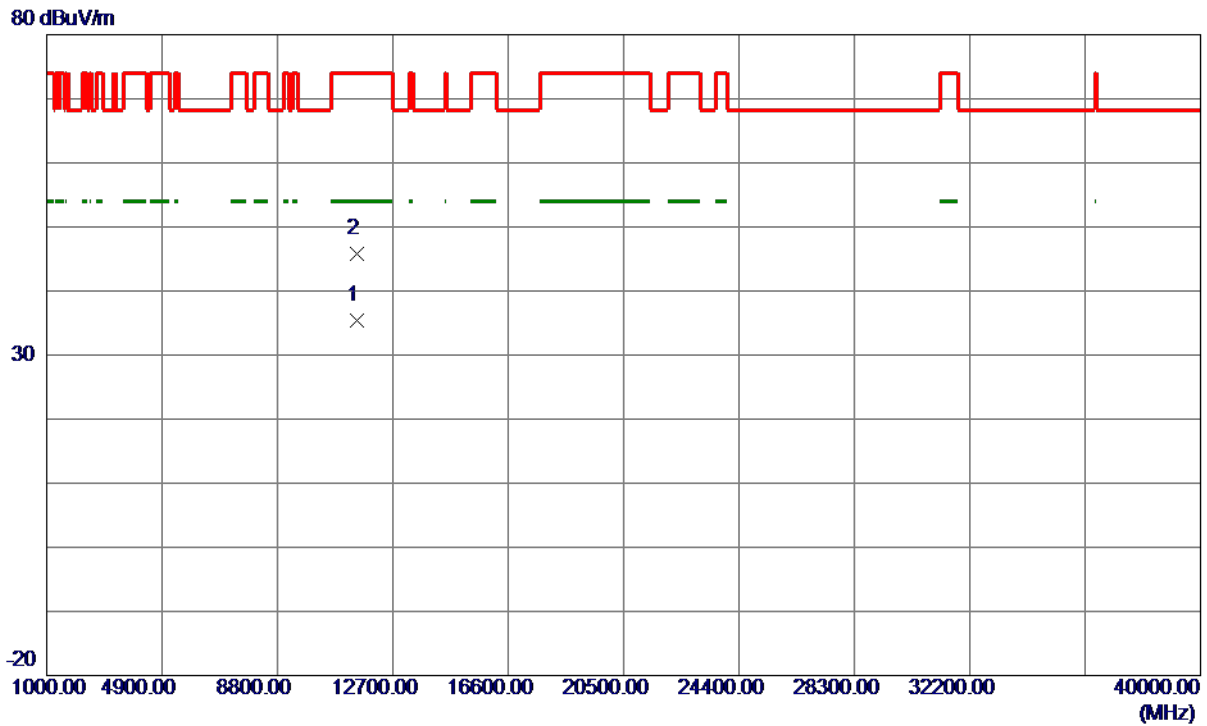

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.1500	23.28	12.06	35.34	54.00	-18.66	AVG	
2	11489.5000	33.81	12.07	45.88	74.00	-28.12	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

Vertical

130 dBuV/m

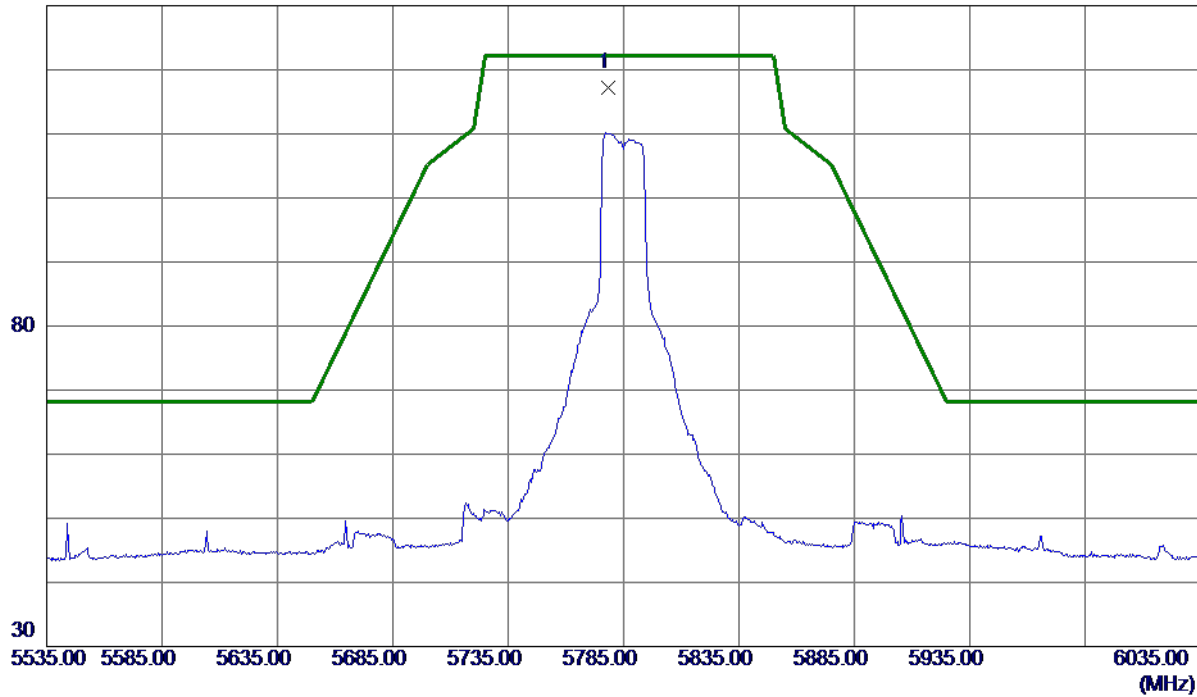

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5778.5000	101.49	15.81	117.30	122.20	-4.90	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

Vertical

80 dBuV/m

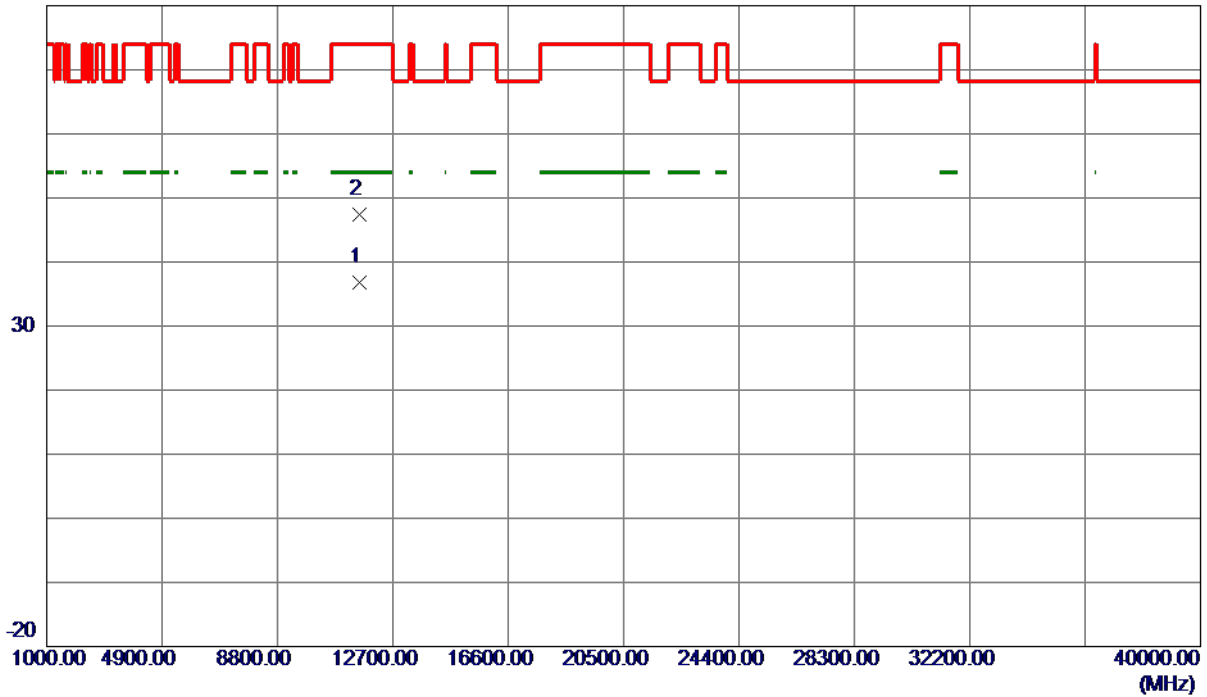

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11561.4250	24.67	12.14	36.81	54.00	-17.19	AVG	
2	11562.6500	35.34	12.14	47.48	74.00	-26.52	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

Horizontal

130 dBuV/m

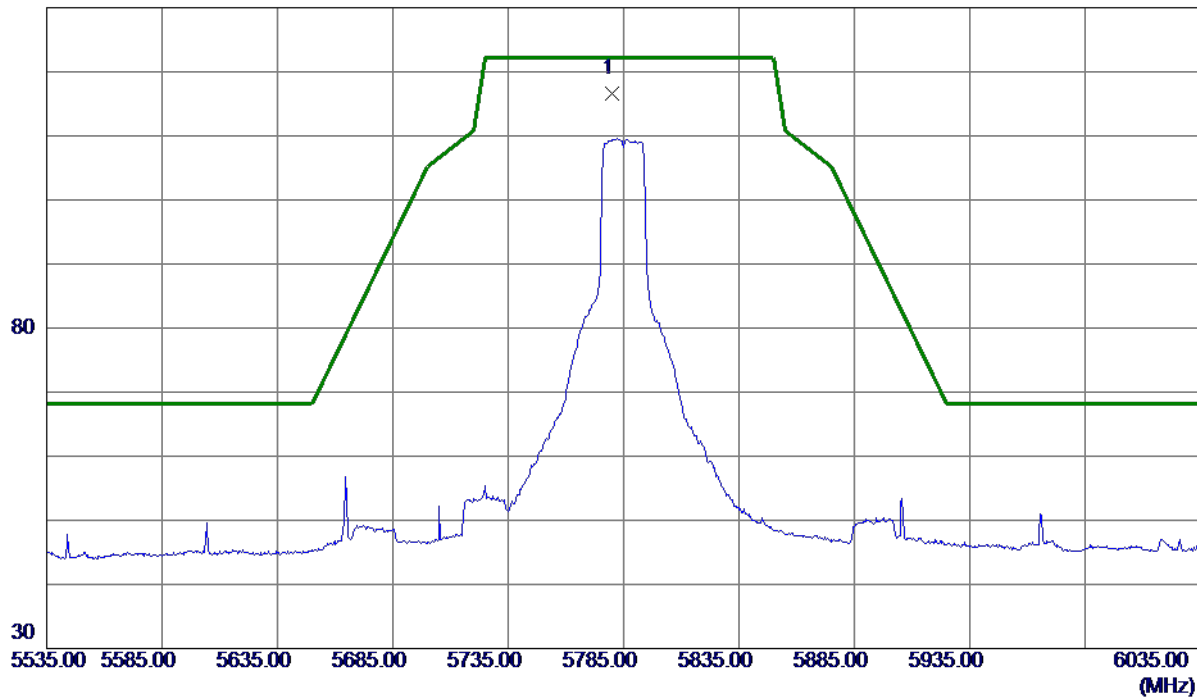

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5779.7500	100.80	15.81	116.61	122.20	-5.59	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

Horizontal

80 dBuV/m

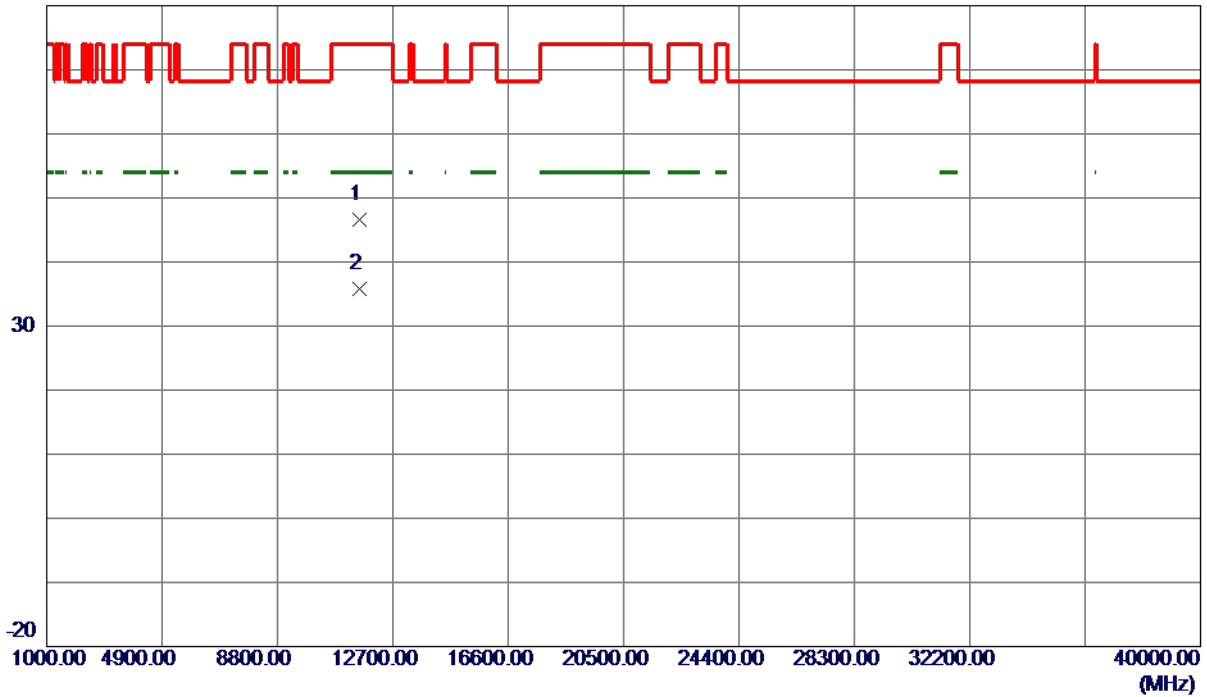

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11571.4100	34.52	12.15	46.67	74.00	-27.33	Peak	
2 *	11576.5400	23.59	12.15	35.74	54.00	-18.26	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Vertical

130 dBuV/m

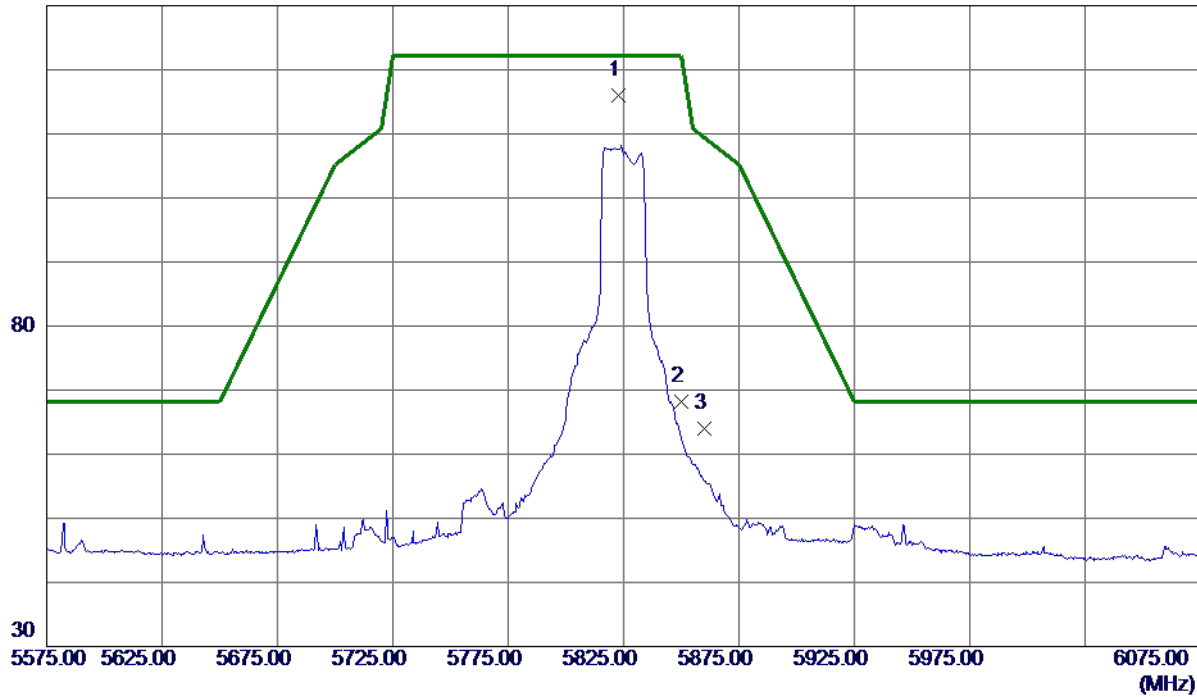

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.0000	100.15	15.91	116.06	122.20	-6.14	Peak	No Limit
2	5850.0000	52.17	15.97	68.14	122.20	-54.06	Peak	
3	5860.0000	48.08	16.00	64.08	109.40	-45.32	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Vertical

80 dBuV/m

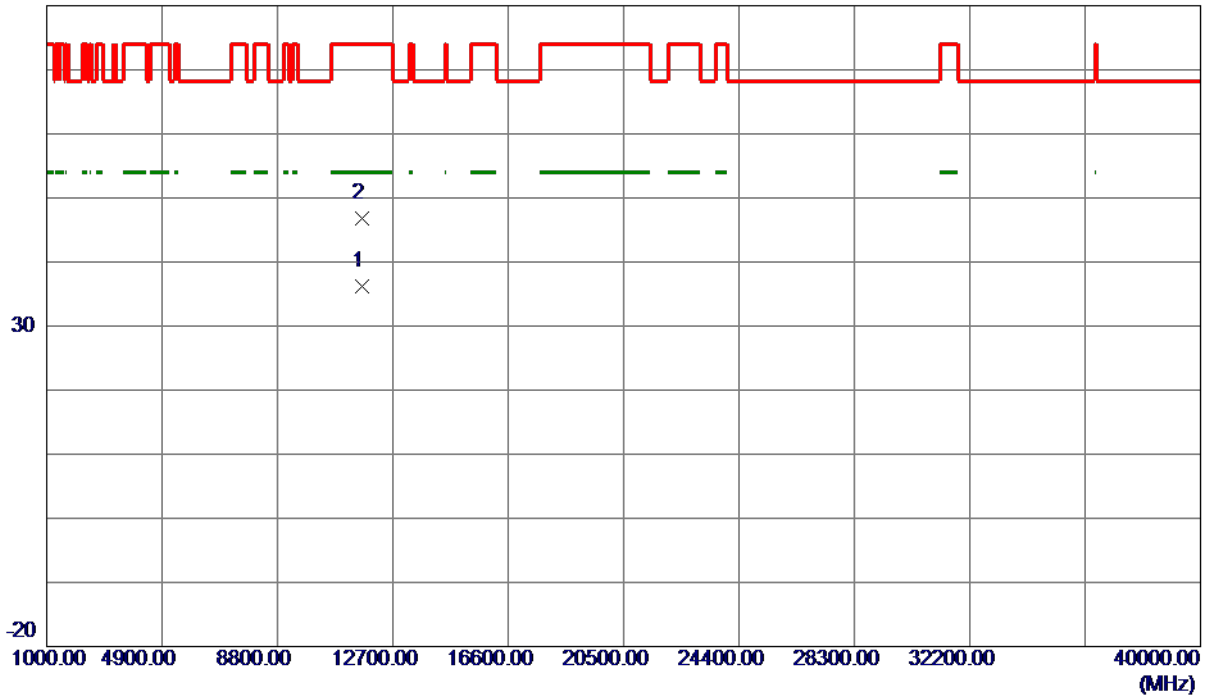

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11656.9750	23.90	12.23	36.13	54.00	-17.87	AVG	
2	11657.3250	34.49	12.23	46.72	74.00	-27.28	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Horizontal

130 dBuV/m

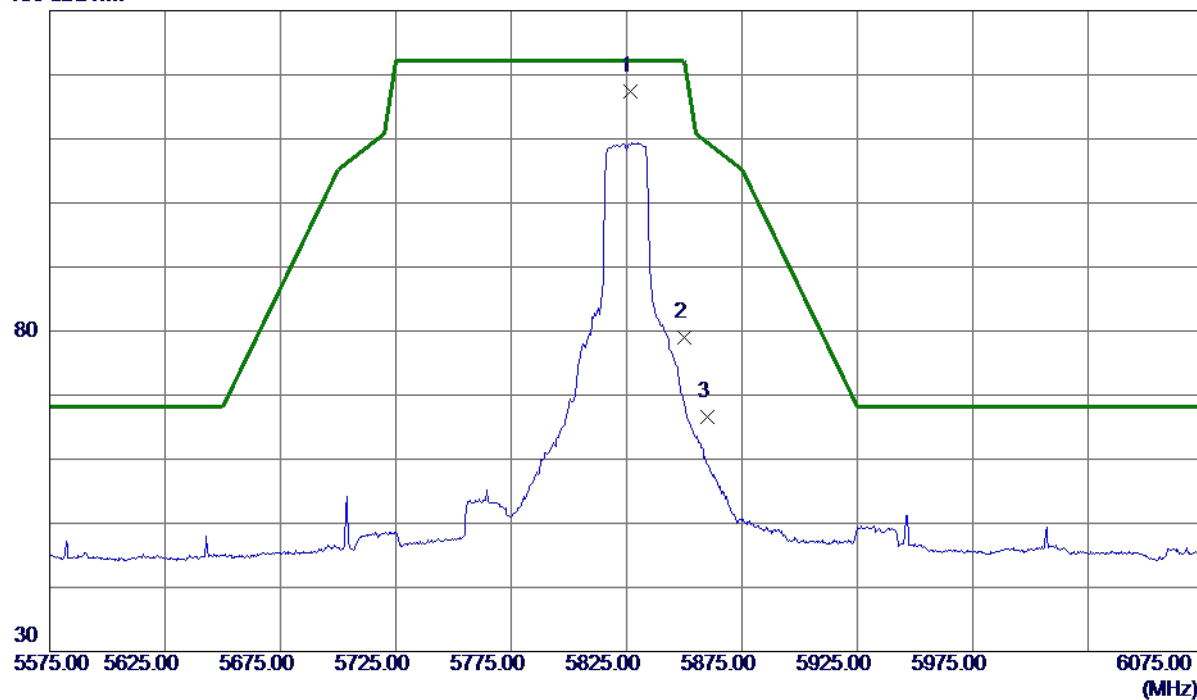

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.7500	101.56	15.92	117.48	122.20	-4.72	Peak	No Limit
2	5850.0000	63.12	15.97	79.09	122.20	-43.11	Peak	
3	5860.0000	50.56	16.00	66.56	109.40	-42.84	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Horizontal

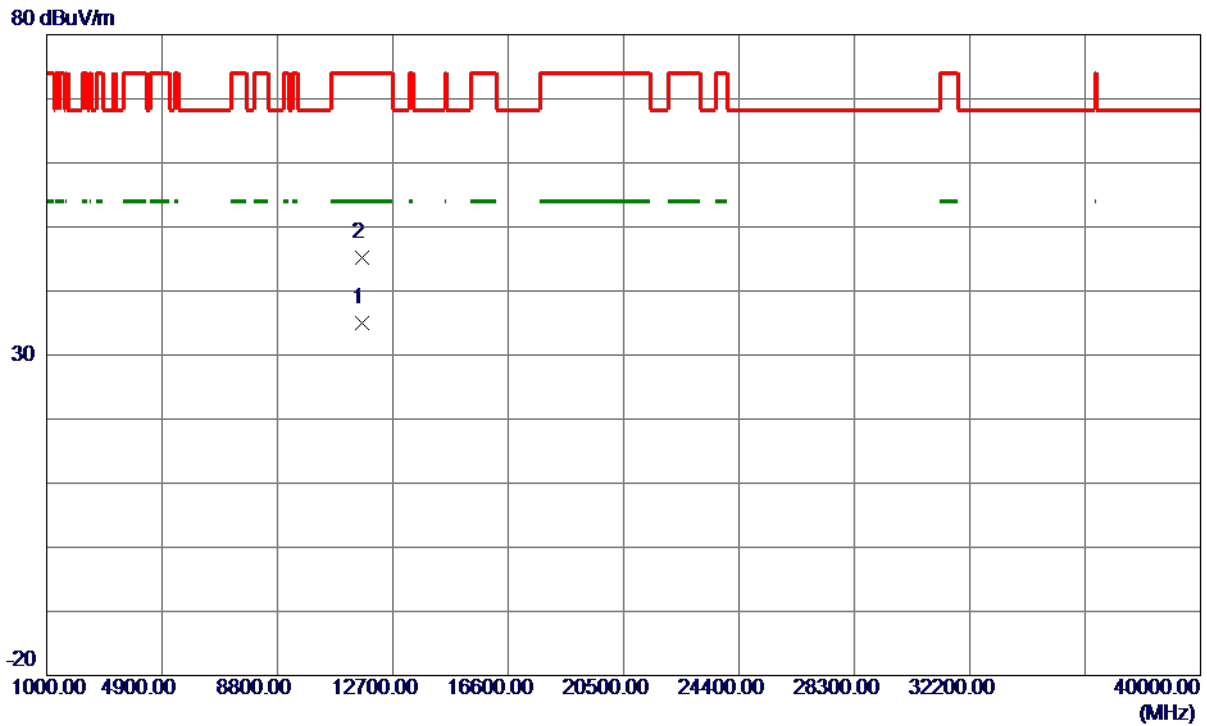

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11653.3099	22.79	12.23	35.02	54.00	-18.98	AVG	
2	11655.7500	32.98	12.23	45.21	74.00	-28.79	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Vertical

130 dBuV/m

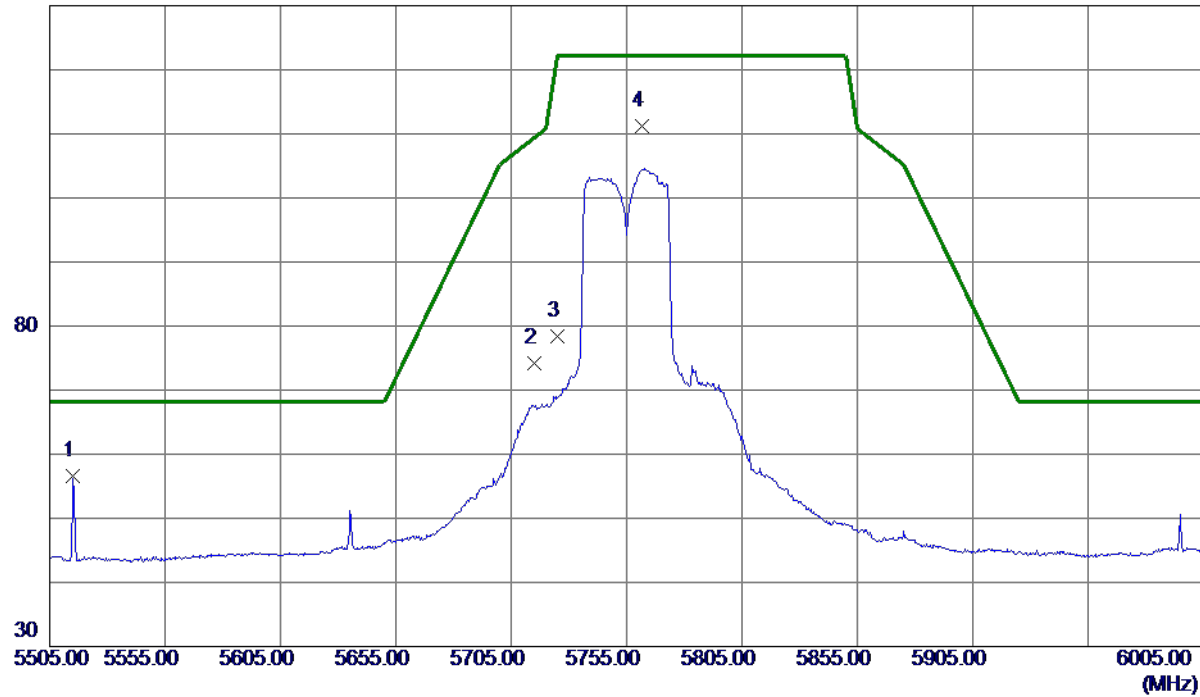

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5515.0000	41.51	15.18	56.69	68.20	-11.51	Peak	
2	5715.0000	58.54	15.65	74.19	109.40	-35.21	Peak	
3	5725.0000	62.74	15.68	78.42	122.20	-43.78	Peak	
4 *	5761.5000	95.45	15.76	111.21	122.20	-10.99	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Vertical

80 dBuV/m

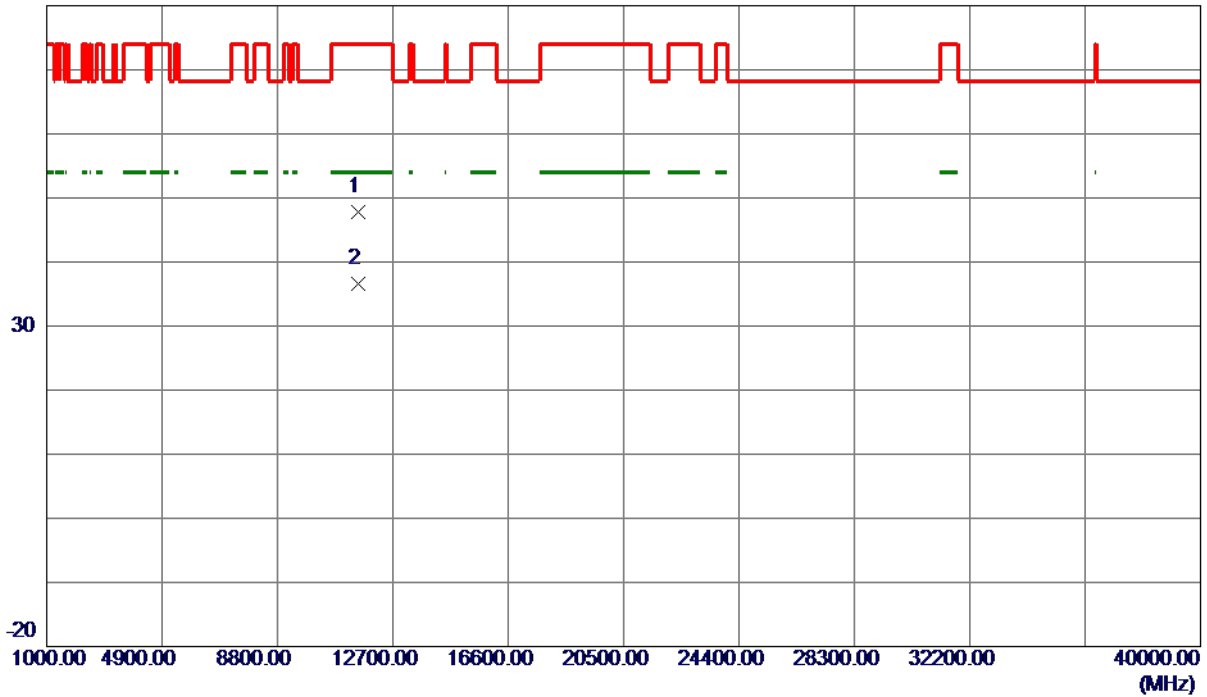

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11513.9600	35.69	12.09	47.78	74.00	-26.22	Peak	
2 *	11514.2850	24.46	12.09	36.55	54.00	-17.45	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Horizontal

130 dBuV/m

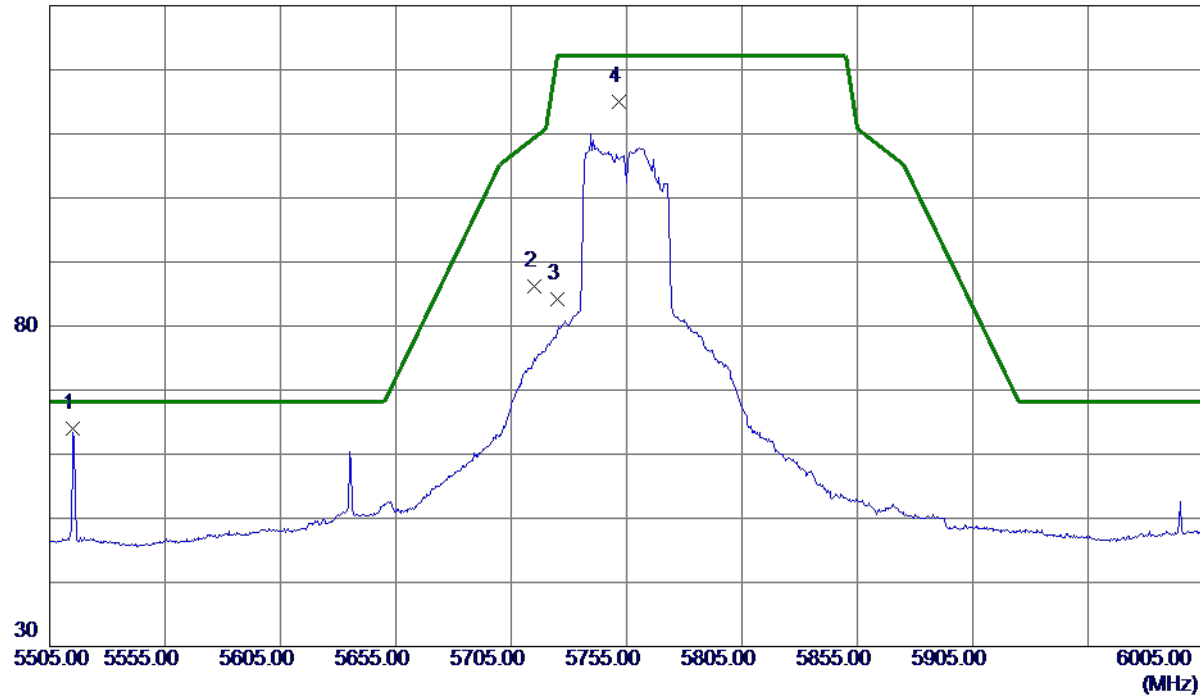

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5515.2500	48.86	15.18	64.04	68.20	-4.16	Peak	
2	5715.0000	70.57	15.65	86.22	109.40	-23.18	Peak	
3	5725.0000	68.49	15.68	84.17	122.20	-38.03	Peak	
4	5751.5000	99.29	15.74	115.03	122.20	-7.17	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Horizontal

80 dBuV/m

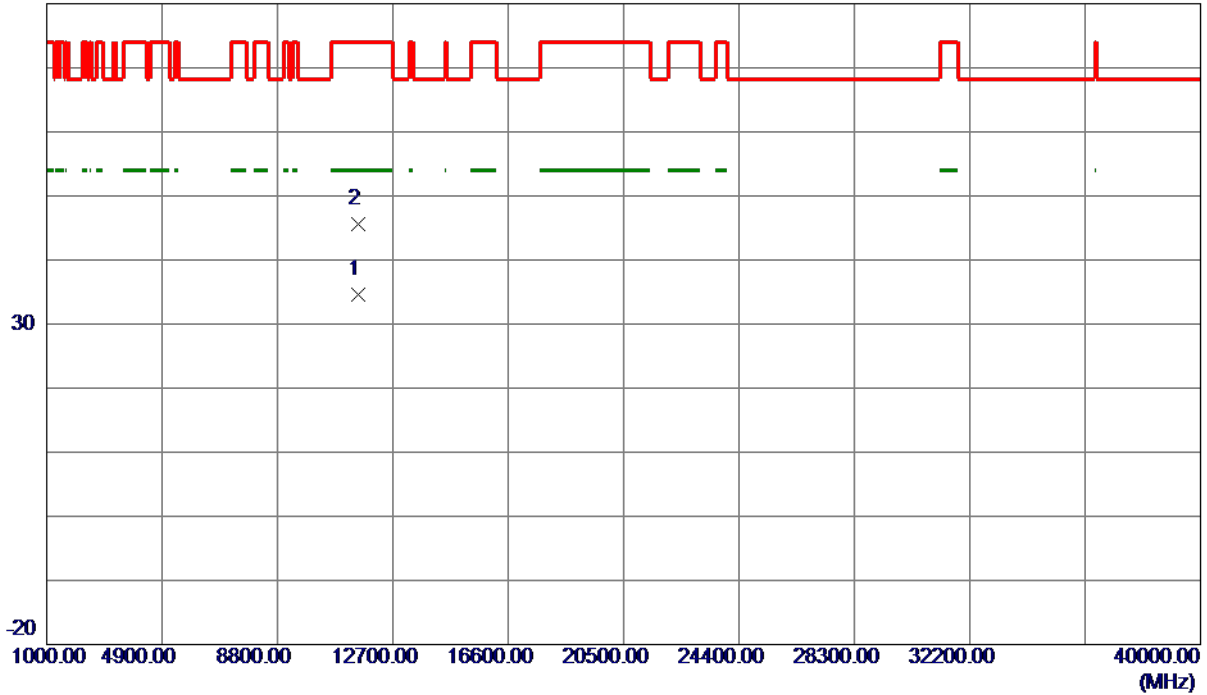

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11513.9300	22.47	12.09	34.56	54.00	-19.44	AVG	
2	11514.5199	33.58	12.09	45.67	74.00	-28.33	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

Vertical

130 dBuV/m

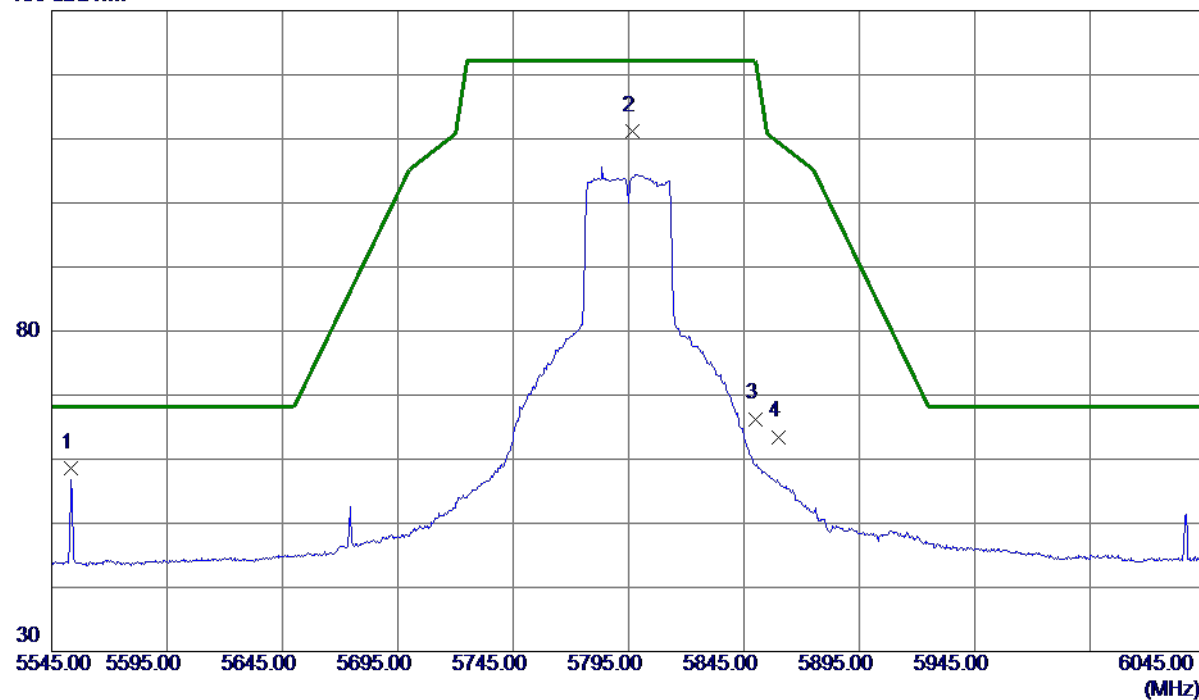

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5553.5000	43.35	15.27	58.62	68.20	-9.58	Peak	
2	5796.5000	95.38	15.85	111.23	122.20	-10.97	Peak	No Limit
3	5850.0000	50.33	15.97	66.30	122.20	-55.90	Peak	
4	5860.0000	47.50	16.00	63.50	109.40	-45.90	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

Vertical

80 dBuV/m

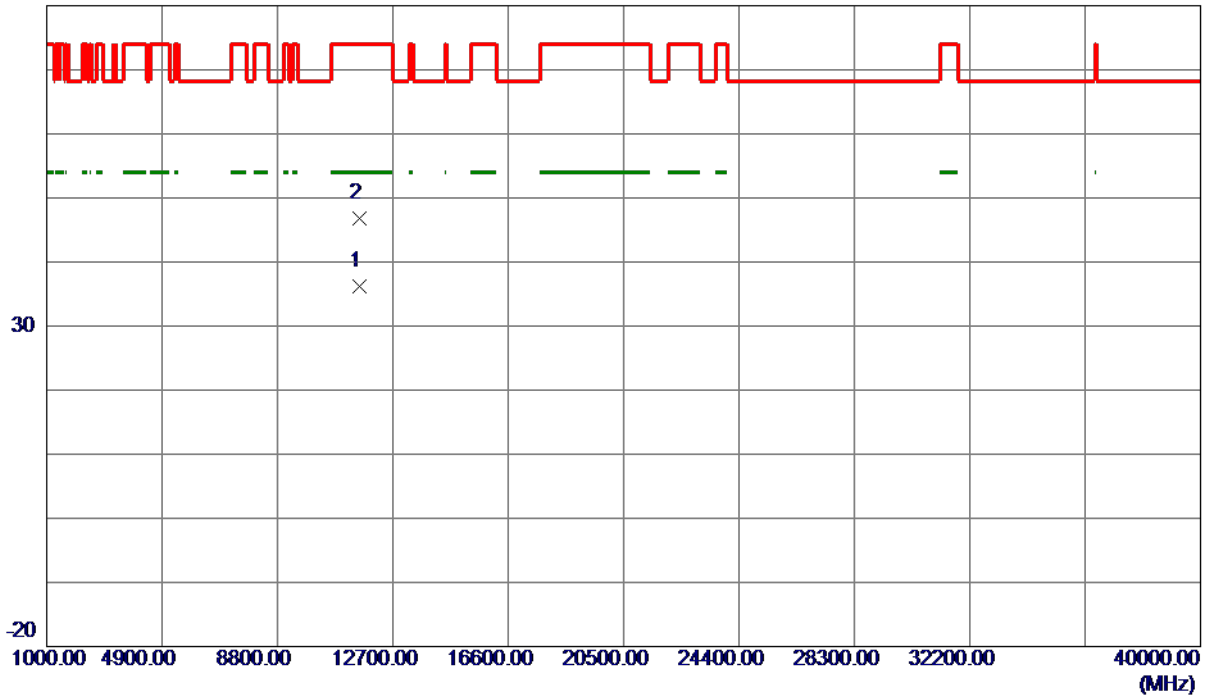

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11589.9700	24.01	12.17	36.18	54.00	-17.82	AVG	
2	11594.1800	34.56	12.17	46.73	74.00	-27.27	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

Horizontal

130 dBuV/m

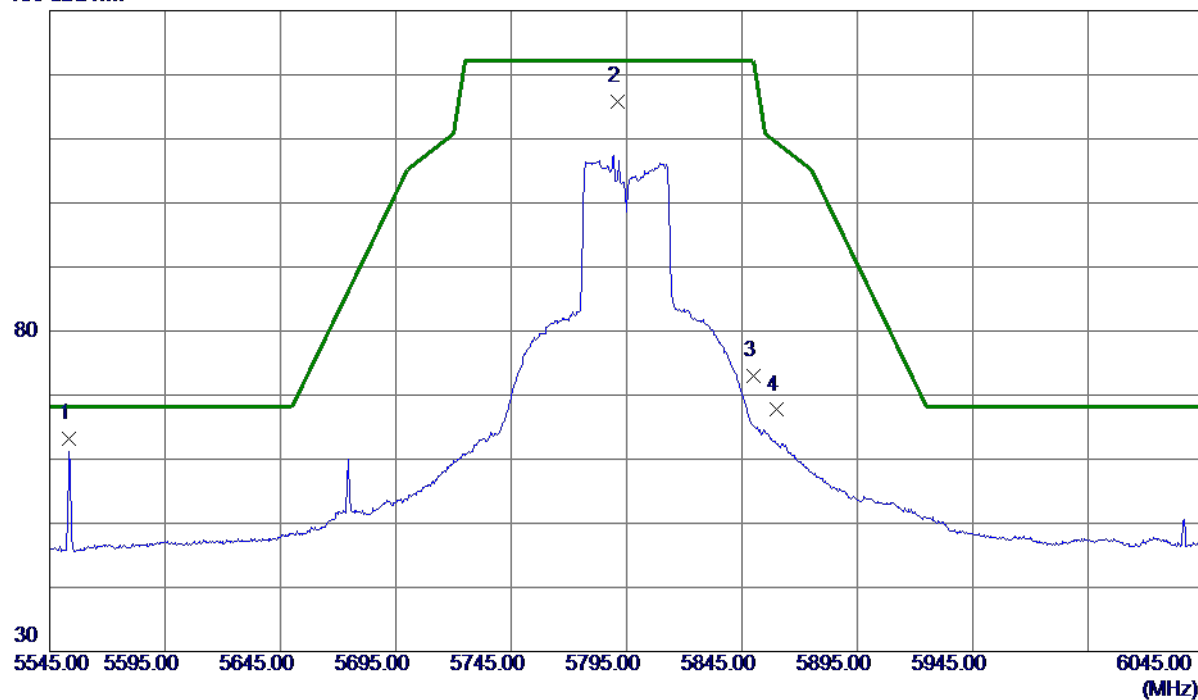

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5553.5000	47.94	15.27	63.21	68.20	-4.99	Peak	
2	5791.0000	99.95	15.83	115.78	122.20	-6.42	Peak	No Limit
3	5850.0000	56.98	15.97	72.95	122.20	-49.25	Peak	
4	5860.0000	51.70	16.00	67.70	109.40	-41.70	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

Horizontal

80 dBuV/m

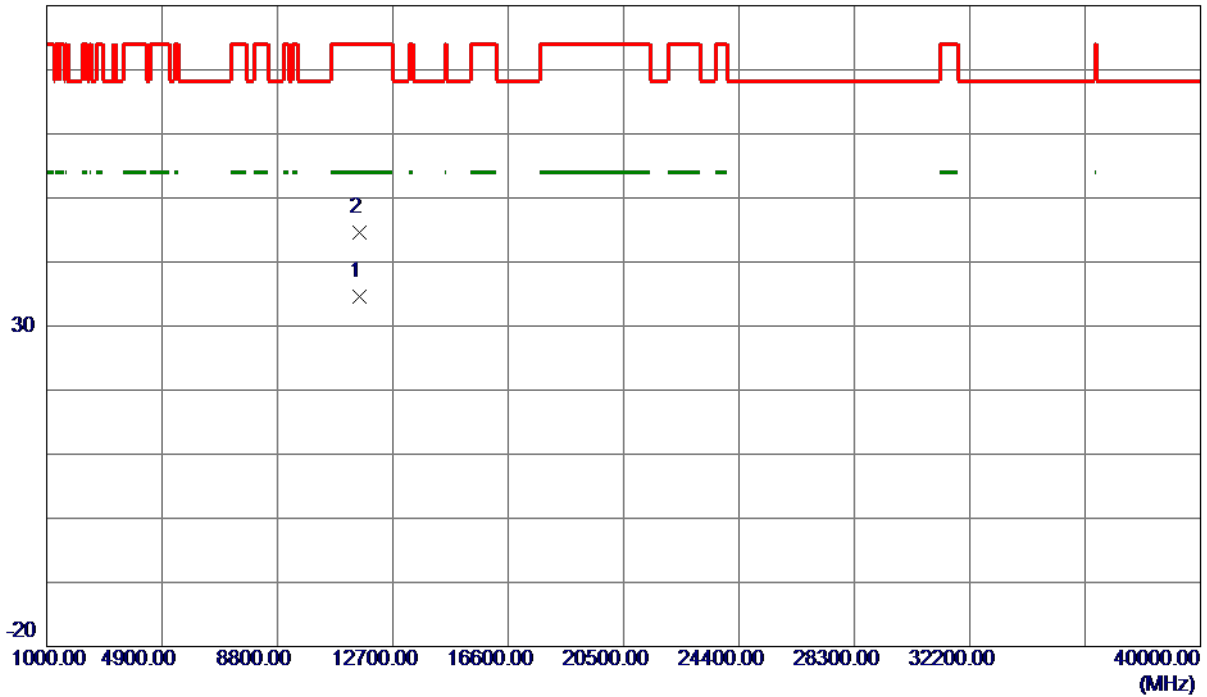

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11588.7850	22.43	12.16	34.59	54.00	-19.41	AVG	
2	11593.3050	32.48	12.17	44.65	74.00	-29.35	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

130 dBuV/m

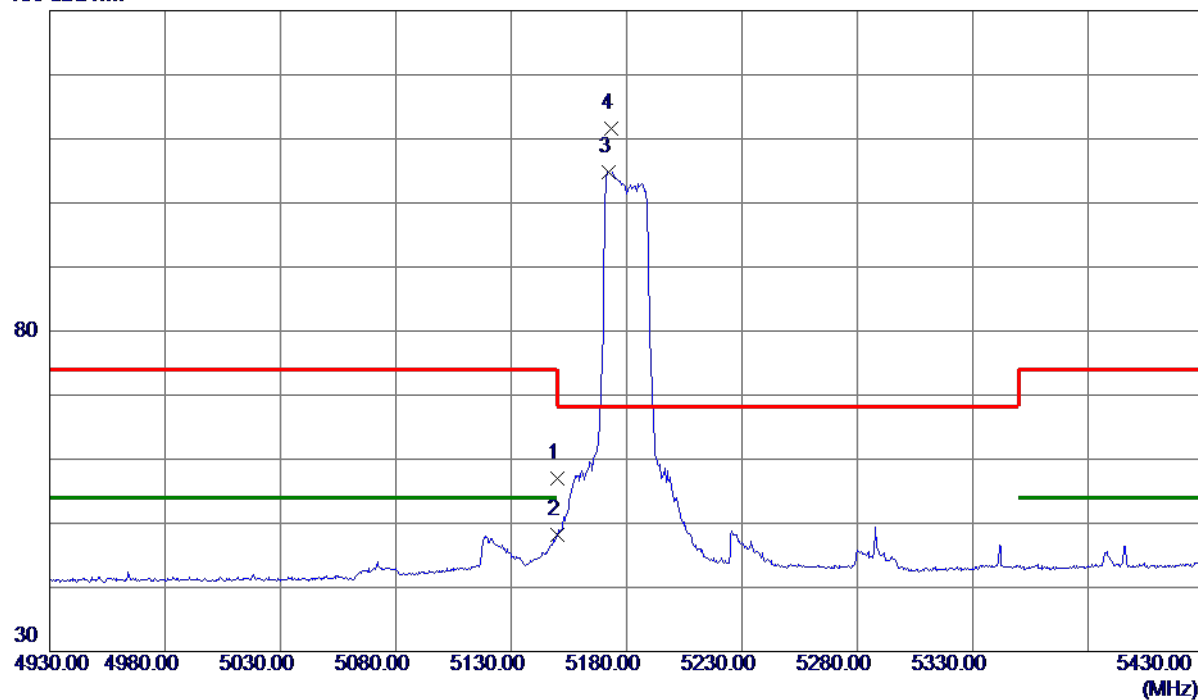

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.70	14.32	57.02	74.00	-16.98	Peak	
2	5150.0000	33.92	14.32	48.24	54.00	-5.76	AVG	
3	5172.2500	90.43	14.37	104.80	999.00	-894.20	AVG	No Limit
4 *	5173.2500	97.19	14.37	111.56	68.30	43.26	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

80 dBuV/m

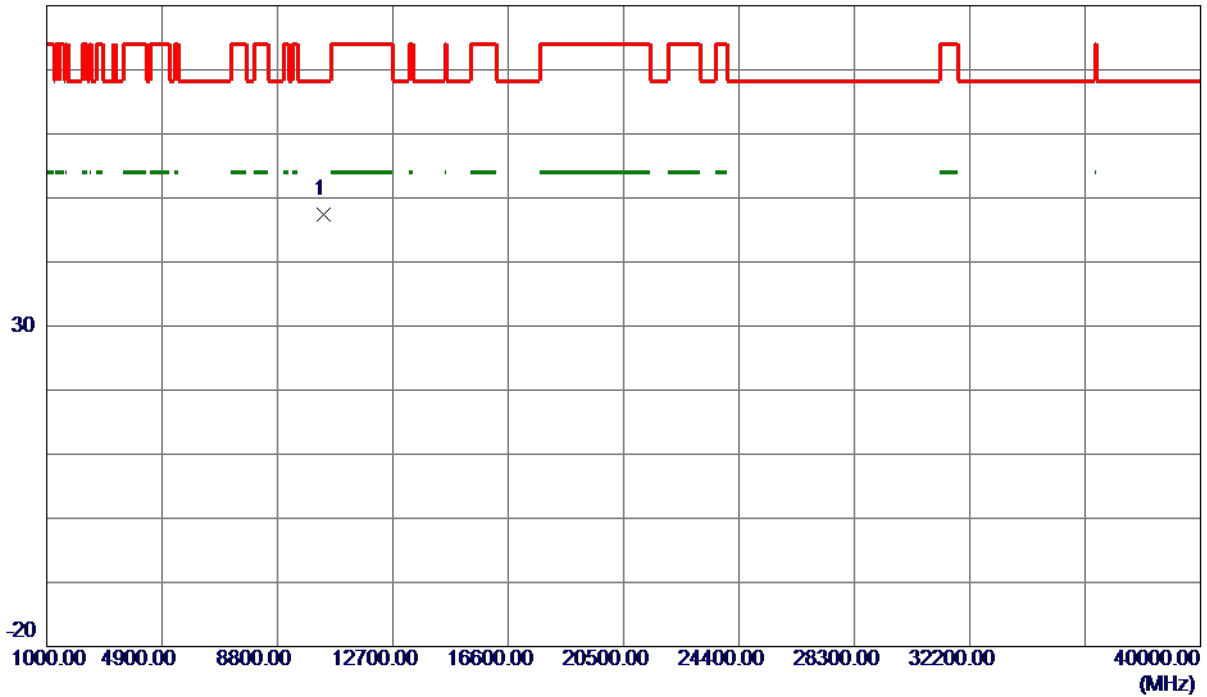

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10371.7750	36.12	11.32	47.44	68.30	-20.86	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Horizontal

130 dBuV/m

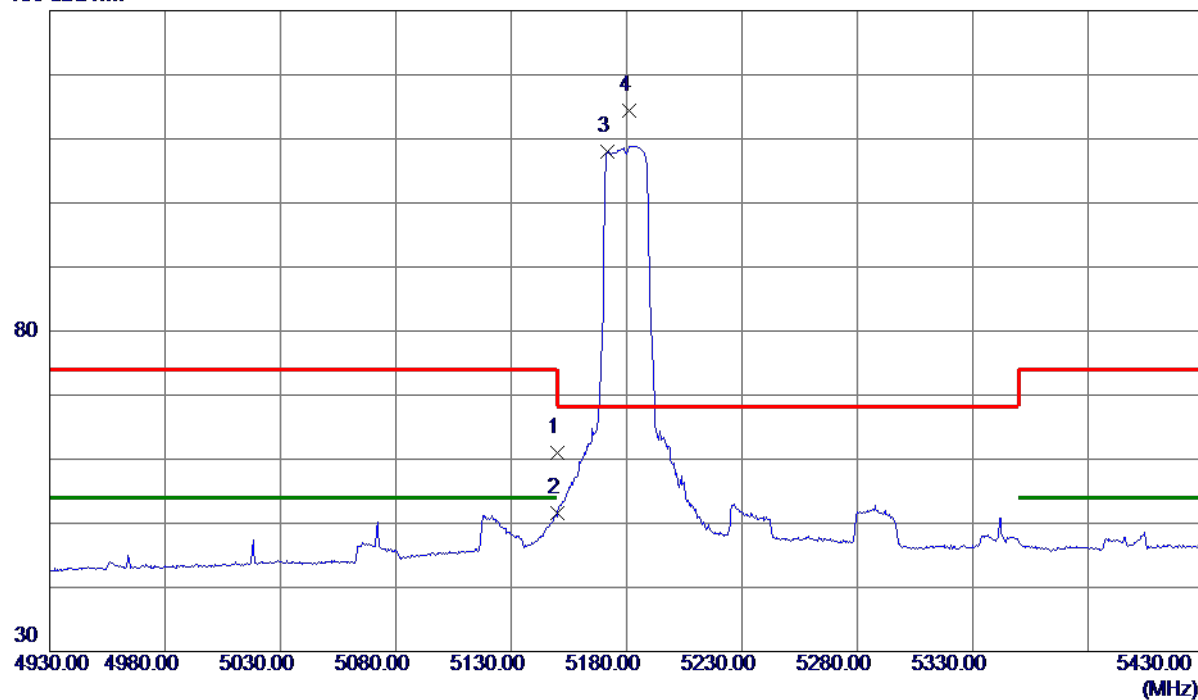

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.73	14.32	61.05	74.00	-12.95	Peak	
2	5150.0000	37.27	14.32	51.59	54.00	-2.41	AVG	
3	5171.7500	93.60	14.37	107.97	999.00	-891.03	AVG	No Limit
4 *	5181.0000	99.95	14.39	114.34	68.30	46.04	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Horizontal

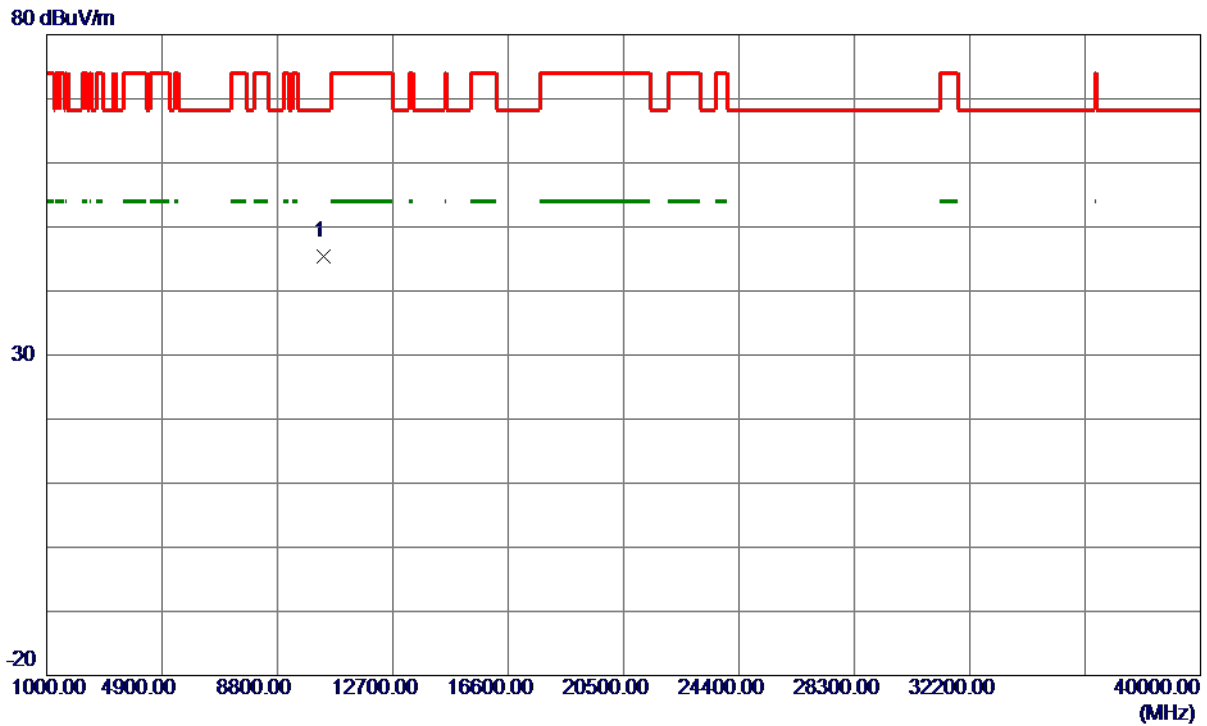

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10367.8500	34.14	11.31	45.45	68.30	-22.85	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

130 dBuV/m

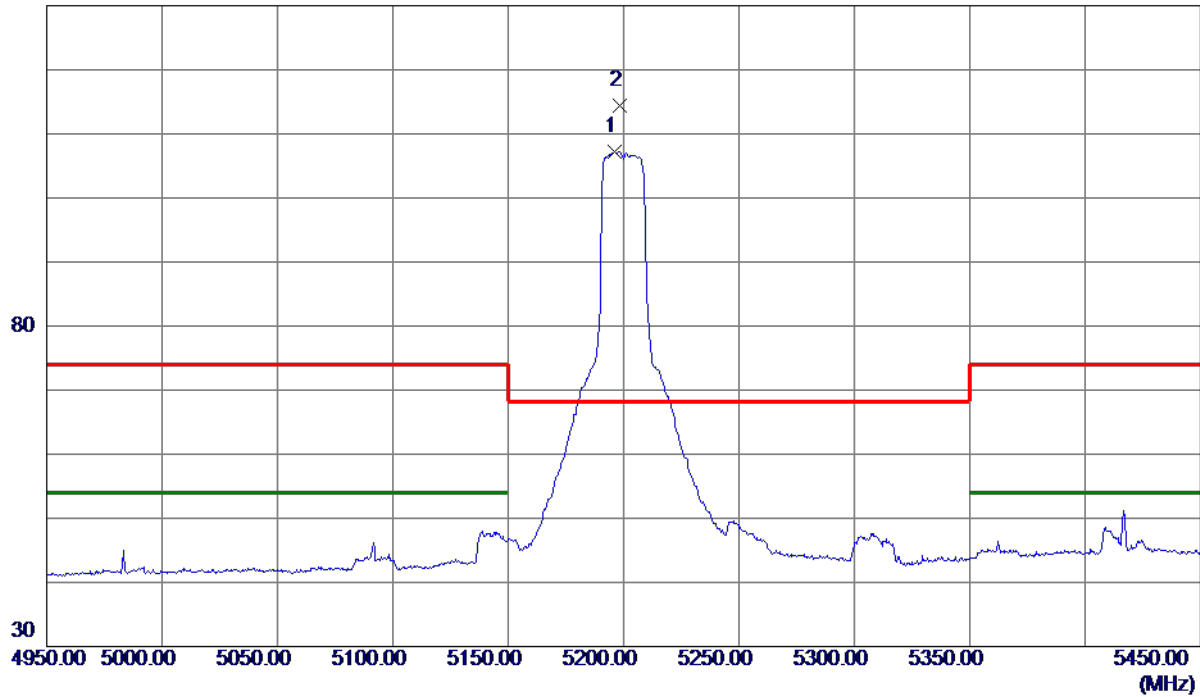

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5196.0000	92.86	14.42	107.28	999.00	-891.72	AVG	No Limit
2 *	5198.2500	99.98	14.43	114.41	68.30	46.11	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

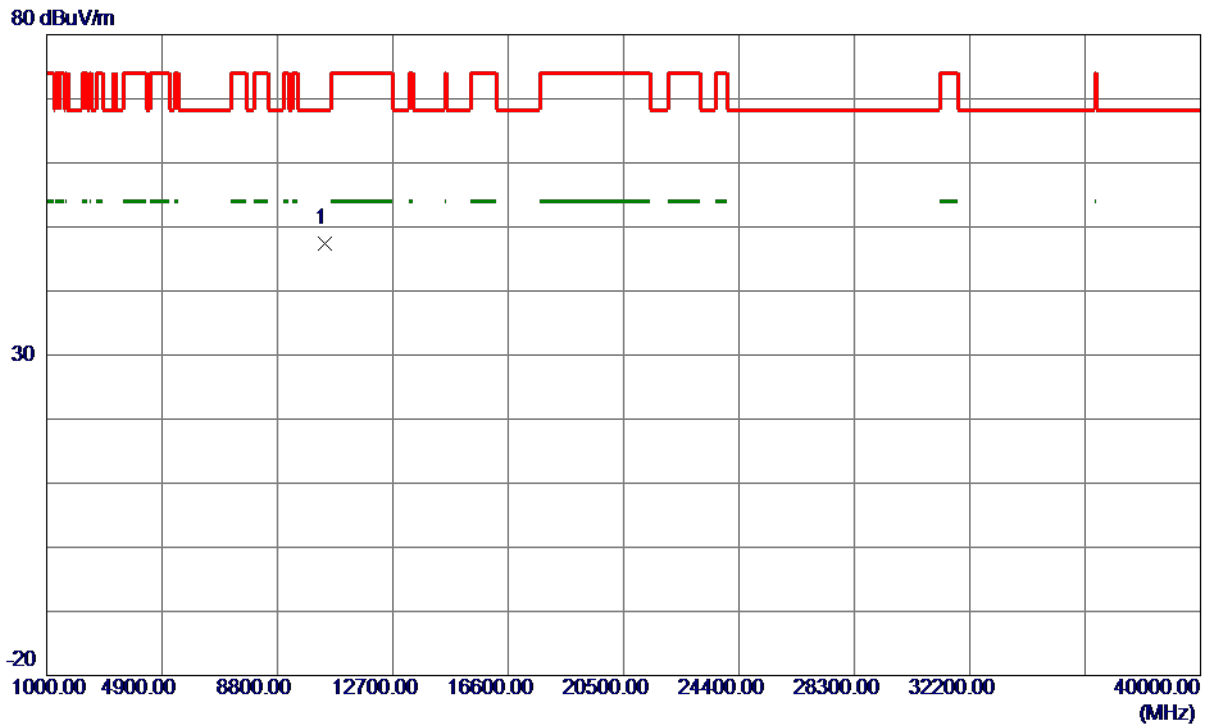

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10398.5750	36.00	11.36	47.36	68.30	-20.94	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

130 dBuV/m

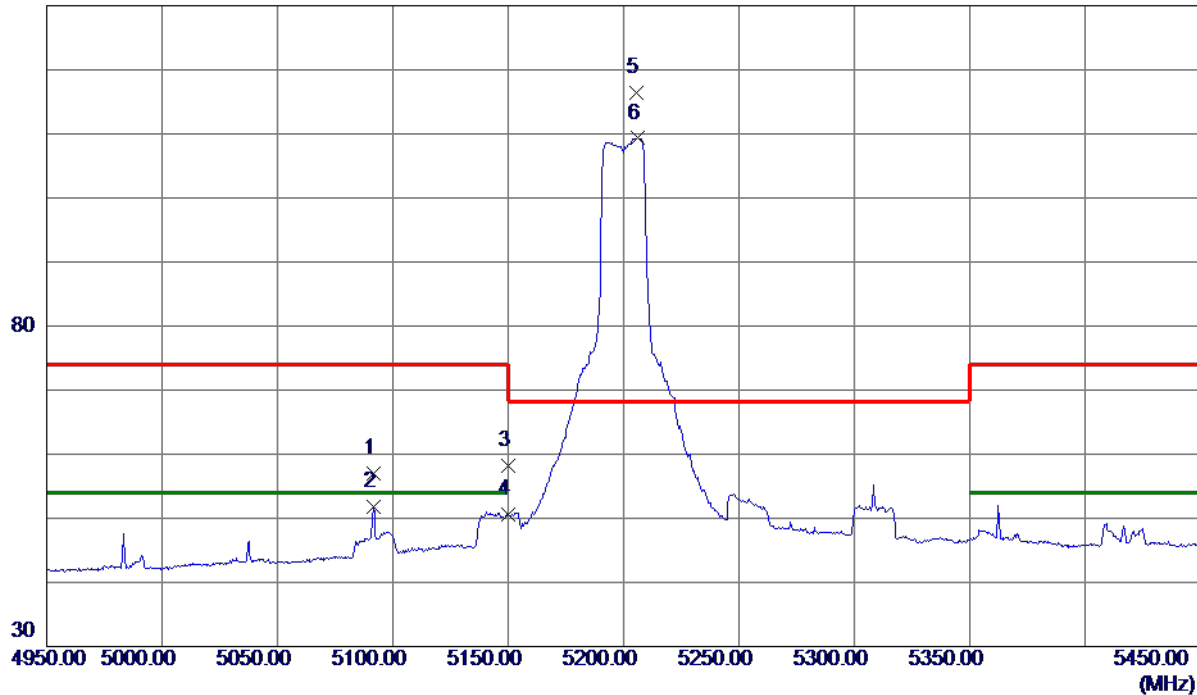

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5091.7500	42.73	14.18	56.91	74.00	-17.09	Peak	
2	5091.7500	37.64	14.18	51.82	54.00	-2.18	AVG	
3	5150.0000	43.82	14.32	58.14	74.00	-15.86	Peak	
4	5150.0000	36.35	14.32	50.67	54.00	-3.33	AVG	
5 *	5205.5000	101.93	14.45	116.38	68.30	48.08	Peak	No Limit
6	5206.2500	94.85	14.45	109.30	999.00	-889.70	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

80 dBuV/m

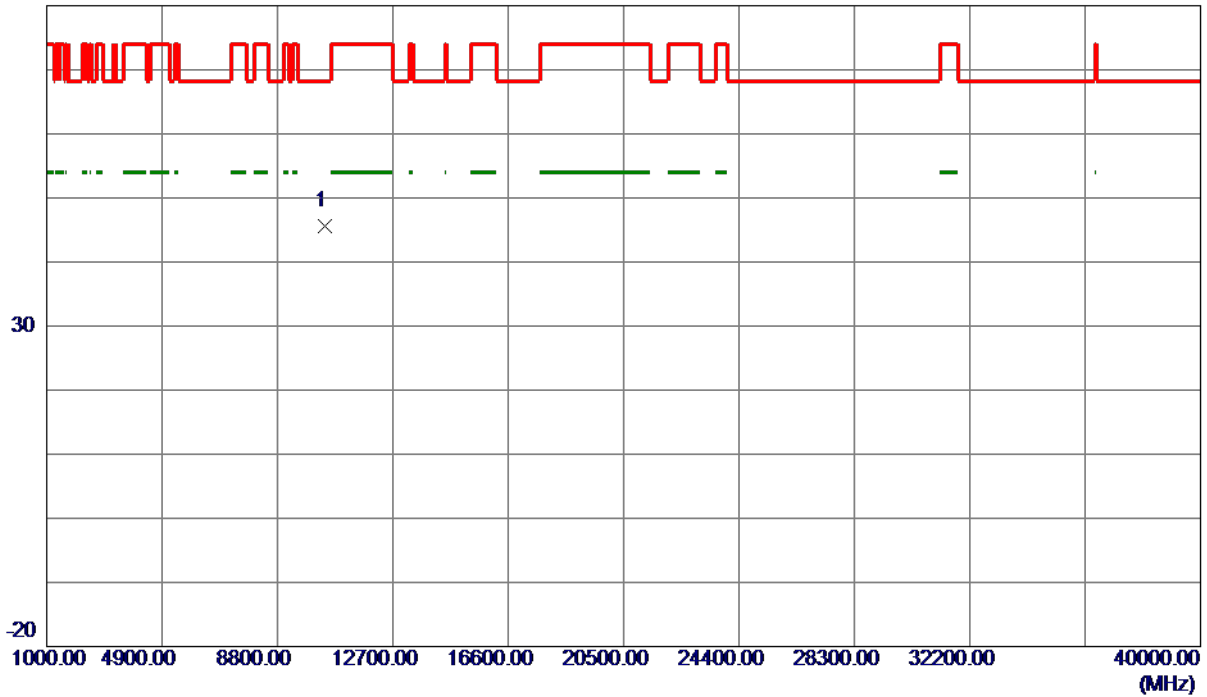

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10404.0500	34.14	11.37	45.51	68.30	-22.79	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

130 dBuV/m

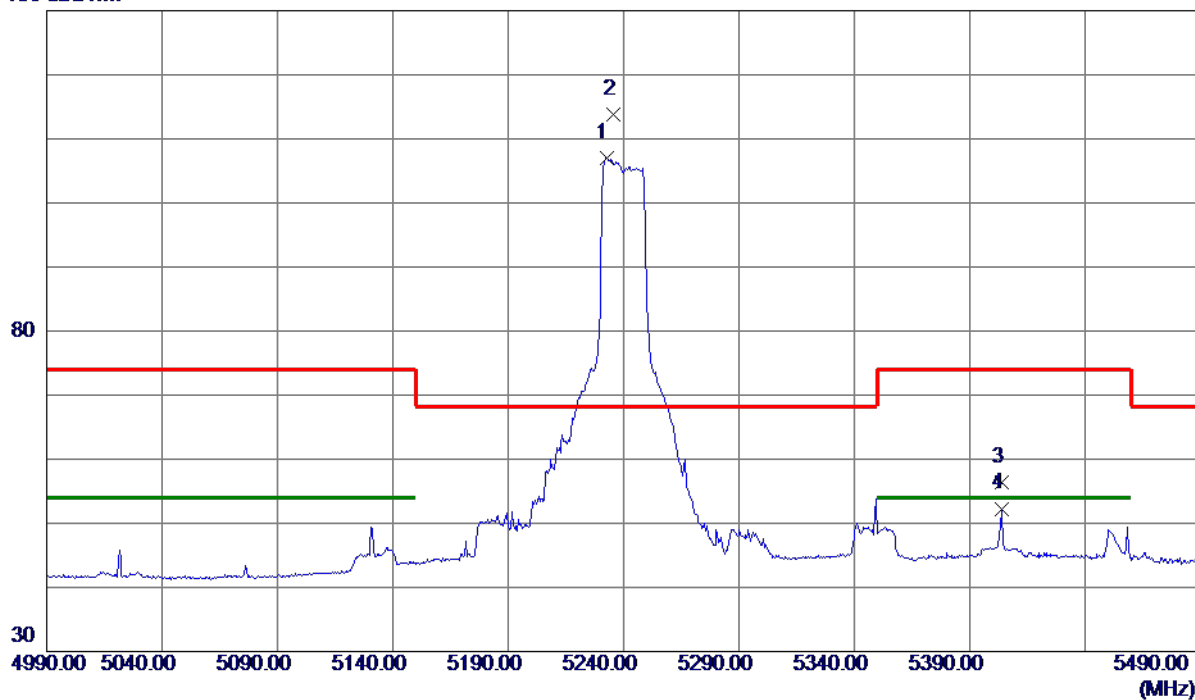

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5232.5000	92.44	14.51	106.95	999.00	-892.05	AVG	No Limit
2 *	5235.7500	99.35	14.52	113.87	68.30	45.57	Peak	No Limit
3	5403.7500	41.45	14.92	56.37	74.00	-17.63	Peak	
4	5403.7500	37.38	14.92	52.30	54.00	-1.70	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

80 dBuV/m

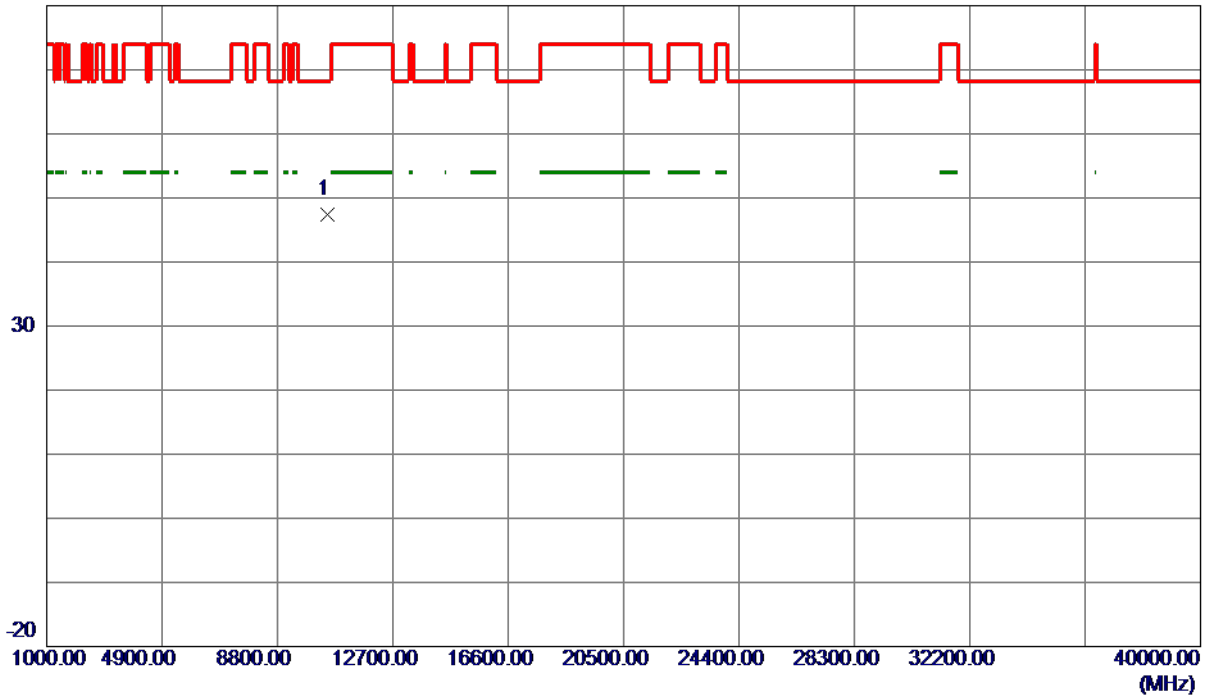

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10479.3250	35.89	11.50	47.39	68.30	-20.91	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

130 dBuV/m

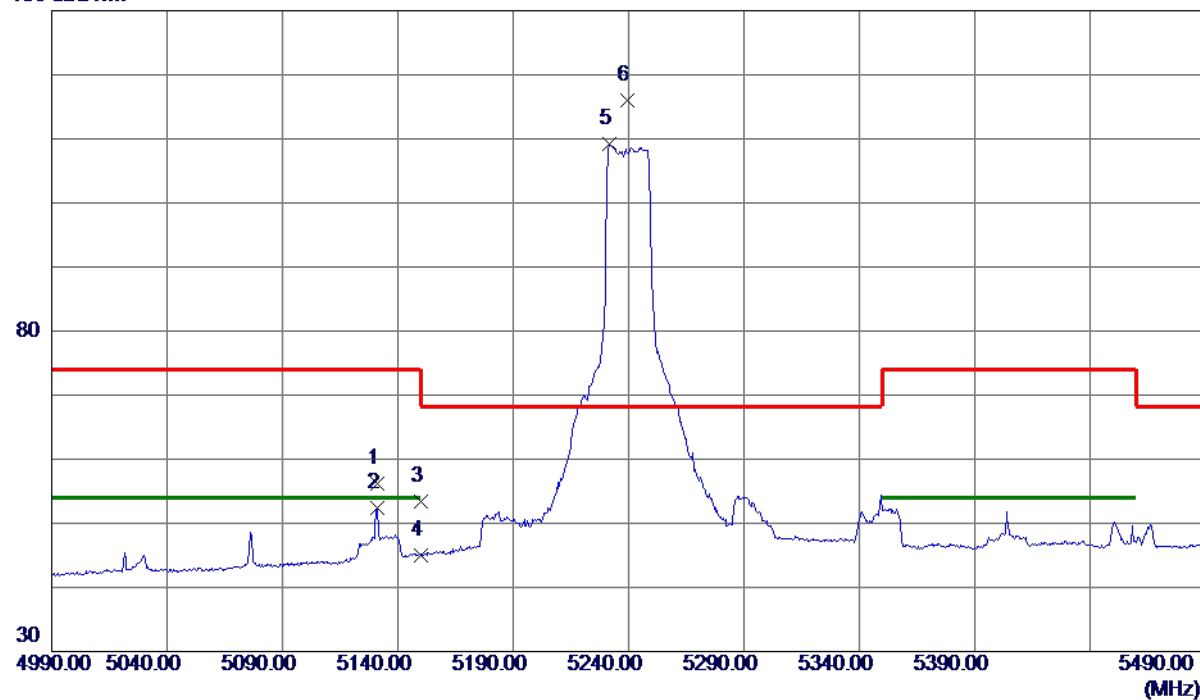

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5131.0000	41.90	14.27	56.17	74.00	-17.83	Peak	
2	5131.0000	38.10	14.27	52.37	54.00	-1.63	AVG	
3	5150.0000	39.08	14.32	53.40	74.00	-20.60	Peak	
4	5150.0000	30.73	14.32	45.05	54.00	-8.95	AVG	
5	5231.7500	94.64	14.51	109.15	999.00	-889.85	AVG	No Limit
6 *	5239.5000	101.57	14.53	116.10	68.30	47.80	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

80 dBuV/m

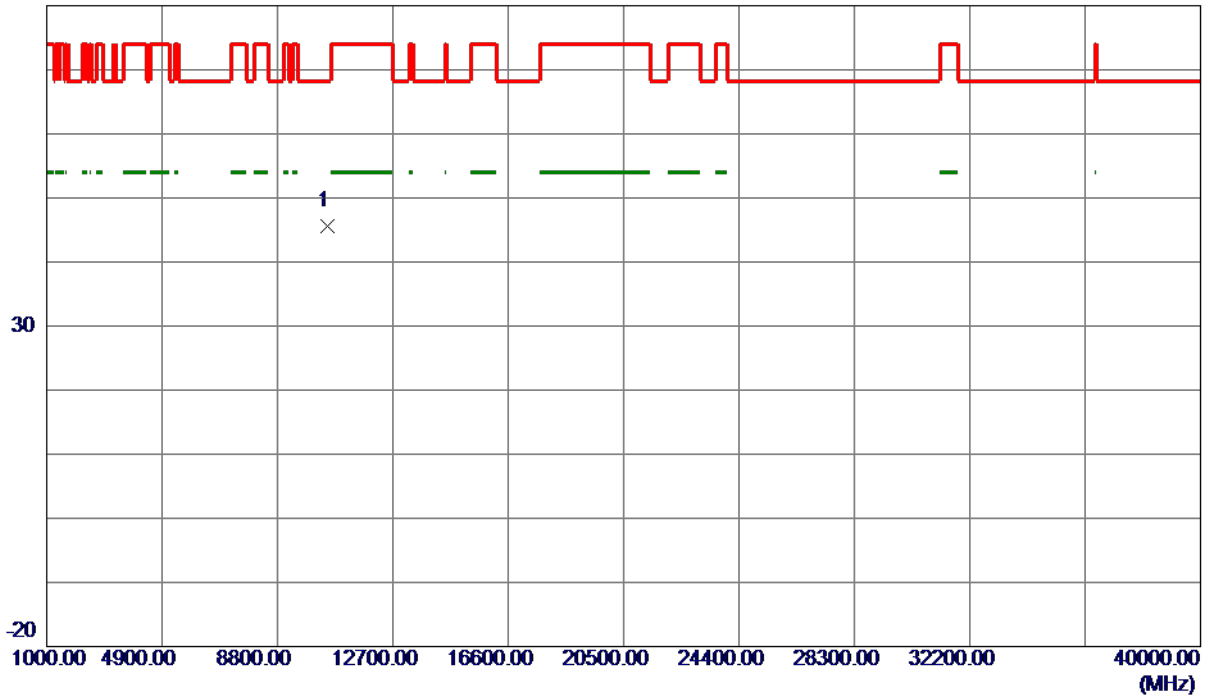

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.2900	34.10	11.50	45.60	68.30	-22.70	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

130 dBuV/m

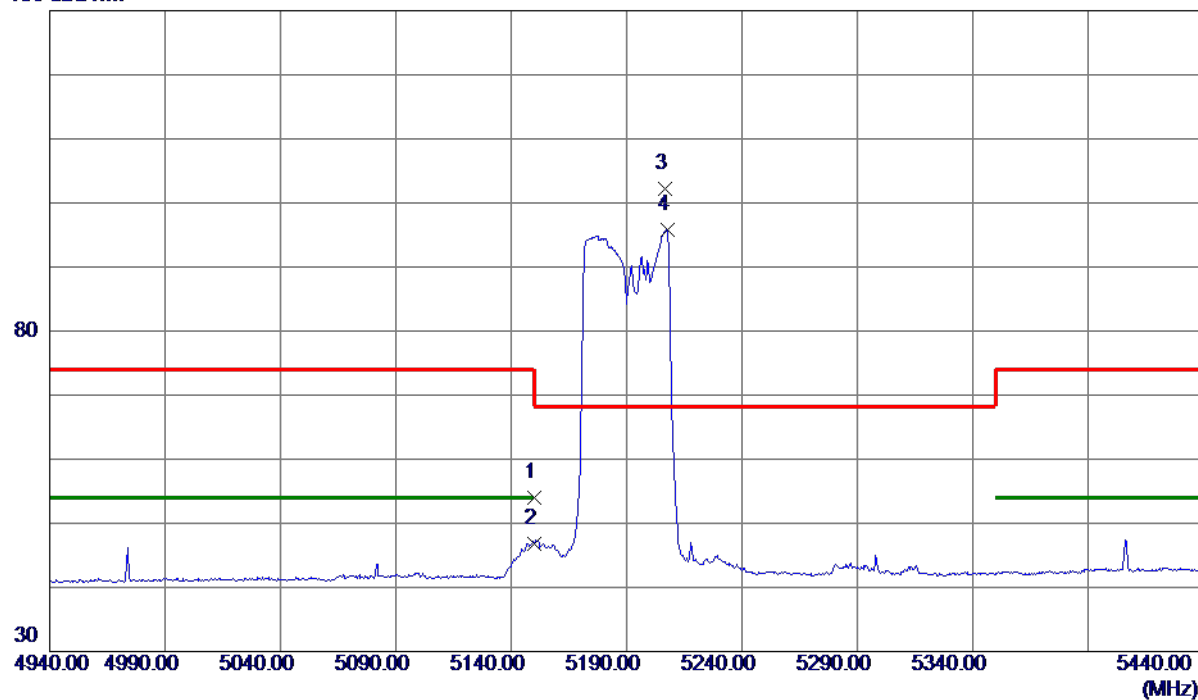

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	39.66	14.32	53.98	74.00	-20.02	Peak	
2	5150.0000	32.50	14.32	46.82	54.00	-7.18	AVG	
3 *	5206.7500	87.70	14.45	102.15	68.30	33.85	Peak	No Limit
4	5207.7500	81.44	14.45	95.89	999.00	-903.11	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

80 dBuV/m

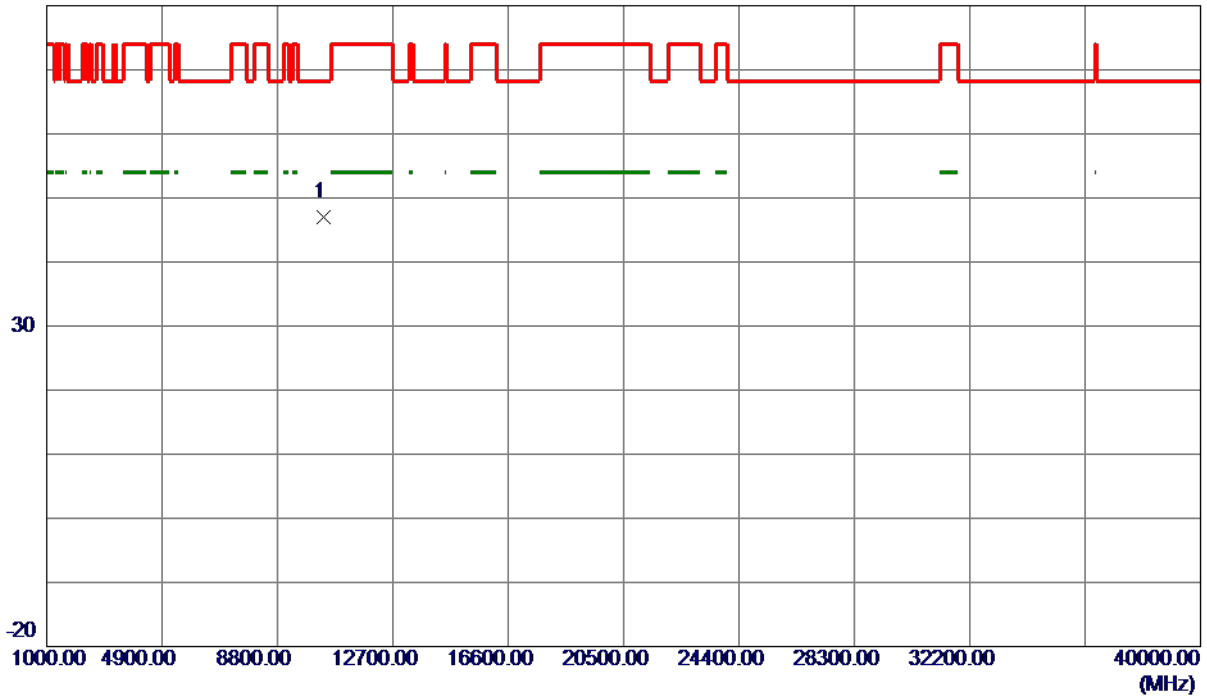

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10377.4150	35.69	11.33	47.02	68.30	-21.28	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

130 dBuV/m

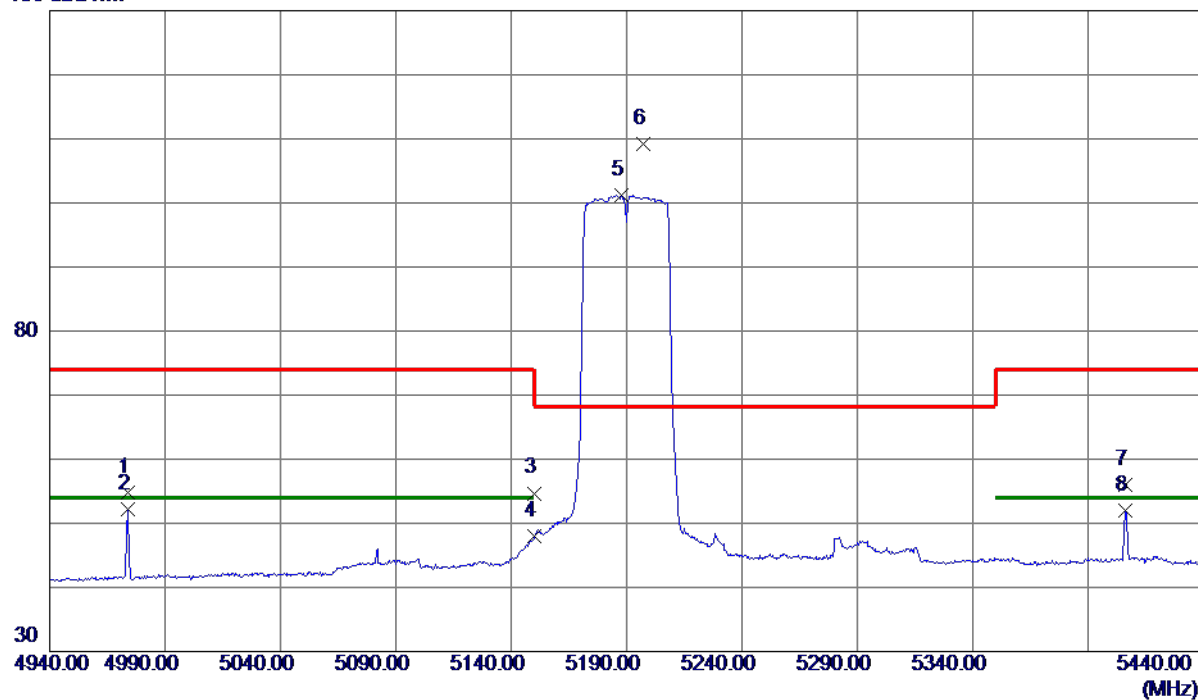

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4973.7500	40.95	13.88	54.83	74.00	-19.17	Peak	
2	4973.7500	38.40	13.88	52.28	54.00	-1.72	AVG	
3	5150.0000	40.38	14.32	54.70	74.00	-19.30	Peak	
4	5150.0000	33.62	14.32	47.94	54.00	-6.06	AVG	
5	5188.0000	86.77	14.41	101.18	999.00	-897.82	AVG	No Limit
6 *	5197.0000	94.83	14.43	109.26	68.30	40.96	Peak	No Limit
7	5406.2500	41.13	14.92	56.05	74.00	-17.95	Peak	
8	5406.2500	37.10	14.92	52.02	54.00	-1.98	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

80 dBuV/m

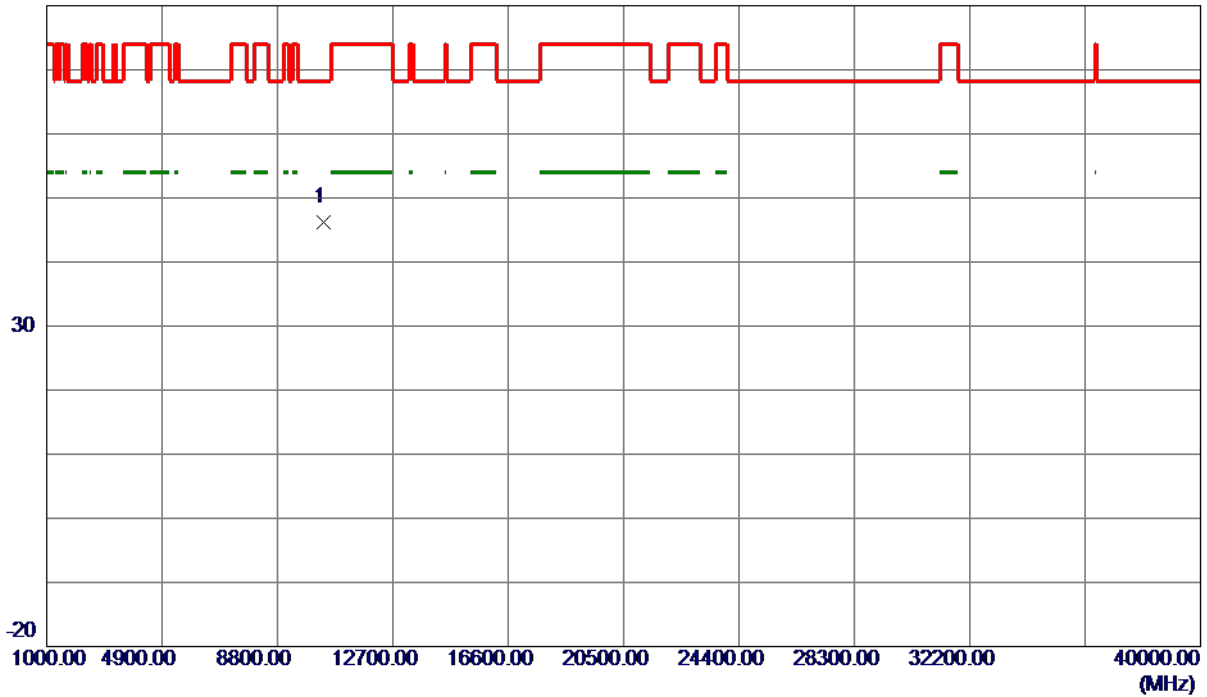

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10375.4500	34.87	11.32	46.19	68.30	-22.11	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

130 dBuV/m

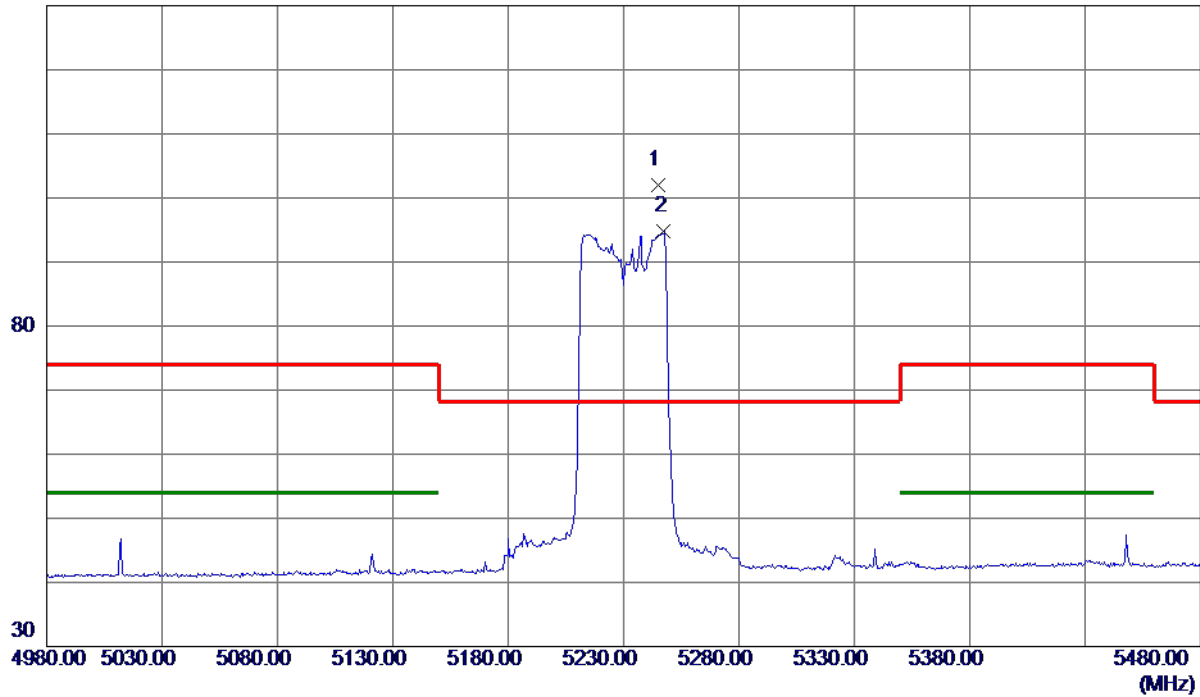

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5245.0000	87.44	14.54	101.98	68.30	33.68	Peak	No Limit
2	5247.5000	80.25	14.55	94.80	999.00	-904.20	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

80 dBuV/m

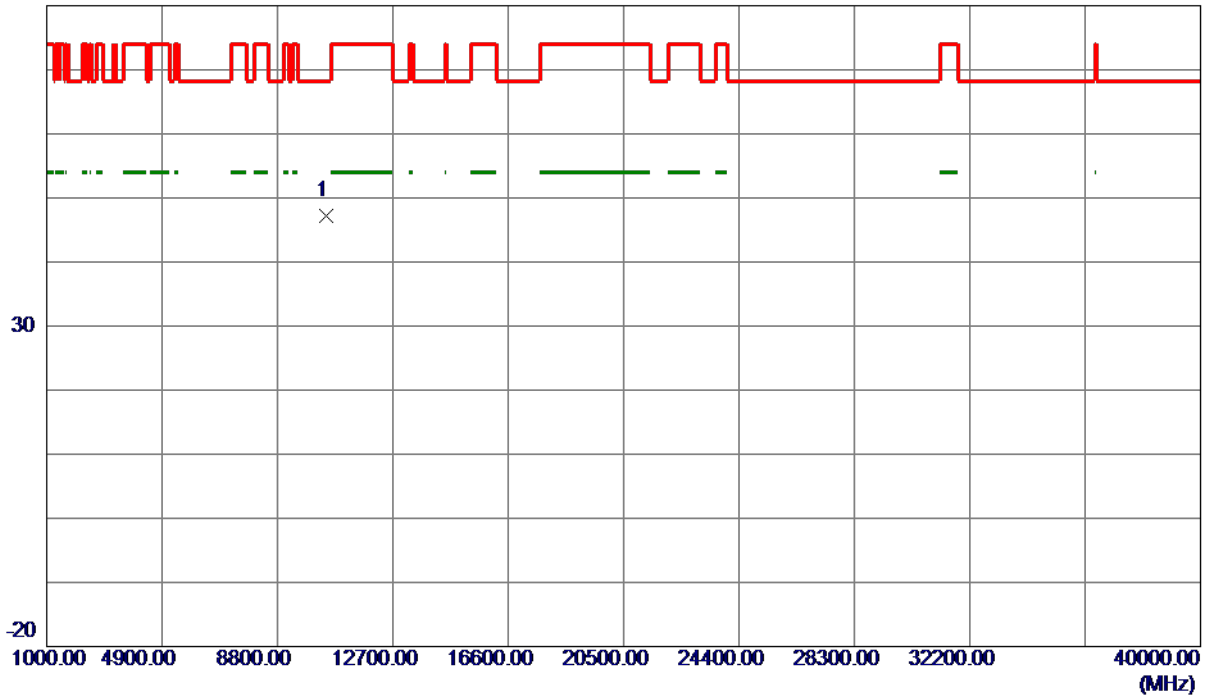

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10458.4000	35.69	11.46	47.15	68.30	-21.15	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

130 dBuV/m

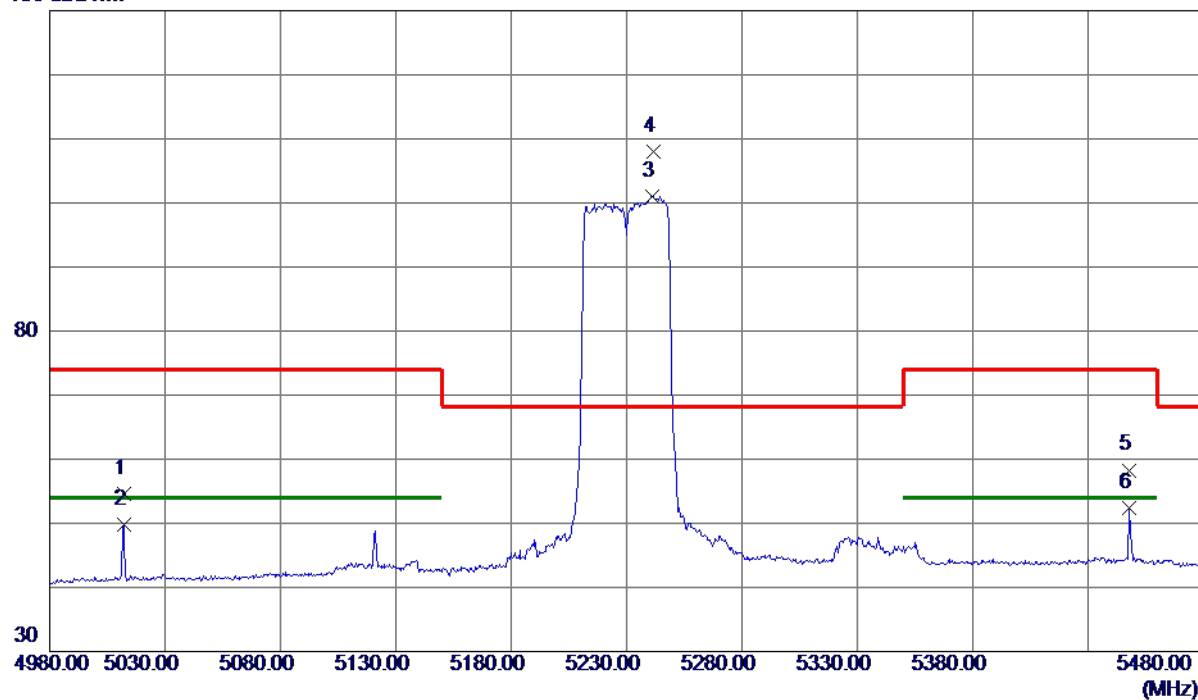

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5012.0000	40.66	13.99	54.65	74.00	-19.35	Peak	
2	5012.0000	35.87	13.99	49.86	54.00	-4.14	AVG	
3	5241.2500	86.48	14.53	101.01	999.00	-897.99	AVG	No Limit
4 *	5241.7500	93.52	14.53	108.05	68.30	39.75	Peak	No Limit
5	5448.0000	43.28	15.02	58.30	74.00	-15.70	Peak	
6	5448.0000	37.44	15.02	52.46	54.00	-1.54	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

80 dBuV/m

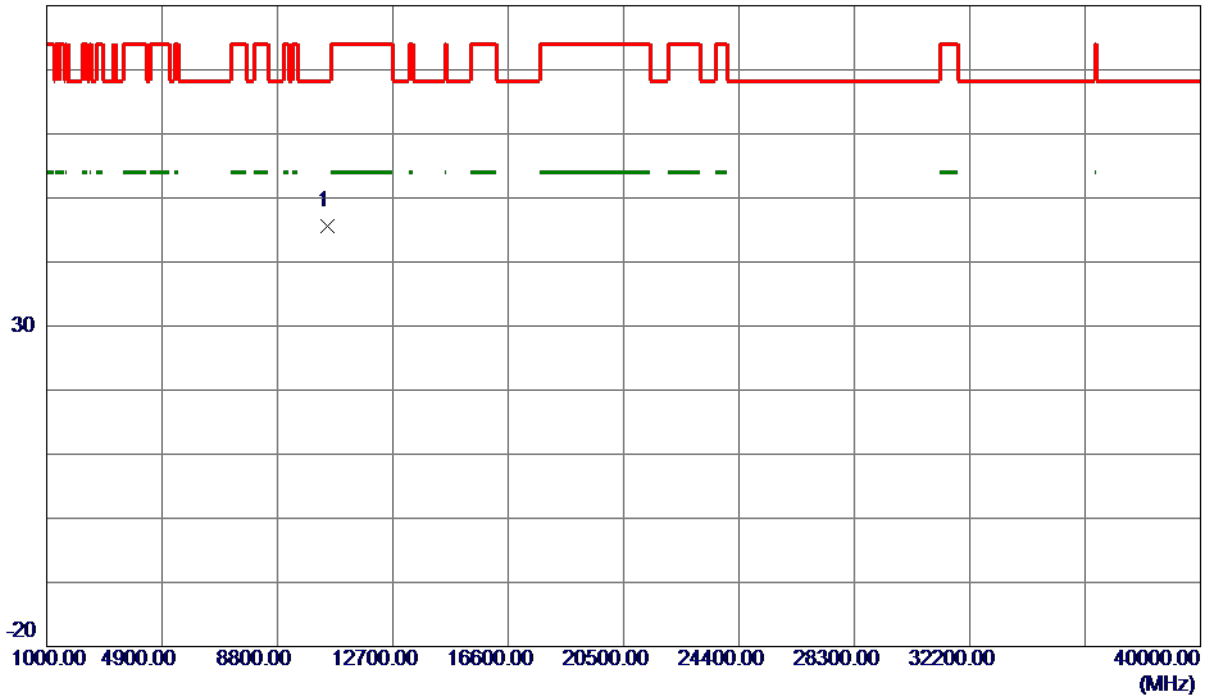

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10468.9500	34.13	11.48	45.61	68.30	-22.69	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

130 dBuV/m

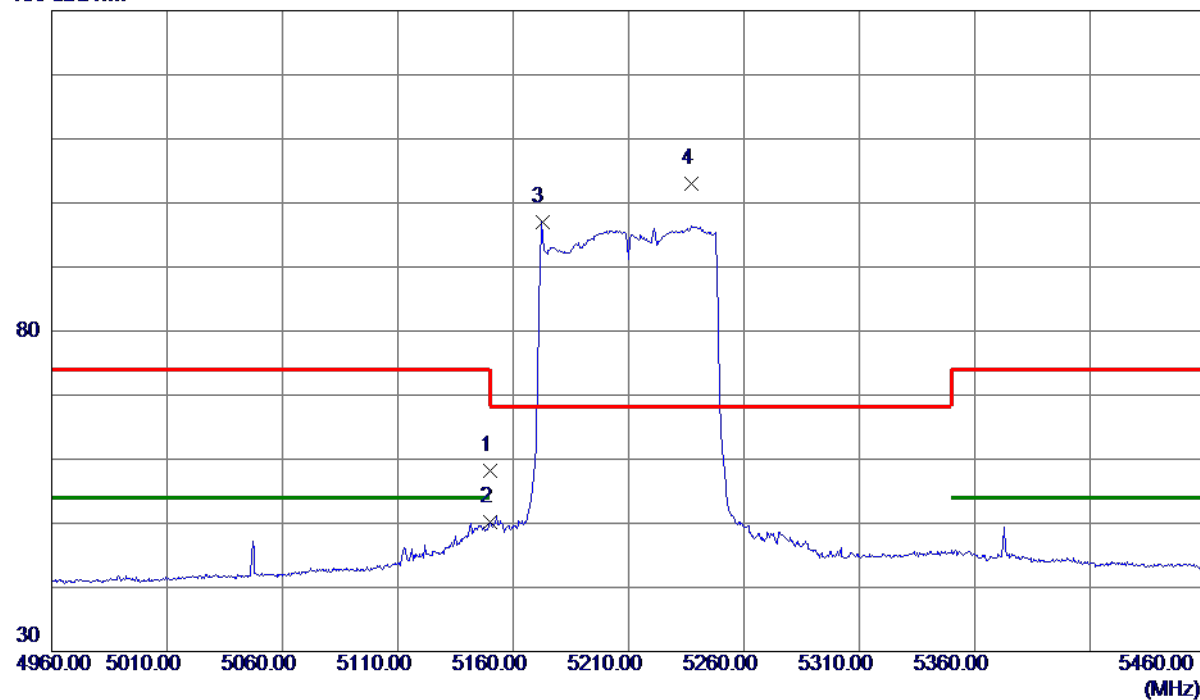

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.80	14.32	58.12	74.00	-15.88	Peak	
2	5150.0000	35.80	14.32	50.12	54.00	-3.88	AVG	
3	5172.5000	82.73	14.37	97.10	999.00	-901.90	AVG	No Limit
4 *	5237.0000	88.42	14.52	102.94	68.30	34.64	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

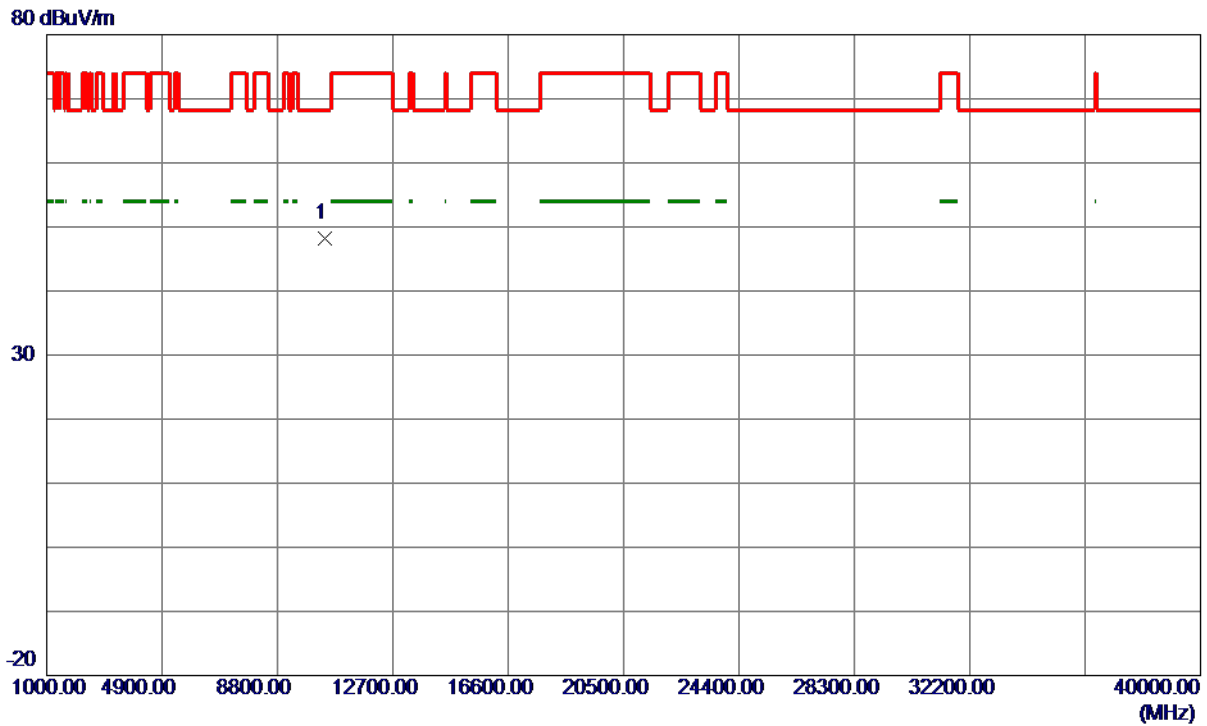

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10416.3900	36.74	11.39	48.13	68.30	-20.17	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

130 dBuV/m

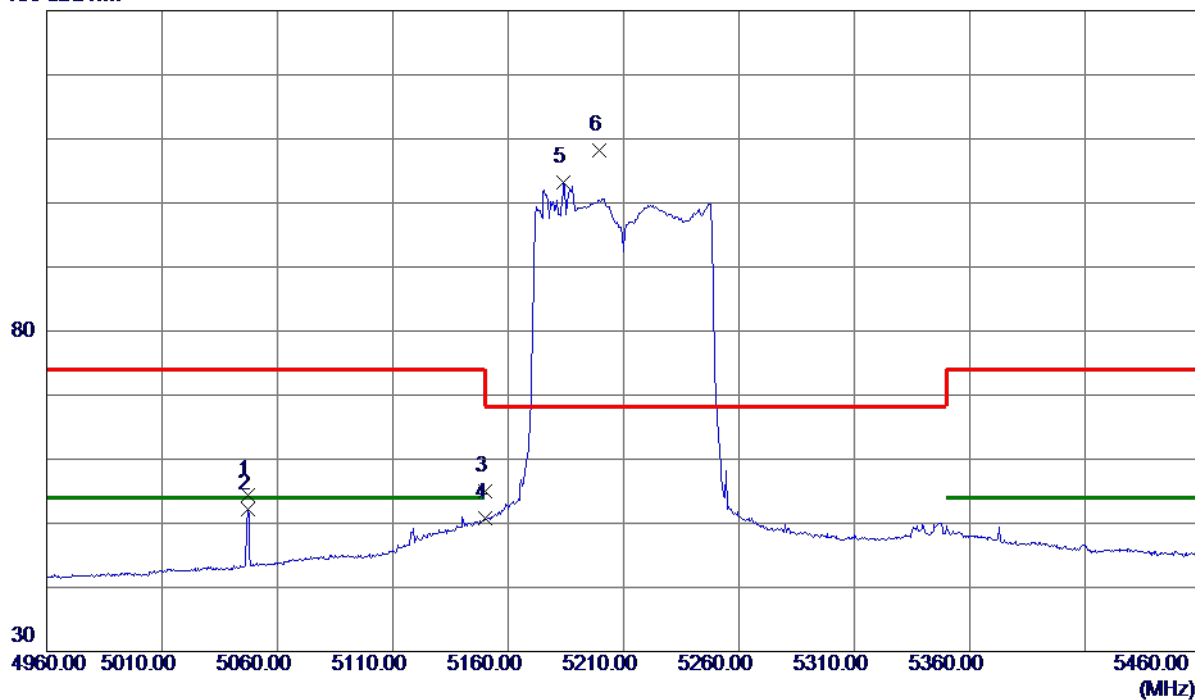

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5047.0000	40.28	14.07	54.35	74.00	-19.65	Peak	
2	5047.0000	38.07	14.07	52.14	54.00	-1.86	AVG	
3	5150.0000	40.59	14.32	54.91	74.00	-19.09	Peak	
4	5150.0000	36.54	14.32	50.86	54.00	-3.14	AVG	
5	5184.0000	88.79	14.40	103.19	999.00	-895.81	AVG	No Limit
6 *	5199.5000	93.83	14.43	108.26	68.30	39.96	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

80 dBuV/m

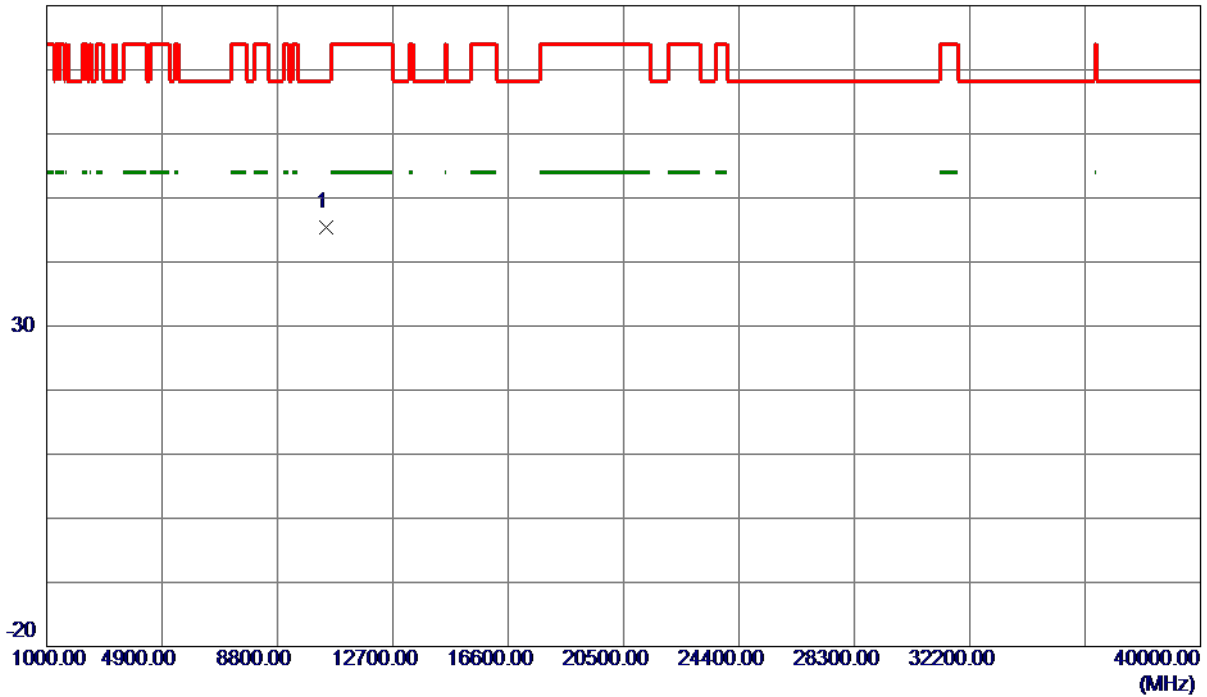

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10435.0500	34.02	11.43	45.45	68.30	-22.85	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Vertical

130 dBuV/m

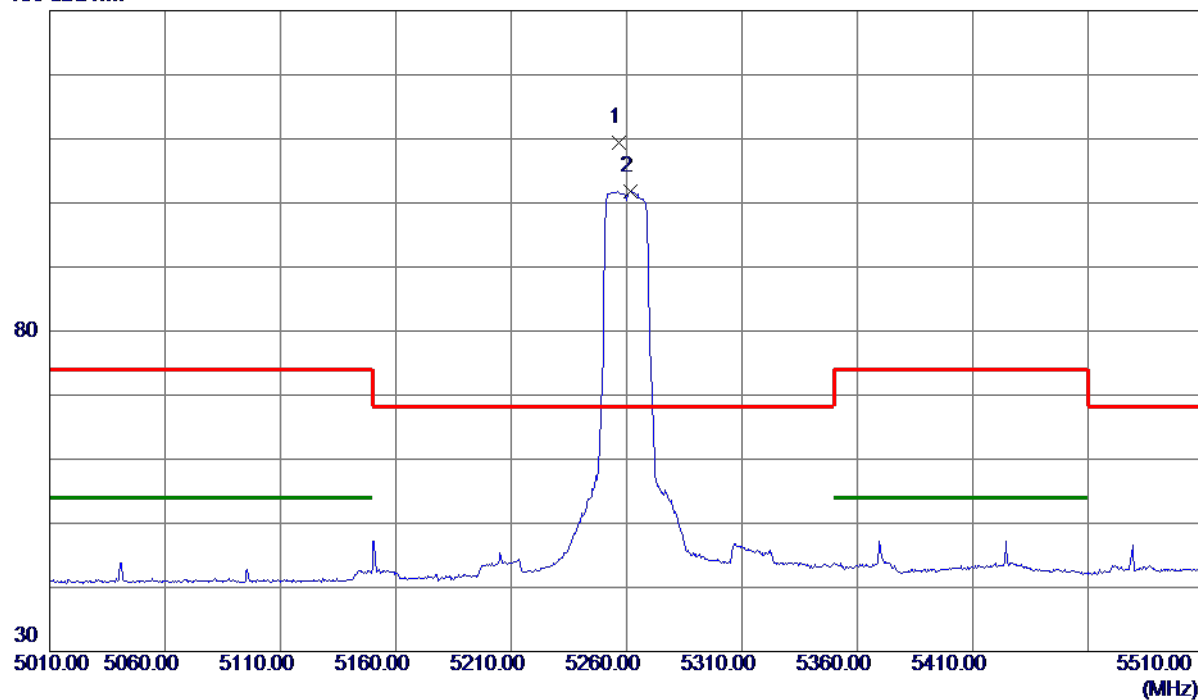

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5256.5000	94.74	14.57	109.31	68.30	41.01	Peak	No Limit
2	5261.7500	87.26	14.58	101.84	999.00	-897.16	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Vertical

80 dBuV/m

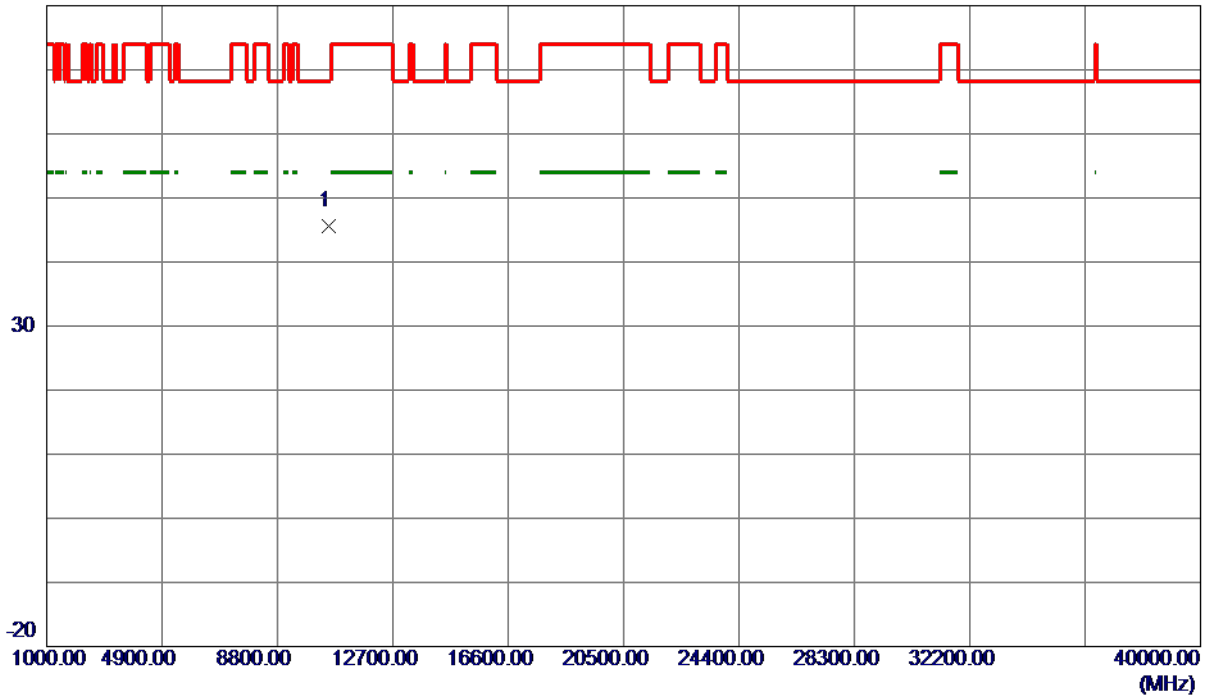

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.3450	34.12	11.54	45.66	68.30	-22.64	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Horizontal

130 dBuV/m

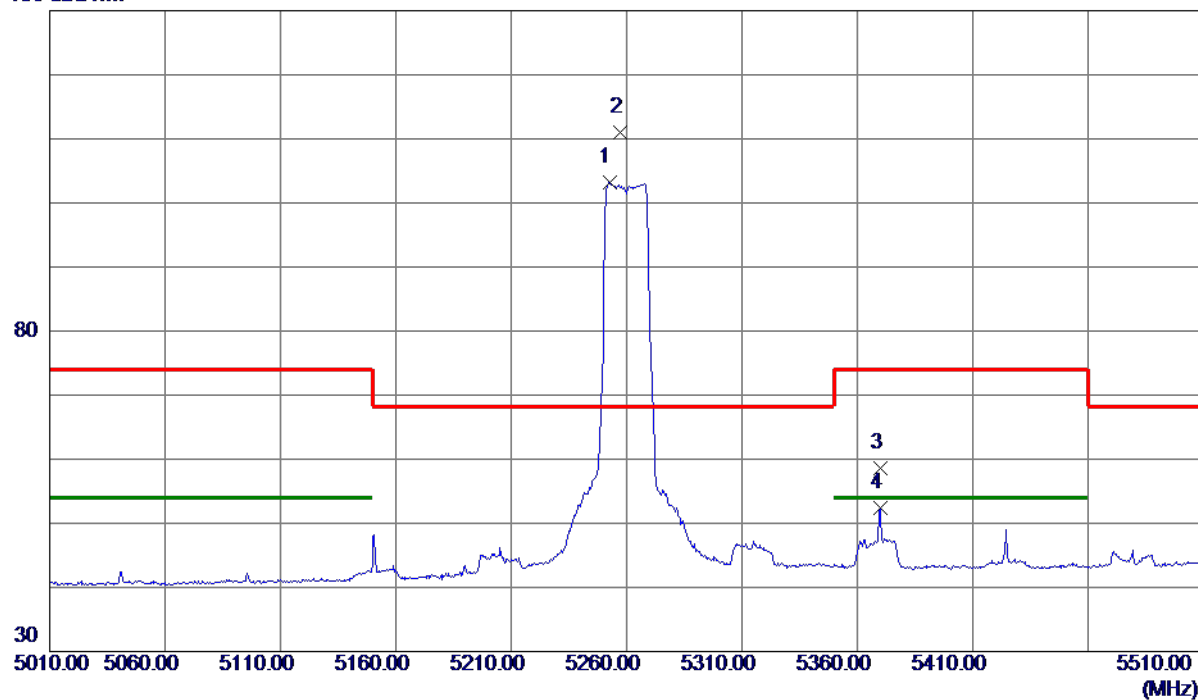

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5252.5000	88.61	14.56	103.17	999.00	-895.83	AVG	No Limit
2 *	5257.0000	96.36	14.57	110.93	68.30	42.63	Peak	No Limit
3	5369.7500	43.70	14.84	58.54	74.00	-15.46	Peak	
4	5369.7500	37.53	14.84	52.37	54.00	-1.63	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Horizontal

80 dBuV/m

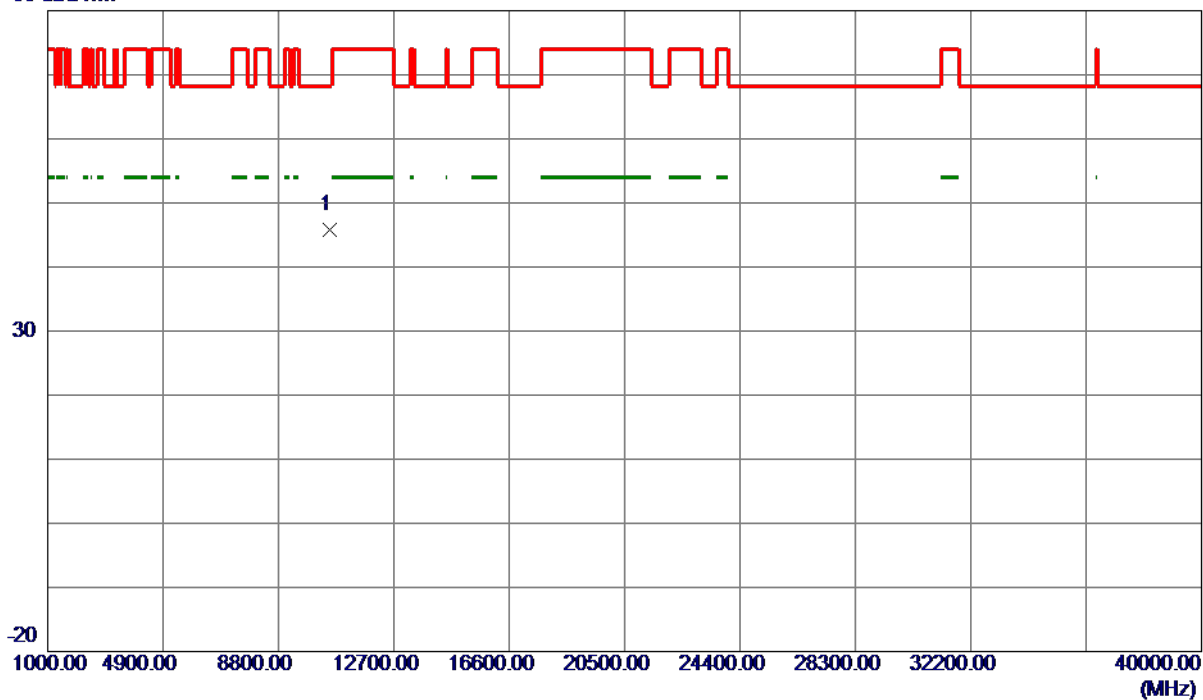

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10519.9700	34.19	11.54	45.73	68.30	-22.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Vertical

130 dBuV/m

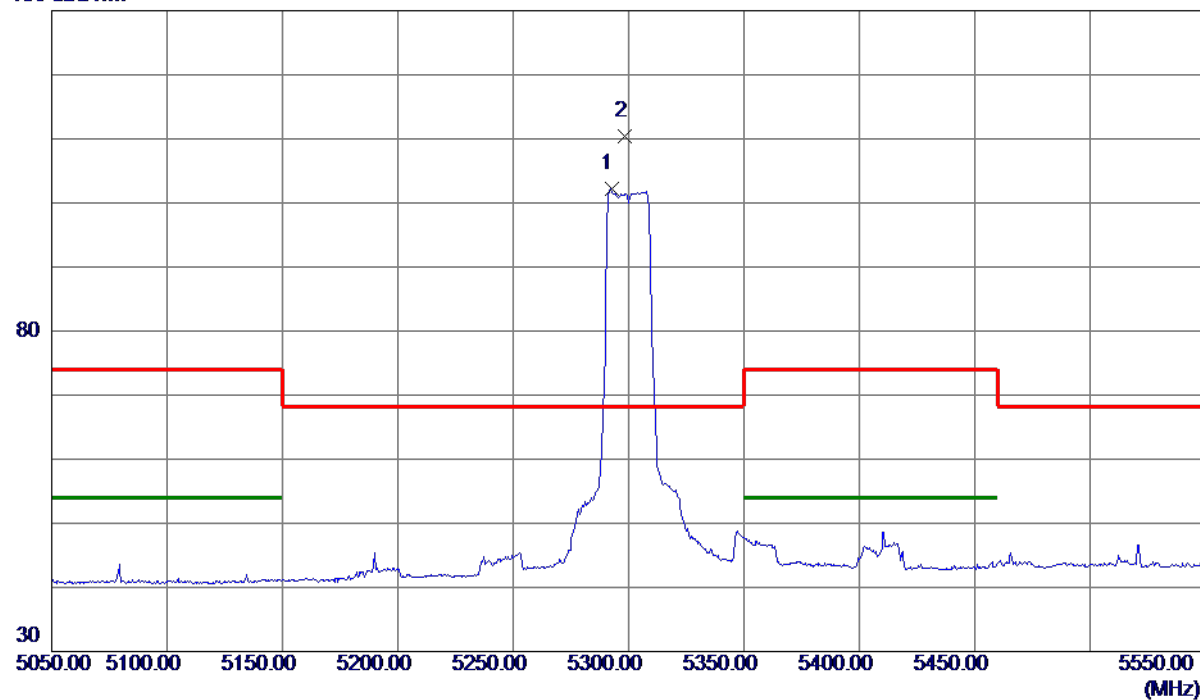

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5292.5000	87.54	14.65	102.19	999.00	-896.81	AVG	No Limit
2 *	5298.5000	95.70	14.67	110.37	68.30	42.07	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Vertical

80 dBuV/m

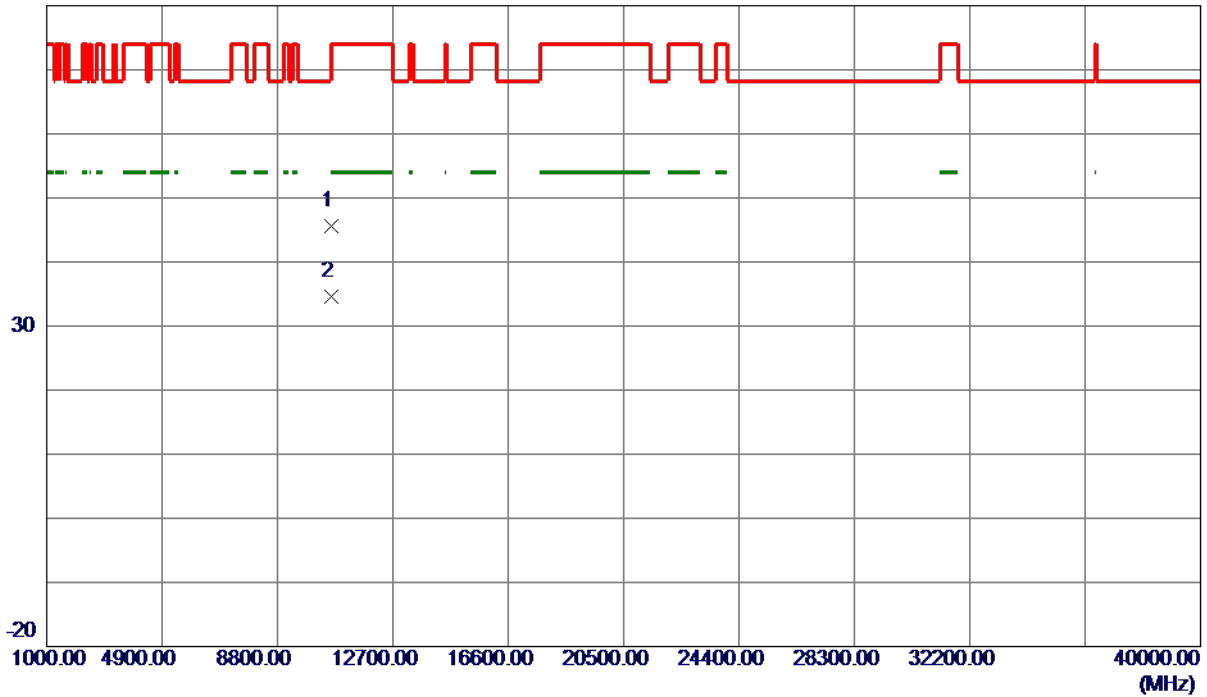

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10600.7250	34.12	11.55	45.67	74.00	-28.33	Peak	
2 *	10601.7500	23.10	11.55	34.65	54.00	-19.35	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Horizontal

130 dBuV/m

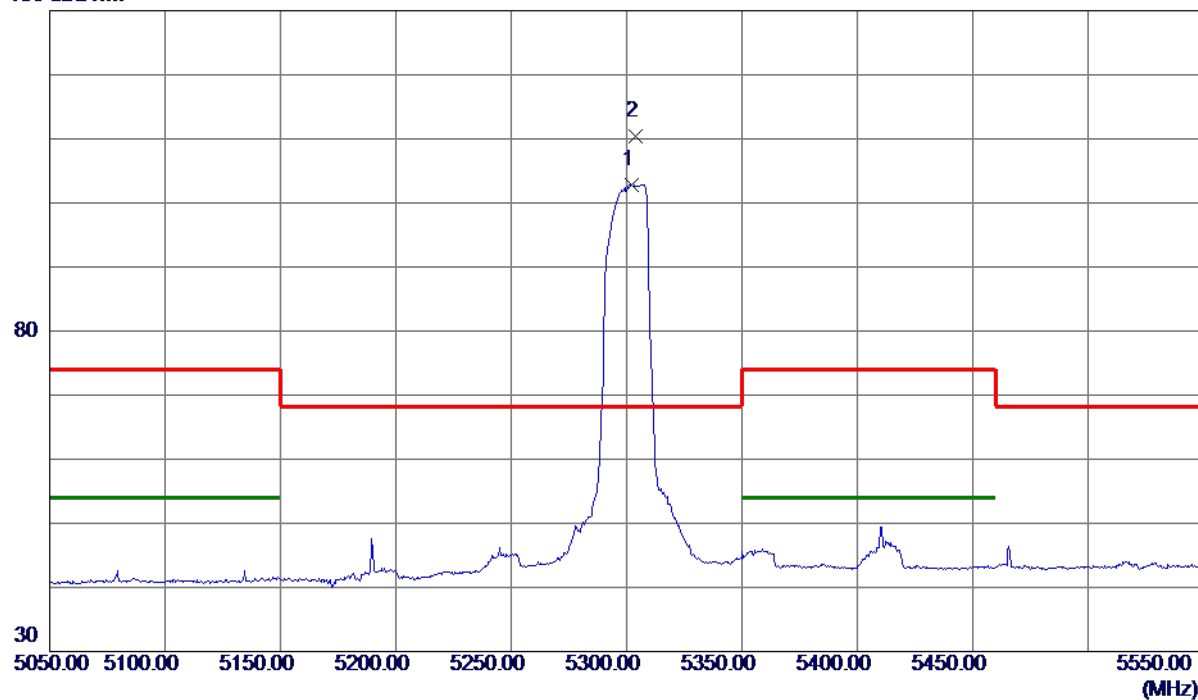

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5302.0000	88.21	14.68	102.89	999.00	-896.11	AVG	No Limit
2 *	5304.0000	95.74	14.68	110.42	68.30	42.12	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Horizontal

80 dBuV/m

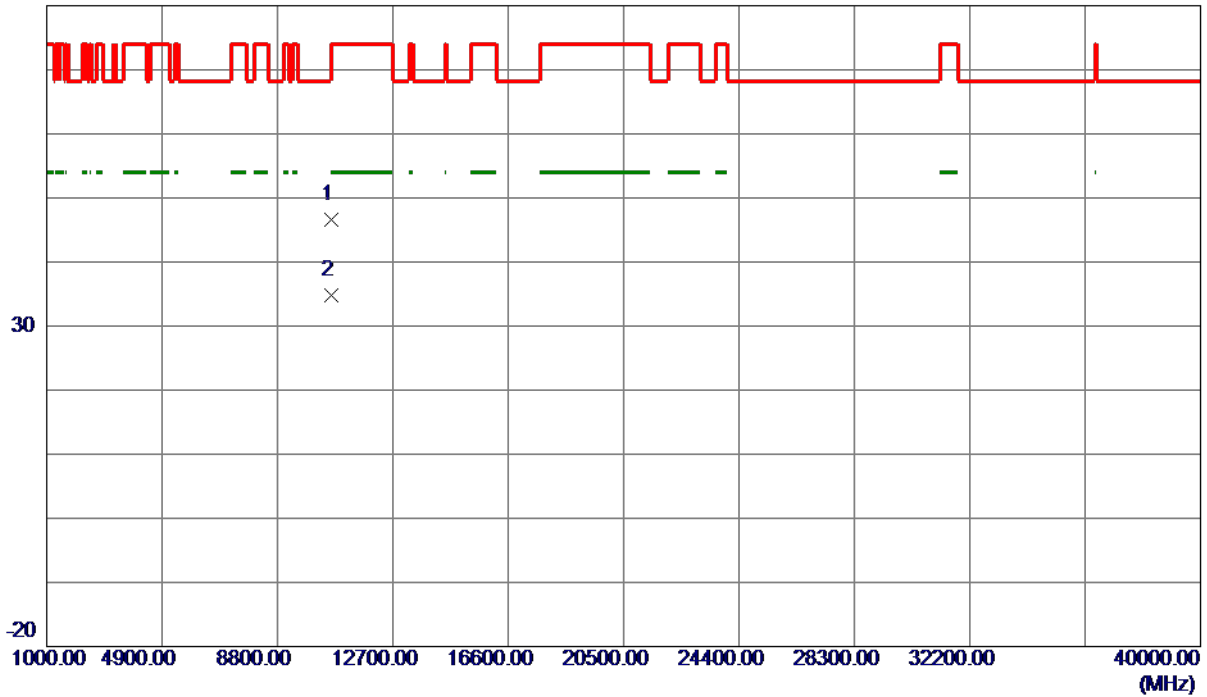

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10603.0150	34.98	11.55	46.53	74.00	-27.47	Peak	
2 *	10603.8550	23.22	11.55	34.77	54.00	-19.23	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Vertical

130 dBuV/m

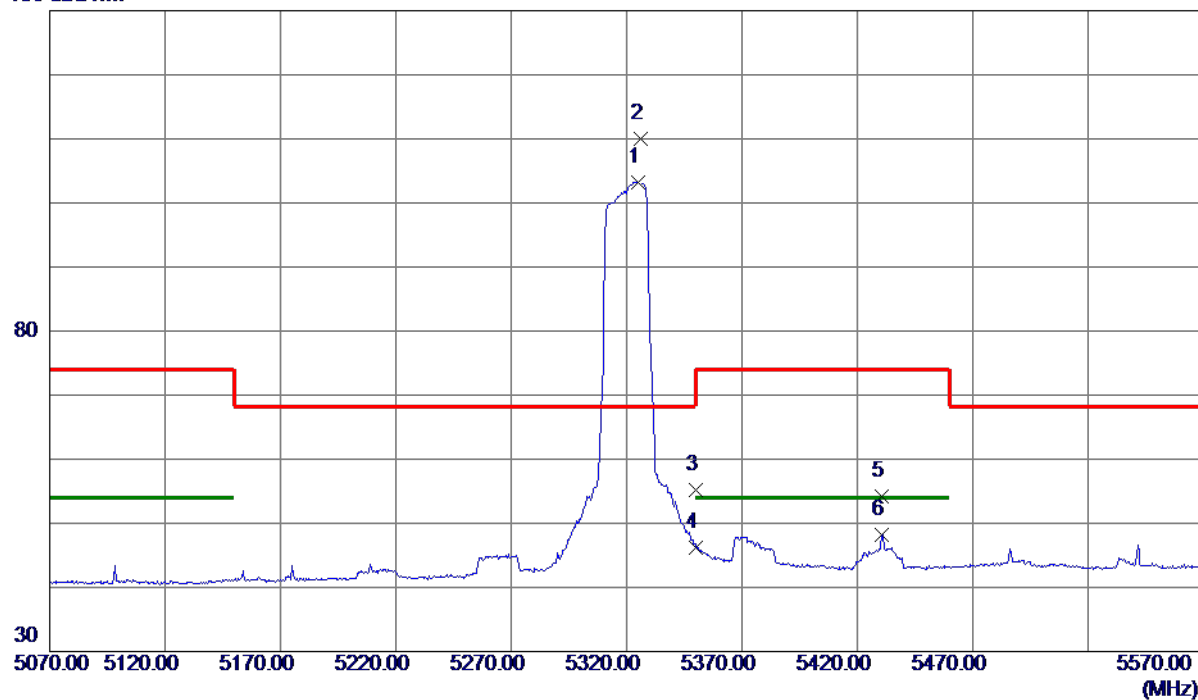

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5325.0000	88.55	14.73	103.28	999.00	-895.72	AVG	No Limit
2 *	5326.0000	95.34	14.73	110.07	68.30	41.77	Peak	No Limit
3	5350.0000	40.39	14.79	55.18	74.00	-18.82	Peak	
4	5350.0000	31.38	14.79	46.17	54.00	-7.83	AVG	
5	5430.7500	39.13	14.98	54.11	74.00	-19.89	Peak	
6	5430.7500	33.24	14.98	48.22	54.00	-5.78	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Vertical

80 dBuV/m

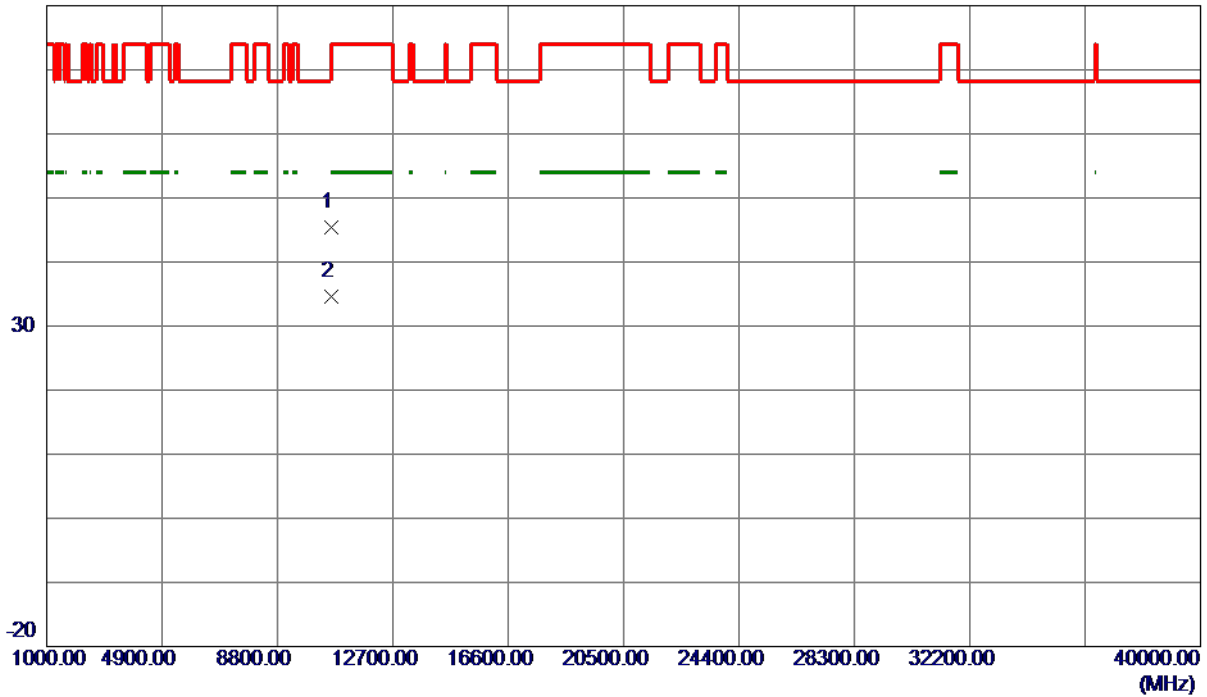

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10637.0350	33.81	11.56	45.37	74.00	-28.63	Peak	
2 *	10637.4200	23.08	11.56	34.64	54.00	-19.36	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Horizontal

130 dBuV/m

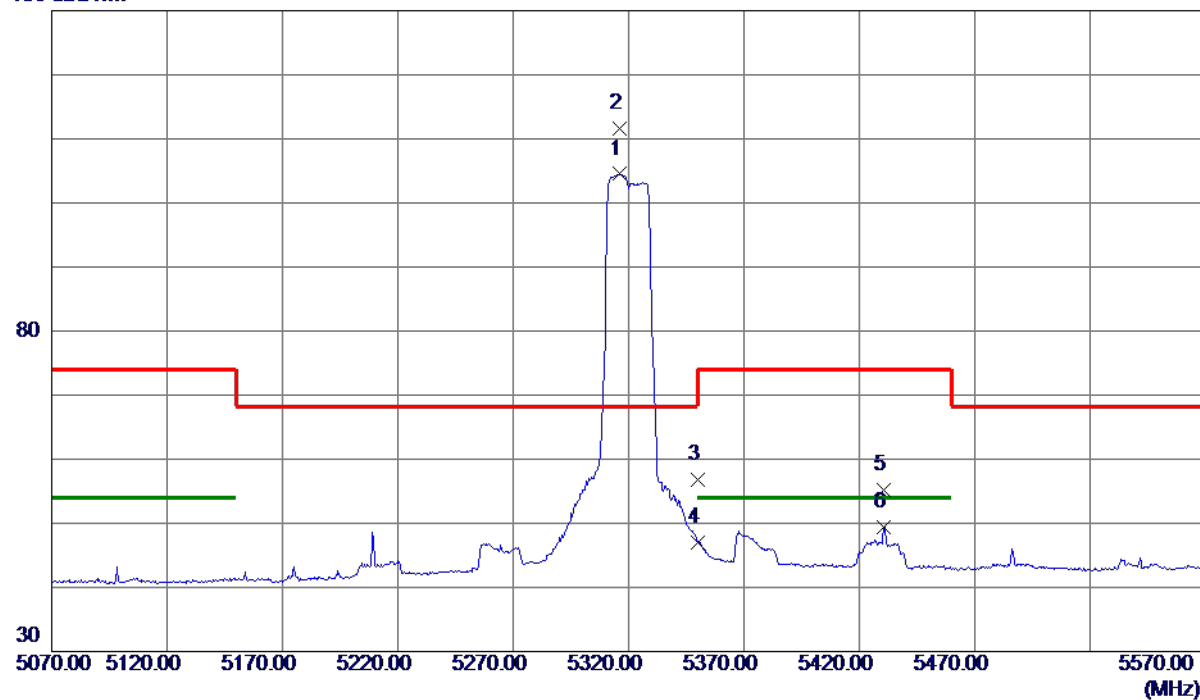

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5316.0000	89.79	14.71	104.50	999.00	-894.50	AVG	No Limit
2 *	5316.2500	96.94	14.71	111.65	68.30	43.35	Peak	No Limit
3	5350.0000	41.93	14.79	56.72	74.00	-17.28	Peak	
4	5350.0000	32.25	14.79	47.04	54.00	-6.96	AVG	
5	5430.7500	40.16	14.98	55.14	74.00	-18.86	Peak	
6	5430.7500	34.49	14.98	49.47	54.00	-4.53	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Horizontal

80 dBuV/m

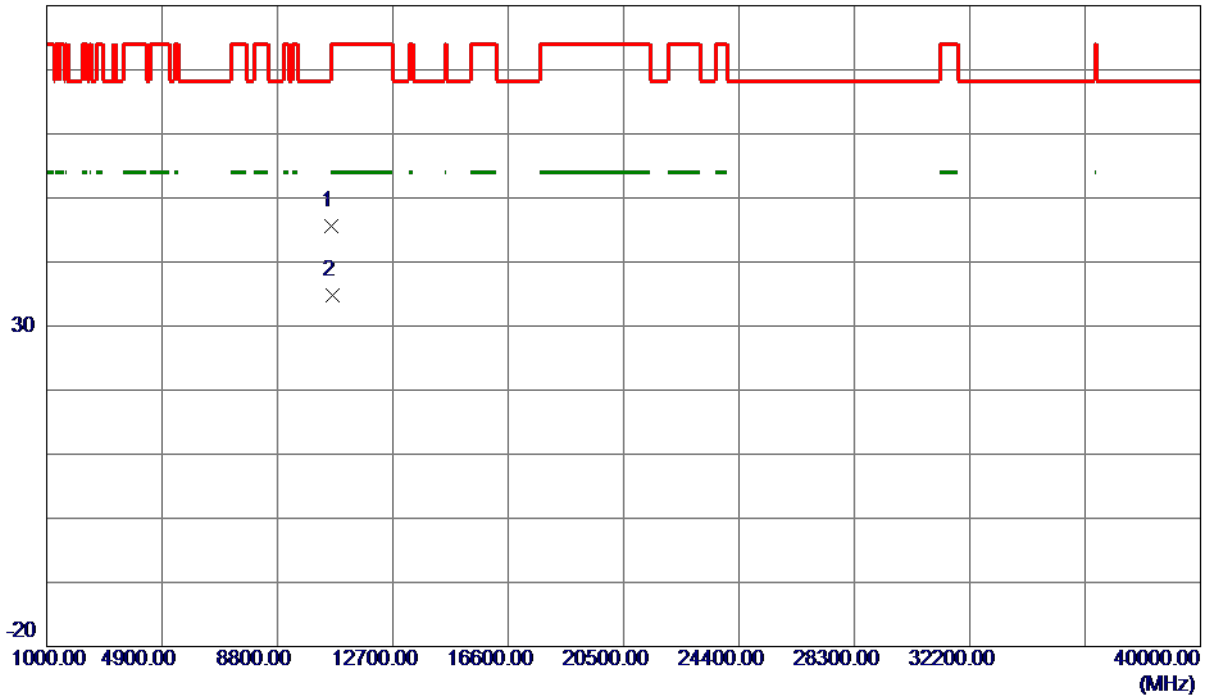

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10639.9100	33.98	11.56	45.54	74.00	-28.46	Peak	
2 *	10643.1350	23.16	11.56	34.72	54.00	-19.28	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Vertical

130 dBuV/m

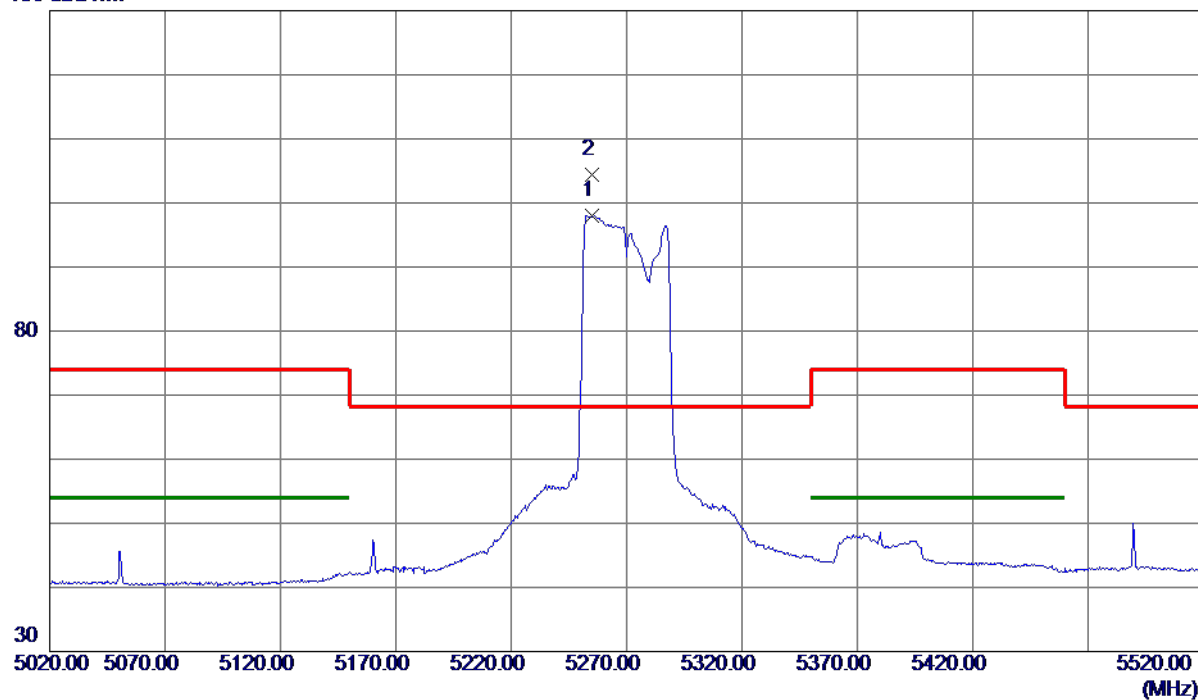

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5255.0000	83.42	14.56	97.98	999.00	-901.02	AVG	No Limit
2 *	5255.2500	89.75	14.56	104.31	68.30	36.01	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Vertical

80 dBuV/m

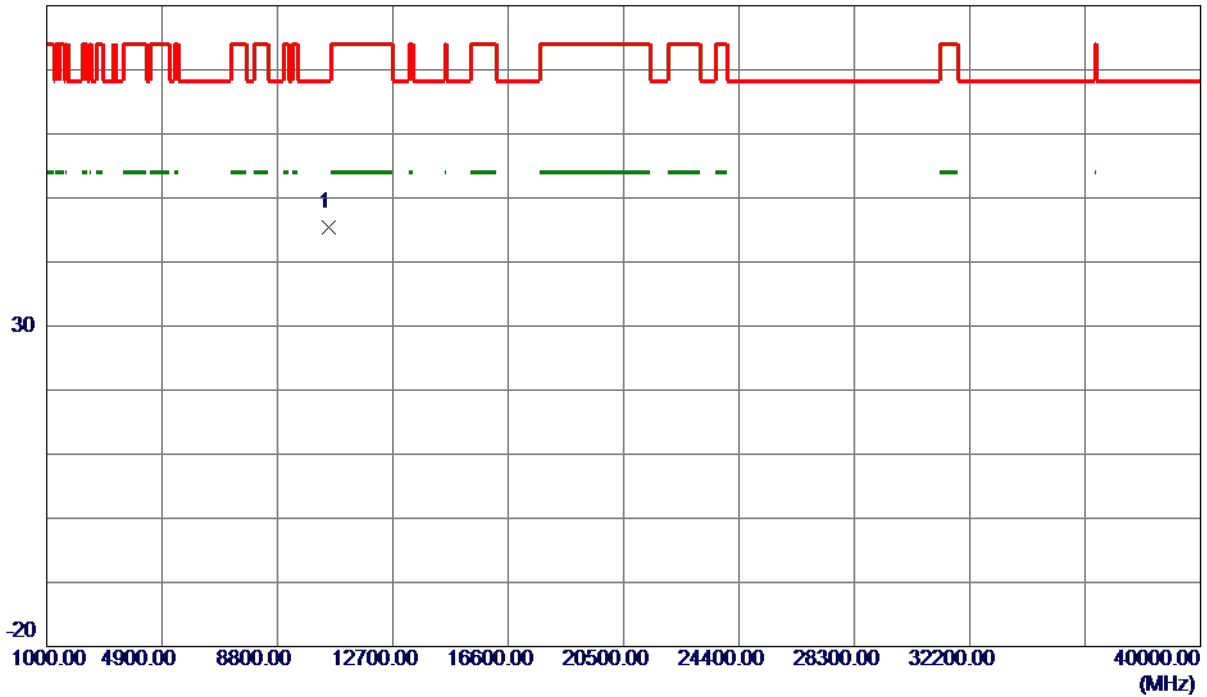

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10538.7650	33.77	11.54	45.31	68.30	-22.99	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Horizontal

130 dBuV/m

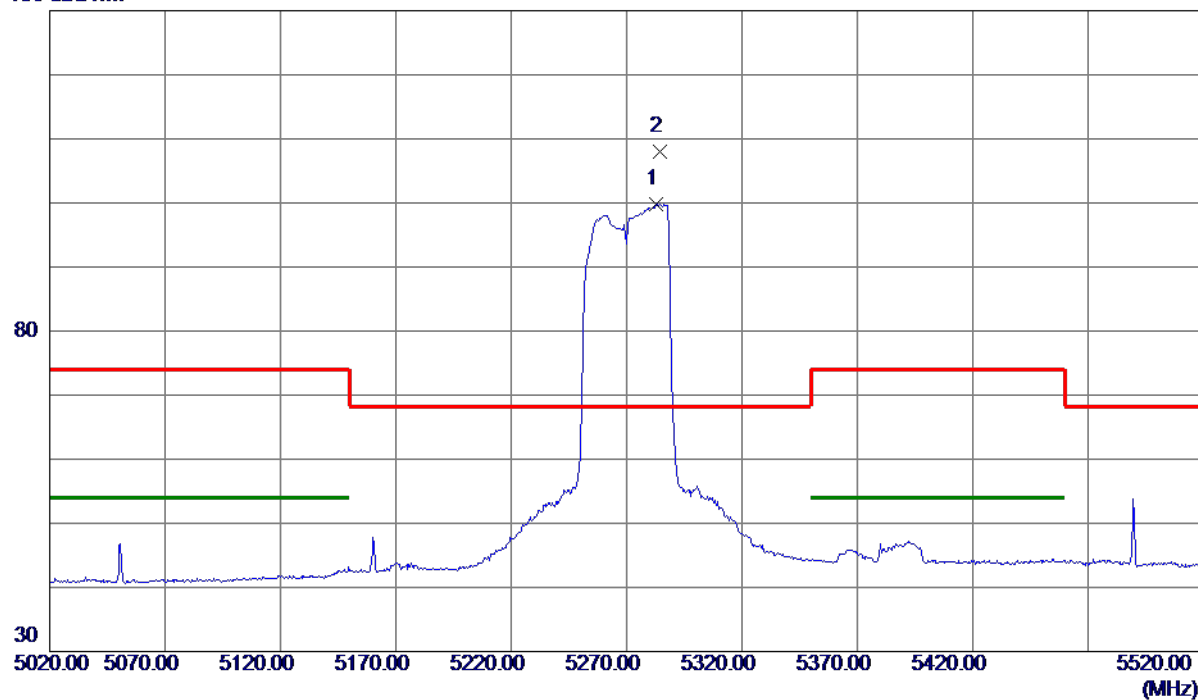

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5283.0000	85.22	14.63	99.85	999.00	-899.15	AVG	No Limit
2 *	5284.5000	93.34	14.63	107.97	68.30	39.67	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Horizontal

80 dBuV/m

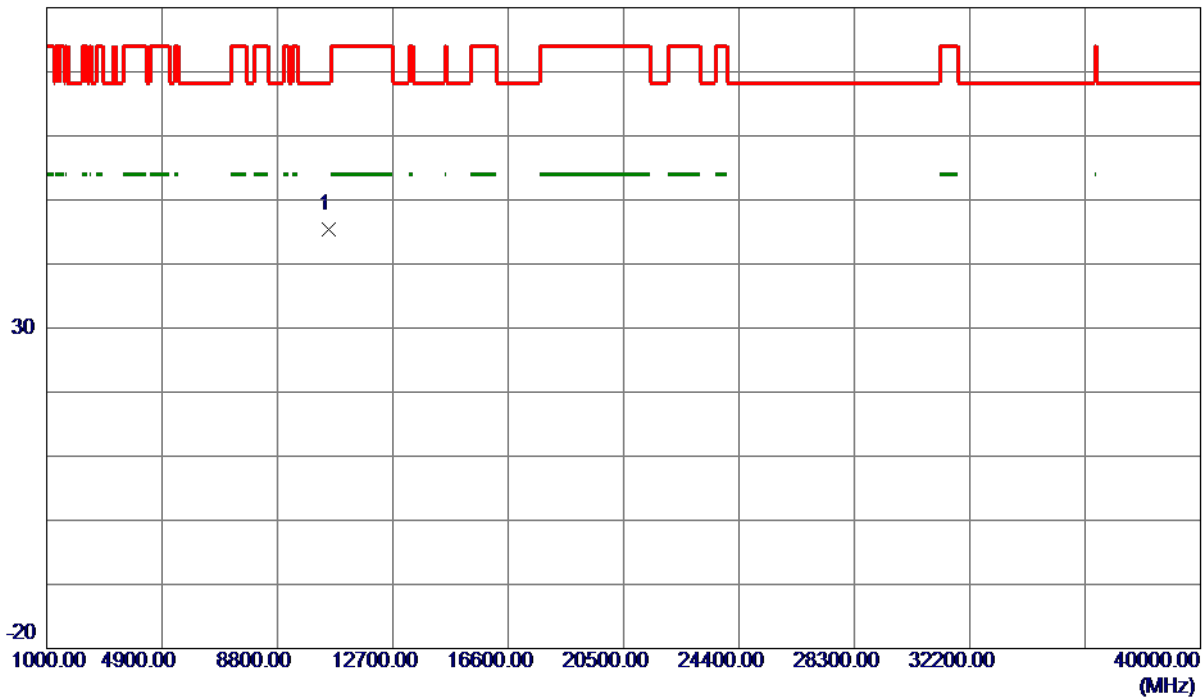

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10543.1700	33.88	11.54	45.42	68.30	-22.88	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Vertical

130 dBuV/m

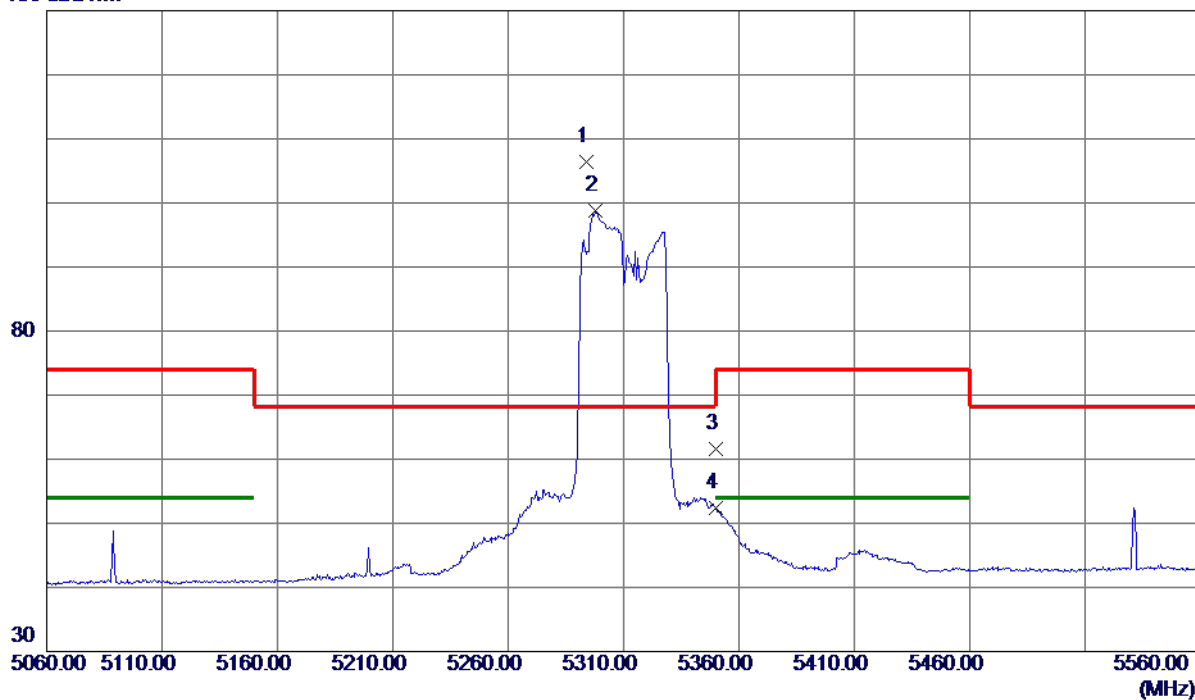

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5294.0000	91.66	14.66	106.32	68.30	38.02	Peak	No Limit
2	5297.7500	84.14	14.67	98.81	999.00	-900.19	AVG	No Limit
3	5350.0000	46.85	14.79	61.64	74.00	-12.36	Peak	
4	5350.0000	37.64	14.79	52.43	54.00	-1.57	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Vertical

80 dBuV/m

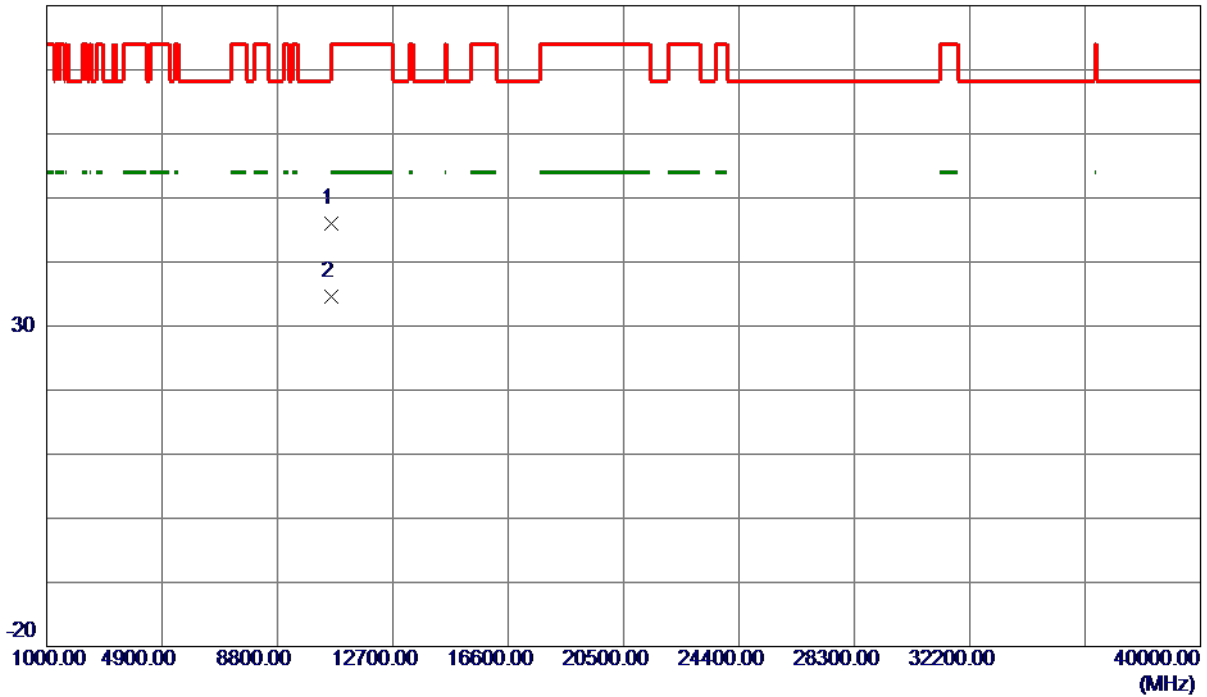

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10616.1449	34.46	11.55	46.01	74.00	-27.99	Peak	
2 *	10619.2900	23.06	11.56	34.62	54.00	-19.38	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Horizontal

130 dBuV/m

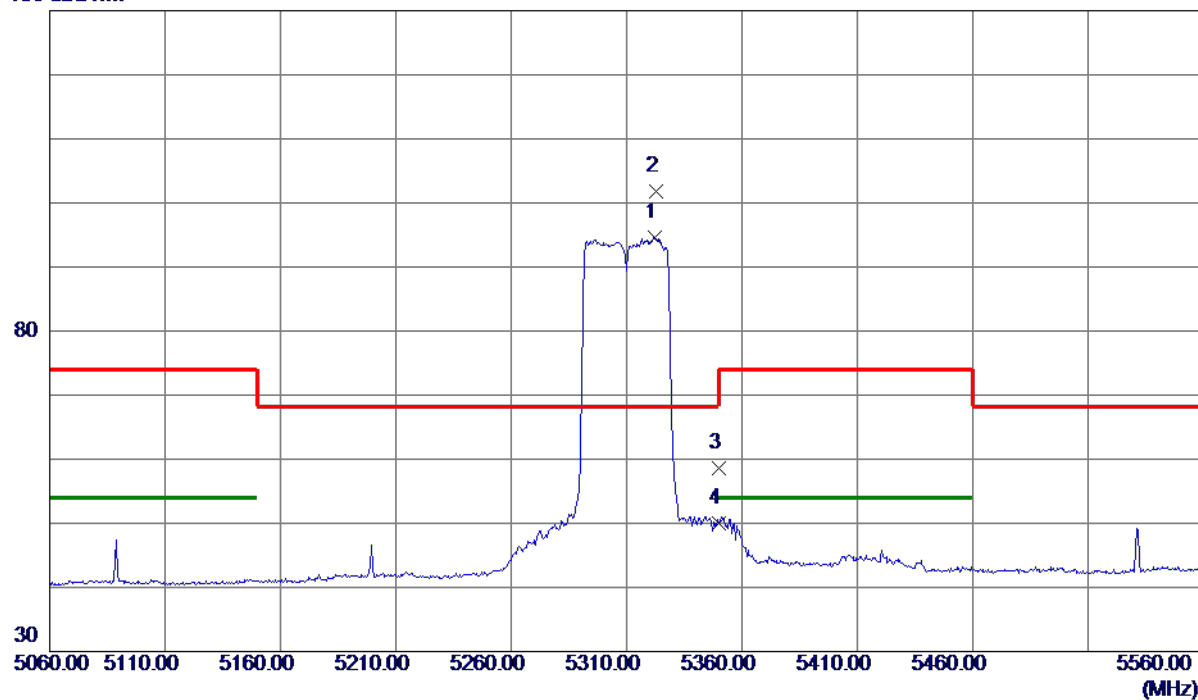

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5322.0000	79.83	14.72	94.55	999.00	-904.45	AVG	No Limit
2 *	5323.0000	86.98	14.73	101.71	68.30	33.41	Peak	No Limit
3	5350.0000	43.84	14.79	58.63	74.00	-15.37	Peak	
4	5350.0000	35.14	14.79	49.93	54.00	-4.07	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

Horizontal

80 dBuV/m

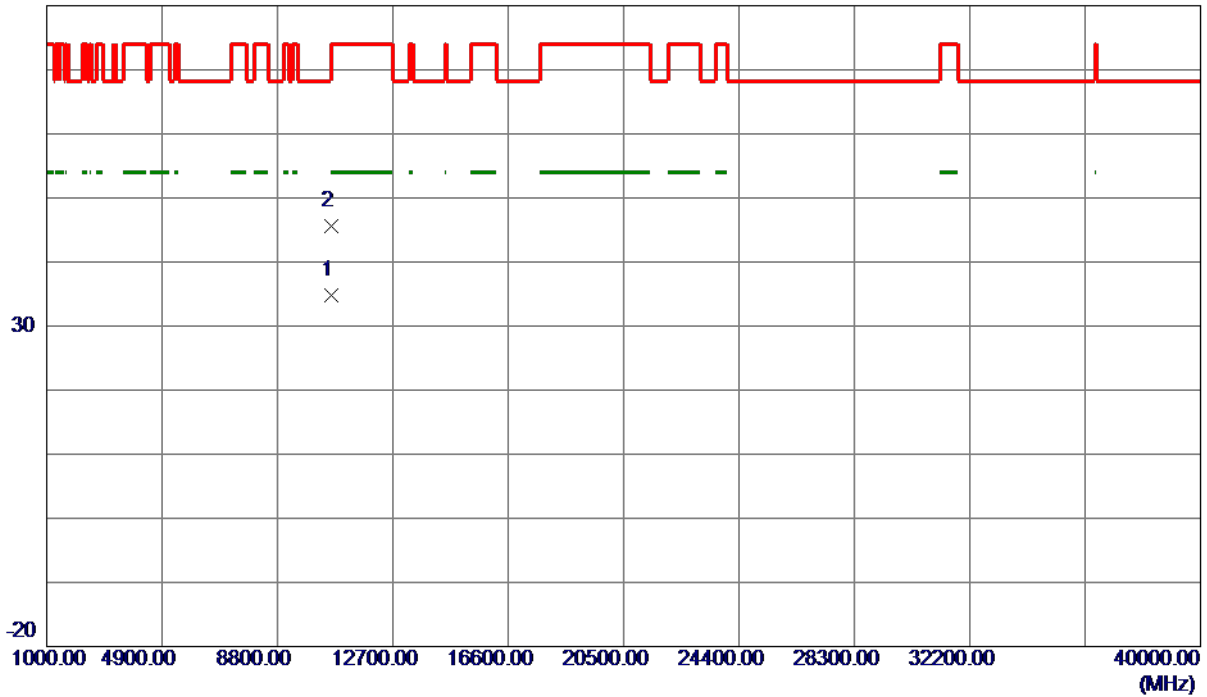

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.9650	23.32	11.56	34.88	54.00	-19.12	AVG	
2	10622.5800	34.08	11.56	45.64	74.00	-28.36	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Vertical

130 dBuV/m

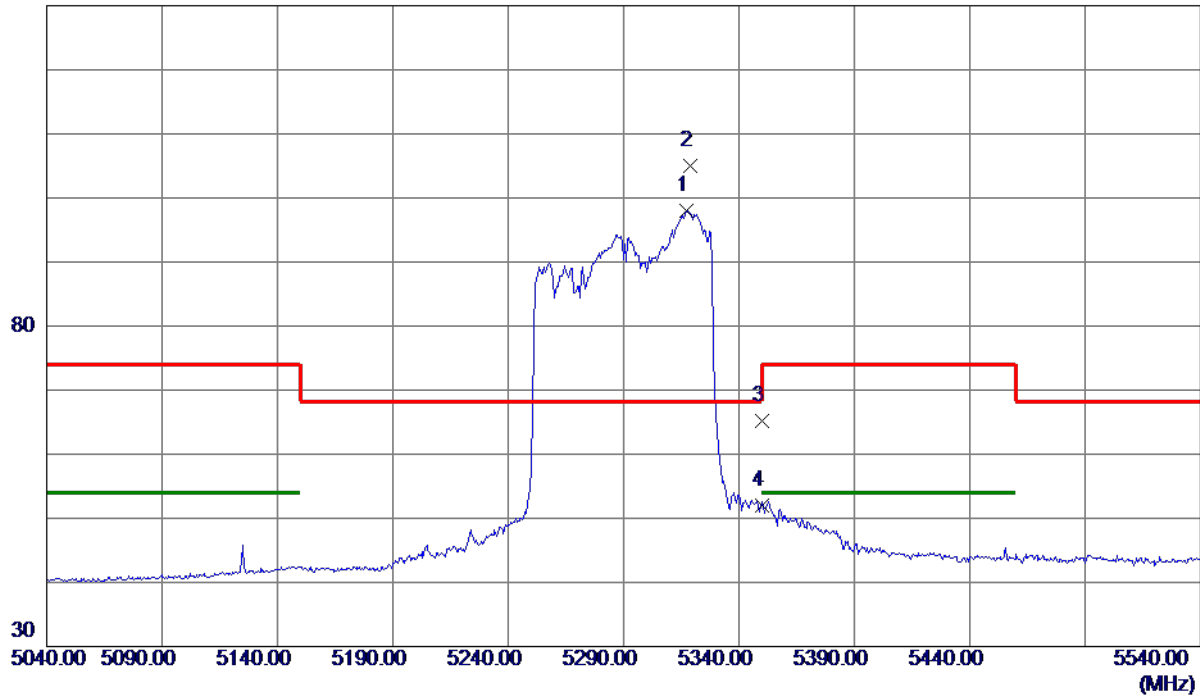

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5317.2500	83.37	14.71	98.08	999.00	-900.92	AVG	No Limit
2 *	5318.7500	90.26	14.72	104.98	68.30	36.68	Peak	No Limit
3	5350.0000	50.37	14.79	65.16	74.00	-8.84	Peak	
4	5350.0000	37.30	14.79	52.09	54.00	-1.91	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Vertical

80 dBuV/m

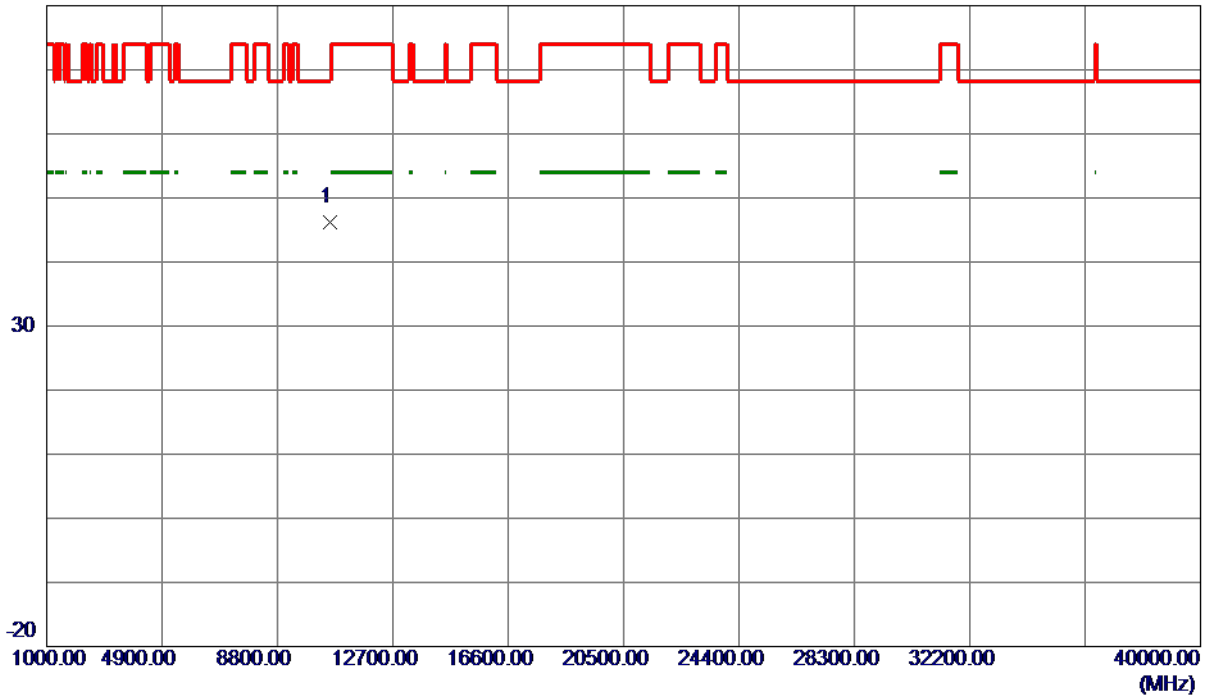

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10577.5150	34.63	11.55	46.18	68.30	-22.12	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Horizontal

130 dBuV/m

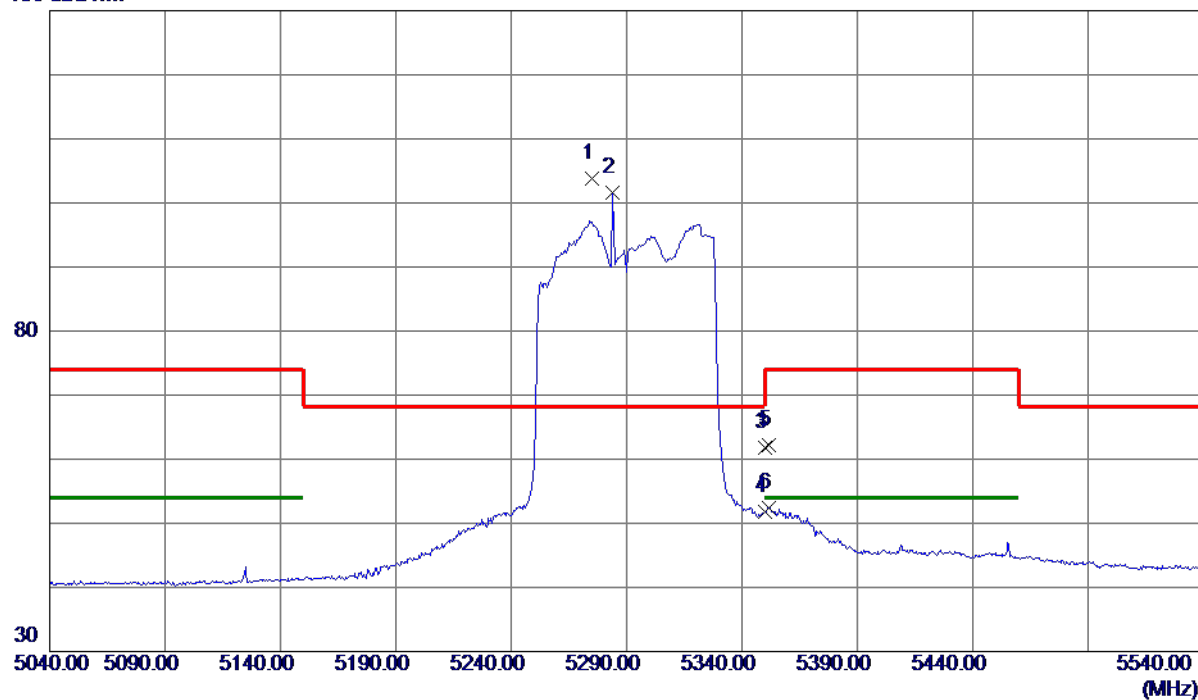

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5274.7500	89.13	14.61	103.74	68.30	35.44	Peak	No Limit
2	5284.0000	87.04	14.63	101.67	999.00	-897.33	AVG	No Limit
3	5350.0000	47.06	14.79	61.85	74.00	-12.15	Peak	
4	5350.0000	37.05	14.79	51.84	54.00	-2.16	AVG	
5	5351.5000	47.45	14.79	62.24	74.00	-11.76	Peak	
6	5351.5000	37.70	14.79	52.49	54.00	-1.51	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

Horizontal

80 dBuV/m

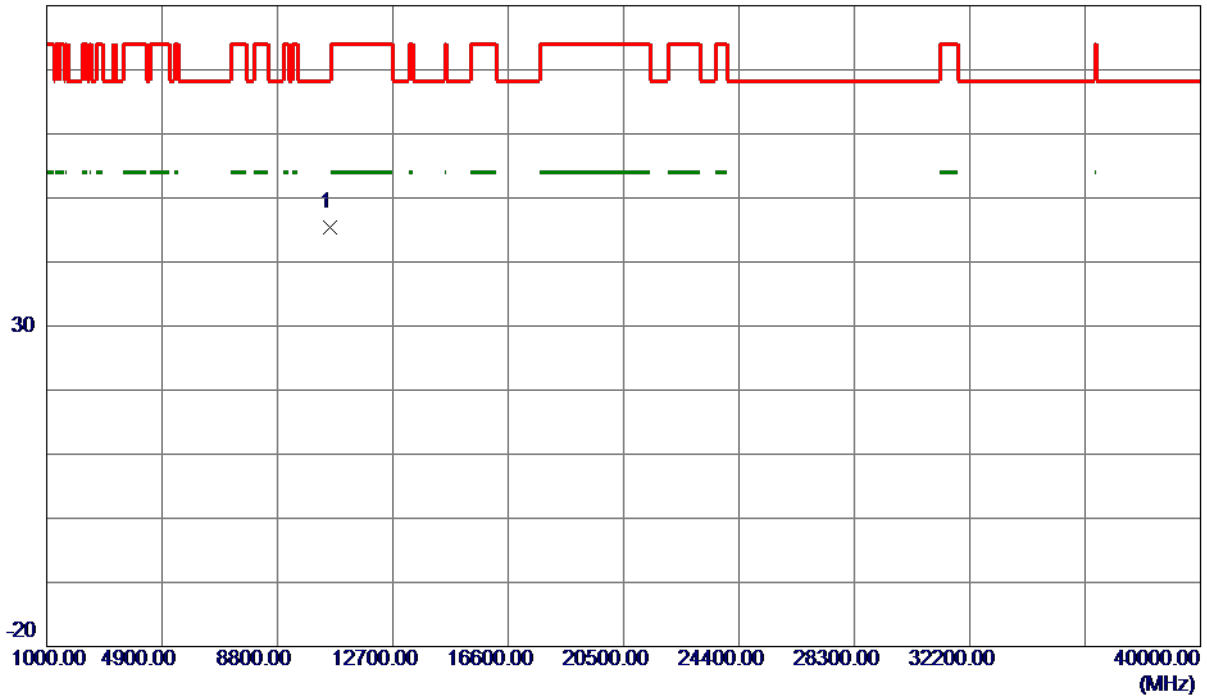

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10582.2050	33.84	11.55	45.39	68.30	-22.91	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Vertical

130 dBuV/m

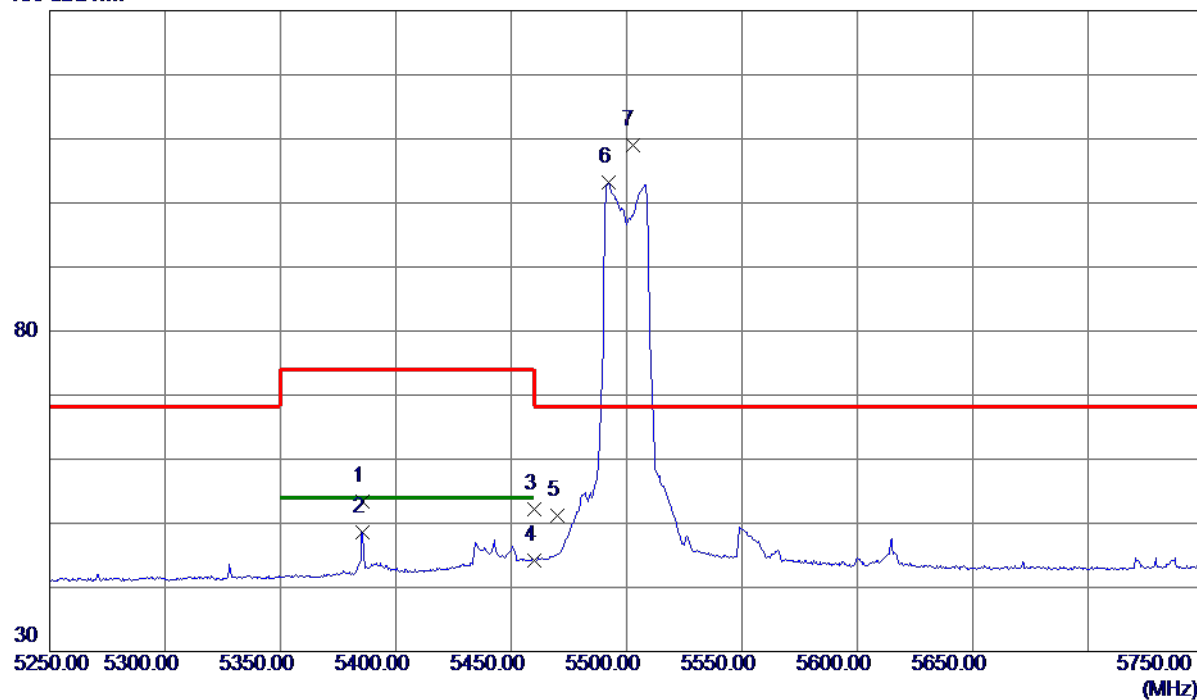

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5385.5000	38.60	14.87	53.47	74.00	-20.53	Peak	
2	5385.5000	33.80	14.87	48.67	54.00	-5.33	AVG	
3	5460.0000	37.07	15.05	52.12	74.00	-21.88	Peak	
4	5460.0000	29.10	15.05	44.15	54.00	-9.85	AVG	
5	5470.0000	36.07	15.07	51.14	68.30	-17.16	Peak	
6	5492.0000	88.09	15.13	103.22	999.00	-895.78	AVG	No Limit
7 *	5502.5000	93.82	15.15	108.97	68.30	40.67	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Vertical

80 dBuV/m

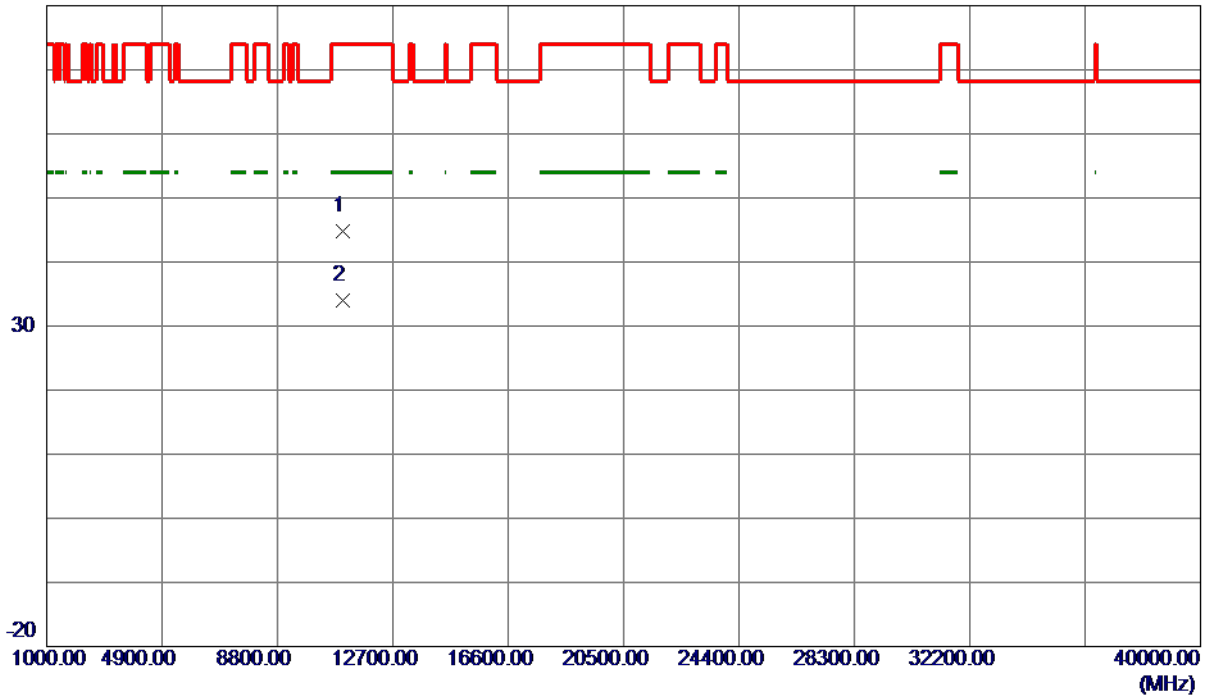

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10996.9450	33.27	11.62	44.89	74.00	-29.11	Peak	
2 *	10998.4950	22.46	11.62	34.08	54.00	-19.92	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Horizontal

130 dBuV/m

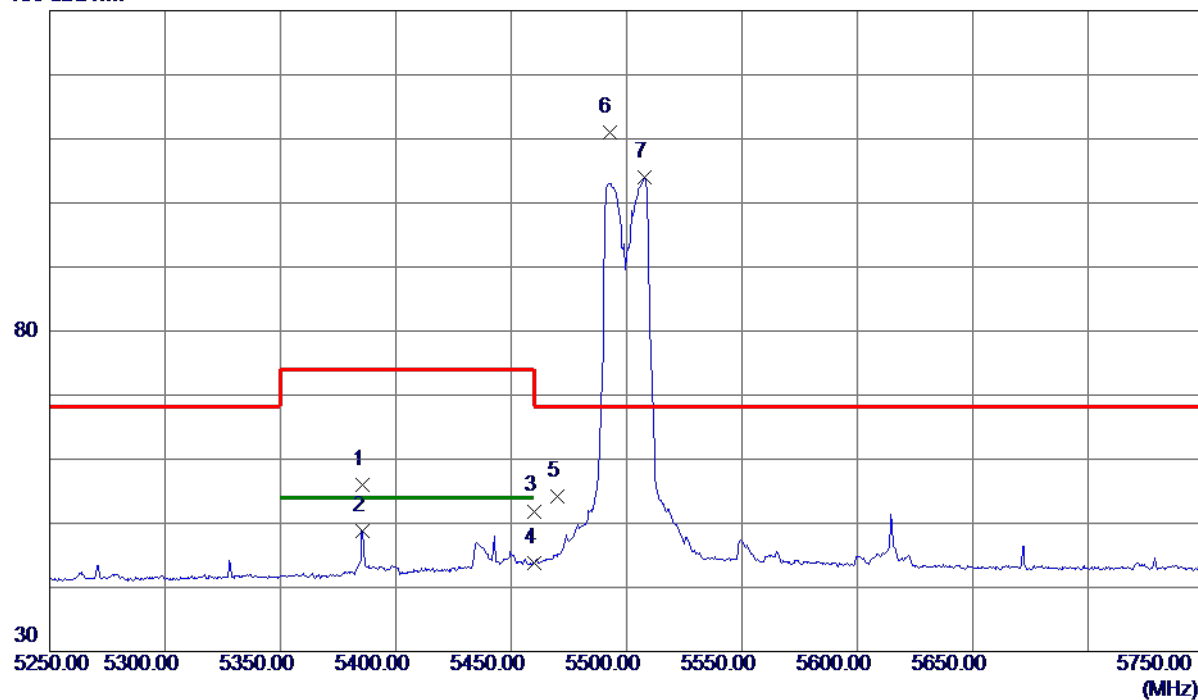

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5385.5000	41.14	14.87	56.01	74.00	-17.99	Peak	
2	5385.5000	34.02	14.87	48.89	54.00	-5.11	AVG	
3	5460.0000	36.85	15.05	51.90	74.00	-22.10	Peak	
4	5460.0000	28.78	15.05	43.83	54.00	-10.17	AVG	
5	5470.0000	39.06	15.07	54.13	68.30	-14.17	Peak	
6 *	5492.5000	95.91	15.13	111.04	68.30	42.74	Peak	No Limit
7	5508.0000	88.83	15.16	103.99	999.00	-895.01	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Horizontal

80 dBuV/m

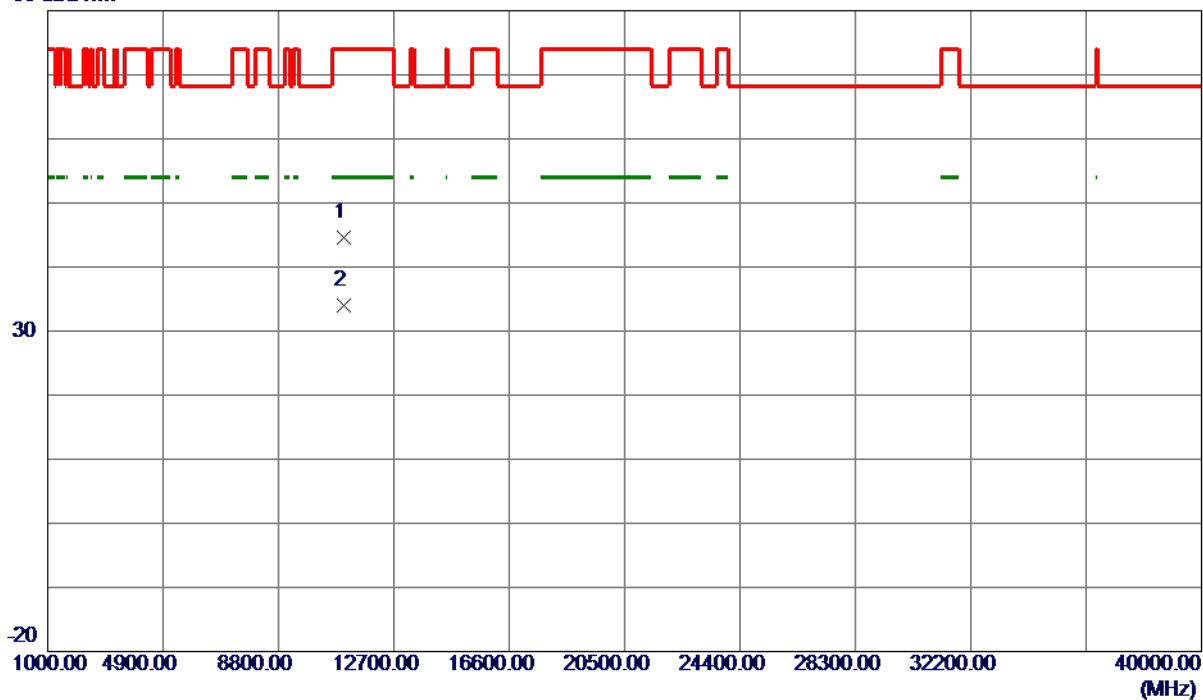

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10995.4700	32.94	11.62	44.56	74.00	-29.44	Peak	
2 *	10997.9900	22.32	11.62	33.94	54.00	-20.06	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Vertical

130 dBuV/m

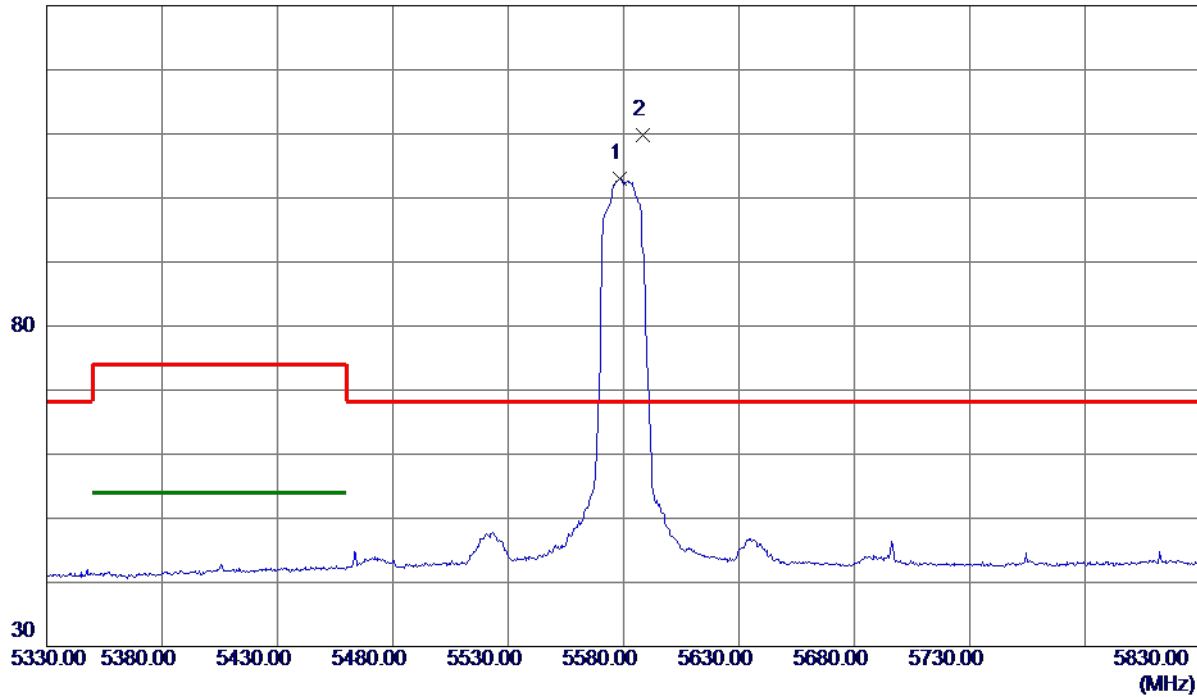

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5578.5000	87.65	15.33	102.98	999.00	-896.02	AVG	No Limit
2 *	5588.5000	94.44	15.35	109.79	68.30	41.49	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Vertical

80 dBuV/m

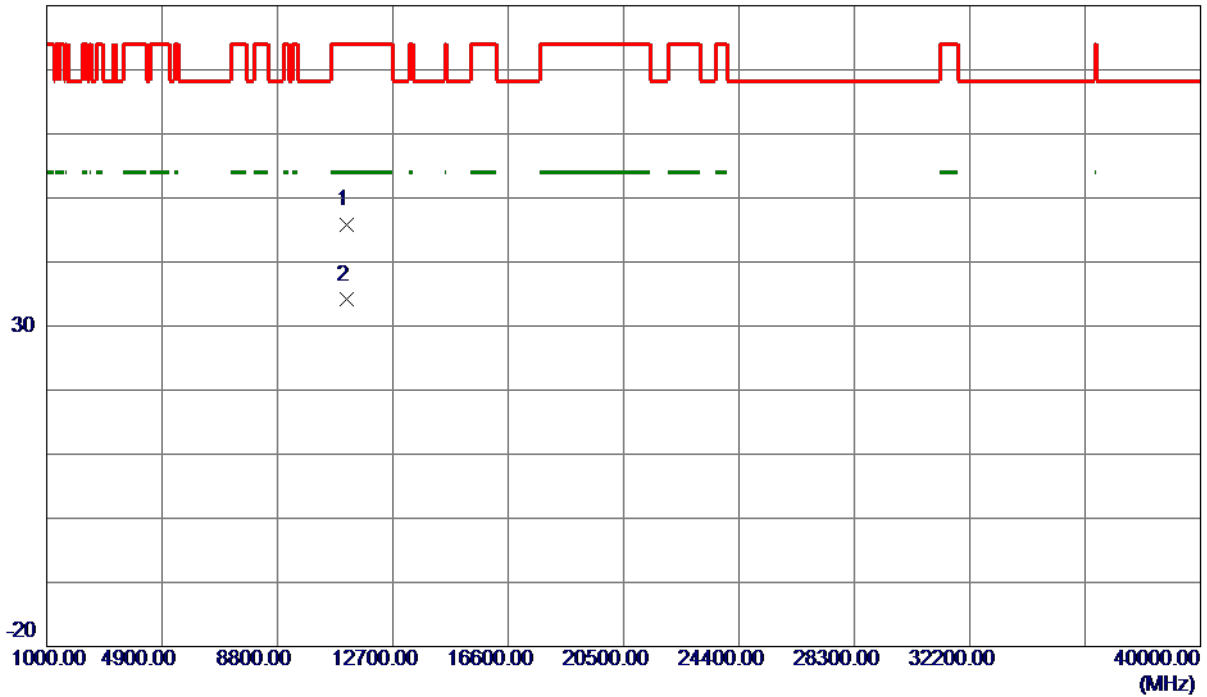

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11155.1500	34.00	11.76	45.76	74.00	-28.24	Peak	
2 *	11157.4150	22.34	11.76	34.10	54.00	-19.90	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Horizontal

130 dBuV/m

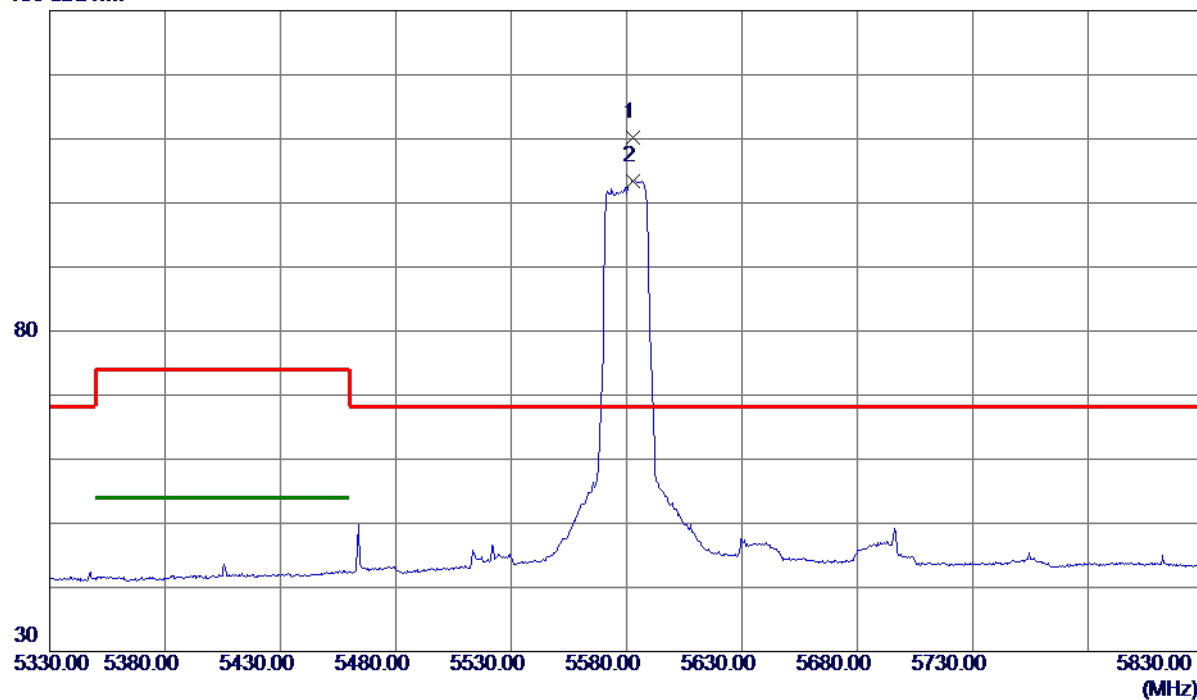

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5582.7500	94.91	15.34	110.25	68.30	41.95	Peak	No Limit
2	5583.0000	88.15	15.34	103.49	999.00	-895.51	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5580 MHz

Horizontal

80 dBuV/m

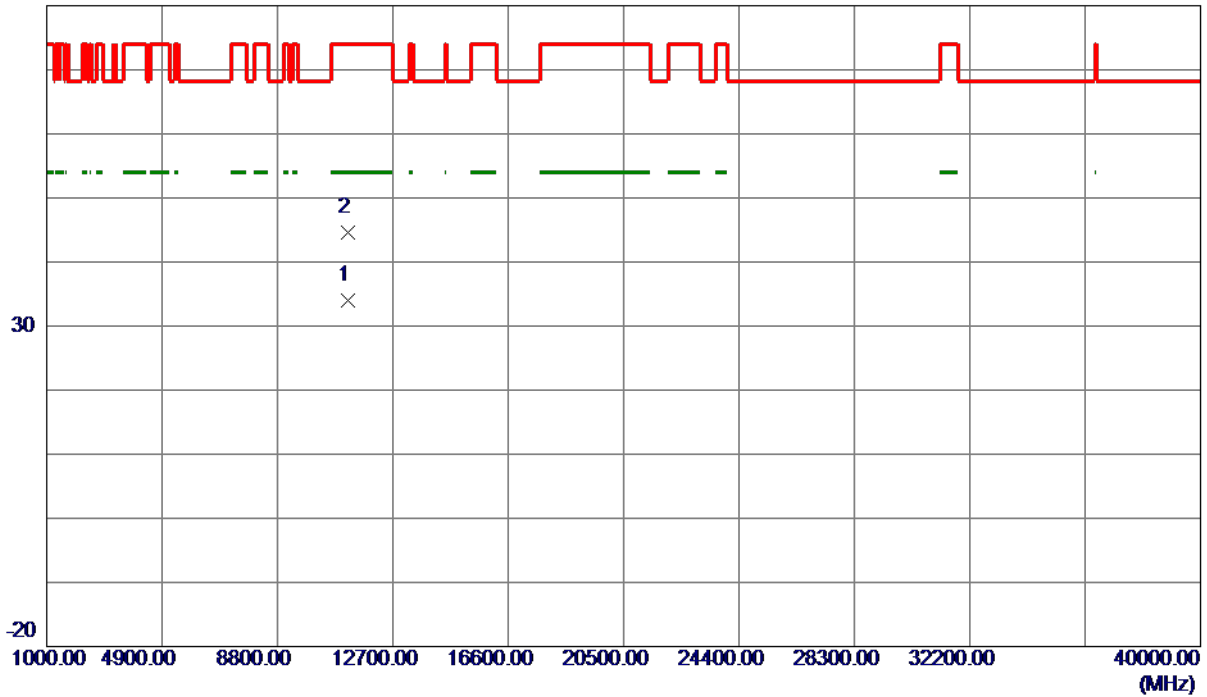

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11163.1750	22.23	11.77	34.00	54.00	-20.00	AVG	
2	11163.3300	32.89	11.77	44.66	74.00	-29.34	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

Vertical

130 dBuV/m

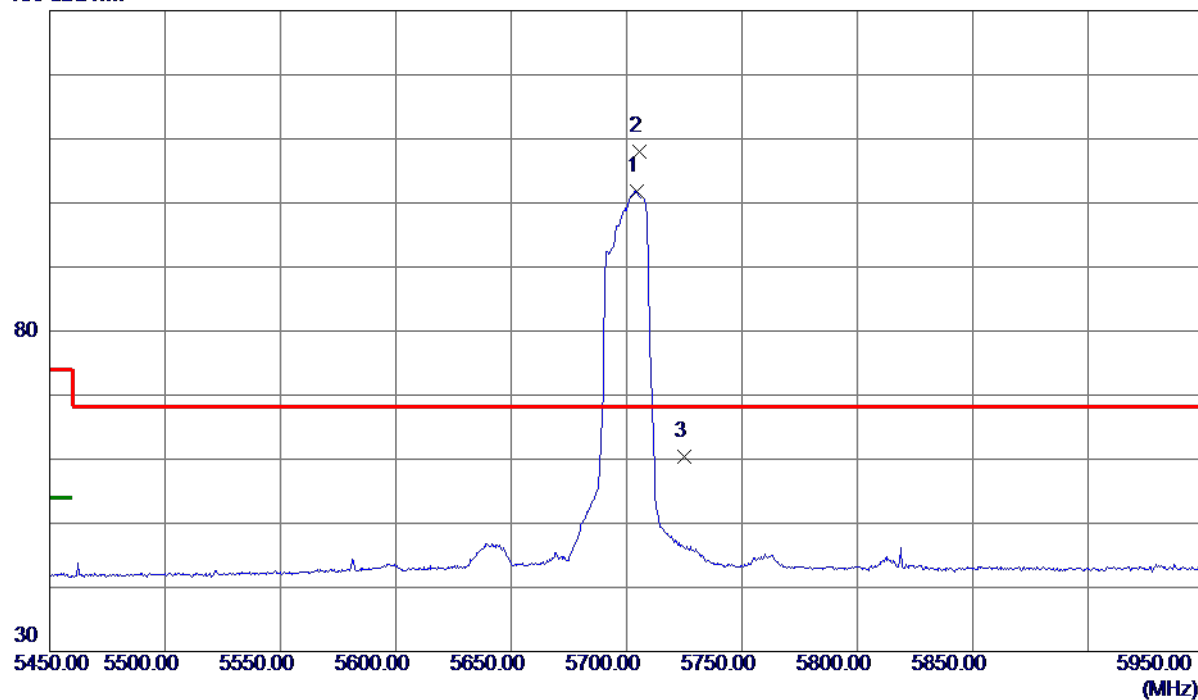

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5704.5000	86.08	15.63	101.71	999.00	-897.29	AVG	No Limit
2 *	5705.7500	92.38	15.63	108.01	68.30	39.71	Peak	No Limit
3	5725.0000	44.66	15.68	60.34	68.30	-7.96	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

Vertical

80 dBuV/m

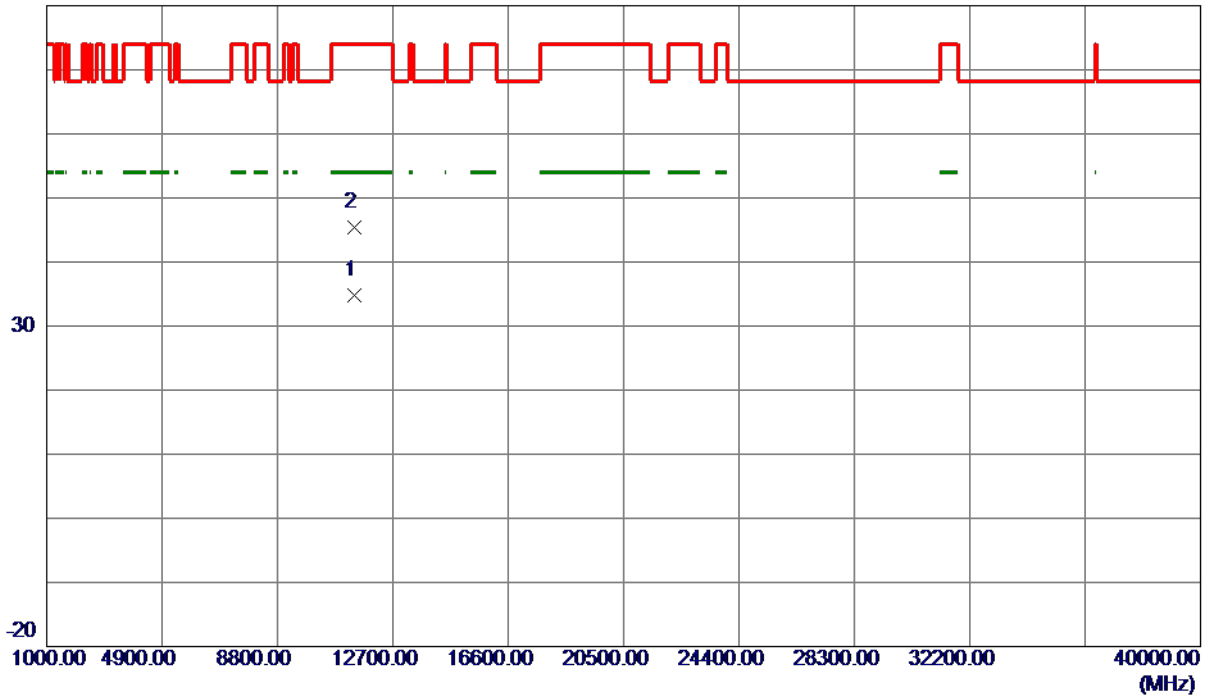

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11401.0850	22.87	11.98	34.85	54.00	-19.15	AVG	
2	11404.0500	33.37	11.99	45.36	74.00	-28.64	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

Horizontal

130 dBuV/m

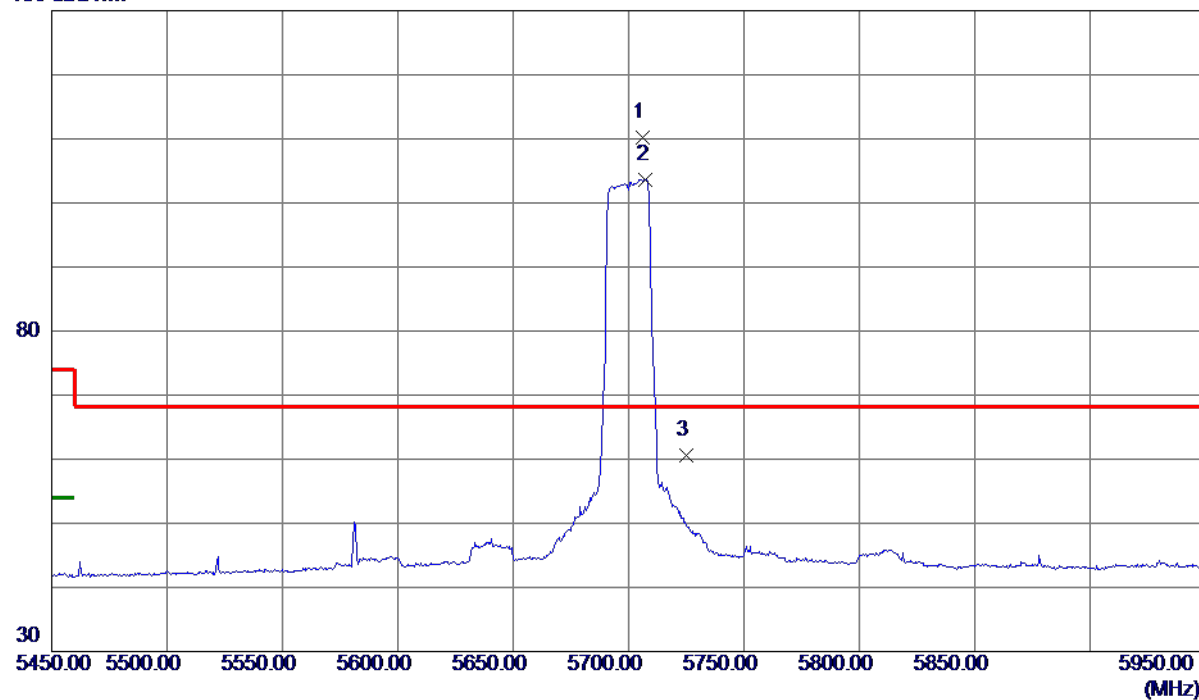

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5706.0000	94.54	15.63	110.17	68.30	41.87	Peak	No Limit
2	5707.5000	88.05	15.64	103.69	999.00	-895.31	AVG	No Limit
3	5725.0000	44.88	15.68	60.56	68.30	-7.74	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

Horizontal

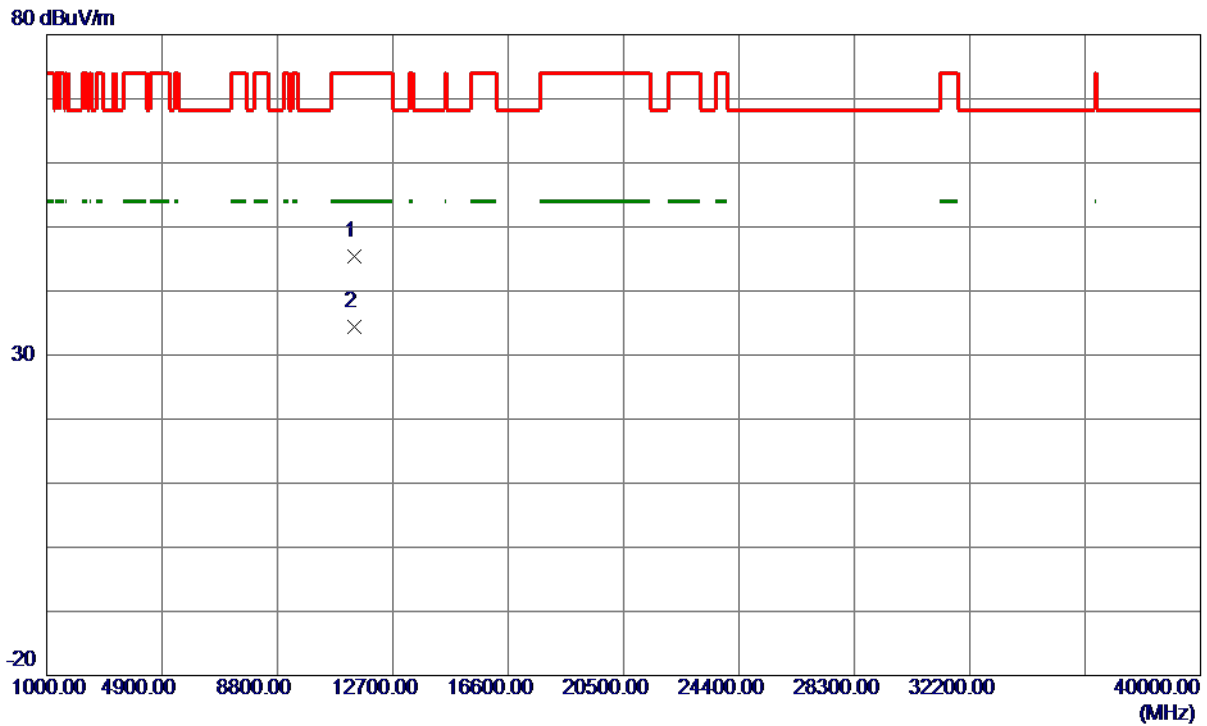

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11400.2600	33.41	11.98	45.39	74.00	-28.61	Peak	
2 *	11401.7100	22.47	11.99	34.46	54.00	-19.54	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

Vertical

130 dBuV/m

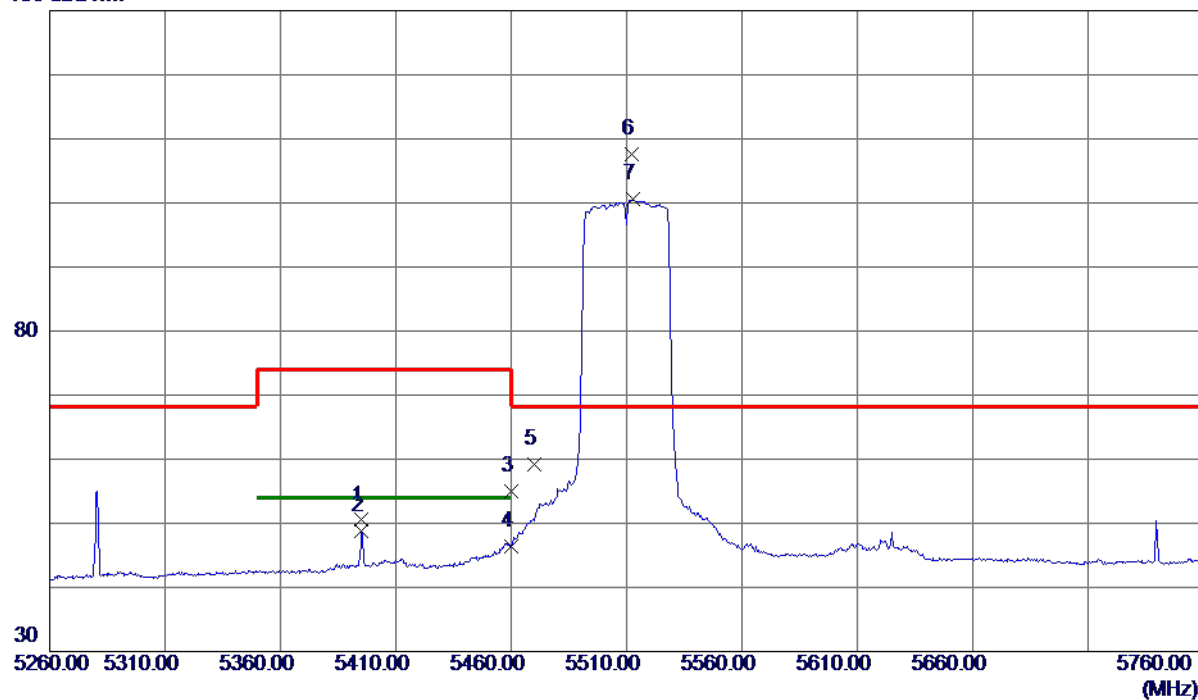

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5395.2500	35.60	14.90	50.50	74.00	-23.50	Peak	
2	5395.2500	33.95	14.90	48.85	54.00	-5.15	AVG	
3	5460.0000	39.90	15.05	54.95	74.00	-19.05	Peak	
4	5460.0000	31.30	15.05	46.35	54.00	-7.65	AVG	
5	5470.0000	44.12	15.07	59.19	68.30	-9.11	Peak	
6 *	5511.9700	92.34	15.17	107.51	68.30	39.21	Peak	No Limit
7	5512.7500	85.33	15.18	100.51	999.00	-898.49	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

Vertical

80 dBuV/m

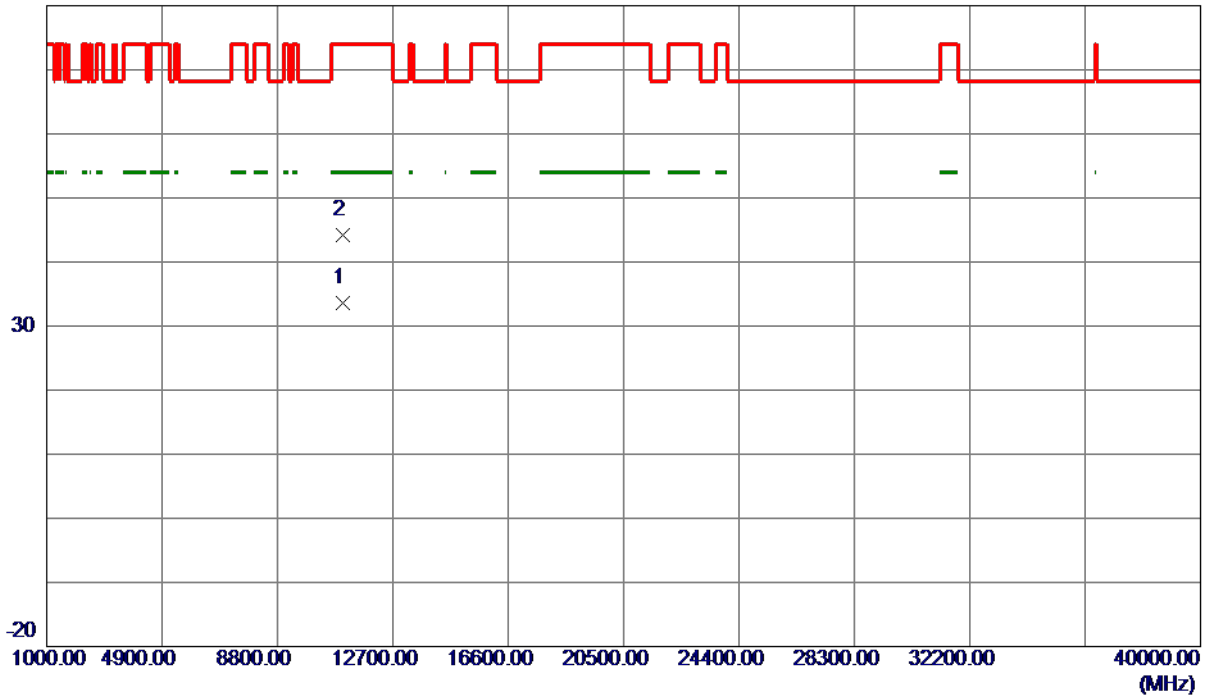

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11016.2400	22.05	11.63	33.68	54.00	-20.32	AVG	
2	11018.9000	32.59	11.64	44.23	74.00	-29.77	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

Horizontal

130 dBuV/m

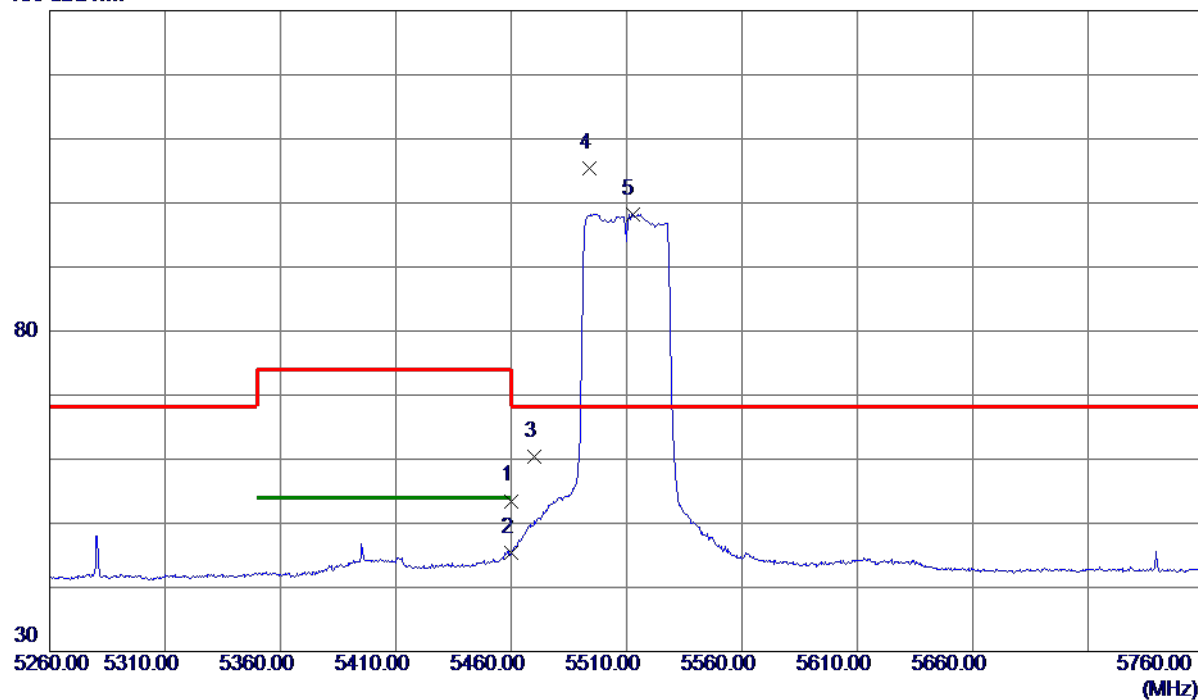

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.45	15.05	53.50	74.00	-20.50	Peak	
2	5460.0000	30.35	15.05	45.40	54.00	-8.60	AVG	
3	5470.0000	45.25	15.07	60.32	68.30	-7.98	Peak	
4 *	5494.0000	90.22	15.13	105.35	68.30	37.05	Peak	No Limit
5	5512.5000	83.11	15.17	98.28	999.00	-900.72	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

Horizontal

80 dBuV/m

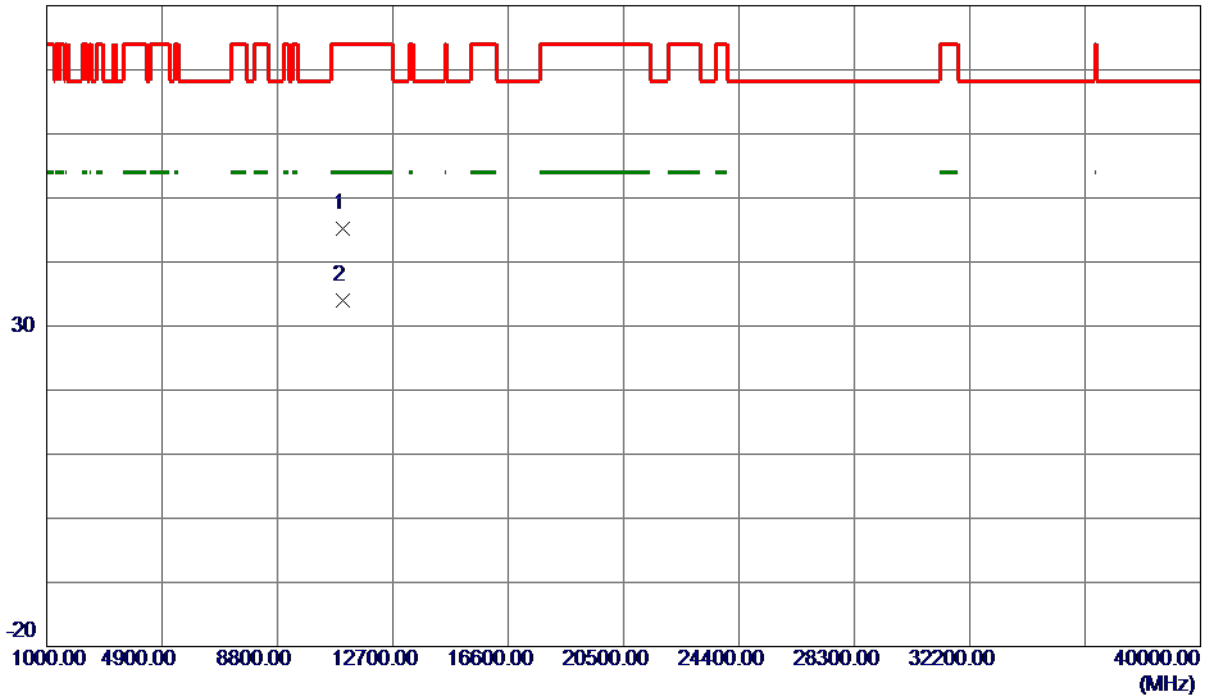

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11018.4250	33.52	11.64	45.16	74.00	-28.84	Peak	
2 *	11024.3500	22.28	11.64	33.92	54.00	-20.08	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

Vertical

130 dBuV/m

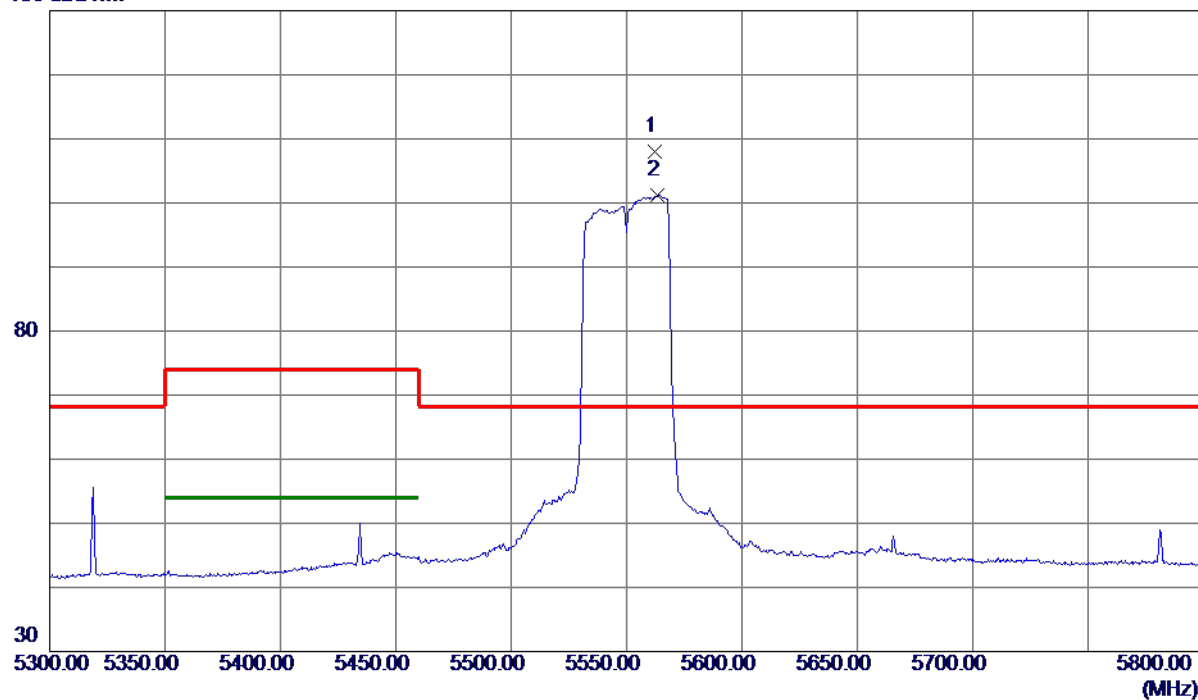

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5562.0000	92.79	15.29	108.08	68.30	39.78	Peak	No Limit
2	5563.5000	85.93	15.30	101.23	999.00	-897.77	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

Vertical

80 dBuV/m

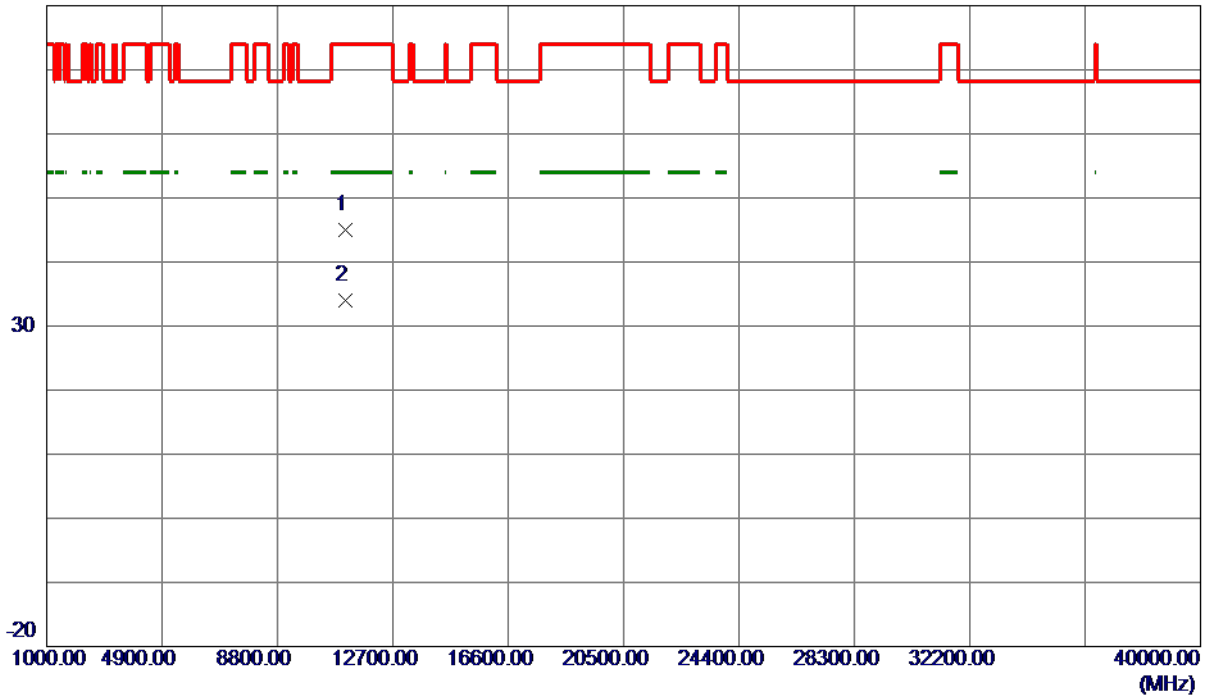

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11095.1250	33.25	11.71	44.96	74.00	-29.04	Peak	
2 *	11101.0650	22.20	11.71	33.91	54.00	-20.09	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

Horizontal

130 dBuV/m

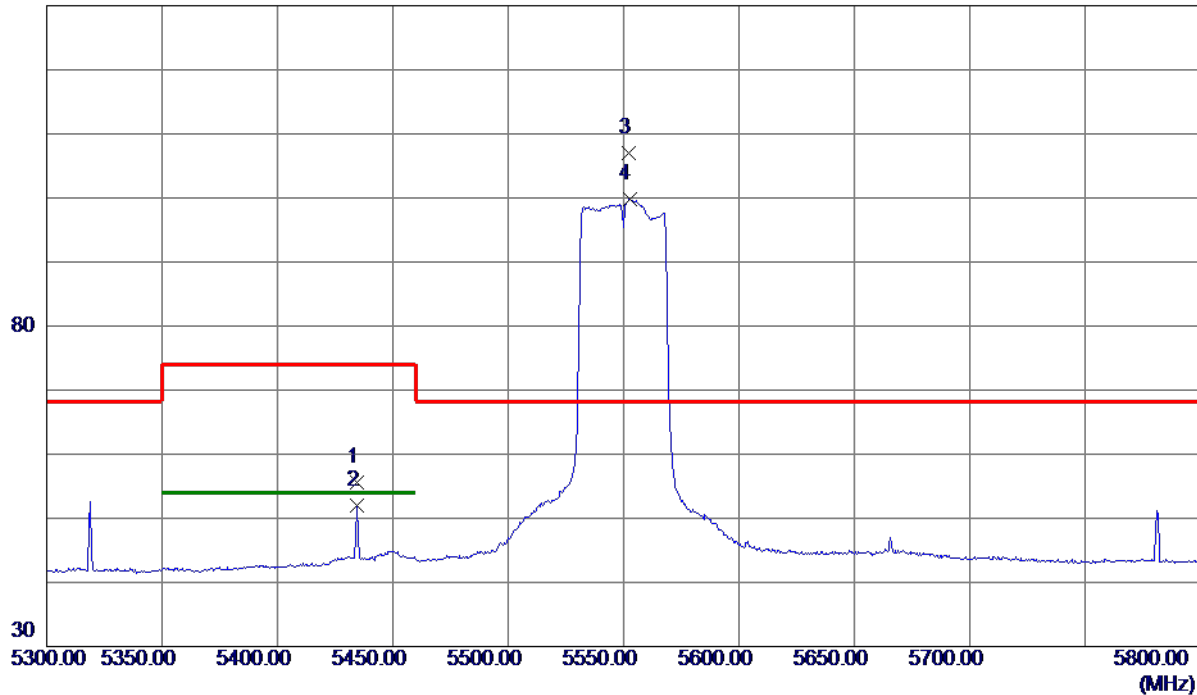

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5434.2500	40.61	14.99	55.60	74.00	-18.40	Peak	
2	5434.2500	37.09	14.99	52.08	54.00	-1.92	AVG	
3 *	5552.0000	91.68	15.27	106.95	68.30	38.65	Peak	No Limit
4	5552.5000	84.57	15.27	99.84	999.00	-899.16	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

Horizontal

80 dBuV/m

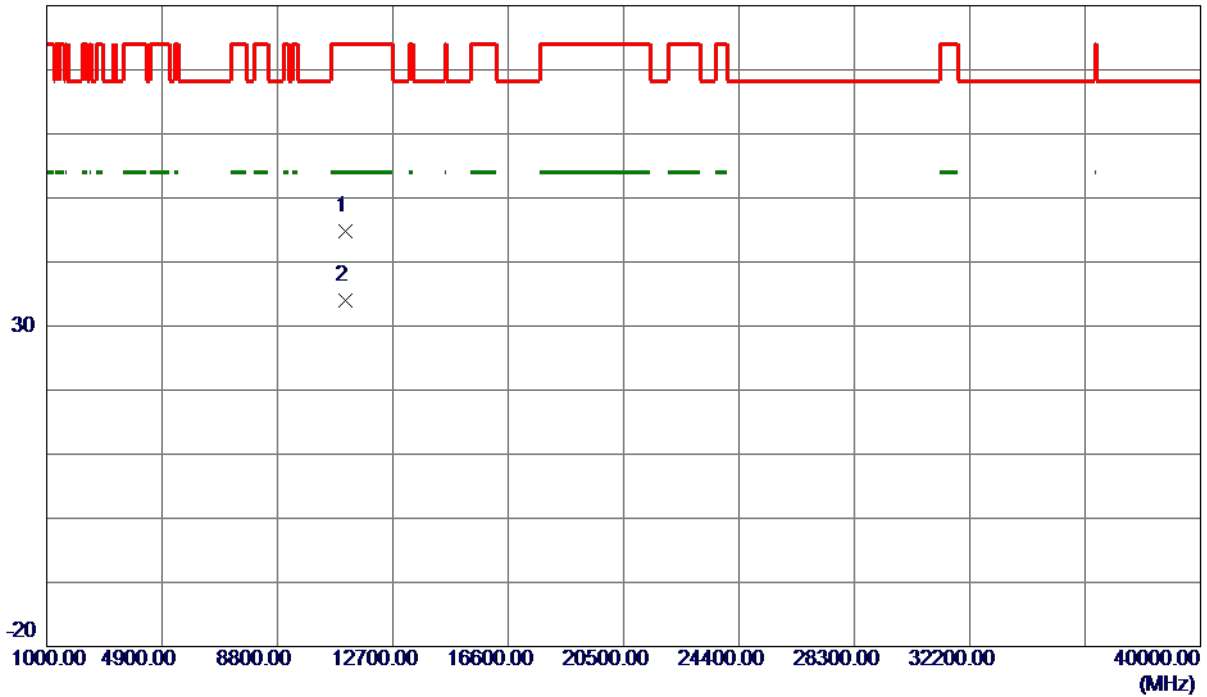

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.4700	33.02	11.71	44.73	74.00	-29.27	Peak	
2 *	11101.6449	22.34	11.71	34.05	54.00	-19.95	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

Vertical

130 dBuV/m

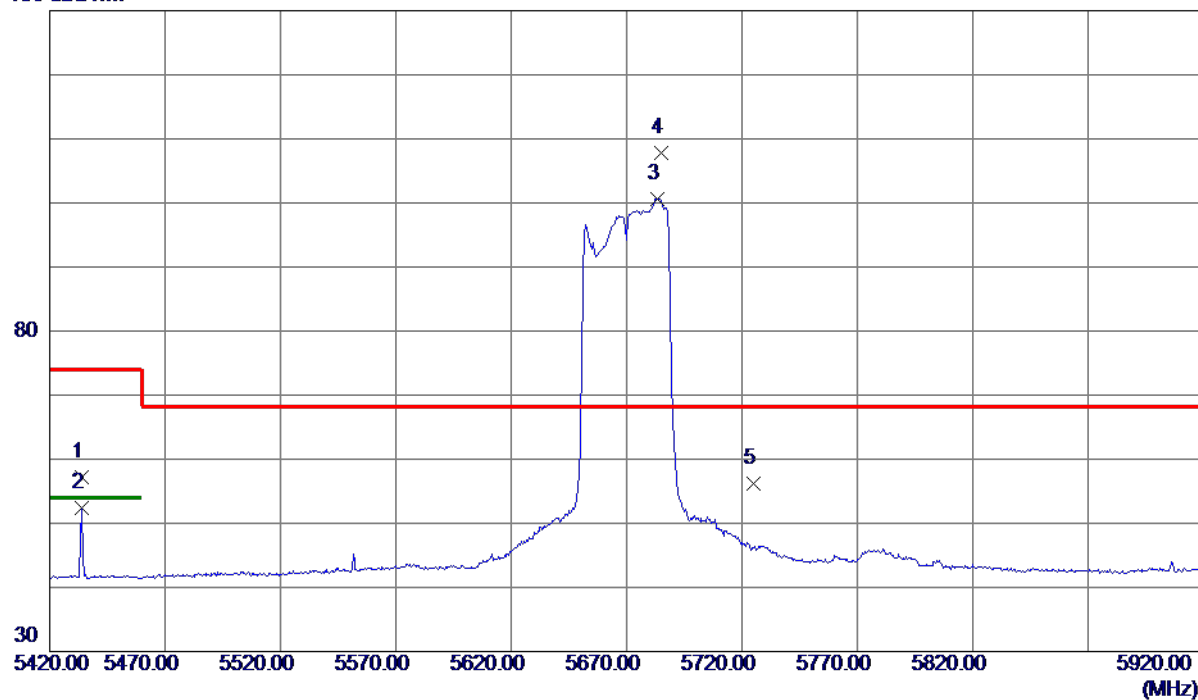

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5433.7500	42.30	14.99	57.29	74.00	-16.71	Peak	
2	5433.7500	37.38	14.99	52.37	54.00	-1.63	AVG	
3	5683.5000	85.01	15.58	100.59	999.00	-898.41	AVG	No Limit
4 *	5684.7500	92.30	15.58	107.88	68.30	39.58	Peak	No Limit
5	5725.0000	40.49	15.68	56.17	68.30	-12.13	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

Vertical

80 dBuV/m

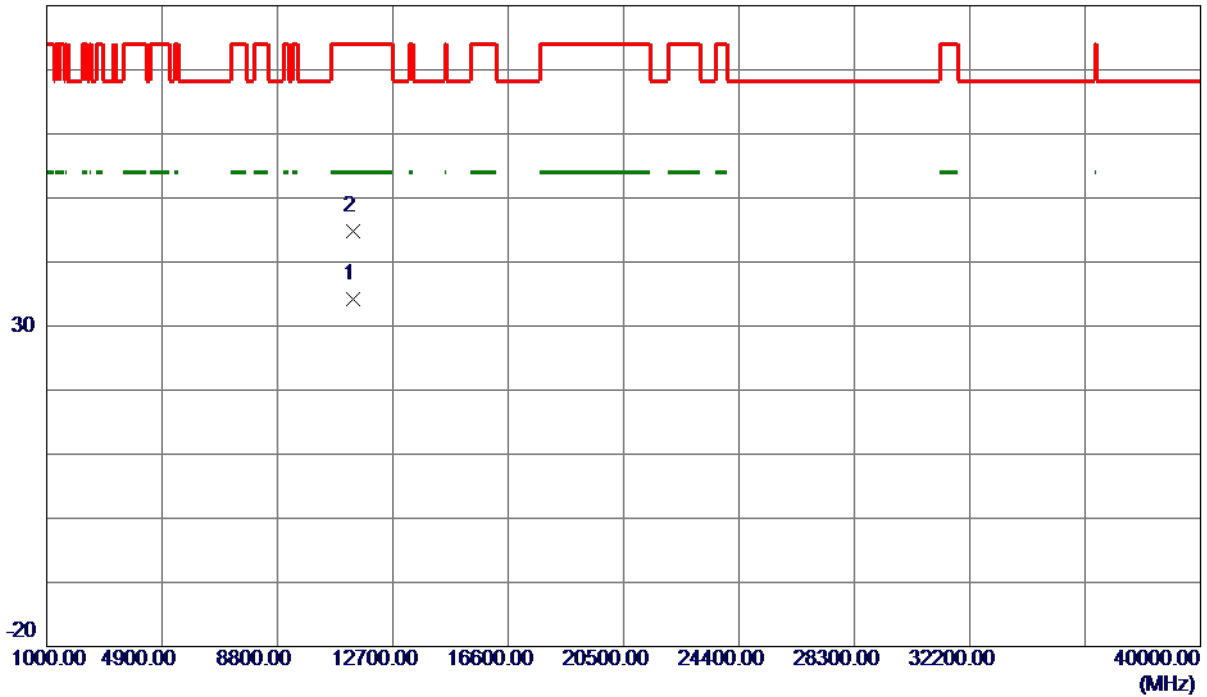

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11342.5500	22.25	11.93	34.18	54.00	-19.82	AVG	
2	11342.8500	32.94	11.93	44.87	74.00	-29.13	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

Horizontal

130 dBuV/m

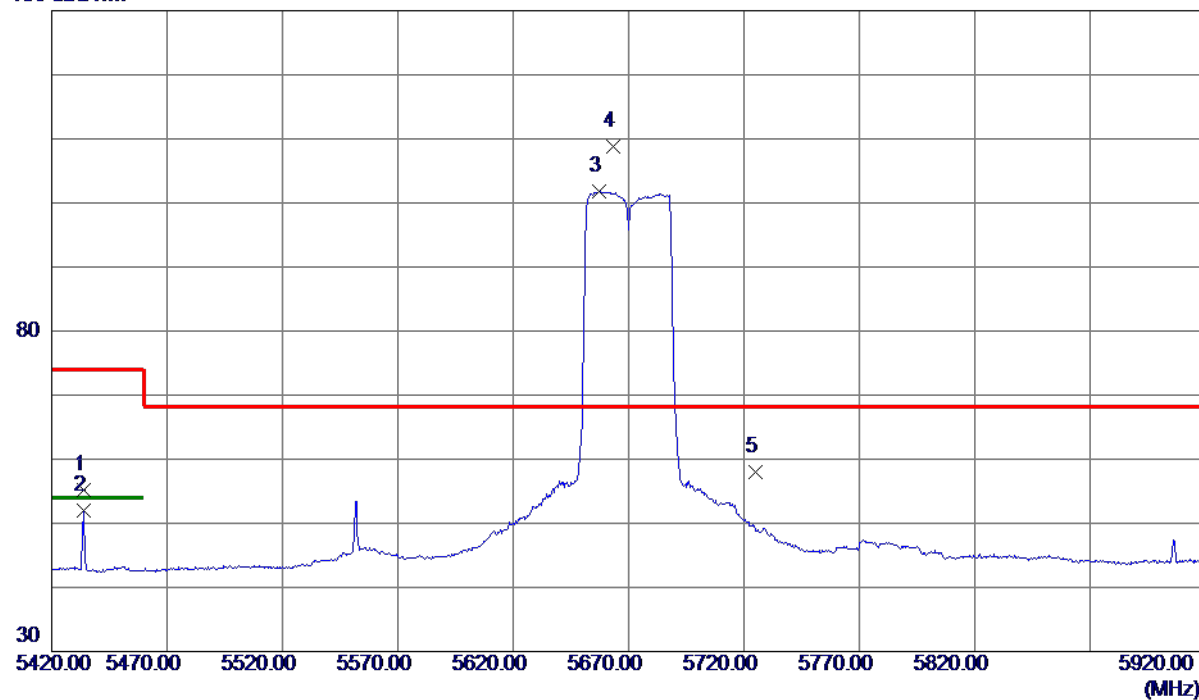

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5433.7500	40.24	14.99	55.23	74.00	-18.77	Peak	
2	5433.7500	36.96	14.99	51.95	54.00	-2.05	AVG	
3	5657.0000	86.34	15.52	101.86	999.00	-897.14	AVG	No Limit
4 *	5663.5000	93.22	15.53	108.75	68.30	40.45	Peak	No Limit
5	5725.0000	42.26	15.68	57.94	68.30	-10.36	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

Horizontal

80 dBuV/m

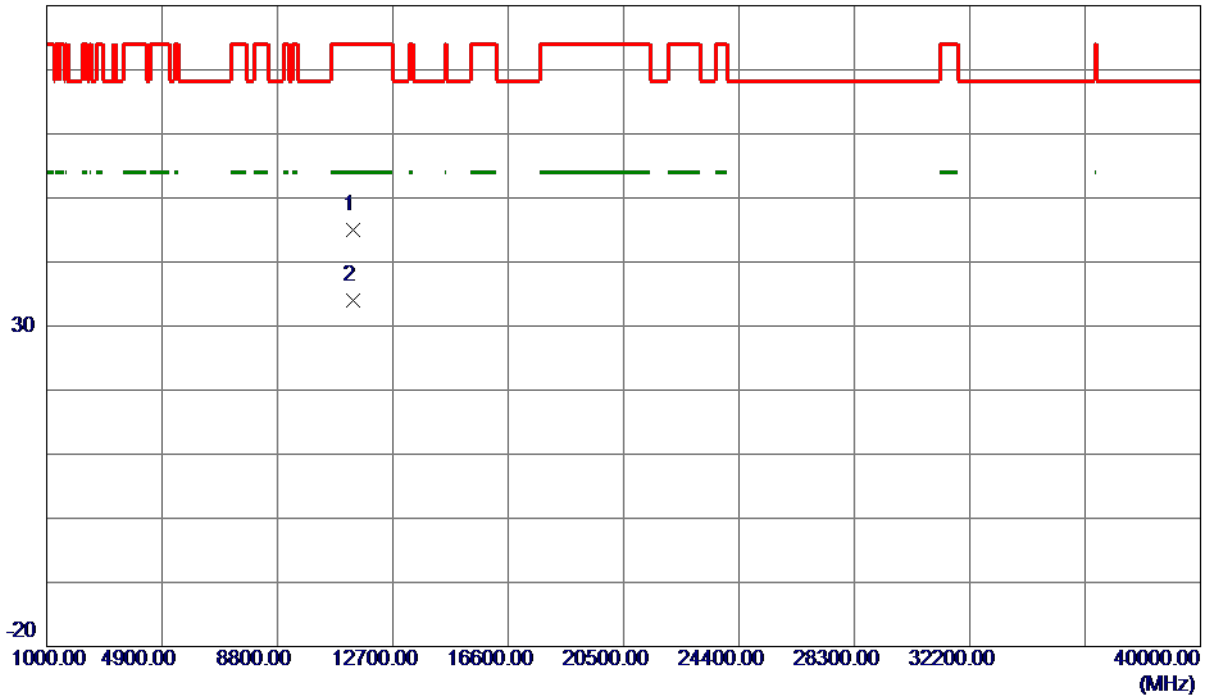

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11342.6800	33.14	11.93	45.07	74.00	-28.93	Peak	
2 *	11342.9150	22.12	11.93	34.05	54.00	-19.95	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Vertical

130 dBuV/m

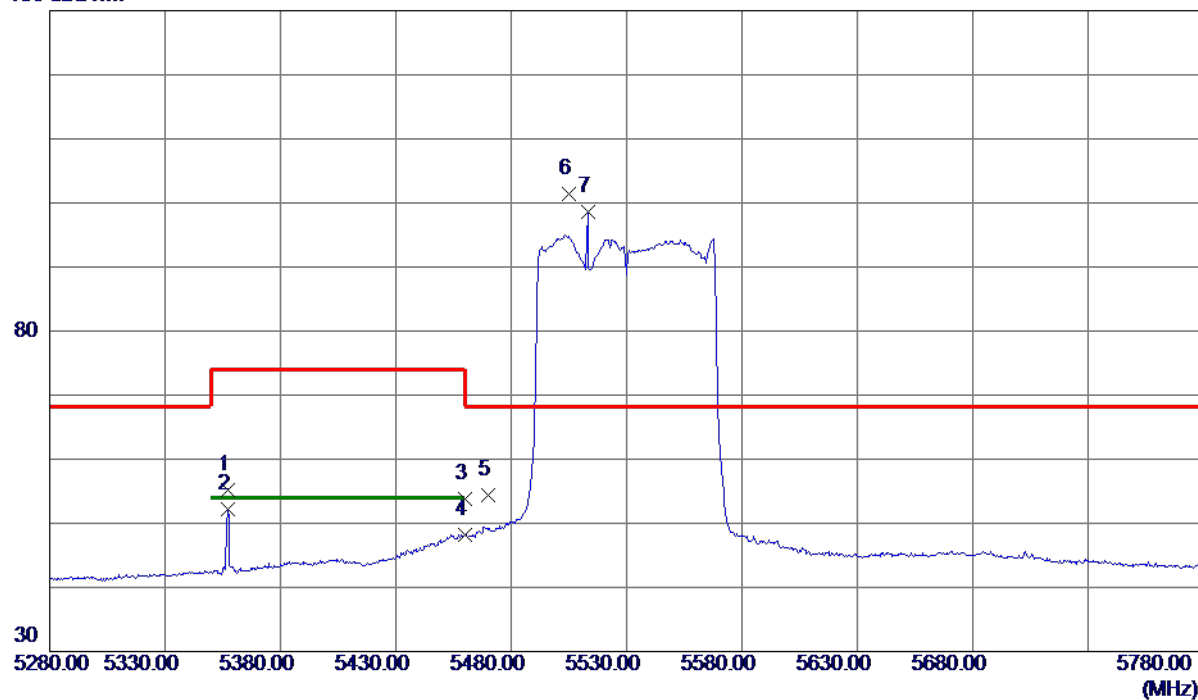

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5357.2500	40.39	14.81	55.20	74.00	-18.80	Peak	
2	5357.2500	37.42	14.81	52.23	54.00	-1.77	AVG	
3	5460.0000	38.81	15.05	53.86	74.00	-20.14	Peak	
4	5460.0000	33.20	15.05	48.25	54.00	-5.75	AVG	
5	5470.0000	39.25	15.07	54.32	68.30	-13.98	Peak	
6 *	5505.0000	86.21	15.16	101.37	68.30	33.07	Peak	No Limit
7	5513.2500	83.51	15.18	98.69	999.00	-900.31	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Vertical

80 dBuV/m

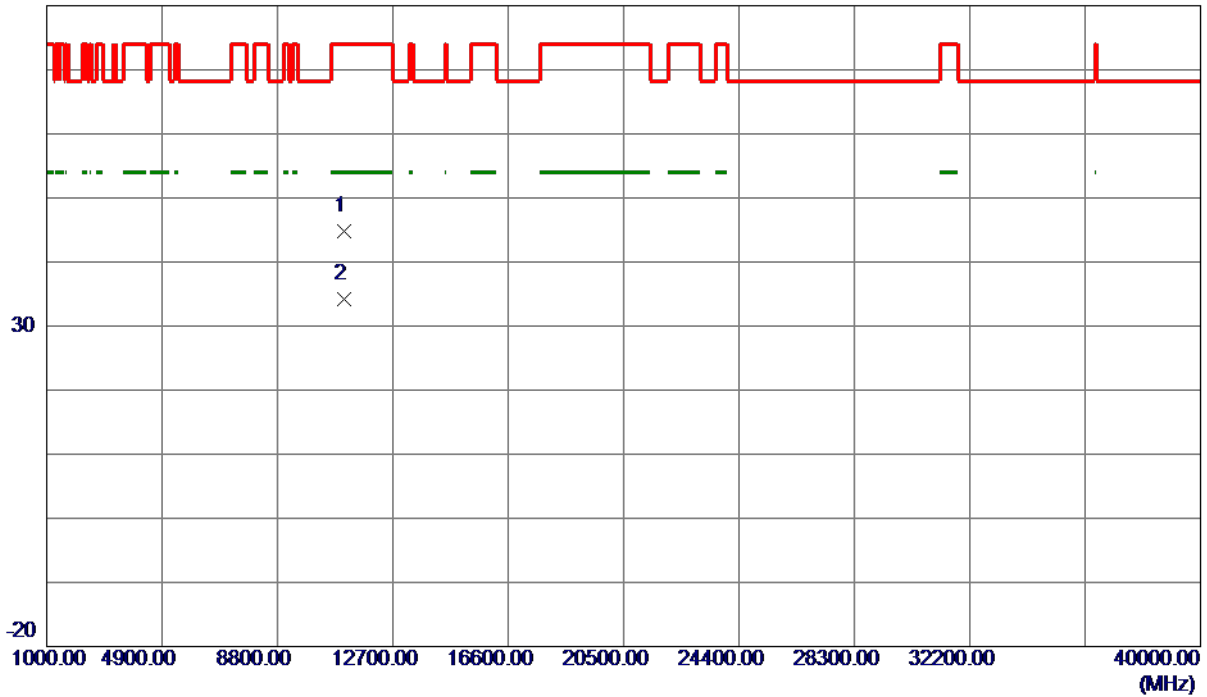

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.2500	33.04	11.67	44.71	74.00	-29.29	Peak	
2 *	11060.8000	22.48	11.68	34.16	54.00	-19.84	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Horizontal

130 dBuV/m

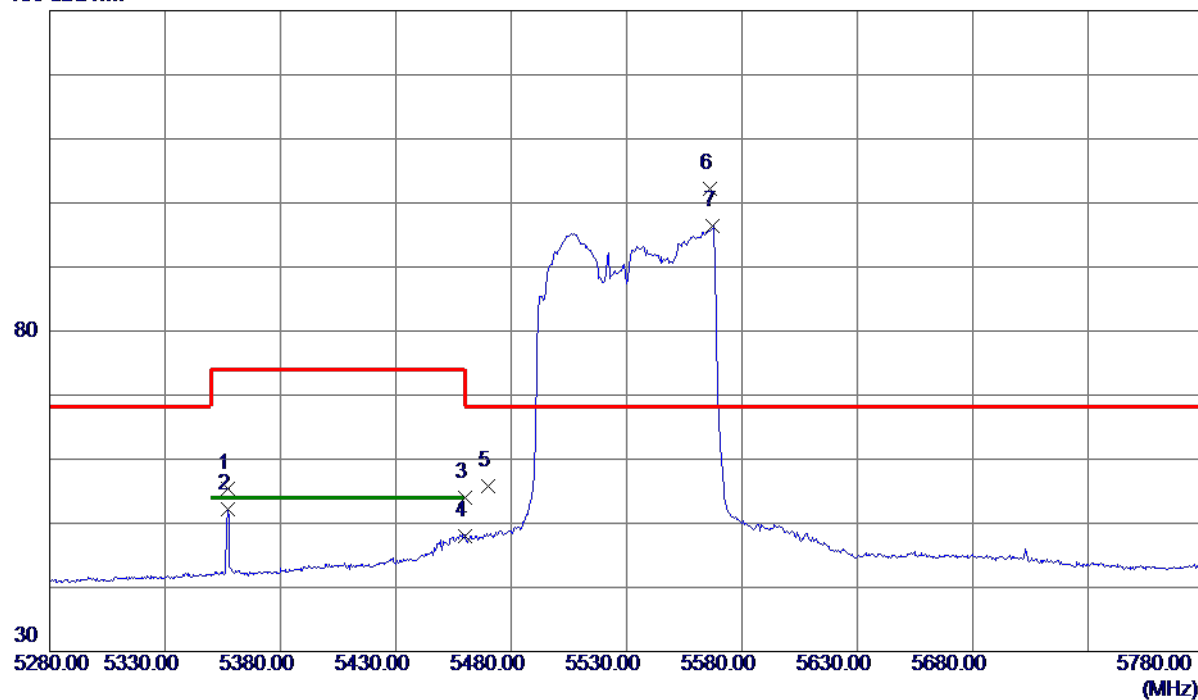

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5357.2500	40.59	14.81	55.40	74.00	-18.60	Peak	
2	5357.2500	37.30	14.81	52.11	54.00	-1.89	AVG	
3	5460.0000	38.95	15.05	54.00	74.00	-20.00	Peak	
4	5460.0000	32.88	15.05	47.93	54.00	-6.07	AVG	
5	5470.0000	40.75	15.07	55.82	68.30	-12.48	Peak	
6 *	5566.2500	86.95	15.30	102.25	68.30	33.95	Peak	No Limit
7	5567.5000	81.00	15.31	96.31	999.00	-902.69	AVG	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Horizontal

80 dBuV/m

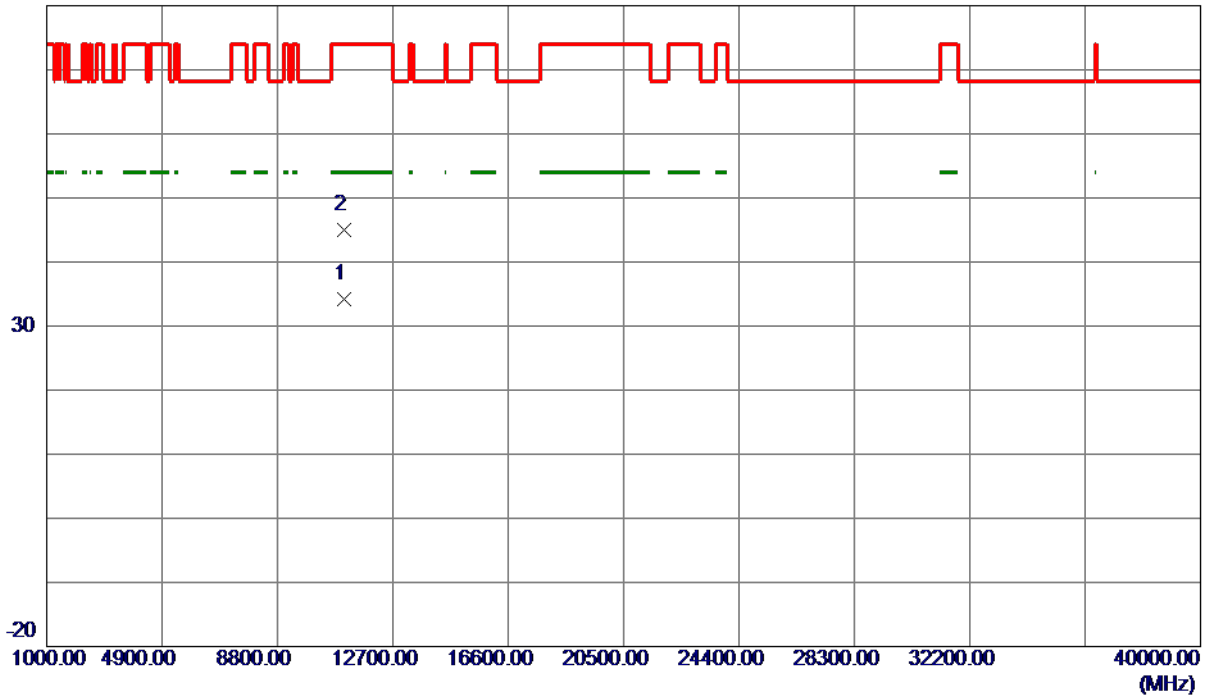

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11057.2350	22.50	11.67	34.17	54.00	-19.83	AVG	
2	11063.7450	33.31	11.68	44.99	74.00	-29.01	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

130 dBuV/m

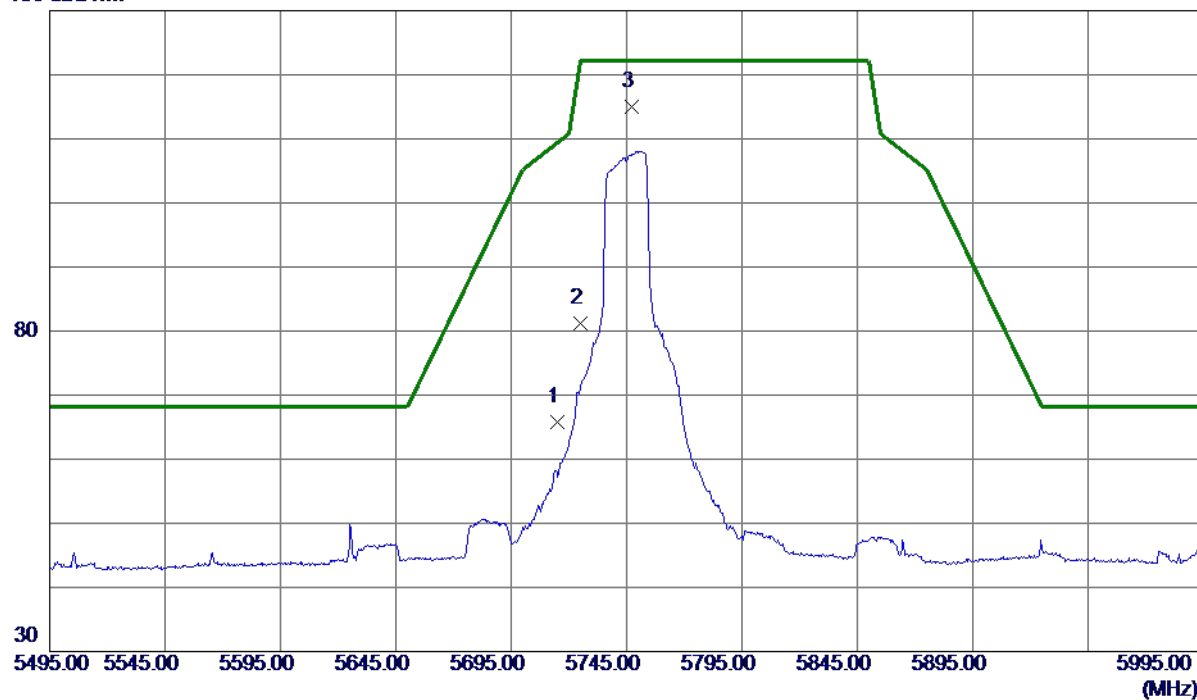

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	50.09	15.65	65.74	109.40	-43.66	Peak	
2	5725.0000	65.52	15.68	81.20	122.20	-41.00	Peak	
3 *	5747.2500	99.22	15.73	114.95	122.20	-7.25	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

80 dBuV/m

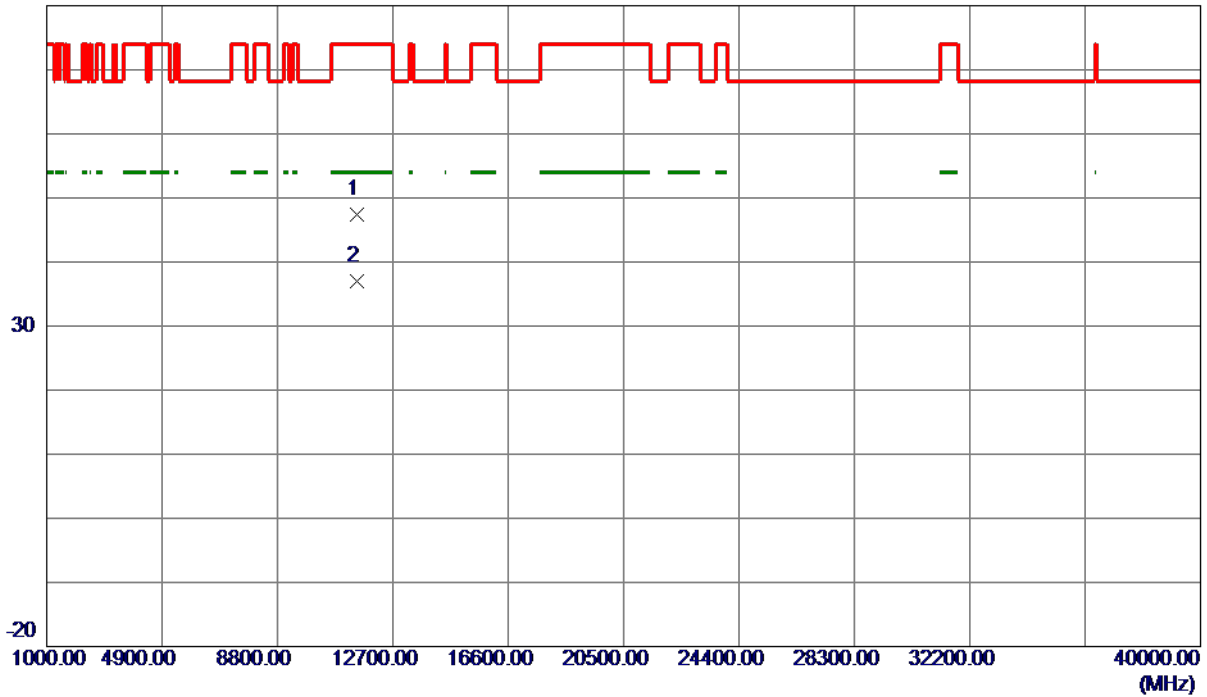

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.3500	35.32	12.06	47.38	74.00	-26.62	Peak	
2 *	11489.3000	24.84	12.07	36.91	54.00	-17.09	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

130 dBuV/m

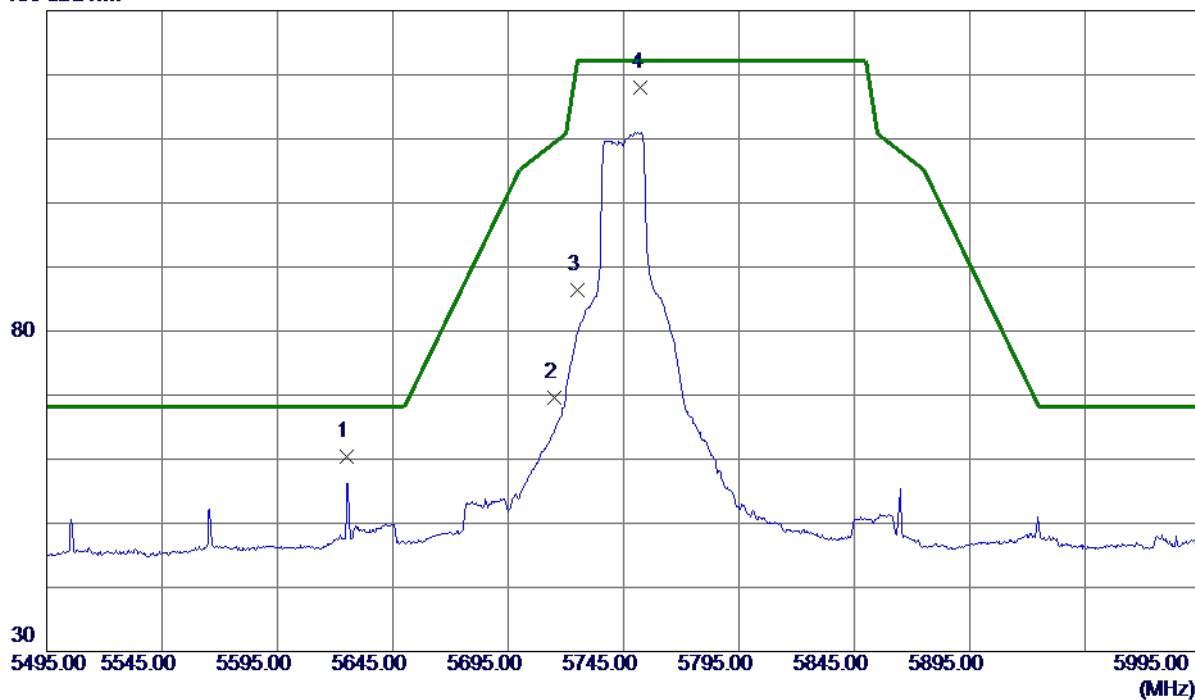

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5625.2500	45.01	15.44	60.45	68.20	-7.75	Peak	
2	5715.0000	53.89	15.65	69.54	109.40	-39.86	Peak	
3	5725.0000	70.80	15.68	86.48	122.20	-35.72	Peak	
4 *	5752.5000	102.32	15.74	118.06	122.20	-4.14	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

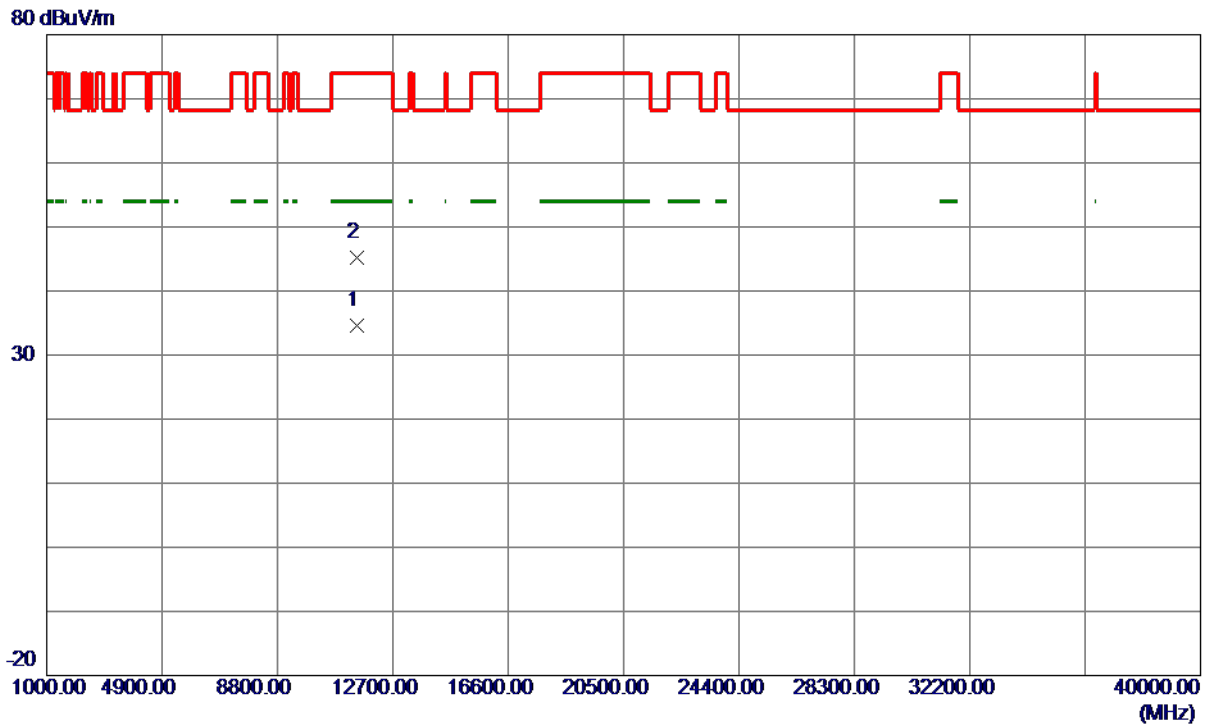

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.5100	22.48	12.07	34.55	54.00	-19.45	AVG	
2	11499.7500	33.19	12.07	45.26	74.00	-28.74	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

130 dBuV/m

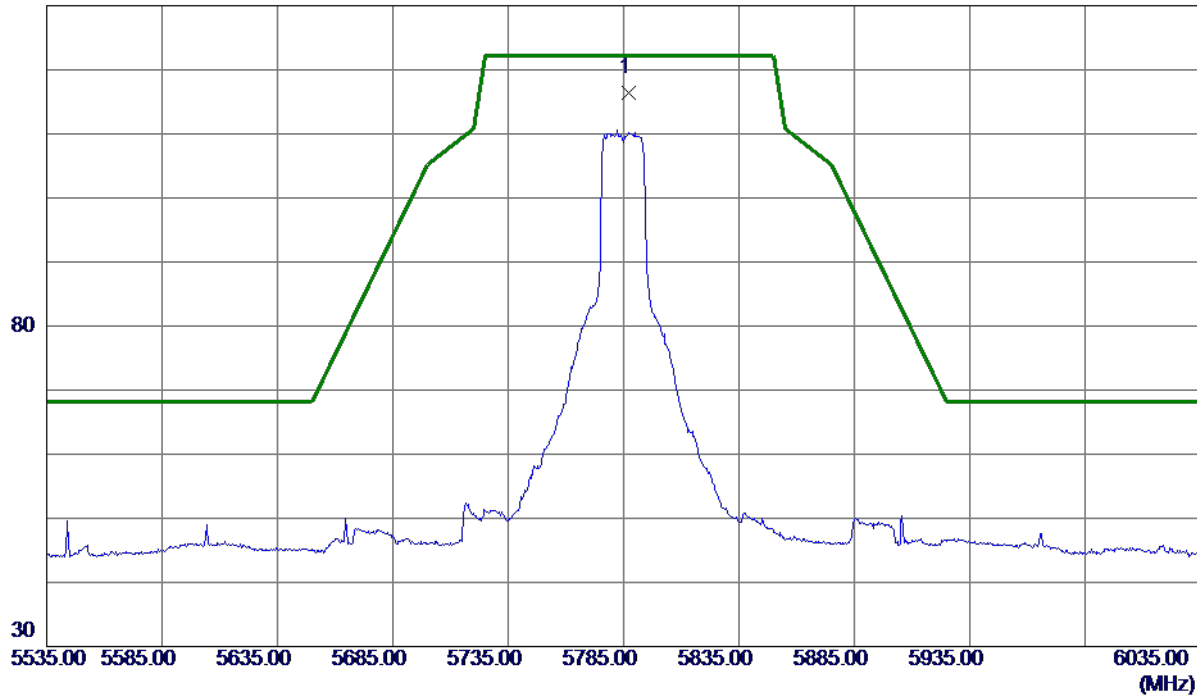

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.2500	100.57	15.83	116.40	122.20	-5.80	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

80 dBuV/m

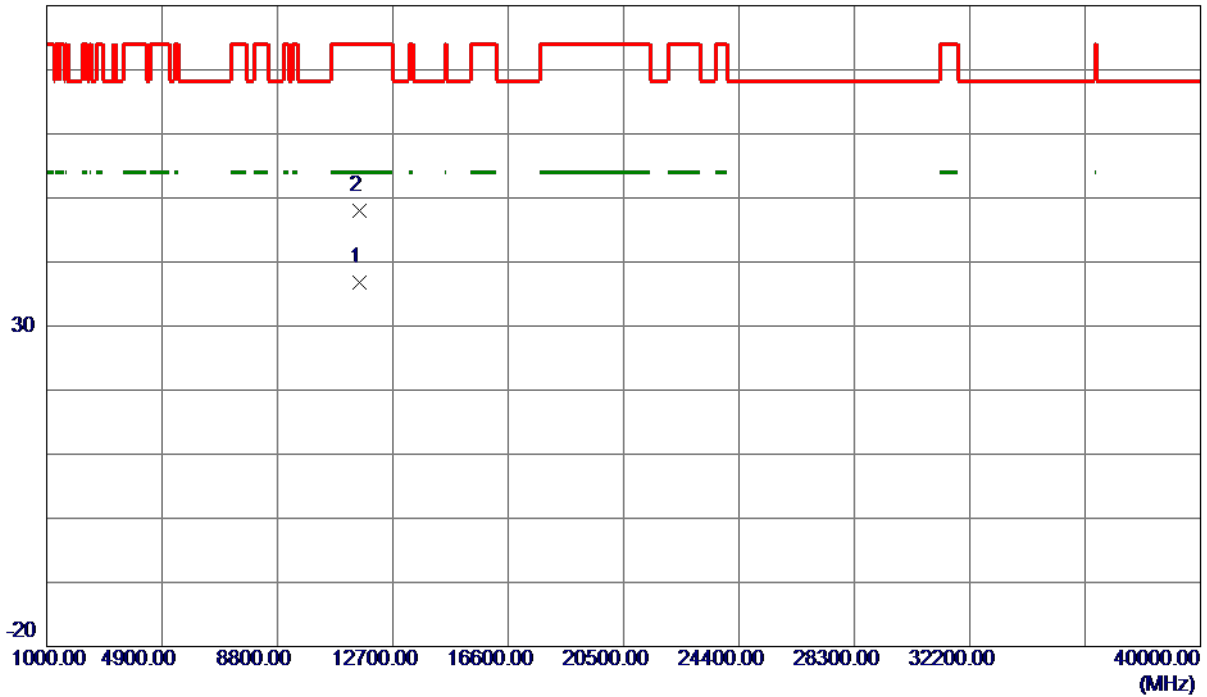

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11565.0500	24.66	12.14	36.80	54.00	-17.20	AVG	
2	11578.0750	35.89	12.15	48.04	74.00	-25.96	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

130 dBuV/m

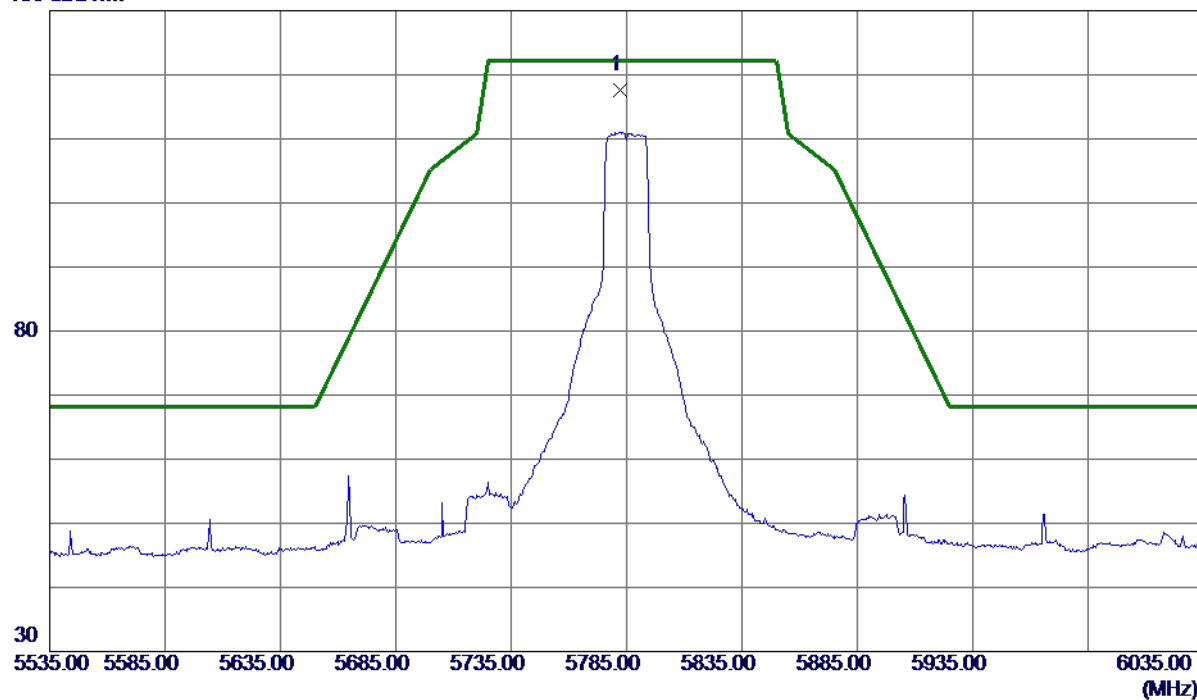

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5782.0000	101.80	15.81	117.61	122.20	-4.59	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

80 dBuV/m

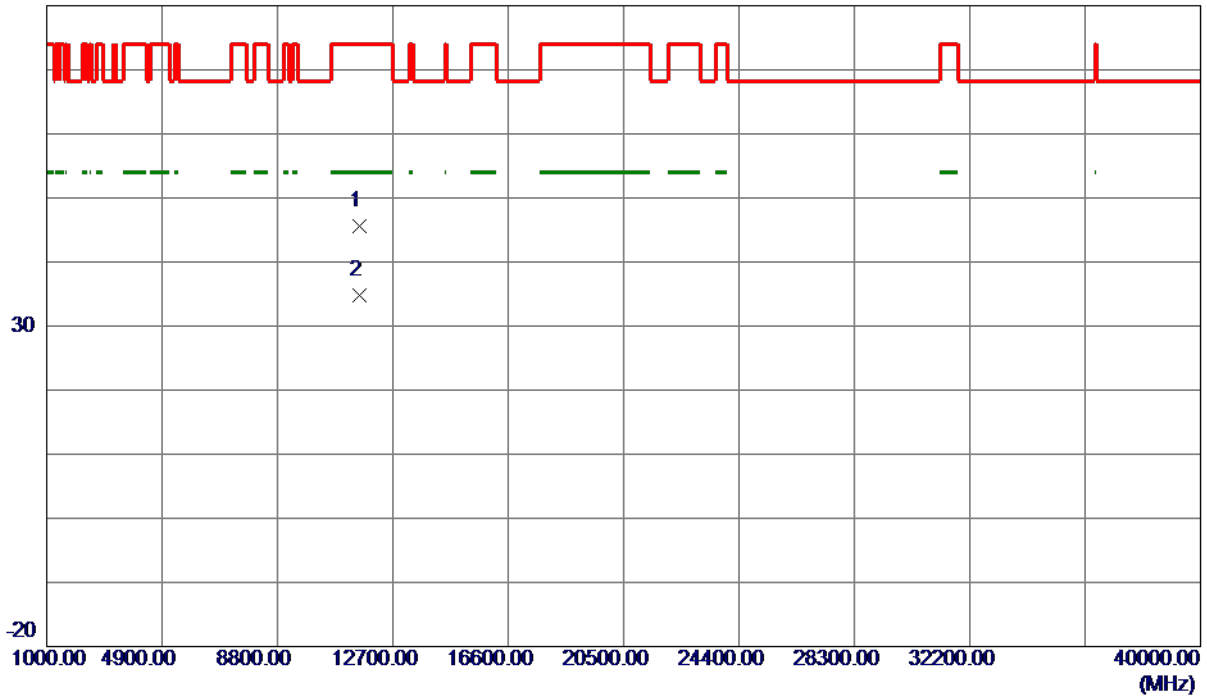

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11563.0500	33.47	12.14	45.61	74.00	-28.39	Peak	
2 *	11577.5100	22.56	12.15	34.71	54.00	-19.29	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

130 dBuV/m

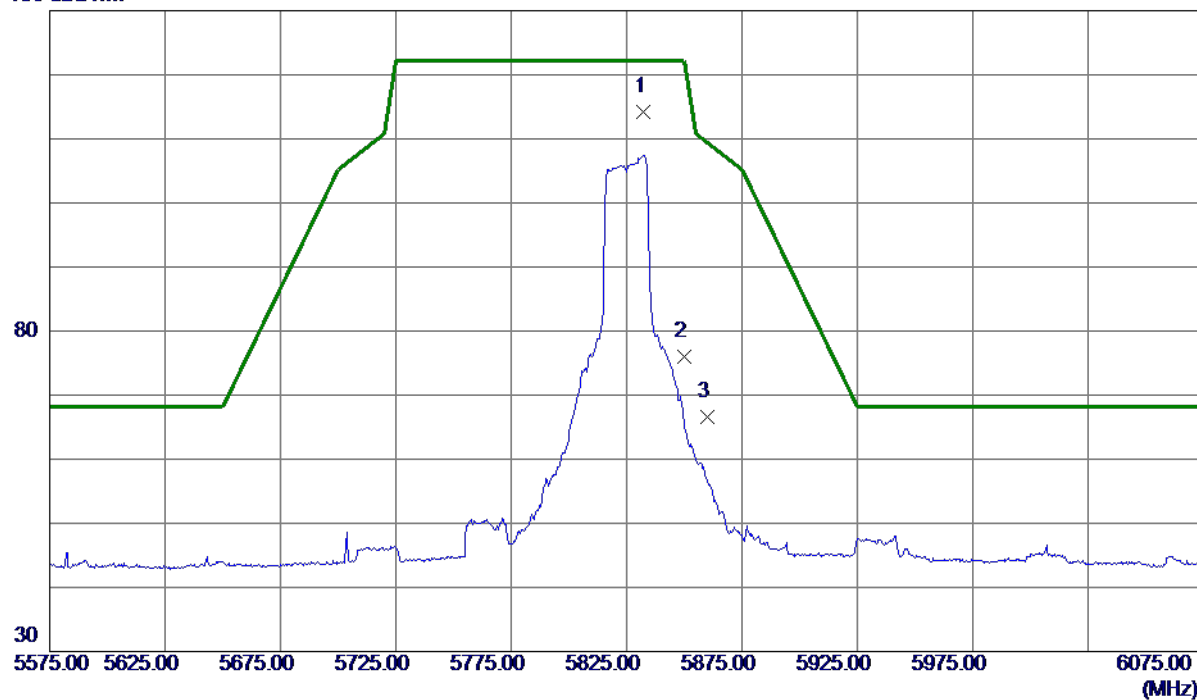

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5832.5000	98.32	15.93	114.25	122.20	-7.95	Peak	No Limit
2	5850.0000	59.95	15.97	75.92	122.20	-46.28	Peak	
3	5860.0000	50.60	16.00	66.60	109.40	-42.80	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

80 dBuV/m

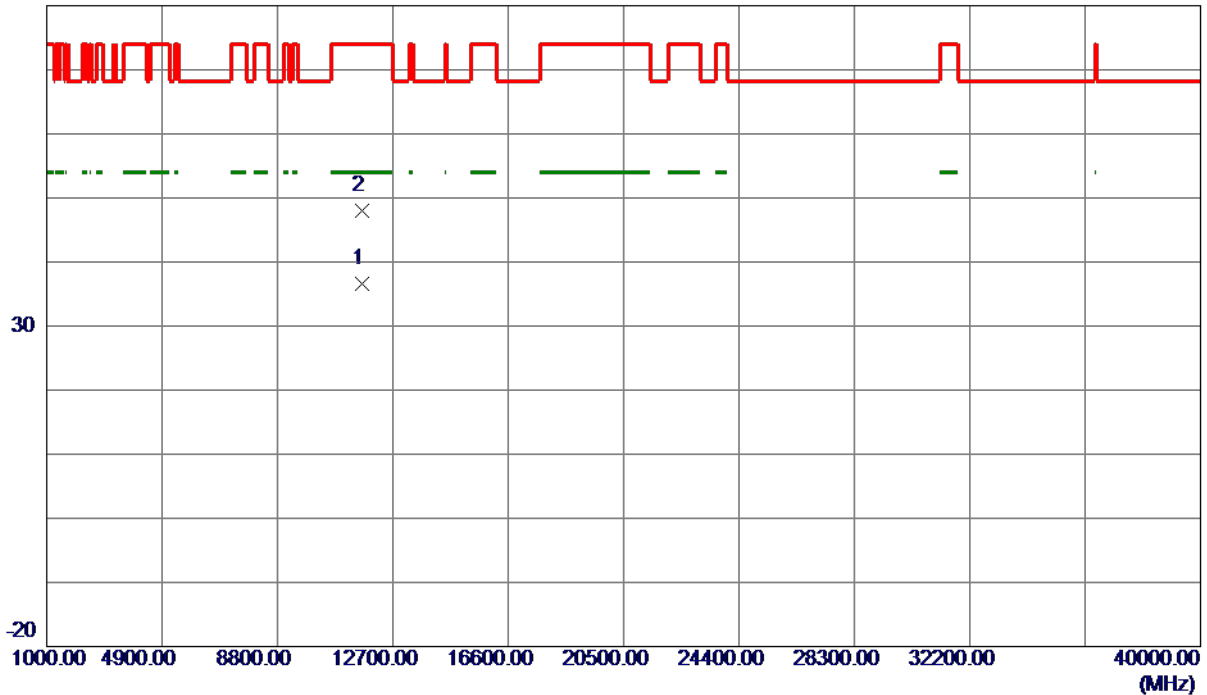

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11645.4600	24.31	12.22	36.53	54.00	-17.47	AVG	
2	11651.9900	35.85	12.23	48.08	74.00	-25.92	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

130 dBuV/m

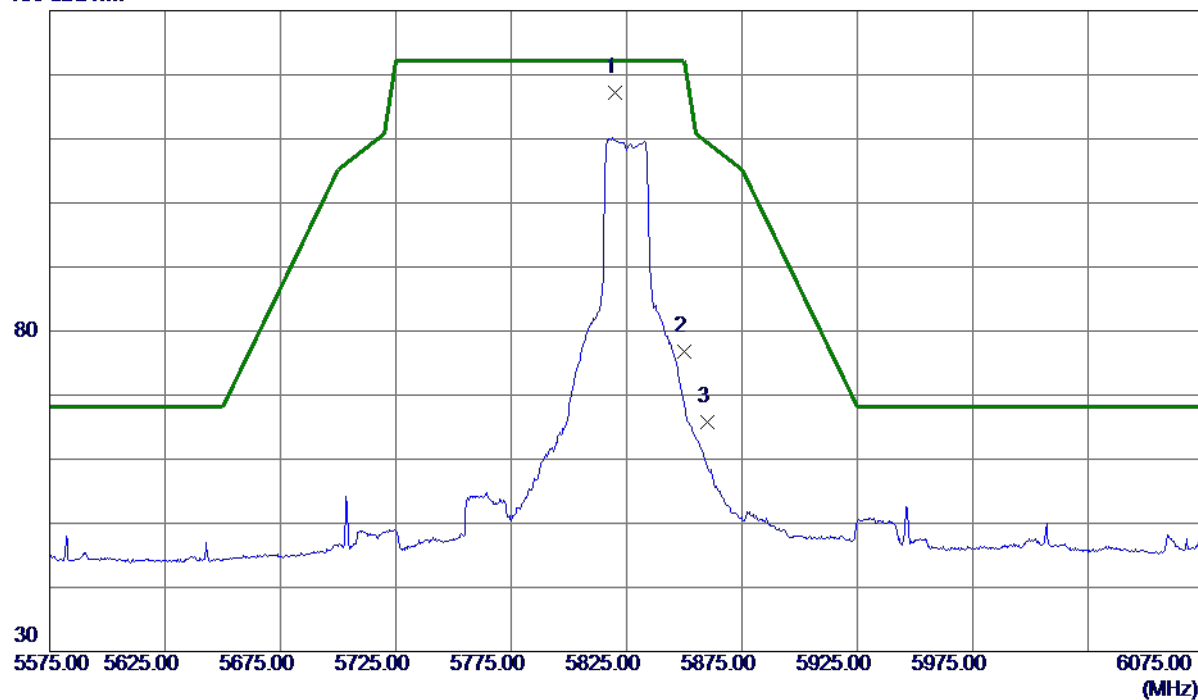

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.7500	101.31	15.90	117.21	122.20	-4.99	Peak	No Limit
2	5850.0000	60.89	15.97	76.86	122.20	-45.34	Peak	
3	5860.0000	49.82	16.00	65.82	109.40	-43.58	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

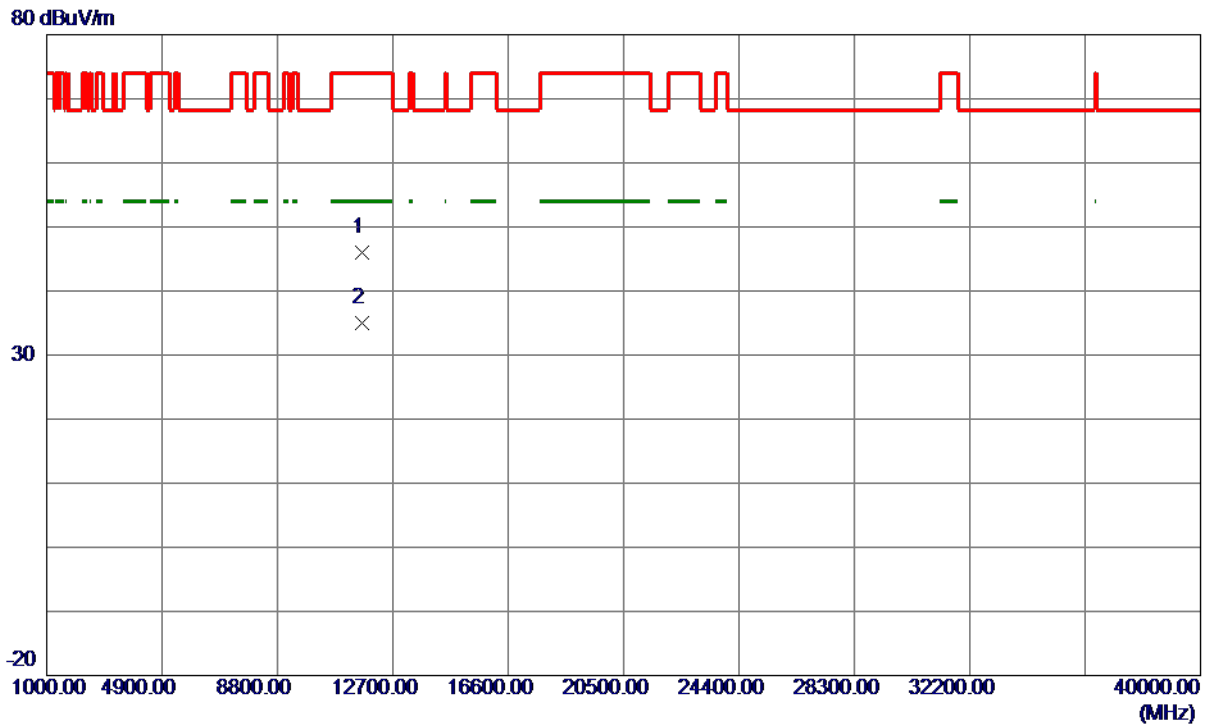

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11641.2500	33.76	12.22	45.98	74.00	-28.02	Peak	
2 *	11659.1800	22.84	12.24	35.08	54.00	-18.92	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

130 dBuV/m

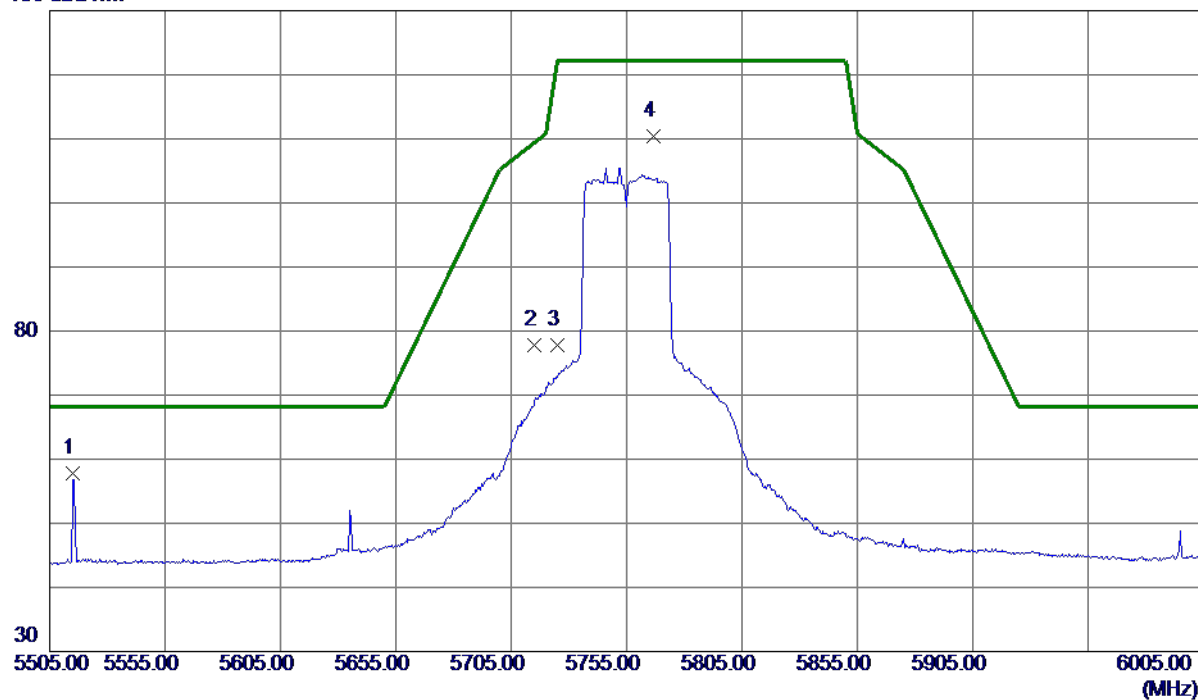

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5515.2500	42.56	15.18	57.74	68.20	-10.46	Peak	
2	5715.0000	62.19	15.65	77.84	109.40	-31.56	Peak	
3	5725.0000	62.21	15.68	77.89	122.20	-44.31	Peak	
4	5766.5000	94.55	15.78	110.33	122.20	-11.87	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

80 dBuV/m

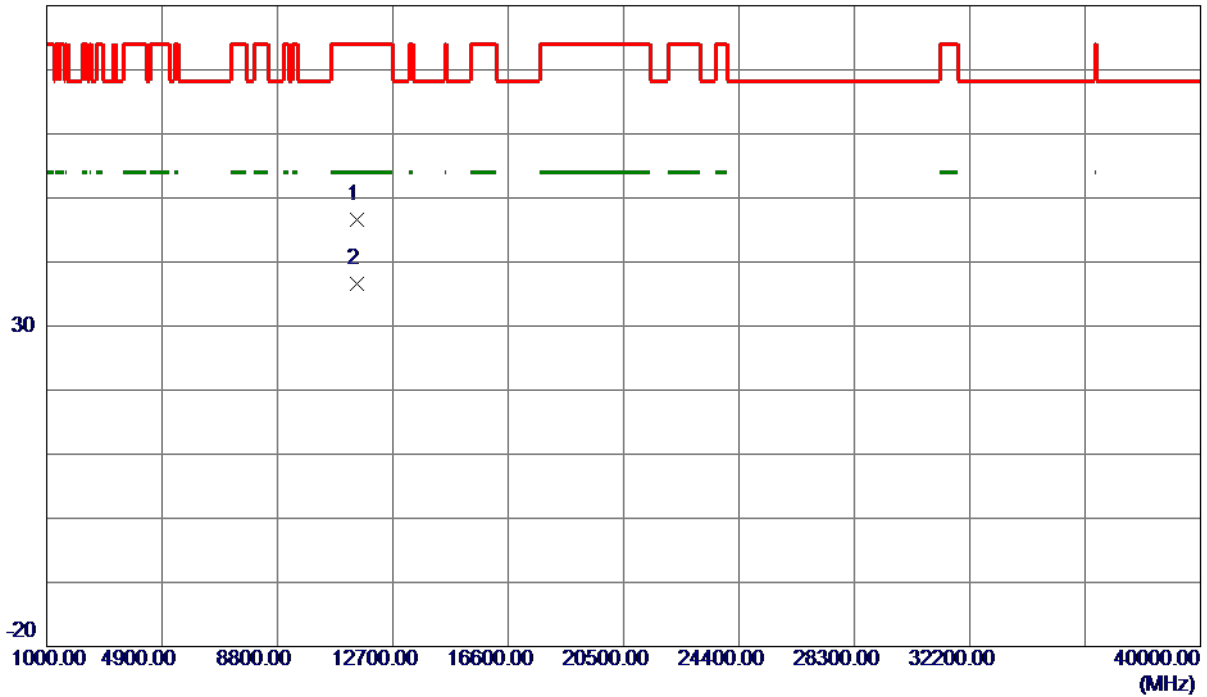

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.0599	34.44	12.08	46.52	74.00	-27.48	Peak	
2 *	11507.6150	24.47	12.08	36.55	54.00	-17.45	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

130 dBuV/m

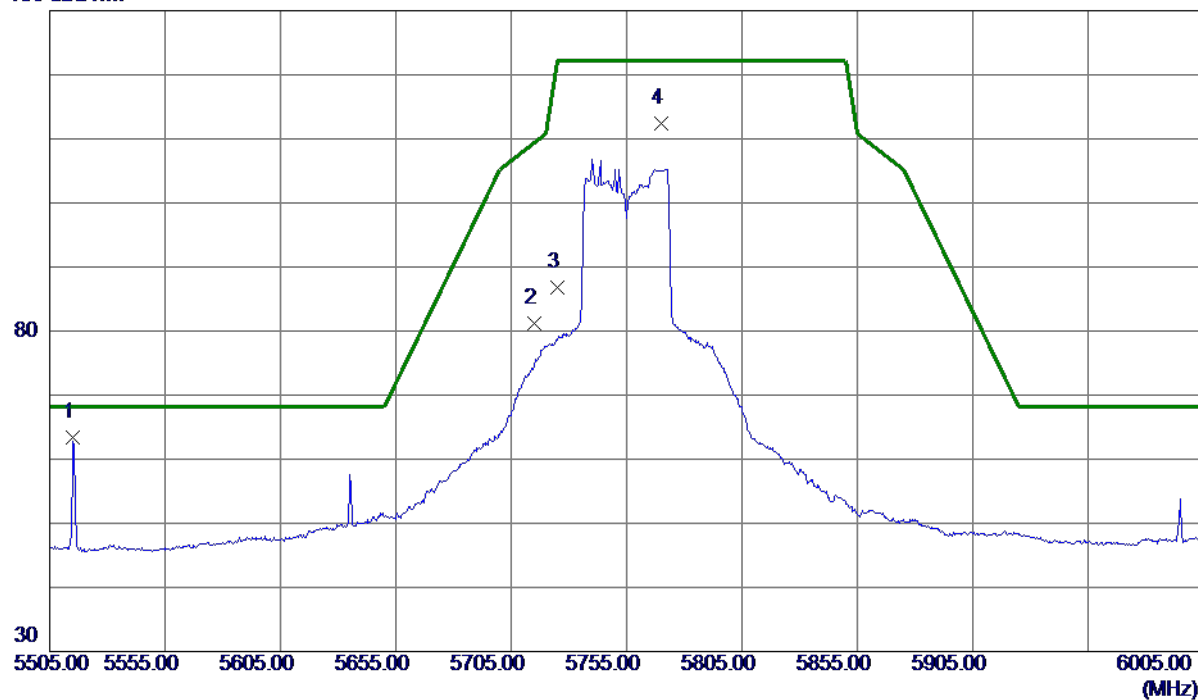

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5515.2500	48.27	15.18	63.45	68.20	-4.75	Peak	
2	5715.0000	65.55	15.65	81.20	109.40	-28.20	Peak	
3	5725.0000	71.03	15.68	86.71	122.20	-35.49	Peak	
4	5770.2500	96.61	15.79	112.40	122.20	-9.80	Peak	No Limit

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

80 dBuV/m

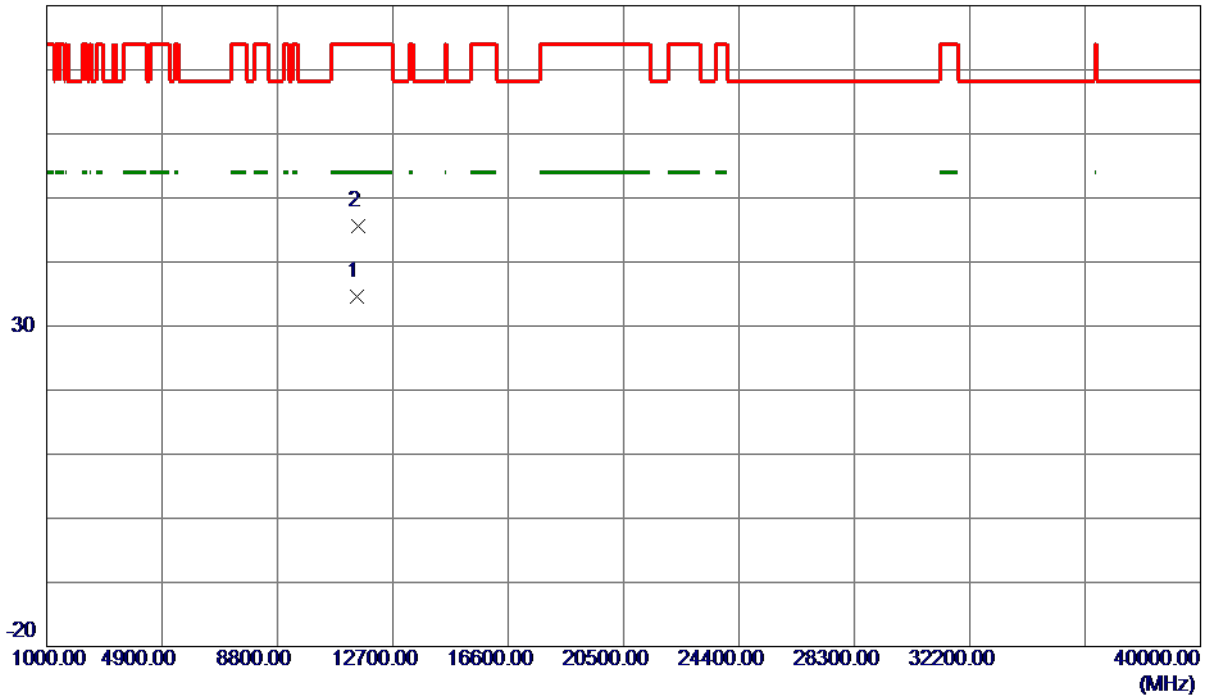

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11507.4950	22.54	12.08	34.62	54.00	-19.38	AVG	
2	11510.7500	33.54	12.09	45.63	74.00	-28.37	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

130 dBuV/m

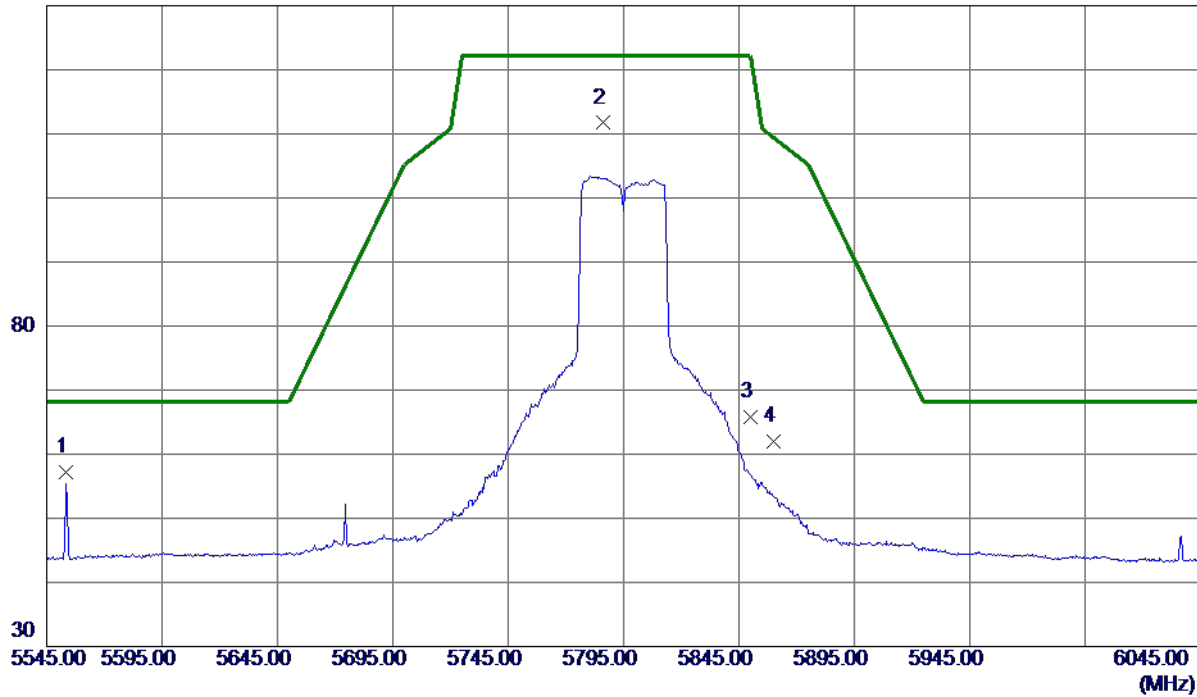

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5553.5000	41.96	15.27	57.23	68.20	-10.97	Peak	
2 *	5786.0000	95.88	15.82	111.70	122.20	-10.50	Peak	No Limit
3	5850.0000	49.90	15.97	65.87	122.20	-56.33	Peak	
4	5860.0000	46.01	16.00	62.01	109.40	-47.39	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

80 dBuV/m

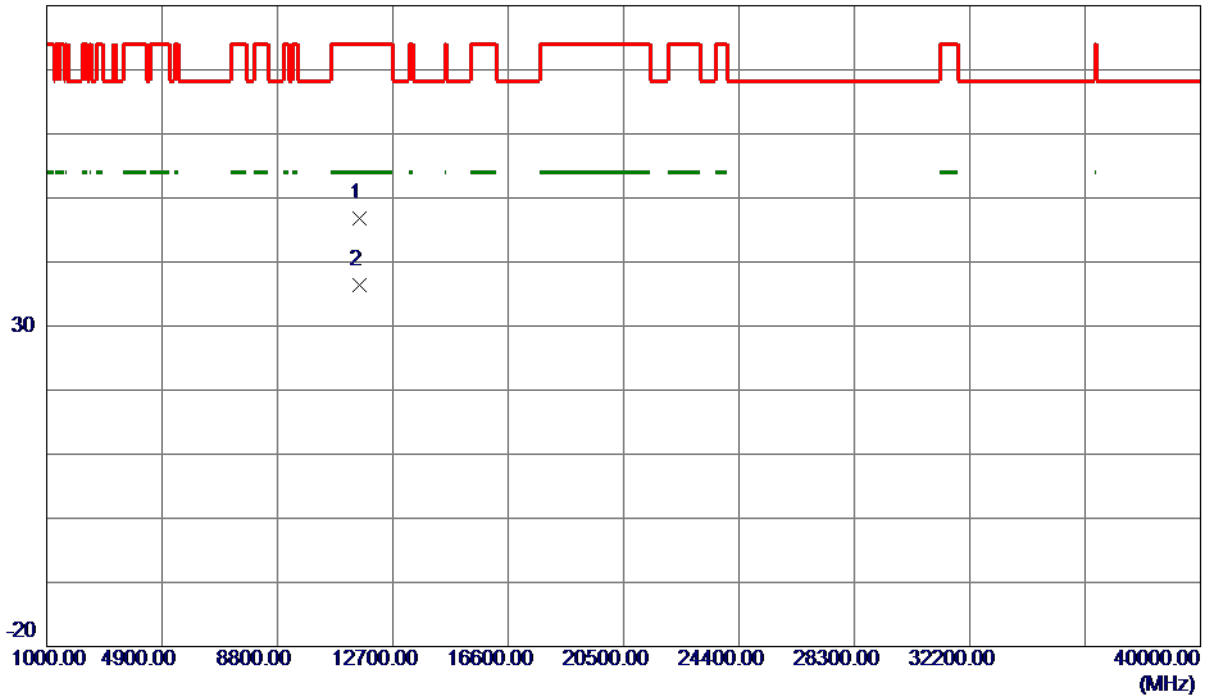

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11580.0100	34.60	12.16	46.76	74.00	-27.24	Peak	
2 *	11589.7500	24.28	12.17	36.45	54.00	-17.55	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

130 dBuV/m

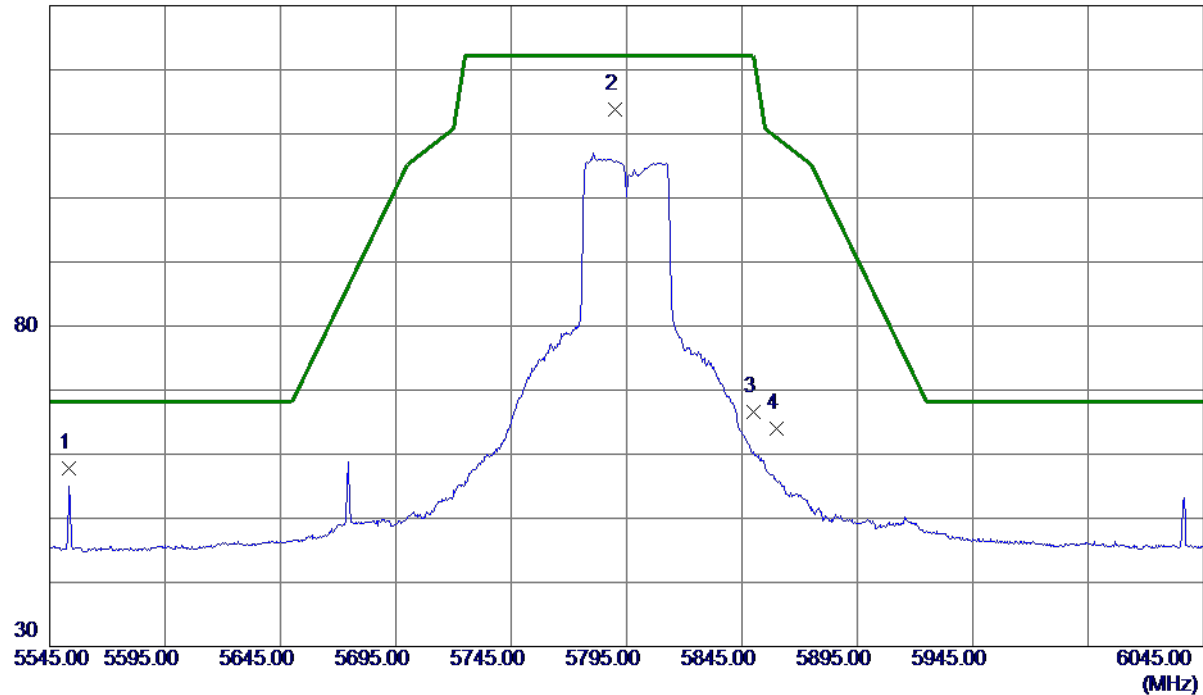

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5553.5000	42.54	15.27	57.81	68.20	-10.39	Peak	
2 *	5790.2500	97.98	15.83	113.81	122.20	-8.39	Peak	No Limit
3	5850.0000	50.61	15.97	66.58	122.20	-55.62	Peak	
4	5860.0000	48.01	16.00	64.01	109.40	-45.39	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

80 dBuV/m

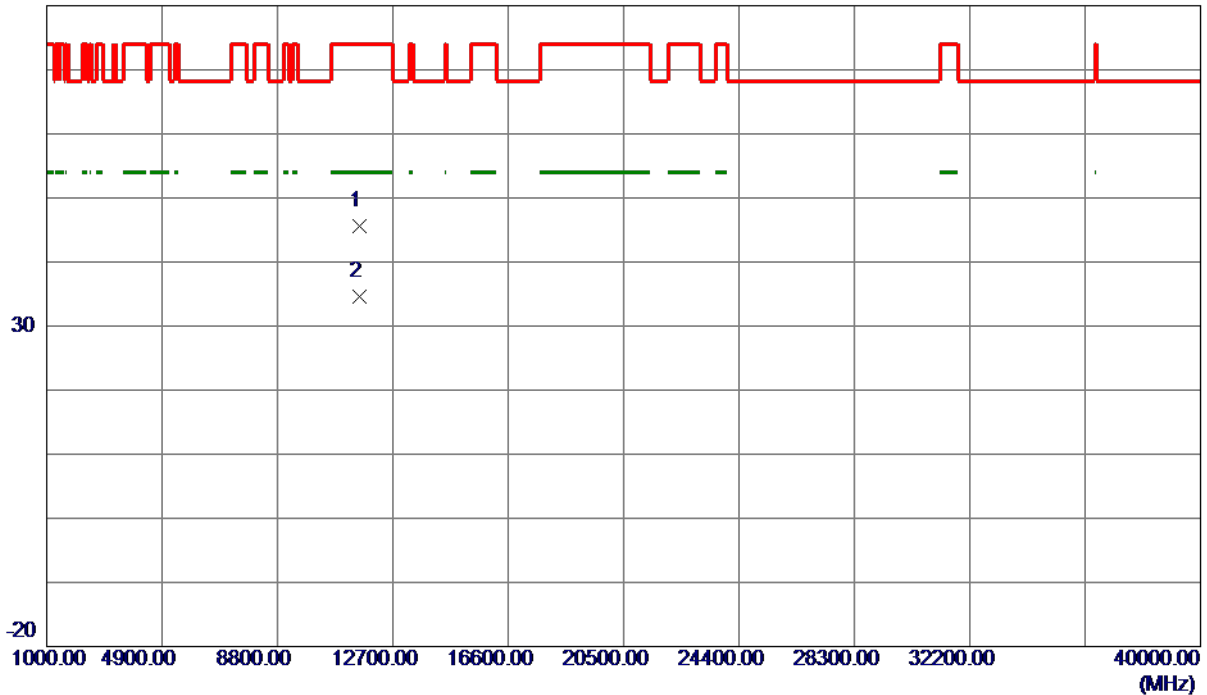

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11566.1250	33.43	12.14	45.57	74.00	-28.43	Peak	
2 *	11567.0250	22.39	12.14	34.53	54.00	-19.47	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

130 dBuV/m

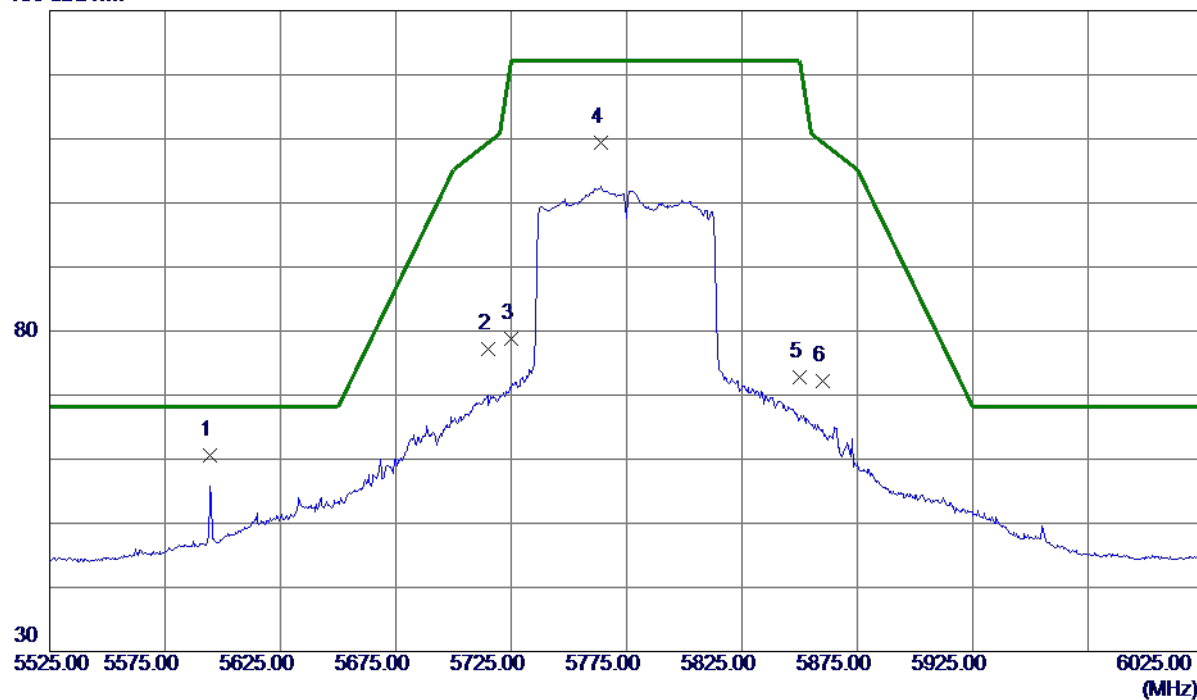

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5594.5000	45.17	15.37	60.54	68.20	-7.66	Peak	
2	5715.0000	61.49	15.65	77.14	109.40	-32.26	Peak	
3	5725.0000	63.21	15.68	78.89	122.20	-43.31	Peak	
4	5764.0000	93.70	15.77	109.47	122.20	-12.73	Peak	No Limit
5	5850.0000	56.83	15.97	72.80	122.20	-49.40	Peak	
6	5860.0000	56.15	16.00	72.15	109.40	-37.25	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

80 dBuV/m

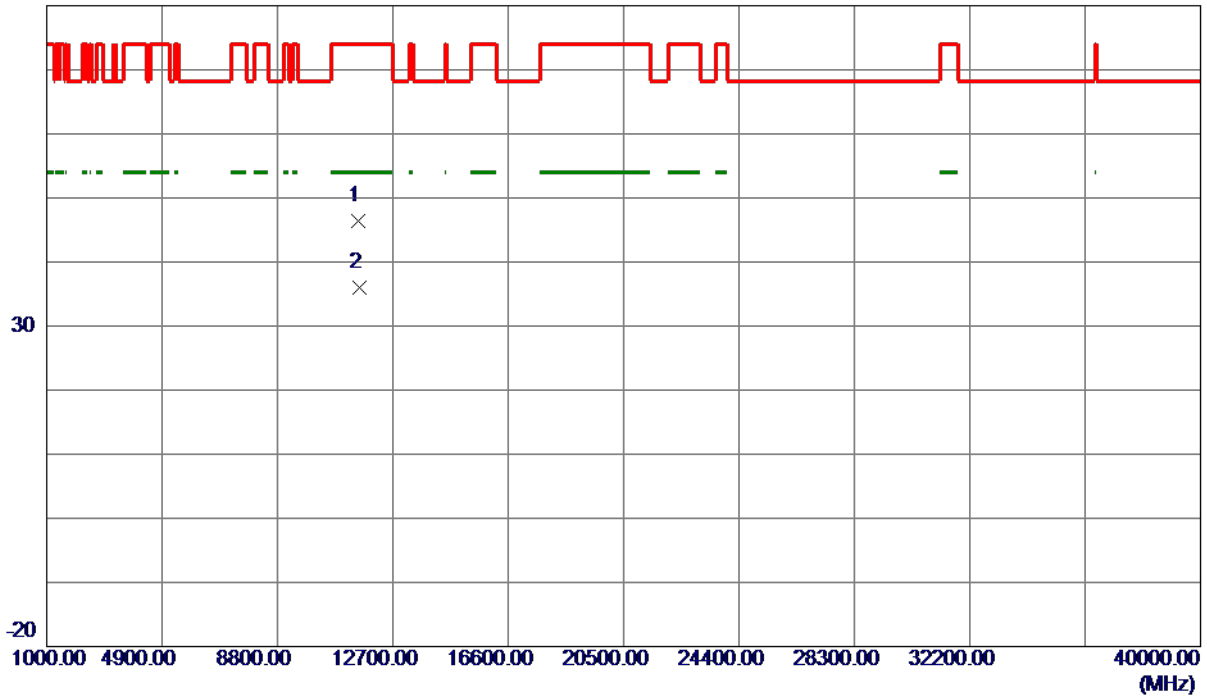

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11551.1900	34.32	12.13	46.45	74.00	-27.55	Peak	
2 *	11551.7550	23.85	12.13	35.98	54.00	-18.02	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

130 dBuV/m

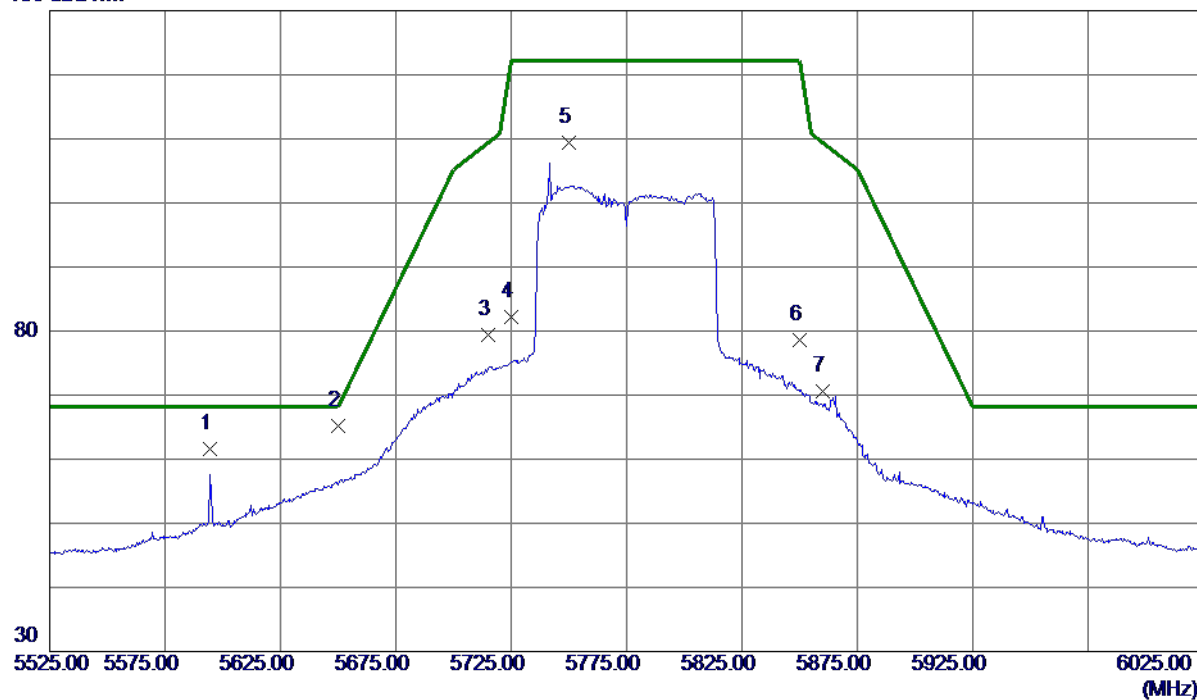

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5594.5000	46.27	15.37	61.64	68.20	-6.56	Peak	
2 *	5650.0000	49.75	15.50	65.25	68.20	-2.95	Peak	
3	5715.0000	63.71	15.65	79.36	109.40	-30.04	Peak	
4	5725.0000	66.57	15.68	82.25	122.20	-39.95	Peak	
5	5750.2500	93.67	15.74	109.41	122.20	-12.79	Peak	No Limit
6	5850.0000	62.62	15.97	78.59	122.20	-43.61	Peak	
7	5860.0000	54.68	16.00	70.68	109.40	-38.72	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

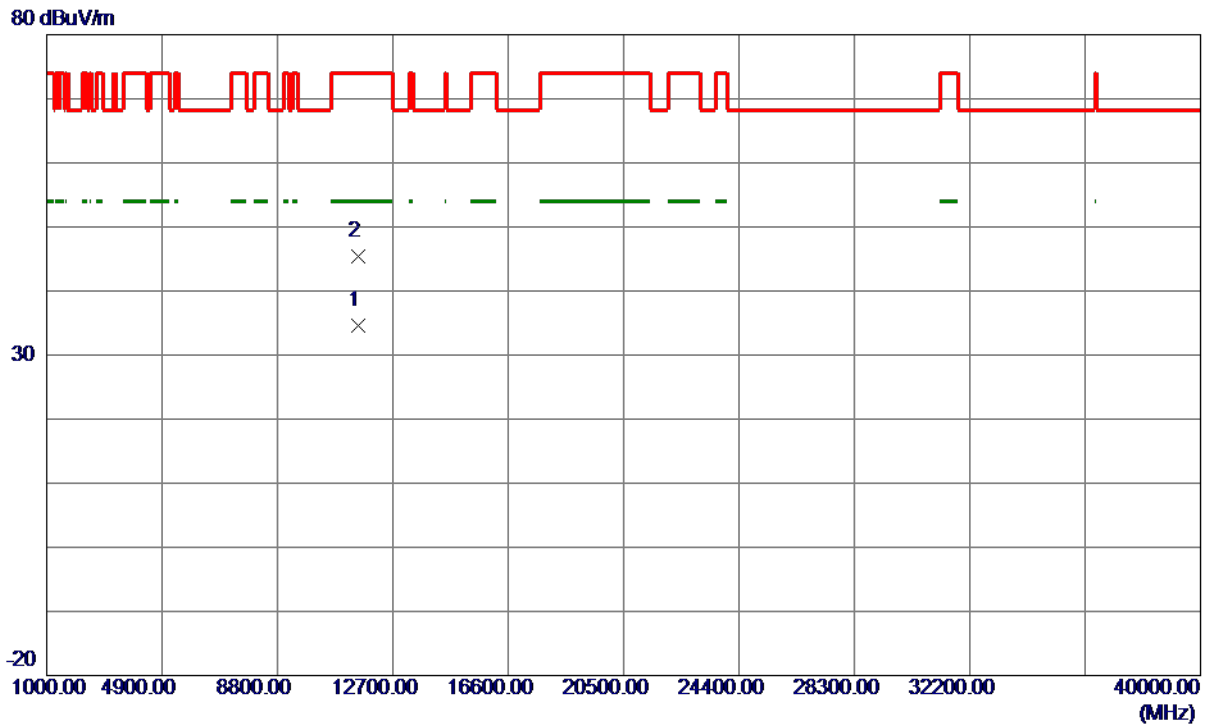

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11549.8500	22.45	12.13	34.58	54.00	-19.42	AVG	
2	11550.6000	33.26	12.13	45.39	74.00	-28.61	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Non Beamforming

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	43.79	29.10
40	5200	44.50	30.20
48	5240	41.95	27.20

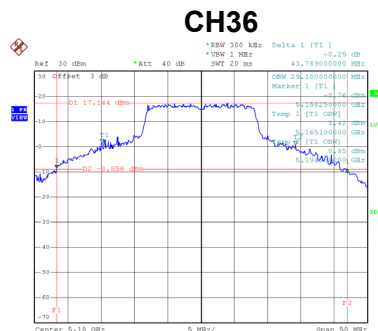

Date: 15.MAY.2019 22:28:05

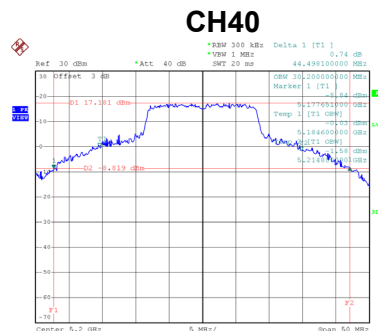


Date: 15.MAY.2019 22:34:12

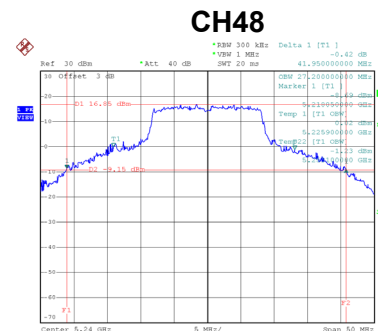


Date: 15.MAY.2019 22:36:52

Test Mode	UNII-1_TX N (HT20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	22.09	18.20
40	5200	23.10	18.10
48	5240	22.59	18.10

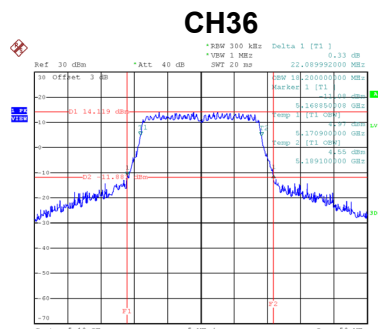

Date: 16.MAY.2019 21:41:48

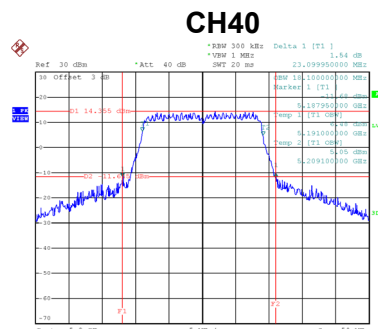


Date: 16.MAY.2019 21:43:04

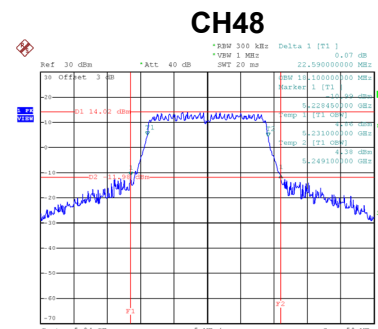


Date: 16.MAY.2019 21:44:19

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	22.30	17.40
60	5300	23.30	17.30
64	5320	21.85	17.30

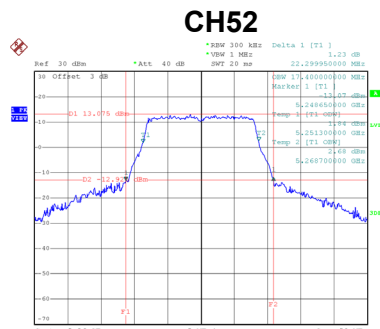

Date: 21.AUG.2019 15:49:53

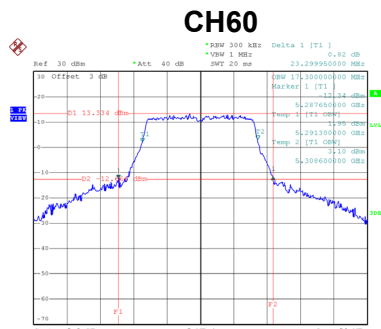


Date: 21.AUG.2019 15:55:22

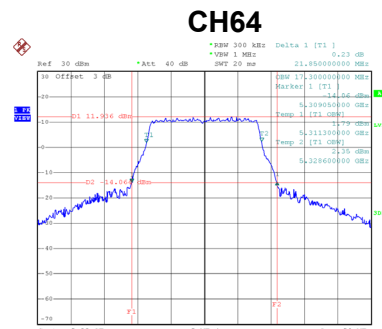


Date: 21.AUG.2019 15:57:30

Test Mode	UNII-2A_TX N (HT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	21.75	18.10
60	5300	21.99	18.00
64	5320	22.00	18.10

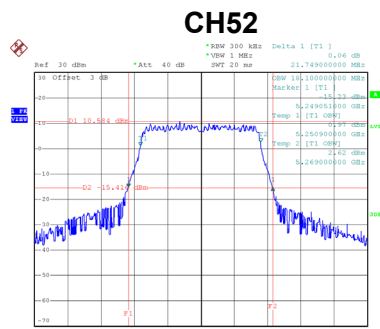

Date: 21.AUG.2019 16:25:09

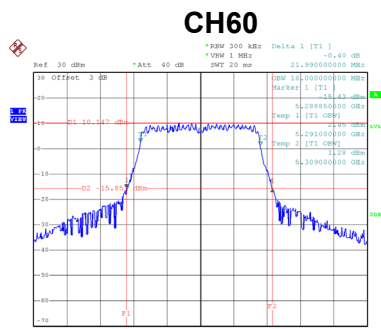

Date: 21.AUG.2019 16:26:11

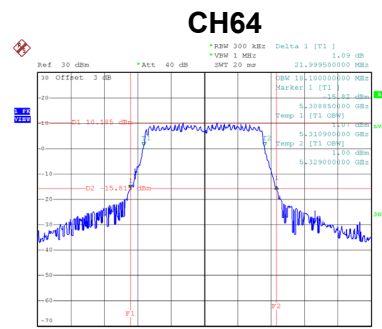


Date: 21.AUG.2019 16:27:12

Test Mode	UNII-2A_TX N (HT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	41.60	37.00
62	5310	41.41	36.80

CH54

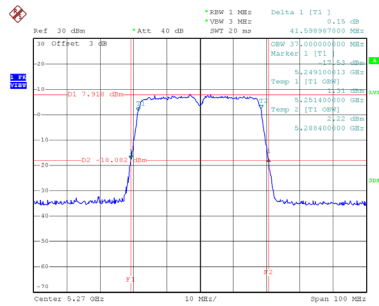

Date: 21.AUG.2019 16:41:58


CH62

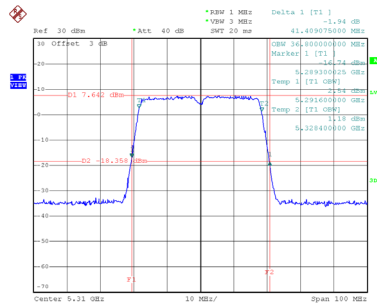


Date: 21.AUG.2019 16:42:52

Test Mode	UNII-2C_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	22.20	17.30
116	5580	24.59	17.50
140	5700	21.75	17.30

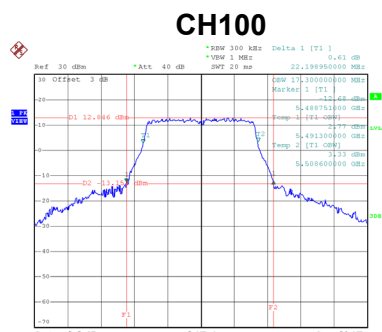

Date: 21.AUG.2019 15:58:43

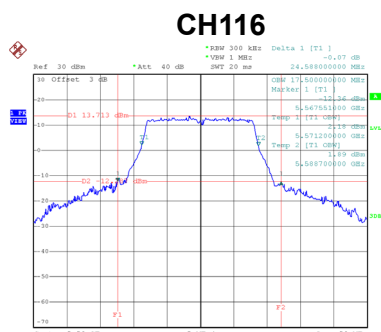


Date: 21.AUG.2019 16:03:06

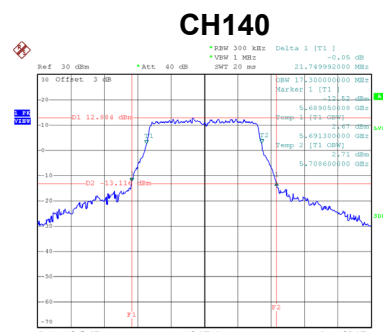


Date: 21.AUG.2019 16:04:05

Test Mode	UNII-2C_TX N (HT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	22.09	18.10
116	5580	22.05	18.10
140	5700	22.35	18.10

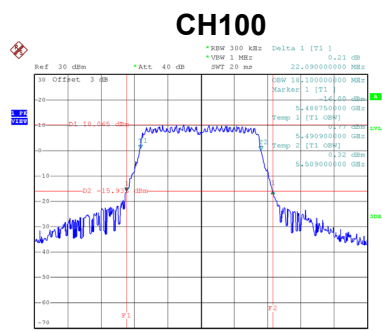

Date: 21.AUG.2019 16:28:15

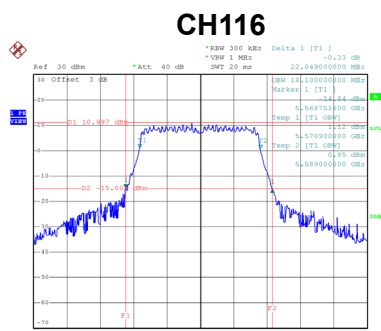


Date: 21.AUG.2019 16:28:53

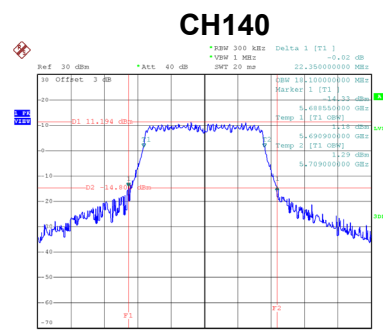

Date: 21.AUG.2019 16:29:51

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	41.60	37.00
110	5550	41.41	37.00
134	5670	41.50	37.00

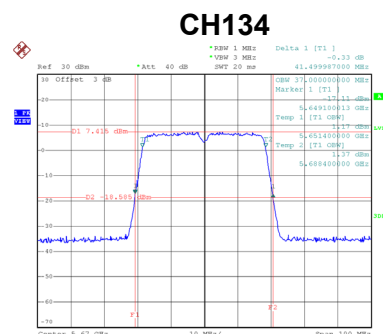


Date: 21.AUG.2019 16:45:09

Test Mode	UNII-3_TX N (HT40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.50	36.40	500	Complies
159	5795	36.50	36.40	500	Complies

CH151

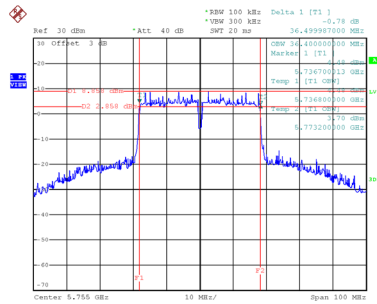

Date: 16.MAY.2019 11:04:14

CH159

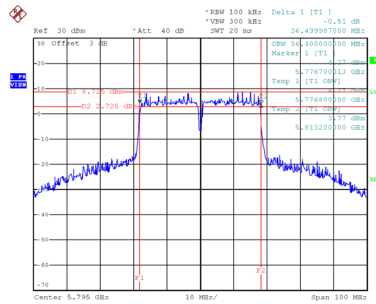

Date: 16.MAY.2019 11:06:24