

# FCC Test Report

## (PART 22)

**Report No.:** RF160104C15

**FCC ID:** GKR-TP00078ASI

**Test Model:** TP00078A

**Received Date:** Jan. 04, 2016

**Test Date:** Feb. 03, 2016

**Issued Date:** Feb. 18, 2016

**Applicant:** Compal Electronics Inc.

**Address:** No.581, Ruiguang Rd., Neihu District, Taipei City, Taiwan 11492, R.O.C.

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan ( R.O.C )

**Test Location:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies



## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Configuration of System under Test.....	8
3.2.1 Description of Support Units .....	8
3.3 Test Mode Applicability and Tested Channel Detail .....	9
3.4 EUT Operating Conditions .....	10
3.5 General Description of Applied Standards.....	10
<b>4 Test Types and Results</b> .....	<b>11</b>
4.1 Output Power Measurement .....	11
4.1.1 Limits of Output Power Measurement .....	11
4.1.2 Test Procedures.....	11
4.1.3 Test Results .....	12
4.2 Radiated Emission Measurement.....	19
4.2.1 Limits of Radiated Emission Measurement .....	19
4.2.2 Test Procedure .....	19
4.2.3 Deviation from Test Standard .....	19
4.2.4 Test Setup.....	19
4.2.5 Test Results .....	20
<b>5 Pictures of Test Arrangements</b> .....	<b>22</b>
<b>Appendix – Information on the Testing Laboratories</b> .....	<b>23</b>



A D T

### Release Control Record

Issue No.	Description	Date Issued
RF160104C15	Original Release	Feb. 18, 2016



**1 Certificate of Conformity**

**Product:** Tablet Computer  
**Brand:** Lenovo  
**Test Model:** TP00078A  
**Sample Status:** Production Unit  
**Applicant:** Compal Electronics Inc.  
**Test Date:** Feb. 03, 2016  
**Standards:** FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Evonne Liu , **Date:** Feb. 18, 2016  
Evonne Liu / Specialist

**Approved by :** Stanley Wu , **Date:** Feb. 18, 2016  
Stanley Wu / Assistant Manager

## 2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -16.30 dB at 2509.20 MHz.

Note: Only test item of Conducted power, ERP, and RSE tests were performed for this report. Other testing data is referring to China Telecommunication Technology Labs module report (Test Report No.: B15W50341-FCC-RF\_Rev1, Issue Date: Jul, 10, 2015).

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Jan. 21, 2016	Jan. 20, 2017
Spectrum Analyzer Agilent	N9010A	MY52220314	Sep. 03, 2015	Sep. 02, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2015	Dec. 16, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Feb. 05, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Feb. 09, 2015	Feb. 08, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Feb. 05, 2015	Feb. 04, 2016
Loop Antenna	EM-6879	269	Jul. 31, 2015	Jul. 30, 2016
Preamplifier EMCI	EMC 012645	980115	Dec. 21, 2015	Dec. 20, 2016
Preamplifier EMCI	EMC 184045	980116	Dec. 21, 2015	Dec. 20, 2016
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2015	Dec. 27, 2016
Power Meter Anritsu	ML2495A	1232002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor Anritsu	MA2411B	1207325	Sep. 21, 2015	Sep. 20, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 12, 2015	Oct. 11, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 12, 2015	Oct. 11, 2016
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 12, 2015	Oct. 11, 2016
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer	MT8820C	6201300640	Aug. 10, 2015	Aug. 09, 2017

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.

4. The FCC Site Registration No. is 690701.

5. The IC Site Registration No. is IC7450F-10.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Tablet Computer	
<b>Brand</b>	Lenovo	
<b>Test Model</b>	TP00078A	
<b>Status of EUT</b>	Production Unit	
<b>Power Supply Rating</b>	20.0 Vdc (adapter) 15.2 Vdc (Li-ion battery)	
<b>Modulation Type</b>	WCDMA	BPSK
	LTE	QPSK, 16QAM
<b>Frequency Range</b>	WCDMA	826.4 ~ 846.6 MHz
	LTE 5 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 5 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 5 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 5 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
	LTE 26 (Channel Bandwidth: 1.4 MHz)	824.7 ~ 848.3 MHz
	LTE 26 (Channel Bandwidth: 3 MHz)	825.5 ~ 847.5 MHz
	LTE 26 (Channel Bandwidth: 5 MHz)	826.5 ~ 846.5 MHz
	LTE 26 (Channel Bandwidth: 10 MHz)	829 ~ 844 MHz
	LTE 26 (Channel Bandwidth: 15 MHz)	831.5 ~ 841.5 MHz
<b>Max. ERP Power</b>	WCDMA	0.12 W
	LTE 5 (Channel Bandwidth: 1.4 MHz)	0.12 W
	LTE 5 (Channel Bandwidth: 3 MHz)	0.12 W
	LTE 5 (Channel Bandwidth: 5 MHz)	0.12 W
	LTE 5 (Channel Bandwidth: 10 MHz)	0.12 W
	LTE 26 (Channel Bandwidth: 1.4 MHz)	0.11 W
	LTE 26 (Channel Bandwidth: 3 MHz)	0.11 W
	LTE 26 (Channel Bandwidth: 5 MHz)	0.11 W
	LTE 26 (Channel Bandwidth: 10 MHz)	0.12 W
	LTE 26 (Channel Bandwidth: 15 MHz)	0.12 W
<b>Accessory Device</b>	Refer to Note as below	
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:

1. The antenna information is listed as below.


Antenna Type	Brand Name	Parts Number	Antenna Gain
PIFA	Ethertronics Inc.	WWAN Main Antenna: 5001997 WWAN Aux. Antenna: 5002014 (RX only)	WCDMA V: 0.06 dBi LTE Band 5: -0.04 dBi LTE Band 26: -0.89 dBi

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter 1	Lenovo	ADLX45NCC2A	I/P: 100-240Vac, 50-60Hz, 1.3A O/P: 20Vdc, 2.25A
Adapter 2	Lenovo	ADLX45NDC2A	I/P: 100-240Vac, 50-60Hz, 1.3A O/P: 20Vdc, 2.25A
Battery	Lenovo	SB10F46465	15.2Vdc, 2.895Ah
WLAN Module	Intel	8260NGW	--
WWAN Module	Sierra	EM7455	--

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

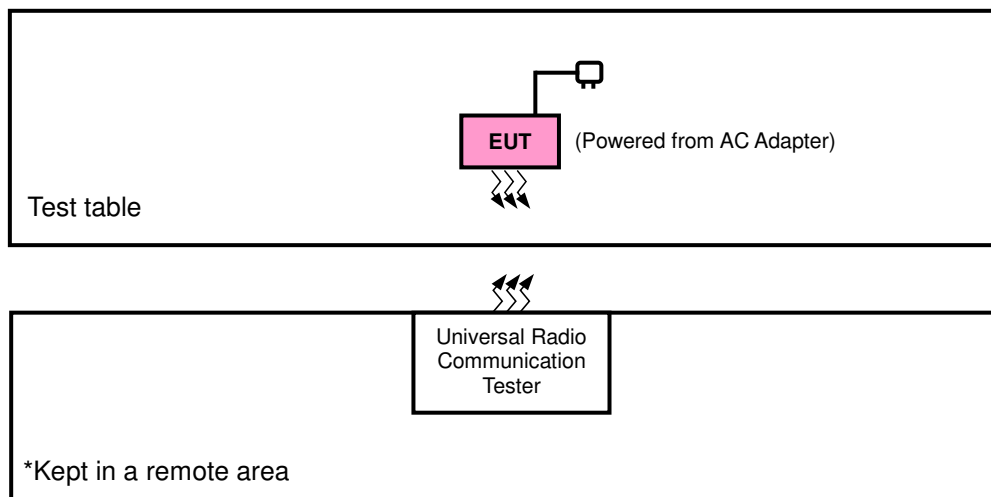

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.



### 3.3 Test Mode Applicability and Tested Channel Detail

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	4132 to 4233	4132, 4182, 4233	WCDMA

#### LTE Band 5

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	20407 to 20643	20407, 20525, 20643	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		20415 to 20635	20415, 20525, 20635	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		20425 to 20625	20425, 20525, 20625	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20450 to 20600	20450, 20525, 20600	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Radiated Emission	20450 to 20600	20525	10 MHz	QPSK	1 RB / 24 RB Offset

#### LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26797 to 27033	26797, 26915, 27033	1.4 MHz	QPSK, 16QAM	1 RB / 5 RB Offset
		26805 to 27025	26805, 26915, 27025	3 MHz	QPSK, 16QAM	1 RB / 14 RB Offset
		26815 to 27015	26815, 26915, 27015	5 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		26840 to 26990	26840, 26915, 26990	10 MHz	QPSK, 16QAM	1 RB / 49 RB Offset
		26865 to 26965	26865, 26915, 26965	15 MHz	QPSK, 16QAM	1 RB / 49 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	15.2 Vdc	Luke Chen
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Anson Lin

### 3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 22**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**KDB 412172 D01 Determining ERP and EIRP v01r01**

**KDB 996369 D01 Module Certification Guide v02**

**ANSI/TIA/EIA-603-D 2010**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement


Mobile / Portable station are limited to 7 watts e.r.p.

#### 4.1.2 Test Procedures

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### Conducted Power Measurement:

- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

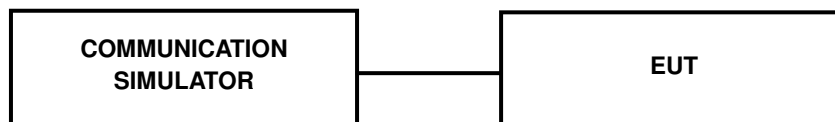

#### EIRP / ERP Measurement:

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

**4.1.3 Test Results**
**Conducted Output Power (dBm)**

Band	WCDMA V		
	4132	4182	4233
Channel	826.4	836.4	846.6
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	22.73	22.69	22.76
HSDPA Subtest-1	21.50	21.45	21.51
HSDPA Subtest-2	21.52	21.48	21.54
HSDPA Subtest-3	21.04	21.02	21.13
HSDPA Subtest-4	21.02	20.98	21.05
HSUPA Subtest-1	21.25	21.20	21.27
HSUPA Subtest-2	19.53	19.50	19.61
HSUPA Subtest-3	20.13	20.09	20.16
HSUPA Subtest-4	19.45	19.40	19.54
HSUPA Subtest-5	21.53	21.50	21.56

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20407	Mid Ch 20525	High Ch 20643		Low Ch 20407	Mid Ch 20525	High Ch 20643	
			824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz	
5 / 1.4M	1	0	22.84	22.82	22.41	0	21.89	21.87	21.47	1
	1	2	22.76	22.73	22.36	0	21.82	21.77	21.42	1
	1	5	22.76	22.73	22.36	0	21.82	21.77	21.42	1
	3	0	21.49	21.48	21.08	0	20.57	20.52	20.07	1
	3	1	21.43	21.42	21.04	0	20.49	20.46	20.99	1
	3	3	21.38	21.35	21.02	0	20.39	20.34	20.94	1
	6	0	21.38	21.35	20.99	1	20.39	20.34	19.94	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20415	Mid Ch 20525	High Ch 20635		Low Ch 20415	Mid Ch 20525	High Ch 20635	
			825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz	
5 / 3M	1	0	22.89	22.88	22.53	0	21.95	21.92	21.49	1
	1	7	22.84	22.82	22.45	0	21.87	21.81	21.44	1
	1	14	22.84	22.82	22.45	0	21.87	21.81	21.44	1
	8	0	21.69	21.60	21.31	1	20.68	20.58	20.20	2
	8	3	21.58	21.56	21.17	1	20.56	20.54	20.13	2
	8	7	21.54	21.51	21.13	1	20.50	20.46	20.07	2
	15	0	21.54	21.51	21.20	1	20.50	20.46	20.09	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20425	Mid Ch 20525	High Ch 20625		Low Ch 20425	Mid Ch 20525	High Ch 20625	
			826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz	
5 / 5M	1	0	22.95	22.93	22.60	0	21.99	21.98	21.61	1
	1	12	22.90	22.88	22.55	0	21.94	21.90	21.56	1
	1	24	22.90	22.88	22.55	0	21.94	21.90	21.56	1
	12	0	21.77	21.71	21.43	1	20.71	20.69	20.34	2
	12	6	21.69	21.67	21.32	1	20.67	20.63	20.26	2
	12	13	21.64	21.62	21.27	1	20.61	20.58	20.22	2
	25	0	21.64	21.62	21.29	1	20.61	20.58	20.23	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20450	Mid Ch 20525	High Ch 20600		Low Ch 20450	Mid Ch 20525	High Ch 20600	
			829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz	
5 / 10M	1	0	23.00	22.99	22.67	0	22.00	21.99	21.70	1
	1	24	22.96	22.95	22.63	0	21.98	21.99	21.65	1
	1	49	22.96	22.95	22.63	0	21.97	21.99	21.65	1
	25	0	21.86	21.80	21.51	1	20.89	20.80	20.42	2
	25	12	21.78	21.77	21.46	1	20.76	20.74	20.41	2
	25	25	21.75	21.74	21.42	1	20.72	20.70	20.37	2
	50	0	21.75	21.74	21.42	1	20.72	20.70	20.43	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26797	Mid Ch 26915	High Ch 27033		Low Ch 26797	Mid Ch 26915	High Ch 27033	
			824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz	
26 / 1.4M	1	0	22.50	21.96	22.57	0	21.53	20.97	21.63	1
	1	2	22.27	21.78	22.18	0	21.28	20.78	21.42	1
	1	5	22.34	21.84	22.44	0	21.36	20.84	21.47	1
	3	0	21.10	20.63	21.51	1	20.07	19.58	20.53	1
	3	1	21.01	20.51	21.40	1	19.96	19.46	20.36	1
	3	3	21.07	20.59	21.44	1	20.03	19.54	20.48	1
	6	0	21.24	20.67	21.27	1	20.22	19.62	20.35	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26805	Mid Ch 26915	High Ch 27025		Low Ch 26805	Mid Ch 26915	High Ch 27025	
			825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz	
26 / 3M	1	0	22.59	22.05	22.64	0	21.63	21.07	21.69	1
	1	7	22.34	21.89	22.26	0	21.37	20.91	21.23	1
	1	14	22.44	21.94	22.48	0	21.47	20.96	21.52	1
	8	0	21.25	20.76	21.34	1	20.23	19.71	20.33	2
	8	3	21.13	20.65	21.11	1	20.10	19.60	20.18	2
	8	7	21.23	20.72	21.26	1	20.20	19.67	20.30	2
	15	0	21.34	20.87	21.40	1	20.34	19.83	20.35	2



Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26815	Mid Ch 26915	High Ch 27015		Low Ch 26815	Mid Ch 26915	High Ch 27015	
			826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz	
26 / 5M	1	0	22.65	22.13	22.68	0	21.68	21.15	21.74	1
	1	12	22.43	21.97	22.51	0	21.46	20.99	21.36	1
	1	24	22.53	22.09	22.55	0	21.56	21.11	21.61	1
	12	0	21.38	20.93	21.43	0	20.35	19.89	20.45	2
	12	6	21.22	20.81	21.34	0	20.19	19.76	20.34	2
	12	13	21.37	20.88	21.40	0	20.34	19.84	20.45	2
	25	0	21.45	20.94	21.51	1	20.44	19.91	20.51	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26840	Mid Ch 26915	High Ch 26990		Low Ch 26840	Mid Ch 26915	High Ch 26990	
			829.0 MHz	836.5 MHz	844.0 MHz		829.0 MHz	836.5 MHz	844.0 MHz	
26 / 10M	1	0	22.62	22.49	22.74	0	21.67	21.53	21.79	1
	1	24	22.34	22.23	22.44	0	21.37	21.25	21.46	1
	1	49	22.45	22.41	22.62	0	21.48	21.44	21.67	1
	25	0	21.46	21.32	21.57	1	20.44	20.29	20.51	2
	25	12	21.31	21.22	21.47	1	20.28	20.17	20.40	2
	25	25	21.44	21.27	21.56	1	20.42	20.24	20.49	2
	50	0	21.5	21.41	21.61	1	20.49	20.38	20.57	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26865	Mid Ch 26915	High Ch 26965		Low Ch 26865	Mid Ch 26915	High Ch 26965	
			831.5 MHz	836.5 MHz	841.5 MHz		831.5 MHz	836.5 MHz	841.5 MHz	
26 / 15M	1	0	22.61	22.63	22.79	0	21.58	21.65	21.84	1
	1	37	22.38	22.56	22.56	0	21.33	21.57	21.67	1
	1	74	22.53	22.59	22.71	0	21.46	21.61	21.74	1
	36	0	21.48	21.66	21.63	1	20.40	20.64	20.66	2
	36	19	21.39	21.58	21.56	1	20.28	20.53	20.56	2
	36	39	21.42	21.62	21.60	1	20.32	20.58	20.61	2
	75	0	21.52	21.64	21.69	1	20.43	20.62	20.71	2

**ERP Power (dBm)**

Band	WCDMA V		
	Channel	4132	4182
Rx Channel	4357	4407	4458
Frequency	826.4	836.4	846.6
Conducted power(dBm)	22.73	22.69	22.76
Conducted power (Watts)	0.19	0.19	0.19
ERP (dBm)	20.64	20.6	20.67
ERP (Watts)	0.12	0.11	0.12

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		20407	20525	20643	20407	20525	20643
	Frequency	824.7	836.5	848.3	824.7	836.5	848.3
		MHz	MHz	MHz	MHz	MHz	MHz
5 / 1.4M	Conducted power (dBm)	22.84	22.82	22.41	21.89	21.87	21.47
	Conducted power (Watts)	0.19	0.19	0.17	0.15	0.15	0.14
	ERP (dBm)	20.75	20.73	20.32	19.8	19.78	19.38
	ERP (Watts)	0.12	0.12	0.11	0.10	0.10	0.09

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		20415	20525	20635	20415	20525	20635
	Frequency	825.5	836.5	847.5	825.5	836.5	847.5
		MHz	MHz	MHz	MHz	MHz	MHz
5 / 3M	Conducted power(dBm)	22.89	22.88	22.53	21.95	21.92	21.49
	Conducted power (Watts)	0.19	0.19	0.18	0.16	0.16	0.14
	ERP (dBm)	20.8	20.79	20.44	19.86	19.83	19.4
	ERP (Watts)	0.12	0.12	0.11	0.10	0.10	0.09

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		20425	20525	20625	20425	20525	20625
	Frequency	826.5	836.5	846.5	826.5	836.5	846.5
MHz		MHz	MHz	MHz	MHz	MHz	
5/ 5M	Conducted power(dBm)	22.95	22.93	22.6	21.99	21.98	21.61
	Conducted power (Watts)	0.20	0.20	0.18	0.16	0.16	0.14
	ERP (dBm)	20.86	20.84	20.51	19.9	19.89	19.52
	ERP (Watts)	0.12	0.12	0.11	0.10	0.10	0.09

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		20450	20525	20600	20450	20525	20600
	Frequency	829	836.5	844	829	836.5	844
MHz		MHz	MHz	MHz	MHz	MHz	
5 /10M	Conducted power(dBm)	23	22.99	22.67	22	21.99	21.7
	Conducted power (Watts)	0.20	0.20	0.18	0.16	0.16	0.15
	ERP (dBm)	20.91	20.9	20.58	19.91	19.9	19.61
	ERP (Watts)	0.12	0.12	0.11	0.10	0.10	0.09



Band / BW	Mode	QPSK			16QAM		
	Channel	RF CH	RF CH	High CH	RF CH	RF CH	High CH
		26797	26915	27033	26797	26915	27033
Frequency	824.7	836.5	848.3	824.7	836.5	848.3	
	MHz	MHz	MHz	MHz	MHz	MHz	
26 / 1.4M	Conducted power(dBm)	22.5	21.96	22.57	21.53	20.97	21.63
	Conducted power (Watts)	0.18	0.16	0.18	0.14	0.13	0.15
	ERP (dBm)	20.41	19.87	20.48	19.44	18.88	19.54
	ERP (Watts)	0.11	0.10	0.11	0.09	0.08	0.09

Band / BW	Mode	QPSK			16QAM		
	Channel	RF CH	RF CH	High CH	RF CH	RF CH	High CH
		26805	26915	27025	26805	26915	27025
Frequency	825.5	836.5	847.5	825.5	836.5	847.5	
	MHz	MHz	MHz	MHz	MHz	MHz	
26 / 3M	Conducted power(dBm)	22.59	22.05	22.64	21.63	21.07	21.69
	Conducted power (Watts)	0.18	0.16	0.18	0.15	0.13	0.15
	ERP (dBm)	20.5	19.96	20.55	19.54	18.98	19.6
	ERP (Watts)	0.11	0.10	0.11	0.09	0.08	0.09

Band / BW	Mode	QPSK			16QAM		
	Channel	RF CH	RF CH	High CH	RF CH	RF CH	High CH
		26815	26915	27015	26815	26915	27015
Frequency	826.5	836.5	846.5	826.5	836.5	846.5	
	MHz	MHz	MHz	MHz	MHz	MHz	
26 / 5M	Conducted power(dBm)	22.65	22.13	22.68	21.68	21.15	21.74
	Conducted power (Watts)	0.18	0.16	0.19	0.15	0.13	0.15
	ERP (dBm)	20.56	20.04	20.59	19.59	19.06	19.65
	ERP (Watts)	0.11	0.10	0.11	0.09	0.08	0.09

Band / BW	Mode	QPSK			16QAM		
	Channel	RF CH	RF CH	High CH	RF CH	RF CH	High CH
		26840	26915	26990	26840	26915	26990
	Frequency	829	836.5	844	829	836.5	844
MHz		MHz	MHz	MHz	MHz	MHz	
26 / 10M	Conducted power(dBm)	22.62	22.49	22.74	21.67	21.53	21.79
	Conducted power (Watts)	0.18	0.18	0.19	0.15	0.14	0.15
	ERP (dBm)	20.53	20.4	20.65	19.58	19.44	19.7
	ERP (Watts)	0.11	0.11	0.12	0.09	0.09	0.09

Band / BW	Mode	QPSK			16QAM		
	Channel	Low CH	Mid CH	High CH	Low CH	Mid CH	High CH
		26865	26915	26965	18675	18900	19125
	Frequency	831.5	836.5	841.5	1857.5	1880	1902.5
MHz		MHz	MHz	MHz	MHz	MHz	
26 / 15M	Conducted power(dBm)	22.61	22.63	22.79	21.58	21.65	21.84
	Conducted power (Watts)	0.18	0.18	0.19	0.14	0.15	0.15
	ERP (dBm)	20.52	20.54	20.7	19.49	19.56	19.75
	ERP (Watts)	0.11	0.11	0.12	0.09	0.09	0.09

## 4.2 Radiated Emission Measurement

### 4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit is equal to -13 dBm.

### 4.2.2 Test Procedure


- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dBi.}$

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

### 4.2.3 Deviation from Test Standard

No deviation.

### 4.2.4 Test Setup

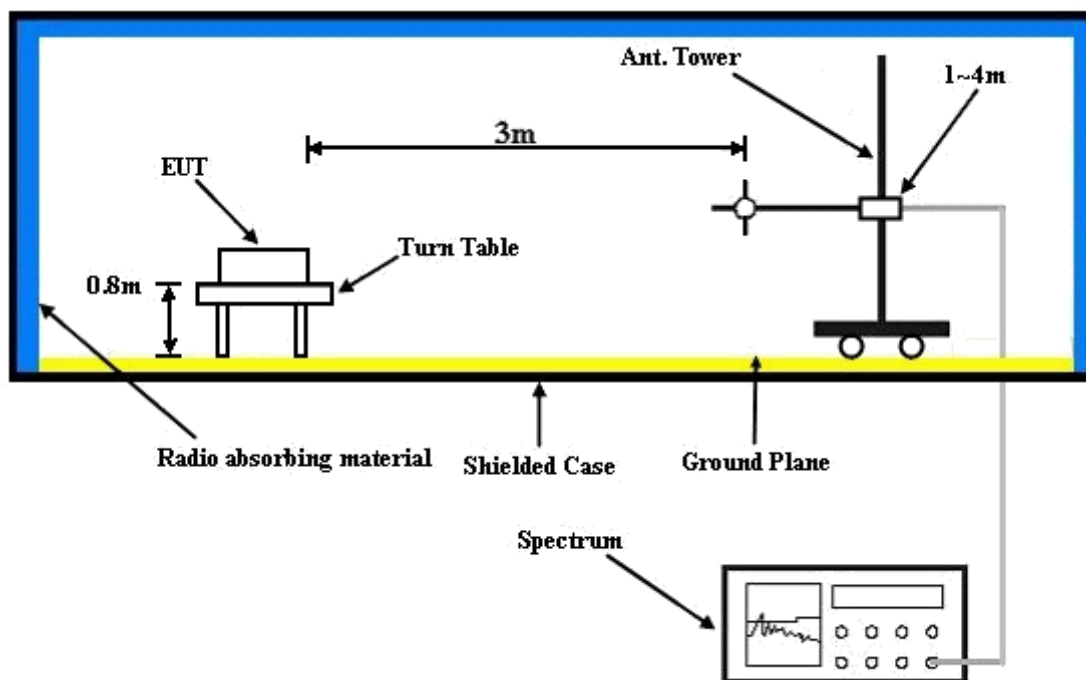

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

LTE Band 5


Channel Bandwidth: 10 MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

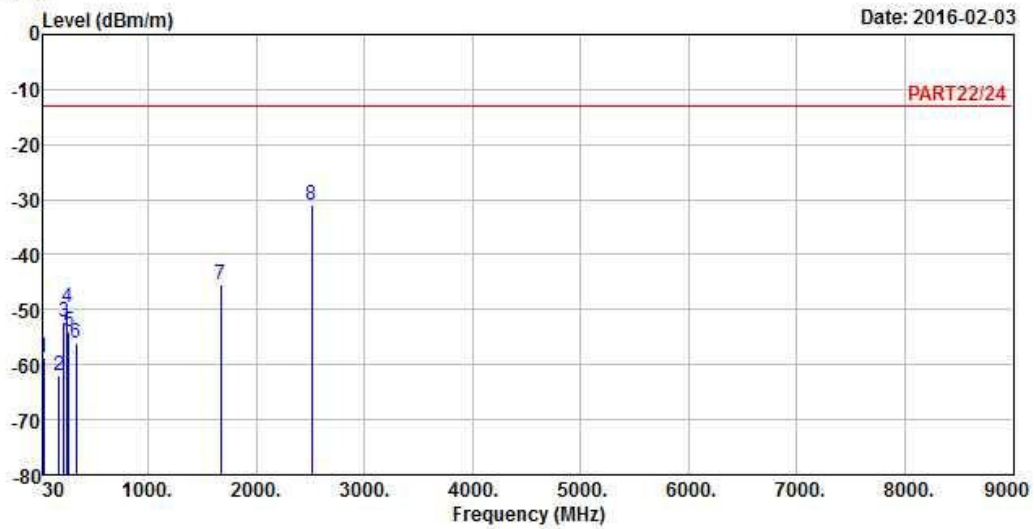

Site : 966 Chamber 5  
 Condition: PART22/24 3m HORIZONTAL  
 Remak : LTE Band V QPSK\_10M(1,0) Link  
 Tested by: Anson Lin  
 Plane : NB

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	34.85	-58.79	-56.72	-13.00	-45.79	-2.07	Peak
2	174.53	-61.88	-55.50	-13.00	-48.88	-6.38	Peak
3	219.15	-52.13	-44.89	-13.00	-39.13	-7.24	Peak
4	251.16	-49.64	-43.63	-13.00	-36.64	-6.01	Peak
5	263.77	-54.11	-47.84	-13.00	-41.11	-6.27	Peak
6	329.73	-56.00	-49.45	-13.00	-43.00	-6.55	Peak
7	1672.80	-45.35	-30.67	-13.00	-32.35	-14.68	Peak
8 pp	2509.20	-30.85	-19.94	-13.00	-17.85	-10.91	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2016-02-03

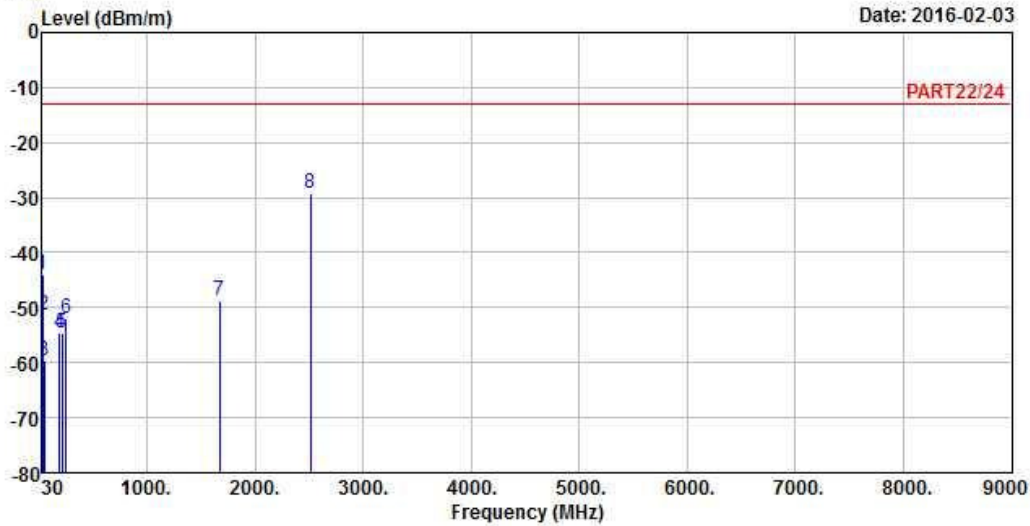

Site : 966 Chamber 5  
 Condition: PART22/24 3m VERTICAL  
 Remak : LTE Band V QPSK\_10M(1,0) Link  
 Tested by: Anson Lin  
 Plane : NB

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	30.00	-44.09	-44.47	-13.00	-31.09	0.38	Peak
2	36.79	-51.32	-50.33	-13.00	-38.32	-0.99	Peak
3	50.37	-59.78	-54.77	-13.00	-46.78	-5.01	Peak
4	191.02	-54.65	-47.47	-13.00	-41.65	-7.18	Peak
5	210.42	-54.60	-47.01	-13.00	-41.60	-7.59	Peak
6	250.19	-51.86	-45.87	-13.00	-38.86	-5.99	Peak
7	1672.80	-48.64	-33.96	-13.00	-35.64	-14.68	Peak
8 pp	2509.20	-29.30	-18.39	-13.00	-16.30	-10.91	Peak



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



A D T

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---