

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



产品规格书

PRODUCT SPECIFICATION

客 户:	
CUSTOMER:	
客户料号:	
CUST P/N:	
金赞料号:	手表线圈
KC P/N :	Watch Coil
产品型号:	15.4*21*0.08*24P*12TS*11mm
D E S E :	
日 期:	2021. 12. 29
D A T E :	
版 本:	A. 0
VERSION :	

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	制程审核 PRODUCTION CHECKED BY	批准 APPROVED BY
贺亮	蓝春林	刘志军 2021.12.29	颜伟 2021.12.30	

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-76986018114 Fax: 86-76986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-12-291

15. 4*21*0.08*24P*12TS*11mm

电科教育

高第

文件编号 FilNo: KC-JZ-12-291

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED


规格内容
Specification客户料号:
CUST P/N

手表线圈 Watch Coil

金赞型号:
KC DESE

15.4*21*0.08*24P*12TS*11mm

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

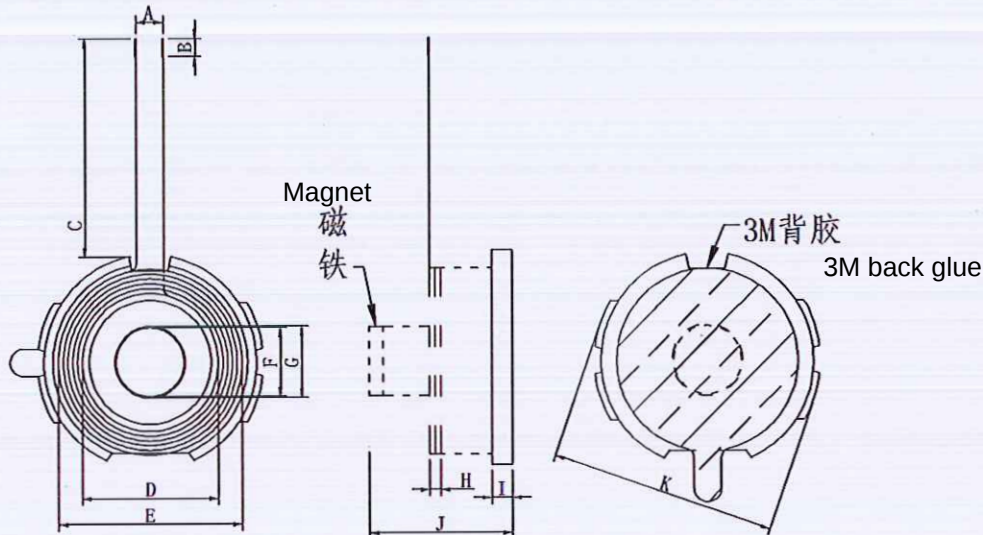

单位(Unit):毫米(mm)

A	B	C	D	E	F
2±1	1-2	11±1.5	15.4±0.5	21MAX	7.5±0.2
G	H	I	J	K	
7.8±0.5	1.05±0.05	2.5±0.15	2.8MAX	25±1	

Reference data: Coil: 1.05H; Incoming lead: 0.2H; Glue: 0.12H; Bottom of disc: 1.15H;
3M adhesive: 0.15H(excluding release paper); Total material thickness: 2.67H (excluding gaps)

PS: 1.C is the length of the magnetic outer lead; 2.H does not contain input wire;
3. Coil inlet wire press wire, reverse paste; 4.J does not include release paper

圈数 Turns	线径 Wire Dia.	绕线方式 疏/ 密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/ 否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
12TS	0.08*24P 热风绞线 (Hot Air stranded Wire)	密绕 (Close)	逆时针 (Anticlockwise)	是(Yes)	反贴 (Anti-Paste)

All materials are required to comply with ROHS standards

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY	制程审核 PRODUCTION CHECKED BY
贺亮	胡志军	陈海华

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-76986018114 Fax: 86-76986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-12-291

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N

手表线圈 Watch Coil

金赞型号:
KC-DESE

15.4*21*0.08*24P*12TS*11mm

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, 湿度 RELATIVE HUMIDITY: $65 \pm 10\%$

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	Coil : $3.95\text{UH} \pm 10\%$	100kHz/V	LCZ METER 1062
2	IND	S-F	Coil and diskette : $6.4\text{UH} \pm 10\%$	100kHz/V	LCZ METER 1062

天线增益 Antenna gain:

Operation frequency:	300 kHz ~ 360 kHz
Antenna Type:	Loop coil Antenna
Antenna gain:	0dBi

3. 材料清单 (BILL OF MATERIAIS):

序号 number	材料名称 Material name	品名描述 Description	物料代码 Material Code
1	Wire rod	0.08*24P 热风绞线 Hot air strand	JX-2U-F-0009
2	Soft magnetic sheet	G25*7.8*2.5H (with holes) Small slot: 5.2 x 2.0H Large slot 8.5 x 2.0H	
3	Strong magnet 48	7.5*2.2H (Magnetic field 2800-3200GS)	
4	3M adhesive	15*0.15H No holes, ears	

拟制
PREPARED BY

贺亮

工程审核
ENGINEER CHECKED BY

胡志军

制程审核
PRODUCTION CHECKED BY

黄伟

Address: 东莞市石碣镇西沙路 2 号 Tel: 86-76986018114 Fax: 86-76986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-12-291