



频率	TRP	3D pattern
2403MHz	-2.21217dBm	<p>3D radiation pattern plots for 2403MHz. The plots show the total power distribution in dBm. The top-left plot is for Azimuth = 0.0, Elevation = 0.0, Roll = 0.0. The top-right plot is for Azimuth = 0.0, Elevation = 0.0, Roll = -90.0. The bottom-left plot is for Azimuth = 0.0, Elevation = -90.0, Roll = -90.0. The color scale for all plots ranges from -10 dBm (purple) to 6 dBm (red).</p>
2441MHz	-1.89288dBm	<p>3D radiation pattern plots for 2441MHz. The plots show the total power distribution in dBm. The top-left plot is for Azimuth = 0.0, Elevation = 0.0, Roll = 0.0. The top-right plot is for Azimuth = 0.0, Elevation = 0.0, Roll = -90.0. The bottom-left plot is for Azimuth = 0.0, Elevation = -90.0, Roll = -90.0. The color scale for all plots ranges from -10 dBm (purple) to 8 dBm (red).</p>
2480MHz	-1.44097dBm	<p>3D radiation pattern plots for 2480MHz. The plots show the total power distribution in dBm. The top-left plot is for Azimuth = 0.0, Elevation = 0.0, Roll = 0.0. The top-right plot is for Azimuth = 0.0, Elevation = 0.0, Roll = -90.0. The bottom-left plot is for Azimuth = 0.0, Elevation = -90.0, Roll = -90.0. The color scale for all plots ranges from -10 dBm (purple) to 8 dBm (red).</p>

频率	Gain	Efficiency (%)
2403MHZ	2.00182	60.0873
2441MHZ	2.18073	64.6714
2480MHz	2.29745	71.7635
频率	S11-SWR	S11-Log Mag
2403MHZ	1.4306	-15.323dB
2441MHZ	1.0993	-26.477dB
2480MHz	1.3886	-15.701dB

3D pattern

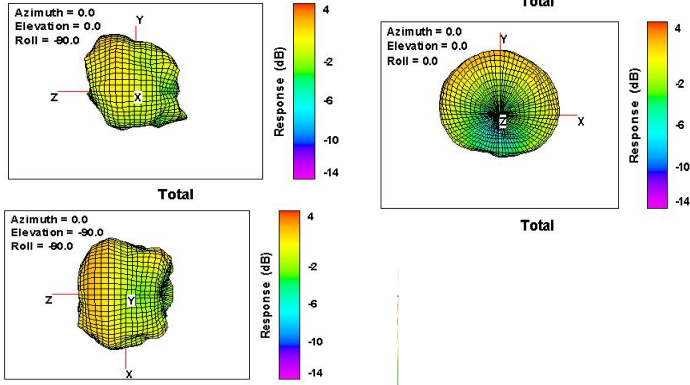

SWR图



<p>conductive power</p>	<p>0.63DB</p>	 <p>The screenshot shows a spectrum analyzer interface for a LIG Nex1 NS-30A. The display includes the following information: REF: 0.0 dBm, SCALE: LOG 10 dB/, ATT: 10 dB, nMarker: 1, and a peak at 2.4030064 GHz with a power of 0.63 dBm. The date and time are Wed Jun 05 14:59:15 2024.</p>
<p>setting power from chipset</p>	<p>0.92DB</p>	 <p>The screenshot shows a spectrum analyzer interface for a LIG Nex1 NS-30A. The display includes the following information: REF: 0.0 dBm, SCALE: LOG 10 dB/, ATT: 10 dB, nMarker: 1, and a peak at 2.4030096 GHz with a power of 0.92 dBm. The date and time are Wed Jun 05 14:57:45 2024. A control panel on the right side of the screen includes buttons for Peak, Next Peak, NPeakLeft, NPeakRight, MinSearch, Fk-Fk, Search, Mkr Track, and More... The status bar at the bottom shows CENTER: 2.4030000 GHz, BW: 100.0 kHz, RES: 3 kHz, and SWP: 95.0 ms.</p>