



FCC TEST REPORT

**Test report
On Behalf of
Delta Electronics Incorporated
For
NovoConnect Wireless collaboration System
Model No.: NC-X700, WCS-X731, WCS-X732, WCS-X741,
WCS-X742, WCS-X700**

FCC ID: H79-NCX700

**Prepared for : Delta Electronic Incorporated
3 Tungyung Road Chungli Industrial Zone, Taoyuan County 32063, Taiwan**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China**

**Date of Test: Nov. 22, 2019 ~Nov. 29, 2019
Date of Report: Nov. 29, 2019
Report Number: HK1910232645-3E**



TEST RESULT CERTIFICATION

Applicant's name Delta Electronic Incorporated
Address 3 Tungyung Road Chungli Industrial Zone, Taoyuan County 32063, Taiwan
Manufacture's Name Delta Electronic Incorporated
Address 3 Tungyung Road Chungli Industrial Zone, Taoyuan County 32063, Taiwan

Product description

Trade Mark: DELTA Vivitek
Product name NovoConnect Wireless collaboration System
Model and/or type reference .. NC-X700, WCS-X731, WCS-X732, WCS-X741, WCS-X742, WCS-X700
Standards FCC Rules and Regulations Part 15 Subpart C Section 15.407
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test

Date (s) of performance of tests Nov. 22, 2019 ~Nov. 29, 2019

Date of Issue Nov. 29, 2019

Test Result Pass

Prepared by:

Project Engineer

Reviewed by:

Project Supervisor

Approved by:

Technical Director



TABLE OF CONTENTS

1. Test Result Summary	4
1.1. TEST PROCEDURES AND RESULTS.....	4
1.2. TEST FACILITY	4
1.3. MEASUREMENT UNCERTAINTY	5
2. EUT Description	6
2.1. GENERAL DESCRIPTION OF EUT	6
2.2. OPERATION FREQUENCY EACH OF CHANNEL.....	7
2.3. OPERATION OF EUT DURING TESTING	7
2.4. DESCRIPTION OF TEST SETUP	8
3. Genera Information.....	9
3.1. TEST ENVIRONMENT AND MODE	9
3.2. DESCRIPTION OF SUPPORT UNITS	10
4. Test Results and Measurement Data	11
4.1. CONDUCTED EMISSION	11
4.2. MAXIMUM CONDUCTED OUTPUT POWER	13
4.3. 6dB EMISSION BANDWIDTH	19
4.4. 26dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	20
4.5. POWER SPECTRAL DENSITY	37
4.6. BAND EDGE.....	55
4.7. SPURIOUS EMISSION	82
4.8. FREQUENCY STABILITY MEASUREMENT.....	89
4.9. ANTENNA REQUIREMENT	91
4.10. PHOTOGRAPHS OF TEST SETUP	91



1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
6dB Emission Bandwidth	§15.407(e)	N/A
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a)	PASS
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a)	PASS
Frequency Stability	§15.407(g)	PASS

Note:

1. PASS: *Test item meets the requirement.*
2. Fail: *Test item does not meet the requirement.*
3. N/A: *Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	NovoConnect Wireless collaboration System
Model Name	NC-X700
Serial No.	WCS-X731, WCS-X732, WCS-X741, WCS-X742, WCS-X700
Trade Mark	DELTA Vivitek
Model Difference	All model's the function, software and electric circuit are the same, only with a product outward and model named different. Test sample model: NC-X700
FCC ID	H79-NCX700
Operation Frequency:	IEEE 802.11a/n/ac(HT20) 5.180GHz-5.240GHz IEEE 802.11n/ac(HT40) 5.190GHz-5.230GHz IEEE 802.11ac(HT80) 5.210GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type	CCK/OFDM/DBPSK/DAPSQ
Antenna Type	External Antenna
Antenna Gain	Antenna 1:1dBi Antenna 2:1dBi MIMO: 4.010dBi
Power Source	DC 5V from adapter With AC 100-240V, 50/60Hz, 0.4A.
Power Supply:	DC 5V from adapter With AC 100-240V, 50/60Hz, 0.4A
Note:	The EUT incorporates a MIMO function. Physically, it provides two completed transmitters and receivers(2T2R), two transmit signals are completely correlated, then, Direction gain=GANT+10*log(2)dB.



2.2. Operation Frequency each of channel

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing

For 802.11a/n (HT20)/ac(HT20)

Band I (5150 - 5250 MHz)		
Channel Number	Channel	Frequency (MHz)
36	Low	5180
40	Mid	5200
48	High	5240

For 802.11n (HT40)/ ac(HT40)

Band I (5150 - 5250 MHz)		
Channel Number	Channel	Frequency (MHz)
38	Low	5190
46	High	5230


For 802.11ac(HT80)

Band I (5150 - 5250 MHz)	
Channel Number	Frequency (MHz)
42	5210



2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation testing:

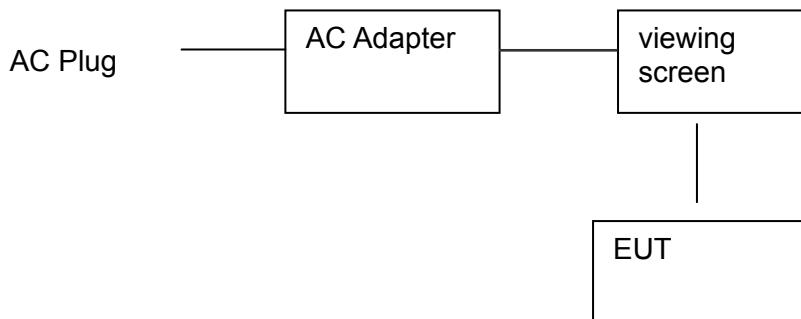

Operation of EUT during Above1GHz Radiation testing:



Display information

Model: 24PFF3661/T3

Input: AC 120V/60Hz

Adapter information

Model: CNXZX3015-050030SA

Input: AC100-240, 50/60Hz, 0.4A

Output: DC5V, 3A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed.

During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position



3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	/

Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---



3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



4. Test Results and Measurement Data

4.1. Conducted Emission

4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"><thead><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr></thead><tbody><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></tbody></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p> <p>40cm 80cm</p> <p>E.U.T — AC power</p> <p>Test table/Insulation plane</p> <p>LISN — Filter — AC power</p> <p>EMI Receiver</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Tx Mode														
Test Procedure:	<ol style="list-style-type: none">1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														



4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2019
LISN	R&S	ENV216	HKE-002	Dec. 27, 2019
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Dec. 27, 2019
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.1.3. Test data

All the test modes completed for test, only the worst result of AC240V/60Hz(802.11a at 5180MHz)
was reported as below:

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

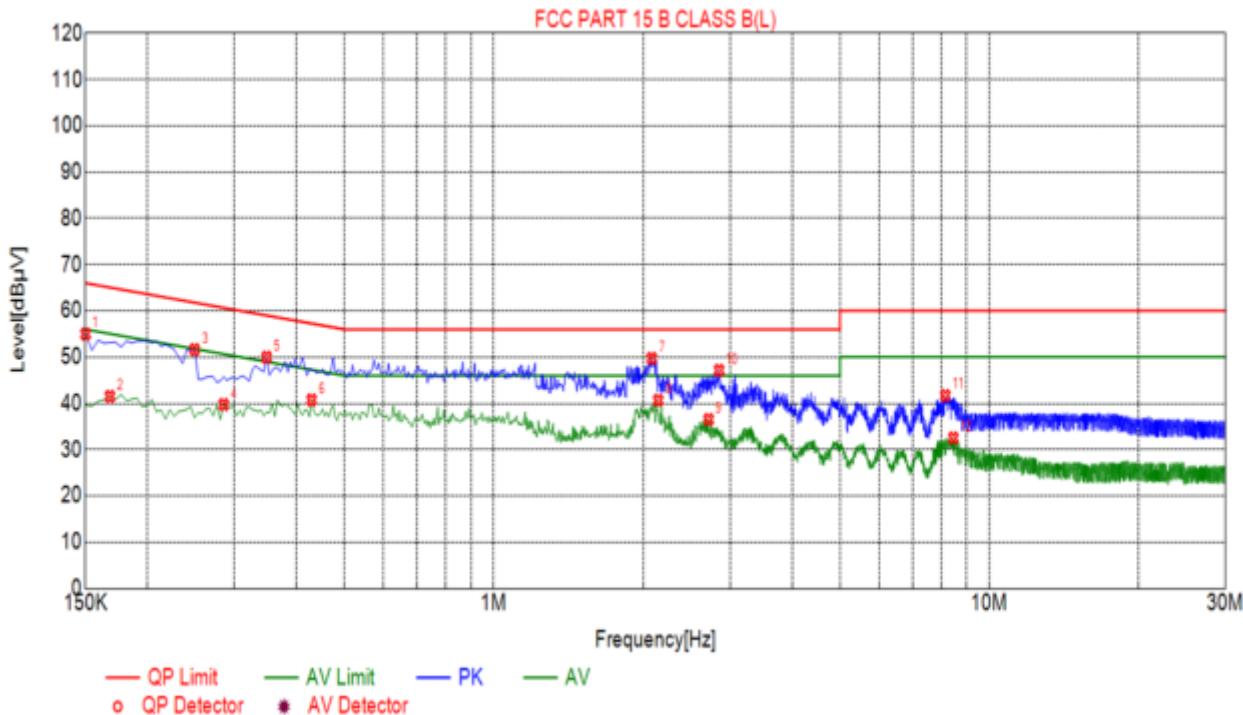

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.1500	54.99	10.03	66.00	11.01	PK
2	0.1680	41.53	10.01	55.06	13.53	AV
3	0.2490	51.65	10.04	61.82	10.17	PK
4	0.2850	39.76	10.04	50.67	10.91	AV
5	0.3480	50.00	10.03	59.06	9.06	PK
6	0.4290	40.75	10.05	47.27	6.52	AV
7	2.0850	49.75	10.15	56.00	6.25	PK
8	2.1480	40.68	10.16	46.00	5.32	AV
9	2.7150	36.51	10.21	46.00	9.49	AV
10	2.8500	47.15	10.21	56.00	8.85	PK
11	8.1555	41.69	10.14	60.00	18.31	PK
12	8.4660	32.53	10.13	50.00	17.47	AV




Remark:

Margin = Limit – Level

Level=Test receiver reading + factor

Factor= Antenna factor + cable loss- Amp factor

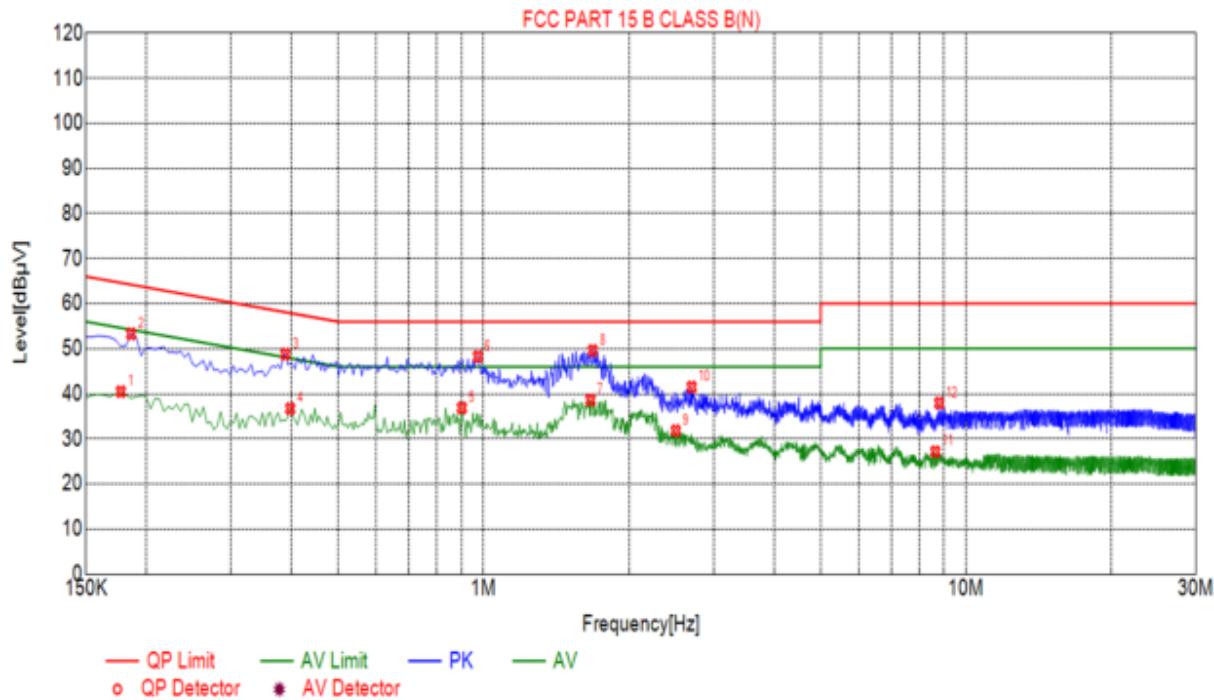**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)****Suspected List**

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Detector
1	0.1770	40.49	10.05	54.63	14.14	AV
2	0.1860	53.31	10.05	64.26	10.95	PK
3	0.3885	48.81	10.04	58.11	9.30	PK
4	0.3975	36.71	10.04	47.91	11.20	AV
5	0.9015	36.87	10.06	46.00	9.13	AV
6	0.9735	48.25	10.06	56.00	7.75	PK
7	1.6665	38.64	10.12	46.00	7.36	AV
8	1.6845	49.61	10.13	56.00	6.39	PK
9	2.5035	31.82	10.19	46.00	14.18	AV
10	2.7015	41.51	10.21	56.00	14.49	PK
11	8.6460	27.15	10.12	50.00	22.85	AV
12	8.8035	37.95	10.11	60.00	22.05	PK

Remark:

Margin = Limit – Level


Level=Test receiver reading + factor

Factor= Antenna factor + cable loss- Amp factor



4.2. Maximum Conducted Output Power

4.2.1. Test Specification

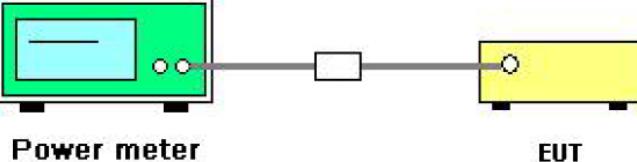Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046				
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E				
Limit:	<table border="1"> <thead> <tr> <th>Frequency Band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td>1W for indoor access points device</td> </tr> </tbody> </table>	Frequency Band (MHz)	Limit	5150-5250	1W for indoor access points device
Frequency Band (MHz)	Limit				
5150-5250	1W for indoor access points device				
Test Setup:	 <p>The diagram illustrates the test setup. On the left, a green rectangular box labeled "Power meter" has two black circular ports at the bottom. A grey horizontal line extends from the right side of the meter to a yellow rectangular box labeled "EUT". Between these two boxes is a small white square component representing an attenuator.</p>				
Test Mode:	Transmitting mode with modulation				
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 5. Measure the conducted output power and record the results in the test report. 				
Test Result:	PASS				
Remark:	<p>Conducted output power= measurement power +$10\log(1/x)$ X is duty cycle=1, so $10\log(1/1)=0$</p> <p>Conducted output power= measurement power</p>				



4.2.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Power meter	Agilent	E4419B	HKE-085	Dec. 27, 2019
Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.2.3. Test Data

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Maximum Conducted Output Power (dBm)			FCC Limit (dBm)	Result
		Antenna port 1	Antenna port 2	MIMO		
11a	CH36	10.25	10.36	/	30	PASS
11a	CH40	10.36	9.15	/	30	PASS
11a	CH48	10.48	10.66	/	30	PASS
11n(HT20)	CH36	9.15	9.27	12.22	30	PASS
11n(HT20)	CH40	9.08	9.36	12.23	30	PASS
11n(HT20)	CH48	10.42	9.58	13.03	30	PASS
11n(HT40)	CH38	9.12	9.47	12.31	30	PASS
11n(HT40)	CH46	9.77	9.13	12.47	30	PASS
11ac(HT20)	CH36	10.36	9.24	12.85	30	PASS
11ac(HT20)	CH40	9.62	9.19	12.42	30	PASS
11ac(HT20)	CH48	9.34	8.22	11.83	30	PASS
11ac(HT40)	CH38	9.17	8.65	11.93	30	PASS
11ac(HT40)	CH46	9.22	8.15	11.73	30	PASS
11ac(HT80)	CH42	9.37	9.76	12.58	30	PASS



4.3. 6dB Emission Bandwidth

4.3.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none">1. KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section C2. Set to the maximum power setting and enable the EUT transmit continuously.3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.4. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4.3.3. Test data

N/A



4.4. 26dB Bandwidth and 99% Occupied Bandwidth

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none">1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C2. Set to the maximum power setting and enable the EUT transmit continuously.3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% EBW$, $VBW \geq 3RBW$, In order to make an accurate measurement.4. Measure and record the results in the test report.
Test Result:	PASS

4.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.4.3. Test data

Band I

ANT 1


Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Verdict
11a	CH36	5180	19.92	PASS
11a	CH40	5200	19.86	PASS
11a	CH48	5240	19.97	PASS
11n(HT20)	CH36	5180	20.19	PASS
11n(HT20)	CH40	5200	20.26	PASS
11n(HT20)	CH48	5240	20.10	PASS
11n(HT40)	CH38	5190	40.34	PASS
11n(HT40)	CH46	5230	40.24	PASS
11ac(HT20)	CH36	5180	20.05	PASS
11ac(HT20)	CH40	5200	20.19	PASS
11ac(HT20)	CH48	5240	20.14	PASS
11ac(HT40)	CH38	5190	40.26	PASS
11ac(HT40)	CH46	5230	40.12	PASS
11ac(HT80)	CH42	5210	80.68	PASS

Test plots as follows:



Band I (5150 – 5250 MHz)



802.11a

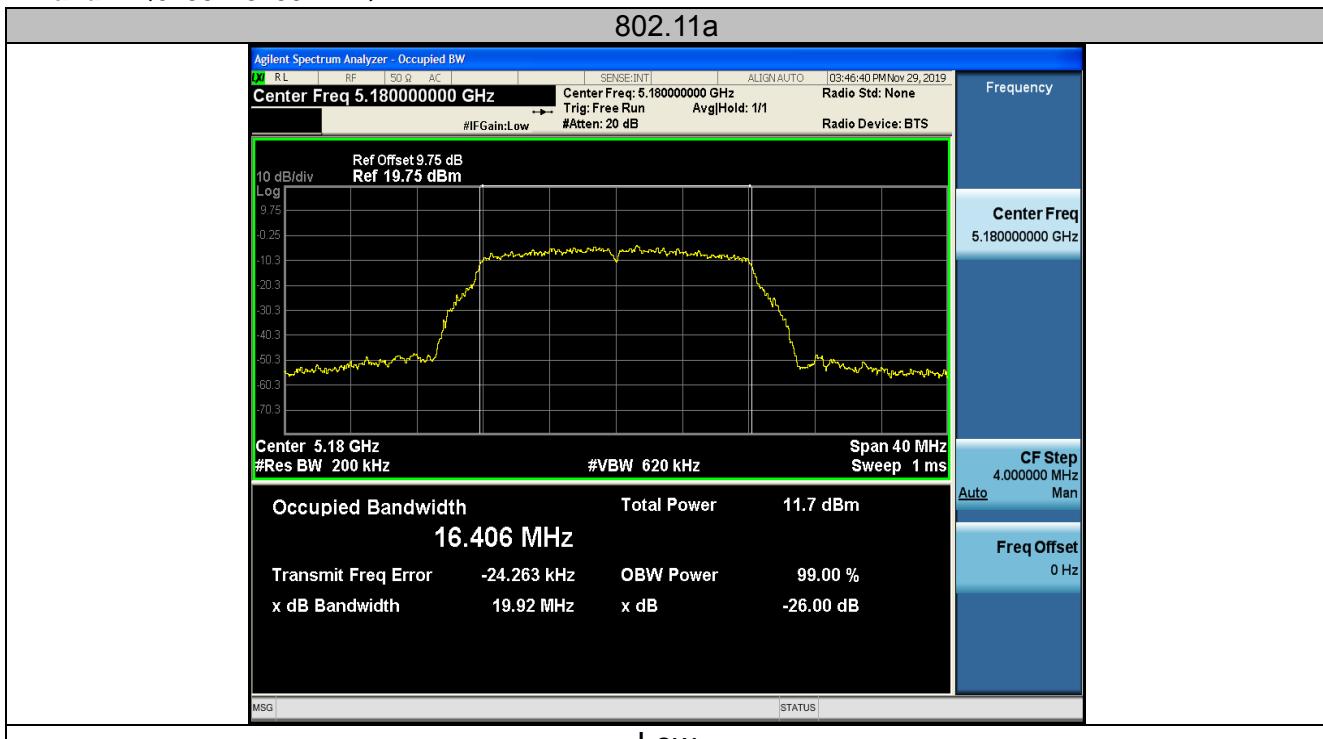


LOW




Mid

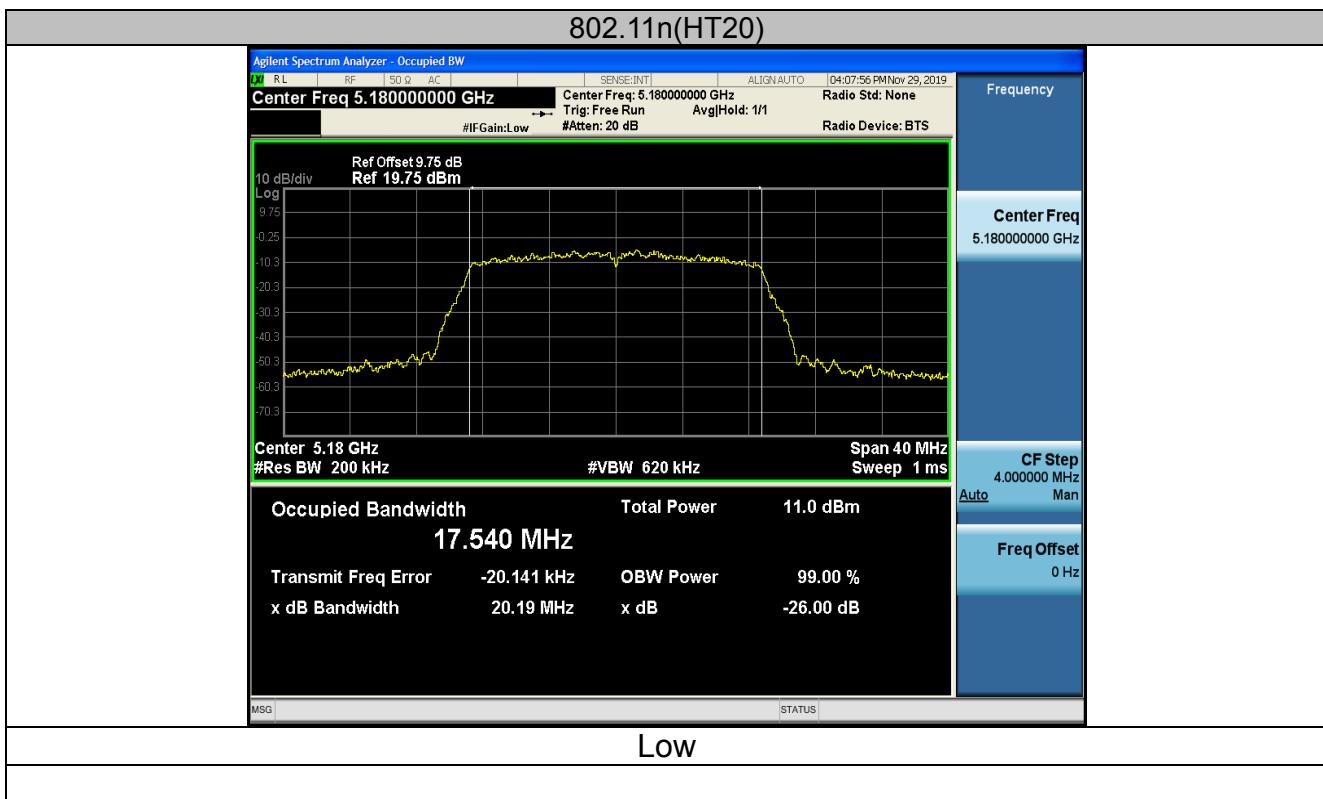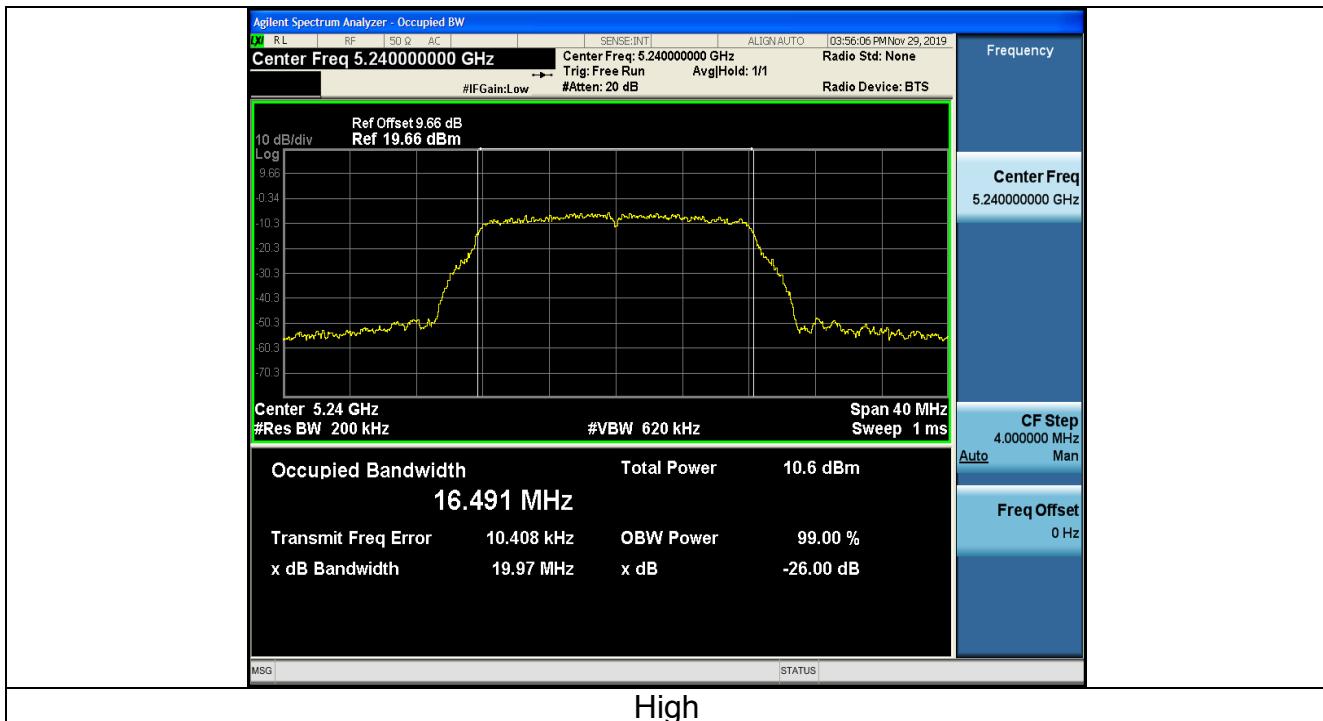

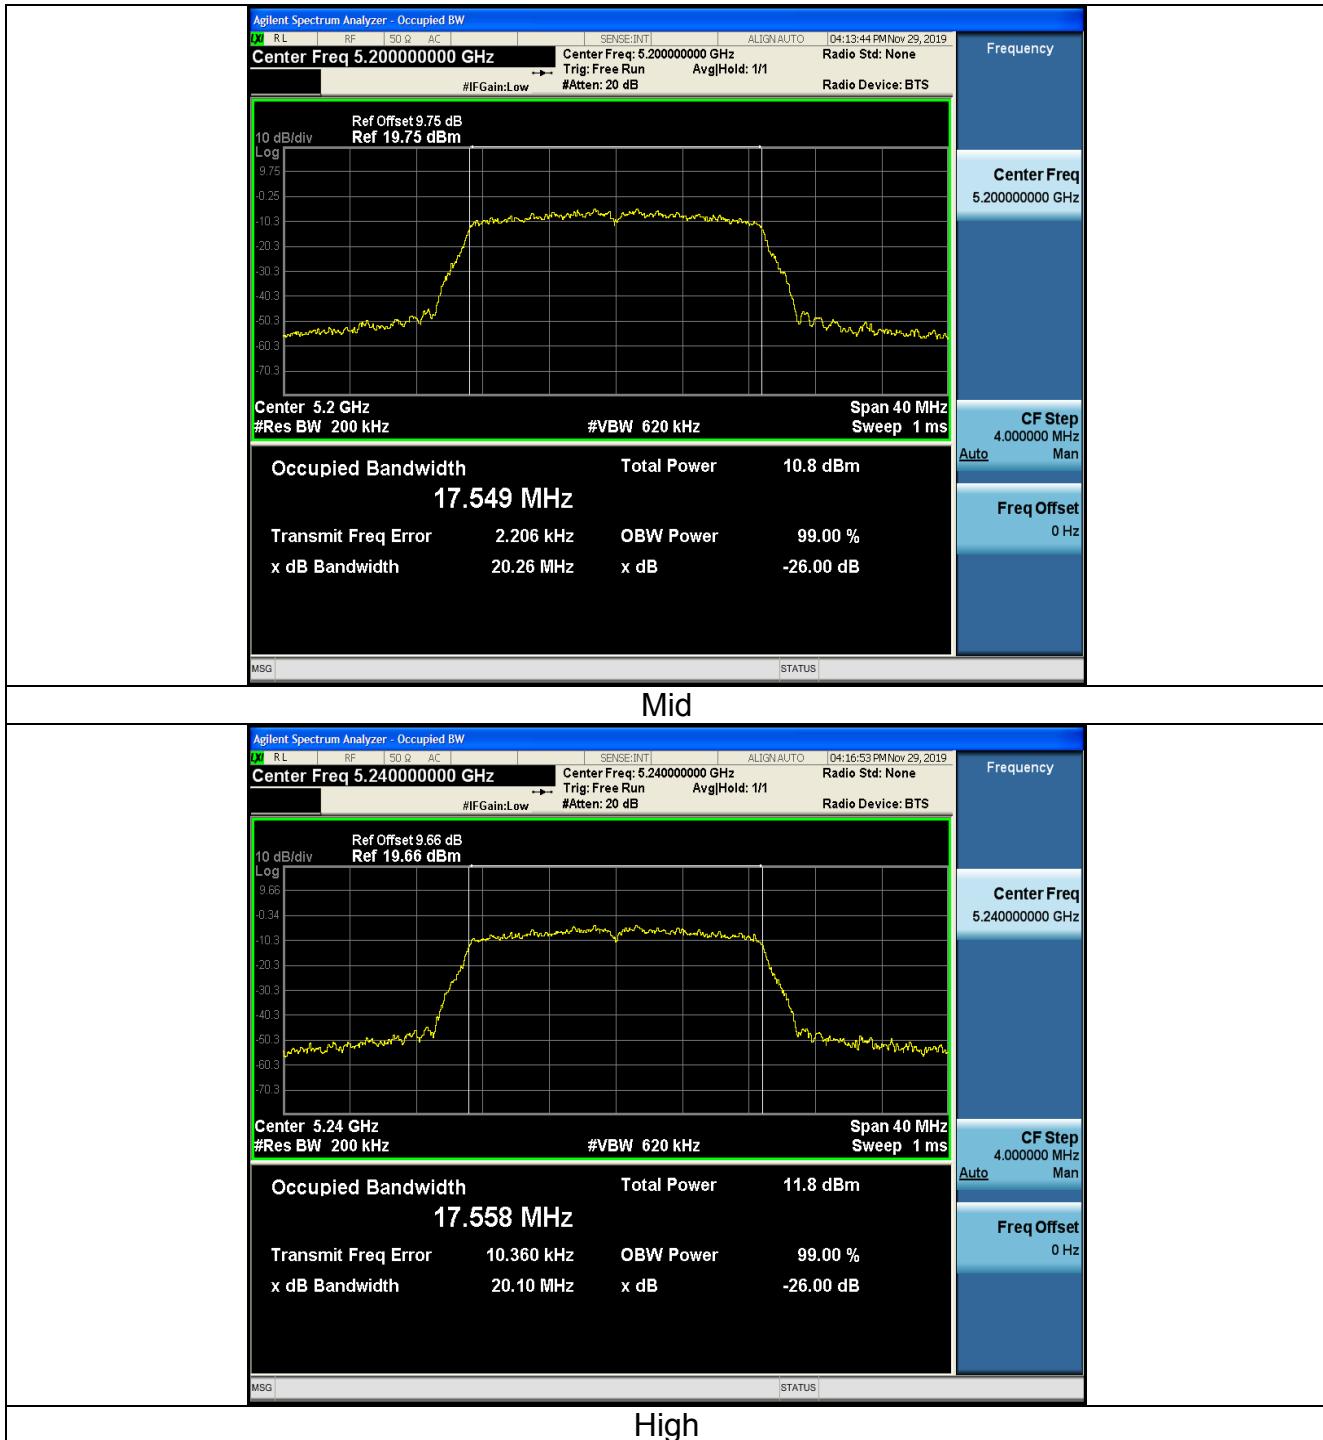




802.11n(HT40)


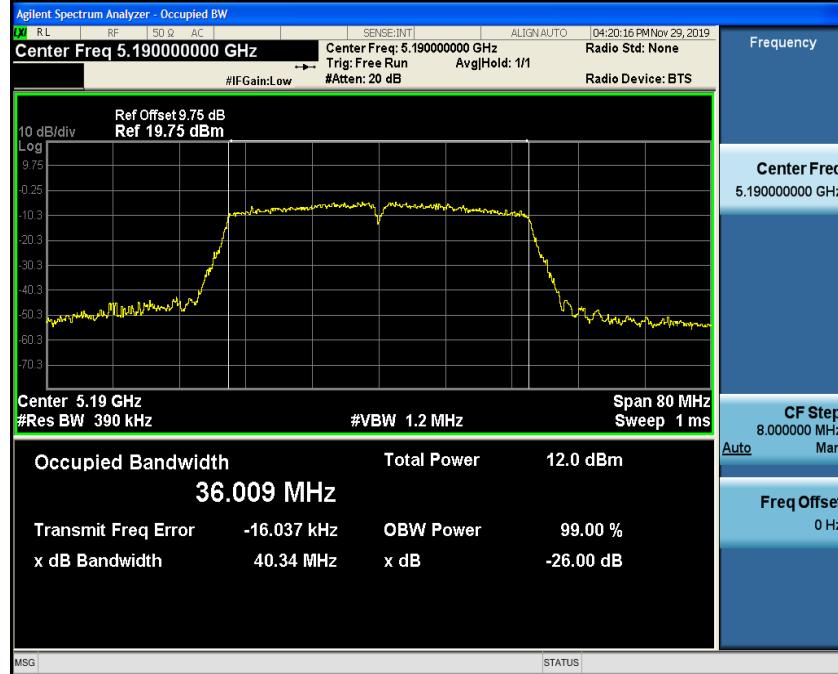




LOW



High

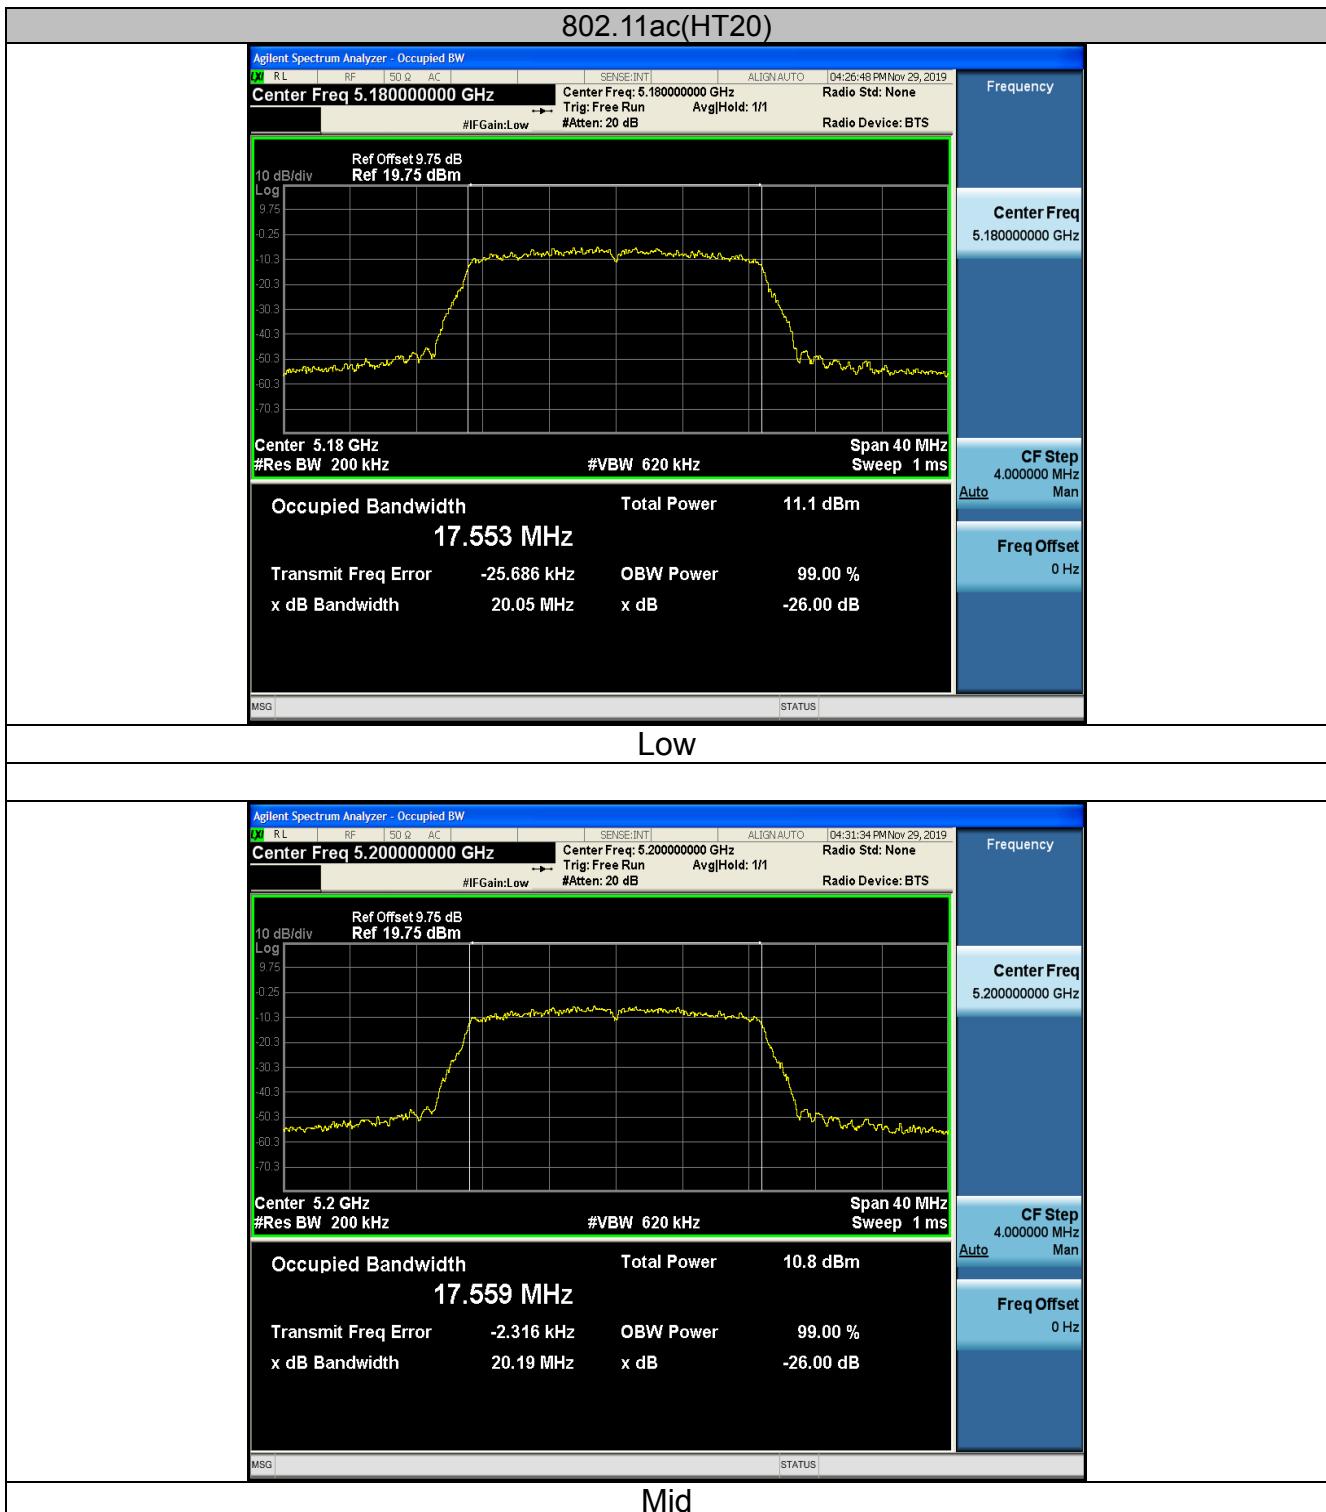

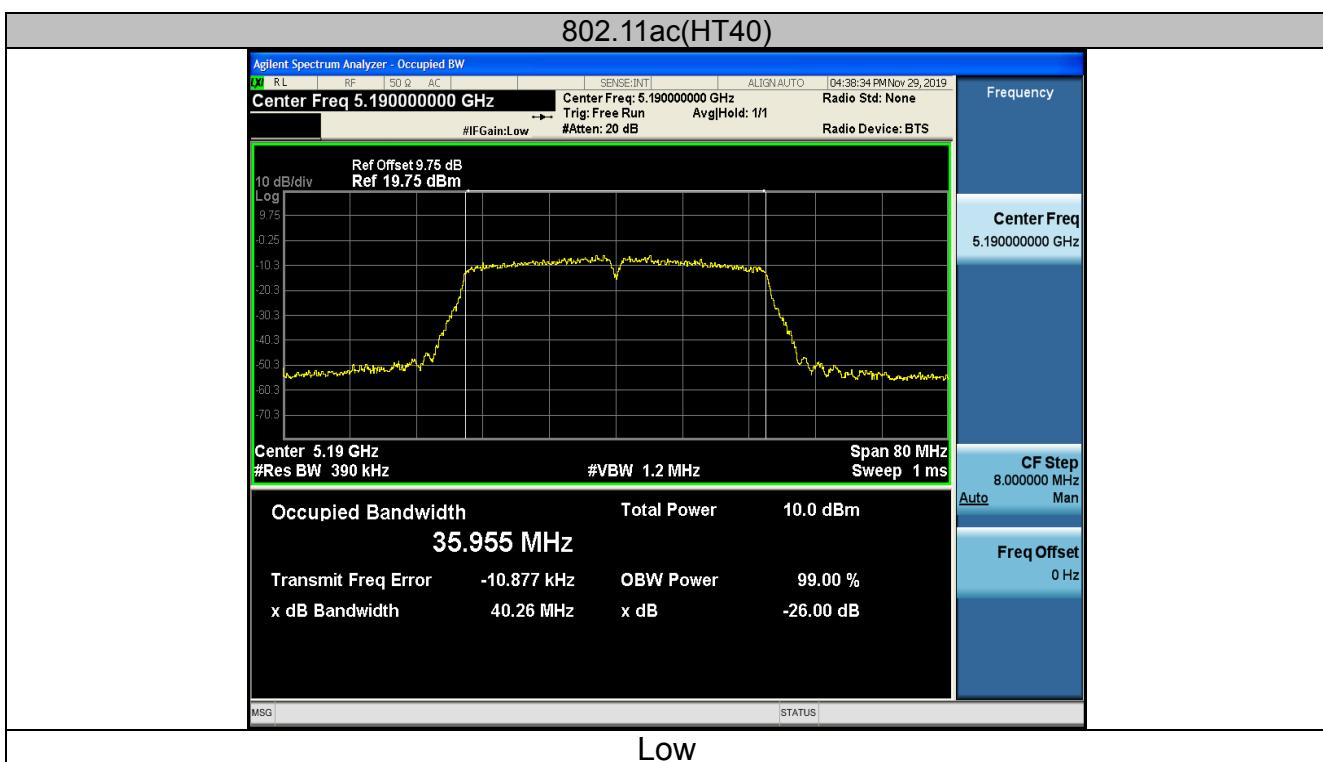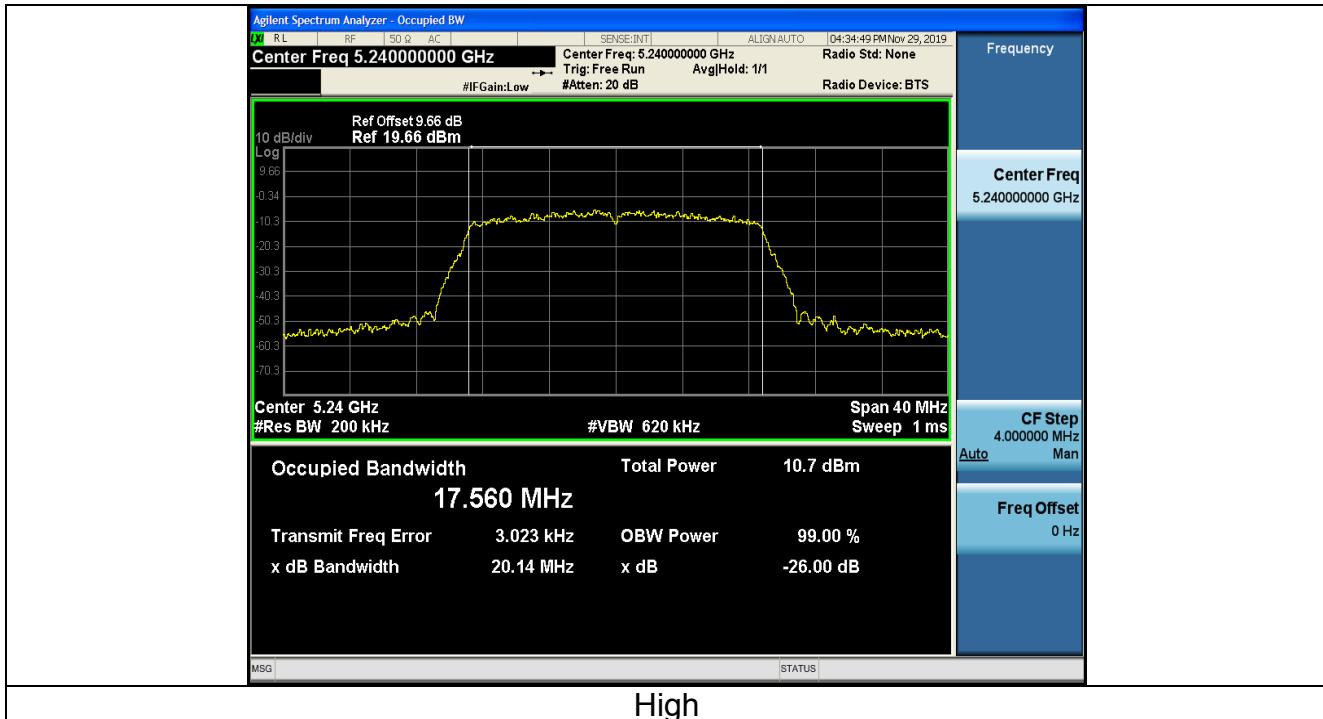

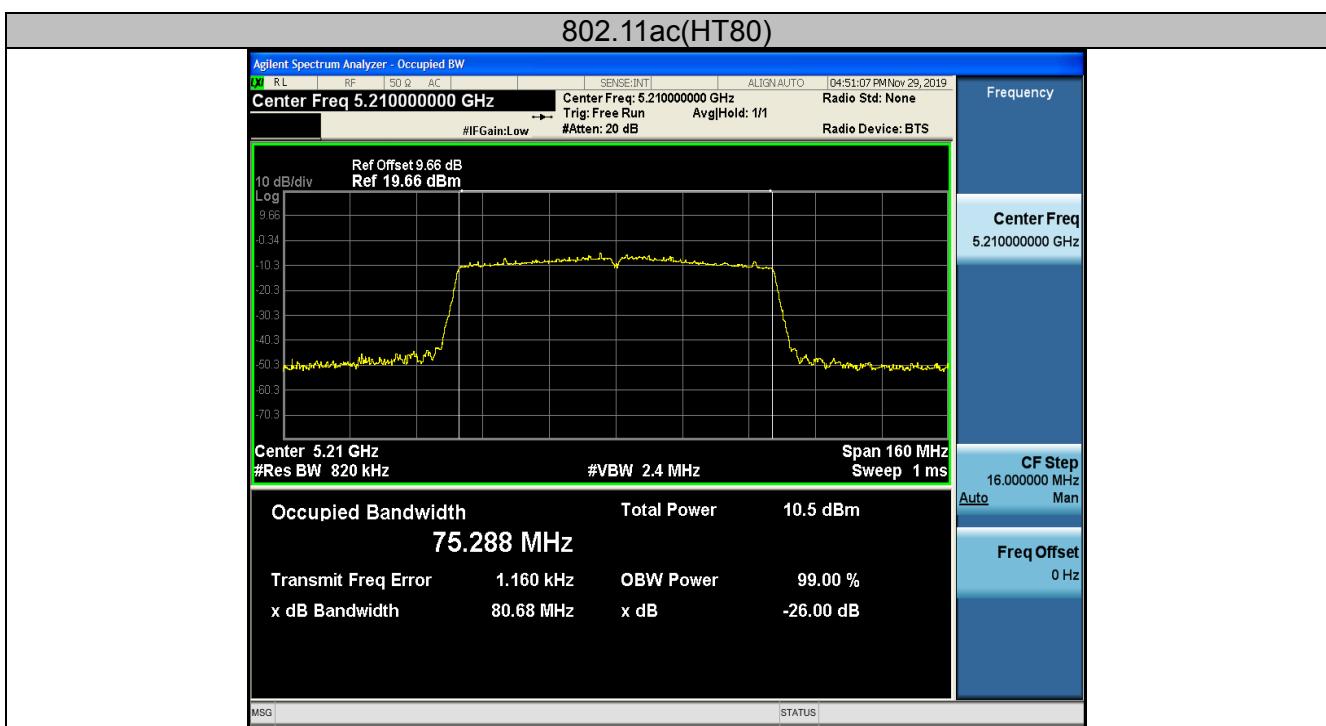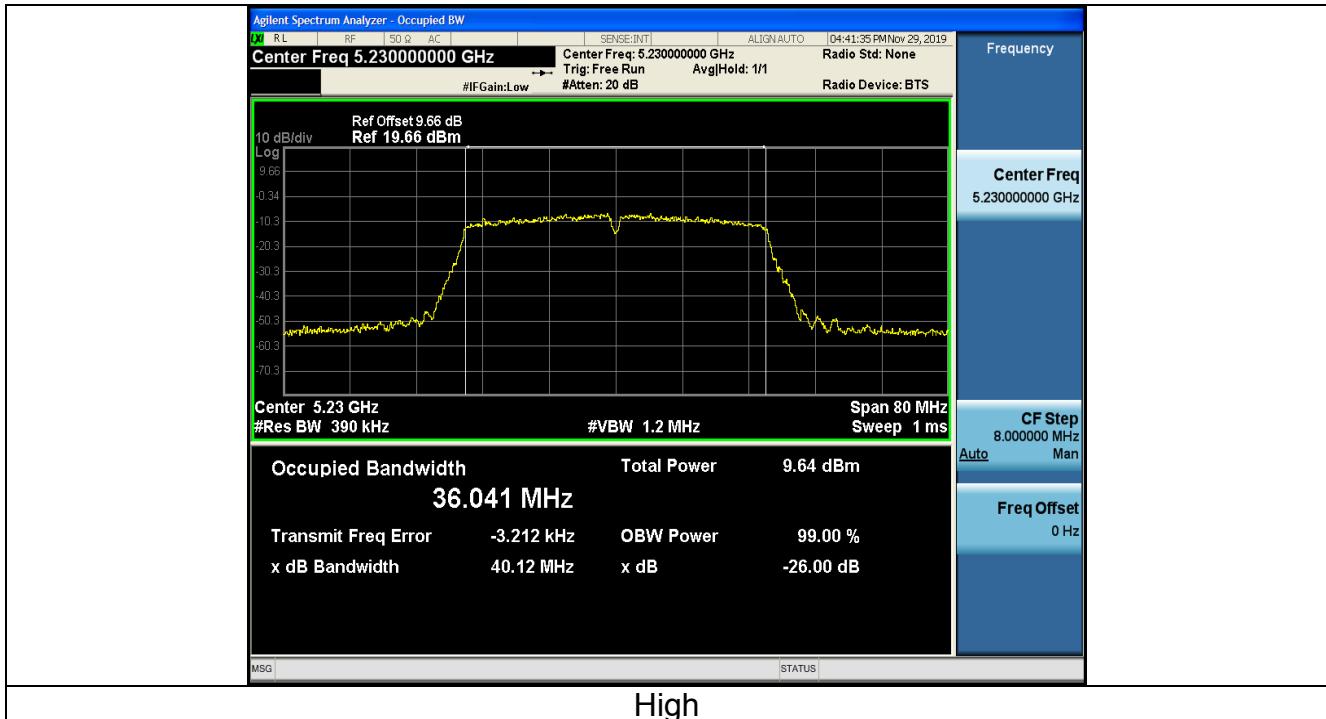

**ANT 2**

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Verdict
11a	CH36	5180	20.05	PASS
11a	CH40	5200	19.77	PASS
11a	CH48	5240	19.87	PASS
11n(HT20)	CH36	5180	20.12	PASS
11n(HT20)	CH40	5200	20.08	PASS
11n(HT20)	CH48	5240	20.08	PASS
11n(HT40)	CH38	5190	40.20	PASS
11n(HT40)	CH46	5230	40.38	PASS
11ac(HT20)	CH36	5180	20.18	PASS
11ac(HT20)	CH40	5200	20.11	PASS
11ac(HT20)	CH48	5240	20.08	PASS
11ac(HT40)	CH38	5190	40.42	PASS
11ac(HT40)	CH46	5230	40.53	PASS
11ac(HT80)	CH42	5210	81.11	PASS

Test plots as follows:




Band I (5150 – 5250 MHz)



802.11a




LOW

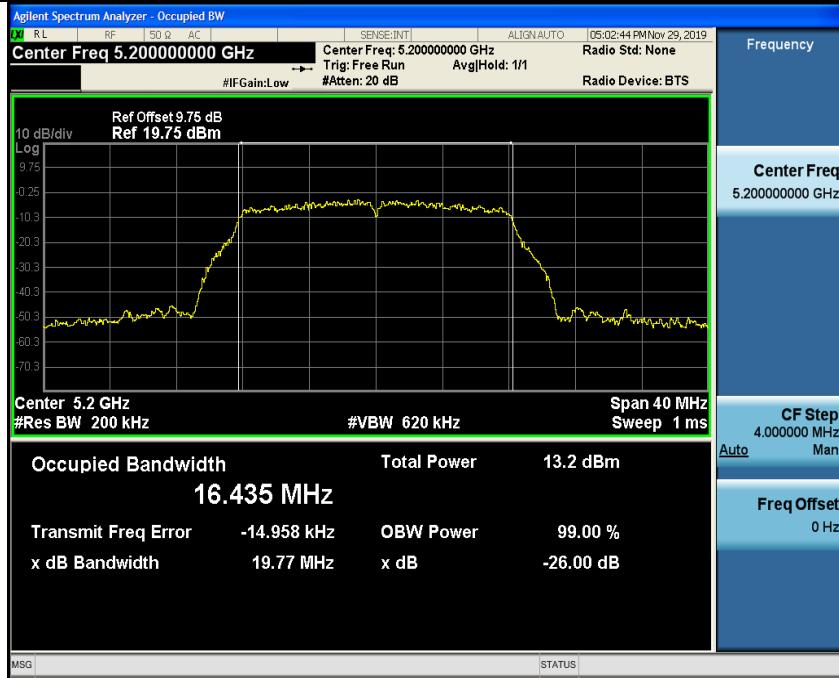


Mid

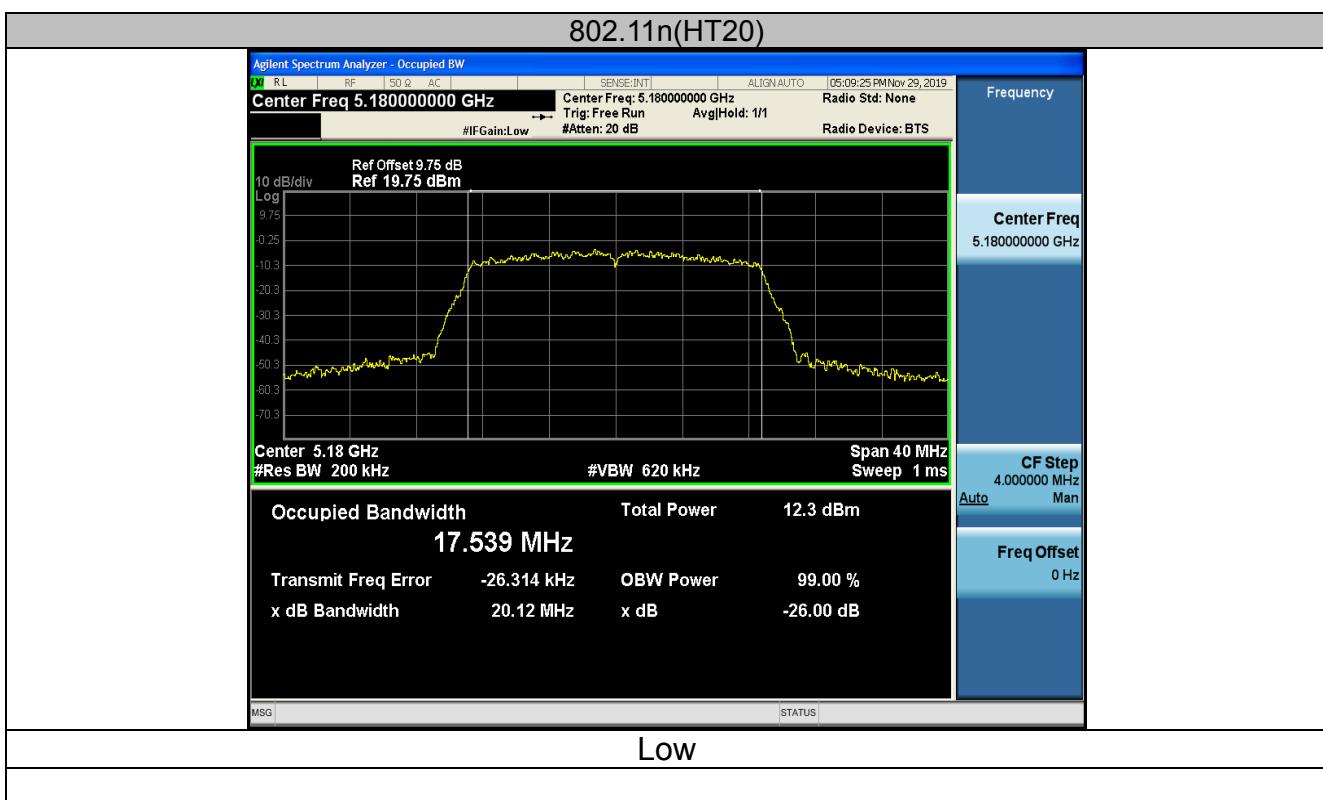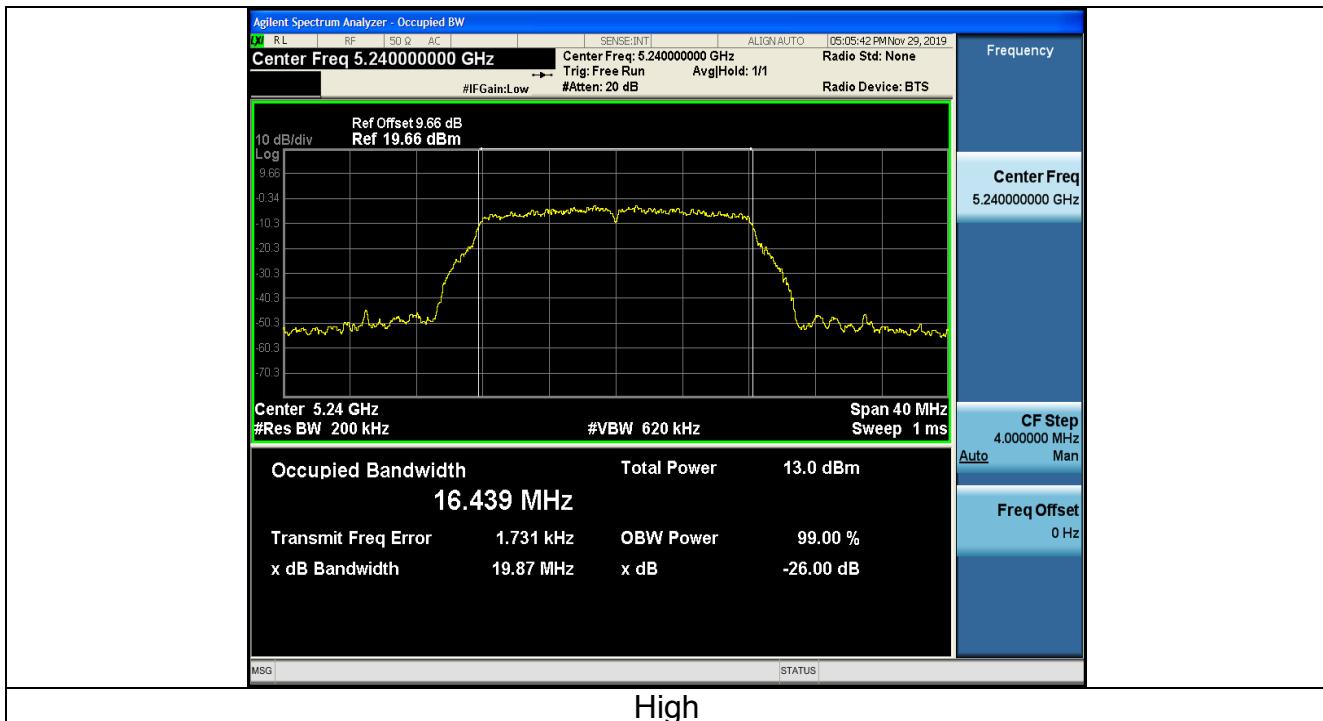

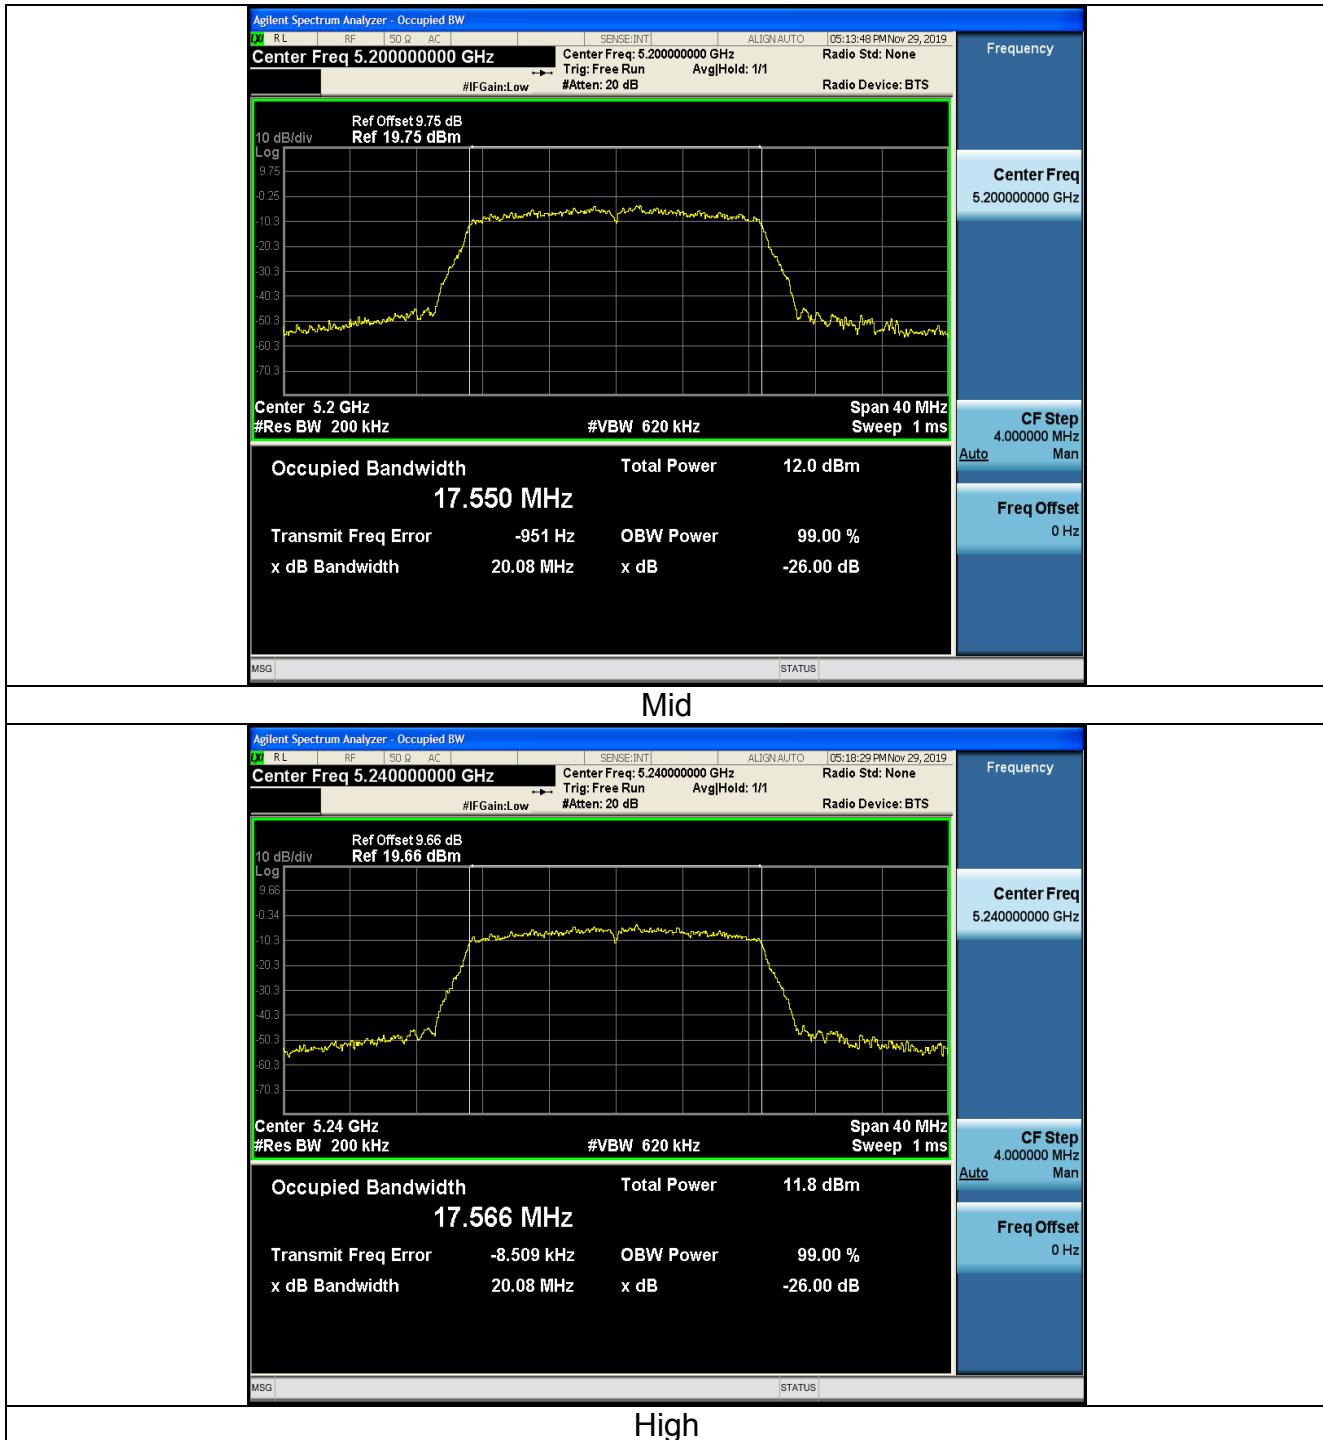




802.11n(HT40)

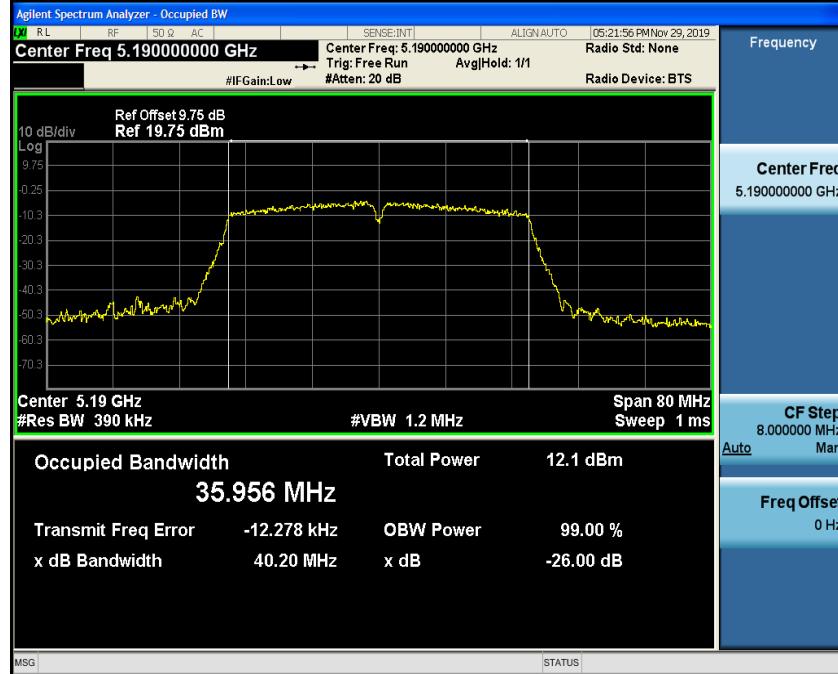

LOW





High

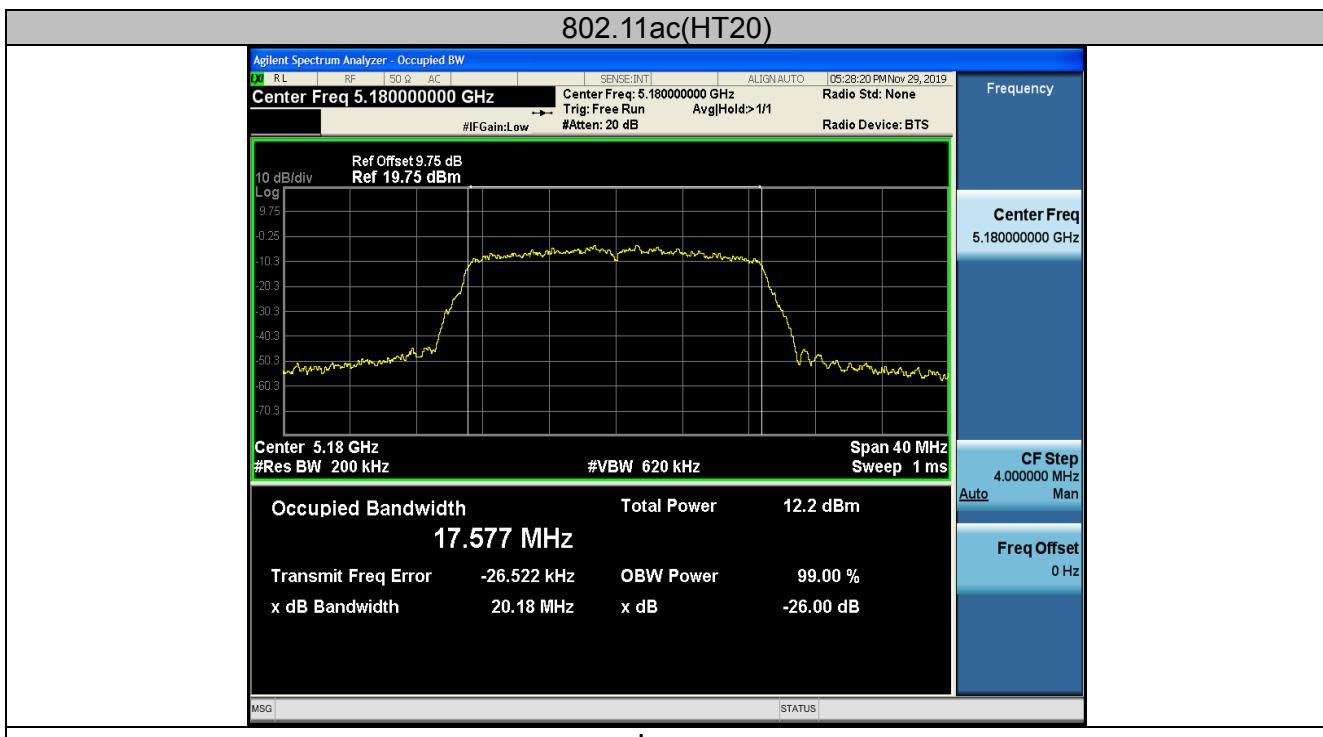


LOW



Mid

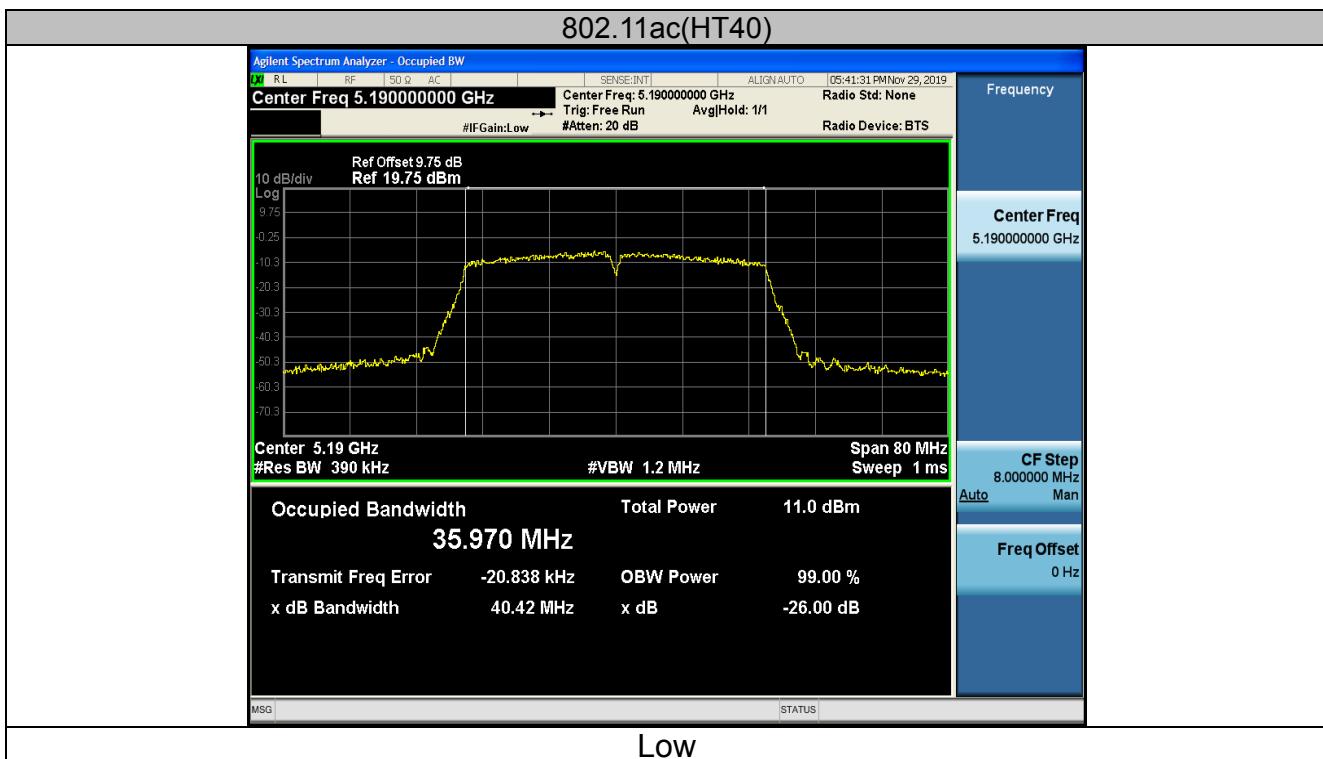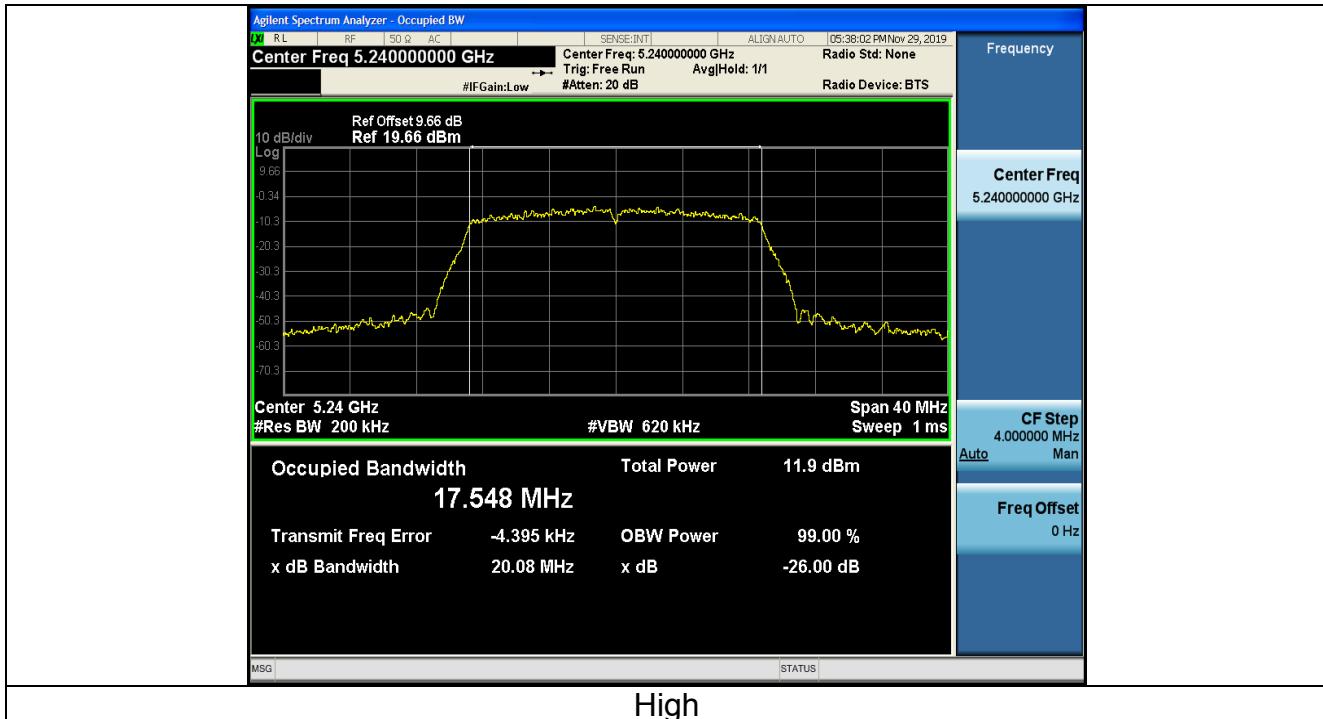

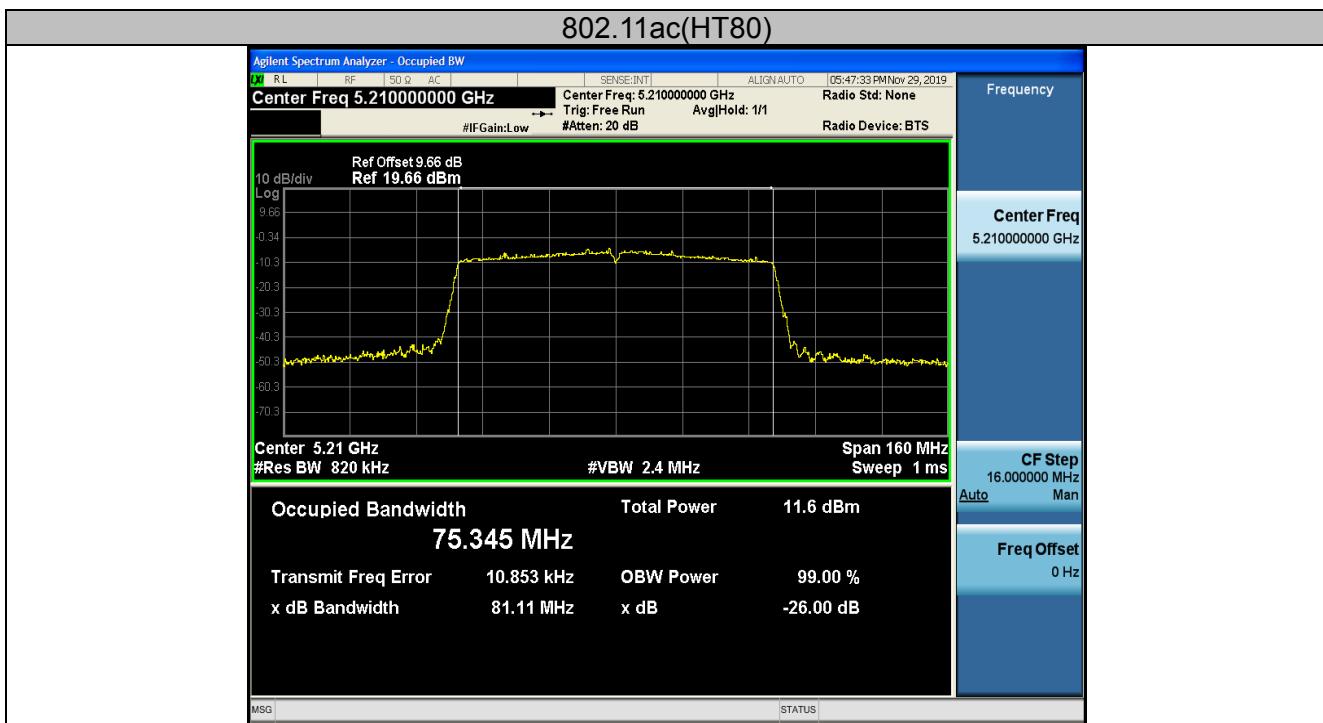



4.5. Power Spectral Density

4.5.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	≤17.00dBm/MHz for Band I 5150MHz-5250MHz ≤30.00dBm/500KHz for Band IV 5725MHz-5850MHz
Test Setup:	<p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW \geq 3*RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

4.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.5.3. Test data


ANT 1


Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	-0.23	0	-0.23	17	PASS
11a	CH40	0.02	0	0.02	17	PASS
11a	CH48	-0.73	0	-0.73	17	PASS
11n(HT20)	CH36	-0.27	0	-0.27	17	PASS
11n(HT20)	CH40	-0.69	0	-0.69	17	PASS
11n(HT20)	CH48	-0.28	0	-0.28	17	PASS
11n(HT40)	CH38	-2.75	0	-2.75	17	PASS
11n(HT40)	CH46	-2.22	0	-2.22	17	PASS
11ac(HT20)	CH36	-0.85	0	-0.85	17	PASS
11ac(HT20)	CH40	-1.24	0	-1.24	17	PASS
11ac(HT20)	CH48	-0.42	0	-0.42	17	PASS
11ac(HT40)	CH38	-4.61	0	-4.61	17	PASS
11ac(HT40)	CH46	-5.32	0	-5.32	17	PASS
11ac(HT80)	CH42	-7.27	0	-7.27	17	PASS




Test plots as follows:

Band I (5150 – 5250 MHz)

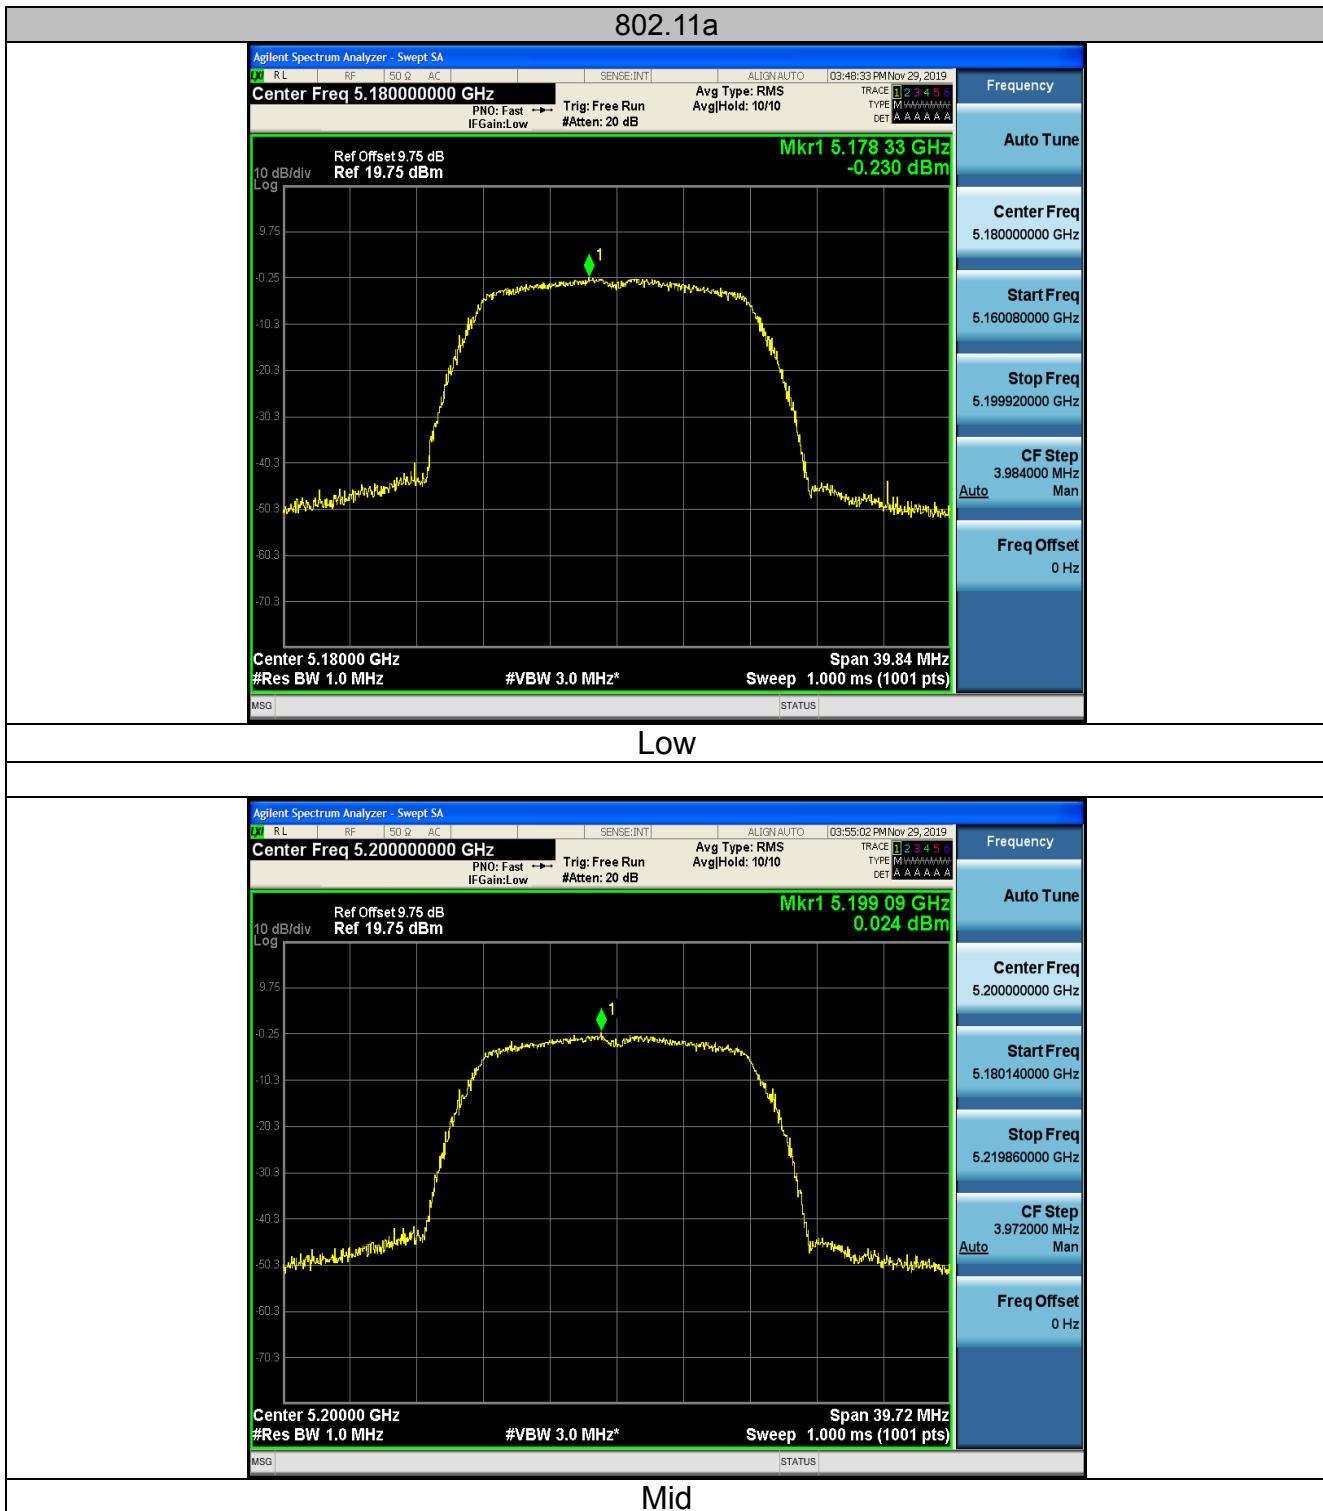


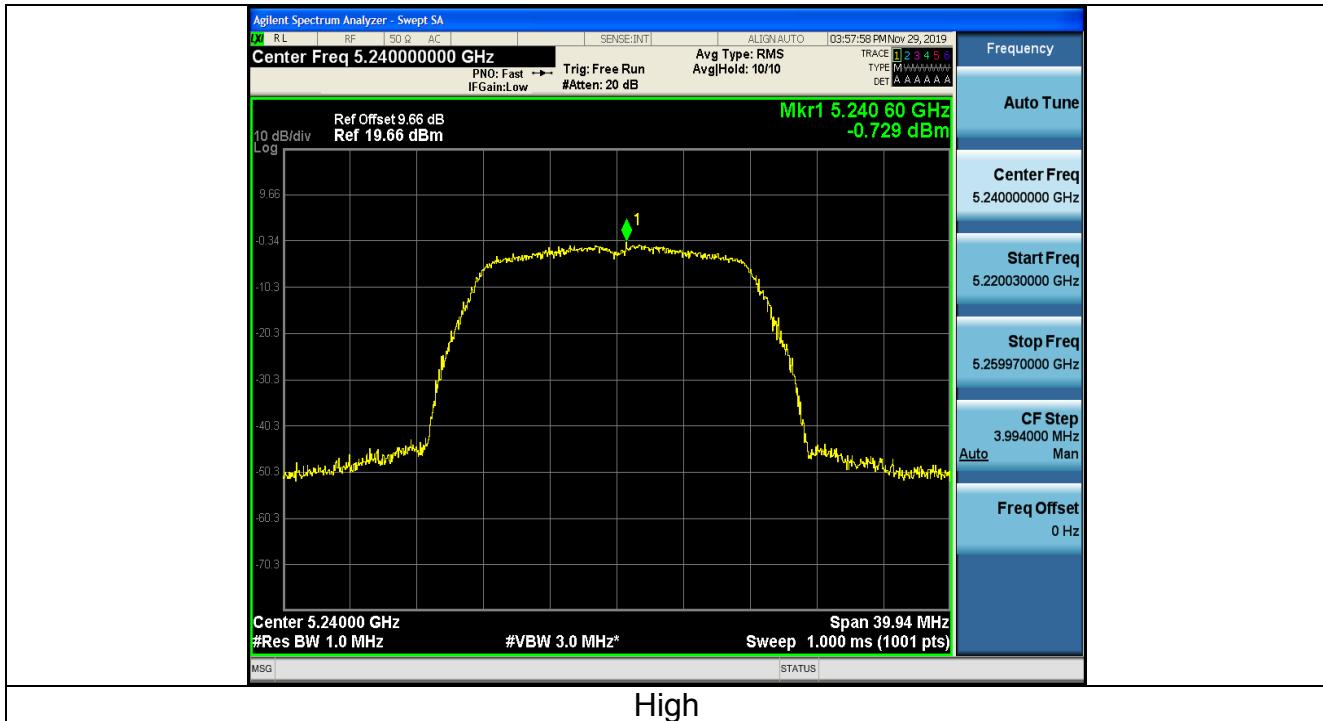

High

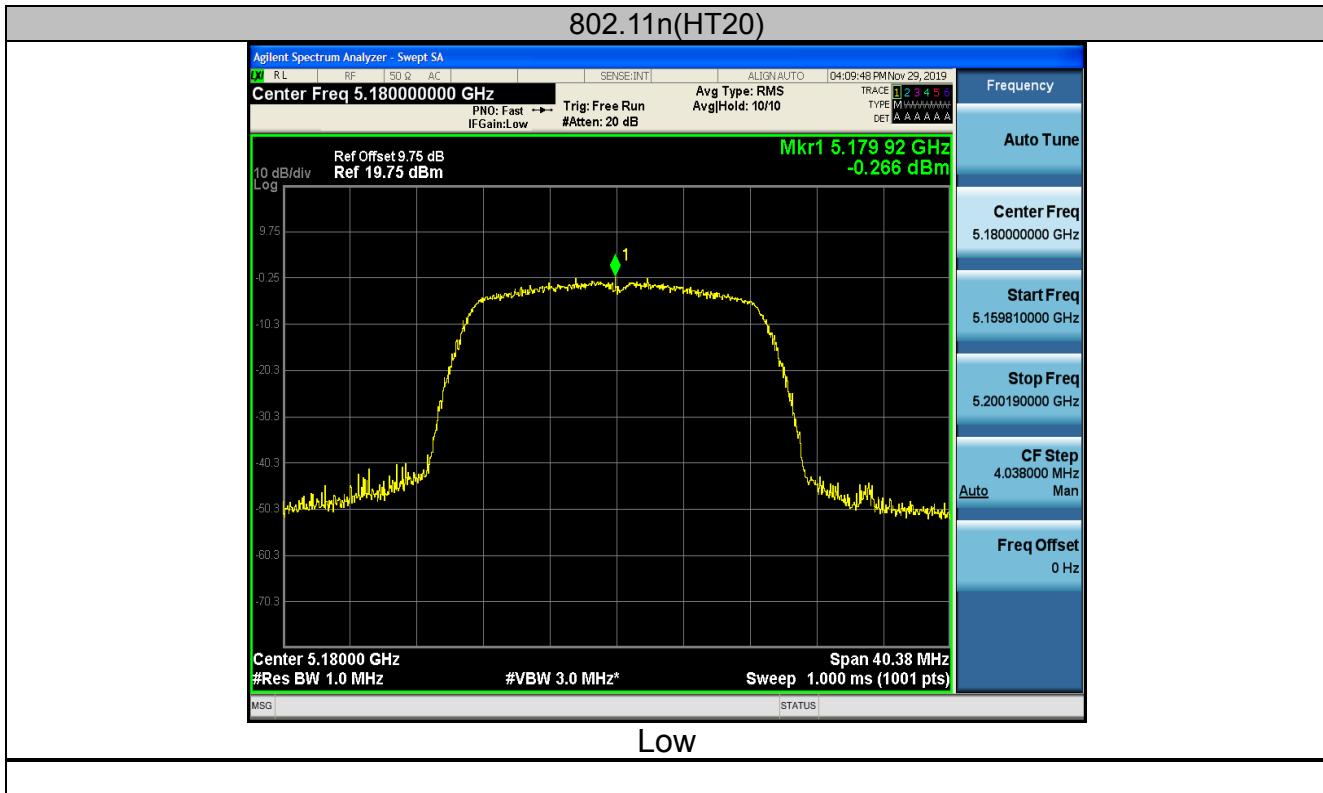


LOW

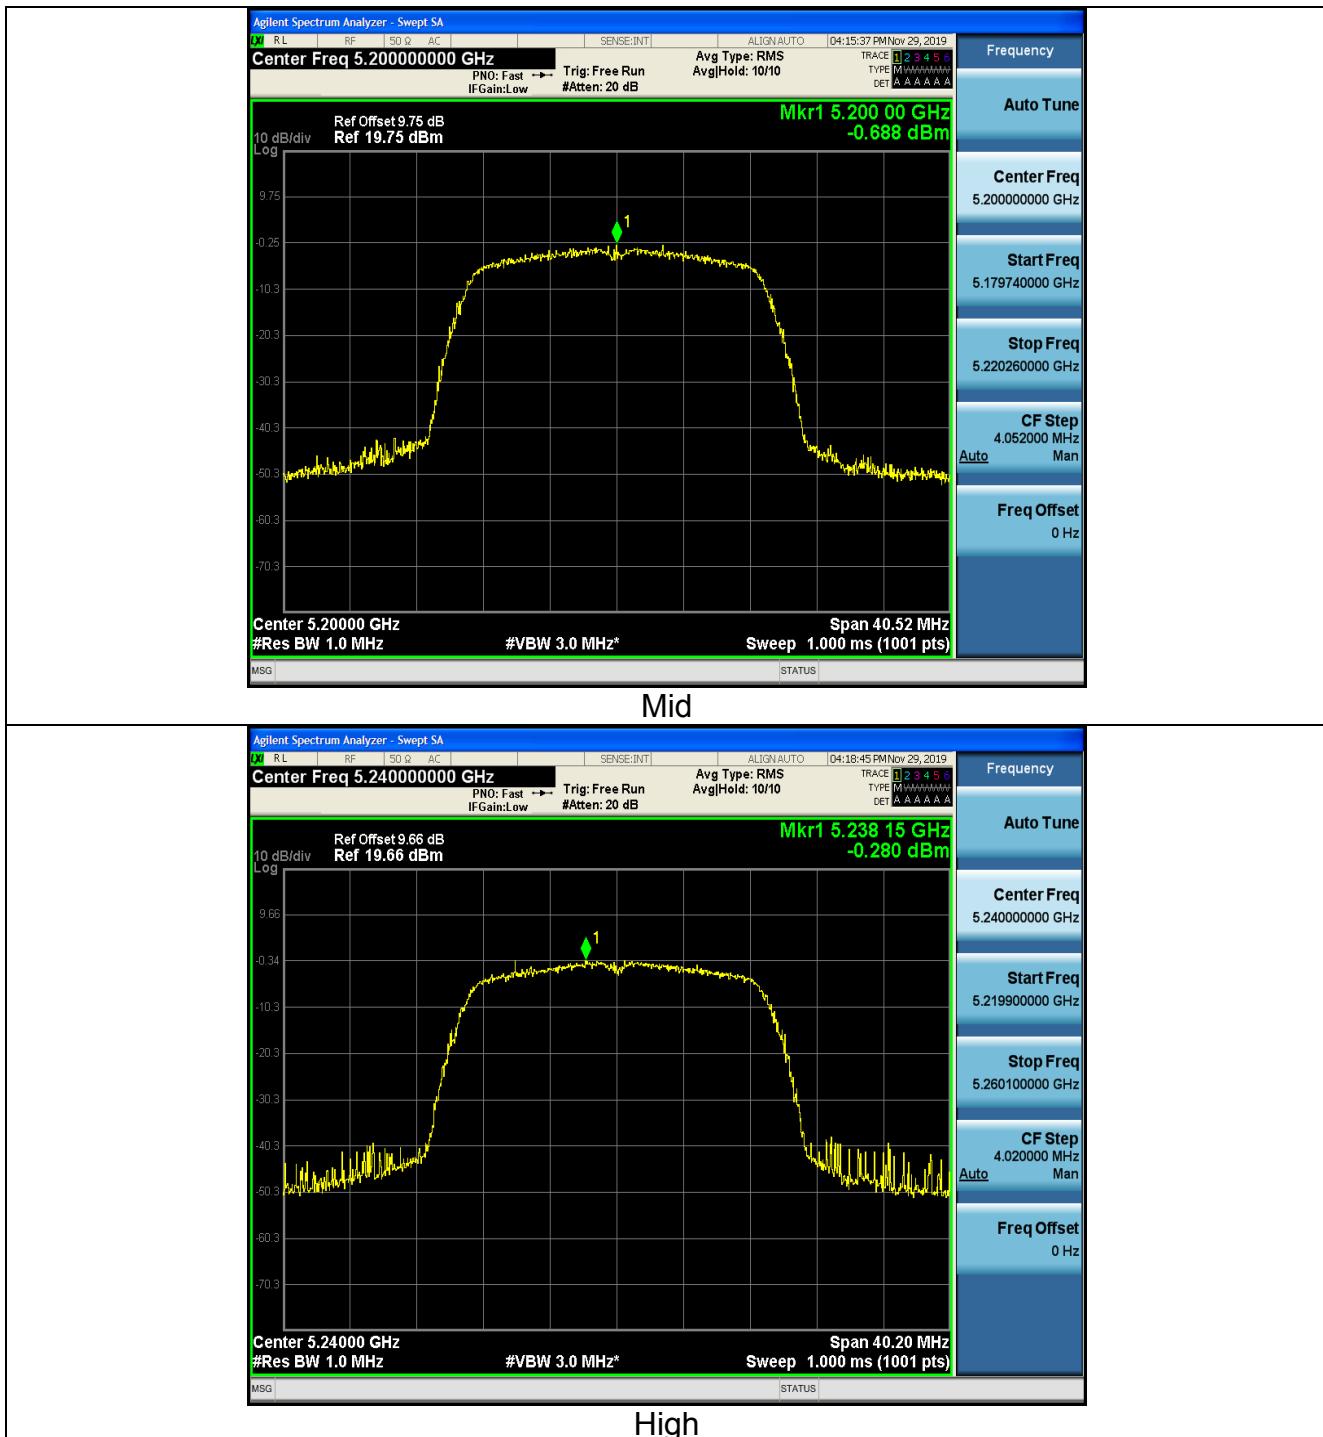



802.11n(HT40)

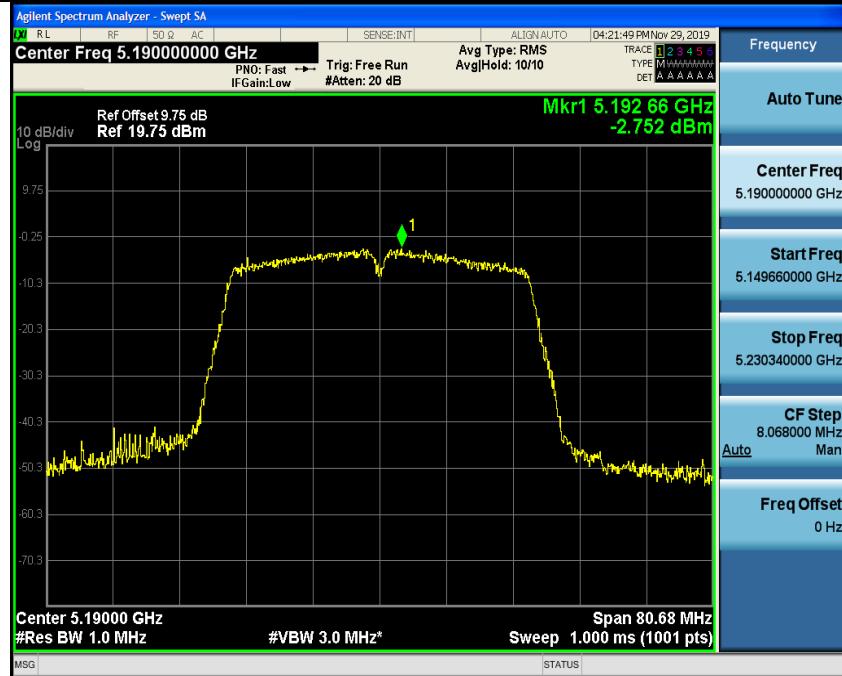

LOW



High





802.11ac(HT20)





LOW



Mid

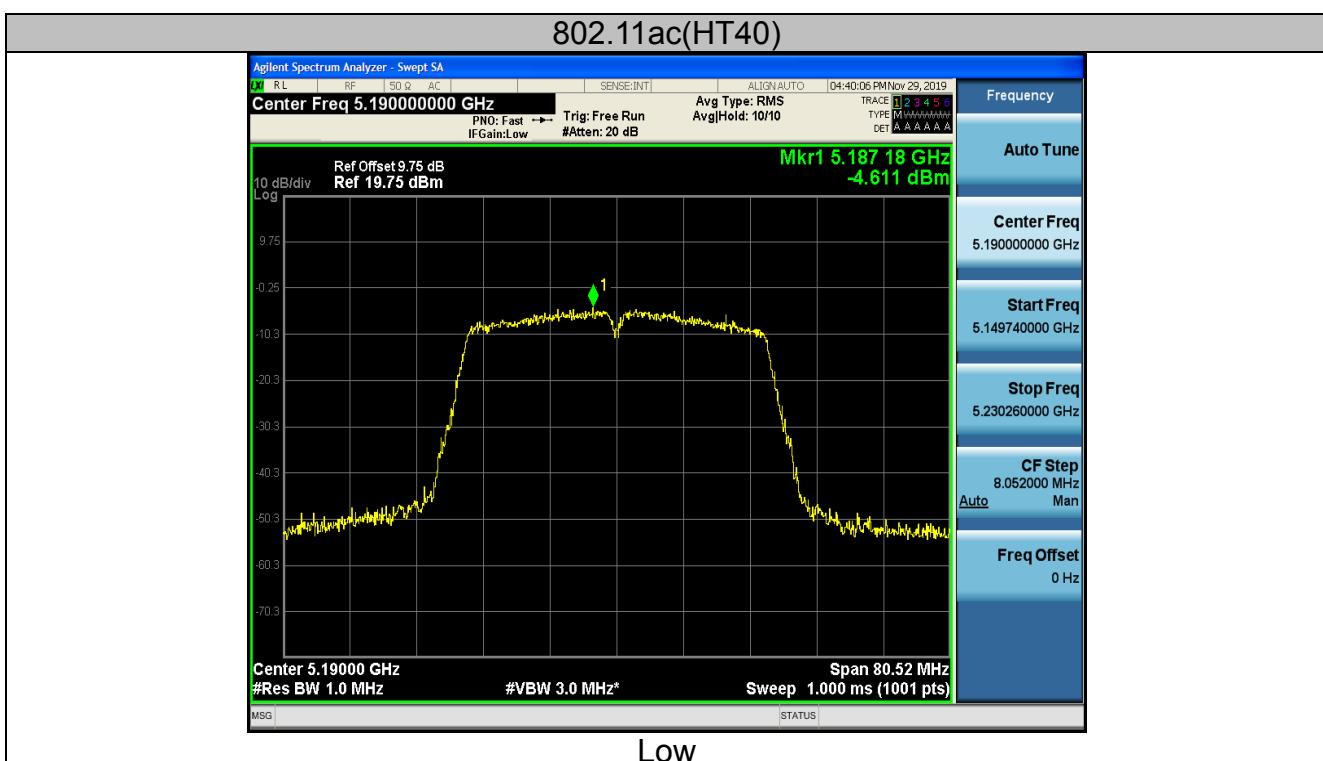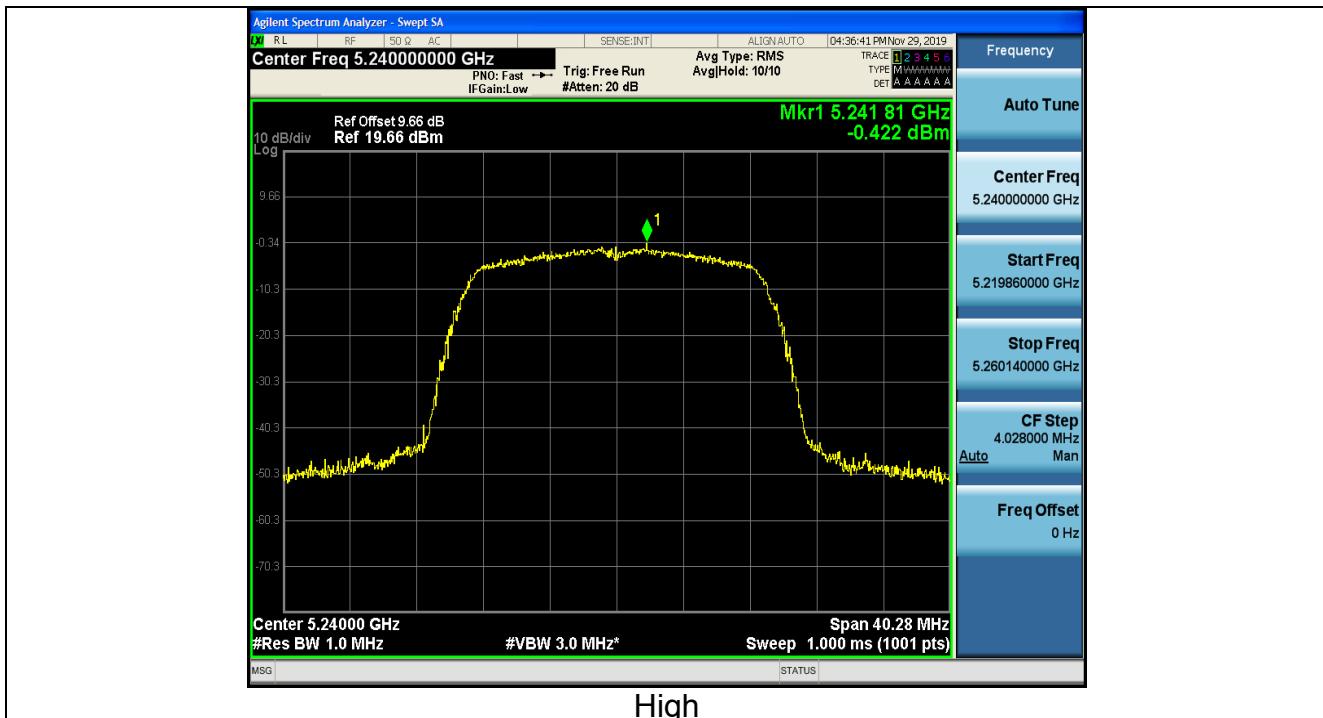

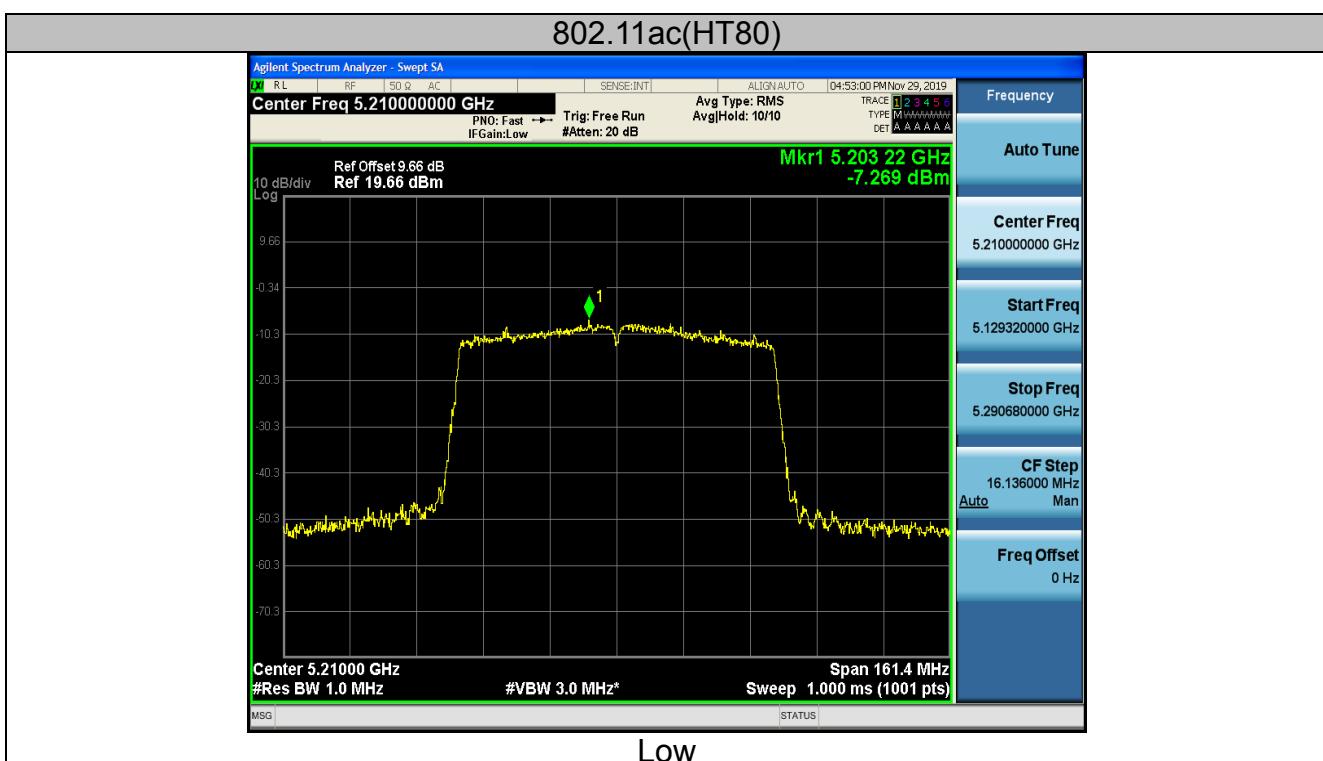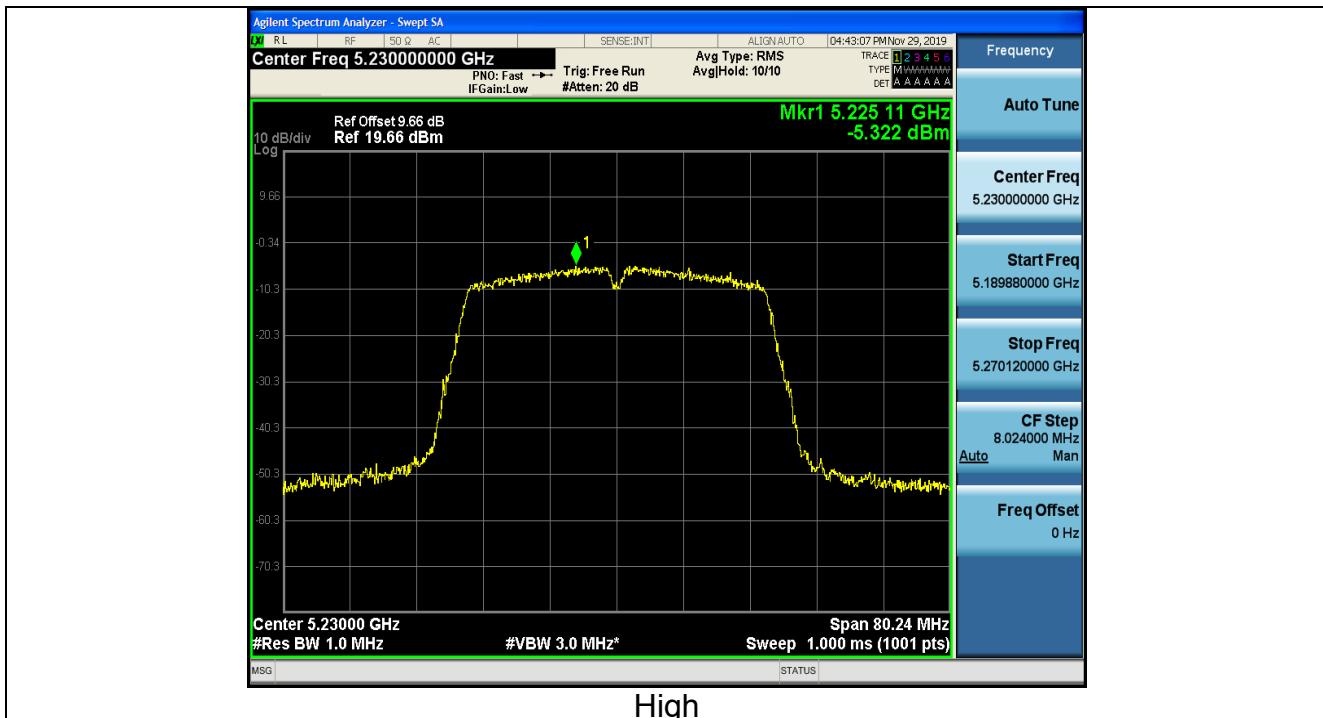




ANT 2


Configuration Band I (5150 - 5250 MHz)

Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	2.31	0	2.31	17	PASS
11a	CH40	1.37	0	1.37	17	PASS
11a	CH48	1.46	0	1.46	17	PASS
11n(HT20)	CH36	0.49	0	0.49	17	PASS
11n(HT20)	CH40	-0.21	0	-0.21	17	PASS
11n(HT20)	CH48	-0.19	0	-0.19	17	PASS
11n(HT40)	CH38	-2.79	0	-2.79	17	PASS
11n(HT40)	CH46	-2.68	0	-2.68	17	PASS
11ac(HT20)	CH36	0.67	0	0.67	17	PASS
11ac(HT20)	CH40	0.25	0	0.25	17	PASS
11ac(HT20)	CH48	0.38	0	0.38	17	PASS
11ac(HT40)	CH38	-3.13	0	-3.13	17	PASS
11ac(HT40)	CH46	-4.15	0	-4.15	17	PASS
11ac(HT80)	CH42	-6.38	0	-6.38	17	PASS




Test plots as follows:
Band I (5150 – 5250 MHz)

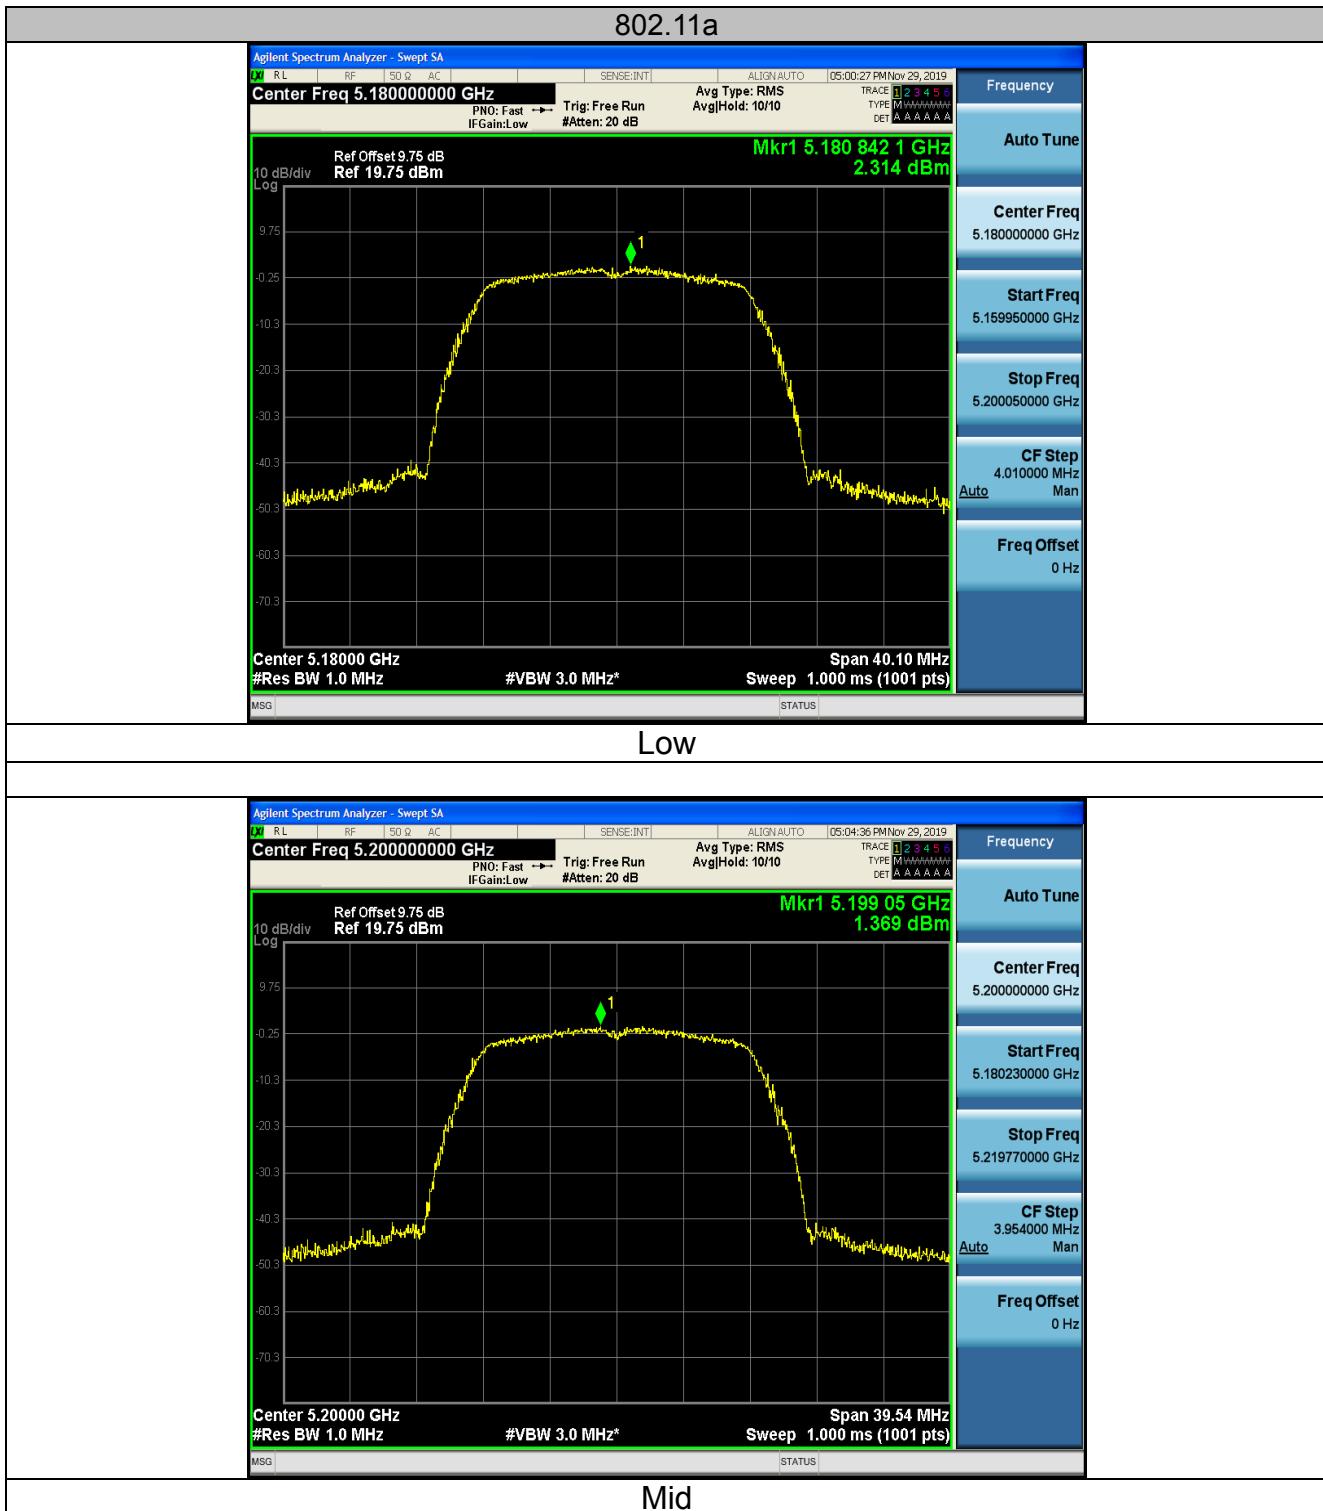


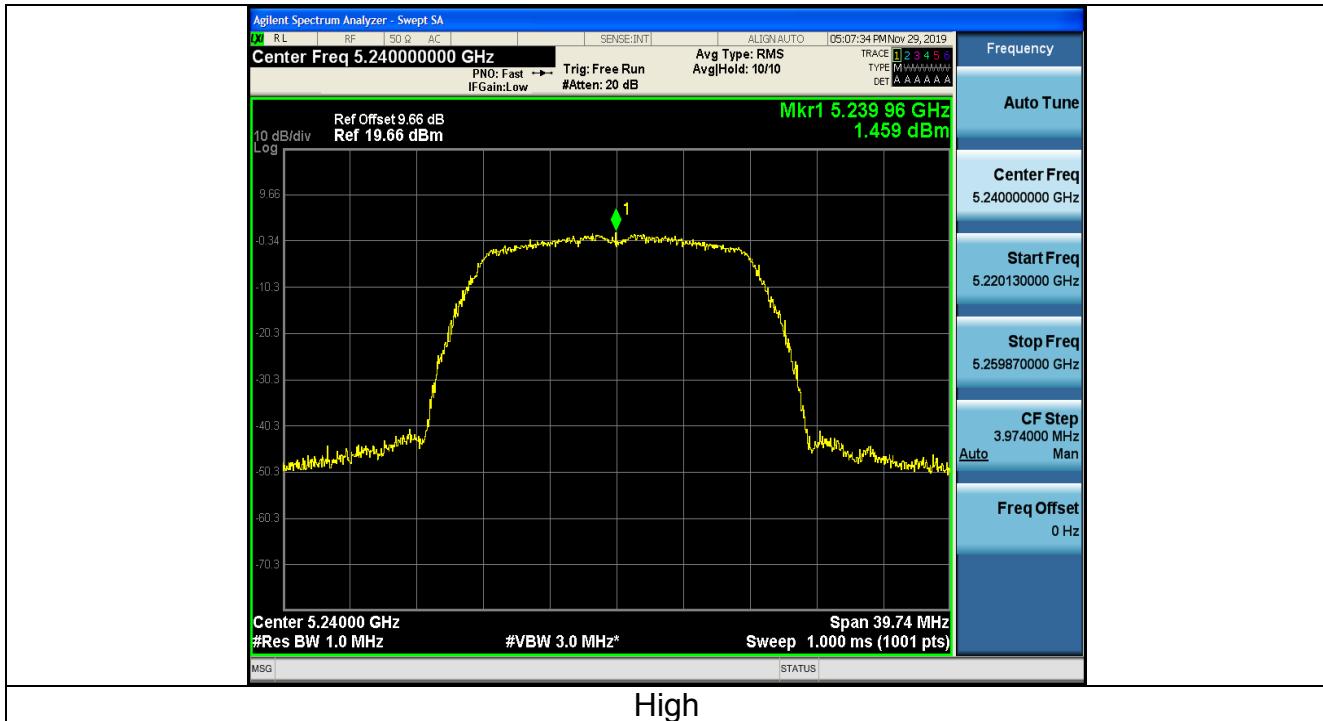

High

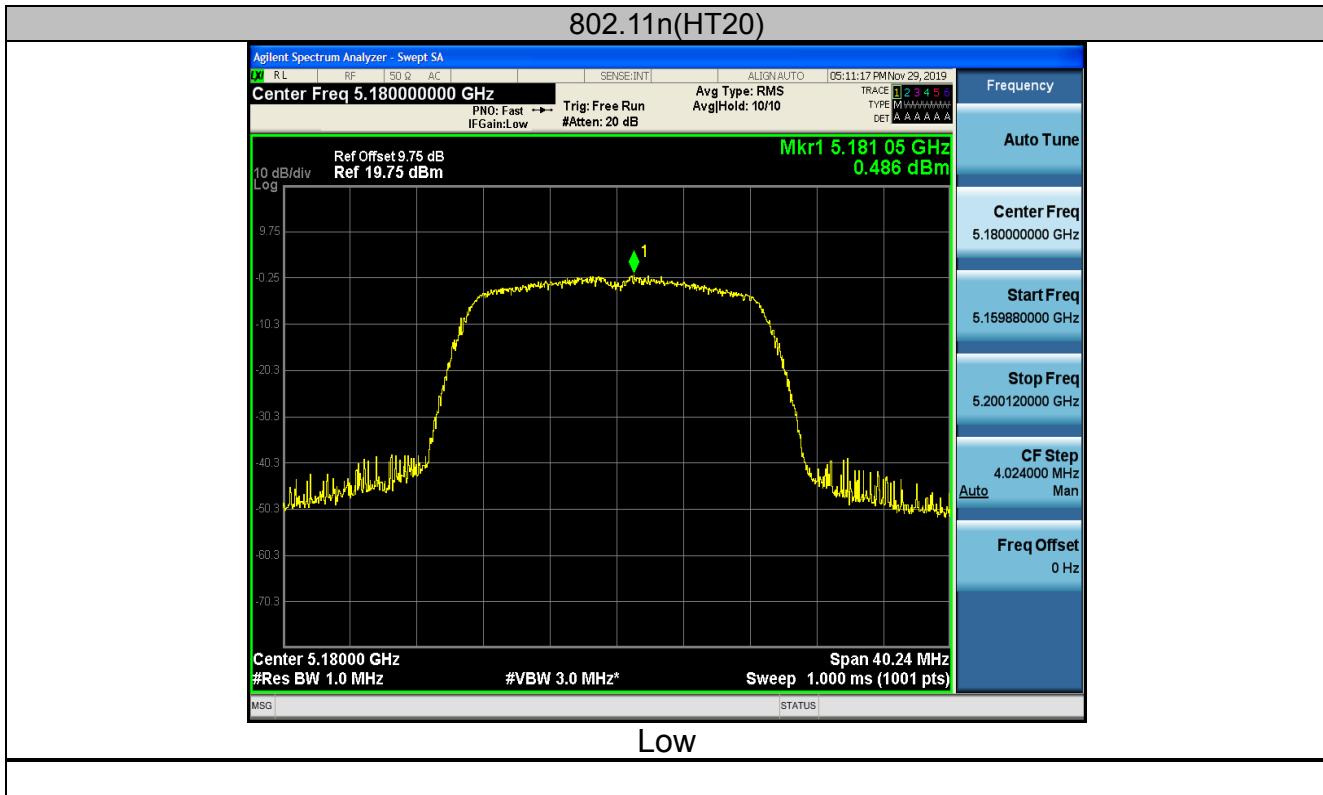

LOW

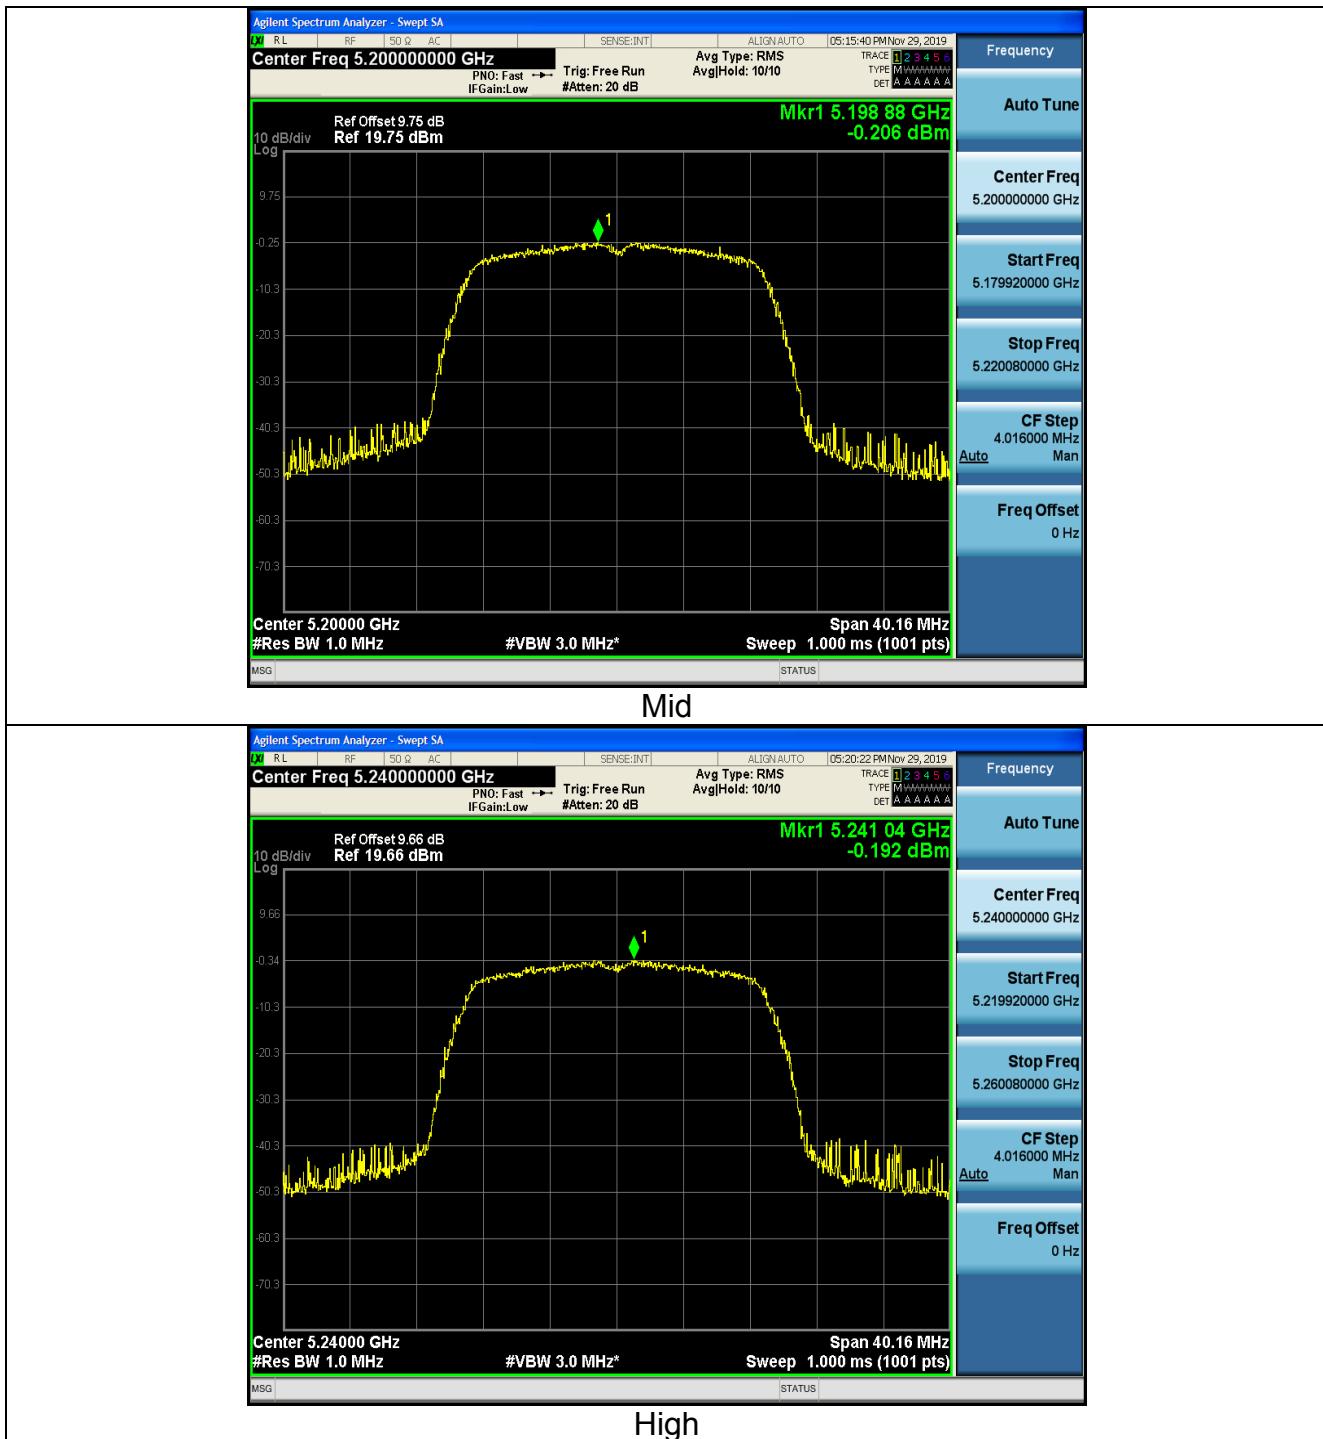



802.11n(HT40)



LOW




High





802.11ac(HT20)




LOW

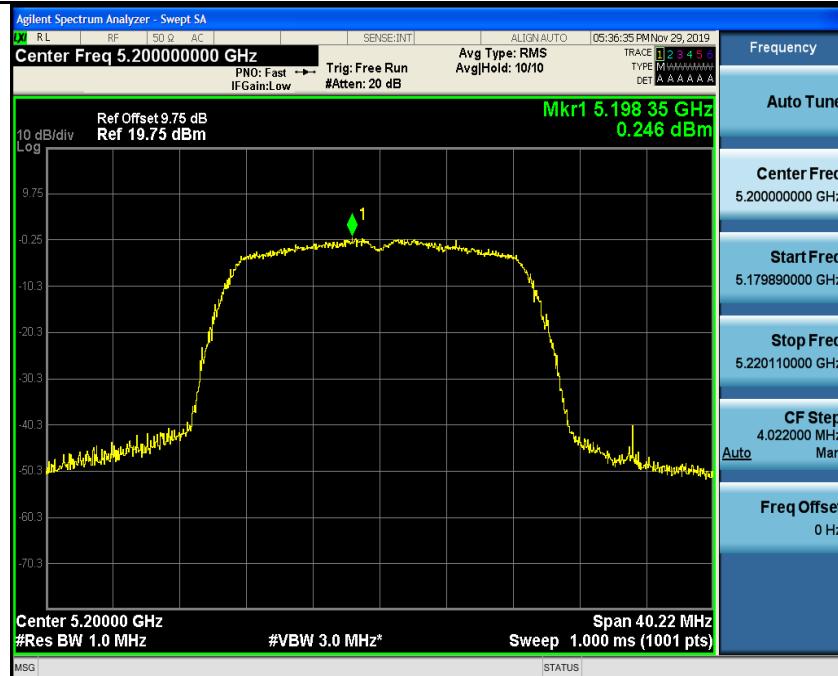

Mid

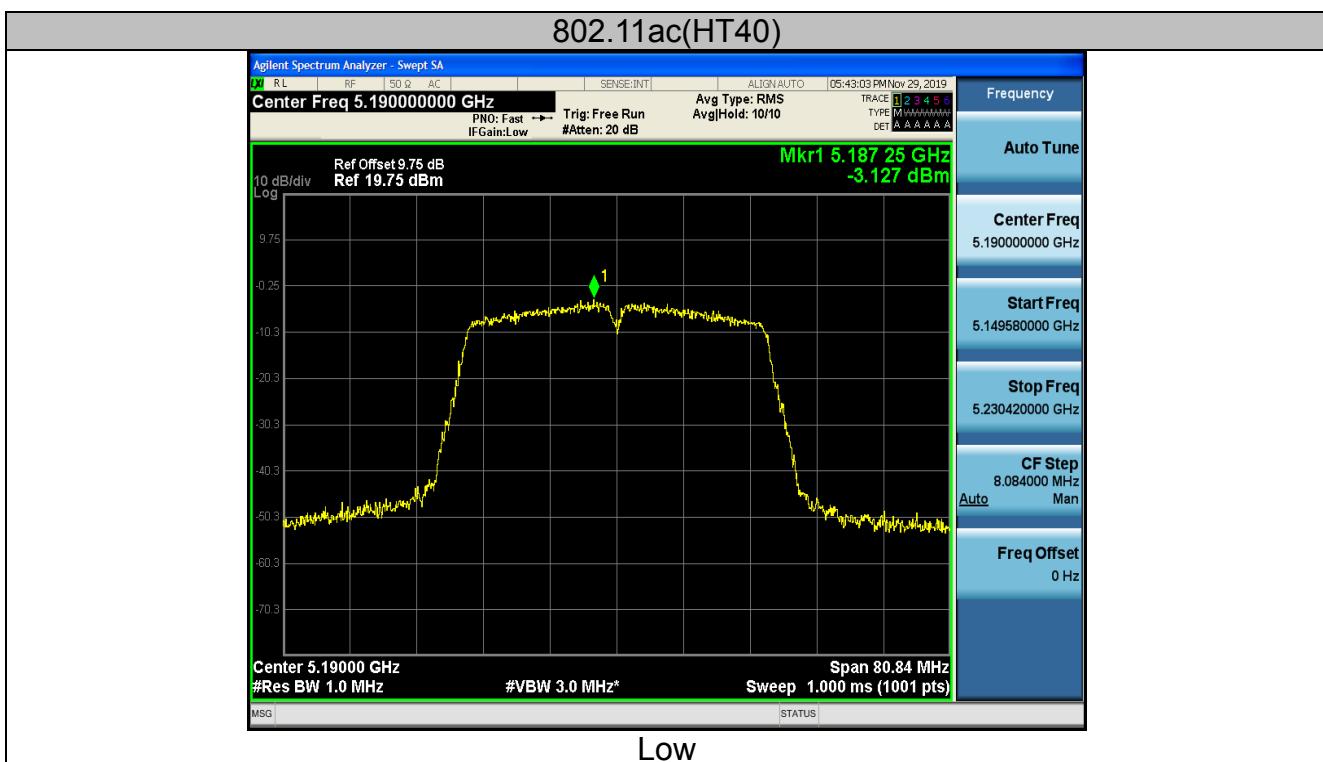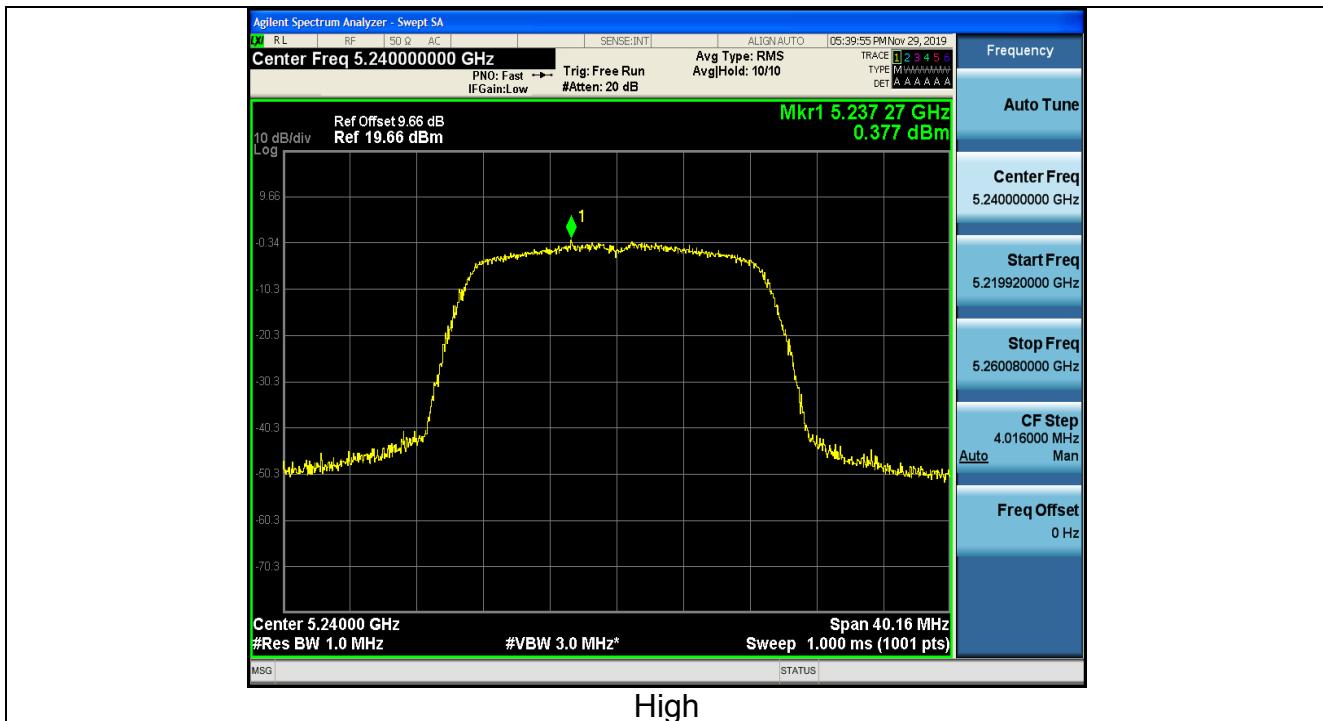

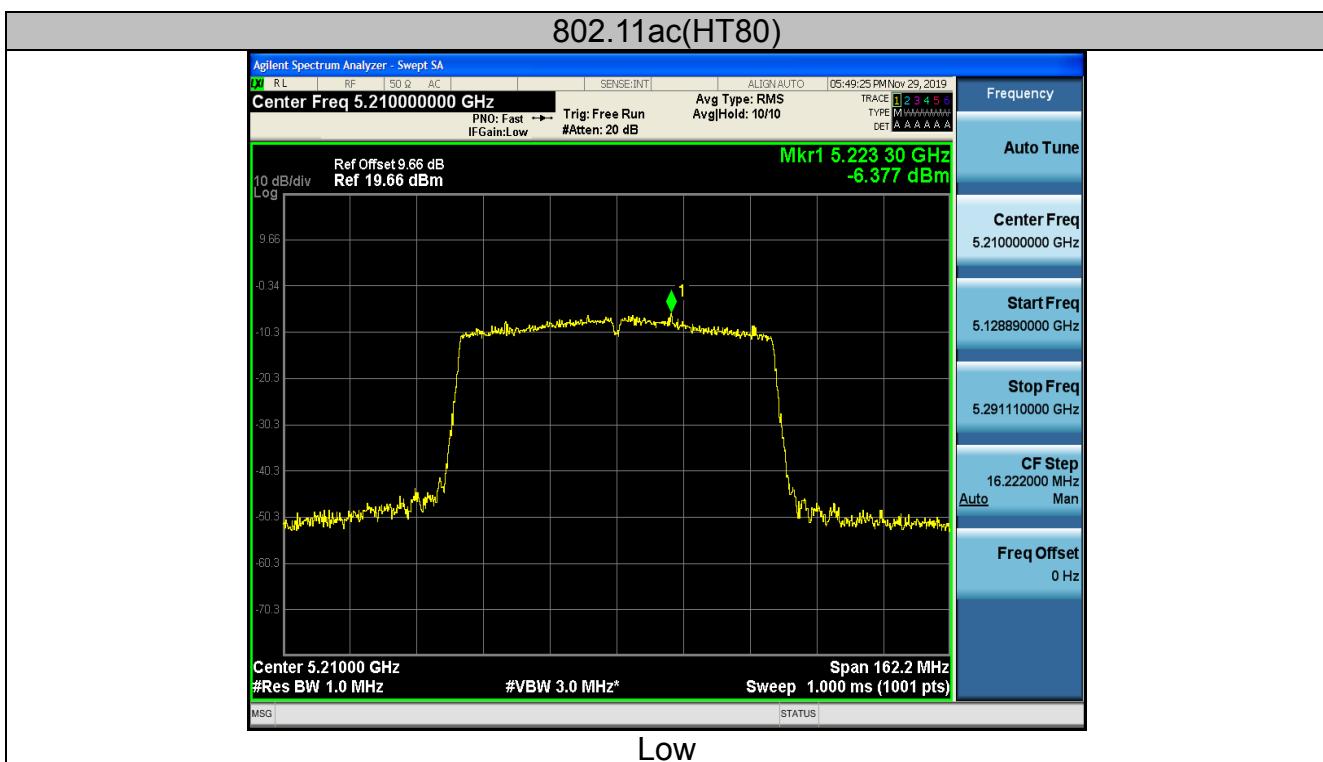



**For MIMO antenna port 1+antenna port 2
Configuration Band IV (5150 - 5250MHz)**

Mode	Test channel	Power Density (dBm)	Limit (dBm)	Result
11a	CH36	/	17	/
11a	CH40	/	17	/
11a	CH48	/	17	/
11n(HT20)	CH36	3.14	17	PASS
11n(HT20)	CH40	2.57	17	PASS
11n(HT20)	CH48	2.78	17	PASS
11n(HT40)	CH38	0.24	17	PASS
11n(HT40)	CH46	0.57	17	PASS
11ac(HT20)	CH36	2.99	17	PASS
11ac(HT20)	CH40	2.58	17	PASS
11ac(HT20)	CH48	3.01	17	PASS
11ac(HT40)	CH38	-0.80	17	PASS
11ac(HT40)	CH46	-1.69	17	PASS
11ac(HT80)	CH42	-3.79	17	PASS
Note: 1 According to KDB 662911, Result power = $10\log(10^{(\text{ant1}/10)} + 10^{(\text{ant2}/10)})$. 2 Result unit: W, The end result is converted to units of dBm.				

Note: This product supports antenna 1 and antenna 2 launch, but only support 802.11 n/ac for MIMO mode,
not support 802.11 a for MIMO mode.

4.6. Band edge

4.6.1. Test Specification

Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	<p>For band I&II&III: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for EIRP(dBm)= -27dBm</p> <p>For transmitters operating in the 5.725-5.85 GHz band:</p> <p>All emissions shall be limited to a level of $-27 \text{ dBm}/\text{MHz}$ at 75 MHz or more above or below the band edge increasing linearly to $10 \text{ dBm}/\text{MHz}$ at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of $15.6 \text{ dBm}/\text{MHz}$ at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of $27 \text{ dBm}/\text{MHz}$ at the band edge.</p> <p>For band IV(5715-5725MHz&5850-5860MHz): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}$, for EIRP(dBm)= -27dBm;</p> <p>For band IV(other un-restricted band): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for EIRP(dBm)= -27dBm</p>
Test Setup:	
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the



	<p>maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</p>
Test Result:	PASS



4.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESRP3	HKE-005	Dec. 27, 2019
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Preamplifier	EMCI	EMC051845S E	HKE-015	Dec. 27, 2019
Preamplifier	Agilent	83051A	HKE-016	Dec. 27, 2019
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2019
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2019
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Dec. 27, 2019
RF cable	Tonscend	1-18G	HKE-099	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.6.3. Test Data

ANT 1

Operation Mode: 802.11a Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.51	-2.49	49.02	74	-24.98	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	52.22	-2.49	49.73	74	-24.27	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.47	-2.28	51.19	74	-22.81	peak
5250	/	-2.28	/	54	/	AVG
5350	51.64	-2.11	49.53	74	-24.47	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	52.32	-2.28	50.04	74	-23.96	peak
5250	/	-2.28	/	54	/	AVG
5350	51.47	-2.11	49.36	74	-24.64	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	53.87	-2.49	51.38	74	-22.62	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.11	-2.49	48.62	74	-25.38	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	51.73	-2.28	49.45	74	-24.55	peak
5250	/	-2.28	/	54	/	AVG
5350	50.12	-2.11	48.01	74	-25.99	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.36	-2.28	51.08	74	-22.92	peak
5250	/	-2.28	/	54	/	AVG
5350	50.12	-2.11	48.01	74	-25.99	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 n40 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	52.01	-2.49	49.52	74	-24.48	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.79	-2.49	49.3	74	-24.7	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.44	-2.28	51.16	74	-22.84	peak
5250	/	-2.28	/	54	/	AVG
5350	50.01	-2.11	47.9	74	-26.1	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	52.27	-2.28	49.99	74	-24.01	peak
5250	/	-2.28	/	54	/	AVG
5350	49.77	-2.11	47.66	74	-26.34	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac20 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	52.96	-2.49	50.47	74	-23.53	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	52.21	-2.49	49.72	74	-24.28	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.14	-2.28	50.86	74	-23.14	peak
5250	/	-2.28	/	54	/	Avg
5350	52.32	-2.11	50.21	74	-23.79	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.25	-2.28	50.97	74	-23.03	peak
5250	/	-2.28	/	54	/	Avg
5350	50.88	-2.11	48.77	74	-25.23	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac40 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	53.13	-2.49	50.64	74	-23.36	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.31	-2.49	48.82	74	-25.18	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	65.51	-2.28	63.23	74	-10.77	peak
5250	/	-2.28	/	54	/	Avg
5350	52.63	-2.11	50.52	74	-23.48	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	64.12	-2.28	61.84	74	-12.16	peak
5250	/	-2.28	/	54	/	Avg
5350	51.43	-2.11	49.32	74	-24.68	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac80 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	53.02	-2.49	50.53	74	-23.47	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.37	-2.49	48.88	74	-25.12	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.15	-2.28	50.87	74	-23.13	peak
5250	/	-2.28	/	54	/	Avg
5350	51.17	-2.11	49.06	74	-24.94	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.69	-2.28	51.41	74	-22.59	peak
5250	/	-2.28	/	54	/	Avg
5350	50.74	-2.11	48.63	74	-25.37	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**ANT 2**

Operation Mode: 802.11a Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.34	-2.49	48.85	74	-25.15	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	52.31	-2.49	49.82	74	-24.18	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.91	-2.28	51.63	74	-22.37	peak
5250	/	-2.28	/	54	/	AVG
5350	52.1	-2.11	49.99	74	-24.01	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	52.13	-2.28	49.85	74	-24.15	peak
5250	/	-2.28	/	54	/	AVG
5350	51.46	-2.11	49.35	74	-24.65	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	56.31	-2.49	53.82	74	-20.18	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.94	-2.49	49.45	74	-24.55	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	55.12	-2.28	52.84	74	-21.16	peak
5250	/	-2.28	/	54	/	AVG
5350	51.35	-2.11	49.24	74	-24.76	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.21	-2.28	50.93	74	-23.07	peak
5250	/	-2.28	/	54	/	AVG
5350	50.37	-2.11	48.26	74	-25.74	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 n40 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	52.1	-2.49	49.61	74	-24.39	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	52.32	-2.49	49.83	74	-24.17	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.21	-2.28	50.93	74	-23.07	peak
5250	/	-2.28	/	54	/	AVG
5350	50.01	-2.11	47.9	74	-26.1	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	52.79	-2.28	50.51	74	-23.49	peak
5250	/	-2.28	/	54	/	AVG
5350	51.51	-2.11	49.4	74	-24.6	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac20 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	54.78	-2.49	52.29	74	-21.71	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	52.32	-2.49	49.83	74	-24.17	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	54.47	-2.28	52.19	74	-21.81	peak
5250	/	-2.28	/	54	/	Avg
5350	52.02	-2.11	49.91	74	-24.09	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.21	-2.28	50.93	74	-23.07	peak
5250	/	-2.28	/	54	/	Avg
5350	50.16	-2.11	48.05	74	-25.95	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac40 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	53.56	-2.49	51.07	74	-22.93	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.71	-2.49	49.22	74	-24.78	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	56.41	-2.28	54.13	74	-19.87	peak
5250	/	-2.28	/	54	/	Avg
5350	52.21	-2.11	50.1	74	-23.9	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	53.61	-2.28	51.33	74	-22.67	peak
5250	/	-2.28	/	54	/	Avg
5350	50.31	-2.11	48.2	74	-25.8	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac80 Mode with 5.2G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.31	-2.49	48.82	74	-25.18	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5150	51.21	-2.49	48.72	74	-25.28	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	55.41	-2.28	53.13	74	-20.87	peak
5250	/	-2.28	/	54	/	Avg
5350	50.62	-2.11	48.51	74	-25.49	peak
5350	/	-2.11	/	54	/	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
5250	52.41	-2.28	50.13	74	-23.87	peak
5250	/	-2.28	/	54	/	Avg
5350	50.3	-2.11	48.19	74	-25.81	peak
5350	/	-2.11	/	54	/	Avg


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.




4.7. Spurious Emission

4.7.1.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205							
Test Method:	KDB 789033 D02 v02r01							
Frequency Range:	9kHz to 40GHz							
Measurement Distance:	3 m							
Antenna Polarization:	Horizontal & Vertical							
Operation mode:	Transmitting mode with modulation							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value			
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value			
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
	Above 1GHz	Peak	1MHz	10Hz	Average Value			
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,							
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)					
	0.009-0.490	2400/F(KHz)	300					
	0.490-1.705	24000/F(KHz)	30					
	1.705-30	30	30					
	30-88	100	3					
	88-216	150	3					
	216-960	200	3					
	Above 960	500	3					
	Frequency	Limit (dBuV/m @3m)	Detector					
	Above 1G	74.0	Peak					
		54.0	Average					
Test setup:	For radiated emissions below 30MHz							
	 Distance = 3m Turn table Ground Plane							
	30MHz to 1GHz							

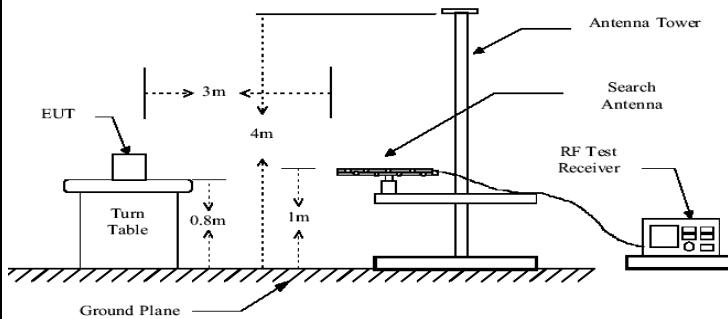

Above 1GHz

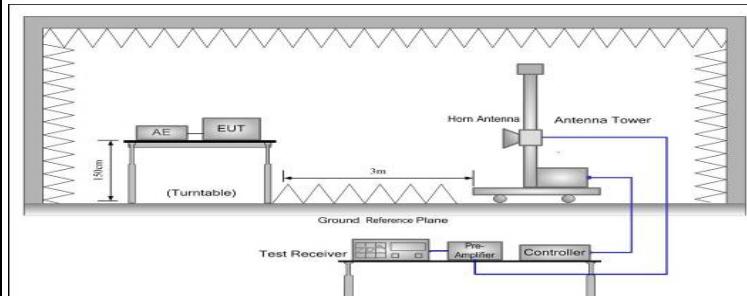

Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test results:

PASS




4.7.2. Test Data

test mode: TX 802.11a 5180MHz

All the test modes completed for test. The worst case of Radiated Emission; the test data of this mode was reported.

Below 1GHz

Horizontal

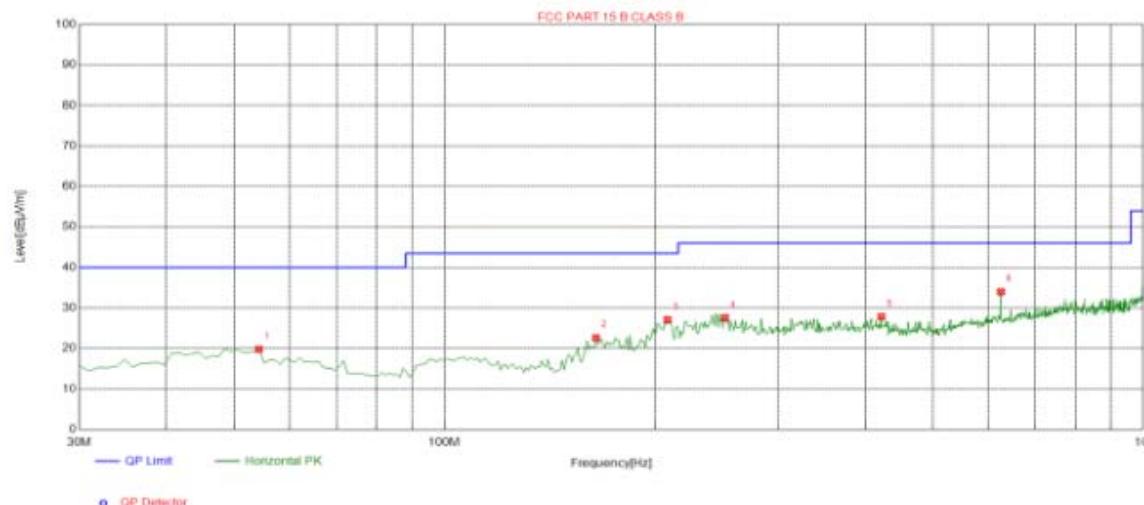

Suspected List


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	54.2500	19.79	-14.29	40.00	20.21	100	54	Horizontal
2	164.830	22.65	-17.78	43.50	20.85	100	57	Horizontal
3	208.480	27.06	-14.84	43.50	16.44	100	101	Horizontal
4	252.130	27.56	-13.42	46.00	18.44	100	270	Horizontal
5	421.880	27.82	-10.00	46.00	18.18	100	129	Horizontal
6	625.580	34.00	-5.50	46.00	12.00	100	305	Horizontal

Remark:

Margin = Limit – Level

Level=Test receiver reading + factor

Factor= Antenna factor + cable loss- Amp factor

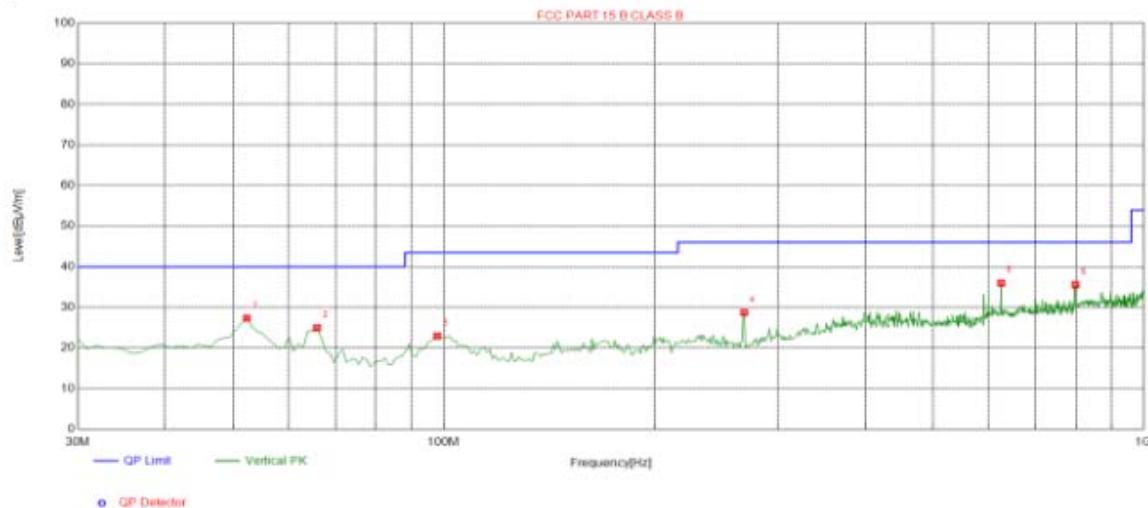**Vertical**

Suspected List								
NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	52.3100	27.31	-14.00	40.00	12.69	100	346	Vertical
2	65.8900	24.93	-16.64	40.00	15.07	100	68	Vertical
3	97.9000	22.98	-15.75	43.50	20.52	100	182	Vertical
4	268.620	28.71	-13.64	46.00	17.29	100	100	Vertical
5	625.580	35.96	-5.50	46.00	10.04	100	214	Vertical
6	799.210	35.57	-3.13	46.00	10.43	100	50	Vertical

Remark:

Margin = Limit – Level

Level=Test receiver reading + factor

Factor= Antenna factor + cable loss- Amp factor

Harmonics and Spurious Emissions**Frequency Range (9 kHz-30MHz)**

Frequency (MHz)	Level@3m (dB μ V/m)	Limit@3m (dB μ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

**Above 1GHz**

LOW CH 36 (802.11 a Mode with 5.2G)/5180

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
3647	61.22	-4.59	56.63	74	-17.37	peak
3647	47.75	-4.59	43.16	54	-10.84	AVG
10360	52.61	3.74	56.35	74	-17.65	peak
10360	41.31	3.74	45.05	54	-8.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
3647	61.14	-4.59	56.55	74	-17.45	peak
3647	45.62	-4.59	41.03	54	-12.97	AVG
10360	51.42	3.74	55.16	74	-18.84	peak
10360	40.01	3.74	43.75	54	-10.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH40 (802.11 a Mode with 5.2G)/5200

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
3647	62.67	-4.59	58.08	74	-15.92	peak
3647	45.42	-4.59	40.83	54	-13.17	AVG
10400	53.43	3.74	57.17	74	-16.83	peak
10400	40.71	3.74	44.45	54	-9.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
3647	62.21	-4.59	57.62	74	-16.38	peak
3647	44.62	-4.59	40.03	54	-13.97	AVG
10400	53.53	3.74	57.27	74	-16.73	peak
10400	49.71	3.74	53.45	54	-0.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH 48 (802.11a Mode with 5.2G)/5240

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
3647	60.21	-4.59	55.62	74	-18.38	peak
3647	44.43	-4.59	39.84	54	-14.16	AVG
10480	53.61	3.75	57.36	74	-16.64	peak
10480	41.52	3.75	45.27	54	-8.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
3647	61.21	-4.59	56.62	74	-17.38	peak
3647	45.11	-4.59	40.52	54	-13.48	AVG
10480	51.23	3.75	54.98	74	-19.02	peak
10480	61.21	3.75	64.96	54	10.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) < 54 dB μ V/m(AV Limit), the Average Detected not need to completed.



4.8. Frequency Stability Measurement

4.8.1. Test Specification

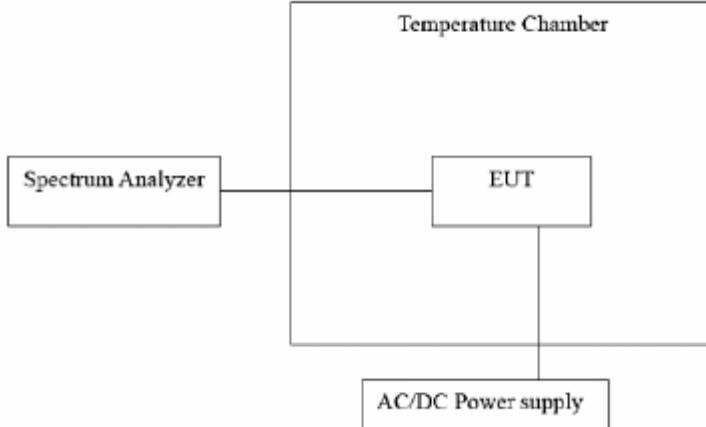Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A

**Test Result as follows:**

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	43.2V	5180.027	13	5239.811	14
	48.0V	5179.930	12	5239.914	17
	52.8 V	5179.851	16	5240.012	12

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	-30	5179.902	32	5240.044	34
	-20	5179.731	33	5239.619	32
	-10	5179.753	29	5239.733	27
	0	5179.815	26	5240.018	25
	10	5179.724	28	5239.863	18
	20	5179.933	14	5239.911	20
	30	5179.666	19	5239.998	23
	40	5179.714	21	5240.221	21
	50	5179.617	28	5240.023	34



4.9. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a External Antenna, and the best case gain of the antenna is Antenna port 1:1dBi and Antenna port 2:1dBi.

WIFI ANTENNA



4.10. Photographs of Test Setup

Radiated Emission





Report No.: HK1910232645-3E

Conducted Emission





4.11. PHOTOS OF THE EUT

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos