


| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 11:54 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz | |

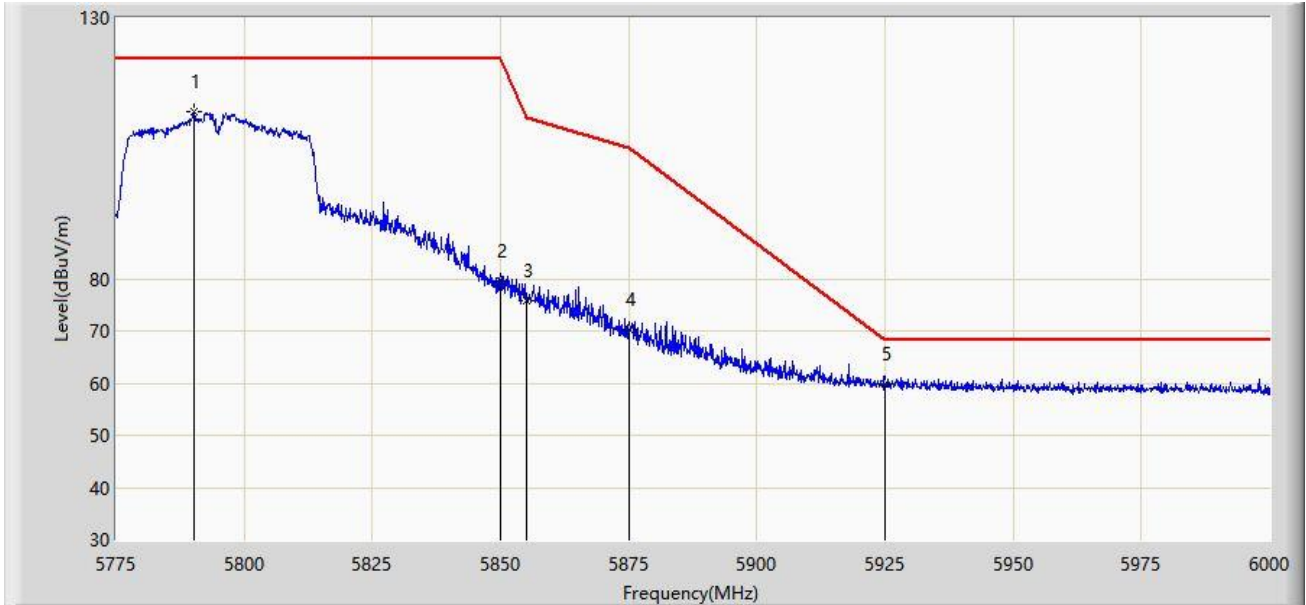


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5790.187 | 111.943 | 107.296 | N/A | N/A | 4.646 | PK |
| 2 | | | 5850.000 | 79.442 | 74.647 | -42.758 | 122.200 | 4.795 | PK |
| 3 | | | 5855.000 | 75.792 | 70.996 | -35.008 | 110.800 | 4.796 | PK |
| 4 | | | 5875.000 | 70.146 | 65.356 | -35.054 | 105.200 | 4.790 | PK |
| 5 | | * | 5925.000 | 59.748 | 54.685 | -8.452 | 68.200 | 5.063 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 12:05 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz | |

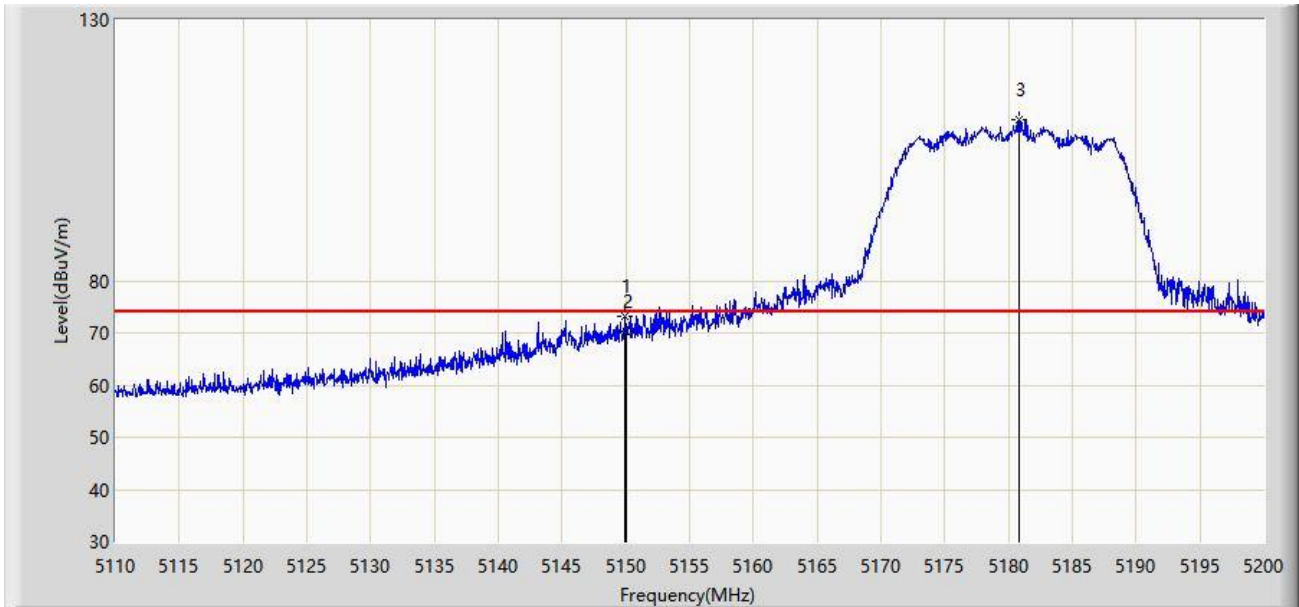


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5149.960 | 73.104 | 69.075 | -0.896 | 74.000 | 4.028 | PK |
| 2 | | | 5150.000 | 70.370 | 66.341 | -3.630 | 74.000 | 4.029 | PK |
| 3 | | * | 5180.875 | 110.868 | 106.771 | N/A | N/A | 4.097 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 12:07 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz | |

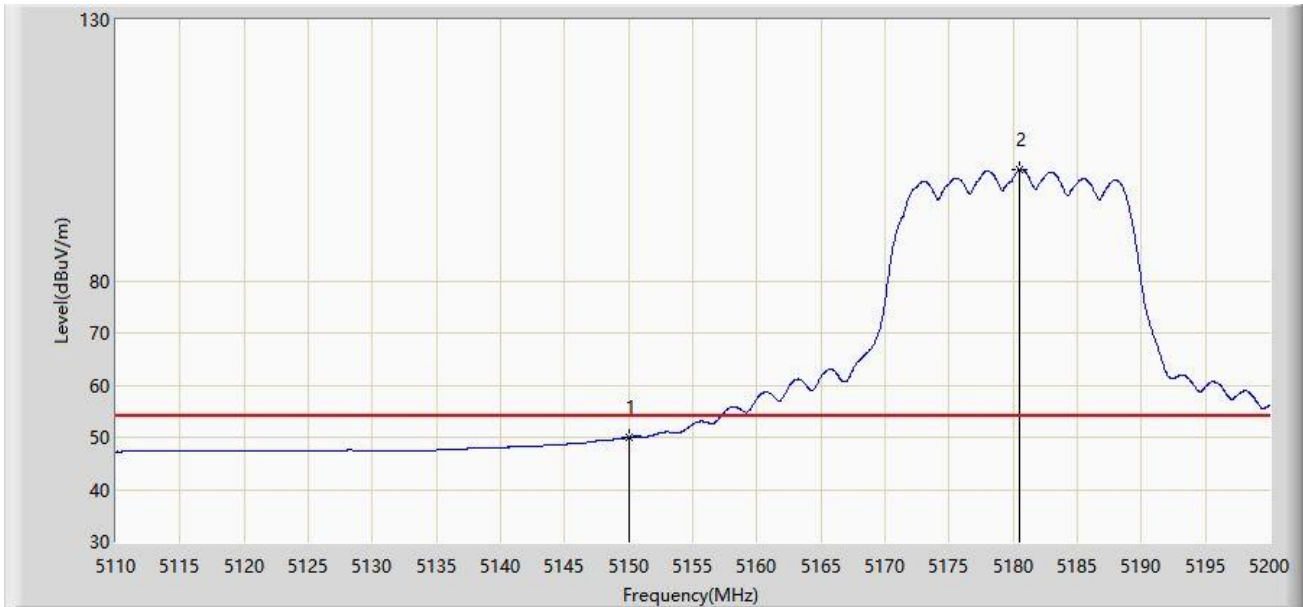


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 50.030 | 46.001 | -3.970 | 54.000 | 4.029 | AV |
| 2 | | * | 5180.470 | 101.291 | 97.192 | N/A | N/A | 4.098 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 12:28 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz | |

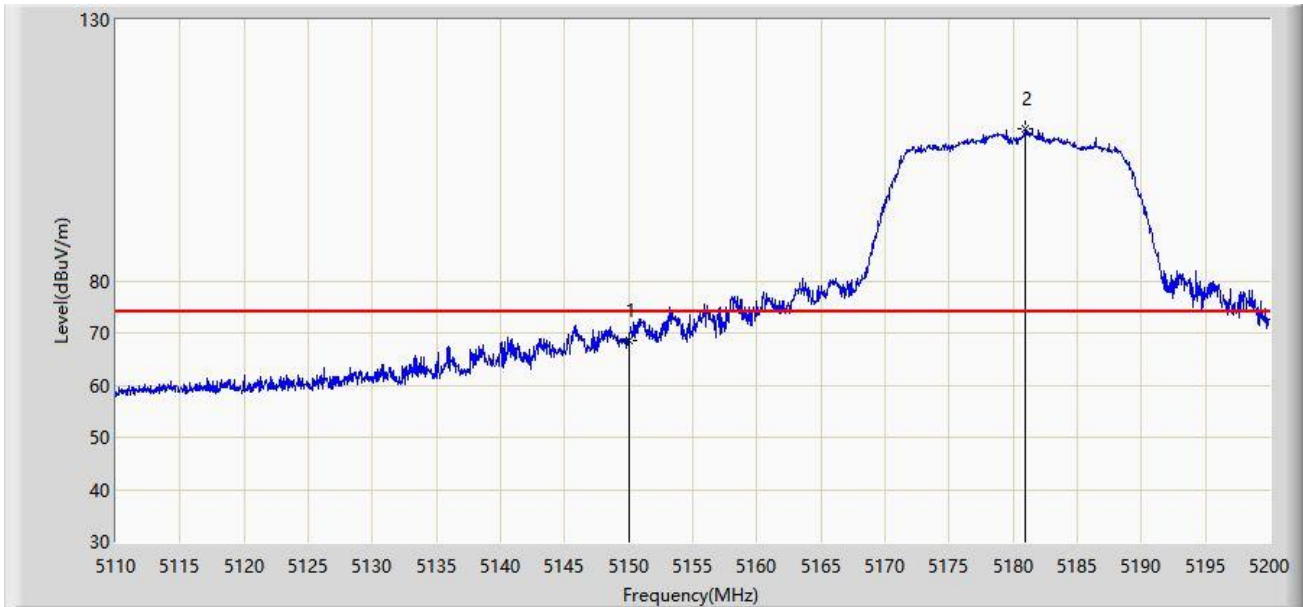

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 68.632 | 64.603 | -5.368 | 74.000 | 4.029 | PK |
| 2 | | * | 5180.965 | 109.095 | 104.999 | N/A | N/A | 4.096 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 12:31 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz | |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 49.043 | 45.014 | -4.957 | 54.000 | 4.029 | AV |
| 2 | | * | 5181.370 | 99.429 | 95.335 | N/A | N/A | 4.094 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 20:53 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz | |

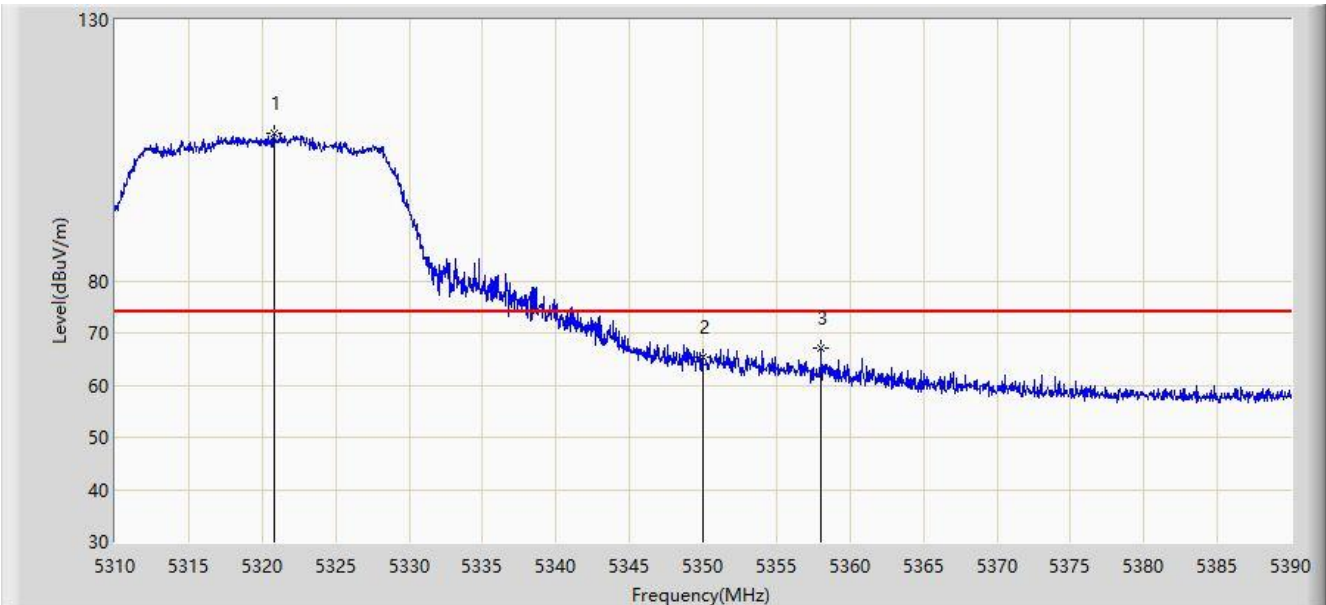


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5320.840 | 108.327 | 104.508 | N/A | N/A | 3.818 | PK |
| 2 | | | 5350.000 | 65.344 | 61.327 | -8.656 | 74.000 | 4.017 | PK |
| 3 | | | 5358.040 | 67.203 | 63.183 | -6.797 | 74.000 | 4.020 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 20:55 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz | |

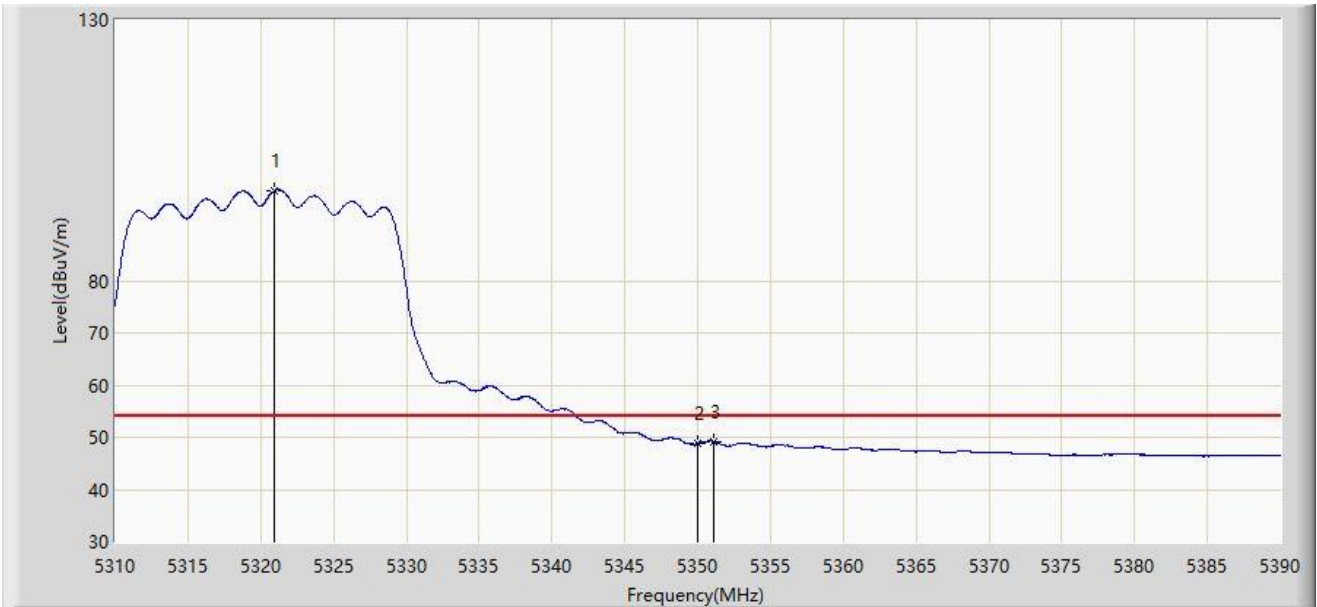


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5320.960 | 97.294 | 93.475 | N/A | N/A | 3.818 | AV |
| 2 | | | 5350.000 | 48.834 | 44.817 | -5.166 | 54.000 | 4.017 | AV |
| 3 | | | 5351.120 | 49.159 | 45.135 | -4.841 | 54.000 | 4.024 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 20:16 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz | |

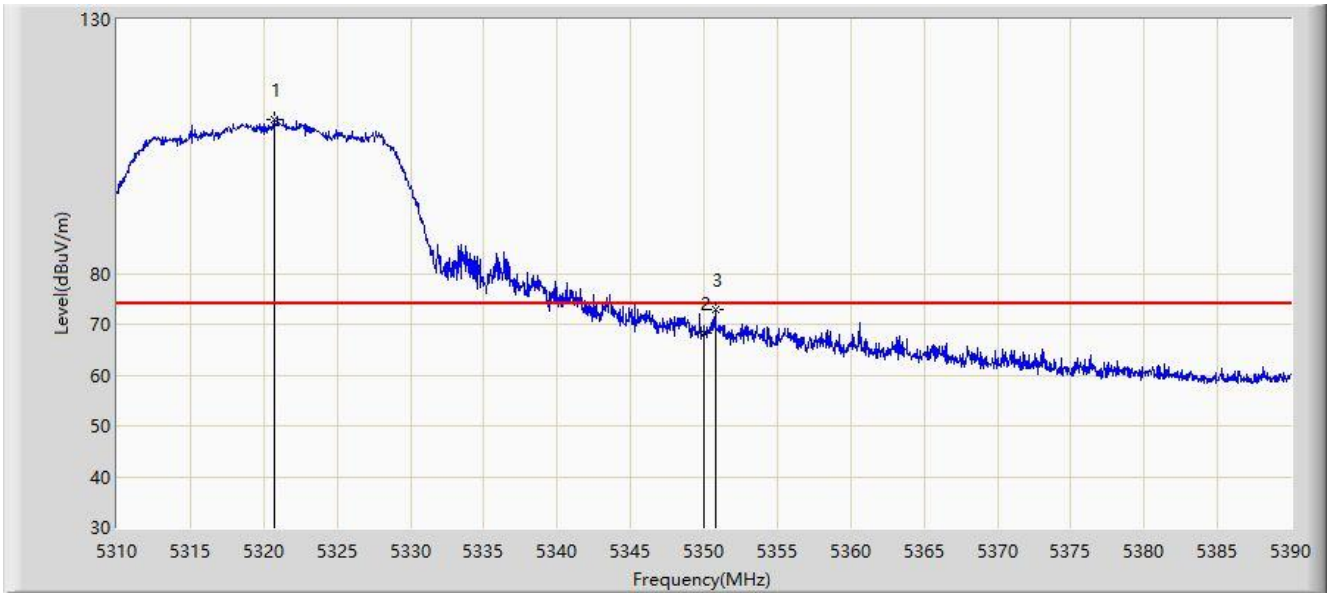


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5320.680 | 110.320 | 106.502 | N/A | N/A | 3.817 | PK |
| 2 | | | 5350.000 | 68.354 | 64.337 | -5.646 | 74.000 | 4.017 | PK |
| 3 | | | 5350.760 | 72.808 | 68.786 | -1.192 | 74.000 | 4.022 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 20:57 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz | |

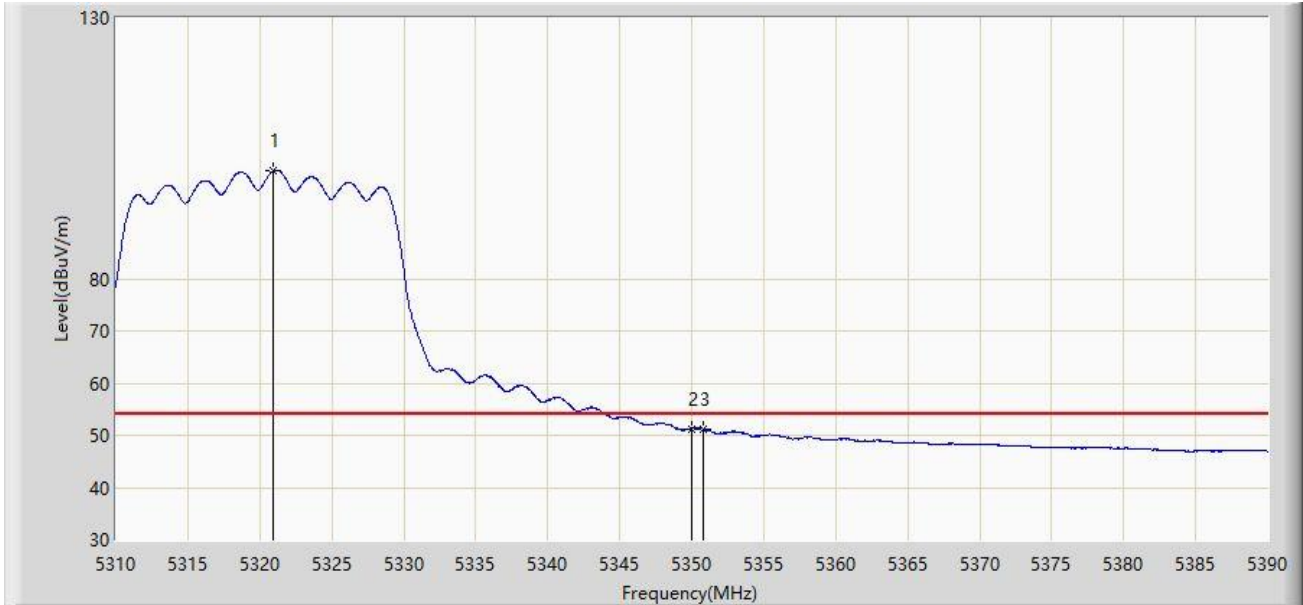


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5320.920 | 100.675 | 96.856 | N/A | N/A | 3.818 | AV |
| 2 | | | 5350.000 | 51.157 | 47.140 | -2.843 | 54.000 | 4.017 | AV |
| 3 | | | 5350.760 | 51.287 | 47.265 | -2.713 | 54.000 | 4.022 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 20:21 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz | |

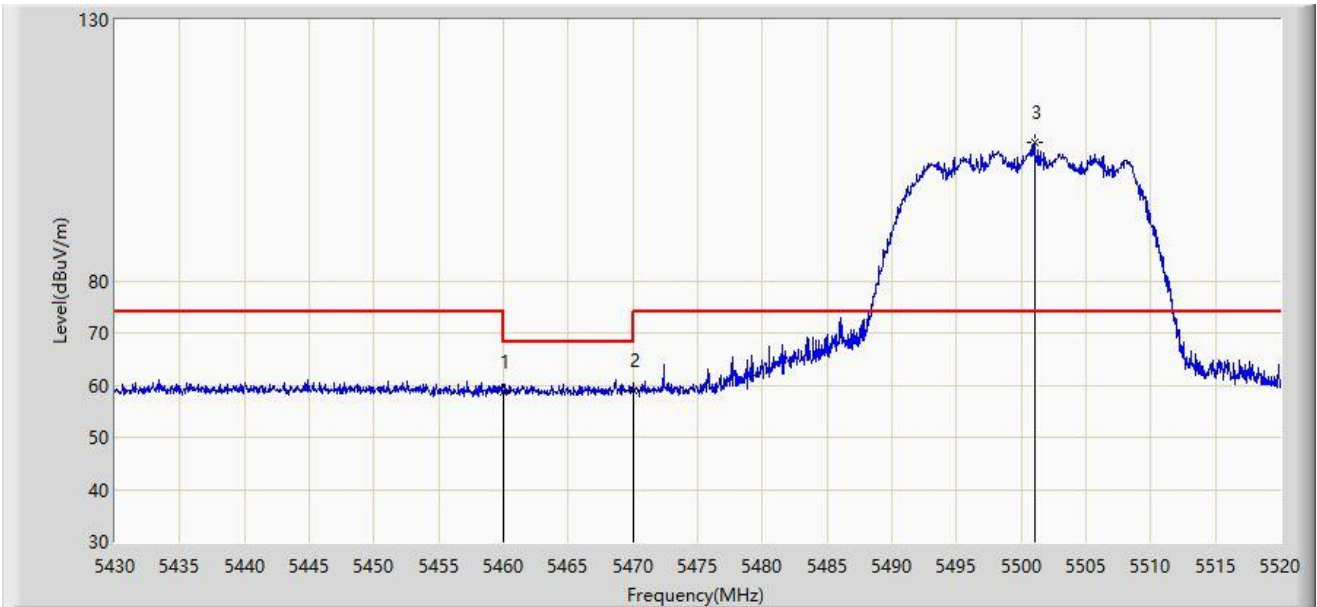

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 58.556 | 54.294 | -15.444 | 74.000 | 4.261 | PK |
| 2 | | | 5470.000 | 59.052 | 54.848 | -9.148 | 68.200 | 4.204 | PK |
| 3 | | * | 5501.010 | 106.620 | 102.230 | N/A | N/A | 4.390 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:20 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz | |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 47.187 | 42.925 | -6.813 | 54.000 | 4.261 | AV |
| 2 | | * | 5500.560 | 97.871 | 93.488 | N/A | N/A | 4.384 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:21 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz | |

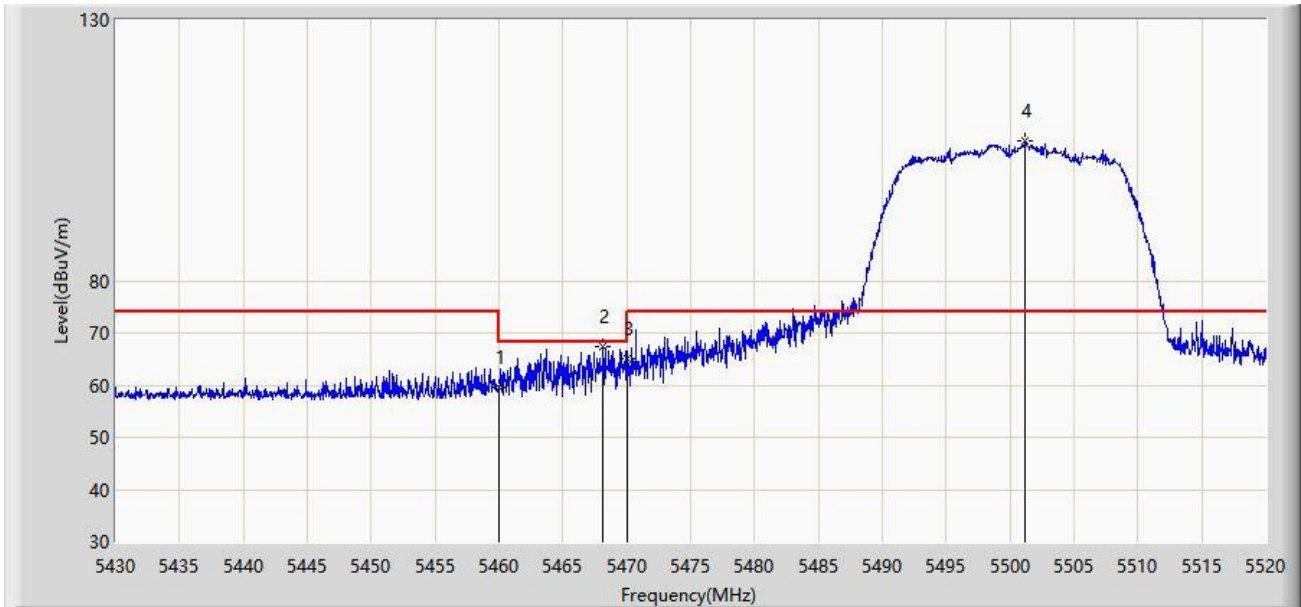


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 59.464 | 55.202 | -14.536 | 74.000 | 4.261 | PK |
| 2 | | | 5468.160 | 67.289 | 63.074 | -0.911 | 68.200 | 4.215 | PK |
| 3 | | | 5470.000 | 65.208 | 61.004 | -2.992 | 68.200 | 4.204 | PK |
| 4 | | * | 5501.190 | 106.816 | 102.423 | N/A | N/A | 4.392 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:25 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz | |

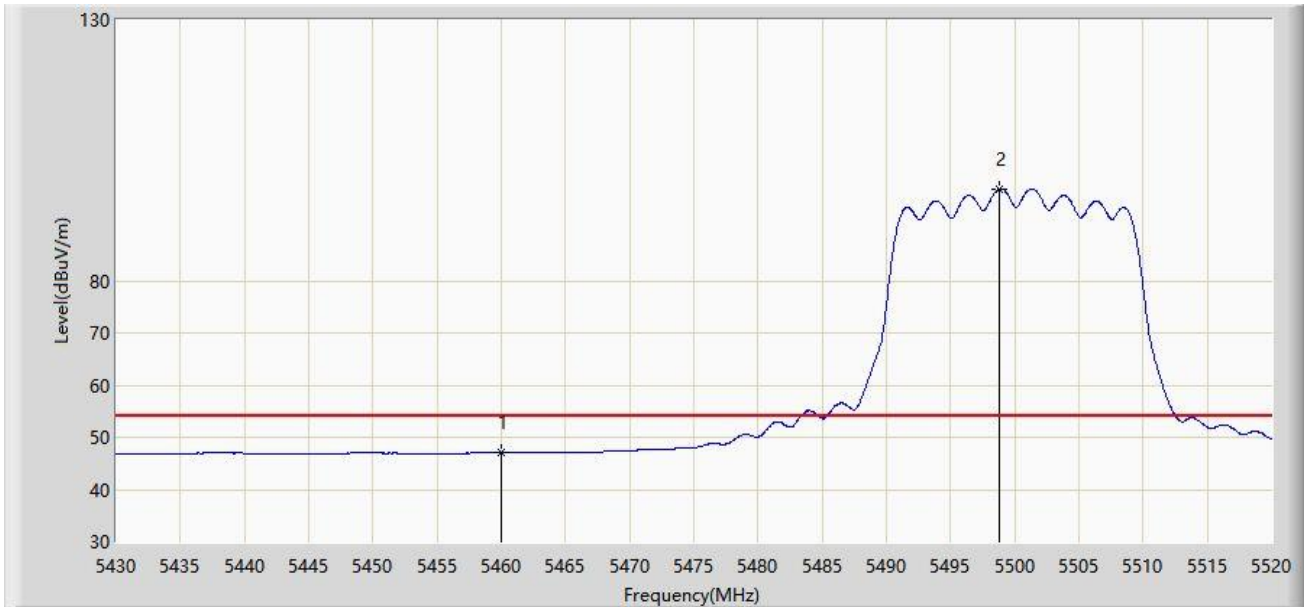


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 47.035 | 42.773 | -6.965 | 54.000 | 4.261 | AV |
| 2 | | * | 5498.805 | 97.584 | 93.227 | N/A | N/A | 4.357 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:37 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz | |

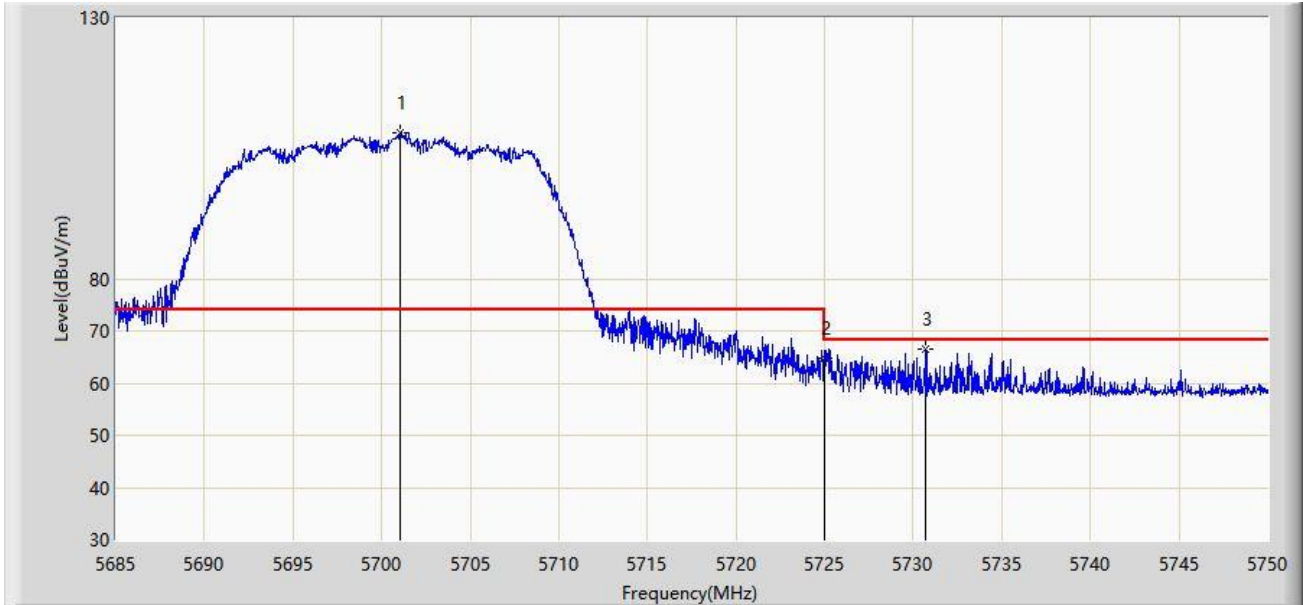


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5701.055 | 107.883 | 103.336 | N/A | N/A | 4.548 | PK |
| 2 | | | 5725.000 | 64.673 | 60.162 | -3.527 | 68.200 | 4.511 | PK |
| 3 | | | 5730.728 | 66.468 | 61.956 | -1.732 | 68.200 | 4.513 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:42 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz | |

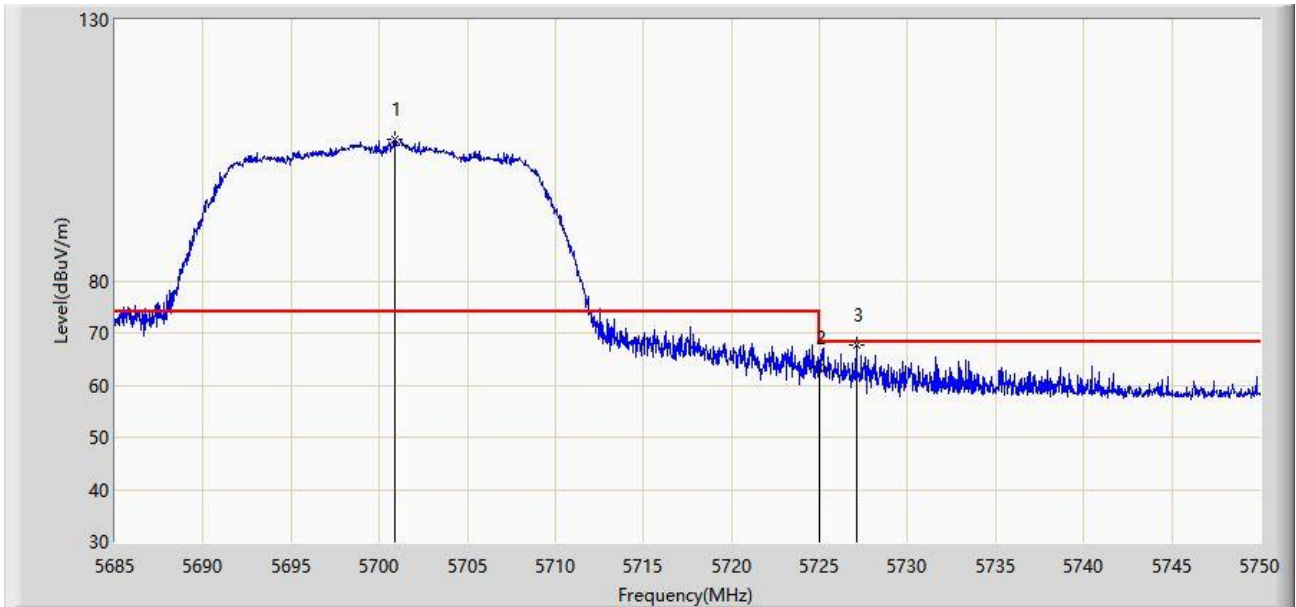


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5700.860 | 106.957 | 102.409 | N/A | N/A | 4.547 | PK |
| 2 | | | 5725.000 | 63.282 | 58.771 | -4.918 | 68.200 | 4.511 | PK |
| 3 | | | 5727.087 | 67.709 | 63.194 | -0.491 | 68.200 | 4.515 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:45 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz | |

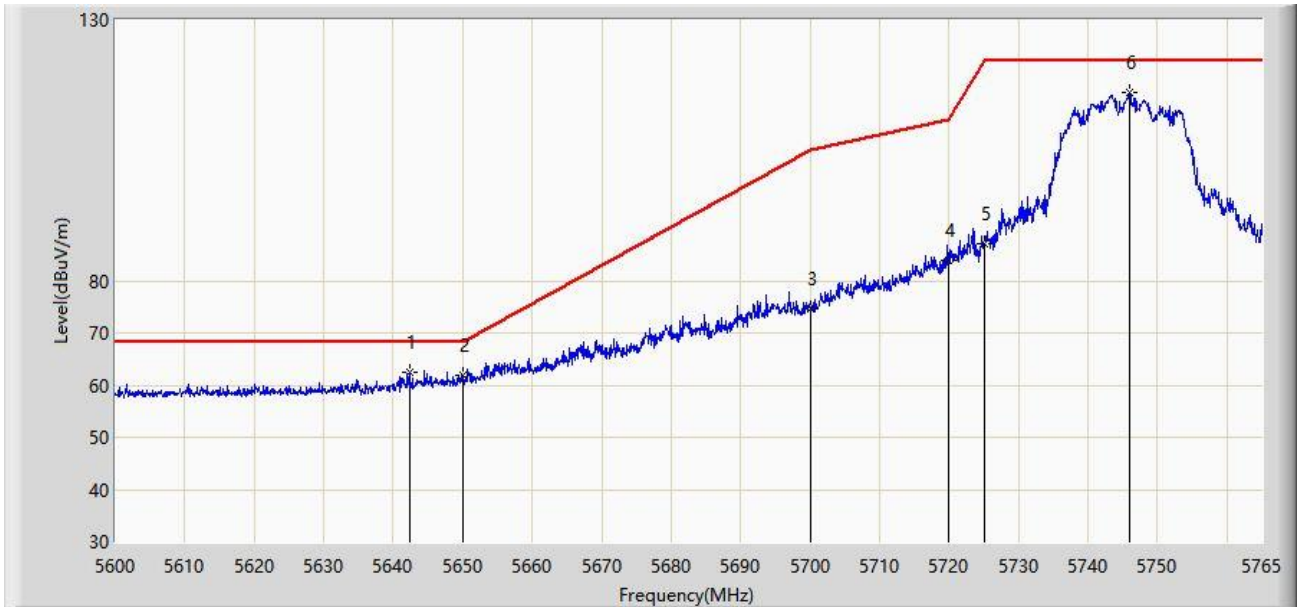


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5642.322 | 62.559 | 58.267 | -5.641 | 68.200 | 4.292 | PK |
| 2 | | | 5650.000 | 61.851 | 57.518 | -6.349 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 74.651 | 70.099 | -30.549 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 83.796 | 79.283 | -27.004 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 87.213 | 82.702 | -34.987 | 122.200 | 4.511 | PK |
| 6 | | | 5746.025 | 116.132 | 111.610 | N/A | N/A | 4.523 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:49 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz | |

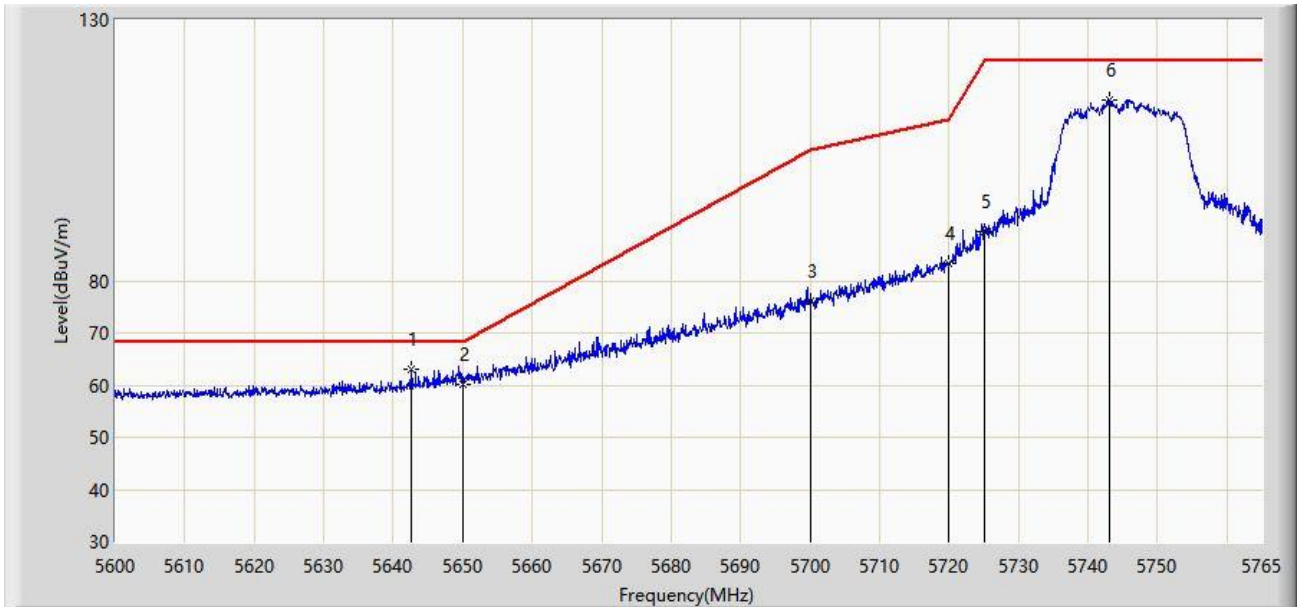


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5642.652 | 63.007 | 58.713 | -5.193 | 68.200 | 4.293 | PK |
| 2 | | | 5650.000 | 60.076 | 55.743 | -8.124 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 76.135 | 71.583 | -29.065 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 83.212 | 78.699 | -27.588 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 89.374 | 84.863 | -32.826 | 122.200 | 4.511 | PK |
| 6 | | | 5743.138 | 114.698 | 110.196 | N/A | N/A | 4.502 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:52 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz | |

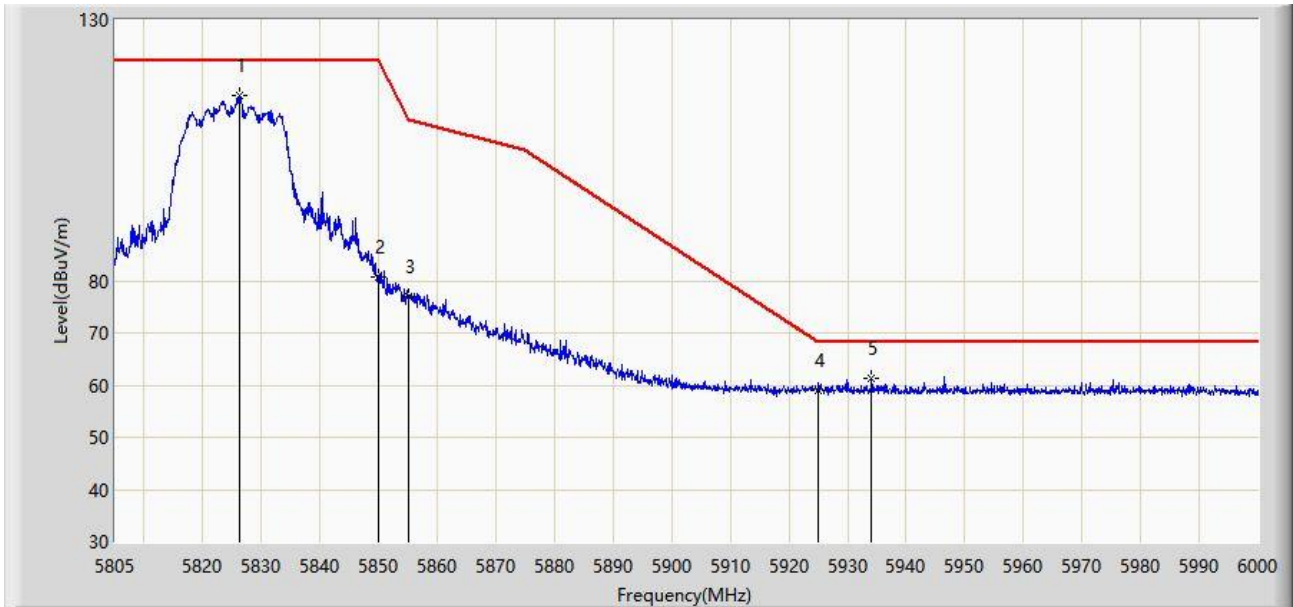


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5826.353 | 115.533 | 110.822 | N/A | N/A | 4.711 | PK |
| 2 | | | 5850.000 | 80.625 | 75.830 | -41.575 | 122.200 | 4.795 | PK |
| 3 | | | 5855.000 | 76.814 | 72.018 | -33.986 | 110.800 | 4.796 | PK |
| 4 | | | 5925.000 | 59.096 | 54.033 | -9.104 | 68.200 | 5.063 | PK |
| 5 | | | 5934.090 | 61.393 | 56.387 | -6.807 | 68.200 | 5.006 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 13:55 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz | |

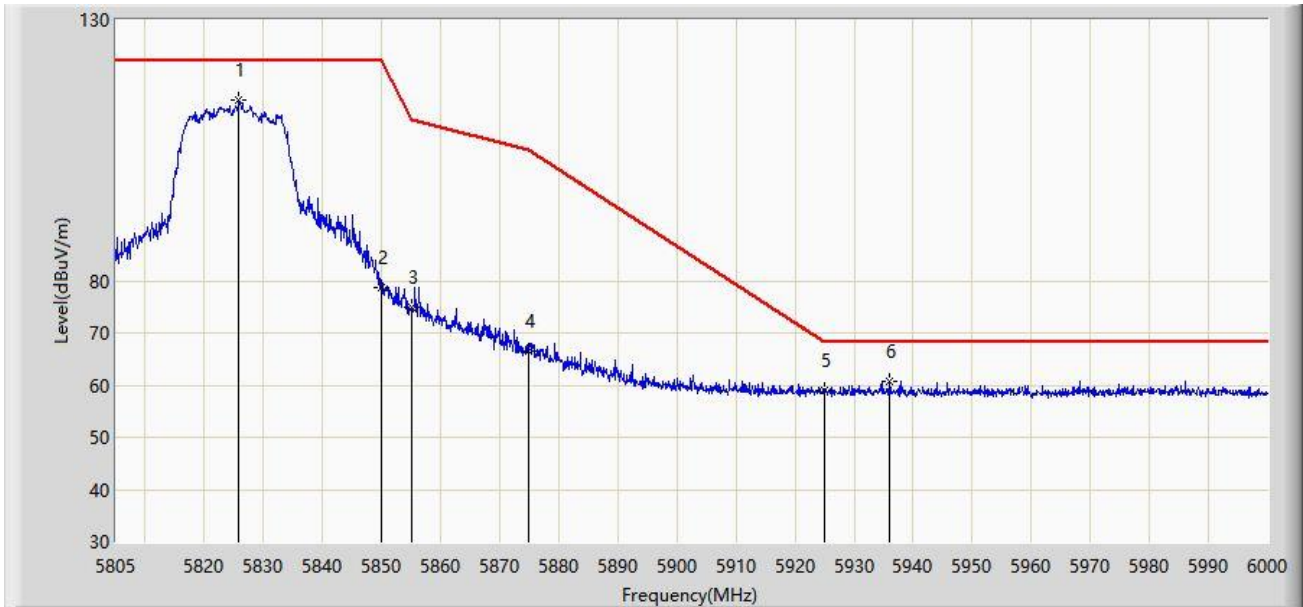


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5825.865 | 114.629 | 109.920 | N/A | N/A | 4.708 | PK |
| 2 | | | 5850.000 | 78.784 | 73.989 | -43.416 | 122.200 | 4.795 | PK |
| 3 | | | 5855.000 | 74.895 | 70.099 | -35.905 | 110.800 | 4.796 | PK |
| 4 | | | 5875.000 | 66.557 | 61.767 | -38.643 | 105.200 | 4.790 | PK |
| 5 | | | 5925.000 | 59.020 | 53.957 | -9.180 | 68.200 | 5.063 | PK |
| 6 | | * | 5936.040 | 60.760 | 55.778 | -7.440 | 68.200 | 4.982 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 21:09 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz | |

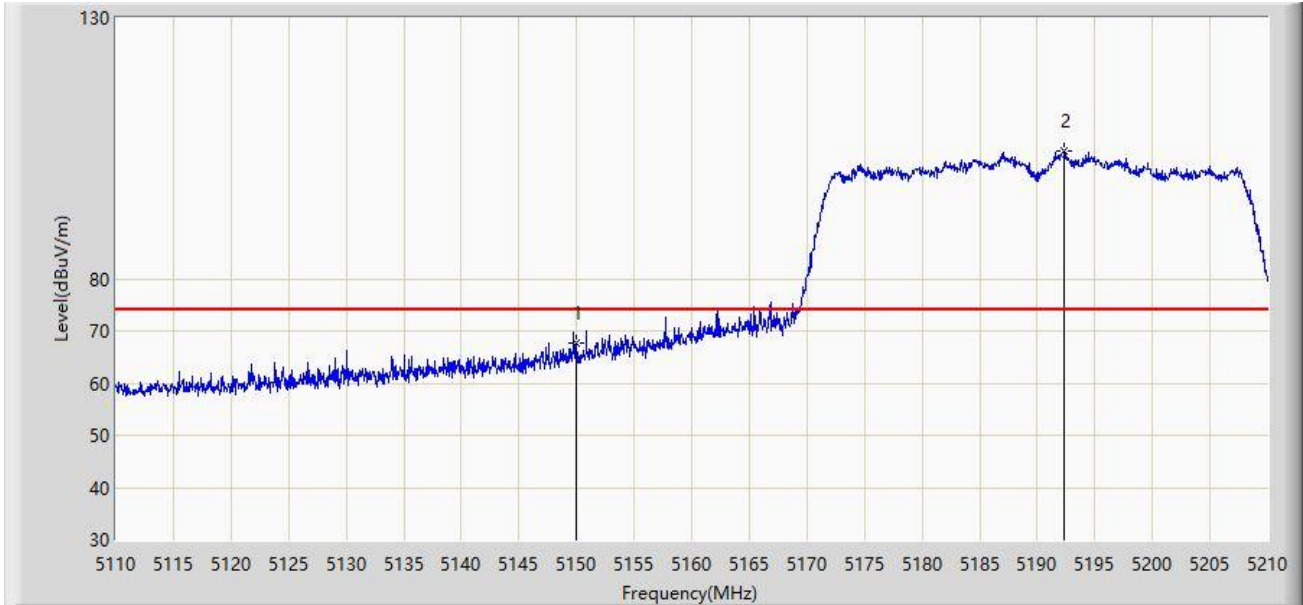


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 67.775 | 63.746 | -6.225 | 74.000 | 4.029 | PK |
| 2 | | * | 5192.350 | 104.537 | 100.491 | N/A | N/A | 4.046 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 20:26 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz | |

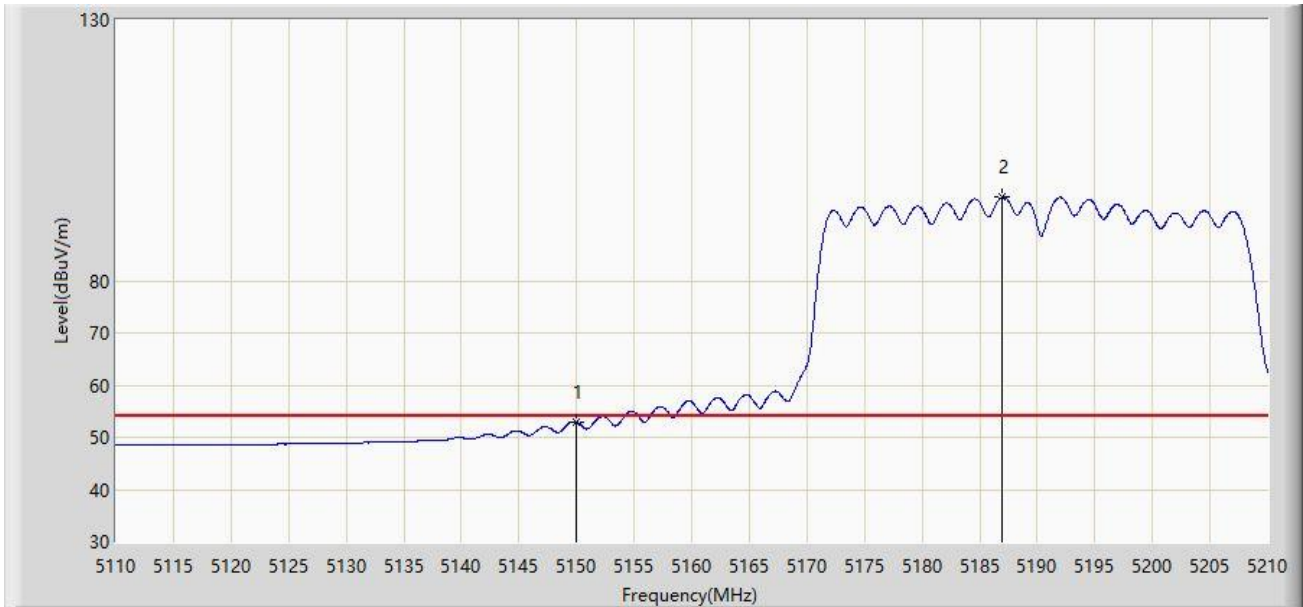


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 52.930 | 48.901 | -1.070 | 54.000 | 4.029 | AV |
| 2 | | * | 5186.950 | 96.022 | 91.981 | N/A | N/A | 4.041 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 21:12 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz | |

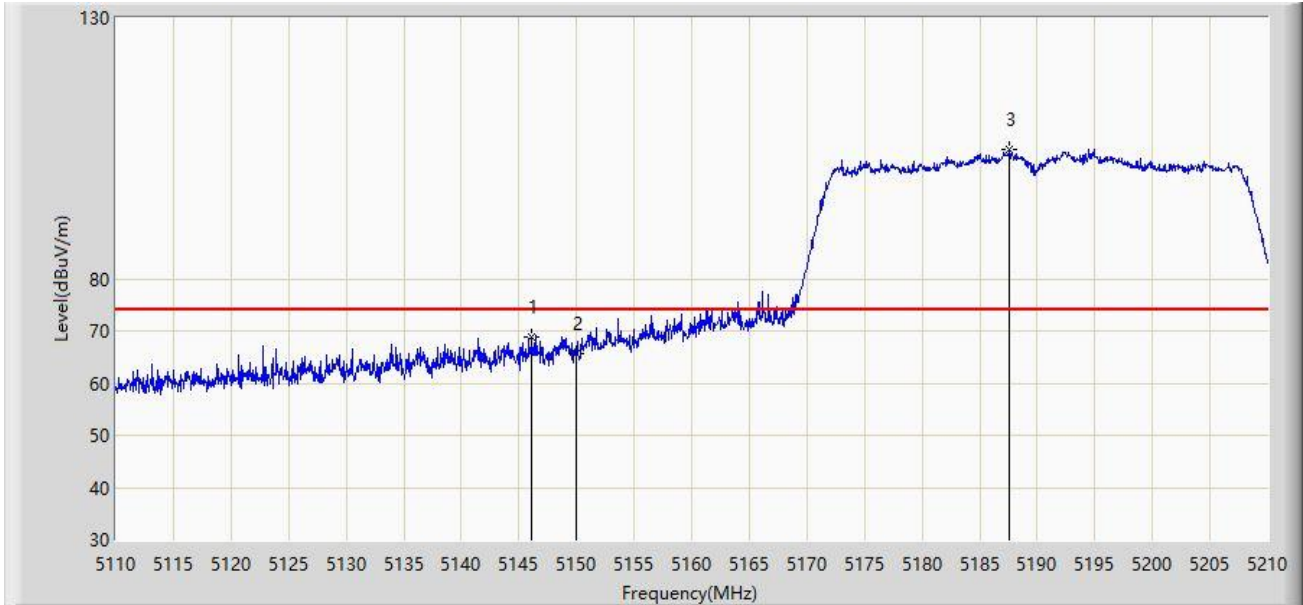


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5146.150 | 68.979 | 64.953 | -5.021 | 74.000 | 4.027 | PK |
| 2 | | | 5150.000 | 65.634 | 61.605 | -8.366 | 74.000 | 4.029 | PK |
| 3 | | * | 5187.600 | 104.659 | 100.622 | N/A | N/A | 4.037 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 21:14 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz | |

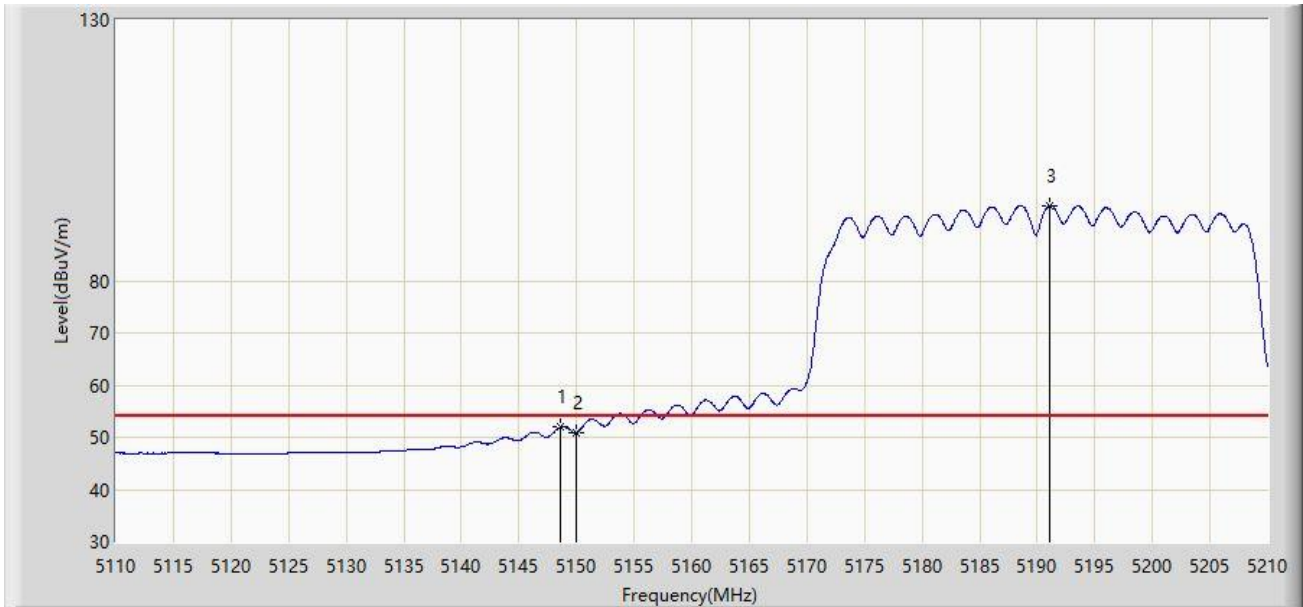


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5148.600 | 51.948 | 47.925 | -2.052 | 54.000 | 4.023 | AV |
| 2 | | | 5150.000 | 50.948 | 46.919 | -3.052 | 54.000 | 4.029 | AV |
| 3 | | * | 5191.100 | 94.449 | 90.406 | N/A | N/A | 4.043 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 14:32 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz | |

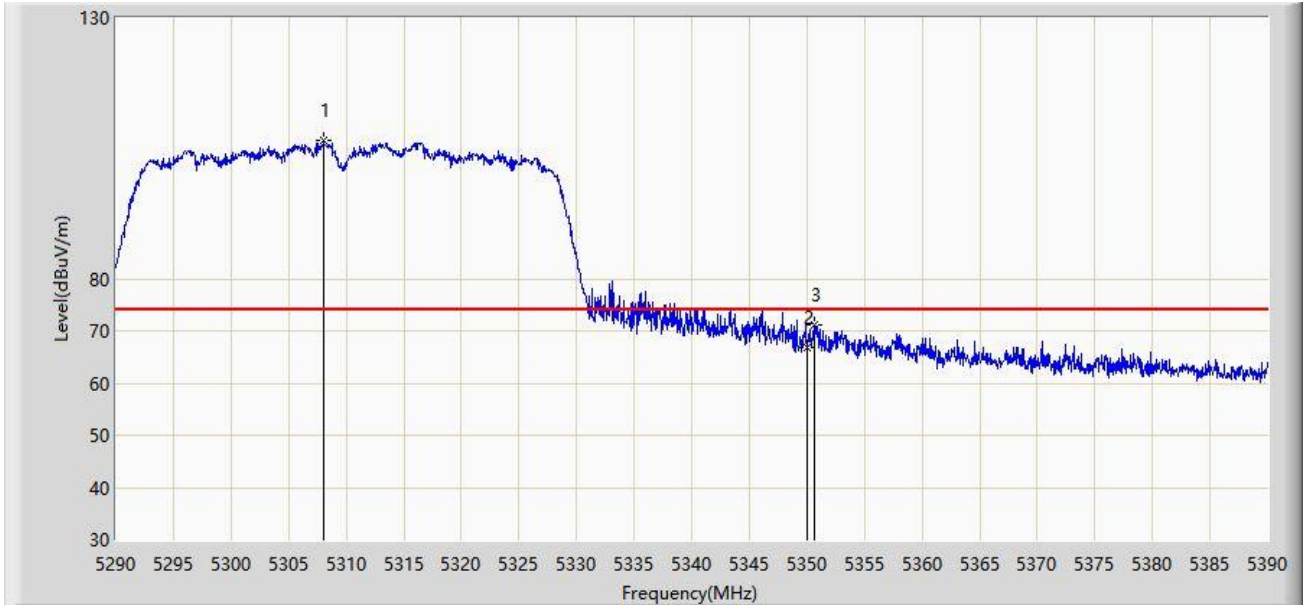


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5308.050 | 106.389 | 102.598 | N/A | N/A | 3.791 | PK |
| 2 | | | 5350.000 | 66.750 | 62.733 | -7.250 | 74.000 | 4.017 | PK |
| 3 | | | 5350.650 | 71.288 | 67.267 | -2.712 | 74.000 | 4.022 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 14:31 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz | |

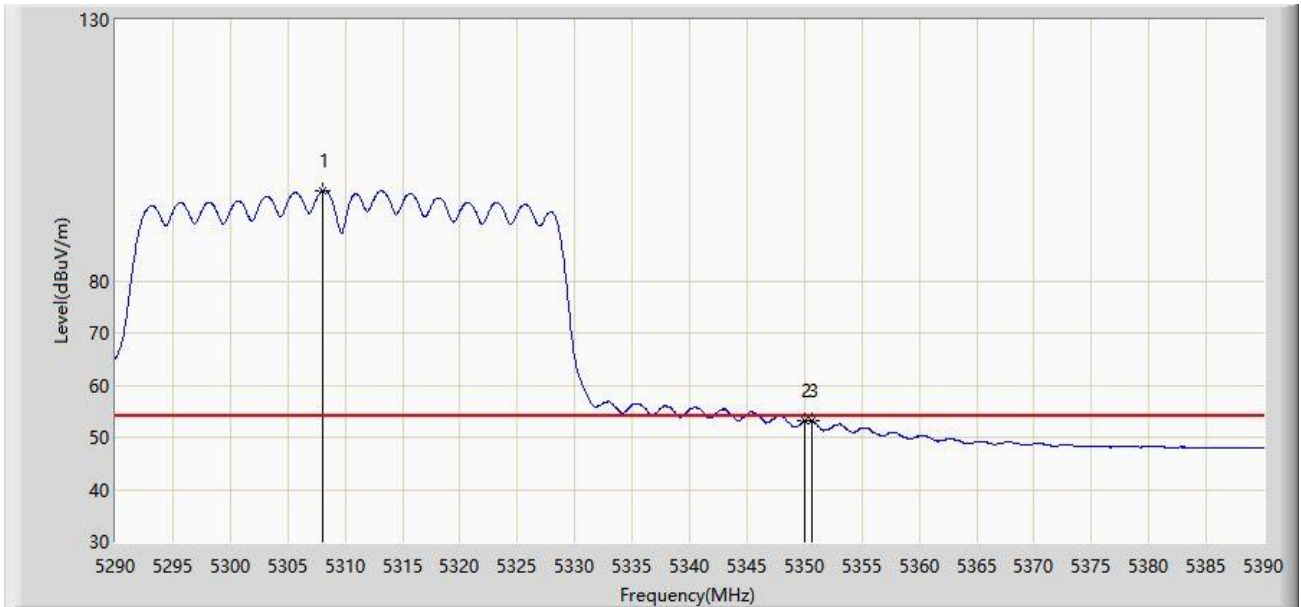


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5308.050 | 97.277 | 93.486 | N/A | N/A | 3.791 | AV |
| 2 | | | 5350.000 | 53.072 | 49.055 | -0.928 | 54.000 | 4.017 | AV |
| 3 | | | 5350.600 | 53.237 | 49.216 | -0.763 | 54.000 | 4.021 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 14:34 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz | |

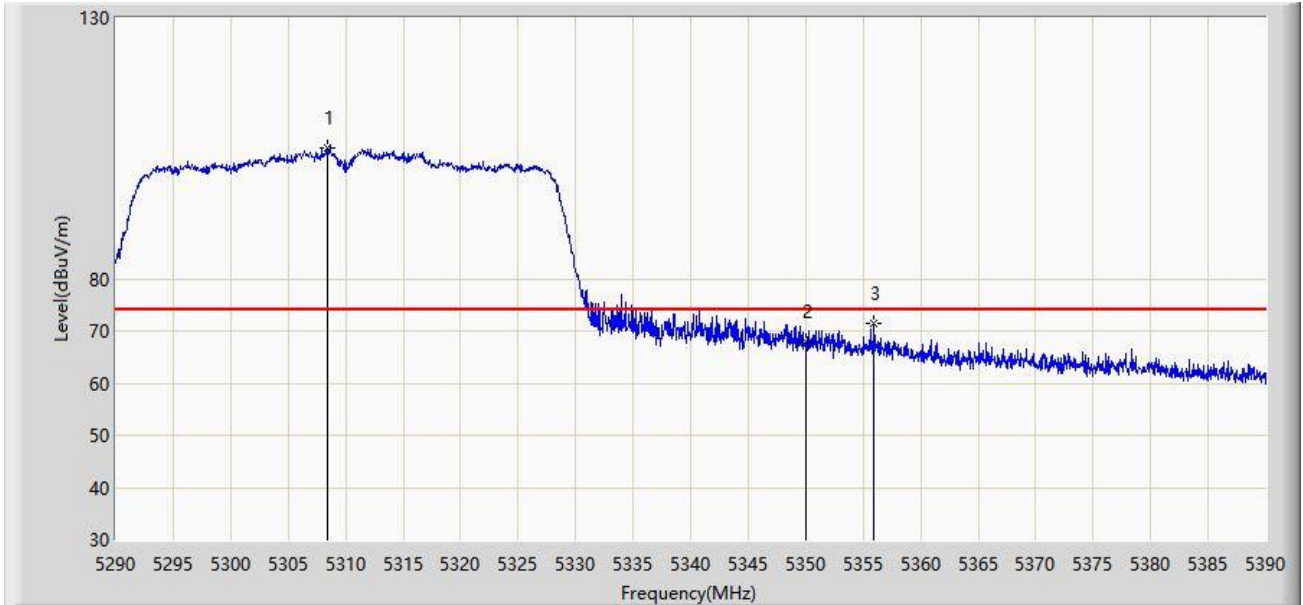


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5308.400 | 105.016 | 101.223 | N/A | N/A | 3.793 | PK |
| 2 | | | 5350.000 | 67.948 | 63.931 | -6.052 | 74.000 | 4.017 | PK |
| 3 | | | 5355.950 | 71.360 | 67.337 | -2.640 | 74.000 | 4.023 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 14:35 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz | |

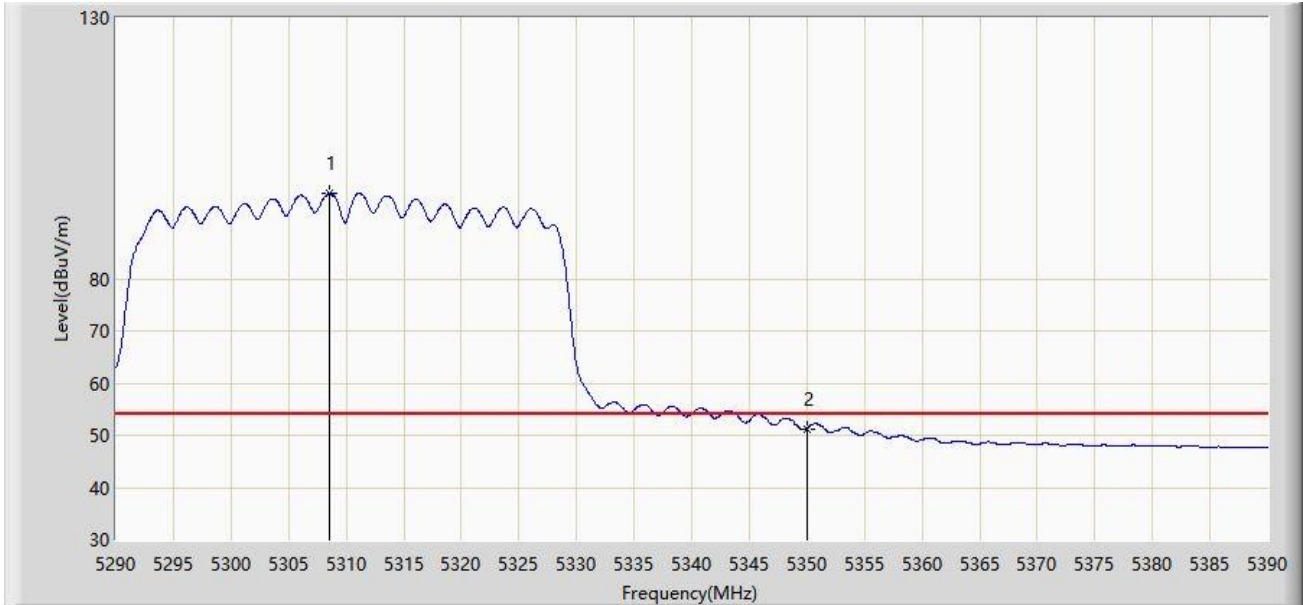


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5308.500 | 96.312 | 92.519 | N/A | N/A | 3.793 | AV |
| 2 | | | 5350.000 | 51.274 | 47.257 | -2.726 | 54.000 | 4.017 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 20:33 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz | |

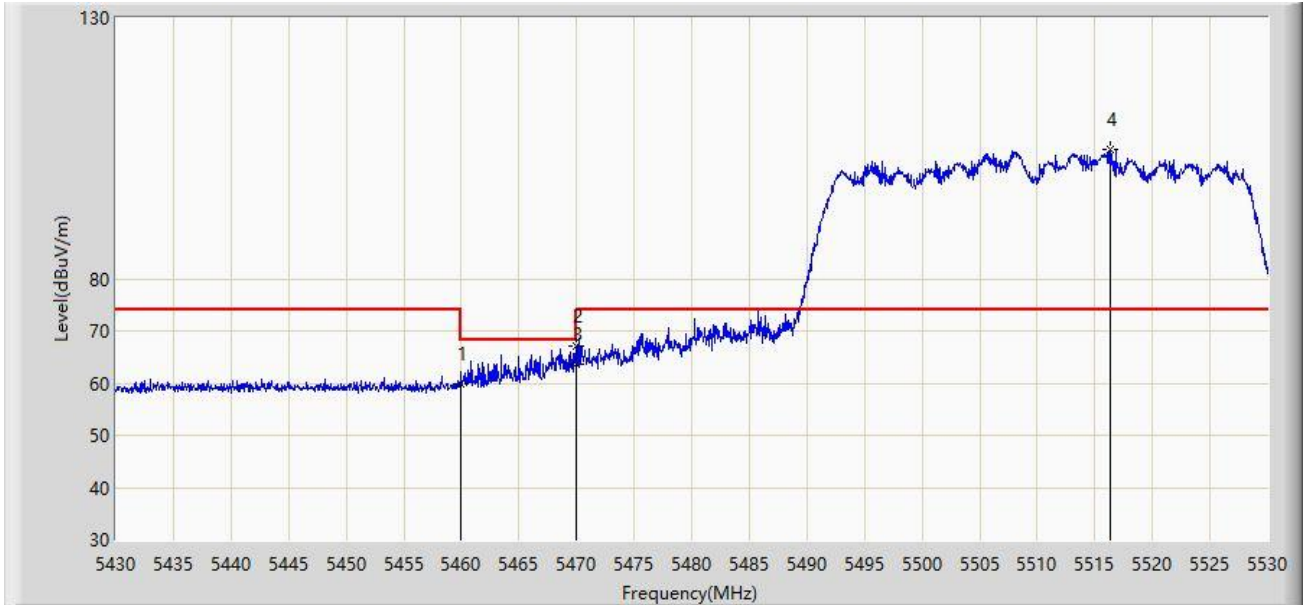


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 59.865 | 55.603 | -14.135 | 74.000 | 4.261 | PK |
| 2 | | | 5469.950 | 67.124 | 62.919 | -1.076 | 68.200 | 4.204 | PK |
| 3 | | | 5470.000 | 63.765 | 59.561 | -4.435 | 68.200 | 4.204 | PK |
| 4 | | * | 5516.350 | 104.779 | 100.273 | N/A | N/A | 4.506 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 14:47 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz | |

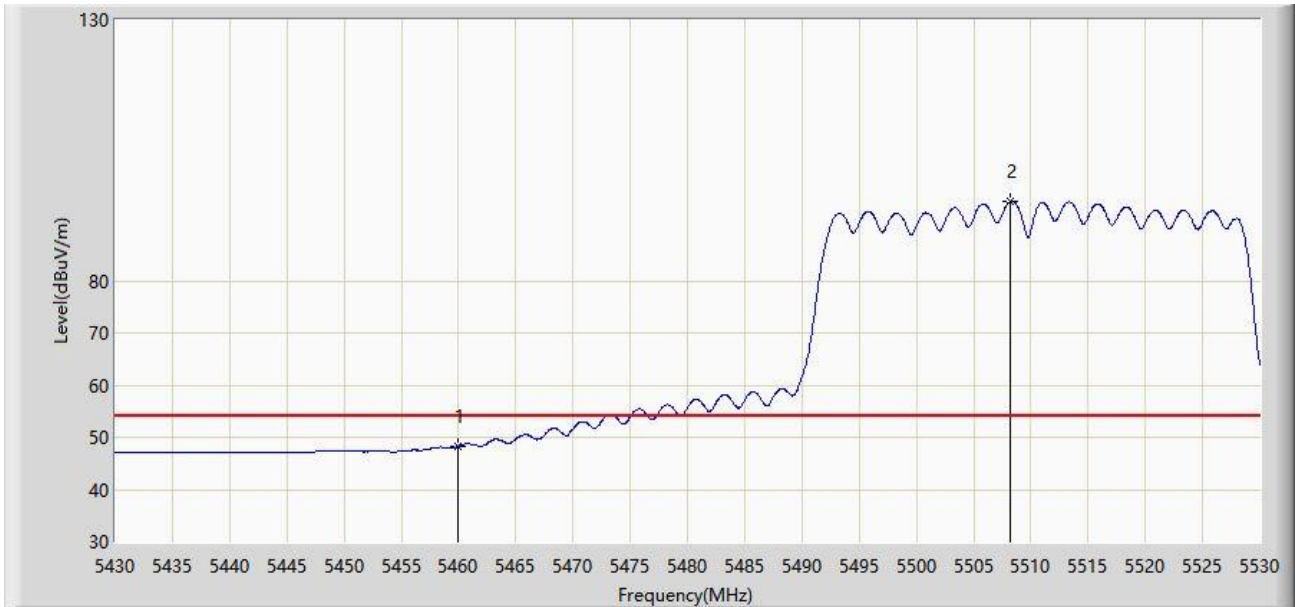


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 48.269 | 44.007 | -5.731 | 54.000 | 4.261 | AV |
| 2 | | * | 5508.150 | 95.111 | 90.641 | N/A | N/A | 4.470 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 14:50 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz | |

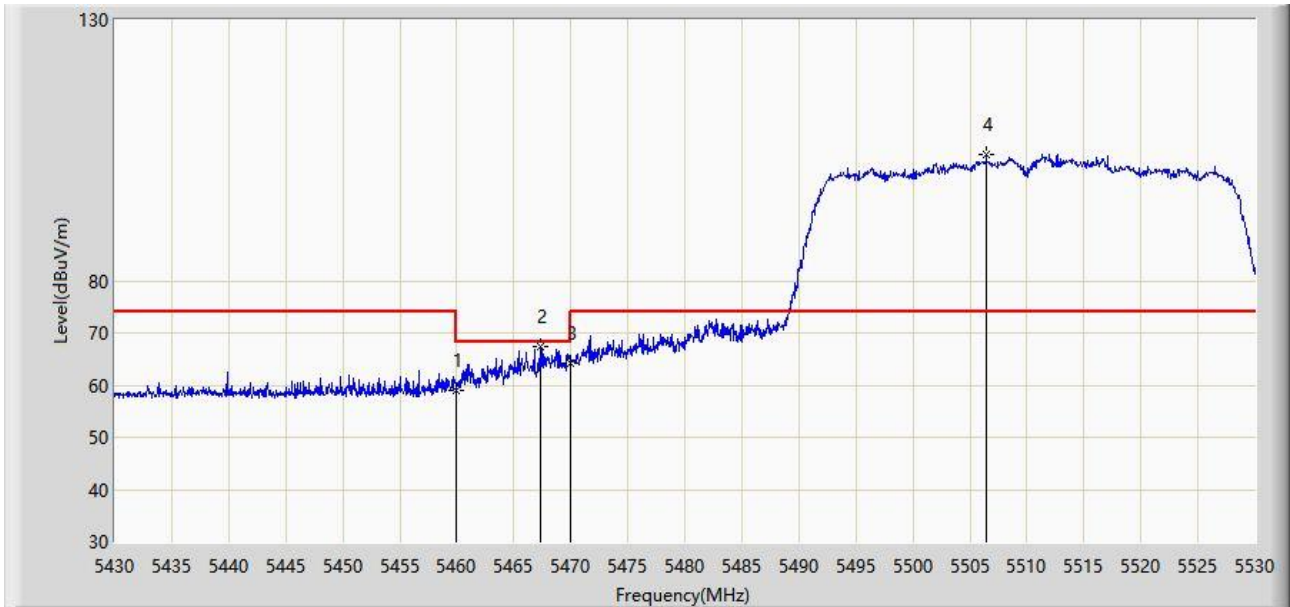


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 59.004 | 54.742 | -14.996 | 74.000 | 4.261 | PK |
| 2 | | | 5467.400 | 67.266 | 63.047 | -0.934 | 68.200 | 4.220 | PK |
| 3 | | | 5470.000 | 64.152 | 59.948 | -4.048 | 68.200 | 4.204 | PK |
| 4 | | * | 5506.450 | 104.253 | 99.794 | N/A | N/A | 4.459 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 14:53 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz | |

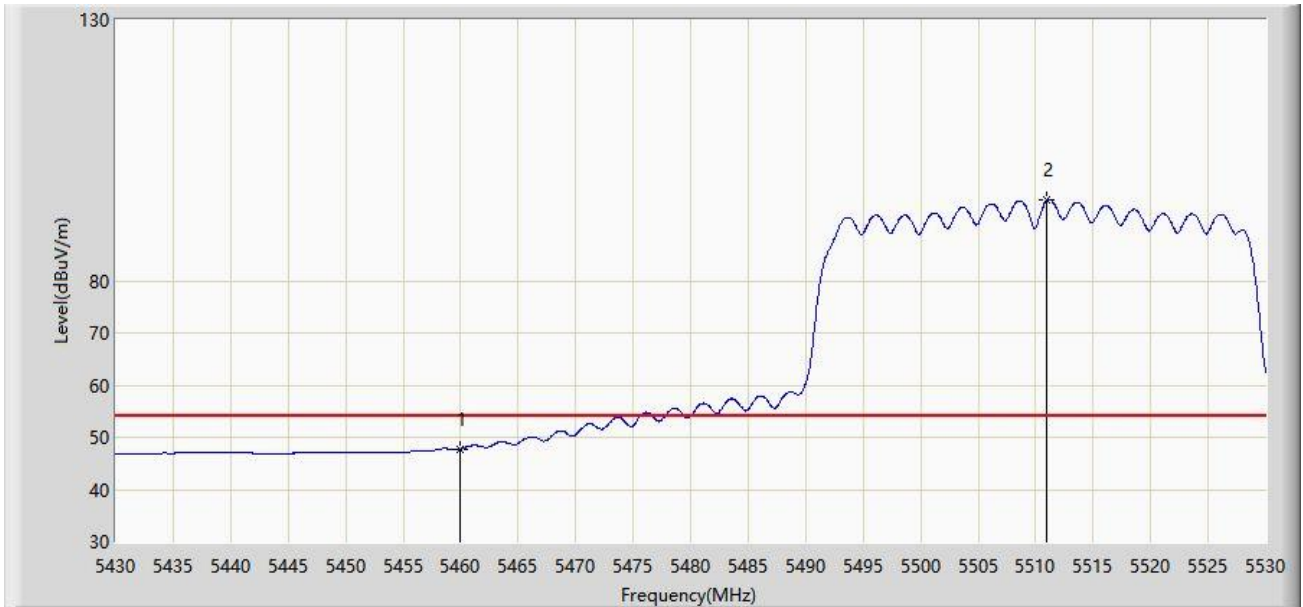


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 47.783 | 43.521 | -6.217 | 54.000 | 4.261 | AV |
| 2 | | * | 5511.000 | 95.385 | 90.897 | N/A | N/A | 4.488 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 15:05 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz | |

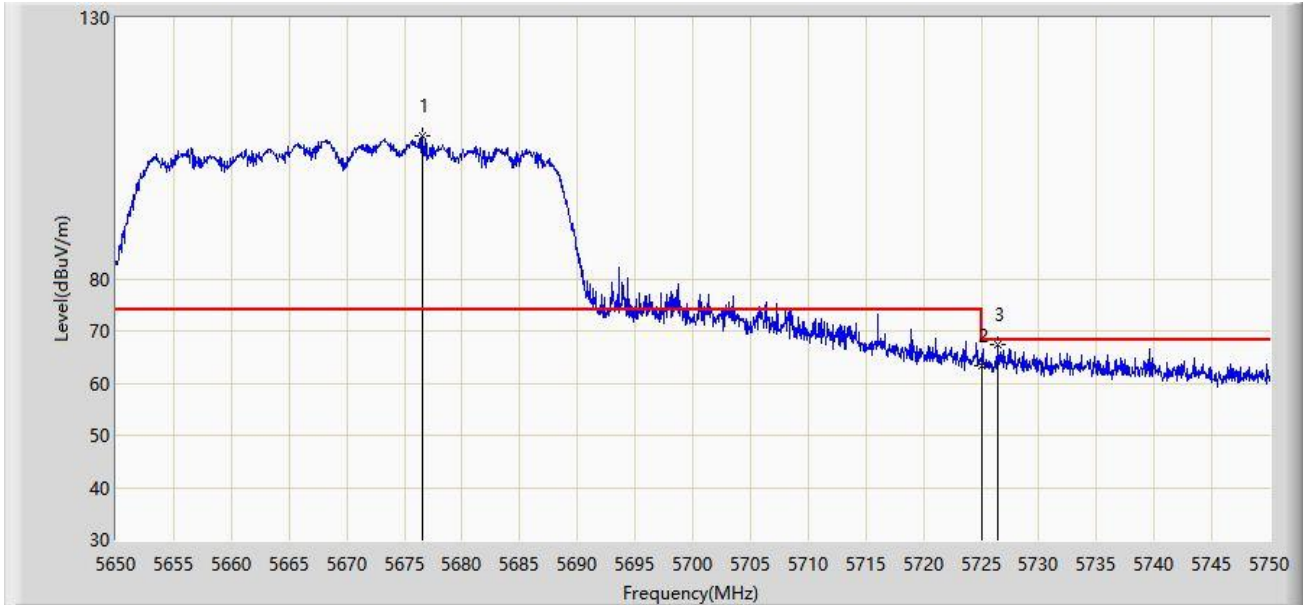


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5676.600 | 107.377 | 102.751 | N/A | N/A | 4.626 | PK |
| 2 | | | 5725.000 | 63.364 | 58.853 | -4.836 | 68.200 | 4.511 | PK |
| 3 | | | 5726.400 | 67.380 | 62.865 | -0.820 | 68.200 | 4.514 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 15:08 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz | |

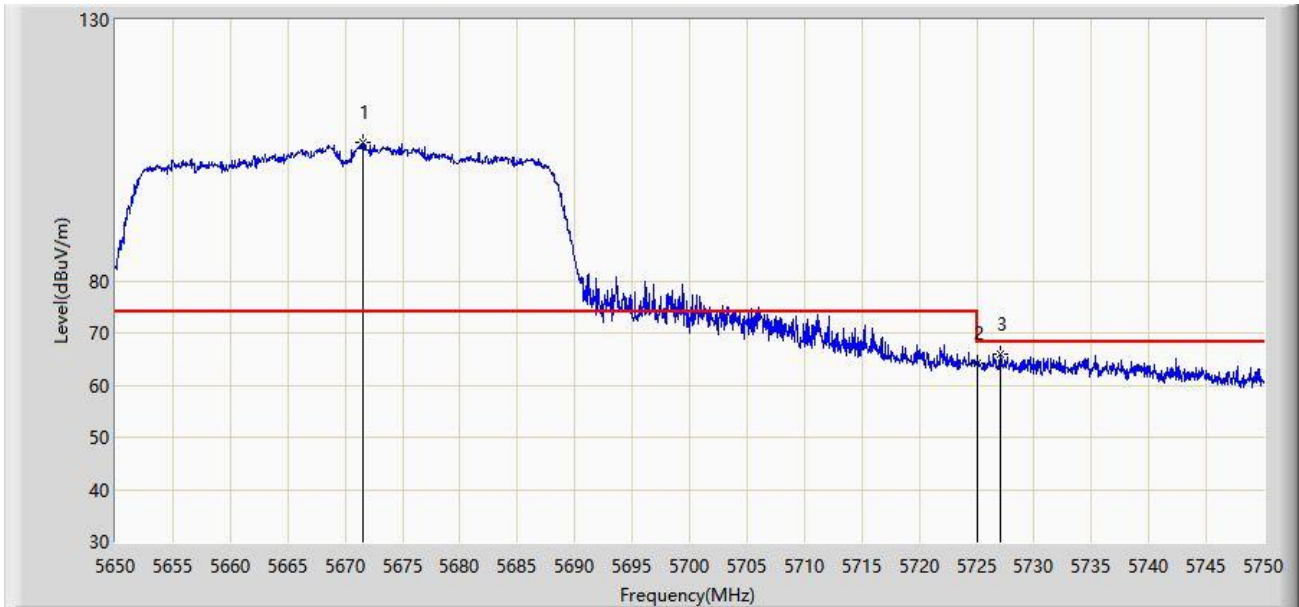


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5671.600 | 106.516 | 101.909 | N/A | N/A | 4.606 | PK |
| 2 | | | 5725.000 | 64.196 | 59.685 | -4.004 | 68.200 | 4.511 | PK |
| 3 | | | 5727.100 | 66.065 | 61.550 | -2.135 | 68.200 | 4.515 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 21:14 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz | |

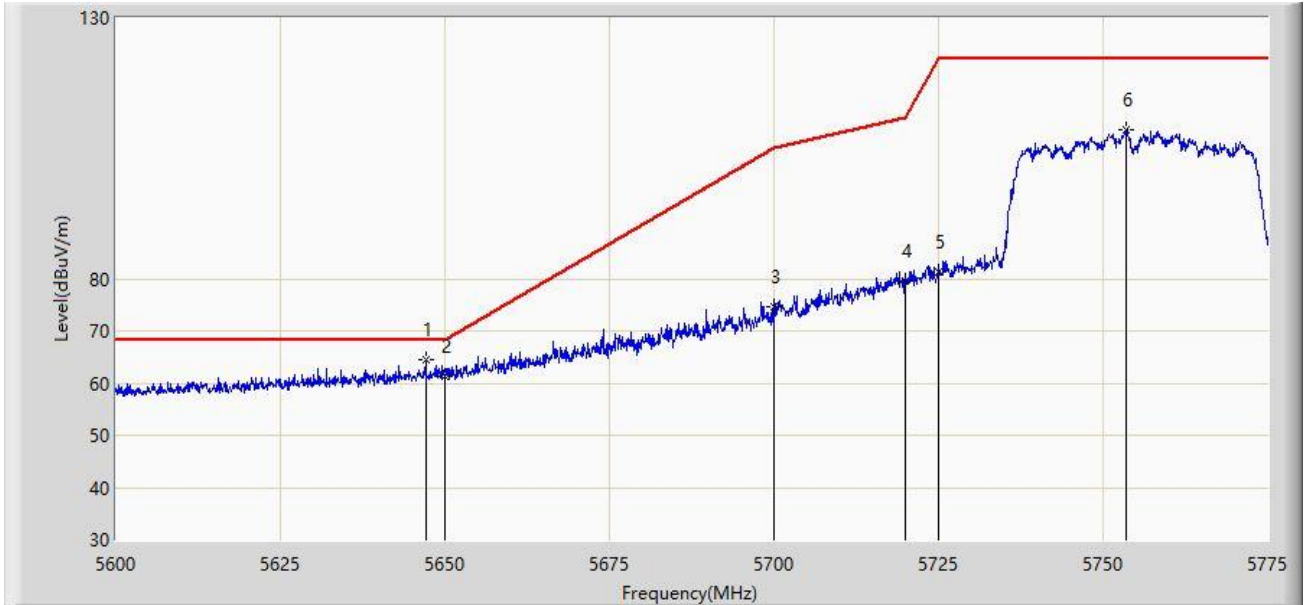


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5647.075 | 64.513 | 60.196 | -3.687 | 68.200 | 4.317 | PK |
| 2 | | | 5650.000 | 61.358 | 57.025 | -6.842 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 74.565 | 70.013 | -30.635 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 79.704 | 75.191 | -31.096 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 81.205 | 76.694 | -40.995 | 122.200 | 4.511 | PK |
| 6 | | | 5753.475 | 108.511 | 103.908 | N/A | N/A | 4.603 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 15:16 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz | |

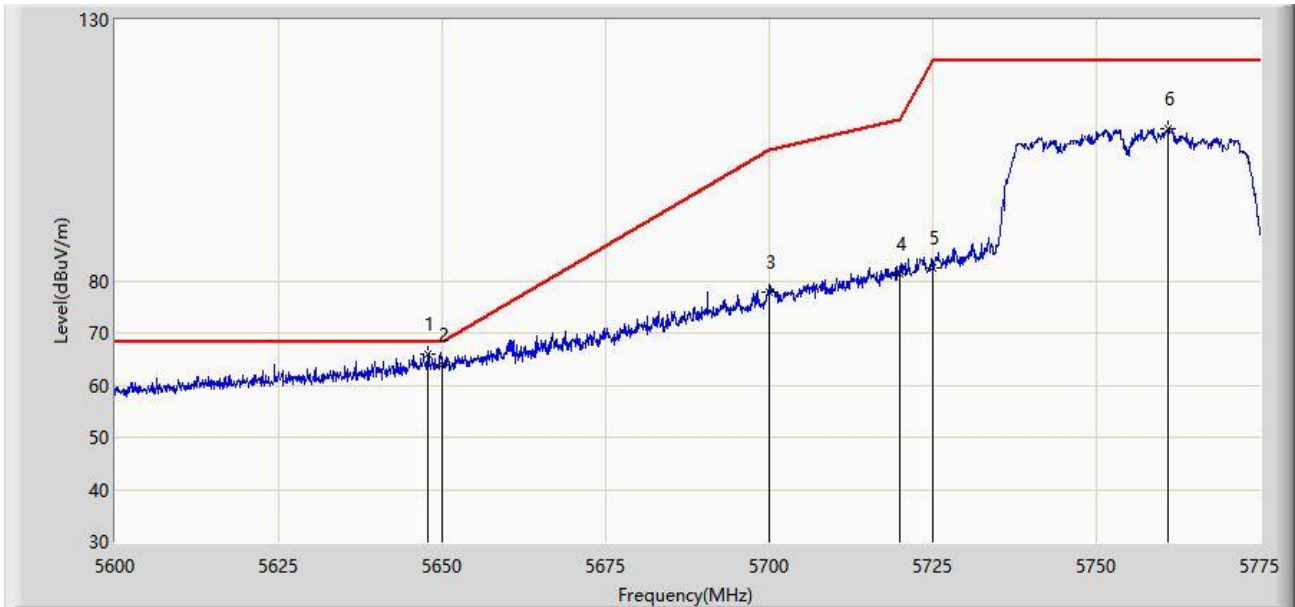


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5647.862 | 65.909 | 61.588 | -2.291 | 68.200 | 4.321 | PK |
| 2 | | | 5650.000 | 63.933 | 59.600 | -4.267 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 77.899 | 73.347 | -27.301 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 81.392 | 76.879 | -29.408 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 82.540 | 78.029 | -39.660 | 122.200 | 4.511 | PK |
| 6 | | | 5761.000 | 109.224 | 104.547 | N/A | N/A | 4.677 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 15:18 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz | |

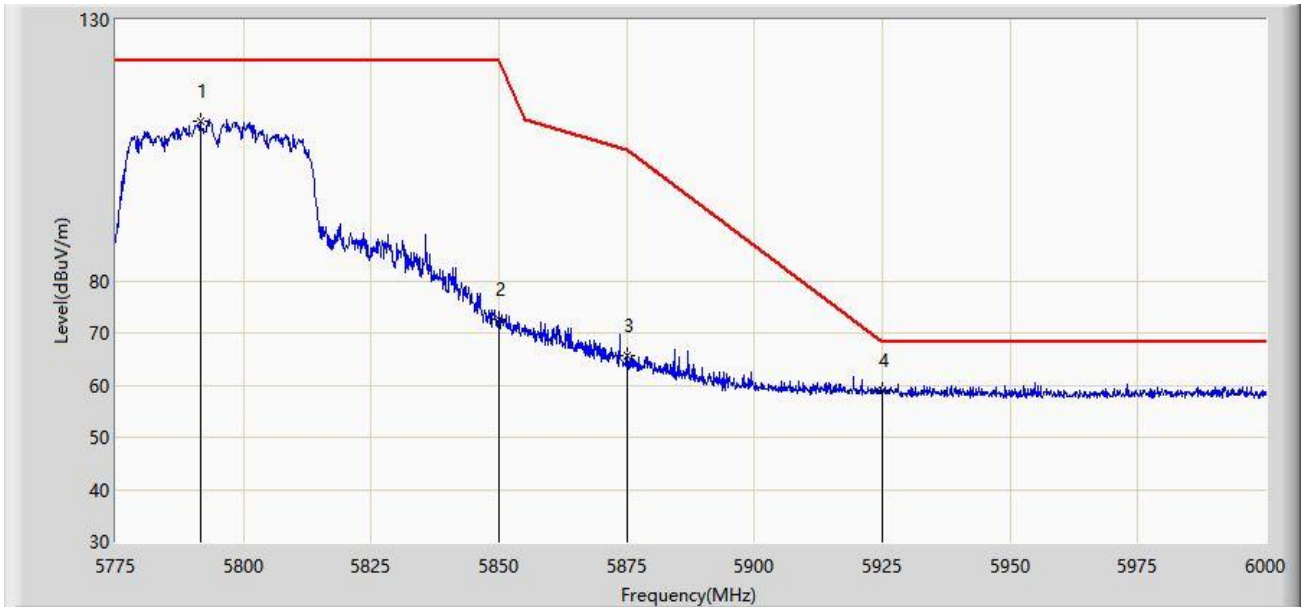


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5791.538 | 110.688 | 106.056 | N/A | N/A | 4.632 | PK |
| 2 | | | 5850.000 | 72.521 | 67.726 | -49.679 | 122.200 | 4.795 | PK |
| 3 | | | 5875.000 | 65.600 | 60.810 | -39.600 | 105.200 | 4.790 | PK |
| 4 | | * | 5925.000 | 58.901 | 53.838 | -9.299 | 68.200 | 5.063 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/29 - 15:27 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz | |

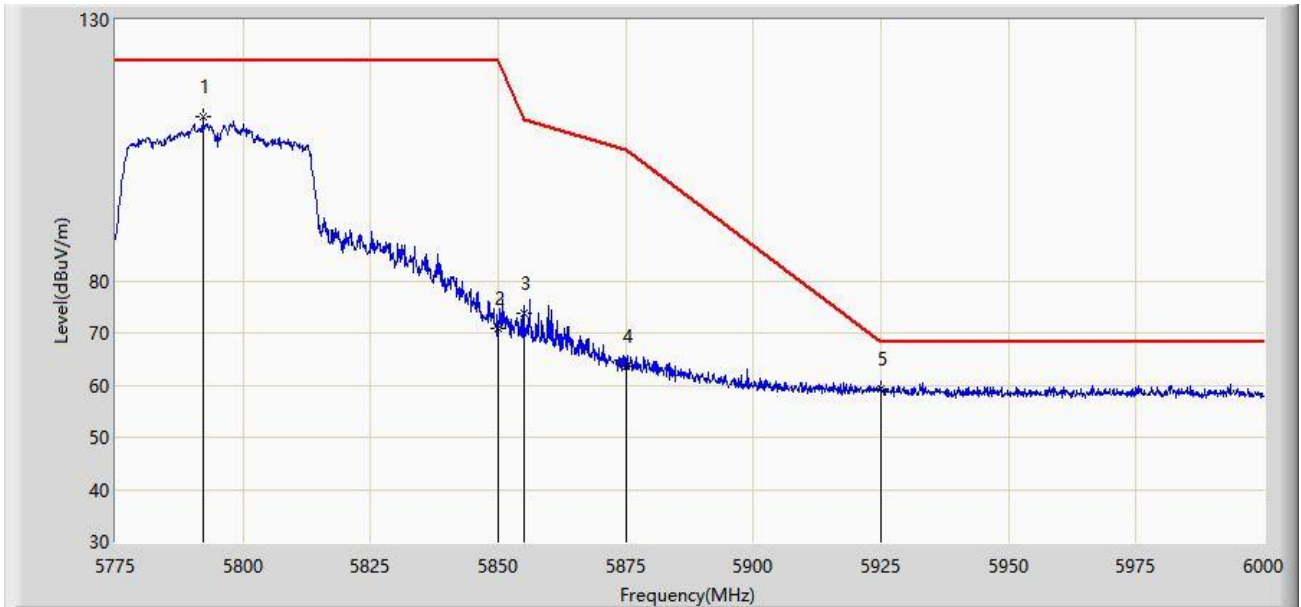


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5792.212 | 111.383 | 106.758 | N/A | N/A | 4.625 | PK |
| 2 | | | 5850.000 | 70.963 | 66.168 | -51.237 | 122.200 | 4.795 | PK |
| 3 | | | 5855.000 | 73.643 | 68.847 | -37.157 | 110.800 | 4.796 | PK |
| 4 | | | 5875.000 | 63.604 | 58.814 | -41.596 | 105.200 | 4.790 | PK |
| 5 | | * | 5925.000 | 59.400 | 54.337 | -8.800 | 68.200 | 5.063 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 21:17 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz | |

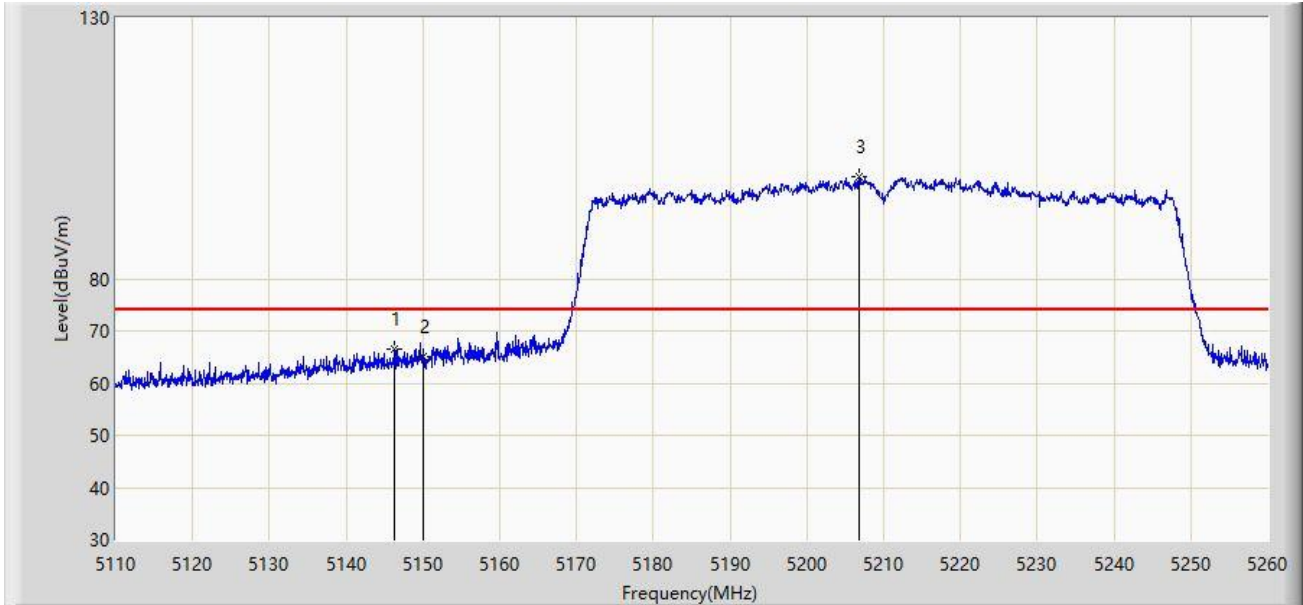


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5146.300 | 66.621 | 62.595 | -7.379 | 74.000 | 4.026 | PK |
| 2 | | | 5150.000 | 65.100 | 61.071 | -8.900 | 74.000 | 4.029 | PK |
| 3 | | * | 5206.750 | 99.548 | 95.517 | N/A | N/A | 4.031 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 20:40 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz | |

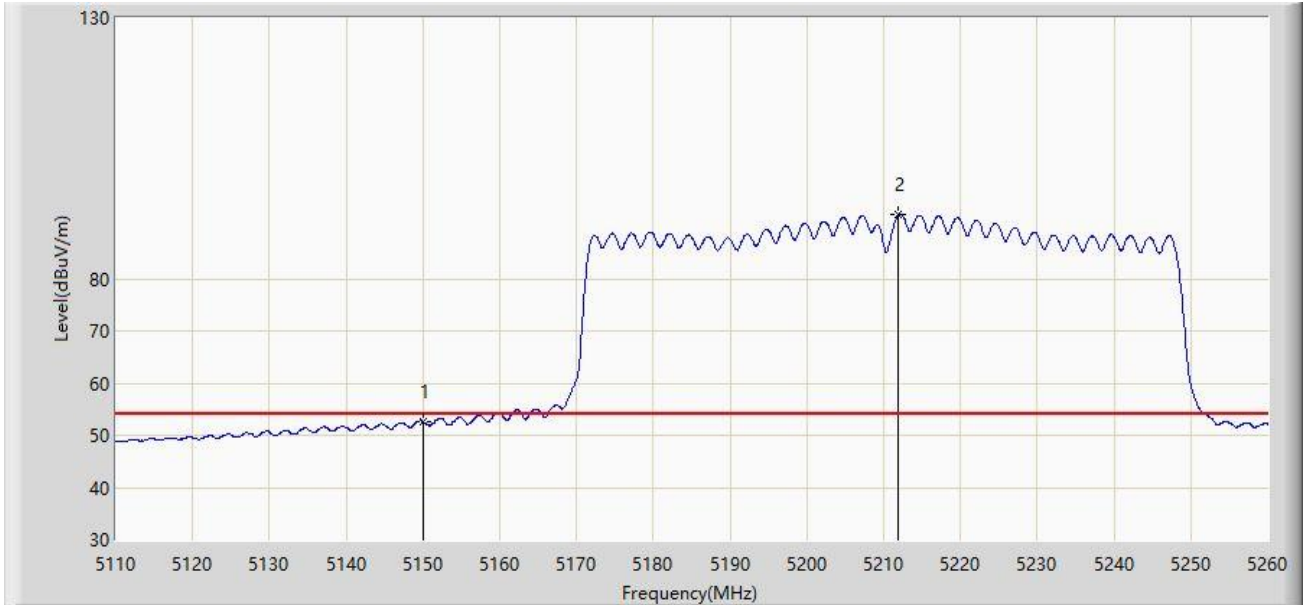


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 52.629 | 48.600 | -1.371 | 54.000 | 4.029 | AV |
| 2 | | * | 5211.925 | 92.307 | 88.295 | N/A | N/A | 4.012 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 21:19 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz | |

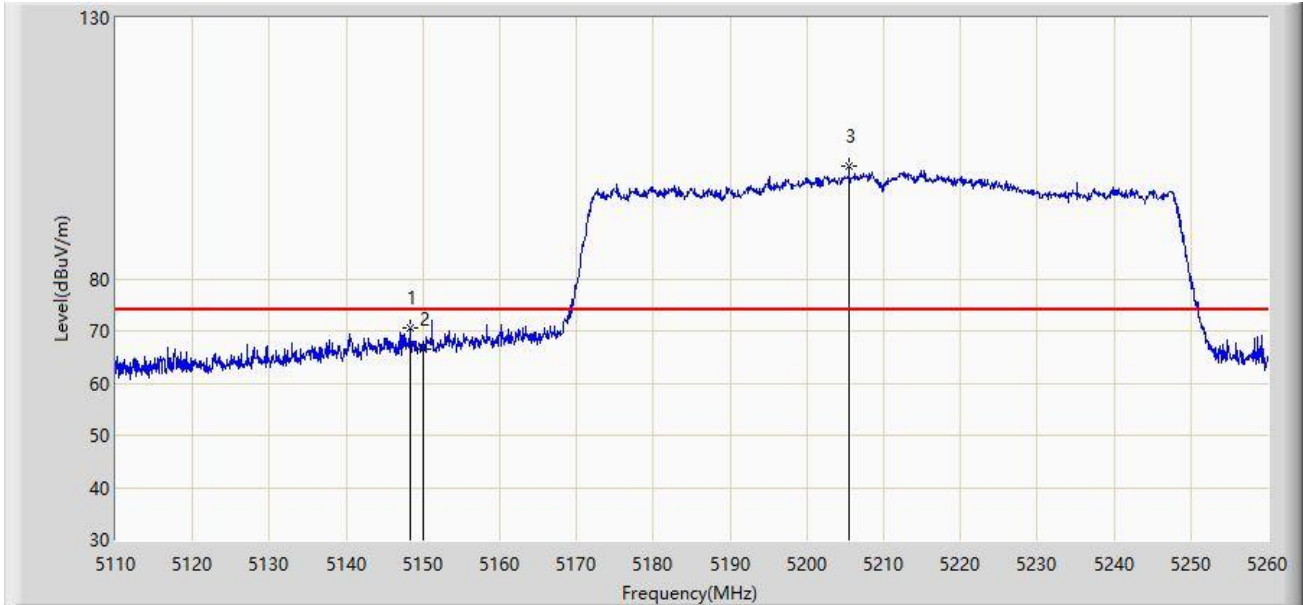


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5148.325 | 70.503 | 66.481 | -3.497 | 74.000 | 4.022 | PK |
| 2 | | | 5150.000 | 66.398 | 62.369 | -7.602 | 74.000 | 4.029 | PK |
| 3 | | * | 5205.475 | 101.652 | 97.616 | N/A | N/A | 4.036 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/28 - 21:21 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Buter Shi |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz | |

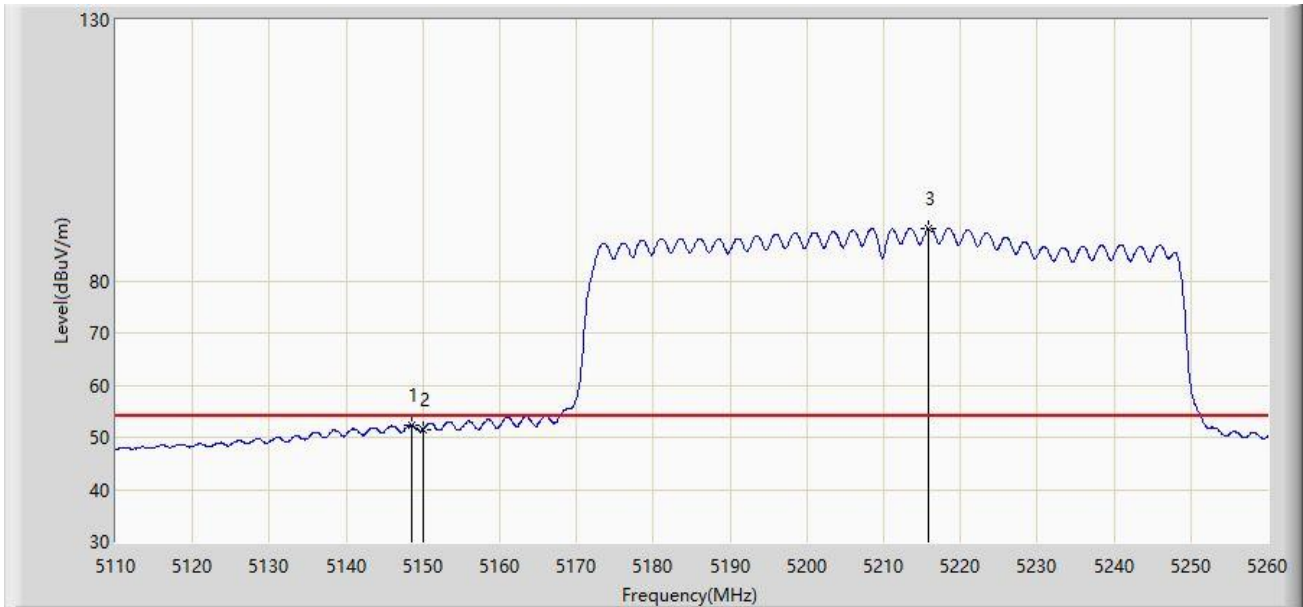


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5148.550 | 52.424 | 48.401 | -1.576 | 54.000 | 4.022 | AV |
| 2 | | | 5150.000 | 51.535 | 47.506 | -2.465 | 54.000 | 4.029 | AV |
| 3 | | * | 5215.825 | 90.105 | 86.107 | N/A | N/A | 3.998 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 11:39 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz | |

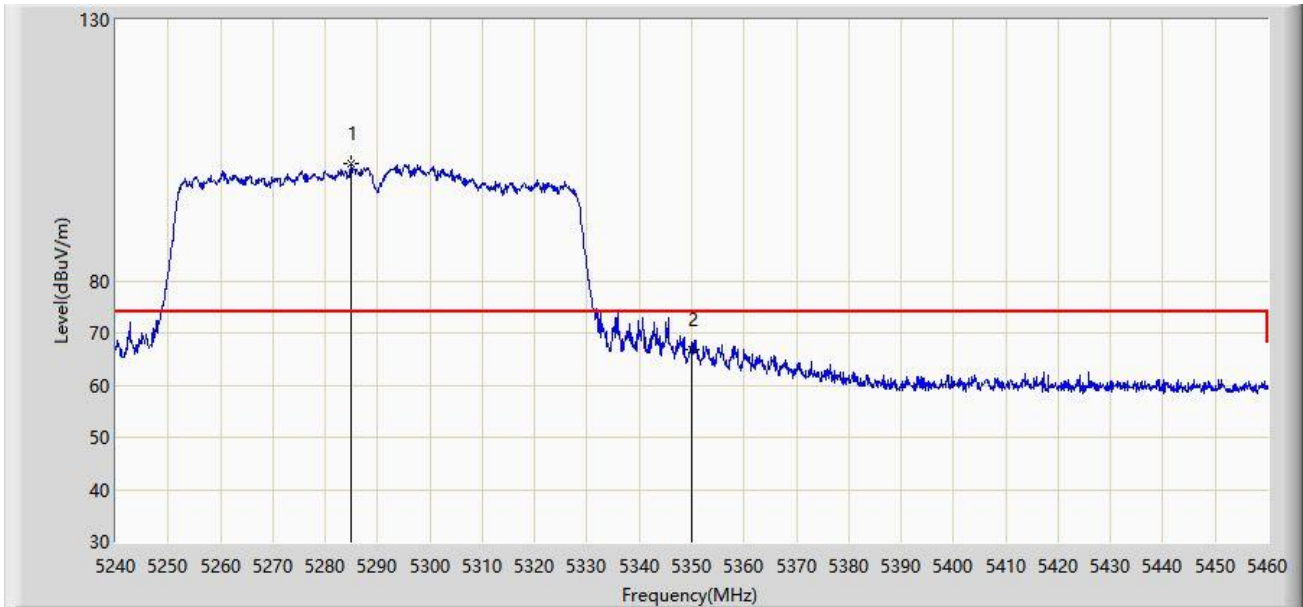


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5284.880 | 102.565 | 98.704 | N/A | N/A | 3.861 | PK |
| 2 | | | 5350.000 | 66.868 | 62.851 | -7.132 | 74.000 | 4.017 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 11:37 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz | |

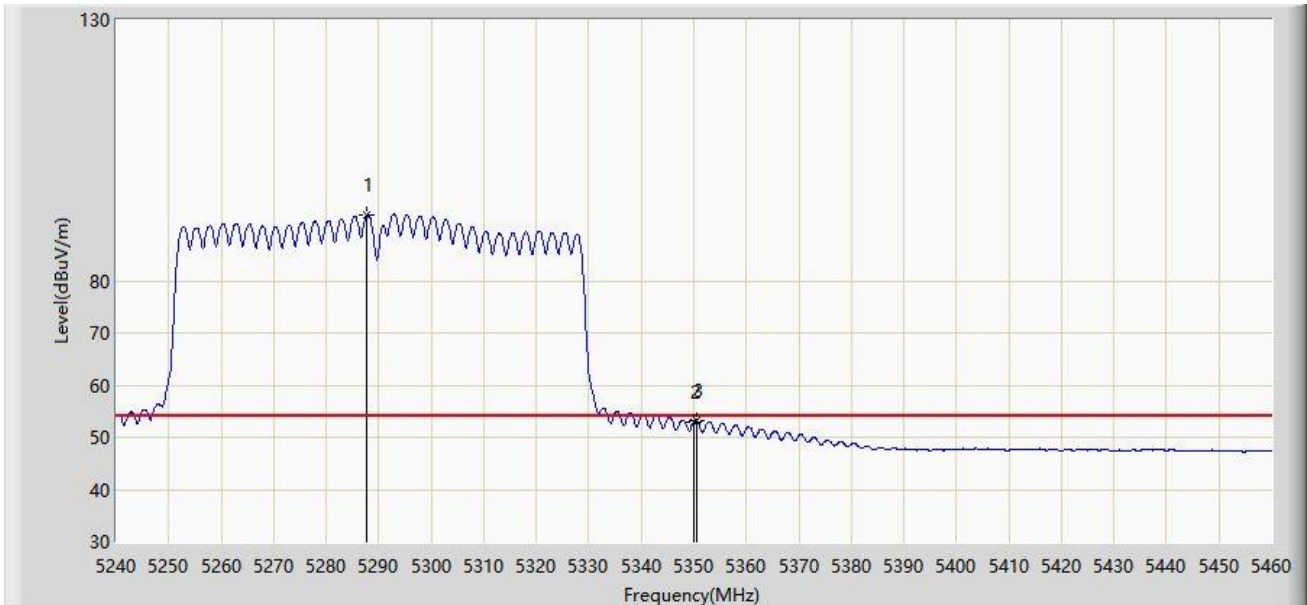


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5287.740 | 92.594 | 88.763 | N/A | N/A | 3.830 | AV |
| 2 | | | 5350.000 | 52.919 | 48.902 | -1.081 | 54.000 | 4.017 | AV |
| 3 | | | 5350.440 | 53.193 | 49.173 | -0.807 | 54.000 | 4.021 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 11:41 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz | |

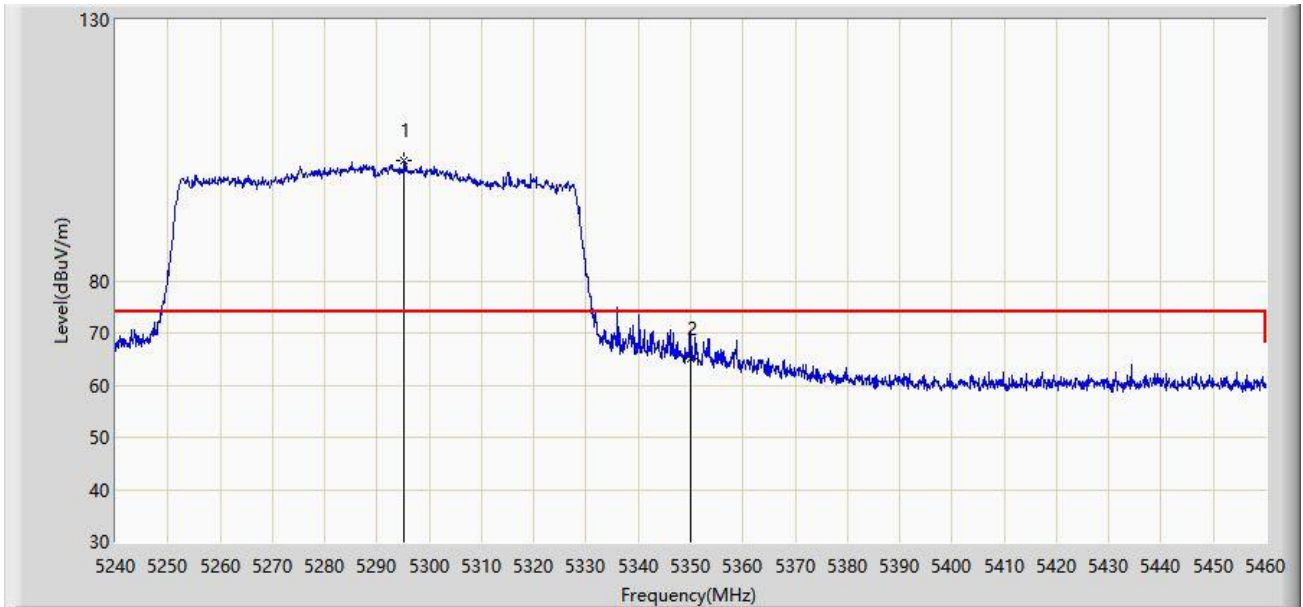


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5295.110 | 103.001 | 99.249 | N/A | N/A | 3.752 | PK |
| 2 | | | 5350.000 | 64.997 | 60.980 | -9.003 | 74.000 | 4.017 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 11:44 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz | |

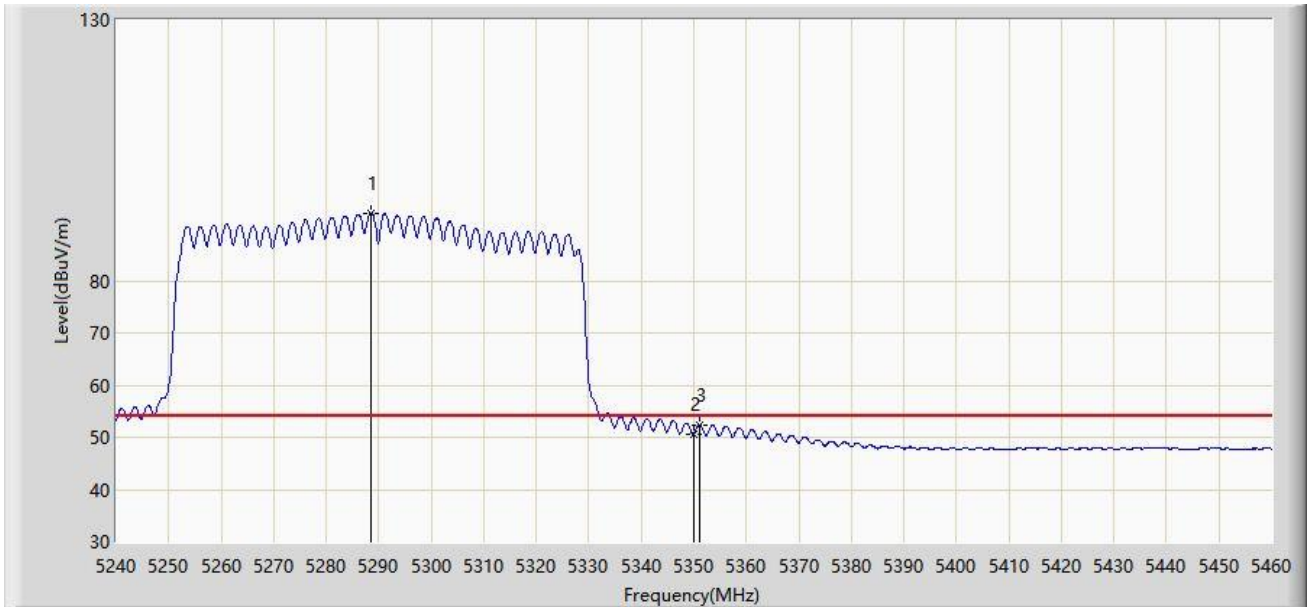


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5288.400 | 92.986 | 89.162 | N/A | N/A | 3.824 | AV |
| 2 | | | 5350.000 | 50.533 | 46.516 | -3.467 | 54.000 | 4.017 | AV |
| 3 | | | 5351.100 | 52.351 | 48.327 | -1.649 | 54.000 | 4.024 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 11:59 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz | |

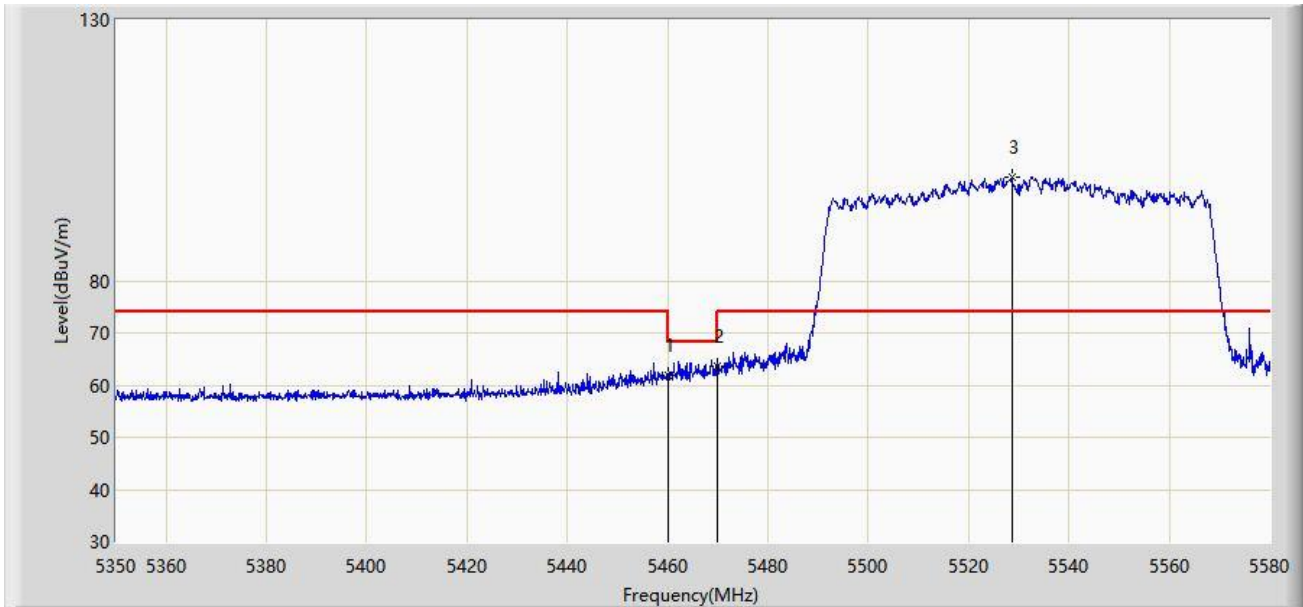


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 61.753 | 57.491 | -12.247 | 74.000 | 4.261 | PK |
| 2 | | | 5470.000 | 63.716 | 59.512 | -4.484 | 68.200 | 4.204 | PK |
| 3 | | * | 5528.595 | 99.818 | 95.334 | N/A | N/A | 4.485 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 12:01 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz | |

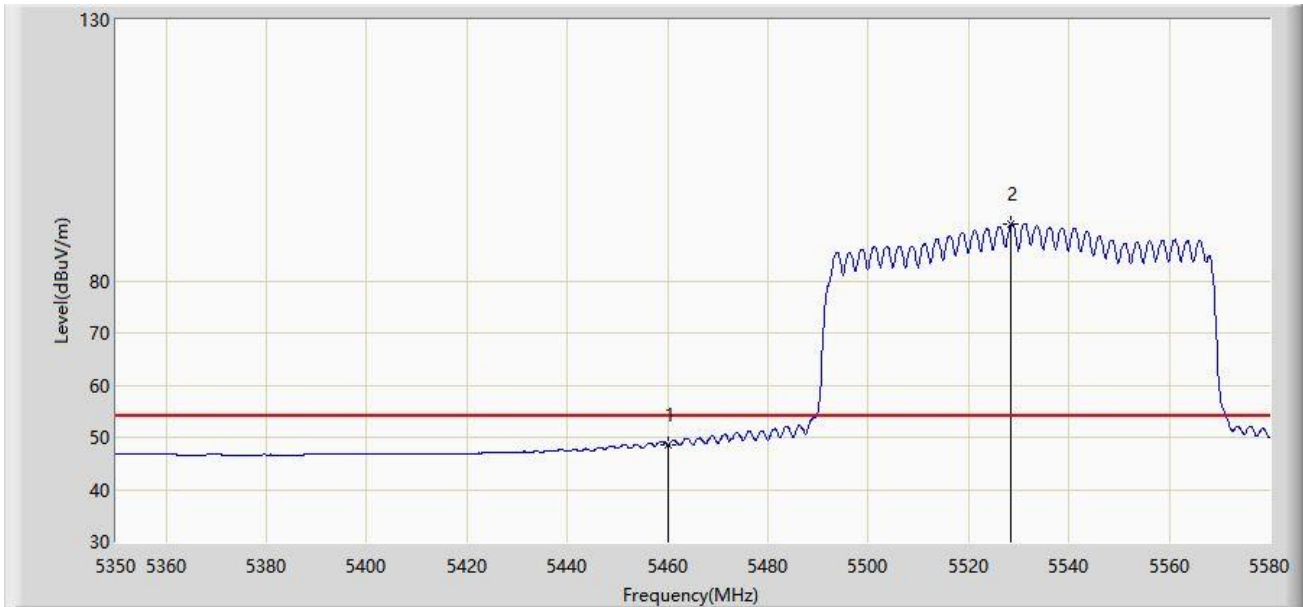


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 48.458 | 44.196 | -5.542 | 54.000 | 4.261 | AV |
| 2 | | * | 5528.480 | 90.812 | 86.327 | N/A | N/A | 4.486 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 20:43 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz | |

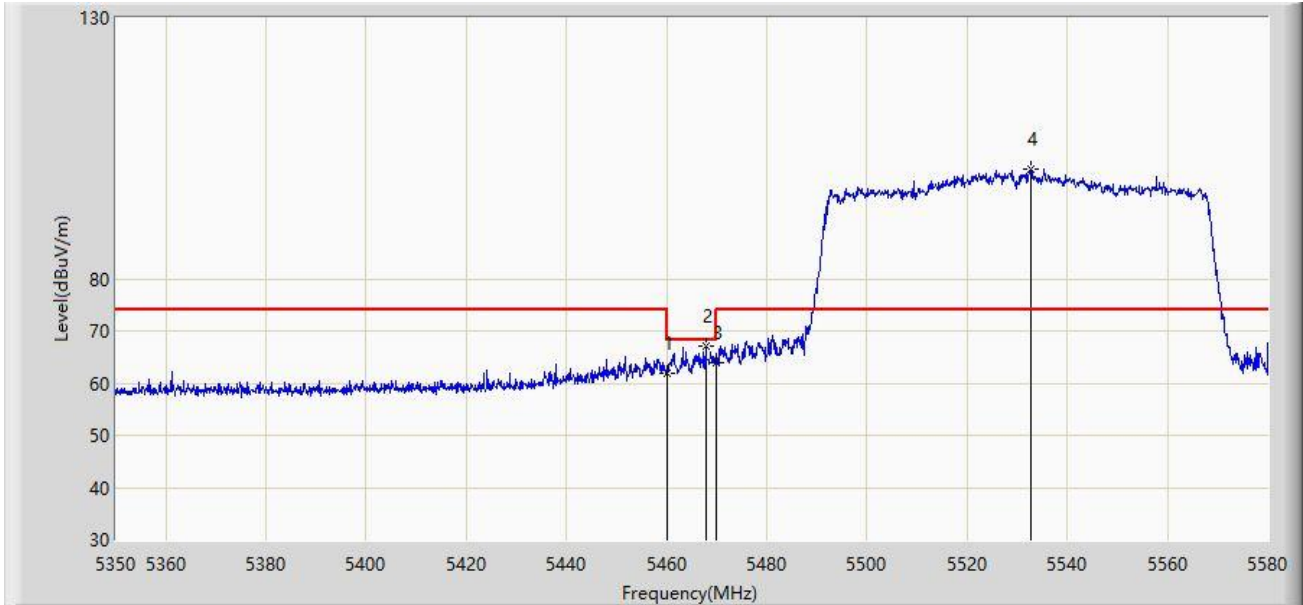


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 61.945 | 57.683 | -12.055 | 74.000 | 4.261 | PK |
| 2 | | | 5467.760 | 67.010 | 62.793 | -1.190 | 68.200 | 4.217 | PK |
| 3 | | | 5470.000 | 63.909 | 59.705 | -4.291 | 68.200 | 4.204 | PK |
| 4 | | * | 5532.735 | 101.090 | 96.654 | N/A | N/A | 4.436 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 12:01 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz | |

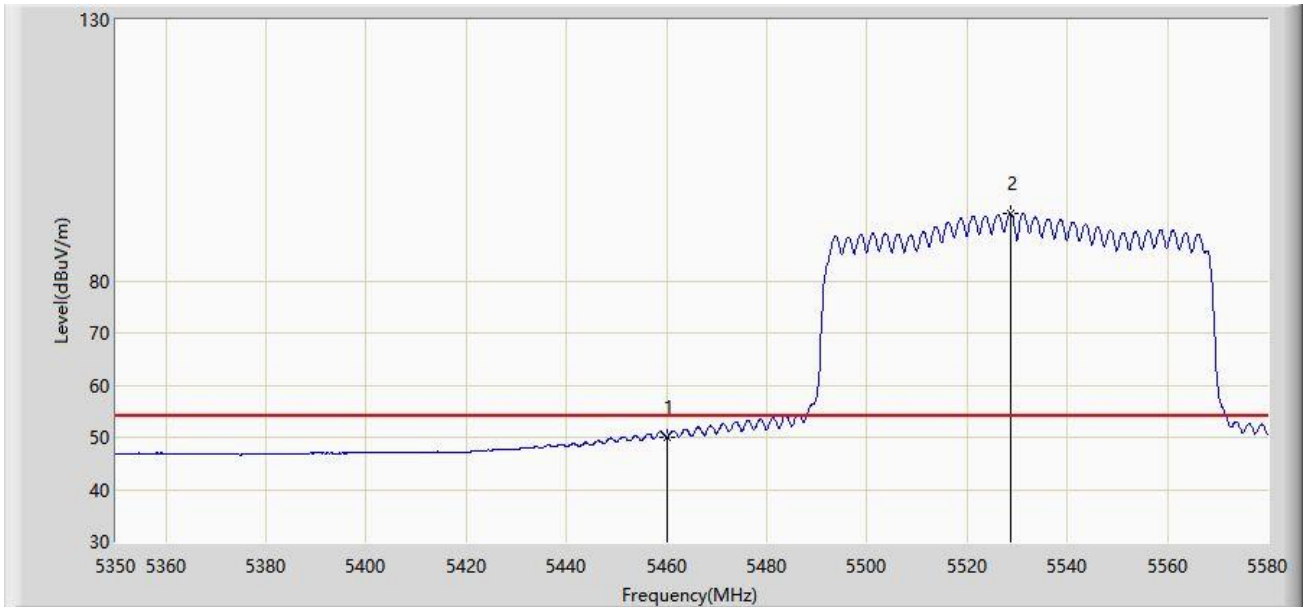


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 50.011 | 45.749 | -3.989 | 54.000 | 4.261 | AV |
| 2 | | * | 5528.595 | 92.896 | 88.412 | N/A | N/A | 4.485 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 13:14 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz | |

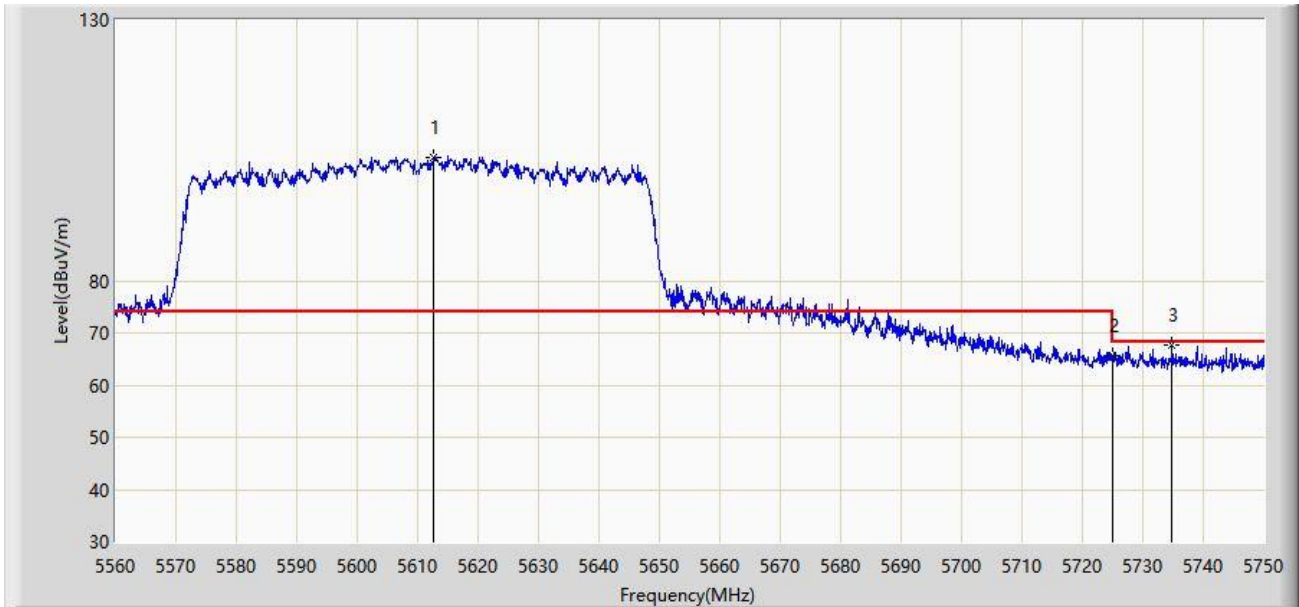


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5612.630 | 103.762 | 99.254 | N/A | N/A | 4.508 | PK |
| 2 | | | 5725.000 | 65.590 | 61.079 | -2.610 | 68.200 | 4.511 | PK |
| 3 | | | 5734.800 | 67.550 | 63.041 | -0.650 | 68.200 | 4.509 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 13:16 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz | |

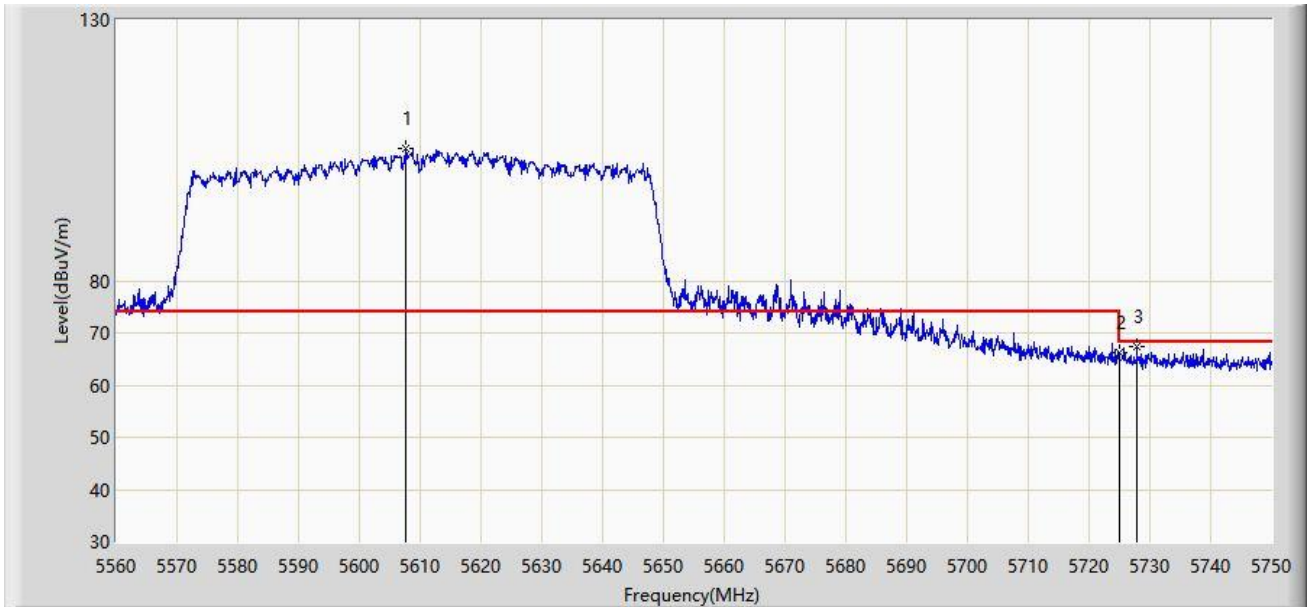


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5607.595 | 105.371 | 100.901 | N/A | N/A | 4.470 | PK |
| 2 | | | 5725.000 | 66.275 | 61.764 | -1.925 | 68.200 | 4.511 | PK |
| 3 | | | 5727.865 | 67.294 | 62.780 | -0.906 | 68.200 | 4.515 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 13:26 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz | |

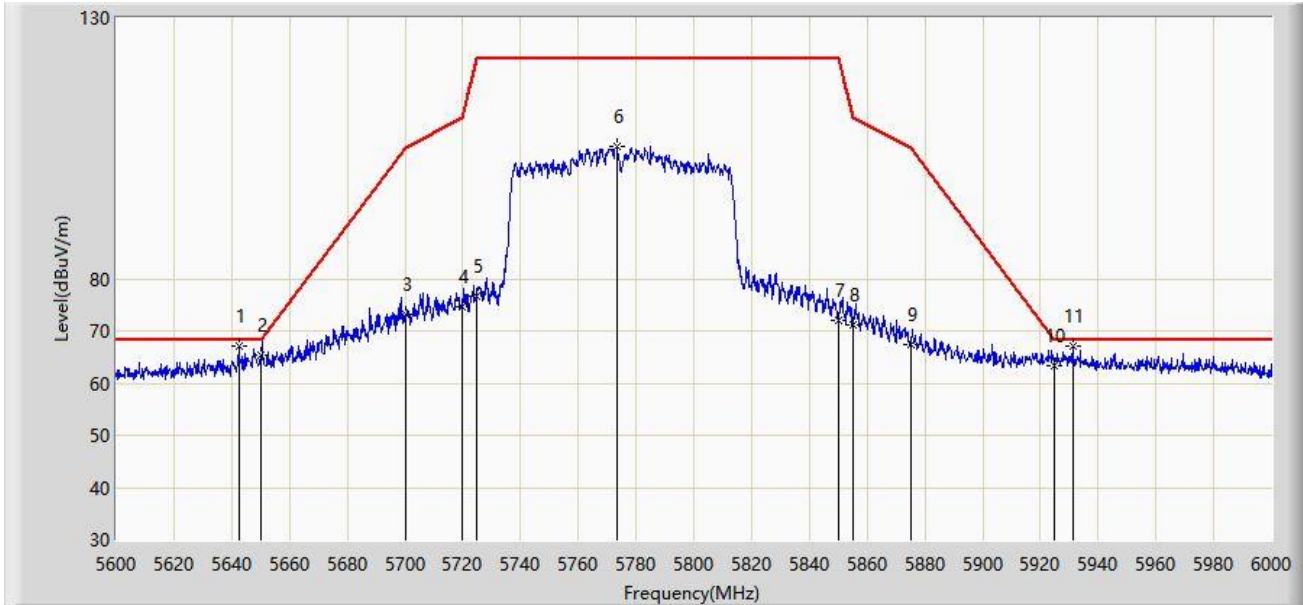


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5642.400 | 67.126 | 62.834 | -1.074 | 68.200 | 4.292 | PK |
| 2 | | | 5650.000 | 65.449 | 61.116 | -2.751 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 73.151 | 68.599 | -32.049 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 74.689 | 70.176 | -36.111 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 76.721 | 72.210 | -45.479 | 122.200 | 4.511 | PK |
| 6 | | | 5773.200 | 105.387 | 100.654 | N/A | N/A | 4.732 | PK |
| 7 | | | 5850.000 | 72.030 | 67.235 | -50.170 | 122.200 | 4.795 | PK |
| 8 | | | 5855.000 | 71.071 | 66.275 | -39.729 | 110.800 | 4.796 | PK |
| 9 | | | 5875.000 | 67.262 | 62.472 | -37.938 | 105.200 | 4.790 | PK |
| 10 | | | 5925.000 | 63.457 | 58.394 | -4.743 | 68.200 | 5.063 | PK |
| 11 | | | 5931.200 | 66.997 | 61.955 | -1.203 | 68.200 | 5.042 | PK |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|--|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 13:24 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz | |

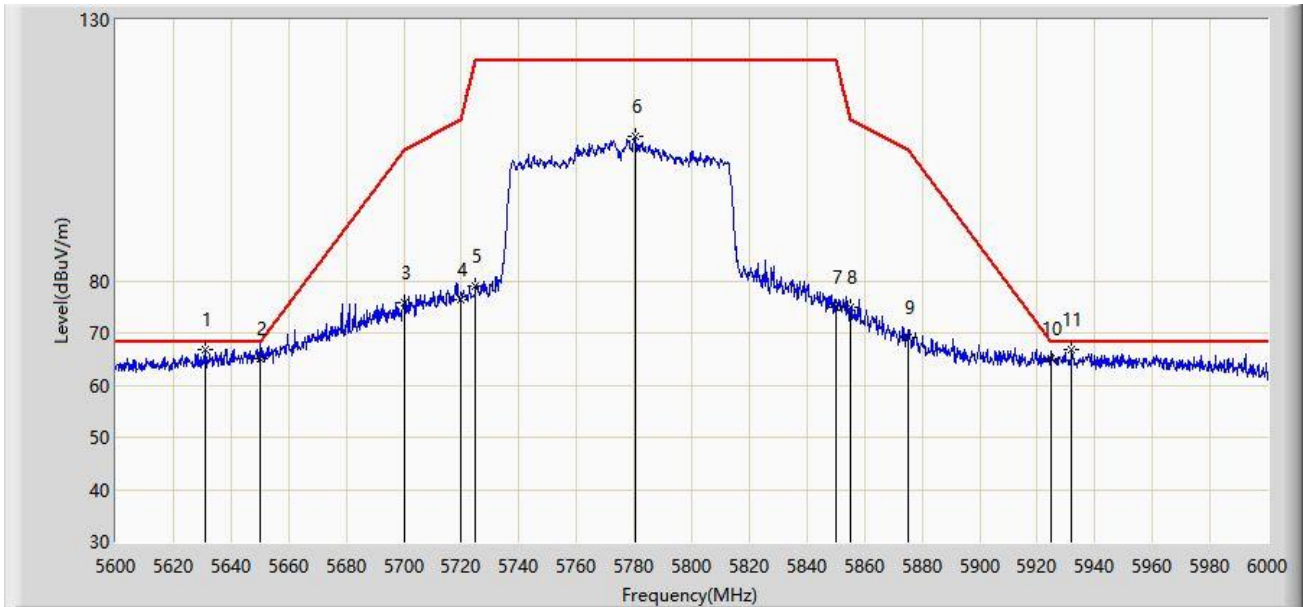


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5631.200 | 66.938 | 62.553 | -1.262 | 68.200 | 4.385 | PK |
| 2 | | | 5650.000 | 65.185 | 60.852 | -3.015 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 75.869 | 71.317 | -29.331 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 76.340 | 71.827 | -34.460 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 78.991 | 74.480 | -43.209 | 122.200 | 4.511 | PK |
| 6 | | | 5780.600 | 107.791 | 103.044 | N/A | N/A | 4.747 | PK |
| 7 | | | 5850.000 | 74.898 | 70.103 | -47.302 | 122.200 | 4.795 | PK |
| 8 | | | 5855.000 | 74.976 | 70.180 | -35.824 | 110.800 | 4.796 | PK |
| 9 | | | 5875.000 | 69.166 | 64.376 | -36.034 | 105.200 | 4.790 | PK |
| 10 | | | 5925.000 | 64.932 | 59.869 | -3.268 | 68.200 | 5.063 | PK |
| 11 | | | 5932.000 | 66.903 | 61.871 | -1.297 | 68.200 | 5.032 | PK |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 13:42 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz | |

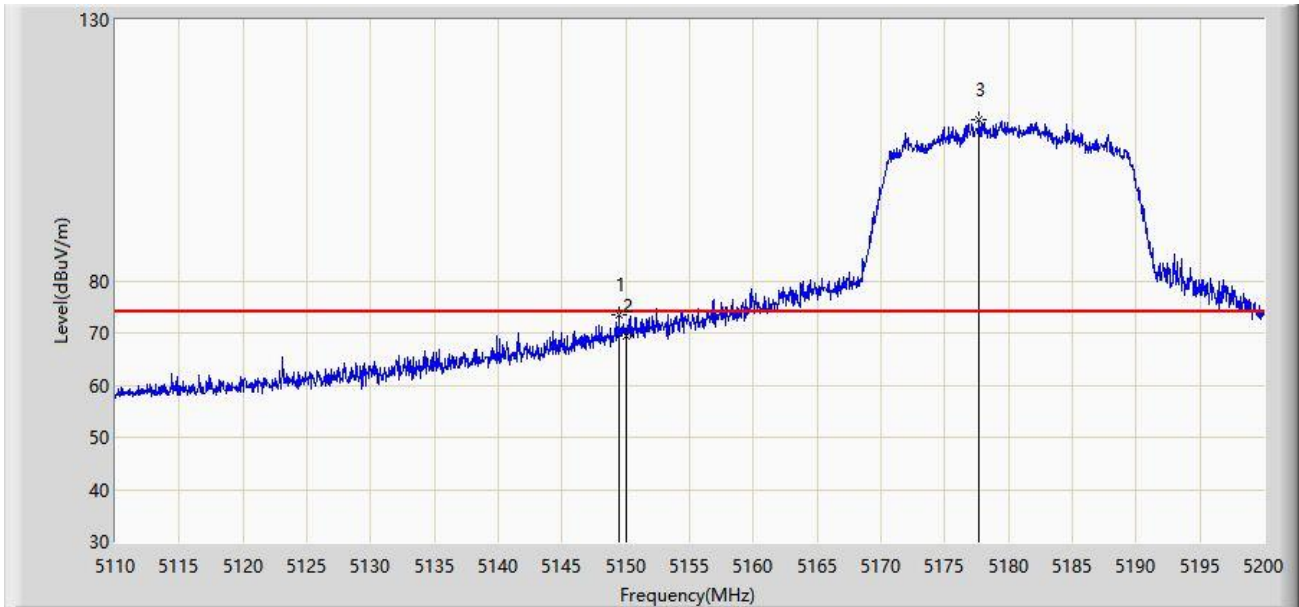


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5149.420 | 73.449 | 69.423 | -0.551 | 74.000 | 4.027 | PK |
| 2 | | | 5150.000 | 69.547 | 65.518 | -4.453 | 74.000 | 4.029 | PK |
| 3 | | * | 5177.725 | 110.744 | 106.632 | N/A | N/A | 4.113 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 13:51 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz | |

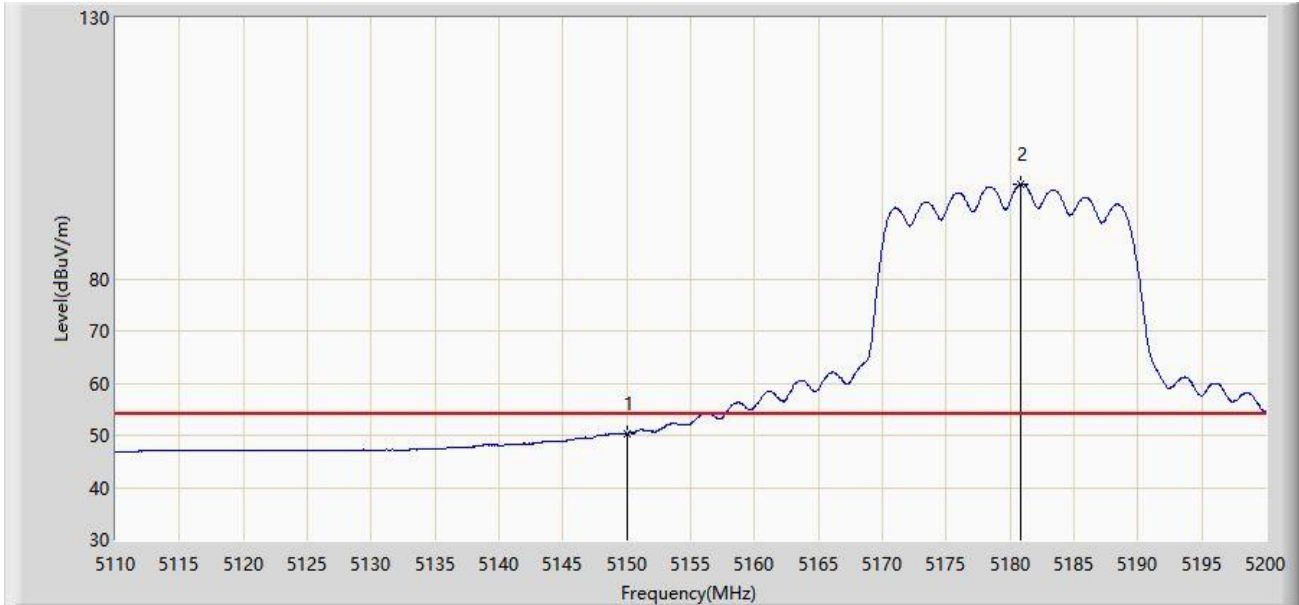


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 50.338 | 46.309 | -3.662 | 54.000 | 4.029 | AV |
| 2 | | * | 5180.785 | 98.183 | 94.086 | N/A | N/A | 4.097 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 13:47 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz | |

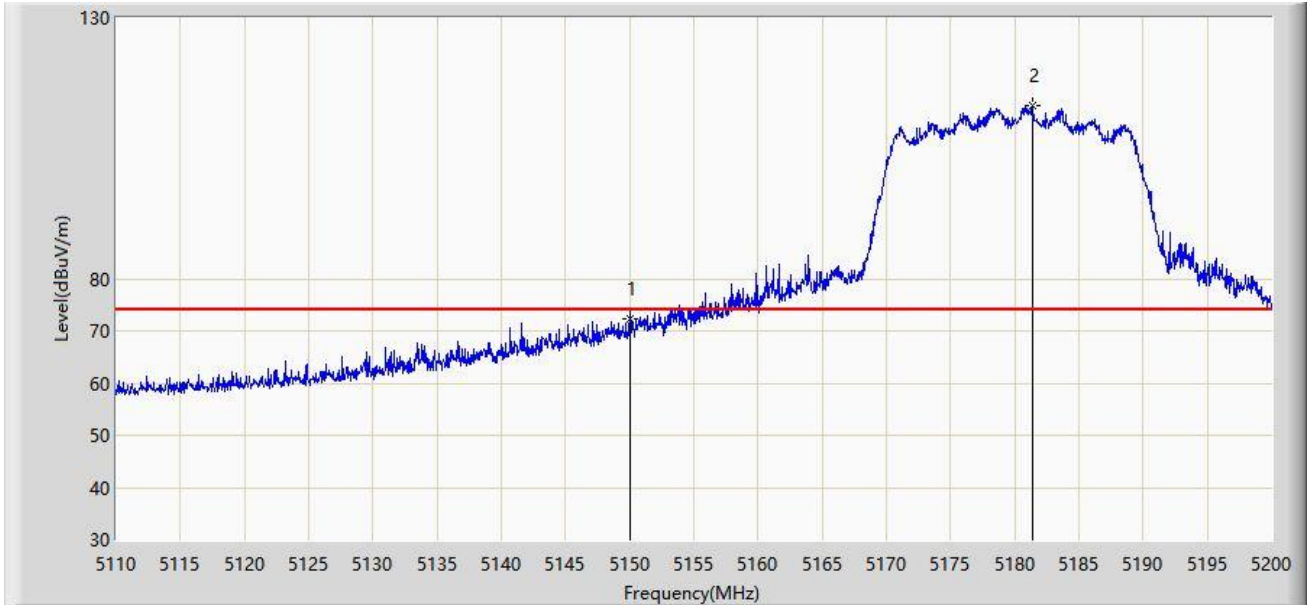


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 72.431 | 68.402 | -1.569 | 74.000 | 4.029 | PK |
| 2 | | * | 5181.370 | 113.178 | 109.084 | N/A | N/A | 4.094 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 13:51 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz | |

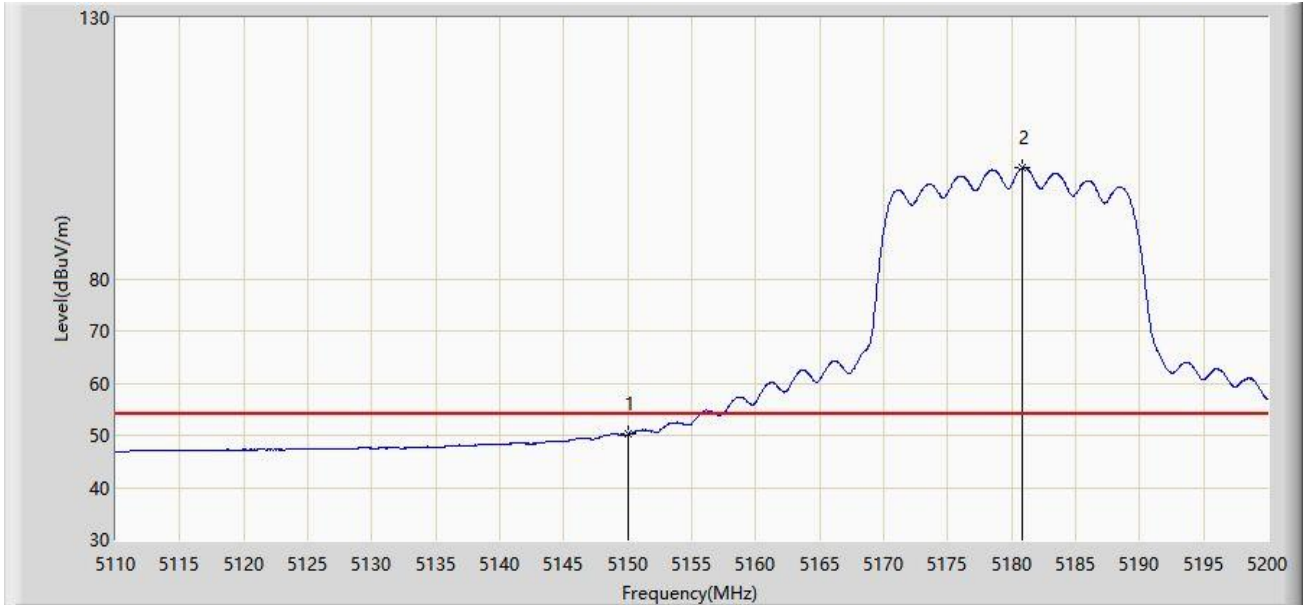


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 50.154 | 46.125 | -3.846 | 54.000 | 4.029 | AV |
| 2 | | * | 5180.875 | 101.313 | 97.216 | N/A | N/A | 4.097 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 14:03 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz | |

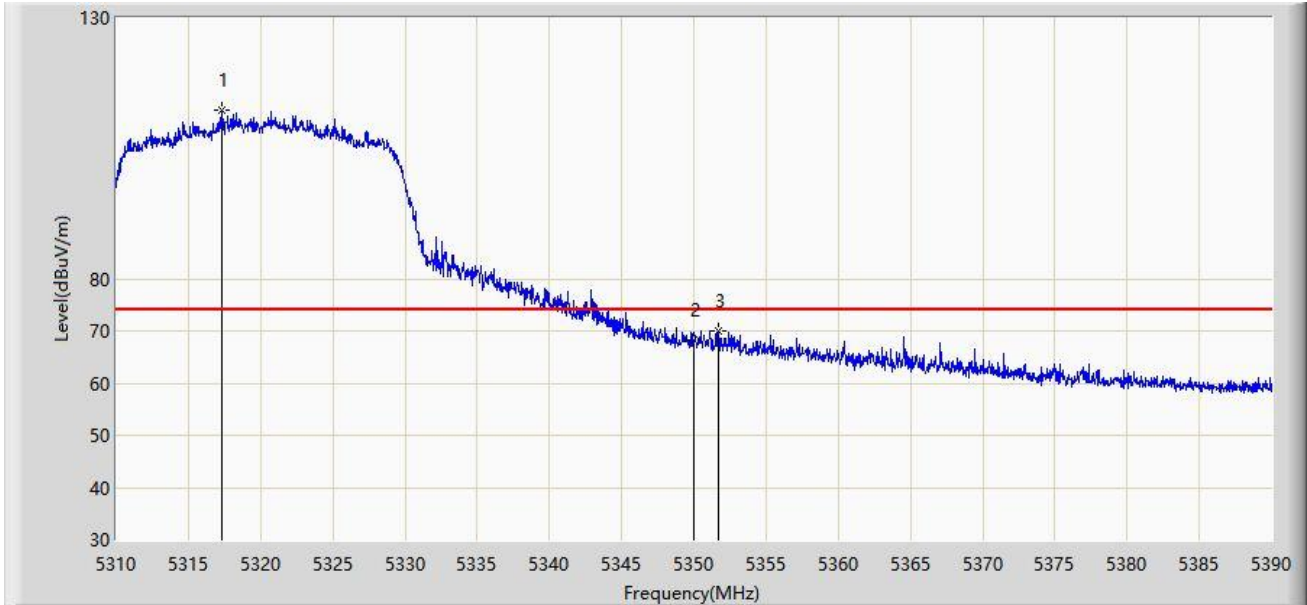


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5317.360 | 112.417 | 108.609 | N/A | N/A | 3.808 | PK |
| 2 | | | 5350.000 | 68.313 | 64.296 | -5.687 | 74.000 | 4.017 | PK |
| 3 | | | 5351.720 | 70.001 | 65.973 | -3.999 | 74.000 | 4.027 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 14:04 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz | |

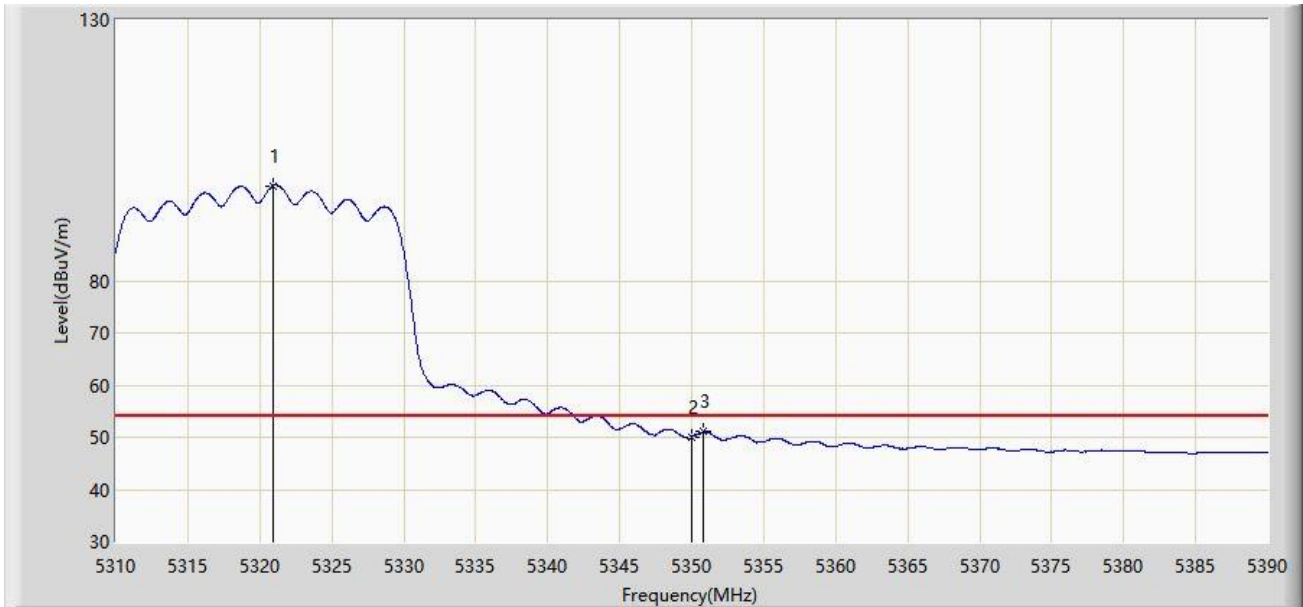


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5320.920 | 98.196 | 94.377 | N/A | N/A | 3.818 | AV |
| 2 | | | 5350.000 | 49.950 | 45.933 | -4.050 | 54.000 | 4.017 | AV |
| 3 | | | 5350.840 | 51.045 | 47.023 | -2.955 | 54.000 | 4.023 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 14:01 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz | |

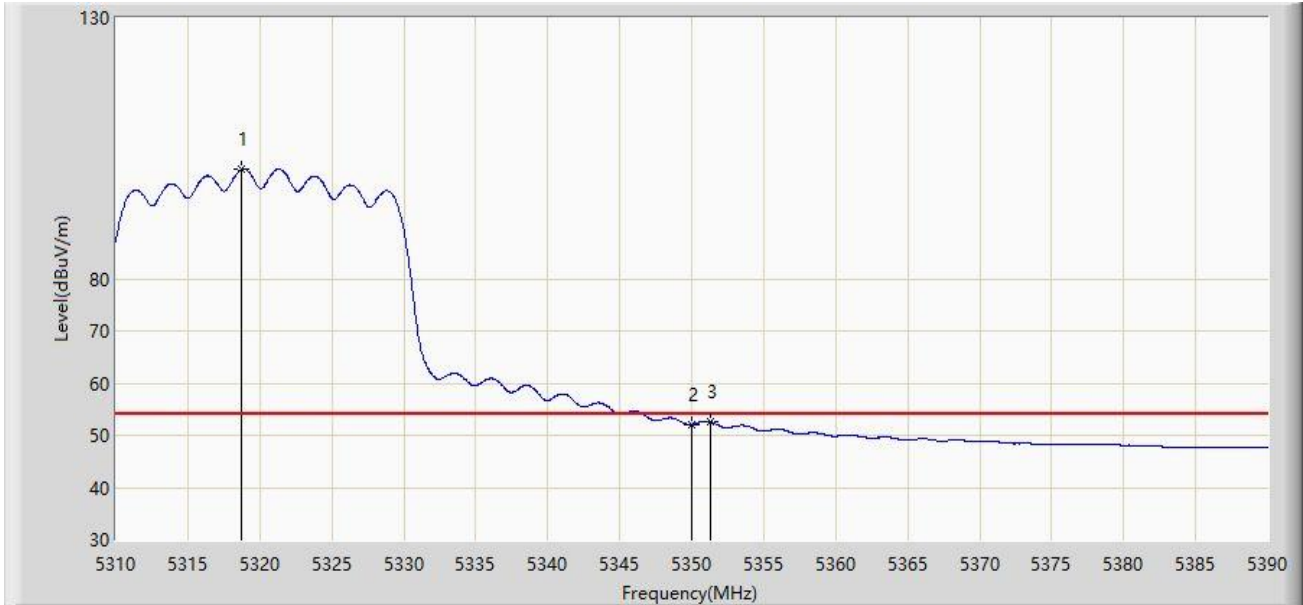


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5318.760 | 100.977 | 97.167 | N/A | N/A | 3.810 | AV |
| 2 | | | 5350.000 | 52.040 | 48.023 | -1.960 | 54.000 | 4.017 | AV |
| 3 | | | 5351.280 | 52.582 | 48.557 | -1.418 | 54.000 | 4.025 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 14:01 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5320MHz | |

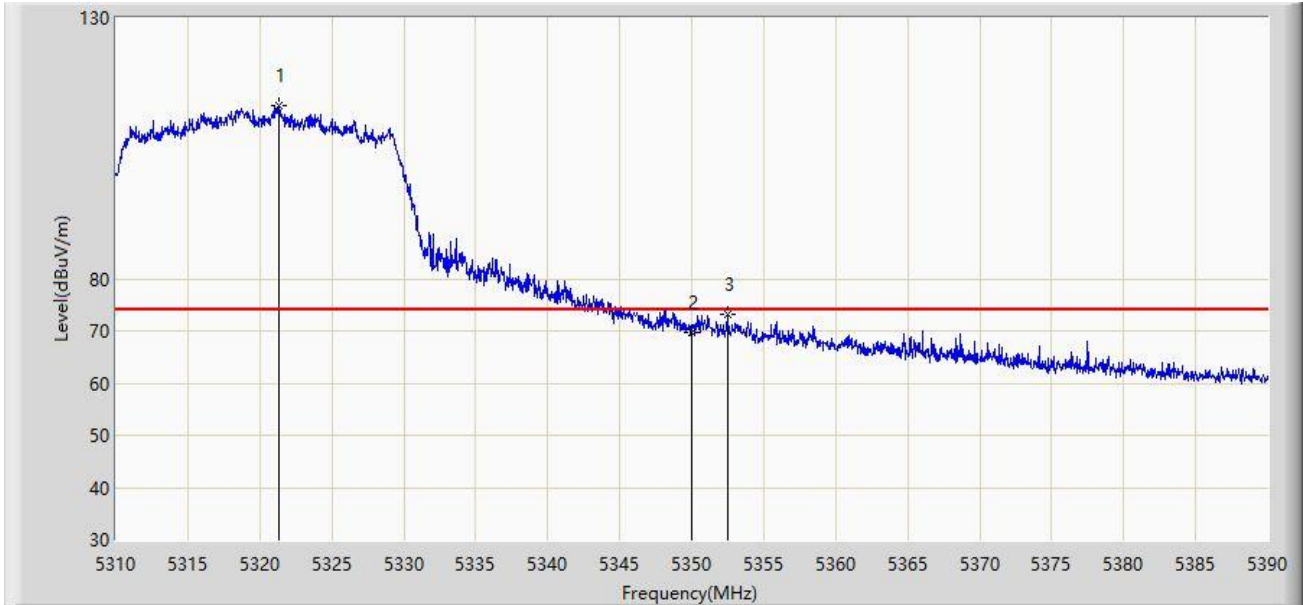


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5321.280 | 113.152 | 109.332 | N/A | N/A | 3.820 | PK |
| 2 | | | 5350.000 | 69.618 | 65.601 | -4.382 | 74.000 | 4.017 | PK |
| 3 | | | 5352.480 | 73.311 | 69.282 | -0.689 | 74.000 | 4.028 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 14:18 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz | |

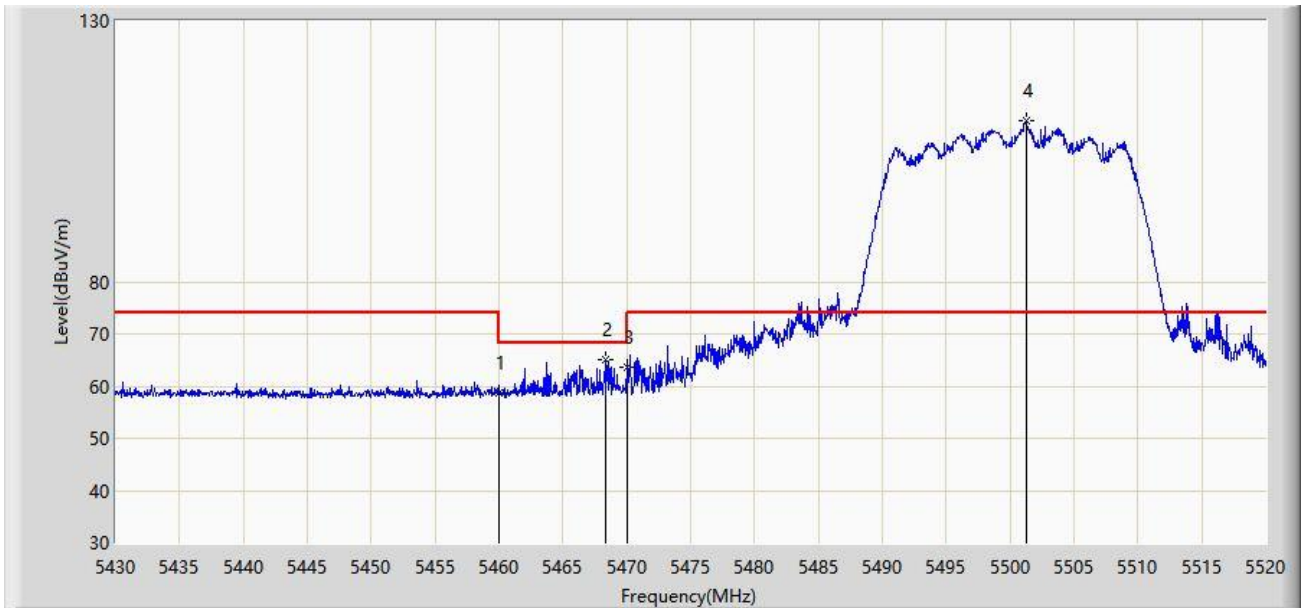

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 58.553 | 54.291 | -15.447 | 74.000 | 4.261 | PK |
| 2 | | | 5468.385 | 65.198 | 60.984 | -3.002 | 68.200 | 4.214 | PK |
| 3 | | | 5470.000 | 63.511 | 59.307 | -4.689 | 68.200 | 4.204 | PK |
| 4 | | * | 5501.325 | 110.966 | 106.571 | N/A | N/A | 4.394 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 14:28 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5500MHz | |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 46.965 | 42.703 | -7.035 | 54.000 | 4.261 | AV |
| 2 | | * | 5497.725 | 97.280 | 92.939 | N/A | N/A | 4.341 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 14:48 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz | |

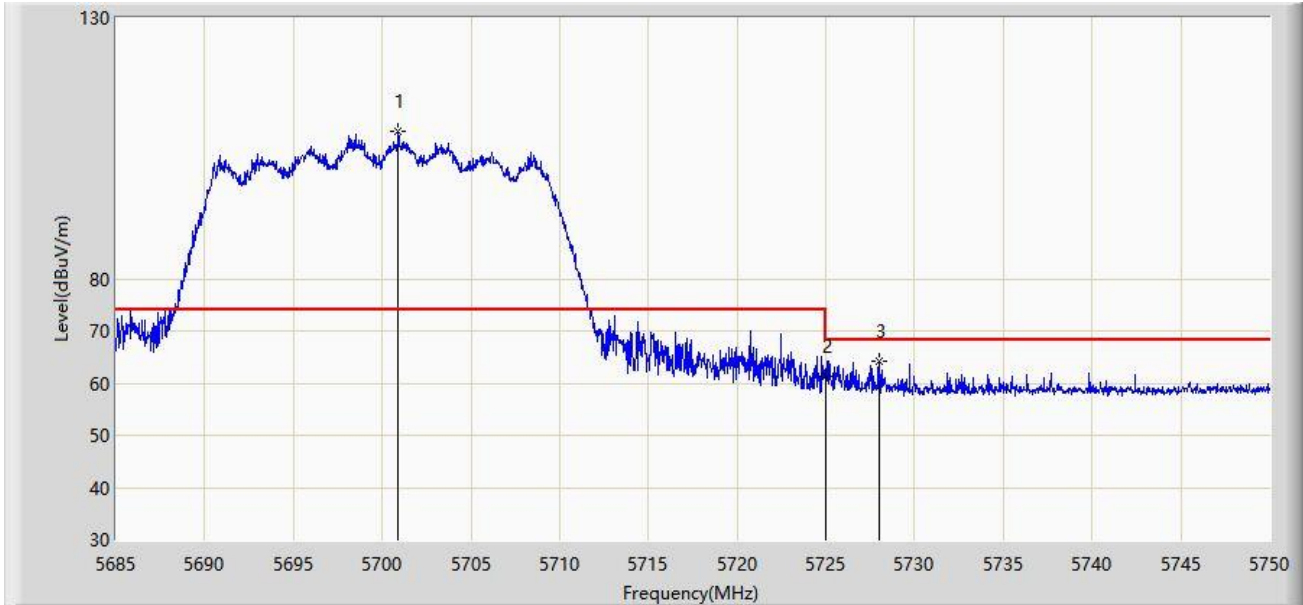


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5700.893 | 108.391 | 103.843 | N/A | N/A | 4.547 | PK |
| 2 | | | 5725.000 | 61.385 | 56.874 | -6.815 | 68.200 | 4.511 | PK |
| 3 | | | 5727.998 | 64.346 | 59.832 | -3.854 | 68.200 | 4.514 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 14:50 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5700MHz | |

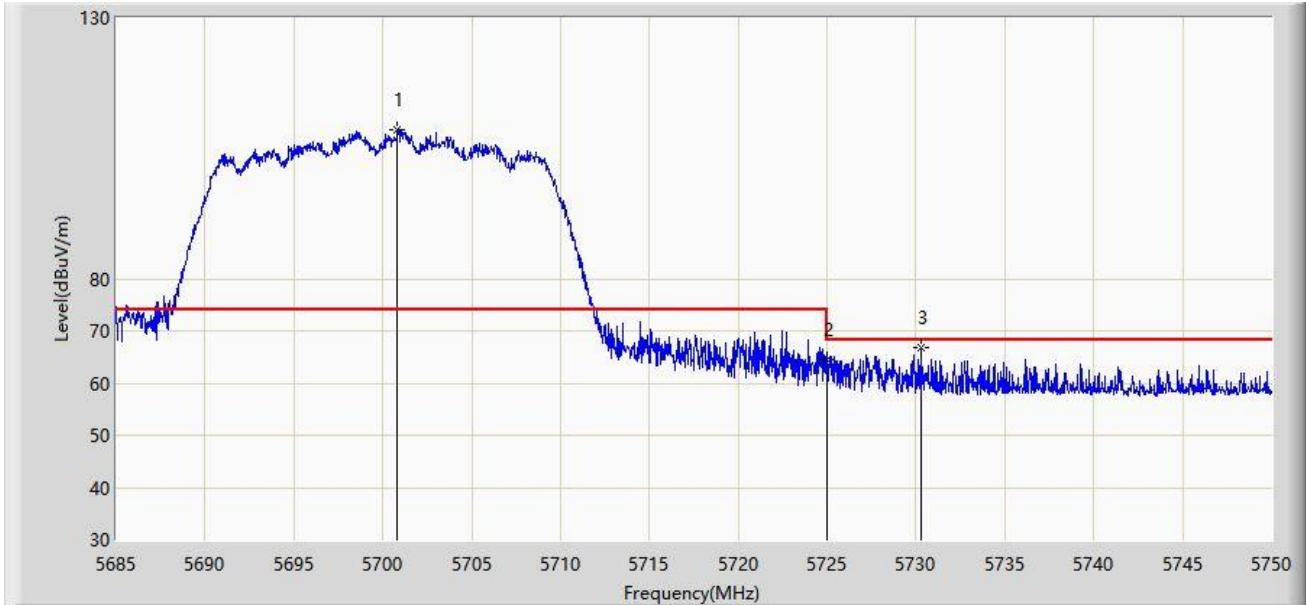


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5700.828 | 108.584 | 104.036 | N/A | N/A | 4.548 | PK |
| 2 | | | 5725.000 | 64.480 | 59.969 | -3.720 | 68.200 | 4.511 | PK |
| 3 | | | 5730.272 | 66.908 | 62.396 | -1.292 | 68.200 | 4.513 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:07 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz | |

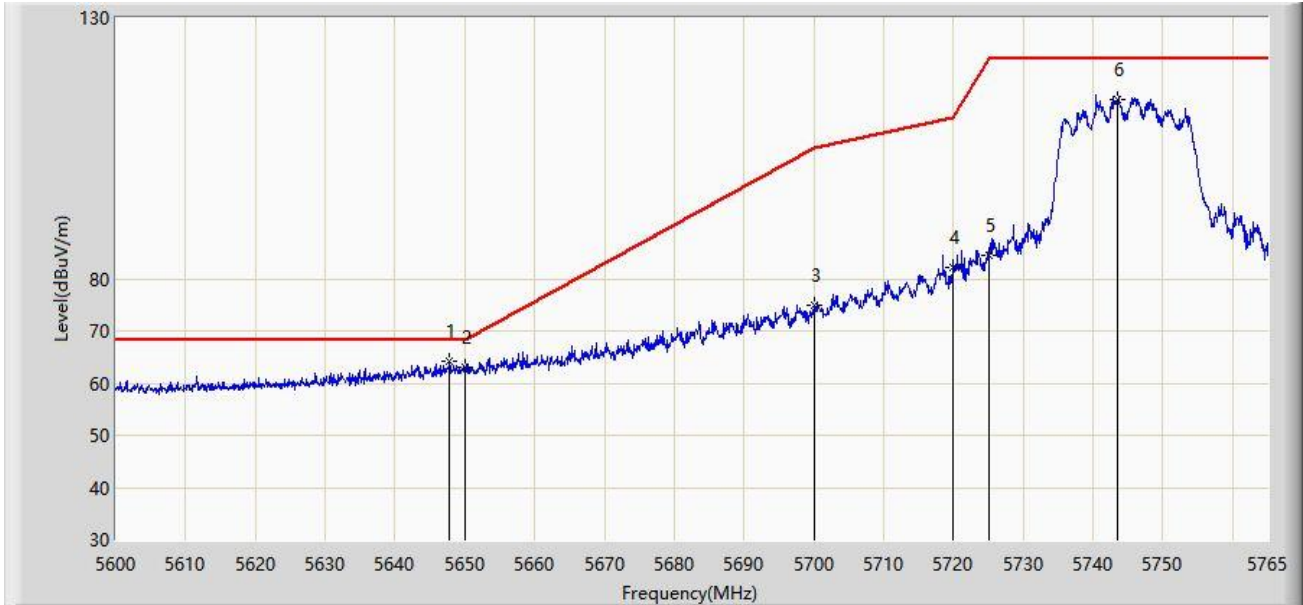


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5647.850 | 64.225 | 59.904 | -3.975 | 68.200 | 4.321 | PK |
| 2 | | | 5650.000 | 63.065 | 58.732 | -5.135 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 74.993 | 70.441 | -30.207 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 82.251 | 77.738 | -28.549 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 84.578 | 80.067 | -37.622 | 122.200 | 4.511 | PK |
| 6 | | | 5743.467 | 114.406 | 109.903 | N/A | N/A | 4.503 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:12 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz | |

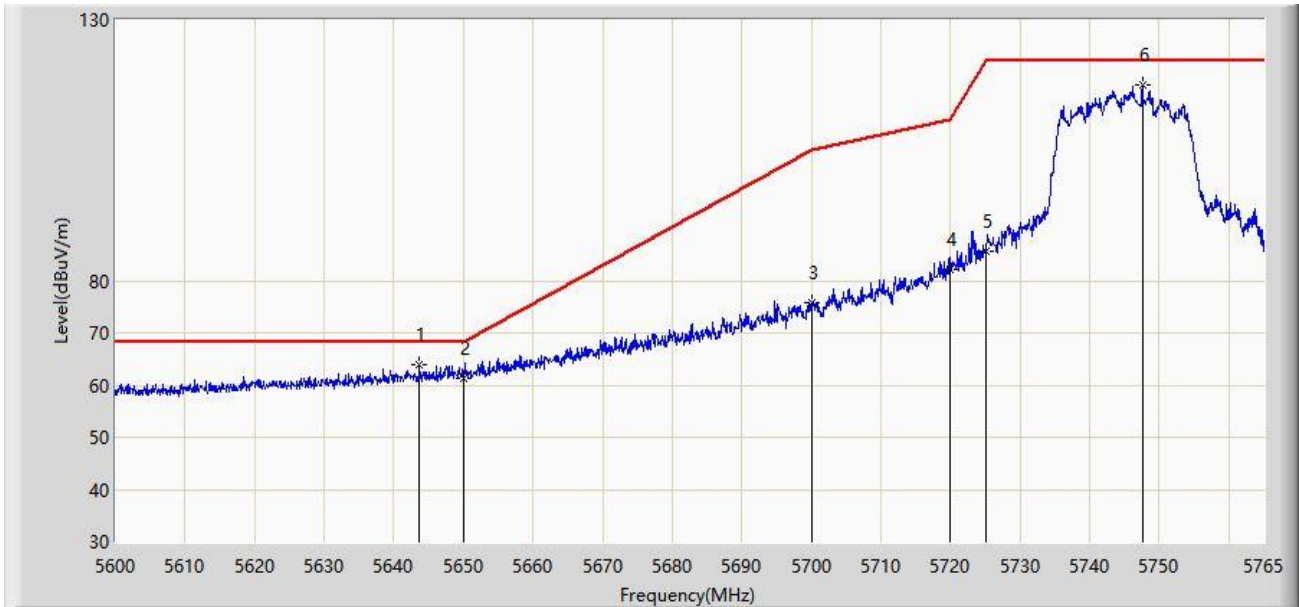


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5643.725 | 63.864 | 59.565 | -4.336 | 68.200 | 4.300 | PK |
| 2 | | | 5650.000 | 61.373 | 57.040 | -6.827 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 75.711 | 71.159 | -29.489 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 82.289 | 77.776 | -28.511 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 85.789 | 81.278 | -36.411 | 122.200 | 4.511 | PK |
| 6 | | | 5747.592 | 117.602 | 113.063 | N/A | N/A | 4.538 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:16 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz | |

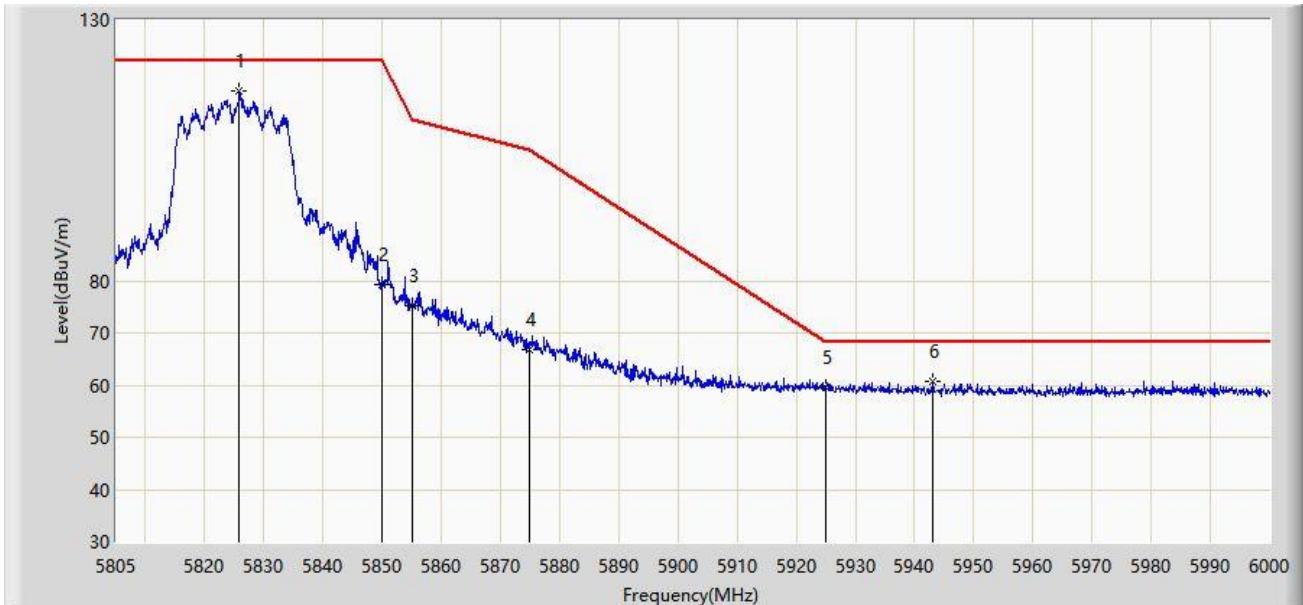


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5825.865 | 116.403 | 111.694 | N/A | N/A | 4.708 | PK |
| 2 | | | 5850.000 | 79.301 | 74.506 | -42.899 | 122.200 | 4.795 | PK |
| 3 | | | 5855.000 | 75.093 | 70.297 | -35.707 | 110.800 | 4.796 | PK |
| 4 | | | 5875.000 | 66.875 | 62.085 | -38.325 | 105.200 | 4.790 | PK |
| 5 | | | 5925.000 | 59.455 | 54.392 | -8.745 | 68.200 | 5.063 | PK |
| 6 | | | 5943.158 | 60.786 | 55.886 | -7.414 | 68.200 | 4.900 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:17 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz | |

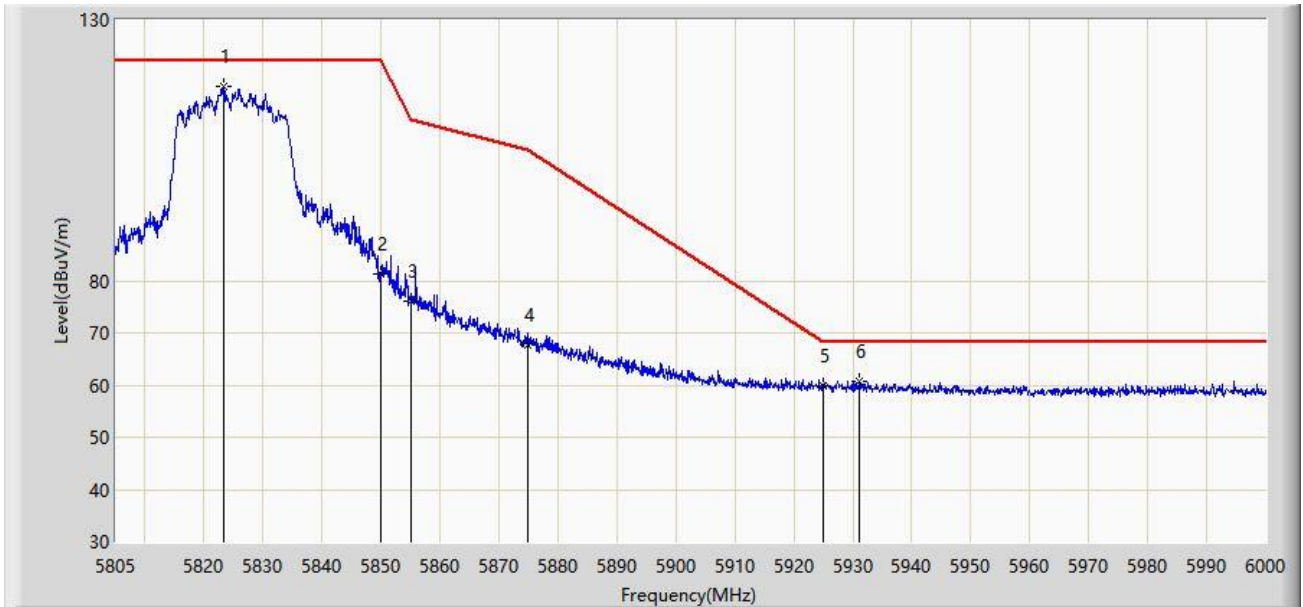


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5823.428 | 117.233 | 112.537 | N/A | N/A | 4.696 | PK |
| 2 | | | 5850.000 | 81.413 | 76.618 | -40.787 | 122.200 | 4.795 | PK |
| 3 | | | 5855.000 | 75.946 | 71.150 | -34.854 | 110.800 | 4.796 | PK |
| 4 | | | 5875.000 | 67.790 | 63.000 | -37.410 | 105.200 | 4.790 | PK |
| 5 | | | 5925.000 | 59.848 | 54.785 | -8.352 | 68.200 | 5.063 | PK |
| 6 | | | 5931.165 | 60.602 | 55.560 | -7.598 | 68.200 | 5.042 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:33 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz | |

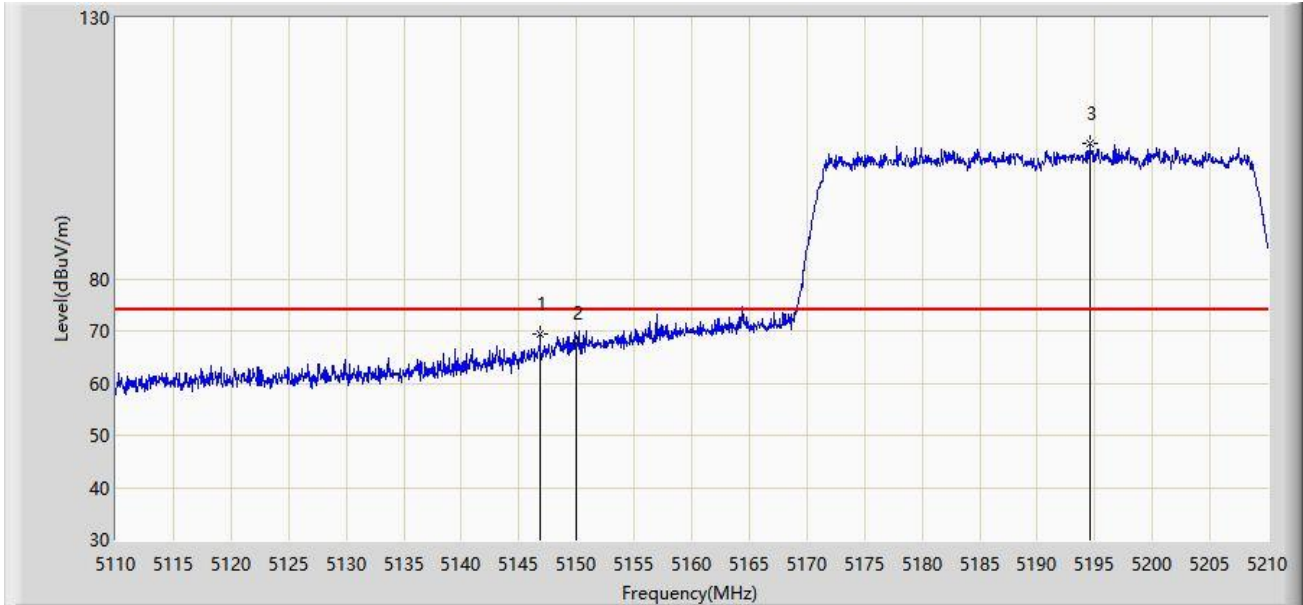


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5146.850 | 69.339 | 65.315 | -4.661 | 74.000 | 4.024 | PK |
| 2 | | | 5150.000 | 67.658 | 63.629 | -6.342 | 74.000 | 4.029 | PK |
| 3 | | * | 5194.550 | 105.824 | 101.774 | N/A | N/A | 4.049 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:32 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz | |

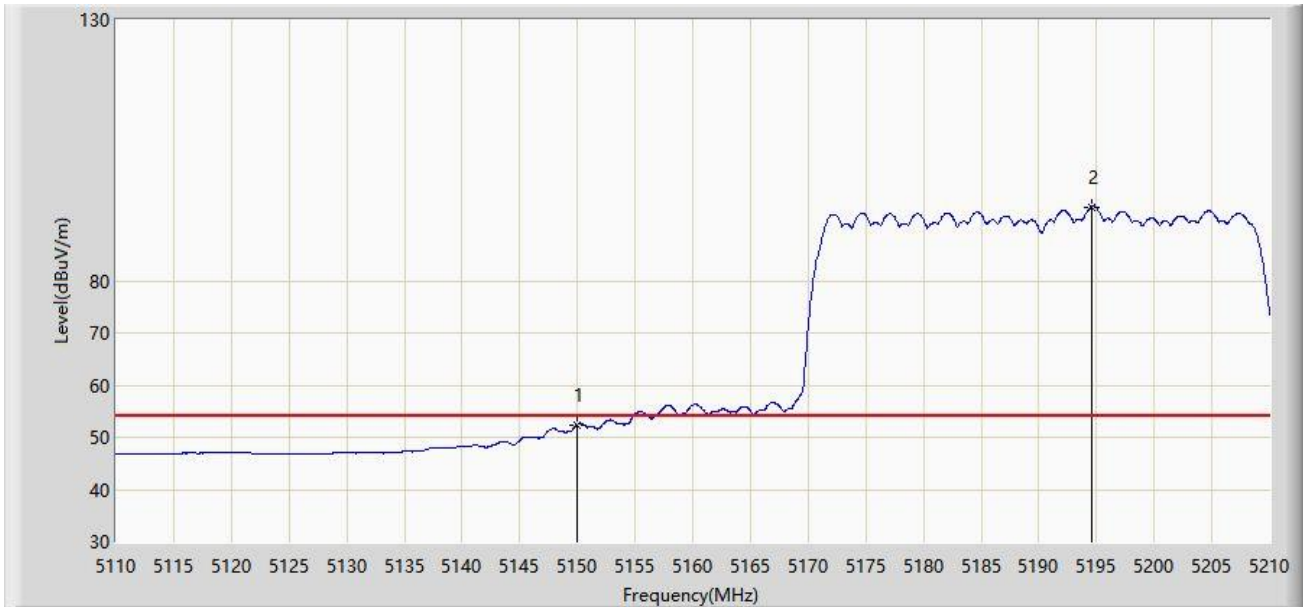


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 52.447 | 48.418 | -1.553 | 54.000 | 4.029 | AV |
| 2 | | * | 5194.550 | 94.164 | 90.114 | N/A | N/A | 4.049 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:35 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz | |

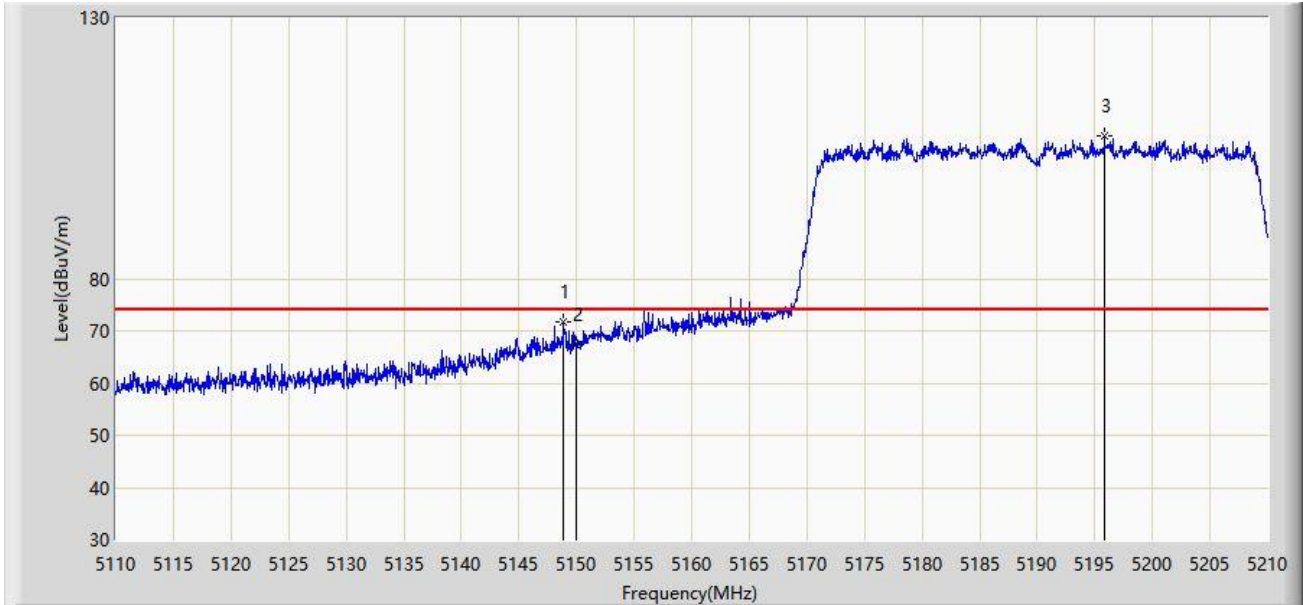


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5148.900 | 71.845 | 67.821 | -2.155 | 74.000 | 4.024 | PK |
| 2 | | | 5150.000 | 67.307 | 63.278 | -6.693 | 74.000 | 4.029 | PK |
| 3 | | * | 5195.850 | 107.357 | 103.305 | N/A | N/A | 4.052 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 20:46 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz | |

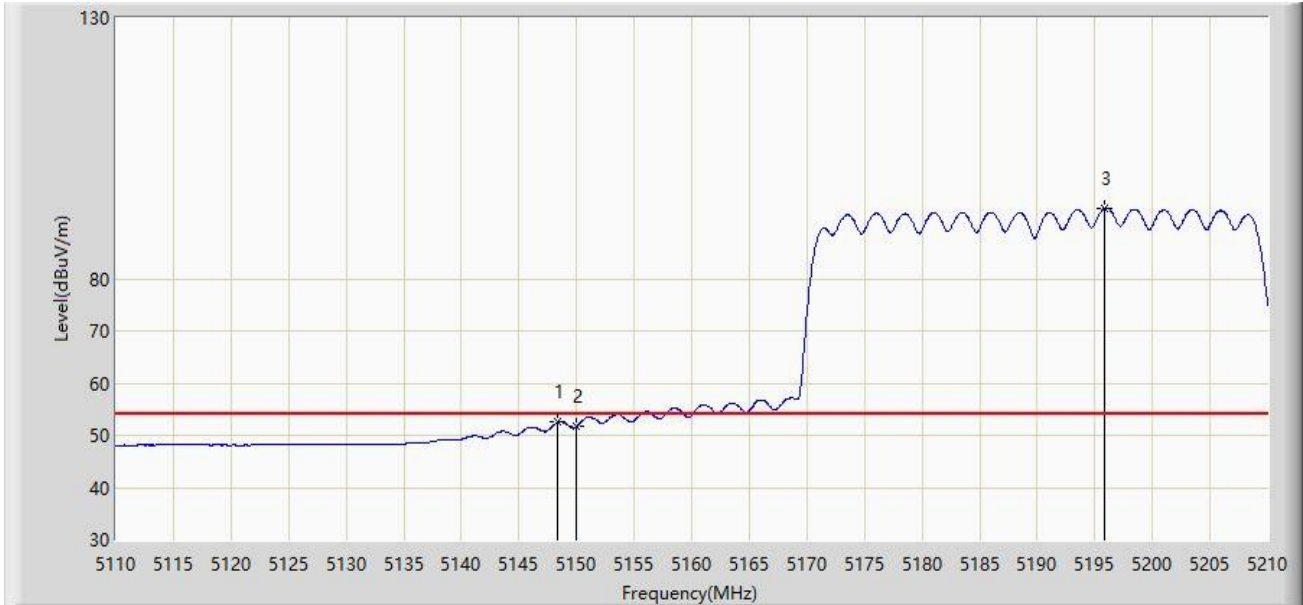


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5148.400 | 52.532 | 48.510 | -1.468 | 54.000 | 4.023 | AV |
| 2 | | | 5150.000 | 51.636 | 47.607 | -2.364 | 54.000 | 4.029 | AV |
| 3 | | * | 5195.850 | 93.511 | 89.459 | N/A | N/A | 4.052 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:49 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz | |

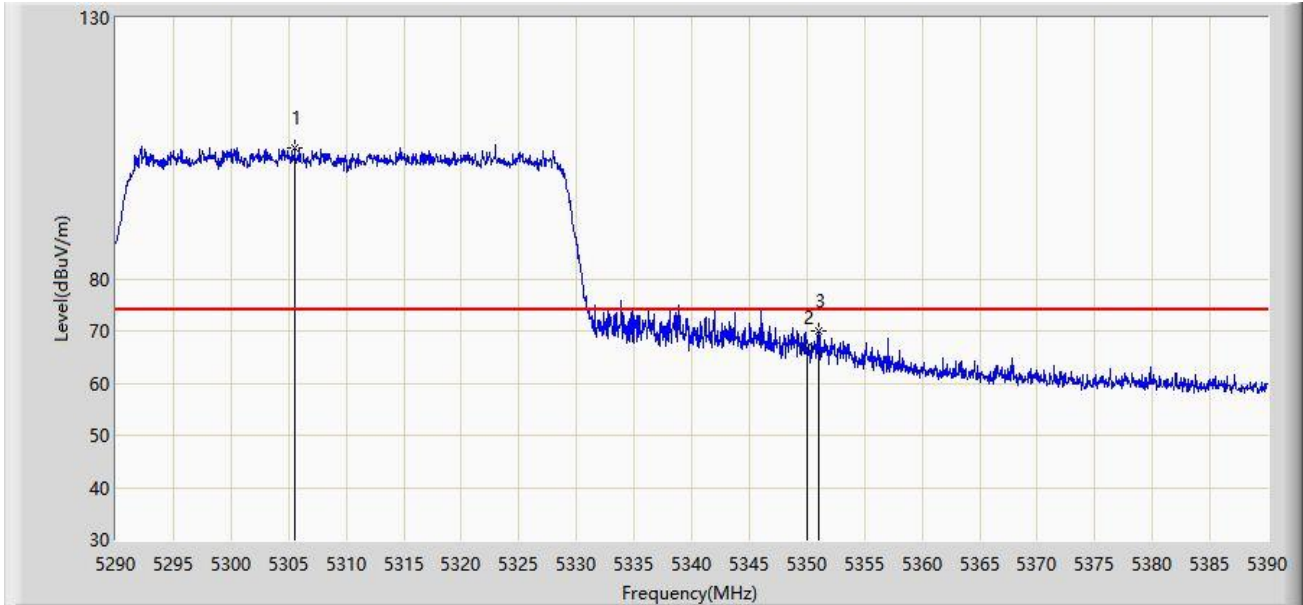


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5305.550 | 105.107 | 101.328 | N/A | N/A | 3.779 | PK |
| 2 | | | 5350.000 | 66.822 | 62.805 | -7.178 | 74.000 | 4.017 | PK |
| 3 | | | 5351.000 | 69.986 | 65.963 | -4.014 | 74.000 | 4.024 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:52 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz | |

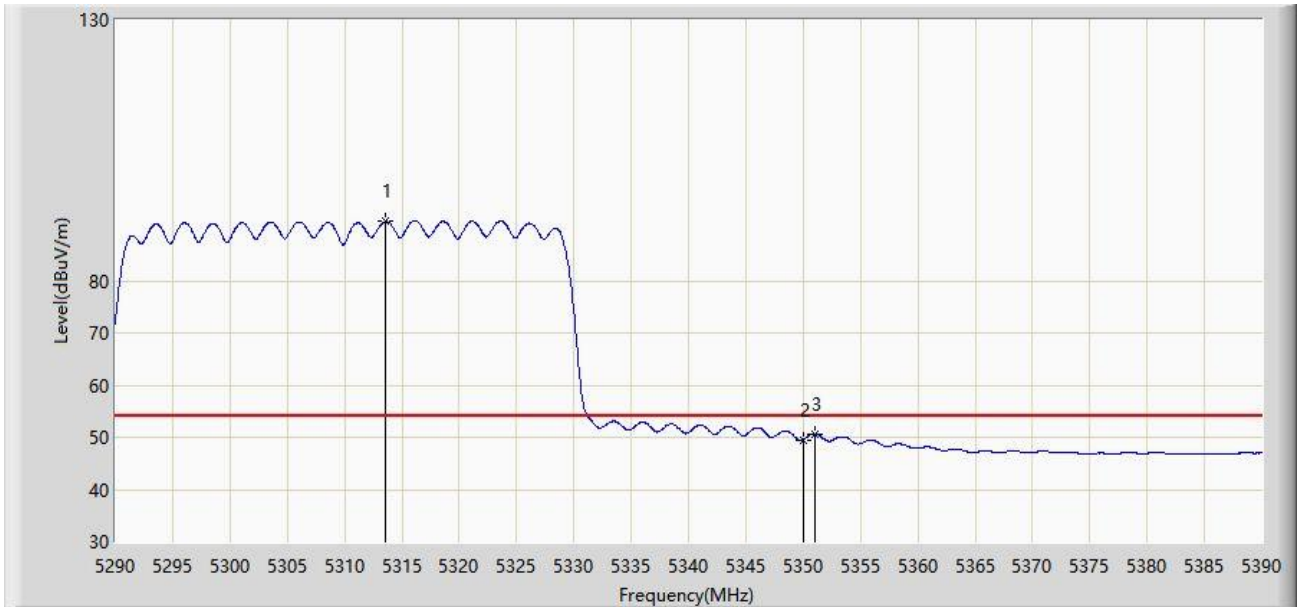


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5313.550 | 91.341 | 87.526 | N/A | N/A | 3.816 | AV |
| 2 | | | 5350.000 | 49.513 | 45.496 | -4.487 | 54.000 | 4.017 | AV |
| 3 | | | 5351.050 | 50.694 | 46.670 | -3.306 | 54.000 | 4.024 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:48 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz | |

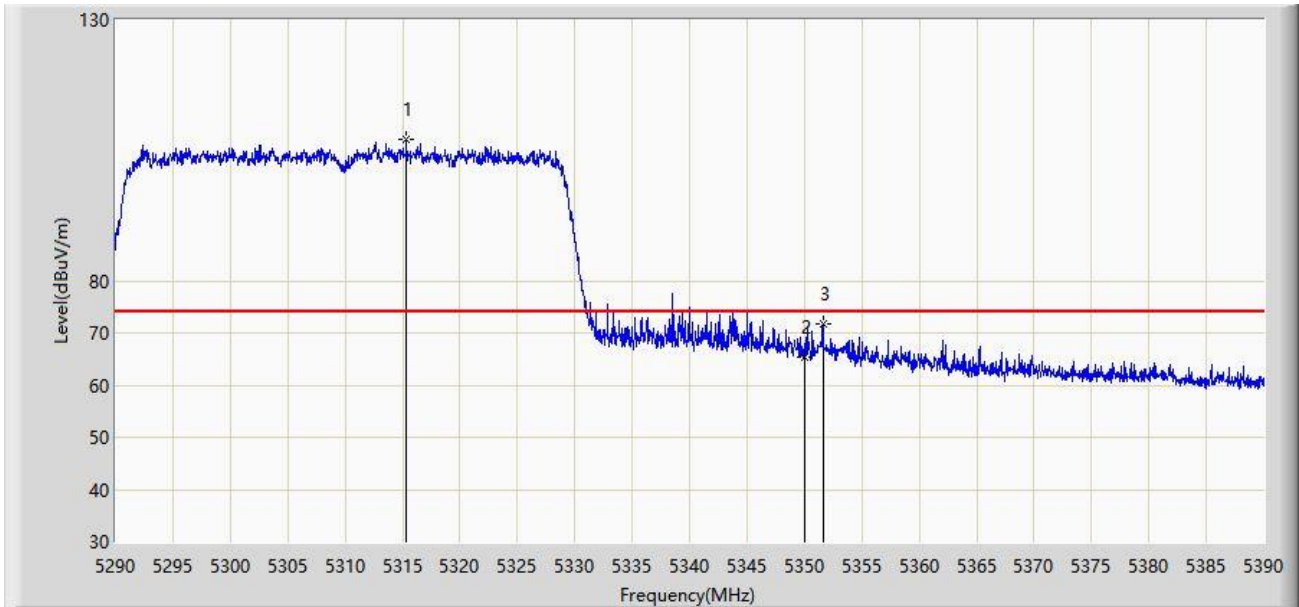


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5315.350 | 107.065 | 103.253 | N/A | N/A | 3.812 | PK |
| 2 | | | 5350.000 | 65.480 | 61.463 | -8.520 | 74.000 | 4.017 | PK |
| 3 | | | 5351.600 | 71.866 | 67.839 | -2.134 | 74.000 | 4.027 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 15:46 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5310MHz | |

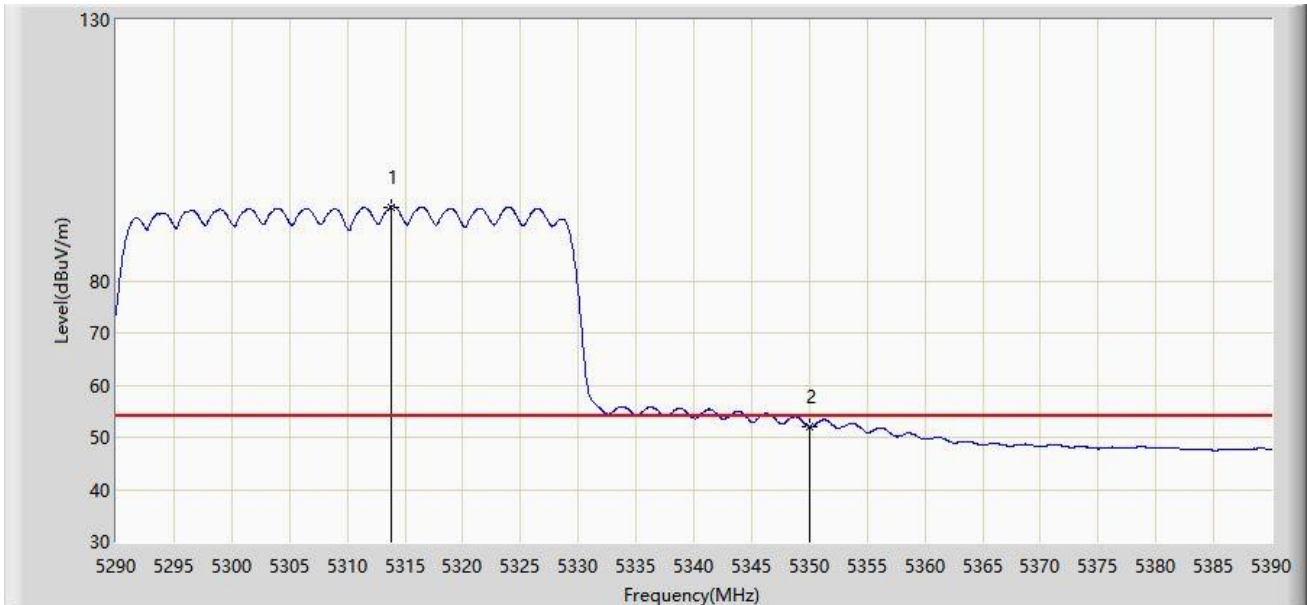


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5313.800 | 94.170 | 90.355 | N/A | N/A | 3.814 | AV |
| 2 | | | 5350.000 | 51.982 | 47.965 | -2.018 | 54.000 | 4.017 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:03 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz | |

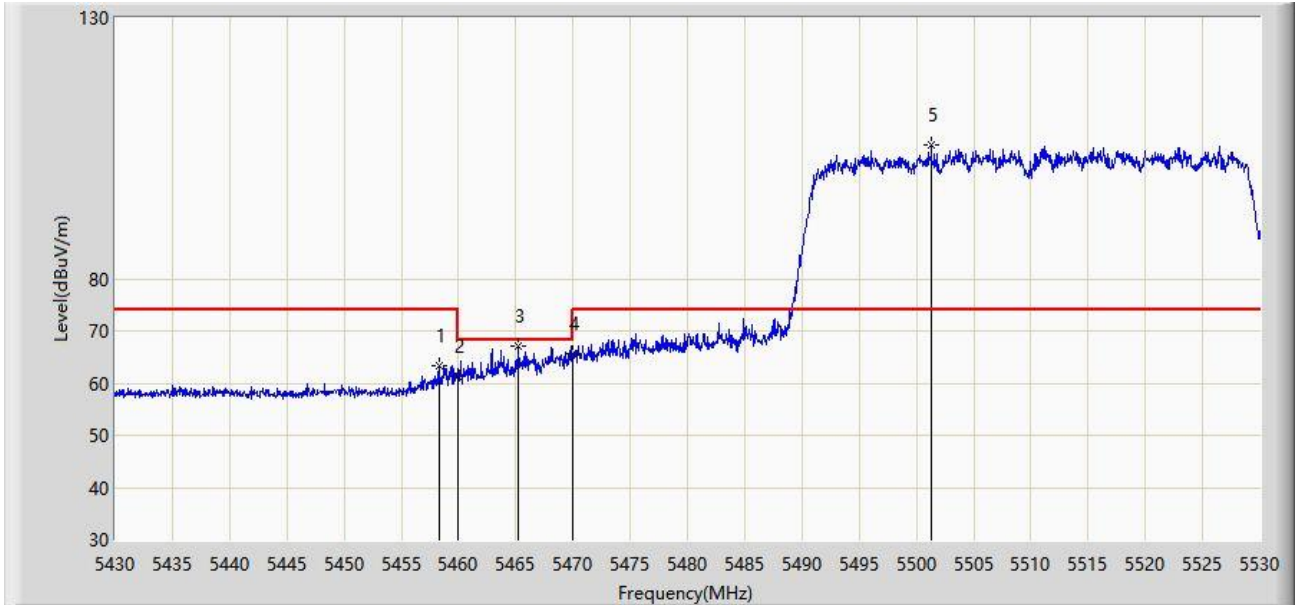


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5458.300 | 63.451 | 59.180 | -10.549 | 74.000 | 4.271 | PK |
| 2 | | | 5460.000 | 61.259 | 56.997 | -12.741 | 74.000 | 4.261 | PK |
| 3 | | | 5465.250 | 67.059 | 62.828 | -1.141 | 68.200 | 4.232 | PK |
| 4 | | | 5470.000 | 65.705 | 61.501 | -2.495 | 68.200 | 4.204 | PK |
| 5 | | * | 5501.300 | 105.704 | 101.310 | N/A | N/A | 4.394 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:04 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz | |

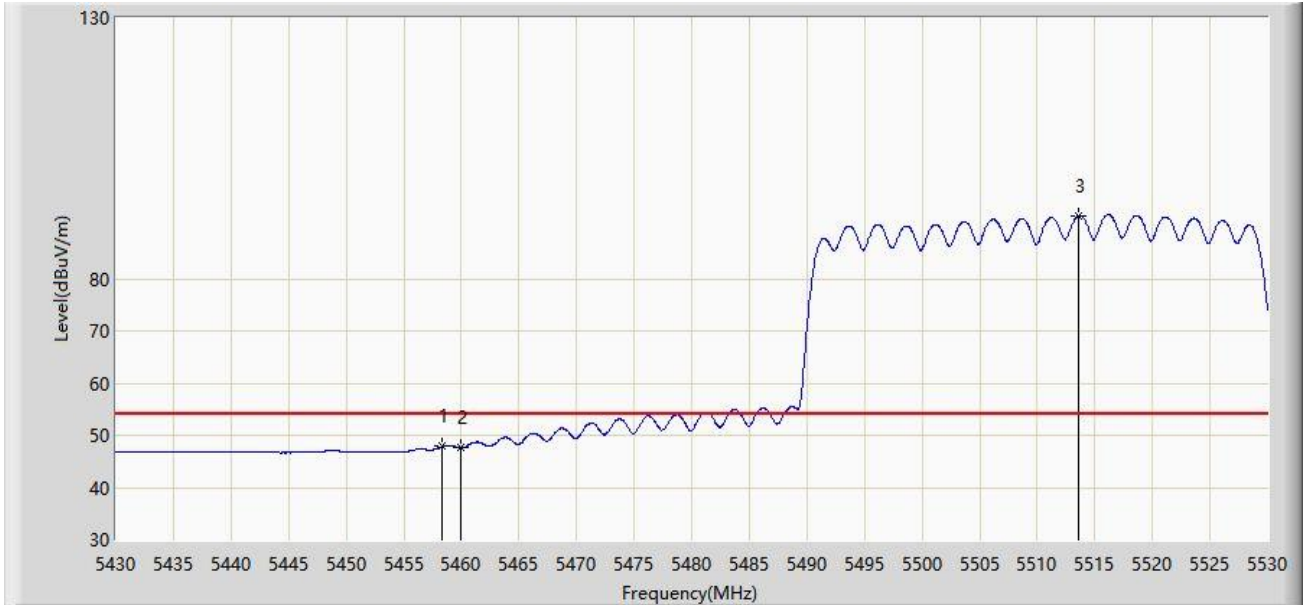


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5458.350 | 47.879 | 43.608 | -6.121 | 54.000 | 4.271 | AV |
| 2 | | | 5460.000 | 47.560 | 43.298 | -6.440 | 54.000 | 4.261 | AV |
| 3 | | * | 5513.550 | 92.000 | 87.503 | N/A | N/A | 4.497 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:01 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz | |

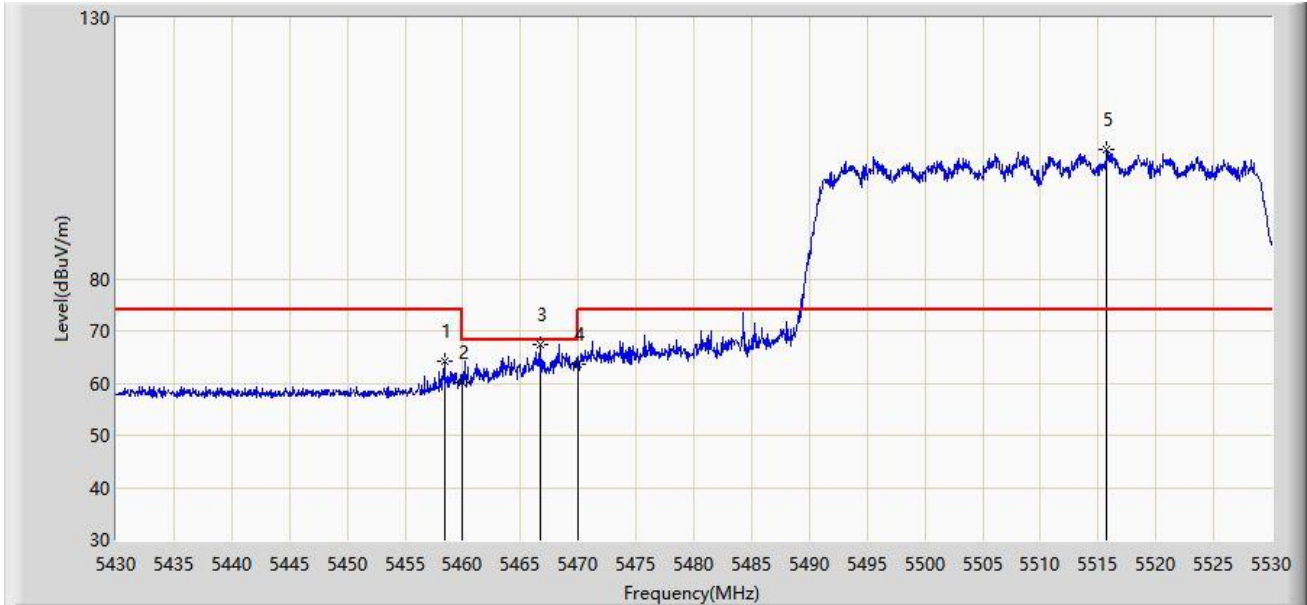


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5458.400 | 64.259 | 59.988 | -9.741 | 74.000 | 31.703 | PK |
| 2 | | | 5460.000 | 60.242 | 55.980 | -13.758 | 74.000 | 31.706 | PK |
| 3 | | | 5466.750 | 67.511 | 63.288 | -0.689 | 68.200 | 31.717 | PK |
| 4 | | | 5470.000 | 63.522 | 59.318 | -4.678 | 68.200 | 31.722 | PK |
| 5 | | * | 5515.750 | 104.775 | 100.271 | N/A | N/A | 31.776 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:05 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5510MHz | |

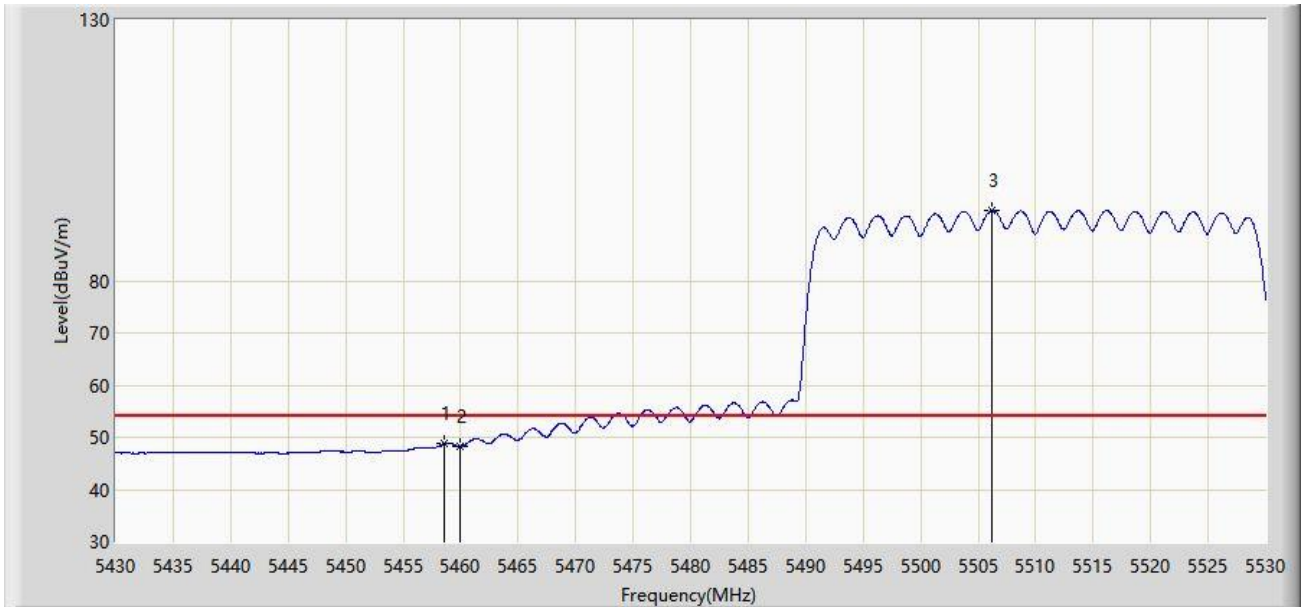


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5458.600 | 48.820 | 44.550 | -5.180 | 54.000 | 4.270 | AV |
| 2 | | | 5460.000 | 48.331 | 44.069 | -5.669 | 54.000 | 4.261 | AV |
| 3 | | * | 5506.150 | 93.526 | 89.069 | N/A | N/A | 4.457 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:24 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz | |

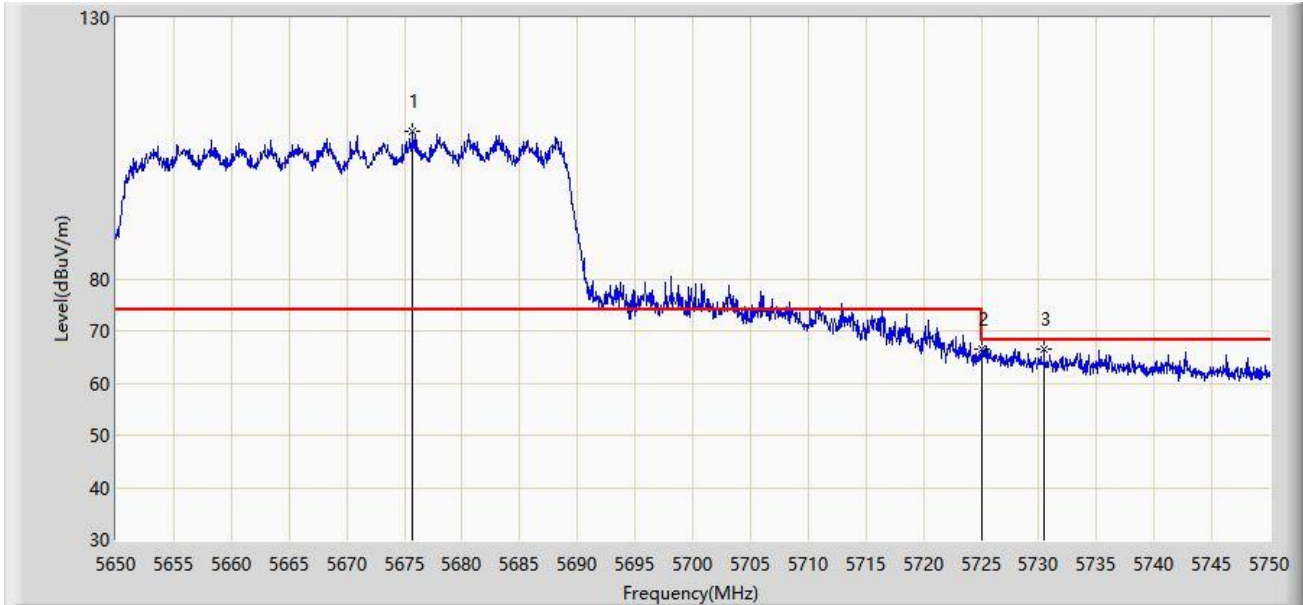


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5675.750 | 108.257 | 103.628 | N/A | N/A | 4.629 | PK |
| 2 | | | 5725.000 | 66.613 | 62.102 | -1.587 | 68.200 | 4.511 | PK |
| 3 | | | 5730.450 | 66.652 | 62.140 | -1.548 | 68.200 | 4.512 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:21 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5670MHz | |

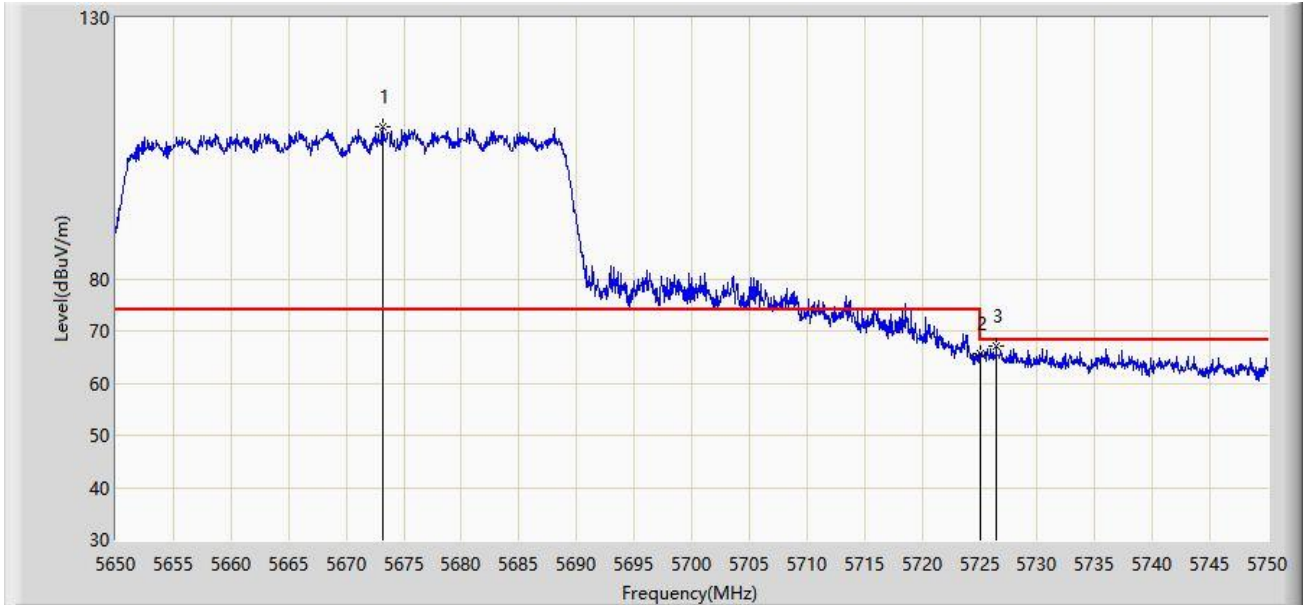


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5673.150 | 109.156 | 104.532 | N/A | N/A | 4.623 | PK |
| 2 | | | 5725.000 | 65.700 | 61.189 | -2.500 | 68.200 | 4.511 | PK |
| 3 | | | 5726.450 | 67.233 | 62.718 | -0.967 | 68.200 | 4.516 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:42 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz | |

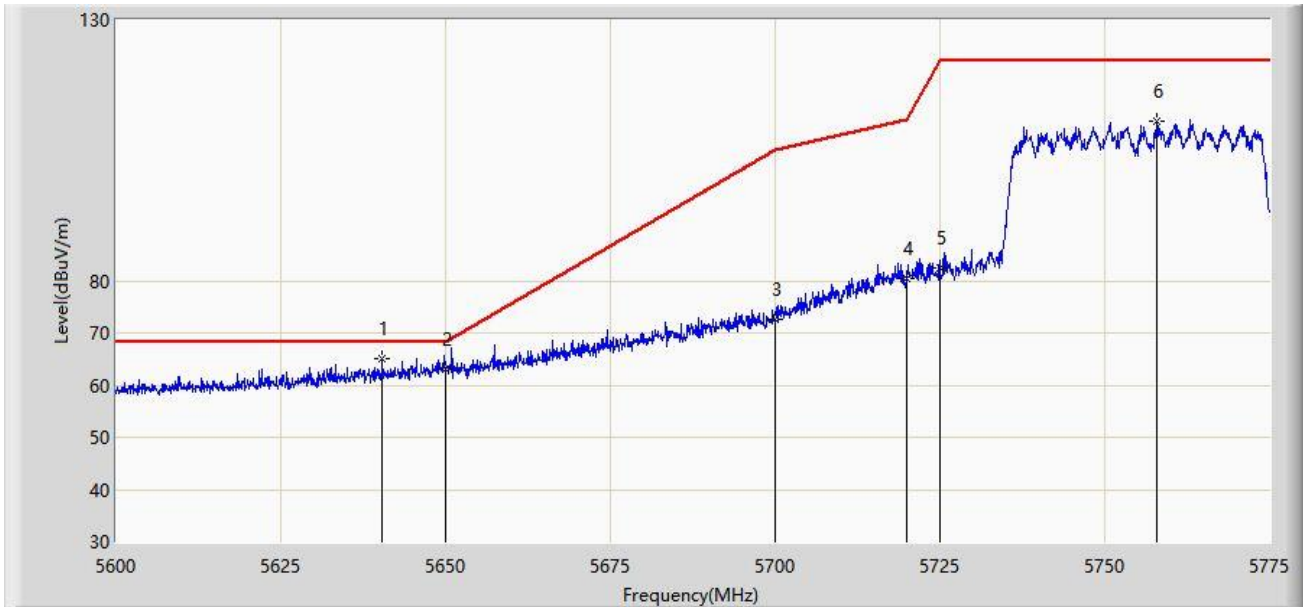


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5640.425 | 65.047 | 60.760 | -3.153 | 68.200 | 4.287 | PK |
| 2 | | | 5650.000 | 62.905 | 58.572 | -5.295 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 72.651 | 68.099 | -32.549 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 80.547 | 76.034 | -30.253 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 82.477 | 77.966 | -39.723 | 122.200 | 4.511 | PK |
| 6 | | | 5757.850 | 110.686 | 106.035 | N/A | N/A | 4.651 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:41 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz | |

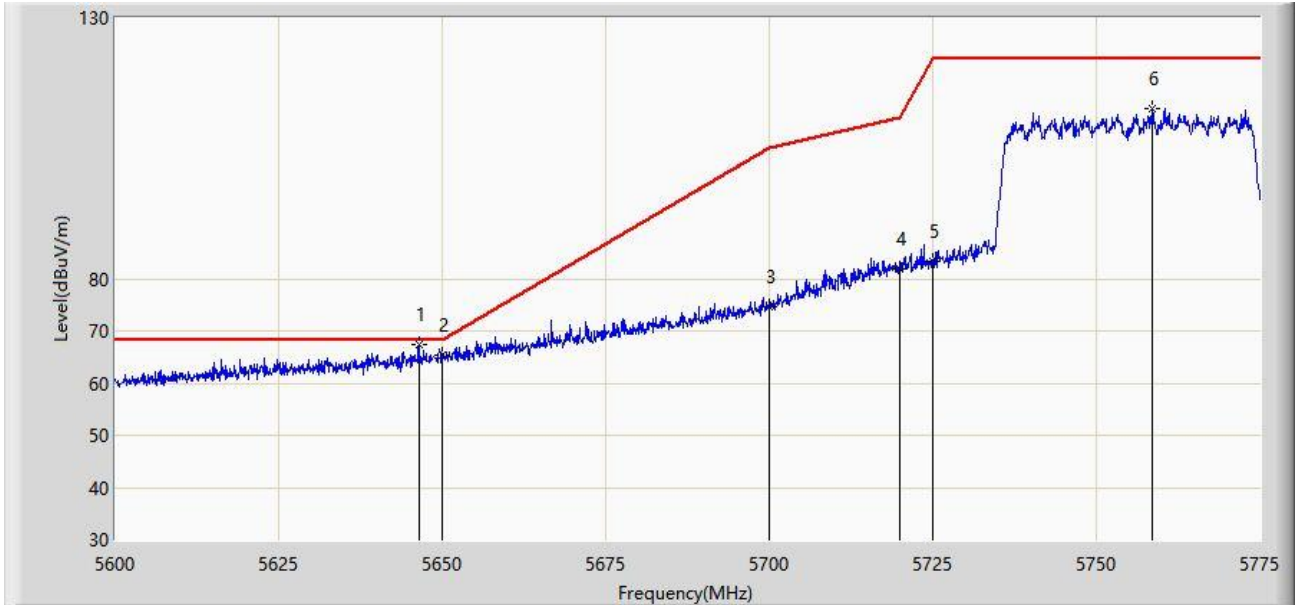


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5646.462 | 67.512 | 63.198 | -0.688 | 68.200 | 4.313 | PK |
| 2 | | | 5650.000 | 65.370 | 61.037 | -2.830 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 74.652 | 70.100 | -30.548 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 82.008 | 77.495 | -28.792 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 83.296 | 78.785 | -38.904 | 122.200 | 4.511 | PK |
| 6 | | | 5758.462 | 112.470 | 107.813 | N/A | N/A | 4.658 | PK |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:45 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz | |

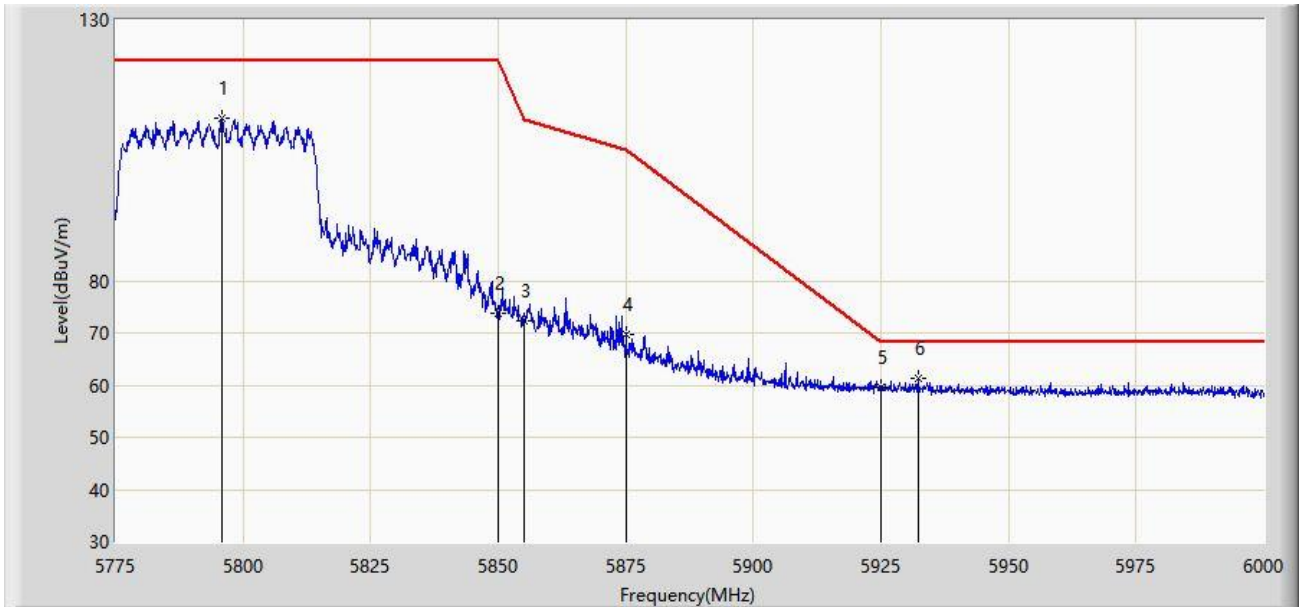


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5795.925 | 111.225 | 106.633 | N/A | N/A | 4.592 | PK |
| 2 | | | 5850.000 | 73.895 | 69.100 | -48.305 | 122.200 | 4.795 | PK |
| 3 | | | 5855.000 | 72.444 | 67.648 | -38.356 | 110.800 | 4.796 | PK |
| 4 | | | 5875.000 | 69.584 | 64.794 | -35.616 | 105.200 | 4.790 | PK |
| 5 | | | 5925.000 | 59.473 | 54.410 | -8.727 | 68.200 | 5.063 | PK |
| 6 | | * | 5932.275 | 61.393 | 56.365 | -6.807 | 68.200 | 5.029 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 16:47 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz | |

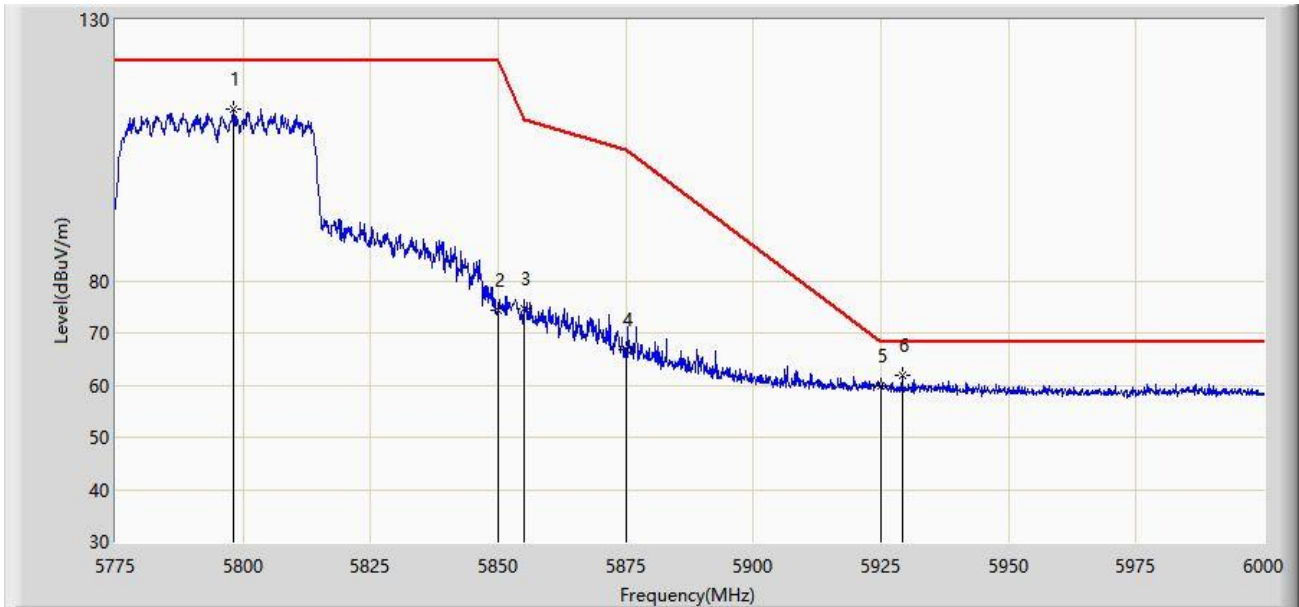


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5798.062 | 112.938 | 108.363 | N/A | N/A | 4.576 | PK |
| 2 | | | 5850.000 | 74.374 | 69.579 | -47.826 | 122.200 | 4.795 | PK |
| 3 | | | 5855.000 | 74.768 | 69.972 | -36.032 | 110.800 | 4.796 | PK |
| 4 | | | 5875.000 | 66.953 | 62.163 | -38.247 | 105.200 | 4.790 | PK |
| 5 | | | 5925.000 | 59.863 | 54.800 | -8.337 | 68.200 | 5.063 | PK |
| 6 | | * | 5929.125 | 61.849 | 56.792 | -6.351 | 68.200 | 5.057 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:01 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz | |

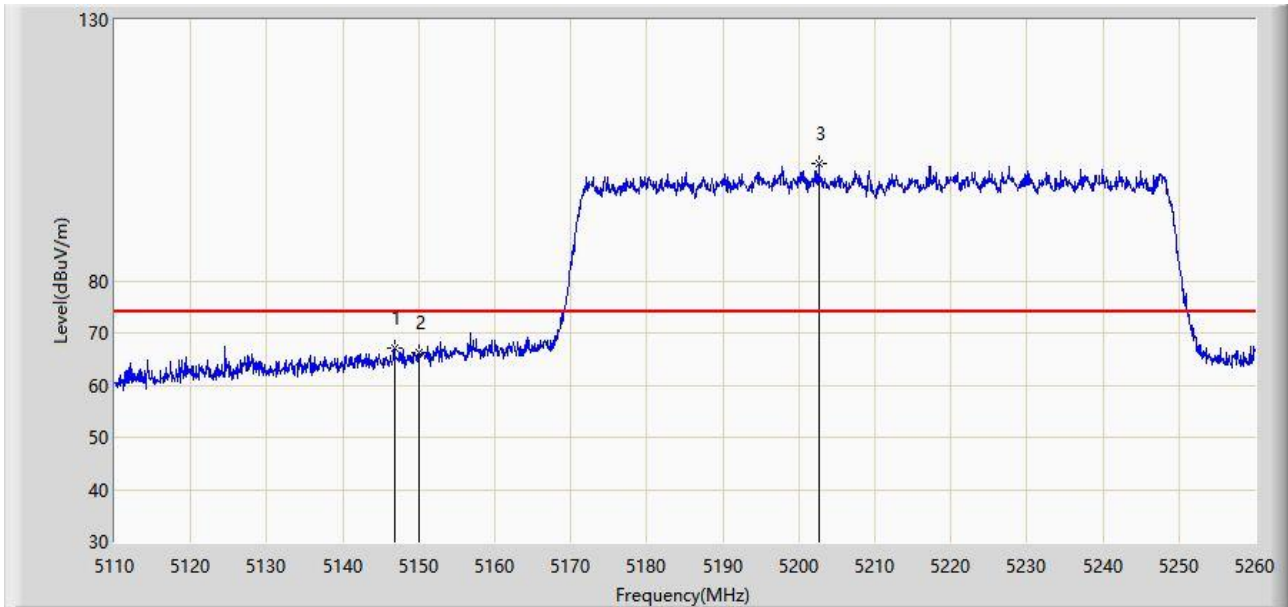


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5146.750 | 67.201 | 63.176 | -6.799 | 74.000 | 4.024 | PK |
| 2 | | | 5150.000 | 66.273 | 62.244 | -7.727 | 74.000 | 4.029 | PK |
| 3 | | * | 5202.625 | 102.403 | 98.358 | N/A | N/A | 4.046 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:03 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz | |

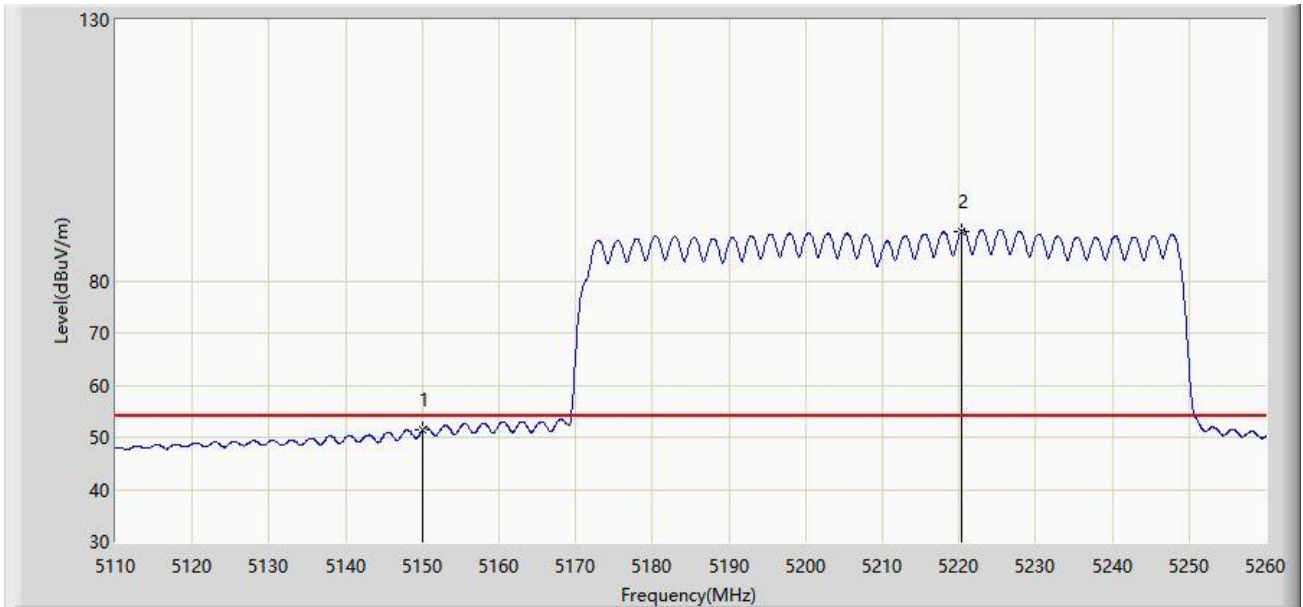


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 51.305 | 47.276 | -2.695 | 54.000 | 4.029 | AV |
| 2 | | * | 5220.325 | 89.558 | 85.567 | N/A | N/A | 3.991 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:00 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz | |

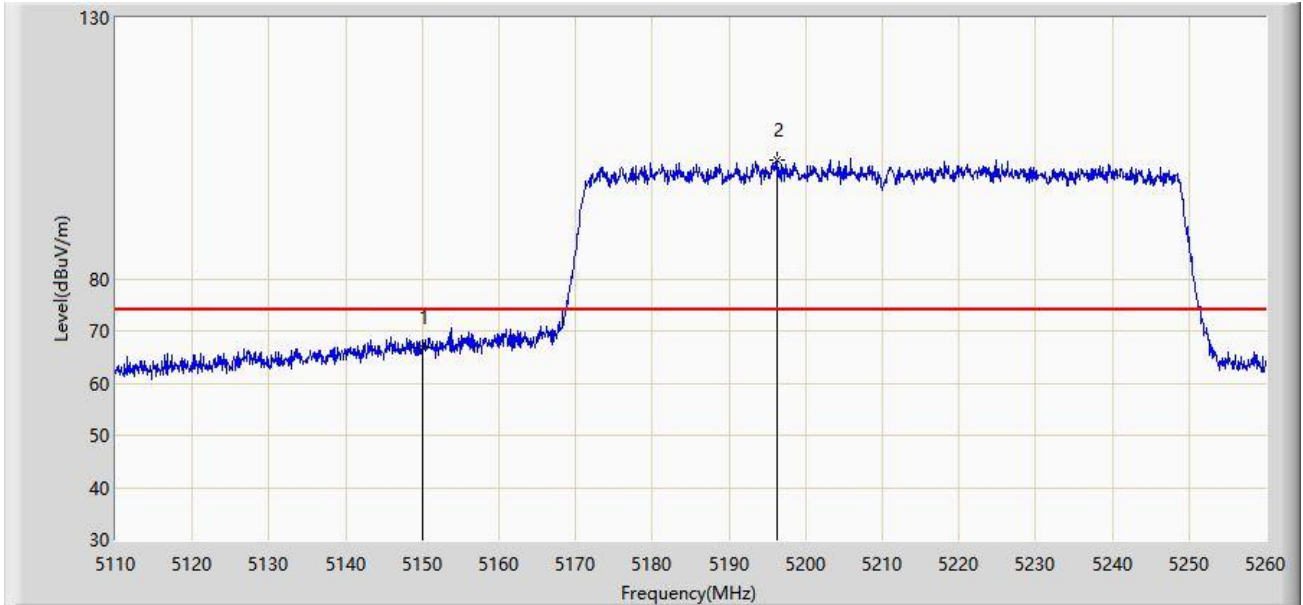


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5150.000 | 66.782 | 62.753 | -7.218 | 74.000 | 4.029 | PK |
| 2 | | * | 5196.325 | 102.847 | 98.794 | N/A | N/A | 4.053 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 21:27 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz | |

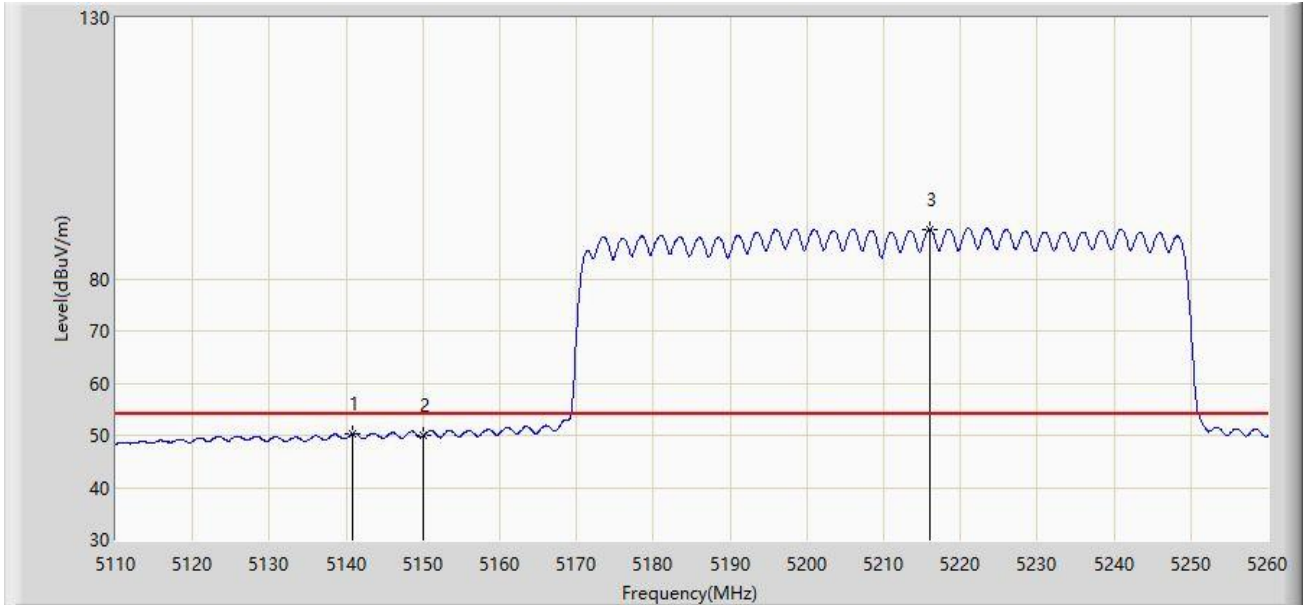


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5140.825 | 50.355 | 46.313 | -3.645 | 54.000 | 4.041 | AV |
| 2 | | | 5150.000 | 49.897 | 45.868 | -4.103 | 54.000 | 4.029 | AV |
| 3 | | * | 5215.975 | 89.477 | 85.480 | N/A | N/A | 3.997 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:15 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz | |

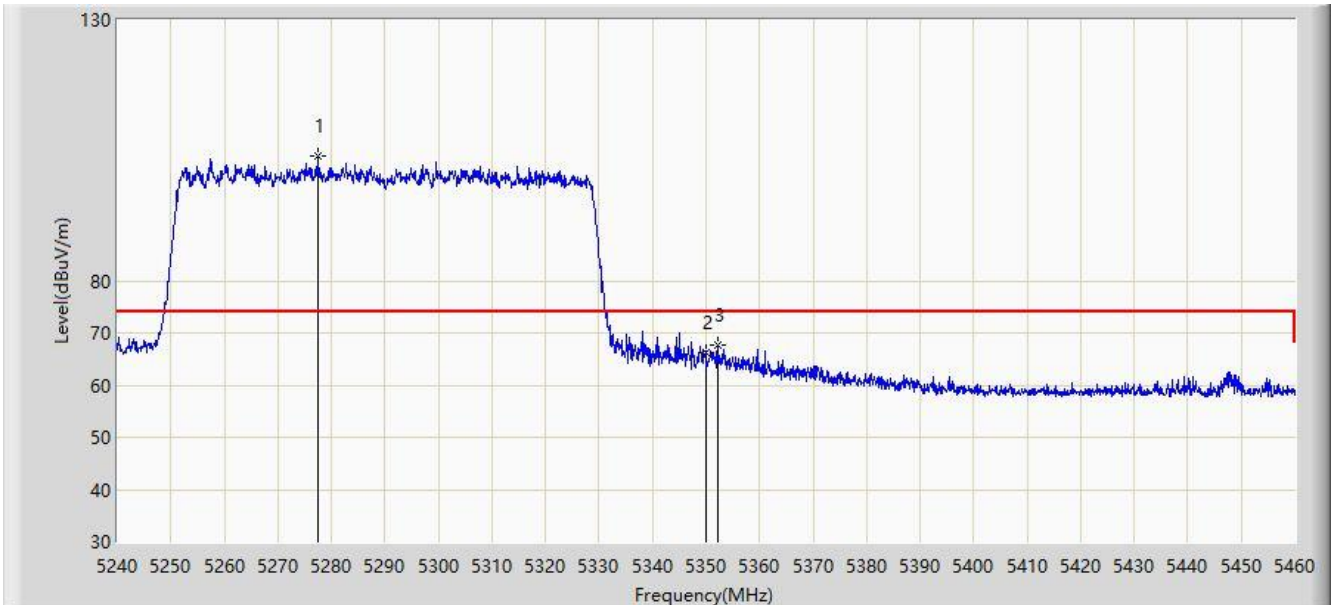


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5277.620 | 103.967 | 100.046 | N/A | N/A | 3.921 | PK |
| 2 | | | 5350.000 | 66.315 | 62.298 | -7.685 | 74.000 | 4.017 | PK |
| 3 | | | 5352.200 | 67.588 | 63.559 | -6.412 | 74.000 | 4.029 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:16 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz | |

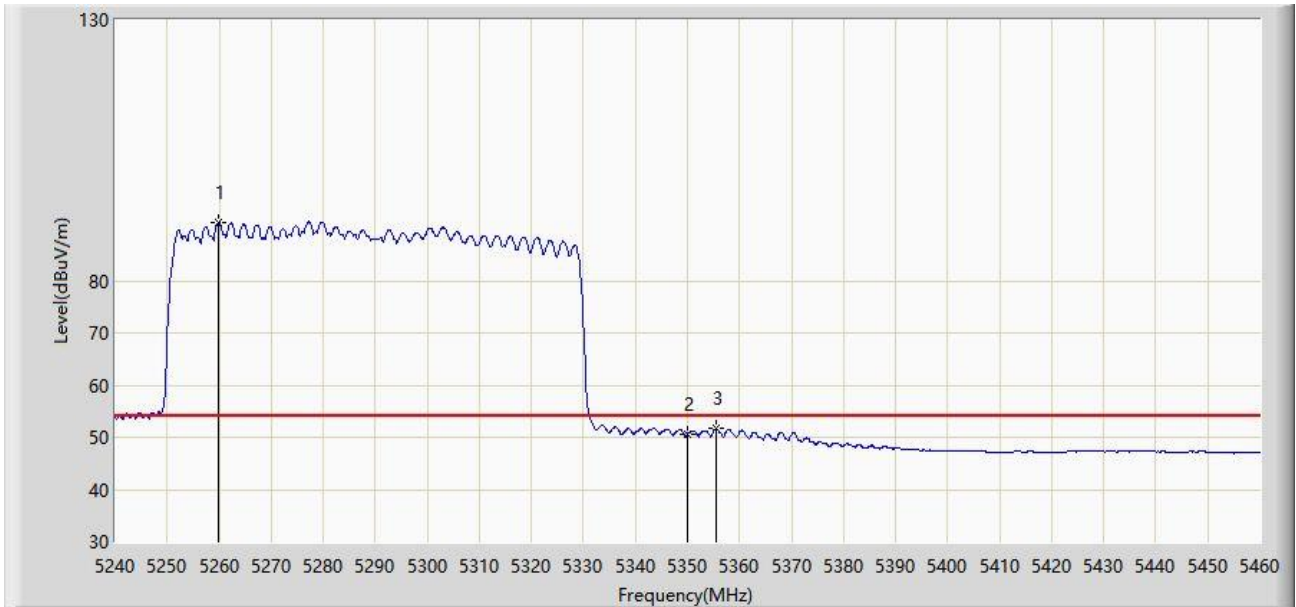


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5259.800 | 91.078 | 87.115 | N/A | N/A | 3.963 | AV |
| 2 | | | 5350.000 | 50.619 | 46.602 | -3.381 | 54.000 | 4.017 | AV |
| 3 | | | 5355.500 | 51.651 | 47.627 | -2.349 | 54.000 | 4.024 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:13 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz | |

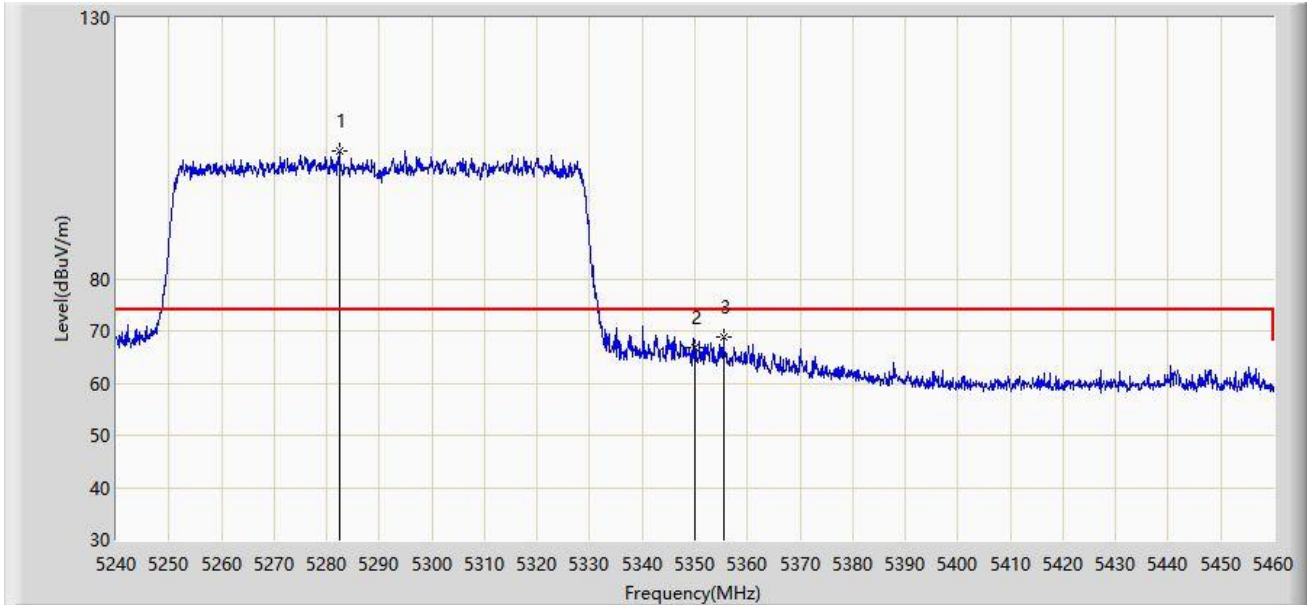


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5282.350 | 104.416 | 100.532 | N/A | N/A | 3.884 | PK |
| 2 | | | 5350.000 | 66.745 | 62.728 | -7.255 | 74.000 | 4.017 | PK |
| 3 | | | 5355.390 | 68.941 | 64.917 | -5.059 | 74.000 | 4.024 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:12 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5290MHz | |

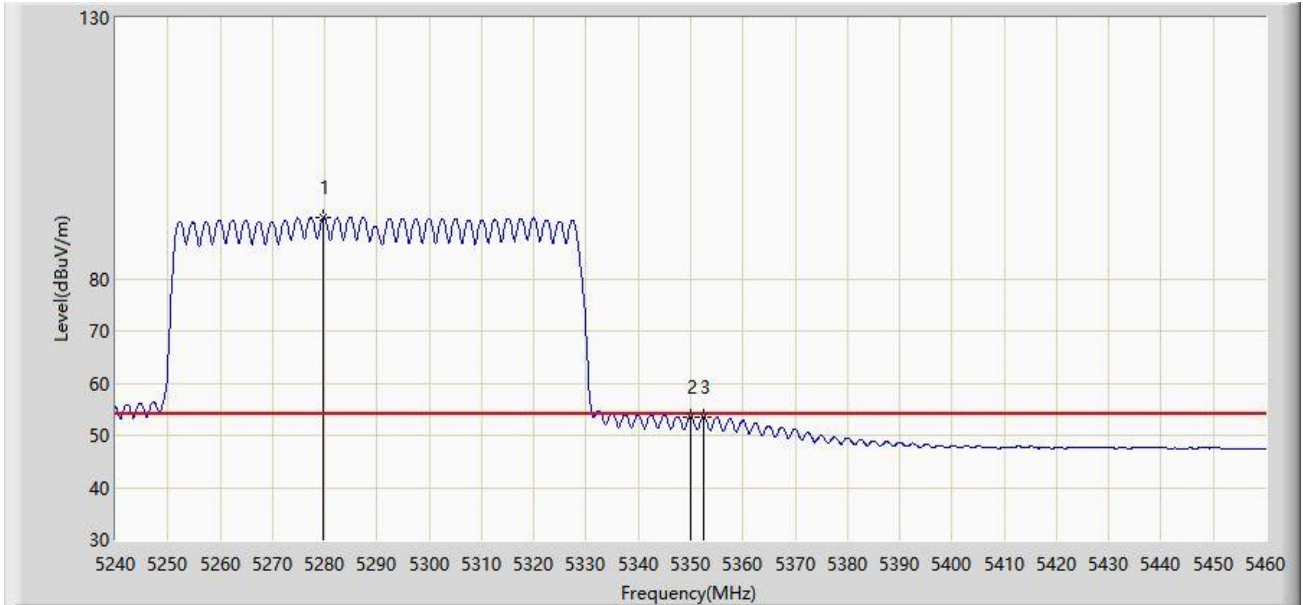


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5279.820 | 91.653 | 87.749 | N/A | N/A | 3.903 | AV |
| 2 | | | 5350.000 | 53.540 | 49.523 | -0.460 | 54.000 | 4.017 | AV |
| 3 | | | 5352.420 | 53.526 | 49.497 | -0.474 | 54.000 | 4.028 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:29 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz | |

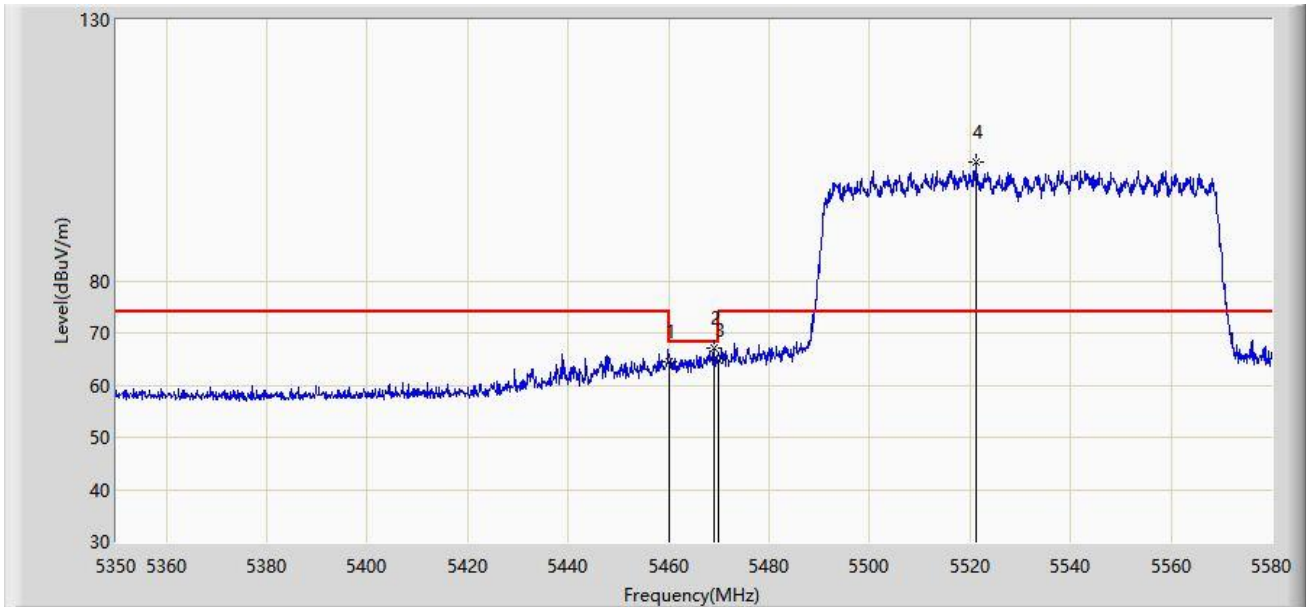


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 64.541 | 60.279 | -9.459 | 74.000 | 4.261 | PK |
| 2 | | | 5468.910 | 67.145 | 62.934 | -1.055 | 68.200 | 4.211 | PK |
| 3 | | | 5470.000 | 64.798 | 60.594 | -3.402 | 68.200 | 4.204 | PK |
| 4 | | * | 5521.235 | 102.725 | 98.203 | N/A | N/A | 4.522 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:31 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz | |

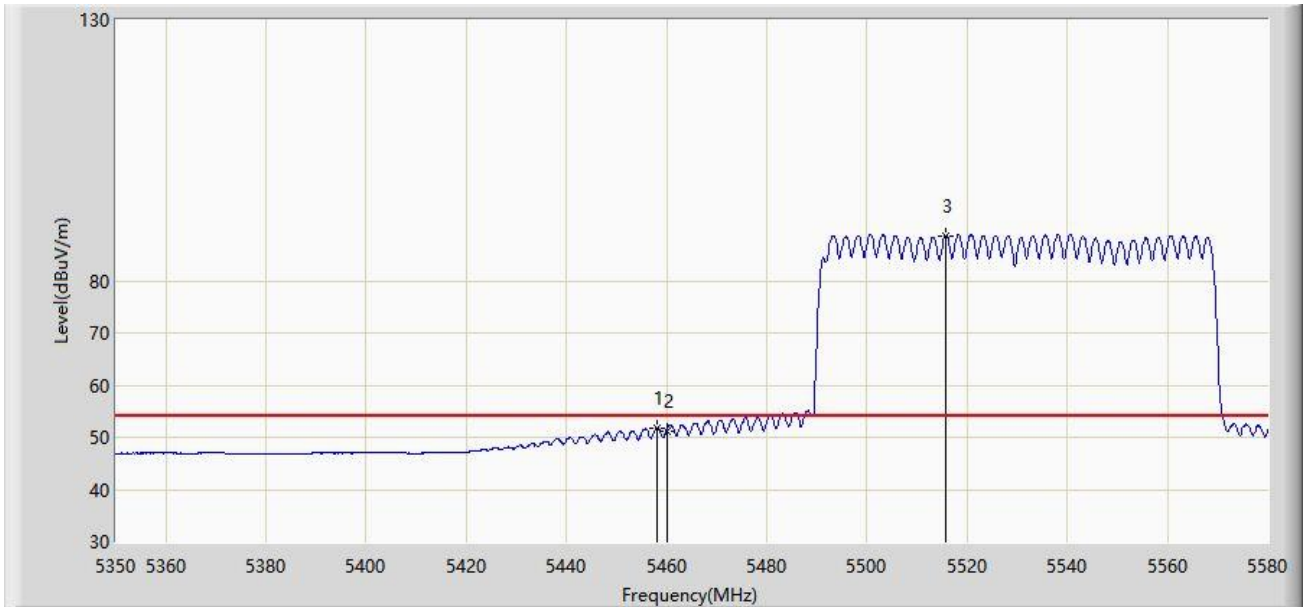


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5458.100 | 51.833 | 47.561 | -2.167 | 54.000 | 4.273 | AV |
| 2 | | | 5460.000 | 51.288 | 47.026 | -2.712 | 54.000 | 4.261 | AV |
| 3 | | * | 5515.600 | 88.593 | 84.090 | N/A | N/A | 4.503 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/06/24 - 21:36 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz | |

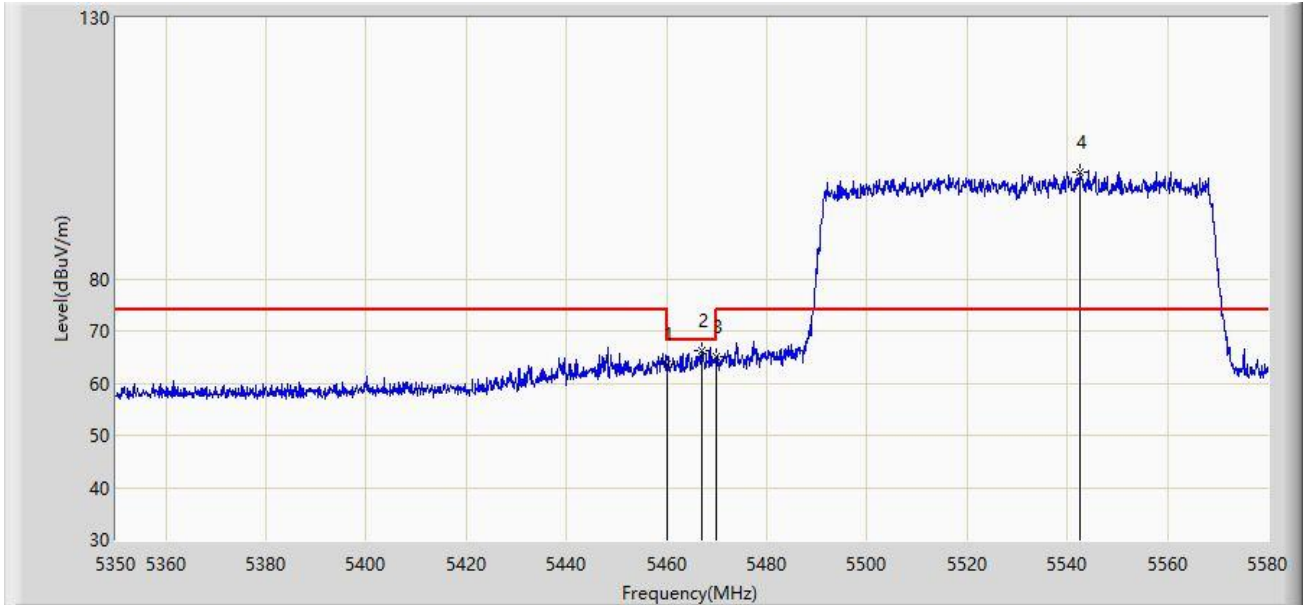


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5460.000 | 63.568 | 59.306 | -10.432 | 74.000 | 4.261 | PK |
| 2 | | | 5467.070 | 66.285 | 62.064 | -1.915 | 68.200 | 4.221 | PK |
| 3 | | | 5470.000 | 64.998 | 60.794 | -3.202 | 68.200 | 4.204 | PK |
| 4 | | * | 5542.395 | 100.425 | 96.102 | N/A | N/A | 4.324 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:32 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5530MHz | |

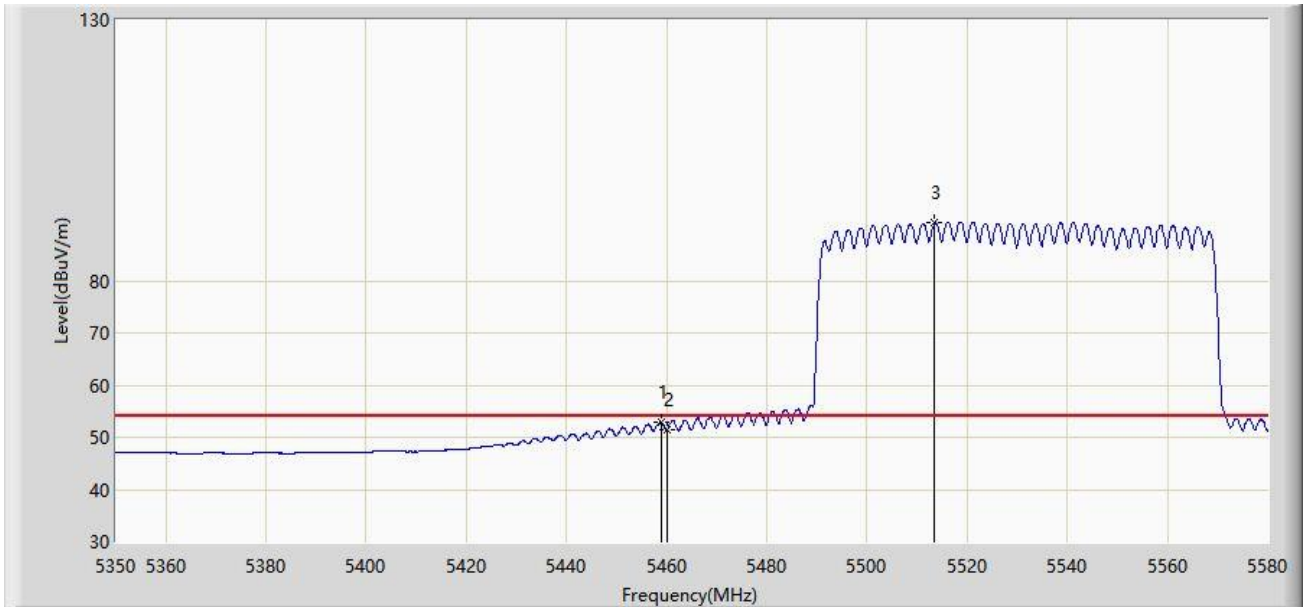


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5458.905 | 52.818 | 48.550 | -1.182 | 54.000 | 4.268 | AV |
| 2 | | | 5460.000 | 51.308 | 47.046 | -2.692 | 54.000 | 4.261 | AV |
| 3 | | * | 5513.530 | 91.050 | 86.554 | N/A | N/A | 4.497 | AV |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:46 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz | |

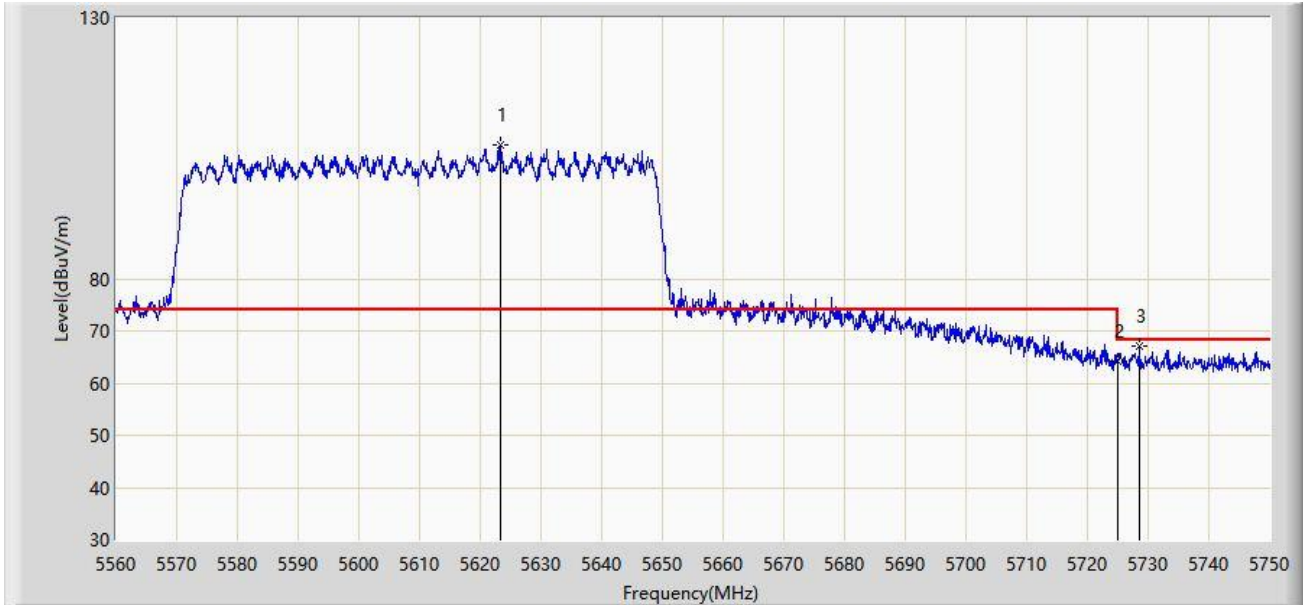


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5623.365 | 105.620 | 101.121 | N/A | N/A | 4.499 | PK |
| 2 | | | 5725.000 | 64.280 | 59.769 | -3.920 | 68.200 | 4.511 | PK |
| 3 | | | 5728.530 | 67.123 | 62.609 | -1.077 | 68.200 | 4.514 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:45 |
| Limit: FCC_Part15.209_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5610MHz | |

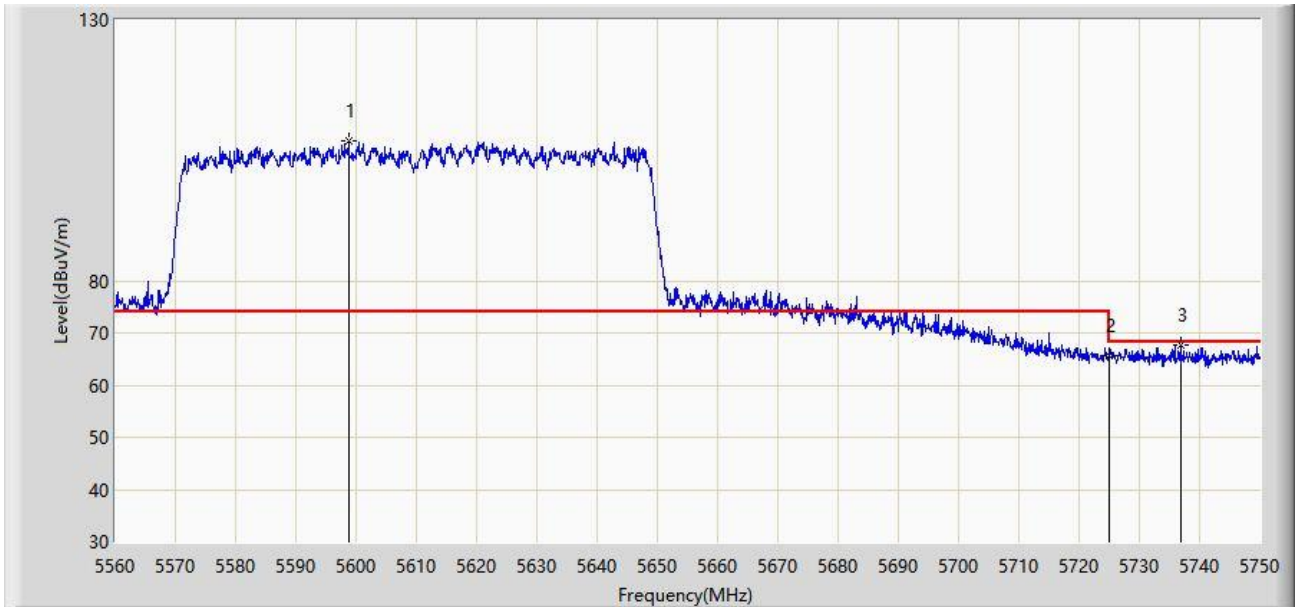


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5598.760 | 106.723 | 102.338 | N/A | N/A | 4.385 | PK |
| 2 | | | 5725.000 | 65.710 | 61.199 | -2.490 | 68.200 | 4.511 | PK |
| 3 | | | 5736.795 | 67.552 | 63.045 | -0.648 | 68.200 | 4.507 | PK |

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:55 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Horizontal |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz | |

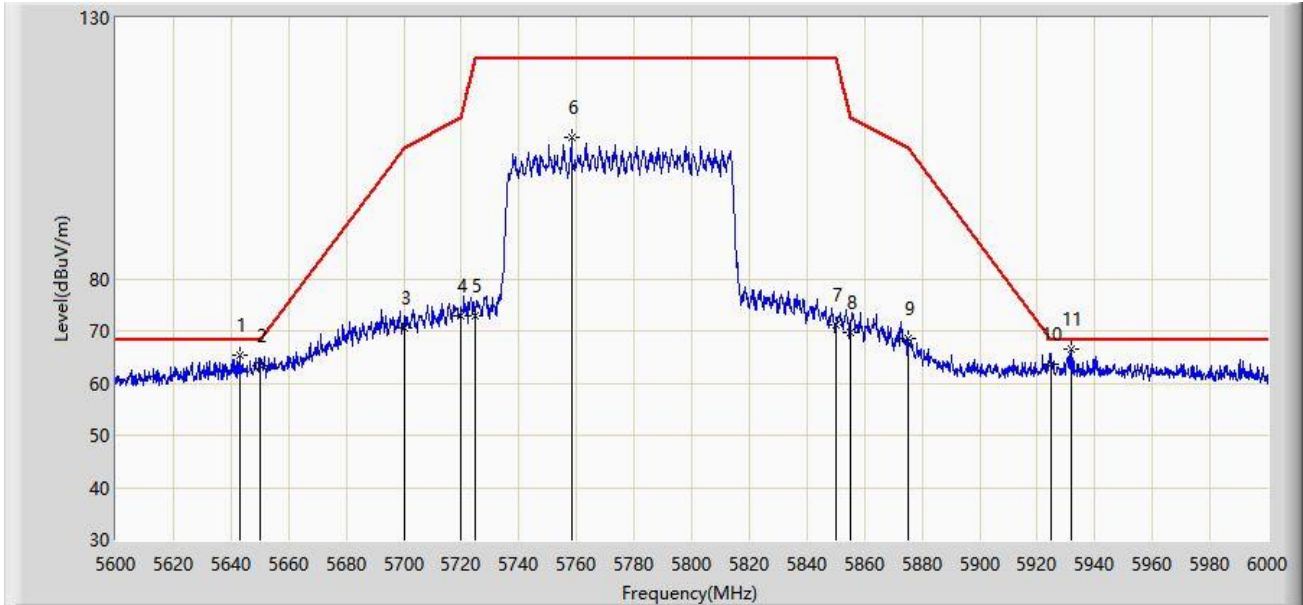


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | | 5643.000 | 65.364 | 61.069 | -2.836 | 68.200 | 4.295 | PK |
| 2 | | | 5650.000 | 63.291 | 58.958 | -4.909 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 70.647 | 66.095 | -34.553 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 72.853 | 68.340 | -37.947 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 72.962 | 68.451 | -49.238 | 122.200 | 4.511 | PK |
| 6 | | | 5758.200 | 107.116 | 102.462 | N/A | N/A | 4.655 | PK |
| 7 | | | 5850.000 | 71.073 | 66.278 | -51.127 | 122.200 | 4.795 | PK |
| 8 | | | 5855.000 | 69.615 | 64.819 | -41.185 | 110.800 | 4.796 | PK |
| 9 | | | 5875.000 | 68.662 | 63.872 | -36.538 | 105.200 | 4.790 | PK |
| 10 | | | 5925.000 | 63.644 | 58.581 | -4.556 | 68.200 | 5.063 | PK |
| 11 | | * | 5931.800 | 66.629 | 61.595 | -1.571 | 68.200 | 5.035 | PK |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

| | |
|---|--------------------------|
| Site: WZ-AC1 | Time: 2021/05/31 - 17:54 |
| Limit: FCC_Part15.407_RE(3m) | Engineer: Tommy Tang |
| Probe: WZ-AC1_BBHA9120D_1-18GHz | Polarity: Vertical |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz | |

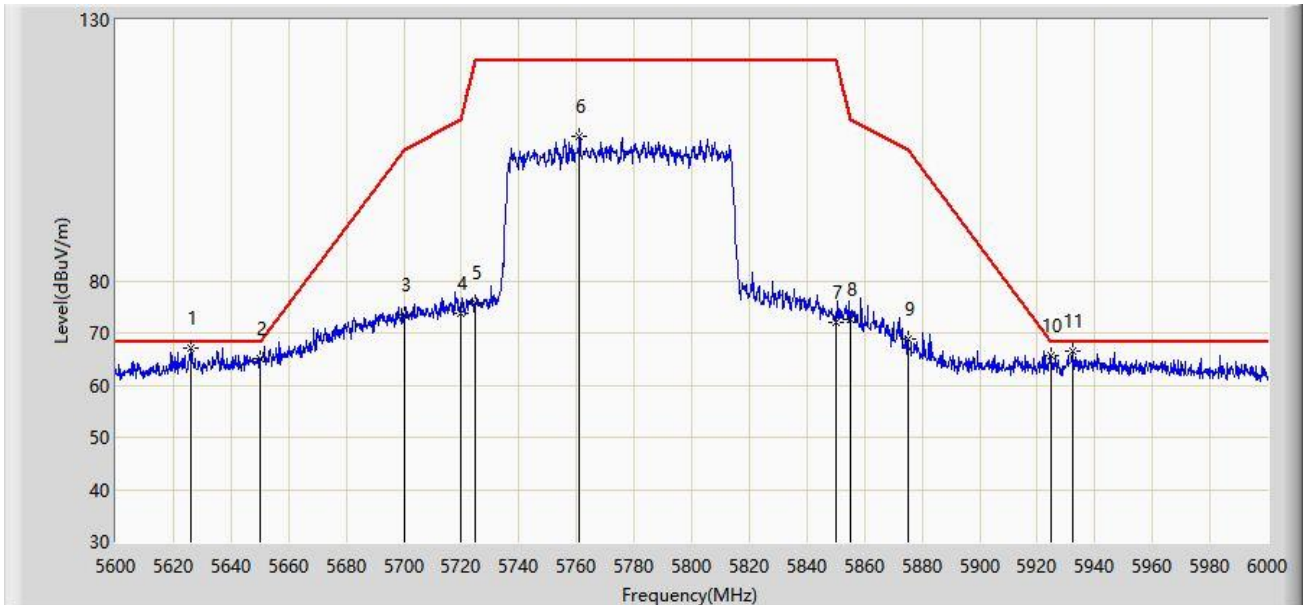

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1 | | * | 5626.200 | 67.018 | 62.559 | -1.182 | 68.200 | 4.460 | PK |
| 2 | | | 5650.000 | 64.962 | 60.629 | -3.238 | 68.200 | 4.333 | PK |
| 3 | | | 5700.000 | 73.578 | 69.026 | -31.622 | 105.200 | 4.551 | PK |
| 4 | | | 5720.000 | 73.786 | 69.273 | -37.014 | 110.800 | 4.513 | PK |
| 5 | | | 5725.000 | 75.867 | 71.356 | -46.333 | 122.200 | 4.511 | PK |
| 6 | | | 5761.000 | 107.557 | 102.880 | N/A | N/A | 4.677 | PK |
| 7 | | | 5850.000 | 72.083 | 67.288 | -50.117 | 122.200 | 4.795 | PK |
| 8 | | | 5855.000 | 72.479 | 67.683 | -38.321 | 110.800 | 4.796 | PK |
| 9 | | | 5875.000 | 68.795 | 64.005 | -36.405 | 105.200 | 4.790 | PK |
| 10 | | | 5925.000 | 65.703 | 60.640 | -2.497 | 68.200 | 5.063 | PK |
| 11 | | | 5932.400 | 66.662 | 61.635 | -1.538 | 68.200 | 5.027 | PK |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

| RSS-GEN Limits | | |
|-----------------|-----------------|-----------------|
| Frequency (MHz) | QP (dB μ V) | AV (dB μ V) |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

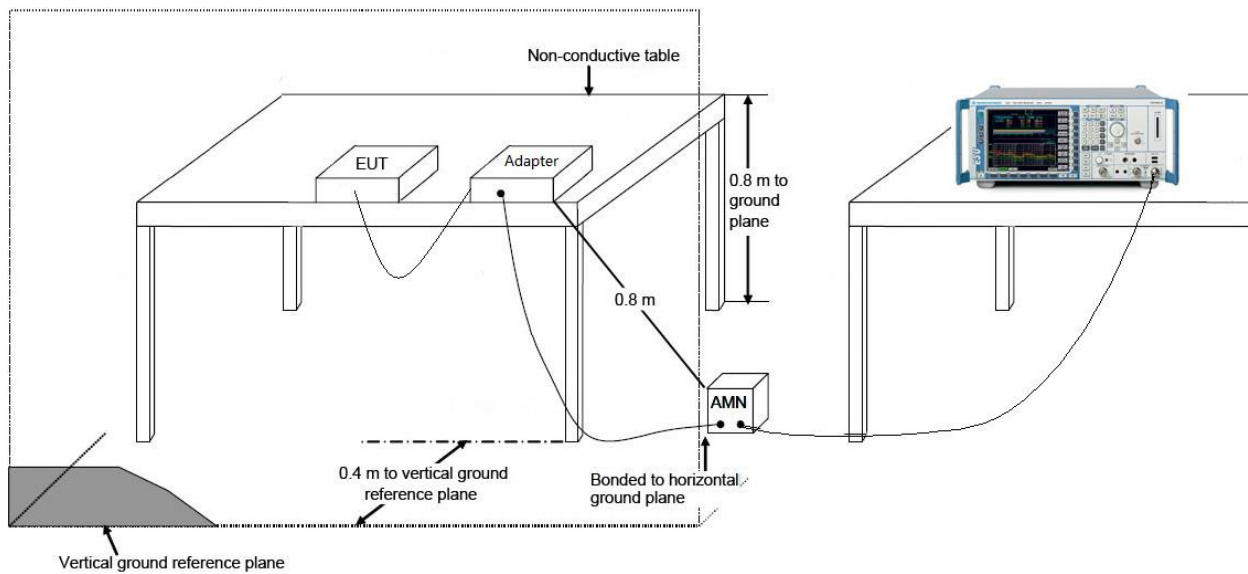

6.10.3. Test Result

| | |
|---|--------------------------|
| Site: WZ-SR2 | Time: 2021/06/21 - 13:42 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Hyde Yu |
| Probe: ENV216_101683_Filter Off_With Adapter | Polarity: Line |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11a at Channel 5180MHz | |

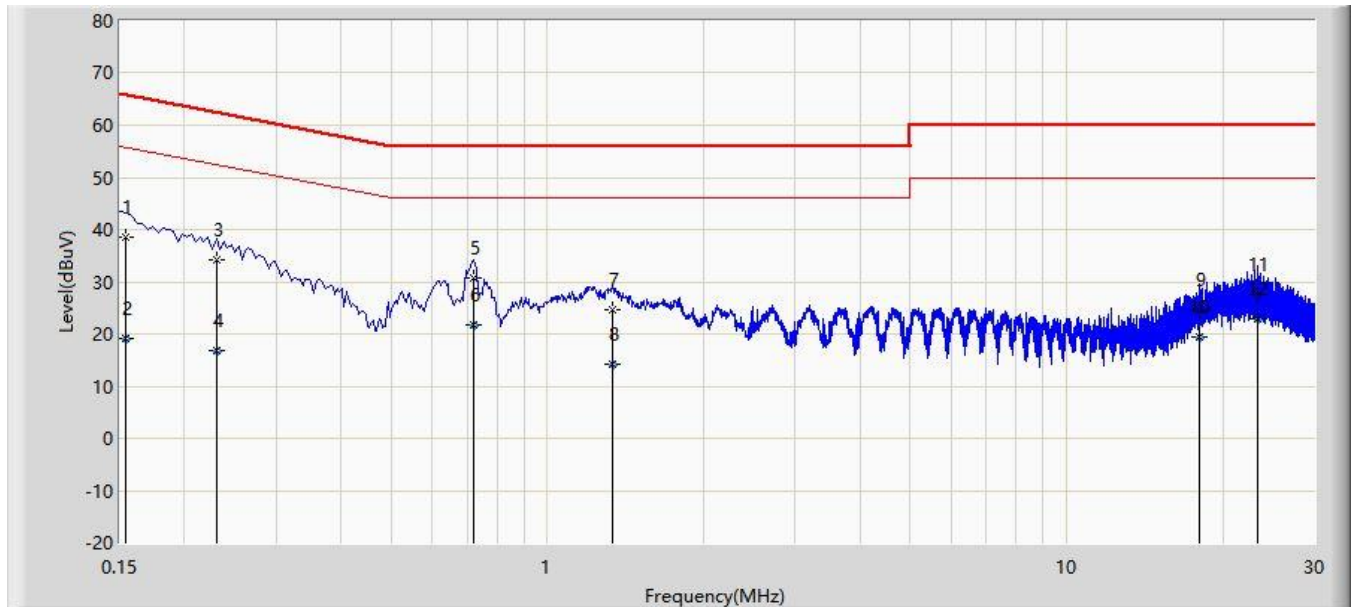


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1 | | | 0.154 | 38.690 | 28.702 | -27.091 | 65.781 | 9.988 | QP |
| 2 | | | 0.154 | 19.214 | 9.226 | -36.567 | 55.781 | 9.988 | AV |
| 3 | | | 0.230 | 34.261 | 24.272 | -28.189 | 62.450 | 9.989 | QP |
| 4 | | | 0.230 | 16.692 | 6.704 | -35.757 | 52.450 | 9.989 | AV |
| 5 | | | 0.722 | 30.846 | 20.805 | -25.154 | 56.000 | 10.041 | QP |
| 6 | | * | 0.722 | 21.859 | 11.818 | -24.141 | 46.000 | 10.041 | AV |
| 7 | | | 1.338 | 24.774 | 14.663 | -31.226 | 56.000 | 10.111 | QP |
| 8 | | | 1.338 | 14.331 | 4.220 | -31.669 | 46.000 | 10.111 | AV |
| 9 | | | 18.058 | 24.607 | 9.434 | -35.393 | 60.000 | 15.173 | QP |
| 10 | | | 18.058 | 19.298 | 4.125 | -30.702 | 50.000 | 15.173 | AV |
| 11 | | | 23.250 | 27.463 | 10.814 | -32.537 | 60.000 | 16.649 | QP |
| 12 | | | 23.250 | 22.955 | 6.306 | -27.045 | 50.000 | 16.649 | AV |

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

| | |
|---|--------------------------|
| Site: WZ-SR2 | Time: 2021/06/21 - 13:52 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Hyde Yu |
| Probe: ENV216_101683_Filter Off_With Adapter | Polarity: Neutral |
| EUT: WIFI+BT Combo Module | Power: AC 120V/60Hz |
| Test Mode: Transmit by 802.11a at Channel 5180MHz | |

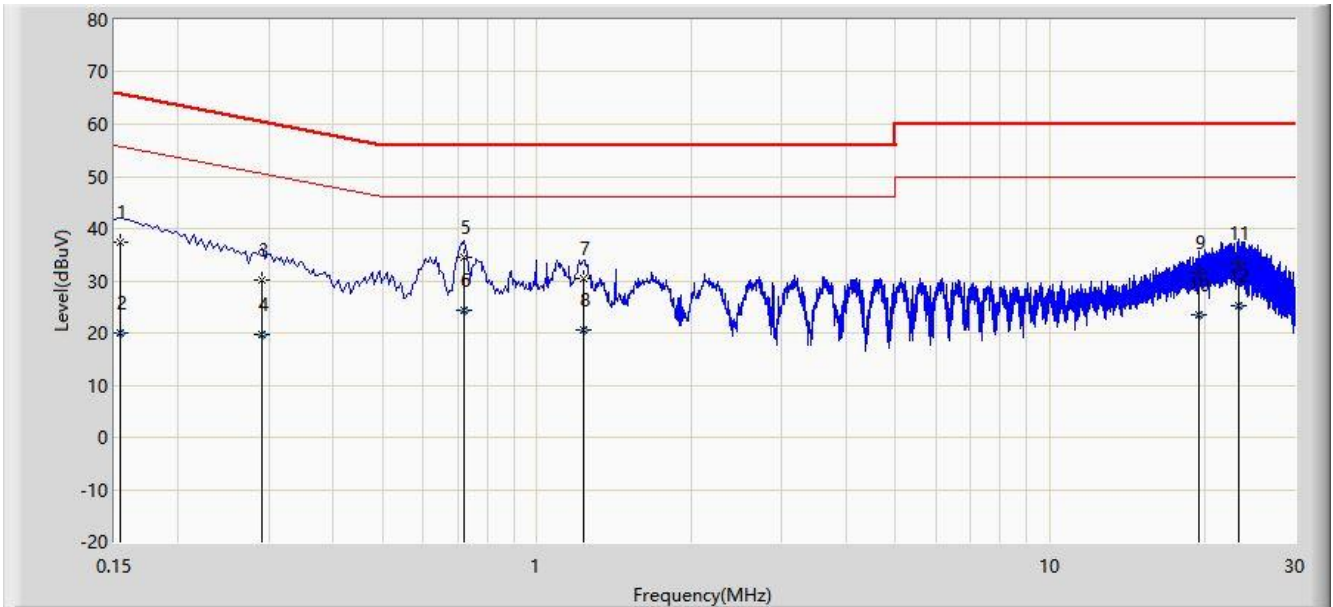

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1 | | | 0.154 | 37.502 | 27.471 | -28.279 | 65.781 | 10.031 | QP |
| 2 | | | 0.154 | 20.133 | 10.101 | -35.648 | 55.781 | 10.031 | AV |
| 3 | | | 0.290 | 30.211 | 20.175 | -30.313 | 60.524 | 10.036 | QP |
| 4 | | | 0.290 | 19.595 | 9.559 | -30.930 | 50.524 | 10.036 | AV |
| 5 | | * | 0.722 | 34.575 | 24.505 | -21.425 | 56.000 | 10.071 | QP |
| 6 | | | 0.722 | 24.242 | 14.172 | -21.758 | 46.000 | 10.071 | AV |
| 7 | | | 1.230 | 30.561 | 20.438 | -25.439 | 56.000 | 10.123 | QP |
| 8 | | | 1.230 | 20.722 | 10.599 | -25.278 | 46.000 | 10.123 | AV |
| 9 | | | 19.442 | 31.549 | 15.974 | -28.451 | 60.000 | 15.575 | QP |
| 10 | | | 19.442 | 23.365 | 7.790 | -26.635 | 50.000 | 15.575 | AV |
| 11 | | | 23.250 | 33.253 | 16.774 | -26.747 | 60.000 | 16.479 | QP |
| 12 | | | 23.250 | 25.208 | 8.729 | -24.792 | 50.000 | 16.479 | AV |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules and ISED rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "2104RSU079-UT" file.

Appendix B - EUT Photograph

Refer to "2104RSU079-UE" file.