

FCC Test Report (Part 22: CDMA BC0 & GSM/GPRS 850)

Report No.: RF160621C08-6

FCC ID: H8N-PCT5230

Test Model: ADR1776

Received Date: Jun. 21, 2016

Test Date: Aug. 22 ~ Aug. 24, 2016

Issued Date: Aug. 25, 2016

Applicant: ASKEY COMPUTER CORP.

Address: 10F, NO.119, JIANKANG RD., ZHONGHE DIST., NEW TAIPEI CITY
23585, TAIWAN, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383,
TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Configuration of System Under Test.....	8
3.2.1 Description of Support Units.....	8
3.3 Test Mode Applicability and Tested Channel Detail.....	9
3.4 EUT Operating Conditions.....	11
3.5 General Description of Applied Standards.....	11
4 Test Types and Results	12
4.1 Output Power Measurement.....	12
4.1.1 Limits of Output Power Measurement.....	12
4.1.2 Test Procedures.....	12
4.1.3 Test Setup.....	13
4.1.4 Test Results.....	14
4.2 Frequency Stability Measurement.....	18
4.2.1 Limits of Frequency Stability Measurement.....	18
4.2.2 Test Procedure.....	18
4.2.3 Test Setup.....	18
4.2.4 Test Results.....	19
4.3 Occupied Bandwidth Measurement.....	20
4.3.1 Test Procedure.....	20
4.3.2 Test Setup.....	20
4.3.3 Test Result (26dB Bandwidth).....	21
4.3.4 Test Result (Occupied Bandwidth).....	23
4.4 Band Edge Measurement.....	25
4.4.1 Limits of Band Edge Measurement.....	25
4.4.2 Test Setup.....	25
4.4.3 Test Procedures.....	25
4.4.4 Test Results.....	26
4.5 Peak To Average Ratio.....	28
4.5.1 Limits of Peak To Average Ratio Measurement.....	28
4.5.2 Test Setup.....	28
4.5.3 Test Procedures.....	28
4.5.4 Test Results.....	29
4.6 Conducted Spurious Emissions.....	31
4.6.1 Limits of Conducted Spurious Emissions Measurement.....	31
4.6.2 Test Setup.....	31
4.6.3 Test Procedure.....	31
4.6.4 Test Results.....	32
4.7 Radiated Emission Measurement.....	44
4.7.1 Limits of Radiated Emission Measurement.....	44
4.7.2 Test Procedure.....	44
4.7.3 Deviation from Test Standard.....	44
4.7.4 Test Setup.....	45
4.7.5 Test Results.....	46
5 Pictures of Test Arrangements	61
Appendix – Information on the Testing Laboratories	62

Release Control Record

Issue No.	Description	Date Issued
RF160621C08-6	Original release.	Aug. 25, 2016

1 Certificate of Conformity

Product: Smart Phone

Brand: Turbonet

Test Model: ADR1776

Sample Status: Engineering sample


Applicant: ASKEY COMPUTER CORP.

Test Date: Aug. 22 ~ Aug. 24, 2016

Standards: FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : , **Date:** Aug. 25, 2016
Polly Chien / Specialist

Approved by : , **Date:** Aug. 25, 2016
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 22 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 22.913 (a)	Effective radiated power	PASS	Meet the requirement of limit.
---	Peak To Average Ratio	PASS	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	PASS	Meet the requirement of limit.
2.1049	Occupied Bandwidth	PASS	Meet the requirement of limit.
22.917	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -25.1dB at 1697.60MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 23, 2015	Dec. 22, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Apr. 19, 2016	Apr. 18, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Jan. 18, 2016	Jan. 17, 2017
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Jan. 08, 2016	Jan. 07, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Jan. 18, 2016	Jan. 17, 2017
Preamplifier Agilent	8449B	3008A01911	Aug. 09, 2016	Aug. 08, 2017
Preamplifier Agilent	8447D	2944A10638	Aug. 09, 2016	Aug. 08, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-02(309222 +248780)	Aug. 09, 2016	Aug. 08, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-03(274092)	Aug. 09, 2016	Aug. 08, 2017
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 09, 2016	Aug. 08, 2017
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 08, 2016	Jun. 07, 2017
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jun. 09, 2015	Jun. 08, 2016
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 215374.
 5. The IC Site Registration No. is IC 7450F-9.

3 General Information

3.1 General Description of EUT

Product	Smart Phone
Brand	Turbonet
Test Model	ADR1776
Sample Status	Engineering sample
Power Supply Rating	3.8Vdc (Battery) 5Vdc or 9Vdc (Adapter or host equipment) 9Vdc (Adapter)
Modulation Type	GSM, GPRS: GMSK EDGE: 8PSK CDMA: QPSK, OQPSK, HPSK
Operating Frequency	GSM: 824.2MHz ~ 848.8MHz CDMA: 824.7MHz ~ 848.31MHz
Max. ERP Power	GSM: 524.807mW (27.2dBm) EDGE: 141.254mW (21.5dBm) CDMA: 64.565mW (18.1dBm)
Antenna Type	Refer to Note for more details
Antenna Connector	Refer to Note for more details
Accessory Device	Refer to Note for more details
Data Cable Supplied	Refer to Note for more details

Note:


1. The EUT contains following accessory devices and data cable.

Item	Brand	Model	Specification
Battery	FUJI	492005	3.8Vdc, 11.21Wh or 2950mAh
USB cable	N/A	N/A	0.95m shielded cable without core
Adapter	DELTA Electronics, INC.	ADP-18GW B	I/P: 100-240Vac, 0.5A, 50-60Hz O/P: 5Vdc, 2A charger 9Vdc, 2A fast charger

2. The EUT uses following antennas.

Antenna	Frequency Range (MHz)	Antenna Gain (dBi)	Antenna Type	Antenna Connector
WWAN	824-849	-0.33	Embedded	Spring

3.2 Configuration of System Under Test

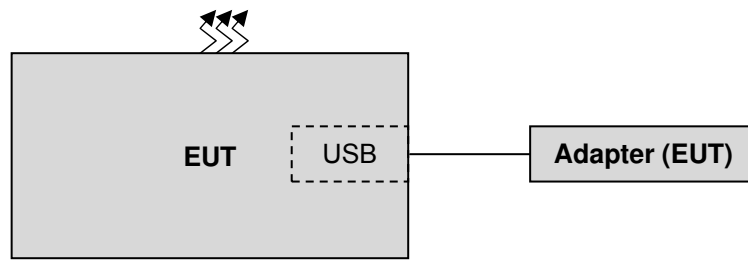

Remote site



3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Universal Radio Communication Tester	R&S	CMU200	123112	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below:

GSM Mode

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	128 to 251	128, 189, 251	GSM, EDGE
-	Frequency Stability	128 to 251	189	GSM
-	Occupied Bandwidth	128 to 251	128, 189, 251	GSM, GPRS, EDGE
-	Band Edge	128 to 251	128, 251	GSM, GPRS, EDGE
-	Peak To Average Ratio	128 to 251	128, 189, 251	GSM, GPRS, EDGE
-	Conducted Emission	128 to 251	128, 189, 251	GSM, GPRS, EDGE
-	Radiated Emission Below 1GHz	128 to 251	128, 189, 251	GSM, EDGE
-	Radiated Emission Above 1GHz	128 to 251	128, 189, 251	GSM, EDGE

CDMA Mode

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	1013 to 777	1013, 384, 777	CDMA
-	Frequency Stability	1013 to 777	384	CDMA
-	Occupied Bandwidth	1013 to 777	1013, 384, 777	CDMA
-	Band Edge	1013 to 777	1013, 777	CDMA
-	Peak To Average Ratio	1013 to 777	1013, 384, 777	CDMA
-	Conducted Emission	1013 to 777	1013, 384, 777	CDMA
-	Radiated Emission Below 1GHz	1013 to 777	1013, 384, 777	CDMA
-	Radiated Emission Above 1GHz	1013 to 777	1013, 384, 777	CDMA

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25deg. C, 69%RH	120Vac, 60Hz	Tank Wu
Frequency Stability	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Occupied Bandwidth	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Band Edge	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Peak To Average Ratio	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Conducted Emission	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
Radiated Emission	20deg. C, 69%RH 25deg. C, 69%RH	120Vac, 60Hz	Bond Tseng, Tank Wu

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-C 2004

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).

The test report has been issued separately.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, EDGE and 5MHz for CDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}$.

Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, CDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 Test Setup

EIRP / ERP Measurement:

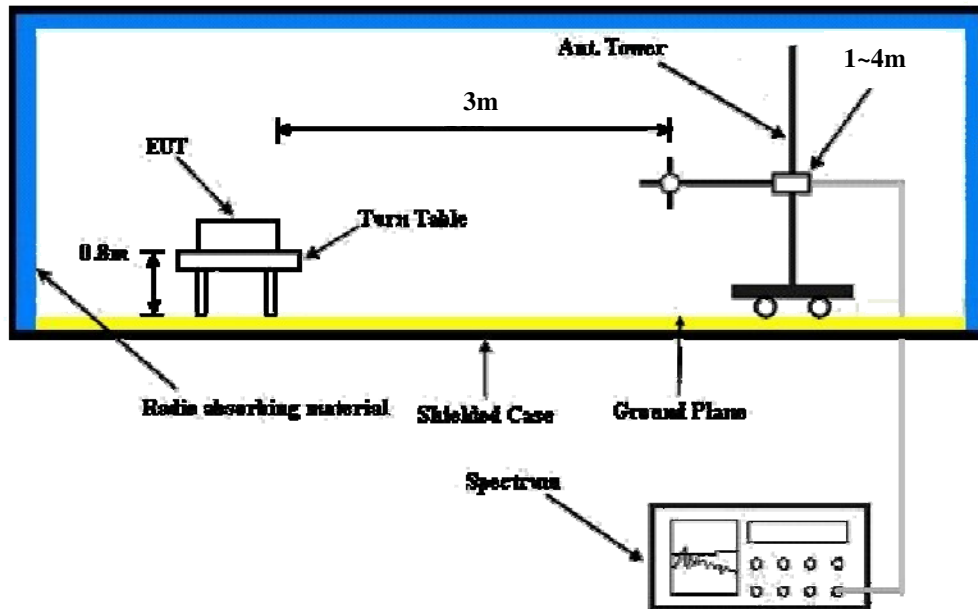

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

Conducted Output Power (dBm)

Band	GSM850		
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GSM	32.41	32.61	32.45
GPRS 8	32.40	32.43	32.60
GPRS 10	31.02	30.84	30.81
GPRS 11	29.61	29.68	29.75
GPRS 12	28.51	28.53	28.47
GPRS 30	32.32	32.38	32.55
GPRS 31	30.93	31.02	30.73
GPRS 32	29.47	29.51	29.58
GPRS 33	28.44	28.43	28.41
DTM 9 (GPRS)	30.31	30.43	30.39
DTM 11 (GPRS)	29.49	29.59	29.65
EDGE 8 (MCS9)	26.11	26.15	26.31
EDGE 10 (MCS9)	24.60	24.64	24.80
EDGE 11 (MCS9)	23.42	23.46	23.62
EDGE 12 (MCS9)	22.14	22.18	22.34
EDGE 30 (MCS9)	26.05	26.09	26.25
EDGE 31 (MCS9)	24.61	24.65	24.81
EDGE 32 (MCS9)	23.39	23.43	23.59
EDGE 33 (MCS9)	22.13	22.17	22.33
DTM 9 (EDGE)	24.18	24.22	24.38
DTM 11 (EDGE)	23.22	23.26	23.42

Band	CDMA2000 BC0		
Channel	1013	384	777
Frequency (MHz)	824.7	836.52	848.31
RC1+SO55	23.47	23.37	23.33
RC3+SO55	23.59	23.49	23.45
RC3+SO32(+ F-SCH)	23.57	23.47	23.43
RC3+SO32(+SCH)	23.56	23.46	23.42
RC1+SO3, 1/8 Rate	23.49	23.39	23.35
RTAP 153.6	23.58	23.48	23.44
RETAP 4096	23.51	23.41	23.37

ERP Power (dBm)
 GSM Mode

MODE		TX channel 128					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.20	-5.2	22.4	3.9	26.3	38.5	-12.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.20	-10.4	18.0	3.9	21.9	38.5	-16.6

MODE		TX channel 189					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.40	-4.1	23.4	3.8	27.2	38.5	-11.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.40	-10.5	17.6	3.8	21.4	38.5	-17.1

MODE		TX channel 251					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.80	-4.4	23.3	3.4	26.7	38.5	-11.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.80	-10.3	17.8	3.4	21.2	38.5	-17.3

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

EDGE Mode

MODE		TX channel 128					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.20	-10.9	16.7	3.9	20.6	38.5	-17.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.20	-16.2	12.1	3.9	16.0	38.5	-22.5

MODE		TX channel 189					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.40	-9.8	17.7	3.8	21.5	38.5	-17.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.40	-16.0	12.1	3.8	15.9	38.5	-22.6

MODE		TX channel 251					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.80	-10.3	17.4	3.4	20.8	38.5	-17.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.80	-16.3	11.8	3.4	15.2	38.5	-23.3

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

CDMA Mode

MODE		TX channel 1013					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.70	-13.6	14.0	3.9	17.9	38.5	-20.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	824.70	-19.4	8.9	3.9	12.8	38.5	-25.7

MODE		TX channel 384					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.52	-13.1	14.3	3.8	18.1	38.5	-20.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	836.52	-21.2	6.9	3.8	10.7	38.5	-27.8

MODE		TX channel 777					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.31	-14.4	13.3	3.4	16.7	38.5	-21.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	848.31	-21.8	6.3	3.4	9.7	38.5	-28.8

Note: ERP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the AC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

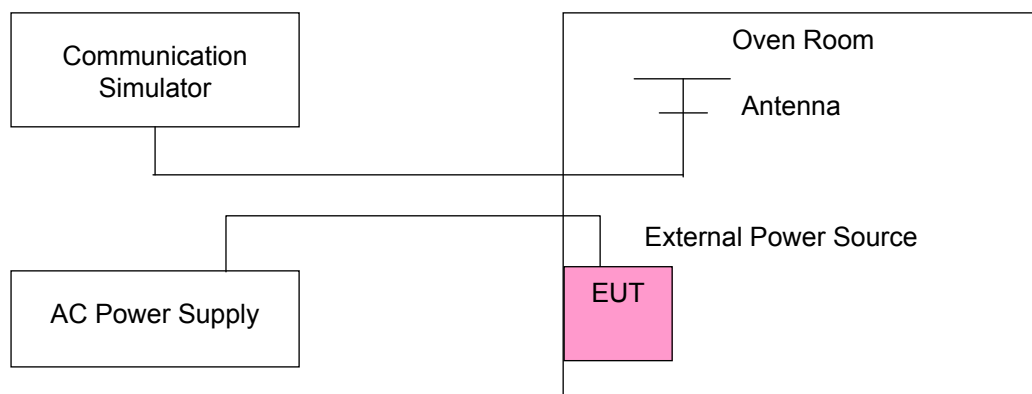

4.2.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	Frequency Error (ppm)		Limit (ppm)
	GSM	CDMA	
132	-0.015	-0.017	2.5
120	-0.014	-0.013	2.5
108	-0.014	-0.015	2.5

NOTE: The applicant defined the normal working voltage is from 108Vac to 132Vac.

Frequency Error vs. Temperature.


TEMP. (°C)	Frequency Error (ppm)		Limit (ppm)
	GSM	CDMA	
70	-0.025	-0.025	2.5
60	-0.025	-0.023	2.5
50	-0.020	-0.019	2.5
40	-0.017	-0.019	2.5
30	-0.016	-0.016	2.5
20	-0.014	-0.013	2.5
10	-0.018	-0.017	2.5
0	-0.020	-0.020	2.5
-10	-0.023	-0.024	2.5
-20	-0.027	-0.027	2.5

4.3 Occupied Bandwidth Measurement

4.3.1 Test Procedure

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 Test Setup

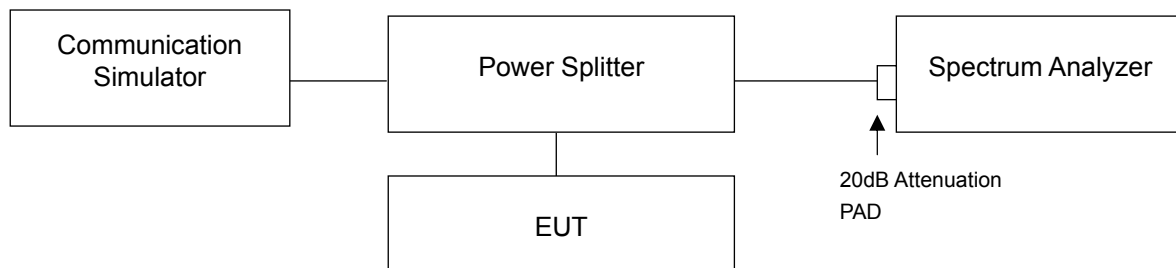


4.3.3 Test Result (26dB Bandwidth)


Channel	Frequency (MHz)	26dB Bandwidth (MHz)		
		GSM	GPRS	EDGE
128	824.2	0.311961094	0.314634873	0.312206030
189	836.4	0.312135677	0.302842607	0.308442910
251	848.8	0.314660898	0.316006510	0.311232445

Spectrum Plot Of Worst Value


GSM

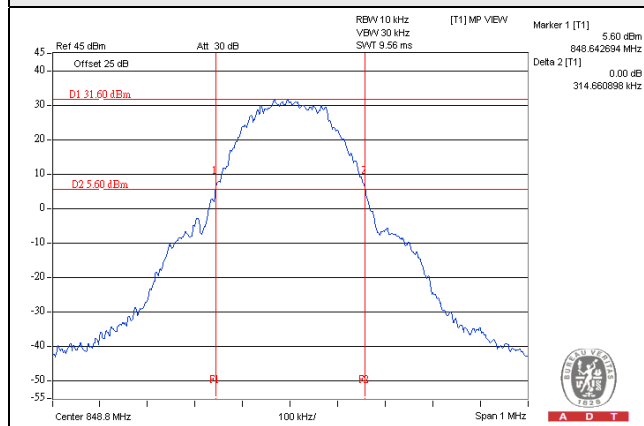

GPRS

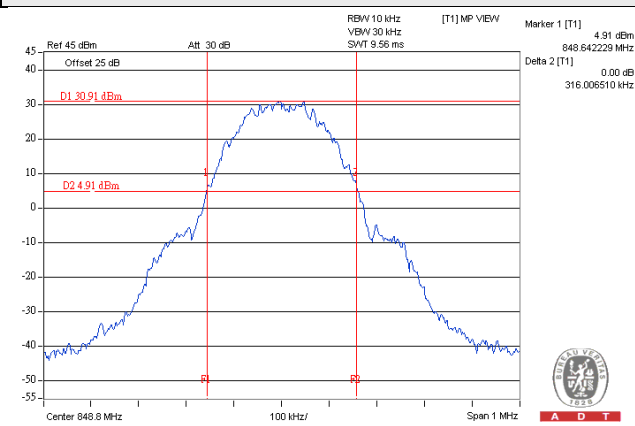


EDGE

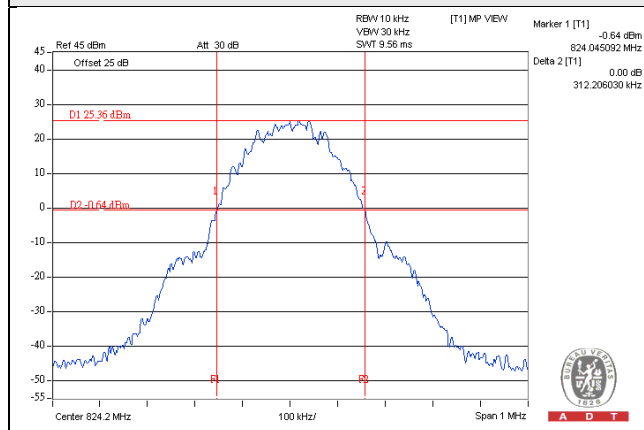

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
		CDMA
1013	824.70	1.456940
384	836.52	1.437693
777	848.31	1.444696

Spectrum Plot Of Worst Value
CDMA

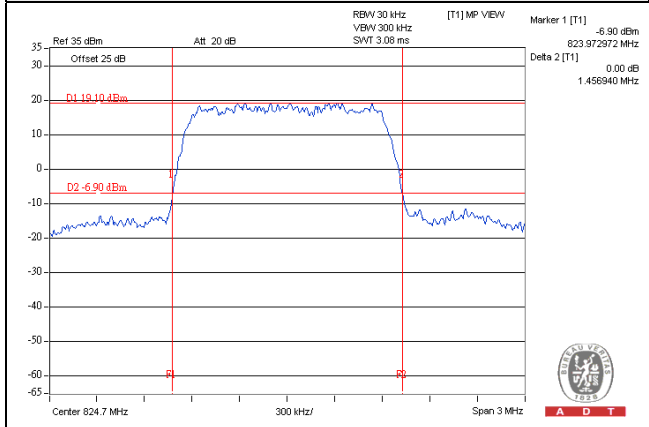


4.3.4 Test Result (Occupied Bandwidth)


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		
		GSM	GPRS	EDGE
128	824.2	0.255	0.260	0.255
189	836.4	0.255	0.260	0.255
251	848.8	0.250	0.250	0.255

Spectrum Plot Of Worst Value


GSM

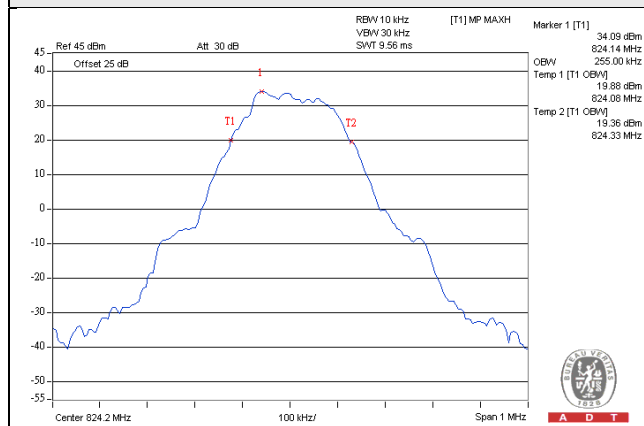


GPRS

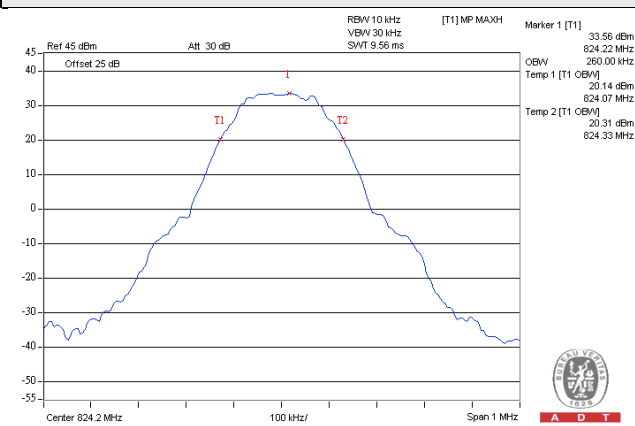

EDGE

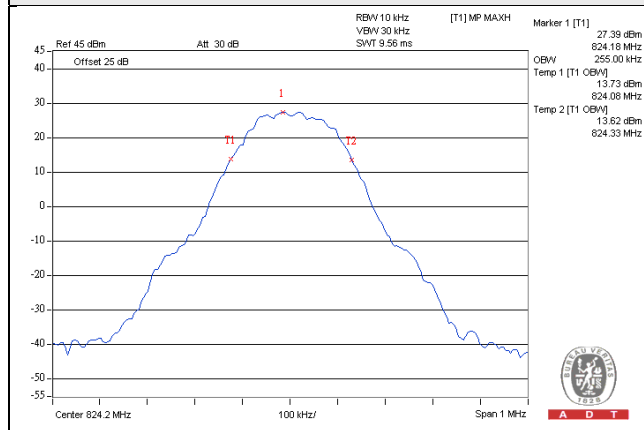

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
		CDMA
1013	824.70	1.28
384	836.52	1.27
777	848.31	1.28

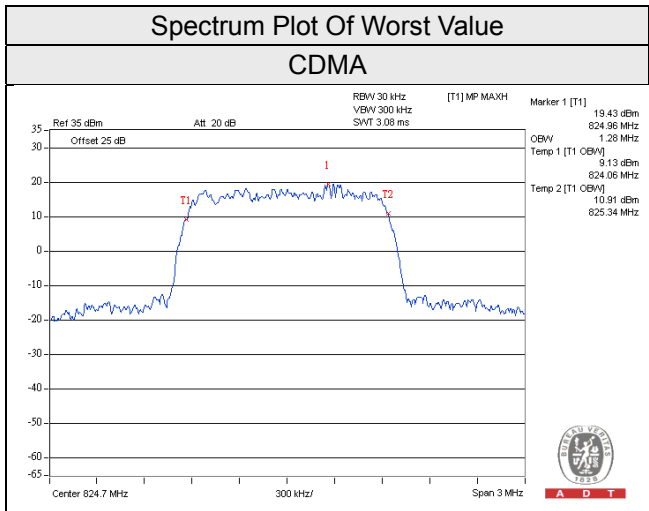


4.4 Band Edge Measurement

4.4.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4.4.2 Test Setup

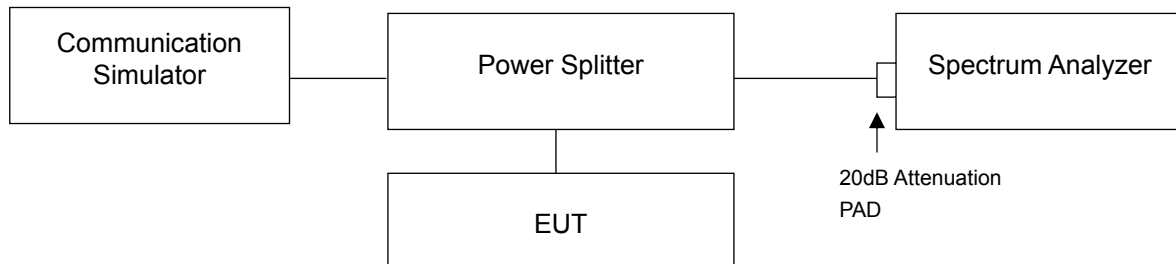

4.4.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS / EDGE).
- The center frequency of spectrum is the band edge frequency and span is 3MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (CDMA).
- Record the max trace plot into the test report.

4.4.4 Test Results

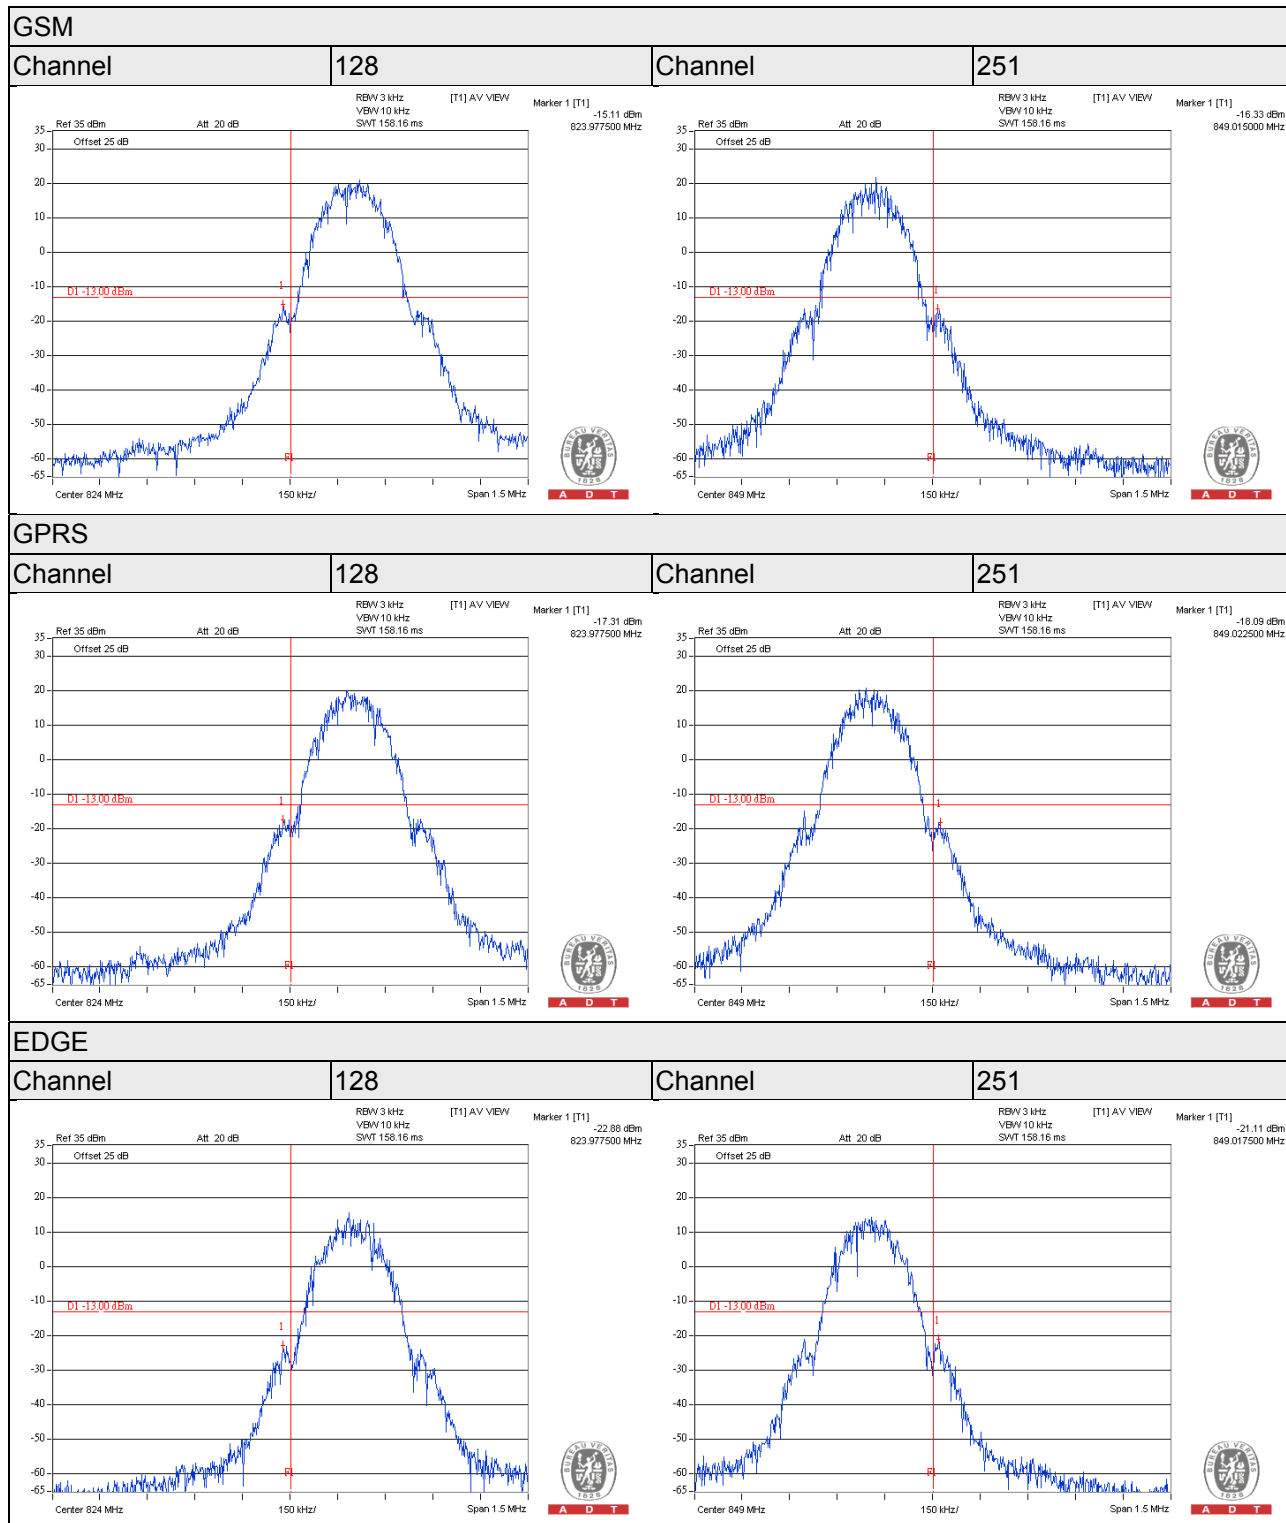



CDMA

Channel

1013

Channel

777

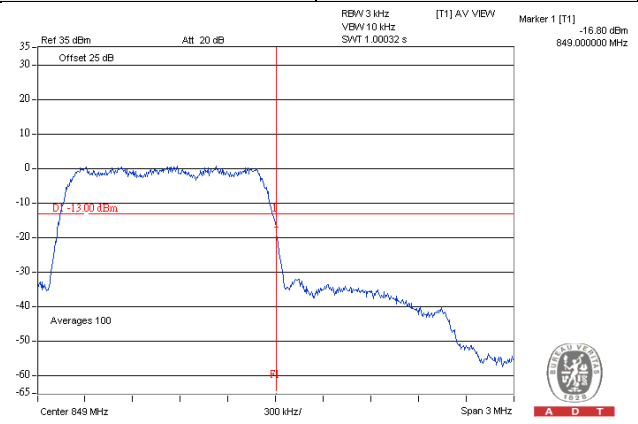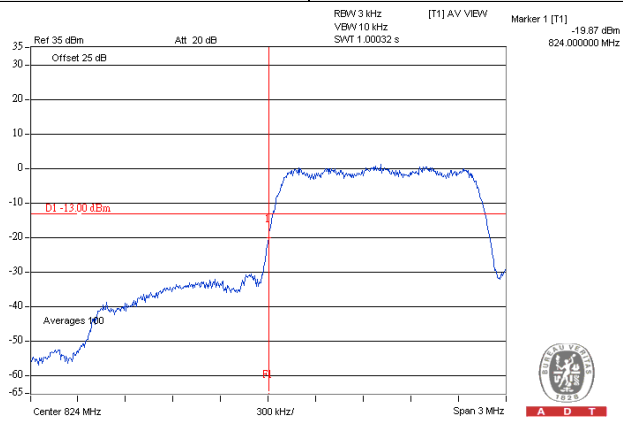


4.5 Peak To Average Ratio

4.5.1 Limits of Peak To Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.5.2 Test Setup


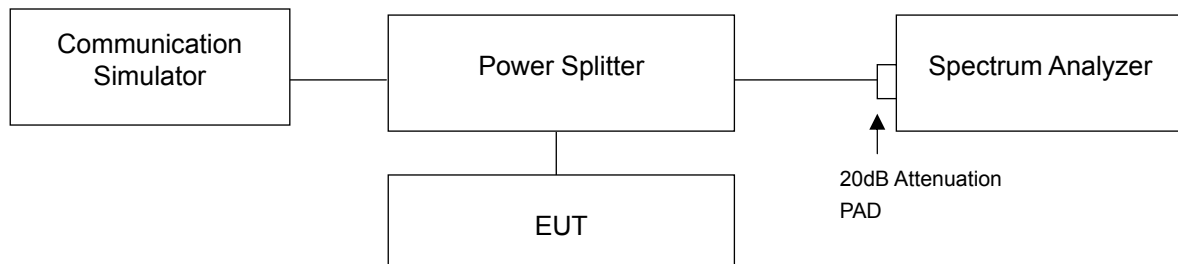


4.5.3 Test Procedures


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.5.4 Test Results

Channel	Frequency (MHz)	Peak To Average Ratio (dB)		
		GSM	GPRS	EDGE
128	824.2	2.53	2.54	2.58
189	836.4	3.23	3.23	2.82
251	848.8	2.53	2.53	3.19

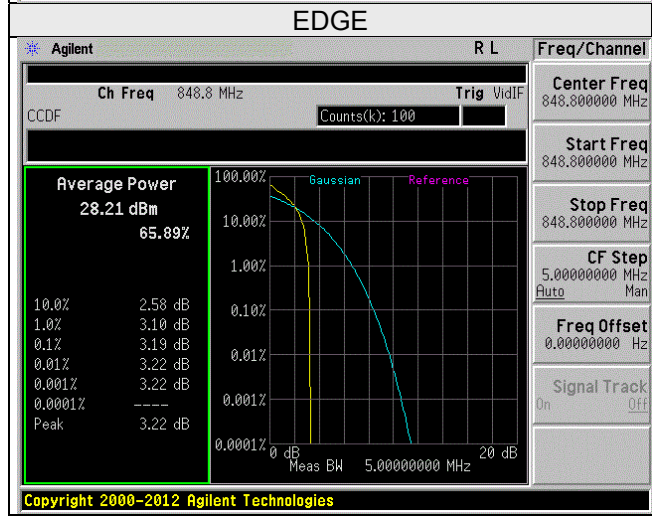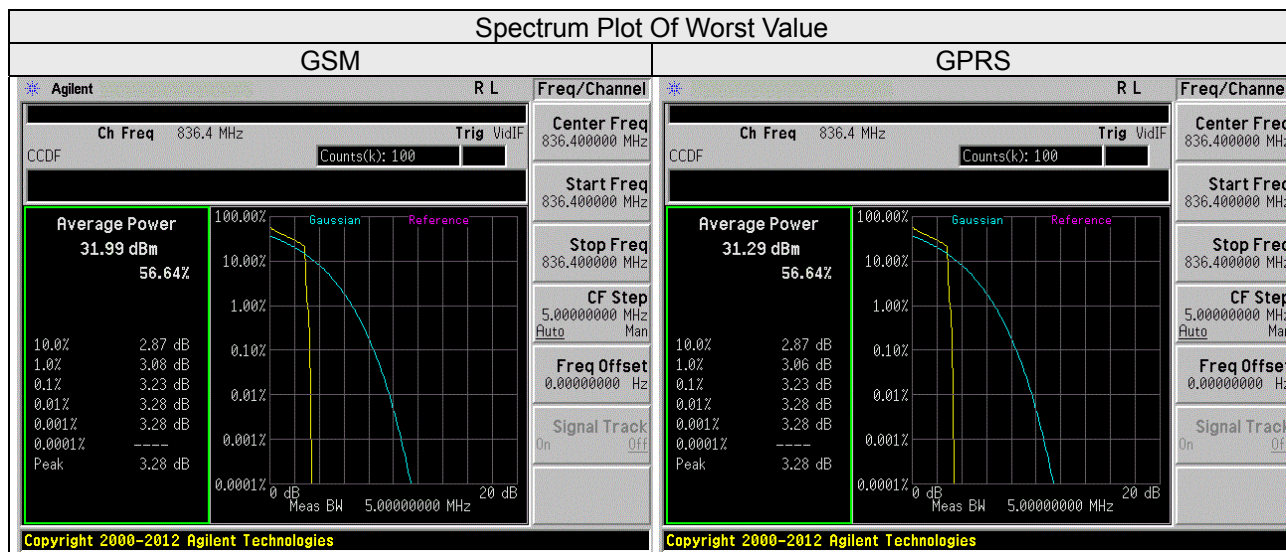

Channel	Frequency (MHz)	Peak To Average Ratio (dB)
		CDMA
1013	824.70	4.90
384	836.52	5.06
777	848.31	4.54

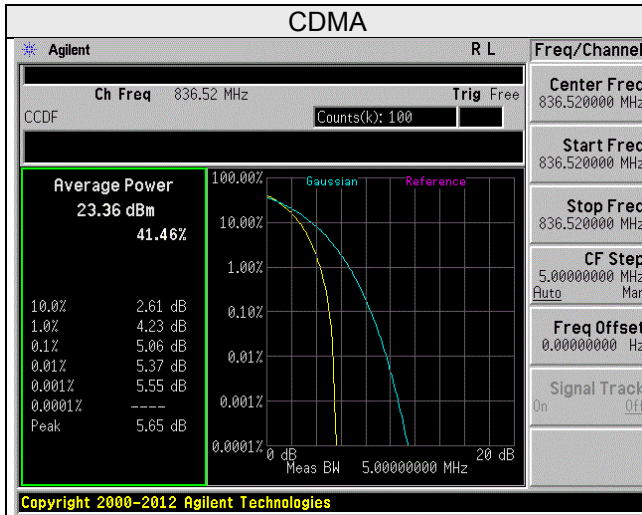


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 Test Setup

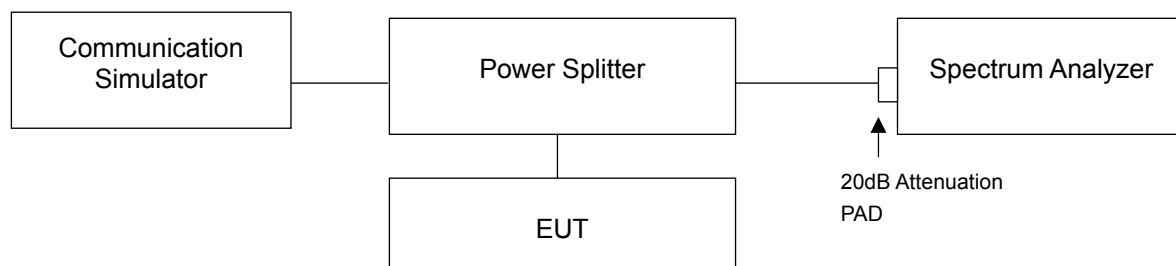

4.6.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 9GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.


4.6.4 Test Results

GSM


Channel 128

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

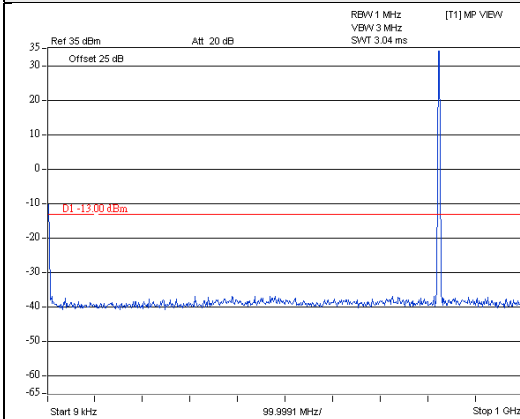


A D T

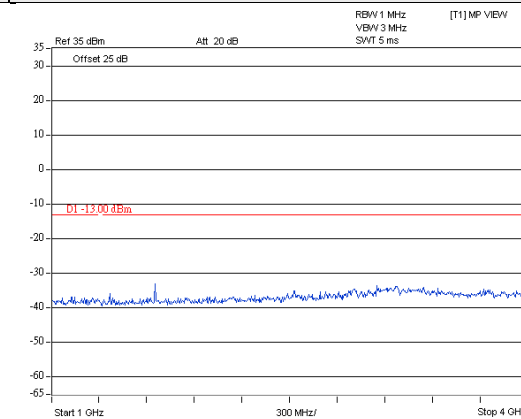


A D T

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

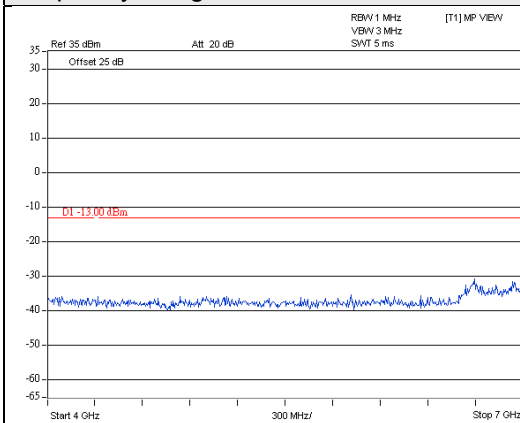

A D T

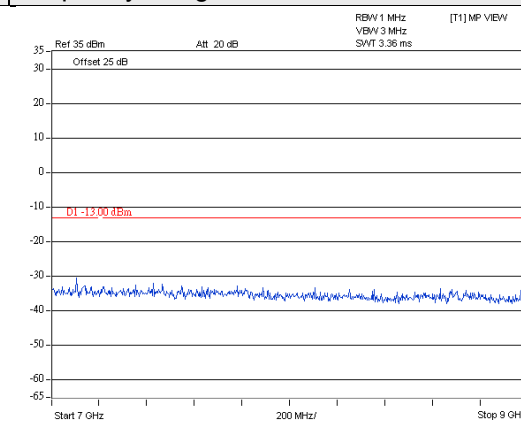


A D T

GSM


Channel 189

Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

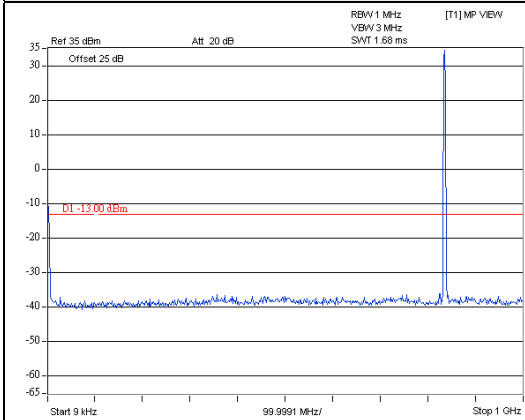


A D T

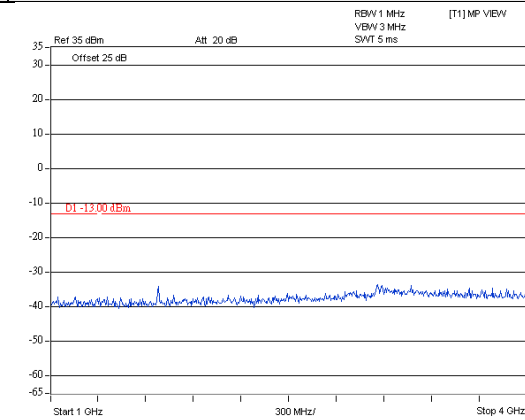


A D T

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

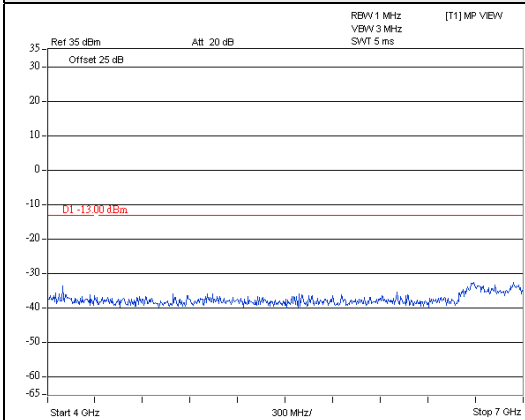

A D T

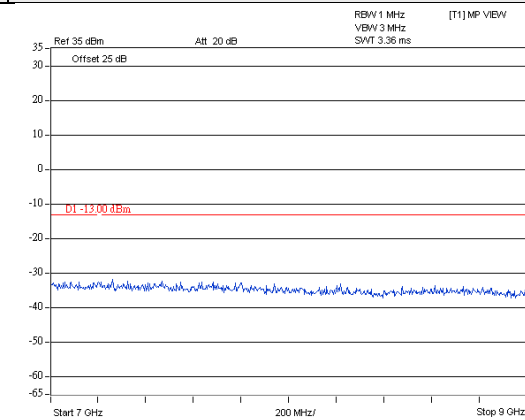



A D T

GSM

Channel 251



Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

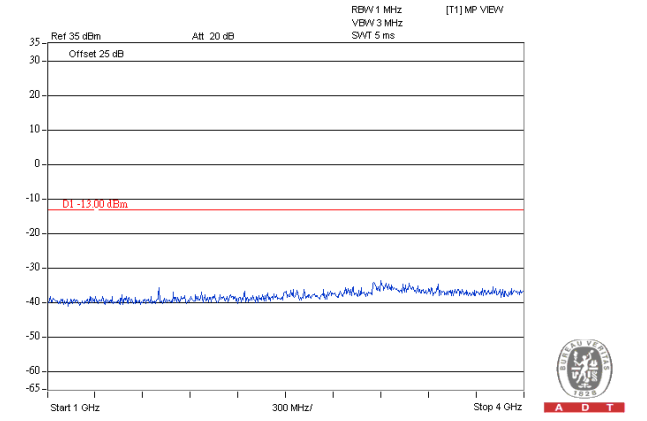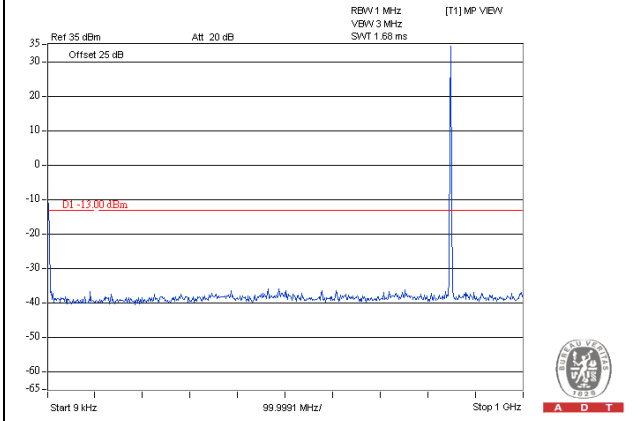

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

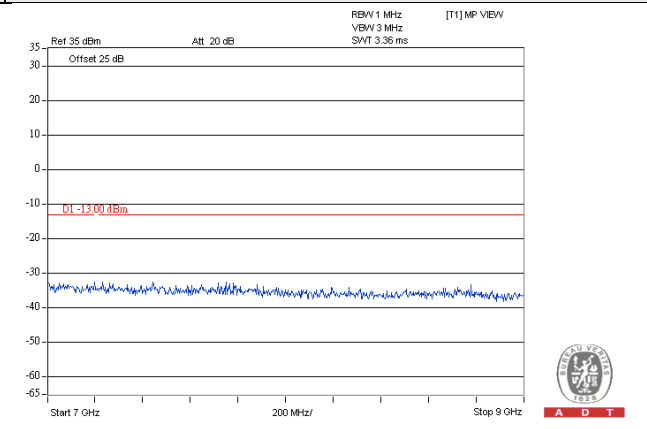
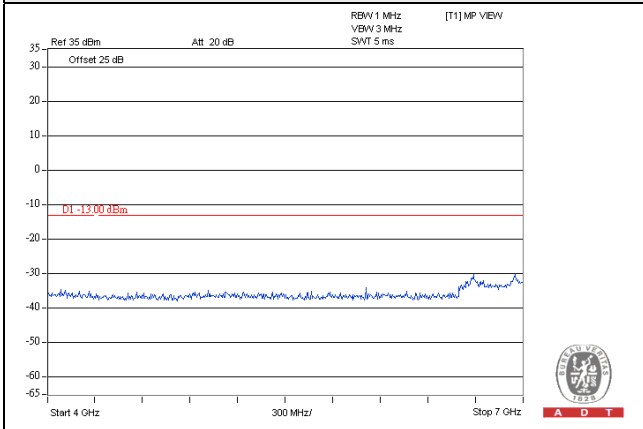


GPRS

Channel 128



Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

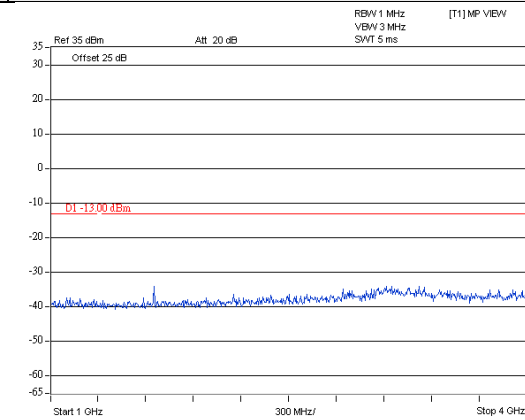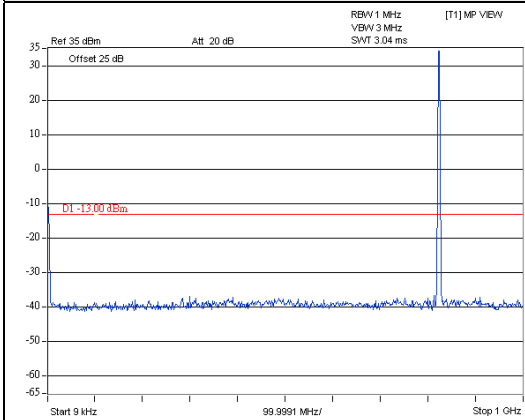

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

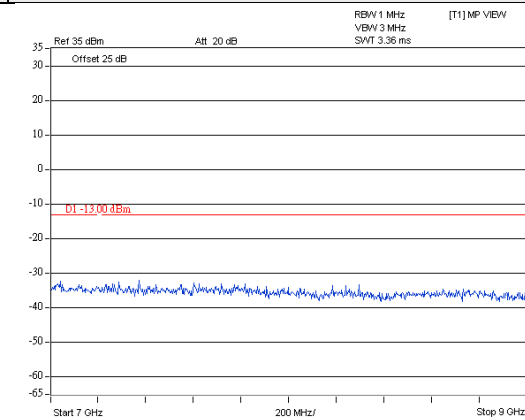
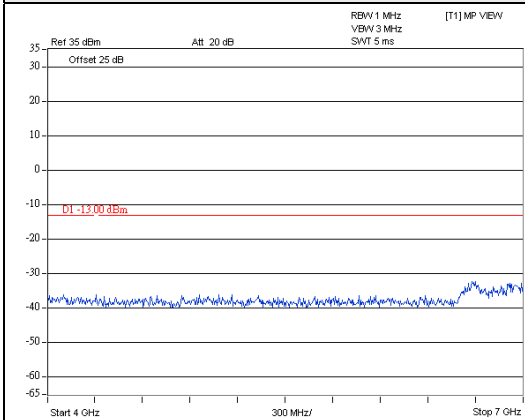


GPRS

Channel 189



Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

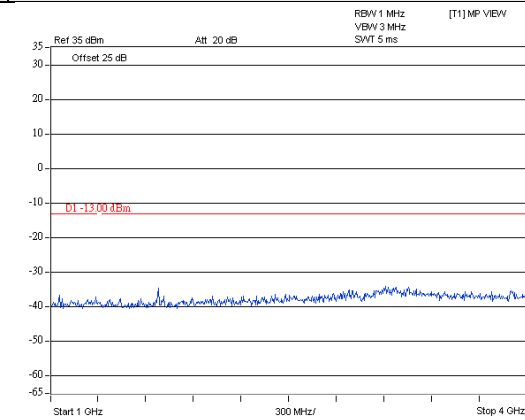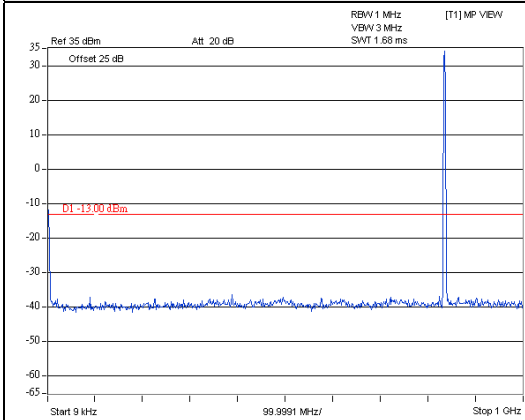

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

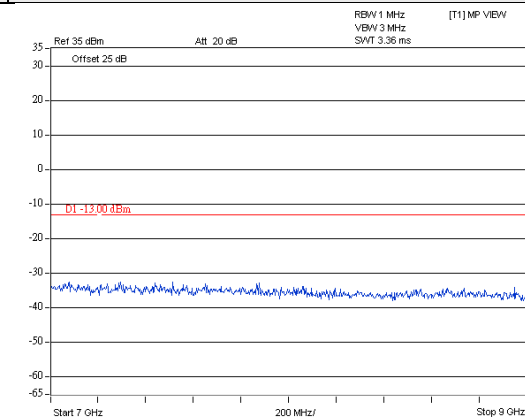
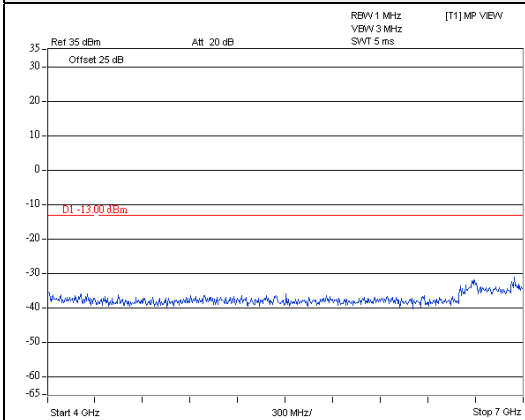


GPRS

Channel 251



Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

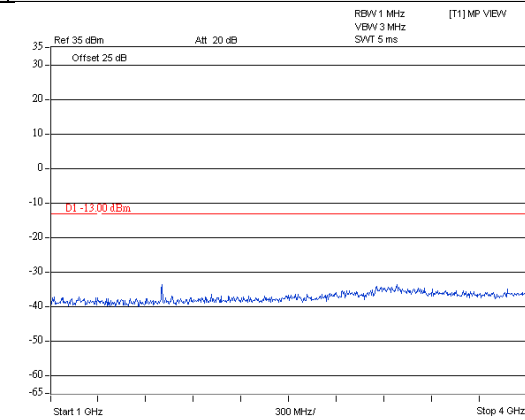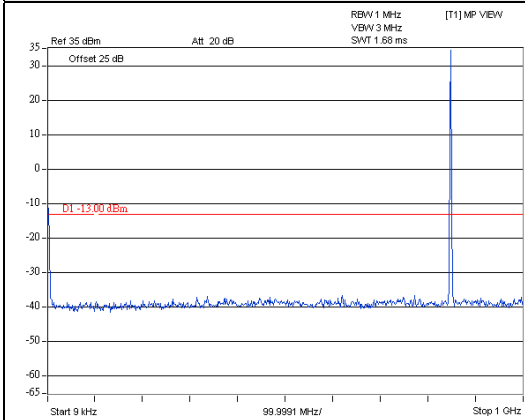

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

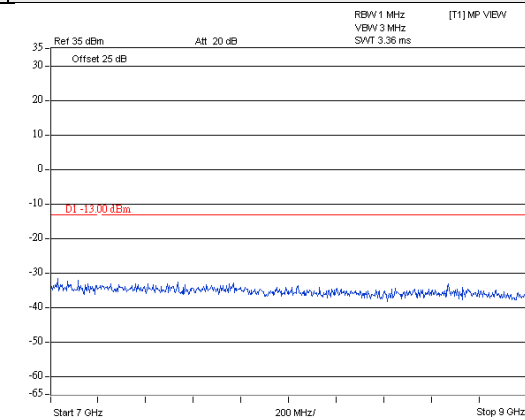
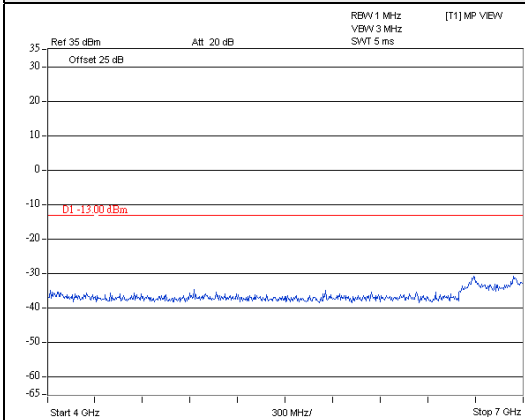


EDGE

Channel 128



Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

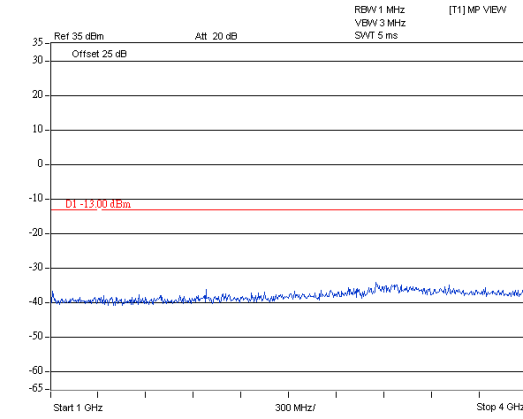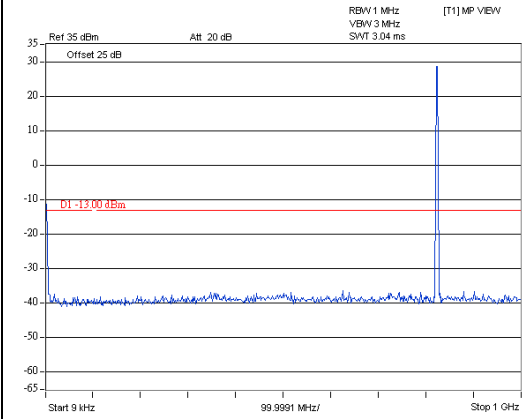

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

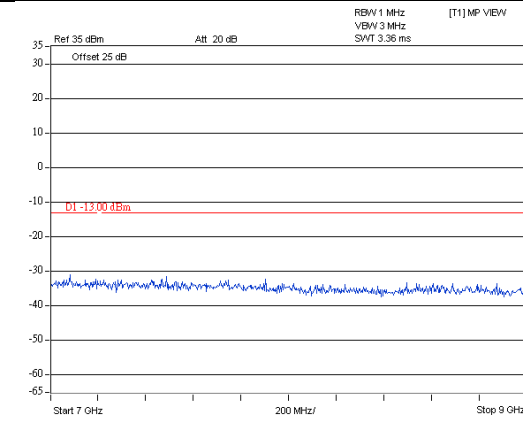
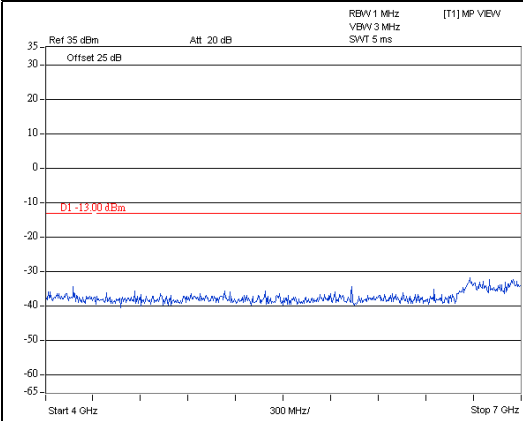


EDGE

Channel 189



Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

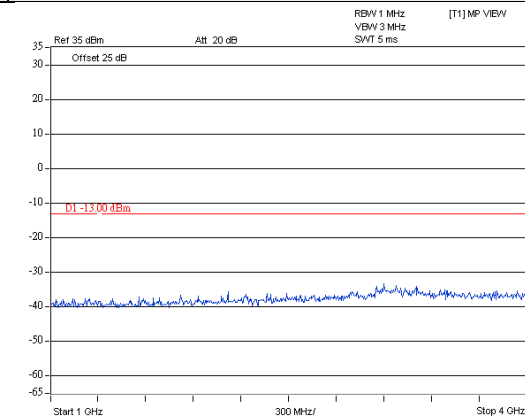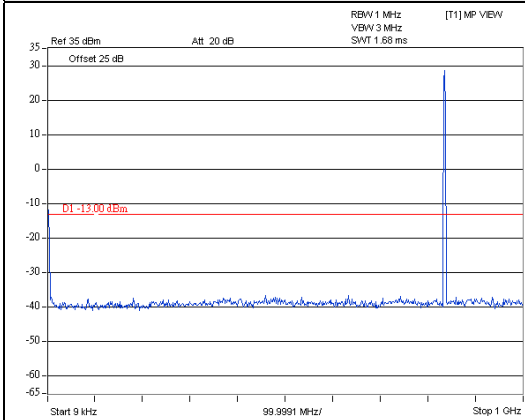

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

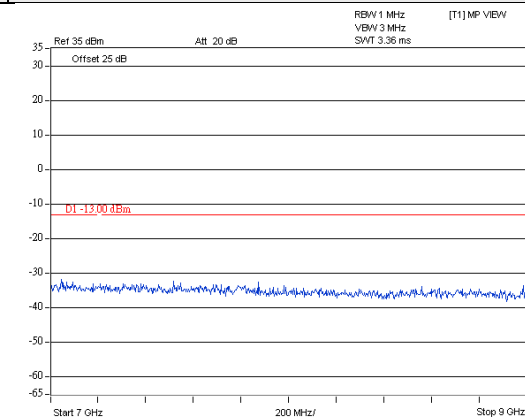
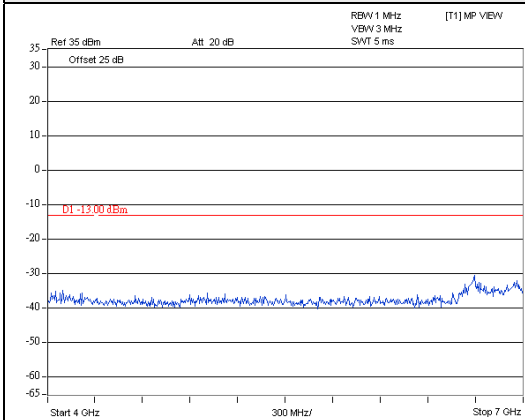


EDGE

Channel 251



Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

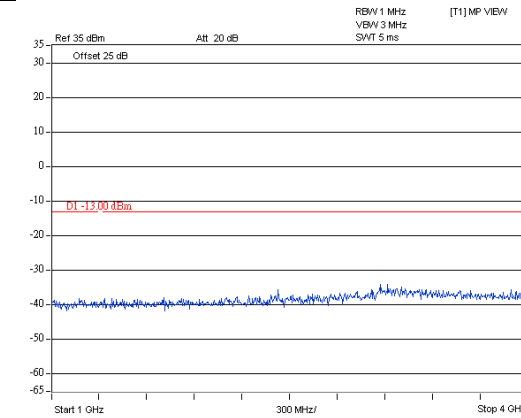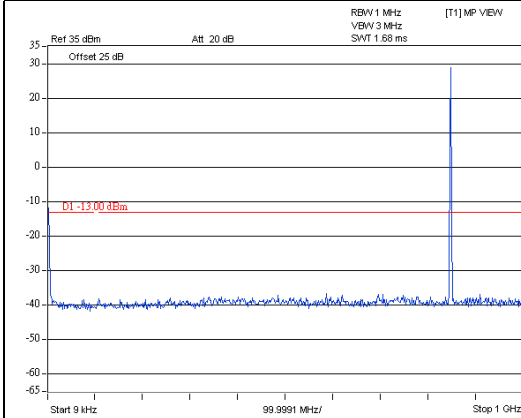

Frequency Range : 4GHz~7GHz

Frequency Range : 7GHz~9GHz

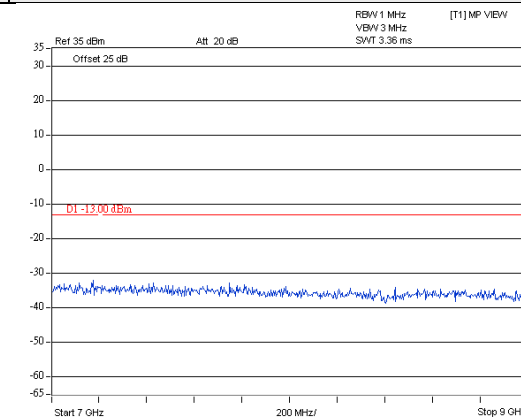
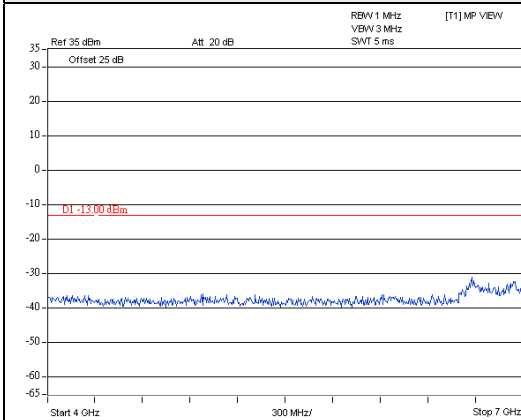


CDMA

Channel 1013



Frequency Range : 9kHz~1GHz

Frequency Range : 1GHz~4GHz

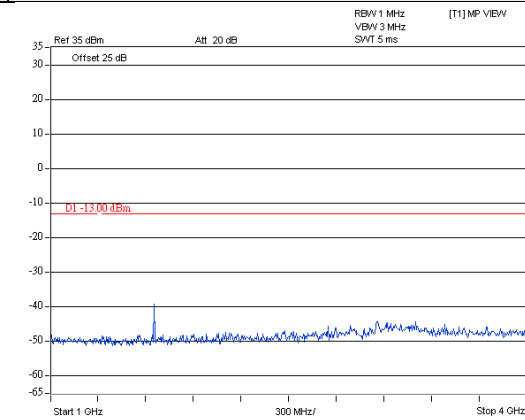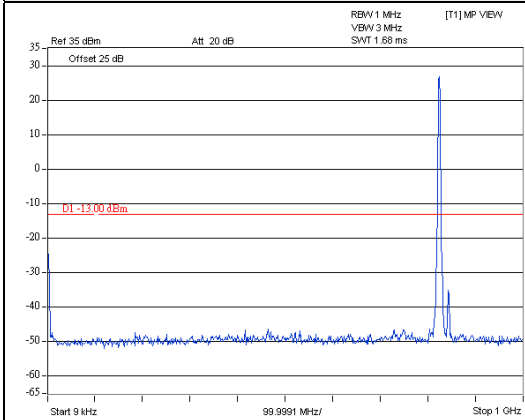

Frequency Range : 4GHz~7GHz


Frequency Range : 7GHz~9GHz

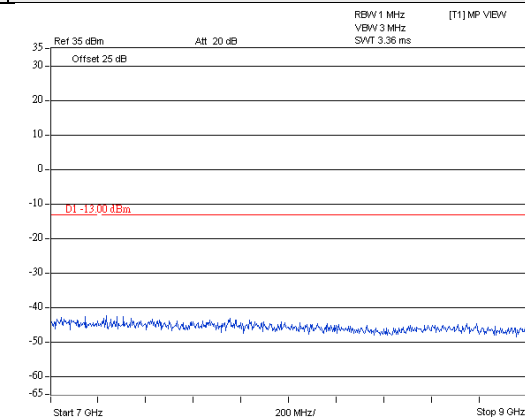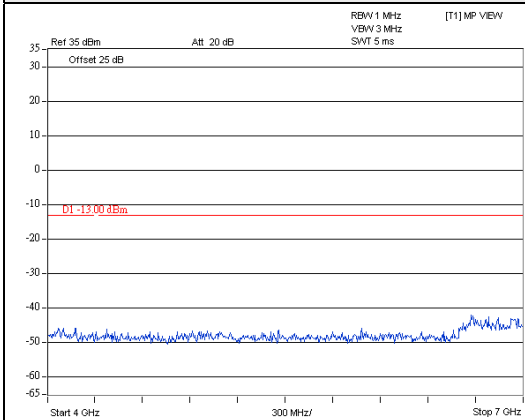


CDMA

Channel 384


Frequency Range : 9kHz~1GHz

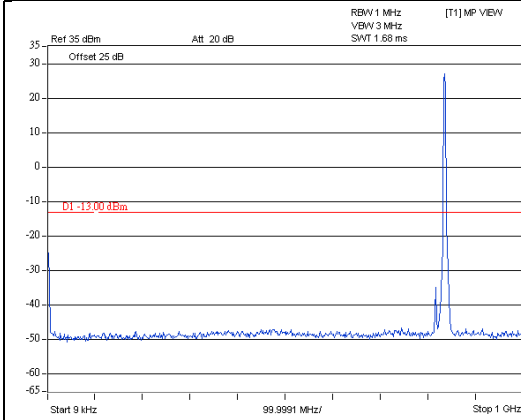


Frequency Range : 1GHz~4GHz

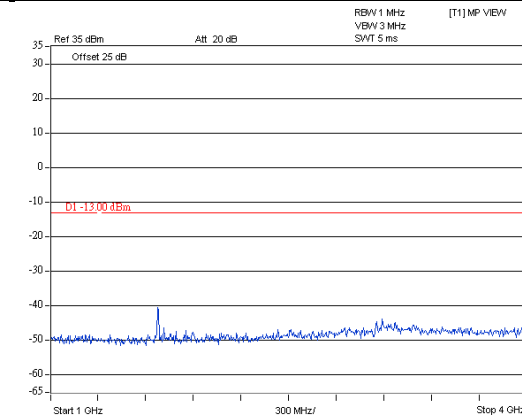

Frequency Range : 4GHz~7GHz

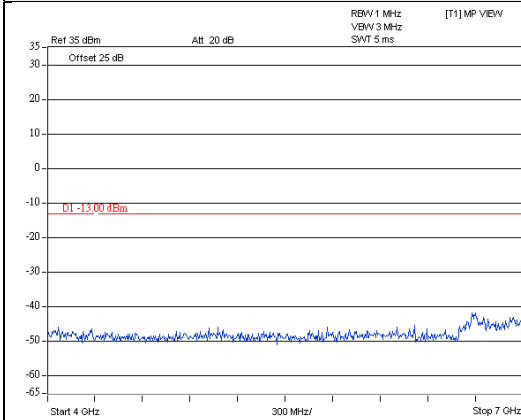


Frequency Range : 7GHz~9GHz

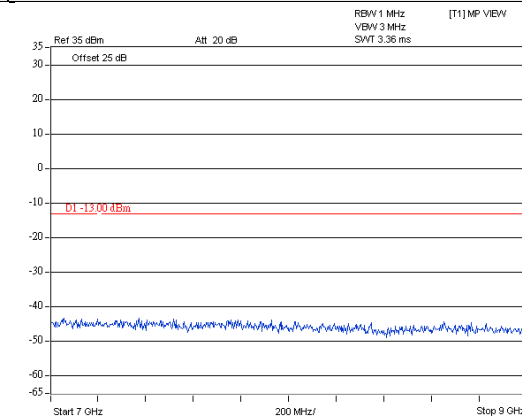


CDMA

Channel 777


Frequency Range : 9kHz~1GHz

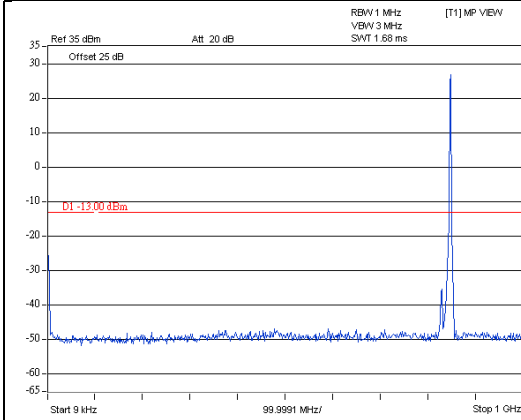


Frequency Range : 1GHz~4GHz

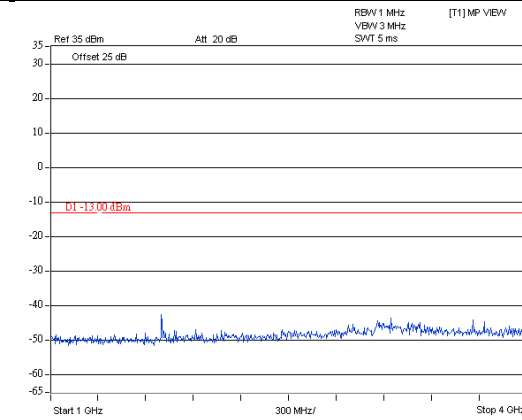

Frequency Range : 4GHz~7GHz

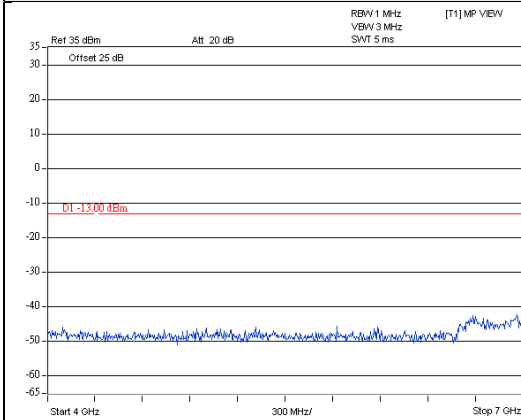

Frequency Range : 7GHz~9GHz

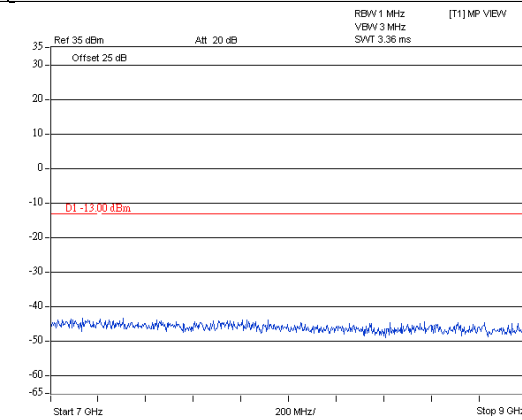

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.7.2 Test Procedure


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.3 Deviation from Test Standard

No deviation.

4.7.4 Test Setup

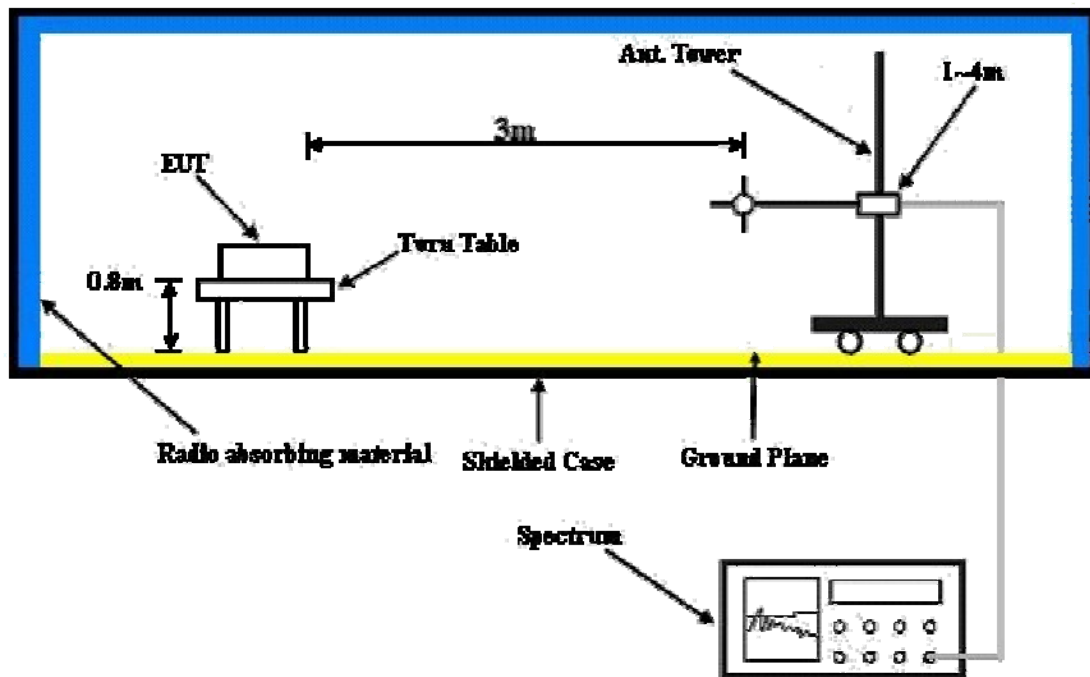

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

Below 1GHz

GSM Mode

Mode	TX channel 128	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-51.2	-33.2	-14.7	-47.9	-13.0	-34.9
2	53.28	-49.5	-45.0	-6.2	-51.2	-13.0	-38.2
3	82.38	-43.7	-49.5	0.4	-49.1	-13.0	-36.1
4	154.16	-55.1	-56.5	-2.9	-59.4	-13.0	-46.4
5	208.48	-52.1	-58.5	-2.0	-60.5	-13.0	-47.5
6	309.36	-57.5	-65.6	3.9	-61.7	-13.0	-48.7

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-37.0	-27.5	-19.4	-46.9	-13.0	-33.9
2	55.22	-40.0	-41.5	-5.4	-46.9	-13.0	-33.9
3	82.38	-38.0	-42.9	0.4	-42.5	-13.0	-29.5
4	148.34	-55.3	-54.4	-3.0	-57.4	-13.0	-44.4
5	208.48	-60.0	-61.0	-2.0	-63.0	-13.0	-50.0
6	433.52	-56.7	-60.4	3.5	-56.9	-13.0	-43.9

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 189	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-47.8	-26.1	-18.3	-44.4	-13.0	-31.4
2	55.22	-49.4	-46.6	-5.4	-52.0	-13.0	-39.0
3	84.32	-45.6	-52.0	0.4	-51.6	-13.0	-38.6
4	138.64	-50.2	-53.0	-3.2	-56.2	-13.0	-43.2
5	177.44	-50.3	-55.2	-3.0	-58.2	-13.0	-45.2
6	369.50	-59.2	-65.4	3.9	-61.5	-13.0	-48.5

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-42.2	-32.7	-19.4	-52.1	-13.0	-39.1
2	55.22	-40.4	-41.9	-5.4	-47.3	-13.0	-34.3
3	82.38	-37.8	-42.7	0.4	-42.3	-13.0	-29.3
4	146.40	-58.5	-57.5	-3.0	-60.5	-13.0	-47.5
5	206.54	-58.6	-59.1	-2.0	-61.1	-13.0	-48.1
6	425.76	-55.7	-59.6	3.5	-56.1	-13.0	-43.1

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 251	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-51.9	-31.9	-17.1	-49.0	-13.0	-36.0
2	55.22	-49.2	-46.4	-5.4	-51.8	-13.0	-38.8
3	80.44	-45.8	-51.2	0.5	-50.7	-13.0	-37.7
4	158.04	-54.0	-56.2	-2.7	-58.9	-13.0	-45.9
5	208.48	-52.0	-58.4	-2.0	-60.4	-13.0	-47.4
6	313.24	-58.8	-66.9	4.0	-62.9	-13.0	-49.9

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-39.6	-30.1	-19.4	-49.5	-13.0	-36.5
2	55.22	-40.3	-41.8	-5.4	-47.2	-13.0	-34.2
3	84.32	-39.8	-45.2	0.4	-44.8	-13.0	-31.8
4	148.34	-57.7	-56.8	-3.0	-59.8	-13.0	-46.8
5	181.32	-57.6	-58.0	-3.0	-61.0	-13.0	-48.0
6	427.70	-55.7	-59.6	3.5	-56.1	-13.0	-43.1

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

EDGE Mode

Mode	TX channel 128	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-48.1	-24.7	-19.4	-44.1	-13.0	-31.1
2	55.22	-48.5	-45.7	-5.4	-51.1	-13.0	-38.1
3	82.38	-44.7	-50.5	0.4	-50.1	-13.0	-37.1
4	138.64	-50.3	-53.1	-3.2	-56.3	-13.0	-43.3
5	177.44	-49.8	-54.7	-3.0	-57.7	-13.0	-44.7
6	210.42	-53.2	-59.7	-2.0	-61.7	-13.0	-48.7

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-46.6	-37.1	-19.4	-56.5	-13.0	-43.5
2	57.16	-39.7	-41.9	-4.7	-46.6	-13.0	-33.6
3	82.38	-36.9	-41.8	0.4	-41.4	-13.0	-28.4
4	144.46	-57.3	-56.3	-3.2	-59.5	-13.0	-46.5
5	365.62	-60.7	-64.8	3.8	-61.0	-13.0	-48.0
6	423.82	-55.1	-58.8	3.4	-55.4	-13.0	-42.4

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 189	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-47.1	-23.7	-19.4	-43.1	-13.0	-30.1
2	55.22	-48.9	-46.1	-5.4	-51.5	-13.0	-38.5
3	82.38	-43.5	-49.3	0.4	-48.9	-13.0	-35.9
4	142.52	-53.2	-55.3	-3.1	-58.4	-13.0	-45.4
5	208.48	-51.8	-58.2	-2.0	-60.2	-13.0	-47.2
6	313.24	-57.6	-65.7	4.0	-61.7	-13.0	-48.7

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-46.5	-37.0	-19.4	-56.4	-13.0	-43.4
2	55.22	-39.7	-41.2	-5.4	-46.6	-13.0	-33.6
3	84.32	-38.9	-44.3	0.4	-43.9	-13.0	-30.9
4	148.34	-53.4	-52.5	-3.0	-55.5	-13.0	-42.5
5	202.66	-58.8	-58.2	-2.1	-60.3	-13.0	-47.3
6	421.88	-56.1	-59.9	3.4	-56.5	-13.0	-43.5

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 251	Frequency Range	Below 1000 MHz
Environmental Conditions	20deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Bond Tseng		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	39.70	-47.6	-31.6	-13.7	-45.3	-13.0	-32.3
2	55.22	-48.6	-45.8	-5.4	-51.2	-13.0	-38.2
3	82.38	-45.1	-50.9	0.4	-50.5	-13.0	-37.5
4	140.58	-52.0	-54.6	-3.0	-57.6	-13.0	-44.6
5	179.38	-47.9	-52.9	-2.9	-55.8	-13.0	-42.8
6	210.42	-52.7	-59.2	-2.0	-61.2	-13.0	-48.2

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-40.4	-32.6	-18.3	-50.9	-13.0	-37.9
2	53.28	-41.5	-42.2	-6.2	-48.4	-13.0	-35.4
3	82.38	-36.8	-41.7	0.4	-41.3	-13.0	-28.3
4	148.34	-56.7	-55.8	-3.0	-58.8	-13.0	-45.8
5	200.72	-59.7	-58.6	-2.3	-60.9	-13.0	-47.9
6	431.58	-55.7	-59.5	3.5	-56.0	-13.0	-43.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

CDMA Mode

Mode	TX channel 1013	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-49.2	-27.5	-18.3	-45.8	-13.0	-32.8
2	57.16	-48.7	-47.6	-4.7	-52.3	-13.0	-39.3
3	80.44	-50.2	-55.6	0.5	-55.1	-13.0	-42.1
4	154.16	-51.1	-52.5	-2.9	-55.4	-13.0	-42.4
5	185.20	-50.2	-55.7	-2.8	-58.5	-13.0	-45.5
6	598.42	-65.9	-68.3	3.9	-64.4	-13.0	-51.4

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-43.7	-34.2	-19.4	-53.6	-13.0	-40.6
2	57.16	-37.6	-39.8	-4.7	-44.5	-13.0	-31.5
3	86.26	-38.4	-44.4	0.1	-44.3	-13.0	-31.3
4	148.34	-50.5	-49.6	-3.0	-52.6	-13.0	-39.6
5	191.02	-52.5	-51.7	-2.7	-54.4	-13.0	-41.4
6	468.44	-56.5	-60.2	3.5	-56.7	-13.0	-43.7

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 384	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	30.00	-48.9	-25.5	-19.4	-44.9	-13.0	-31.9
2	57.16	-50.9	-49.8	-4.7	-54.5	-13.0	-41.5
3	80.44	-50.7	-56.1	0.5	-55.6	-13.0	-42.6
4	142.52	-50.3	-52.4	-3.1	-55.5	-13.0	-42.5
5	183.26	-49.3	-54.7	-3.0	-57.7	-13.0	-44.7
6	385.02	-62.9	-67.3	3.5	-63.8	-13.0	-50.8

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	31.94	-40.6	-32.8	-18.3	-51.1	-13.0	-38.1
2	57.16	-38.5	-40.7	-4.7	-45.4	-13.0	-32.4
3	82.38	-41.5	-46.4	0.4	-46.0	-13.0	-33.0
4	146.40	-51.5	-50.5	-3.0	-53.5	-13.0	-40.5
5	200.72	-55.6	-54.5	-2.3	-56.8	-13.0	-43.8
6	452.92	-58.5	-62.2	3.5	-58.7	-13.0	-45.7

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 777	Frequency Range	Below 1000 MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-50.9	-30.9	-17.1	-48.0	-13.0	-35.0
2	57.16	-49.5	-48.4	-4.7	-53.1	-13.0	-40.1
3	78.50	-49.7	-55.4	0.6	-54.8	-13.0	-41.8
4	152.22	-52.6	-54.0	-2.8	-56.8	-13.0	-43.8
5	185.20	-51.3	-56.8	-2.8	-59.6	-13.0	-46.6
6	439.34	-63.4	-67.1	3.5	-63.6	-13.0	-50.6

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	33.88	-42.9	-36.4	-17.1	-53.5	-13.0	-40.5
2	57.16	-39.2	-41.4	-4.7	-46.1	-13.0	-33.1
3	84.32	-40.0	-45.4	0.4	-45.0	-13.0	-32.0
4	148.34	-50.4	-49.5	-3.0	-52.5	-13.0	-39.5
5	191.02	-54.7	-53.9	-2.7	-56.6	-13.0	-43.6
6	468.44	-58.9	-62.6	3.5	-59.1	-13.0	-46.1

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Above 1GHz
 GSM Mode

Mode	TX channel 128	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1648.80	-50.6	-42.9	0.9	-42.0	-13.0	-29.0
2	2473.20	-53.5	-47.1	0.1	-47.0	-13.0	-34.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1648.80	-55.4	-48.0	0.9	-47.1	-13.0	-34.1
2	2473.20	-58.2	-54.2	0.1	-54.1	-13.0	-41.1

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 189	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-49.0	-41.4	0.8	-40.6	-13.0	-27.6
2	2509.20	-49.3	-43.0	0.2	-42.8	-13.0	-29.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-55.0	-47.7	0.8	-46.9	-13.0	-33.9
2	2509.20	-58.1	-54.2	0.2	-54.0	-13.0	-41.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 251	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1697.60	-46.4	-38.8	0.7	-38.1	-13.0	-25.1
2	2546.40	-48.1	-42.1	0.2	-41.9	-13.0	-28.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1697.60	-47.9	-40.6	0.7	-39.9	-13.0	-26.9
2	2546.40	-54.2	-50.2	0.2	-50.0	-13.0	-37.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

EDGE Mode

Mode	TX channel 128	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1648.80	-52.9	-45.1	0.9	-44.2	-13.0	-31.2
2	2473.20	-55.8	-49.4	0.1	-49.3	-13.0	-36.3

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1648.80	-56.9	-49.5	0.9	-48.6	-13.0	-35.6
2	2473.20	-60.9	-56.8	0.1	-56.7	-13.0	-43.7

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 189	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-52.2	-44.6	0.8	-43.8	-13.0	-30.8
2	2509.20	-55.2	-48.9	0.2	-48.7	-13.0	-35.7

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1672.80	-57.4	-50.0	0.8	-49.2	-13.0	-36.2
2	2509.20	-59.9	-55.9	0.2	-55.7	-13.0	-42.7

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 251	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1697.60	-52.0	-44.5	0.7	-43.8	-13.0	-30.8
2	2546.40	-55.0	-48.9	0.2	-48.7	-13.0	-35.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1697.60	-56.9	-49.6	0.7	-48.9	-13.0	-35.9
2	2546.40	-59.9	-55.8	0.2	-55.6	-13.0	-42.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

CDMA Mode

Mode	TX channel 1013	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1649.40	-56.2	-48.5	0.9	-47.6	-13.0	-34.6
2	2474.10	-57.2	-50.9	0.1	-50.8	-13.0	-37.8

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1649.40	-56.5	-49.3	0.9	-48.4	-13.0	-35.4
2	2474.10	-57.9	-53.9	0.1	-53.8	-13.0	-40.8

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 384	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.04	-55.8	-48.1	0.8	-47.3	-13.0	-34.3
2	2509.56	-56.8	-50.6	0.2	-50.4	-13.0	-37.4

Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1673.04	-56.6	-49.3	0.8	-48.5	-13.0	-35.5
2	2509.56	-57.1	-53.2	0.2	-53.0	-13.0	-40.0

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Mode	TX channel 777	Frequency Range	Above 1000MHz
Environmental Conditions	25deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Tank Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1696.62	-55.6	-48.1	0.7	-47.4	-13.0	-34.4
2	2544.93	-56.5	-50.4	0.2	-50.2	-13.0	-37.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1696.62	-56.0	-48.7	0.7	-48.0	-13.0	-35.0
2	2544.93	-56.5	-52.5	0.2	-52.3	-13.0	-39.3

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---