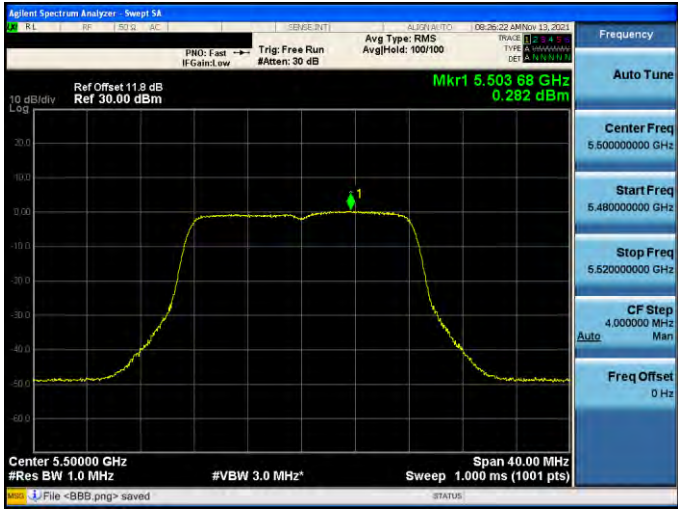
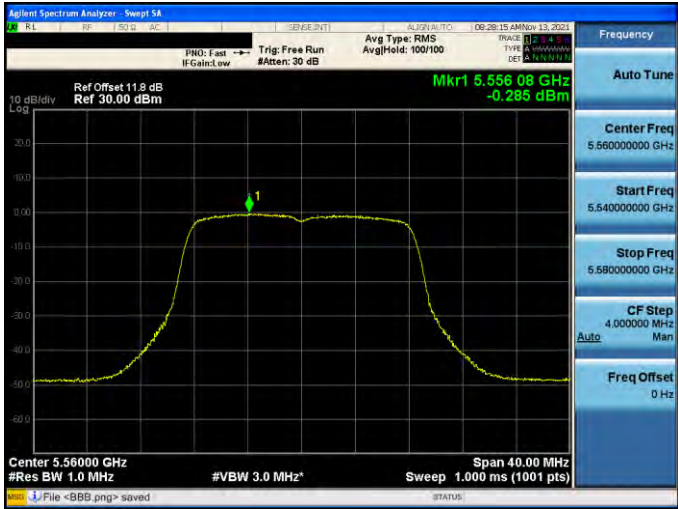
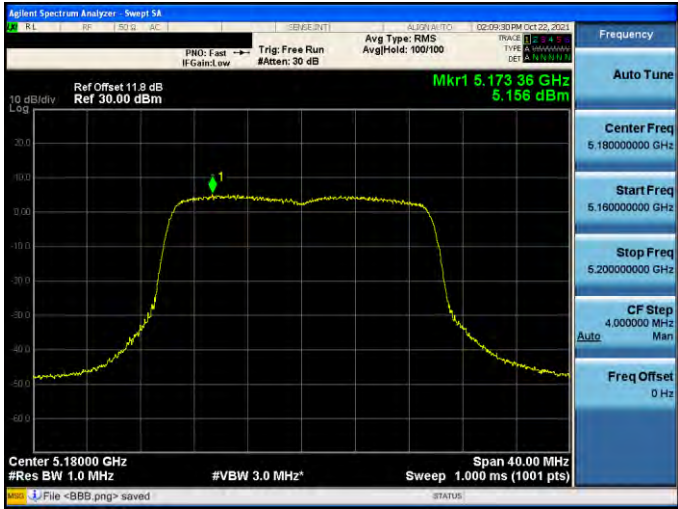
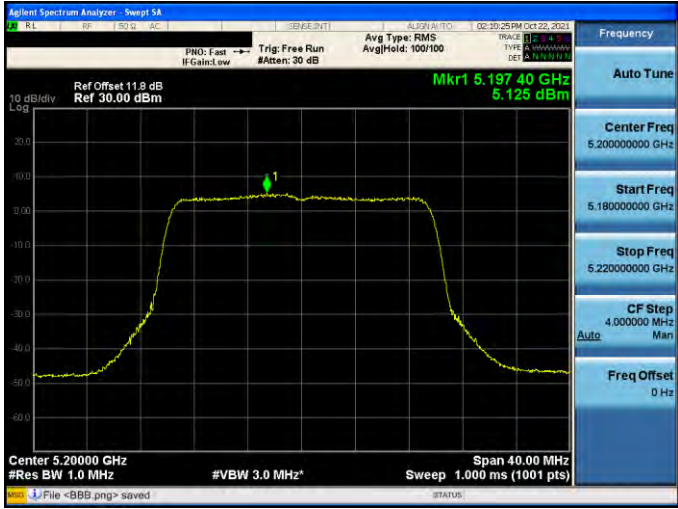
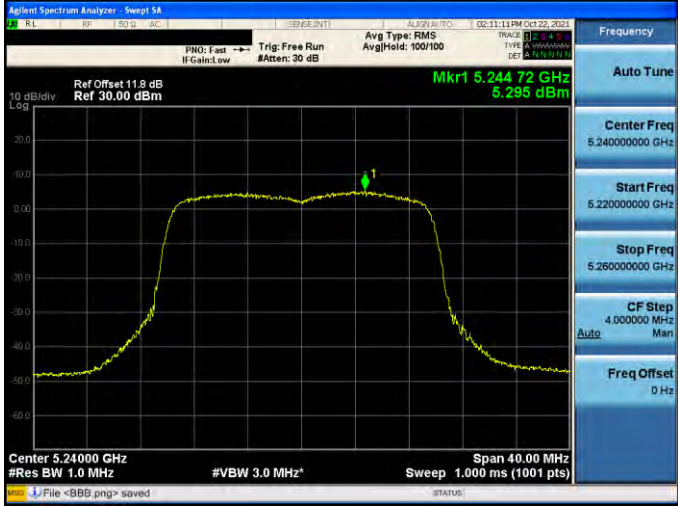
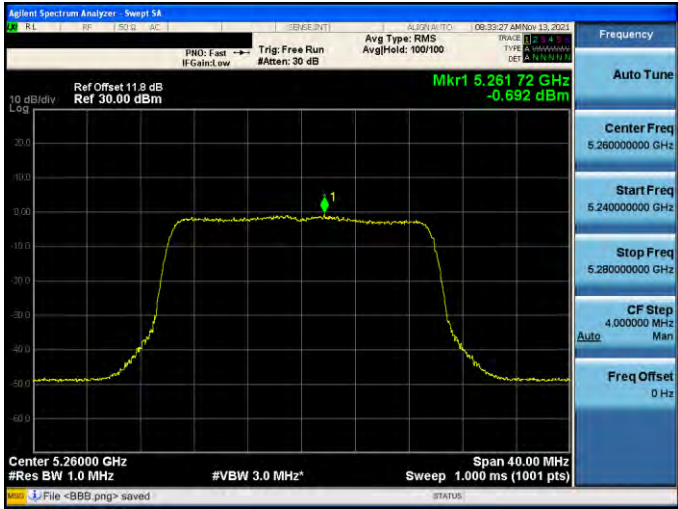
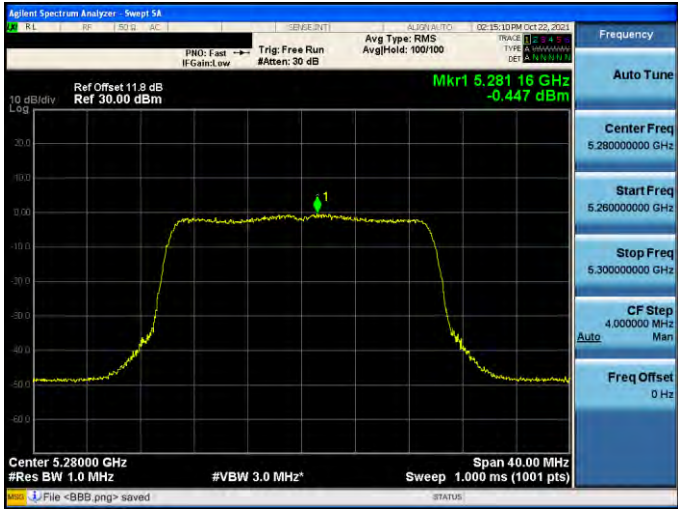
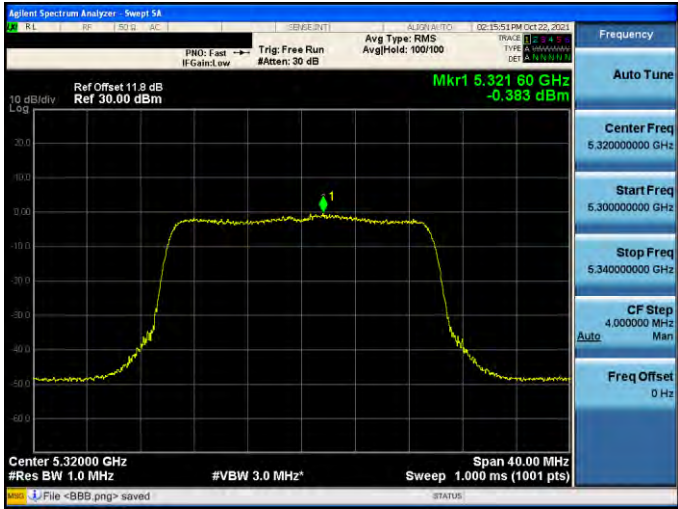
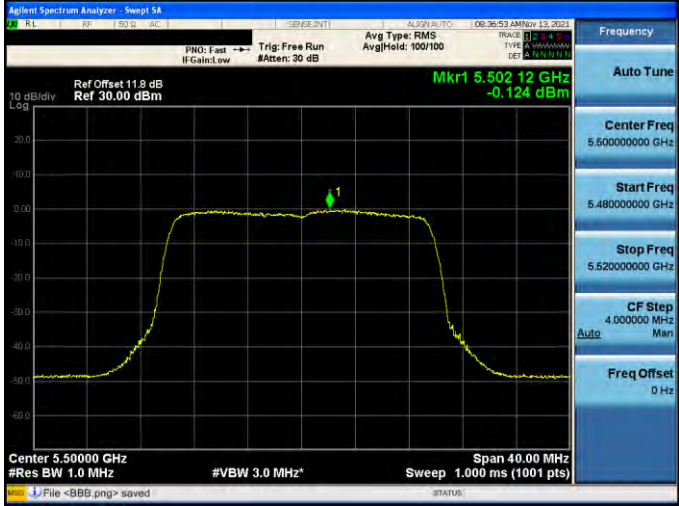


Mode 2: IEEE 802.11a Continuous TX mode _ANT-0	
5500 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA Ref Offset: 11.8 dB Ref: 30.00 dBm Mkr1 5.503 68 GHz 0.282 dBm Center 5.50000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5560 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA Ref Offset: 11.8 dB Ref: 30.00 dBm Mkr1 5.556 08 GHz -0.285 dBm Center 5.56000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5700 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA Ref Offset: 11.8 dB Ref: 30.00 dBm Mkr1 5.703 28 GHz 0.091 dBm Center 5.70000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>


Mode 2: IEEE 802.11a Continuous TX mode _ANT-0	
5745 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.752 44 GHz 4.221 dBm Center 5.74500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>
5785 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.782 16 GHz 4.354 dBm Center 5.78500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>
5825 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.818 40 GHz 3.765 dBm Center 5.82500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	


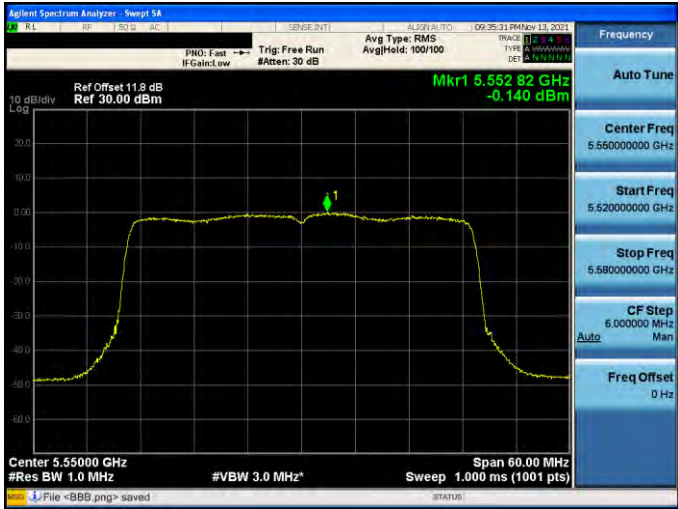
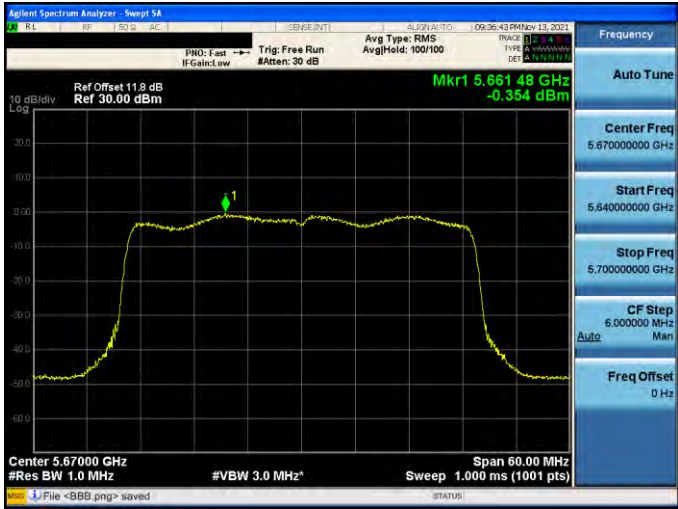
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.26172 GHz -0.692 dBm Center 5.26000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5280 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.28116 GHz -0.447 dBm Center 5.28000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5320 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.32160 GHz -0.393 dBm Center 5.32000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.502 12 GHz -0.124 dBm Center 5.50000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>
5560 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.557 44 GHz -0.146 dBm Center 5.56000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>
5700 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.702 44 GHz 0.105 dBm Center 5.70000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>

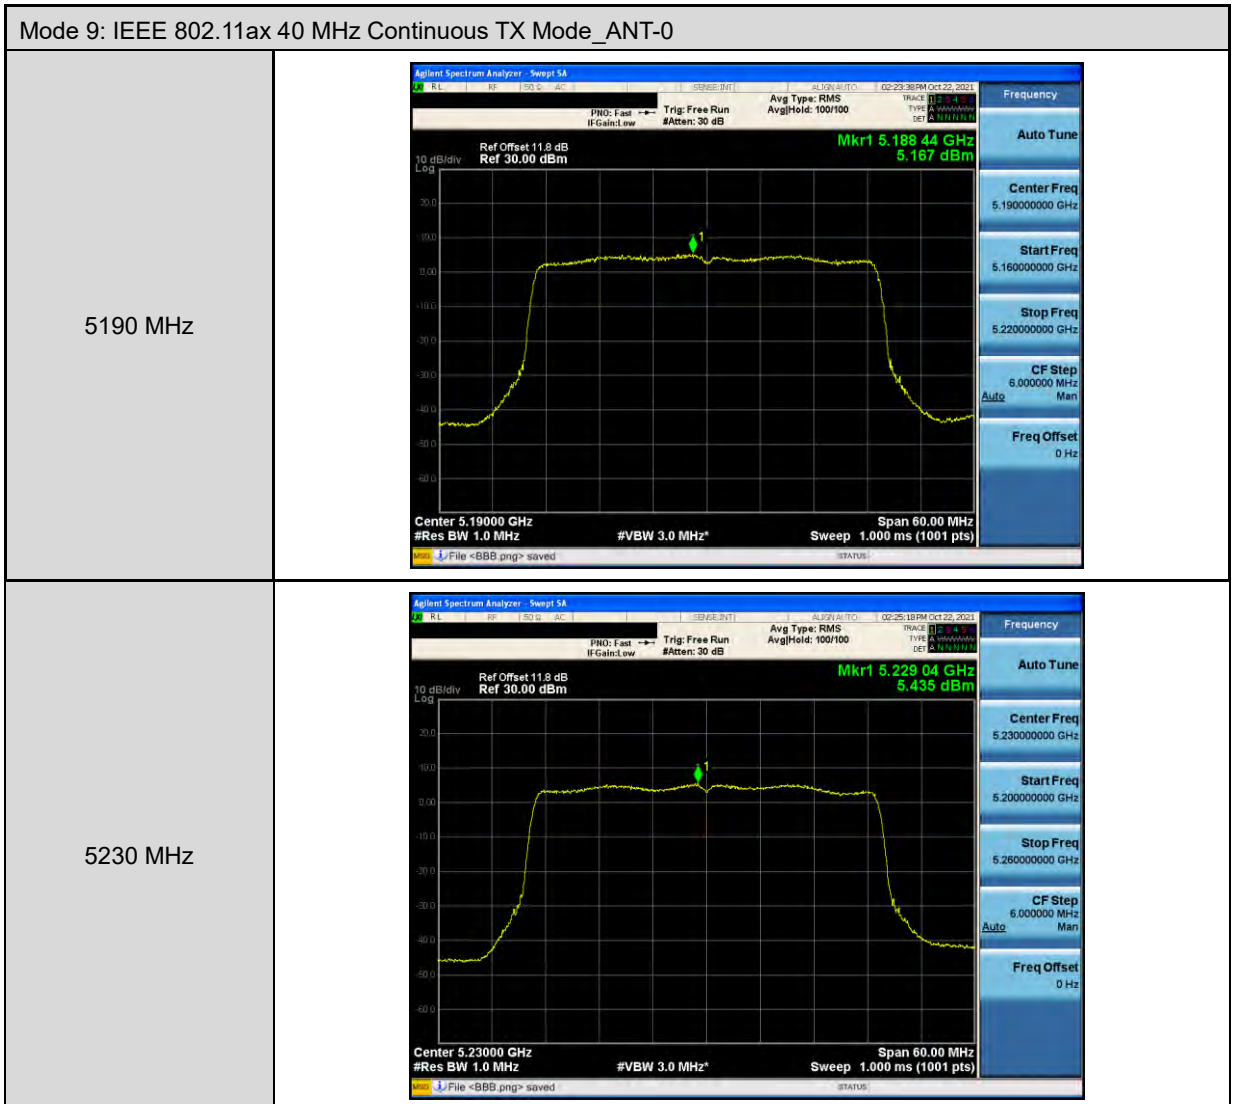


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	

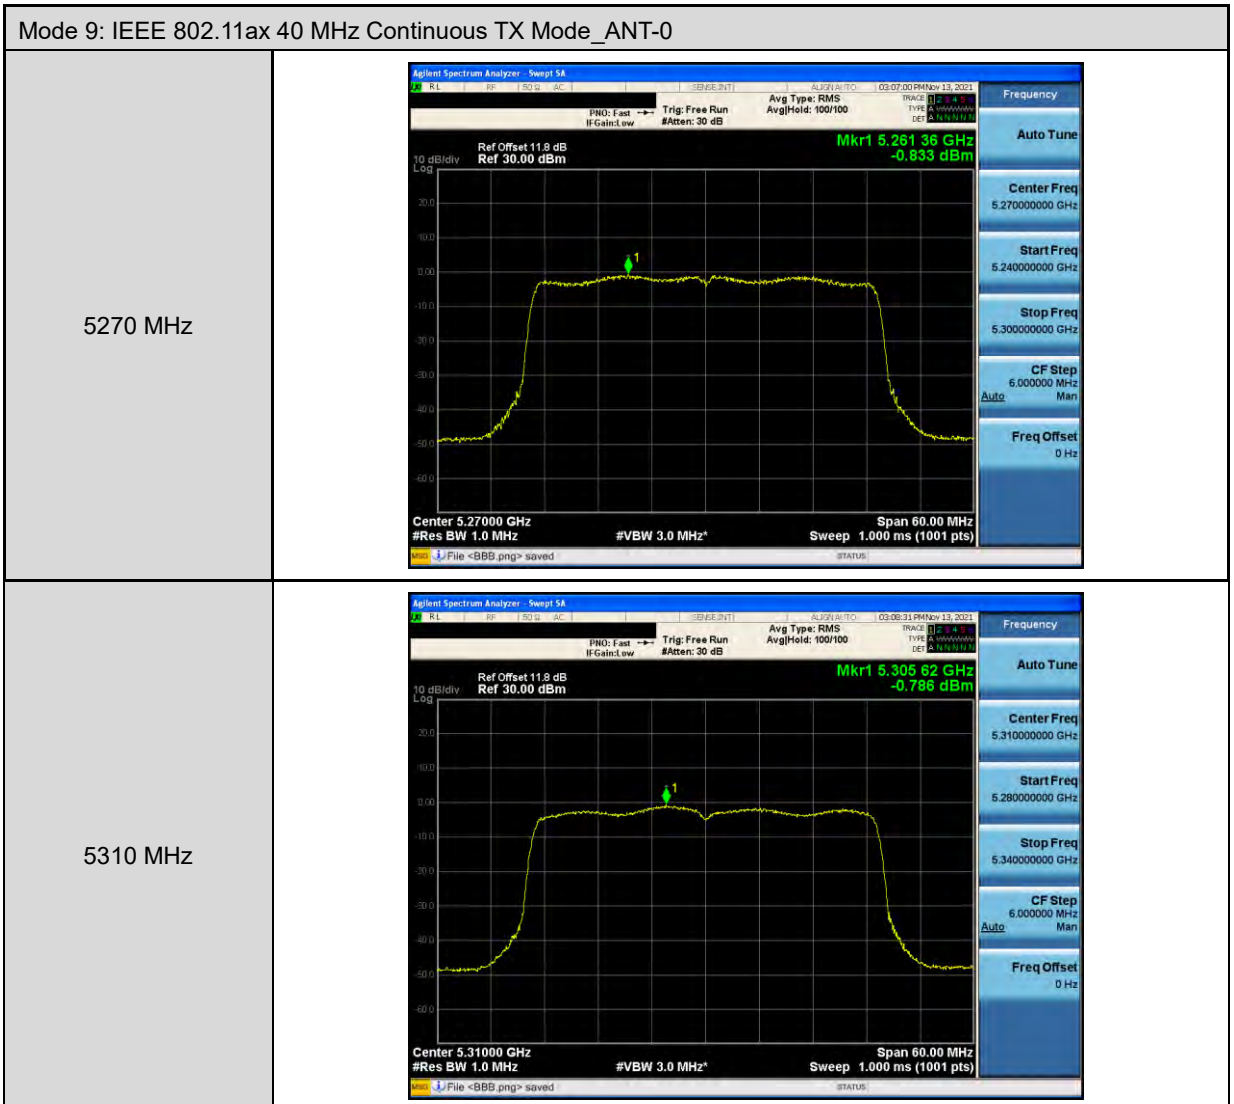


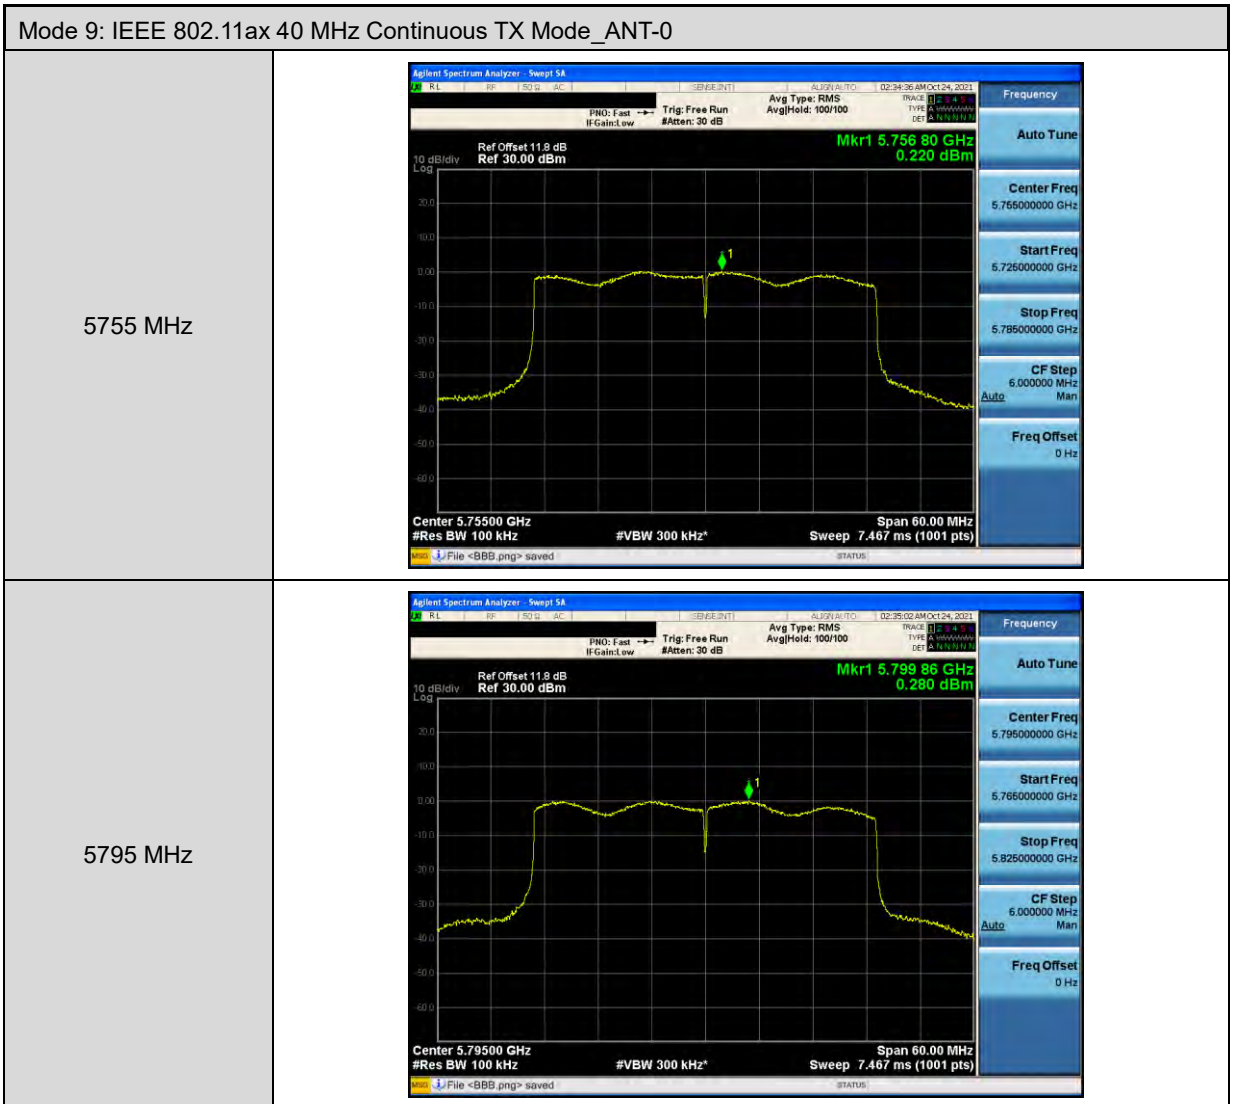


Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.51642 GHz 0.195 dBm</p> <p>Center 5.51000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p>
5550 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.55282 GHz -0.140 dBm</p> <p>Center 5.55000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p>
5670 MHz	 <p>Agilent Spectrum Analyzer: Sweep SA</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.66148 GHz -0.354 dBm</p> <p>Center 5.67000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p>




Mode 10: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	
5530 MHz	

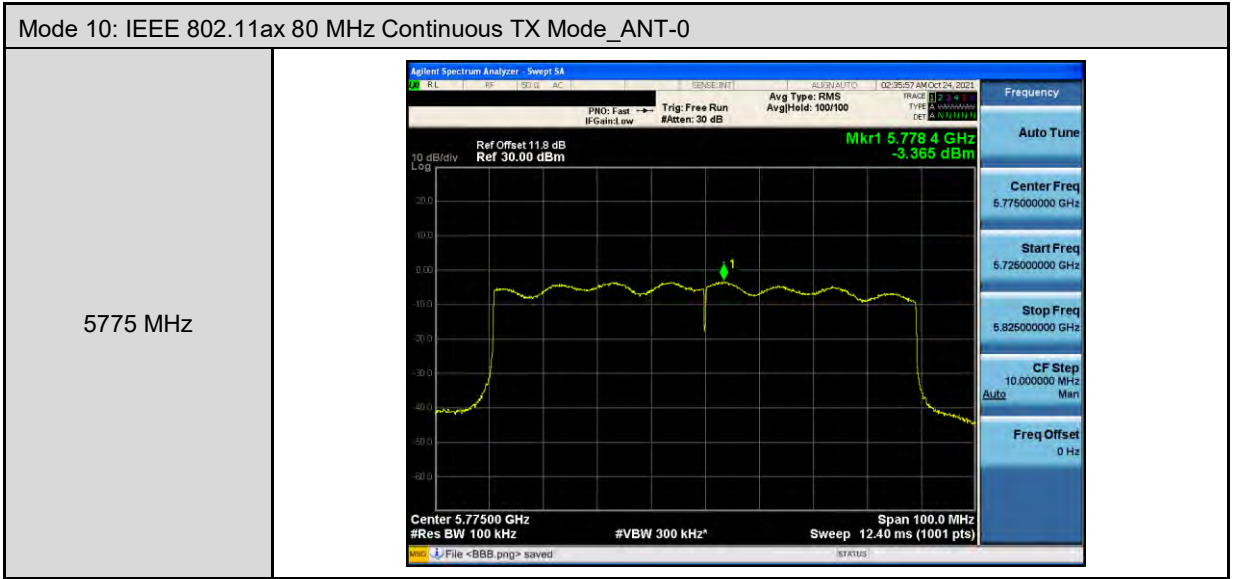

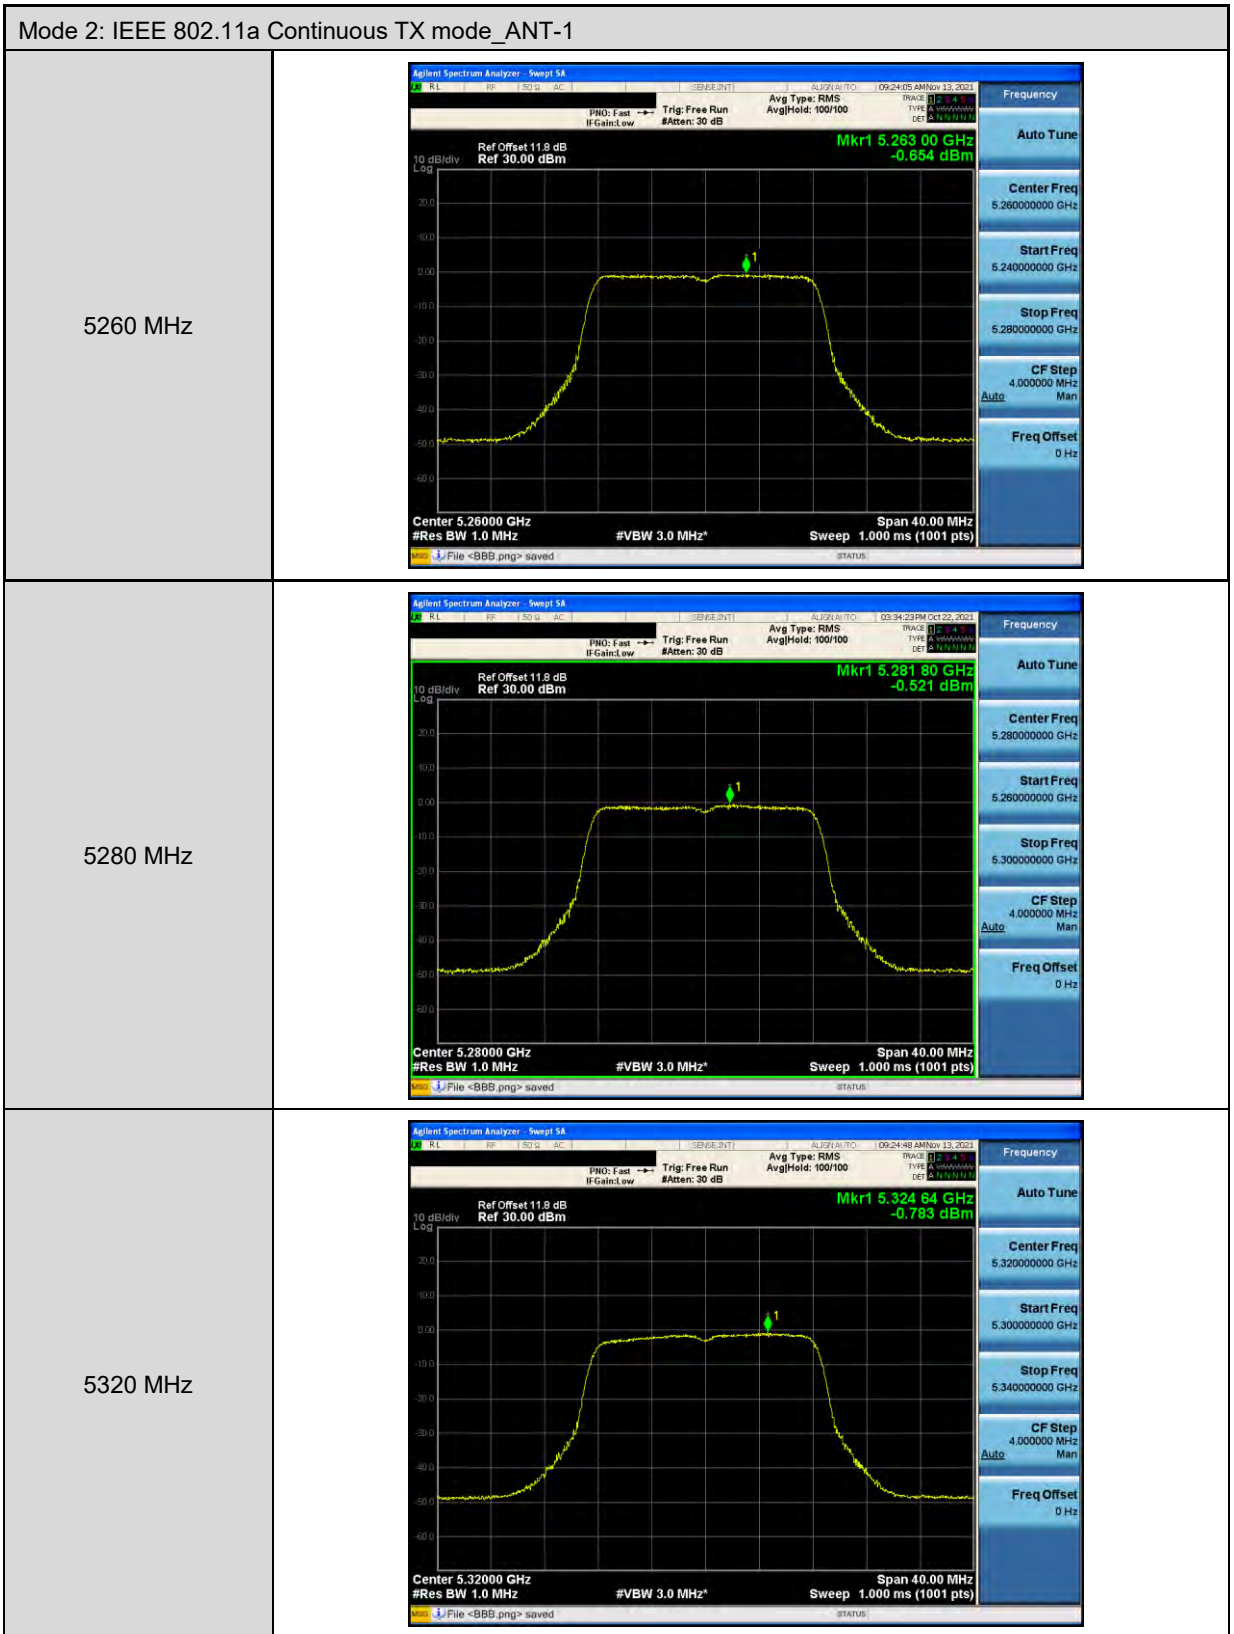


Mode 2: IEEE 802.11a Continuous TX mode _ANT-1	
5180 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.178 12 GHz 5.278 dBm Center 5.180000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5200 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.197 56 GHz 5.325 dBm Center 5.200000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5240 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.237 16 GHz 5.273 dBm Center 5.240000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>

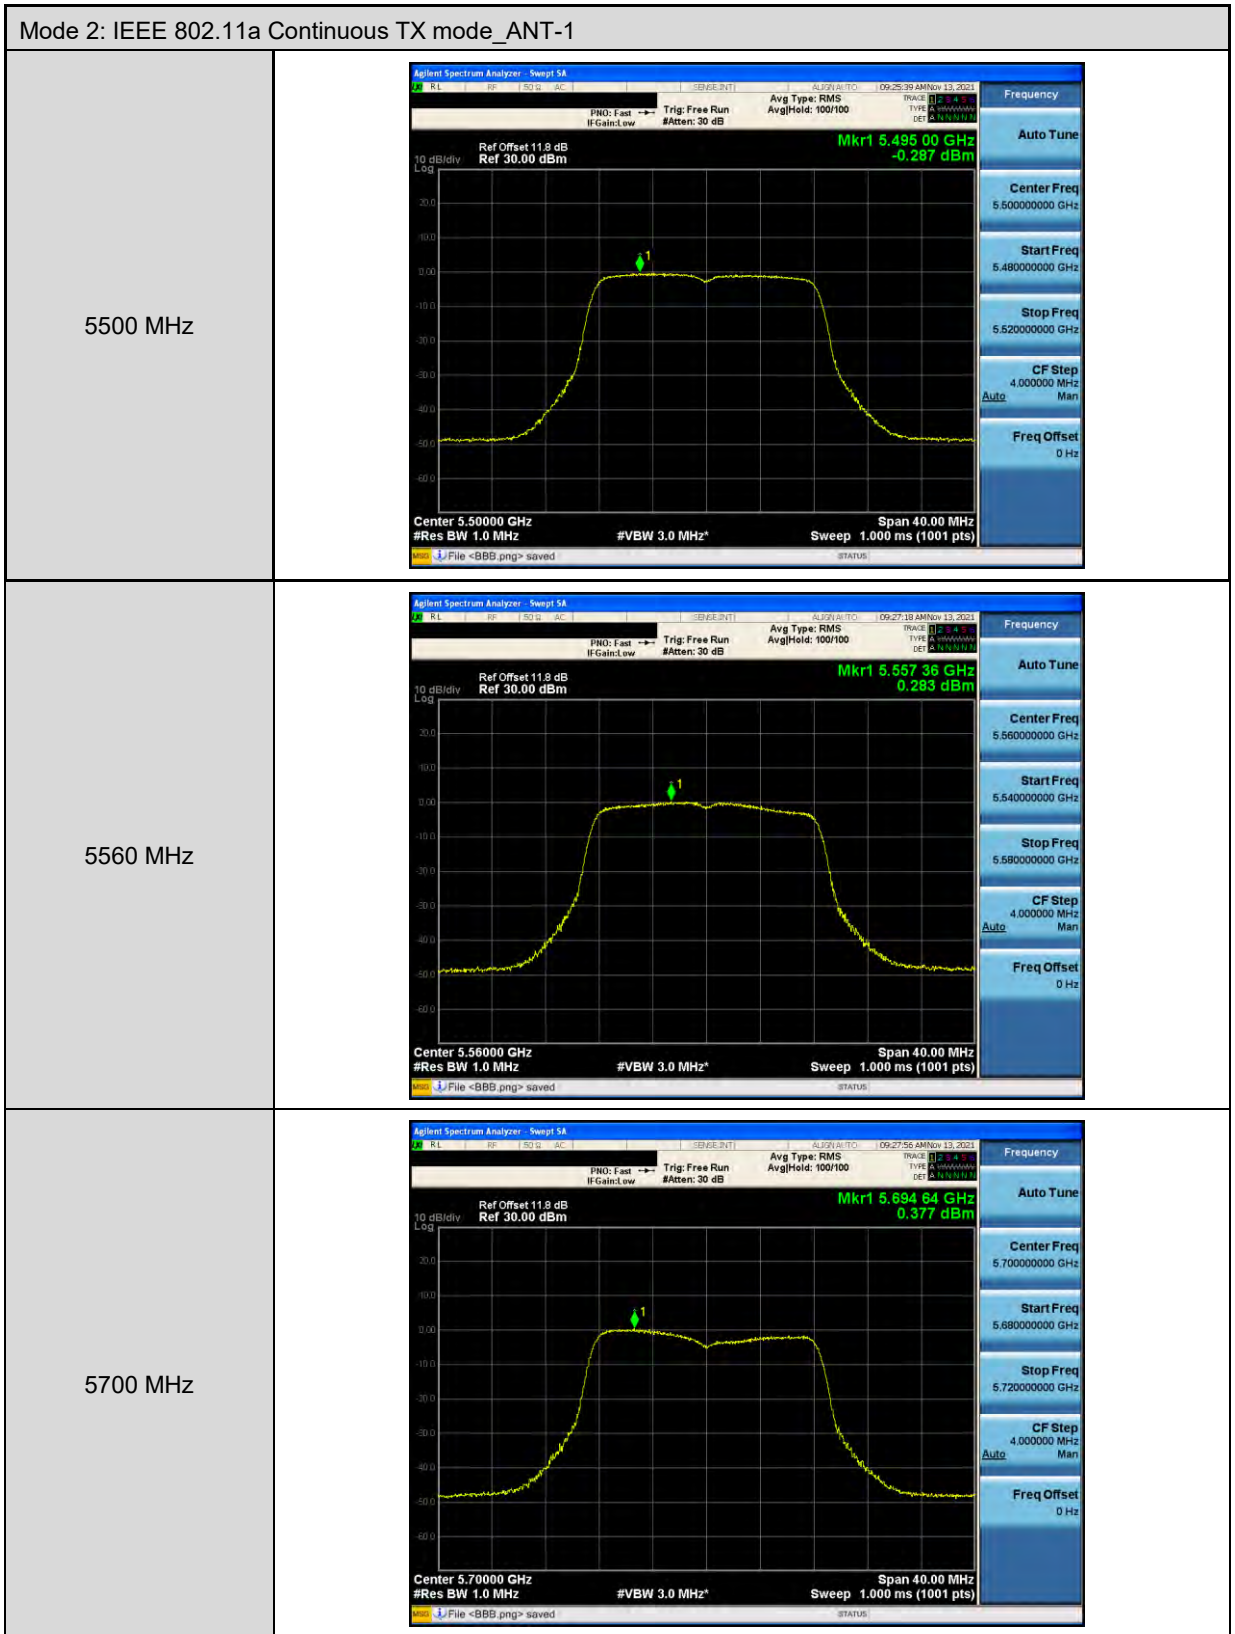




Mode 2: IEEE 802.11a Continuous TX mode _ANT-1	
5745 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.740 28 GHz 4.538 dBm Center 5.74500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>
5785 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.789 32 GHz 4.086 dBm Center 5.78500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>
5825 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.829 36 GHz 3.092 dBm Center 5.82500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>

Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5180 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.17792 GHz 5.383 dBm</p> <p>Center 5.18000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
5200 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.19756 GHz 5.328 dBm</p> <p>Center 5.20000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
5240 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.23408 GHz 5.131 dBm</p> <p>Center 5.24000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>

Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5260 MHz	<p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.263 88 GHz -0.310 dBm Center 5.26000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>
5280 MHz	<p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.277 44 GHz -0.602 dBm Center 5.28000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>
5320 MHz	<p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.318 84 GHz -0.500 dBm Center 5.32000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5500 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.502 80 GHz -0.021 dBm Center 5.50000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5560 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.555 84 GHz 0.147 dBm Center 5.56000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5700 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.698 28 GHz 0.171 dBm Center 5.70000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>

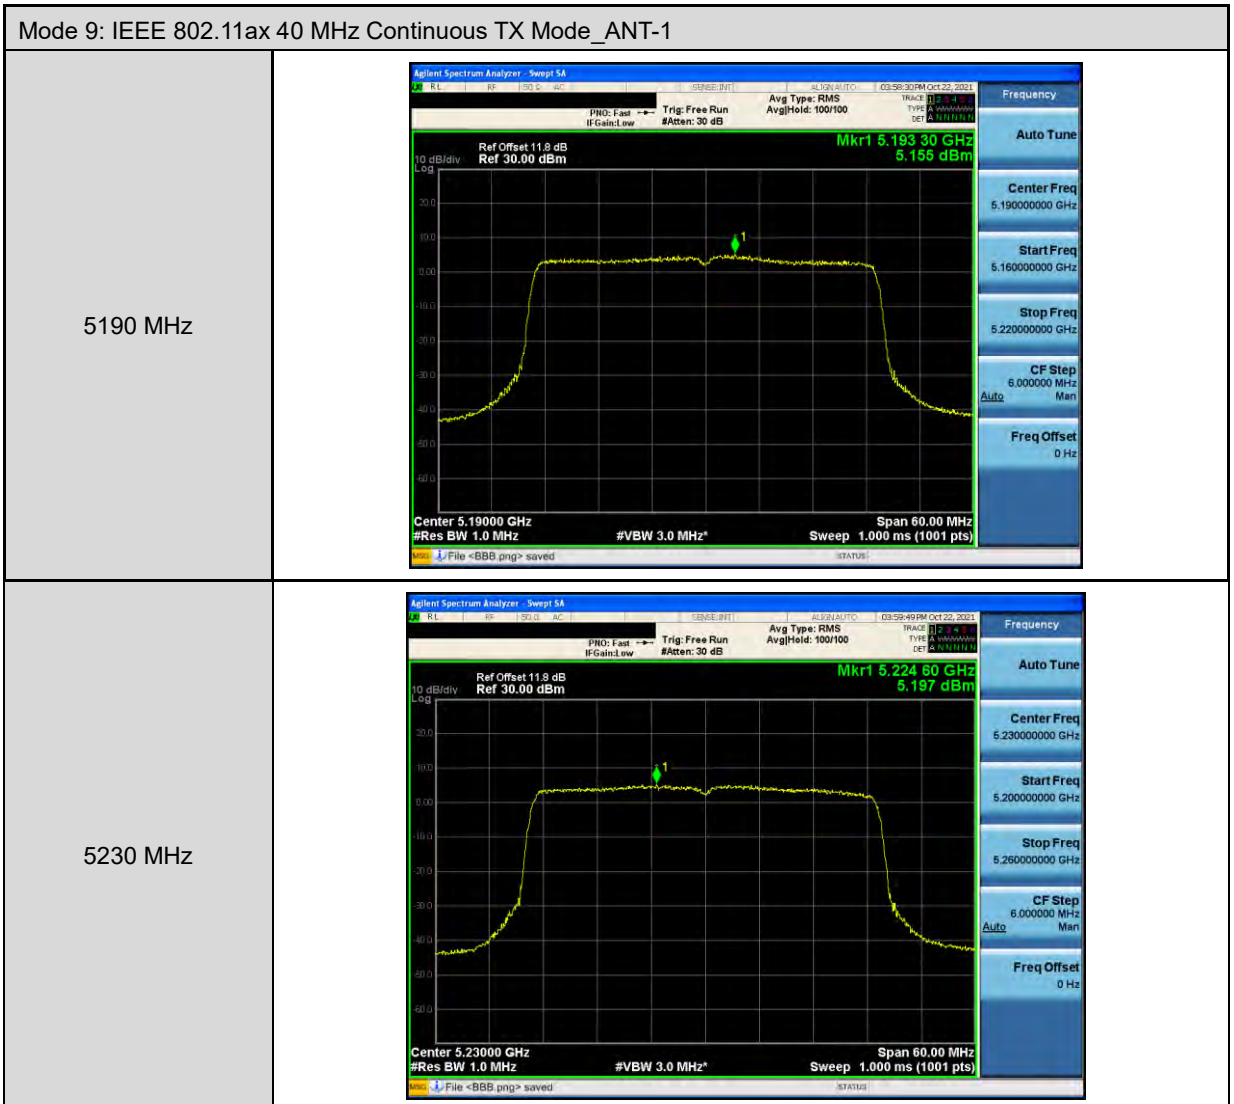


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1	
5745 MHz	
5785 MHz	
5825 MHz	



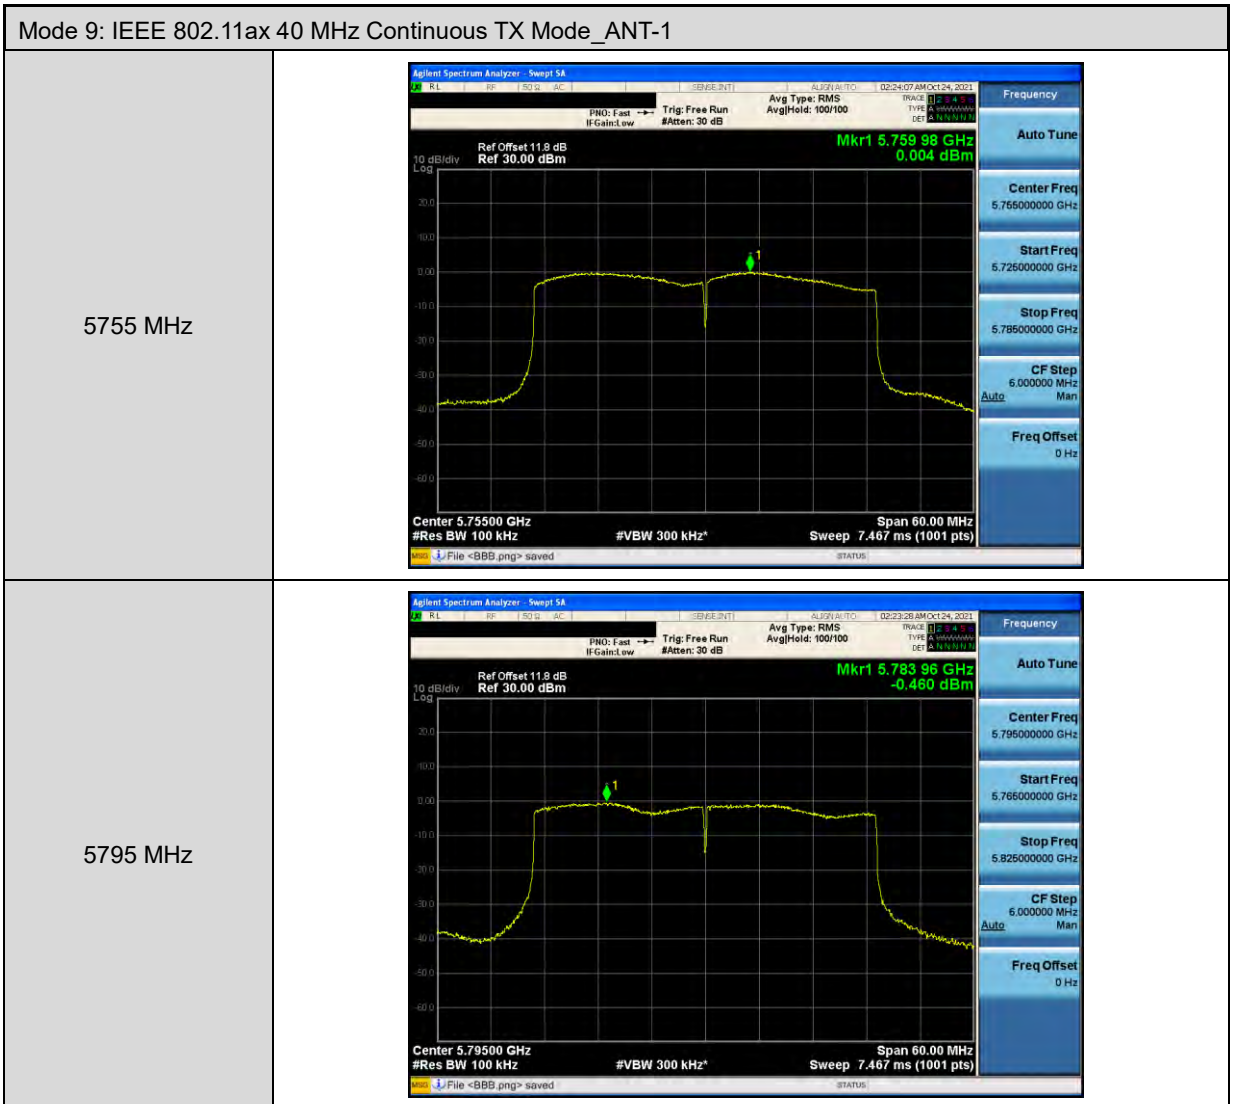

Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1	
5510 MHz	<p>Agilent Spectrum Analyzer: Swept SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.50562 GHz -0.145 dBm Center 5.51000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p>
5550 MHz	<p>Agilent Spectrum Analyzer: Swept SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.54784 GHz -0.047 dBm Center 5.55000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p>
5670 MHz	<p>Agilent Spectrum Analyzer: Swept SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.67858 GHz 0.129 dBm Center 5.67000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p>






Mode 10: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-1	
5210 MHz	
5290 MHz	
5530 MHz	

Mode 2: IEEE 802.11a Continuous TX mode_ANT-2	
5180 MHz	
5200 MHz	
5240 MHz	




Mode 2: IEEE 802.11a Continuous TX mode _ANT-2	
5260 MHz	<p>Agilent Spectrum Analyzer - Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.261 48 GHz -0.422 dBm Center 5.26000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>
5280 MHz	<p>Agilent Spectrum Analyzer - Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.285 48 GHz -0.674 dBm Center 5.28000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>
5320 MHz	<p>Agilent Spectrum Analyzer - Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.321 56 GHz -0.894 dBm Center 5.32000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz</p>

Mode 2: IEEE 802.11a Continuous TX mode _ANT-2	
5500 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.50216 GHz -0.181 dBm Center 5.50000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5560 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.55696 GHz 0.047 dBm Center 5.56000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5700 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.69308 GHz -0.279 dBm Center 5.70000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>


Mode 2: IEEE 802.11a Continuous TX mode _ANT-2	
5475 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.741 24 GHz 4.080 dBm Center 5.74500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>
5785 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.781 84 GHz 3.925 dBm Center 5.78500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>
5825 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.816 84 GHz 2.912 dBm Center 5.82500 GHz #Res BW 100 kHz #VBW 300 kHz* Span 40.00 MHz Sweep 5.000 ms (1001 pts)</p>


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5180 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.177 56 GHz 5.057 dBm</p> <p>Center 5.18000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency: Auto Tune Center Freq: 5.18000000 GHz Start Freq: 5.16000000 GHz Stop Freq: 5.20000000 GHz CF Step: 4.000000 MHz (Auto/Man) Freq Offset: 0 Hz</p>
5200 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.197 24 GHz 5.126 dBm</p> <p>Center 5.20000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency: Auto Tune Center Freq: 5.20000000 GHz Start Freq: 5.18000000 GHz Stop Freq: 5.22000000 GHz CF Step: 4.000000 MHz (Auto/Man) Freq Offset: 0 Hz</p>
5240 MHz	 <p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.233 80 GHz 5.101 dBm</p> <p>Center 5.24000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency: Auto Tune Center Freq: 5.24000000 GHz Start Freq: 5.22000000 GHz Stop Freq: 5.26000000 GHz CF Step: 4.000000 MHz (Auto/Man) Freq Offset: 0 Hz</p>

Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5260 MHz	
5280 MHz	
5320 MHz	

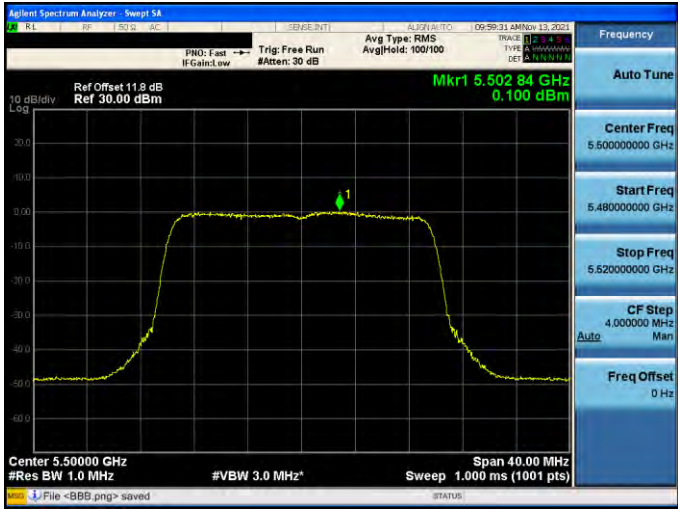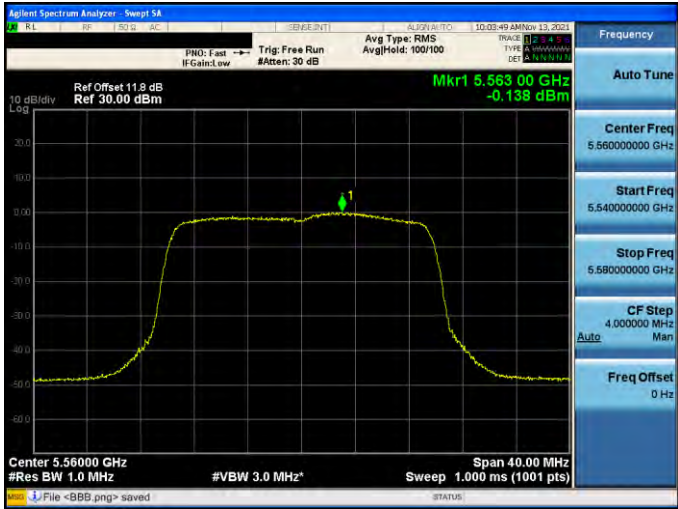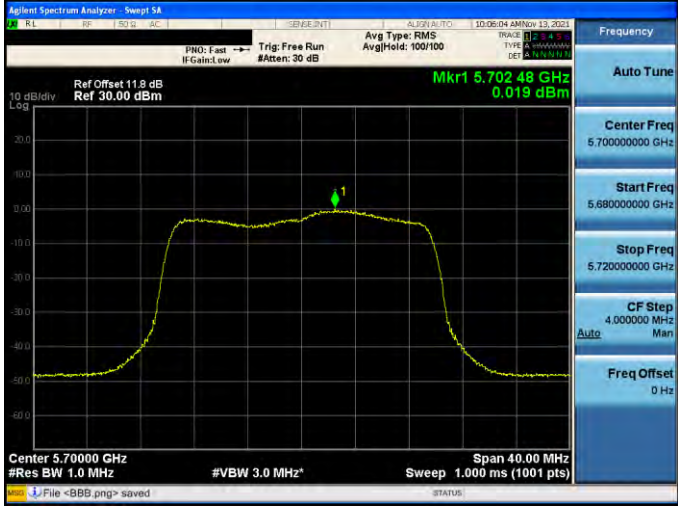Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5500 MHz	
5560 MHz	
5700 MHz	

Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-2	
5475 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.738 04 GHz 2.793 dBm</p> <p>Center 5.74500 GHz #Res BW 100 kHz #VBW 300 kHz* Sweep 5.000 ms (1001 pts)</p> <p>Span 40.00 MHz</p> <p>File <BBB.png> saved</p> <p>Frequency: 5.74500000 GHz Center Freq: 5.74500000 GHz Start Freq: 5.72500000 GHz Stop Freq: 5.76500000 GHz CF Step: 4.000000 MHz Freq Offset: 0 Hz</p>
5785 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.779 16 GHz 2.746 dBm</p> <p>Center 5.78500 GHz #Res BW 100 kHz #VBW 300 kHz* Sweep 5.000 ms (1001 pts)</p> <p>Span 40.00 MHz</p> <p>File <BBB.png> saved</p> <p>Frequency: 5.78500000 GHz Center Freq: 5.78500000 GHz Start Freq: 5.76500000 GHz Stop Freq: 5.80500000 GHz CF Step: 4.000000 MHz Freq Offset: 0 Hz</p>
5825 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.824 00 GHz 2.546 dBm</p> <p>Center 5.82500 GHz #Res BW 100 kHz #VBW 300 kHz* Sweep 5.000 ms (1001 pts)</p> <p>Span 40.00 MHz</p> <p>File <BBB.png> saved</p> <p>Frequency: 5.82500000 GHz Center Freq: 5.82500000 GHz Start Freq: 5.80500000 GHz Stop Freq: 5.84500000 GHz CF Step: 4.000000 MHz Freq Offset: 0 Hz</p>

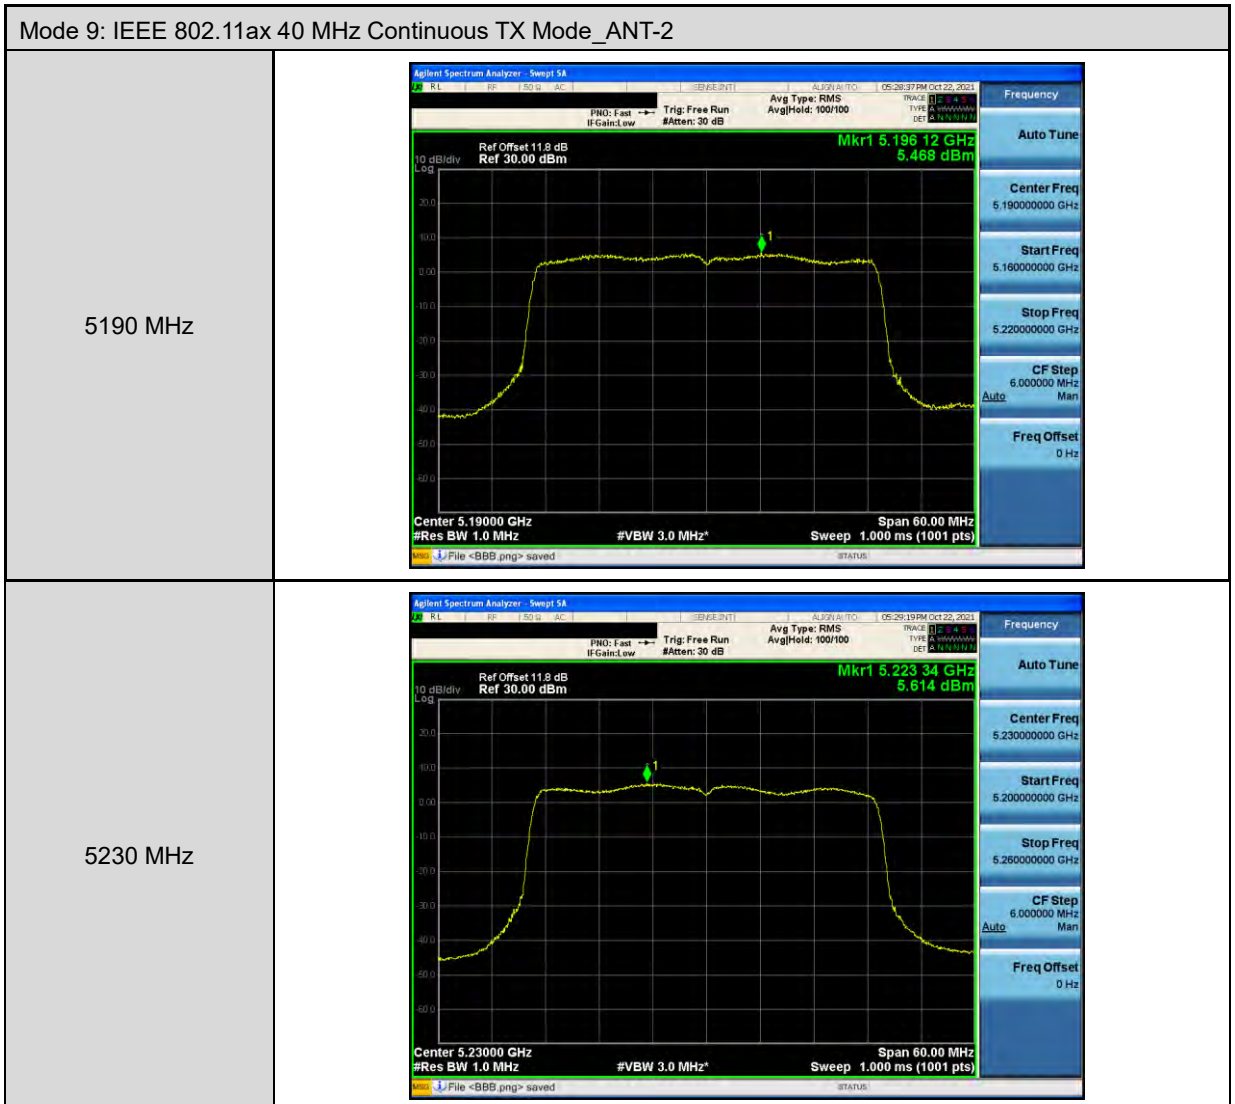


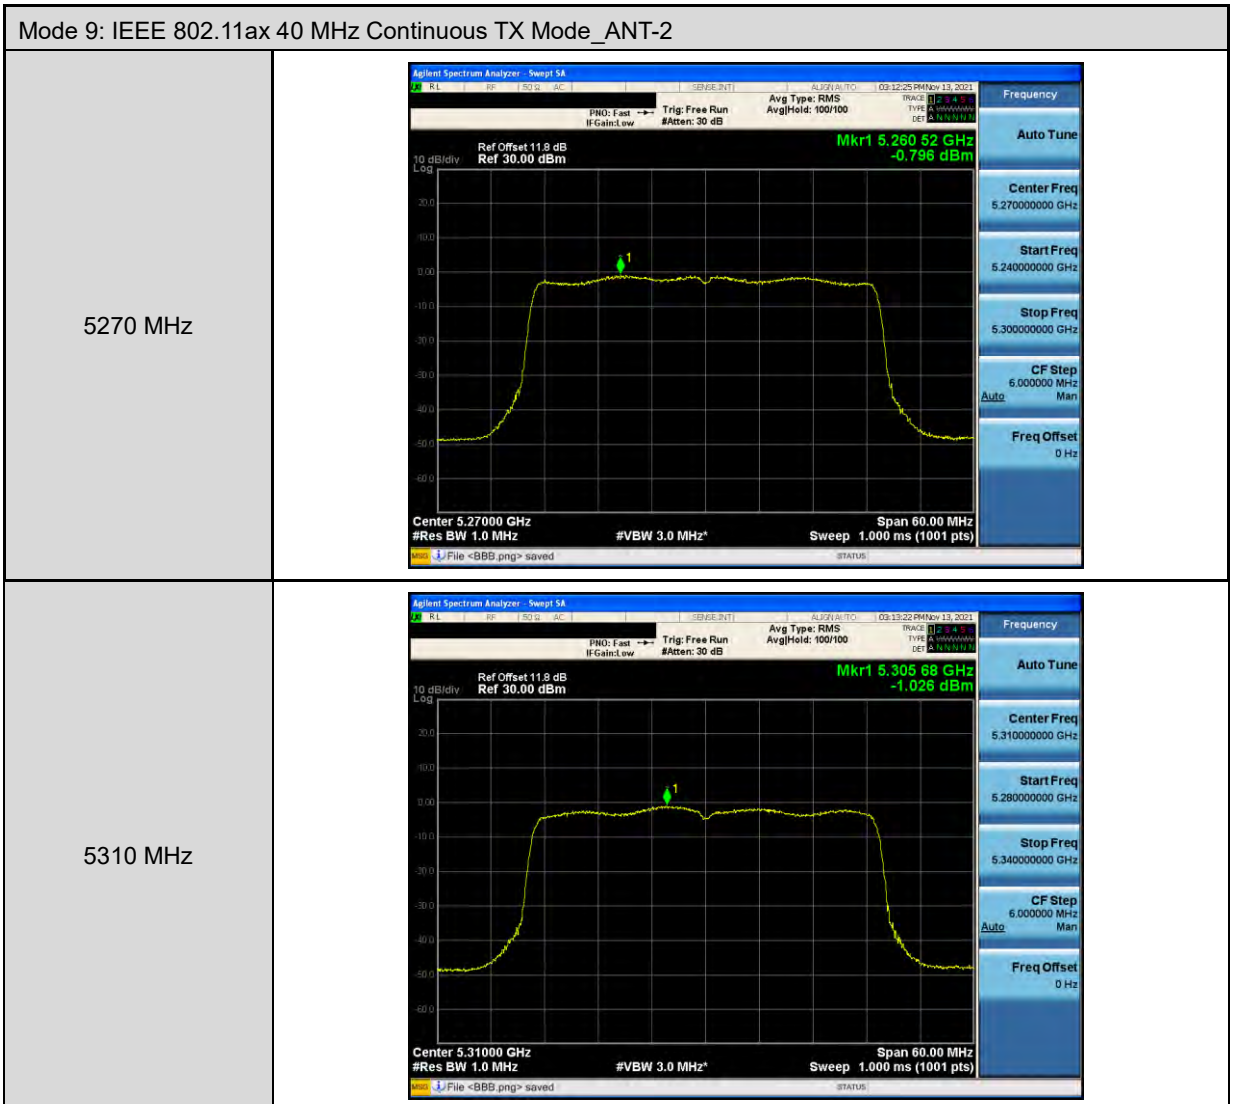


Mode 9: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-2	
5510 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset: 11.8 dB Ref: 30.00 dBm Mkr1 5.51786 GHz -0.102 dBm Center 5.51000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p>
5550 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset: 11.8 dB Ref: 30.00 dBm Mkr1 5.54796 GHz 0.214 dBm Center 5.55000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p>
5670 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset: 11.8 dB Ref: 30.00 dBm Mkr1 5.67240 GHz 0.216 dBm Center 5.67000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 60.00 MHz Sweep 1.000 ms (1001 pts)</p>



Mode 10: IEEE 802.11ax 80 MHz Continuous TX Mode_ANT-2	
5210 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.197 5 GHz 0.958 dBm Center 5.21000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 100.0 MHz Sweep 1.000 ms (1001 pts)</p>
5290 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.269 4 GHz -0.919 dBm Center 5.29000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 100.0 MHz Sweep 1.000 ms (1001 pts)</p>
5530 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.548 7 GHz -0.175 dBm Center 5.53000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 100.0 MHz Sweep 1.000 ms (1001 pts)</p>

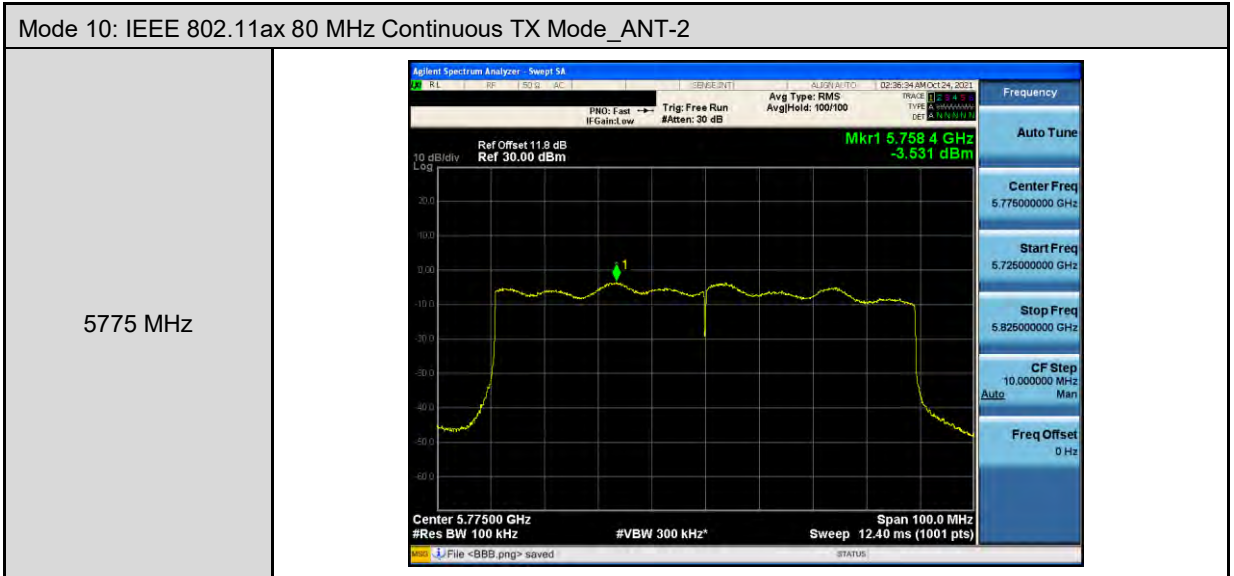




Mode 2: IEEE 802.11a Continuous TX mode _ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	



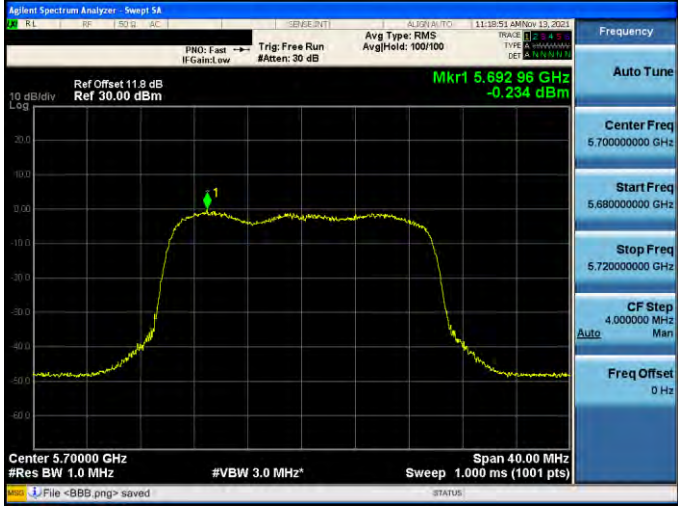
Mode 2: IEEE 802.11a Continuous TX mode_ANT-3	
5260 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.25716 GHz -0.942 dBm</p> <p>Center 5.26000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency</p> <ul style="list-style-type: none"> Auto Tune Center Freq 5.26000000 GHz Start Freq 5.24000000 GHz Stop Freq 5.28000000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz
5280 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.27720 GHz -0.568 dBm</p> <p>Center 5.28000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency</p> <ul style="list-style-type: none"> Auto Tune Center Freq 5.28000000 GHz Start Freq 5.26000000 GHz Stop Freq 5.30000000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz
5320 MHz	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 11.8 dB Ref 30.00 dBm</p> <p>Mkr1 5.32332 GHz -0.804 dBm</p> <p>Center 5.32000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p> <p>File <BBB.png> saved</p> <p>Frequency</p> <ul style="list-style-type: none"> Auto Tune Center Freq 5.32000000 GHz Start Freq 5.30000000 GHz Stop Freq 5.34000000 GHz CF Step 4.000000 MHz Auto Man Freq Offset 0 Hz

Mode 2: IEEE 802.11a Continuous TX mode _ANT-3	
5500 MHz	<p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.502 44 GHz 0.080 dBm Center 5.50000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5560 MHz	<p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.558 40 GHz -0.090 dBm Center 5.56000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>
5700 MHz	<p>Agilent Spectrum Analyzer: Sweep SA Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.699 00 GHz -0.327 dBm Center 5.70000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts)</p>


Mode 2: IEEE 802.11a Continuous TX mode _ANT-3	
5745 MHz	
5785 MHz	
5825 MHz	


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5180 MHz	
5200 MHz	
5240 MHz	


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5260 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.264 44 GHz -0.650 dBm Center 5.26000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts) File <BBB.png> saved</p>
5280 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.276 76 GHz -0.520 dBm Center 5.28000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts) File <BBB.png> saved</p>
5320 MHz	<p>Agilent Spectrum Analyzer: Sweep 5A Ref Offset 11.8 dB Ref 30.00 dBm Mkr1 5.323 64 GHz -0.664 dBm Center 5.32000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts) File <BBB.png> saved</p>

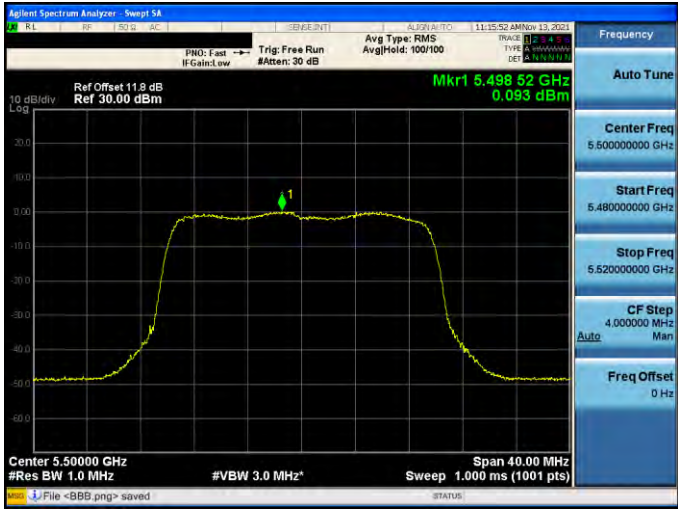
Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5500 MHz	
5560 MHz	
5700 MHz	


Mode 8: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-3	
5745 MHz	
5785 MHz	
5825 MHz	

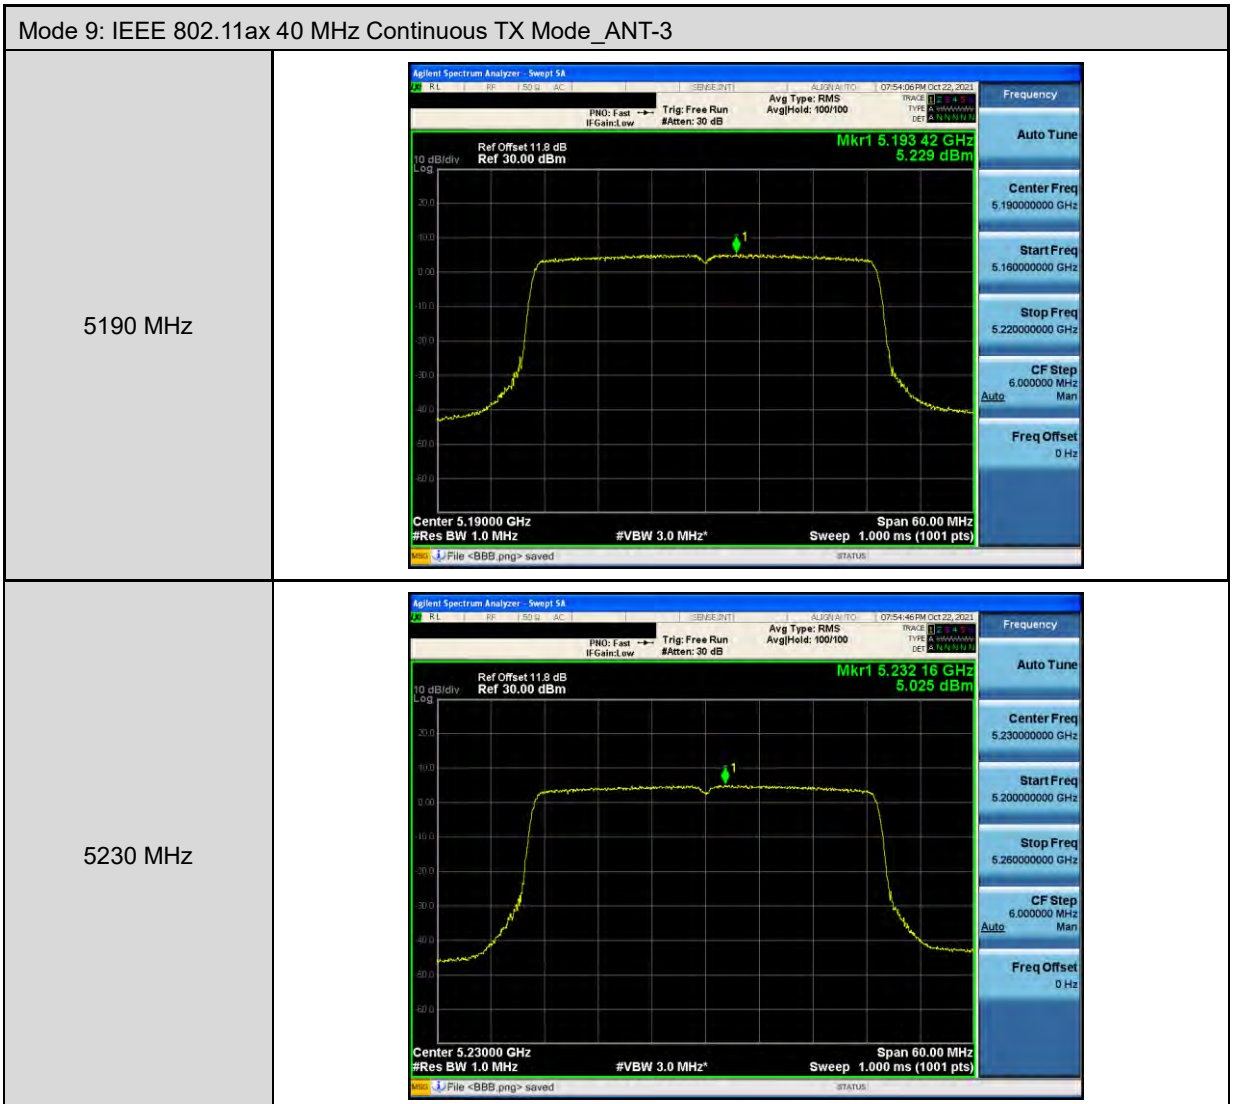


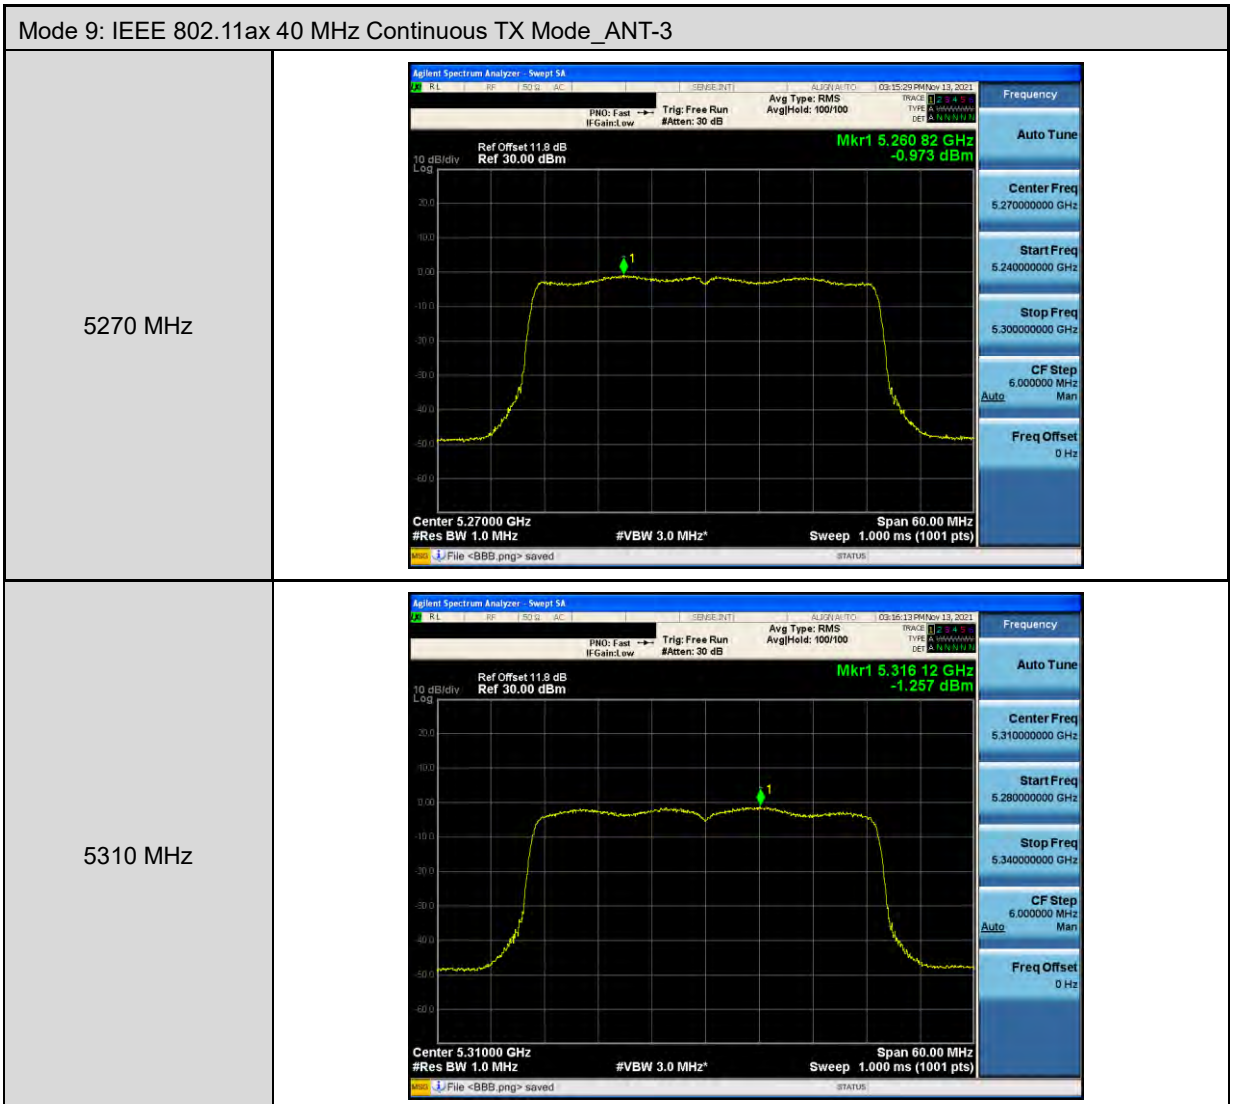

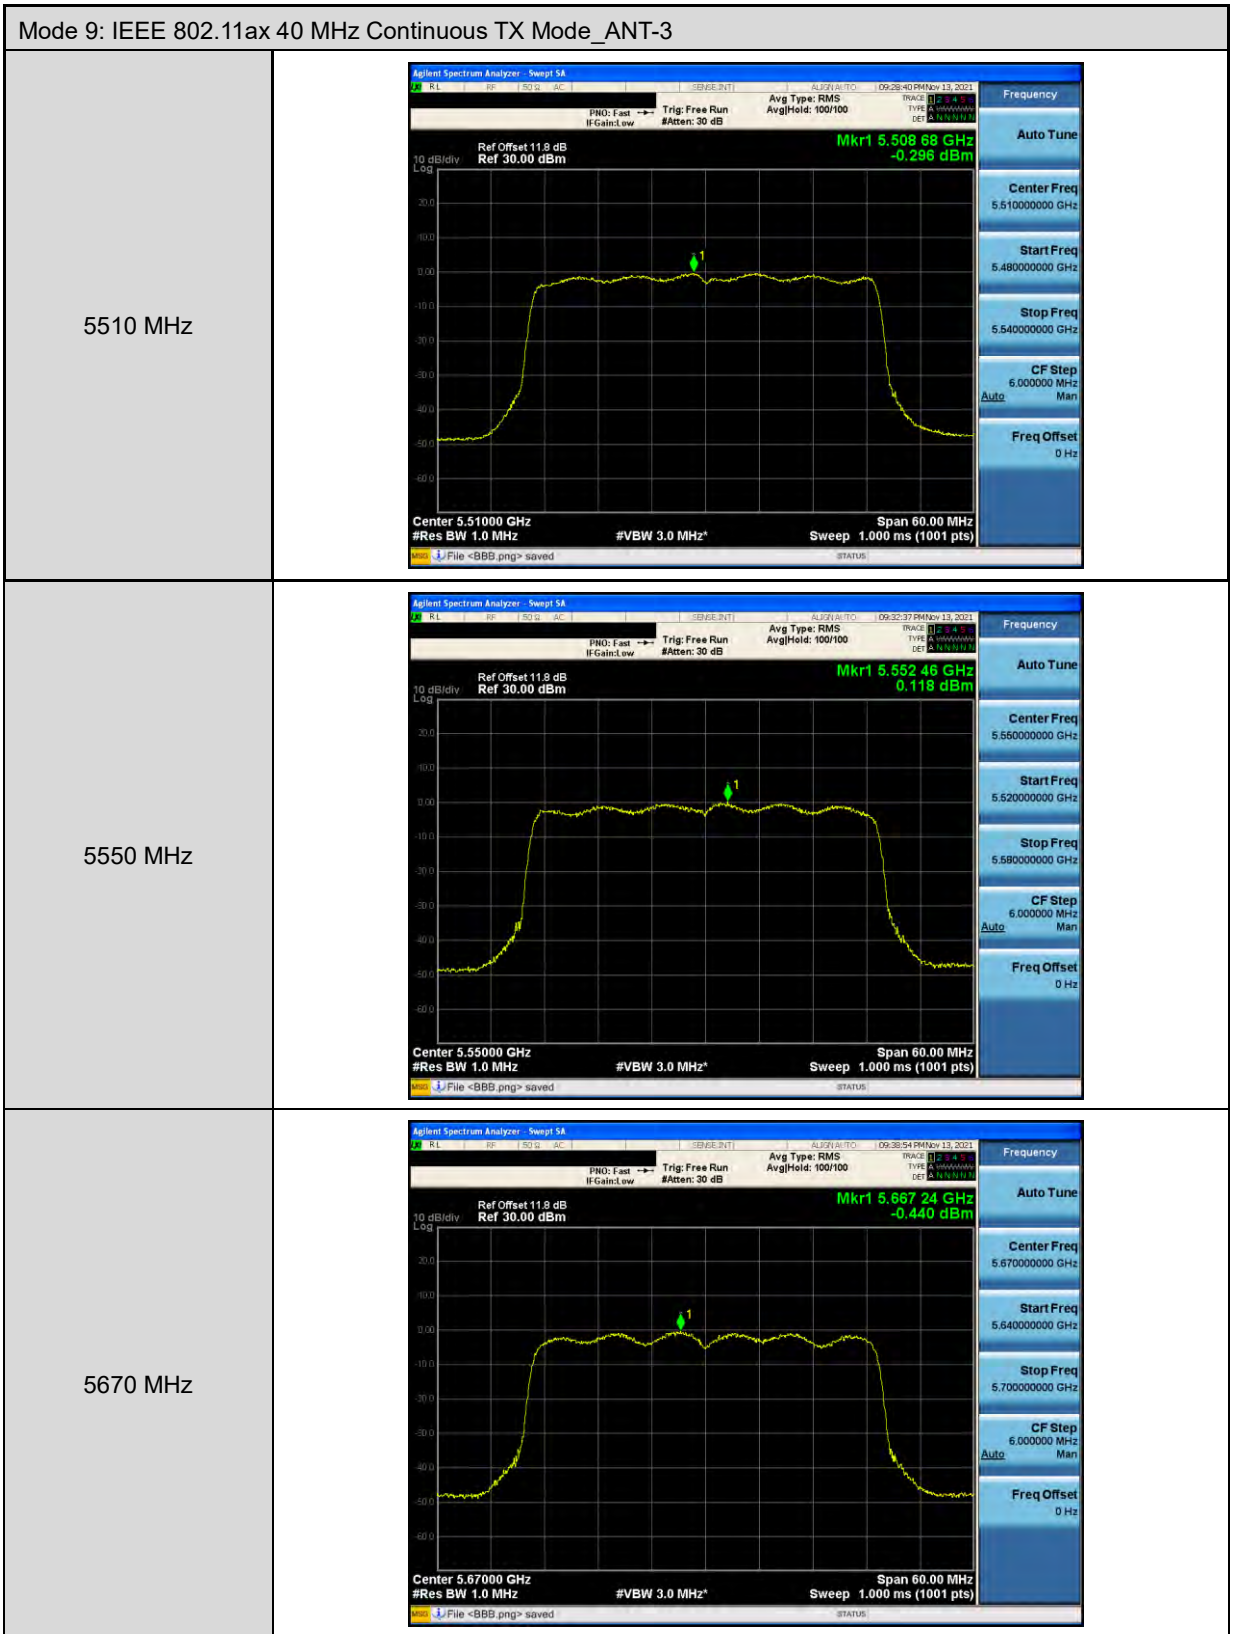

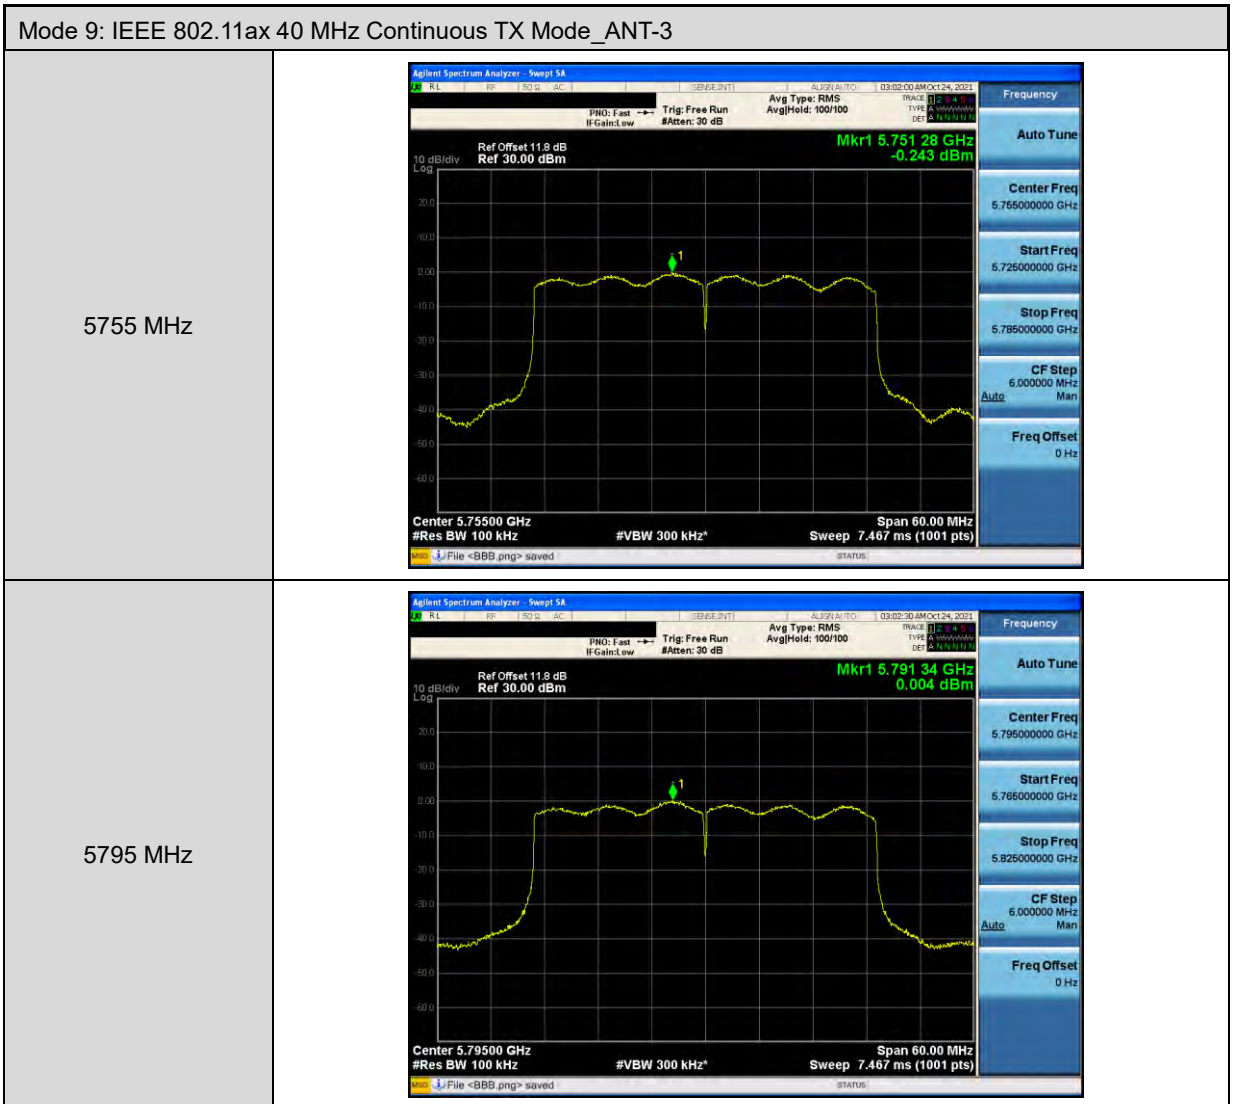

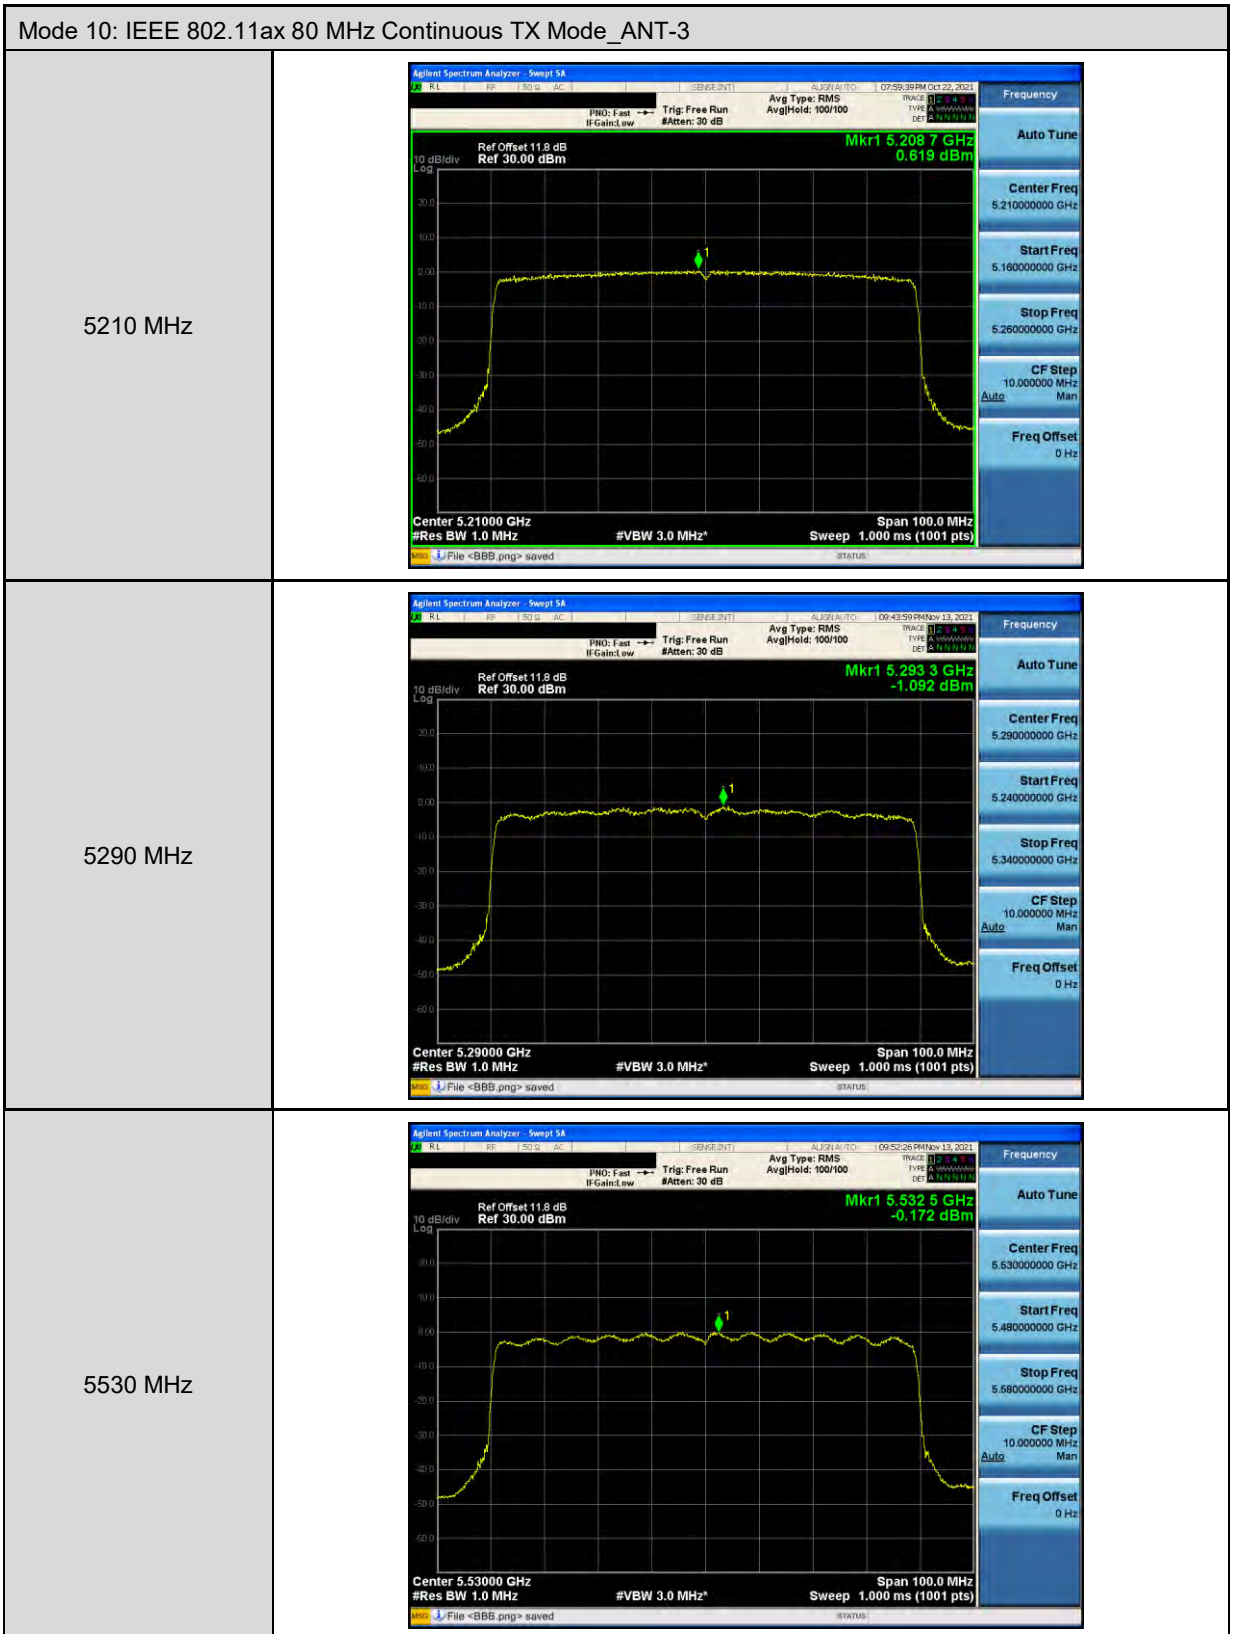

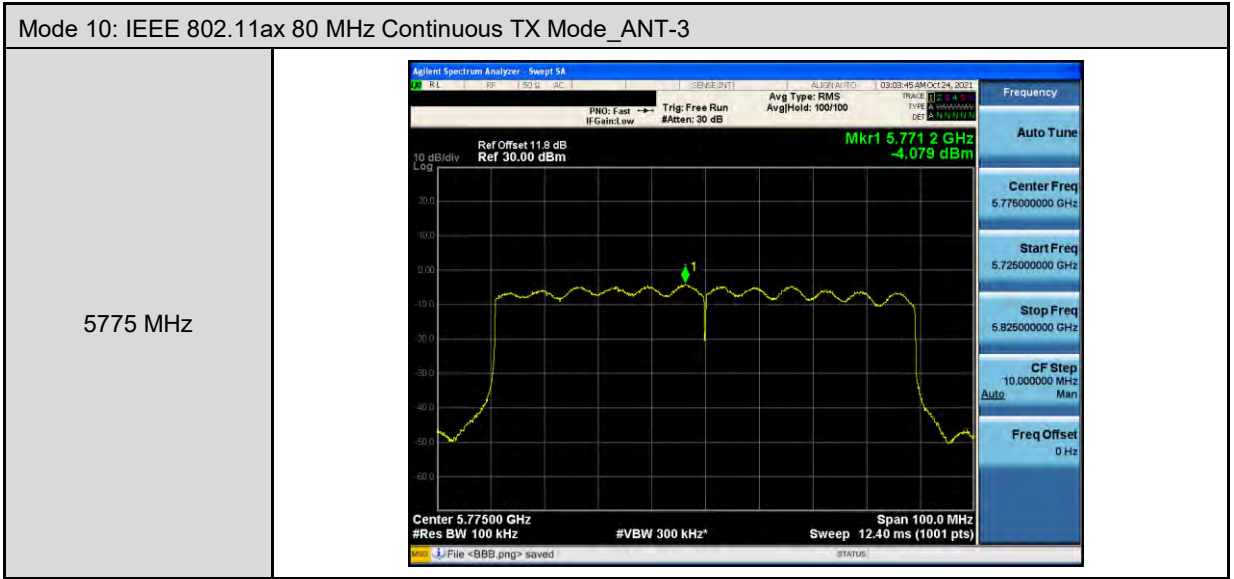

Beamforming on

Maximum Conducted Output Power Measurement

Test Mode	Frequency (MHz)	RF Power setting in Test Software				Test Software Version
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 3	5180	22	22	22	22	QSPR Version 5.0-00196
	5200	22	22	22	22	
	5220	22	22	22	22	
	5240	22	22	22	22	
	5260	16	16	16	16	
	5280	16.5	16.5	16.5	16.5	
	5300	16.5	16.5	16.5	16.5	
	5320	16.5	16.5	16.5	16.5	
	5500	17.5	17.5	17.5	17.5	
	5520	17.5	17.5	17.5	17.5	
	5540	17.5	17.5	17.5	17.5	
	5560	17.5	17.5	17.5	17.5	
	5580	17.5	17.5	17.5	17.5	
	5660	17.5	17.5	17.5	17.5	
	5680	17.5	17.5	17.5	17.5	
	5700	15.5	15.5	15.5	15.5	
	5745	24	24	24	24	
	5765	24	24	24	24	
	5785	24	24	24	24	
	5805	24	24	24	24	
5825	24	24	24	24		

Test Mode	Frequency (MHz)	RF Power setting in Test Software				Test Software Version
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 4	5190	24	24	24	24	QSPR Version 5.0-00196
	5230	24	24	24	24	
	5270	17.5	17.5	17.5	17.5	
	5310	17.5	17.5	17.5	17.5	
	5510	18.5	18.5	18.5	18.5	
	5550	18.5	18.5	18.5	18.5	
	5670	18	18	18	18	
	5755	24	24	24	24	
	5795	24	24	24	24	
Mode 5	5180	22	22	22	22	QSPR Version 5.0-00196
	5200	22	22	22	22	
	5220	22	22	22	22	
	5240	22	22	22	22	
	5260	16	16	16	16	
	5280	16.5	16.5	16.5	16.5	
	5300	16.5	16.5	16.5	16.5	
	5320	16.5	16.5	16.5	16.5	
	5500	17.5	17.5	17.5	17.5	
	5520	17.5	17.5	17.5	17.5	
	5540	17.5	17.5	17.5	17.5	
	5560	17.5	17.5	17.5	17.5	
	5580	17.5	17.5	17.5	17.5	
	5660	17.5	17.5	17.5	17.5	
	5680	17.5	17.5	17.5	17.5	
	5700	15.5	15.5	15.5	15.5	
	5745	24	24	24	24	
	5765	24	24	24	24	
	5785	24	24	24	24	
	5805	24	24	24	24	
5825	24	24	24	24		

Test Mode	Frequency (MHz)	RF Power setting in Test Software				Test Software Version
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 6	5190	24	24	24	24	QSPR Version 5.0-00196
	5230	24	24	24	24	
	5270	17.5	17.5	17.5	17.5	
	5310	17.5	17.5	17.5	17.5	
	5510	18.5	18.5	18.5	18.5	
	5550	18.5	18.5	18.5	18.5	
	5670	18	18	18	18	
	5755	24	24	24	24	
	5795	24	24	24	24	
Mode 7	5210	22.5	22.5	22.5	22.5	
	5290	17.5	17.5	17.5	17.5	
	5530	19	19	19	19	
	5775	23.5	23.5	23.5	23.5	
Mode 8	5180	22	22	22	22	QSPR Version 5.0-00196
	5200	22	22	22	22	
	5220	22	22	22	22	
	5240	22	22	22	22	
	5260	16	16	16	16	
	5280	16.5	16.5	16.5	16.5	
	5300	16.5	16.5	16.5	16.5	
	5320	16.5	16.5	16.5	16.5	
	5500	17.5	17.5	17.5	17.5	
	5520	17.5	17.5	17.5	17.5	
	5540	17.5	17.5	17.5	17.5	
	5560	17.5	17.5	17.5	17.5	
	5580	17.5	17.5	17.5	17.5	
	5660	17.5	17.5	17.5	17.5	
	5680	17.5	17.5	17.5	17.5	
	5700	15.5	15.5	15.5	15.5	
	5745	24	24	24	24	
	5765	24	24	24	24	
	5785	24	24	24	24	
	5805	24	24	24	24	
5825	24	24	24	24		

Test Mode	Frequency (MHz)	RF Power setting in Test Software				Test Software Version
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 9	5190	24	24	24	24	QSPR Version 5.0-00196
	5230	24	24	24	24	
	5270	17.5	17.5	17.5	17.5	
	5310	17.5	17.5	17.5	17.5	
	5510	18.5	18.5	18.5	18.5	
	5550	18.5	18.5	18.5	18.5	
	5670	18	18	18	18	
	5755	24	24	24	24	
	5795	24	24	24	24	
Mode 10	5210	22.5	22.5	22.5	22.5	
	5290	17.5	17.5	17.5	17.5	
	5530	19	19	19	19	
	5775	23.5	23.5	23.5	23.5	

Maximum Conducted Output Power

Test Mode		Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX mode								
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-2		ANT-3		Limit (dBm)
		Max. Output Power								
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180.0	26 M	16.45	0.044	16.41	0.044	16.50	0.045	16.61	0.046	≤ 24.68
5200.0		16.35	0.043	16.25	0.042	16.58	0.045	16.49	0.045	≤ 24.68
5220.0		16.18	0.041	15.99	0.040	16.39	0.044	16.50	0.045	≤ 24.68
5240.0		16.38	0.043	16.52	0.045	16.58	0.045	16.54	0.045	≤ 24.68
5260.0		10.45	0.011	9.88	0.010	10.40	0.011	10.27	0.011	≤ 18.72
5280.0		10.58	0.011	10.74	0.012	10.54	0.011	10.88	0.012	≤ 18.72
5300.0		10.65	0.012	10.48	0.011	10.26	0.011	10.82	0.012	≤ 18.72
5320.0		10.47	0.011	9.96	0.010	9.64	0.009	9.95	0.010	≤ 18.72
5500.0		11.30	0.013	11.23	0.013	10.72	0.012	11.34	0.014	≤ 19.33
5520.0		11.25	0.013	11.15	0.013	10.77	0.012	11.48	0.014	≤ 19.33
5540.0		11.20	0.013	11.17	0.013	10.90	0.012	11.49	0.014	≤ 19.33
5560.0		11.38	0.014	11.35	0.014	11.06	0.013	11.54	0.014	≤ 19.33
5580.0		11.07	0.013	11.30	0.013	11.01	0.013	11.36	0.014	≤ 19.33
5660.0		10.89	0.012	11.06	0.013	10.90	0.012	11.18	0.013	≤ 19.33
5680.0		10.87	0.012	10.77	0.012	10.80	0.012	10.99	0.013	≤ 19.33
5700.0		10.82	0.012	10.53	0.011	10.84	0.012	10.77	0.012	≤ 19.33
5745.0		18.11	0.065	17.47	0.056	17.39	0.055	17.44	0.055	≤ 24.95
5765.0		18.05	0.064	17.16	0.052	17.50	0.056	17.78	0.060	≤ 24.95
5785.0		18.07	0.064	17.14	0.052	17.77	0.060	17.89	0.062	≤ 24.95
5805.0		17.96	0.063	17.19	0.052	17.60	0.058	17.80	0.060	≤ 24.95
5825.0	17.75	0.060	17.41	0.055	17.63	0.058	17.72	0.059	≤ 24.95	

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX mode		
Frequency (MHz)	Data Rate	ANT-0+1+2+3		Limit (dBm)
		(dBm)	(W)	
5180.0	26 M	22.51	0.178	≤ 24.68
5200.0		22.44	0.175	≤ 24.68
5220.0		22.29	0.169	≤ 24.68
5240.0		22.53	0.179	≤ 24.68
5260.0		16.28	0.042	≤ 18.72
5280.0		16.71	0.047	≤ 18.72
5300.0		16.58	0.045	≤ 18.72
5320.0		16.04	0.040	≤ 18.72
5500.0		17.18	0.052	≤ 19.33
5520.0		17.19	0.052	≤ 19.33
5540.0		17.22	0.053	≤ 19.33
5560.0		17.36	0.054	≤ 19.33
5580.0		17.21	0.053	≤ 19.33
5660.0		17.03	0.050	≤ 19.33
5680.0		16.88	0.049	≤ 19.33
5700.0		16.76	0.047	≤ 19.33
5745.0		23.63	0.231	≤ 24.95
5765.0		23.66	0.232	≤ 24.95
5785.0		23.75	0.237	≤ 24.95
5805.0		23.67	0.233	≤ 24.95
5825.0	23.65	0.232	≤ 24.95	

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX mode								
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-2		ANT-3		Limit (dBm)
		Max. Output Power								
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190.0	54 M	17.52	0.056	17.50	0.056	17.45	0.056	17.37	0.055	≤ 24.68
5230.0		17.16	0.052	17.14	0.052	17.59	0.057	17.35	0.054	≤ 24.68
5270.0		12.19	0.017	11.58	0.014	12.11	0.016	11.85	0.015	≤ 18.72
5310.0		11.91	0.016	11.85	0.015	11.61	0.014	11.49	0.014	≤ 18.72
5510.0		12.82	0.019	12.38	0.017	12.74	0.019	12.39	0.017	≤ 19.33
5550.0		12.74	0.019	12.11	0.016	12.39	0.017	12.12	0.016	≤ 19.33
5670.0		12.60	0.018	12.57	0.018	13.15	0.021	12.82	0.019	≤ 19.33
5755.0		18.43	0.070	18.01	0.063	18.71	0.074	17.67	0.058	≤ 24.95
5795.0		18.21	0.066	17.99	0.063	18.12	0.065	17.82	0.061	≤ 24.95

Test Mode		Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Max. Transmitter Output Power (ANT-0+1+2+3)				Limit (dBm)
		(dBm)		(W)		
5190.0	54 M	23.48		0.223		≤ 24.68
5230.0		23.33		0.215		≤ 24.68
5270.0		17.96		0.063		≤ 18.72
5310.0		17.74		0.059		≤ 18.72
5510.0		18.61		0.073		≤ 19.33
5550.0		18.37		0.069		≤ 19.33
5670.0		18.81		0.076		≤ 19.33
5755.0		24.24		0.266		≤ 24.95
5795.0		24.06		0.255		≤ 24.95

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode								
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-2		ANT-3		Limit (dBm)
		Max. Output Power								
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180.0	26 M	16.56	0.045	16.62	0.046	16.67	0.046	16.77	0.048	≤ 24.68
5200.0		16.53	0.045	16.41	0.044	16.80	0.048	16.70	0.047	≤ 24.68
5220.0		16.37	0.043	16.18	0.041	16.56	0.045	16.61	0.046	≤ 24.68
5240.0		16.48	0.044	16.69	0.047	16.69	0.047	16.67	0.046	≤ 24.68
5260.0		10.52	0.011	13.64	0.023	10.51	0.011	10.40	0.011	≤ 18.72
5280.0		10.76	0.012	10.91	0.012	10.71	0.012	11.05	0.013	≤ 18.72
5300.0		10.83	0.012	10.69	0.012	10.46	0.011	11.01	0.013	≤ 18.72
5320.0		10.62	0.012	10.13	0.010	9.90	0.010	10.10	0.010	≤ 18.72
5500.0		11.56	0.014	11.37	0.014	10.91	0.012	11.59	0.014	≤ 19.33
5520.0		11.48	0.014	11.37	0.014	10.99	0.013	11.65	0.015	≤ 19.33
5540.0		11.46	0.014	11.43	0.014	11.06	0.013	11.71	0.015	≤ 19.33
5560.0		11.54	0.014	11.60	0.014	11.29	0.013	11.72	0.015	≤ 19.33
5580.0		11.32	0.014	11.49	0.014	11.20	0.013	11.52	0.014	≤ 19.33
5660.0		11.10	0.013	11.31	0.014	11.16	0.013	11.39	0.014	≤ 19.33
5680.0		11.03	0.013	11.01	0.013	11.06	0.013	11.20	0.013	≤ 19.33
5700.0		11.02	0.013	10.79	0.012	11.05	0.013	10.91	0.012	≤ 19.33
5745.0		18.28	0.067	17.60	0.058	17.54	0.057	17.64	0.058	≤ 24.95
5765.0		18.22	0.066	17.36	0.054	17.71	0.059	17.89	0.062	≤ 24.95
5785.0		18.21	0.066	17.34	0.054	17.89	0.062	18.06	0.064	≤ 24.95
5805.0		18.09	0.064	17.37	0.055	17.75	0.060	18.02	0.063	≤ 24.95
5825.0	17.94	0.062	17.53	0.057	17.75	0.060	17.85	0.061	≤ 24.95	

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 5: IEEE 802.11ac 20 MHz Continuous TX mode ode		
Frequency (MHz)	Data Rate	Max. Transmitter Output Power (ANT-0+1+2+3)		Limit (dBm)
		(dBm)	(W)	
5180.0	26 M	22.68	0.185	≤ 24.68
5200.0		22.63	0.183	≤ 24.68
5220.0		22.45	0.176	≤ 24.68
5240.0		22.65	0.184	≤ 24.68
5260.0		17.53	0.057	≤ 18.72
5280.0		16.88	0.049	≤ 18.72
5300.0		16.77	0.048	≤ 18.72
5320.0		16.22	0.042	≤ 18.72
5500.0		17.39	0.055	≤ 19.33
5520.0		17.40	0.055	≤ 19.33
5540.0		17.44	0.055	≤ 19.33
5560.0		17.56	0.057	≤ 19.33
5580.0		17.41	0.055	≤ 19.33
5660.0		17.26	0.053	≤ 19.33
5680.0		17.10	0.051	≤ 19.33
5700.0		16.96	0.050	≤ 19.33
5745.0		23.80	0.240	≤ 24.95
5765.0		23.83	0.241	≤ 24.95
5785.0		23.91	0.246	≤ 24.95
5805.0		23.84	0.242	≤ 24.95
5825.0	23.79	0.239	≤ 24.95	

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode								
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-2		ANT-3		Limit (dBm)
		Max. Output Power								
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190.0	54 M	17.74	0.059	17.68	0.059	17.67	0.058	17.57	0.057	≤ 24.68
5230.0		17.37	0.055	17.27	0.053	17.69	0.059	17.47	0.056	≤ 24.68
5270.0		12.31	0.017	11.79	0.015	12.22	0.017	11.98	0.016	≤ 18.72
5310.0		12.06	0.016	12.08	0.016	11.83	0.015	11.62	0.015	≤ 18.72
5510.0		12.98	0.020	12.58	0.018	12.99	0.020	12.63	0.018	≤ 19.33
5550.0		12.87	0.019	12.27	0.017	12.57	0.018	12.39	0.017	≤ 19.33
5670.0		12.74	0.019	12.70	0.019	13.20	0.021	12.91	0.020	≤ 19.33
5755.0		18.65	0.073	18.18	0.066	18.91	0.078	17.85	0.061	≤ 24.95
5795.0		18.43	0.070	18.14	0.065	18.29	0.067	17.95	0.062	≤ 24.95

Test Mode		Mode 6: IEEE 802.11ac 40 MHz Continuous TX mode			
Frequency (MHz)	Data Rate	Max. Transmitter Output Power (ANT-0+1+2+3)			Limit (dBm)
		(dBm)		(W)	
5190.0	54 M	23.69		0.234	≤ 24.68
5230.0		23.47		0.223	≤ 24.68
5270.0		18.10		0.065	≤ 18.72
5310.0		17.92		0.062	≤ 18.72
5510.0		18.82		0.076	≤ 19.33
5550.0		18.55		0.072	≤ 19.33
5670.0		18.91		0.078	≤ 19.33
5755.0		24.44		0.278	≤ 24.95
5795.0		24.23		0.265	≤ 24.95

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode								
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-2		ANT-3		Limit (dBm)
		Max. Output Power								
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5210.0	117.2 M	17.17	0.052	16.74	0.047	17.12	0.052	16.67	0.046	≤ 24.68
5290.0		12.03	0.016	12.36	0.017	12.11	0.016	12.07	0.016	≤ 18.72
5530.0		13.16	0.021	12.82	0.019	12.72	0.019	12.81	0.019	≤ 19.33
5775.0		18.38	0.069	18.03	0.064	18.51	0.071	17.77	0.060	≤ 24.95

Test Mode		Mode 7: IEEE 802.11ac 80 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Max. Transmitter Output Power (ANT-0+1+2+3)				Limit (dBm)
		(dBm)		(W)		
5210.0	117.2 M	22.95		0.197		≤ 24.68
5290.0		18.17		0.066		≤ 18.72
5530.0		18.90		0.078		≤ 19.33
5775.0		24.20		0.263		≤ 24.95

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode								
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-2		ANT-3		Limit (dBm)
		Max. Output Power								
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180.0	MCS 0	16.95	0.050	16.86	0.049	17.01	0.050	17.03	0.050	≤ 24.68
5200.0		16.85	0.048	16.75	0.047	17.18	0.052	17.09	0.051	≤ 24.68
5220.0		16.79	0.048	16.72	0.047	17.10	0.051	17.04	0.051	≤ 24.68
5240.0		16.72	0.047	16.91	0.049	16.90	0.049	16.95	0.050	≤ 24.68
5260.0		10.78	0.012	10.25	0.011	10.72	0.012	10.63	0.012	≤ 18.72
5280.0		11.08	0.013	11.15	0.013	11.00	0.013	11.29	0.013	≤ 18.72
5300.0		11.05	0.013	11.09	0.013	10.78	0.012	11.25	0.013	≤ 18.72
5320.0		10.85	0.012	10.42	0.011	10.25	0.011	10.40	0.011	≤ 18.72
5500.0		11.91	0.016	11.60	0.014	11.15	0.013	11.84	0.015	≤ 19.33
5520.0		11.79	0.015	11.68	0.015	11.30	0.013	11.90	0.015	≤ 19.33
5540.0		11.75	0.015	11.78	0.015	11.42	0.014	11.92	0.016	≤ 19.33
5560.0		11.82	0.015	11.90	0.015	11.50	0.014	11.95	0.016	≤ 19.33
5580.0		11.68	0.015	11.75	0.015	11.48	0.014	11.81	0.015	≤ 19.33
5660.0		11.45	0.014	11.58	0.014	11.45	0.014	11.67	0.015	≤ 19.33
5680.0		11.36	0.014	11.22	0.013	11.40	0.014	11.45	0.014	≤ 19.33
5700.0		11.25	0.013	11.03	0.013	11.36	0.014	11.20	0.013	≤ 19.33
5745.0		18.58	0.072	17.92	0.062	17.82	0.061	18.01	0.063	≤ 24.95
5765.0		18.45	0.070	17.70	0.059	18.00	0.063	18.15	0.065	≤ 24.95
5785.0		18.50	0.071	17.72	0.059	18.15	0.065	18.28	0.067	≤ 24.95
5805.0		18.32	0.068	17.70	0.059	18.09	0.064	18.25	0.067	≤ 24.95
5825.0	18.18	0.066	17.88	0.061	18.04	0.064	18.20	0.066	≤ 24.95	

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 8: IEEE 802.11ax 20 MHz Continuous TX mode		
Frequency (MHz)	Data Rate	Max. Transmitter Output Power (ANT-0+1+2+3)		Limit (dBm)
		(dBm)	(W)	
5180.0	MCS 0	22.98	0.199	≤ 24.68
5200.0		22.99	0.199	≤ 24.68
5220.0		22.94	0.197	≤ 24.68
5240.0		22.89	0.195	≤ 24.68
5260.0		16.62	0.046	≤ 18.72
5280.0		17.15	0.052	≤ 18.72
5300.0		17.07	0.051	≤ 18.72
5320.0		16.51	0.045	≤ 18.72
5500.0		17.66	0.058	≤ 19.33
5520.0		17.69	0.059	≤ 19.33
5540.0		17.74	0.059	≤ 19.33
5560.0		17.82	0.060	≤ 19.33
5580.0		17.70	0.059	≤ 19.33
5660.0		17.56	0.057	≤ 19.33
5680.0		17.38	0.055	≤ 19.33
5700.0		17.23	0.053	≤ 19.33
5745.0		24.11	0.258	≤ 24.95
5765.0		24.10	0.257	≤ 24.95
5785.0		24.19	0.263	≤ 24.95
5805.0		24.12	0.258	≤ 24.95
5825.0	24.10	0.257	≤ 24.95	

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode								
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-2		ANT-3		Limit (dBm)
		Max. Output Power								
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190.0	MCS 0	18.03	0.064	17.95	0.062	18.01	0.063	17.81	0.060	≤ 24.68
5230.0		17.71	0.059	17.56	0.057	18.05	0.064	17.75	0.060	≤ 24.68
5270.0		12.54	0.018	12.12	0.016	12.42	0.017	12.35	0.017	≤ 18.72
5310.0		12.40	0.017	12.38	0.017	12.15	0.016	11.85	0.015	≤ 18.72
5510.0		13.28	0.021	12.85	0.019	13.28	0.021	12.94	0.020	≤ 19.33
5550.0		13.10	0.020	12.55	0.018	12.81	0.019	12.60	0.018	≤ 19.33
5670.0		12.95	0.020	13.04	0.020	13.55	0.023	13.13	0.021	≤ 19.33
5755.0		18.93	0.078	18.55	0.072	19.14	0.082	18.18	0.066	≤ 24.95
5795.0		18.70	0.074	18.38	0.069	18.57	0.072	18.28	0.067	≤ 24.95

Test Mode		Mode 9: IEEE 802.11ax 40 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Max. Transmitter Output Power (ANT-0+1+2+3)				Limit (dBm)
		(dBm)		(W)		
5190.0	MCS 0	23.97		0.250		≤ 24.68
5230.0		23.79		0.239		≤ 24.68
5270.0		18.38		0.069		≤ 18.72
5310.0		18.22		0.066		≤ 18.72
5510.0		19.11		0.082		≤ 19.33
5550.0		18.79		0.076		≤ 19.33
5670.0		19.19		0.083		≤ 19.33
5755.0		24.74		0.298		≤ 24.95
5795.0		24.51		0.282		≤ 24.95

Note: The relevant measured result has the offset with cable loss already.

Test Mode		Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode								
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-2		ANT-3		Limit (dBm)
		Max. Output Power								
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5210.0	MCS 0	17.39	0.055	17.14	0.052	17.43	0.055	16.91	0.049	≤ 24.68
5290.0		12.33	0.017	12.61	0.018	12.45	0.018	12.33	0.017	≤ 18.72
5530.0		13.37	0.022	13.13	0.021	13.09	0.020	13.17	0.021	≤ 19.33
5775.0		18.70	0.074	18.35	0.068	18.80	0.076	18.05	0.064	≤ 24.95

Test Mode		Mode 10: IEEE 802.11ax 80 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Max. Transmitter Output Power (ANT-0+1+2+3)				Limit (dBm)
		(dBm)		(W)		
5210.0	MCS 0	23.24		0.211		≤ 24.68
5290.0		18.45		0.070		≤ 18.72
5530.0		19.21		0.083		≤ 19.33
5775.0		24.51		0.282		≤ 24.95

Note: The relevant measured result has the offset with cable loss already.