


|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:21 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5320MHz, Ant 0 + 1 |                          |

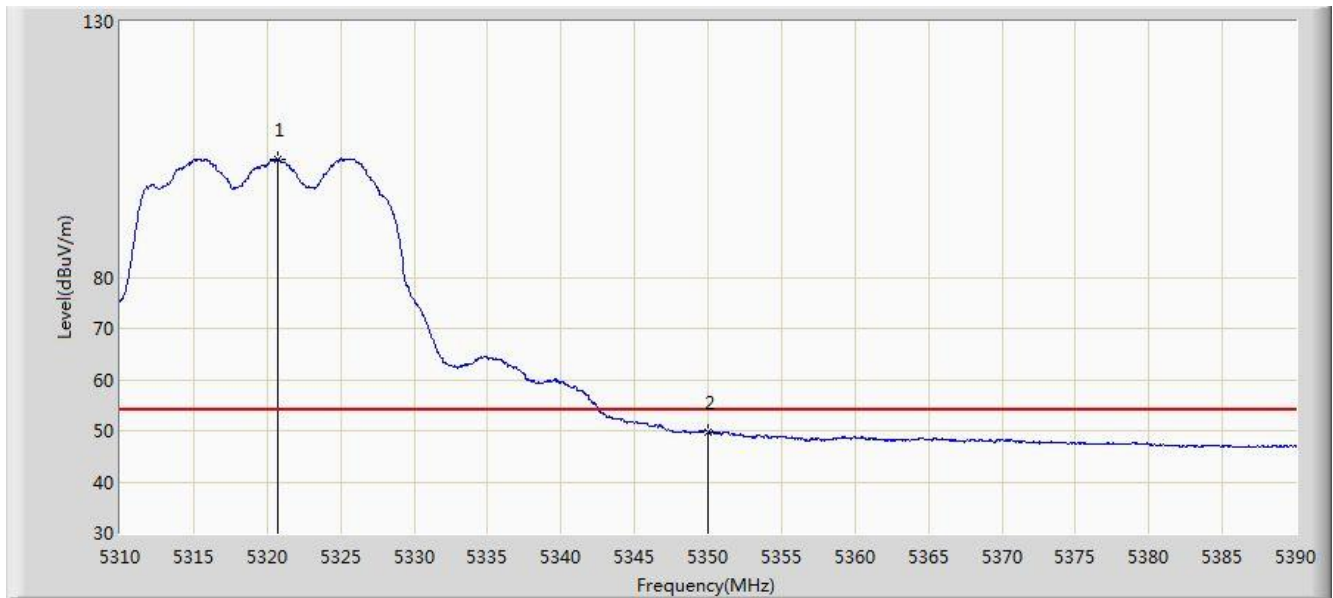


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5320.680        | 103.178                | 96.881               | N/A             | N/A            | 6.297       | AV   |
| 2  |      |      | 5350.000        | 49.751                 | 43.291               | -4.249          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:21 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5320MHz, Ant 0 + 1 |                          |

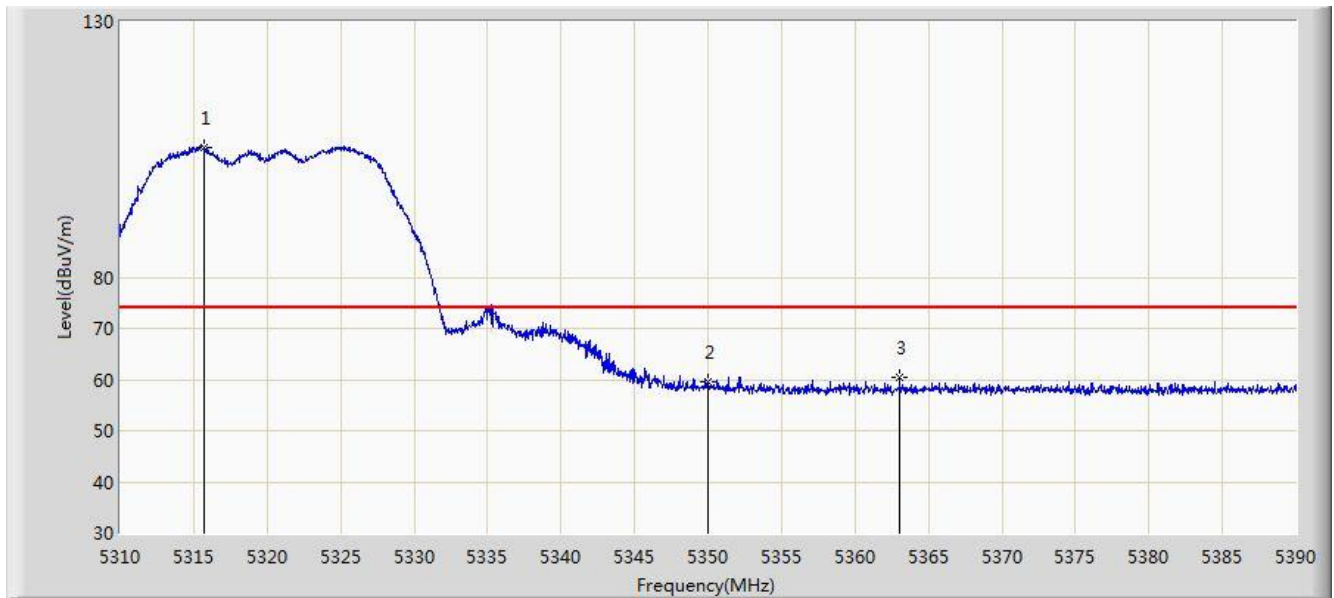


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5315.680        | 105.352                | 99.074               | N/A             | N/A            | 6.278       | PK   |
| 2  |      |      | 5350.000        | 59.445                 | 52.985               | -14.555         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5363.040        | 60.387                 | 53.878               | -13.613         | 74.000         | 6.510       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:22 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5320MHz, Ant 0 + 1 |                          |

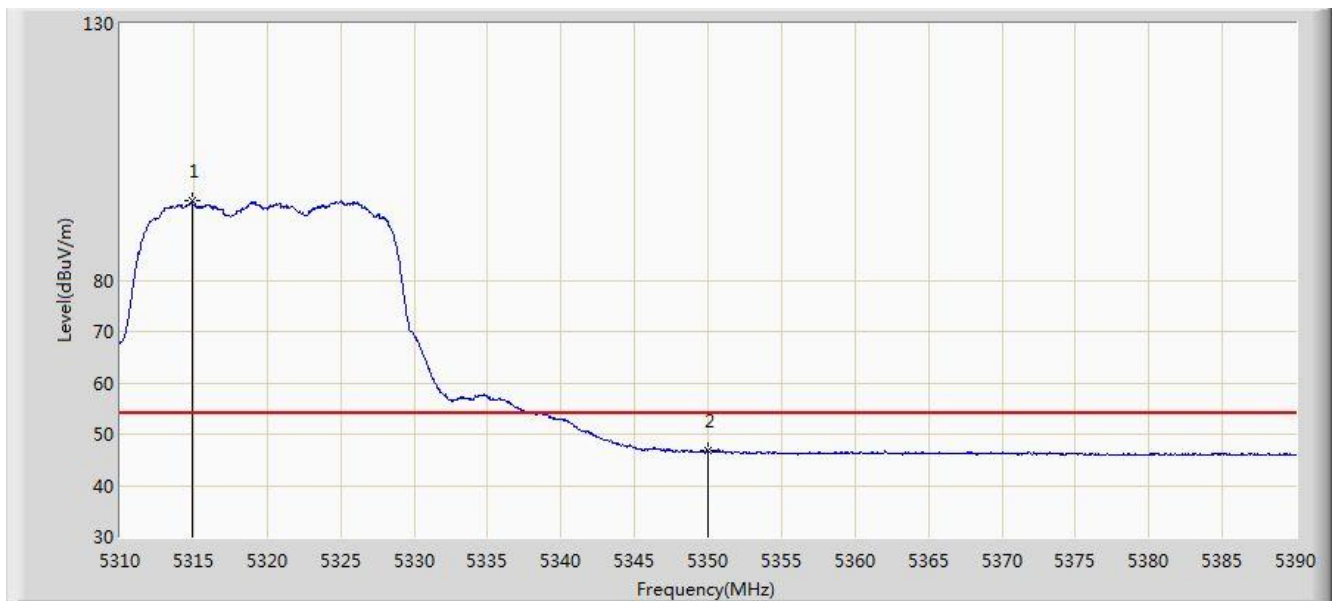


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5314.920        | 95.386                 | 89.110               | N/A             | N/A            | 6.277       | AV   |
| 2  |      |      | 5350.000        | 46.681                 | 40.221               | -7.319          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:24 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5500MHz, Ant 0 + 1 |                          |

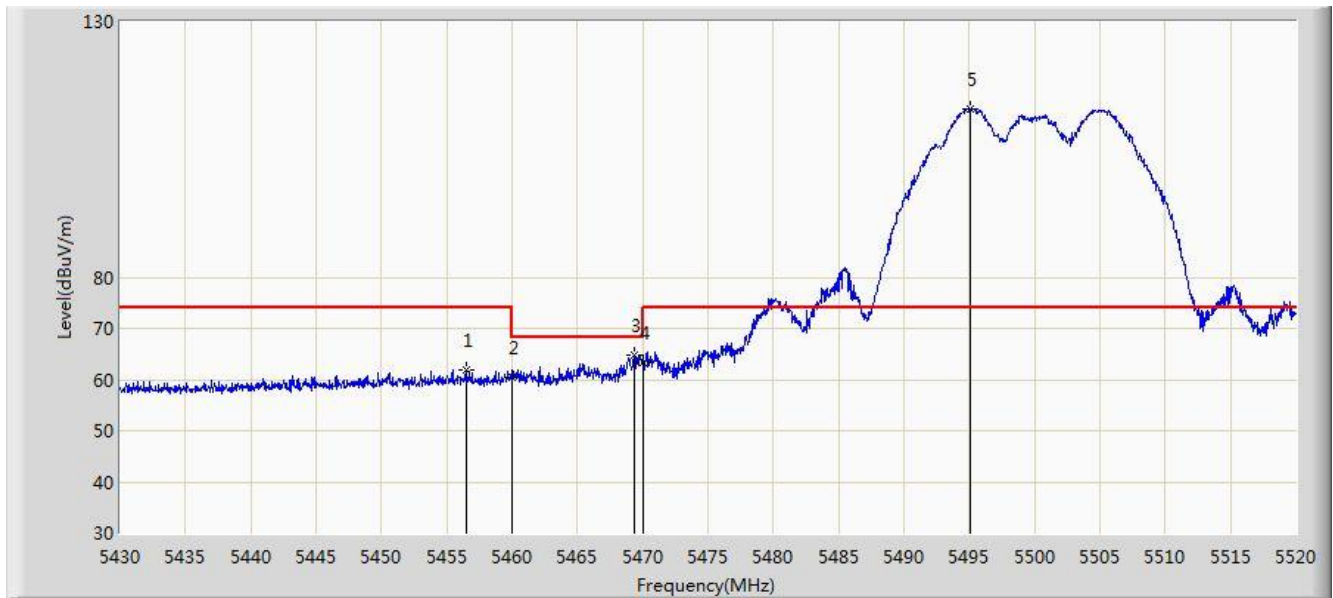


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5456.460        | 62.025                 | 55.239               | -11.975         | 74.000         | 6.786       | PK   |
| 2  |      |      | 5460.000        | 60.534                 | 53.732               | -13.466         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5469.375        | 64.753                 | 57.911               | -3.447          | 68.200         | 6.842       | PK   |
| 4  |      |      | 5470.000        | 63.302                 | 56.457               | -4.898          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5495.025        | 112.775                | 105.947              | N/A             | N/A            | 6.828       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:26 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5500MHz, Ant 0 + 1 |                          |

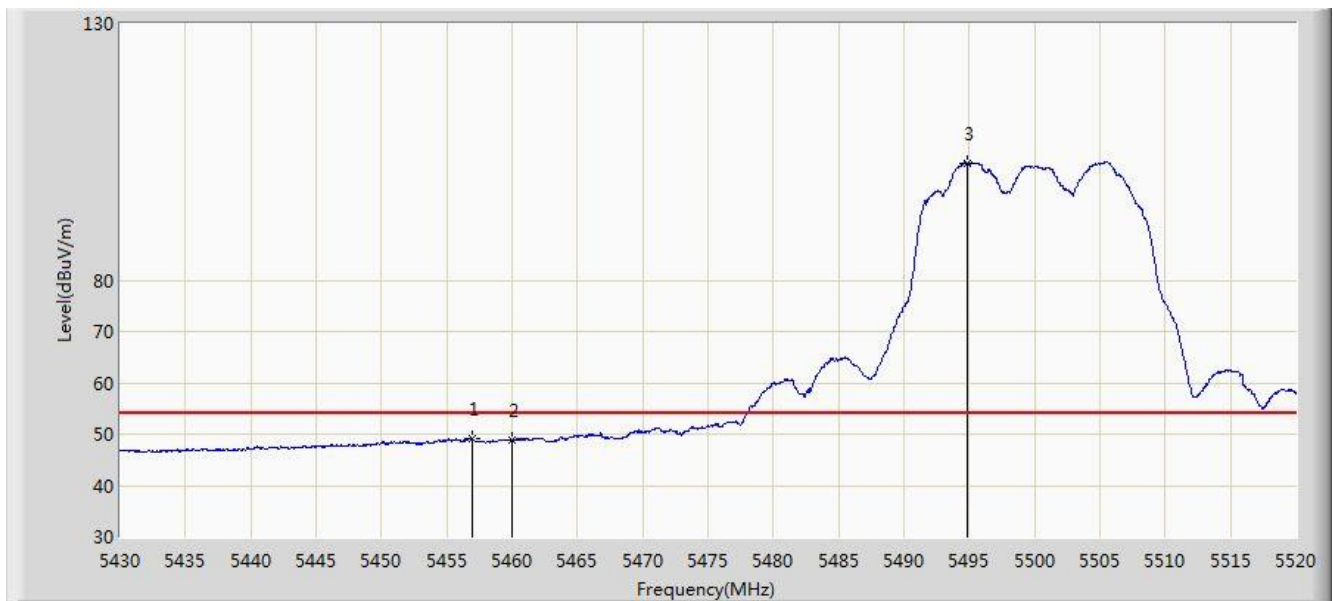


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5456.910        | 49.168                 | 42.380               | -4.832          | 54.000         | 6.789       | AV   |
| 2  |      |      | 5460.000        | 48.961                 | 42.159               | -5.039          | 54.000         | 6.802       | AV   |
| 3  |      | *    | 5494.890        | 102.891                | 96.063               | N/A             | N/A            | 6.828       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:27 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5500MHz, Ant 0 + 1 |                          |

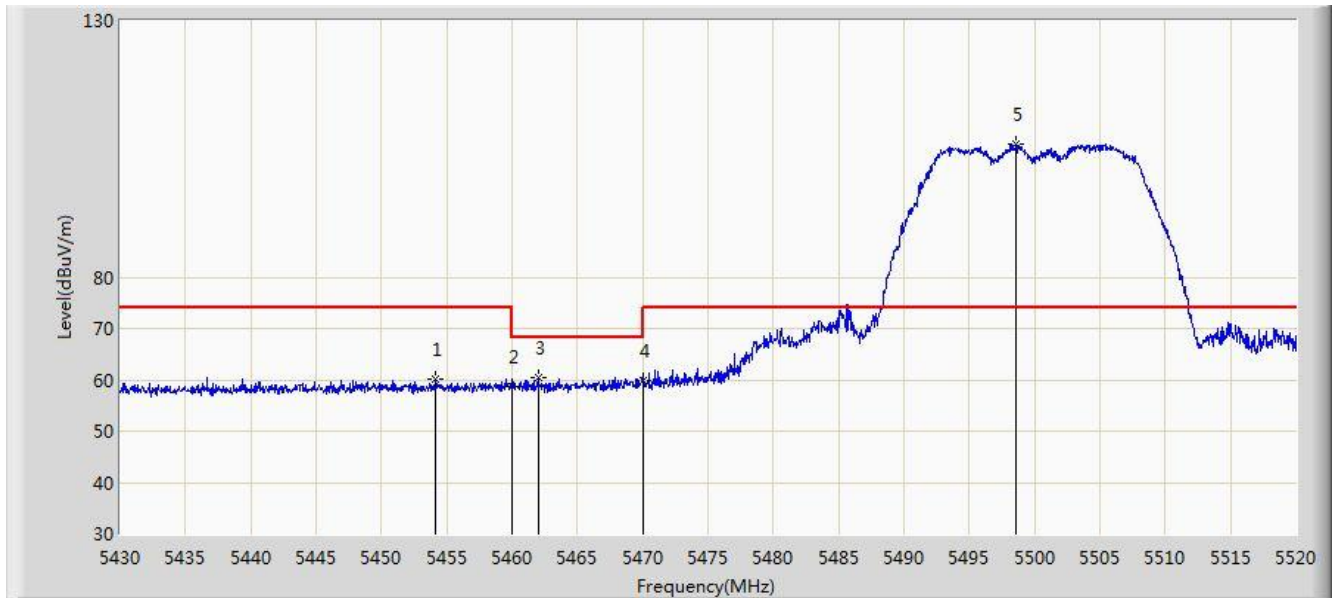


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5454.165        | 60.188                 | 53.412               | -13.812         | 74.000         | 6.775       | PK   |
| 2  |      |      | 5460.000        | 58.778                 | 51.976               | -15.222         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5461.995        | 60.339                 | 53.529               | -7.861          | 68.200         | 6.811       | PK   |
| 4  |      |      | 5470.000        | 59.722                 | 52.877               | -8.478          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5498.625        | 105.938                | 99.116               | N/A             | N/A            | 6.821       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:28 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5500MHz, Ant 0 + 1 |                          |

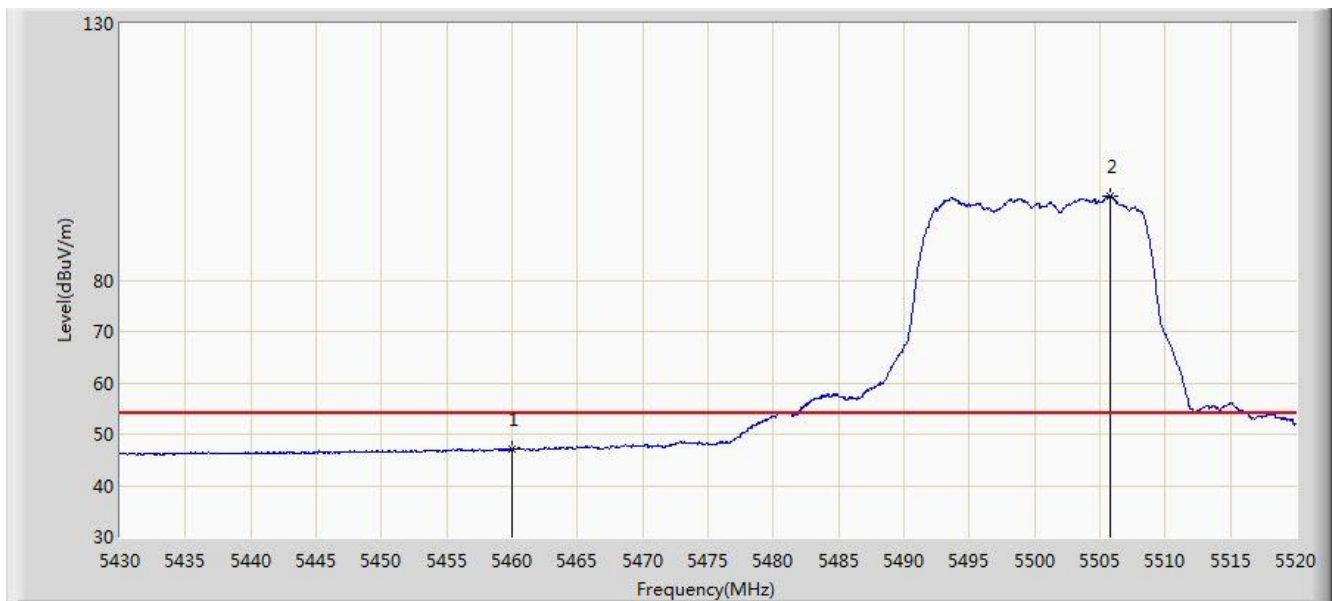


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.051                 | 40.249               | -6.949          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5505.825        | 96.343                 | 89.532               | N/A             | N/A            | 6.811       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:31 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5700MHz, Ant 0 + 1 |                          |

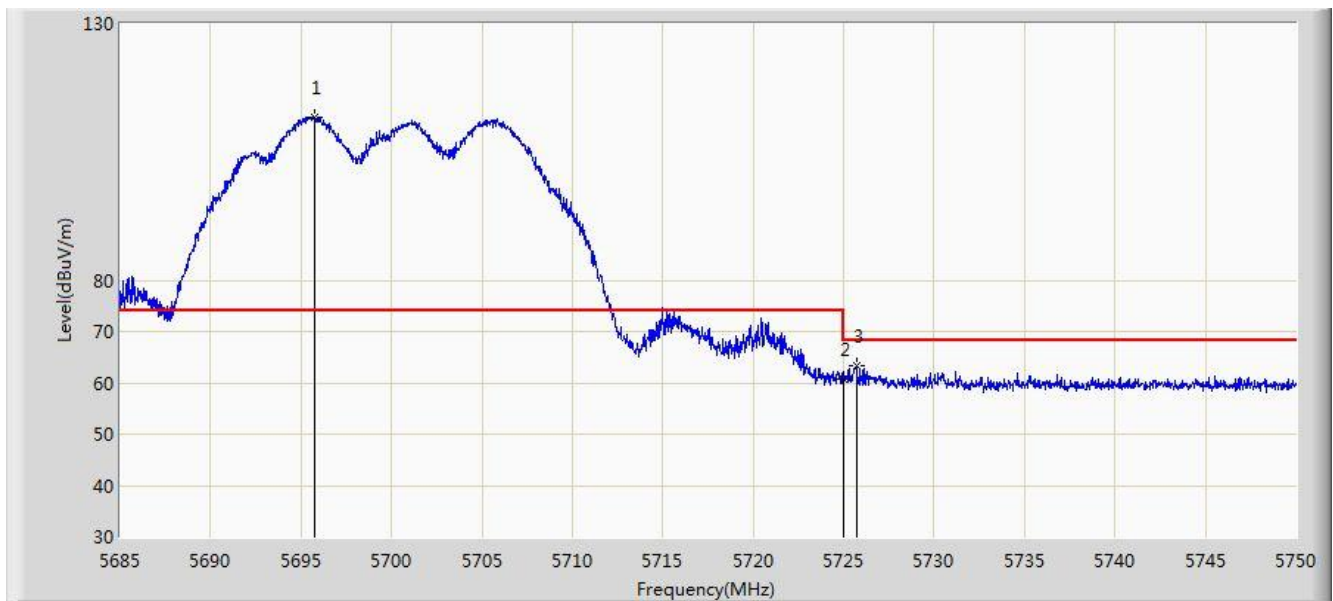


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5695.725        | 111.839                | 104.702              | N/A             | N/A            | 7.136       | PK   |
| 2  |      |      | 5725.000        | 60.867                 | 53.539               | -7.333          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5725.690        | 63.302                 | 55.970               | -4.898          | 68.200         | 7.332       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:32 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5700MHz, Ant 0 + 1 |                          |

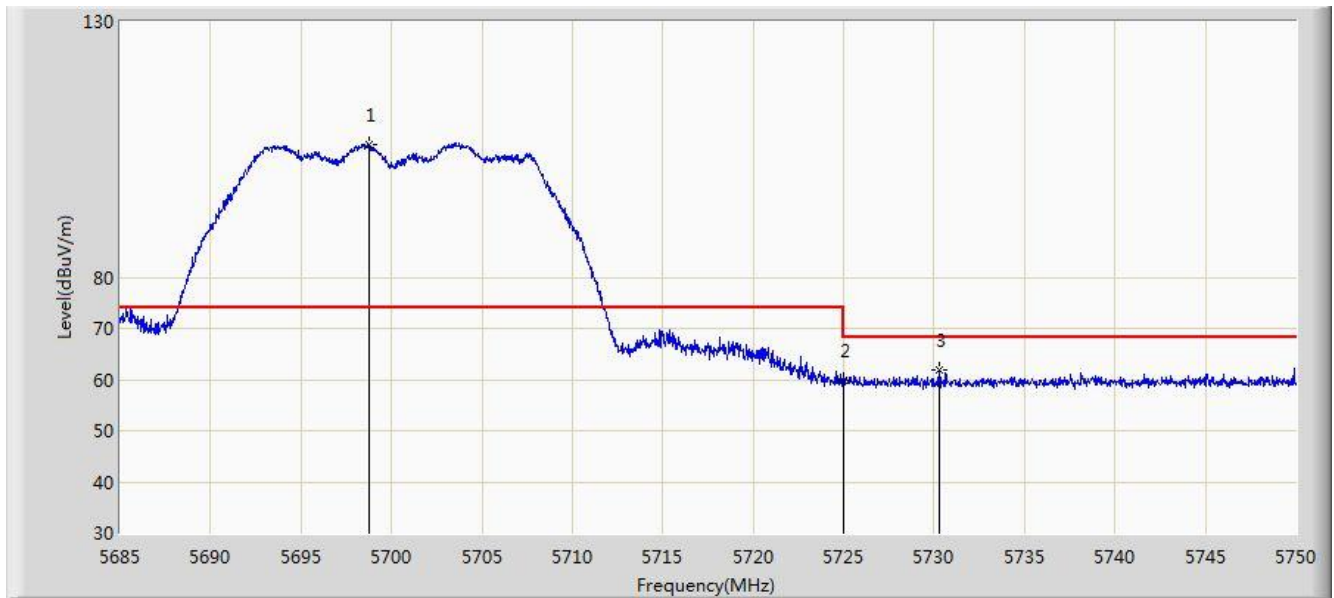


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5698.748        | 105.912                | 98.755               | N/A             | N/A            | 7.157       | PK   |
| 2  |      |      | 5725.000        | 59.791                 | 52.463               | -8.409          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5730.305        | 61.988                 | 54.636               | -6.212          | 68.200         | 7.351       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:36 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz, Ant 0 + 1 |                          |

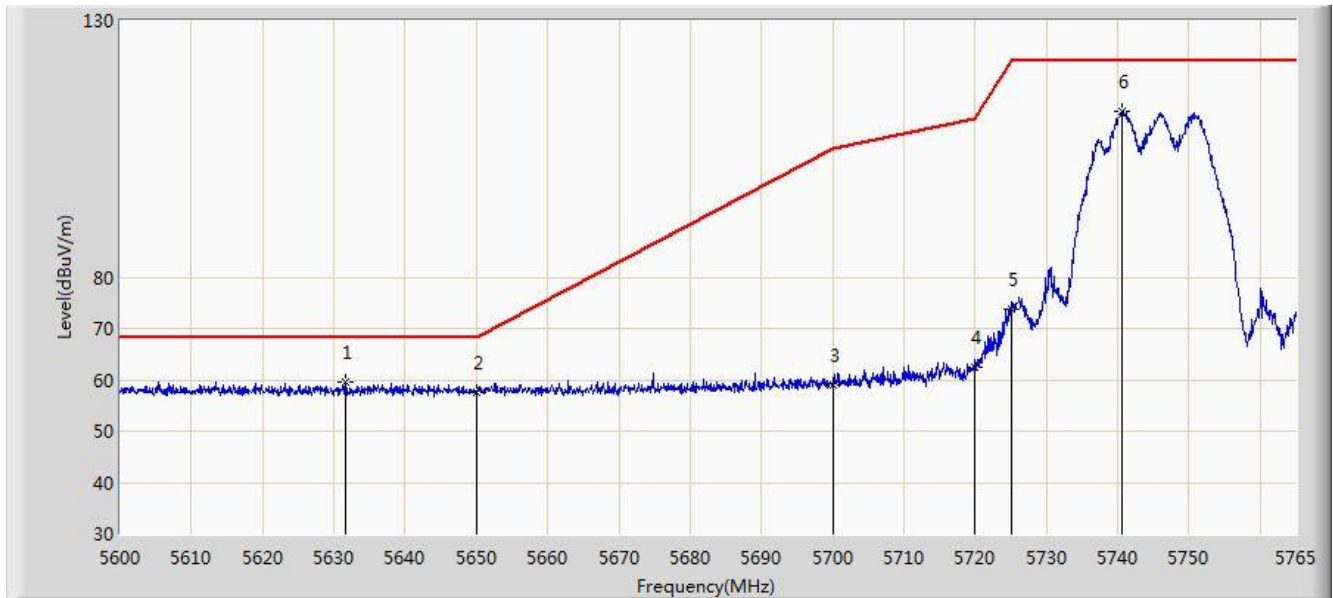


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5631.680        | 59.569                 | 52.568               | -8.631          | 68.200         | 7.002       | PK   |
| 2  |      |      | 5650.000        | 57.582                 | 50.577               | -10.618         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 59.117                 | 51.952               | -46.083         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 62.606                 | 55.307               | -48.194         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 73.794                 | 66.466               | -48.406         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5740.663        | 112.176                | 104.782              | N/A             | N/A            | 7.394       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:35 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz, Ant 0 + 1 |                          |

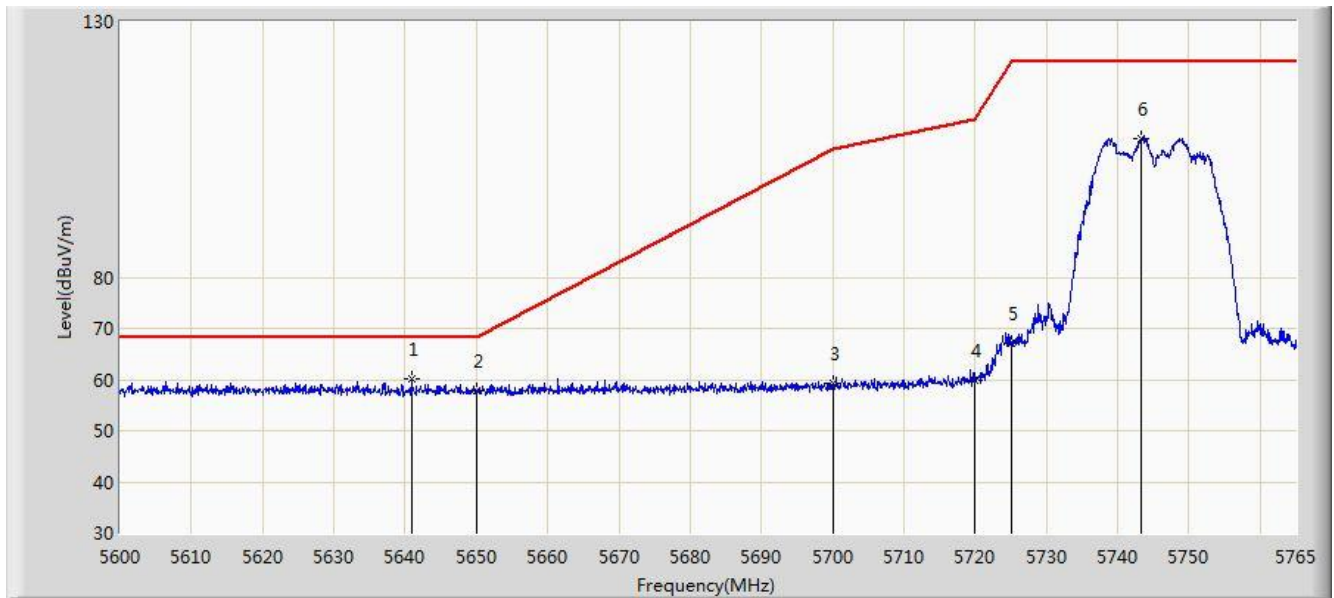


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5640.837        | 60.115                 | 53.130               | -8.085          | 68.200         | 6.986       | PK   |
| 2  |      |      | 5650.000        | 57.769                 | 50.764               | -10.431         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 59.297                 | 52.132               | -45.903         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 59.908                 | 52.609               | -50.892         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 67.228                 | 59.900               | -54.972         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5743.220        | 107.182                | 99.779               | N/A             | N/A            | 7.403       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:37 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5825MHz, Ant 0 + 1 |                          |

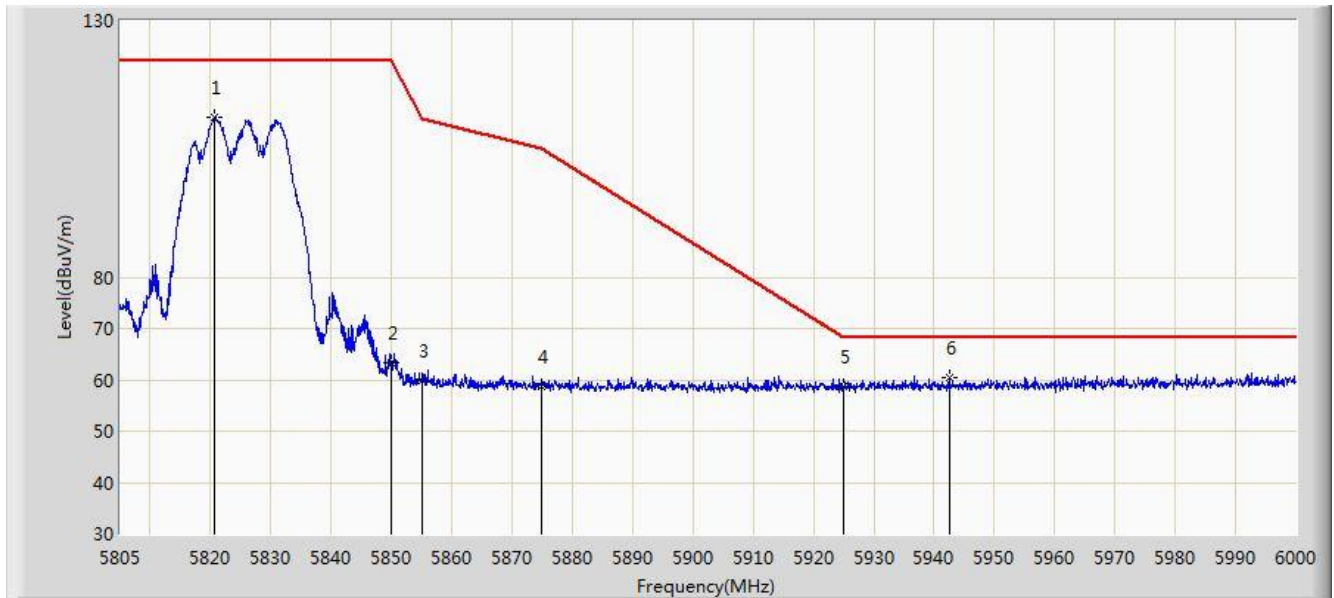


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5820.697        | 111.061                | 103.422              | N/A             | N/A            | 7.638       | PK   |
| 2  |      |      | 5850.000        | 63.435                 | 55.662               | -58.765         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 59.726                 | 51.950               | -51.074         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 58.797                 | 50.979               | -46.403         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 58.562                 | 50.743               | -9.638          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5942.475        | 60.408                 | 52.569               | -7.792          | 68.200         | 7.839       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2019/02/28 - 23:39 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                     | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                    | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5825MHz, Ant 0 + 1 |                          |

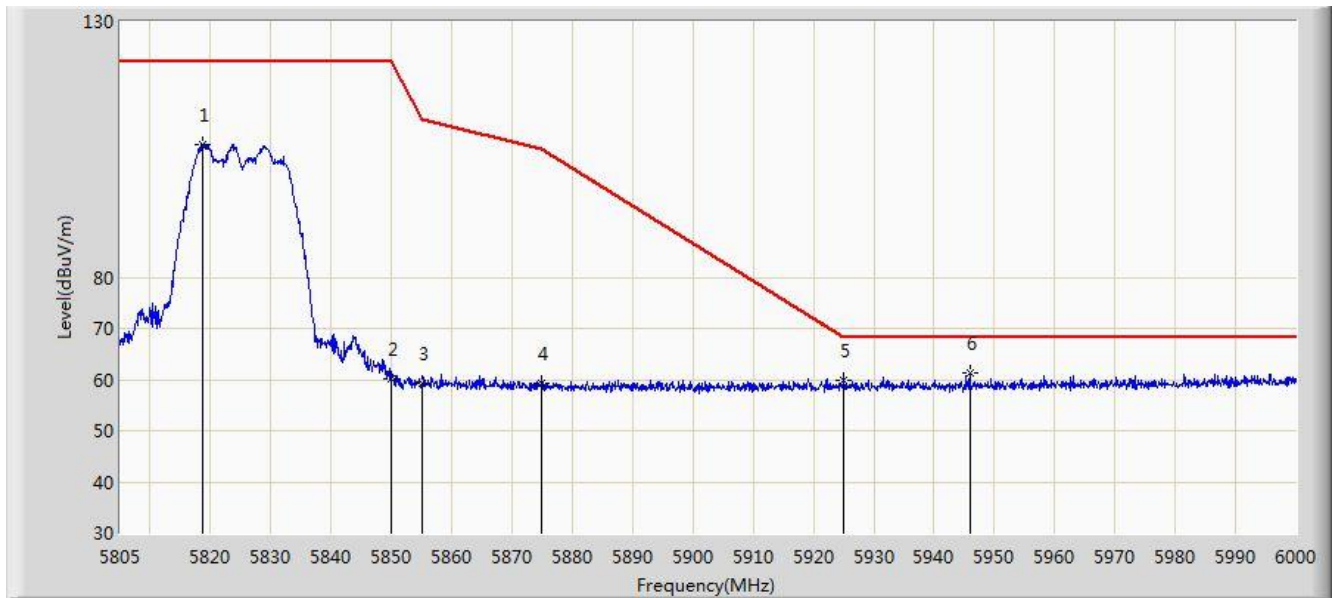


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5818.650        | 106.050                | 98.421               | N/A             | N/A            | 7.629       | PK   |
| 2  |      |      | 5850.000        | 60.015                 | 52.242               | -62.185         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 59.172                 | 51.396               | -51.628         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.300                 | 51.482               | -45.900         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.885                 | 52.066               | -8.315          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5945.888        | 61.296                 | 53.453               | -6.904          | 68.200         | 7.843       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:40 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz, Ant 0 + 1 |                          |

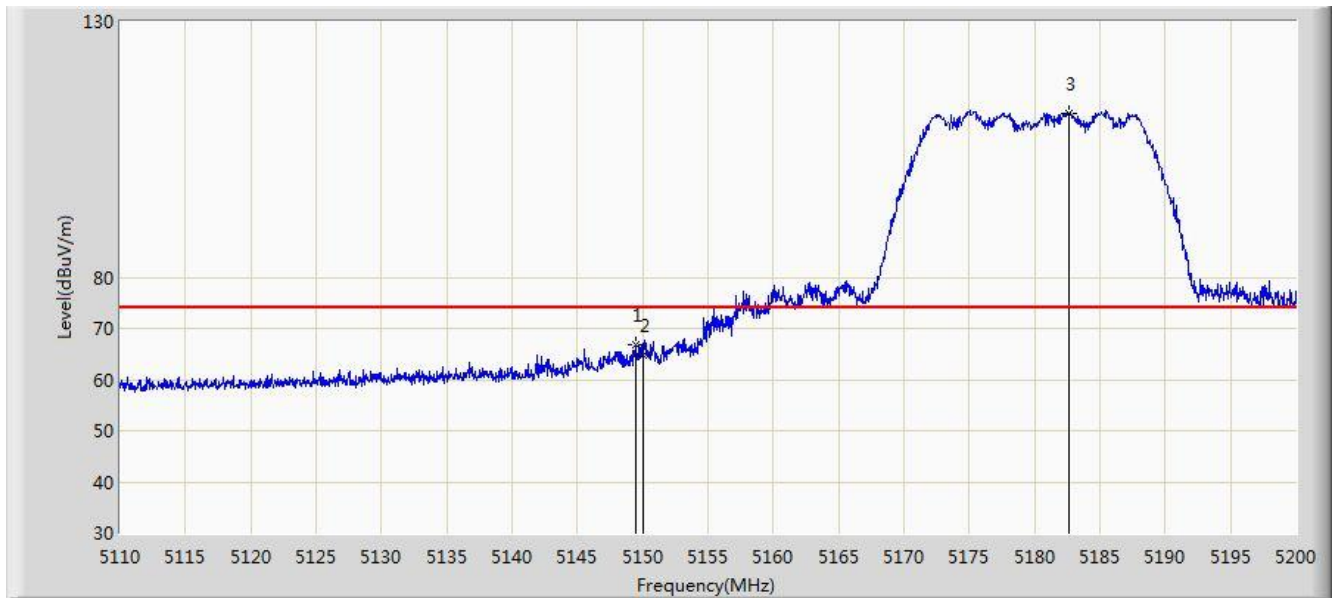


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.465        | 66.680                 | 60.119               | -7.320          | 74.000         | 6.561       | PK   |
| 2  |      |      | 5150.000        | 64.703                 | 58.141               | -9.297          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5182.630        | 112.156                | 105.731              | N/A             | N/A            | 6.424       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:45 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz, Ant 0 + 1 |                          |

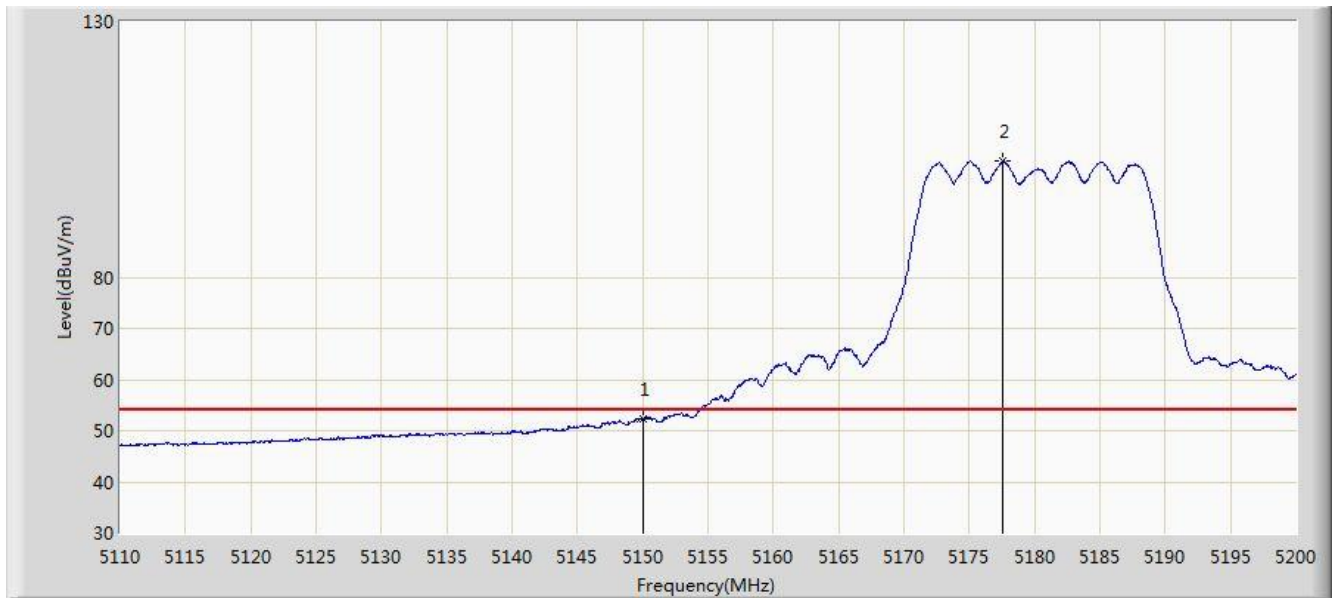


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.276                 | 45.714               | -1.724          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5177.590        | 102.852                | 96.389               | N/A             | N/A            | 6.463       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:46 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz, Ant 0 + 1 |                          |

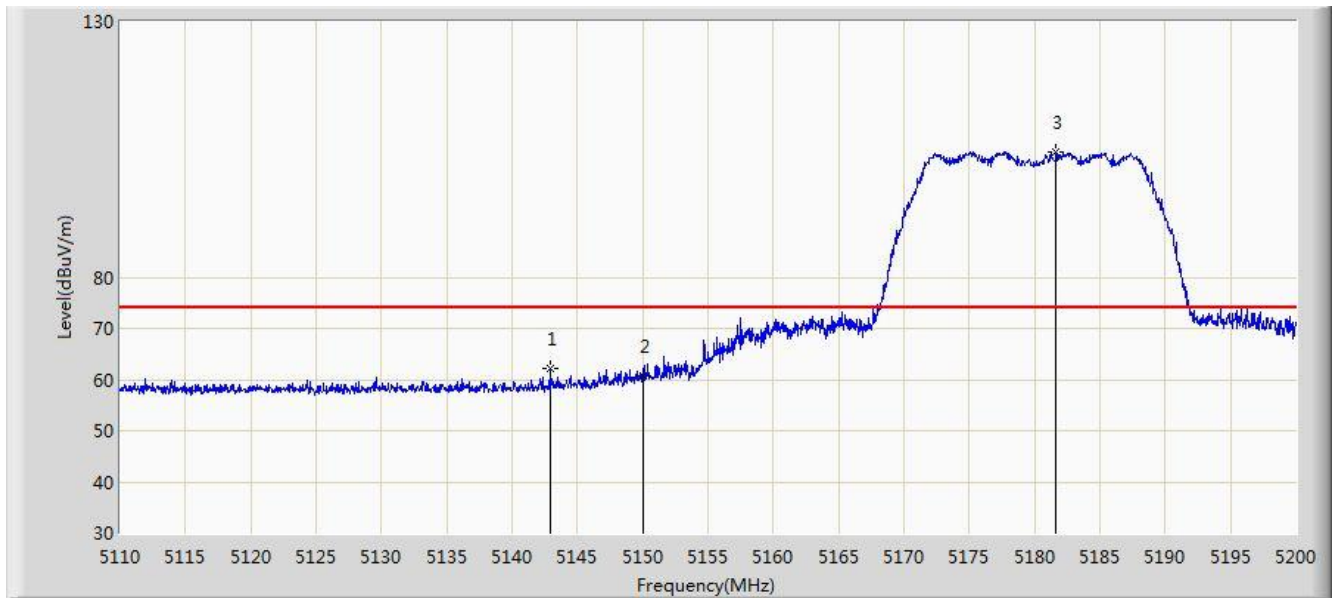


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5142.895        | 62.029                 | 55.441               | -11.971         | 74.000         | 6.588       | PK   |
| 2  |      |      | 5150.000        | 60.842                 | 54.280               | -13.158         | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5181.640        | 104.468                | 98.037               | N/A             | N/A            | 6.431       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:47 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz, Ant 0 + 1 |                          |

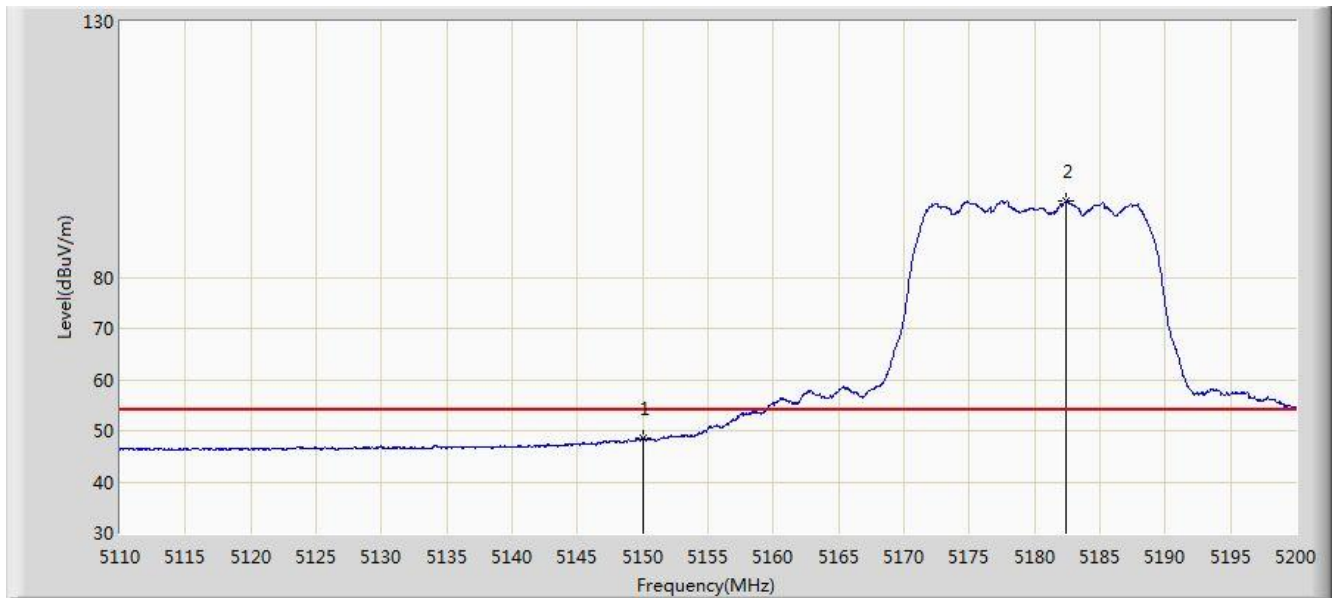


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 48.537                 | 41.975               | -5.463          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5182.360        | 94.800                 | 88.374               | N/A             | N/A            | 6.426       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:48 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz, Ant 0 + 1 |                          |

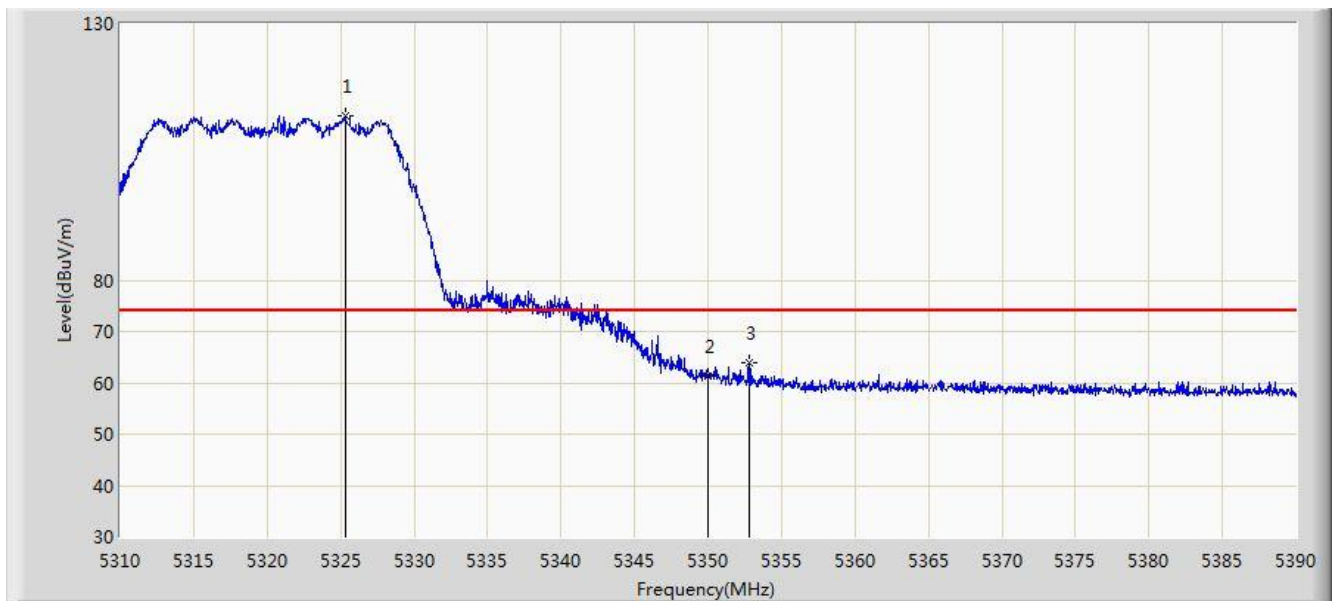


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5325.320        | 111.941                | 105.617              | N/A             | N/A            | 6.324       | PK   |
| 2  |      |      | 5350.000        | 61.447                 | 54.987               | -12.553         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5352.760        | 64.005                 | 57.532               | -9.995          | 74.000         | 6.473       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:50 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz, Ant 0 + 1 |                          |

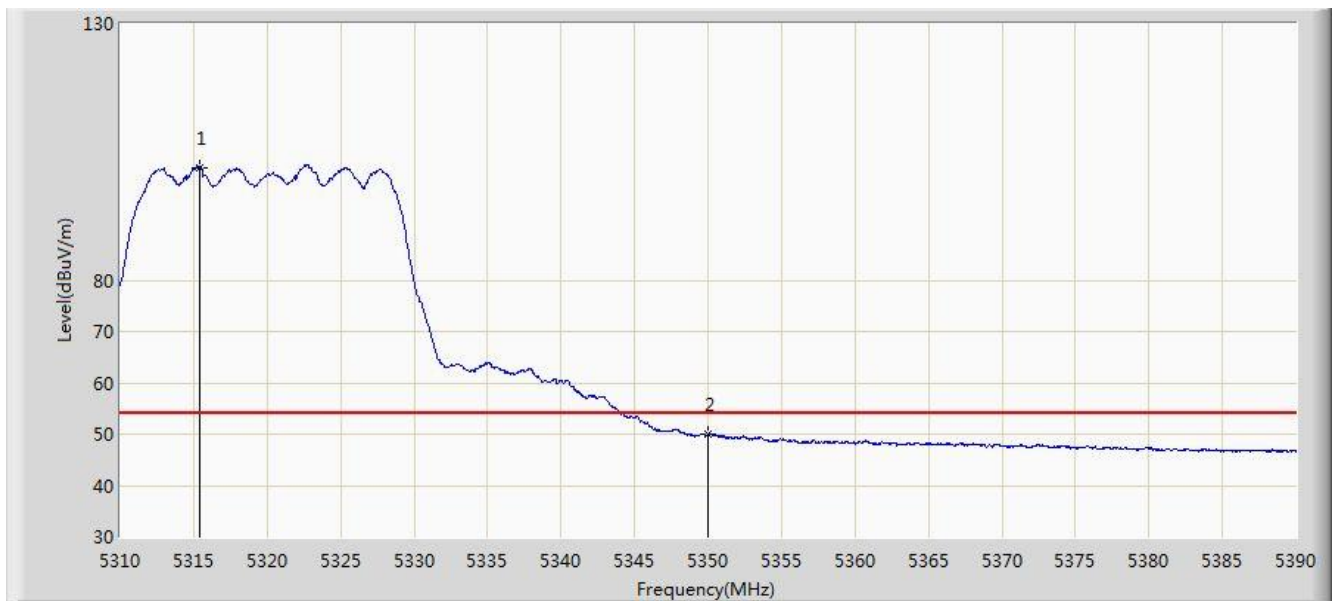


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5315.400        | 101.963                | 95.686               | N/A             | N/A            | 6.277       | AV   |
| 2  |      |      | 5350.000        | 50.030                 | 43.570               | -3.970          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:50 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz, Ant 0 + 1 |                          |

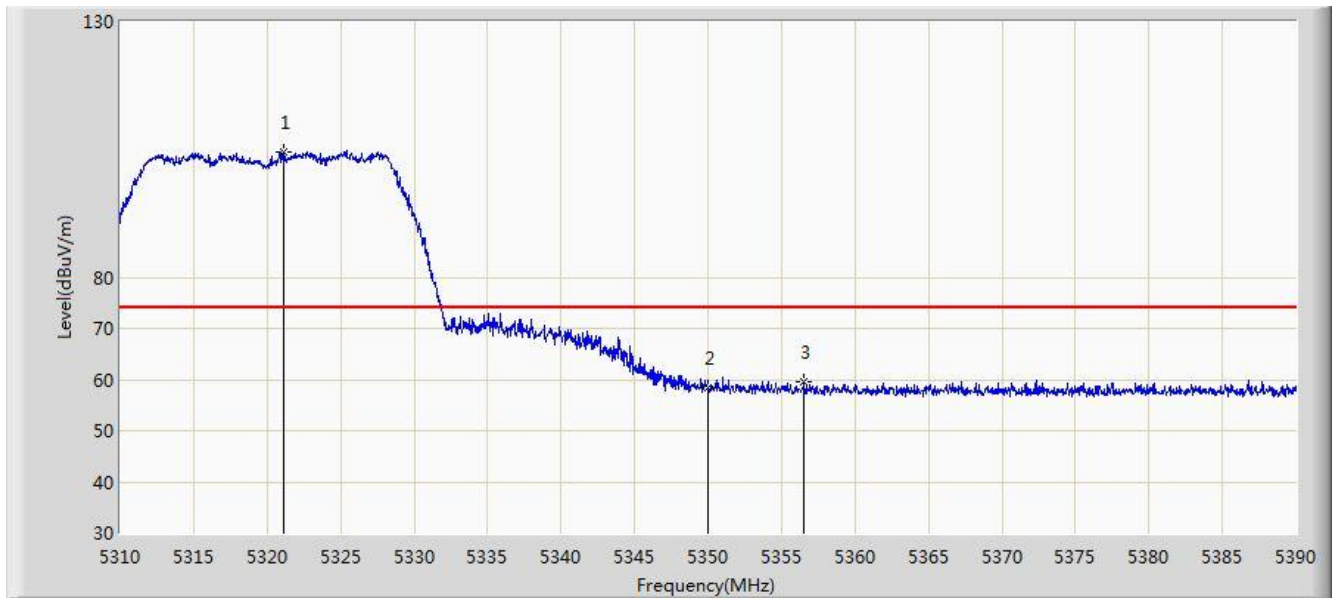


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5321.160        | 104.429                | 98.129               | N/A             | N/A            | 6.300       | PK   |
| 2  |      |      | 5350.000        | 58.420                 | 51.960               | -15.580         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5356.520        | 59.694                 | 53.208               | -14.306         | 74.000         | 6.487       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:51 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz, Ant 0 + 1 |                          |

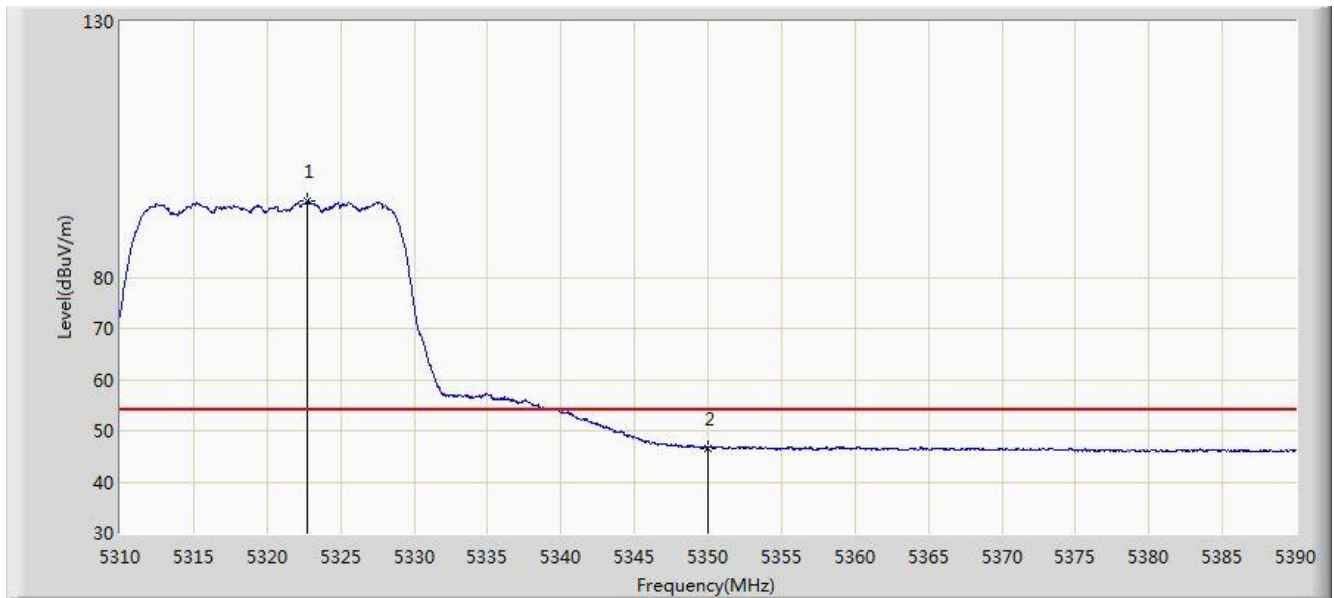


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5322.760        | 94.840                 | 88.531               | N/A             | N/A            | 6.310       | AV   |
| 2  |      |      | 5350.000        | 46.649                 | 40.189               | -7.351          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:53 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz, Ant 0 + 1 |                          |

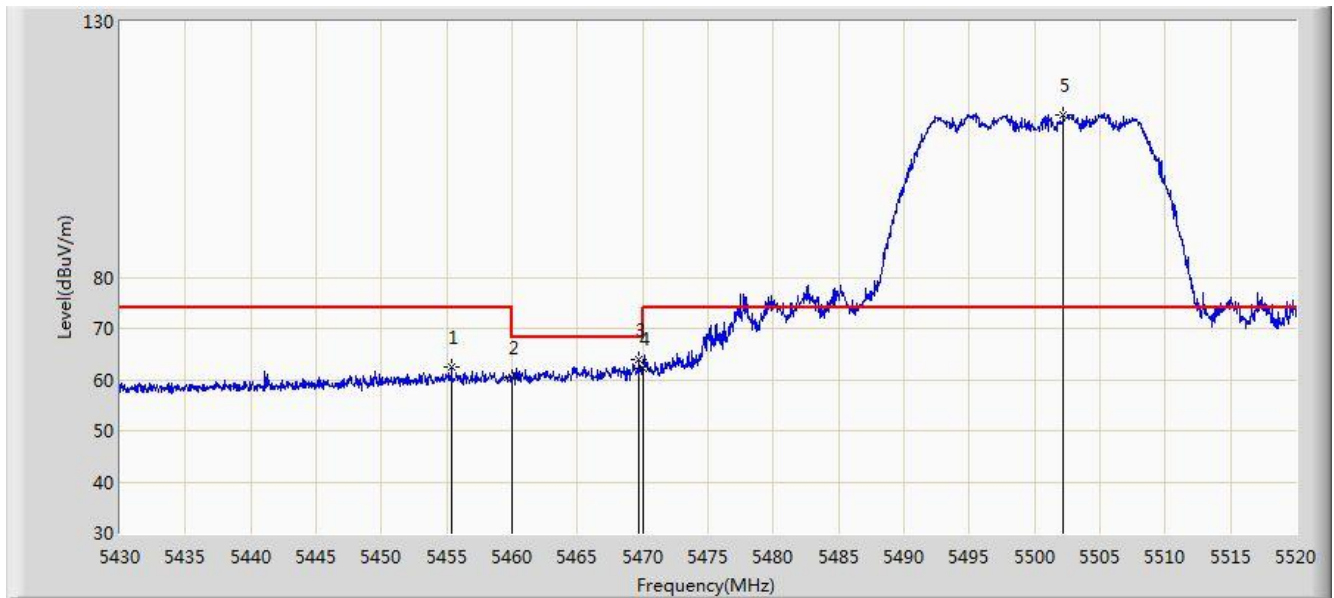


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5455.380        | 62.419                 | 55.637               | -11.581         | 74.000         | 6.781       | PK   |
| 2  |      |      | 5460.000        | 60.417                 | 53.615               | -13.583         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5469.735        | 64.026                 | 57.182               | -4.174          | 68.200         | 6.844       | PK   |
| 4  |      |      | 5470.000        | 62.284                 | 55.439               | -5.916          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5502.225        | 111.870                | 105.055              | N/A             | N/A            | 6.816       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:55 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz, Ant 0 + 1 |                          |

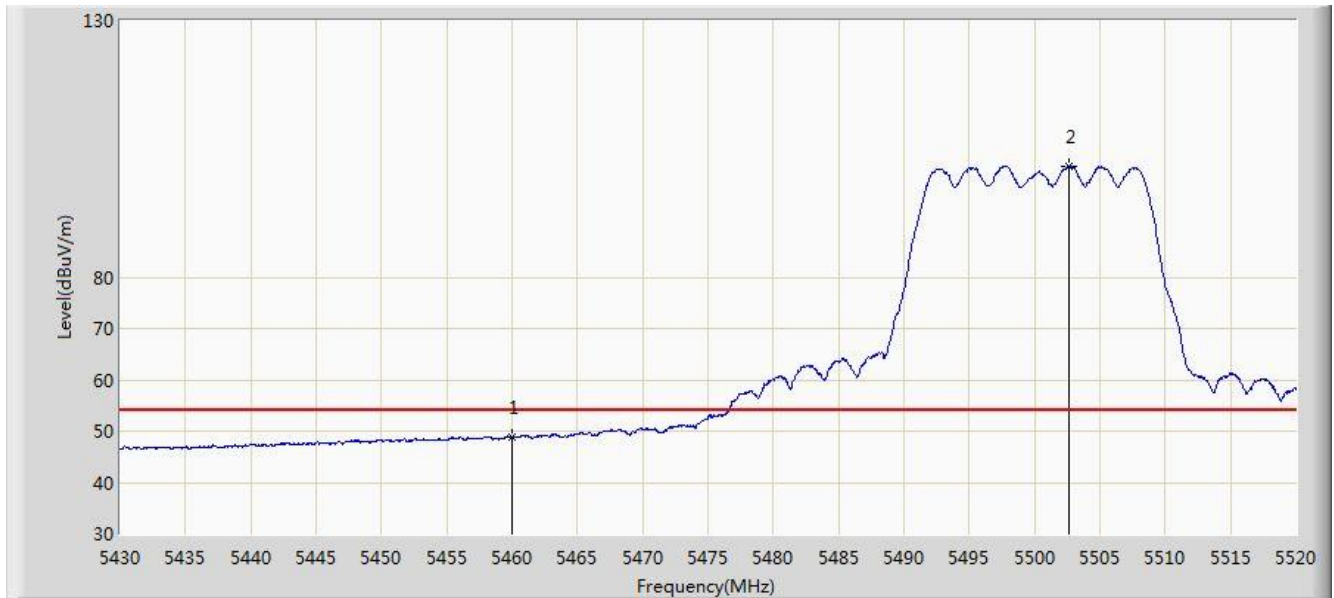


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 48.700                 | 41.898               | -5.300          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5502.585        | 101.702                | 94.887               | N/A             | N/A            | 6.814       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:55 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz, Ant 0 + 1 |                          |

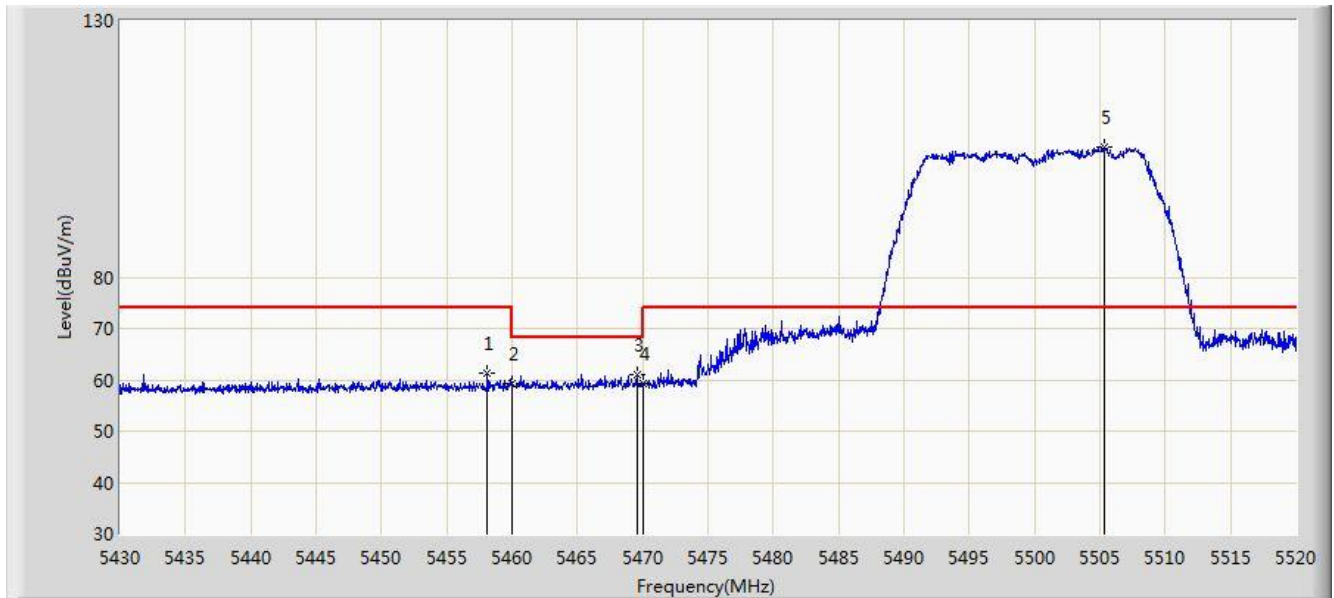


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5458.125        | 61.172                 | 54.378               | -12.828         | 74.000         | 6.794       | PK   |
| 2  |      |      | 5460.000        | 59.352                 | 52.550               | -14.648         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5469.555        | 60.991                 | 54.148               | -7.209          | 68.200         | 6.844       | PK   |
| 4  |      |      | 5470.000        | 59.189                 | 52.344               | -9.011          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5505.285        | 105.322                | 98.511               | N/A             | N/A            | 6.811       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:56 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz, Ant 0 + 1 |                          |

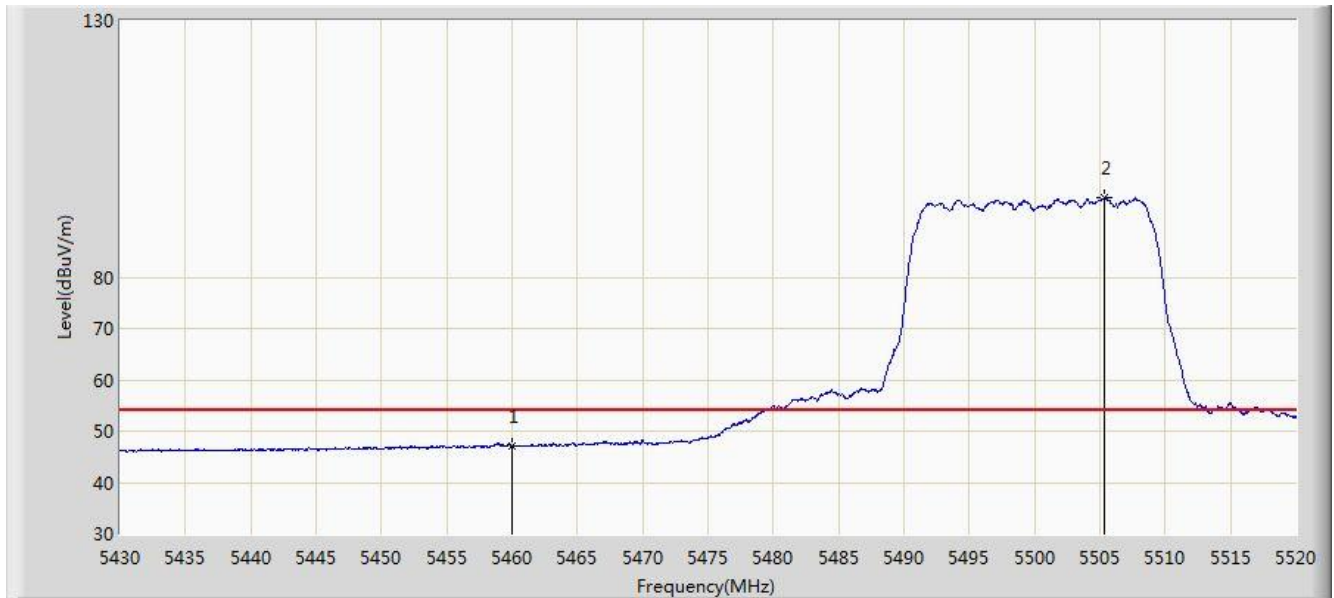


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.101                 | 40.299               | -6.899          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5505.375        | 95.461                 | 88.650               | N/A             | N/A            | 6.811       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:57 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz, Ant 0 + 1 |                          |

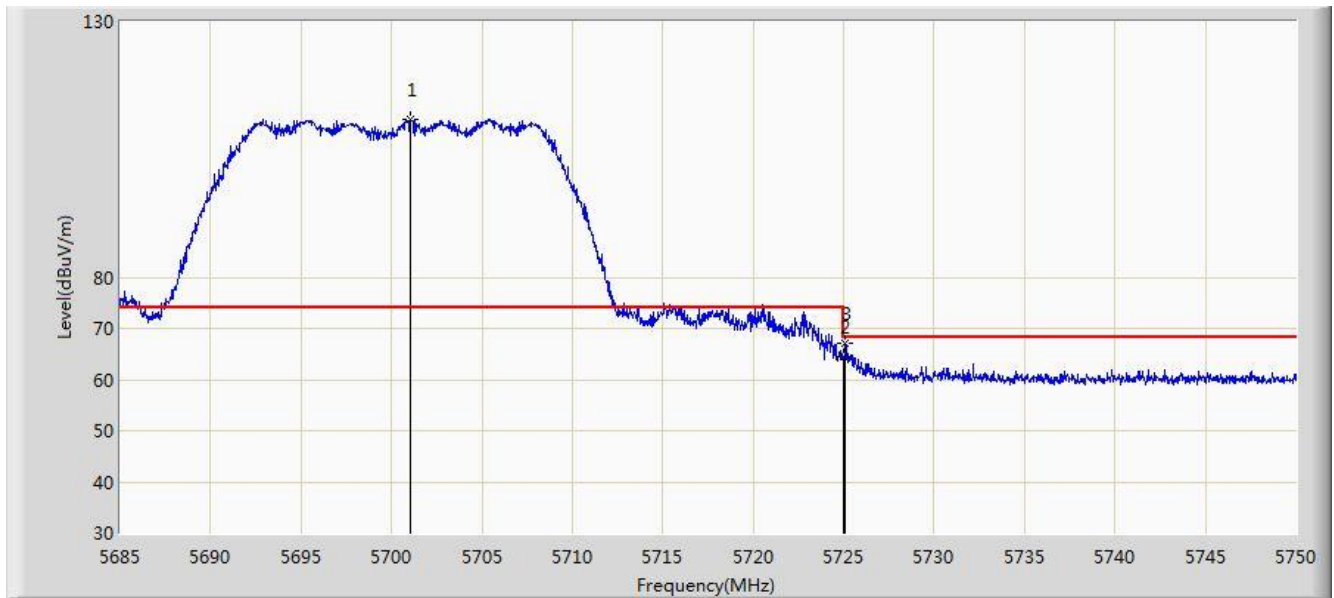


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5701.055        | 110.899                | 103.727              | N/A             | N/A            | 7.172       | PK   |
| 2  |      |      | 5725.000        | 64.369                 | 57.041               | -3.831          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5725.105        | 67.151                 | 59.822               | -1.049          | 68.200         | 7.328       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/02/28 - 23:59 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz, Ant 0 + 1 |                          |

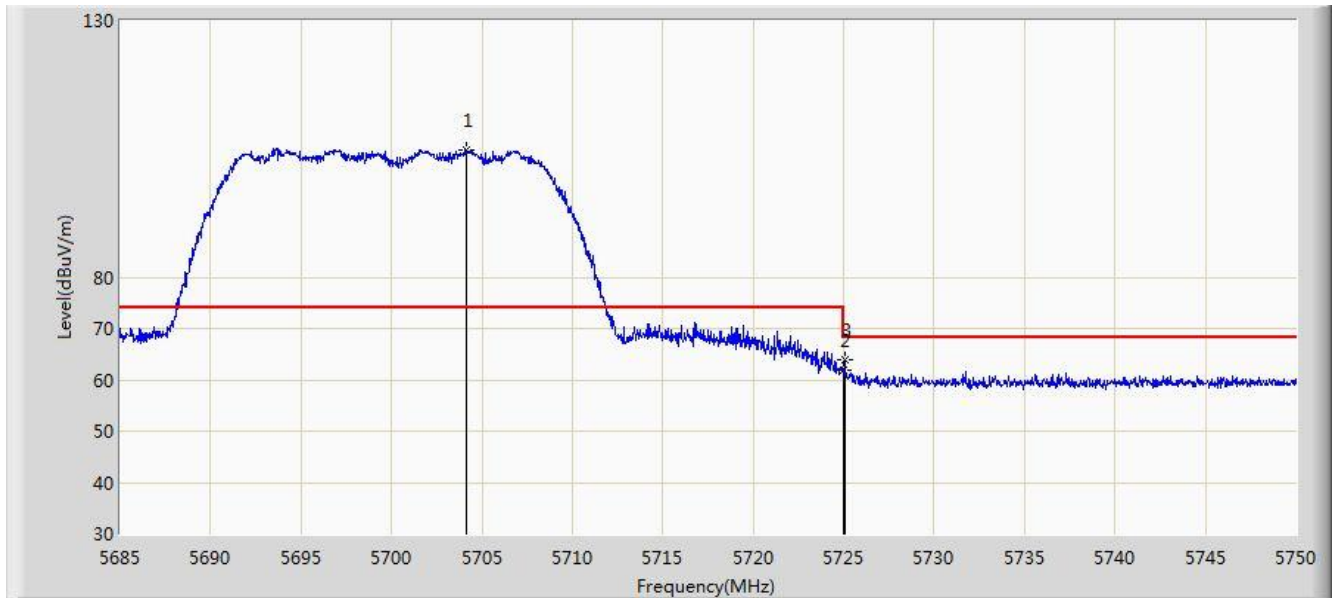


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5704.143        | 104.884                | 97.688               | N/A             | N/A            | 7.196       | PK   |
| 2  |      |      | 5725.000        | 61.959                 | 54.631               | -6.241          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5725.072        | 63.839                 | 56.511               | -4.361          | 68.200         | 7.328       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:00 |
| Limit: FCC_Part15.407_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz, Ant 0 + 1 |                          |

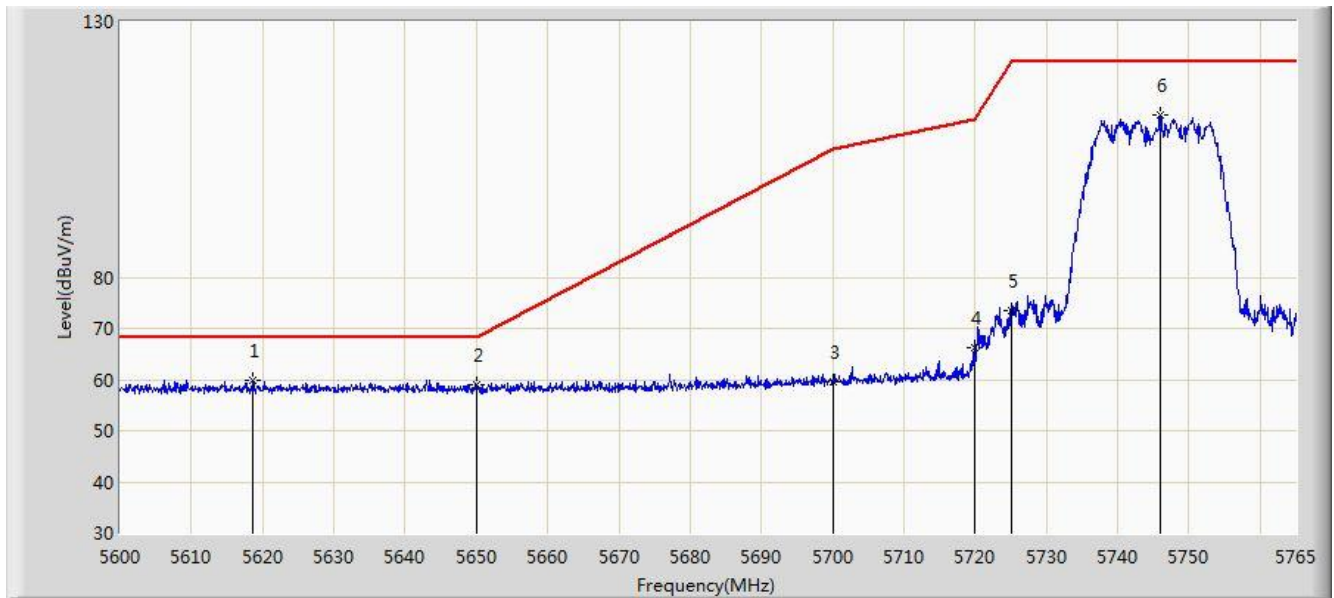


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5618.562        | 59.921                 | 52.918               | -8.279          | 68.200         | 7.003       | PK   |
| 2  |      |      | 5650.000        | 58.945                 | 51.940               | -9.255          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 59.646                 | 52.481               | -45.554         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 66.147                 | 58.848               | -44.653         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 73.476                 | 66.148               | -48.724         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5745.942        | 111.835                | 104.430              | N/A             | N/A            | 7.405       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:02 |
| Limit: FCC_Part15.407_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz, Ant 0 + 1 |                          |

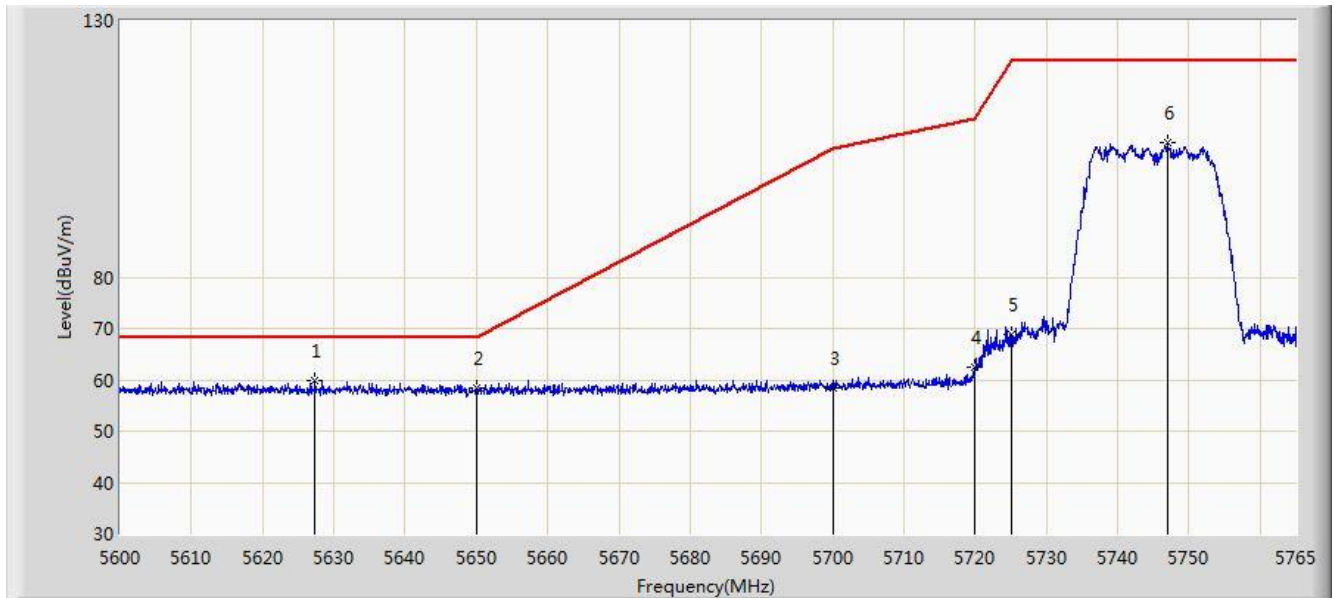


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5627.390        | 59.745                 | 52.736               | -8.455          | 68.200         | 7.009       | PK   |
| 2  |      |      | 5650.000        | 58.414                 | 51.409               | -9.786          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 58.471                 | 51.306               | -46.729         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 62.510                 | 55.211               | -48.290         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 68.888                 | 61.560               | -53.312         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5746.933        | 106.162                | 98.756               | N/A             | N/A            | 7.407       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:04 |
| Limit: FCC_Part15.407_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz, Ant 0 + 1 |                          |

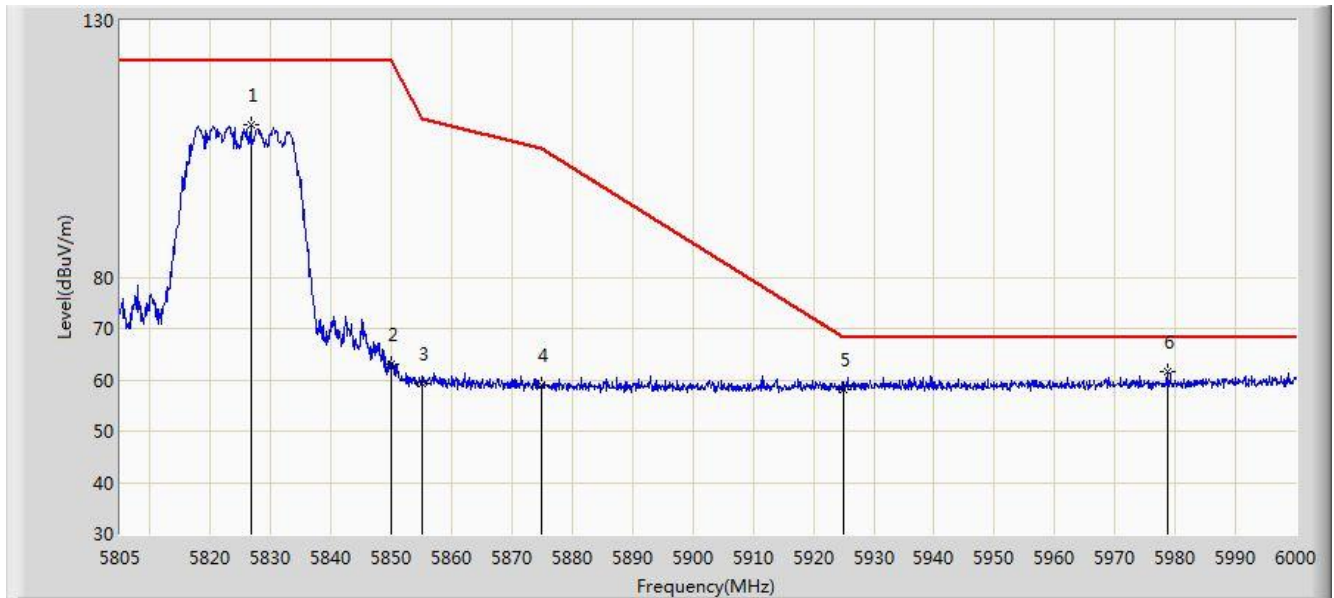


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5826.645        | 109.593                | 101.927              | N/A             | N/A            | 7.666       | PK   |
| 2  |      |      | 5850.000        | 63.169                 | 55.396               | -59.031         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 59.189                 | 51.413               | -51.611         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.097                 | 51.279               | -46.103         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 57.979                 | 50.160               | -10.221         | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5978.647        | 61.542                 | 53.656               | -6.658          | 68.200         | 7.885       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:05 |
| Limit: FCC_Part15.407_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz, Ant 0 + 1 |                          |

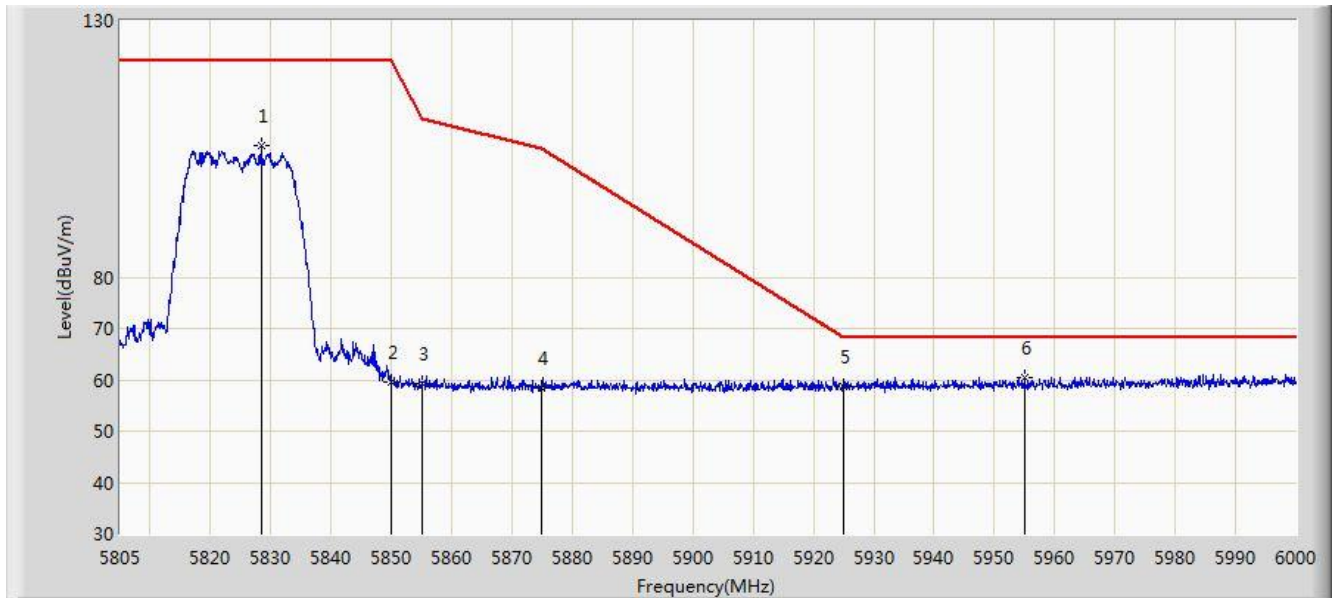


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5828.400        | 105.732                | 98.058               | N/A             | N/A            | 7.674       | PK   |
| 2  |      |      | 5850.000        | 59.560                 | 51.787               | -62.640         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 59.379                 | 51.603               | -51.421         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 58.426                 | 50.608               | -46.774         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 58.772                 | 50.953               | -9.428          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5954.955        | 60.448                 | 52.599               | -7.752          | 68.200         | 7.849       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:12 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz, Ant 0 + 1 |                          |

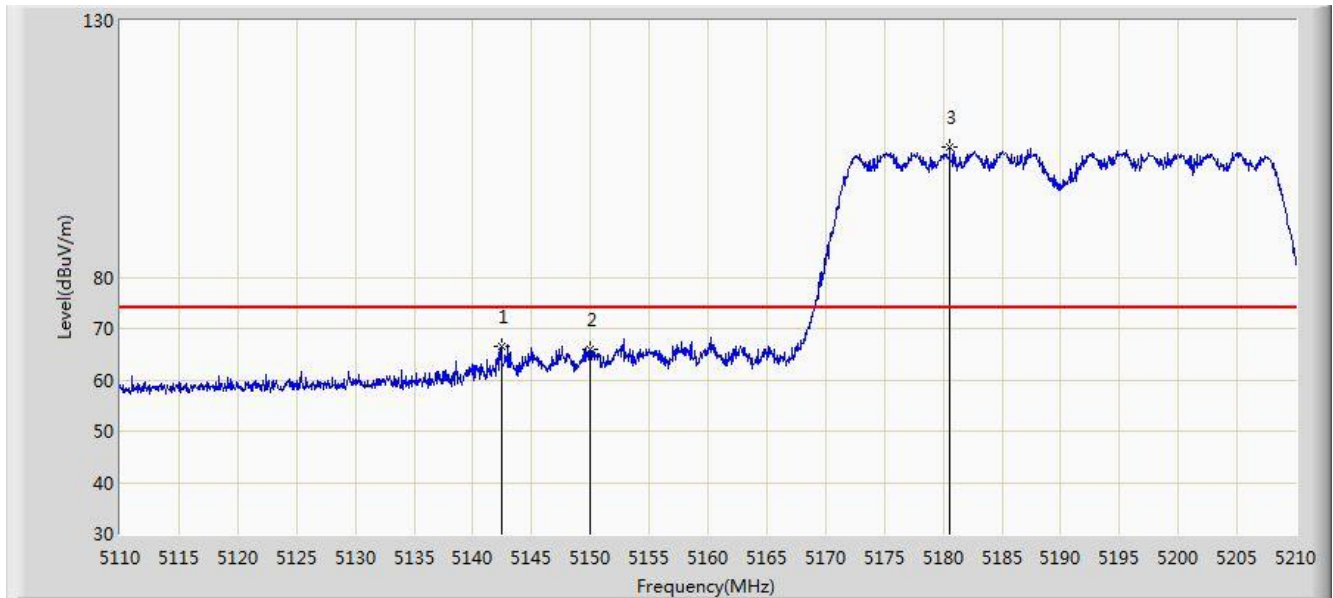


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5142.400        | 66.505                 | 59.914               | -7.495          | 74.000         | 6.592       | PK   |
| 2  |      |      | 5150.000        | 66.048                 | 59.486               | -7.952          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5180.550        | 105.343                | 98.903               | N/A             | N/A            | 6.440       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:11 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz, Ant 0 + 1 |                          |

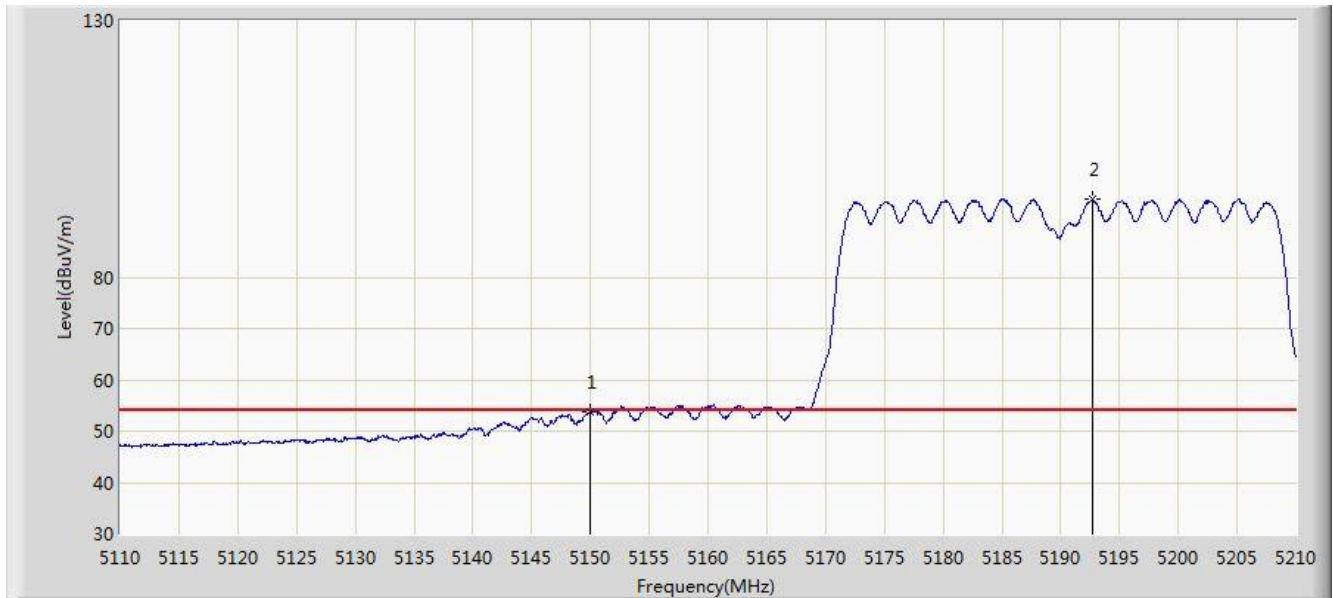


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.675                 | 47.113               | -0.325          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5192.650        | 95.073                 | 88.707               | N/A             | N/A            | 6.366       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:12 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz, Ant 0 + 1 |                          |

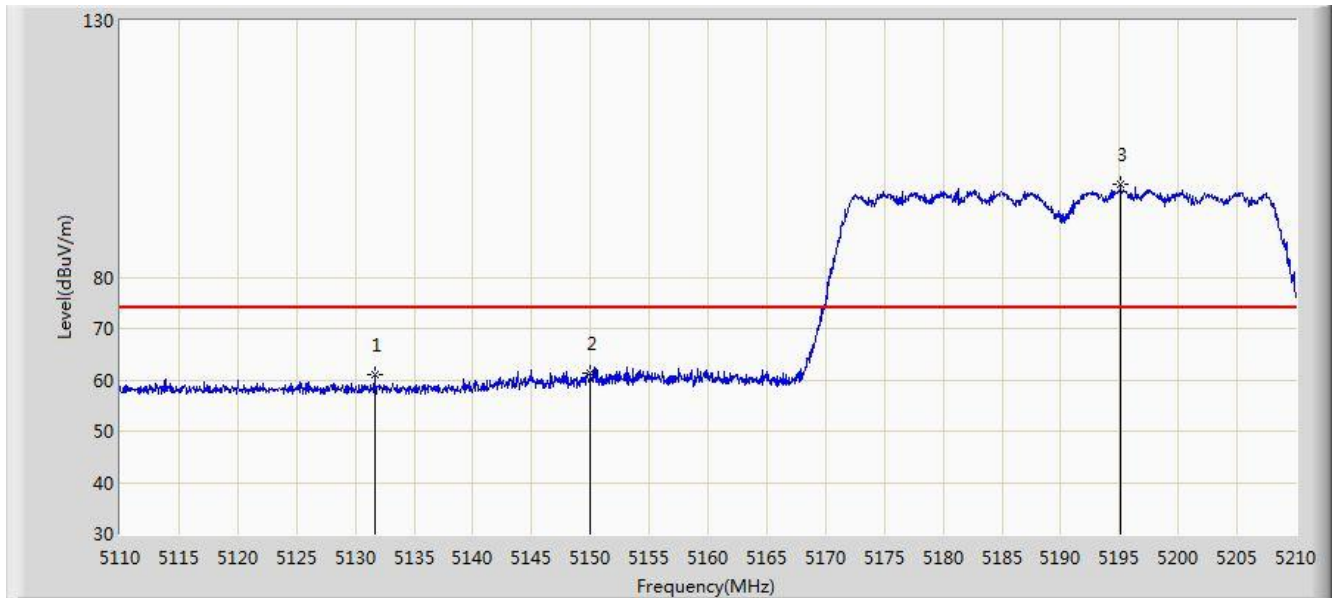


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5131.650        | 60.926                 | 54.276               | -13.074         | 74.000         | 6.650       | PK   |
| 2  |      |      | 5150.000        | 61.247                 | 54.685               | -12.753         | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5195.100        | 97.979                 | 91.626               | N/A             | N/A            | 6.352       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:13 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz, Ant 0 + 1 |                          |

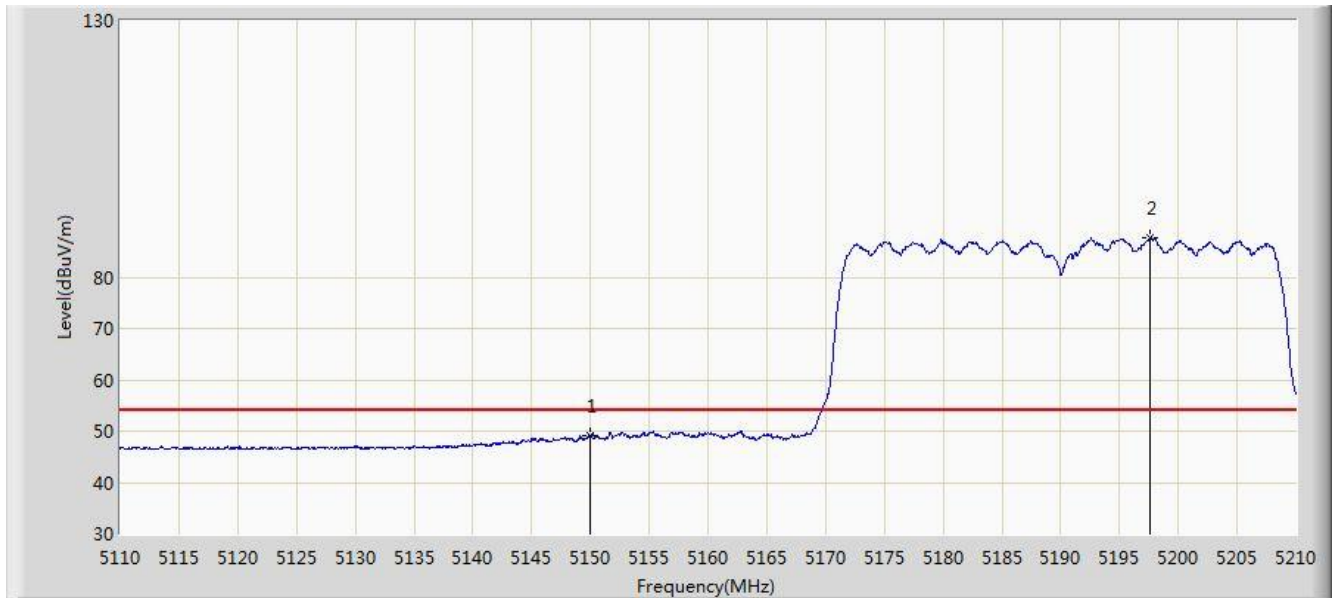


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 49.126                 | 42.564               | -4.874          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5197.600        | 87.616                 | 81.277               | N/A             | N/A            | 6.338       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:18 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz, Ant 0 + 1 |                          |

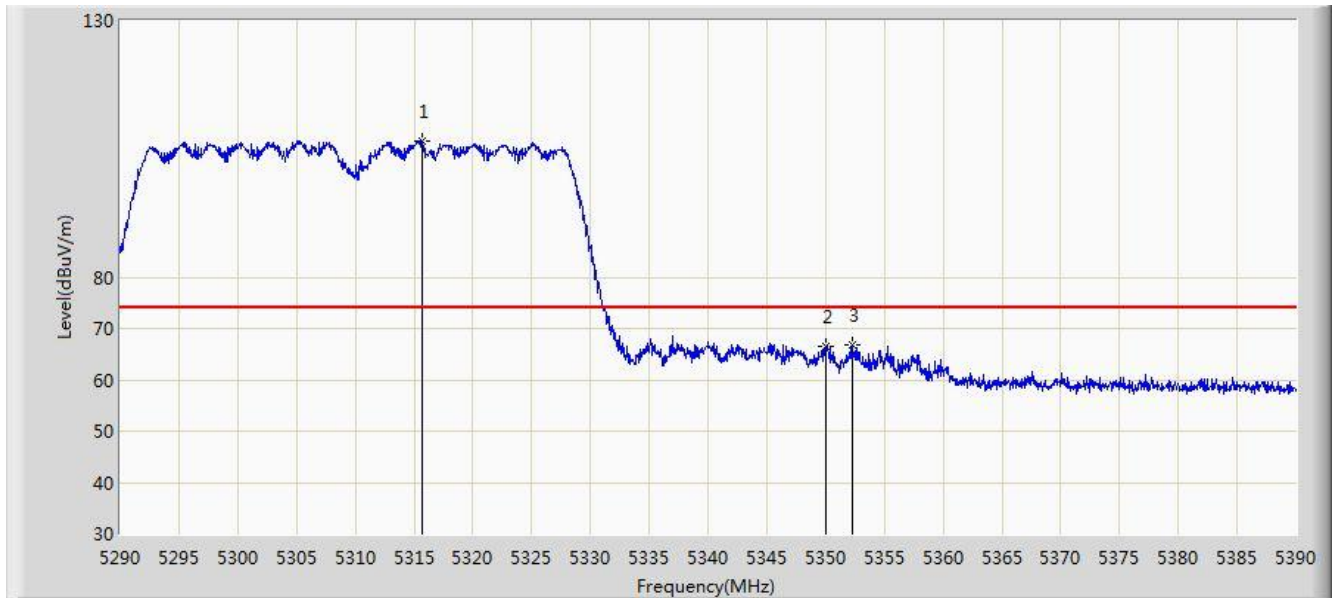


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5315.650        | 106.643                | 100.365              | N/A             | N/A            | 6.278       | PK   |
| 2  |      |      | 5350.000        | 66.485                 | 60.025               | -7.515          | 74.000         | 6.460       | PK   |
| 3  |      |      | 5352.250        | 66.872                 | 60.401               | -7.128          | 74.000         | 6.471       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:17 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz, Ant 0 + 1 |                          |

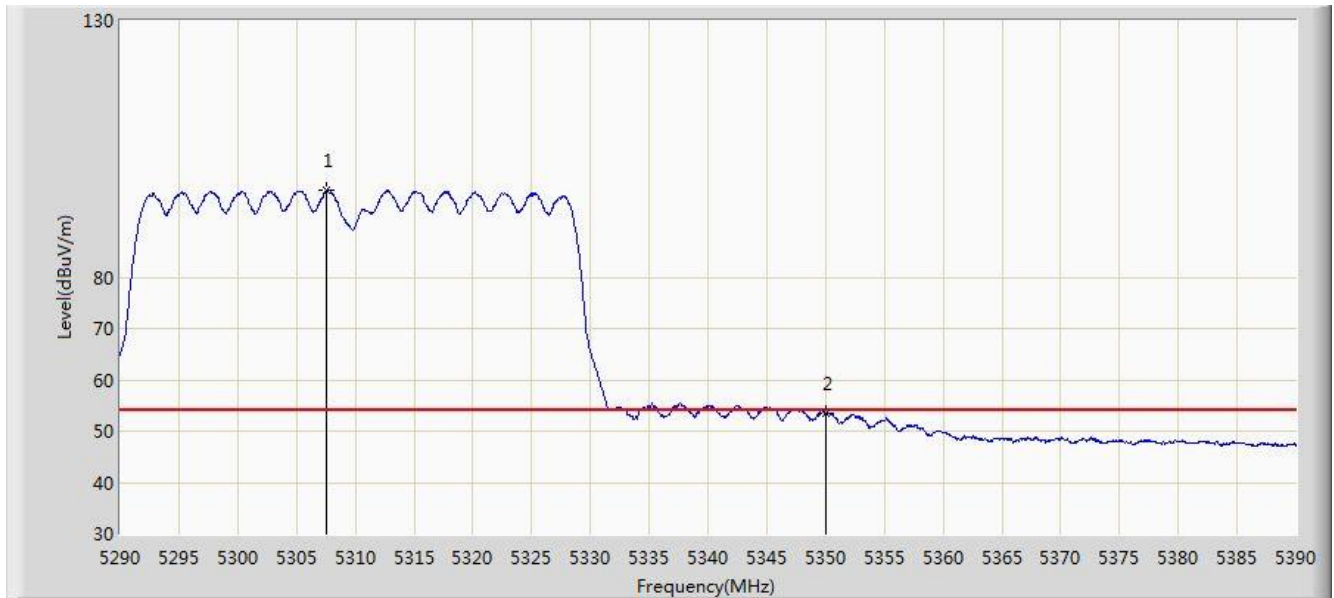


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5307.550        | 96.974                 | 90.708               | N/A             | N/A            | 6.267       | AV   |
| 2  |      |      | 5350.000        | 53.610                 | 47.150               | -0.390          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:19 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz, Ant 0 + 1 |                          |

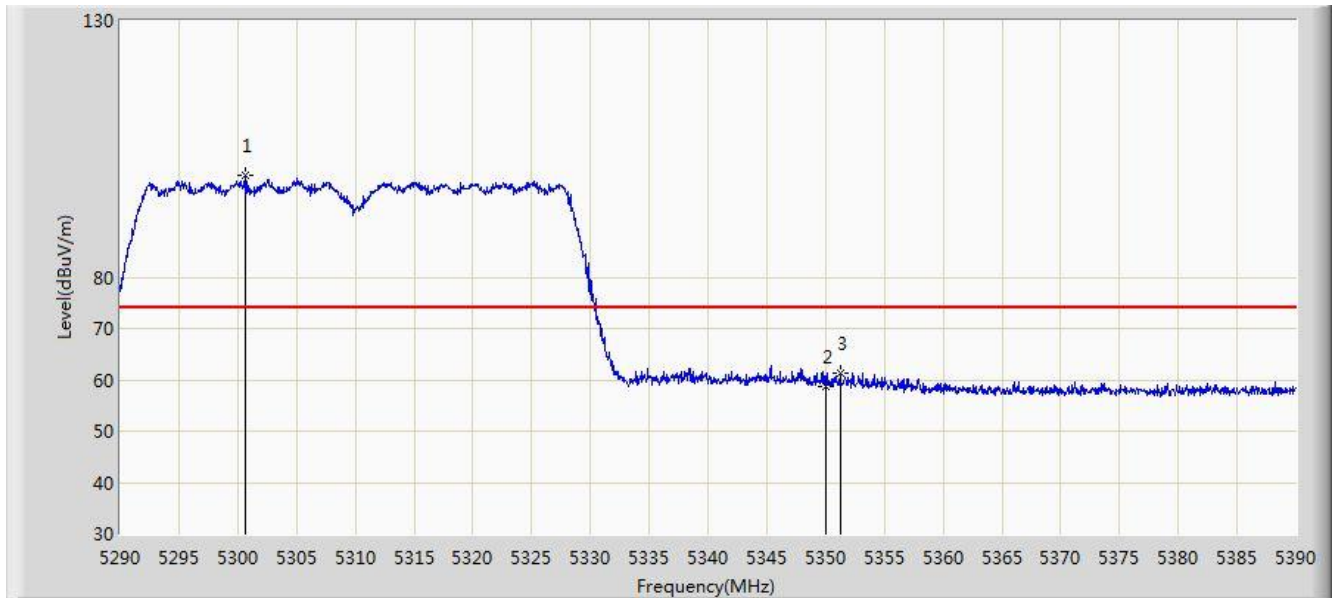


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5300.600        | 99.760                 | 93.502               | N/A             | N/A            | 6.258       | PK   |
| 2  |      |      | 5350.000        | 58.675                 | 52.215               | -15.325         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5351.250        | 61.405                 | 54.938               | -12.595         | 74.000         | 6.467       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:19 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz, Ant 0 + 1 |                          |

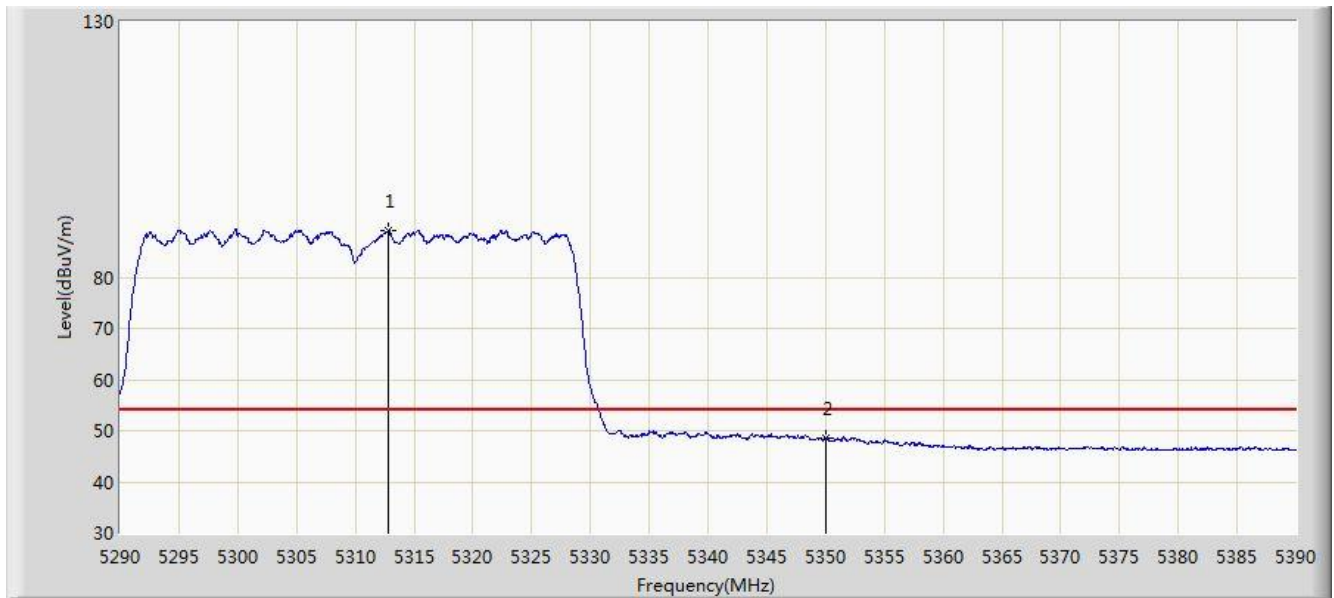


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5312.850        | 89.255                 | 82.982               | N/A             | N/A            | 6.272       | AV   |
| 2  |      |      | 5350.000        | 48.572                 | 42.112               | -5.428          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:24 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant 0 + 1 |                          |

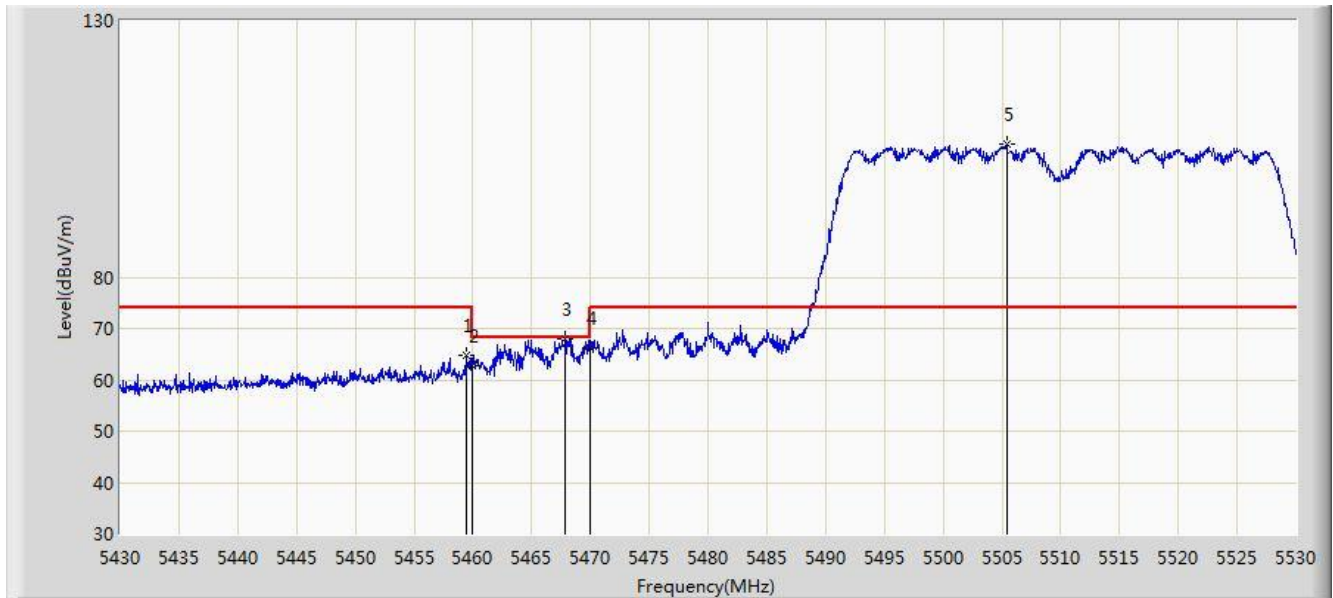


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5459.500        | 64.699                 | 57.899               | -9.301          | 74.000         | 6.799       | PK   |
| 2  |      |      | 5460.000        | 62.766                 | 55.964               | -11.234         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5467.850        | 68.000                 | 61.164               | -0.200          | 68.200         | 6.836       | PK   |
| 4  |      |      | 5470.000        | 66.269                 | 59.424               | -1.931          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5505.400        | 105.827                | 99.016               | N/A             | N/A            | 6.811       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:26 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant 0 + 1 |                          |

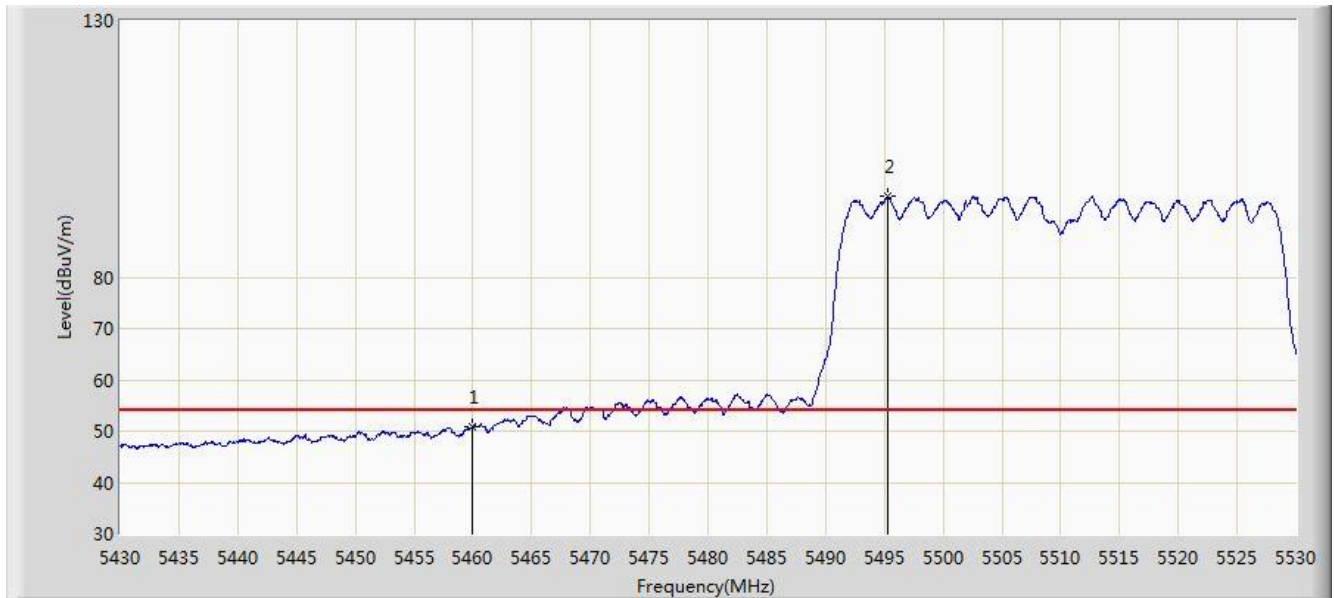


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 50.805                 | 44.003               | -3.195          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5495.350        | 95.736                 | 88.909               | N/A             | N/A            | 6.827       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:27 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant 0 + 1 |                          |

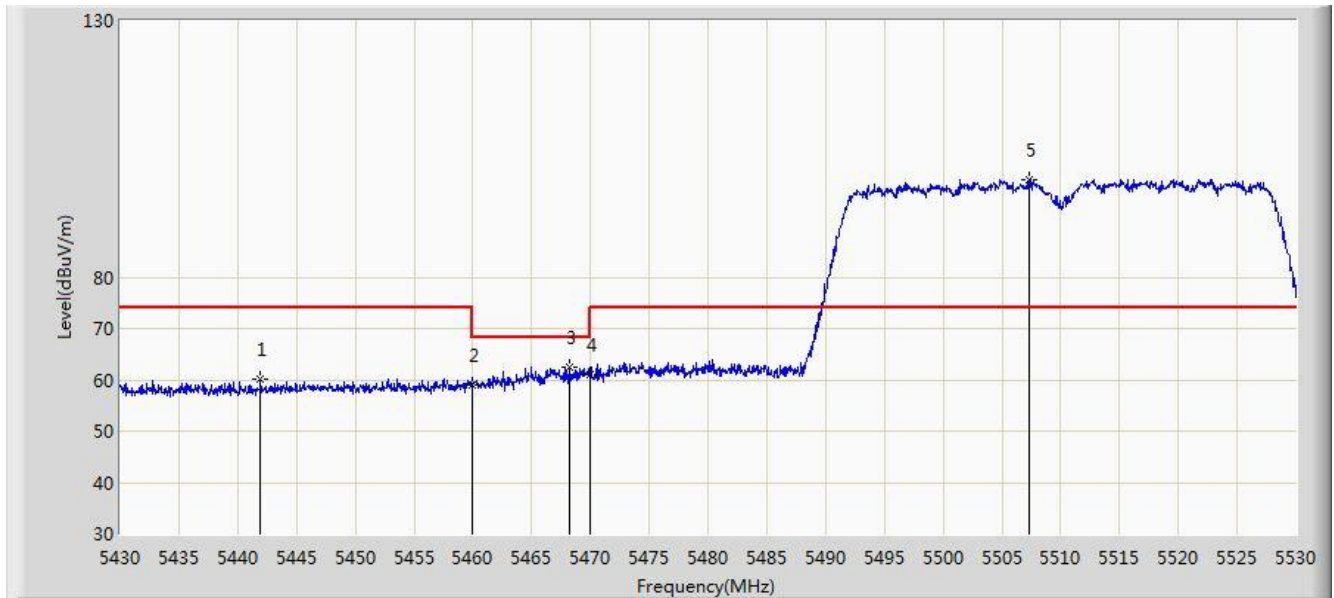


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5441.900        | 60.183                 | 53.500               | -13.817         | 74.000         | 6.683       | PK   |
| 2  |      |      | 5460.000        | 59.059                 | 52.257               | -14.941         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5468.200        | 62.487                 | 55.650               | -5.713          | 68.200         | 6.836       | PK   |
| 4  |      |      | 5470.000        | 61.011                 | 54.166               | -7.189          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5507.300        | 98.872                 | 92.061               | N/A             | N/A            | 6.811       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:28 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant 0 + 1 |                          |

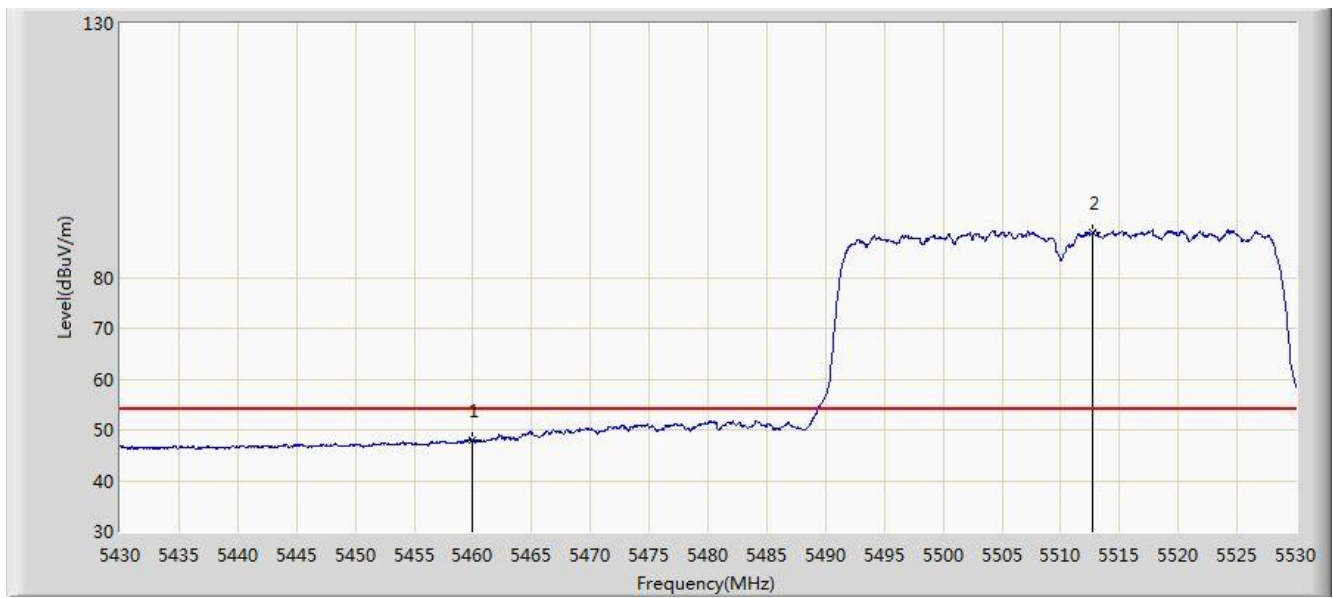


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.973                 | 41.171               | -6.027          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5512.750        | 88.932                 | 82.120               | N/A             | N/A            | 6.813       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:30 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant 0 + 1 |                          |

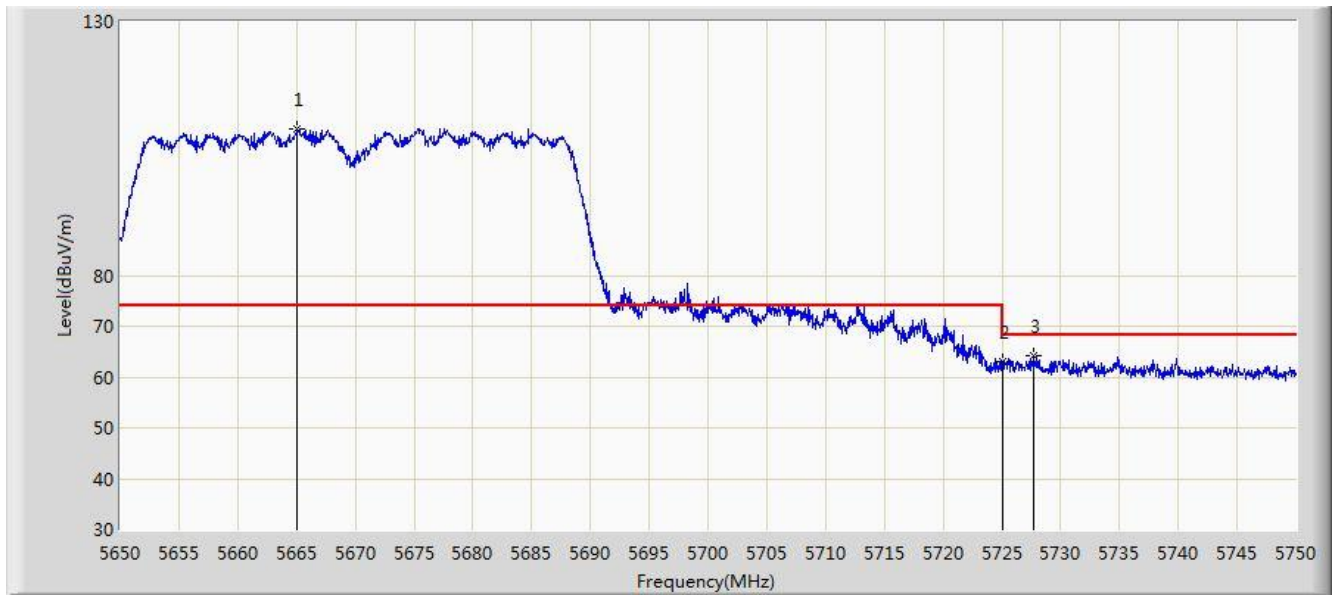


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5665.050        | 108.786                | 101.746              | N/A             | N/A            | 7.040       | PK   |
| 2  |      |      | 5725.000        | 62.946                 | 55.618               | -5.254          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5727.750        | 64.088                 | 56.747               | -4.112          | 68.200         | 7.340       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:31 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant 0 + 1 |                          |

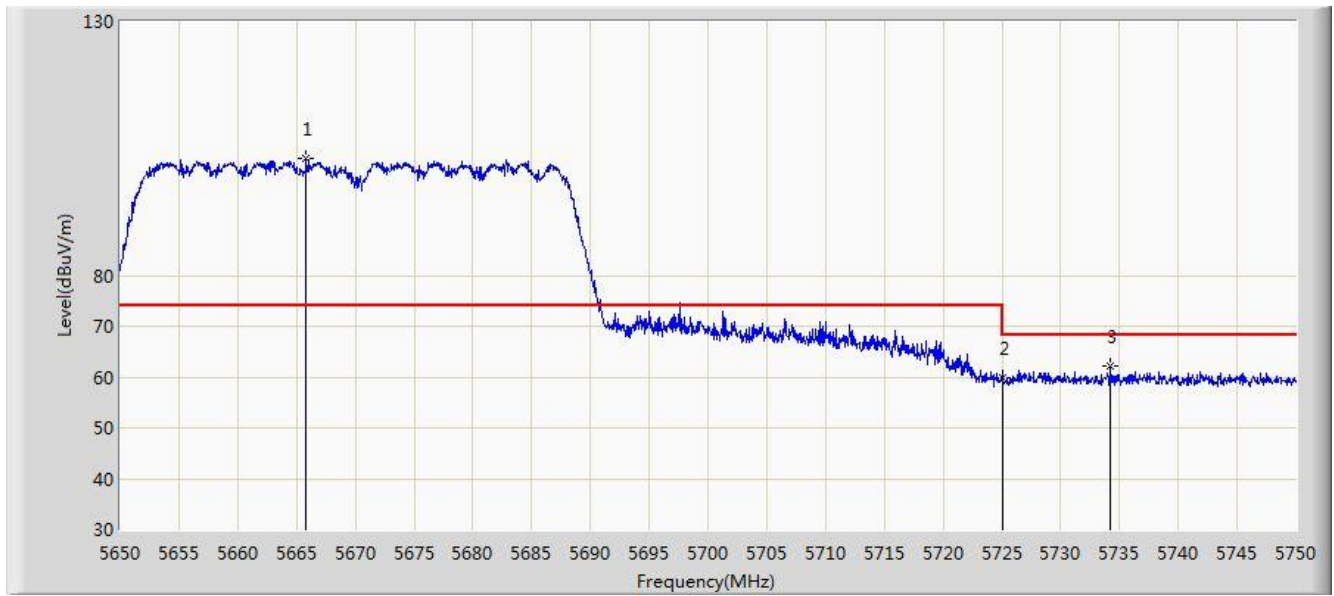


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5665.850        | 103.064                | 96.023               | N/A             | N/A            | 7.040       | PK   |
| 2  |      |      | 5725.000        | 59.931                 | 52.603               | -8.269          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5734.250        | 62.294                 | 54.926               | -5.906          | 68.200         | 7.368       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:32 |
| Limit: FCC_Part15.407_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz, Ant 0 + 1 |                          |

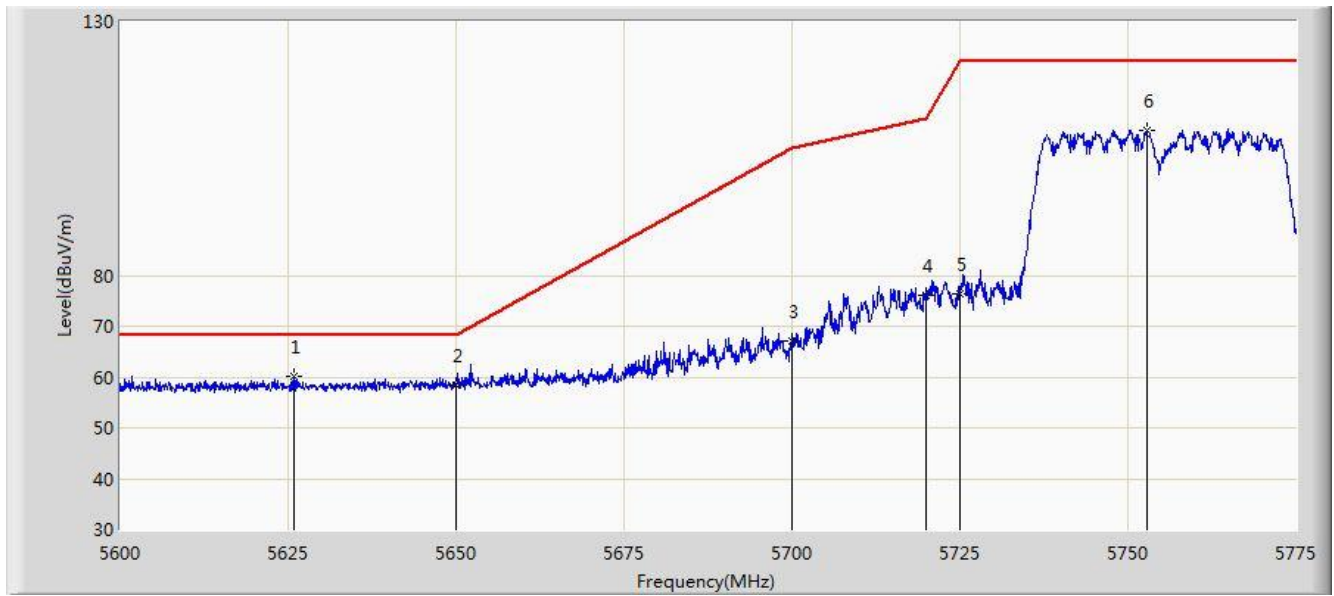


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5625.812        | 60.247                 | 53.235               | -7.953          | 68.200         | 7.012       | PK   |
| 2  |      |      | 5650.000        | 58.535                 | 51.530               | -9.665          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 67.007                 | 59.842               | -38.193         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 75.998                 | 68.699               | -34.802         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 76.461                 | 69.133               | -45.739         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5752.775        | 108.421                | 101.011              | N/A             | N/A            | 7.411       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:34 |
| Limit: FCC_Part15.407_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz, Ant 0 + 1 |                          |

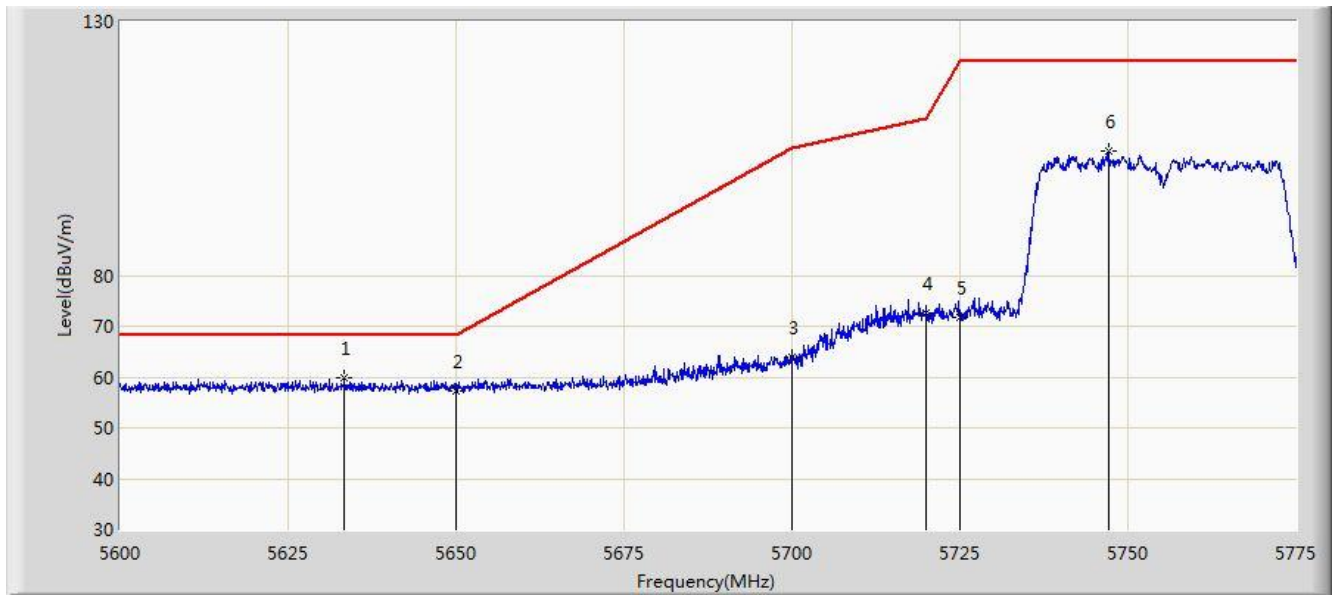


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5633.425        | 59.718                 | 52.720               | -8.482          | 68.200         | 6.998       | PK   |
| 2  |      |      | 5650.000        | 57.318                 | 50.313               | -10.882         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 64.053                 | 56.888               | -41.147         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 72.639                 | 65.340               | -38.161         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 71.731                 | 64.403               | -50.469         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5747.087        | 104.478                | 97.072               | N/A             | N/A            | 7.406       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:35 |
| Limit: FCC_Part15.407_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz, Ant 0 + 1 |                          |

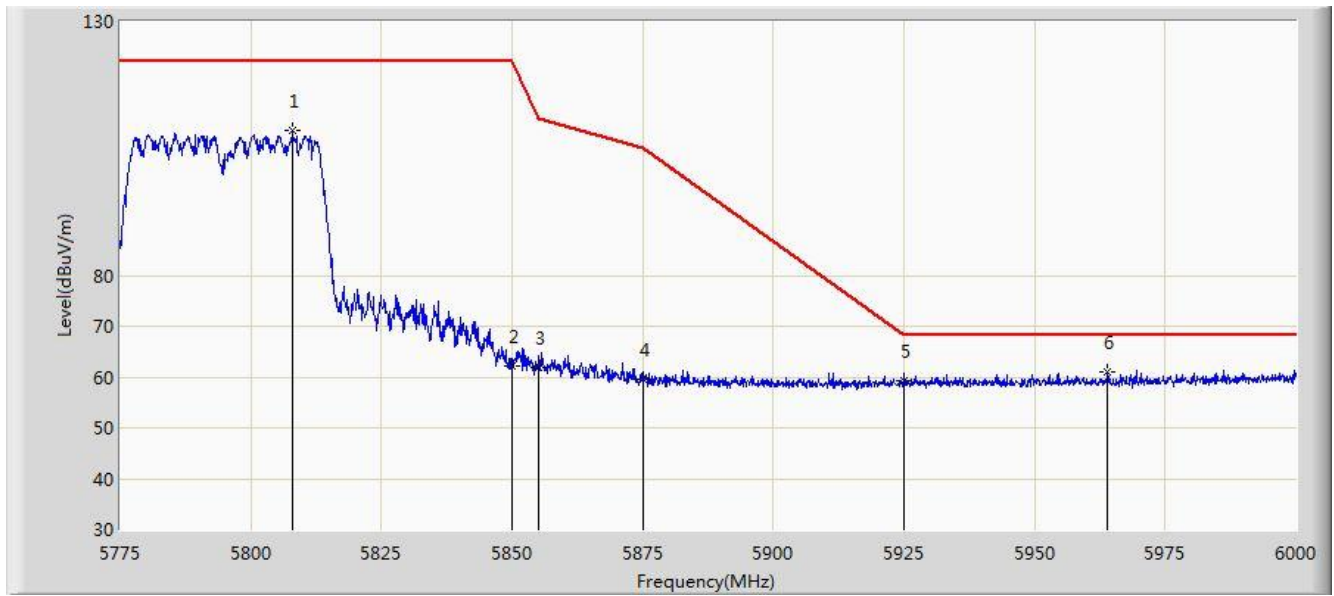


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5807.962        | 108.516                | 100.932              | N/A             | N/A            | 7.583       | PK   |
| 2  |      |      | 5850.000        | 62.211                 | 54.438               | -59.989         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 61.990                 | 54.214               | -48.810         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.481                 | 51.663               | -45.719         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.337                 | 51.518               | -8.863          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5964.000        | 61.154                 | 53.292               | -7.046          | 68.200         | 7.862       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: AC1                                                         | Time: 2019/03/01 - 00:37 |
| Limit: FCC_Part15.407_RE(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                          | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz, Ant 0 + 1 |                          |

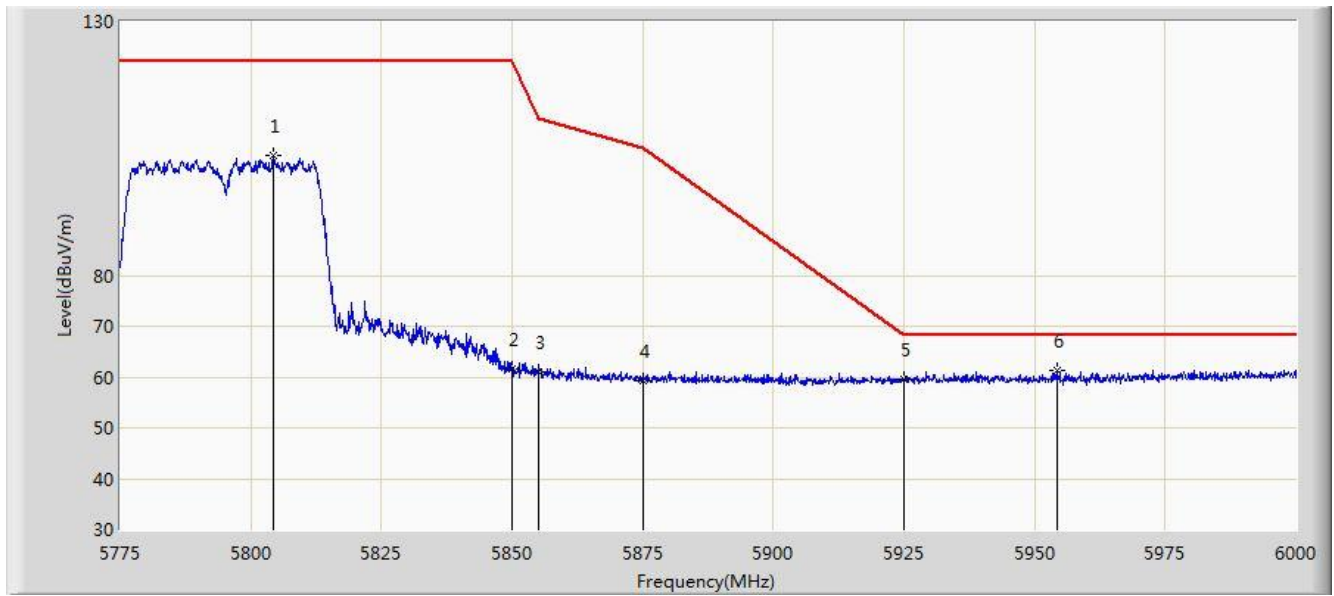


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5804.250        | 103.655                | 96.084               | N/A             | N/A            | 7.571       | PK   |
| 2  |      |      | 5850.000        | 61.571                 | 53.798               | -60.629         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 60.922                 | 53.146               | -49.878         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.343                 | 51.525               | -45.857         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.644                 | 51.825               | -8.556          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5954.437        | 61.346                 | 53.498               | -6.854          | 68.200         | 7.848       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 05:52 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz, Ant 0 + 1 |                          |

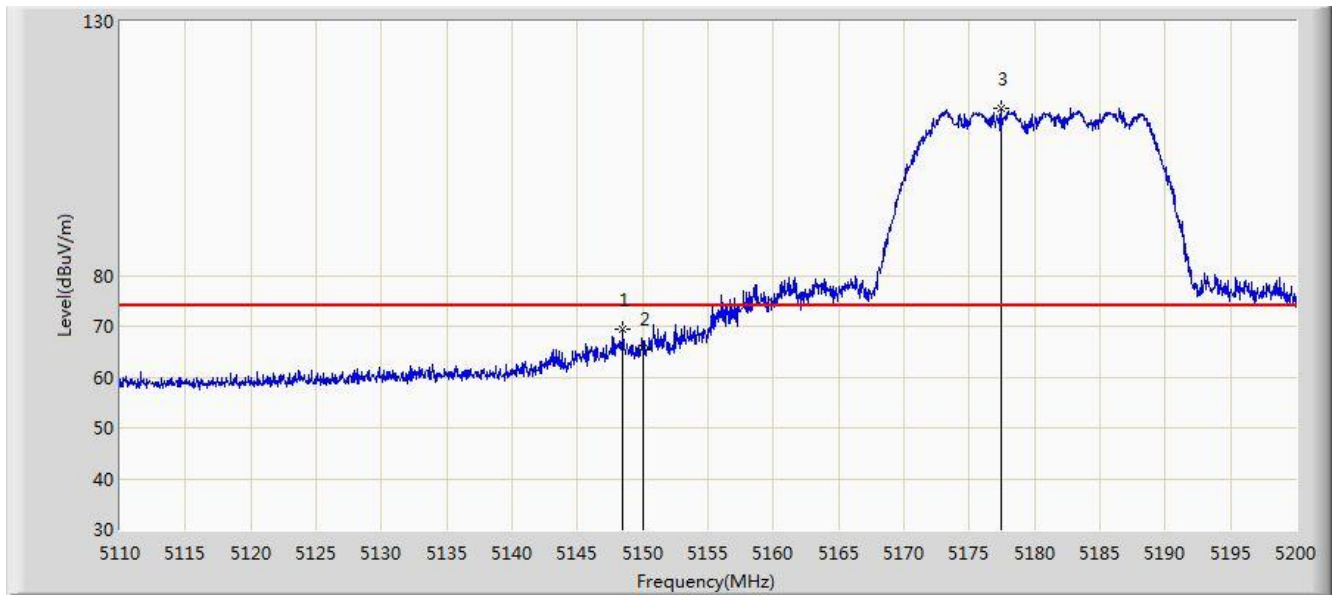


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.475        | 69.295                 | 62.736               | -4.705          | 74.000         | 6.560       | PK   |
| 2  |      |      | 5150.000        | 65.712                 | 59.150               | -8.288          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5177.410        | 112.943                | 106.478              | N/A             | N/A            | 6.464       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 05:57 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz, Ant 0 + 1 |                          |

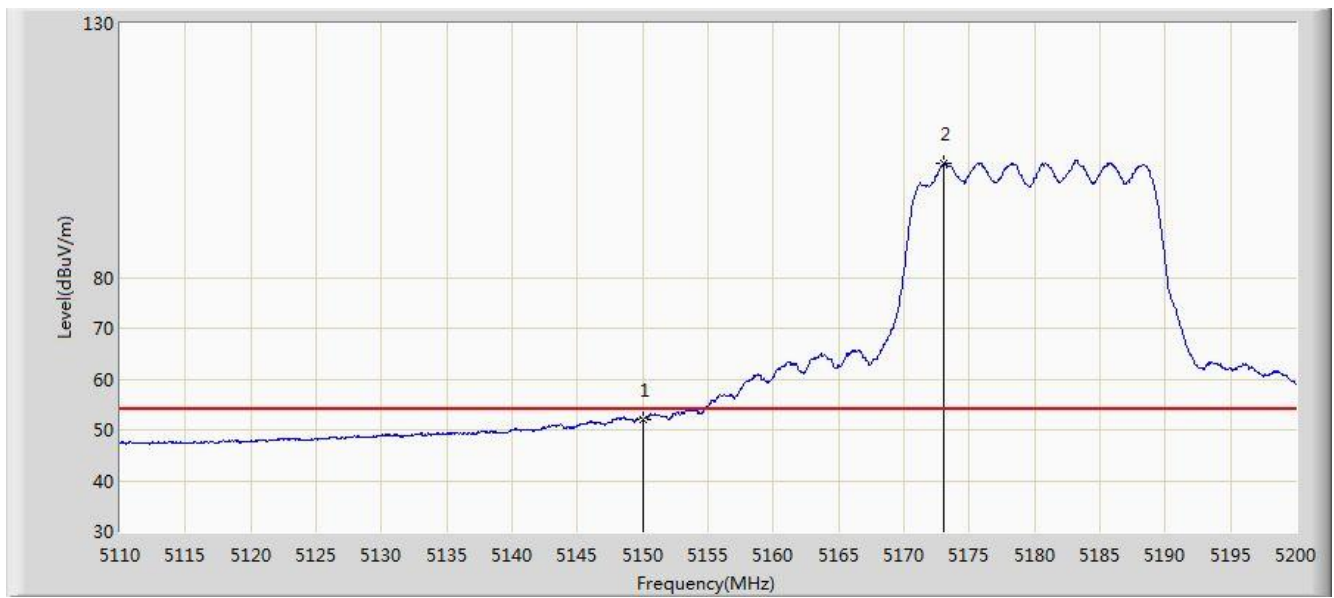


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.105                 | 45.543               | -1.895          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5173.045        | 102.516                | 96.016               | N/A             | N/A            | 6.499       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 05:57 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz, Ant 0 + 1 |                          |

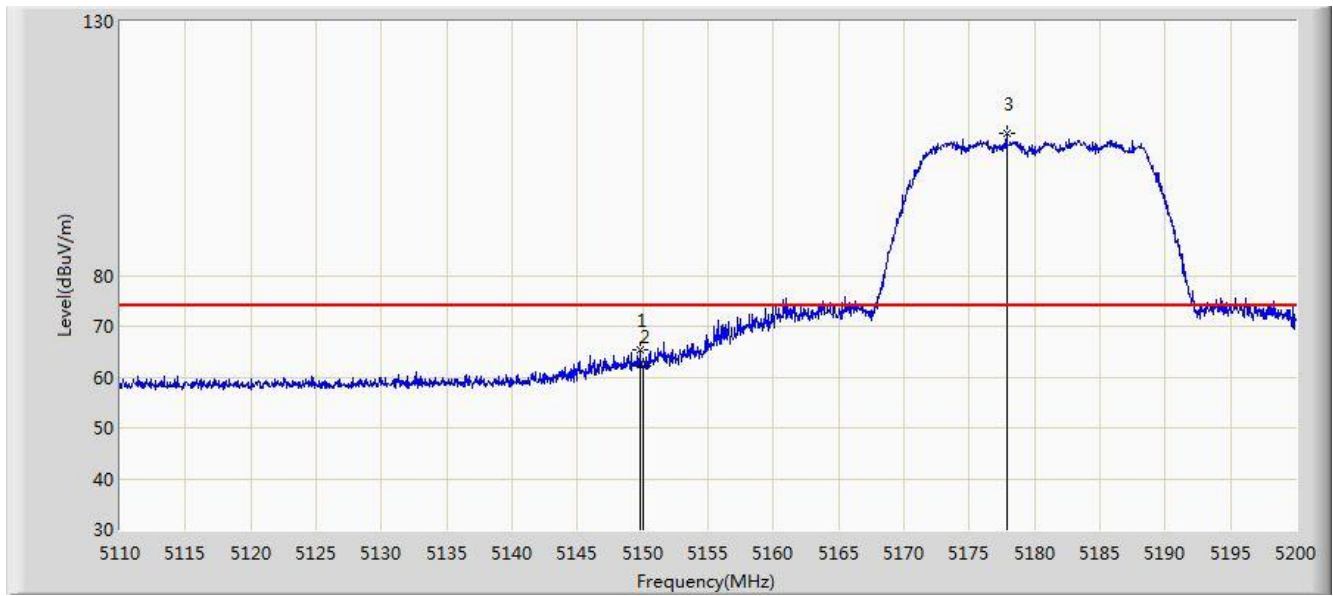


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.780        | 65.410                 | 58.849               | -8.590          | 74.000         | 6.561       | PK   |
| 2  |      |      | 5150.000        | 62.120                 | 55.558               | -11.880         | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5177.860        | 107.995                | 101.534              | N/A             | N/A            | 6.461       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 05:59 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz, Ant 0 + 1 |                          |

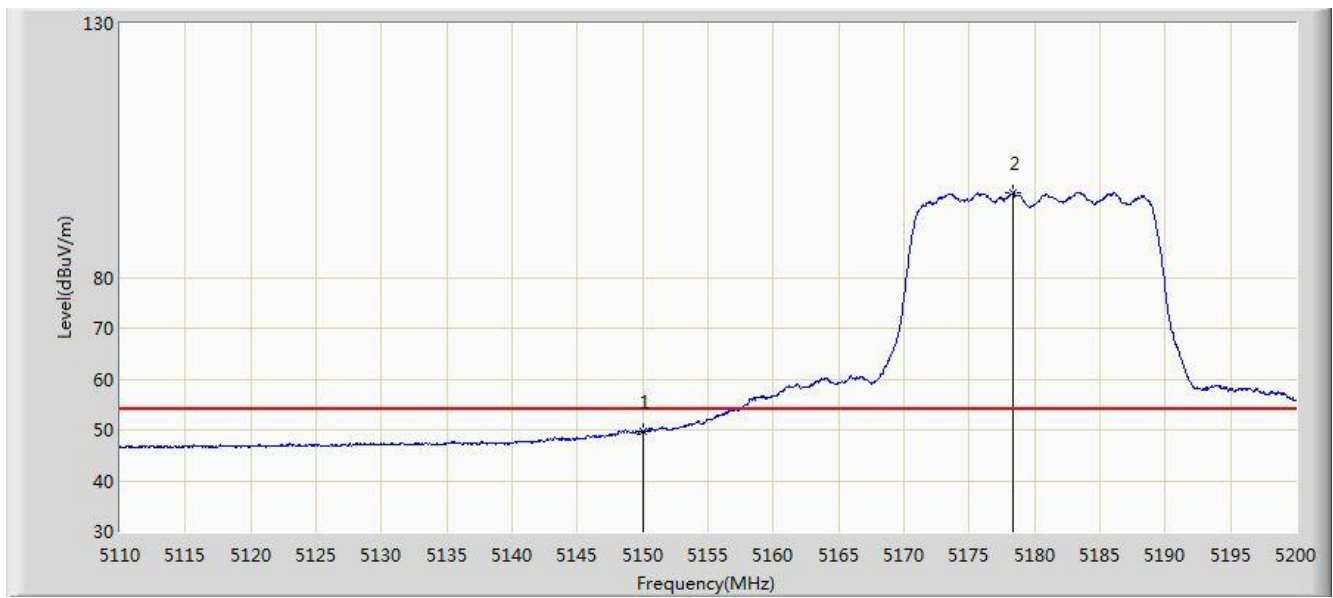


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 49.659                 | 43.097               | -4.341          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5178.400        | 96.691                 | 90.234               | N/A             | N/A            | 6.457       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:00 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz, Ant 0 + 1 |                          |

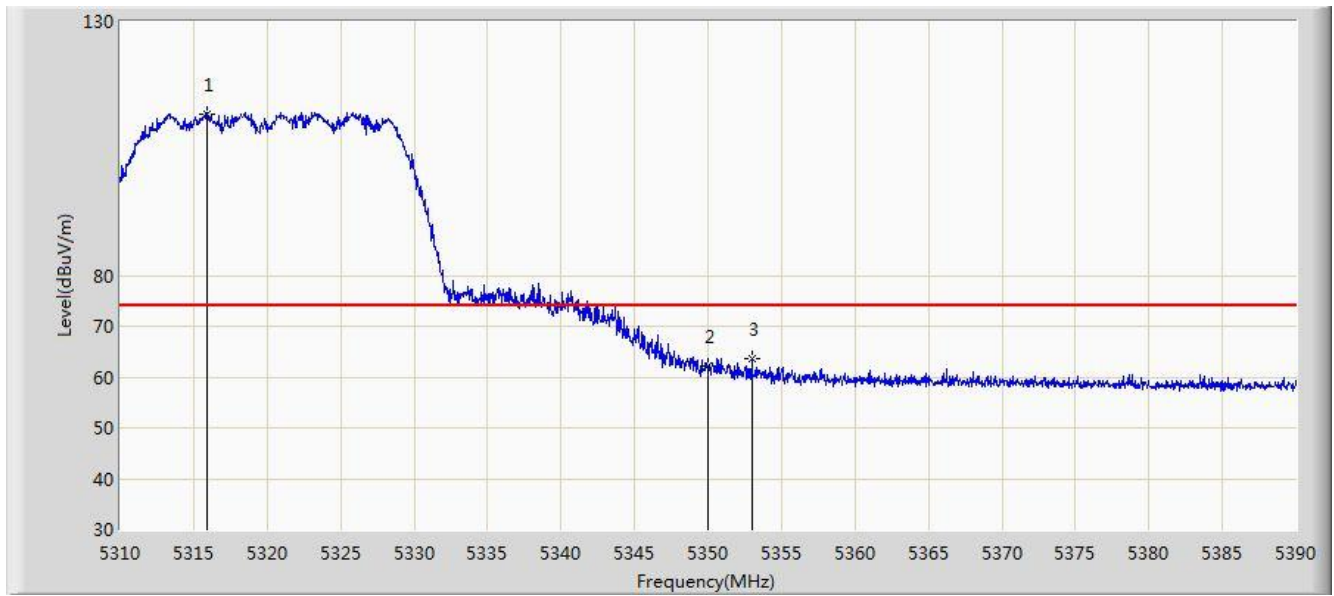


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5315.920        | 111.871                | 105.593              | N/A             | N/A            | 6.278       | PK   |
| 2  |      |      | 5350.000        | 62.146                 | 55.686               | -11.854         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5352.960        | 63.624                 | 57.150               | -10.376         | 74.000         | 6.473       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:02 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz, Ant 0 + 1 |                          |

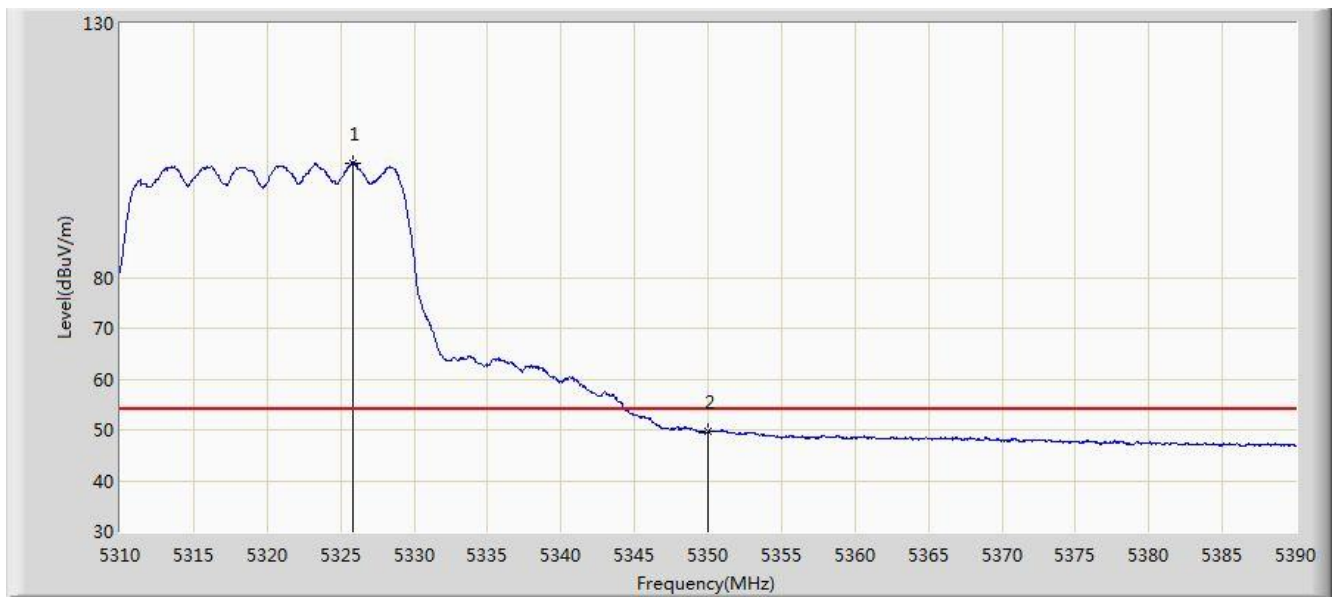


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5325.800        | 102.587                | 96.260               | N/A             | N/A            | 6.327       | AV   |
| 2  |      |      | 5350.000        | 49.681                 | 43.221               | -4.319          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:03 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz, Ant 0 + 1 |                          |

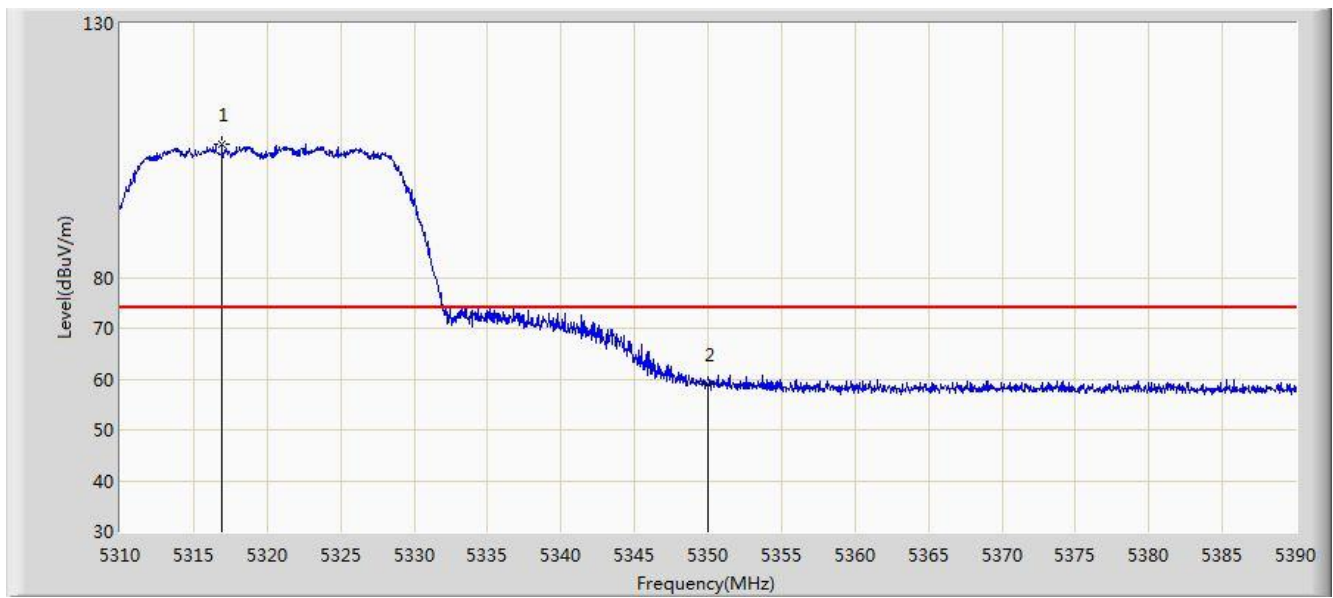


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.920        | 106.285                | 100.005              | N/A             | N/A            | 6.280       | PK   |
| 2  |      |      | 5350.000        | 59.109                 | 52.649               | -14.891         | 74.000         | 6.460       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:04 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz, Ant 0 + 1 |                          |

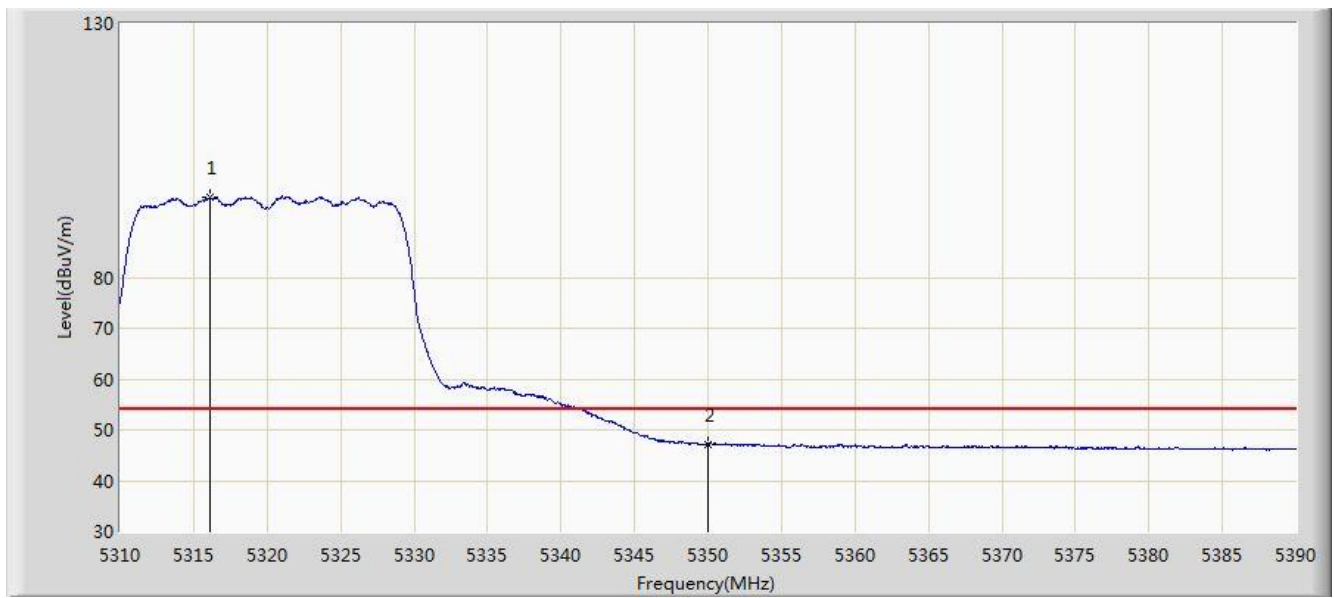


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.160        | 95.718                 | 89.439               | N/A             | N/A            | 6.279       | AV   |
| 2  |      |      | 5350.000        | 47.130                 | 40.670               | -6.870          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:05 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz, Ant 0 + 1 |                          |

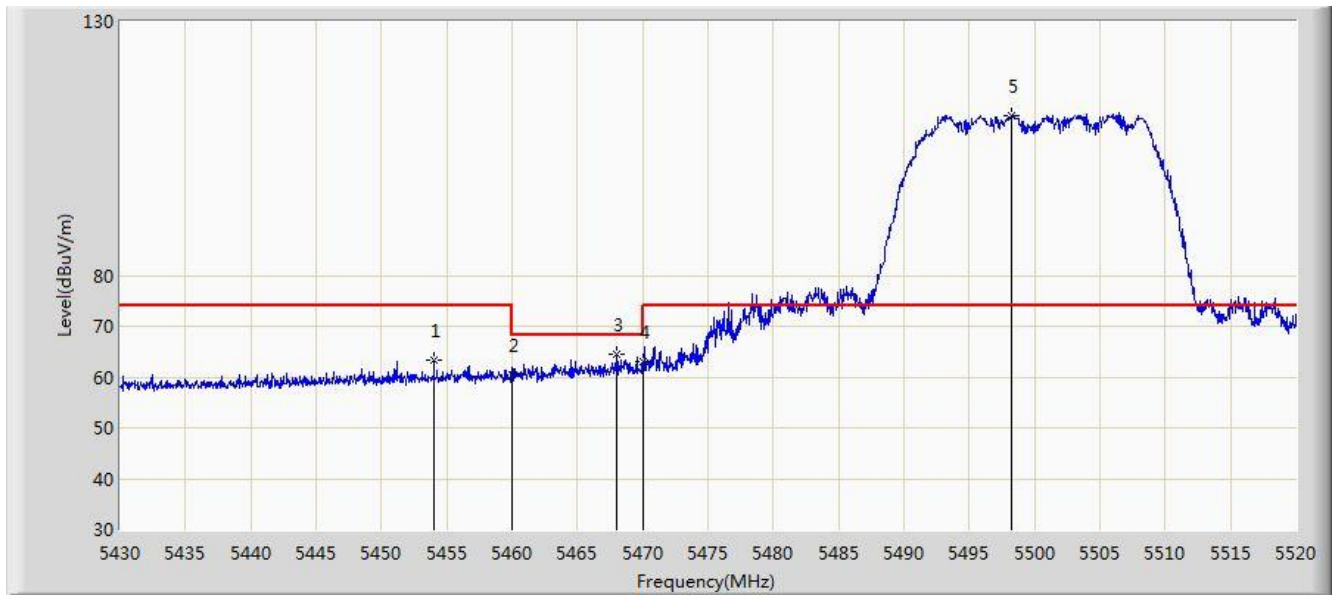


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5454.030        | 63.451                 | 56.676               | -10.549         | 74.000         | 6.775       | PK   |
| 2  |      |      | 5460.000        | 60.432                 | 53.630               | -13.568         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5467.980        | 64.577                 | 57.741               | -3.623          | 68.200         | 6.836       | PK   |
| 4  |      |      | 5470.000        | 62.907                 | 56.062               | -5.293          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5498.220        | 111.591                | 104.769              | N/A             | N/A            | 6.822       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:07 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz, Ant 0 + 1 |                          |

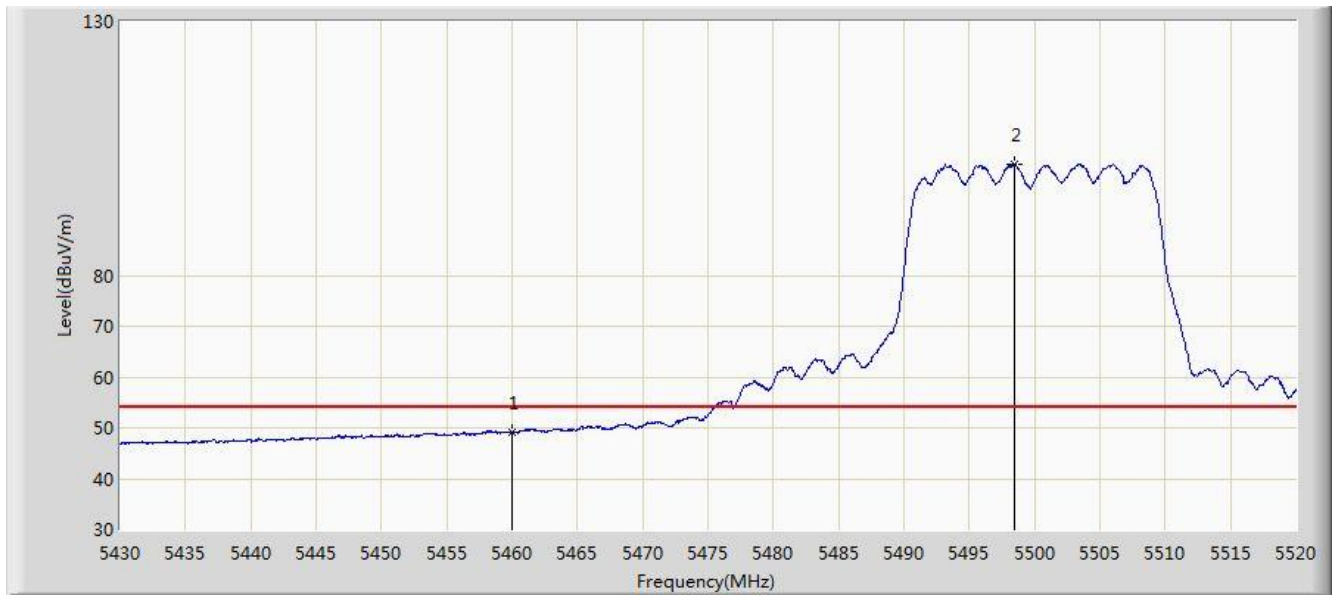


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 49.009                 | 42.207               | -4.991          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5498.445        | 101.924                | 95.102               | N/A             | N/A            | 6.822       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:08 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz, Ant 0 + 1 |                          |

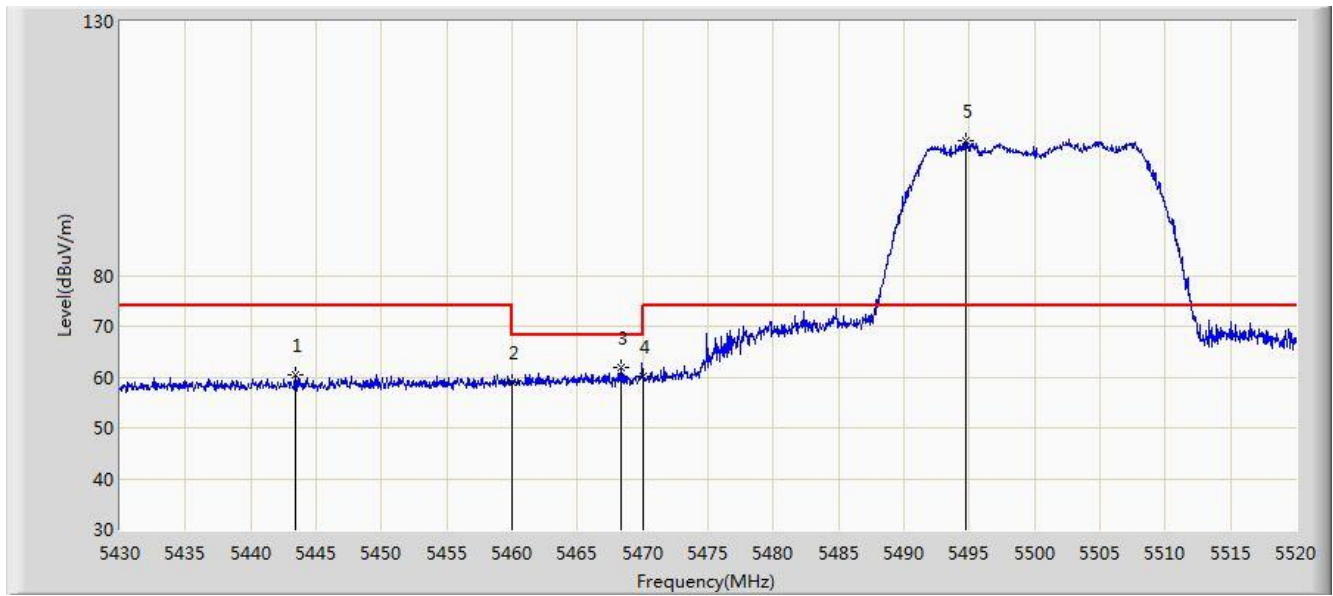


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5443.365        | 60.347                 | 53.653               | -13.653         | 74.000         | 6.694       | PK   |
| 2  |      |      | 5460.000        | 59.058                 | 52.256               | -14.942         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5468.295        | 61.877                 | 55.039               | -6.323          | 68.200         | 6.837       | PK   |
| 4  |      |      | 5470.000        | 60.105                 | 53.260               | -8.095          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5494.755        | 106.508                | 99.680               | N/A             | N/A            | 6.828       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:09 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz, Ant 0 + 1 |                          |

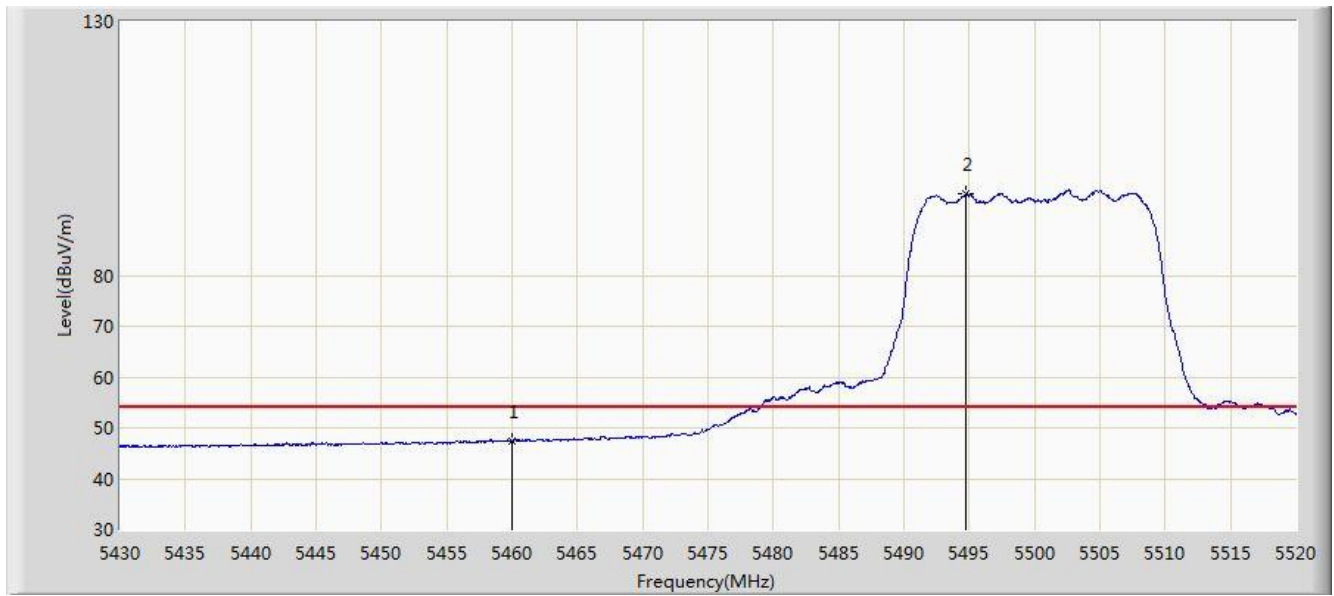


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.484                 | 40.682               | -6.516          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5494.755        | 96.116                 | 89.288               | N/A             | N/A            | 6.828       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:10 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz, Ant 0 + 1 |                          |

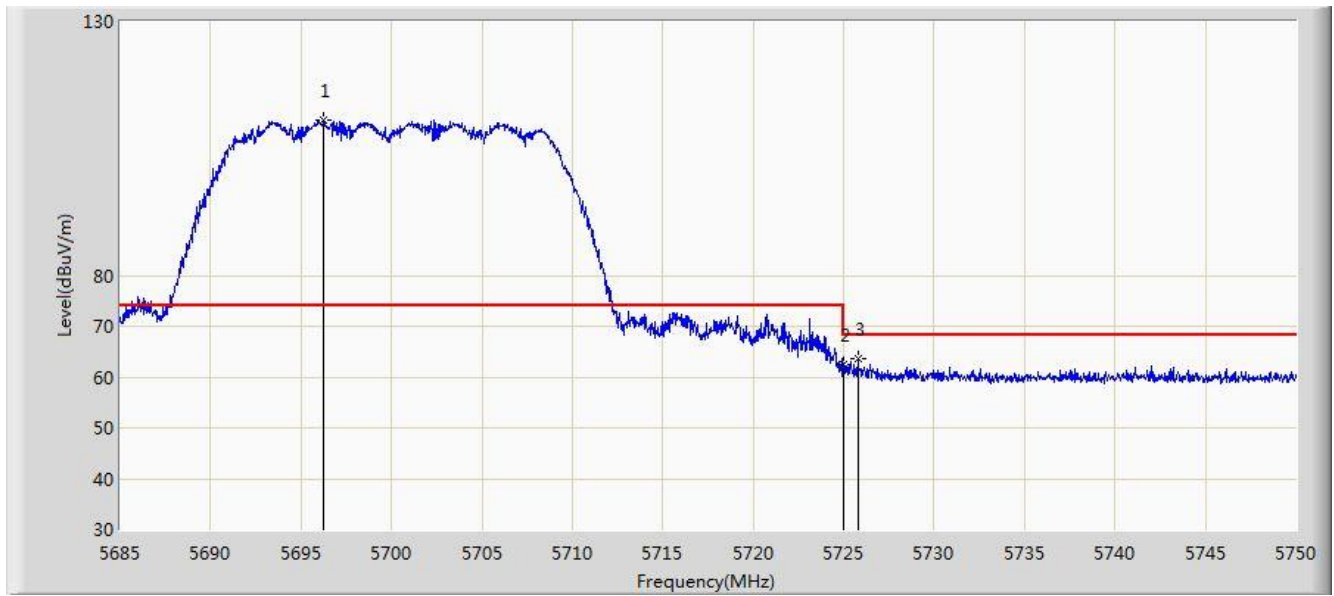


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5696.277        | 110.625                | 103.485              | N/A             | N/A            | 7.140       | PK   |
| 2  |      |      | 5725.000        | 62.396                 | 55.068               | -5.804          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5725.788        | 63.720                 | 56.387               | -4.480          | 68.200         | 7.333       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:12 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz, Ant 0 + 1 |                          |

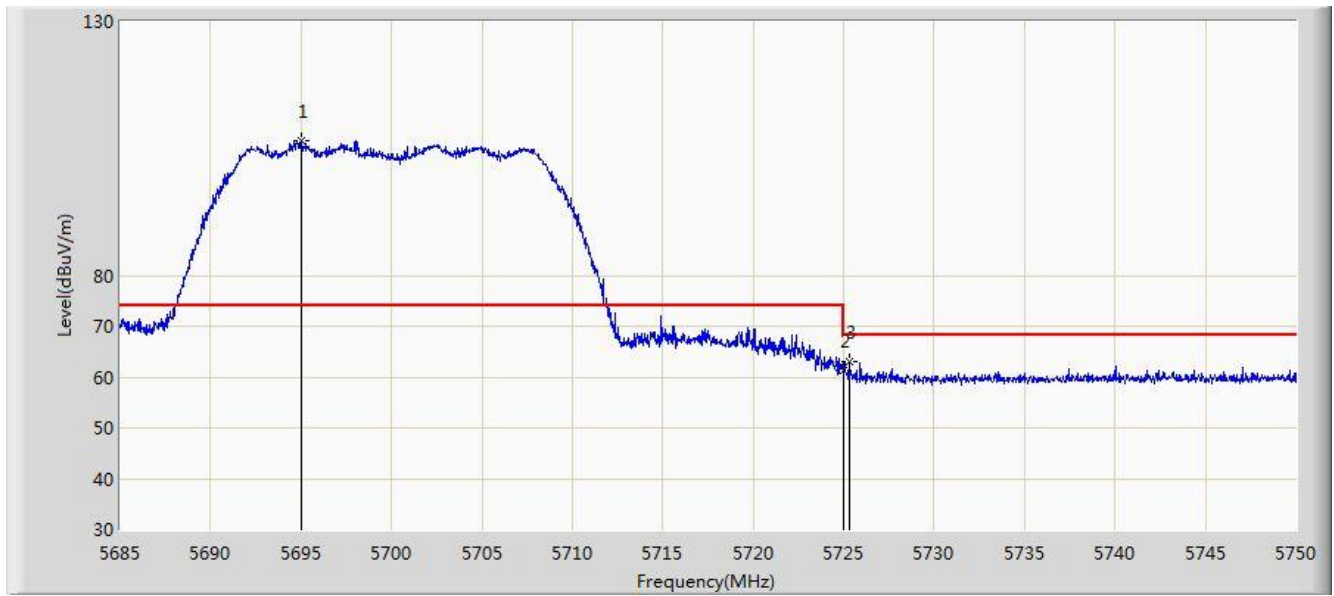


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5695.010        | 106.651                | 99.519               | N/A             | N/A            | 7.131       | PK   |
| 2  |      |      | 5725.000        | 61.234                 | 53.906               | -6.966          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5725.300        | 62.899                 | 55.569               | -5.301          | 68.200         | 7.329       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:14 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz, Ant 0 + 1 |                          |

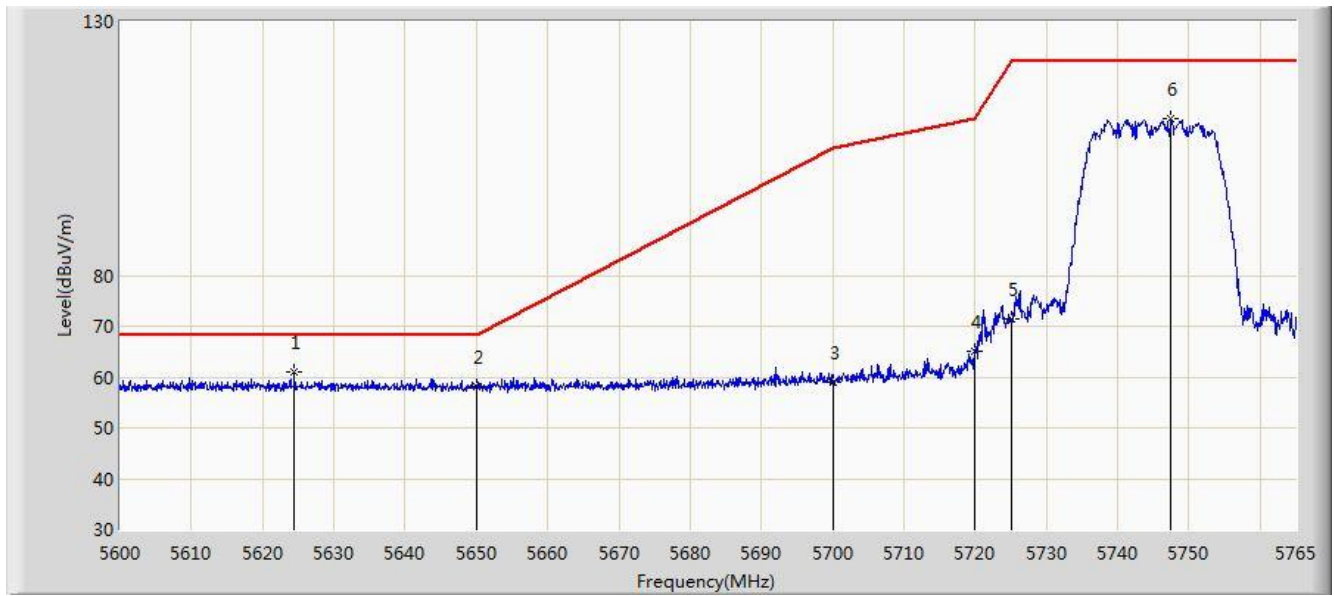


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5624.420        | 61.002                 | 53.988               | -7.198          | 68.200         | 7.014       | PK   |
| 2  |      |      | 5650.000        | 58.200                 | 51.195               | -10.000         | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 59.014                 | 51.849               | -46.186         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 65.166                 | 57.867               | -45.634         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 71.449                 | 64.121               | -50.751         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5747.428        | 110.950                | 103.544              | N/A             | N/A            | 7.406       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:17 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz, Ant 0 + 1 |                          |

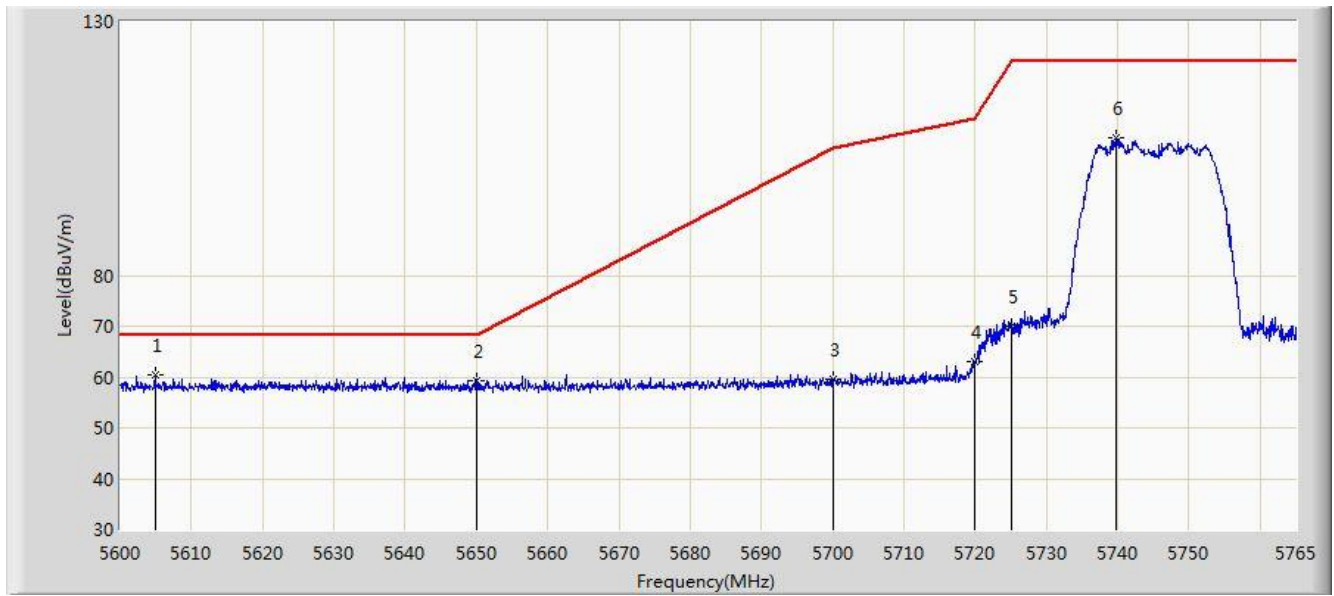


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5604.868        | 60.422                 | 53.443               | -7.778          | 68.200         | 6.980       | PK   |
| 2  |      |      | 5650.000        | 59.337                 | 52.332               | -8.863          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 59.481                 | 52.316               | -45.719         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 63.028                 | 55.729               | -47.772         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 70.124                 | 62.796               | -52.076         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5739.755        | 107.180                | 99.789               | N/A             | N/A            | 7.391       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:19 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz, Ant 0 + 1 |                          |

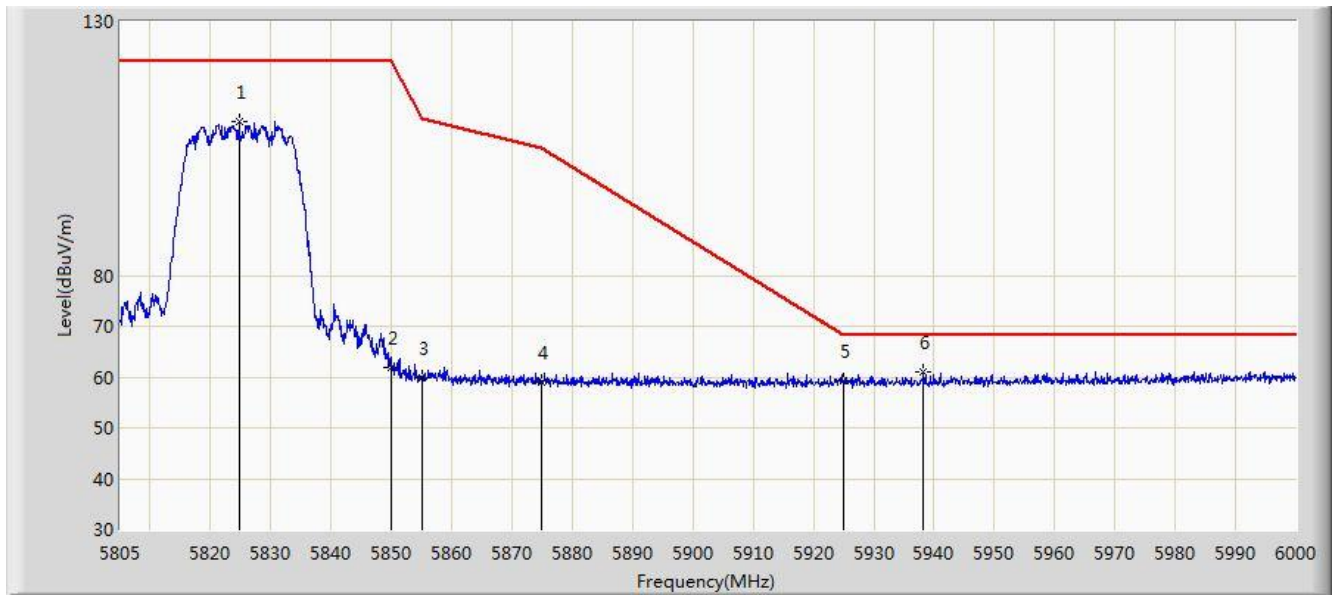


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5824.695        | 110.340                | 102.683              | N/A             | N/A            | 7.658       | PK   |
| 2  |      |      | 5850.000        | 61.886                 | 54.113               | -60.314         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 60.000                 | 52.224               | -50.800         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.049                 | 51.231               | -46.151         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.169                 | 51.350               | -9.031          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5938.283        | 61.106                 | 53.273               | -7.094          | 68.200         | 7.833       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:21 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz, Ant 0 + 1 |                          |

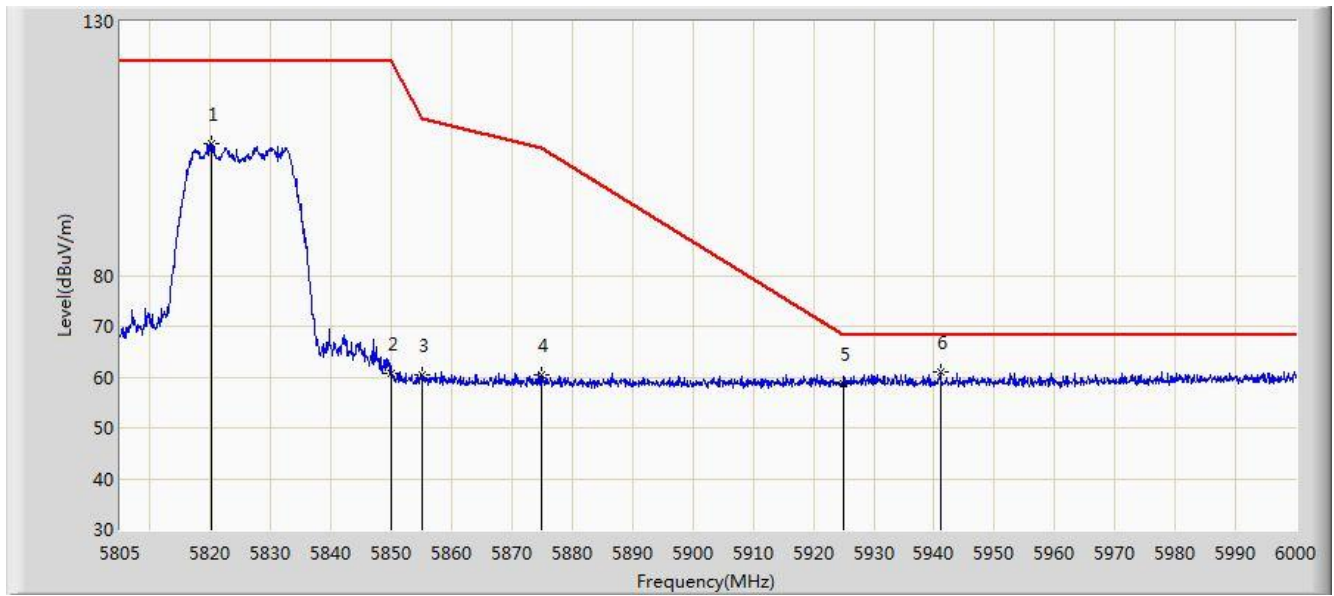


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5820.210        | 106.005                | 98.369               | N/A             | N/A            | 7.637       | PK   |
| 2  |      |      | 5850.000        | 60.860                 | 53.087               | -61.340         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 60.408                 | 52.632               | -50.392         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 60.448                 | 52.630               | -44.752         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 58.639                 | 50.820               | -9.561          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5941.013        | 60.947                 | 53.110               | -7.253          | 68.200         | 7.836       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:26 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz, Ant 0 + 1 |                          |

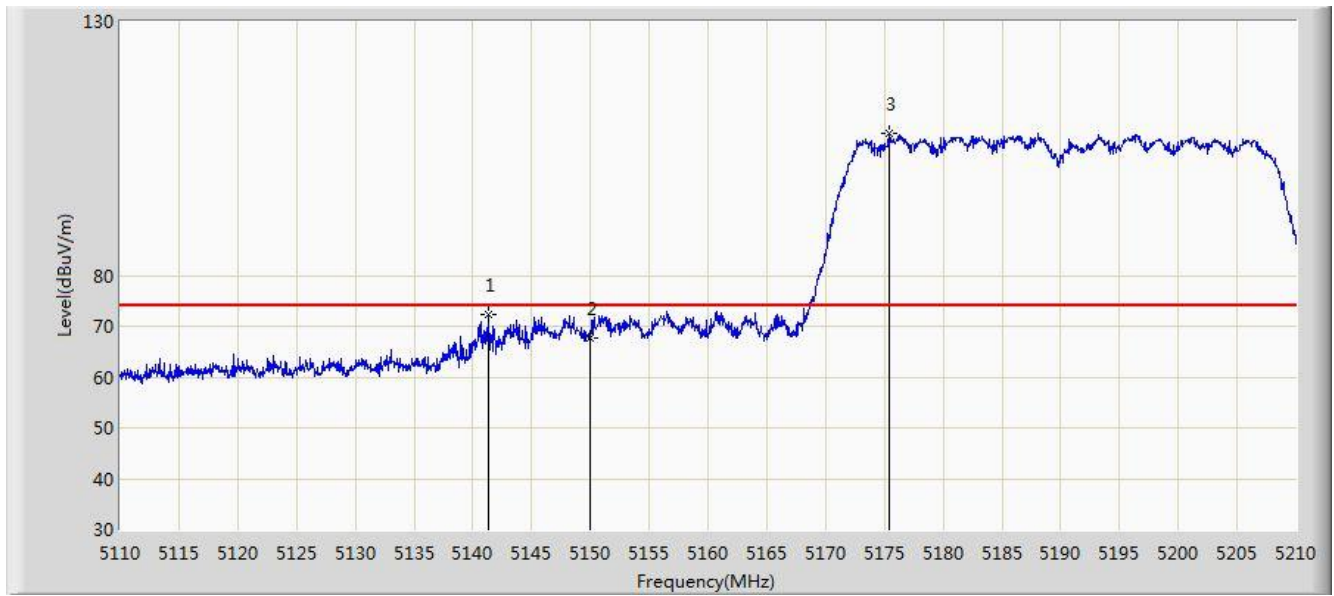


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5141.350        | 72.432                 | 65.835               | -1.568          | 74.000         | 6.596       | PK   |
| 2  |      |      | 5150.000        | 67.794                 | 61.232               | -6.206          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5175.400        | 107.885                | 101.404              | N/A             | N/A            | 6.481       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:29 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz, Ant 0 + 1 |                          |

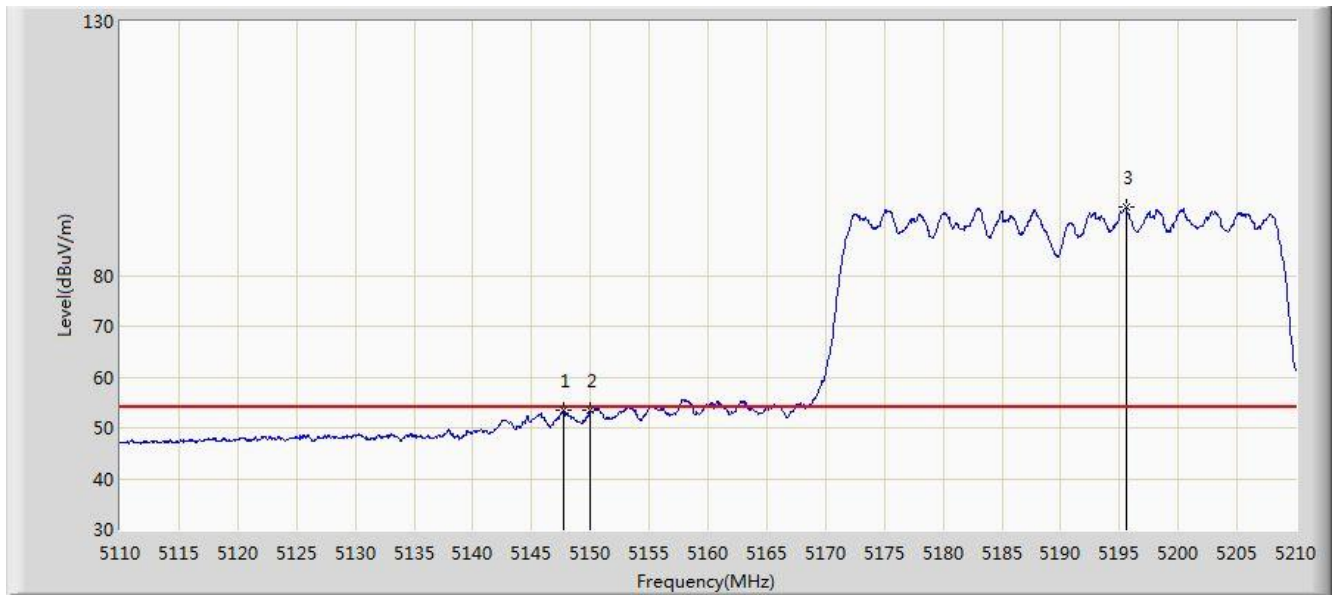


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.700        | 53.462                 | 46.902               | -0.538          | 54.000         | 6.560       | AV   |
| 2  |      |      | 5150.000        | 53.338                 | 46.776               | -0.662          | 54.000         | 6.562       | AV   |
| 3  |      | *    | 5195.600        | 93.584                 | 87.234               | N/A             | N/A            | 6.350       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:33 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz, Ant 0 + 1 |                          |

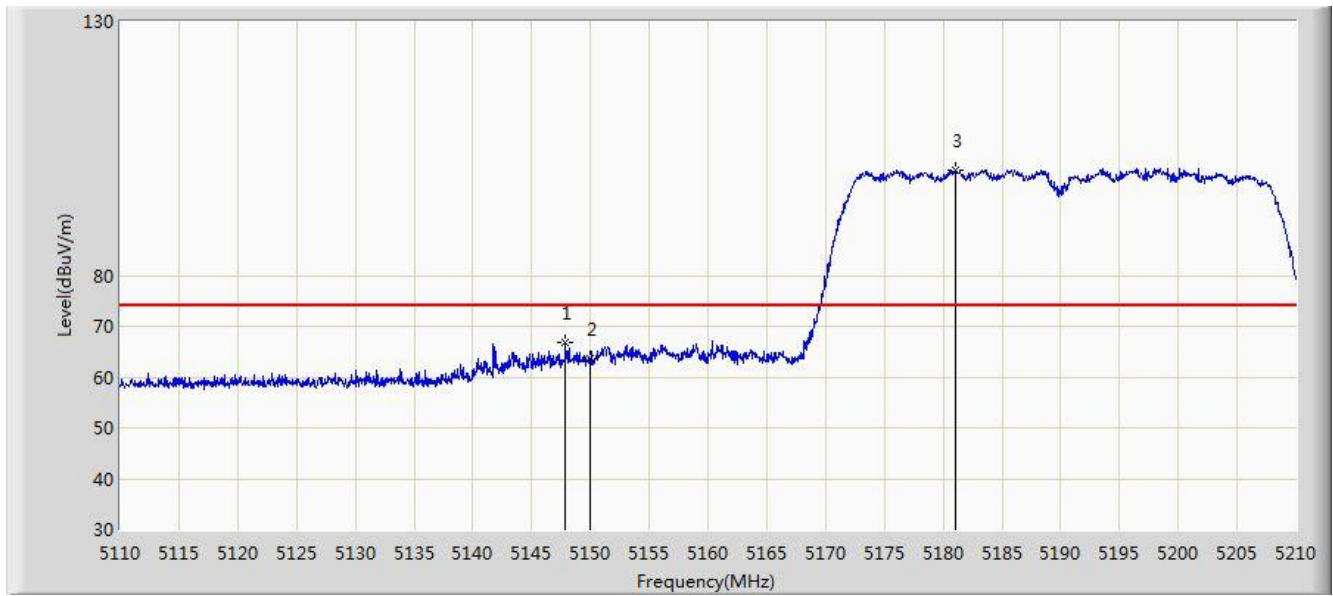


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.900        | 66.934                 | 60.375               | -7.066          | 74.000         | 6.559       | PK   |
| 2  |      |      | 5150.000        | 63.704                 | 57.142               | -10.296         | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5181.100        | 100.664                | 94.229               | N/A             | N/A            | 6.435       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:34 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz, Ant 0 + 1 |                          |

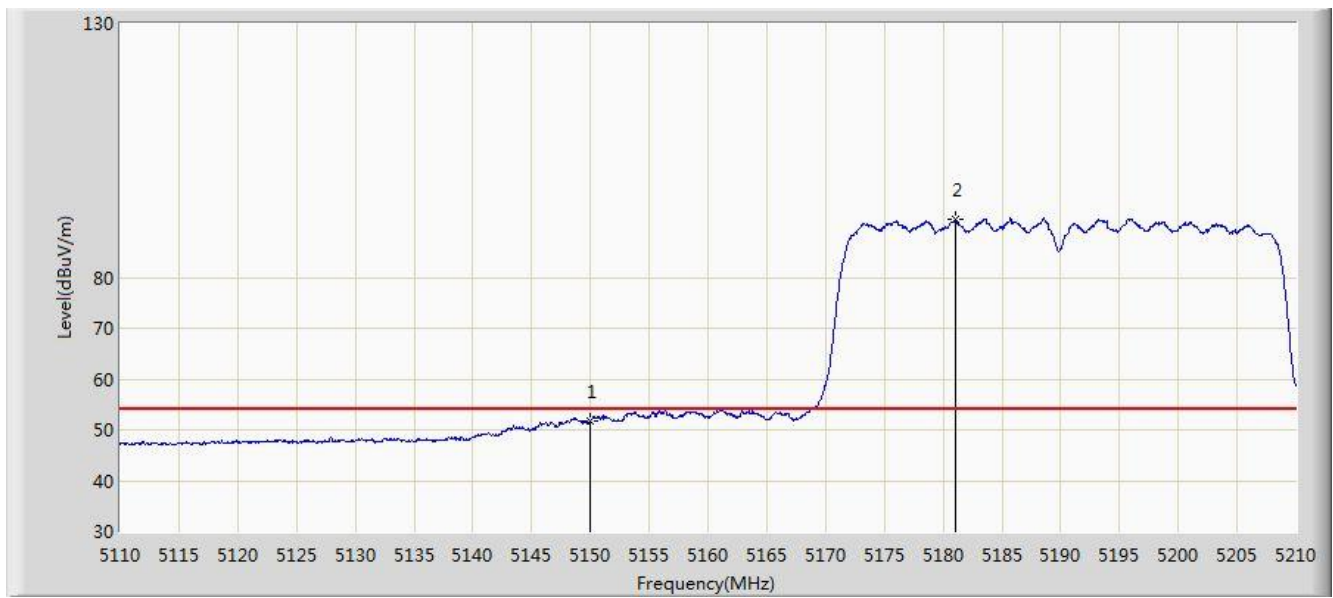


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.706                 | 45.144               | -2.294          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5181.050        | 91.366                 | 84.930               | N/A             | N/A            | 6.435       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:44 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz, Ant 0 + 1 |                          |

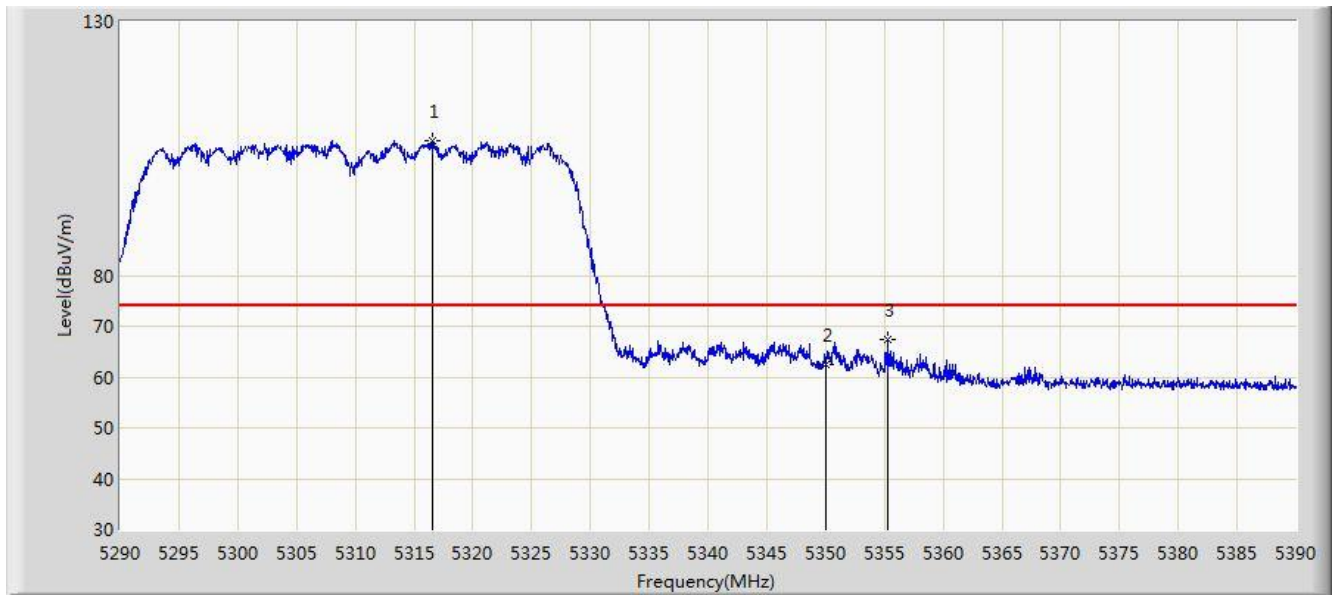


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5316.600        | 106.553                | 100.274              | N/A             | N/A            | 6.280       | PK   |
| 2  |      |      | 5350.000        | 62.376                 | 55.916               | -11.624         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5355.350        | 67.502                 | 61.020               | -6.498          | 74.000         | 6.483       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:43 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz, Ant 0 + 1 |                          |

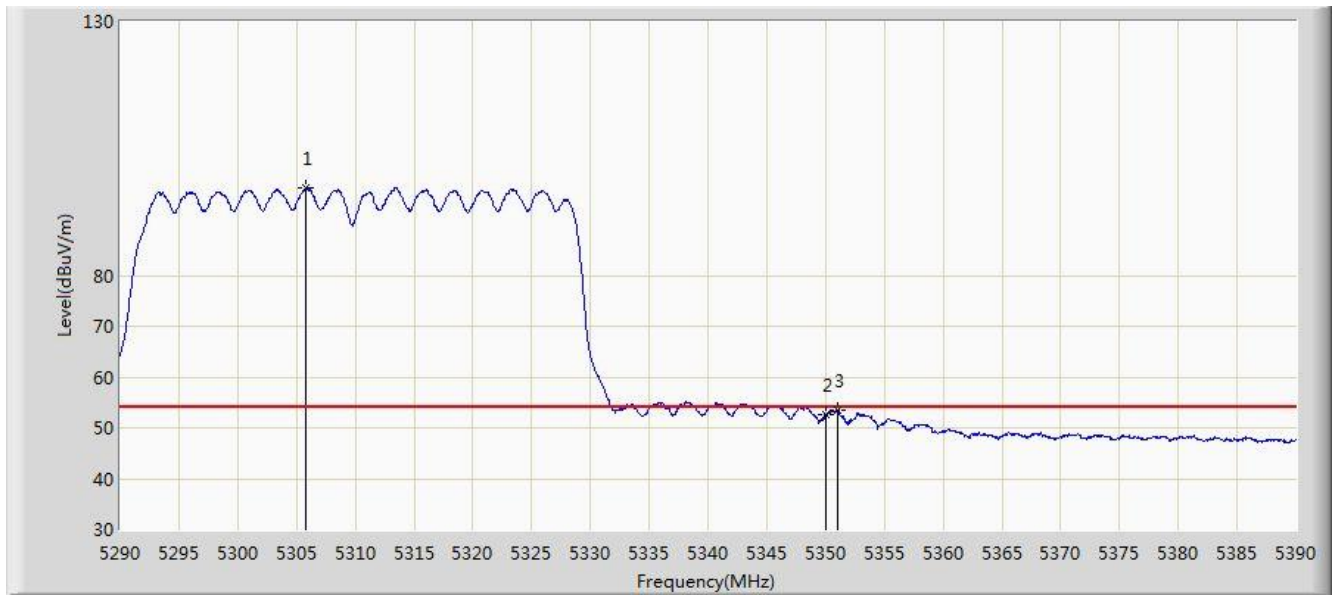


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5305.750        | 97.130                 | 90.866               | N/A             | N/A            | 6.264       | AV   |
| 2  |      |      | 5350.000        | 52.612                 | 46.152               | -1.388          | 54.000         | 6.460       | AV   |
| 3  |      |      | 5351.050        | 53.512                 | 47.047               | -0.488          | 54.000         | 6.465       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:45 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz, Ant 0 + 1 |                          |

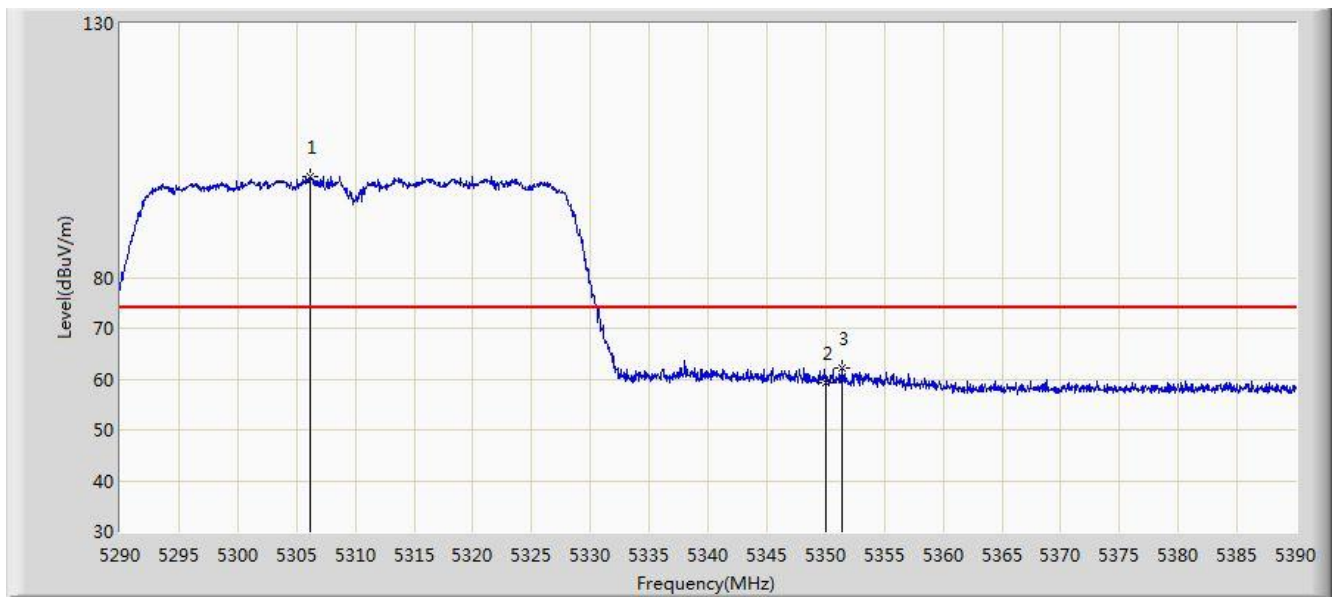


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5306.150        | 99.875                 | 93.610               | N/A             | N/A            | 6.265       | PK   |
| 2  |      |      | 5350.000        | 59.284                 | 52.824               | -14.716         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5351.350        | 62.250                 | 55.783               | -11.750         | 74.000         | 6.467       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:47 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz, Ant 0 + 1 |                          |

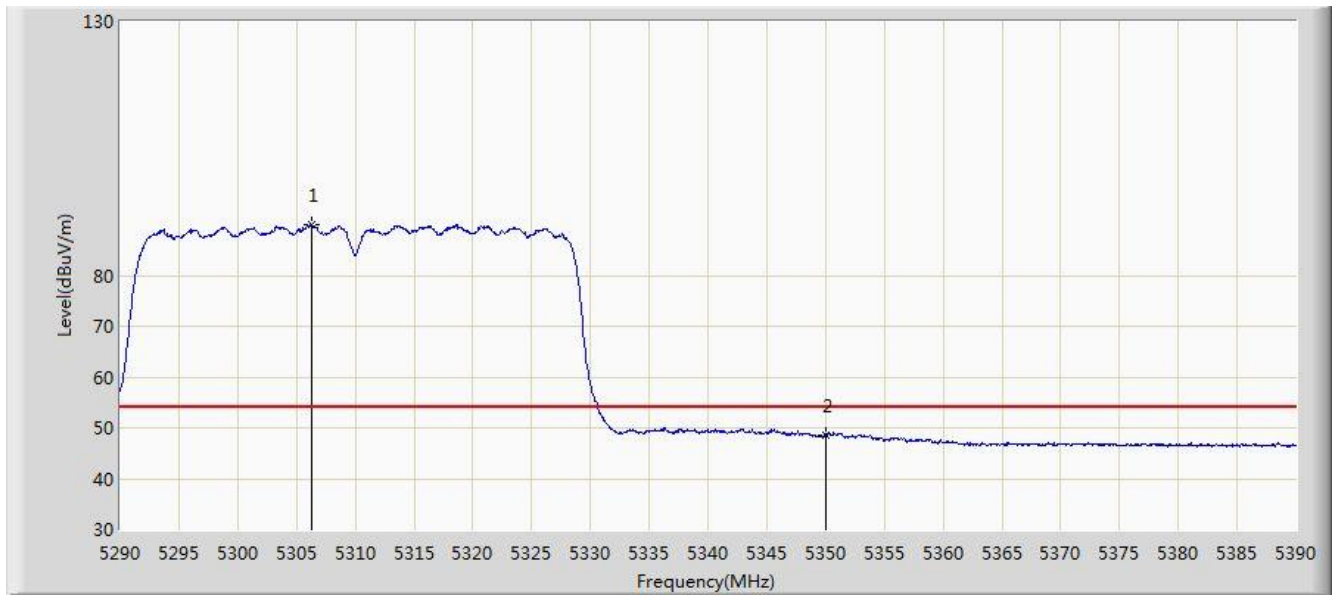


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5306.300        | 89.942                 | 83.677               | N/A             | N/A            | 6.265       | AV   |
| 2  |      |      | 5350.000        | 48.601                 | 42.141               | -5.399          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/02/27 - 06:53 |
| Limit: FCC_Part15.209_RE(3m)                                                  | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz, Ant 0 + 1 Ant 0 + 1 |                          |

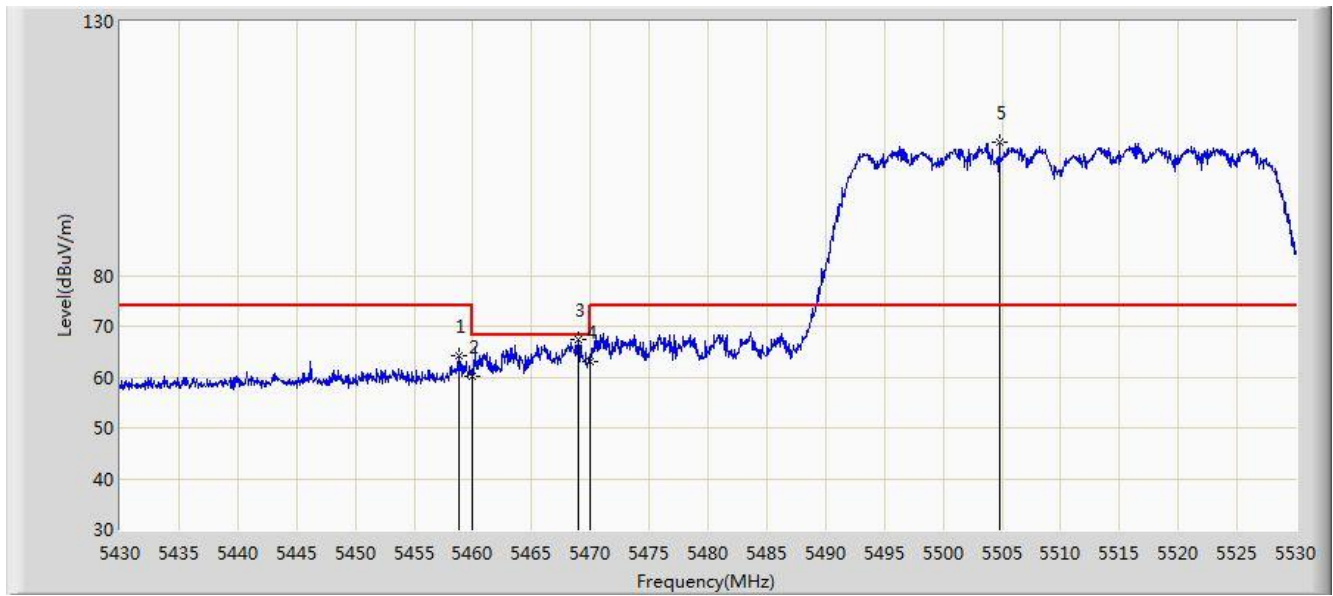


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5458.800        | 64.183                 | 57.386               | -9.817          | 74.000         | 6.797       | PK   |
| 2  |      |      | 5460.000        | 60.222                 | 53.420               | -13.778         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5469.000        | 67.342                 | 60.501               | -0.858          | 68.200         | 6.840       | PK   |
| 4  |      |      | 5470.000        | 63.119                 | 56.274               | -5.081          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5504.750        | 106.130                | 99.319               | N/A             | N/A            | 6.810       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:55 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz, Ant 0 + 1 |                          |

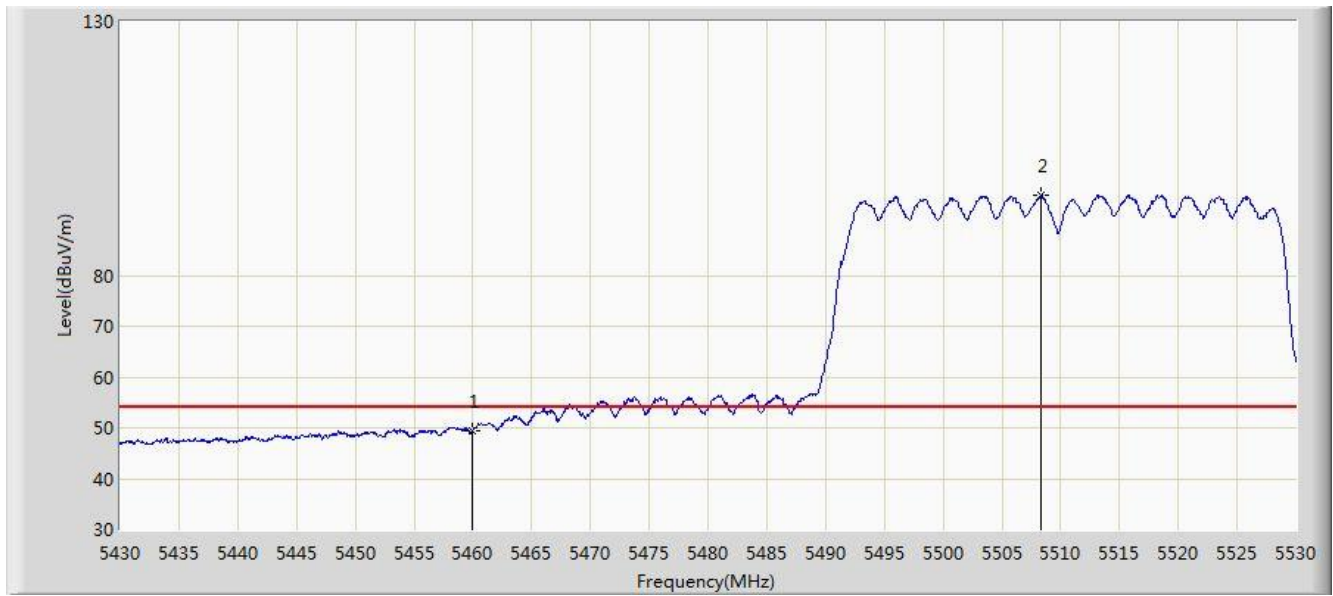


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 49.534                 | 42.732               | -4.466          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5508.350        | 95.788                 | 88.977               | N/A             | N/A            | 6.812       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:55 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz, Ant 0 + 1 |                          |

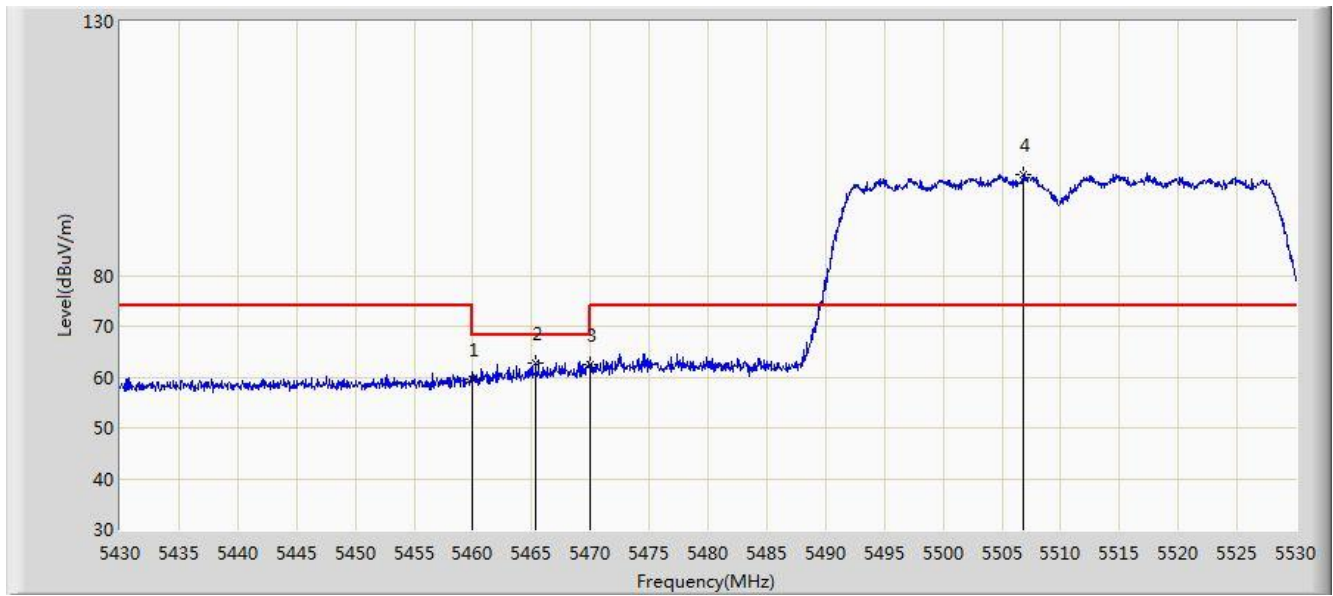


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 59.468                 | 52.666               | -14.532         | 74.000         | 6.802       | PK   |
| 2  |      |      | 5465.350        | 62.882                 | 56.057               | -5.318          | 68.200         | 6.825       | PK   |
| 3  |      |      | 5470.000        | 62.333                 | 55.488               | -5.867          | 68.200         | 6.845       | PK   |
| 4  |      | *    | 5506.800        | 99.918                 | 93.107               | N/A             | N/A            | 6.811       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:57 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz, Ant 0 + 1 |                          |

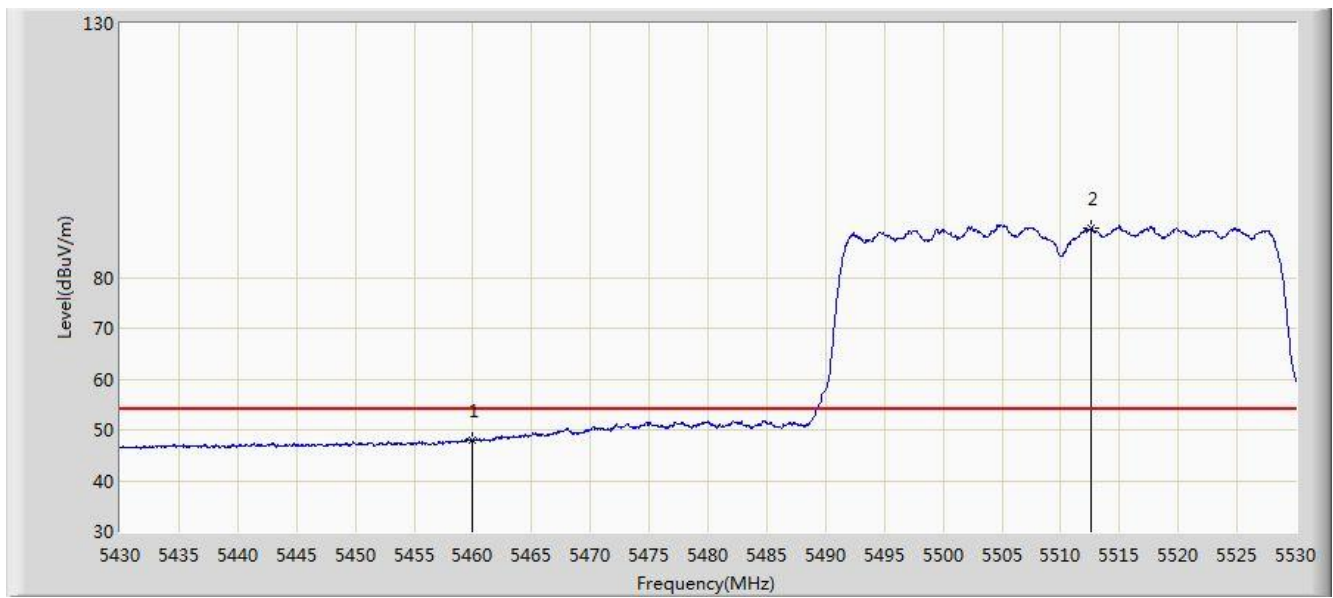


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 48.006                 | 41.204               | -5.994          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5512.600        | 89.805                 | 82.993               | N/A             | N/A            | 6.811       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 06:59 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz, Ant 0 + 1 |                          |

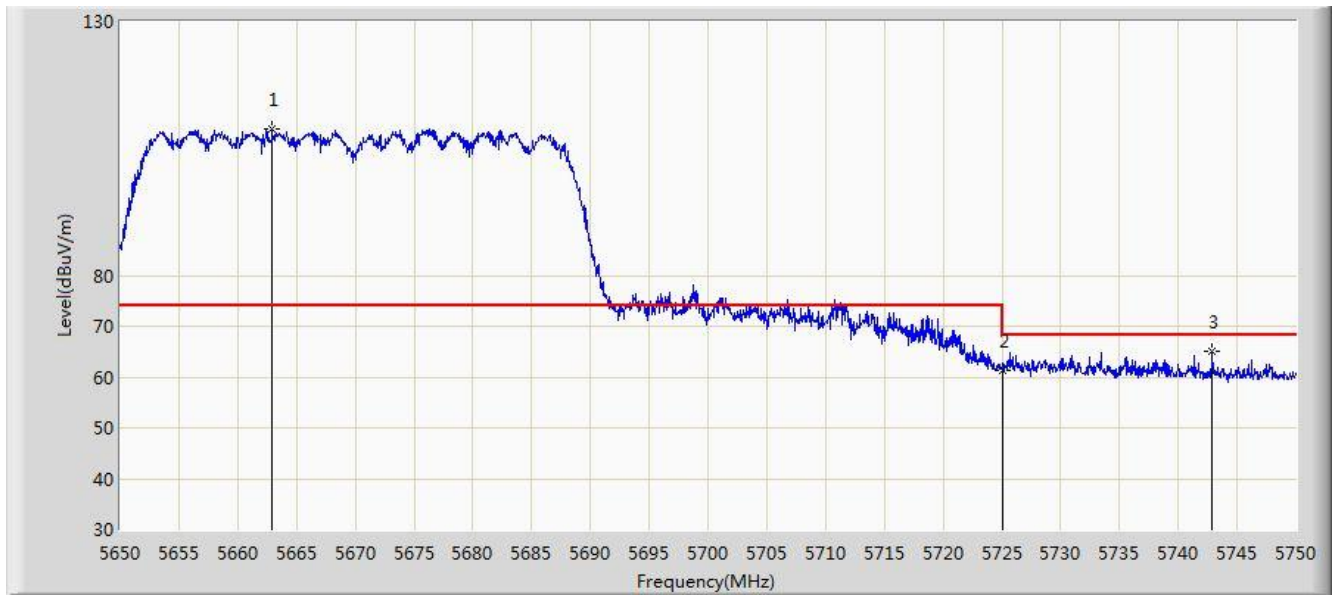


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5662.900        | 108.752                | 101.716              | N/A             | N/A            | 7.036       | PK   |
| 2  |      |      | 5725.000        | 61.442                 | 54.114               | -6.758          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5742.900        | 65.165                 | 57.762               | -3.035          | 68.200         | 7.403       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:01 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz, Ant 0 + 1 |                          |

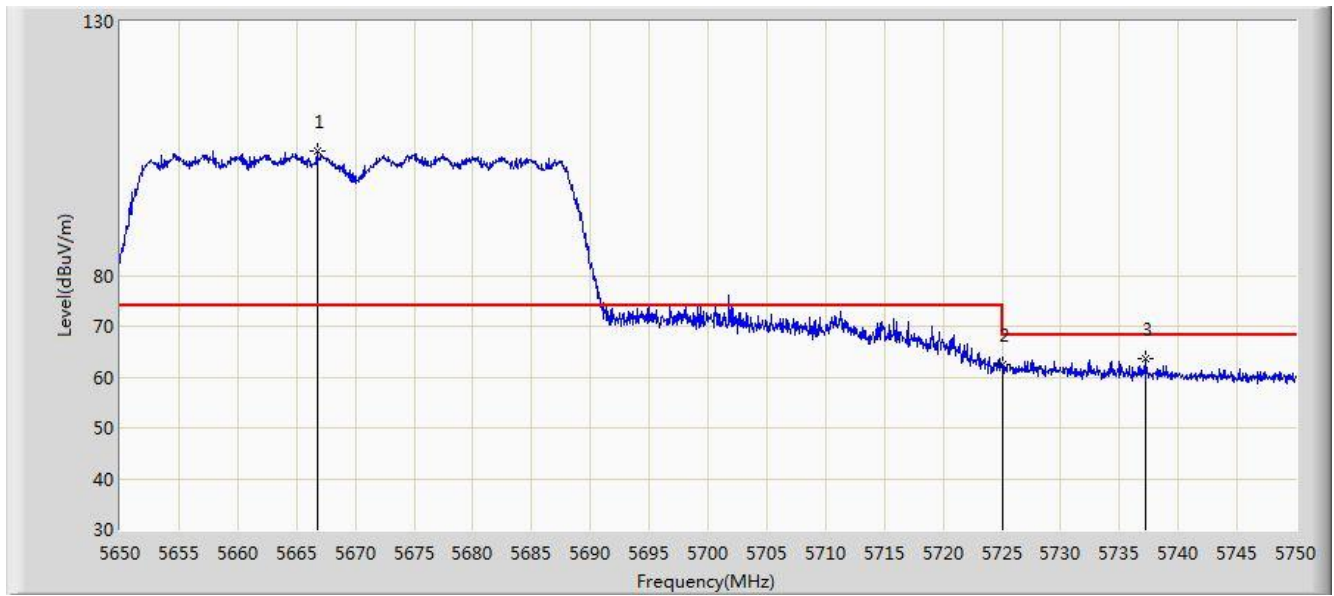


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5666.750        | 104.375                | 97.333               | N/A             | N/A            | 7.043       | PK   |
| 2  |      |      | 5725.000        | 62.408                 | 55.080               | -5.792          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5737.200        | 63.739                 | 56.358               | -4.461          | 68.200         | 7.381       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:03 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz, Ant 0 + 1 |                          |

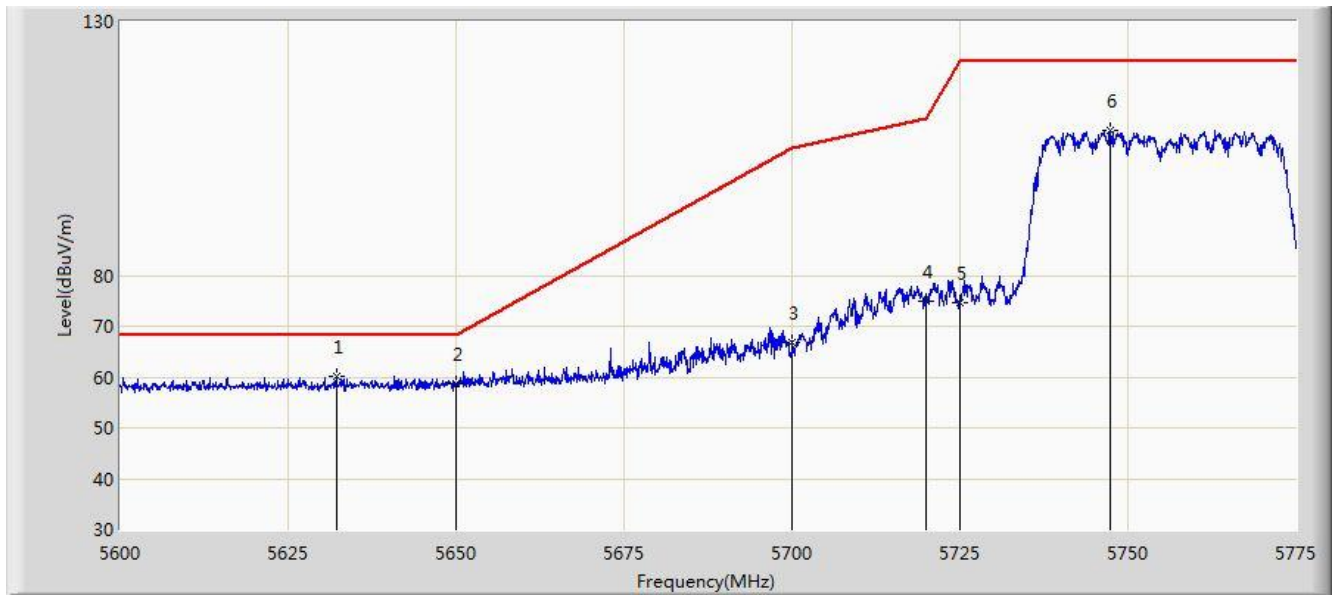


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5632.200        | 60.008                 | 53.008               | -8.192          | 68.200         | 7.000       | PK   |
| 2  |      |      | 5650.000        | 58.572                 | 51.567               | -9.628          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 66.775                 | 59.610               | -38.425         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 74.819                 | 67.520               | -35.981         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 74.629                 | 67.301               | -47.571         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5747.350        | 108.454                | 101.048              | N/A             | N/A            | 7.406       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:04 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz, Ant 0 + 1 |                          |

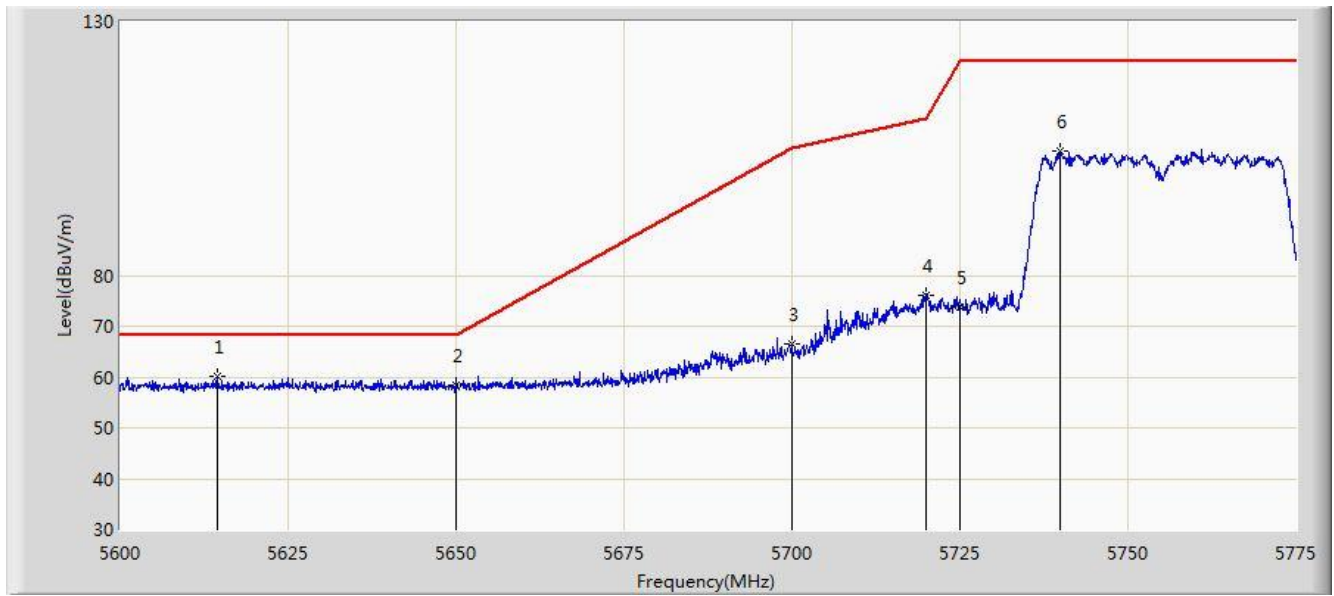


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5614.437        | 60.258                 | 53.265               | -7.942          | 68.200         | 6.993       | PK   |
| 2  |      |      | 5650.000        | 58.344                 | 51.339               | -9.856          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 66.394                 | 59.229               | -38.806         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 75.976                 | 68.677               | -34.824         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 73.823                 | 66.495               | -48.377         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5739.913        | 104.615                | 97.224               | N/A             | N/A            | 7.392       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:06 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz, Ant 0 + 1 |                          |

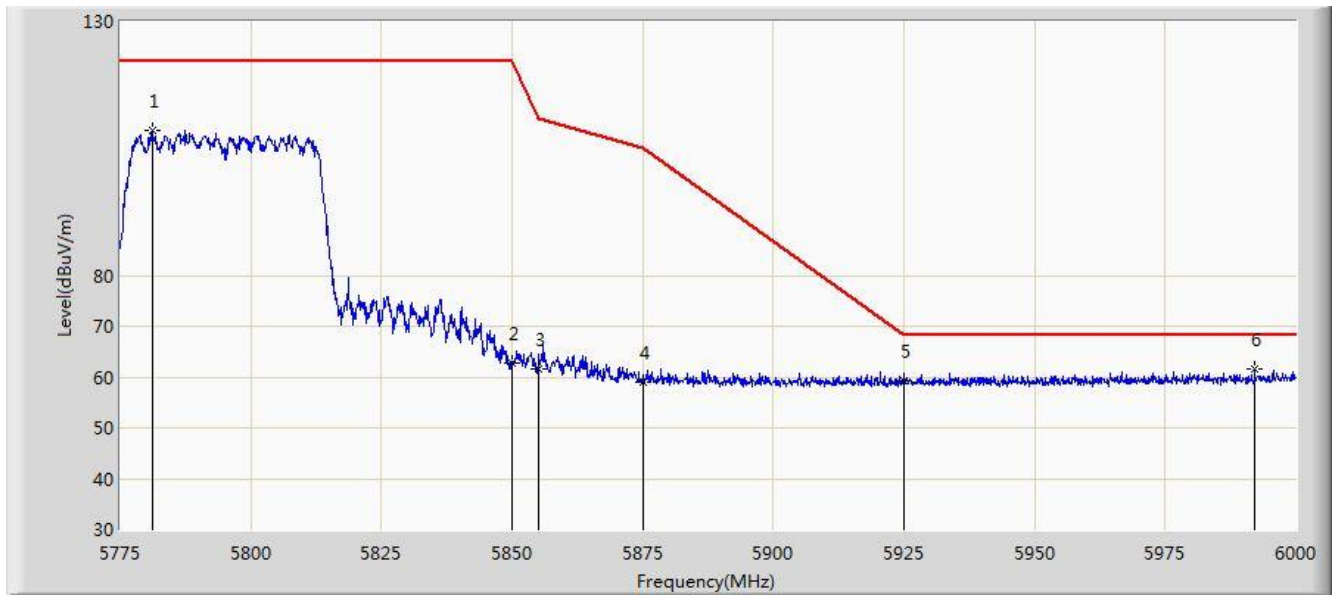


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5781.075        | 108.542                | 101.054              | N/A             | N/A            | 7.489       | PK   |
| 2  |      |      | 5850.000        | 62.646                 | 54.873               | -59.554         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 61.501                 | 53.725               | -49.299         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.001                 | 51.183               | -46.199         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.392                 | 51.573               | -8.808          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5992.125        | 61.684                 | 53.742               | -6.516          | 68.200         | 7.942       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:08 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz, Ant 0 + 1 |                          |

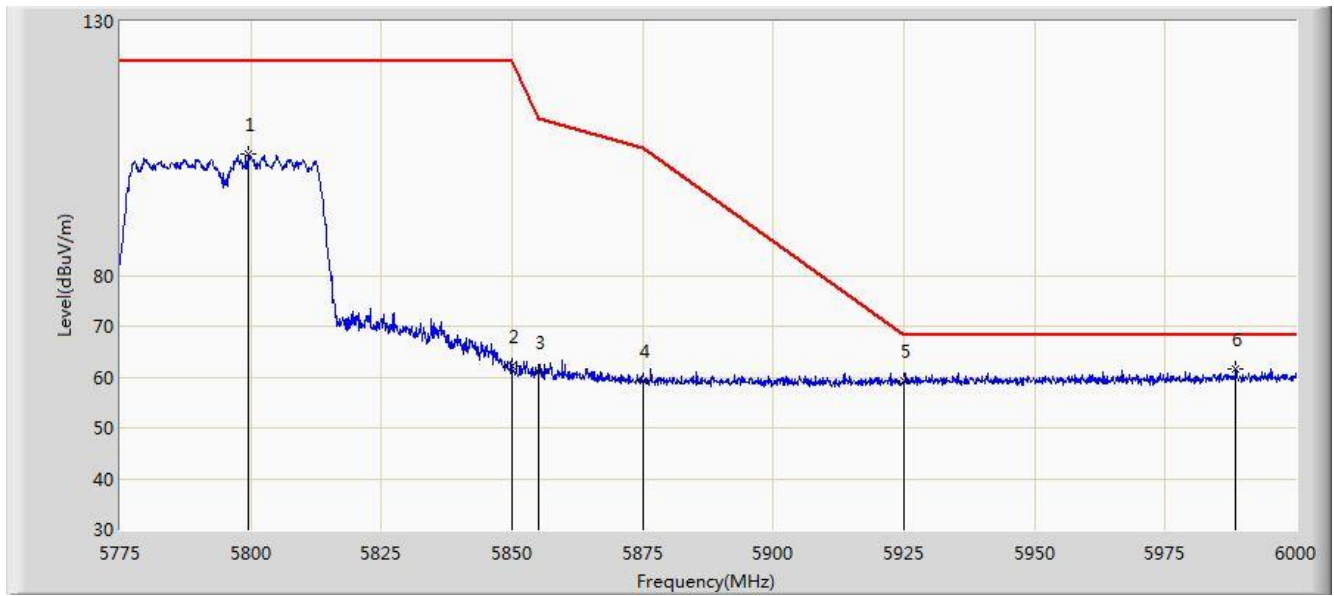


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5799.638        | 103.933                | 96.377               | N/A             | N/A            | 7.556       | PK   |
| 2  |      |      | 5850.000        | 62.103                 | 54.330               | -60.097         | 122.200        | 7.774       | PK   |
| 3  |      |      | 5855.000        | 60.898                 | 53.122               | -49.902         | 110.800        | 7.775       | PK   |
| 4  |      |      | 5875.000        | 59.378                 | 51.560               | -45.822         | 105.200        | 7.818       | PK   |
| 5  |      |      | 5925.000        | 59.218                 | 51.399               | -8.982          | 68.200         | 7.819       | PK   |
| 6  |      | *    | 5988.525        | 61.529                 | 53.603               | -6.671          | 68.200         | 7.925       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:25 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz, Ant 0 + 1 |                          |

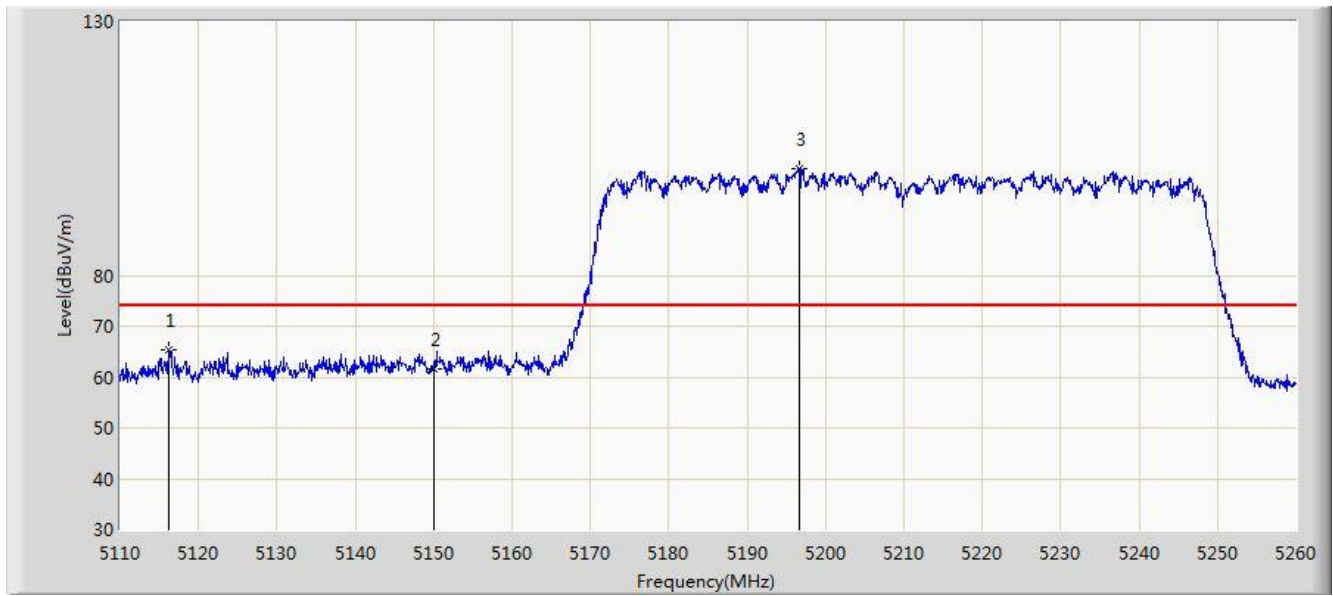


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5116.150        | 65.276                 | 58.631               | -8.724          | 74.000         | 6.645       | PK   |
| 2  |      |      | 5150.000        | 61.628                 | 55.066               | -12.372         | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5196.700        | 101.058                | 94.714               | N/A             | N/A            | 6.344       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:24 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz, Ant 0 + 1 |                          |

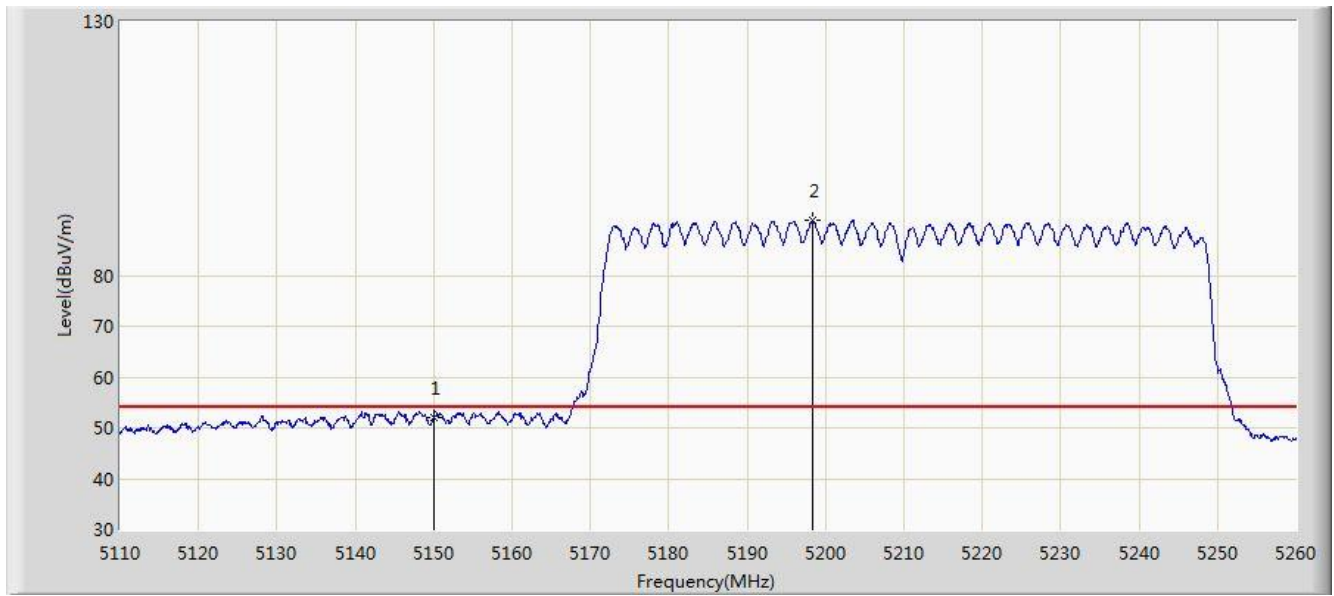


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.168                 | 45.606               | -1.832          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5198.275        | 90.746                 | 84.411               | N/A             | N/A            | 6.335       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:26 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz, Ant 0 + 1 |                          |

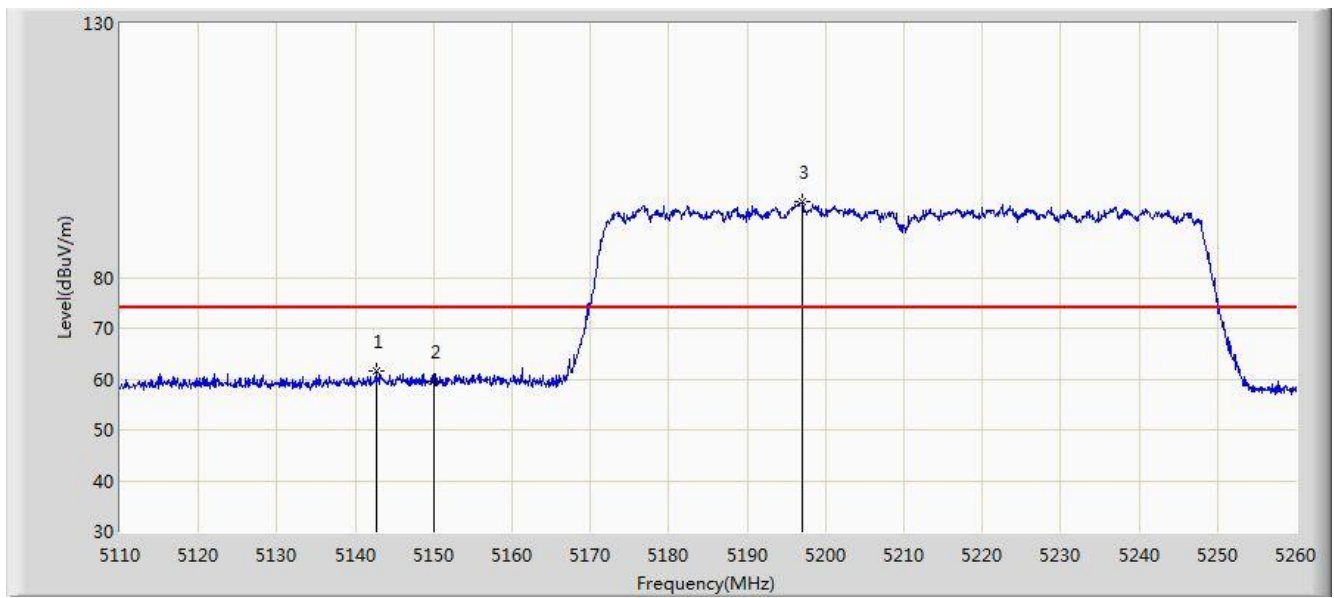


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5142.625        | 61.643                 | 55.053               | -12.357         | 74.000         | 6.589       | PK   |
| 2  |      |      | 5150.000        | 59.474                 | 52.912               | -14.526         | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5197.000        | 94.869                 | 88.527               | N/A             | N/A            | 6.342       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:28 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz, Ant 0 + 1 |                          |

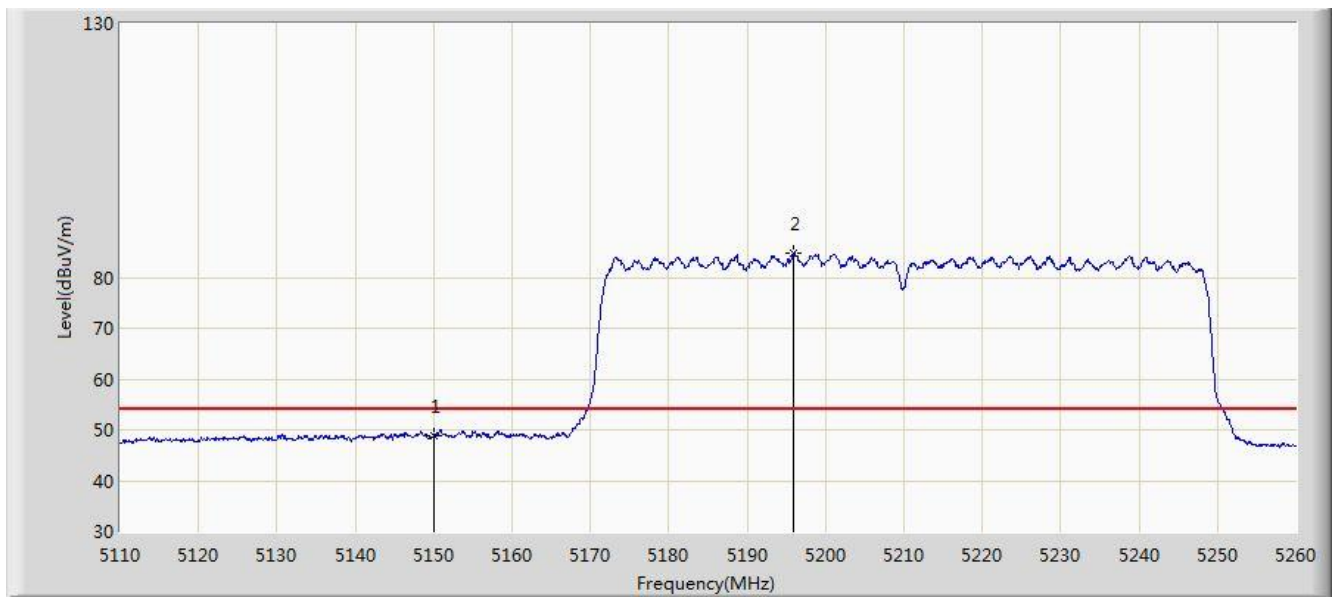


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 48.960                 | 42.398               | -5.040          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5195.950        | 84.866                 | 78.518               | N/A             | N/A            | 6.349       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:35 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz, Ant 0 + 1 |                          |

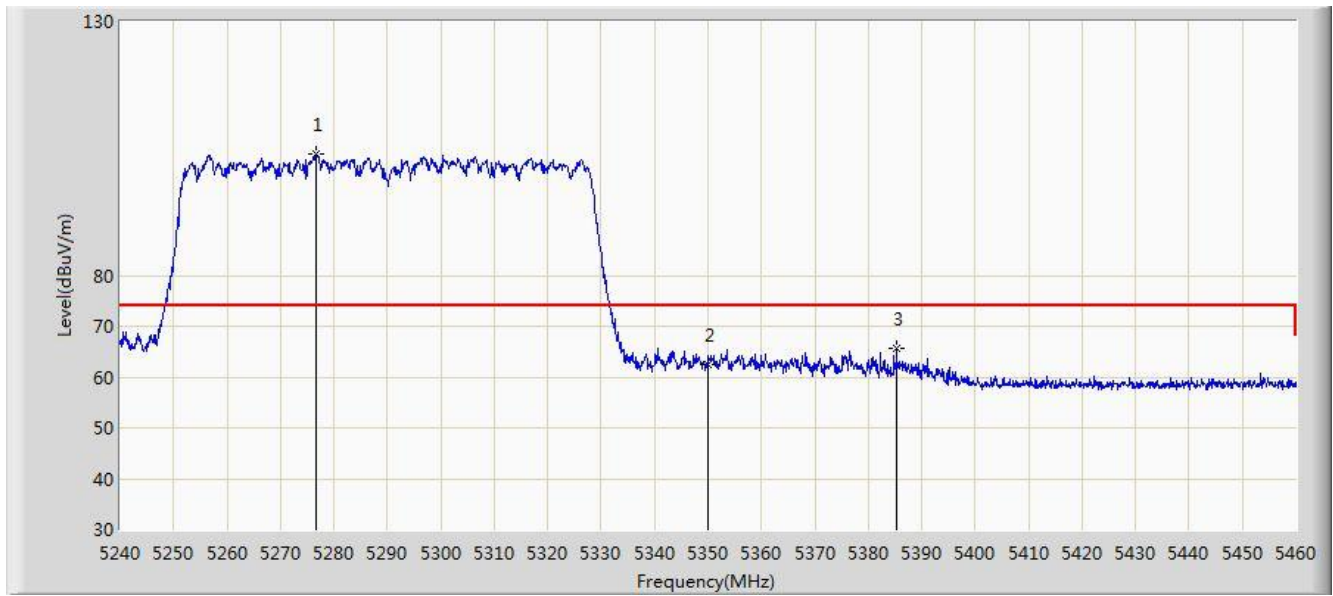


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5276.740        | 103.987                | 97.692               | N/A             | N/A            | 6.295       | PK   |
| 2  |      |      | 5350.000        | 62.437                 | 55.977               | -11.563         | 74.000         | 6.460       | PK   |
| 3  |      |      | 5385.310        | 65.566                 | 59.016               | -8.434          | 74.000         | 6.550       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:34 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz, Ant 0 + 1 |                          |

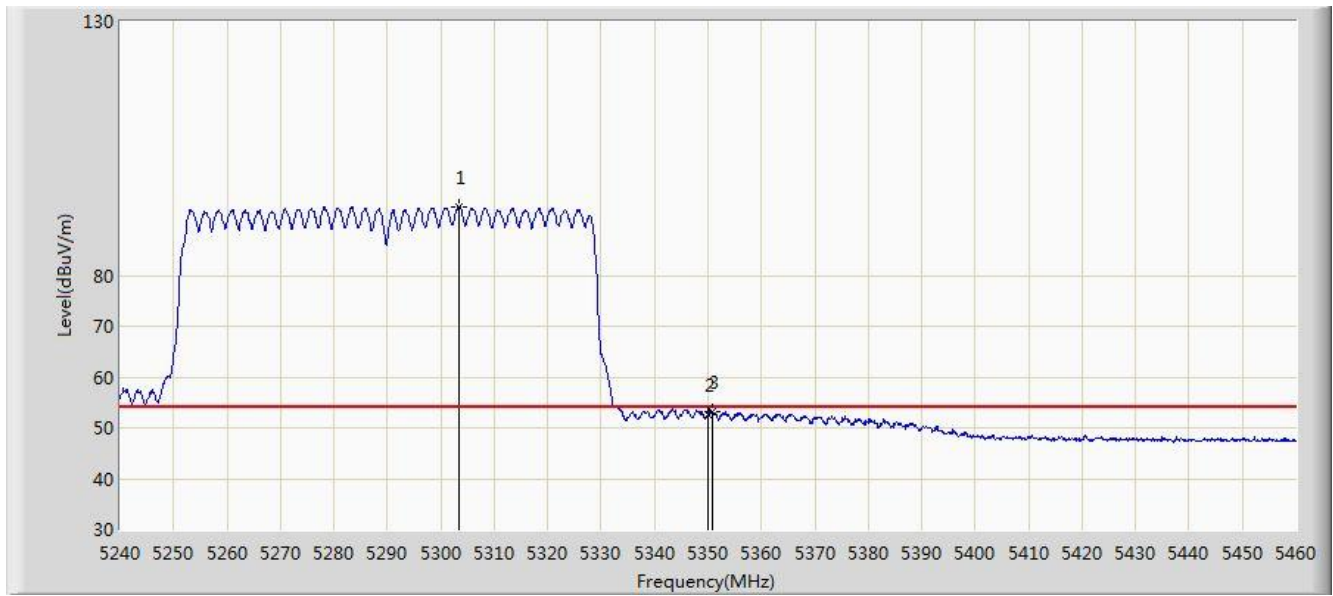


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5303.360        | 93.617                 | 87.356               | N/A             | N/A            | 6.261       | AV   |
| 2  |      |      | 5350.000        | 52.494                 | 46.034               | -1.506          | 54.000         | 6.460       | AV   |
| 3  |      |      | 5350.880        | 53.218                 | 46.753               | -0.782          | 54.000         | 6.465       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:37 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz, Ant 0 + 1 |                          |

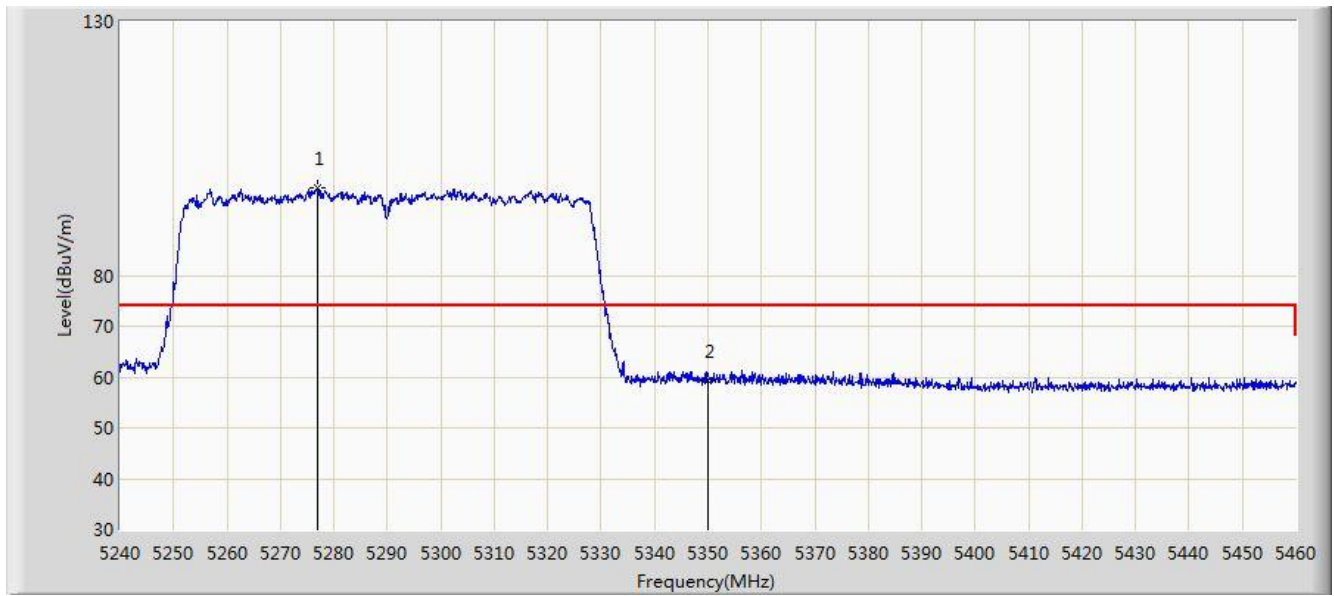


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5276.850        | 97.350                 | 91.055               | N/A             | N/A            | 6.296       | PK   |
| 2  |      |      | 5350.000        | 59.198                 | 52.738               | -14.802         | 74.000         | 6.460       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:38 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz, Ant 0 + 1 |                          |

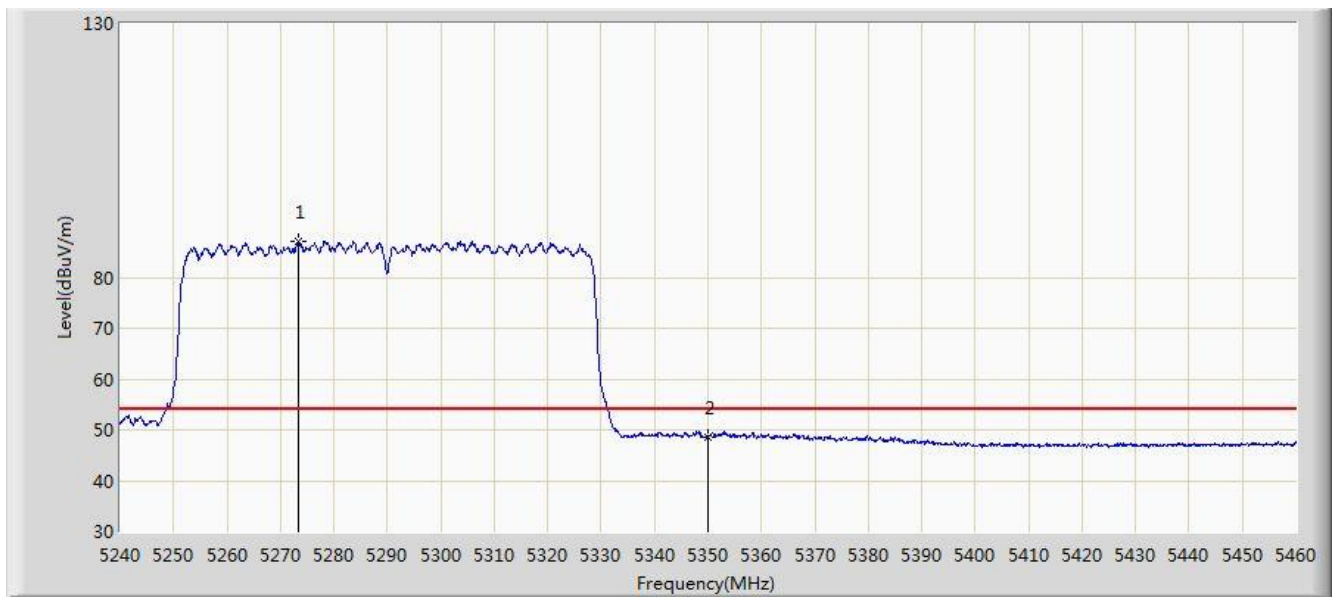


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5273.440        | 87.006                 | 80.705               | N/A             | N/A            | 6.301       | AV   |
| 2  |      |      | 5350.000        | 48.551                 | 42.091               | -5.449          | 54.000         | 6.460       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:46 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz, Ant 0 + 1 |                          |

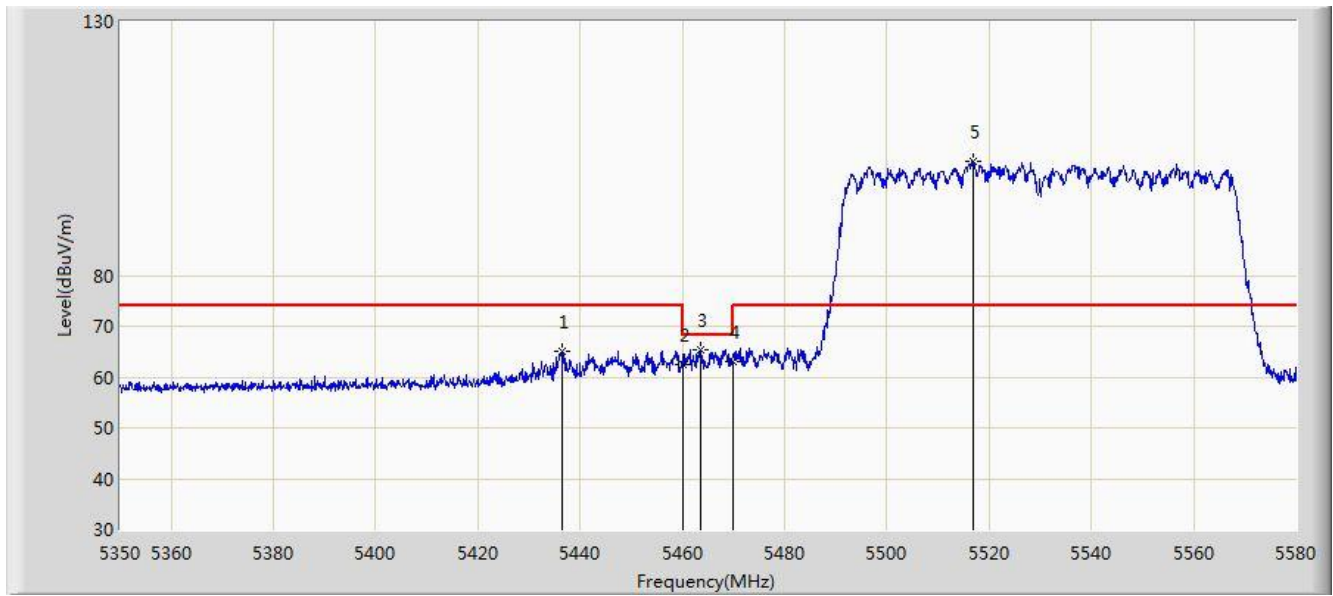


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5436.365        | 65.152                 | 58.508               | -8.848          | 74.000         | 6.644       | PK   |
| 2  |      |      | 5460.000        | 62.590                 | 55.788               | -11.410         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5463.505        | 65.386                 | 58.569               | -2.814          | 68.200         | 6.817       | PK   |
| 4  |      |      | 5470.000        | 62.936                 | 56.091               | -5.264          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5516.750        | 102.561                | 95.748               | N/A             | N/A            | 6.813       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:45 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz, Ant 0 + 1 |                          |

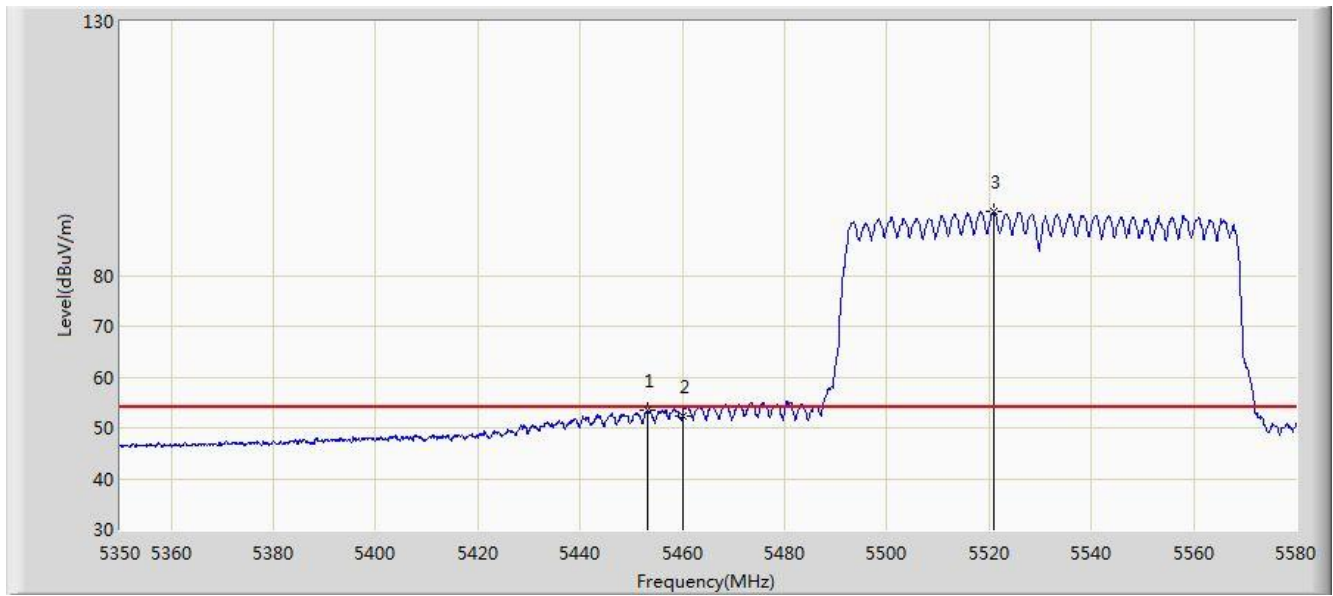


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5453.155        | 53.458                 | 46.690               | -0.542          | 54.000         | 6.768       | AV   |
| 2  |      |      | 5460.000        | 52.297                 | 45.495               | -1.703          | 54.000         | 6.802       | AV   |
| 3  |      | *    | 5520.890        | 92.630                 | 85.816               | N/A             | N/A            | 6.813       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:48 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz, Ant 0 + 1 |                          |

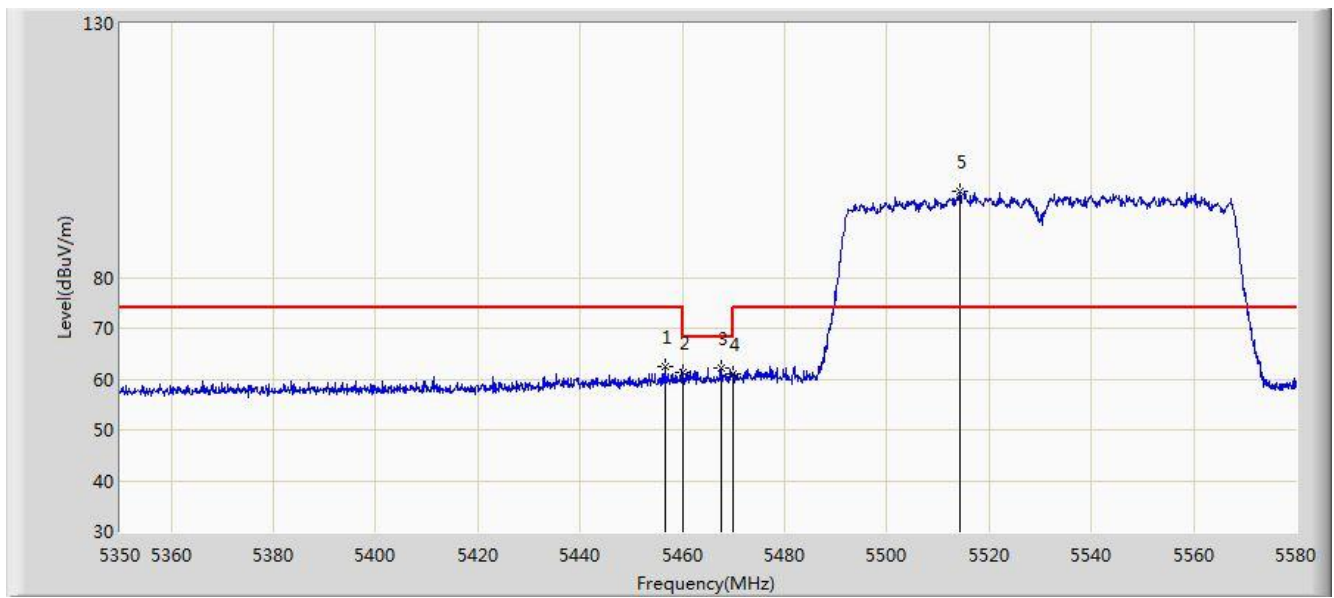


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5456.605        | 62.541                 | 55.754               | -11.459         | 74.000         | 6.787       | PK   |
| 2  |      |      | 5460.000        | 61.299                 | 54.497               | -12.701         | 74.000         | 6.802       | PK   |
| 3  |      |      | 5467.645        | 62.245                 | 55.410               | -5.955          | 68.200         | 6.835       | PK   |
| 4  |      |      | 5470.000        | 60.876                 | 54.031               | -7.324          | 68.200         | 6.845       | PK   |
| 5  |      | *    | 5514.220        | 96.942                 | 90.129               | N/A             | N/A            | 6.812       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:49 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz, Ant 0 + 1 |                          |

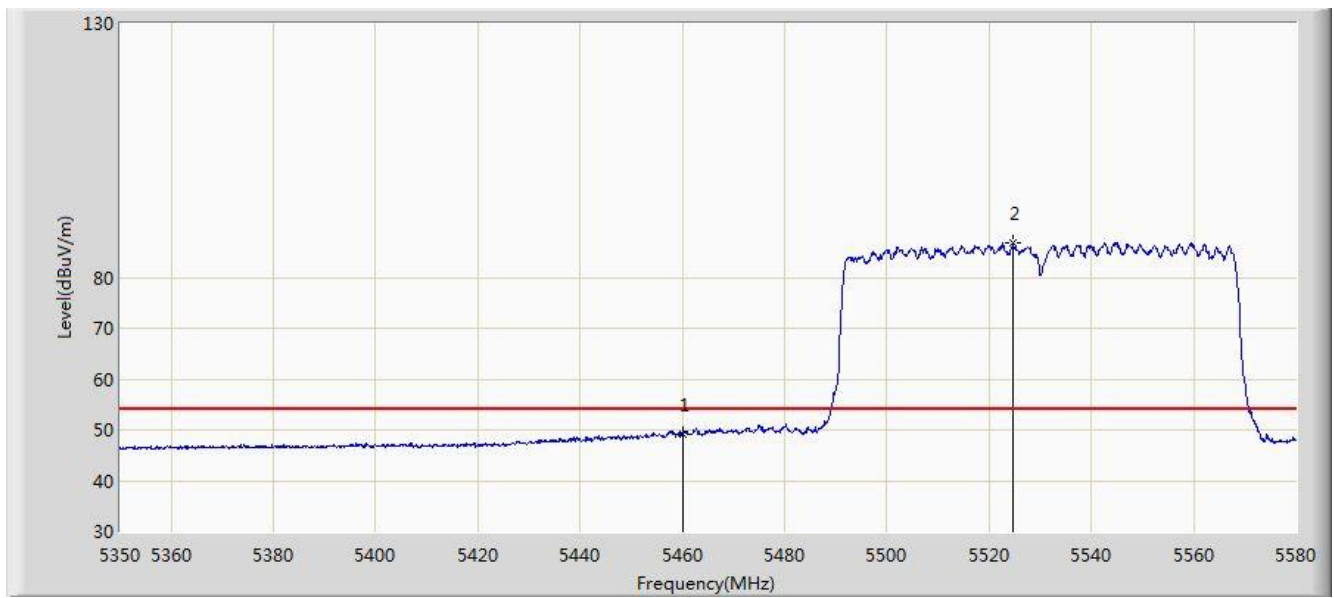


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 49.189                 | 42.387               | -4.811          | 54.000         | 6.802       | AV   |
| 2  |      | *    | 5524.800        | 86.759                 | 79.931               | N/A             | N/A            | 6.828       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:52 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant 0 + 1 |                          |

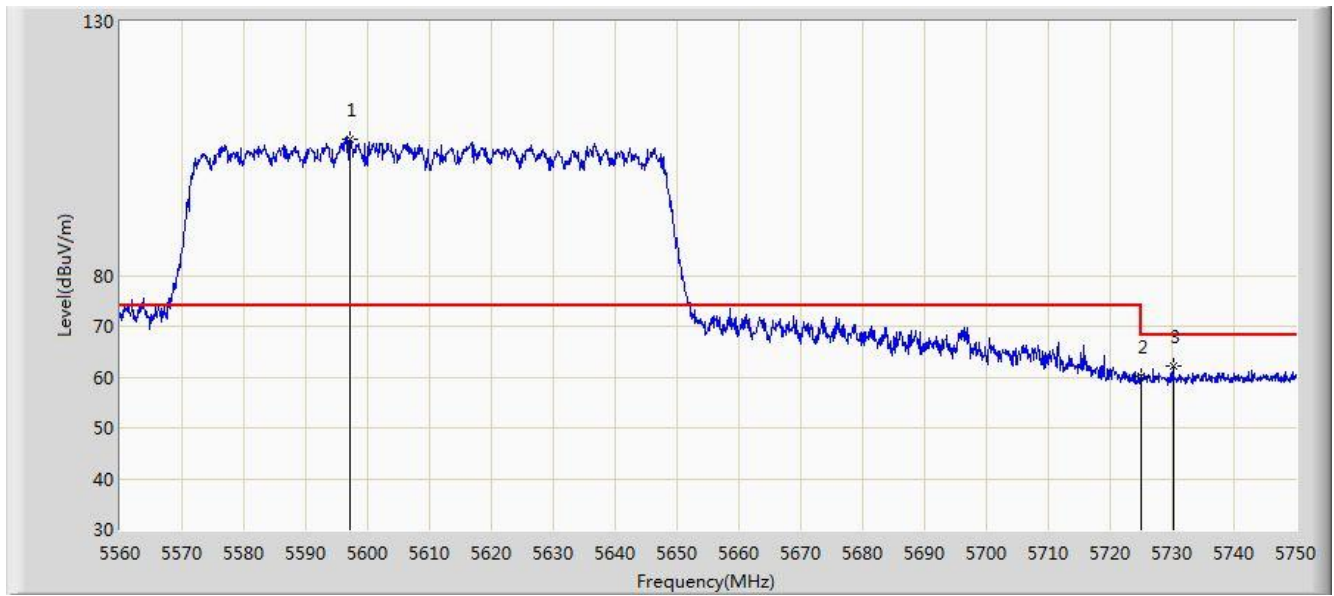


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5597.145        | 106.870                | 99.889               | N/A             | N/A            | 6.981       | PK   |
| 2  |      |      | 5725.000        | 60.192                 | 52.864               | -8.008          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5730.240        | 62.074                 | 54.722               | -6.126          | 68.200         | 7.352       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:54 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant 0 + 1 |                          |

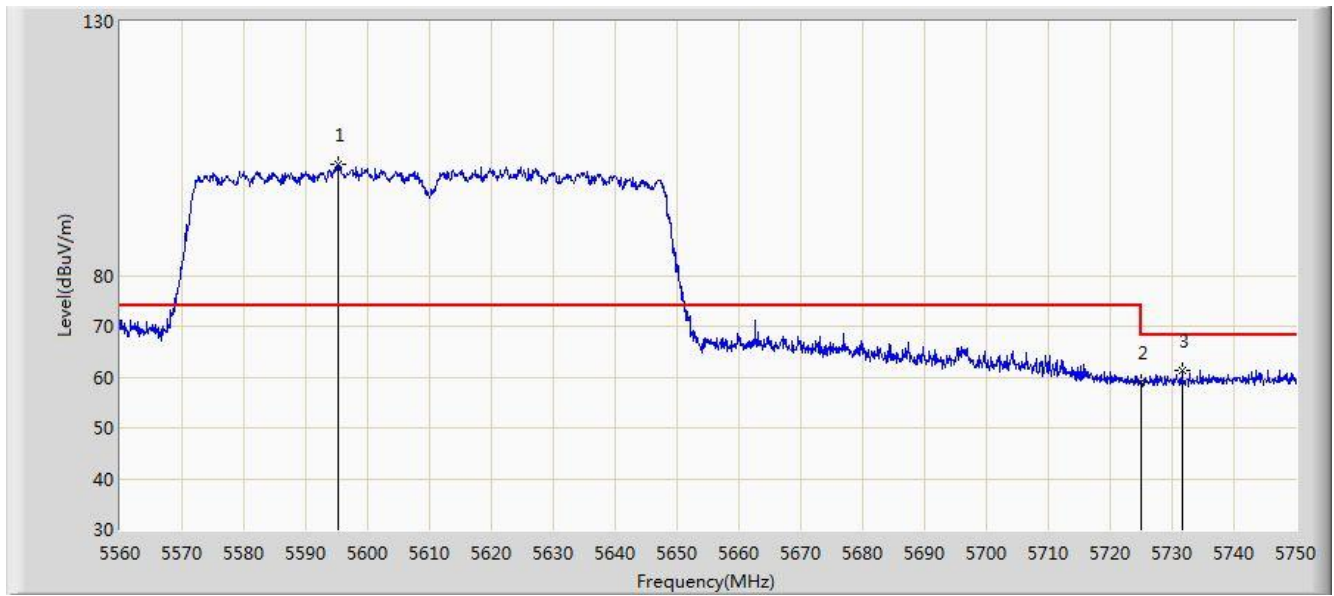


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5595.340        | 102.025                | 95.042               | N/A             | N/A            | 6.982       | PK   |
| 2  |      |      | 5725.000        | 58.988                 | 51.660               | -9.212          | 68.200         | 7.328       | PK   |
| 3  |      |      | 5731.570        | 61.226                 | 53.869               | -6.974          | 68.200         | 7.357       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:56 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Horizontal     |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz, Ant 0 + 1 |                          |

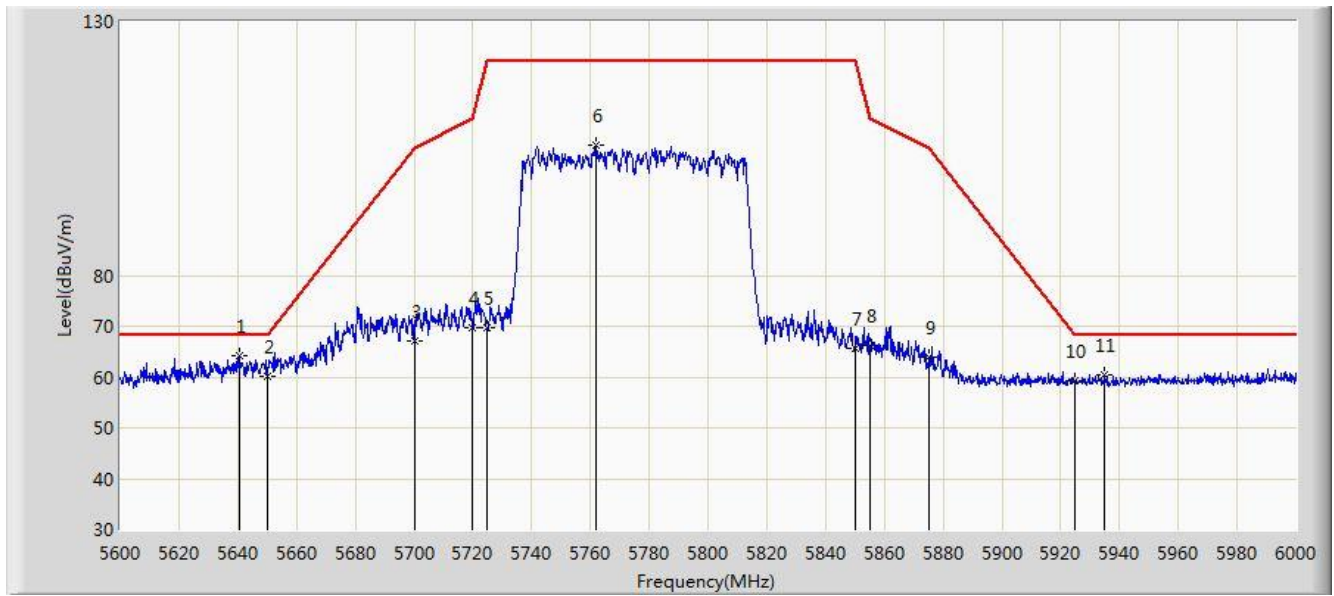


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5640.800        | 64.089                 | 57.104               | -4.111          | 68.200         | 6.986       | PK   |
| 2  |      |      | 5650.000        | 60.111                 | 53.106               | -8.089          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 67.187                 | 60.022               | -38.013         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 69.641                 | 62.342               | -41.159         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 69.606                 | 62.278               | -52.594         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5762.000        | 105.794                | 98.374               | N/A             | N/A            | 7.420       | PK   |
| 7  |      |      | 5850.000        | 65.787                 | 58.014               | -56.413         | 122.200        | 7.774       | PK   |
| 8  |      |      | 5855.000        | 66.316                 | 58.540               | -44.484         | 110.800        | 7.775       | PK   |
| 9  |      |      | 5875.000        | 64.000                 | 56.182               | -41.200         | 105.200        | 7.818       | PK   |
| 10 |      |      | 5925.000        | 59.311                 | 51.492               | -8.889          | 68.200         | 7.819       | PK   |
| 11 |      |      | 5935.000        | 60.541                 | 52.712               | -7.659          | 68.200         | 7.829       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2019/02/27 - 07:57 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                            | Polarity: Vertical       |
| EUT: WIFI+BT Combo Module                                           | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz, Ant 0 + 1 |                          |

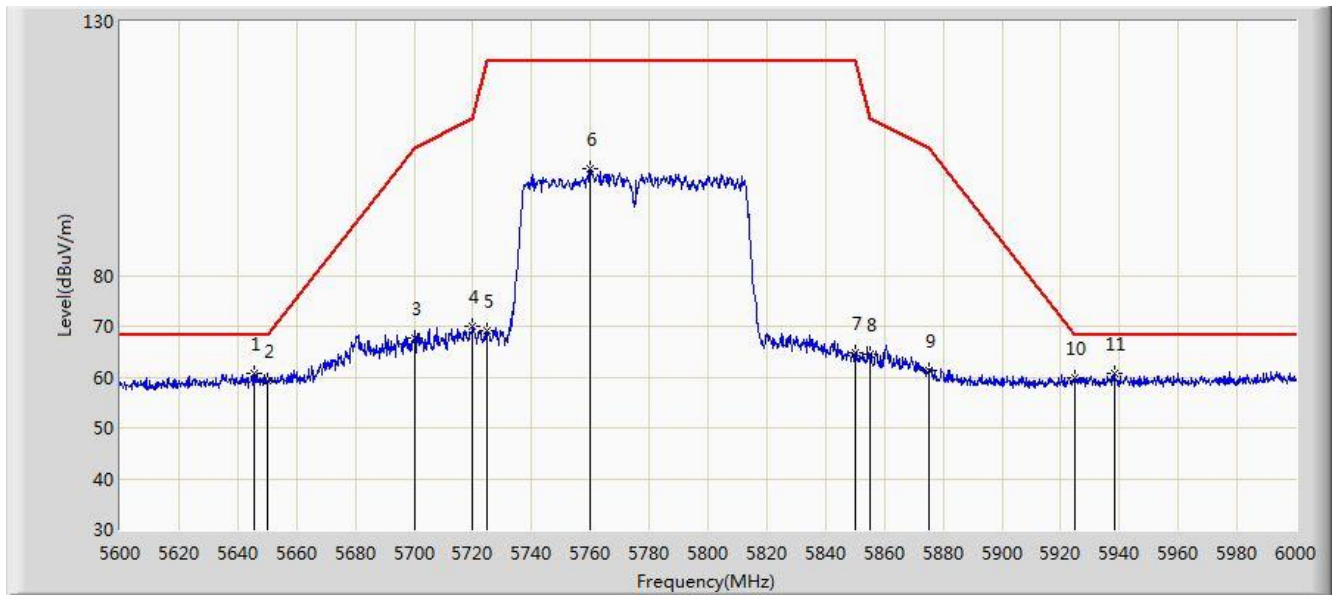

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5645.600        | 60.736                 | 53.741               | -7.464          | 68.200         | 6.996       | PK   |
| 2  |      |      | 5650.000        | 59.218                 | 52.213               | -8.982          | 68.200         | 7.005       | PK   |
| 3  |      |      | 5700.000        | 67.580                 | 60.415               | -37.620         | 105.200        | 7.165       | PK   |
| 4  |      |      | 5720.000        | 69.987                 | 62.688               | -40.813         | 110.800        | 7.299       | PK   |
| 5  |      |      | 5725.000        | 69.018                 | 61.690               | -53.182         | 122.200        | 7.328       | PK   |
| 6  |      |      | 5760.000        | 101.130                | 93.717               | N/A             | N/A            | 7.413       | PK   |
| 7  |      |      | 5850.000        | 64.721                 | 56.948               | -57.479         | 122.200        | 7.774       | PK   |
| 8  |      |      | 5855.000        | 64.512                 | 56.736               | -46.288         | 110.800        | 7.775       | PK   |
| 9  |      |      | 5875.000        | 61.255                 | 53.437               | -43.945         | 105.200        | 7.818       | PK   |
| 10 |      |      | 5925.000        | 59.879                 | 52.060               | -8.321          | 68.200         | 7.819       | PK   |
| 11 |      |      | 5938.200        | 60.721                 | 52.888               | -7.479          | 68.200         | 7.833       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

## 7.10. AC Conducted Emissions Measurement


### 7.10.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 ~ 0.50                                   | 66 ~ 56   | 56 ~ 46   |
| 0.50 ~ 5.0                                    | 56        | 46        |
| 5.0 ~ 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.10.2. Test Setup

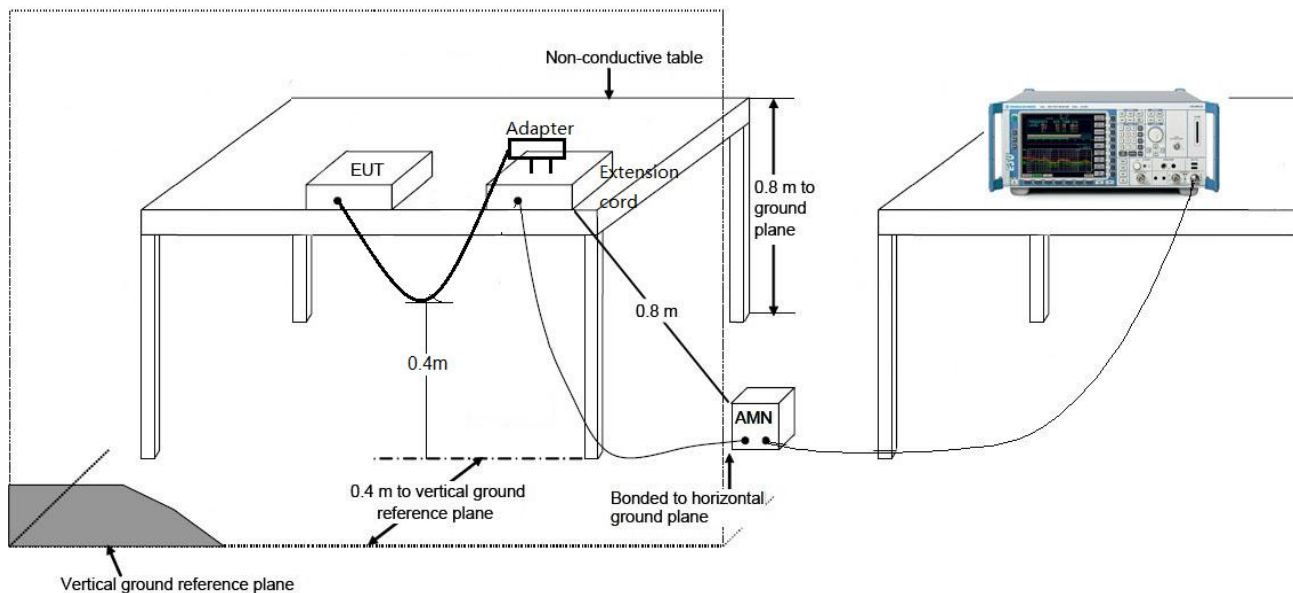

### 7.10.3. Test Result

|                                   |                          |
|-----------------------------------|--------------------------|
| Site: SR2                         | Time: 2019/03/12 - 18:43 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Liz Yuan       |
| Probe: ENV216_101683_Filter On    | Polarity: Neutral        |
| EUT: WIFI+BT Combo Module         | Power: AC 120V/60Hz      |
| Test Mode: Worst Case             |                          |

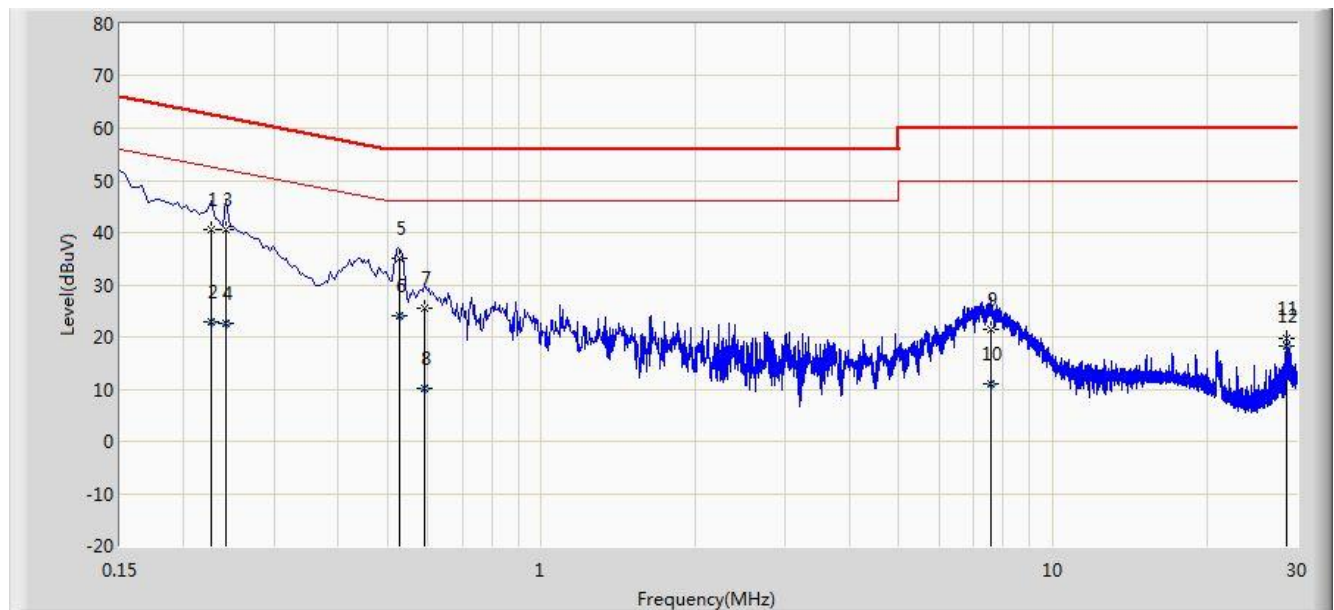


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-----------------|--------------|-------------|------|
| 1  |      |      | 0.226           | 40.639               | 30.656               | -21.956         | 62.595       | 9.982       | QP   |
| 2  |      |      | 0.226           | 23.033               | 13.051               | -29.562         | 52.595       | 9.982       | AV   |
| 3  |      |      | 0.242           | 40.571               | 30.576               | -21.456         | 62.027       | 9.995       | QP   |
| 4  |      |      | 0.242           | 22.466               | 12.471               | -29.561         | 52.027       | 9.995       | AV   |
| 5  |      | *    | 0.527           | 35.160               | 24.989               | -20.840         | 56.000       | 10.171      | QP   |
| 6  |      |      | 0.527           | 24.015               | 13.844               | -21.985         | 46.000       | 10.171      | AV   |
| 7  |      |      | 0.590           | 25.363               | 15.227               | -30.637         | 56.000       | 10.137      | QP   |
| 8  |      |      | 0.590           | 10.123               | -0.013               | -35.877         | 46.000       | 10.137      | AV   |
| 9  |      |      | 7.590           | 21.587               | 11.407               | -38.413         | 60.000       | 10.180      | QP   |
| 10 |      |      | 7.590           | 11.046               | 0.867                | -38.954         | 50.000       | 10.180      | AV   |
| 11 |      |      | 28.686          | 19.750               | 9.335                | -40.250         | 60.000       | 10.414      | QP   |
| 12 |      |      | 28.686          | 18.137               | 7.723                | -31.863         | 50.000       | 10.414      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

|                                   |                          |
|-----------------------------------|--------------------------|
| Site: SR2                         | Time: 2019/03/12 - 18:48 |
| Limit: FCC_Part15.207_CE_AC Power | Engineer: Liz Yuan       |
| Probe: ENV216_101683_Filter On    | Polarity: Neutral        |
| EUT: WIFI+BT Combo Module         | Power: AC 120V/60Hz      |
| Test Mode: Worst Case             |                          |

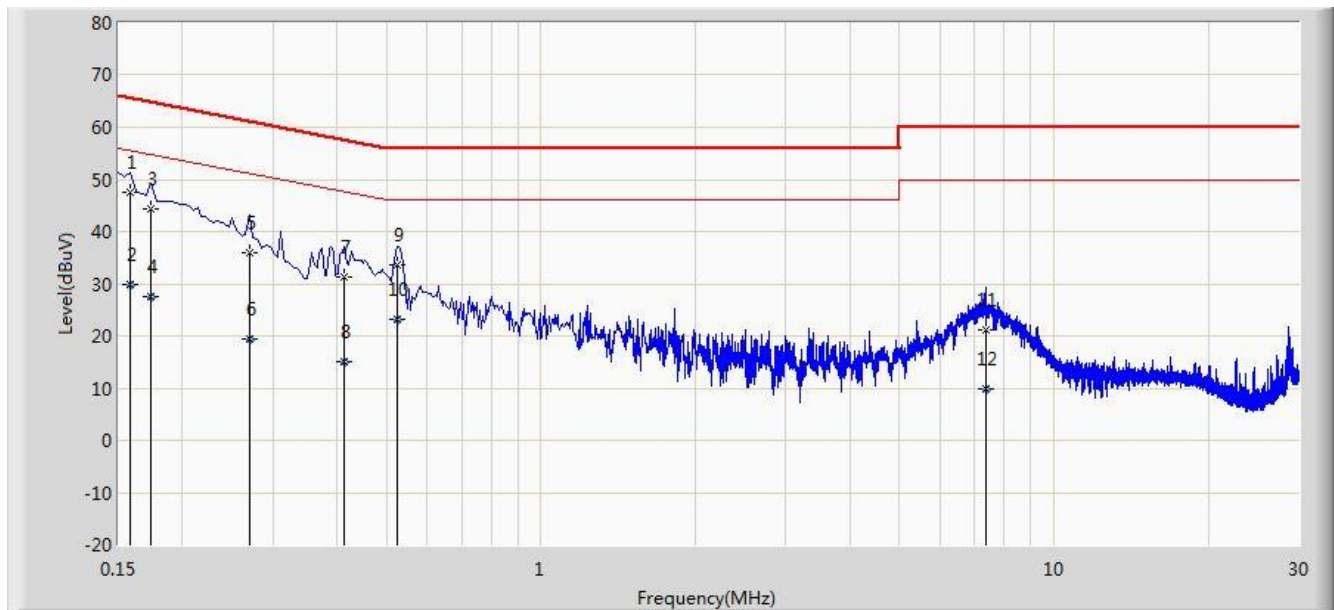

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-----------------|--------------|-------------|------|
| 1  |      | *    | 0.158           | 47.587               | 37.298               | -17.981         | 65.568       | 10.290      | QP   |
| 2  |      |      | 0.158           | 29.782               | 19.493               | -25.786         | 55.568       | 10.290      | AV   |
| 3  |      |      | 0.174           | 44.450               | 34.393               | -20.318         | 64.767       | 10.057      | QP   |
| 4  |      |      | 0.174           | 27.439               | 17.383               | -27.328         | 54.767       | 10.057      | AV   |
| 5  |      |      | 0.270           | 35.947               | 25.931               | -25.171         | 61.118       | 10.016      | QP   |
| 6  |      |      | 0.270           | 19.407               | 9.391                | -31.711         | 51.118       | 10.016      | AV   |
| 7  |      |      | 0.414           | 31.189               | 21.066               | -26.379         | 57.568       | 10.123      | QP   |
| 8  |      |      | 0.414           | 15.160               | 5.037                | -32.407         | 47.568       | 10.123      | AV   |
| 9  |      |      | 0.526           | 33.659               | 23.488               | -22.341         | 56.000       | 10.172      | QP   |
| 10 |      |      | 0.526           | 23.047               | 12.875               | -22.953         | 46.000       | 10.172      | AV   |
| 11 |      |      | 7.374           | 21.038               | 10.856               | -38.962         | 60.000       | 10.182      | QP   |
| 12 |      |      | 7.374           | 9.892                | -0.290               | -40.108         | 50.000       | 10.182      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules and ISED rules.

---

The End

## **Appendix A - Test Setup Photograph**

Refer to “1902RSU013-UT” file.

## **Appendix B - EUT Photograph**

Refer to “1902RSU013-UE” file.