

## FCC Test Report (CA mode\_Spot Check)

**Report No.:** RF170208C16B-4

**FCC ID:** H8NSFE3046

**Original FCC ID:** H8NSS2FII

**Test Model:** SS2FII Femtocell Multi-band SOHO

**Received Date:** Jun. 11, 2018

**Test Date:** Jun. 14 ~ Sep. 07, 2018

**Issued Date:** Sep. 10, 2018

**Applicant:** ASKEY COMPUTER CORP.

**Address:** 10F, No. 119, Jiankang Rd., Zhonghe Dist., New Taipei City 23585, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Configuration of System under Test.....	8
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail.....	9
3.4 EUT Operating Conditions.....	9
3.5 General Description of Applied Standards.....	9
<b>4 Test Types and Results</b> .....	<b>10</b>
4.1 Output Power Measurement.....	10
4.1.1 Limits of Output Power Measurement.....	10
4.1.2 Test Procedures.....	10
4.1.3 Test Setup.....	11
4.1.4 Test Results.....	12
4.2 Emission Bandwidth Measurement.....	39
4.2.1 Test Procedure.....	39
4.2.2 Test Setup.....	39
4.2.3 Test Result.....	40
4.3 Band Edge Measurement.....	42
4.3.1 Limits of Band Edge Measurement.....	42
4.3.2 Test Setup.....	42
4.3.3 Test Procedures.....	42
4.3.4 Test Results.....	42
4.4 Conducted Spurious Emissions.....	43
4.4.1 Limits of Conducted Spurious Emissions Measurement.....	43
4.4.2 Test Setup.....	43
4.4.3 Test Procedure.....	43
4.4.4 Test Results.....	44
4.5 Radiated Emission Measurement.....	48
4.5.1 Limits of Radiated Emission Measurement.....	48
4.5.2 Test Procedure.....	48
4.5.3 Deviation from Test Standard.....	48
4.5.4 Test Setup.....	49
4.5.5 Test Results.....	50
<b>5 Pictures of Test Arrangements</b> .....	<b>52</b>
<b>Appendix – Information on the Testing Laboratories</b> .....	<b>53</b>

### Release Control Record

Issue No.	Description	Date Issued
RF170208C16B-4	Original release	Sep. 10, 2018

## 1 Certificate of Conformity

**Product:** Femtocell

**Brand:** Nokia

**Test Model:** SS2FII Femtocell Multi-band SOHO

**Sample Status:** Engineering sample

**Applicant:** ASKEY COMPUTER CORP.

**Test Date:** Jun. 14 ~ Sep. 07, 2018

**Standards:** FCC Part 24, Subpart E  
FCC Part 27, Subpart C, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Pettie Chen , **Date:** Sep. 10, 2018  
Pettie Chen / Senior Specialist

**Approved by :** Dylan Chiou , **Date:** Sep. 10, 2018  
Dylan Chiou / Project Engineer

## 2 Summary of Test Results

FCC Clause		Test Item	Result	Remarks
FCC Part 24 & Part 2	FCC Part 27 & Part 2			
2.1046 24.232	-	Effective radiated power	Pass	Meet the requirement of limit.
-	2.1046 27.50(d)(4)	Equivalent Isotropically Radiated Power	Pass	Meet the requirement of limit.
2.1049 24.238(b)	-	Occupied Bandwidth	Pass	Meet the requirement of limit.
-	2.1049 27.53(m)(6)	Emission Bandwidth	Pass	Meet the requirement of limit.
24.238(b)	2.1051 27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	2.1051 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.1dB at 4230.00MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 11, 2018	Apr. 10, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	May 29, 2018	May 28, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Dec. 12, 2017	Dec. 11, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Loop Antenna TESEQ	HLA 6121	45745	Jun. 14, 2018	Jun. 13, 2019
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Aug. 08, 2017	Aug. 07, 2018
			Aug. 08, 2018	Aug. 07, 2019
Preamplifier Agilent (Above 1GHz)	8449B	3008A01638	Feb. 22, 2018	Feb. 21, 2019
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	Jan. 15, 2018	Jan. 14, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Aug. 08, 2017	Aug. 07, 2018
			Aug. 08, 2018	Aug. 07, 2019
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 01, 2017	Jul. 31, 2018
			Jul. 31, 2018	Jul. 30, 2019
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Temperature And Humidity Chamber TERCHY	HRM-120RF	931022	Nov. 20, 2017	Nov. 19, 2018
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Radio Communication Analyzer	MT8821C	6261786083	Dec. 21, 2017	Dec. 20, 2018

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 9.  
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
4. The FCC Site Registration No. is 215374.  
5. The IC Site Registration No. is IC 7450F-9.

### 3 General Information

#### 3.1 General Description of EUT

Product	Femtocell
Brand	Nokia
Test Model	SS2FII Femtocell Multi-band SOHO
Sample Status	Engineering sample
Power Supply Rating	12Vdc (Adapter)
Modulation Type	LTE: QPSK, 16QAM, 64QAM
Operating Frequency	LTE Band 2 (Channel Bandwidth 5MHz): 1932.5MHz ~ 1987.5MHz LTE Band 2 (Channel Bandwidth 10MHz): 1935.0MHz ~ 1985.0MHz LTE Band 2 (Channel Bandwidth 15MHz): 1937.5MHz ~ 1982.5MHz LTE Band 2 (Channel Bandwidth 20MHz): 1940.0MHz ~ 1980.0MHz LTE Band 4 (Channel Bandwidth 5MHz): 2112.5MHz ~ 2152.5MHz LTE Band 4 (Channel Bandwidth 10MHz): 2115.0MHz ~ 2150.0MHz LTE Band 4 (Channel Bandwidth 15MHz): 2117.5MHz ~ 2147.5MHz LTE Band 4 (Channel Bandwidth 20MHz): 2120.0MHz ~ 2145.0MHz
Emission Designator	Refer to Note
Max. EIRP Power	Refer to Note
Antenna Type	LTE Band 2: Antenna 2: PIFA antenna with 2.9dBi gain Antenna 4: PIFA antenna with 3.7dBi gain LTE Band 4: Antenna 1: PIFA antenna with 3.1dBi gain Antenna 3: PIFA antenna with 2.6dBi gain
Antenna Connector	NA
Accessory Device	Adapter, GPS antenna (Brand: INPAQ, model: GPSGLONASS15D-S6-0341-A, cable: 4.55m non-shielded cable w/o core)
Data Cable Supplied	2.95m non-shielded RJ45 cable w/o core

Note:

- Exhibit prepared for FCC Spot Check Verification report, the format, test items and amount of spot-check test data are decided by applicant's engineering judgment, for more details please refer to declaration letter exhibit.
- The EUT uses following adapters. (Adapter 2 is new)

Adapter 1	
Brand	SHENZHEN FRECOM ELECTRONICS CO., LTD
Model	F24W5-120200SPAU
Input Power	100-240Vac, 50/60Hz, 0.6A
Output Power	12Vdc, 2A
Power Line	1.5m DC cable without core attached on adapter

<b>Adapter 2</b>	
Brand	AOEM
Model	ADS0248T-W120200(H)
Input Power	100-240Vac~50-60Hz 0.6A
Output Power	12Vdc / 2.0A
Power Line	1.55m DC cable without core attached on adapter

\*After pre-testing, adapter 1 was the worst case for the final tests.


3. The EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX FUNCTION	RX FUNCTION
LTE	2TX	2RX

4. Emission Designator as below.

Mode	Output power			Emission Designator		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
CA mode: LTE Band 2 5M +LTE Band 4 5M	0.550W (27.4dBm)	0.489W (26.9dBm)	0.457W (26.6dBm)	8M84G7D	8M88W7D	8M88W7D
CA mode: LTE Band 2 10M +LTE Band 4 10M	0.575W (27.6dBm)	0.501W (27.0dBm)	0.437W (26.4dBm)	-	-	-
CA mode: LTE Band 2 20M +LTE Band 4 20M	0.562W (27.5dBm)	0.525W (27.2dBm)	0.457W (26.6dBm)	-	-	-

### 3.2 Configuration of System under Test

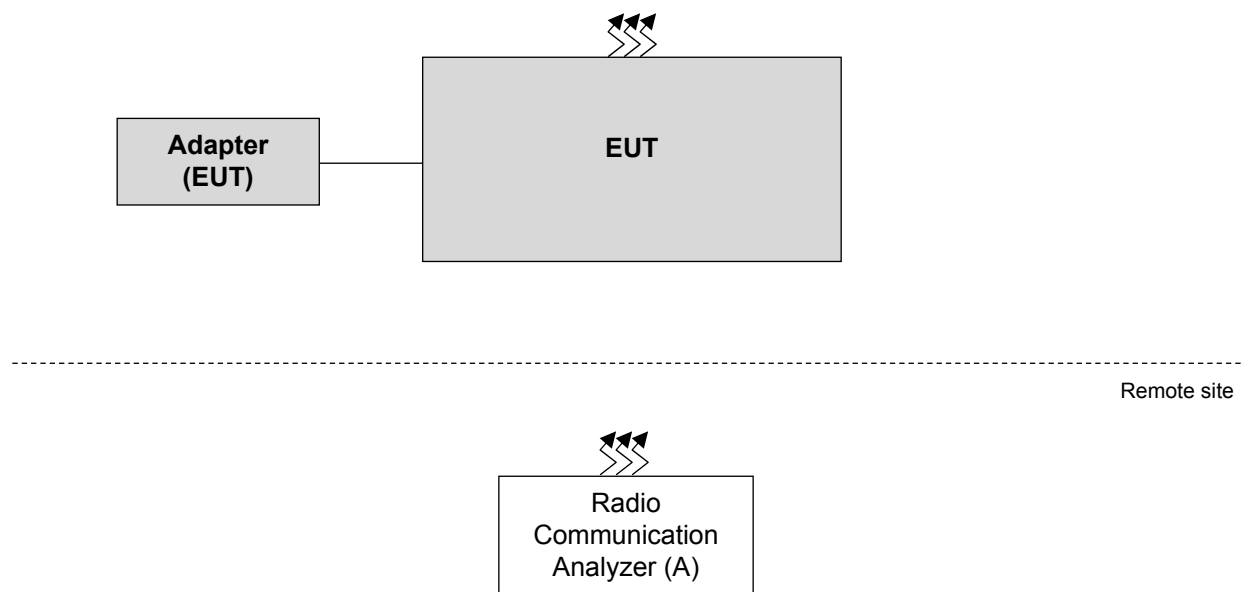



### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Radio Communication Analyzer	Anritsu	MT8820C	6201010284	NA	-

Note: 1. All power cords of the above support units are non-shielded (1.8m).

### 3.3 Test Mode Applicability and Tested Channel Detail

Following channel(s) was (were) selected for the final test as listed below:

Test Mode	Band	Tested Channel	Band	Tested Channel
1	LTE Band 2 (Channel Bandwidth 5MHz)	625(1932.5MHz), 900(1960.0MHz), 1175(1987.5MHz)	LTE Band 4 (Channel Bandwidth 5MHz)	1975(2112.5MHz), 2175(2132.5MHz), 2375(2152.5MHz)
2	LTE Band 2 (Channel Bandwidth 10MHz)	650(1935.0MHz), 900(1960.0MHz), 1150(1985.0MHz)	LTE Band 4 (Channel Bandwidth 10MHz)	2000(2115.0MHz), 2175(2132.5MHz), 2350(2150.0MHz)
3	LTE Band 2 (Channel Bandwidth 20MHz)	700(1940.0MHz), 900(1960.0MHz), 1100(1980.0MHz)	LTE Band 4 (Channel Bandwidth 20MHz)	2050(2120.0MHz), 2175(2132.5MHz), 2300(2145.0MHz)

Note: Depends on 3GPP TS 36.141 Ver. 13.4.0 clause 4.7 and consult with manufacturer to declare test mode.

### 3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**FCC 47 CFR Part 27**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D 2010**

**3GPP TS 36.141 version 13.4.0**

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.r.p.

#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10MHz for LTE Mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dB}$ .

##### **Conducted Power Measurement:**

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

### 4.1.3 Test Setup

EIRP / ERP Measurement:

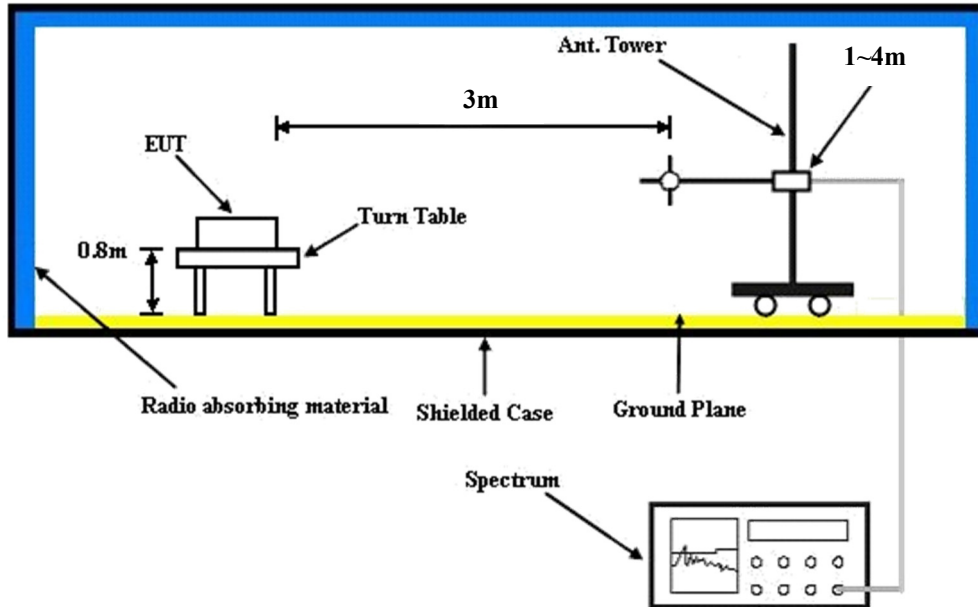

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 Test Results

##### Modulation Type: QPSK

EIRP Power (dBm)

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-20.7	21.0	-0.3	20.7	30.0	-9.3
Antenna Polarity & Test Distance: Vertical at 3 m							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-16.2	26.3	-0.3	26.0	30.0	-4.0

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-19.5	22.4	-0.4	22.0	30.0	-8.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-14.8	27.8	-0.4	27.4	30.0	-2.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-19.3	22.7	-0.3	22.4	30.0	-7.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-16.2	26.2	-0.3	25.9	30.0	-4.1

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-20.0	21.7	-0.3	21.4	30.0	-8.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-15.4	27.1	-0.3	26.8	30.0	-3.2

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-19.63	22.22	-0.32	21.90	30.00	-8.10
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-15.6	27.0	-0.4	26.6	30.0	-3.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-20.8	21.2	-0.3	20.9	30.0	-9.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-16.8	25.6	-0.3	25.3	30.0	-4.7

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-21.3	20.4	-0.3	20.1	30.0	-9.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-15.2	27.3	-0.3	27.0	30.0	-3.0

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-20.4	21.5	-0.4	21.1	30.0	-8.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-15.5	27.1	-0.4	26.7	30.0	-3.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-19.8	22.0	-0.3	21.7	30.0	-8.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-16.5	26.0	-0.3	25.7	30.0	-4.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-19.9	21.8	-0.3	21.5	30.0	-8.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-15.7	26.8	-0.3	26.5	30.0	-3.5

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-22.5	19.4	-0.4	19.0	30.0	-11.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2	2132.5	-15.1	27.5	-0.4	27.1	30.0	-2.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-21.5	20.4	-0.3	20.1	30.0	-9.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-18.3	24.1	-0.3	23.8	30.0	-6.2

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-19.2	22.5	-0.3	22.2	30.0	-7.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-14.6	27.9	-0.3	27.6	30.0	-2.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-22.2	19.7	-0.4	19.3	30.0	-10.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-16.1	26.5	-0.4	26.1	30.0	-3.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-21.2	20.7	-0.3	20.4	30.0	-9.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-18.0	24.4	-0.3	24.1	30.0	-5.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-21.3	20.4	-0.3	20.1	30.0	-9.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-15.1	27.4	-0.3	27.1	30.0	-2.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-22.4	19.5	-0.4	19.1	30.0	-10.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-17.1	25.5	-0.4	25.1	30.0	-4.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-21.4	20.5	-0.3	20.2	30.0	-9.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-16.4	26.0	-0.3	25.7	30.0	-4.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-20.2	21.6	-0.3	21.3	30.0	-8.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-18.0	24.5	-0.3	24.2	30.0	-5.8

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.3	23.6	-0.4	23.2	30.0	-6.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.0	24.6	-0.4	24.2	30.0	-5.8

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-19.0	22.9	-0.3	22.6	30.0	-7.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-15.1	27.4	-0.3	27.1	30.0	-2.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-19.1	22.7	-0.3	22.4	30.0	-7.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-14.8	27.7	-0.3	27.4	30.0	-2.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-19.2	22.7	-0.4	22.3	30.0	-7.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.2	24.4	-0.4	24.0	30.0	-6.0

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-18.5	23.4	-0.3	23.1	30.0	-6.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-15.5	27.0	-0.3	26.7	30.0	-3.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-19.7	22.1	-0.3	21.8	30.0	-8.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-15.9	26.6	-0.3	26.3	30.0	-3.7

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-17.8	24.1	-0.4	23.7	30.0	-6.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.0	24.6	-0.4	24.2	30.0	-5.8

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-19.6	22.3	-0.3	22.0	30.0	-8.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-14.7	27.8	-0.3	27.5	30.0	-2.5

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

**Modulation Type: 16QAM**

EIRP Power (dBm)

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-20.9	20.8	-0.3	20.5	30.0	-9.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-16.6	25.9	-0.3	25.6	30.0	-4.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-20.2	21.7	-0.4	21.3	30.0	-8.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-15.3	27.3	-0.4	26.9	30.0	-3.1

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-19.8	22.2	-0.3	21.9	30.0	-8.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-16.7	25.7	-0.3	25.4	30.0	-4.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-20.9	20.8	-0.3	20.5	30.0	-9.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-16.1	26.4	-0.3	26.1	30.0	-3.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-20.3	21.6	-0.4	21.2	30.0	-8.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-16.1	26.5	-0.4	26.1	30.0	-3.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-21.5	20.5	-0.3	20.2	30.0	-9.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-16.9	25.5	-0.3	25.2	30.0	-4.8

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-21.6	20.1	-0.3	19.8	30.0	-10.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-15.5	27.0	-0.3	26.7	30.0	-3.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-20.6	21.3	-0.4	20.9	30.0	-9.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-15.8	26.8	-0.4	26.4	30.0	-3.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-20.0	22.0	-0.3	21.7	30.0	-8.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-16.4	26.0	-0.3	25.7	30.0	-4.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-20.3	21.4	-0.3	21.1	30.0	-8.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-16.6	25.9	-0.3	25.6	30.0	-4.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-22.6	19.3	-0.4	18.9	30.0	-11.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2	2132.5	-15.2	27.4	-0.4	27.0	30.0	-3.0

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-21.6	20.3	-0.3	20.0	30.0	-10.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-18.4	24.0	-0.3	23.7	30.0	-6.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-19.8	21.9	-0.3	21.6	30.0	-8.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-15.3	27.2	-0.3	26.9	30.0	-3.1

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-22.3	19.6	-0.4	19.2	30.0	-10.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-16.4	26.2	-0.4	25.8	30.0	-4.2

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-21.6	20.3	-0.3	20.0	30.0	-10.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-17.4	25.0	-0.3	24.7	30.0	-5.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-22.2	19.5	-0.3	19.2	30.0	-10.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-15.5	27.0	-0.3	26.7	30.0	-3.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-22.7	19.2	-0.4	18.8	30.0	-11.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-17.6	25.0	-0.4	24.6	30.0	-5.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-21.6	20.3	-0.3	20.0	30.0	-10.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-16.5	25.9	-0.3	25.6	30.0	-4.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-20.4	21.5	-0.4	21.1	30.0	-8.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-18.2	24.3	-0.3	24.0	30.0	-6.0

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.8	23.1	-0.4	22.7	30.0	-7.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.4	24.2	-0.4	23.8	30.0	-6.2

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-19.1	22.8	-0.3	22.5	30.0	-7.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-15.6	26.9	-0.3	26.6	30.0	-3.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-19.5	22.3	-0.3	22.0	30.0	-8.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-15.8	26.7	-0.3	26.4	30.0	-3.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-19.6	22.3	-0.4	21.9	30.0	-8.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.5	24.1	-0.4	23.7	30.0	-6.3

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-18.8	23.1	-0.3	22.8	30.0	-7.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-16.1	26.4	-0.3	26.1	30.0	-3.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-19.9	21.9	-0.3	21.6	30.0	-8.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-16.1	26.4	-0.3	26.1	30.0	-3.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.4	23.5	-0.4	23.1	30.0	-6.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.8	23.8	-0.4	23.4	30.0	-6.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-20.1	21.8	-0.3	21.5	30.0	-8.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-15.0	27.5	-0.3	27.2	30.0	-2.8

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

**Modulation Type: 64QAM**

EIRP Power (dBm)

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-21.6	20.1	-0.3	19.8	30.0	-10.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-16.9	25.6	-0.3	25.3	30.0	-4.7

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-20.5	21.4	-0.4	21.0	30.0	-9.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-15.6	27.0	-0.4	26.6	30.0	-3.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 625 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-20.0	22.0	-0.3	21.7	30.0	-8.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-16.8	25.6	-0.3	25.3	30.0	-4.7

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-21.0	20.7	-0.3	20.4	30.0	-9.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-16.2	26.3	-0.3	26.0	30.0	-4.0

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-20.6	21.3	-0.4	20.9	30.0	-9.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-16.2	26.4	-0.4	26.0	30.0	-4.0

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 900 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-21.7	20.3	-0.3	20.0	30.0	-10.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-17.5	24.9	-0.3	24.6	30.0	-5.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 1975					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-21.8	19.9	-0.3	19.6	30.0	-10.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2112.5	-15.8	26.7	-0.3	26.4	30.0	-3.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-21.5	20.4	-0.4	20.0	30.0	-10.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-16.1	26.5	-0.4	26.1	30.0	-3.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 1: LTE Band 2 5MHz: TX channel 1175 + LTE Band 4 5MHz TX channel 2375					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-20.8	21.2	-0.3	20.9	30.0	-9.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2152.5	-17.3	25.1	-0.3	24.8	30.0	-5.2

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).



MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-20.4	21.3	-0.3	21.0	30.0	-9.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-16.8	25.7	-0.3	25.4	30.0	-4.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-22.9	19.0	-0.4	18.6	30.0	-11.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2	2132.5	-15.8	26.8	-0.4	26.4	30.0	-3.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 650 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-22.1	19.8	-0.3	19.5	30.0	-10.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-18.7	23.7	-0.3	23.4	30.0	-6.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-19.9	21.8	-0.3	21.5	30.0	-8.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-15.8	26.7	-0.3	26.4	30.0	-3.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-23.0	18.9	-0.4	18.5	30.0	-11.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-16.8	25.8	-0.4	25.4	30.0	-4.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-21.8	20.1	-0.3	19.8	30.0	-10.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-18.7	23.7	-0.3	23.4	30.0	-6.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2000					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-22.4	19.3	-0.3	19.0	30.0	-11.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2115.0	-15.9	26.6	-0.3	26.3	30.0	-3.7

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-23.1	18.8	-0.4	18.4	30.0	-11.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.1	24.5	-0.4	24.1	30.0	-5.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 2: LTE Band 2 10MHz: TX channel 1150 + LTE Band 4 10MHz TX channel 2350					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-21.9	20.0	-0.3	19.7	30.0	-10.3
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2150.0	-16.6	25.8	-0.3	25.5	30.0	-4.5

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-21.2	20.6	-0.3	20.3	30.0	-9.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-18.3	24.2	-0.3	23.9	30.0	-6.1

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-19.0	22.9	-0.4	22.5	30.0	-7.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.8	23.8	-0.4	23.4	30.0	-6.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 700 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-19.6	22.3	-0.3	22.0	30.0	-8.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-16.1	26.4	-0.3	26.1	30.0	-3.9

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-19.9	21.9	-0.3	21.6	30.0	-8.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-16.2	26.3	-0.3	26.0	30.0	-4.0

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-19.2	22.7	-0.4	22.3	30.0	-7.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.7	23.9	-0.4	23.5	30.0	-6.5

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 900 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-19.2	22.7	-0.3	22.4	30.0	-7.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-16.6	25.9	-0.3	25.6	30.0	-4.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2050					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-20.2	21.6	-0.3	21.3	30.0	-8.7
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2120.0	-16.8	25.7	-0.3	25.4	30.0	-4.6

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2175					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-19.0	22.9	-0.4	22.5	30.0	-7.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2132.5	-18.9	23.7	-0.4	23.3	30.0	-6.7

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

MODE		Mode 3: LTE Band 2 20MHz: TX channel 1100 + LTE Band 4 20MHz TX channel 2300					
Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-20.4	21.5	-0.3	21.2	30.0	-8.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	2145.0	-15.6	26.9	-0.3	26.6	30.0	-3.4

Note: EIRP (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

## 4.2 Emission Bandwidth Measurement

### 4.2.1 Test Procedure


Part 24:

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

Part 27:

According to FCC 27.53(m)(6) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

### 4.2.2 Test Setup

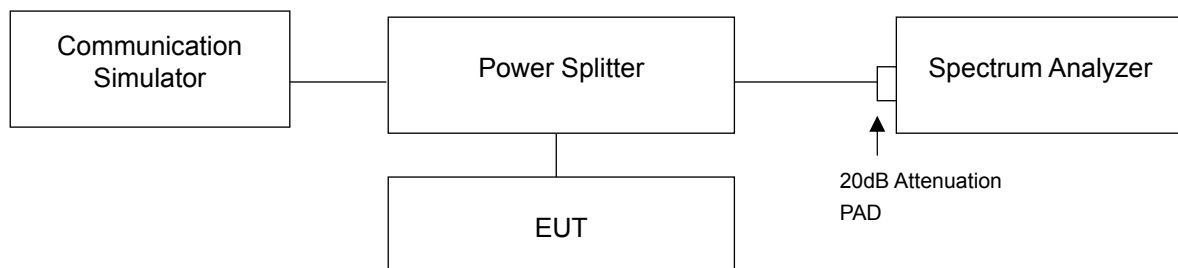


### 4.2.3 Test Result

Chain 0

Mode		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2000					
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
900	1960.0	9.49	9.55	9.57	8.90	8.93	8.90
2000	2115.0	9.58	9.58	9.59	8.90	8.90	8.90
Total		-			17.80	17.83	17.80


#### Spectrum Plot of Worst Value

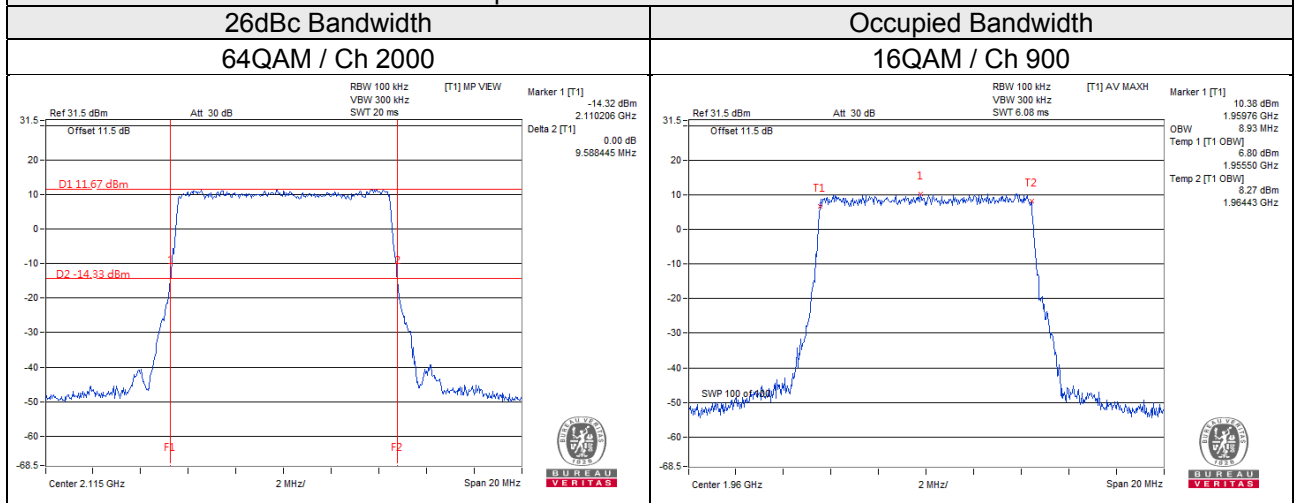



Chain 1

Mode		Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2000					
Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
900	1960.0	9.56	9.50	9.57	8.90	8.90	8.90
2000	2115.0	9.55	9.55	9.57	8.93	8.90	8.90
Total		-			17.83	17.80	17.80

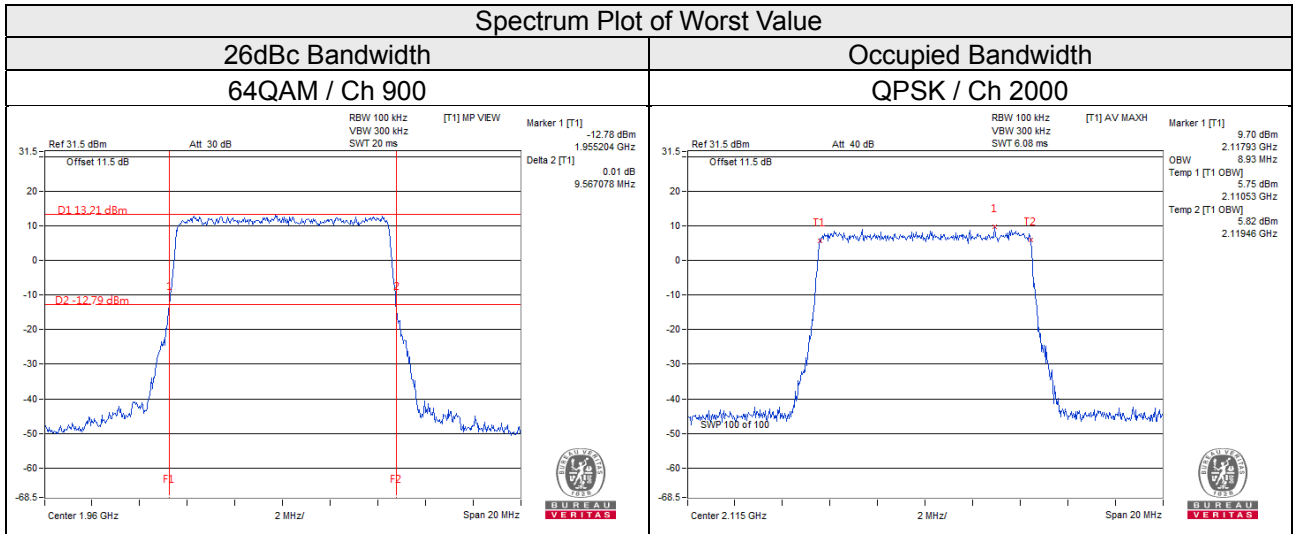


### 4.3 Band Edge Measurement

#### 4.3.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


#### 4.3.2 Test Setup

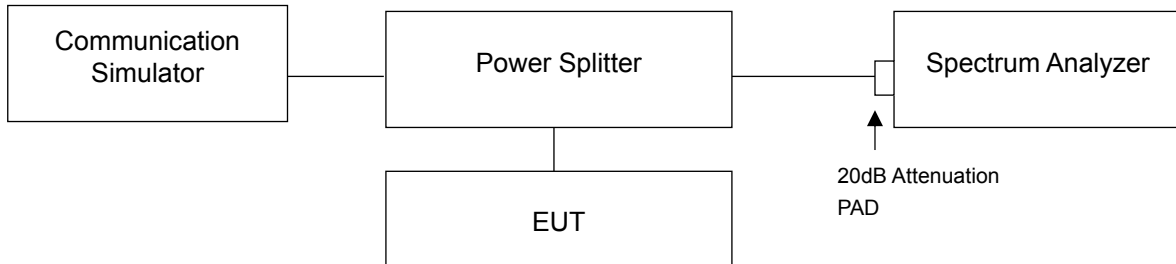

#### 4.3.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 50kHz and VB of the spectrum is 150kHz (LTE).
- Record the max trace plot into the test report.

#### 4.3.4 Test Results

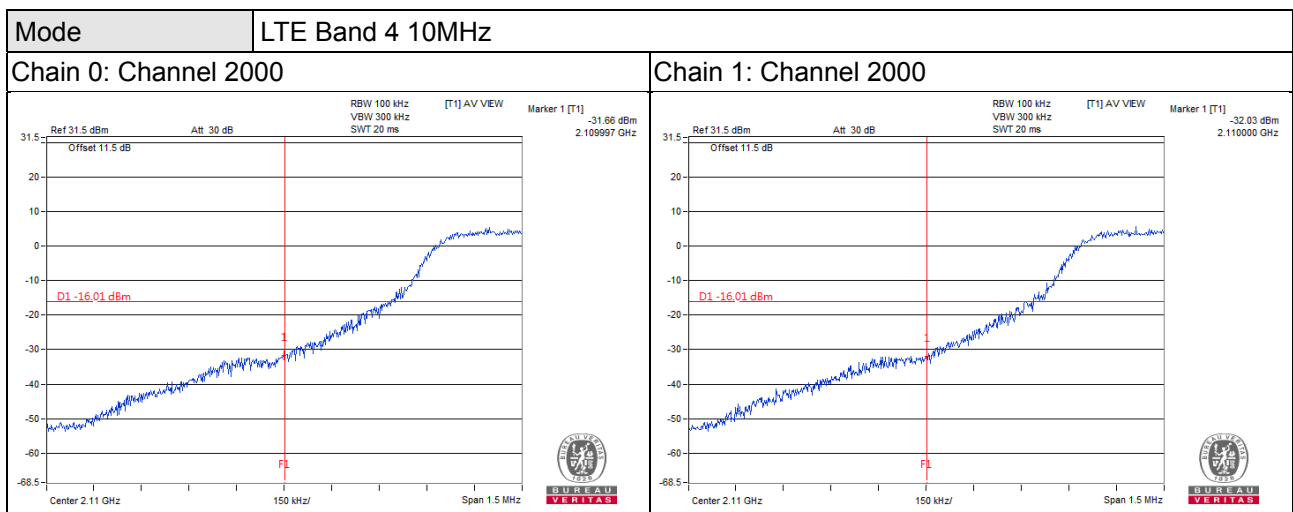


## 4.4 Conducted Spurious Emissions

### 4.4.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 4.4.2 Test Setup

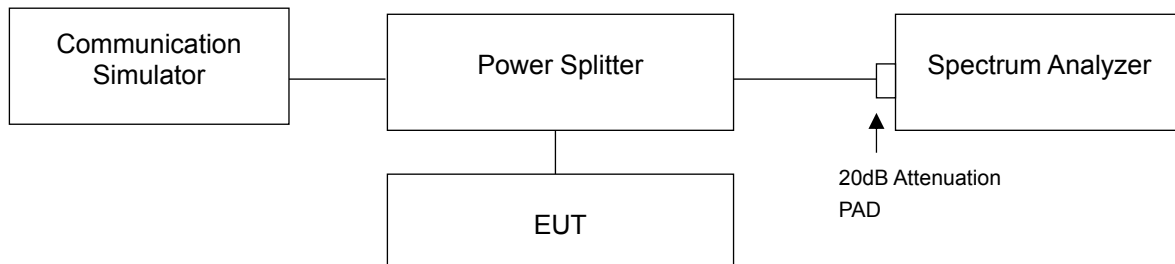


### 4.4.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 20GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.


### 4.4.4 Test Results

Chain 0

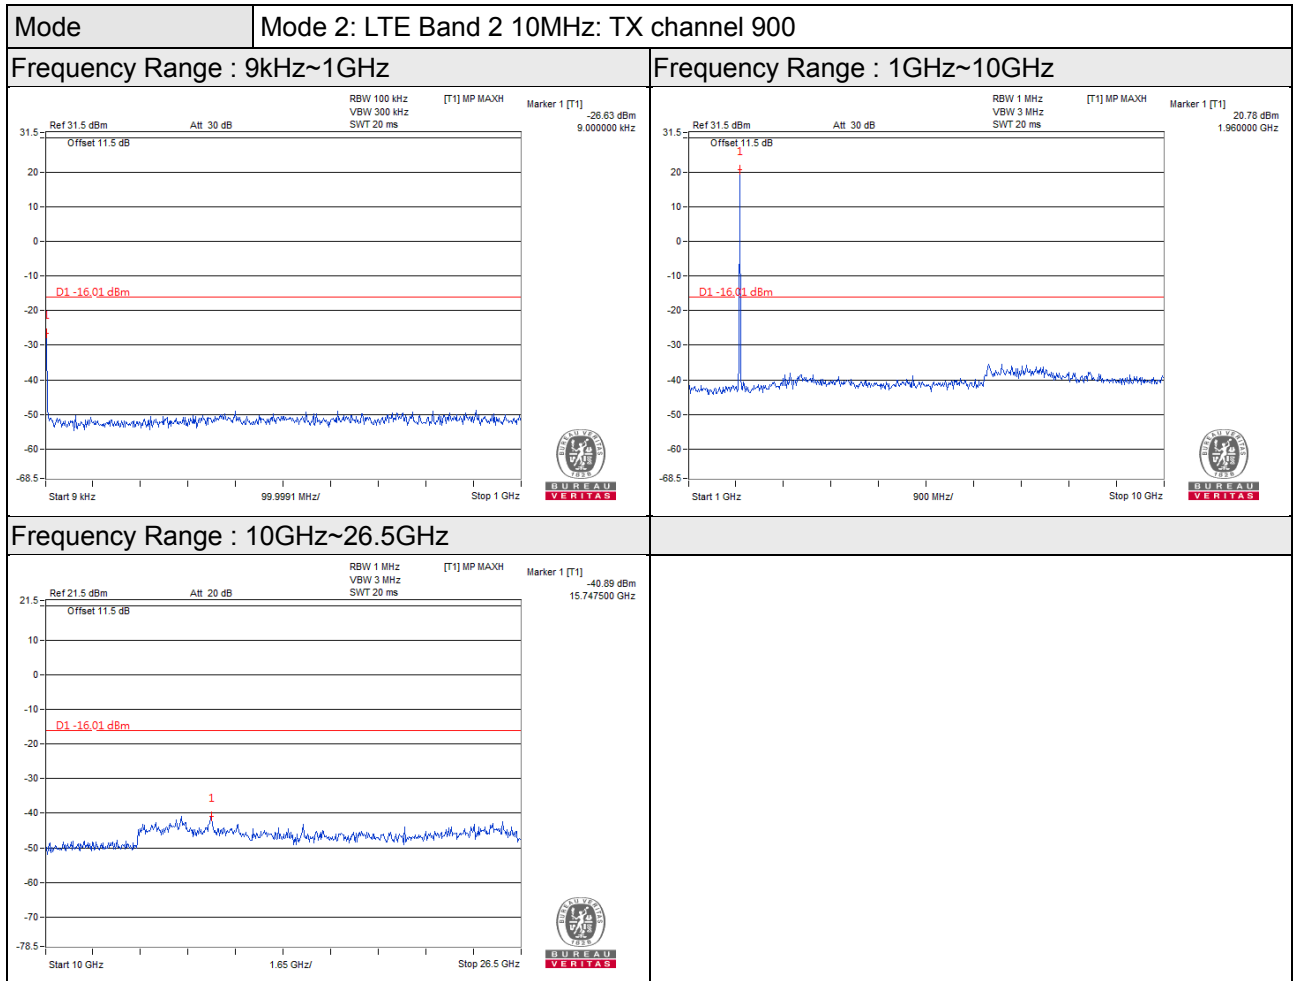


Mode Mode 2: LTE Band 4 10MHz: TX channel 2000


Frequency Range : 9kHz~1GHz

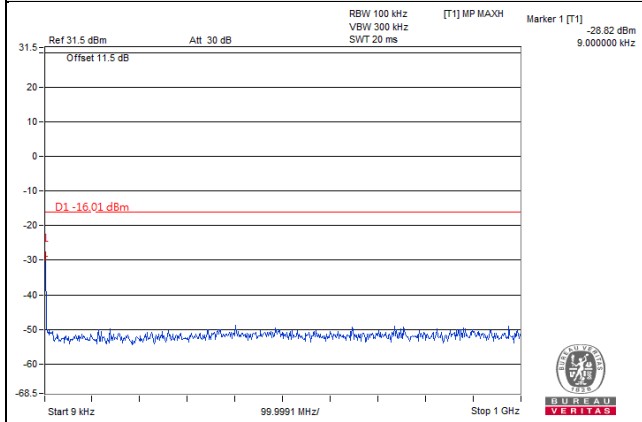


Frequency Range : 1GHz~10GHz

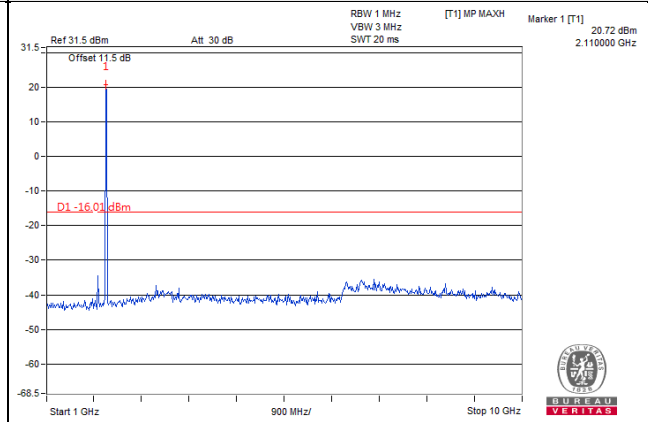


Frequency Range : 10GHz~26.5GHz

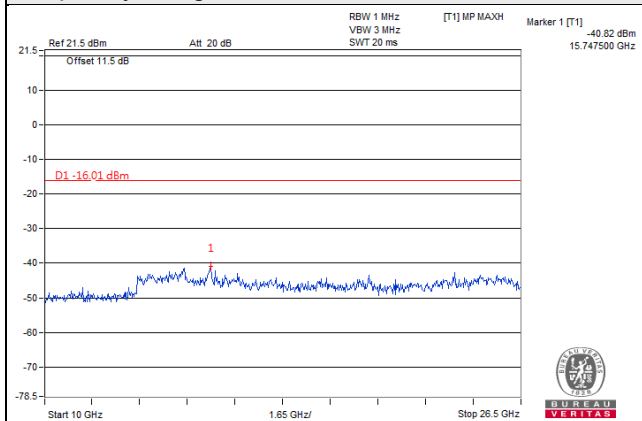

Chain 1

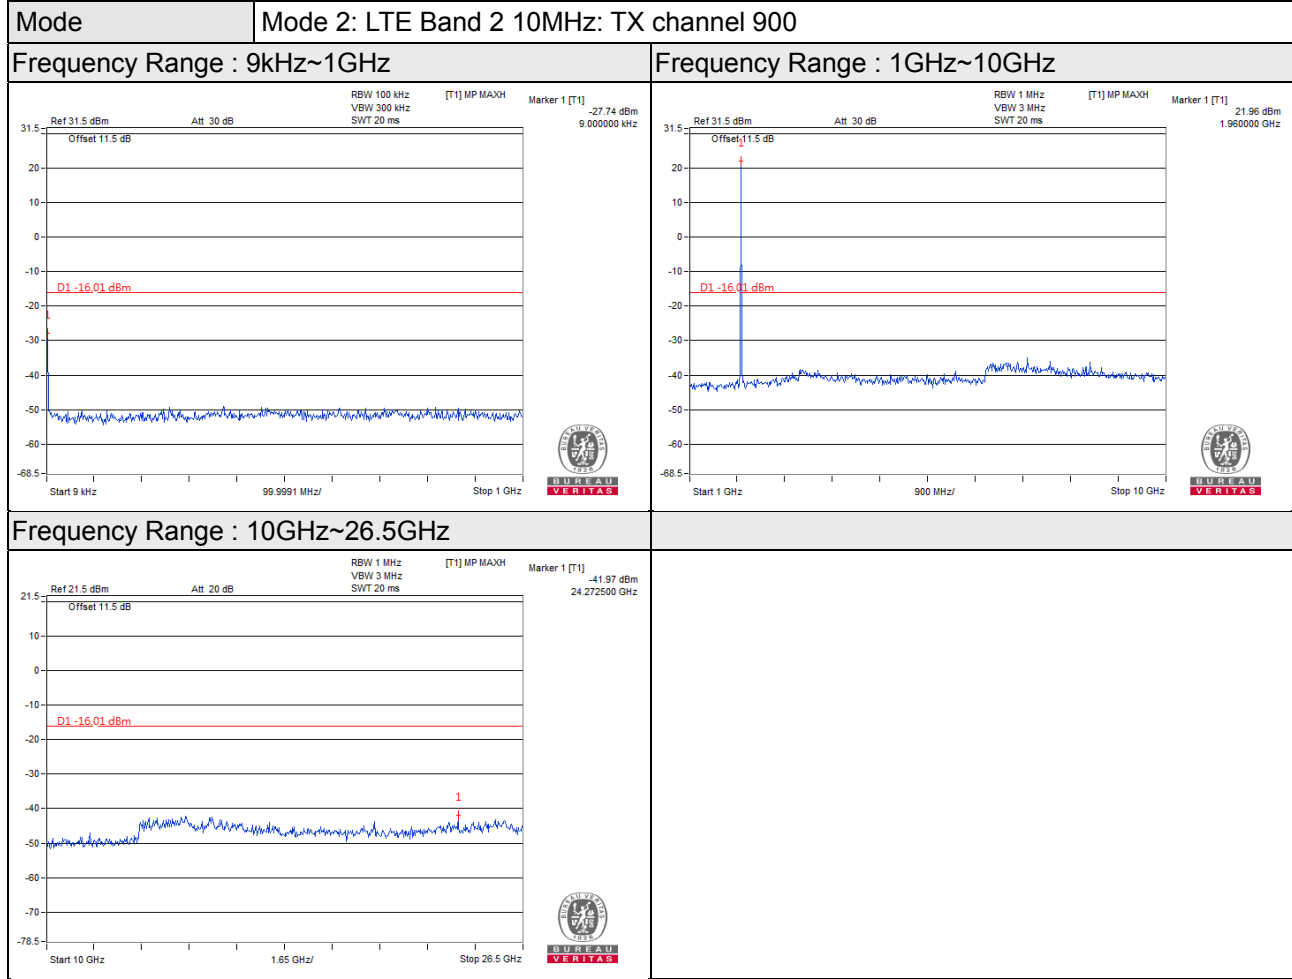

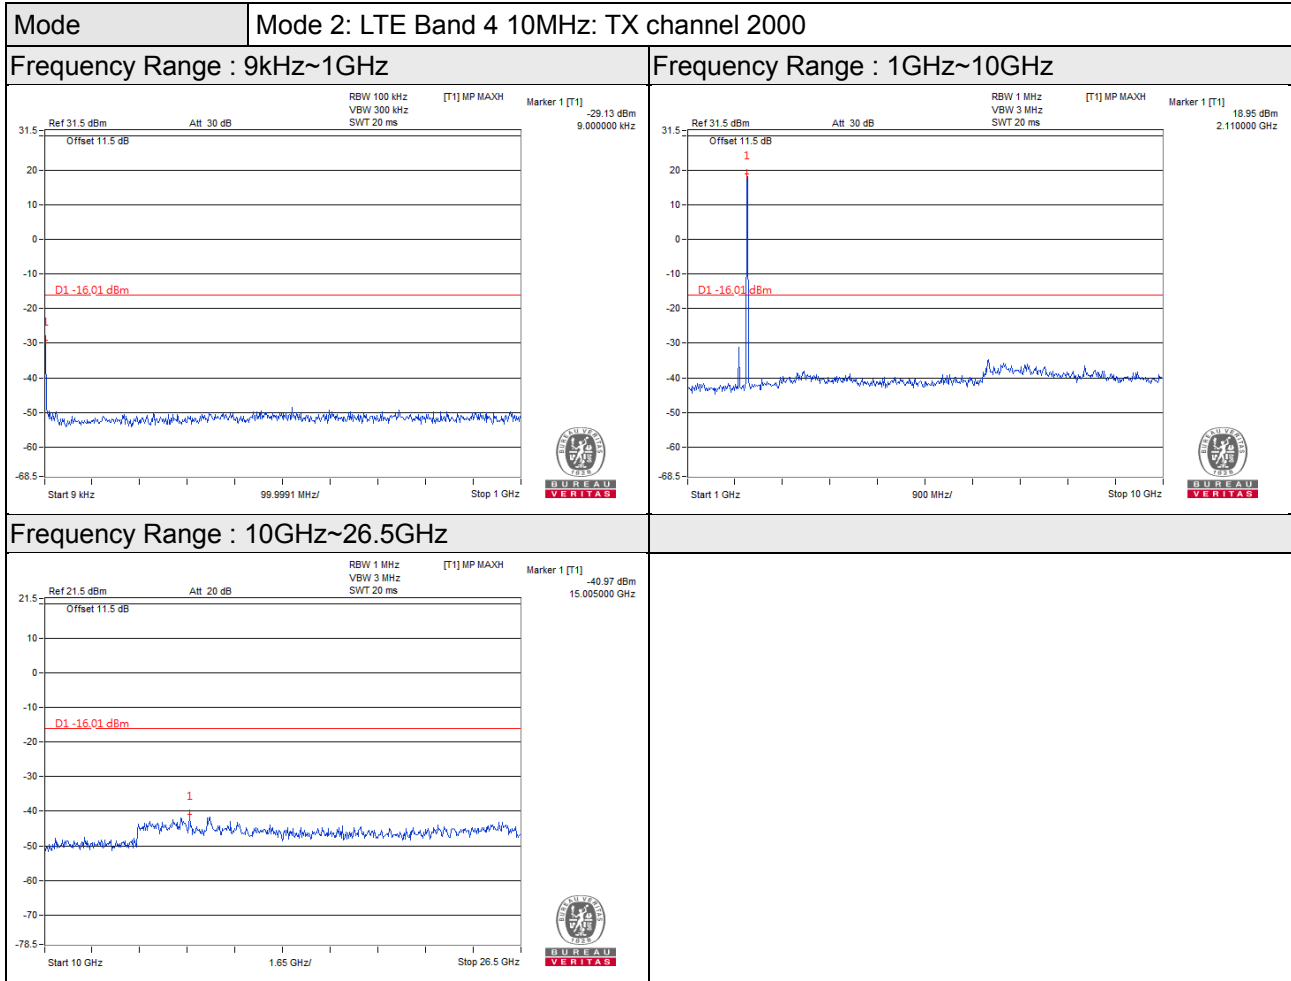

## 4.5 Radiated Emission Measurement

### 4.5.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 4.5.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}$ .


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.5.3 Deviation from Test Standard

No deviation.



#### 4.5.4 Test Setup

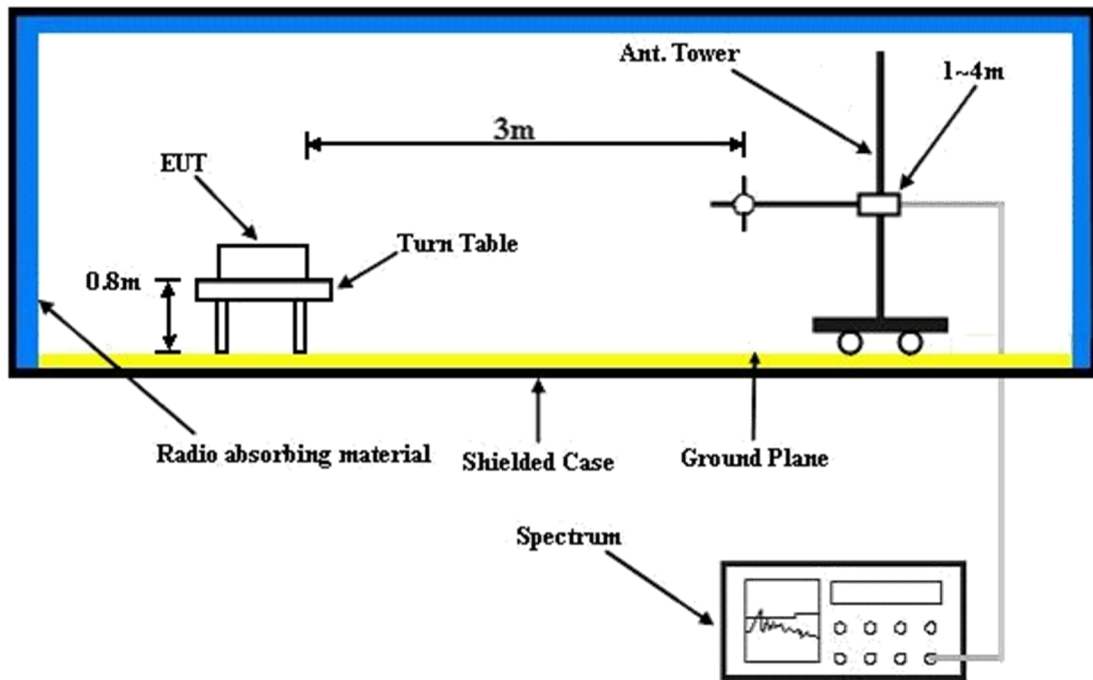

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.5.5 Test Results

Below 1GHz

Mode	Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2000
------	---

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	151.25	-69.8	-73.5	-2.8	-76.3	-13.0	-63.3
2	254.07	-66.2	-72.5	-1.4	-73.9	-13.0	-60.9
3	329.73	-65.9	-76.0	4.1	-71.9	-13.0	-58.9
4	552.83	-67.5	-73.1	3.8	-69.3	-13.0	-56.3
5	715.79	-62.9	-65.4	3.5	-61.9	-13.0	-48.9
6	883.60	-68.0	-66.3	3.3	-63.0	-13.0	-50.0
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	77.53	-65.8	-73.9	0.5	-73.4	-13.0	-60.4
2	96.93	-64.1	-73.1	-1.2	-74.3	-13.0	-61.3
3	148.34	-68.5	-69.7	-3.0	-72.7	-13.0	-59.7
4	436.43	-69.1	-74.9	3.6	-71.3	-13.0	-58.3
5	612.97	-70.2	-71.2	3.6	-67.6	-13.0	-54.6
6	910.76	-67.5	-64.7	3.5	-61.2	-13.0	-48.2

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

Above 1GHz

Mode	Mode 2: LTE Band 2 10MHz: TX channel 900 + LTE Band 4 10MHz TX channel 2000
------	---

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	4230.00	-57.8	-49.1	1.0	-48.1	-13.0	-35.1
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
1	4230.00	-60.3	-50.6	1.0	-49.6	-13.0	-36.6

Remarks:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---