

---

**REPORT ON**  
Specific Absorption Rate Testing of the  
Symbol Technologies Inc. NetVision® Phone.

**Report Number: WS612323 – 001 issue 1.00**

**April 2004**

---

**REPORT ON:** Specific Absorption Rate Testing of the  
Symbol Technologies Inc. NetVision® Phone.

Report No: WS612323 – 001 issue 1.00

**FCC ID:** H9PDM4046  
**IC:** 1549104135A

**PREPARED FOR:** Symbol Technologies Inc.  
One Symbol Plaza  
Holtsville  
NY 11742-1300  
New York  
United States of America

**ATTESTATION:** The wireless portable device described within this report has been shown to be capable of compliance for localised specific absorption rate (SAR) for General Population/Uncontrolled Exposure Limits as defined in the FCC standard Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01) and RSS-102 Issue 1 (Provisional) September 25, 1999 of 1.6 W/kg.

The measurements shown in this report were made in accordance with the procedures specified in OET Bulletin 65 (Edition 97-01) and IEEE1528-2003.

All reported testing was carried out on a sample of equipment to demonstrate compliance with the above standards. The sample tested was found to comply with the requirements in the applied rules.



A Miller  
**Senior SAR Test Engineer**

**APPROVED BY:**



M J Hardy  
**Deputy Wireless Group Leader**

**DATED:** 20<sup>th</sup> April 2004

**DISTRIBUTION:** Symbol Technologies Inc.

Copy No: 1

BABT

Copy No.: 2

Copy No.:

*Note: The test results reported herein relate only to the item tested as identified above and on the Status Page.*



## CONTENTS

|   |          |
|---|----------|
| <b>EXECUTIVE SUMMARY</b>  | <b>3</b> |
| 1.1 Status  | 4        |
| 1.2 Declaration of Build Status   | 5        |
| 1.3 Summary   | 6        |
| 1.4 Test Result Summary   | 7        |
| <br>  |          |
| <b>TEST DETAILS</b>   | <b>9</b> |
| 2.1 Test Equipment  | 10       |
| 2.2 Test Software   | 10       |
| 2.3 Dielectric Properties of Simulant Liquids   | 11       |
| 2.4 Test Conditions   | 12       |
| 2.5 Measurement Uncertainty   | 13       |
| 2.6 SAR Measuring System<br>Probe and Amplifier Specification<br>Probe Calibration<br>SAR Measurement Procedure | 14       |
| 2.7 OET 65(c) and IEEE1528-2003 Test Positions<br>SAM phantom head position<br>Flat phantom position            | 32       |
| 2.8 SAR Distributions (Area Scans – 2D)   | 34       |
| 2.9 Test Positional Photographs   | 43       |
| 2.10 Record Photographs   | 45       |
| 2.11 User Information   | 50       |
| 2.12 Copyright Statement  | 51       |



## **EXECUTIVE SUMMARY**

Specific Absorption Rate Testing of the  
Symbol Technologies Inc. NetVision® Phone.

**PROJECT MANAGER: M. GLASSPOOL**



1.1 **STATUS**

|                                  |   |
|----------------------------------|---|
| <b>MANUFACTURING DESCRIPTION</b> | The NetVision® Phone adds voice-over-IP (VoIP) communications to Symbol's Wi-Fi™ wireless LAN installations |
| <b>STATUS OF TEST</b>            | Specific Absorption Rate Testing  |
| <b>APPLICANT</b>                 | Symbol Technologies Inc   |
| <b>MANUFACTURER</b>              | Symbol Technologies Inc   |
| <b>TYPE</b>                      | NP4046  |
| <b>MODEL NUMBER</b>              | NP4046–300  |
| <b>HARDWARE VERSION</b>          | Build Status Rev A  |
| <b>SERIAL NUMBER</b>             | F410C83   |
| <b>RADIO LAN</b>                 | 802.11b DSSS Radio Module.  |
| <b>TYPE</b>                      | DM4046  |
| <b>POWER</b>                     | +20dBm (100mW)  |
| <b>BATTERY MANUFACTURER</b>      | Wongs   |
| <b>TYPE OR MODEL NUMBER</b>      | 50–24000–030  |

**TEST SPECIFICATIONS:**

US Federal Government, Code of Federal Regulations, Title 47 Telecommunication, Chapter I Federal Communications Commission, part 2, section 1093.  
Federal Communications Commission (FCC) OET Bulletin 65c, Edition 01-01, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields – Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions  
RSS-102 Issue 1 (Provisional) September 25, 1999: Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to radio Frequency Fields

**REFERENCES:**

IEEE 1528 –2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques

|                                  |                              |
|----------------------------------|------------------------------|
| <b>BABT REGISTRATION NUMBER:</b> | WS612323.                    |
| <b>RECEIPT OF TEST SAMPLES:</b>  | 22 <sup>nd</sup> March 2004. |
| <b>START OF TEST:</b>            | 15 <sup>th</sup> April 2004. |
| <b>FINISH OF TEST:</b>           | 16 <sup>th</sup> April 2004. |



**1.2 DECLARATION OF BUILD STATUS**

| <b>MAIN EUT</b>             |  |
|-----------------------------|--|
| MANUFACTURING DESCRIPTION   | NetVision Phone  |
| MANUFACTURER                | Symbol Technologies Inc  |
| TYPE                        | NP4046-300   |
| PART NUMBER                 | NP4046-300-WW  |
| SERIAL NUMBER               | F410C83  |
| HARDWARE VERSION            | Rev A  |
| COUNTRY OF ORIGIN           | United States of America   |
| FCC ID                      | H9PDM4046  |
| INDUSTRY CANADA ID          | 1549104135A  |
| TRANSMITTER OPERATING RANGE | 2400 – 2483.5MHz   |
| TRANSMITTER POWER           | 100mW (+20dBm)   |
| RECEIVER OPERATING RANGE    | 2400 – 2483.5MHz   |
| INTERMEDIATE FREQUENCIES    | 374MHz   |
| EMISSION DESIGNATOR         | 11M0F1D  |
| DHSS/FHSS/COMBINED          | DSSS   |
| TECHNICAL DESCRIPTION       | The NetVision® Phone incorporates an 802.11b Direct Sequence Spread Spectrum radio transmitter. The NetVision® Phone adds voice-over-IP (VoIP) communications to Symbol's Wi-Fi™ wireless LAN installations. |
| <b>BATTERY/POWER SUPPLY</b> |  |
| MANUFACTURING DESCRIPTION   | Lithium Ion Battery  |
| MANUFACTURER                | Symbol Technologies Inc.   |
| TYPE                        | N/A  |
| PART NUMBER                 | 50-24000-054   |
| VOLTAGE                     | 7.2V   |
| <b>ACCESSORY</b>            |  |
| MANUFACTURING DESCRIPTION   | NetVision Phone Leather Case   |
| MANUFACTURER                | Wongs  |
| TYPE                        | N/A  |
| PART NUMBER                 | N/A  |

**Signature**

**Date**  
**D of B S Serial No**

22<sup>nd</sup> March 2004  
 OR612324



### 1.3 SUMMARY

The NetVision® Phone incorporates an 802.11b Direct Sequence Spread Spectrum radio transmitter. The NetVision® Phone adds voice-over-IP (VoIP) communications to Symbol's Wi-Fi™ wireless LAN installations. The testing was performed with batteries supplied by Symbol and manufactured by Wongs. The battery was fully charged before each measurement and there were no external connections.

SAR testing was performed with the device in a CW test mode only using a Specific Anthropomorphic Mannequin (SAM) phantom as specified in the standard IEEE 1528-2003. The phantom was filled with simulant liquid appropriate to the frequency band. The dielectric properties were measured and found to be in accordance with the requirements for the dielectric properties specified in OET65(c) & IEEE 1528-2003.

SAR testing was performed at both the left and right ear of the phantom at both handset positions stated in the specification. Testing was performed at the middle frequency of each band and at the top and the bottom frequencies for the position giving maximum SAR. The sequence used accorded with the block diagram of tests given in IEEE 1528-2003. Testing was performed at the maximum power. This was achieved using on board test software, which controlled the handset at power level 0. The Symbol NetVision® Phone had an integral antenna so that the requirement for testing with antenna extended and retracted was not applicable.

SAR testing was performed with the device set in the appropriate Test Mode for the Radio Module under test. The device was then placed at distance set by the belt clip of the NetVision® leather case. Flat Phantom dimensions 220mmx200mmx150mm and with a sidewall thickness of 2.0mm. The phantom was filled to a depth of 150mm with the appropriate Body simulant liquid. The dielectric properties were in accordance with the requirements for the dielectric properties specified in Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).

This device was tested for the specified body-worn operation. A minimum separation distance of 1.0 cm must be maintained between this device and the body. The use of third-party belt-clips, holsters, and similar accessories should not contain metallic components in its assembly. The use of these accessories that do not satisfy these requirements may not comply with appropriate RF exposure compliance requirements, and should not be used

SAR testing was carried out at the top, middle and bottom frequency of each of the device operating bands.

Included in this report are descriptions of the test method; the equipment used and an analysis of the test uncertainties applicable and diagrams indicating the locations of maximum SAR for each test position along with photographs indicating the positioning of the handset against either the right or left ear, as appropriate.

The maximum 1g volume averaged SAR level measured for all the tests performed did not exceed the limits for General Population/Uncontrolled Exposure (W/kg) Partial Body of 1.6 W/kg. Level defined in Supplement C (Edition 01-01) to OET Bulletin 65 (97-01).

The following accessories were supplied for assessment with the device, these were: -

- NetVision® leather case <sup>[1]</sup> – supplied in NetVision® Phone Kit, p/n KT-NP-4046-300-ww

[1]. The Holster was declared to be used in one position only on the end user, see section 2.11 for further details. SAR assessment of the Symbol Technologies NetVision® Phone was based upon this user configuration.



**1.4 TEST RESULT SUMMARY**

**SYSTEM PERFORMANCE / VALIDATION CHECK RESULTS**

Prior to formal testing being performed a System Check was performed in accordance with Appendix D IEEE1528-2003 Standard. The following results were obtained: -

| Date       | Dipole Used | Frequency (MHz) | Max 1g SAR (W/kg) | Percentage Drift on Reference | Max 10g SAR (W/kg) | Percentage Drift on Reference |
|------------|-------------|-----------------|-------------------|-------------------------------|--------------------|-------------------------------|
| 11/03/2004 | 2450        | 2450            | 51.45*            | -1.82%                        | 24.10*             | 0.44%                         |

\*Normalised to a forward power of 1W

**2450MHz HEAD Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Symbol NetVision® Phone Handset Using Standard Battery.**

| Position  |                 | Channel Number | Frequency (MHz) | Max Spot SAR (W/kg) | Max 1g SAR (W/kg) | Max 10g SAR (W/kg) | SAR Drift dB | Area scan (Figure number) |
|---|-----------------|----------------|-----------------|---------------------|-------------------|--------------------|--------------|---------------------------|
| Left or Right Hand Ear  | Mobile Position |                |                 |                     |                   |                    |              |                           |
| LH  | Cheek           | 2437           | 6               | 0.050               | 0.042             | 0.022              | 0.170        | Figure 18                 |
| LH  | 15              | 2437           | 6               | 0.030               | 0.026             | 0.013              | 0.000        | Figure 19                 |
| RH  | Cheek           | 2437           | 6               | 0.060               | 0.058             | 0.033              | 0.030        | Figure 20                 |
| RH  | 15              | 2437           | 6               | 0.030               | 0.028             | 0.016              | 0.000        | Figure 21                 |
| RH  | Cheek           | 2412           | 1               | 0.040               | 0.036             | 0.021              | -0.330       | Figure 22                 |
| RH  | Cheek           | 2462           | 11              | 0.070               | 0.064             | 0.036              | 0.090        | Figure 23                 |
| Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g) |                 |                |                 |                     |                   |                    |              |                           |

**2450MHz BODY Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Symbol NetVision® Phone Handset fitted into the NetVision® Leather case.**

| Position  |                 | Channel Number | Frequency (MHz) | Max Spot SAR (W/kg) | Max 1g SAR (W/kg) | Max 10g SAR (W/kg) | SAR Drift dB | Area scan (Figure number) |
|---|-----------------|----------------|-----------------|---------------------|-------------------|--------------------|--------------|---------------------------|
| Spacing from Phantom  | Mobile Position |                |                 |                     |                   |                    |              |                           |
| 10mm  | Back            | 2412           | 1               | 0.760               | 0.559             | 0.258              | 0.060        | Figure 24                 |
| 10mm  | Back            | 2437           | 6               | 0.910               | 0.665             | 0.303              | 0.080        | Figure 25                 |
| 10mm  | Back            | 2462           | 11              | 0.710               | 0.506             | 0.230              | 0.090        | Figure 26                 |
| Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g) |                 |                |                 |                     |                   |                    |              |                           |





**1.4 TEST RESULT SUMMARY**

**OUTPUT POWER OF TEST DEVICE MEASUREMENT METHOD**

The Spectrum Analyser was tuned to the test frequency. The device output power setting was controlled via the 'Test Mode' on each handset being set to the conditions specified in the Summary on page 5 of this document. The device was then rotated through 360 degrees until the highest power level was observed in both planes of polarisation. The device was then replaced with a substitution antenna, the signal to the antenna was adjusted to equal the related level detected from the device.

**MAXIMUM POWER**

Recorded from the Symbol NetVision® Phone mobile handset

| Radio Device                                 | Frequency (MHz) | Raw Result (dBm) | Substitution Level (dBm) | Substitution Antenna Gain (dB) | Result ERP (dBm) | Result ERP (mW) |
|--|-----------------|------------------|--------------------------|--------------------------------|------------------|-----------------|
| 802.11b DSSS Radio Module.<br>(CW Test Mode) | 2412            | -27.3            | 9.0                      | 9.1                            | 18.1             | 64.6            |
| 802.11b DSSS Radio Module.<br>(CW Test Mode) | 2437            | -25.8            | 10.5                     | 9.2                            | 19.7             | 93.3            |
| 802.11b DSSS Radio Module.<br>(CW Test Mode) | 2462            | -25.9            | 10.4                     | 9.2                            | 19.6             | 91.2            |

FCC ID: H9PDM4046  
IC: 1549104135A



## **TEST DETAILS**

Specific Absorption Rate Testing of the Symbol Technologies Inc.  
NetVision® Phone Model Number NP4046-300

**TEST ENGINEER: A. MILLER**



## 2.1 TEST EQUIPMENT

The following test equipment was used at BABT:

| INSTRUMENT DESCRIPTION        | MANUFACTURER      | MODEL TYPE | INVENTORY NO. | SERIAL NUMBER | CALIBRATION DATES |
|-------------------------------|-------------------|------------|---------------|---------------|-------------------|
| Bench-top Robot               | Mitsubishi        | RV-E2      | 4691          | EA009006      | N/A               |
| SAM Phantom                   | Antennessa        | SAM        | N/A           | 04/02 FT04    | N/A               |
| 2450 MHz Head Tissue Simulant | BABT              | Batch 4    | N/A           | N/A           | 03/04/04*         |
| 2450 MHz Head Tissue Simulant | BABT              | Batch 4    | N/A           | N/A           | 03/04/04*         |
| 2450 MHz Dipole               | IndexSAR          | IEEE1528   | N/A           | N/A           | 15/04/04*         |
| RF Pre-Amplifier              | Vectawave         | 10M-2.5G   | 4697          | N/A           | N/A               |
| Bi-Directional Coupler        | Krytar            | 1850       | 4561          | N/A           | 15/04/04          |
| 20dB Attenuator               | Weinschel         | 46-20-34   | 4653          | AT9195        | 24/05/04 (due)    |
| Power Meter                   | Rohde and Schwarz | NRV        | 2472          | 860327/025    | 22/05/04 (due)    |
| Hygrometer                    | Rotronic          | -          | 3230          | N/A           | 04/10/04 (due)    |
| Thermometer                   | Digitron          | T208       | 3178          | N/A           | 16/06/04 (due)    |
| SAR Probe                     | IndexSAR          | IXP- 050   | N/A           | 84            | 17/04/04 (due)    |
| Flat Phantom box (200mm cube) | SARTest Ltd.      | N/A        | N/A           | N/A           | N/A               |
| Turntable & Controller        | HD GMBH           | HD 050     | 2528          | N/A           | N/A               |
| Antenna Mast                  | EMCO              | 2070       | N/A           | N/A           | N/A               |
| Antenna Mast Controller       | EMCO              | 2090       | N/A           | N/A           | N/A               |
| Screened Room 5               | Siemens           | EAC 54300  | 2533          | N/A           | N/A               |
| Horn                          | EMCO              | 3115       | 2297          | N/A           | 04/07/04 (due)    |
| Horn (1-18GHz)                | EMCO              | 3115       | 2397          | N/A           | 04/07/04 (due)    |
| Signal Generator              | Hewlett Packard   | 8672A      | 411           | N/A           | 02/03/05 (due)    |
| Test Reciever                 | Rohde and Schwarz | ESIB 26    | 2988          | N/A           | 08/04/05 (due)    |

\* Verified at time of test.

## 2.2 TEST SOFTWARE

The following software was used to control the BABT SARA2 System:

| INSTRUMENT                                    | VERSION NO.       | DATE       |
|---|-------------------|------------|
| SARA2 system                                  | v.2.3 VPM         | 29/02/2004 |
| Mitsubishi robot controller firmware revision | RV-E2 Version C9a | -          |
| IXA-10 Probe amplifier                        | Version 2.5       | -          |



### 2.3 DIELECTRIC PROPERTIES OF SIMULANT LIQUIDS

The fluids were calibrated in our Laboratory and re-checked prior to any measurements being made against reference fluids stated in IEEE 1528-2003 of 0.9% NaCl (Salt Solution) at 23°C and also for Dimethylsulphoxide (DMS) at 21°C.

The fluids were made at BABT under controlled conditions from the following OET(65)c formulae and reference made to Standard IEEE 1528-2003. The composition of ingredients may have been modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation:

#### OET 65(c) Recipes

| Ingredients<br>(% by weight) | Frequency (MHz) |       |       |      |       |       |       |      |      |      |
|------------------------------|-----------------|-------|-------|------|-------|-------|-------|------|------|------|
|                              | 450             |       | 835   |      | 915   |       | 1900  |      | 2450 |      |
| Tissue Type                  | Head            | Body  | Head  | Body | Head  | Body  | Head  | Body | Head | Body |
| Water                        | 38.56           | 51.16 | 41.45 | 52.4 | 41.05 | 56.0  | 54.9  | 40.4 | 62.7 | 73.2 |
| Salt (NaCl)                  | 3.95            | 1.49  | 1.45  | 1.4  | 1.35  | 0.76  | 0.18  | 0.5  | 0.5  | 0.04 |
| Sugar                        | 56.32           | 46.78 | 56.0  | 45.0 | 56.5  | 41.76 | 0.0   | 58.0 | 0.0  | 0.0  |
| HEC                          | 0.98            | 0.52  | 1.0   | 1.0  | 1.0   | 1.21  | 0.0   | 1.0  | 0.0  | 0.0  |
| Bactericide                  | 0.19            | 0.05  | 0.1   | 0.1  | 0.1   | 0.27  | 0.0   | 0.1  | 0.0  | 0.0  |
| Triton X-100                 | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 0.0   | 0.0  | 36.8 | 0.0  |
| DGBE                         | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 44.92 | 0.0  | 0.0  | 26.7 |
| Dielectric Constant          | 43.42           | 58.0  | 42.54 | 56.1 | 42.0  | 56.8  | 39.9  | 54.0 | 39.8 | 52.5 |
| Conductivity (S/m)           | 0.85            | 0.83  | 0.91  | 0.95 | 1.0   | 1.07  | 1.42  | 1.45 | 1.88 | 1.78 |

#### IEEE 1528 Recipes

| Frequency (MHz)                                 | 300   | 450   | 835  | 900   |       |       | 1450 | 1800  |       |       |       | 1900  | 1950  | 2000  | 2100  |      | 2450 |       |       | 3000  |       |
|---|-------|-------|------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|-------|-------|-------|-------|
| Recipe #  | 1     | 1     | 3    | 1     | 1     | 2     | 3    | 1     | 1     | 2     | 2     | 3     | 1     | 2     | 4     | 1    | 1    | 2     | 2     | 3     | 1     |
| <b>Ingredients (% by weight)</b>                |       |       |      |       |       |       |      |       |       |       |       |       |       |       |       |      |      |       |       |       |       |
| I,2-Propanediol                                 |       |       |      |       |       | 64.81 |      |       |       |       |       |       |       |       |       |      |      |       |       |       |       |
| Bactericide                                     | 0.19  | 0.19  | 0.5  | 0.1   | 0.1   |       | 0.5  |       |       |       |       | 0.5   |       |       |       |      |      |       |       |       | 0.5   |
| Diacetin  |       |       | 48.9 |       |       |       | 49.2 |       |       |       |       | 49.43 |       |       |       |      |      |       |       |       | 49.75 |
| DGBE  |       |       |      |       |       |       |      | 45.41 | 47    | 13.84 | 44.92 |       | 44.92 | 13.84 | 45    | 50   | 50   | 7.99  | 7.99  |       | 7.99  |
| HEC   | 0.98  | 0.98  |      | 1     | 1     |       |      |       |       |       |       |       |       |       |       |      |      |       |       |       |       |
| NaCl  | 5.95  | 3.95  | 1.7  | 1.45  | 1.48  | 0.79  | 1.1  | 0.67  | 0.36  | 0.35  | 0.18  | 0.64  | 0.18  | 0.35  |       |      |      |       | 0.16  | 0.16  | 0.16  |
| Sucrose   | 55.32 | 56.32 |      | 57    | 56.5  |       |      |       |       |       |       |       |       |       |       |      |      |       |       |       |       |
| Triton X-100                                    |       |       |      |       |       |       |      |       |       | 30.45 |       |       |       |       | 30.45 |      |      |       |       | 19.97 | 19.97 |
| Water   | 37.56 | 38.56 | 48.9 | 40.45 | 40.92 | 34.4  | 49.2 | 53.82 | 52.64 | 55.36 | 54.9  | 49.43 | 54.9  | 55.36 | 55    | 50   | 50   | 71.88 | 71.88 | 49.75 | 71.88 |
| <b>Measured dielectric parameters</b>           |       |       |      |       |       |       |      |       |       |       |       |       |       |       |       |      |      |       |       |       |       |
| $\epsilon'_r$                                   | 46    | 43.4  | 44.3 | 41.6  | 41.2  | 41.8  | 42.7 | 40.9  | 39.3  | 41    | 40.4  | 39.2  | 39.9  | 41    | 40.1  | 37   | 36.8 | 41.1  | 40.3  | 39.2  | 37.9  |
| $\sigma$ (S/m)                                  | 0.86  | 0.85  | 0.9  | 0.9   | 0.98  | 0.97  | 0.99 | 1.21  | 1.39  | 1.38  | 1.4   | 1.4   | 1.42  | 1.38  | 1.41  | 1.4  | 1.51 | 1.55  | 1.88  | 1.82  | 2.46  |
| Temp. (°C)                                      | 22    | 22    | 20   | 22    | 22    | 22    | 20   | 22    | 22    | 21    | 22    | 20    | 21    | 21    | 20    | 22   | 22   | 20    | 20    | 20    | 20    |
| <b>Target dielectric parameters (Table 5-1)</b> |       |       |      |       |       |       |      |       |       |       |       |       |       |       |       |      |      |       |       |       |       |
| $\epsilon'_r$                                   | 45.3  | 43.5  | 41.5 | 41.5  |       |       | 40.5 | 40    |       |       |       |       |       |       |       | 39.8 | 39.2 | 38.5  |       |       |       |
| $\sigma$ (S/m)                                  | 0.87  | 0.87  | 0.9  | 0.97  |       |       | 1.2  | 1.4   |       |       |       |       |       |       |       | 1.49 | 1.8  | 2.4   |       |       |       |



### 2.3 DIELECTRIC PROPERTIES OF SIMULANT LIQUIDS

The dielectric properties of the tissue simulant liquids used for the SAR testing at BABT are as follows:-

| FLUID TYPE AND FREQUENCY | RELATIVE PERMITTIVITY $\epsilon_r$ ( $\epsilon'$ ) TARGET | RELATIVE PERMITTIVITY $\epsilon_r$ ( $\epsilon'$ ) MEASURED | CONDUCTIVITY $\sigma$ TARGET | CONDUCTIVITY $\sigma$ MEASURED |
|--------------------------|---|---|------------------------------|--------------------------------|
| Head 2450 MHz            | 39.2  | <b>37.59</b>  | 1.80 S/m                     | <b>1.901</b>                   |
| Body 2450 MHz            | 52.7  | <b>50.58</b>  | 1.95 S/m                     | <b>2.047</b>                   |

### 2.4 TEST CONDITIONS

#### TEST LABORATORY CONDITIONS

Ambient Temperature: Within +15°C to +35°C at 20% RH to 75% RH.  
 The actual Temperature during the testing ranged from 22.0°C to 22.9°C.  
 The actual Humidity during the testing ranged from 35.6% to 41.8% RH.

#### TEST FLUID TEMPERATURE RANGE

| TISSUE SIMULATING LIQUID TEMPERATURE: +20°C TO +25°C. |          |          |
|---|----------|----------|
| FREQUENCY   | 2450 MHz | 2450 MHz |
| BODY / HEAD FLUID                                     | HEAD     | BODY     |
| MIN TEMPERATURE                                       | 22.9     | 21.6     |
| MAX TEMPERATURE                                       | 23.1     | 22.9     |

#### SAR DRIFT

SAR Drift during scans. The maximum SAR Drift, drift due to the mobile phone electronics, was recorded as -7.310% (-0.330 dB) for all of the testing. The value of 7.31% is included in the measurement uncertainty budget.



**2.5 MEASUREMENT UNCERTAINTY**

| ERROR SOURCES  | EN 50361 Description (Subclause) | Uncertainty (%) | Probability Distribution | Divisor | ci  | ci^2 | Standard Uncertainty (%) | Stand Uncert^2 | (Stand Uncert^2) X (ci^2) |
|--|----------------------------------|-----------------|--------------------------|---------|-----|------|--------------------------|----------------|---------------------------|
| <b>Measurement Equipment</b>   |                                  |                 |                          |         |     |      |                          |                |                           |
| Calibration  | 7.2.1.1                          | 10              | Normal                   | 2.00    | 1   | 1    | 5.00                     | 25.00          | 25.00                     |
| Isotropy   | 7.2.1.2                          | 10.6            | Rectangular              | 1.73    | 1   | 1    | 6.12                     | 37.45          | 37.45                     |
| Linearity  | 7.2.1.3                          | 2.92            | Rectangular              | 1.73    | 1   | 1    | 1.69                     | 2.84           | 2.84                      |
| Probe Stability  | -                                | 2.46            | Rectangular              | 1.73    | 1   | 1    | 1.42                     | 2.02           | 2.02                      |
| Detection limits   | 7.2.1.4                          | 0               | Rectangular              | 1.73    | 1   | 1    | 0.00                     | 0.00           | 0.00                      |
| Boundary effect  | 7.2.1.5                          | 1.7             | Rectangular              | 1.73    | 1   | 1    | 0.98                     | 0.96           | 0.96                      |
| Measurement device   | 7.2.1.6                          | 0               | Normal                   | 1.00    | 1   | 1    | 0.00                     | 0.00           | 0.00                      |
| Response time  | 7.2.1.7                          | 0               | Normal                   | 1.00    | 1   | 1    | 0.00                     | 0.00           | 0.00                      |
| Noise  | 7.2.1.8                          | 0               | Normal                   | 1.00    | 1   | 1    | 0.00                     | 0.00           | 0.00                      |
| Integration time   | 7.2.1.9                          | 2.3             | Normal                   | 1.00    | 1   | 1    | 2.30                     | 5.29           | 5.29                      |
| <b>Mechanical constraints</b>  |                                  |                 |                          |         |     |      |                          |                |                           |
| Scanning system  | 7.2.2.1                          | 0.57            | Rectangular              | 1.73    | 1   | 1    | 0.33                     | 0.11           | 0.11                      |
| Phantom shell  | 7.2.2.2                          | 1.43            | Rectangular              | 1.73    | 1   | 1    | 0.83                     | 0.68           | 0.68                      |
| Matching between probe and phantom   | 7.2.2.3                          | 2.86            | Rectangular              | 1.73    | 1   | 1    | 1.65                     | 2.73           | 2.73                      |
| Positioning of the phone 'Y' Coordinate  | 7.2.2.4                          | 1.5             | Normal                   | 1.00    | 1   | 1    | 1.50                     | 2.25           | 2.25                      |
| Positioning of the phone 'Z' Coordinate  | 7.2.2.4                          | 1.73            | Normal                   | 1.00    | 1   | 1    | 1.73                     | 2.99           | 2.99                      |
| <b>Physical Parameters</b>   |                                  |                 |                          |         |     |      |                          |                |                           |
| Liquid conductivity (deviation from target)  | 7.2.3.2                          | 5               | Rectangular              | 1.73    | 0.5 | 0.25 | 2.89                     | 8.33           | 2.08                      |
| Liquid conductivity (measurement error)  | 7.2.3.2                          | 5               | Rectangular              | 1.73    | 0.5 | 0.25 | 2.89                     | 8.33           | 2.08                      |
| Liquid permittivity (deviation from target)  | 7.2.3.3                          | 5               | Rectangular              | 1.73    | 0.5 | 0.25 | 2.89                     | 8.33           | 2.08                      |
| Liquid permittivity (measurement error)  | 7.2.3.3                          | 5               | Rectangular              | 1.73    | 0.5 | 0.25 | 2.89                     | 8.33           | 2.08                      |
| Drifts in output power of the phone, probe, temperature and humidity   | 7.2.3.4                          | 7.3             | Rectangular              | 1.73    | 1   | 1    | 4.22                     | 17.81          | 17.81                     |
| Perturbation by the environment  | 7.2.3.5                          | 3               | Rectangular              | 1.73    | 1   | 1    | 1.73                     | 3.00           | 3.00                      |
| <b>Post-Processing</b>   |                                  |                 |                          |         |     |      |                          |                |                           |
| SAR interpolation and extrapolation  | 7.2.4.1                          | 2.4             | Rectangular              | 1.73    | 1   | 1    | 1.39                     | 1.92           | 1.92                      |
| Maximum SAR evaluation   | 7.2.4.2                          | 2.4             | Rectangular              | 1.73    | 1   | 1    | 1.39                     | 1.92           | 1.92                      |
| <b>Combined standard uncertainty</b>   | <b>10.74</b>                     |                 |                          |         |     |      | <b>Total</b>             |                | <b>115.31</b>             |
| <b>Expanded uncertainty = 21.48 % (Using a Coverage Factor of K=2)</b><br><b>(confidence interval of 95 %)</b> |                                  |                 |                          |         |     |      |                          |                |                           |



## 2.6 SAR MEASUREMENT SYSTEM

### ROBOT SYSTEM SPECIFICATION

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

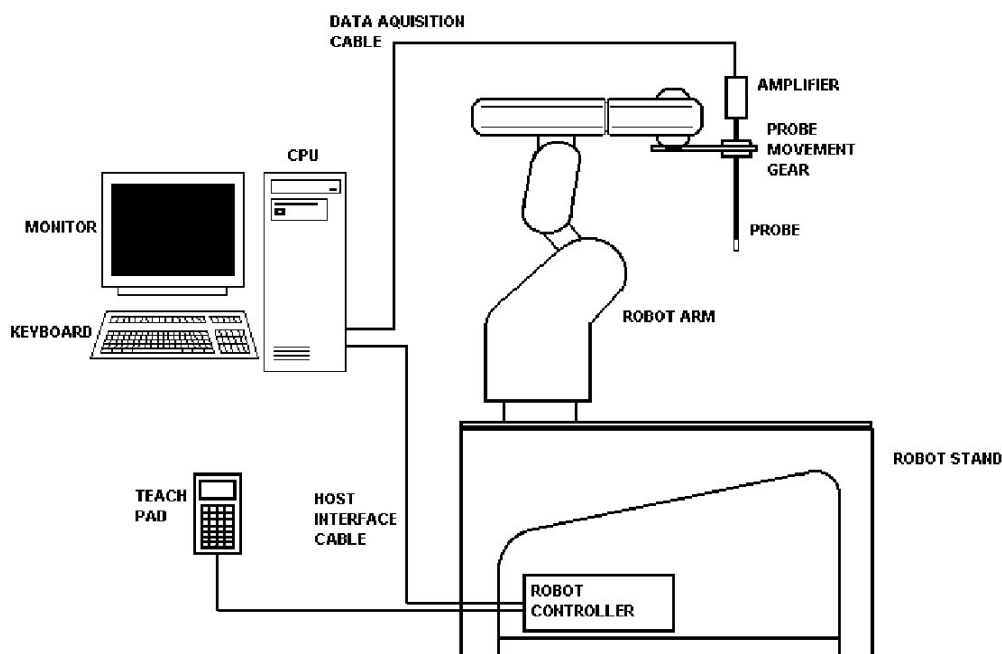


Figure 1: Schematic diagram of the SAR measurement system

The position and digitised shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitised using a Mitutoyo CMM machine to a precision of 0.001mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.



## 2.6 SAR MEASUREMENT SYSTEM

### PROBE AND AMPLIFIER SPECIFICATION

#### **IXP-050 Indexsar isotropic immersible SAR probe**

The probes are constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probes have built-in shielding against static charges and are contained within a PEEK cylindrical enclosure material at the tip. Probe calibration is described in the following section.

#### **IXP-039 Amplifier**

The amplifier unit has a multi-pole connector to connect to the probe and a multiplexer selects between the 3-channel single-ended inputs. A 16-bit AtoD converter with programmable gain is used along with an on-board micro-controller with non-volatile firmware. Battery life is around 150 hours and data are transferred to the PC via 3m of duplex optical fibre and a self-powered RS232 to optical converter.

#### **Phantoms**

The Specific Anthropomorphic Mannequin (SAM) Upright Phantom is fabricated using moulds generated from the CAD files as specified by CENELEC EN50361. It is mounted via a rotation base to a supporting table, which also holds the robotic positioner. The phantom and robot alignment is assured by both mechanical and laser registration systems.





## 2.6 SAR MEASUREMENT SYSTEM

### PROBE CALIBRATION PROCEDURE

#### EQUIPMENT USED

For the first part of the characterisation procedure, the probe is placed in an isotropy measurement jig as pictured in Figure 2. In this position the probe can be rotated about its axis by a non-metallic belt driven by a stepper motor.

The probe is attached via its amplifier and an optical cable to a PC. A schematic representation of the test geometry is illustrated in Figure 3.

A balanced dipole (900 MHz) is inserted horizontally into the bracket attached to a second belt (Figure 2). The dipole can also be rotated about its axis. A cable connects the dipole to a signal generator, via a directional coupler and power meter. The signal generator feeds an RF amplifier at constant power, the output of which is monitored using the power meter. The probe is positioned so that its sensors line up with the rotation center of the source dipole. By recording output voltage measurements of each channel as both the probe and the dipole are rotated, data are obtained from which the spherical isotropy of the probe can be optimised and its magnitude determined.

The calibration process requires E-field measurements to be taken in air, in 900 MHz simulated brain liquid and at other frequencies/liquids as appropriate.

#### LINEARISING PROBE OUTPUT

The probe channel output signals are linearised in the manner set out in Refs [1] and [2]. The following equation is utilized for each channel:


$$U_{lin} = U_{o/p} + U_{o/p}^2 / DCP \quad (1)$$

where  $U_{lin}$  is the linearised signal,  $U_{o/p}$  is the raw output signal in voltage units and DCP is the diode compression potential in similar voltage units.

DCP is determined from fitting equation (1) to measurements of  $U_{lin}$  versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the schottky diodes used as the sensors. For the IXP-050 probes with CW signals the DCP values are typically 0.10V (or 20 in the voltage units used by Indexsar software, which are  $V*200$ ).

#### SELECTING CHANNEL SENSITIVITY FACTORS TO OPTIMISE ISOTROPIC RESPONSE

The basic measurements obtained using the calibration jig (Fig 2) represent the output from each diode sensor as a function of the presentation angle of the source (probe and dipole rotation angles). The directionality of the orthogonally-arranged sensors can be checked by analysing the data using dedicated Indexsar software, which displays the data in 3D format as in Figure 4. The left-hand side of this diagram shows the individual channel outputs after linearisation (see above). The program uses these data to balance the channel outputs and then applies an optimisation process, which makes fine adjustments to the channel factors for optimum isotropic response.



## 2.6 SAR MEASUREMENT SYSTEM

### PROBE CALIBRATION PROCEDURE - Continued

The next stage of the process is to calibrate the Indexsar probe to a W&G EMR300 E-field meter in air. The principal reasons for this are to obtain conversion factors applicable should the probe be used in air and to provide an overall measure of the probe sensitivity.

A multiplier is applied to factors to bring the magnitudes of the average E-field measurements as close as possible to those of the W&G probe.

The following equation is used (where linearised output voltages are in units of V\*200):

$$E_{air}^2 (V/m) = \begin{aligned} &U_{linx} * Air Factor_x \\ &+ U_{liny} * Air Factor_y \\ &+ U_{linz} * Air Factor_z \end{aligned} \quad (2)$$

It should be noted that the air factors are not separately used for normal SAR testing. The IXP-050 probes are optimised for use in tissue-simulating liquids and do not behave isotropically in air.

### 900 MHz LIQUID CALIBRATION

Conversion factors for use when the probes are immersed in tissue-simulant liquids at 900 MHz are determined either using a waveguide or by comparison to a reference probe that has been calibrated by NPL. Waveguide procedures are described later. The summary sheet indicates the method used for the probe S/N 0084.

The conversion factor, referred to as the 'liquid factor' is also applied to the measurements of each channel. The following equation is used (where output voltages are in units of V\*200):

$$E_{liq}^2 (V/m) = \begin{aligned} &U_{linx} * Air Factor_x * Liq Factor_x \\ &+ U_{liny} * Air Factor_y * Liq Factor_y \\ &+ U_{linz} * Air Factor_z * Liq Factor_z \end{aligned} \quad (3)$$

A 3D representation of the spherical isotropy for probe S/N 0084 using these factors is shown in Figure 4

The rotational isotropy can also be determined from the calibration jig measurements and is reported as the 900MHz isotropy in the summary table. Note that waveguide measurements can also be used to determine rotational isotropy (Fig. 6).

The design of the cells used for determining probe conversion factors are waveguide cells is shown in Figure 5. The cells consist of a coax to waveguide transition and an open-ended section of waveguide containing a dielectric separator. Each waveguide cell stands in the upright position and is filled with liquid within 10 mm of the open end. The separator provides a liquid seal and is designed for a good electrical transition from air filled guide to liquid filled guide. The choice of cell depends on the portion of the frequency band to be examined and the choice of liquid used. The depth of liquid ensures there is negligible radiation from the waveguide open top and that the probe calibration is not influenced by reflections from nearby objects. The return loss at the coaxial connector of the filled waveguide cell is measured initially using a network analyser and this information is used subsequently in the calibration procedure. The probe is positioned in the centre of the waveguide and is adjusted vertically or rotated using stepper motor arrangements. The signal generator is connected to the waveguide cell and the power is monitored with a coupler and a power meter. A fuller description of the waveguide method is given below.



## 2.6 SAR MEASUREMENT SYSTEM

### PROBE CALIBRATION PROCEDURE - Continued

The liquid dielectric parameters used for the probe calibrations are listed in the Tables below. The final calibration factors for the probe are listed in the summary chart.

### WAVEGUIDE MEASUREMENT PROCEDURE

The calibration method is based on setting up a calculable specific absorption rate (SAR) in a vertically-mounted WG8 (R22) waveguide section [1]. The waveguide has an air-filled, launcher section and a liquid-filled section separated by a matching window that is designed to minimise reflections at the liquid interface. A  $TE_{01}$  mode is launched into the waveguide by means of a N-type-to-waveguide adapter. The power delivered to the liquid section is calculated from the forward power and reflection coefficient measured at the input to the waveguide. At the centre of the cross-section of the waveguide, the local spot SAR in the liquid as a function of distance from the window is given by functions set out in IEEE 1528 as below:

Because of the low cut-off frequency, the field inside the liquid nearly propagates as a TEM wave. The depth of the medium (greater than three penetration depths) ensures that reflections at the upper surface of the liquid are negligible. The power absorbed in the liquid is determined by measuring the waveguide forward and reflected power. Equation (4) shows the relationship between the SAR at the cross-sectional center of the lossy waveguide and the longitudinal distance ( $z$ ) from the dielectric separator


$$SAR(z) = \frac{4(P_f - P_b)}{\rho ab \delta} e^{-2z/\delta} \quad (4)$$

where the density  $\rho$  is conventionally assumed to be  $1000 \text{ kg/m}^3$ ,  $ab$  is the cross-sectional area of the waveguide,  $P_f$  and  $P_b$  are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth  $\delta$ , which is the reciprocal of the waveguide-mode attenuation coefficient, is determined from a scan along the  $z$ -axis and compared with the theoretical value determined from Equation (5) using the measured dielectric properties of the lossy liquid.

$$\delta = \left[ \text{Re} \left\{ \sqrt{(\pi/a)^2 + j\omega\mu_o(\sigma + j\omega\epsilon_o\epsilon_r)} \right\} \right]^{-1} \quad (5)$$

Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 30 dB at the most important frequencies used for personal wireless communications. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 2500 MHz because of the waveguide size is not severe in the context of compliance testing.



## **2.6 SAR MEASUREMENT SYSTEM**

### **PROBE CALIBRATION PROCEDURE - Continued**

#### **CALIBRATION FACTORS MEASURED FOR PROBE S/N 0084**

The probe was calibrated at 900, 1800, 1900 and 2450MHz in liquid samples representing both brain liquid and body fluid at these frequencies. The calibration was for CW signals only, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The axial isotropy of the probe was measured by rotating the probe about its axis in 10 degree steps through 360 degrees in this orientation.

The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 mm from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software.

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

#### **DIELECTRIC PROPERTIES OF LIQUIDS**

The dielectric properties of the brain and body tissue-simulant liquids employed for calibration are listed in the tables below. The measurements were performed prior to each waveguide test using an Indexasar DiLine measurement kit, which uses the TEM method as recommended in [2].

#### **AMBIENT CONDITIONS**

Measurements were made in the open laboratory at  $22 \pm 2.0^{\circ}\text{C}$ . The temperature of the liquids in the waveguide used was measured using a mercury thermometer.

#### **RESPONSE TO MODULATED SIGNALS**

To measure the response of the probe and amplifier to modulated signals, the probe is held vertically in a liquid-filled waveguide.

An RF amplifier is allowed to warm up and stabilise before use. A spectrum analyser is used to demonstrate that the peak power of the RF amplifier for the CW signals and the pulsed signals are within 0.1dB of each other when the signal generator is switched from CW to modulated output. Subsequently, the power levels recorded are read from a power meter when a CW signal is being transmitted.

The test sequence involves manually stepping the power up in regular (e.g. 2 dB) steps from the lowest power that gives a measurable reading on the SAR probe up to the maximum that the amplifiers can deliver.

At each power level, the individual channel outputs from the SAR probe are recorded at CW and then recorded again with the modulation setting. The results are entered into a spreadsheet. Using the spreadsheets, the modulated power is calculated by applying a factor to the measured CW power (e.g. for GSM, this factor is 9.03dB). This process is repeated 3 times with the response maximised for each channel sensor in turn.



## 2.6 SAR MEASUREMENT SYSTEM

### PROBE CALIBRATION PROCEDURE - Continued

The probe channel output signals are linearised in the manner set out in Section 1 above using equation (1) with the DCPs determined from the linearisation procedure. Calibration factors for the probe are used to determine the E-field values corresponding to the probe readings using equation (3). SAR is determined from the equation

$$\text{SAR (W/kg)} = E_{\text{liq}}^2 \text{ (V/m)} * \sigma \text{ (S/m)} / 1000 \quad (6)$$

Where  $\sigma$  is the conductivity of the simulant liquid employed.

Using the spreadsheet data, the DCP value for linearising each of the individual channels (X, Y and Z) is assessed separately. The corresponding DCP values are listed in the summary page of the calibration factors for each probe.

Figure 9 shows the linearised probe response to 900MHz GSM signals, Figure 9a the response to 1800MHz GSM signals, Figure 10 the response to GPRS signals (GSM with 2 timeslots) and Figure 11 & 12 the response to CDMA IS-95A and W-CDMA signals.


Additional tests have shown that the modulation response is similar at 1800MHz and is not affected by the orientation between the source and the probe.



**2.6 SAR MEASUREMENT SYSTEM**

**PROBE CALIBRATION PROCEDURE - Continued**

**SUMMARY OF CALIBRATION FACTORS FOR PROBE IXP-050 S/N 0084**

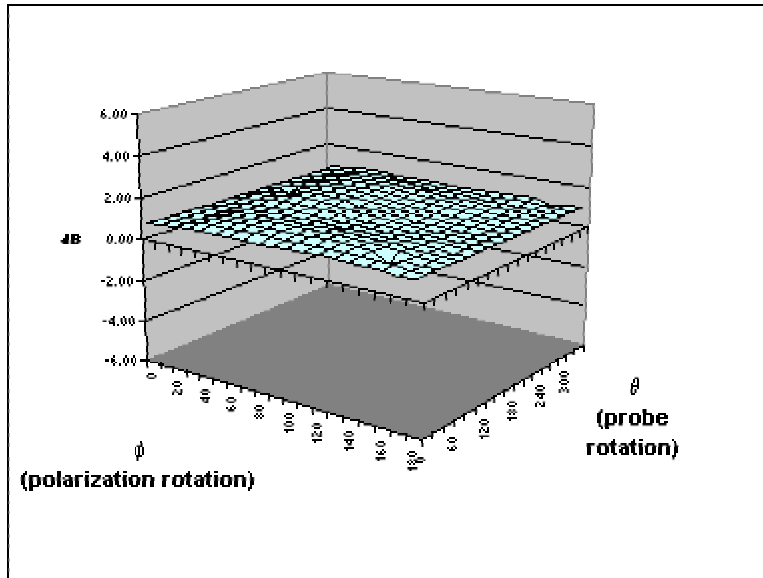

|                    | X    | Y    | Z    |         |
|--------------------|------|------|------|---------|
| <b>Air factors</b> | 500  | 410  | 385  | (V*200) |
| <b>DCPs</b>        | 20   | 20   | 20   | (V*200) |
| <b>GSM</b>         | 10.9 | 13   | 11.4 | (V*200) |
| <b>GPRS</b>        | 16.1 | 16.1 | 14.7 | (V*200) |
| <b>CDMA</b>        | 20   | 20   | 20   | (V*200) |

| f (MHz) | Axial isotropy (+/- dB) |      | SAR conversion factors(liq/air) |       | Notes |
|---------|-------------------------|------|---------------------------------|-------|-------|
|         | BRAIN                   | BODY | BRAIN                           | BODY  |       |
| 900     | 0.09                    | 0.09 | 0.279                           | 0.300 | 3,4   |
| 1800    | 0.12                    | 0.10 | 0.342                           | 0.375 | 3,4   |
| 1900    | 0.13                    | 0.10 | 0.354                           | 0.405 | 3,4   |
| 2450    | 0.12                    | 0.09 | 0.396                           | 0.468 | 3,4   |

| Notes |  |
|-------|--|
| 1)    | Calibrations done at 22C +/- 2C  |
| 2)    | Probe calibration by substitution against NPL-calibrated probe<br>(Probe IXP-050 S/N0071; NPL Cal Rept. No: EF07/2002/03/IndexSAR) |
| 3)    | Waveguide calibration  |
| 4)    | Checked using box-phantom validation test  |

(The graph shows a simple, spreadsheet representation of surface shown in 3D in Figure 4)



## 2.6 SAR MEASUREMENT SYSTEM

### PROBE CALIBRATION PROCEDURE - Continued

#### PROBE SPECIFICATIONS

IndexSAR probe 0084, along with its calibration, is compared with CENELEC and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

| <b>DIMENSIONS</b>                              | <b>S/N 0084</b> | <b>CENELEC [1]</b> | <b>IEEE [2]</b> |
|--|-----------------|--------------------|-----------------|
| Overall length (mm)                            | 350             | -                  | -               |
| Tip length (mm)                                | 10              | -                  | -               |
| Body diameter (mm)                             | 12              | -                  | -               |
| Tip diameter (mm)                              | 5.2             | 8                  | 8               |
| Distance from probe tip to dipole centers (mm) | 2.7             | -                  | -               |

| <b>DYNAMIC RANGE</b> | <b>S/N 0084</b> | <b>CENELEC [1]</b> | <b>IEEE [2]</b> |
|----------------------|-----------------|--------------------|-----------------|
| Minimum (W/kg)       | 0.01            | <0.02              | 0.01            |
| Maximum (W/kg)       | >100            | >100               | 100             |

| <b>LINEARITY OF RESPONSE</b>        | <b>S/N 0084</b> | <b>CENELEC [1]</b> | <b>IEEE [2]</b> |
|-------------------------------------|-----------------|--------------------|-----------------|
| Over range 0.01 – 100 W/kg (+/- dB) | 0.125           | 0.50               | 0.25            |

| <b>Isotropy (measured at 900MHz)</b>  | <b>S/N 0084</b>                  | <b>CENELEC [1]</b> | <b>IEEE [2]</b> |
|---|----------------------------------|--------------------|-----------------|
| Axial rotation with probe normal to source (+/- dB) at 900, 1800, 1900 and 2450 MHz | Max. 0.13<br>(see summary table) | 0.5                | 0.25            |
| Spherical isotropy covering all orientations to source (+/- dB)                     | 0.34                             | 1.0                | 0.50            |


|                            |  |
|----------------------------|--|
| <b>CONSTRUCTION</b>        | Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. No adhesives are used in the immersed section. Outer case materials are PEEK and heat-shrink sleeving. |
| <b>CHEMICAL RESISTANCE</b> | Tested to be resistant to glycol and alcohol containing simulant liquids but probes should be removed, cleaned and dried when not in use.  |

## 2.6 SAR MEASUREMENT SYSTEM


### PROBE CALIBRATION PROCEDURE - Continued

#### REFERENCES

- [1] CENELEC, EN 50361, July 2001. Basic Standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones.
- [2] IEEE 1528, Recommended practice for determining the spatial-peak specific absorption rate (SAR) in the human body due to wireless communications devices: Experimental techniques.
- [3] Calibration report on SAR probe IXP-050 S/N 0071 from National Physical Laboratory. Test Report EF07/2002/03/IndexSAR. Dated 20 February 2002.

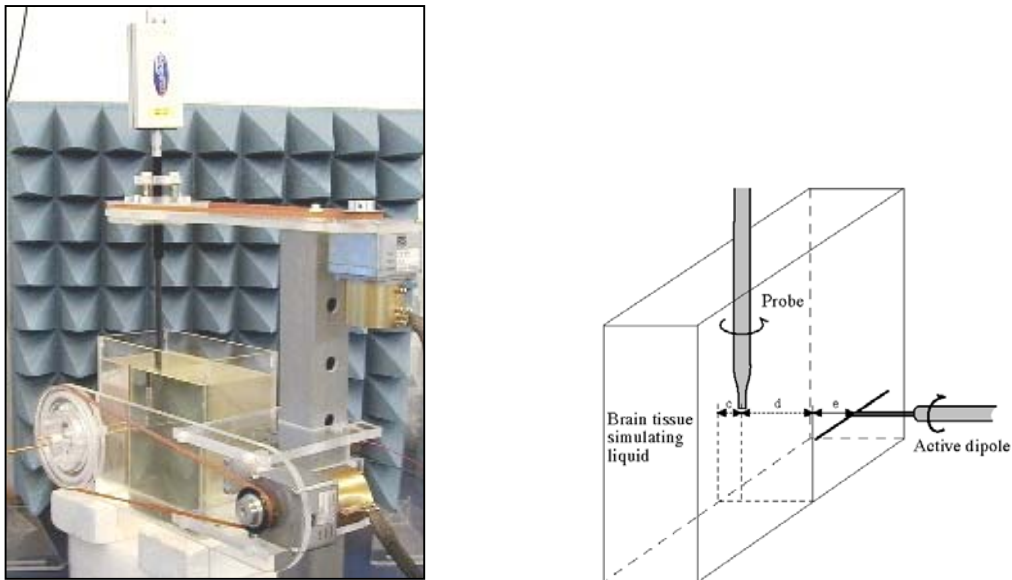

**Figure 2.** Spherical isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

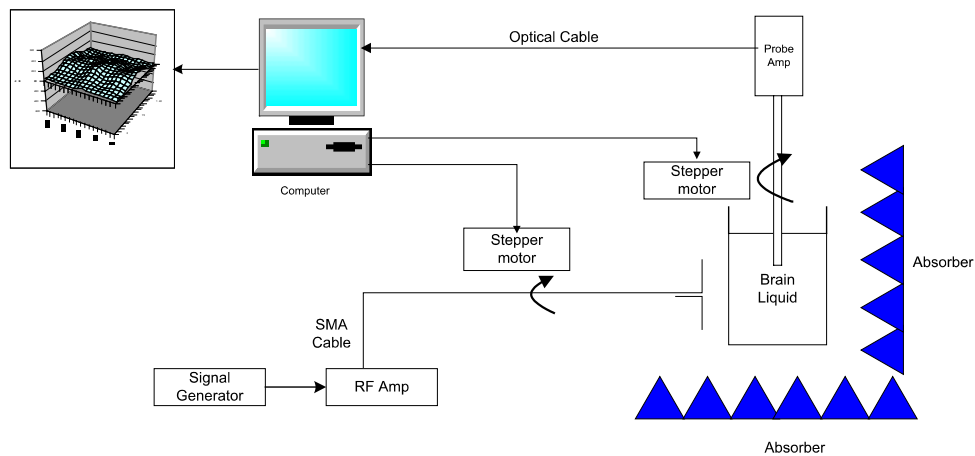

**Figure 3.** Schematic diagram of the test geometry used for isotropy determination







## 2.6 SAR MEASUREMENT SYSTEM

### PROBE CALIBRATION PROCEDURE - Continued

#### REFERENCES

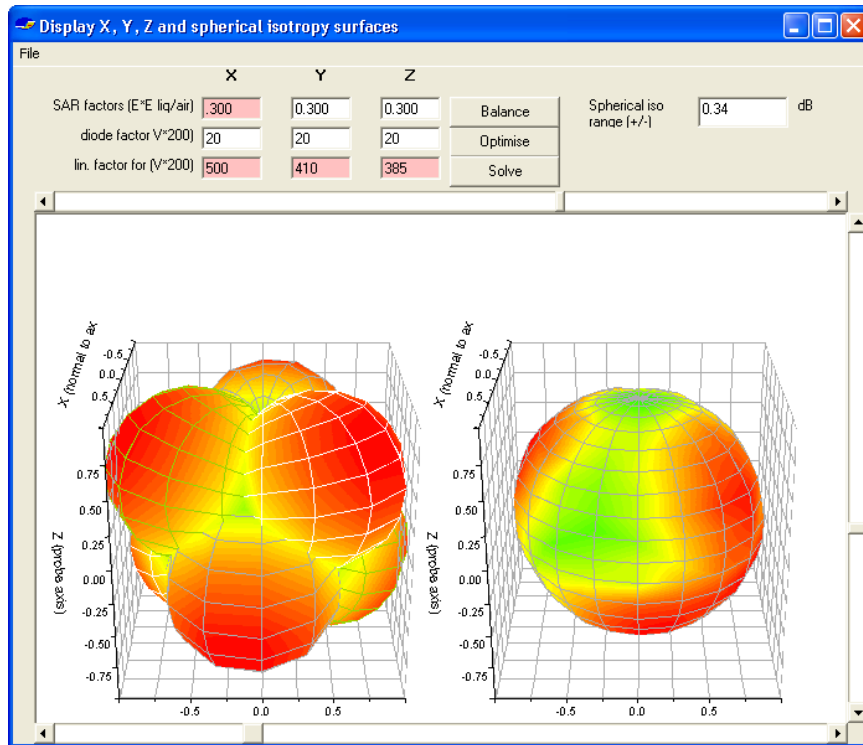

**Figure 4.** Graphical representation of the probe response to fields applied from each direction. The diagram on the left shows the individual response characteristics of each of the three channels and the diagram on the right shows the resulting probe sensitivity in each direction. The colour range in the figure images the lowest values as blue and the maximum values as red. For the probe S/N 0084, this range is (+/-) 0.34 dB. The probe is more sensitive to fields parallel to the axis and less sensitive to fields normal to the probe axis.

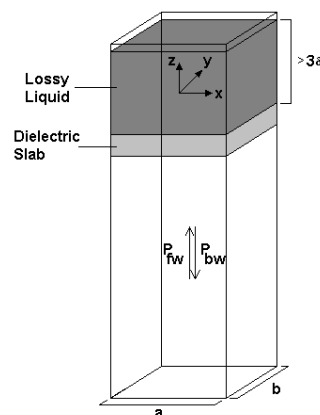


**Figure 5.** Geometry used for waveguide calibration (after Ref [2]. Section A.3.2.2)



## 2.6 SAR MEASUREMENT SYSTEM

### PROBE CALIBRATION PROCEDURE - Continued

#### REFERENCES

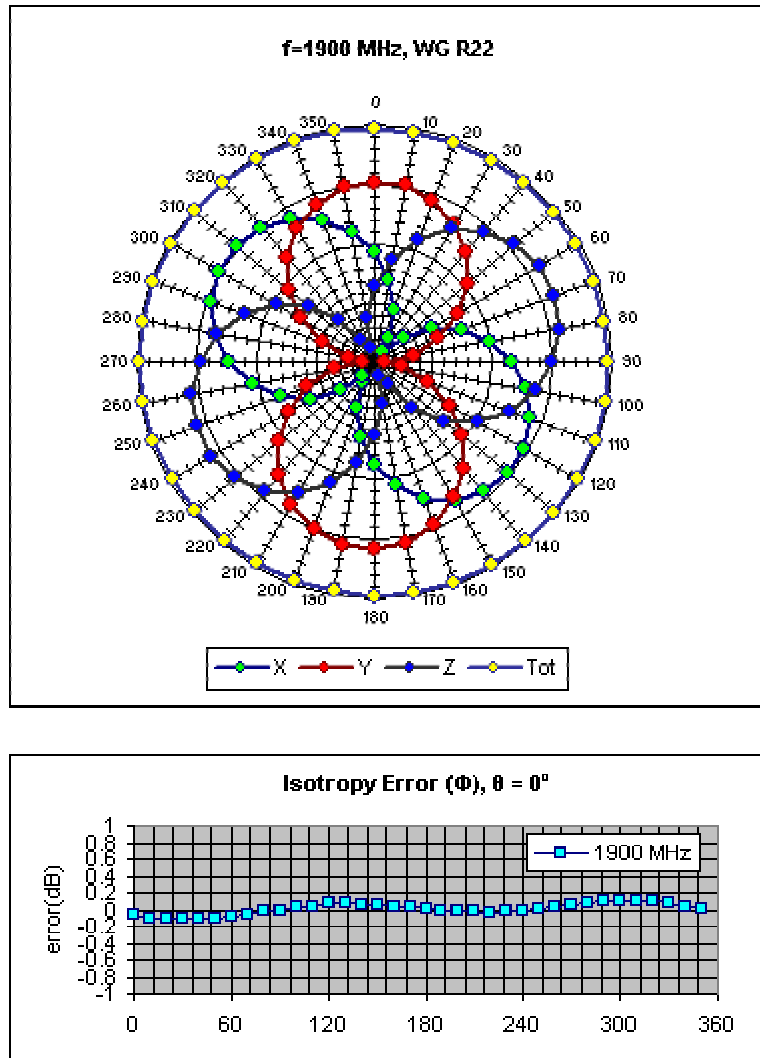


**Figure 6.** Example of the rotational isotropy of probe S/N 0084 obtained by rotating the probe in a liquid-filled waveguide at 1800 MHz. Similar distributions are obtained at the other test frequencies (900, 1900 and 2450 MHz) both in brain liquids and body fluids (see summary table)




## 2.6 SAR MEASUREMENT SYSTEM

### PROBE CALIBRATION PROCEDURE - Continued

#### REFERENCES

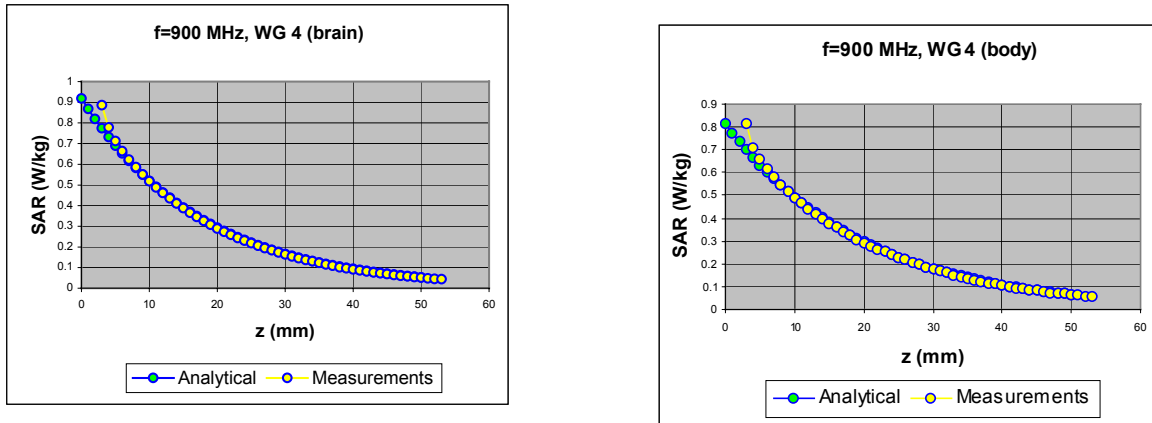

**Figure 7.** The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

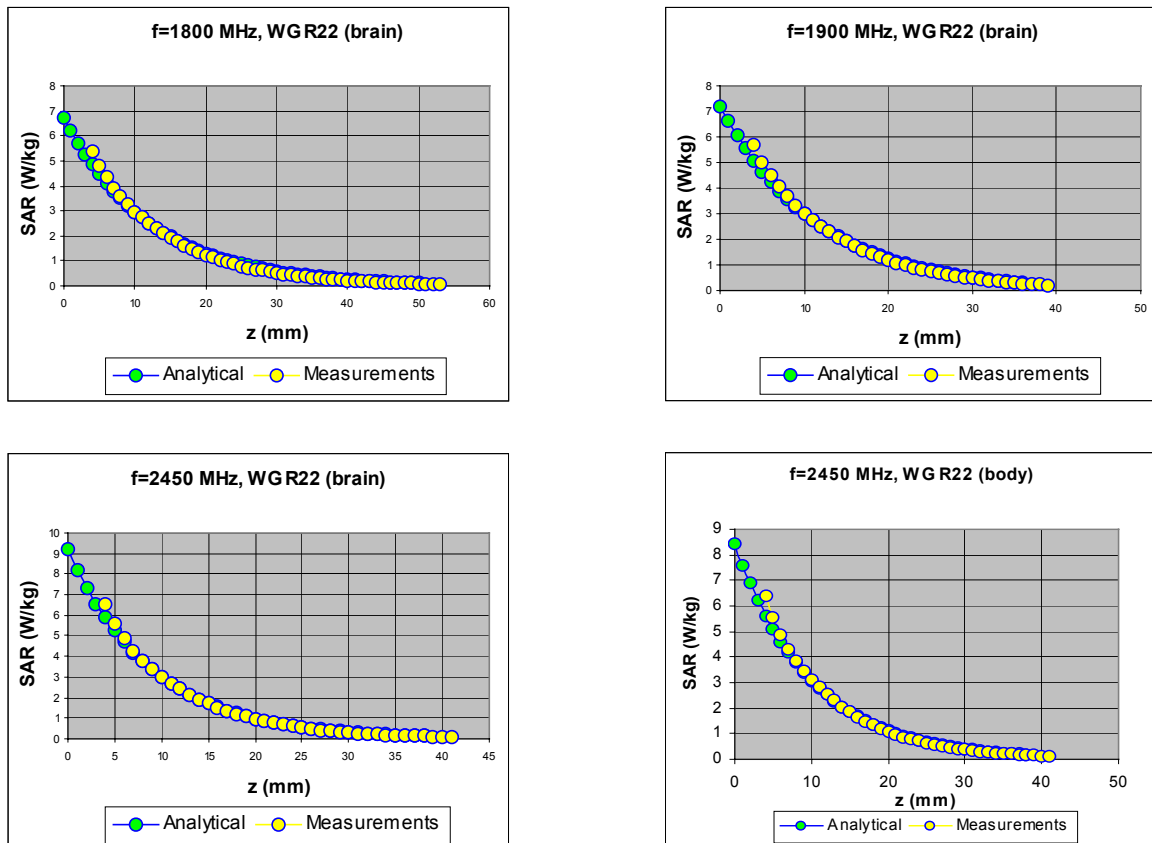


**Figure 8.** The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.




## 2.6 SAR MEASUREMENT SYSTEM


### PROBE CALIBRATION PROCEDURE - Continued

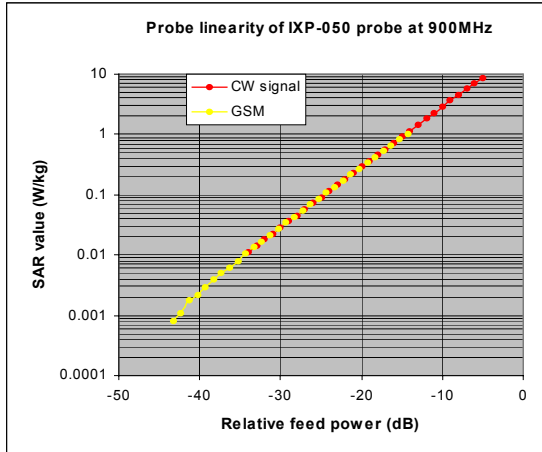


**Figure 9.** The GSM response of an IXP-050 probe at 900MHz

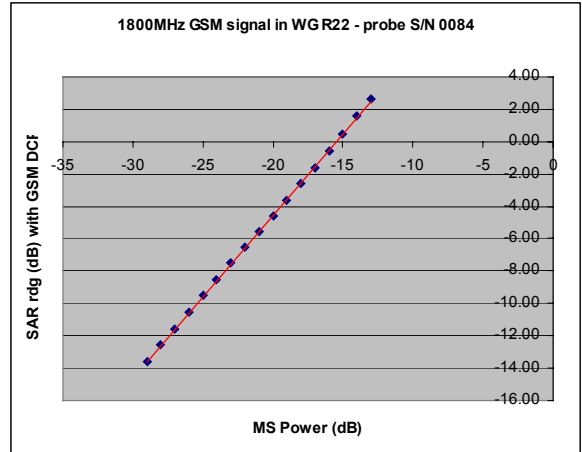

**Figure 9a.** The actual GSM response of IXP-050 probe S/N 0084 at 1800MHz.

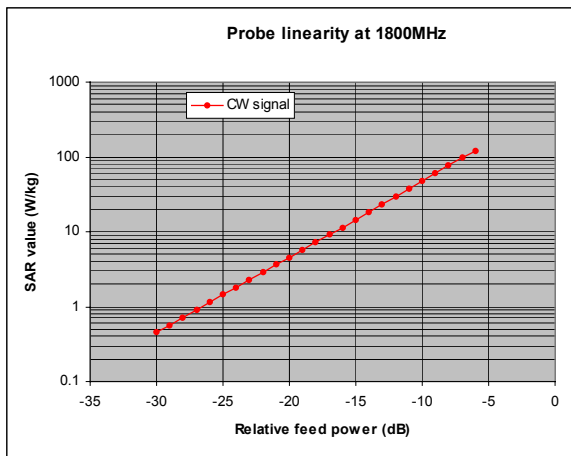

**Figure 9b.** The actual CW response of IXP-050 probe SN0084 up to 100W/kg

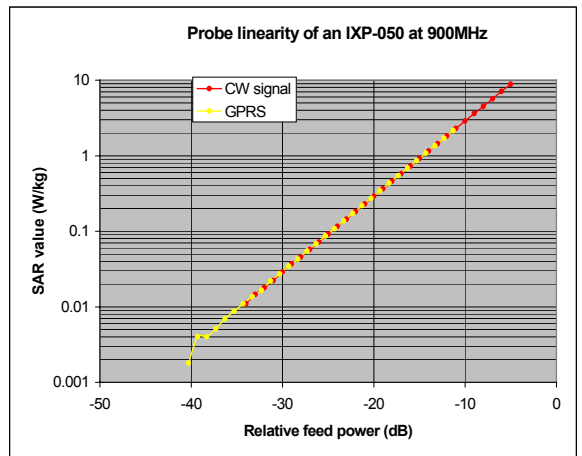


**Figure 10.** The GPRS response of an IXP-050 probe at 900MHz.




**2.6 SAR MEASUREMENT SYSTEM**

**PROBE CALIBRATION PROCEDURE - Continued**

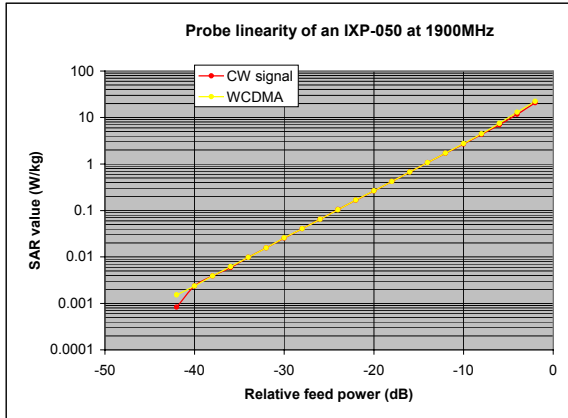


**Figure 11.** The WCDMA response of an IXP-050 probe at 1900MHz.

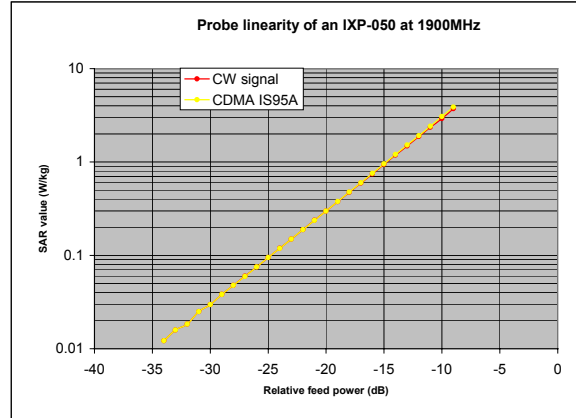

**Figure 12.** The CDMA IS95A response of an IXP-050 probe at 1900MHz.

**TABLE INDICATING THE DIELECTRIC PARAMETERS OF THE LIQUIDS USED FOR CALIBRATIONS AT EACH FREQUENCY**

| Liquid used    | Relative permittivity (measured) | Conductivity (S/m) (measured) |
|----------------|----------------------------------|-------------------------------|
| 900 MHz BRAIN  | 41.80                            | 1.000                         |
| 900 MHz BODY   | 57.50                            | 1.031                         |
| 1800 MHz BRAIN | 38.64                            | 1.380                         |
| 1800 MHz BODY  | 54.30                            | 1.587                         |
| 1900 MHz BRAIN | 38.12                            | 1.470                         |
| 1900 MHz BODY  | 52.97                            | 1.460                         |
| 2450 MHz BRAIN | 38.67                            | 1.881                         |
| 2450 MHz BODY  | 52.19                            | 1.949                         |



## 2.6 SAR MEASUREMENT SYSTEM

### SAR MEASUREMENT PROCEDURE



*Figure 13: Principal components of the SAR measurement test bench*

The major components of the test bench are shown in the picture above. A test set and dipole antenna control the handset via an air link and a low-mass phone holder can position the phone at either ear. Graduated scales are provided to set the phone in the 15 degree position. The upright phantom head holds approx. 7 litres of simulant liquid. The phantom is filled and emptied through a 45mm diameter penetration hole in the top of the head.


After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

#### **SARA2 Interpolation and Extrapolation schemes**

SARA2 software contains support for both 2D cubic B-spline interpolation as well as 3D cubic B-spline interpolation. In addition, for extrapolation purposes, a general  $n^{\text{th}}$  order polynomial fitting routine is implemented following a singular value decomposition algorithm presented in [4]. A 4<sup>th</sup> order polynomial fit is used by default for data extrapolation, but a linear-logarithmic fitting function can be selected as an option. The polynomial fitting procedures have been tested by comparing the fitting coefficients generated by the SARA2 procedures with those obtained using the polynomial fit functions of Microsoft Excel when applied to the same test input data.

#### **Interpolation of 2D area scan**

The 2D cubic B-spline interpolation is used after the initial area scan at fixed distance from the phantom shell wall. The initial scan data are collected with approx. 10mm spatial resolution and spline interpolation is used to find the location of the local maximum to within a 1mm resolution for positioning the subsequent 3D scanning.



## 2.6 SAR MEASUREMENT SYSTEM

### SAR MEASUREMENT PROCEDURE - Continued

#### Extrapolation of 3D scan

For the 3D scan, data are collected on a spatially regular 3D grid having (by default) 6.4 mm steps in the lateral dimensions and 3.5 mm steps in the depth direction (away from the source). SARA2 enables full control over the selection of alternative step sizes in all directions.

The digitised shape of the head is available to the SARA2 software, which decides which points in the 3D array are sufficiently well within the shell wall to be 'visited' by the SAR probe. After the data collection, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

#### Interpolation of 3D scan and volume averaging

The procedure used for defining the shape of the volumes used for SAR averaging in the SARA2 software follow the method of adapting the surface of the 'cube' to conform with the curved inner surface of the phantom (see Appendix C.2.2.1 in EN 50361). This is called, here, the conformal scheme.

For each row of data in the depth direction, the data are extrapolated and interpolated to less than 1mm spacing and average values are calculated from the phantom surface for the row of data over distances corresponding to the requisite depth for 10g and 1g cubes. This results in two 2D arrays of data, which are then cubic B-spline interpolated to sub mm lateral resolution. A search routine then moves an averaging square around through the 2D array and records the maximum value of the corresponding 1g and 10g volume averages. For the definition of the surface in this procedure, the digitised position of the headshell surface is used for measurement in head-shaped phantoms. For measurements in rectangular, box phantoms, the distance between the phantom wall and the closest set of gridded data points is entered into the software.

For measurements in box-shaped phantoms, this distance is under the control of the user. The effective distance must be greater than 2.5mm as this is the tip-sensor distance and to avoid interface proximity effects, it should be at least 5mm. A value of 6 or 8mm is recommended. This distance is called **dbe** in EN 50361.

For automated measurements inside the head, the distance cannot be less than 2.5mm, which is the radius of the probe tip and to avoid interface proximity effects, a minimum clearance distance of  $x$  mm is retained. The actual value of **dbe** will vary from point to point depending upon how the spatially-regular 3D grid points fit within the shell. The greatest separation is when a grid point is just not visited due to the probe tip dimensions. In this case the distance could be as large as the step-size plus the minimum clearance distance (i.e with  $x=5$  and a step size of 3.5, **dbe** will be between 3.5 and 8.5mm).

The default step size (**dstep** in EN 50361) used is 3.5mm, but this is under user-control. The compromise is with time of scan, so it is not practical to make it much smaller or scan times become long and power-drop influences become larger.

The robot positioning system specification for the repeatability of the positioning (**dss** in EN50361) is +/- 0.04mm.



## 2.6 SAR MEASUREMENT SYSTEM

### SAR MEASUREMENT PROCEDURE - Continued

The phantom shell is made by an industrial moulding process from the CAD files of the SAM shape, with both internal and external moulds. For the upright phantoms, the external shape is subsequently digitised on a Mitutoyo CMM machine (Euro C574) to a precision of 0.001mm. Wall thickness measurements made non-destructively with an ultrasonic sensor indicate that the shell thickness (**dph**) away from the ear is 2.0 +/- 0.1mm. The ultrasonic measurements were calibrated using additional mechanical measurements on available cut surfaces of the phantom shells.

For the upright phantom, the alignment is based upon registration of the rotation axis of the phantom on its 253mm-diameter baseplate bearing and the position of the probe axis when commanded to go to the axial position. A laser alignment tool is provided (procedure detailed elsewhere). This enables the registration of the phantom tip (**dmis**) to be assured to within approx. 0.2mm. This alignment is done with reference to the actual probe tip after installation and probe alignment. The rotational positioning of the phantom is variable – offering advantages for special studies, but locating pins ensure accurate repositioning at the principal positions (LH and RH ears).



## 2.7 EN50361 TEST POSITIONS

This recommended practice specifies exactly two test positions for the handset against the head phantom, the “cheek” position and the “tilted” position. These two test positions are defined in the following sub-clauses. The handset should be tested in both positions on the left and right sides of the SAM phantom. In each test position the centre of the earpiece of the device is placed directly at the entrance of the auditory canal. The angles mentioned in the test positions used are referenced to the line connecting both auditory canal openings. The plane this line is on is known as the reference plane. Testing is performed on the right and left-hand sides of the generic phantom head.

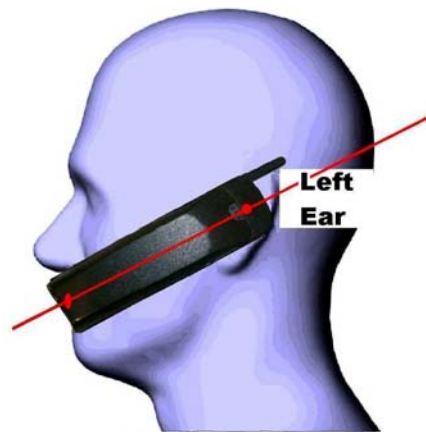


Figure 14. – Side View of Mobile next to head showing alignment.

### The Cheek Position

The Cheek Position is where the mobile is in the reference plane and the line between the mobile and the line connecting both auditory canal openings is reduced until any part of the mobile touches any part of the generic twin phantom head.

### The 15° Position

The 15° Position is where the mobile is in the reference cheek position and the phone is kept in contact with the auditory canal at the earpiece, the bottom of the phone is then tilted away from the phantom mouth by 15°.



Figure 15. – Cheek Position.

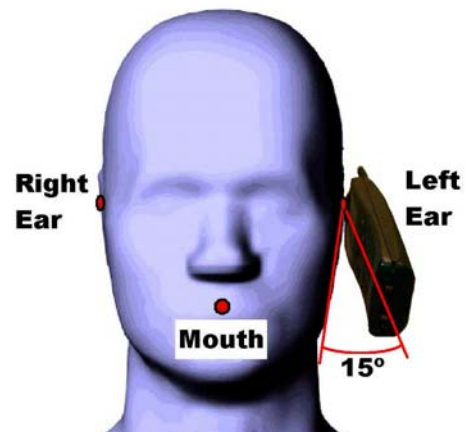


Figure 16. – 15° Tilt Position.

2.7 TEST POSITIONS

OET65(c) FLAT PHANTOM TEST POSITIONS – GRAPHICAL REPRESENTATION

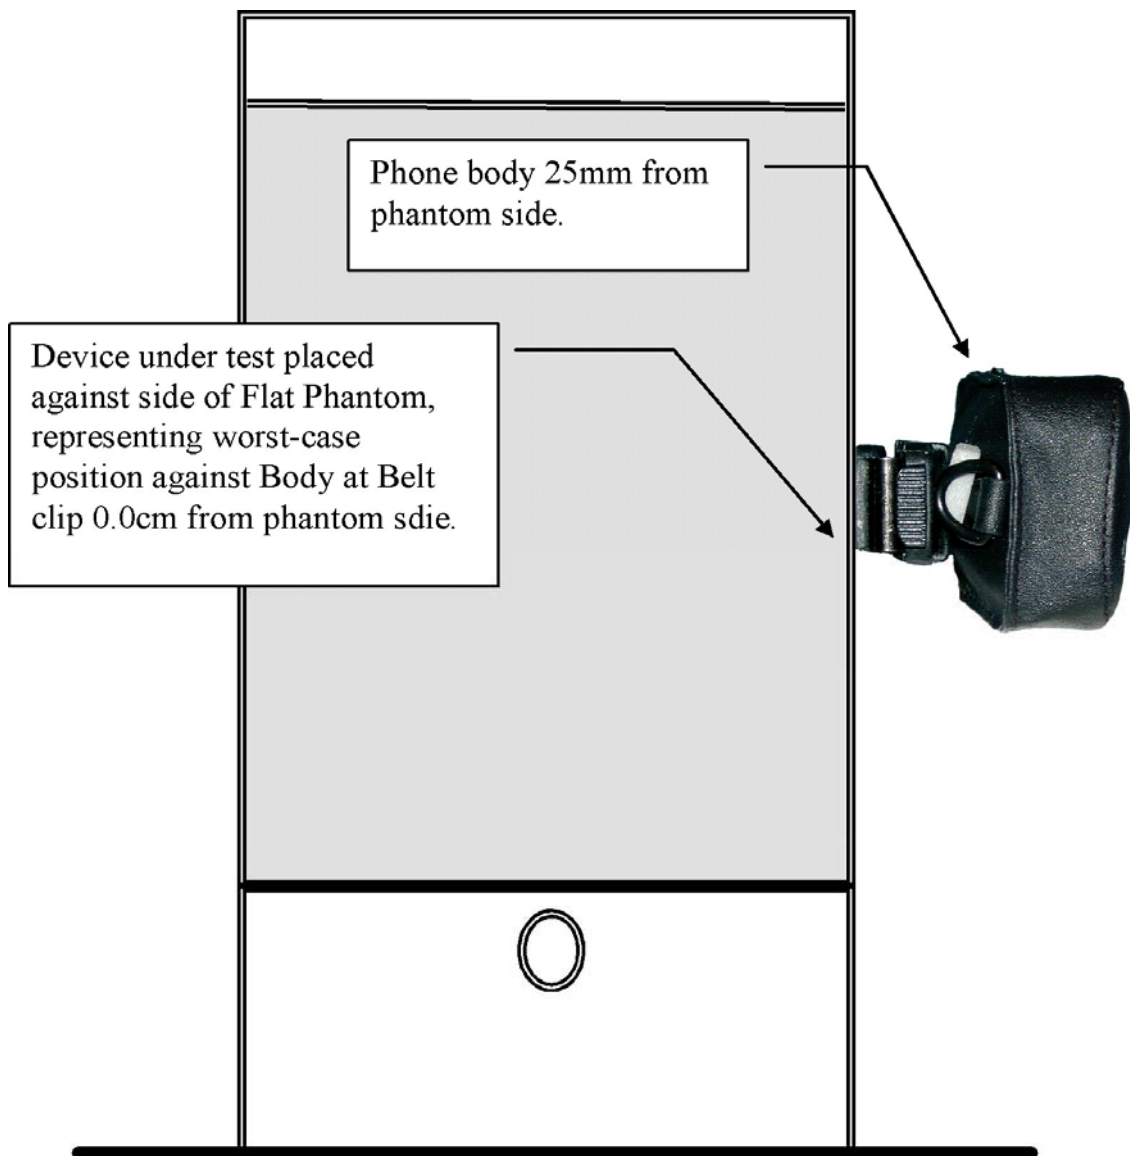


Figure 17. – Back Position against Flat phantom separated by Belt Clip, phone parallel to phantom.



**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 10:26:01   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_001.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22.8°C                | LIQUID SIMULANT:            | 2450 Head    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 37.59        |
| RELATIVE HUMIDITY:                 | 34.8%                 | CONDUCTIVITY:               | 1.901        |
| PHANTOM S/NO:                      | HeadFT04.csv          | LIQUID TEMPERATURE:         | 23.1°C       |
| PHANTOM ROTATION:                  | 0°                    | MAX SAR Y-AXIS LOCATION:    | -26.70 mm    |
| DUT POSITION:                      | LH Cheek              | MAX SAR Z-AXIS LOCATION:    | -180.45 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 4.93 V/m     |
| TEST FREQUENCY:                    | 2437MHz               | SAR 1g:                     | 0.042 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.022 W/kg   |
| CONVERSION FACTORS:                | 0.396 / 0.396 / 0.396 | SAR START:                  | 0.012 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.012 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | 0.17 dB      |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

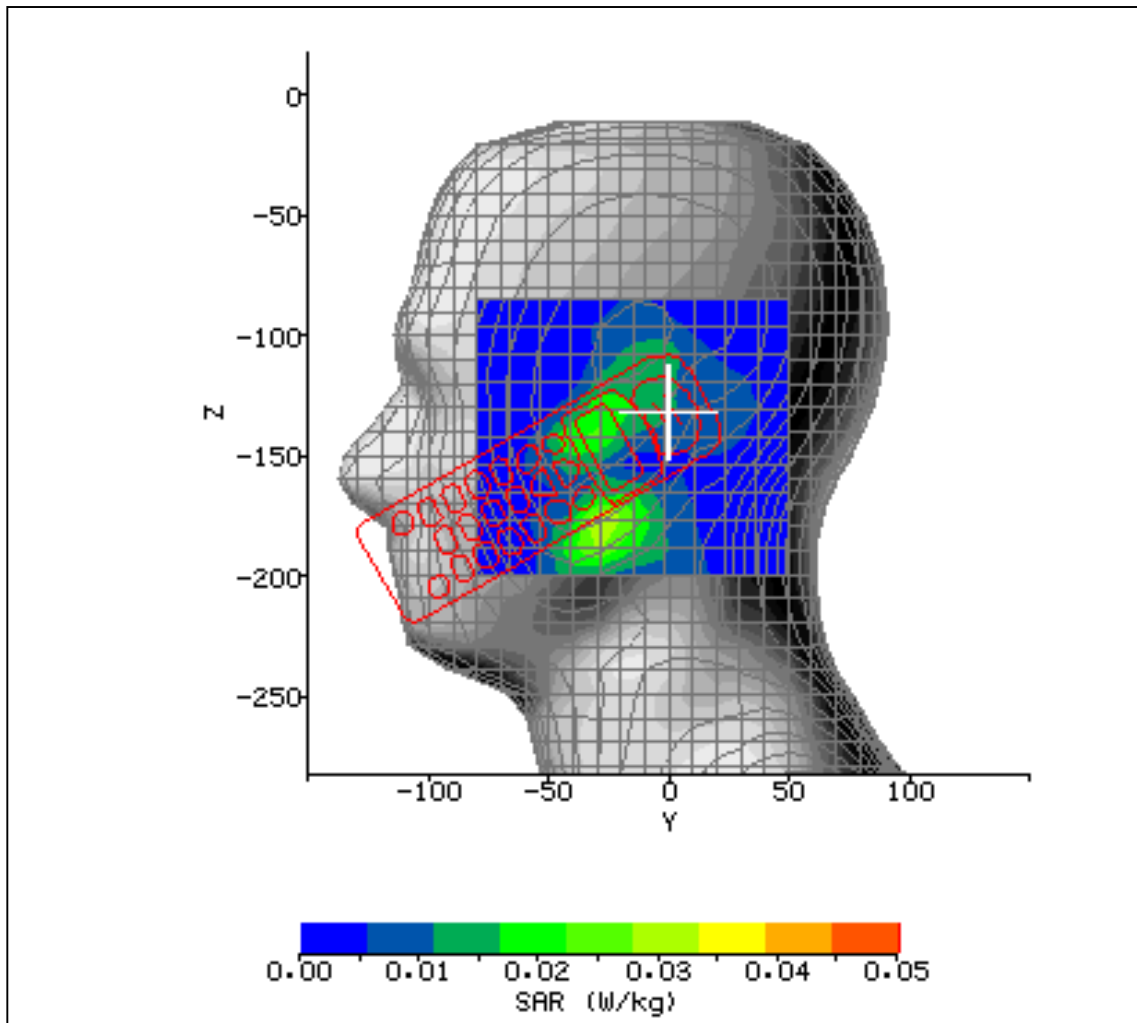


Figure 18



**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 10:58:40   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_002.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22.4°C                | LIQUID SIMULANT:            | 2450 Head    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 37.59        |
| RELATIVE HUMIDITY:                 | 37.3%                 | CONDUCTIVITY:               | 1.901        |
| PHANTOM S/NO:                      | HeadFT04.csv          | LIQUID TEMPERATURE:         | 23.1°C       |
| PHANTOM ROTATION:                  | 0°                    | MAX SAR Y-AXIS LOCATION:    | -2.00 mm     |
| DUT POSITION:                      | LH 15°                | MAX SAR Z-AXIS LOCATION:    | -112.60 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 3.94 V/m     |
| TEST FREQUENCY:                    | 2437MHz               | SAR 1g:                     | 0.026 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.013 W/kg   |
| CONVERSION FACTORS:                | 0.396 / 0.396 / 0.396 | SAR START:                  | 0.006 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.006 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | 0.00 dB      |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

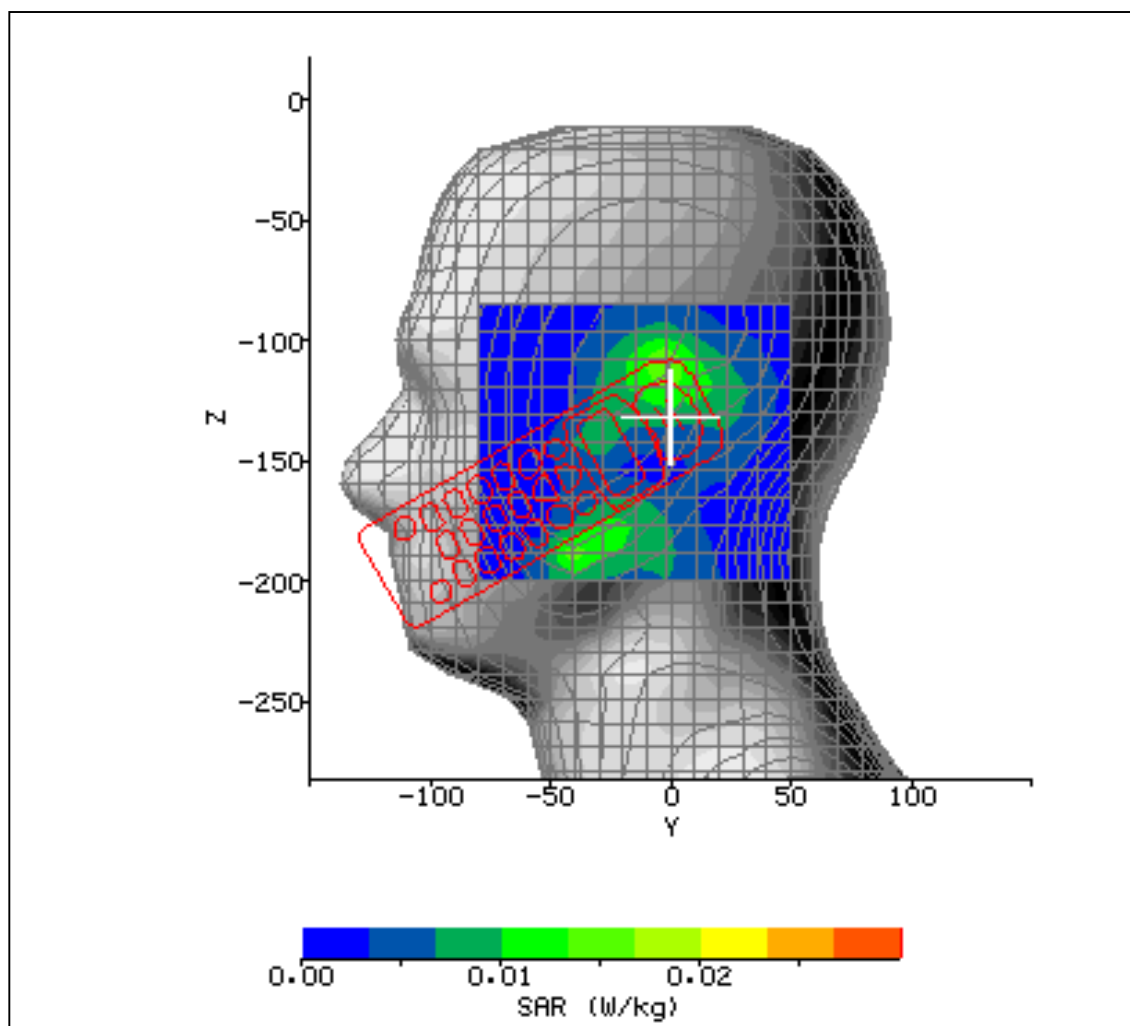


Figure 19



**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 11:38:09   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_003.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22.9°C                | LIQUID SIMULANT:            | 2450 Head    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 37.59        |
| RELATIVE HUMIDITY:                 | 35.6%                 | CONDUCTIVITY:               | 1.901        |
| PHANTOM S/NO:                      | HeadFT04.csv          | LIQUID TEMPERATURE:         | 23.1°C       |
| PHANTOM ROTATION:                  | 180°                  | MAX SAR Y-AXIS LOCATION:    | 54.00 mm     |
| DUT POSITION:                      | RH Cheek              | MAX SAR Z-AXIS LOCATION:    | -118.35 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 5.83 V/m     |
| TEST FREQUENCY:                    | 2437MHz               | SAR 1g:                     | 0.058 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.033 W/kg   |
| CONVERSION FACTORS:                | 0.396 / 0.396 / 0.396 | SAR START:                  | 0.016 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.016 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | 0.03 dB      |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

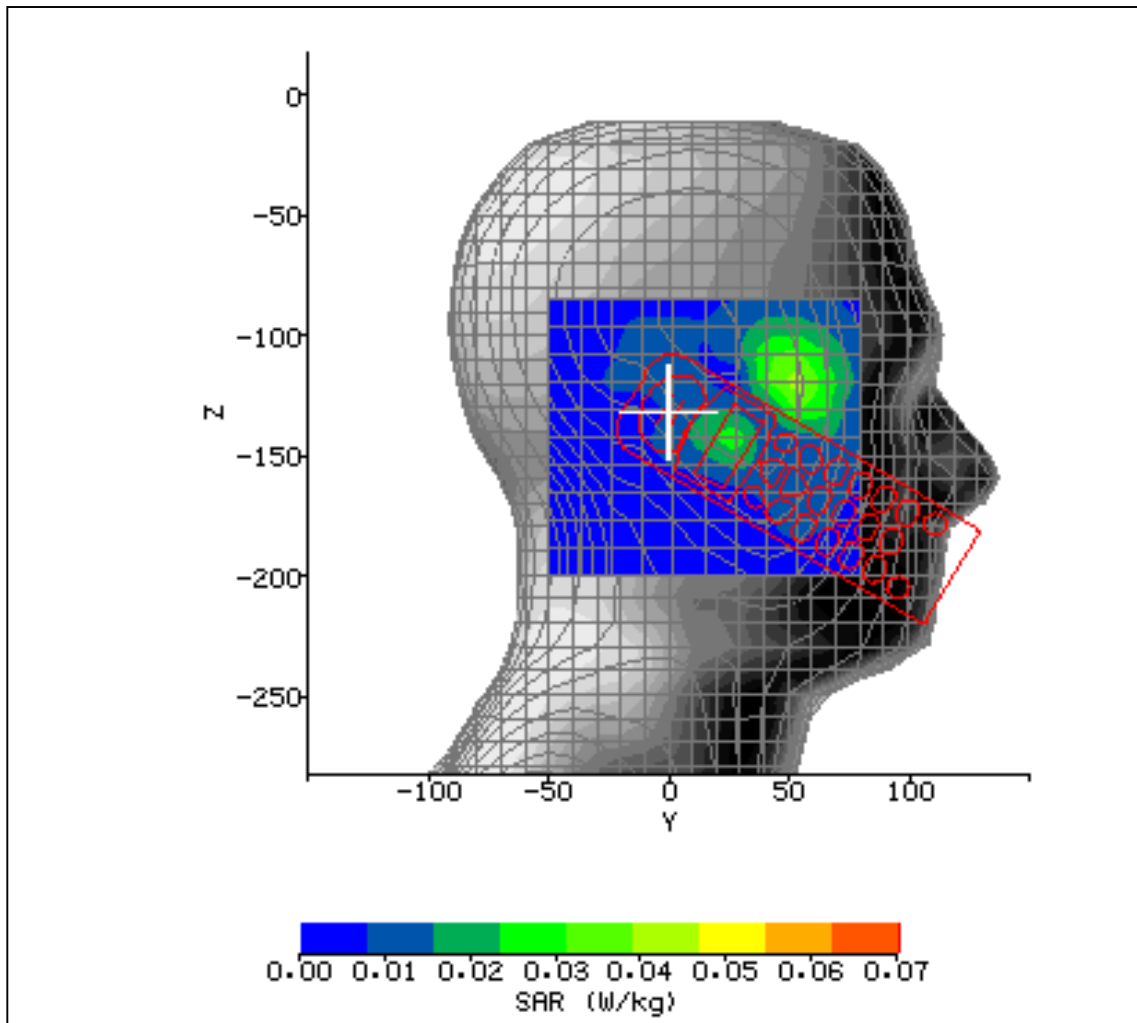


Figure 20



**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 12:19:12   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_004.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22.7°C                | LIQUID SIMULANT:            | 2450 Head    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 37.59        |
| RELATIVE HUMIDITY:                 | 37.1%                 | CONDUCTIVITY:               | 1.901        |
| PHANTOM S/NO:                      | HeadFT04.csv          | LIQUID TEMPERATURE:         | 23°C         |
| PHANTOM ROTATION:                  | 180°                  | MAX SAR Y-AXIS LOCATION:    | 50.10 mm     |
| DUT POSITION:                      | RH 15°                | MAX SAR Z-AXIS LOCATION:    | -108.00 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 3.87 V/m     |
| TEST FREQUENCY:                    | 2437MHz               | SAR 1g:                     | 0.028 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.016 W/kg   |
| CONVERSION FACTORS:                | 0.396 / 0.396 / 0.396 | SAR START:                  | 0.007 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.007 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | 0.00 dB      |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

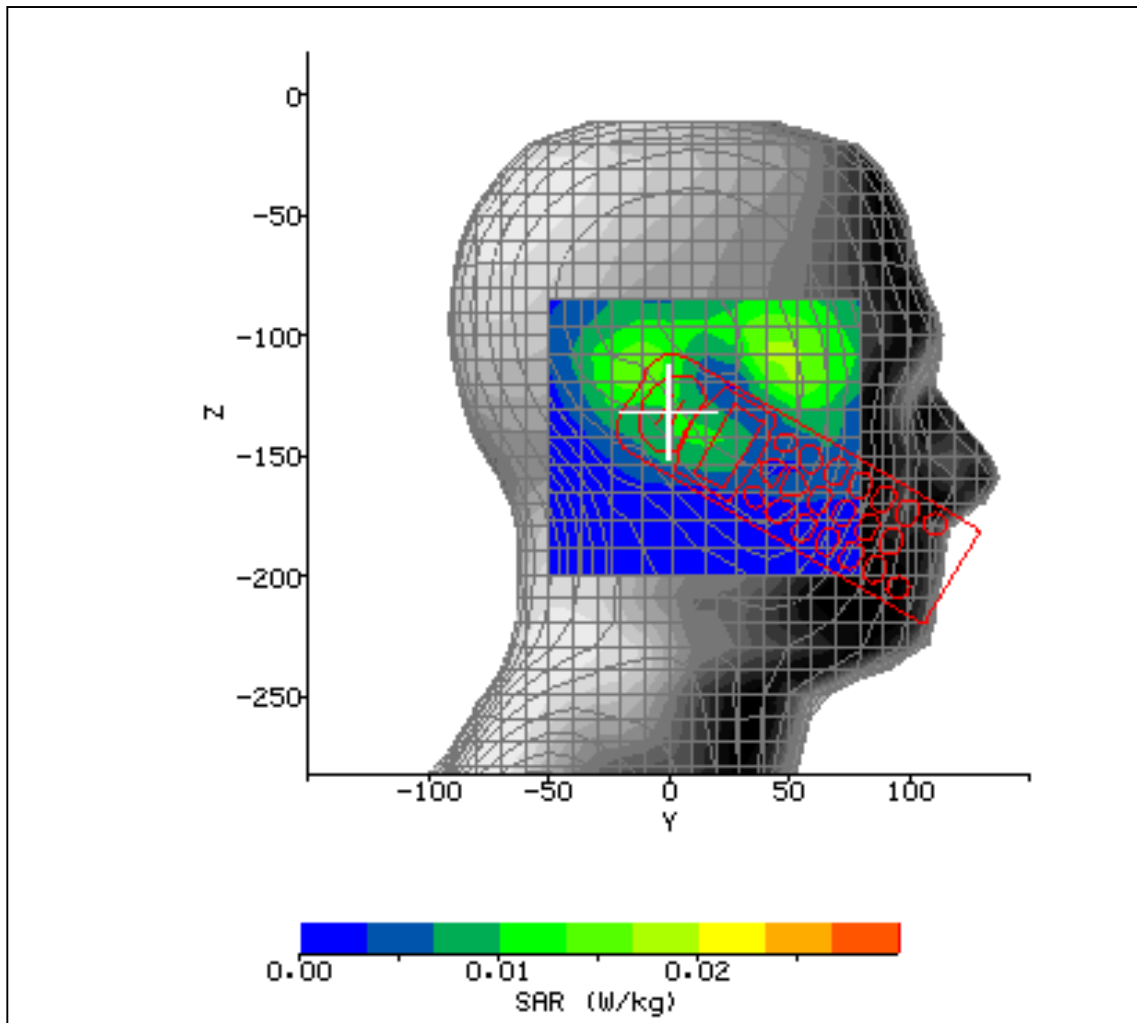


Figure 21



**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 12:56:50   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_005.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22.2°C                | LIQUID SIMULANT:            | 2450 Head    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 37.59        |
| RELATIVE HUMIDITY:                 | 39.7%                 | CONDUCTIVITY:               | 1.901        |
| PHANTOM S/NO:                      | HeadFT04.csv          | LIQUID TEMPERATURE:         | 22.9°C       |
| PHANTOM ROTATION:                  | 180°                  | MAX SAR Y-AXIS LOCATION:    | 54.00 mm     |
| DUT POSITION:                      | RH Cheek              | MAX SAR Z-AXIS LOCATION:    | -116.05 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 4.59 V/m     |
| TEST FREQUENCY:                    | 2412MHz               | SAR 1g:                     | 0.036 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.021 W/kg   |
| CONVERSION FACTORS:                | 0.396 / 0.396 / 0.396 | SAR START:                  | 0.011 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.010 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | -0.33 dB     |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

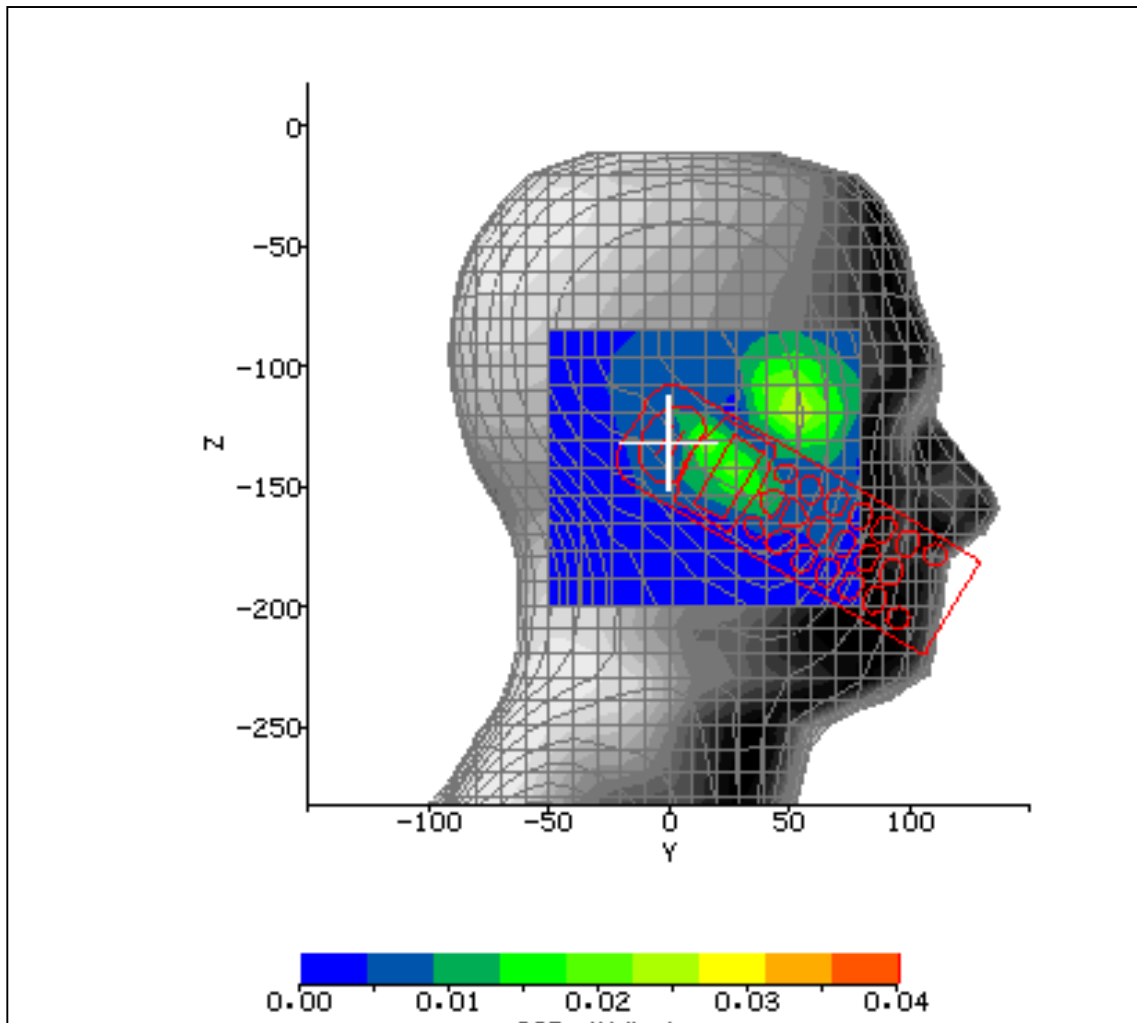


Figure 22



**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 13:34:08   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_006.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22.4°C                | LIQUID SIMULANT:            | 2450 Head    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 37.59        |
| RELATIVE HUMIDITY:                 | 33.6%                 | CONDUCTIVITY:               | 1.901        |
| PHANTOM S/NO:                      | HeadFT04.csv          | LIQUID TEMPERATURE:         | 30°C         |
| PHANTOM ROTATION:                  | 180°                  | MAX SAR Y-AXIS LOCATION:    | 52.70 mm     |
| DUT POSITION:                      | RH Cheek              | MAX SAR Z-AXIS LOCATION:    | -117.20 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 6.04 V/m     |
| TEST FREQUENCY:                    | 2462MHz               | SAR 1g:                     | 0.064 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.036 W/kg   |
| CONVERSION FACTORS:                | 0.396 / 0.396 / 0.396 | SAR START:                  | 0.016 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.016 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | 0.09 dB      |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

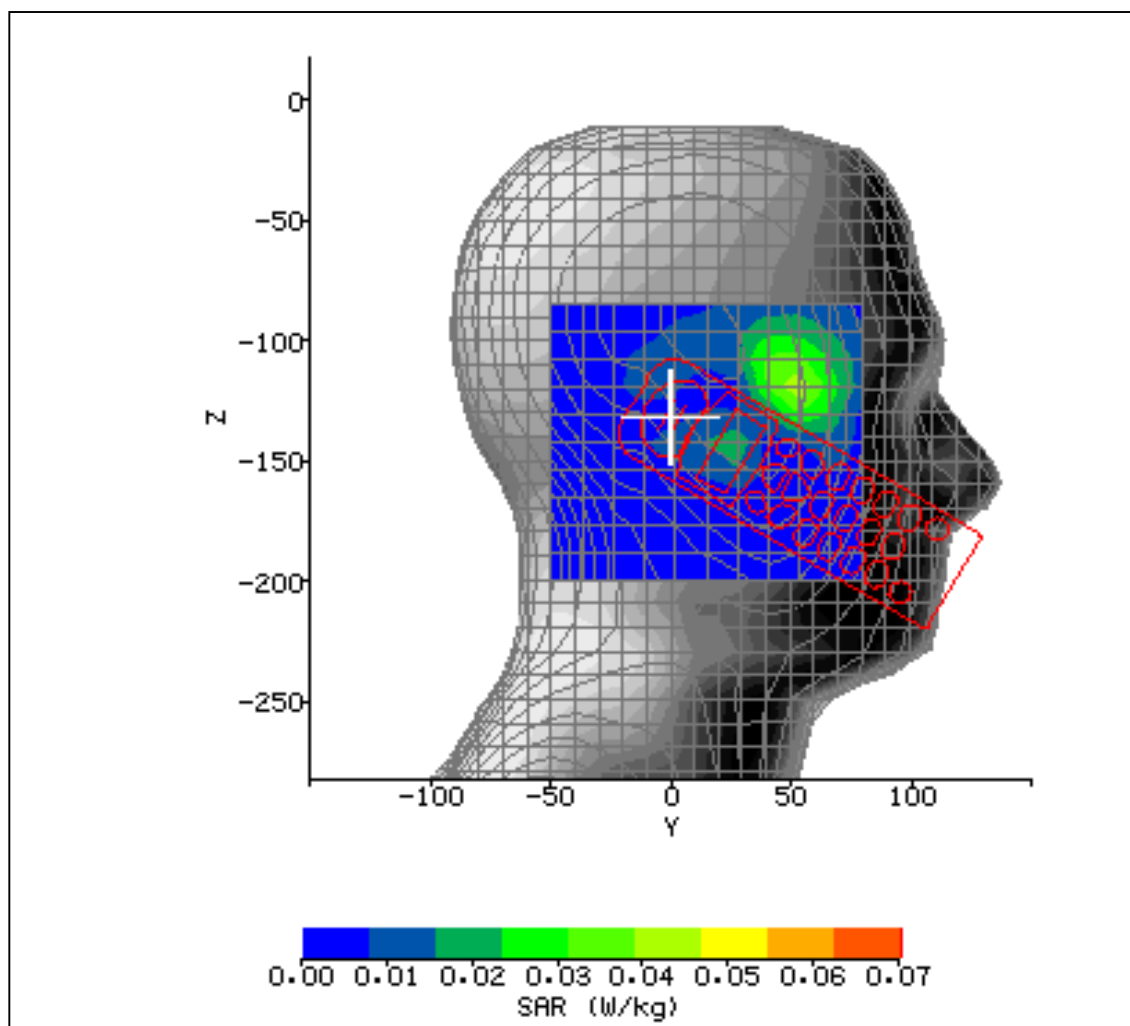


Figure 23





**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 15:24:30   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_007.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22°C                  | LIQUID SIMULANT:            | 2450 Body    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 50.58        |
| RELATIVE HUMIDITY:                 | 41.8%                 | CONDUCTIVITY:               | 2.047        |
| PHANTOM S/NO:                      | HeadBox01.csv         | LIQUID TEMPERATURE:         | 29.9°C       |
| PHANTOM ROTATION:                  | 0°                    | MAX SAR Y-AXIS LOCATION:    | -49.60 mm    |
| DUT POSITION:                      | Holster (rear facing) | MAX SAR Z-AXIS LOCATION:    | -144.80 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 19.22 V/m    |
| TEST FREQUENCY:                    | 2412MHz               | SAR 1g:                     | 0.559 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.258 W/kg   |
| CONVERSION FACTORS:                | 0.468 / 0.468 / 0.468 | SAR START:                  | 0.144 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.146 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | 0.06 dB      |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

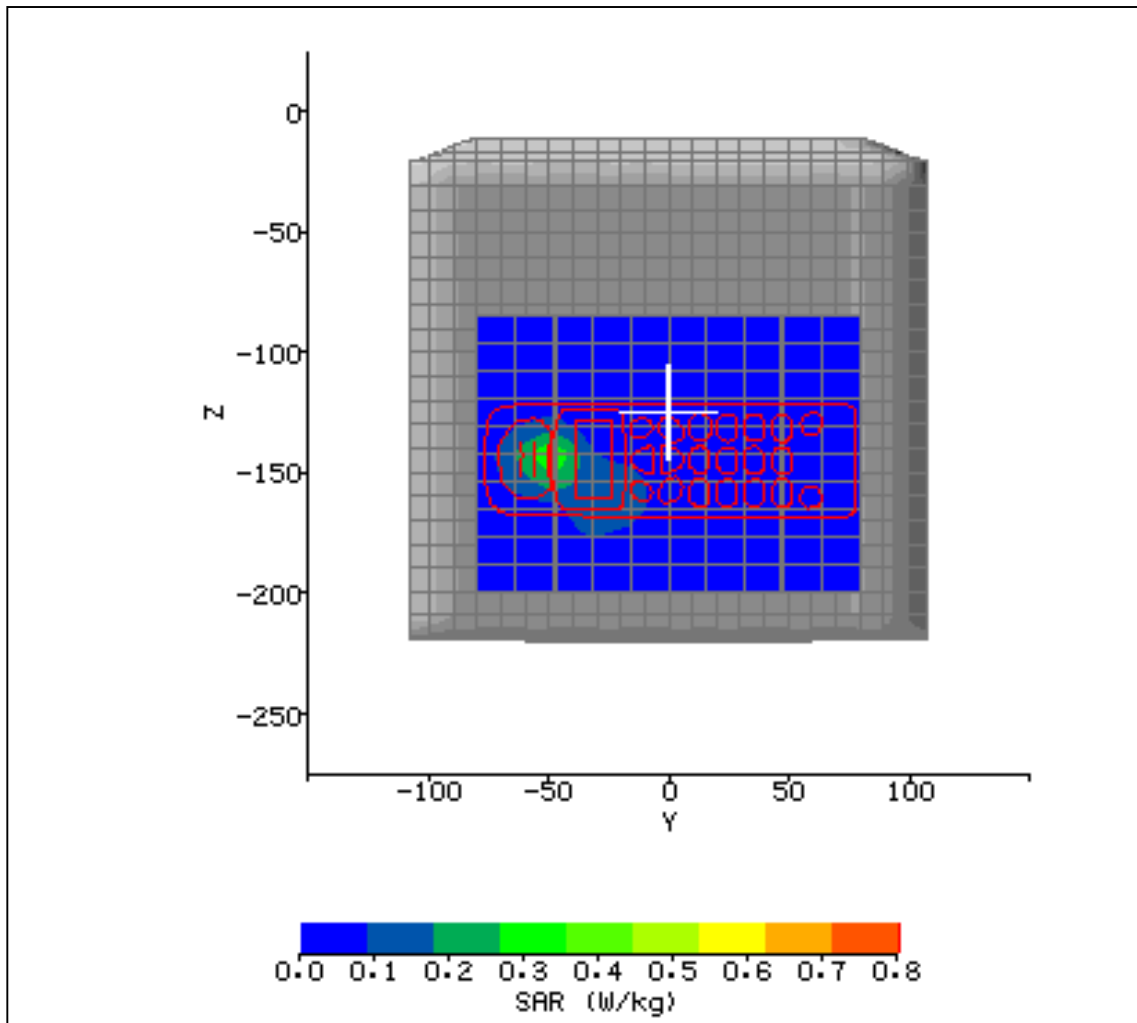


Figure 24



**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 16:05:33   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_008.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22.5°C                | LIQUID SIMULANT:            | 2450 Body    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 50.58        |
| RELATIVE HUMIDITY:                 | 38.4%                 | CONDUCTIVITY:               | 2.047        |
| PHANTOM S/NO:                      | HeadBox01.csv         | LIQUID TEMPERATURE:         | 22.9°C       |
| PHANTOM ROTATION:                  | 0°                    | MAX SAR Y-AXIS LOCATION:    | -49.60 mm    |
| DUT POSITION:                      | Holster (rear facing) | MAX SAR Z-AXIS LOCATION:    | -144.80 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 21.14 V/m    |
| TEST FREQUENCY:                    | 2437MHz               | SAR 1g:                     | 0.665 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.303 W/kg   |
| CONVERSION FACTORS:                | 0.468 / 0.468 / 0.468 | SAR START:                  | 0.166 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.170 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | 0.08 dB      |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

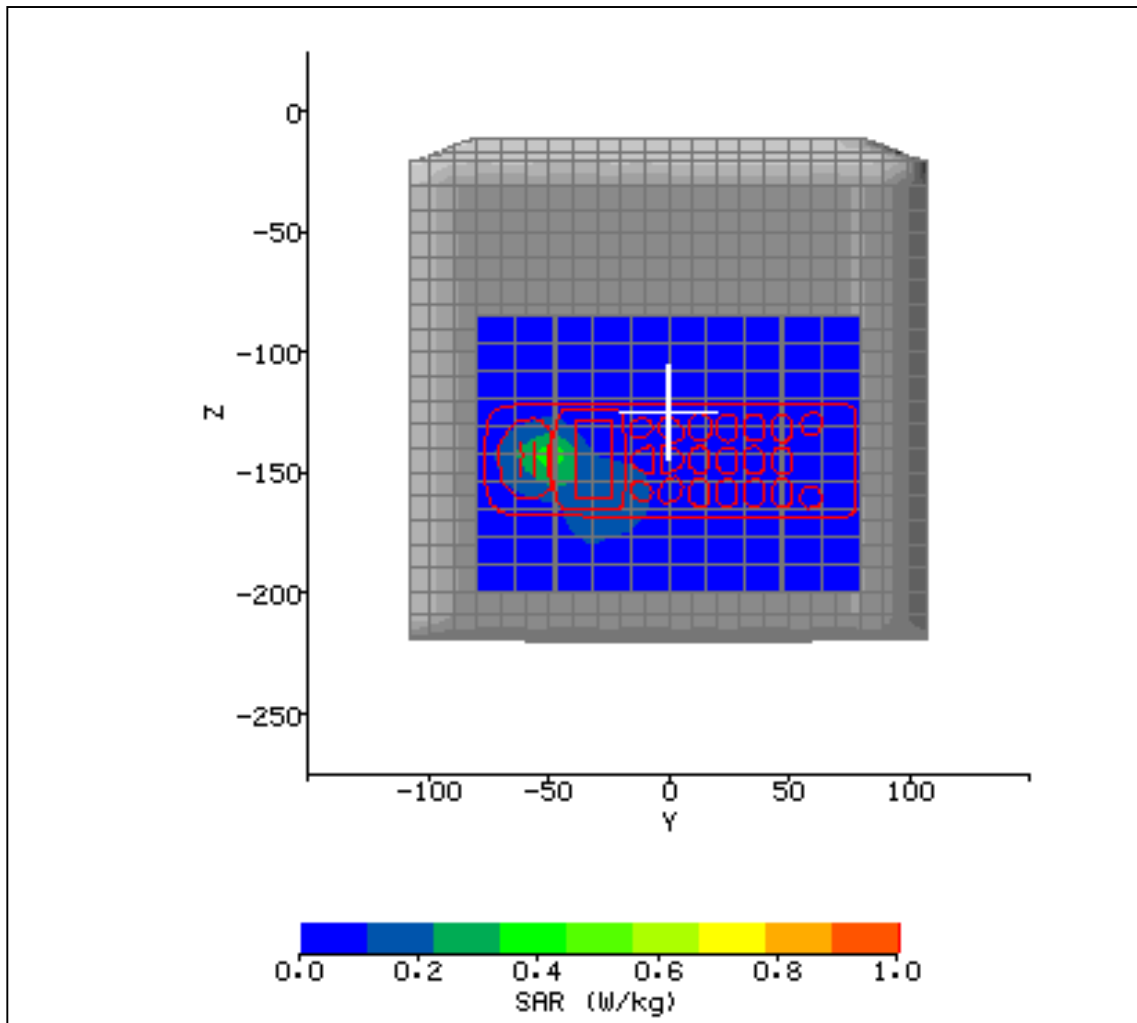


Figure 25



**2.8 TEST RESULTS INCLUDING SAR DISTRIBUTIONS (AREA SCANS – 2D)**

|                                    |                       |                             |              |
|------------------------------------|-----------------------|-----------------------------|--------------|
| SYSTEM / SOFTWARE:                 | SARA2 / 2.3 VPM       | INPUT POWER DRIFT:          | 0.0 dB       |
| DATE / TIME:                       | 15/04/2004 16:45:00   | DUT BATTERY MODEL/NO:       | 50-24000-030 |
| FILENAME:                          | 612323_009.txt        | PROBE SERIAL NUMBER:        | 0084         |
| AMBIENT TEMPERATURE:               | 22.2°C                | LIQUID SIMULANT:            | 2450 Body    |
| DEVICE UNDER TEST:                 | Symbol NP4046-300     | RELATIVE PERMITTIVITY:      | 50.58        |
| RELATIVE HUMIDITY:                 | 38.9%                 | CONDUCTIVITY:               | 2.047        |
| PHANTOM S/NO:                      | HeadBox01.csv         | LIQUID TEMPERATURE:         | 21.6°C       |
| PHANTOM ROTATION:                  | 0°                    | MAX SAR Y-AXIS LOCATION:    | -48.00 mm    |
| DUT POSITION:                      | Holster (rear facing) | MAX SAR Z-AXIS LOCATION:    | -144.80 mm   |
| ANTENNA CONFIGURATION:             | Fixed Internal        | MAX E FIELD:                | 18.63 V/m    |
| TEST FREQUENCY:                    | 2462MHz               | SAR 1g:                     | 0.506 W/kg   |
| AIR FACTORS:                       | 500 / 410 / 385       | SAR 10g:                    | 0.230 W/kg   |
| CONVERSION FACTORS:                | 0.468 / 0.468 / 0.468 | SAR START:                  | 0.125 W/kg   |
| TYPE OF MODULATION:                | CW                    | SAR END:                    | 0.128 W/kg   |
| MODN. DUTY CYCLE:                  | 100%                  | SAR DRIFT DURING SCAN:      | 0.09 dB      |
| DIODE COMPRESSION FACTORS (V*200): | 20 / 20 / 20          | PROBE BATTERY LAST CHANGED: | 13/04/04     |
| INPUT POWER LEVEL:                 | 0                     | EXTRAPOLATION:              | poly4        |

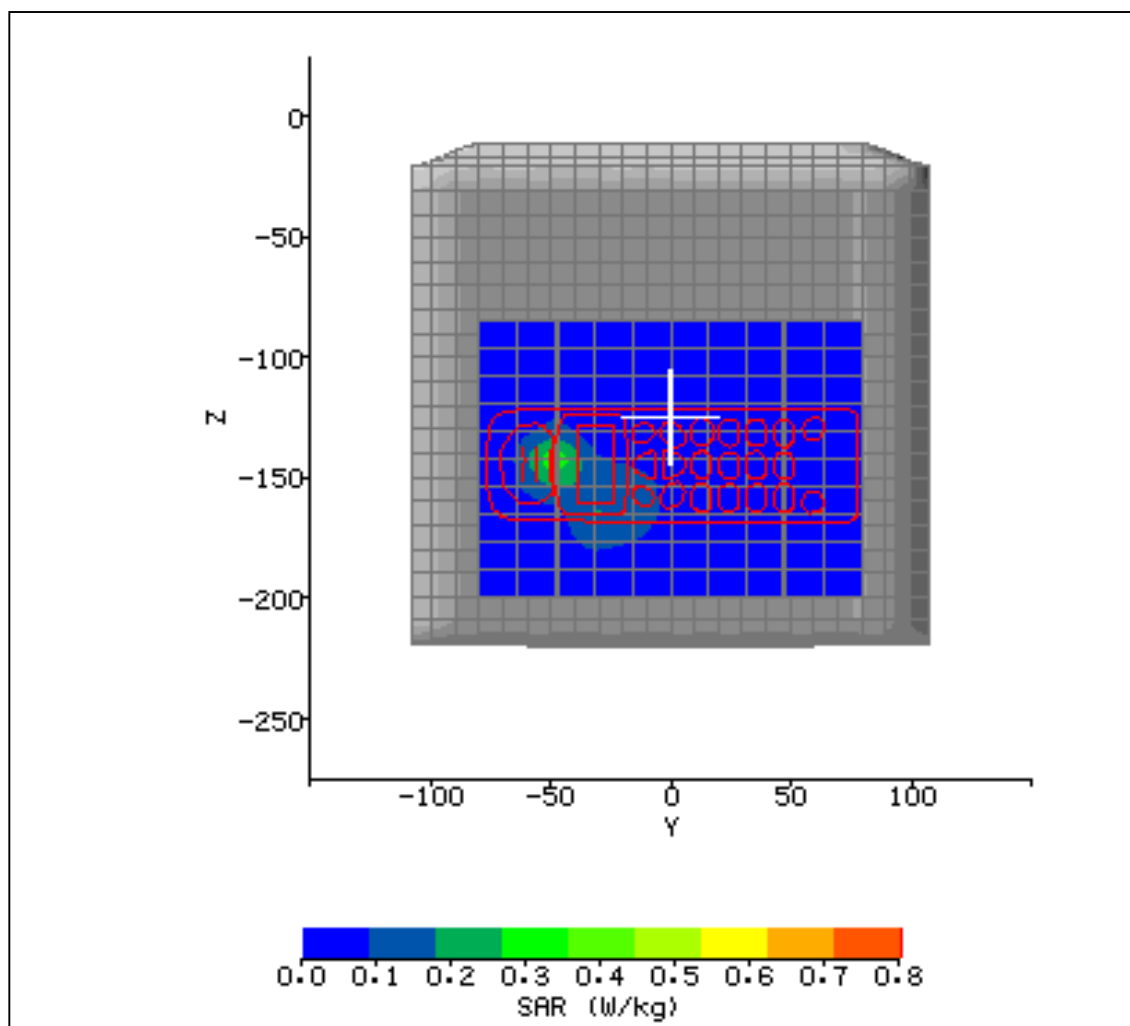


Figure 26

2.9 TEST POSITIONAL PHOTOGRAPHS



Figure 27. Positional photograph of the NetVision® Phone Handset in the Left-hand Cheek Position



Figure 28. Positional photograph of NetVision® Phone Handset in the Left-hand 15 Degree Position



Figure 29. Positional photograph of NetVision® Phone Handset in the Right-hand Cheek Position



Figure 30. Positional photograph of NetVision® Phone Handset in the Right-hand 15 Degree Position



## 2.9 TEST POSITIONAL PHOTOGRAPHS

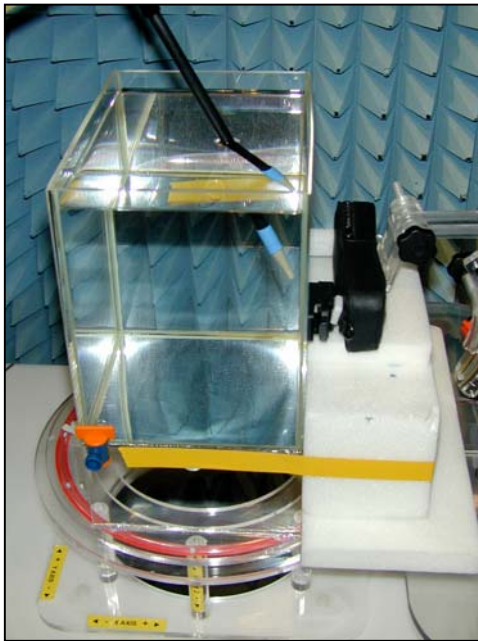


Figure 31. A Positional photograph of the NetVision® Phone Handset Fitted with Normal Battery positioned Rear Facing 10mm from the Flat Phantom.

2.10 RECORD PHOTOGRAPHS



Figure 32. Front view.

2.10 RECORD PHOTOGRAPHS



Figure 33. Rear view.

2.10 RECORD PHOTOGRAPHS



Figure 34. Rear view with battery removed.



2.10 RECORD PHOTOGRAPHS



Figure 35. NetVision® leather case front view.

2.10 RECORD PHOTOGRAPHS



Figure 36. NetVision® leather case rear view.



## 2.11 USER INFORMATION

The holster in normal operation will be placed on the belt at the side of the body. This position has been assessed for SAR compliance.

The following SAR statement will be included in the Regulatory Guide for the NetVision® Phone Model Number NP4046-300.

‘ This device was tested for typical body-worn operation. A minimum separation distance of 1.0 cm must be maintained between this device and the body. The use of third-party belt-clips, holsters, and similar accessories should not contain metallic components in its assembly. The use of these accessories that do not satisfy these requirements may not comply with FCC RF exposure compliance requirements, and should not be used.’

FCC ID: H9PDM4046  
IC: 1549104135A



2.12 COPYRIGHT DETAILS

© 2004 TUV Product Service Ltd

This report must not be reproduced without the written permission of TUV Product Service Ltd.