


HT-388D SOUNDBAR BT ANT SPEC

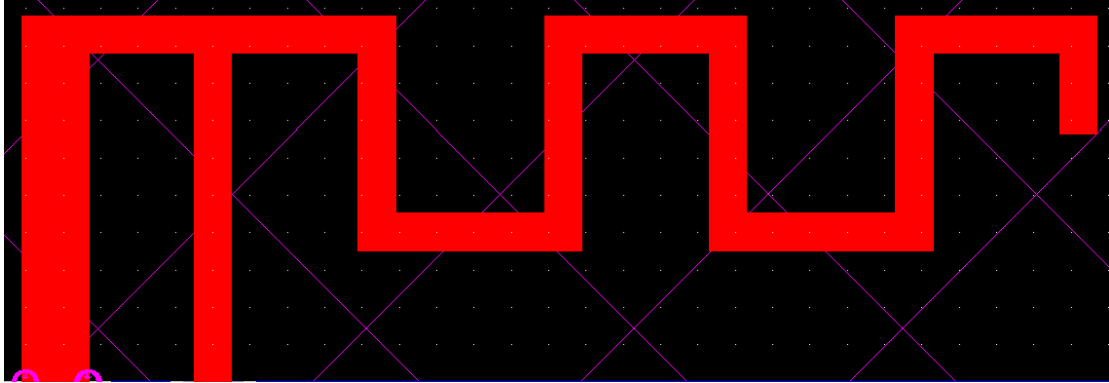

Type: PCB On Board ANT

Length: 14.4mm

Width: 4.9mm

Technology: FR4&Cover Resistance Welding Oil

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.


Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

SWR & Return Loss




Efficiency & Gain

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400 MHz	37.46	1.26
2410 MHz	36.92	1.33
2420 MHz	36.48	1.31
2430 MHz	36.95	1.31
2440 MHz	37.32	1.42
2450 MHz	38.87	1.50
2460 MHz	38.26	1.47
2470 MHz	37.75	1.46
2480 MHz	37.54	1.42
2490 MHz	36.69	1.43
2500 MHz	36.51	1.41

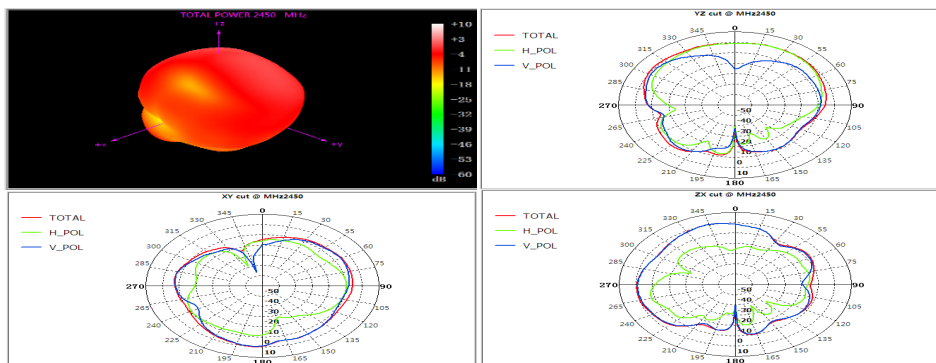

HT-388D SUBWOOFER BT ANT SPEC

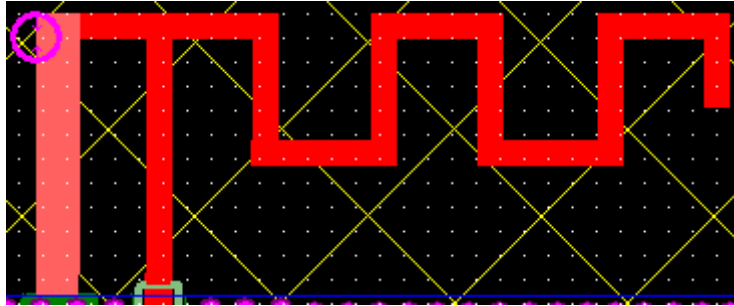

Type: PCB On Board ANT

Length: 14.4mm

Width: 5.8mm

Technology: FR4&Cover Resistance Welding Oil

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

SWR & Return Loss



Efficiency & Gain

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400 MHz	37.53	1.26
2410 MHz	36.82	1.33
2420 MHz	37.47	1.35
2430 MHz	37.45	1.37
2440 MHz	36.92	1.42
2450 MHz	38.87	1.50
2460 MHz	38.26	1.47
2470 MHz	37.75	1.43
2480 MHz	37.54	1.39
2490 MHz	36.69	1.43
2500 MHz	36.51	1.35

