



# RADIO TEST REPORT

# (FCC Part 15 Subpart C / IC RSS-247)

Applicant:	Honeywell International Inc Honeywell Safety and Productivity Solutions	
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States	

Manufacturer:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Product:	Mobile Computer
Brand Name:	Honeywell
Model Name:	CT45-L0N
FCC ID:	HD5-CT45L0N
IC:	1693B-CT45L0N
Date of tests:	2021-03-19 to 2021-04-16

The tests have been carried out according to the requirements of the following standard:

### Part 15 Subpart C §15. 247 / IC RSS-247 issue 2

CONCLUSION: The submitted sample was found to <u>COMPLY</u> with the test requirement

Prepared by Simon Wang Engineer / Mobile Department Approved by Luke Lu

Manager / Mobile Department

e lu

Date: Apr. 19, 2021

Date: Apr. 19, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at http://www.bureeuvertas.com/home/about-us/our-business/cps/about-us/terms-conditions/and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China



# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2021.04.19	Valid	Original Report



# TABLE OF CONTENTS

1	TEST		5
	1.1	Test facility	5
2	GEN	ERAL DESCRIPTION	6
	2.1	Applicant	6
	2.2	Manufacturer	6
	2.3	General Description Of EUT	6
	2.4	Modification of EUT	8
	2.5	Applicable Standards	8
3	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	9
	3.1	Descriptions of Test Mode	9
	3.2	Test Mode	9
	3.3	Support Equipment	10
	3.4	Test Setup	11
	3.5	Measurement Results Explanation Example	15
4	TEST	RESULT	16
	4.1	20dB and 99% Bandwidth Measurement	16
	4.2	Peak Output Power Measurement	17
	4.3	Carrier Frequency Separation Measurement	
	4.4	Time of Occupancy Measurement	
	4.5	Number of Hopping Channels Measurement	20
	4.6	Conducted Band Edges Measurement	
	4.7	Conducted Spurious Emission Measurement	22
	4.8	Radiated Band Edges and Spurious Emission Measurement	
	4.9	AC Conducted Emission Measurement	
	4.10	Antenna Requirements	51
5	LIST	OF MEASURING EQUIPMENT	52
6	UNC	ERTAINTY OF EVALUATION	54
	Арре	ndix A: 20dB Emission Bandwidth	55
	Арре	ndix B: Occupied Channel Bandwidth	61
	Арре	ndix C: Maximum conducted output power	67
	Арре	ndix D: Carrier frequency separation	73
	Арре	ndix E: Time of occupancy	76
	Арре	ndix F: Number of hopping channels	86
	Арре	endix G: Band edge measurements	89
	Арре	ndix H: Conducted Spurious Emission	96

**Report Version 1** 



Summary	of	Test	Result
---------	----	------	--------

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(1)	RSS-247 5.1(a)	20dB Bandwidth	NA	Pass	-
-	RSS-Gen 6.7	99% Bandwidth	-	Pass	-
15.247(a)(1)	RSS-247 5.1(b)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	-
15.247(a)(1)	RSS-247 5.1(d)	Number of Channels	≥ 15Chs	Pass	-
15.247(a)(1)	RSS-247 5.1(d)	Average Time of Occupancy	≤ 0.4sec in 31.6sec period	Pass	-
15.247(b)(1)	RSS-247 5.4(b)	Peak Output Power	≤ 125 mW	Pass	-
15.247(d)	RSS-247 5.5	Conducted Band Edges	≤ 20dBc	Pass	-
15.247(d)	RSS-247 5.5	Conducted Spurious Emission	≤ 20dBc	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.42 dB at 9608 MHz
15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 16.72 dB at 0.502 MHz
15.203 & 15.247(b)	RSS-Gen 6.8	Antenna Requirement	15.203 & 15.247(b) RSS-GEN 6.8	Pass	-



# 1 Test Laboratory

# 1.1 Test facility

- 1. The FCC Site Registration No. is 525120; The Designation No. is CN1171.
- 2. The IC test Site Registration No. is 21771-1; The CAB Identifier No. is CN0007



# 2 General Description

# 2.1 Applicant

Honeywell International Inc Honeywell Safety and Productivity Solutions 9680 Old Bailes Road, Fort Mill, SC 29707 United States

# 2.2 Manufacturer

Honeywell International Inc Honeywell Safety and Productivity Solutions 9680 Old Bailes Road, Fort Mill, SC 29707 United States

# 2.3 General Description Of EUT

Product	Mobile Computer
Model No.	CT45-L0N
Additional NO.	N/A
Difference Description	N/A
Power Supply	3.85Vdc for EUT
Modulation Technology	FHSS
Modulation Type	GFSK, 8DPSK, π/4 DQPSK
Operating Frequency	2402MHz~2480MHz
Number Of Channel	79
Max. Output Power	Bluetooth BR(1Mbps) : 7.09 dBm (0.0051W) Bluetooth BR(2Mbps) : 6.07 dBm (0.0040W) Bluetooth BR(3Mbps) : 6.41 dBm (0.0044W)
Max. e.i.r.p.	8.49 dBm (0.0071W)
Antenna Type	PIFA Antenna type with 1.4dBi gain
HW Version	DVT
SW Version	HON4290-R-92.00.00-DEBUG-(0212)
I/O Ports	Refer to user's manual
Cable Supplied	N/A

#### NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



2. This product includes the following four SKU which hardware is exactly same, the difference is described as following, Sample 1 was full test, The difference test are presented in 15B and ICES 003

SAMPLE	EUT CONFIGURATION INFORMATION
1	SKU ID:CT45-L0N-27D100G ,Assembled Scanner Imager: 7-S0703
2	SKU ID:CT45-L0N-28D100G ,Assembled Scanner Imager: 8 - 6803 FlexRange
3	SKU ID: CT45-L0N-28D200G, The device is same #2, only software is none GMS package
4	SKU ID: CT45-L0N-27D200G, The device is same #1, only software is none GMS package

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



# 2.4 Modification of EUT

No modifications are made to the EUT during all test items.

# 2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2013
- IC RSS-247 Issue 2
- IC RSS-Gen Issue 5
- KDB 558074 D01 15.247 Meas Guidance v05r02

#### Remark:

3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B&ICES-003, recorded in a separate test report.



# **3** Test Configuration of Equipment Under Test

# 3.1 Descriptions of Test Mode

Mode	Channel	Frequency	Bluetooth RF Output Power
	Ch00	2402MHz	7.09
GFSK	Ch39	2441MHz	6.51
	Ch78	2480MHz	7.08
4π-DQPSK	Ch00	2402MHz	6.05
	Ch39	2441MHz	5.64
	Ch78	2480MHz	6.07
	Ch00	2402MHz	6.41
8DPSK	Ch39	2441MHz	6.08
	Ch78	2480MHz	6.37

The transmitter has a maximum peak conducted output power as follows:

#### Remark:

- 1. All the test data for each data rate were verified, but only the worst case was reported.
- 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.

# 3.2 Test Mode

### 3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases				
	Data Rate / Modulation			
Test Item	Bluetooth BR 1Mbps	Bluetooth EDR 2Mbps	Bluetooth EDR 3Mbps	
	GFSK	π/4-DQPSK	8-DPSK	
Conducted	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz	
Conducted	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz	
Test Cases	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz	



### 3.2.2 Radiated Emission Test (Below 1GHz)

Radiated	Bluetooth BR 1Mbps GFSK
Test Cases	Mode 1: CH00_2402MHz

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

2. Following channel(s) was (were) selected for the final test as listed above

### 3.2.3 Radiated Emission Test (Above 1GHz)

	Bluetooth BR 1Mbps GFSK
Radiated	Mode 1: CH00_2402 MHz
Test Cases	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

- 2. Following channel(s) was (were) selected for the final test as listed above
- 3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

### 3.2.4 Power Line Conducted Emission Test:

AC	
Conducted	Mode 1 : BT Linking + Earphone + Adapter
Emission	

# 3.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGEAR	R7800	PY315100319	N/A	shielded, 1.8 m



2.	Notebook	Lenovo	E470C	FCC sDoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable1.2 m
3.	Earphone	Honeywell	PTE-300N	FCC sDoC	N/A	N/A
4.	Adapter	Honeywell	ADS-12B-06 05010E	FCC sDoC	N/A	N/A


# 3.4 Test Setup

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BT communications.


	w Settings Help		
Target: MSM_MDM   Library Mode:		Disconnect Runtime Mode: 💾 🗊 🎲 O	
🔘 📷 🖃 Un-named	Commands Bluetooth Signaling Debug X Bluetooth Non-Signaling	(EPTM)	
Category Bluetooth	Diactori dignamy bookg		
Chipset ALL_CHIPSETS -	HCI Commands	HCI Write Scan	
Commands, Logs and Custom APIs	HCI Reset	Write Scan Option	
•	HCI DUT Mode	HCI Scan Enable	
	HCI Set Event Filter	RSSI	
Bluetooth CSR8811     Bluetooth Debug	Event Filter Option	Set Channel Offset 0	
Bluetooth ListMode	HCI Set Filter	Get RSSI	
Bluetooth Low Energy		RSSI Value (dBm) —	
Bluetooth Non-Signaling (EPTM)     Bluetooth Signaling Debug			
C Dideudon olgitaling beoug			
Platform Configuration			
* 6 6 6 6			
	自 Activity		
	ORCT OMSL		
	🍸 🗎 🐻 📑 🖬 Status Polling		
	Time Calegory Message		
	10:36:15.643 Info Number of available COM Port: 10:36:26.628 Info Failed: COM port connection	s: 1	
	10:37:10.324 Info Number of available COM Ports	s: 1	
	10:37:15.775 Info Failed to Get COM ports 10:37:18.946 Info MPSS.HA.1.0-00580-KAMORT	A_GEN_PACK-1 is connected	
	10:37:18.952 Info COM3: Connected		
COM 3: Connected MPSS.HA.1.0-0058	80-KAMORTA_GEN_PACK-1 Connection Method: QF	PST Polling Status: Enabled Mode: FTM	

#### Setup diagram for Conducted Test








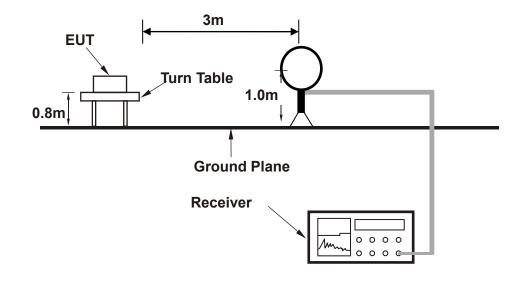

Setup diagram for Raidation(Below 1G) Test

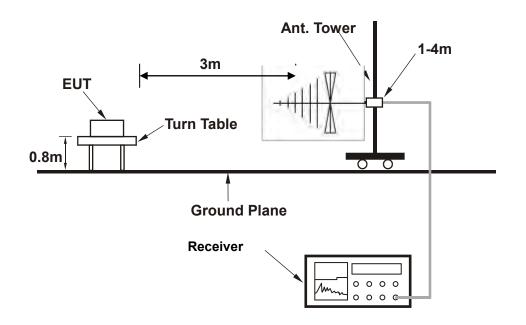

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

**Report Version 1** 



Setup diagram for Raidation(Above1G) Test





Ant. Tower

1-4m

3m

EUT& Support Units


Turn Table

1.5m

Spectrum Analyzer



#### Setup diagram for AC Conducted Emission Test

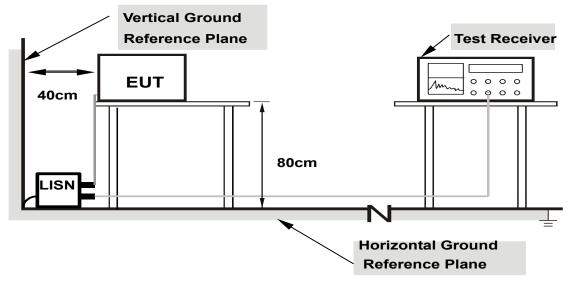

### Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

# 3.5 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 5 + 10 = 15 (dB)

#### For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level Over Limit (dB  $\mu$  V/m) = Level(dB  $\mu$  V/m) - Limit Level (dB  $\mu$  V/m)





# 4 Test Result

# 4.1 20dB and 99% Bandwidth Measurement

### 4.1.1 Limit of 20dB and 99% Bandwidth

None; for reporting purposes only.

### 4.1.2 Test Procedures

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument.
- 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.

4. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.

Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel; RBW  $\geq$  1% of the 99% bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = sample; Trace = max hold.

### 4.1.3 Test Result of 20dB Bandwidth

Refer to Appendix A of this test report.

### 4.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.



# 4.2 Peak Output Power Measurement

### 4.2.1 Limit of Peak Output Power

Section 15.247 (b)

The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

RSS-247 5.4(b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W

### 4.2.2 Test Procedures

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument.
- 3. The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### 4.2.3 Test Result of Peak Output Power

Refer to Appendix C of this test report.



# 4.3 Carrier Frequency Separation Measurement

### 4.3.1 Limit of Hopping Channel Separation

FCC §15.247 (a) (1)

RSS-247 5.1(b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 4.3.2 Test Procedures

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument.
- 3. The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

## 4.3.3 Test Result of Hopping Channel Separation

Refer to Appendix D of this test report.



# 4.4 Time of Occupancy Measurement

### 4.4.1 Limit of Average Time of Occupancy

#### FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

RSS-247 5.1(d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

### 4.4.2 Test Procedures

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument.
- 3. The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.
- 4. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

Test channel: 2441MHz as below:

DH1 time slot= Burst Width (ms)\*(1600/ (2\*79))\*31.6

DH3 time slot= Burst Width (ms)\*(1600/ (4\*79))\*31.6

DH5 time slot= Burst Width (ms)\*(1600/ (6\*79))\*31.6

#### 4.4.3 Test Result of Dwell Time

Refer to Appendix E of this test report.



# 4.5 Number of Hopping Channels Measurement

### 4.5.1 Limits of Number of Hopping Channels

#### FCC § 15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

RSS-247 5.1(d)

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

### 4.5.2 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument.
- 3. The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to 100KHz. The analyzer is set to Max Hold.

### 4.5.3 Test Result of Number of Hopping Channels

Refer to Appendix F of this test report.





### 4.6.1 Limit of Band Edges

FCC §15.247(d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 4.6.2 Test Procedures

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument.
- 3.Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
- 4. Enable hopping function of the EUT and then repeat step 1~3.

### 4.6.3 Test Result of Conducted Band Edges

Refer to Appendix G of this test report.





# 4.7 Conducted Spurious Emission Measurement

### 4.7.1 Limit of Spurious Emission Measurement

FCC §15.247(d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 4.7.2 Test Procedure

- 1.Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument.
- 3.Set to the maximum power setting and enable the EUT transmit continuously.
- 4.Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 4.7.3 Test Result of Conducted Spurious Emission

Refer to Appendix H of this test report.



# 4.8 Radiated Band Edges and Spurious Emission Measurement

### 4.8.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency	Field Strength	Measurement Distance	
(MHz)	(microvolts/meter)	(meters)	
0.009 - 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	
30 – 88	100	3	
88 – 216	150	3	
216 - 960	200	3	
Above 960	500	3	

Note: The frequency range from 9KHz to 10th harmonic (25GHz) are checked, and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.



### 4.8.2 Test Procedures

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz ; VBW=3RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement:

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

- 5. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
- 6. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

 $E = EIRP - 20 \log d + 104.8$ 

Where:

E is the electric field strength in  $dB\mu V/m$ 


EIRP is the equivalent isotropically radiated power in dBm

d is the specified measurement distance in m

 $E[dB\mu V/m] = EIRP[dBm] + 95.2$ , for d = 3 m.

7. Compare the resultant electric field strength level with the applicable regulatory limit.



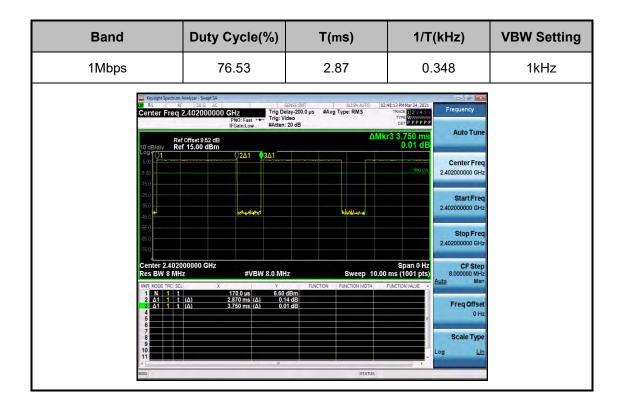


## 4.8.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

## 4.8.4 Test Result of Radiated Spurious at Band Edges




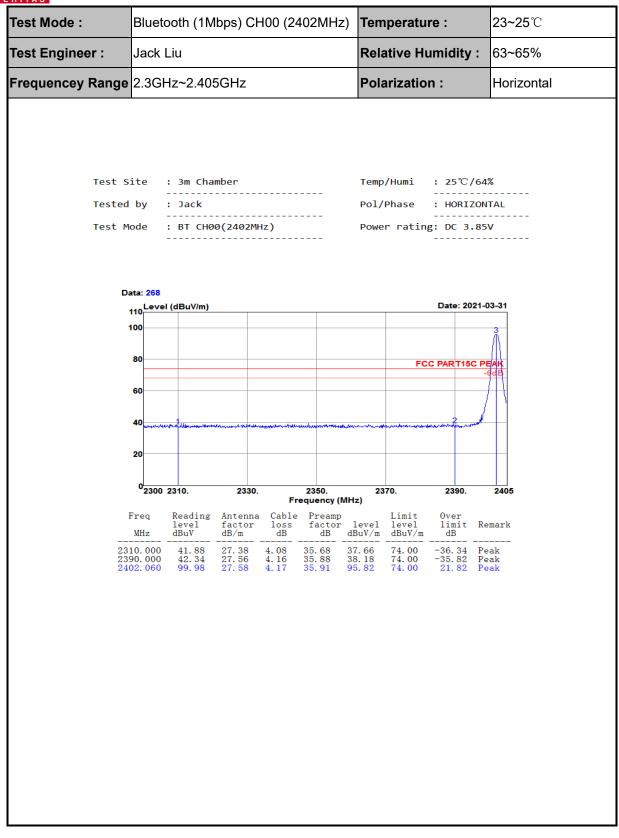



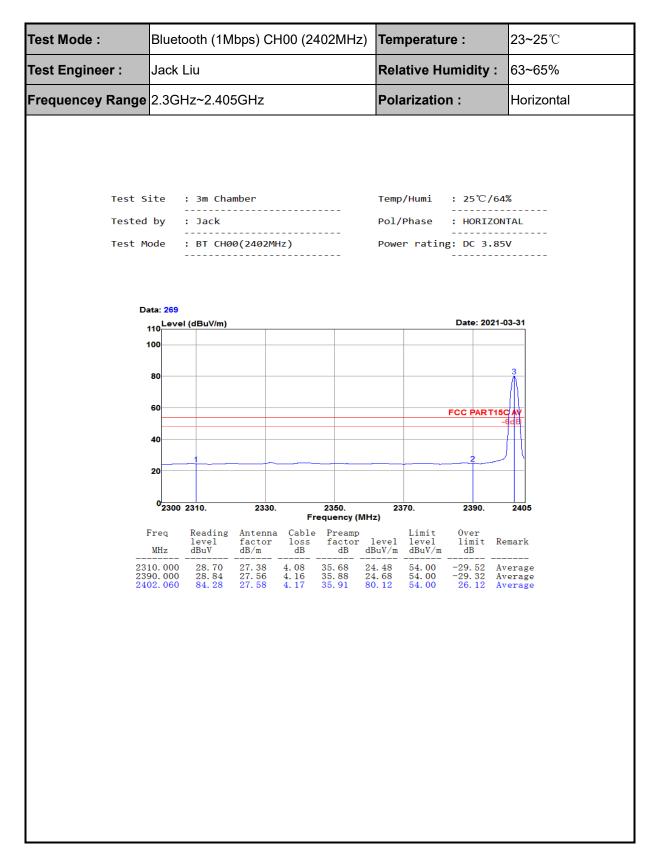




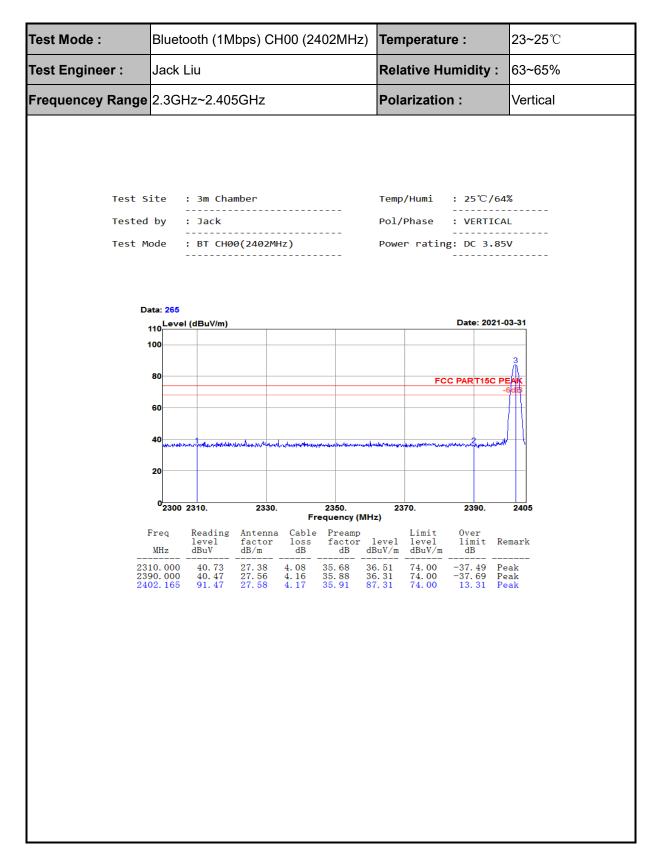


**Report Version 1** 




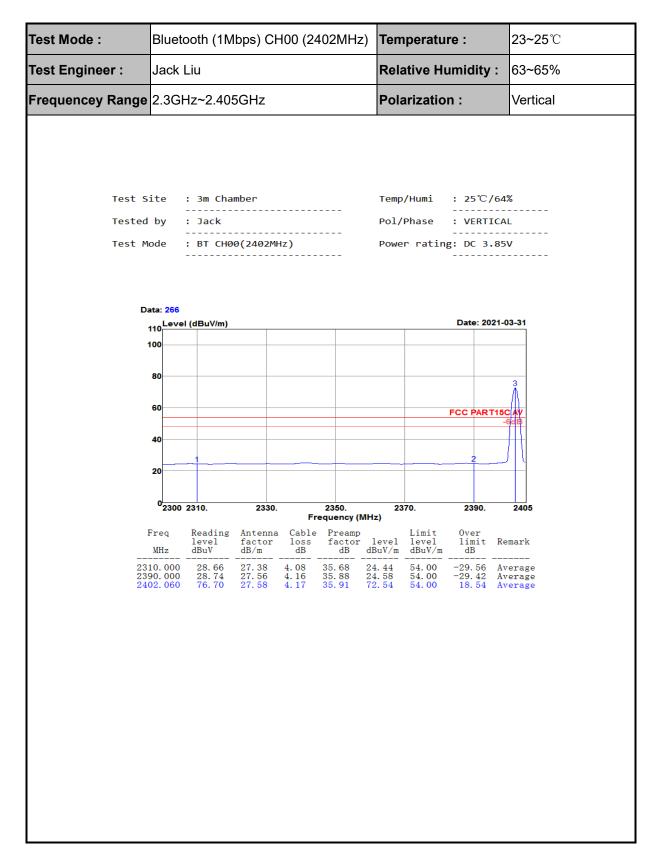




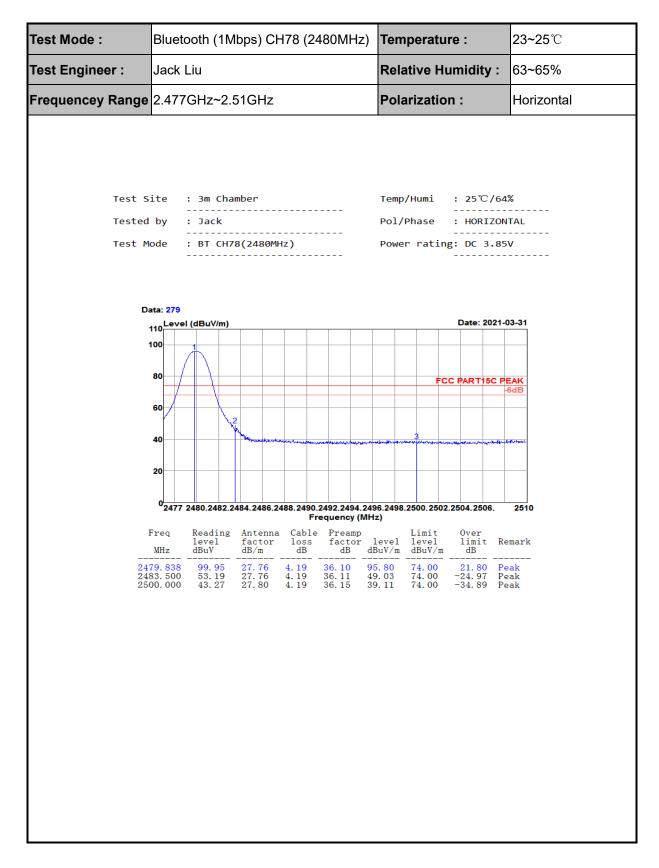




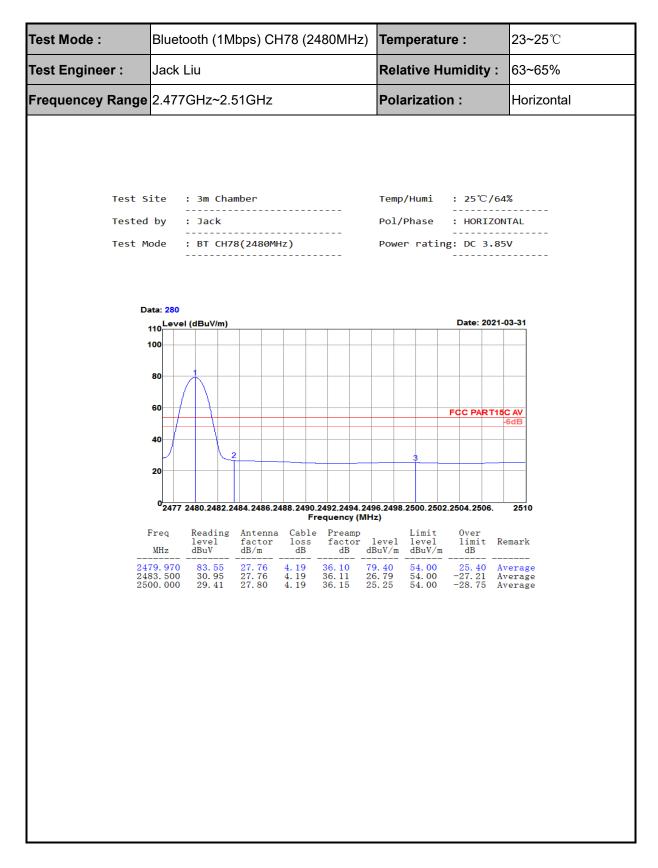



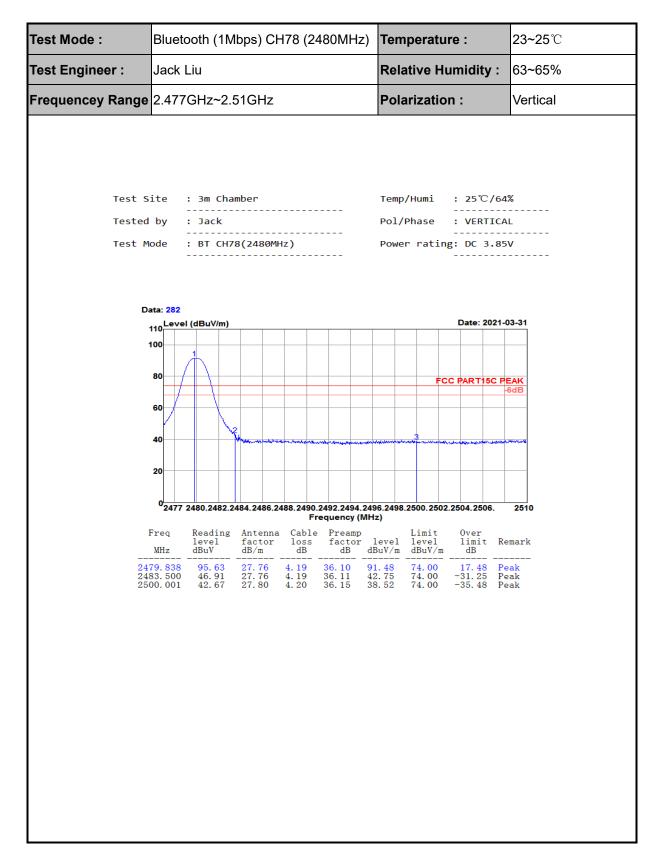




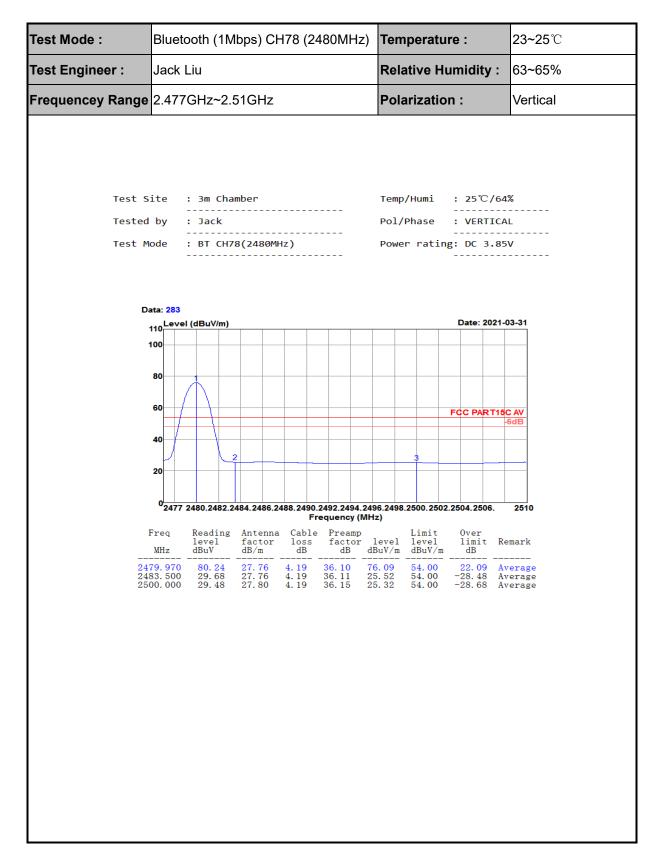




### 4.8.1 Test Result of Radiated Spurious Emission (1GHz ~ 10<sup>th</sup> Harmonic)

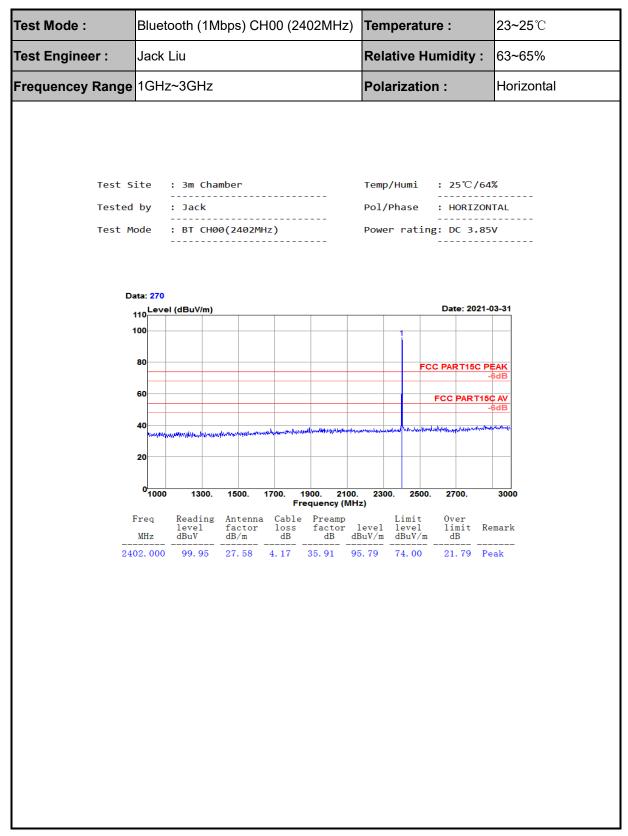

BV 7Layers Communications Technology (Shenzhen) Co. Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China



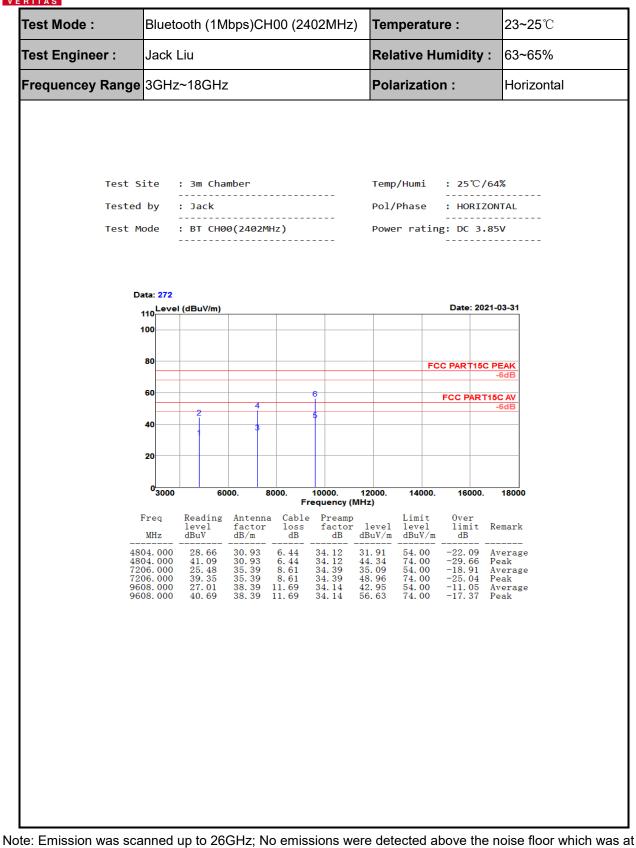


least 20dB below the specification limit.



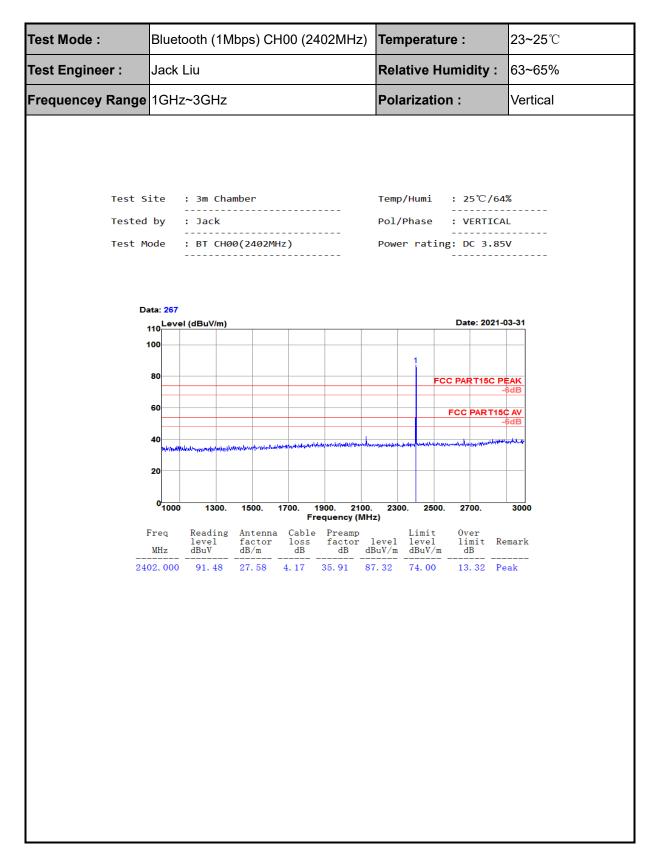



### Test Report No.: RFW7L-P21040029-4

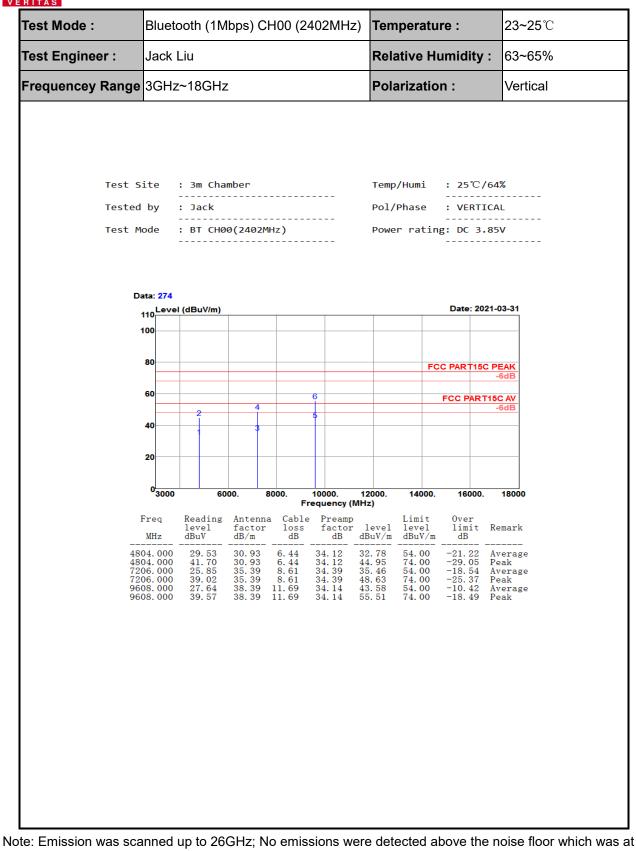


least 20dB below the specification limit.

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China


**Report Version 1** 



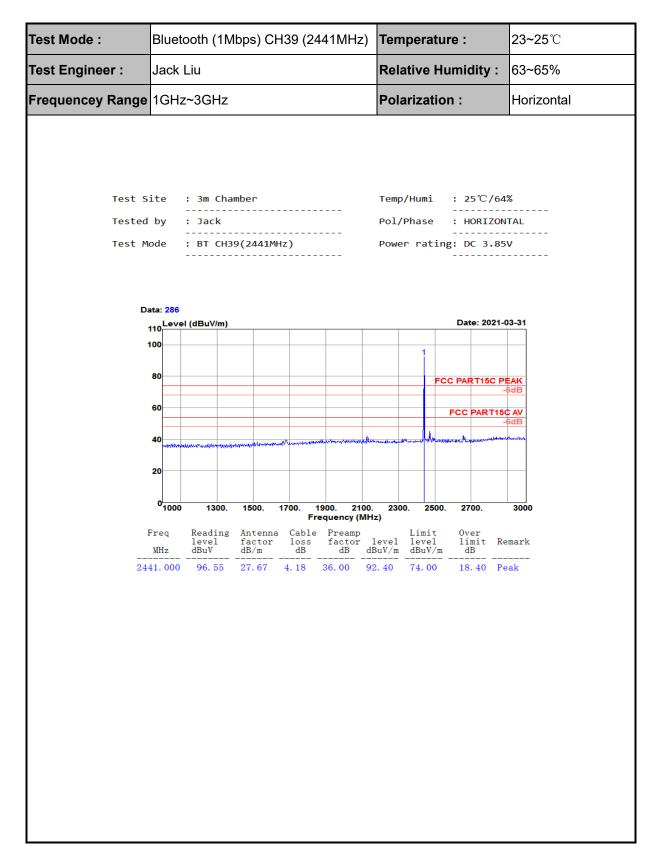




### Test Report No.: RFW7L-P21040029-4

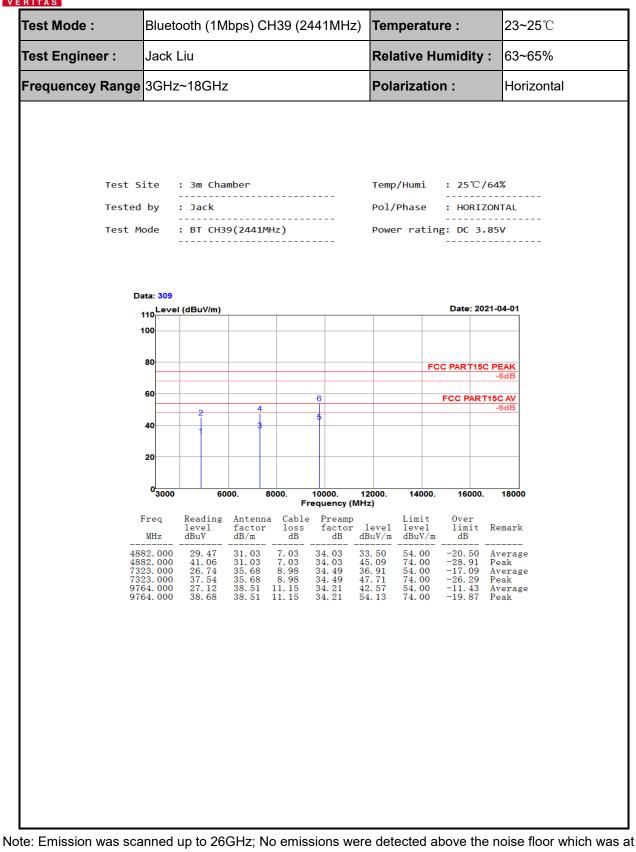


least 20dB below the specification limit.



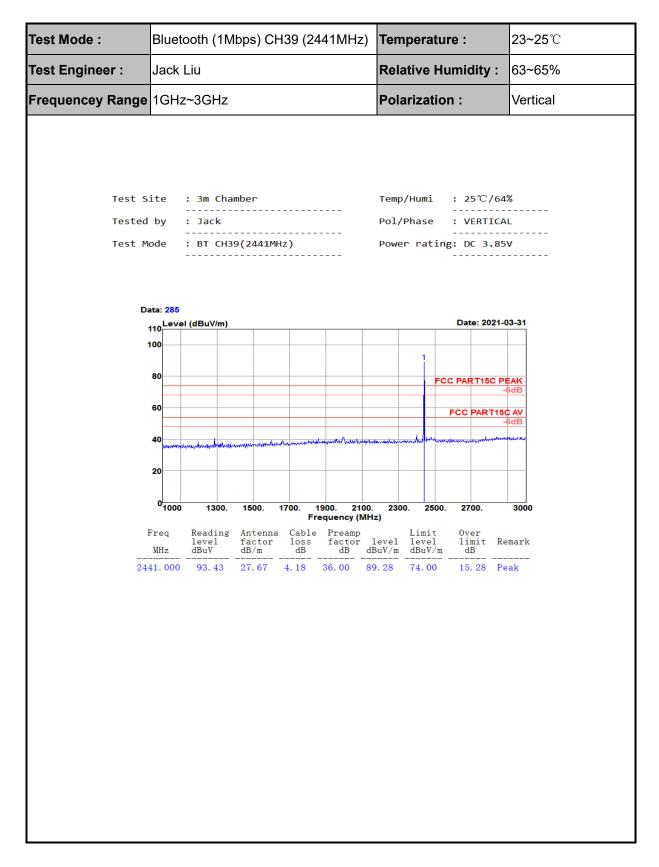



### Test Report No.: RFW7L-P21040029-4

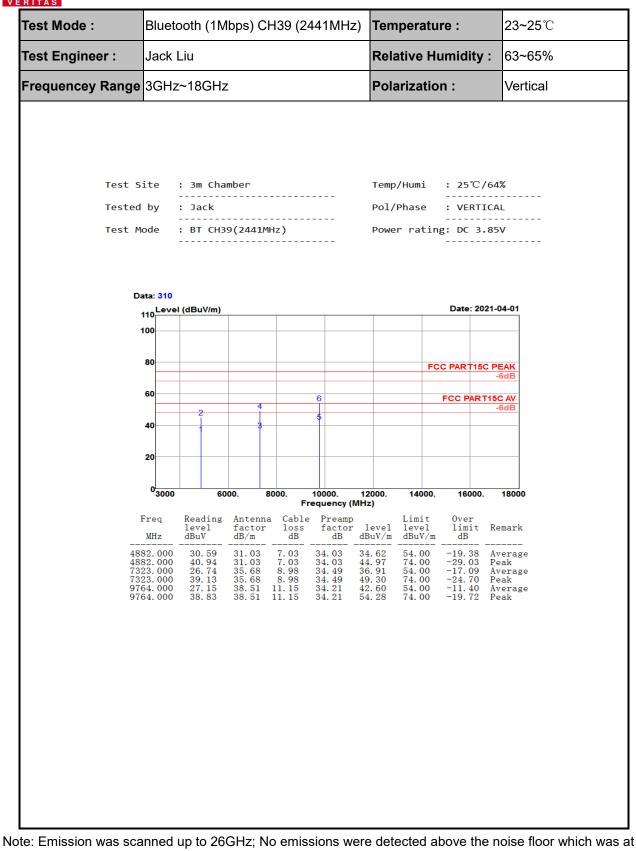


least 20dB below the specification limit.

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China


**Report Version 1** 



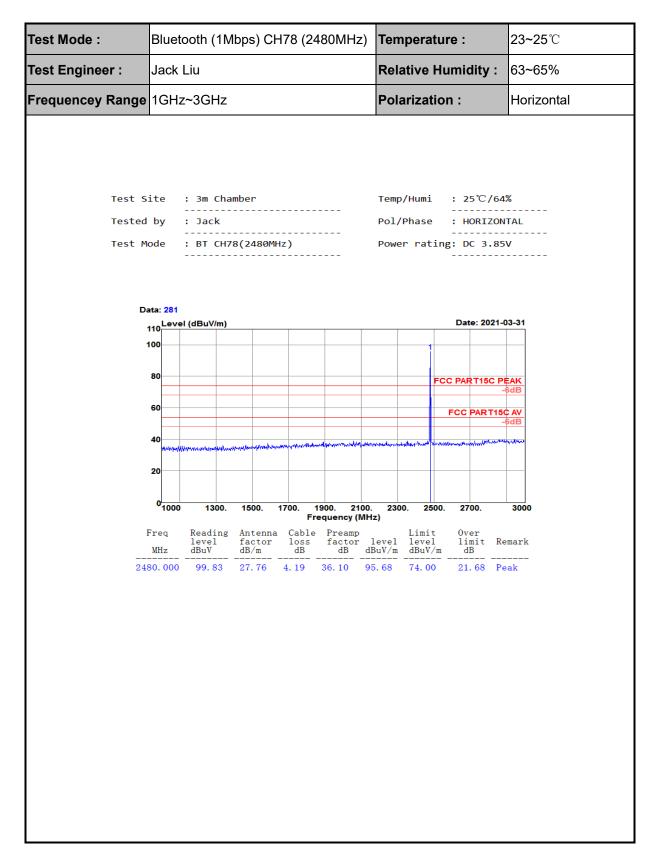



### Test Report No.: RFW7L-P21040029-4

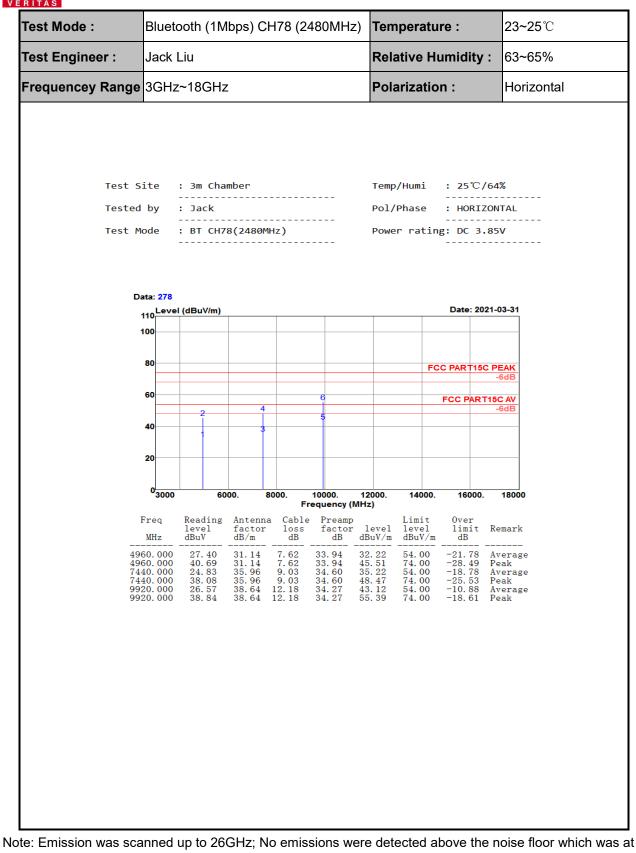


least 20dB below the specification limit.

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

**Report Version 1** 



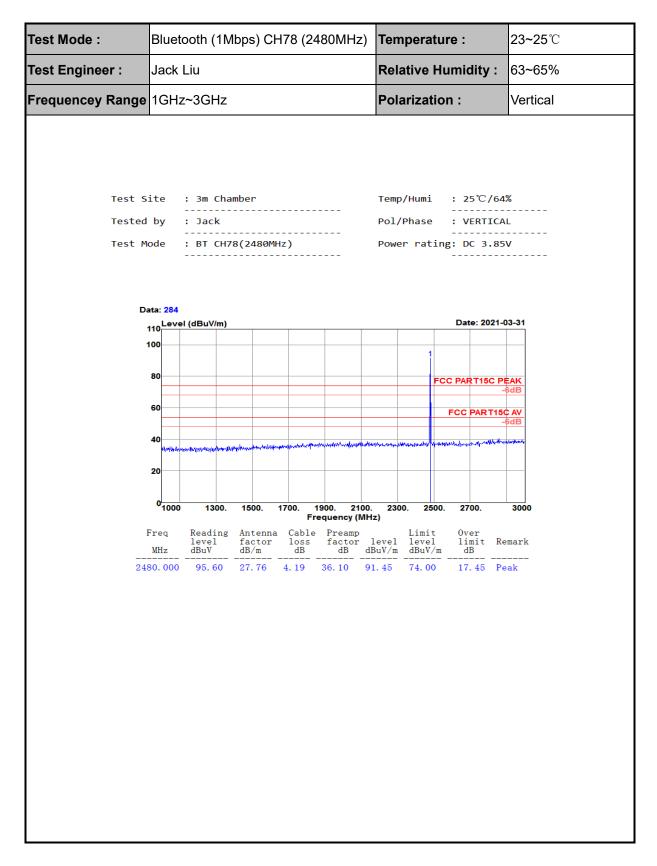


Page 44 of 110

Tel: +86 755 8869 6566



### Test Report No.: RFW7L-P21040029-4

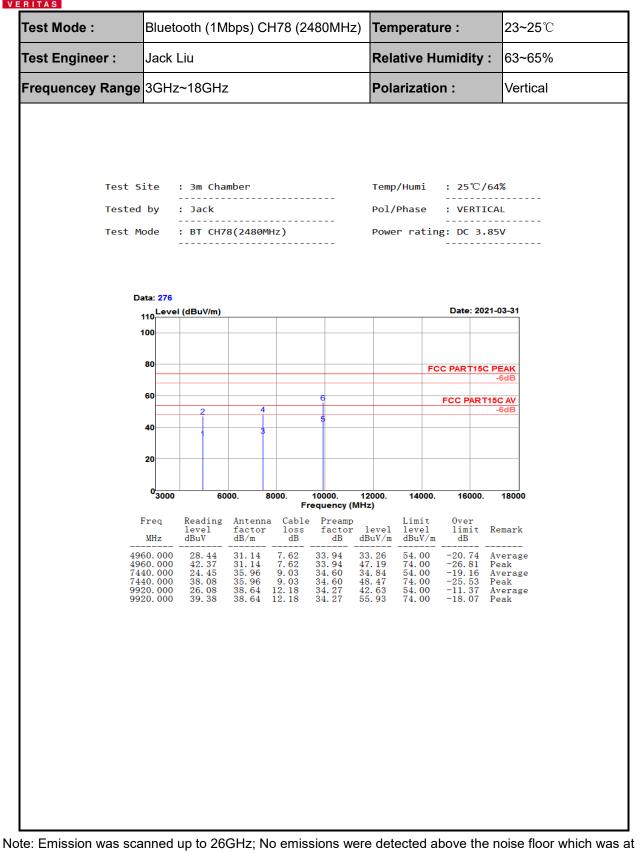


least 20dB below the specification limit.

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

**Report Version 1** 



# 4.8.2 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

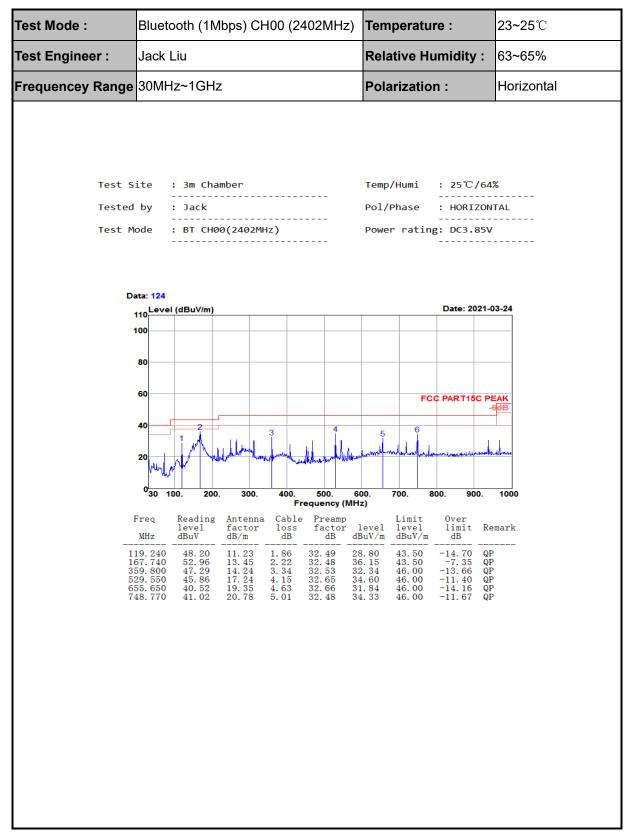


BV 7Layers Communications Technology (Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China



#### Test Report No.: RFW7L-P21040029-4

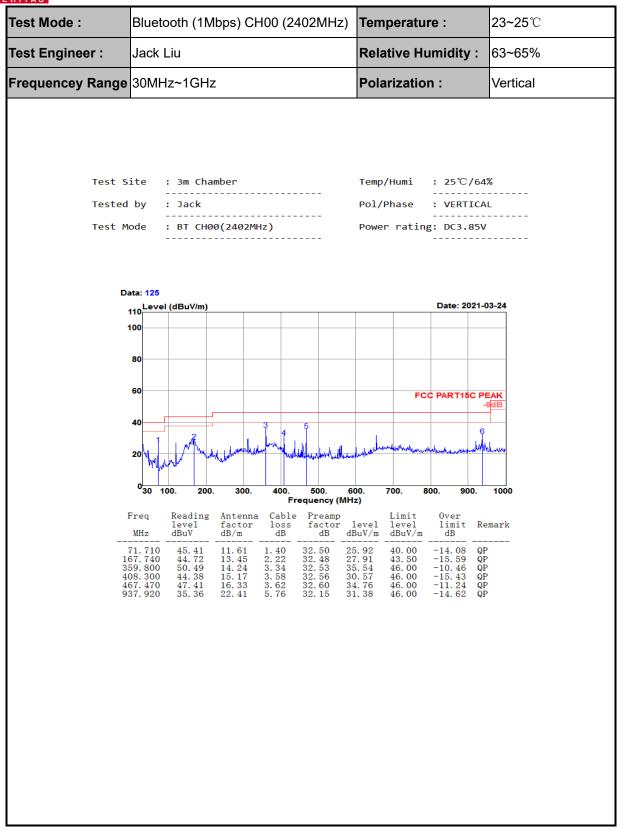

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

**Report Version 1** 



# 4.9 AC Conducted Emission Measurement

# 4.9.1 Limit of AC Conducted Emission

FCC §15.207

IC RSS-GEN 8.8

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.


Frequency of omission (MHz)	Conducted limit (dBµV)				
Frequency of emission (MHz)	Quasi-peak	Average			
0.15-0.5	66 to 56*	56 to 46*			
0.5-5	56	46			
5-30	60	50			

\*Decreases with the logarithm of the frequency.

## 4.9.2 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6.Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- 8.Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



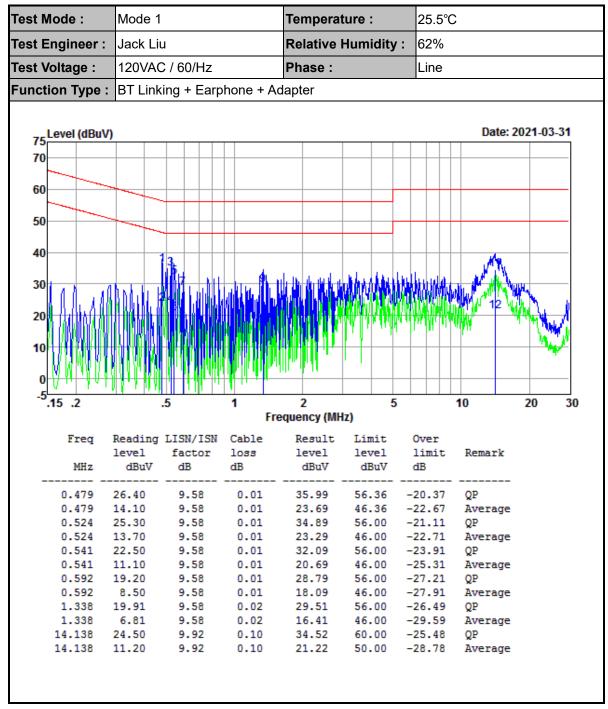


# 4.9.3 Test Result of AC Conducted Emission

Result Level= Reading Level + LISN Factor + Cable Loss

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

**Report Version 1** 



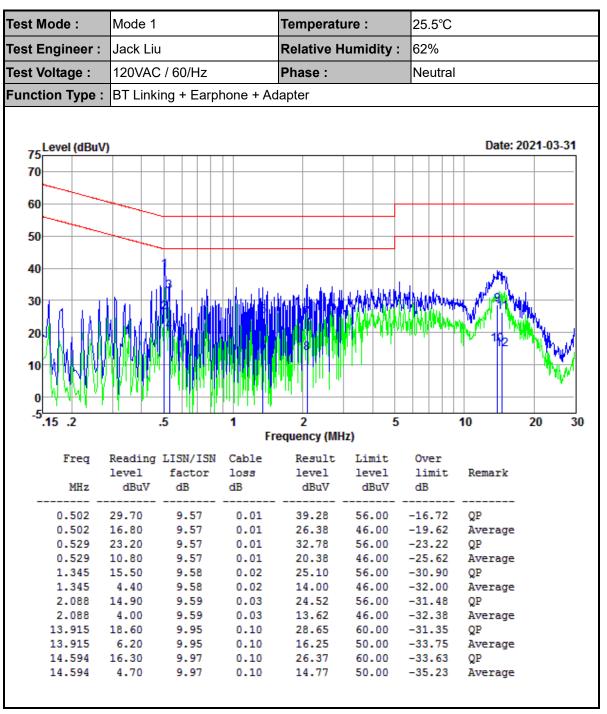

Result Level= Reading Level + LISN Factor + Cable Loss





# 4.10 Antenna Requirements

# 4.10.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

# 4.10.2 Antenna Connected Construction

An LDS type Antenna design is used

## 4.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



# 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2021-01-05	2022-01-04	Conducted
Thermal Chamber	Howkin	UHL-34	19111801	2020-05-09	2021-05-08	Conducted
Base Station	R&S	CMW 270	101231	2021-01-05	2022-01-04	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2021-01-05	2022-01-04	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2021-01-05	2022-01-04	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2021-01-05	2022-01-04	Radiation
Amplifier	Sonoma	310	363917	2021-01-06	2022-01-05	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2021-01-06	2022-01-05	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2020-05-14	2021-05-15	Radiation
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	2020-02-14	2023-02-13	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2020-09-27	2023-09-26	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2020-02-14	2023-02-13	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-20	2021-06-19	Radiation
Test Software	Audix	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation



Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
LISN	R&S	ENV216	102125	2021-01-05	2022-01-04	Conducted
LISN	R&S	ENV432	101327	2021-01-06	2022-01-05	Conducted
EMI Test	R&S	ESR3	102143	2021-01-06	2022-01-05	Conducted
Receiver	nao	LONG	102140	2021-01-00	2022-01-00	Conducted
EMI Test	Audix	E3	N/A	N/A	N/A	Conducted
Software	Audix	Eð	IN/A	N/A	IN/A	Conducted

N/A: No Calibration Required



# 6 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	±196.4Hz
RF output power, conducted	±2.31dB
Power density, conducted	±2.31dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



# Appendix A: 20dB Emission Bandwidth

### **Test Result**

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
		2402	0.936	2401.517	2402.453		PASS
DH5	Ant1	2441	0.954	2440.514	2441.468		PASS
		2480	0.948	2479.517	2480.465		PASS
		2402	1.284	2401.346	2402.630		PASS
2DH5 Ant1	Ant1	2441	1.287	2440.343	2441.630		PASS
		2480	1.275	2479.349	2480.624		PASS
		2402	1.314	2401.325	2402.639		PASS
3DH5	Ant1	2441	1.302	2440.334	2441.636		PASS
		2480	1.293	2479.331	2480.624		PASS



## **Test Graphs**














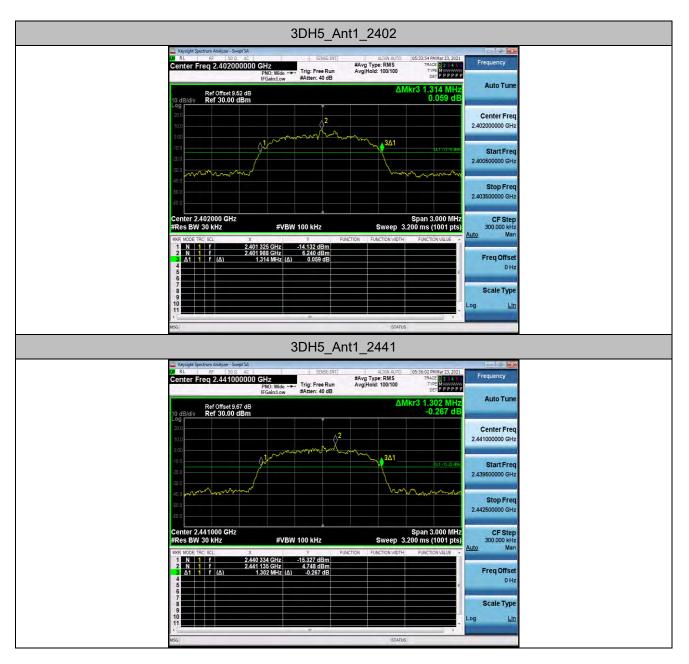







# **Appendix B: Occupied Channel Bandwidth**

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
		2402	0.83799	2401.558	2402.396		PASS
DH5	Ant1	2441	0.82481	2440.564	2441.388		PASS
		2480	0.82099	2479.567	2480.388		PASS
		2402	1.1839	2401.388	2402.572		PASS
2DH5 Ant1	Ant1	2441	1.1805	2440.387	2441.568		PASS
	2480	1.1790	2479.388	2480.567		PASS	
		2402	1.1875	2401.381	2402.569		PASS
3DH5	Ant1	2441	1.1891	2440.378	2441.567		PASS
		2480	1.1940	2479.376	2480.570		PASS



## **Test Graphs**



No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China
















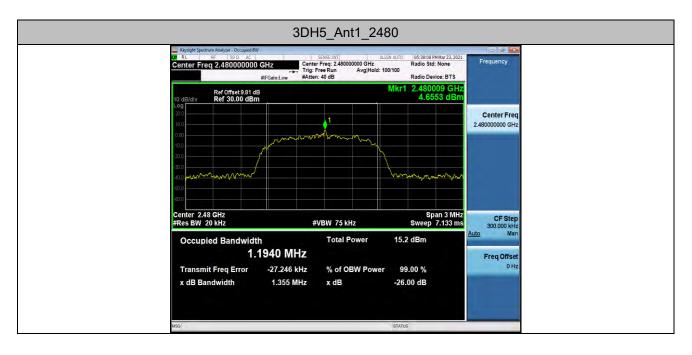




# Appendix C: Maximum conducted output power

#### **Test Result**

TestMode	Antenna	Channel	Result[dBm]	EIRP [dBm]	Limit[dBm]	Verdict	
		2402	7.09	8.49	<=20.97	PASS	
DH5	Ant1	2441	6.51	7.91	<=20.97	PASS	
		2480	7.08	8.48	<=20.97	PASS	
			2402	6.05	7.45	<=20.97	PASS
2DH5	Ant1	2441	5.64	7.04	<=20.97	PASS	
		2480	6.07	7.47	<=20.97	PASS	
		2402	6.41	7.81	<=20.97	PASS	
3DH5	Ant1	2441	6.08	7.48	<=20.97	PASS	
		2480	6.37	7.77	<=20.97	PASS	




## **Test Graphs**

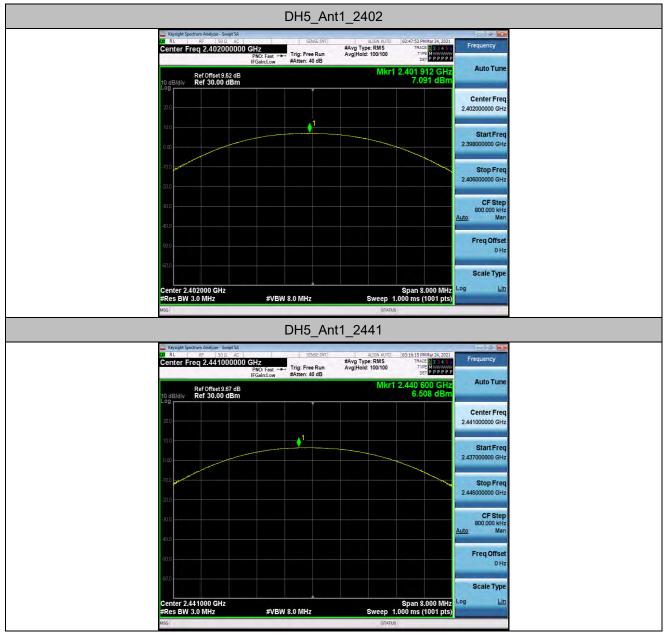


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China




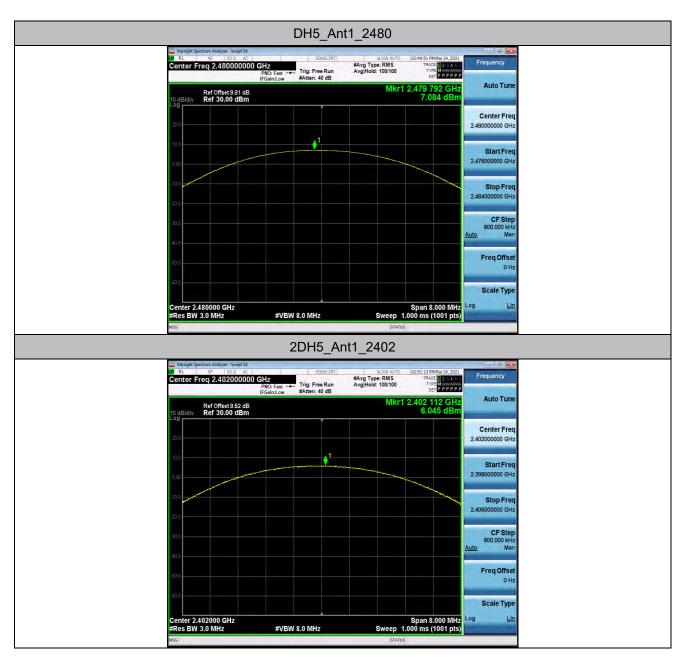




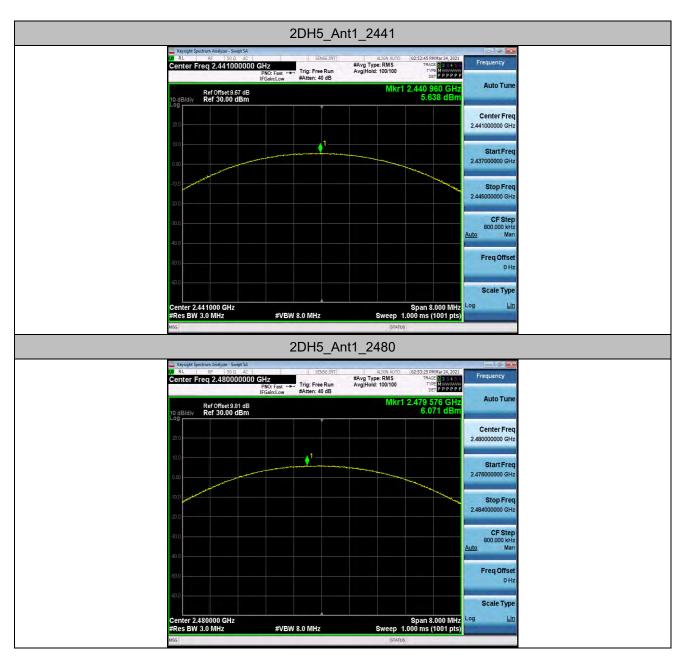



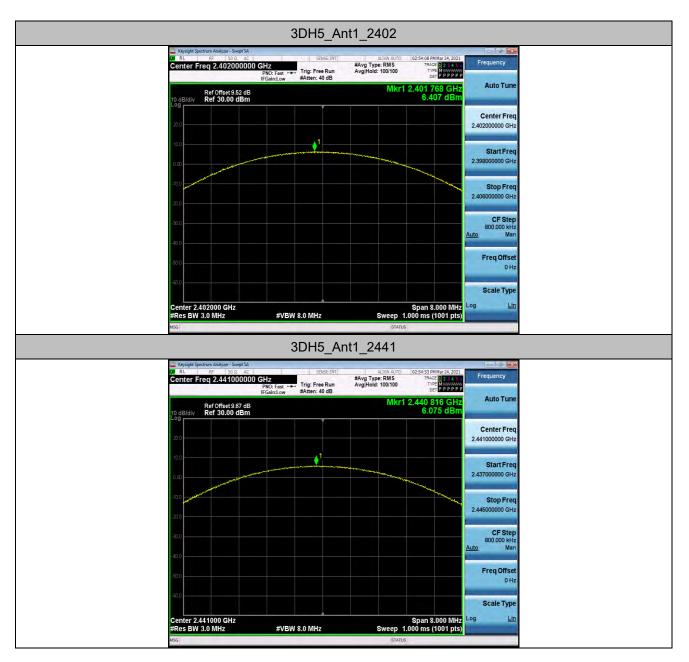



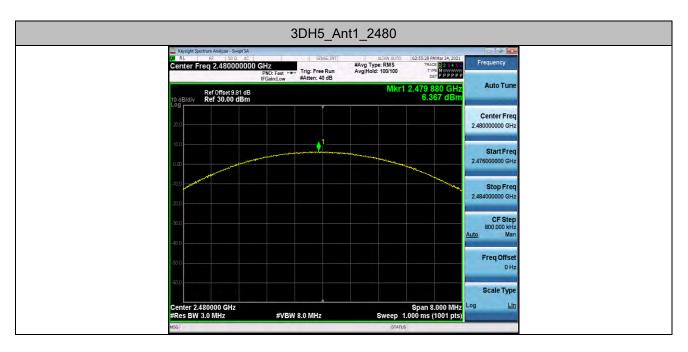



## Appendix D: Carrier frequency separation

### **Test Result**

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Нор	1.008	>=0.636	PASS
2DH5	Ant1	Нор	1.322	>=0.858	PASS
3DH5	Ant1	Нор	1.286	>=0.876	PASS



## **Test Graphs**



No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

**Report Version 1** 



	3DH5_A	nt1_Hop		
Keysight Spectrum Analyzer - Swept SA	SENSE:INT	ALIGN AUTO	05:58:15 PM Mar 23, 2021	Frequency
Center Freq 2.441500000	PNO: Fast +++ IFGain:Low #Atten: 40 dB	#Avg Type: RMS Avg Hold: 100/100	TRACE 1 2 3 4 5 0 TYPE M	
Ref Offset 9.67 dB 10 dB/div Ref 30.00 dBm		Δι	Mkr2 1.286 MHz 0.126 dB	Auto Tune
20.0				Center Freq 2.441500000 GHz
10.0			2Δ1	StartFreq
0.00				2.440500000 GHz
-10.0				Stop Freq 2.442500000 GHz
-30.0				CF Step 200.000 kHz Auto Man
-40.0				Auto Man Freq Offset
-50.0				0 Hz
-60.0				Scale Type
Start 2.440500 GHz #Res BW 300 kHz	#VBW 300 kHz	Sweep 1	Stop 2.442500 GHz .000 ms (1001 pts)	




# Appendix E: Time of occupancy

### **Test Result**

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop_2441	0.38	310	0.118	<=0.4	PASS
DH3	Ant1	Hop_2441	1.64	140	0.229	<=0.4	PASS
DH5	Ant1	Hop_2441	2.88	100	0.288	<=0.4	PASS
2DH1	Ant1	Hop_2441	0.39	290	0.112	<=0.4	PASS
2DH3	Ant1	Hop_2441	1.64	160	0.262	<=0.4	PASS
2DH5	Ant1	Hop_2441	2.89	110	0.318	<=0.4	PASS
3DH1	Ant1	Hop_2441	0.39	300	0.116	<=0.4	PASS
3DH3	Ant1	Hop_2441	1.64	140	0.229	<=0.4	PASS
3DH5	Ant1	Hop_2441	2.89	80	0.231	<=0.4	PASS



## **Test Graphs**

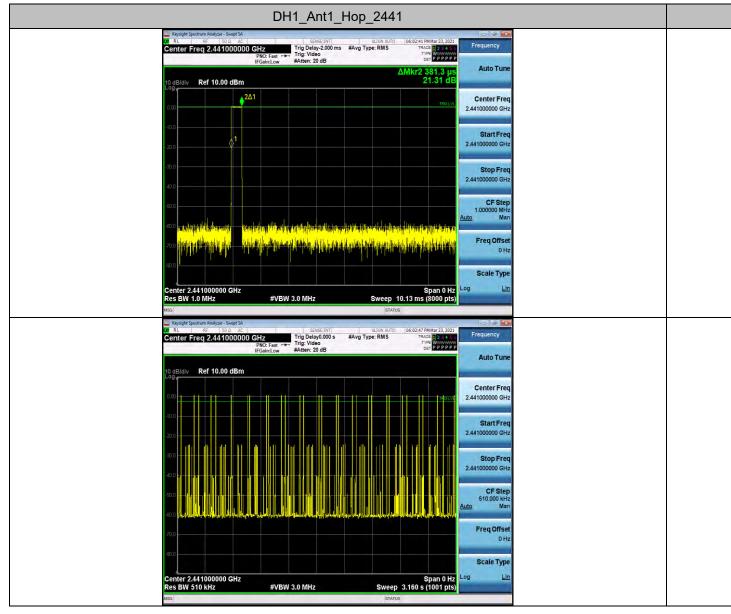

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China



	DH3_Ant1_Hop_244	11	
Keysight Spectrum	Analyzer - Swept SA		
Center Freq	2.441000000 GHz PN0: Fast ↔ IFGain1.cow Trig: Video #Atten: 20 dB		
10 dB/div Re	10.00 dBm	ΔMkr2 1.637 ms 15.09 dB	
0.00	2Δ1	TROLVU Center Freq 2.441000000 GHz	
-10.0	0 <sup>1</sup>	Start Freq	
-20.0		2.441000000 GHz	
-30.0		Stop Freq 2.44100000 GHz	
-40.0		CF Step	
		1.000000 MHz Auto Man	
-500 <mark>바라에 대한 사람이 다.</mark> -700 <mark>바라에 날랐다.</mark>		Freq Offset	
-soo			
Center 2.4410	00000 GHz	Span 0 Hz Log Lin	
Res BW 1.0 M	HZ #VBW 3.0 MHZ Sweep	Span 0 Hz 10.13 ms (8000 pts) TUS	
Keysight Spectrum	Analyzer - Swept SA 50.0. AC SENSE:INT ALIGN AU 2.441000000 GHz Trig Delay0.000 s #Avg Type: RMS	0 06:08:41 PMMar 23, 2021 TRACE TRACE	
Center Frey	PNO: Fast Trig: Video IFGain:Low #Atten: 20 dB	TRACE 23455 TYPE PPPPP DET PPPPPP Auto Tune	
10 dB/div <b>Re</b> Log	f 10.00 dBm		
0.00		Center Freq 2.441000000 GHz	
-10.0		Start Freq	
-20.0		2.441000000 GHz	
30.0		Stop Freq 2.441000000 GHz	
-40.0		CF Step	
-200 - 200	والمعالية والمعالية والمعالية والمعالية والمعالية والمعالية	510.000 kHz <u>Auto</u> Man	
-70.0		Freq Offset 0 Hz	
-80.0		Scale Type	
Center 2.4410	00000 GHz	Span 0 Hz Log Lin	
Res BW 510 k		ep 3.160 s (1001 pts) mus	



DH5_Ant1_Hop_24	441
Keyspit Spectrum Analyzer - Swept SA     S0 Ω AC     SPICE-DIT     ALDIN     Center Freq 2.441000000 GHz     Trig Delay-2000 μs #Avg Type: RM     PNO: Fast → Trig: VBC     Formal.cow     #Atten: 20 dB	AUTO 05:45:37 PM Mar 23, 2021 MS TRACE [] D 3 4 51 TYPE WWWWW DET (P P P P P P
10 dB/diy Ref 10.00 dBm	Auto Tun 3.78 dB
ο	1990 (M) Center Free 2.441000000 GH
-10.0	Start Fre 2.441000000 GH
40.0	Stop Free 2.441000000 GH
	CF Ster 1.00000 MH Auto Mai
1700 providence in the second s	Freq Offse 0 H Scale Type
Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Swe	Span 0 Hz Log Linep 15.46 ms (8000 pts)
Keysight Spectrum Analyzer-Swept SA     Sog AC     Sence_ENT     Autor     Center Freq 2.441000000 GHz     Figure Autor     Figure Autor	AUTO 105-55-51 PM Mar 23, 2021 IS TRACE 10 25 4 5 T THE WARK OF THE PP PP PP Auto Tune
10 dB/dlv Ref 10.00 dBm	Center Free 2.441000000 GH
	Start Free 2.441000000 GH Stop Free
	2.441000000 GH CF Ster 510.000 kH
	Auto Mai Freq Offse 0 H
Center 2.441000000 GHz	Span 0 Hz veep 3.160 s (1001 pts)
Res BW 510 kHz #VBW 3.0 MHz Sw MBg	status



2DH1_Ant1_Hop_2441	
Exception Section: Address - Section 2010 and 2010 a	
<u>کا الدین محمد من محمد محمد</u>	
000 01 2241 000 0Hz	
2000 Start Freq 2.441000000 GHz	
500 Stop Freq 2.441000000 GHz	
50.0 CF Step 1.000000 MHz Auto Man	
<sup>200</sup> <mark>specified and the second seco</mark>	
Center 2.441000000 GHz Span 0 Hz	
Res BW 1.0 MHz         #VBW 3.0 MHz         Sweep 10.13 ms (8000 pts)           DS0         STATUS	
Engught Spectrum Jeulyzer-Swept SA         SECISE::011         VLON. AUTO         (66:64:28 PM Mar 23, 2021)           RL         FS         30 ar         AC         Trig Delay0.000 s         #Avg Type: RMS         Trace 12 a 4 s           Center Freq 2:.4441000000 GHz         Trig Delay0.000 s         #Avg Type: RMS         Trace 12 a 4 s         Frequency           IFGainLow         #Atten: 20 dB         best PP PP         Auto Tune	
to dBldiv Ref 10.00 dBm	
Solo III IIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	
2.44100000 GHz 50.0	
600 <b>August Standard and Anna Anna Anna Anna Anna Anna Anna</b>	
Center 2.441000000 GHz Span 0 Hz	
Res BW 510 kHz #VBW 3.0 MHz Sweep 3.160 s (1001 pts)	



2DH3_Ant1_Hop_2441	
in Guinacon	TRACE 12345 TYPE W
10 dB/dły Ref 10.00 dBm	2 1.638 ms 9.99 dB
221 0.00	Center Fre 2.441000000 Gi
-20.0	Start Fro 2.441000000 Gi
40.0	Stop Fre 2.441000000 Gi
-500 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	CF Ste 1.00000 Mi <u>Auto</u> Mi
	Freq Offs 01
Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 n	Span 0 Hz ns (8000 pts)
MSG STATUS	0 2
RL RF 50.0 AC SENSE:INT ALIGN AUTO 06:05	b) PMMar 23, 2021 TRACE D 23 4 5 DET P P P P P P Auto Tur
	Center Fre 2.441000000 Gi
	Start Fra 2.441000000 Gi Stop Fra 2.441000000 Gi
	CF Ste 510.000 ki
700	Freq Offs 01 Scale Typ
Center 2.441000000 GHz Res BV10 kHz #VBW 3.0 MHz Sweep 3.160 NSG	Span 0 Hz 9 s (1001 pts)



2DH5_Ant1_Hop_2441
Keysight Spectrum Analyzer - Singt 3A         Schicz Birth         ALLISH AUTO         Geodesion PM14rr23, 2021         Frequency           Center Freq 2.4440000000 GHz         Trip Delay-2000 µs         #Avg Type: RMS         TRuce 102.445         Frequency           PR0: Fast →         Trig: Video         Truce 102.445         Truce 102.445         Frequency
ΔMkr2 2.887 ms 10 dB/diy Ref 10.00 dBm 7.36 dB
Contract         2Δ1         Center Freq         2.411000000 GHz           1
500 Start Freq 24100000 GHz
400
500 CF Step 1.000000 MHz 4.000 Mercenter (1.00000 MHz) 500 Mercenter (1.0000 MHz) 500 MHz) 500 Mercenter (1.0000 MHz) 500 MHZ
FreqOffset
Scale Type           Center 2.441000000 GHz         Span 0 Hz           Res BW 1.0 MHz         #VBW 3.0 MHz           Sweep 10.13 ms (8000 pts)
NSG STATUS
RL         RE         S0         ACC         SENSE-DIT         ALLON AUTO         Geode 00 PM Mar 23, 2021         Frequency           Center Freq 2.441000000 GHz         Trig Delay0.000 s         #Avg Type: RMS         TRUCE 12 4 4 5         Frequency           PR0: Fast
Center Freq 2.44100000 GHz 100 Start Freq Start Freq
2000 2441000000 GHz 3000 400 500 500 500 500 500 500 500 500
5000 5000 Annual and a second
500 Freq Offset 0 Hz 500 Scale Type
Center 2.441000000 GHz Res BW 510 kHz #VBW 3.0 MHz Sweep 3.160 s (1001 pts)



3DH1_Ant1_	Hon 2441	
Keysight Spectrum Analyzer - Swept SA		
Center Freq 2.441000000 GHz FR0: Fast → Trig: Video FR0: Fast → Trig: Video	ALTCN AUTO 06:09:00 PM Mar 23, 2021	
IFGaintow whiten 20 db	ΔMkr2 385.1 μs Auto Tune	
10 dB/div Ref 10.00 dBm	1.77 dB	
ο.co Λ1.9 <sup>2Δ1</sup>	Center Freq 2.44100000 GHz	
-10.0		
200	Start Freq 2.44100000 GHz	
200		
-300	Stop Freq 2.44100000 GHz	
-40.0	CF Step	
-500	1.000000 MHz Auto Man	
-500 diplomating the state of t	n de en felera hij net ferene lijk de geskeldere de terenen en service en service en service en service en serv	
.700 lastil pilotasetter - Teaston alder historie a langilastic erro	definition and the local data Freq Offset 0 Hz	
-50.0	Scale Type	
Center 2.441000000 GHz	Span 0 Hz Log Lin	
Res BW 1.0 MHz #VBW 3.0 MHz	Sweep 10.13 ms (8000 pts)	
Keysight Spectrum Analyzer - Swept SA		
Center Freq 2.441000000 GHz PNO: Fast	ALIGN AUTO (0649955 PMM at 22, 2021) EAvg Type: RMS TRACE 10:3 4:5 TYPE DEPENDEND	
iroaintow whiten 20 db	Auto Tune	
10 dB/div Ref 10.00 dBm		
0.00	Center Freq 2.44100000 GHz	
-19.0		
	Start Freq 2.441000000 GHz	
30.0		
400	Stop Freq 2.441000000 GHz	
	CF Step	
	510.000 kHz Auto Man	
an a think a strong a the strong and the strong and strong and the strong and the strong and the strong of the	Freq Offset	
79.0	OHz	
	Scale Type	
Center 2.441000000 GHz	Span 0 Hz Sweep 3.160 s (1001 pts)	
Res BW 510 kHz #VBW 3.0 MHz		



	3DH3_Ant1_H	lop_2441		
Kepsight Spectrum Analyzer - Sweek Si RL RF SO A A Center Freq 2.4410000	A OO GHz PNO: Fast →→ IFGain:Low Trig: Video #Atten: 20 dB	DET P P P P	Frequency	
10 dB/div Ref 10.00 dBr	n	ΔMkr2 1.638 m 7.63 d		
	2Δ1		2.44100000 GHz	
-10.0			Start Freq 2.441000000 GHz	
-30.0			Stop Freq 2.441000000 GHz	
-50 0 -60 0	Noral Ita, alazz, mainkhiti, da a	ar hang dafta dalah serie persona difara tang ang serie pertamangan pertamangkan pertamangkan pertamangkan per	CF Step 1.000000 MHz Auto Man	
-700 - 100 -			Freq Offset 0 Hz	
Center 2.441000000 GHz		Shan 0 l	Scale Type	
		Sparror	z Log Lin	
Res BW 1.0 MHz	#VBW 3.0 MHz	Span 0 H Sweep 10.13 ms (8000 pr STATUS	z cog Lin s)	
asc Kepsipht Spectrum Analyzar-Sweet S R RL RF 50.2 A Center Freq 2.4410000	SENEELINT COUCHZ Trig Delay0.000 s # PRO: Fast Trig: Video IFGainLow #Atten: 20 dB	Avg Type: RMS TRACE 12.3 4 TRACE 12.3 4 Avg Type: RMS TRACE 12.3 4 TRACE 13.3 4 TR	<b></b>	
MSG Keysight Spectrum Analyzer - Swept Si M RL RF 50 D A	SENEELINT COUCHZ Trig Delay0.000 s # PRO: Fast Trig: Video IFGainLow #Atten: 20 dB	STATUS	21 Frequency	
asc Kepsipht Spectrum Analyzar-Sweet S R RL RF 50.2 A Center Freq 2.4410000	SENEELINT COUCHZ Trig Delay0.000 s # PRO: Fast Trig: Video IFGainLow #Atten: 20 dB	STATUS	Frequency Auto Tune Center Freq	
asc Kepsipht Spectrum Analyzar-Sweet S R RL RF 50.2 A Center Freq 2.4410000	SENEELINT COUCHZ Trig Delay0.000 s # PRO: Fast Trig: Video IFGainLow #Atten: 20 dB	STATUS	Auto Tune Center Freq 2.44100000 GHz Stop Freq 2.441000000 GHz	
asc Kepsipht Spectrum Analyzar-Sweet S R RL RF 50.2 A Center Freq 2.4410000	SENEELINT COUCHZ Trig Delay0.000 s # PRO: Fast Trig: Video IFGainLow #Atten: 20 dB	STATUS	Auto Tune Center Freq 2.44100000 GHz Start Freq 2.44100000 GHz Stop Freq	
asc Kepsipht Spectrum Analyzar-Sweet S R RL RF 50.2 A Center Freq 2.4410000	SENEELINT COUCHZ Trig Delay0.000 s # PRO: Fast Trig: Video IFGainLow #Atten: 20 dB	STATUS	Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 610.0000 kHz Auto Man Freq Offset 0 Hz	
asc Kepsipht Spectrum Analyzar-Sweet S R RL RF 50.2 A Center Freq 2.4410000	COUCHZ SENSE ANT PRO: Fast	STATUS	Auto Tune Center Freq 2.44100000 GHz Start Freq 2.441000000 GHz CF Step 510.000 KHz Auto Man Freq Offset 0 Hz Scale Type Log Lin	



3	DH5_Ant1_Ho	p 2441	
Keysight Spectrum Analyzer - Swept SA			
Center Freq 2.441000000 GHz PNO: Fast IFGain:Low	Trig Delay-2.000 ms #Avg Trig: Video #Atten: 20 dB	Type: RMS TRACE	Frequency
10 dB/div Ref 10.00 dBm		ΔMkr2 2.888 ms 1.92 dB	Auto Tune
	▲2∆1		Center Freq 2.441000000 GHz
		TRIO LVL	2.441000000 GHZ
-20.0	<u>عادما ام ا</u>		Start Freq 2.441000000 GHz
-30.0			Stop Freq
43.0			2.441000000 GHz
-90.0			CF Step 1.000000 MHz
60.0 w	e porte ple state the barre	and the head distance of the state of the state of the	<u>Auto</u> Man
	and distant of the second	an sa ka	Freq Offset 0 Hz
80.0			Scale Type
Center 2.44 1000000 GHz		Span 0 Hz Sweep 10.13 ms (8000 pts)	
Res BW 1.0 MHz #V	/BW 3.0 MHz	Sweep 10.13 ms (8000 pts) STATUS	
Rt spright Spectrum Analyzer - Swept SA           RL         RF         50 Ω         AC           Center Freq 2.441000000 GHz	SENSE:INT Trig Delay0.000 s #Avg	ALIGN AUTO 06:02:00 PM Mar 23, 2021 Type: RMS TRACE 2 2 3 4 5	Frequency
PNO: Fast IFGain:Low	t Trig: Video w #Atten: 20 dB	Type: RMS TRACE 2.3455 TYPE TRACE 2.3455 TYPE TYPE TYPE TYPE TYPE TYPE TYPE TYPE	Auto Tune
10 dB/div Ref 10.00 dBm			
0.00			Center Freq 2.441000000 GHz
-10.0		TRIG LVL	Start From
-20.0			Start Freq 2.441000000 GHz
30.0			Stop Freq
43.0			2.441000000 GHz
-50.0			CF Step 510.000 kHz
-60.0 <b>1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1</b>	أكمعه عاريك المعالمة المعارك المعالية المعطاة	Milet Martine in the Martine Martine	<u>Auto</u> Man
-70.0			Freq Offset 0 Hz
80.0			Scale Type
Center 2.441000000 GHz Res BW 510 kHz #V	/BW 3.0 MHz	Span 0 Hz Sweep 3.160 s (1001 pts)	Log <u>Lin</u>
MSG WY TO KIZ #V	BW 5.0 Miliz	status	




# Appendix F: Number of hopping channels

### **Test Result**


TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Нор	79	>=15	PASS
2DH5	Ant1	Нор	79	>=15	PASS
3DH5	Ant1	Нор	79	>=15	PASS



## **Test Graphs**

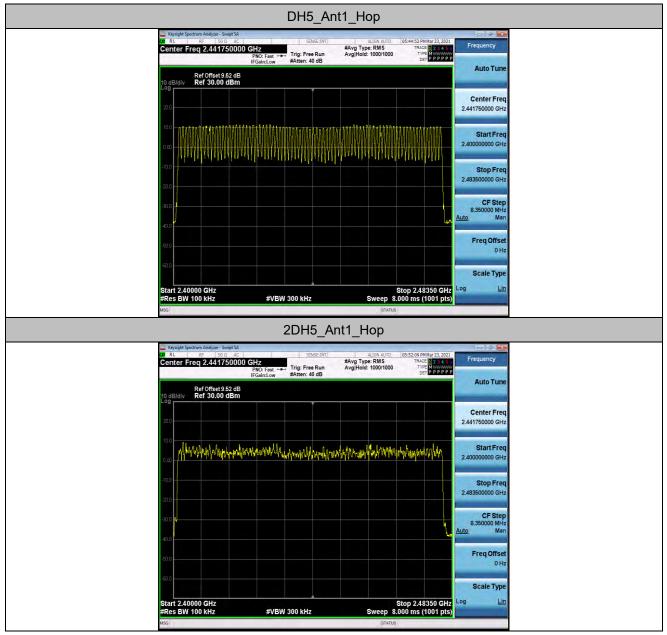



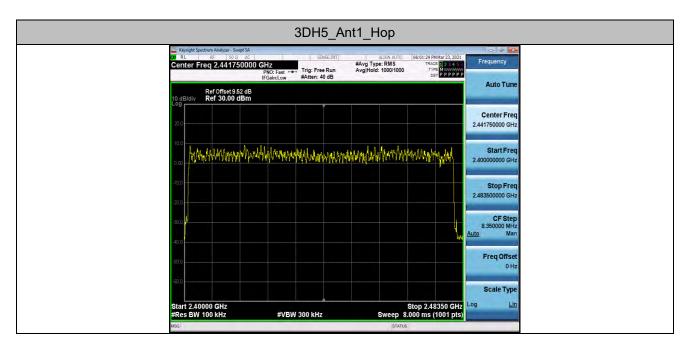



## Appendix G: Band edge measurements

#### **Test Result**

TestMode	Antenna	ChName	Channel	RefLevel	Result	Limit	Verdict
				[dBm]	[dBm]	[dBm]	
DH5	Ant1	Low	2402	11.02	-45.85	<=-8.98	PASS
		High	2480	10.84	-45.67	<=-9.16	PASS
		Low	Hop_2402	10.89	-45.57	<=-9.11	PASS
		High	Hop_2480	11.09	-45	<=-8.91	PASS
2DH5	Ant1	Low	2402	8.75	-43.68	<=-11.25	PASS
		High	2480	8.79	-45.32	<=-11.21	PASS
		Low	Hop_2402	6.72	-45.79	<=-13.28	PASS
		High	Hop_2480	8.32	-45.57	<=-11.68	PASS
3DH5	Ant1	Low	2402	9.17	-45.47	<=-10.83	PASS
		High	2480	7.97	-45.23	<=-12.03	PASS
		Low	Hop_2402	9.18	-46.29	<=-10.82	PASS
		High	Hop_2480	7.61	-45.33	<=-12.39	PASS