


Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

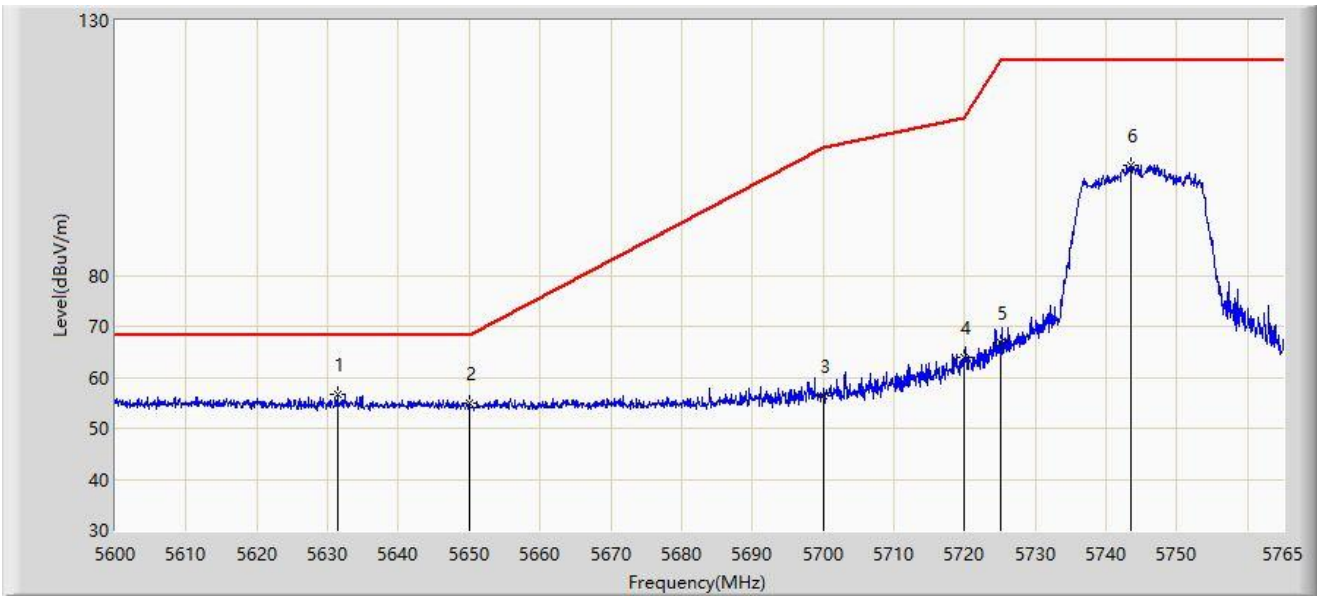


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5631.350	56.779	54.290	-11.421	68.200	2.489	PK
2		5650.000	54.822	52.224	-13.378	68.200	2.598	PK
3		5700.000	56.467	53.569	-48.733	105.200	2.897	PK
4		5720.000	64.004	61.156	-46.796	110.800	2.848	PK
5		5725.000	66.740	63.856	-55.460	122.200	2.884	PK
6		5743.550	101.707	98.623	N/A	N/A	3.084	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

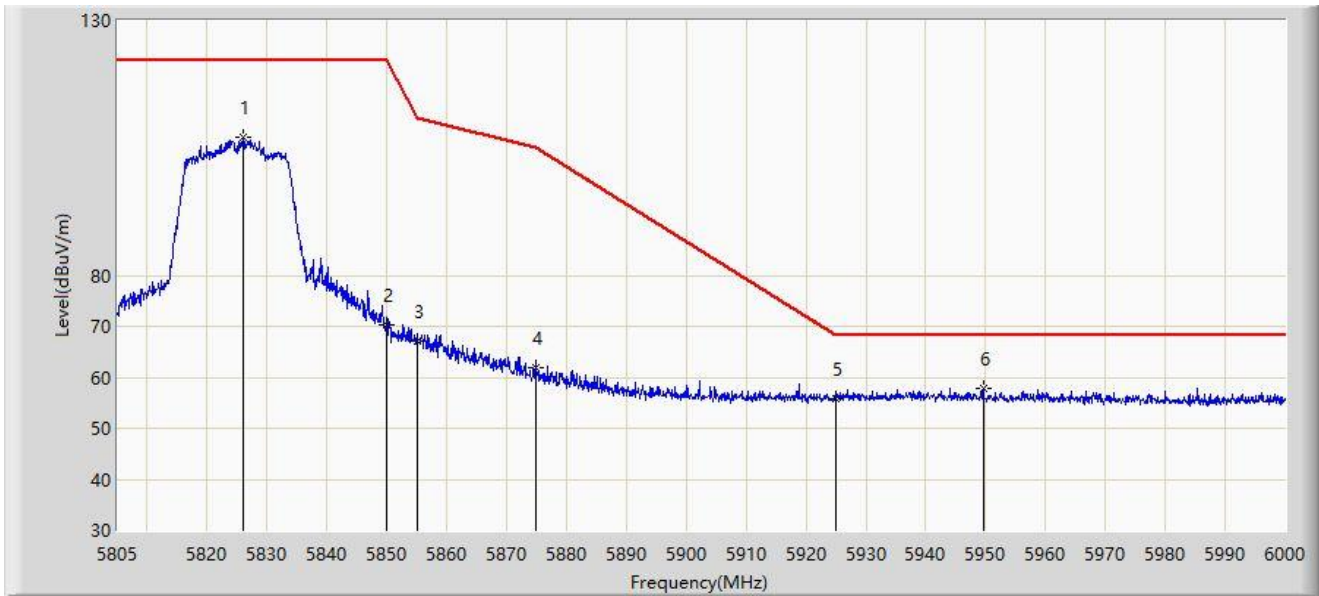


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5826.060	107.021	103.557	N/A	N/A	3.464	PK
2		5850.000	70.286	66.948	-51.914	122.200	3.338	PK
3		5855.000	67.042	63.699	-43.758	110.800	3.343	PK
4		5875.000	61.961	58.564	-43.239	105.200	3.397	PK
5		5925.000	55.836	52.106	-12.364	68.200	3.731	PK
6	*	5949.592	57.879	53.987	-10.321	68.200	3.892	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

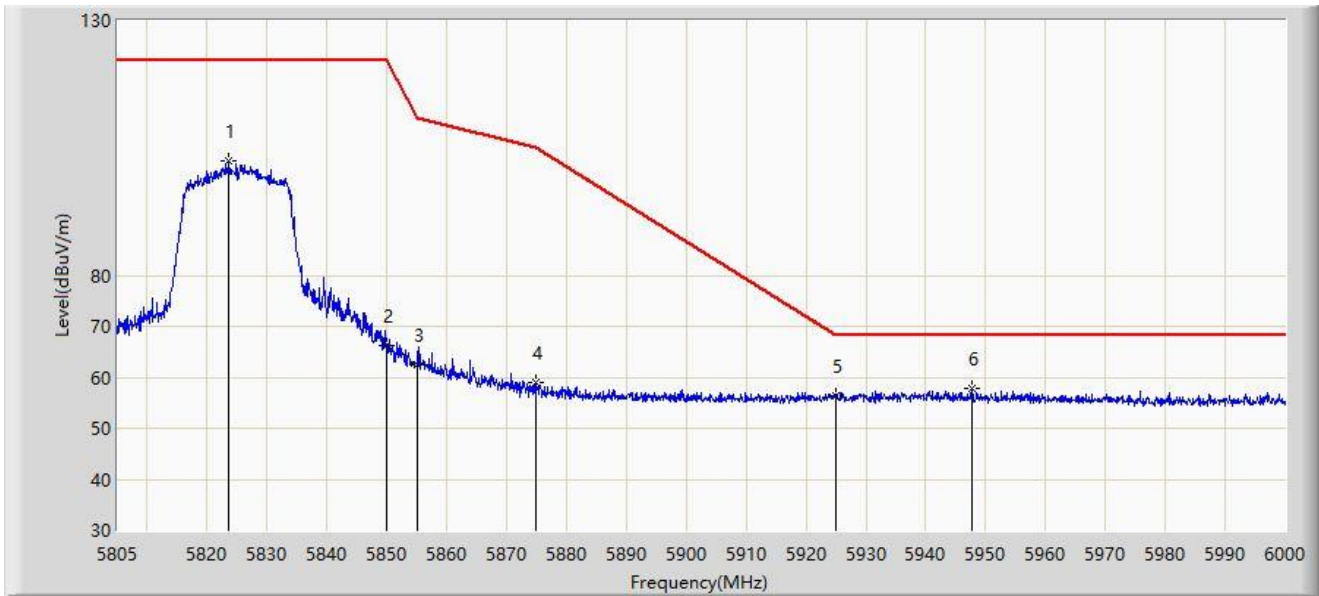


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.623	102.474	99.052	N/A	N/A	3.422	PK
2		5850.000	66.234	62.896	-55.966	122.200	3.338	PK
3		5855.000	62.575	59.232	-48.225	110.800	3.343	PK
4		5875.000	58.901	55.504	-46.299	105.200	3.397	PK
5		5925.000	56.403	52.673	-11.797	68.200	3.731	PK
6	*	5947.740	57.746	53.838	-10.454	68.200	3.909	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

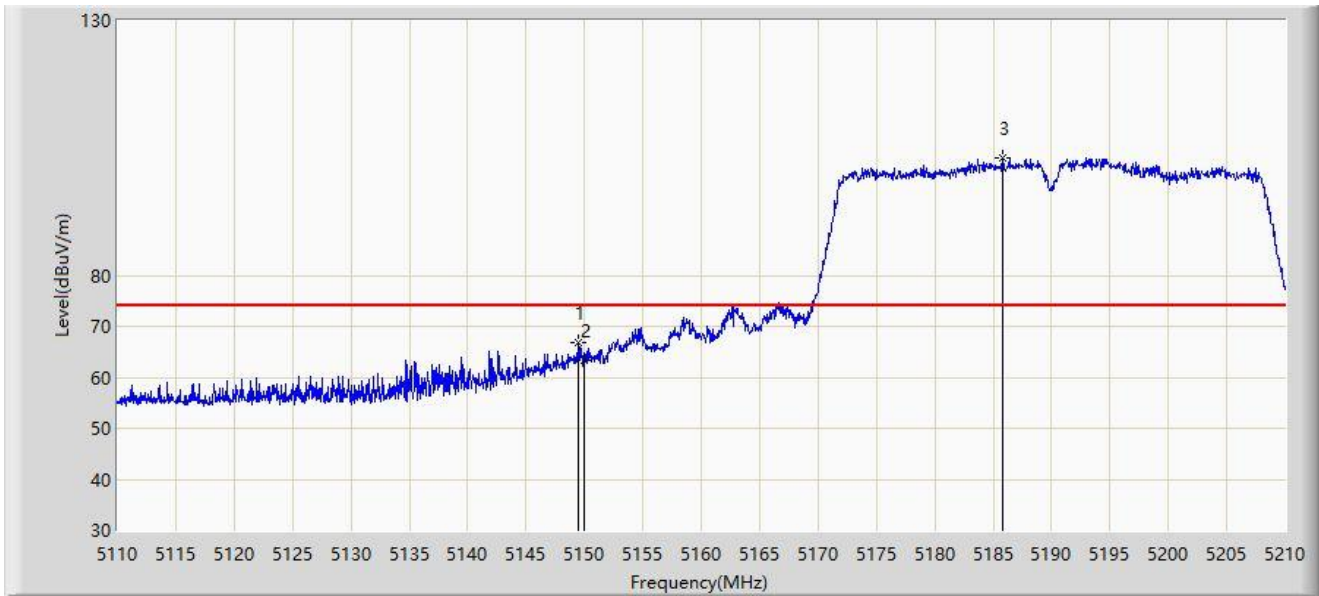


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.450	66.888	64.218	-7.112	74.000	2.670	PK
2		5150.000	63.468	60.802	-10.532	74.000	2.665	PK
3		5185.800	103.019	101.067	N/A	N/A	1.952	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

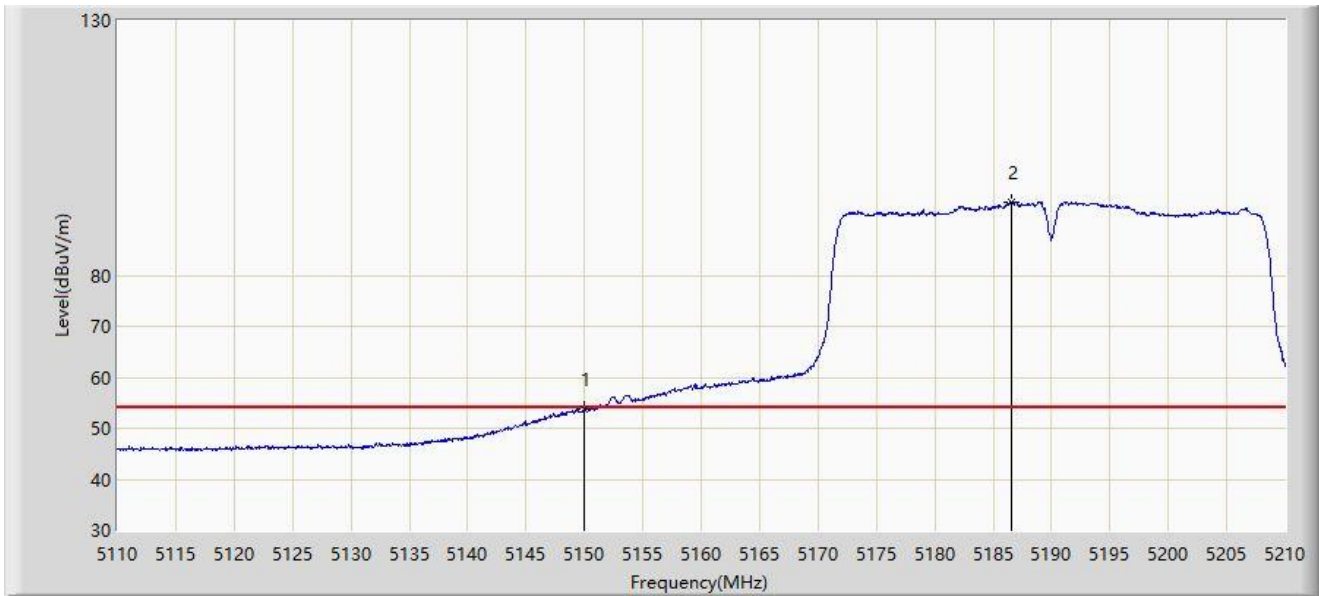


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5150.000	53.729	51.063	-0.271	54.000	2.665	AV
2		5186.600	94.423	92.477	N/A	N/A	1.946	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

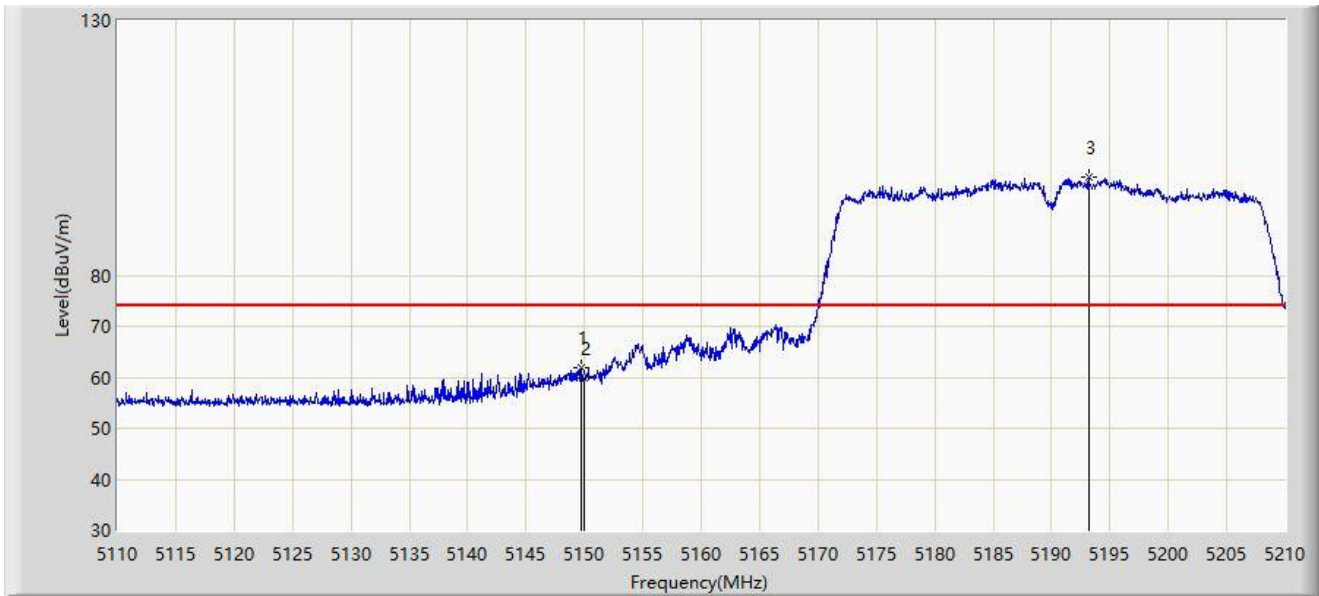


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.750	61.878	59.211	-12.122	74.000	2.667	PK
2		5150.000	59.999	57.333	-14.001	74.000	2.665	PK
3		5193.200	99.186	97.291	N/A	N/A	1.896	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

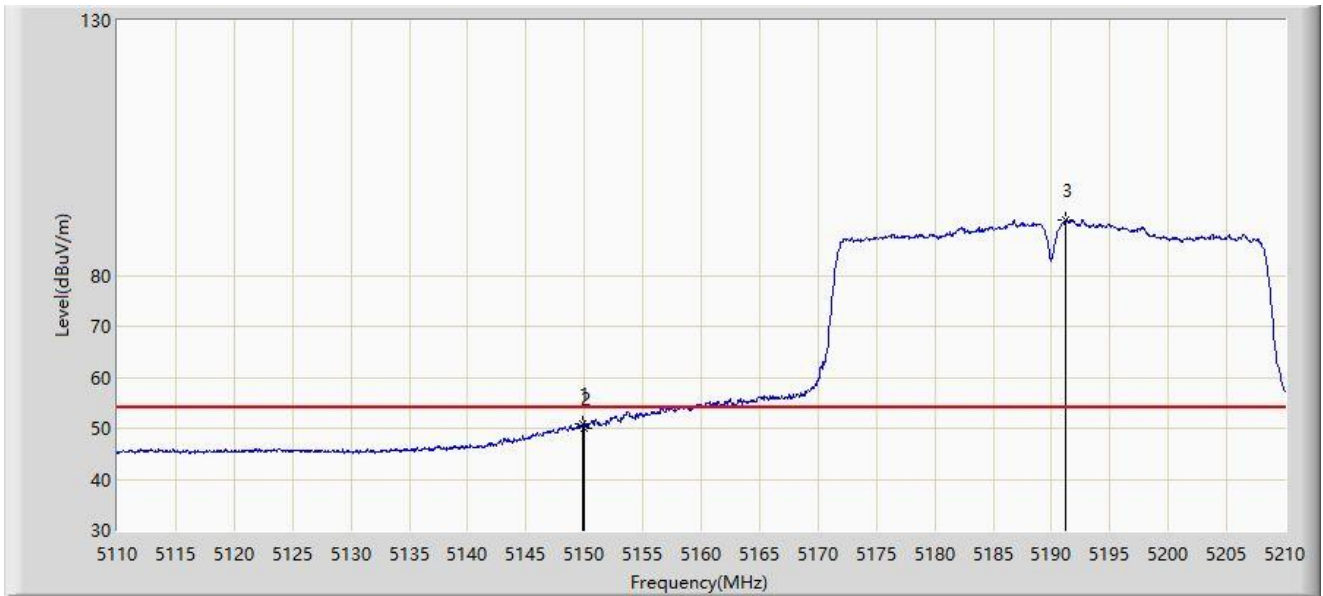


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.900	50.752	48.086	-3.248	54.000	2.667	AV
2		5150.000	49.953	47.287	-4.047	54.000	2.665	AV
3		5191.250	90.975	89.065	N/A	N/A	1.911	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

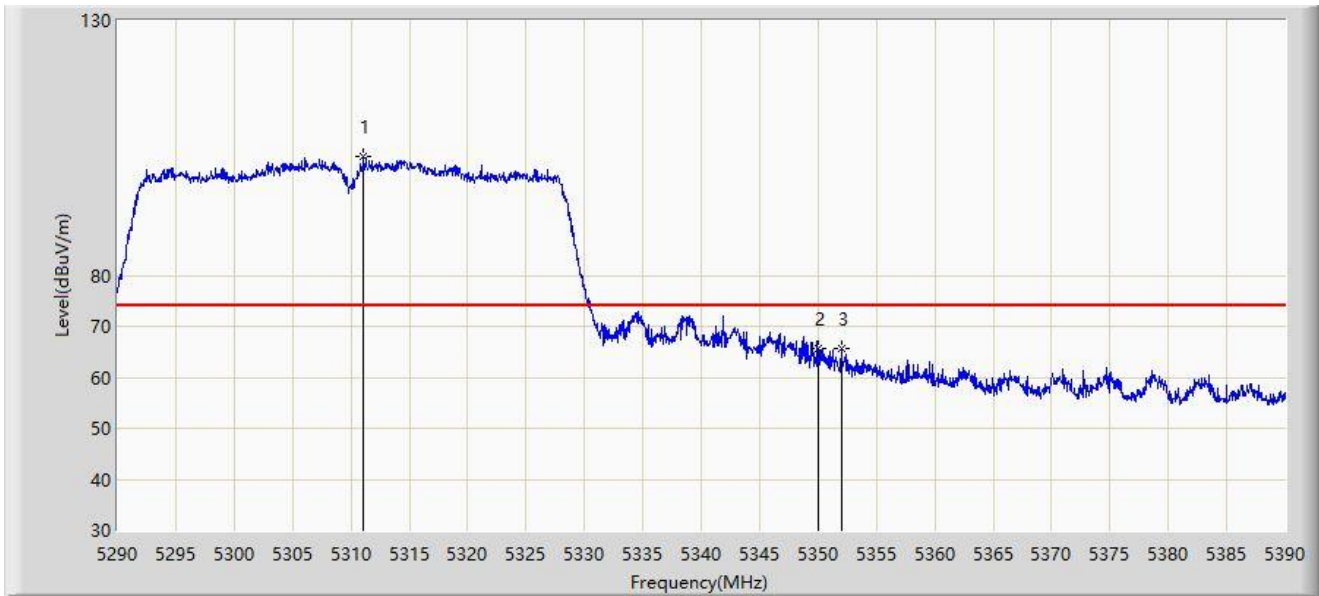

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5311.100	103.385	101.731	N/A	N/A	1.654	PK
2		5350.000	65.538	64.027	-8.462	74.000	1.511	PK
3	*	5352.000	65.606	64.098	-8.394	74.000	1.508	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

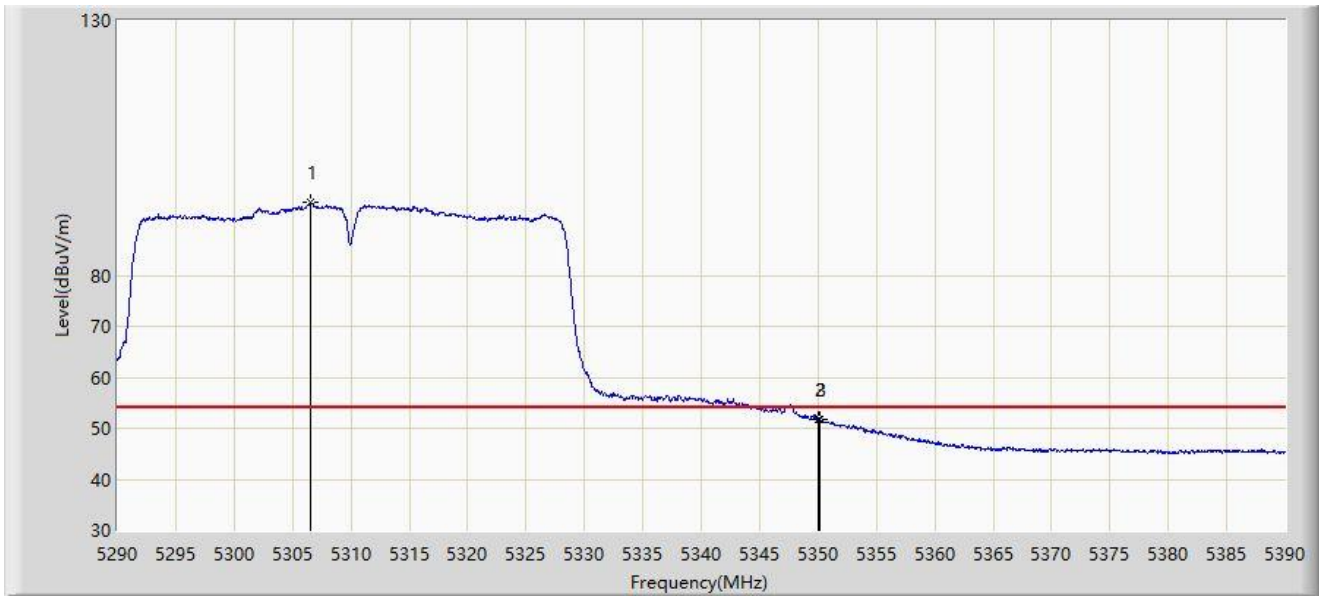


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5306.500	94.217	92.500	N/A	N/A	1.717	AV
2		5350.000	51.626	50.115	-2.374	54.000	1.511	AV
3	*	5350.200	51.706	50.196	-2.294	54.000	1.511	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

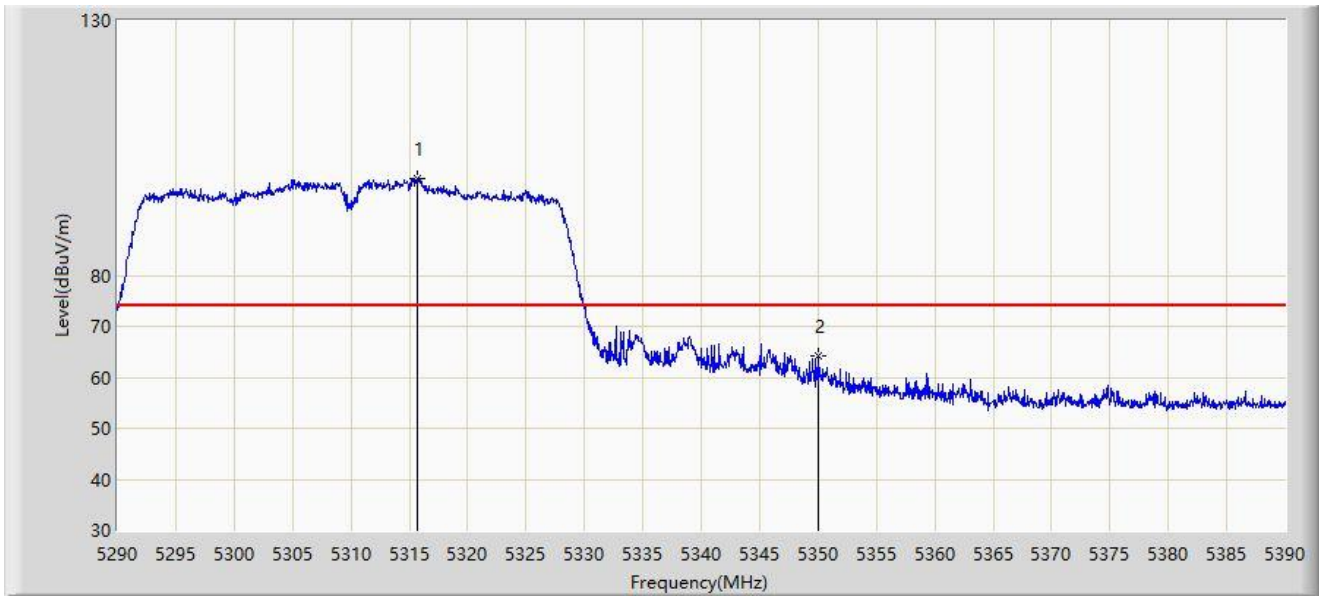


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5315.700	99.054	97.463	N/A	N/A	1.592	PK
2	*	5350.000	64.311	62.800	-9.689	74.000	1.511	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

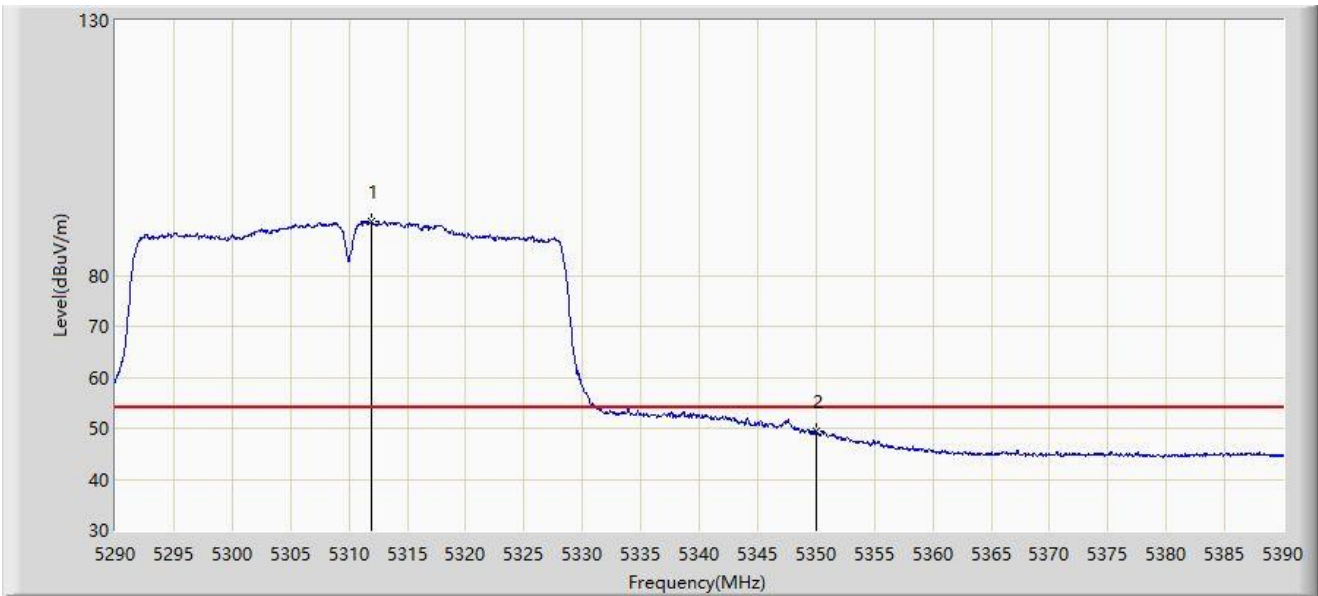


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.950	90.543	88.900	N/A	N/A	1.642	AV
2	*	5350.000	49.411	47.900	-4.589	54.000	1.511	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

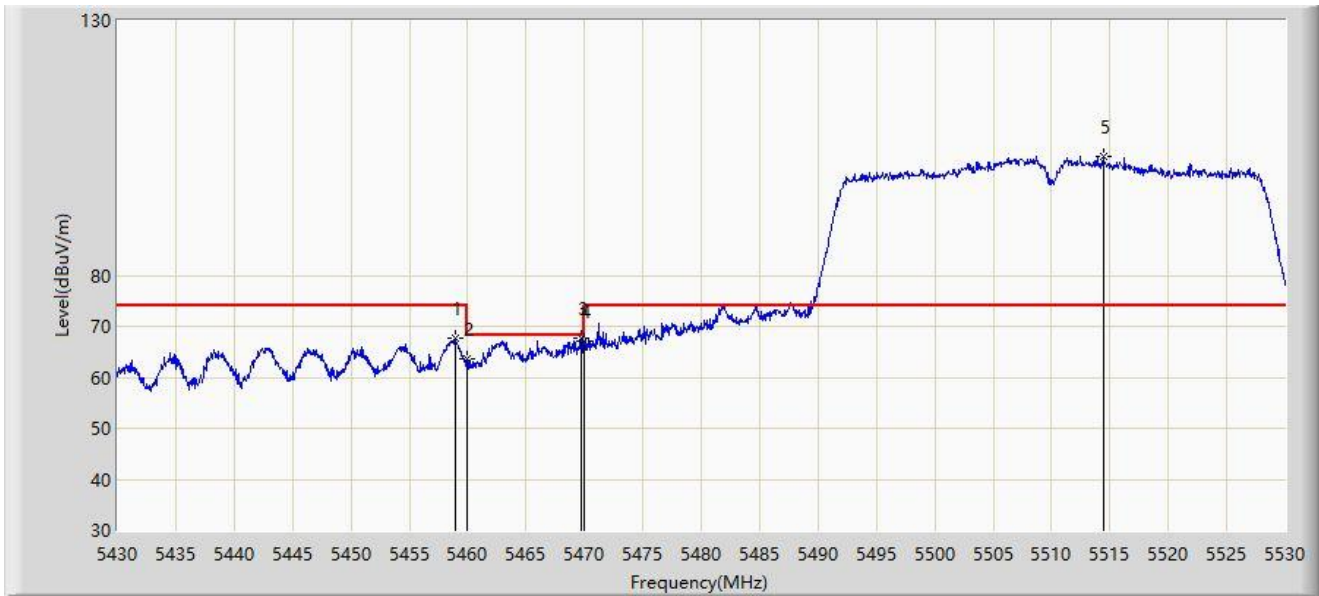


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.900	67.547	65.425	-6.453	74.000	2.122	PK
2		5460.000	63.757	61.623	-10.243	74.000	2.134	PK
3	*	5469.700	67.628	65.387	-0.572	68.200	2.241	PK
4		5470.000	67.072	64.828	-1.128	68.200	2.244	PK
5		5514.400	103.359	101.222	N/A	N/A	2.138	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

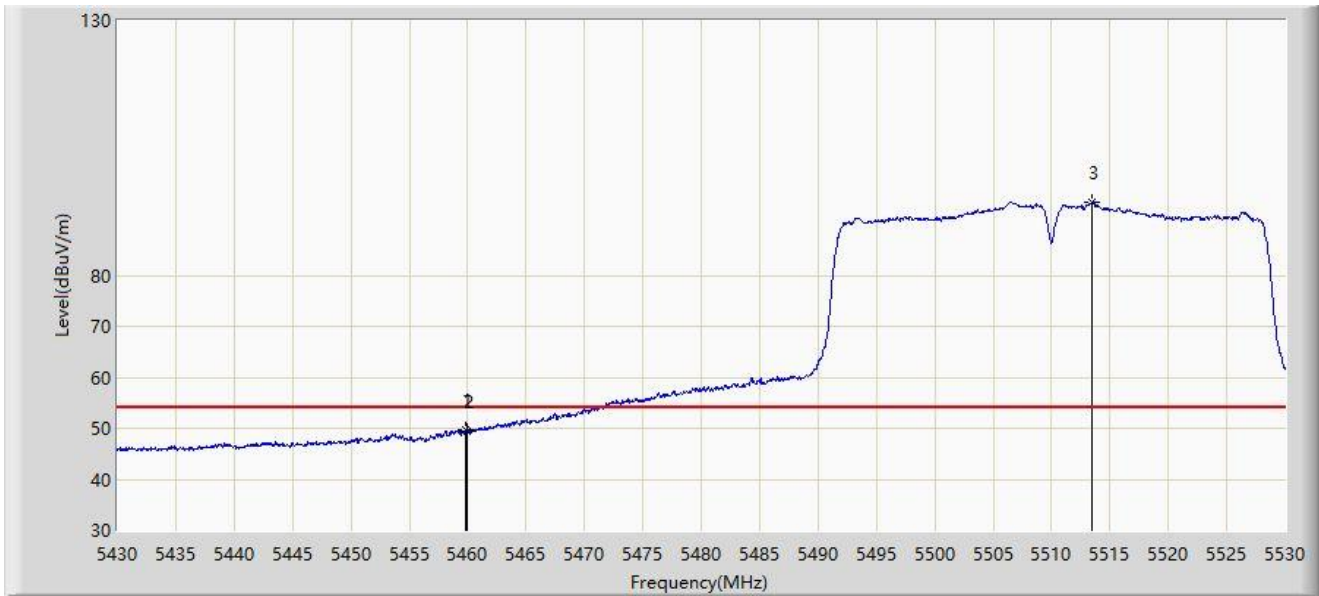


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.850	49.837	47.705	-4.163	54.000	2.133	AV
2		5460.000	49.366	47.232	-4.634	54.000	2.134	AV
3		5513.500	94.309	92.143	N/A	N/A	2.167	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

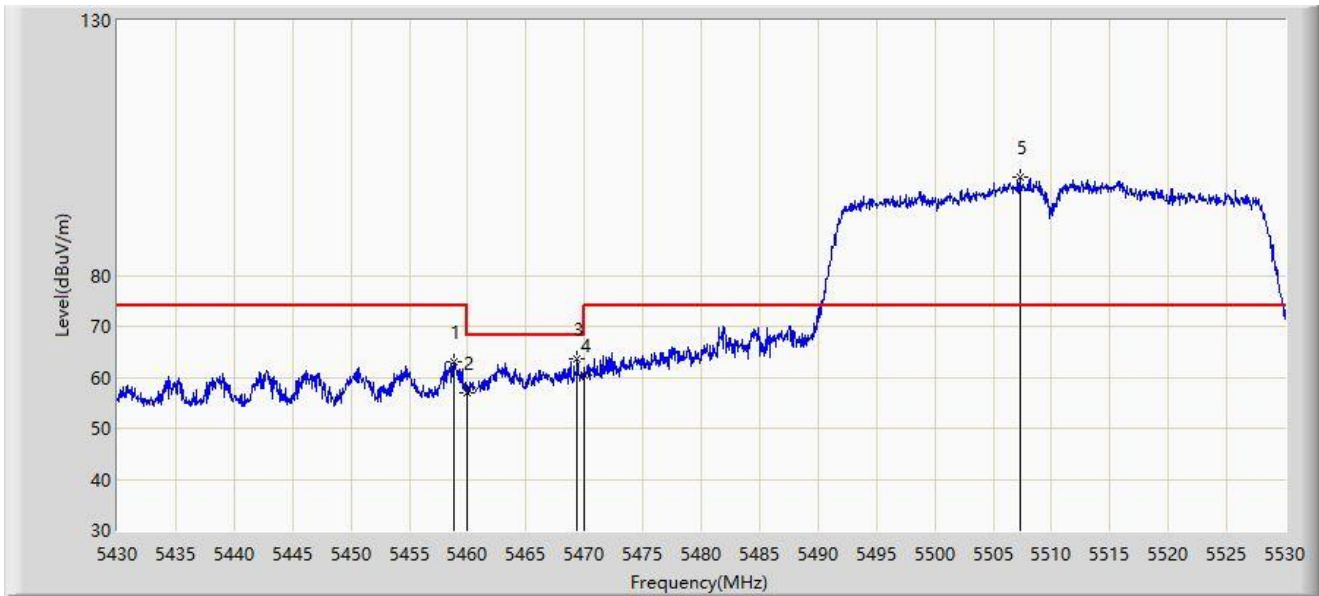


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5458.800	62.942	60.821	-11.058	74.000	2.121	PK
2		5460.000	57.077	54.943	-16.923	74.000	2.134	PK
3	*	5469.400	63.528	61.291	-4.672	68.200	2.237	PK
4		5470.000	60.316	58.072	-7.884	68.200	2.244	PK
5		5507.300	99.196	96.829	N/A	N/A	2.366	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

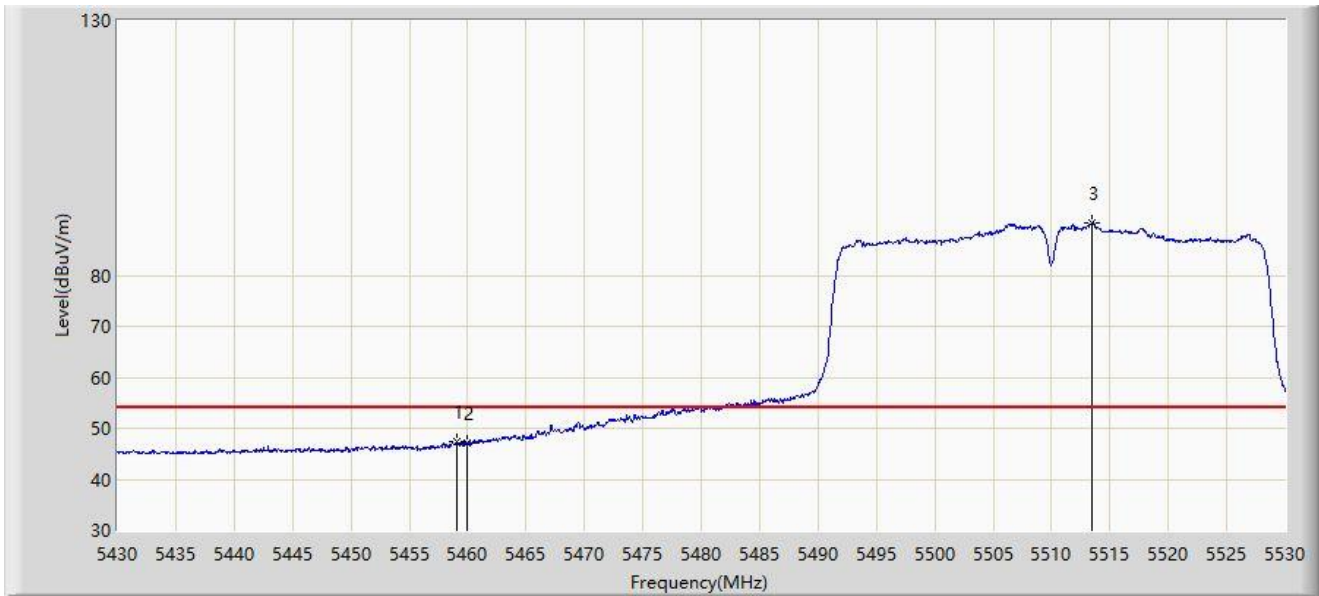


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.050	47.508	45.384	-6.492	54.000	2.123	AV
2		5460.000	47.204	45.070	-6.796	54.000	2.134	AV
3		5513.500	90.231	88.064	N/A	N/A	2.167	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

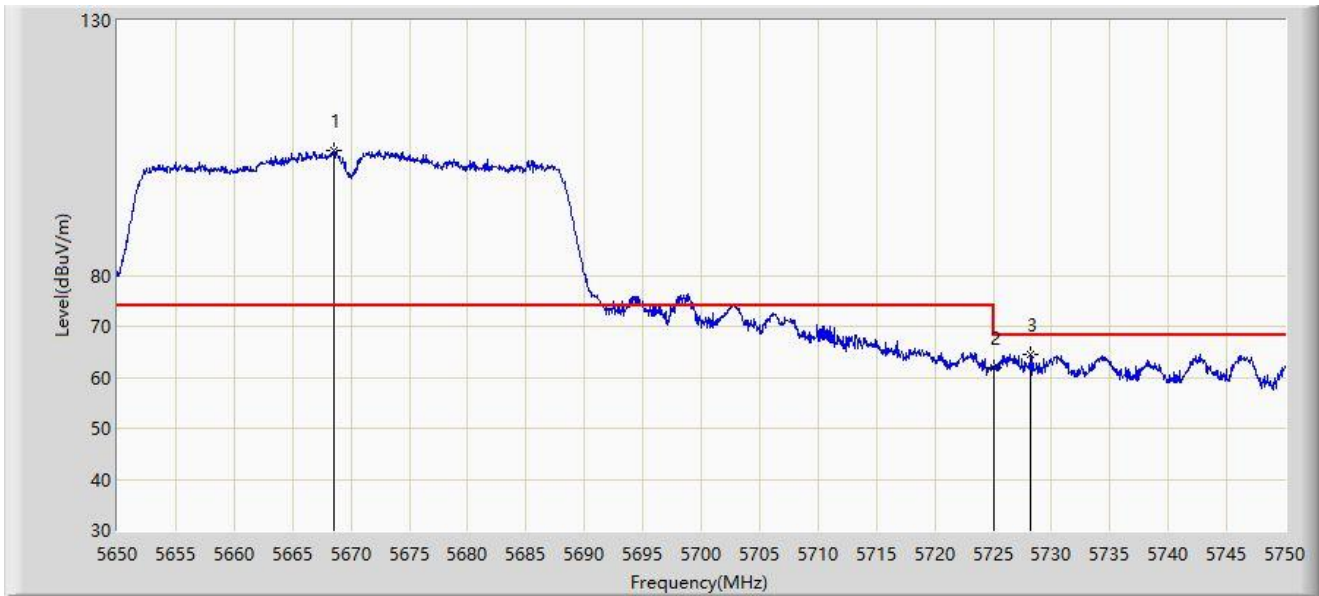

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5668.550	104.429	101.838	N/A	N/A	2.592	PK
2		5725.000	61.879	58.995	-6.321	68.200	2.884	PK
3	*	5728.250	64.628	61.712	-3.572	68.200	2.916	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

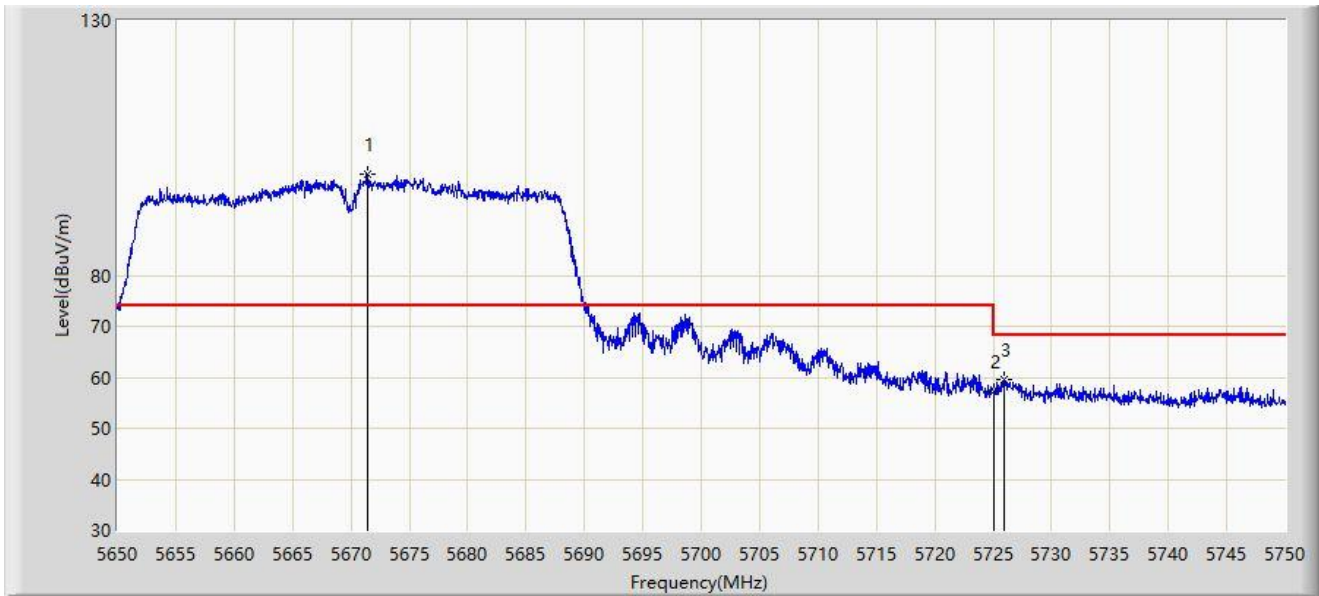


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5671.450	99.927	97.343	N/A	N/A	2.584	PK
2		5725.000	57.345	54.461	-10.855	68.200	2.884	PK
3	*	5726.000	59.446	56.555	-8.754	68.200	2.891	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

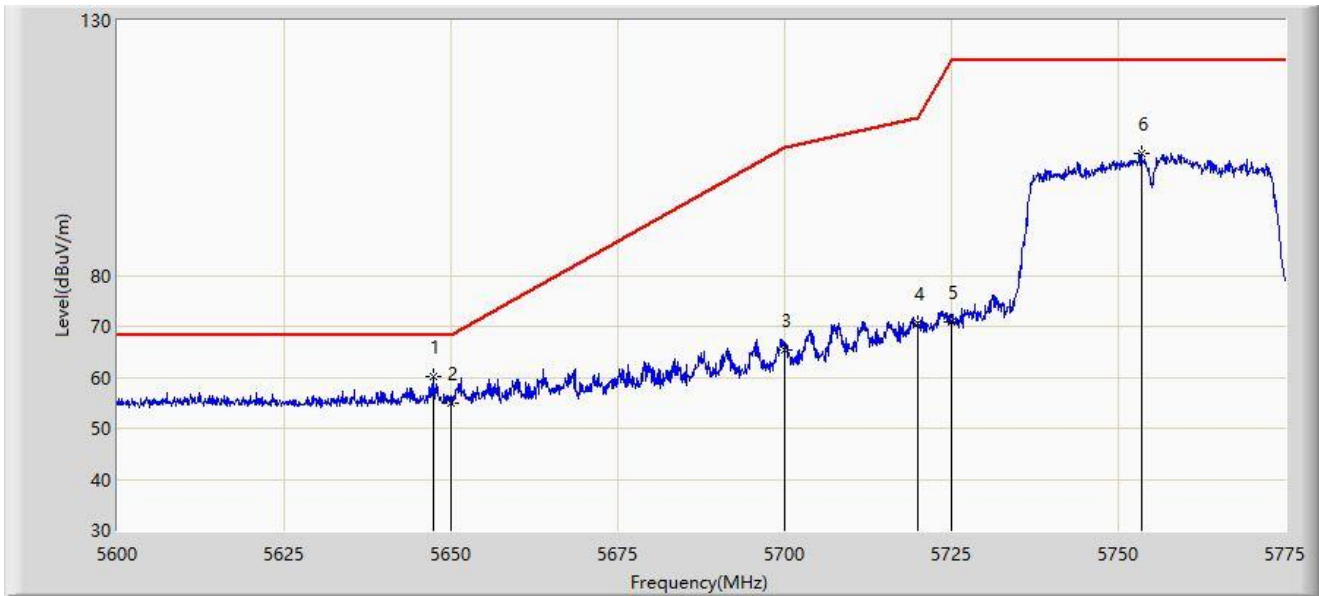


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5647.337	60.008	57.416	-8.192	68.200	2.592	PK
2		5650.000	55.038	52.440	-13.162	68.200	2.598	PK
3		5700.000	65.268	62.370	-39.932	105.200	2.897	PK
4		5720.000	70.586	67.738	-40.214	110.800	2.848	PK
5		5725.000	70.954	68.070	-51.246	122.200	2.884	PK
6		5753.475	103.950	100.783	N/A	N/A	3.167	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

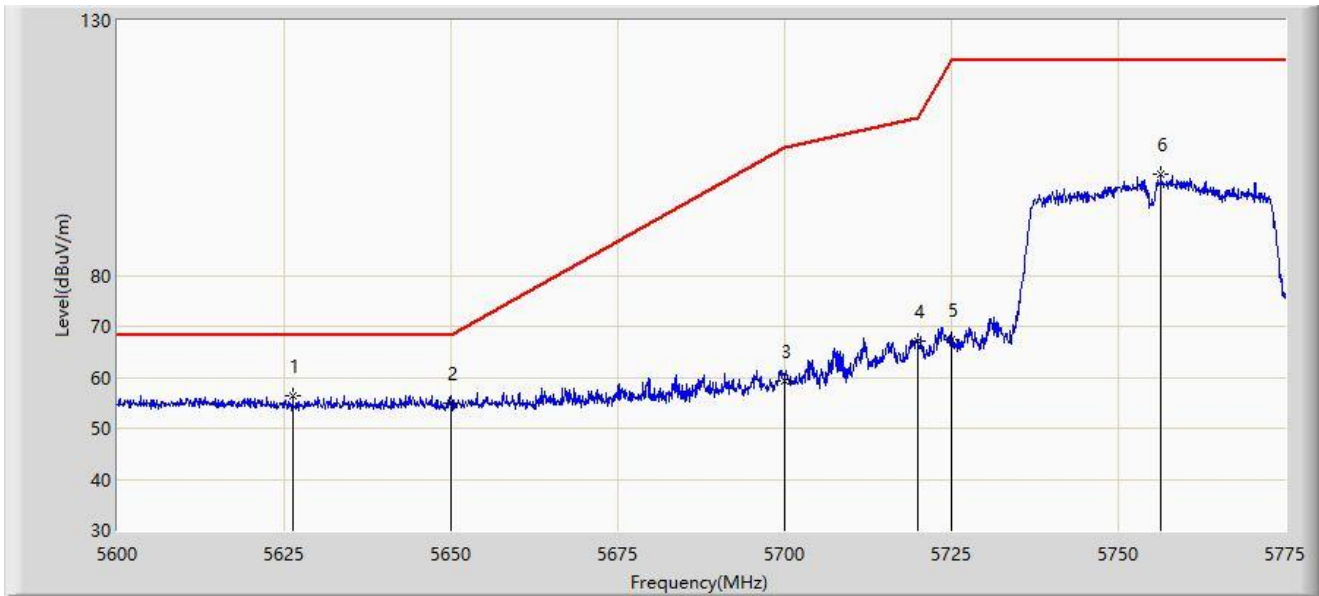


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5626.337	56.466	54.023	-11.734	68.200	2.444	PK
2		5650.000	54.792	52.194	-13.408	68.200	2.598	PK
3		5700.000	59.373	56.475	-45.827	105.200	2.897	PK
4		5720.000	67.009	64.161	-43.791	110.800	2.848	PK
5		5725.000	67.292	64.408	-54.908	122.200	2.884	PK
6		5756.362	99.784	96.593	N/A	N/A	3.191	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

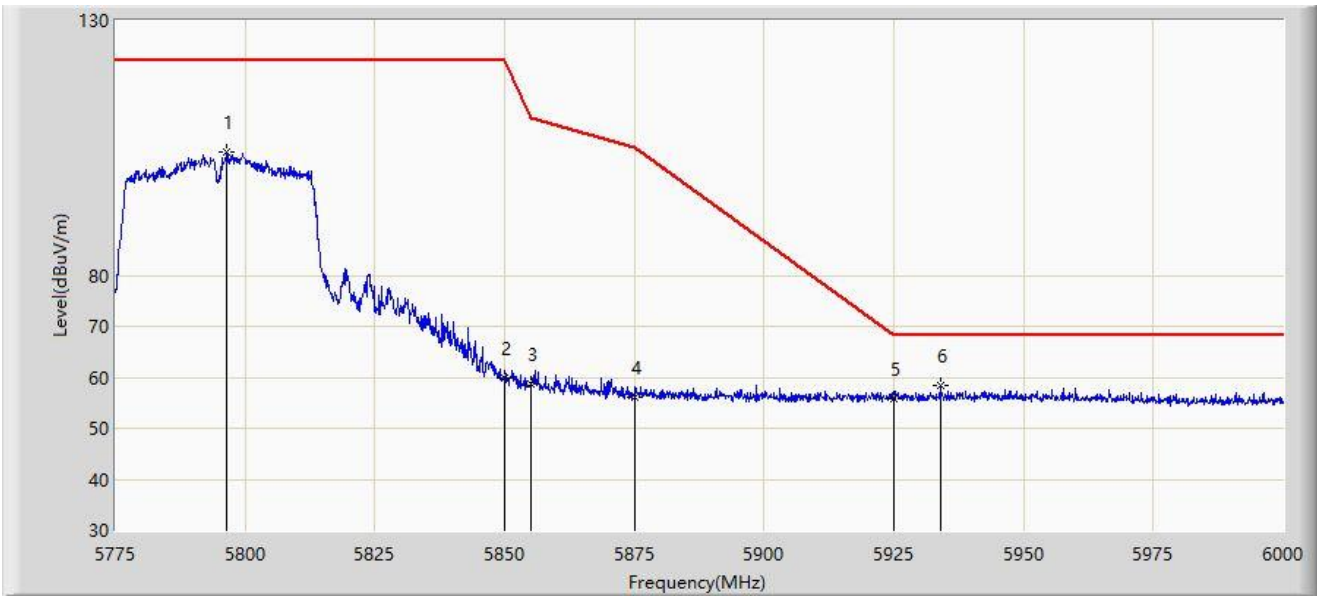


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5796.487	104.209	100.965	N/A	N/A	3.243	PK
2		5850.000	59.741	56.403	-62.459	122.200	3.338	PK
3		5855.000	58.687	55.344	-52.113	110.800	3.343	PK
4		5875.000	56.060	52.663	-49.140	105.200	3.397	PK
5		5925.000	55.868	52.138	-12.332	68.200	3.731	PK
6	*	5933.962	58.264	54.419	-9.936	68.200	3.845	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

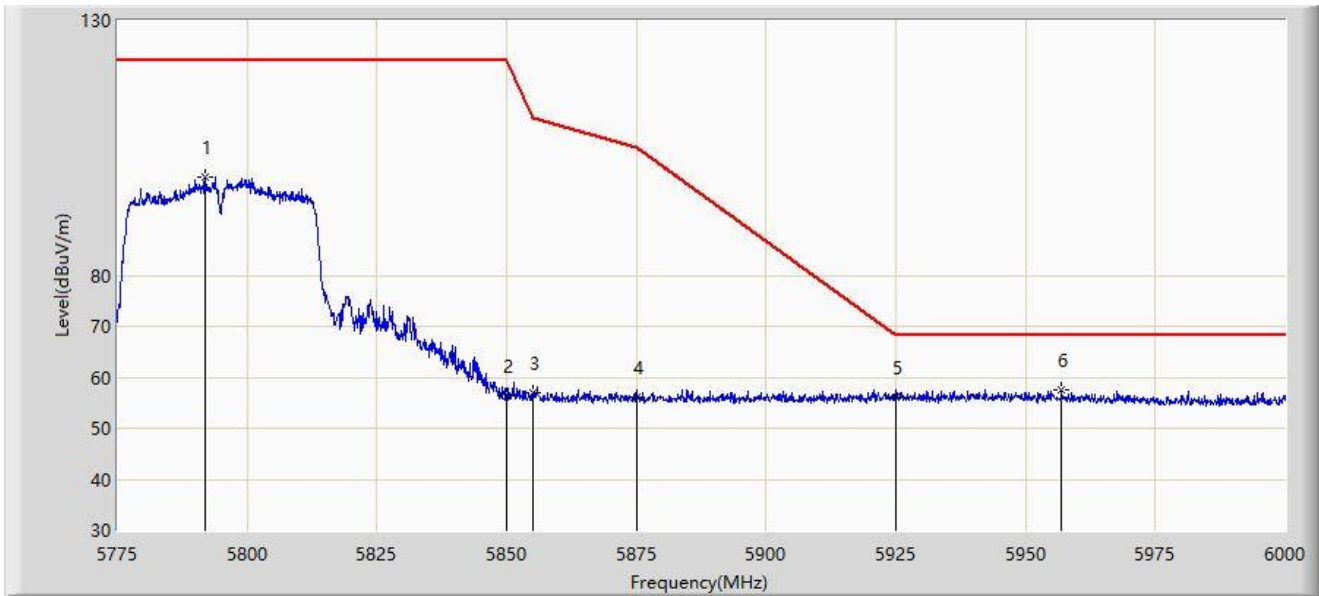


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5791.875	99.319	96.089	N/A	N/A	3.230	PK
2		5850.000	56.390	53.052	-65.810	122.200	3.338	PK
3		5855.000	56.918	53.575	-53.882	110.800	3.343	PK
4		5875.000	56.132	52.735	-49.068	105.200	3.397	PK
5		5925.000	55.993	52.263	-12.207	68.200	3.731	PK
6	*	5956.913	57.670	53.844	-10.530	68.200	3.826	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

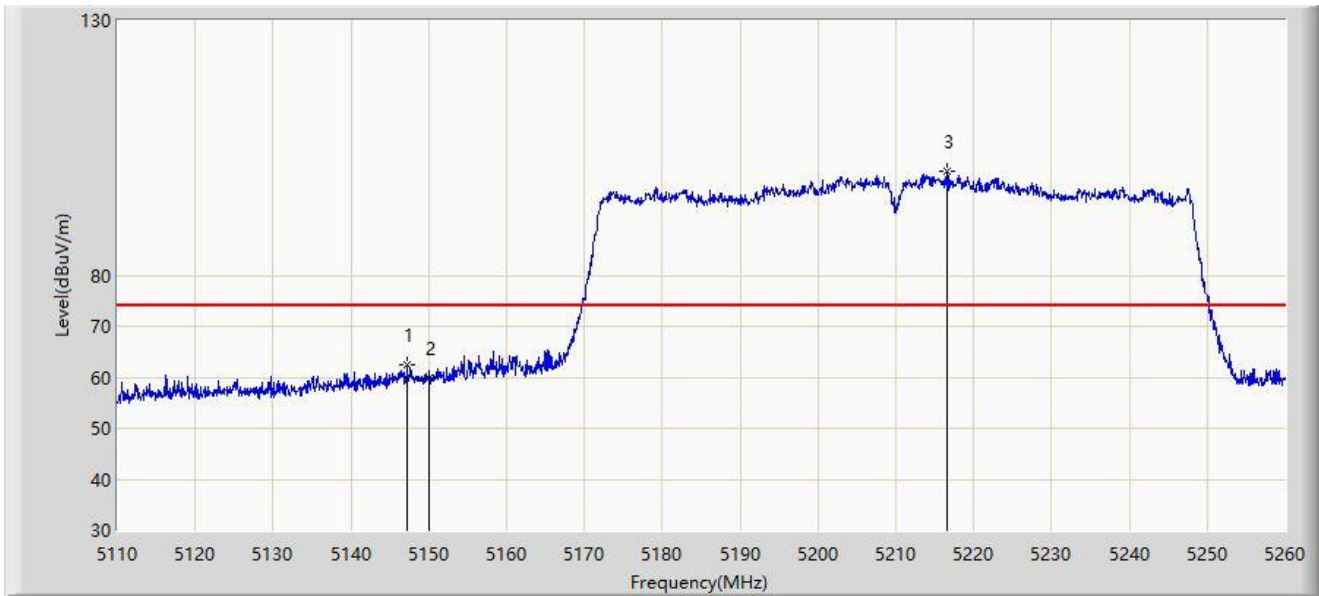


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.200	62.552	59.890	-11.448	74.000	2.662	PK
2		5150.000	59.744	57.078	-14.256	74.000	2.665	PK
3		5216.575	100.301	98.017	N/A	N/A	2.284	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

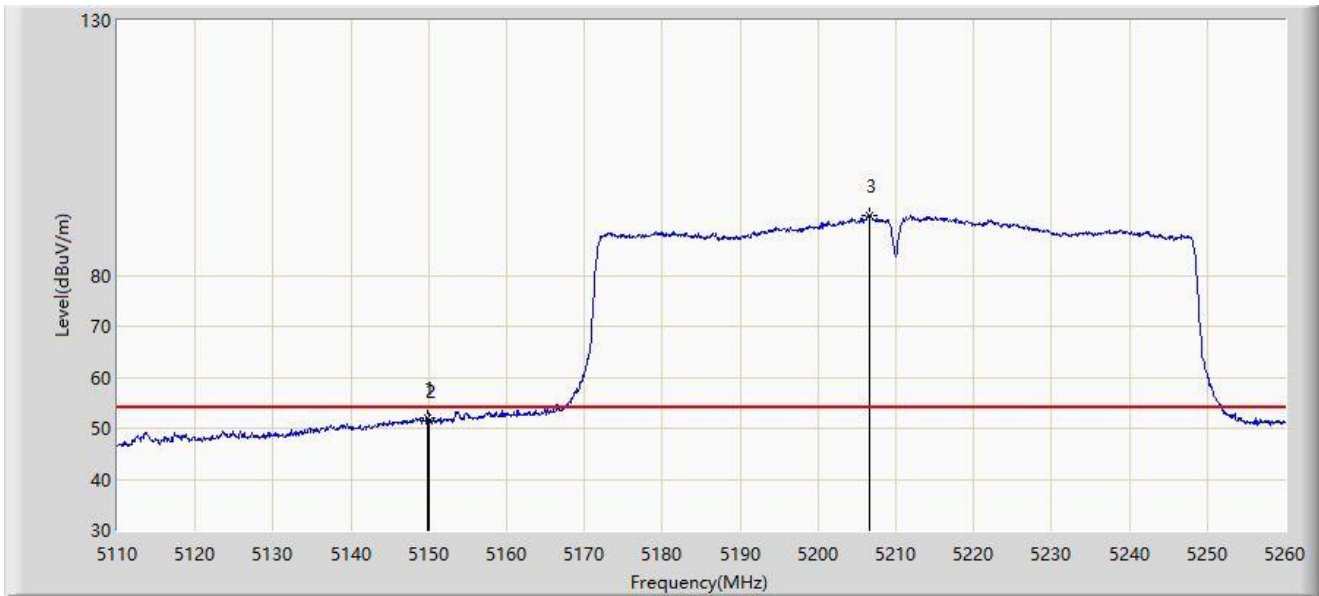


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.825	51.990	49.323	-2.010	54.000	2.667	AV
2		5150.000	51.550	48.884	-2.450	54.000	2.665	AV
3		5206.600	91.833	89.786	N/A	N/A	2.047	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

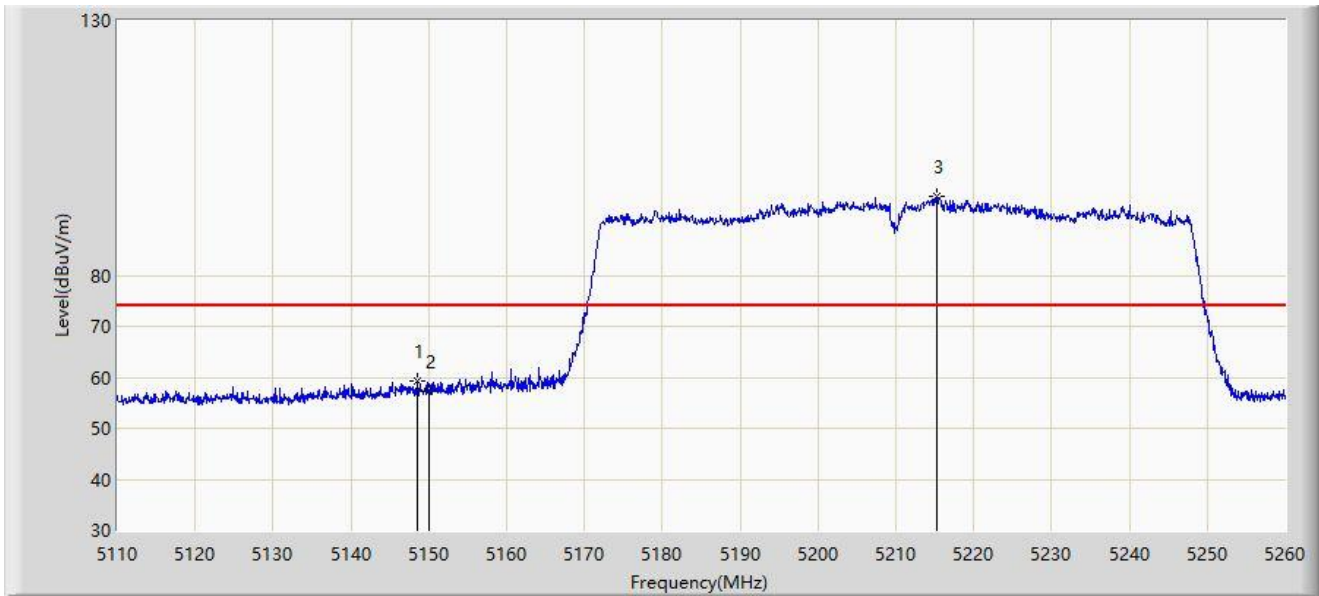

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.475	59.167	56.490	-14.833	74.000	2.676	PK
2		5150.000	57.241	54.575	-16.759	74.000	2.665	PK
3		5215.300	95.486	93.215	N/A	N/A	2.271	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

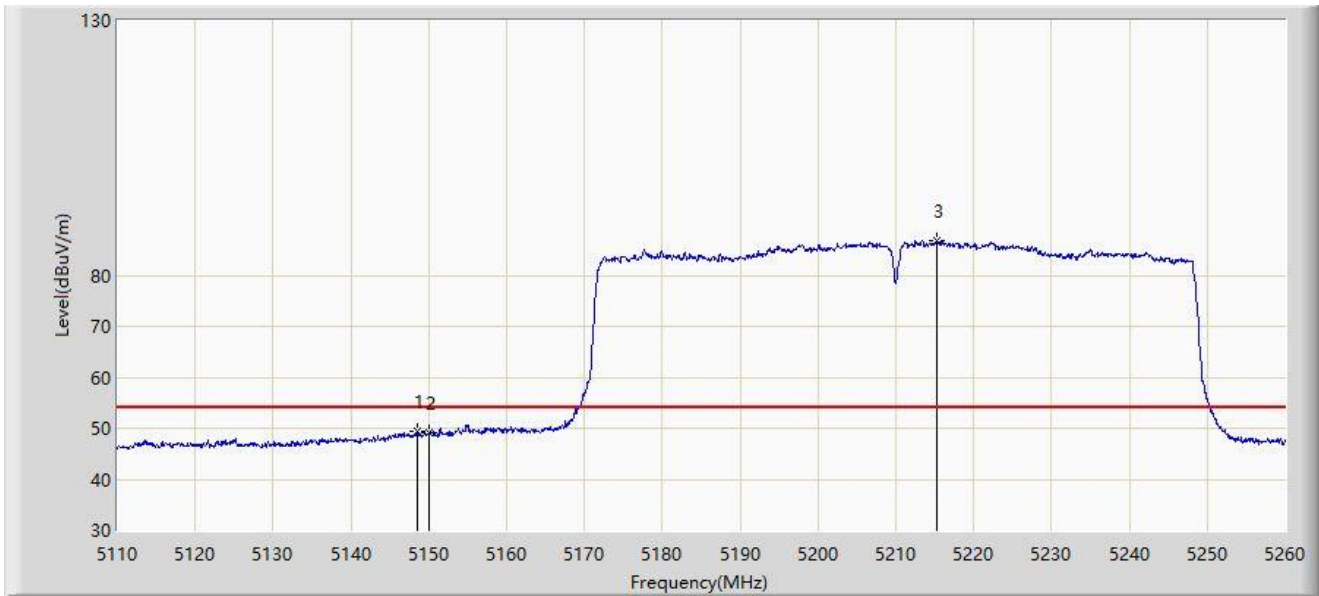


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.625	49.302	46.627	-4.698	54.000	2.676	AV
2		5150.000	49.036	46.370	-4.964	54.000	2.665	AV
3		5215.300	86.940	84.669	N/A	N/A	2.271	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

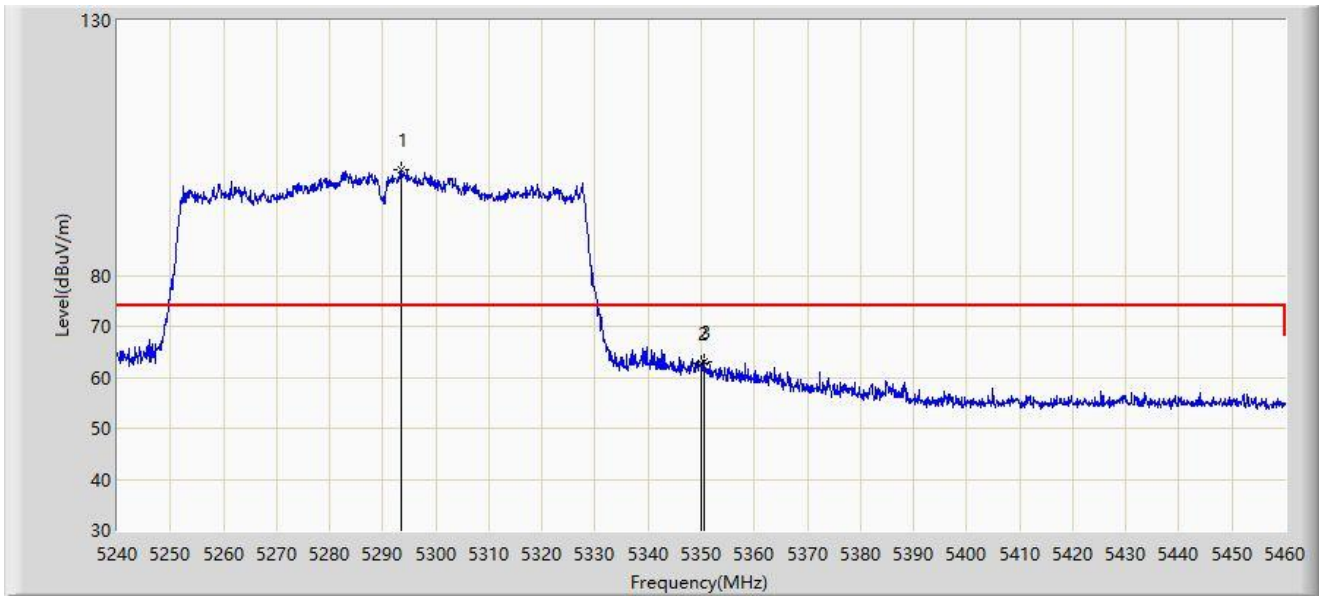


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5293.460	100.607	98.774	N/A	N/A	1.833	PK
2		5350.000	62.768	61.257	-11.232	74.000	1.511	PK
3	*	5350.660	63.058	61.548	-10.942	74.000	1.509	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

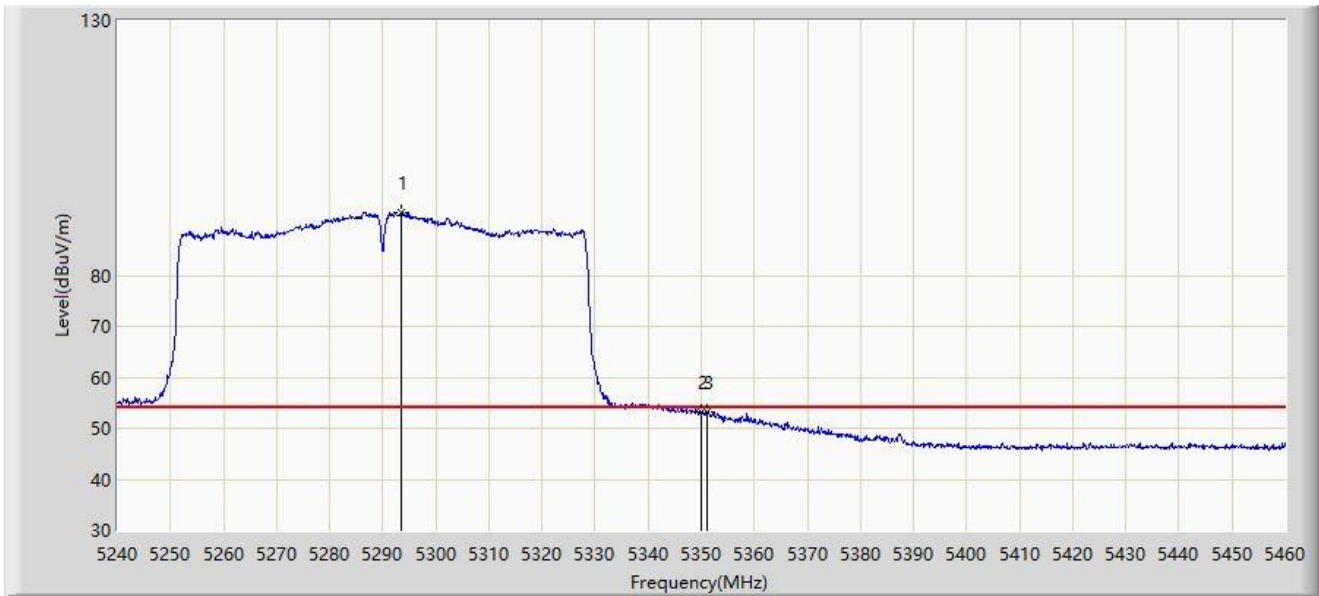


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5293.460	92.341	90.508	N/A	N/A	1.833	AV
2		5350.000	53.182	51.671	-0.818	54.000	1.511	AV
3	*	5351.100	53.325	51.816	-0.675	54.000	1.510	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

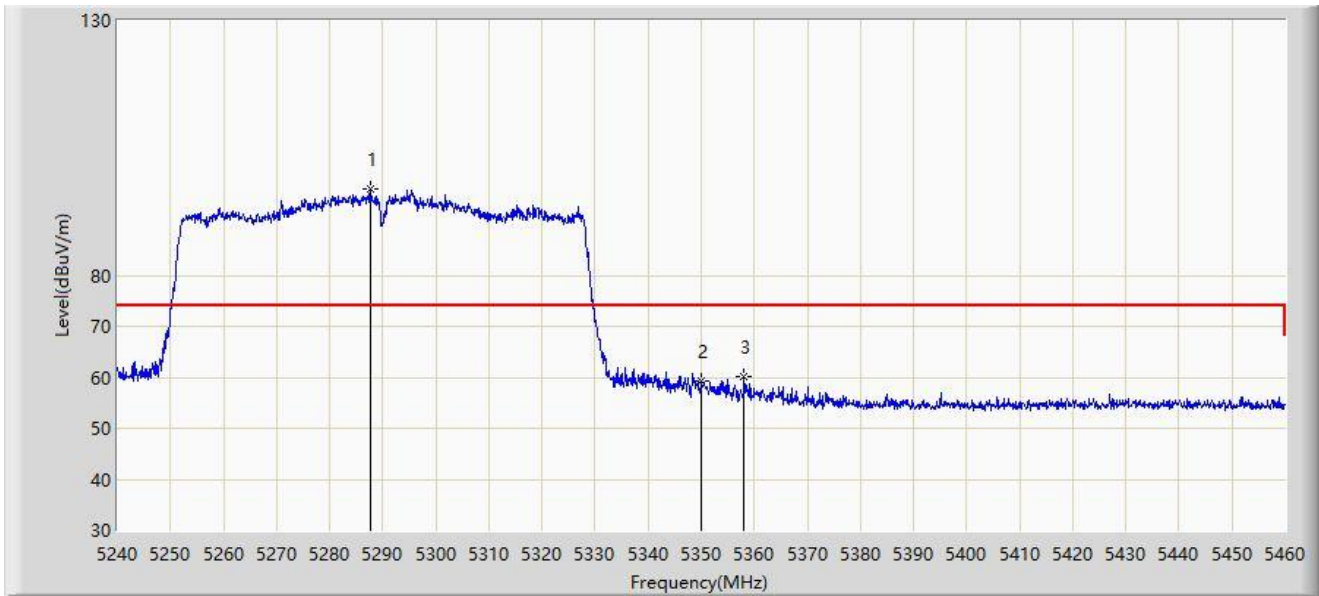


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5287.630	96.837	94.972	N/A	N/A	1.865	PK
2		5350.000	59.211	57.700	-14.789	74.000	1.511	PK
3	*	5358.030	60.221	58.626	-13.779	74.000	1.594	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

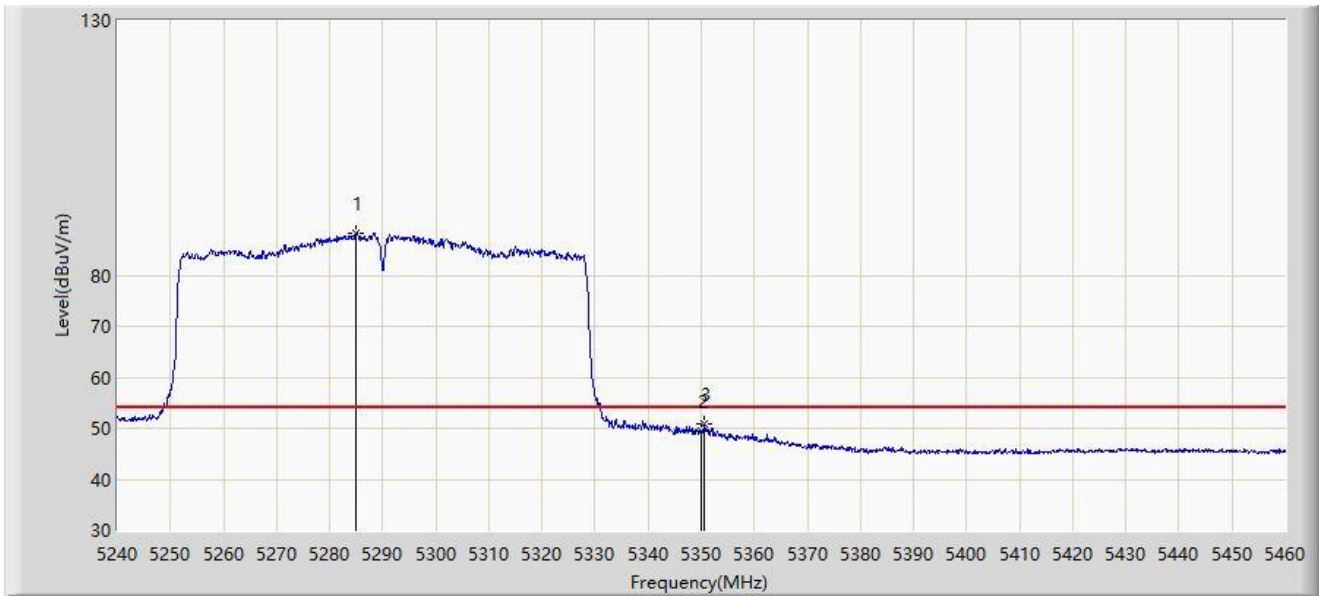


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5284.990	88.377	86.497	N/A	N/A	1.879	AV
2		5350.000	49.411	47.900	-4.589	54.000	1.511	AV
3	*	5350.550	50.980	49.470	-3.020	54.000	1.510	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

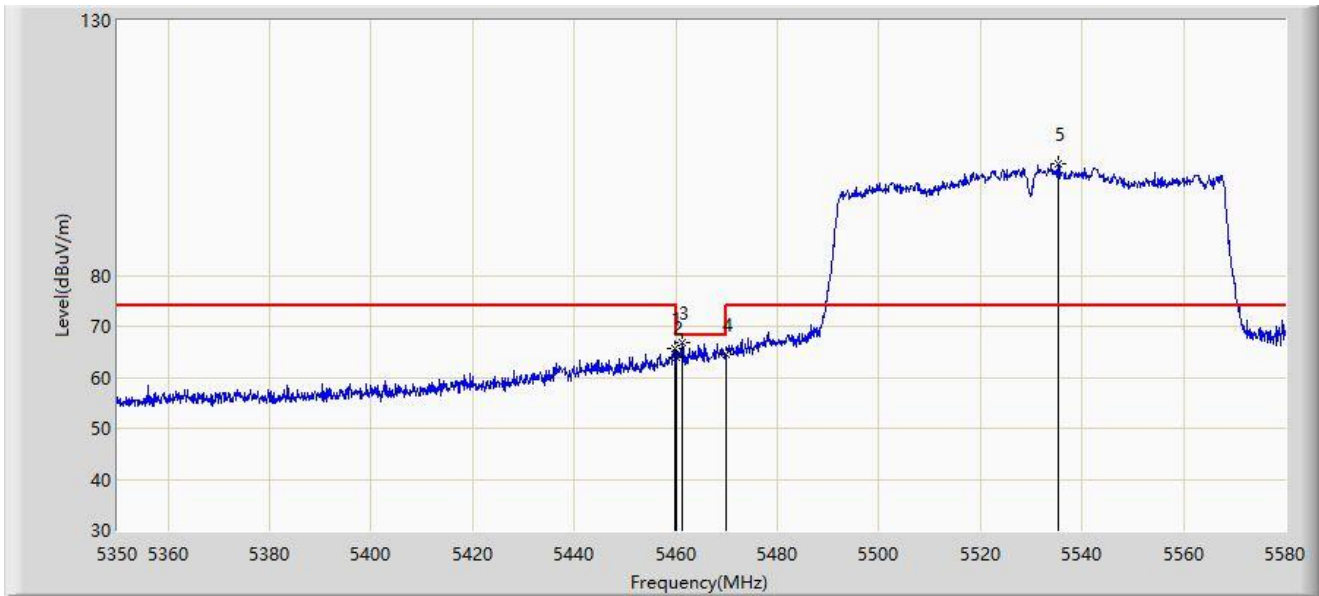


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.710	65.742	63.611	-8.258	74.000	2.131	PK
2		5460.000	64.012	61.878	-9.988	74.000	2.134	PK
3	*	5461.320	66.810	64.661	-1.390	68.200	2.148	PK
4		5470.000	64.464	62.220	-3.736	68.200	2.244	PK
5		5535.380	101.879	99.638	N/A	N/A	2.240	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

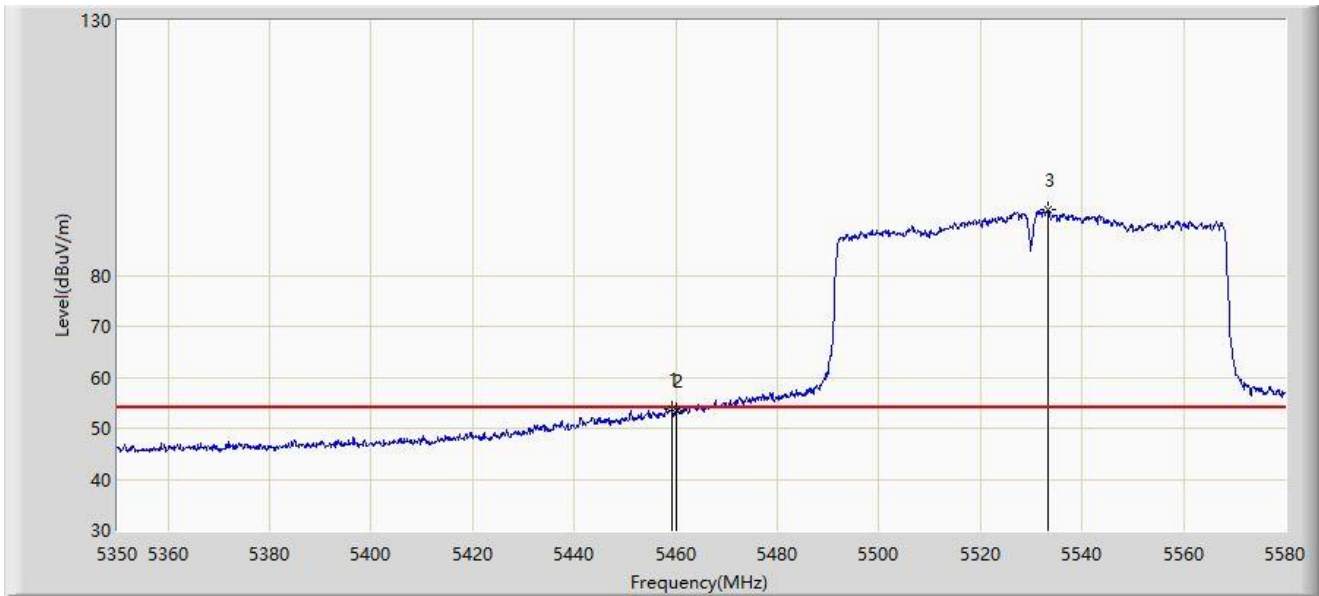


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.135	53.674	51.550	-0.326	54.000	2.124	AV
2		5460.000	53.415	51.281	-0.585	54.000	2.134	AV
3		5533.425	92.820	90.630	N/A	N/A	2.189	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

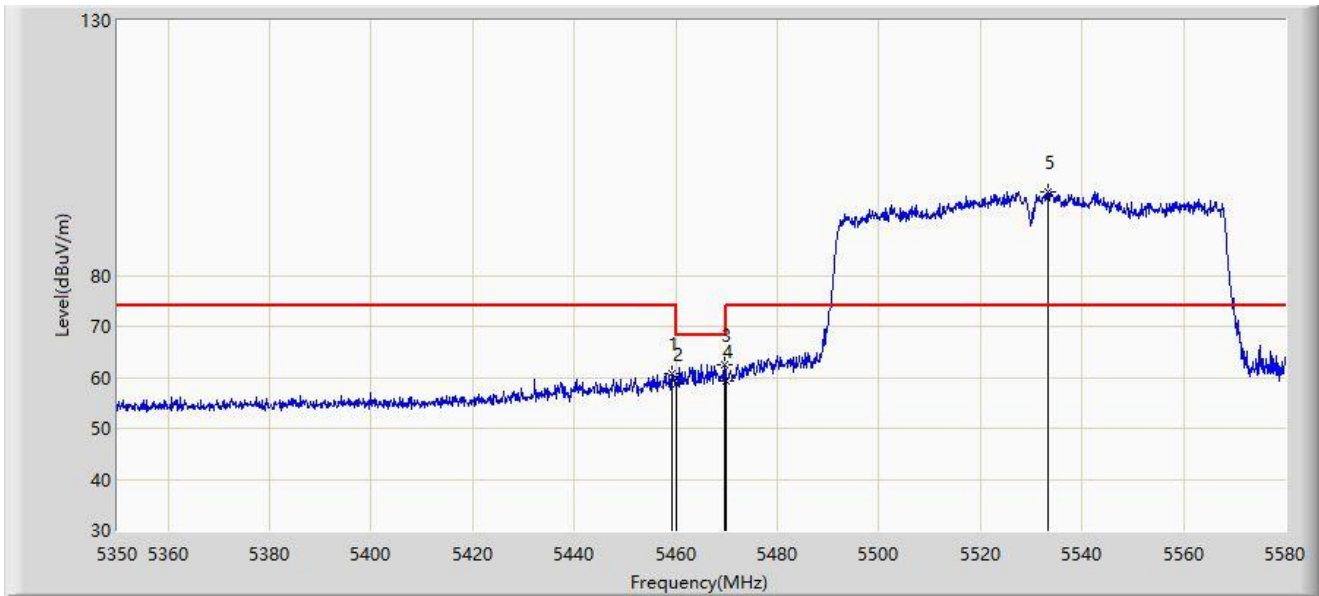

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.135	60.733	58.609	-13.267	74.000	2.124	PK
2		5460.000	58.658	56.524	-15.342	74.000	2.134	PK
3	*	5469.485	62.453	60.215	-5.747	68.200	2.239	PK
4		5470.000	59.347	57.103	-8.853	68.200	2.244	PK
5		5533.310	96.501	94.314	N/A	N/A	2.187	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

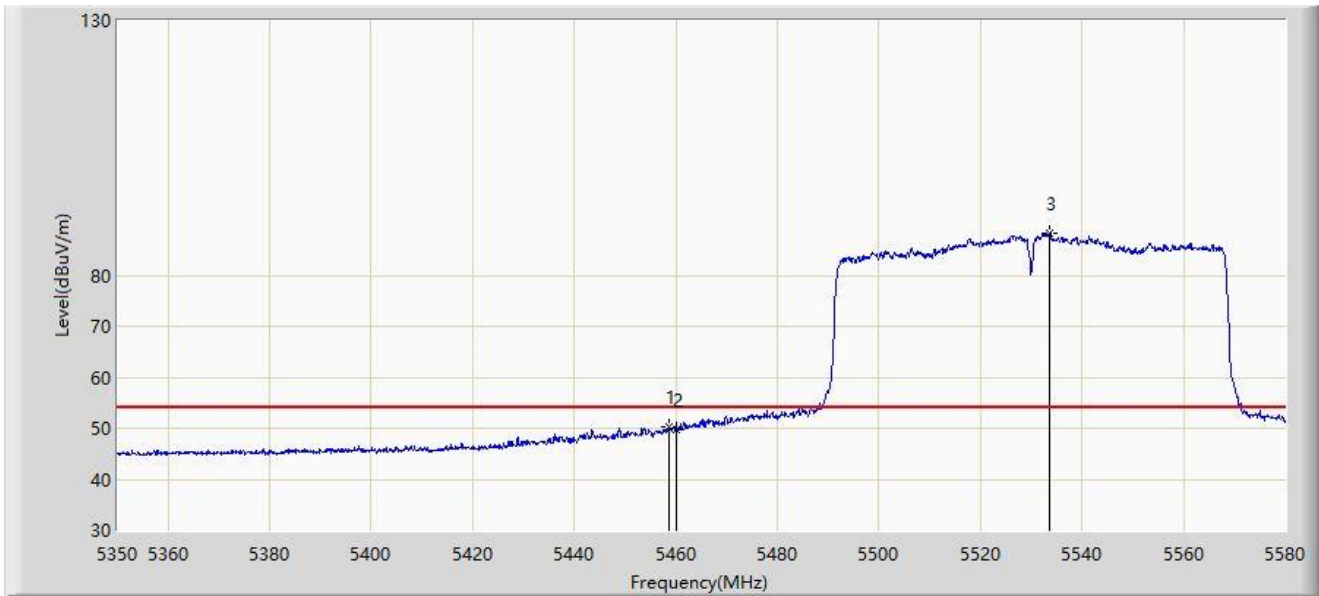


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5458.560	50.179	48.061	-3.821	54.000	2.118	AV
2		5460.000	49.793	47.659	-4.207	54.000	2.134	AV
3		5533.655	88.388	86.192	N/A	N/A	2.196	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

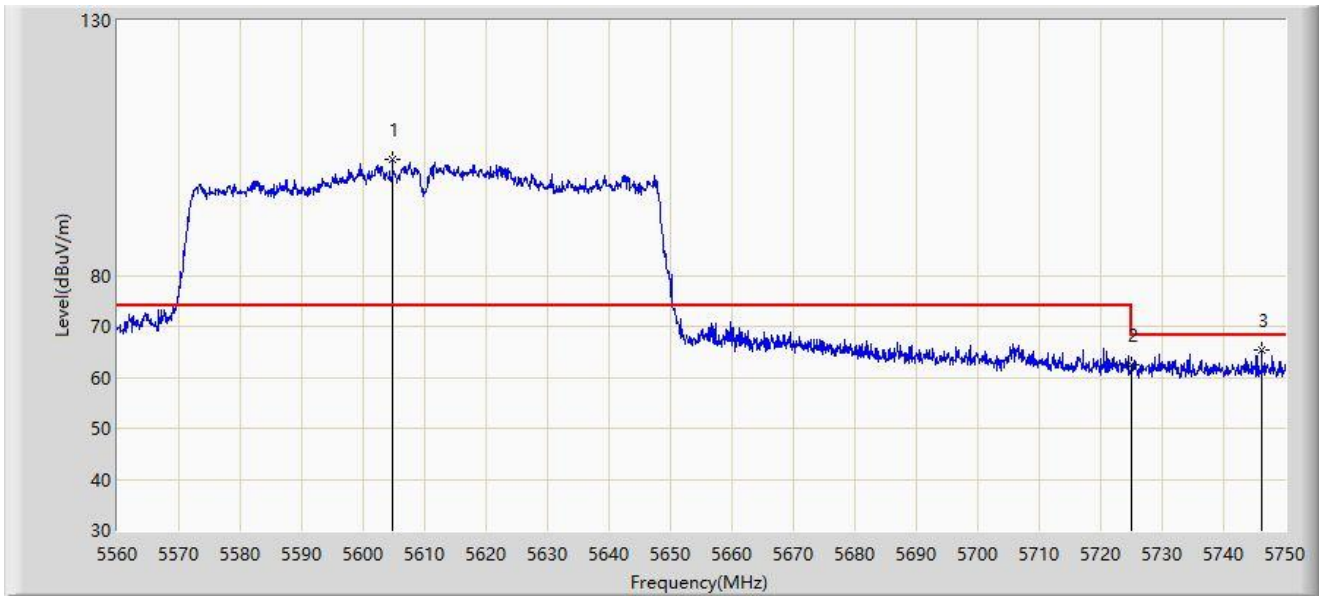


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5604.745	102.854	100.415	N/A	N/A	2.438	PK
2		5725.000	62.364	59.480	-5.836	68.200	2.884	PK
3	*	5746.200	65.273	62.167	-2.927	68.200	3.106	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

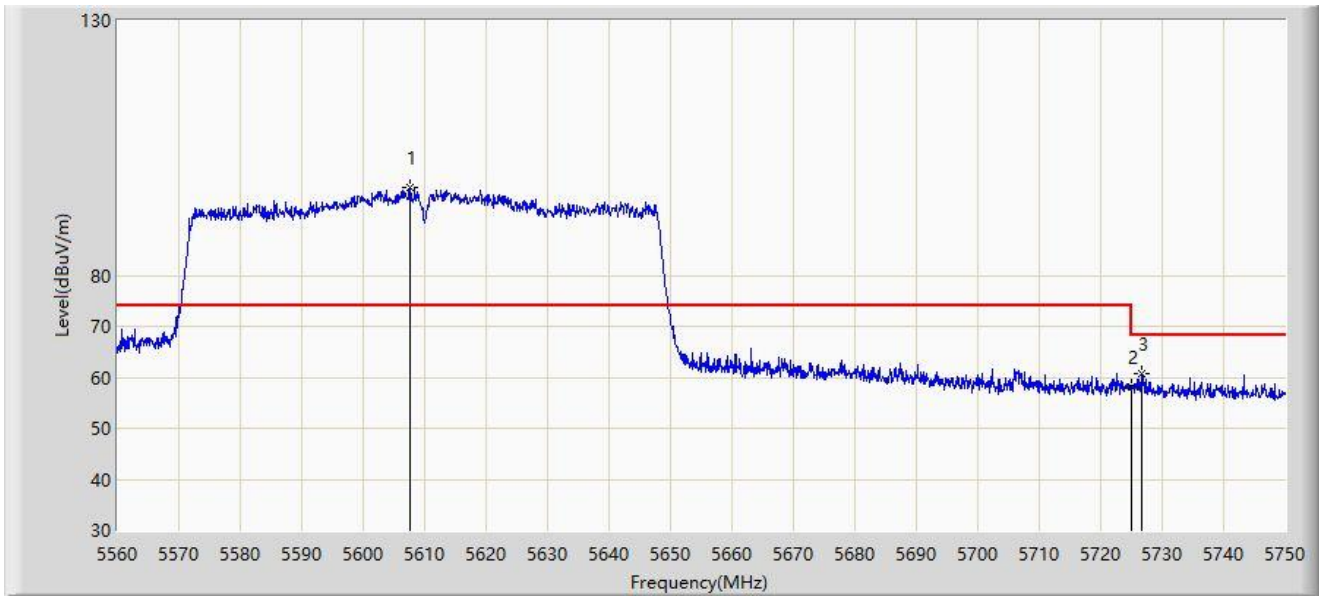


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5607.500	97.111	94.646	N/A	N/A	2.464	PK
2		5725.000	58.089	55.205	-10.111	68.200	2.884	PK
3	*	5726.630	60.763	57.865	-7.437	68.200	2.898	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

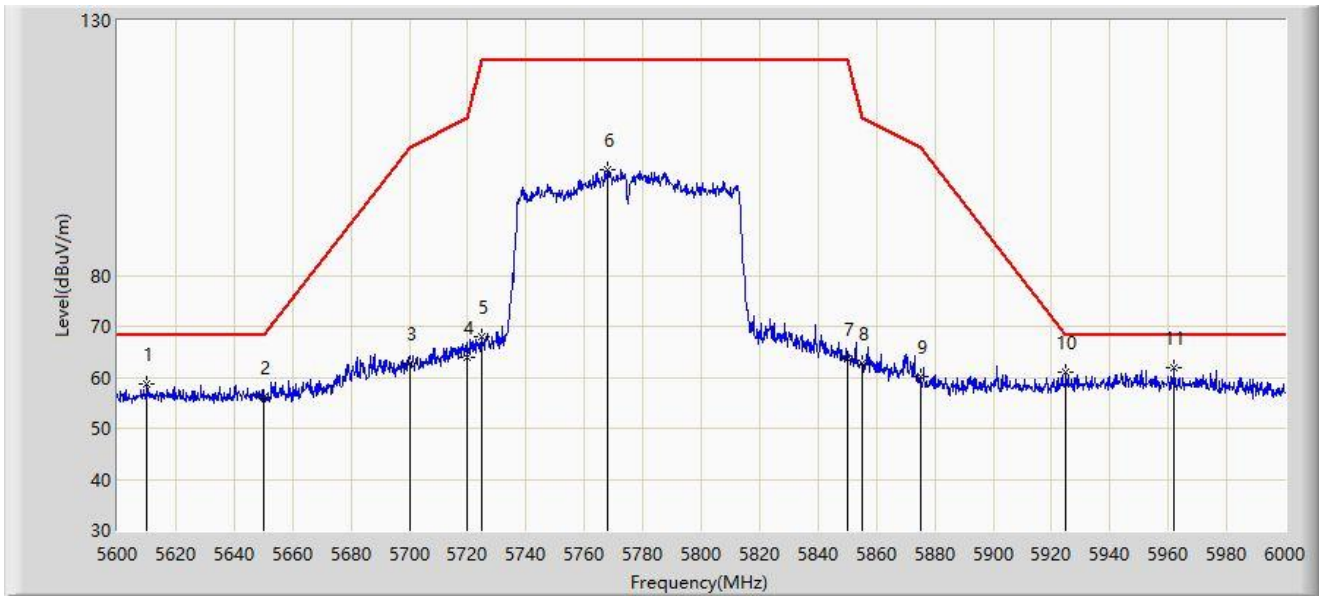


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5610.200	58.682	56.224	-9.518	68.200	2.458	PK
2		5650.000	56.047	53.449	-12.153	68.200	2.598	PK
3		5700.000	62.771	59.873	-42.429	105.200	2.897	PK
4		5720.000	64.019	61.171	-46.781	110.800	2.848	PK
5		5725.000	67.853	64.969	-54.347	122.200	2.884	PK
6		5768.000	100.678	97.520	N/A	N/A	3.158	PK
7		5850.000	63.666	60.328	-58.534	122.200	3.338	PK
8		5855.000	62.867	59.524	-47.933	110.800	3.343	PK
9		5875.000	60.192	56.795	-45.008	105.200	3.397	PK
10		5925.000	61.055	57.325	-7.145	68.200	3.731	PK
11	*	5962.000	61.979	58.198	-6.221	68.200	3.781	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

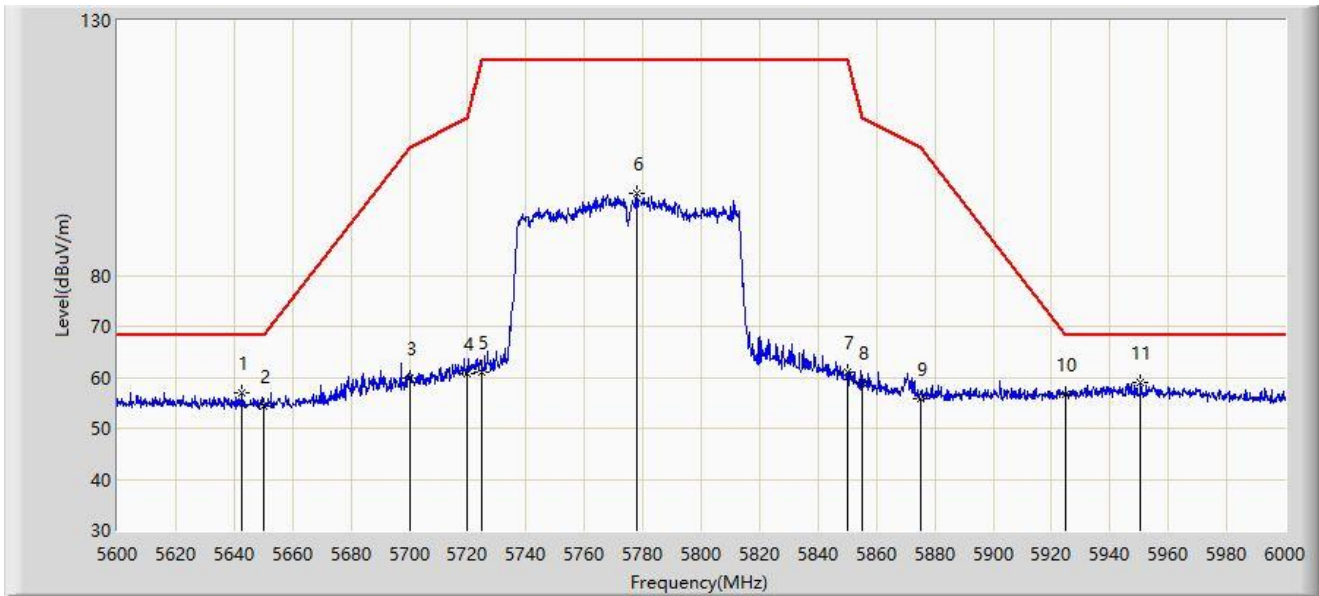


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5642.800	57.096	54.515	-11.104	68.200	2.581	PK
2		5650.000	54.282	51.684	-13.918	68.200	2.598	PK
3		5700.000	59.790	56.892	-45.410	105.200	2.897	PK
4		5720.000	60.655	57.807	-50.145	110.800	2.848	PK
5		5725.000	61.073	58.189	-61.127	122.200	2.884	PK
6		5777.800	95.970	92.876	N/A	N/A	3.094	PK
7		5850.000	60.982	57.644	-61.218	122.200	3.338	PK
8		5855.000	59.085	55.742	-51.715	110.800	3.343	PK
9		5875.000	55.882	52.485	-49.318	105.200	3.397	PK
10		5925.000	56.631	52.901	-11.569	68.200	3.731	PK
11	*	5950.600	58.966	55.083	-9.234	68.200	3.882	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

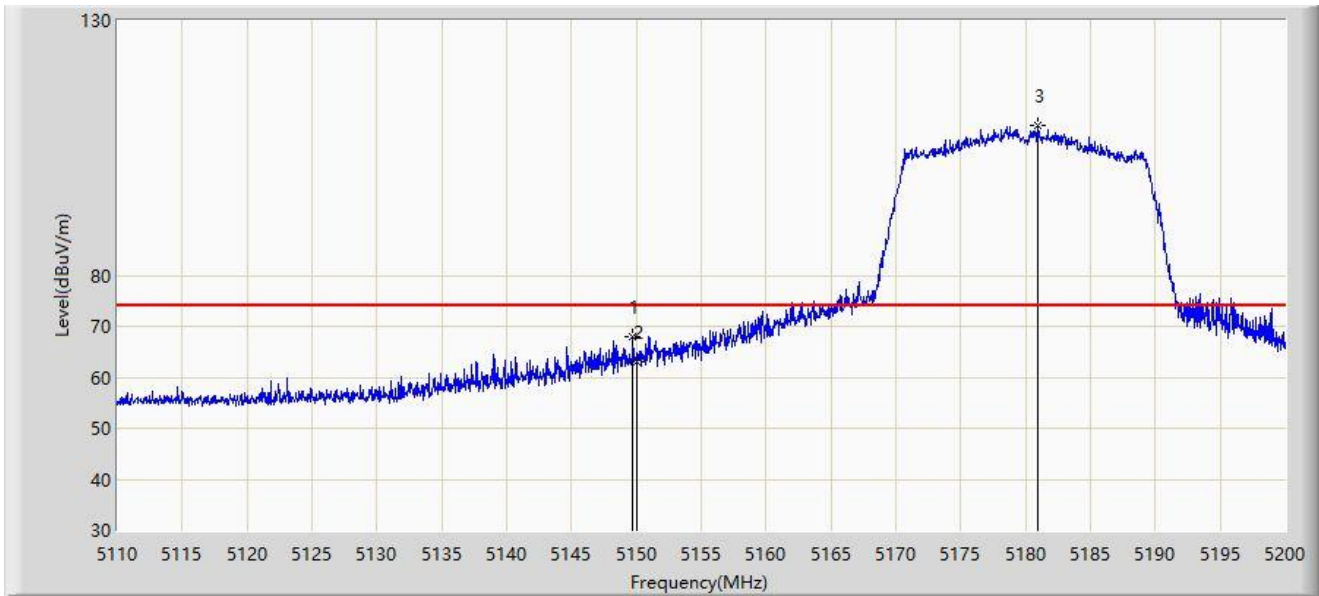


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.735	67.978	65.311	-6.022	74.000	2.667	PK
2		5150.000	63.176	60.510	-10.824	74.000	2.665	PK
3		5180.965	109.341	107.325	N/A	N/A	2.016	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

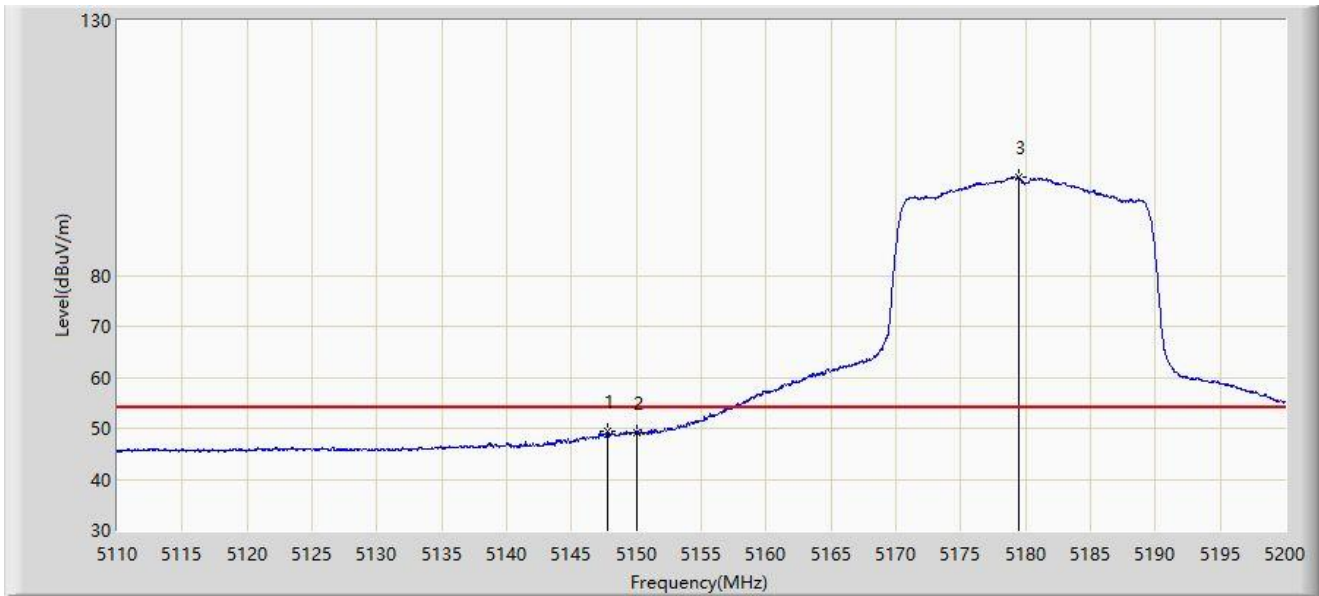


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5147.755	49.321	46.647	-4.679	54.000	2.674	AV
2		5150.000	49.113	46.447	-4.887	54.000	2.665	AV
3		5179.435	99.349	97.281	N/A	N/A	2.067	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

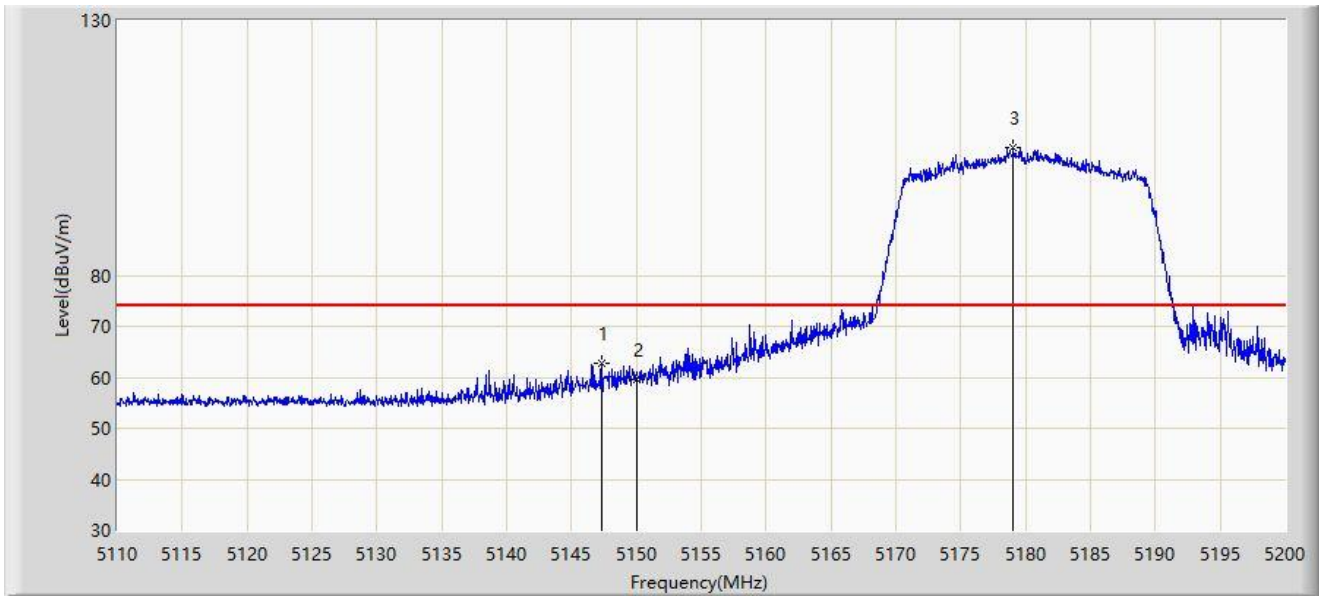

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.305	62.742	60.078	-11.258	74.000	2.665	PK
2		5150.000	59.463	56.797	-14.537	74.000	2.665	PK
3		5179.030	105.024	102.942	N/A	N/A	2.082	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

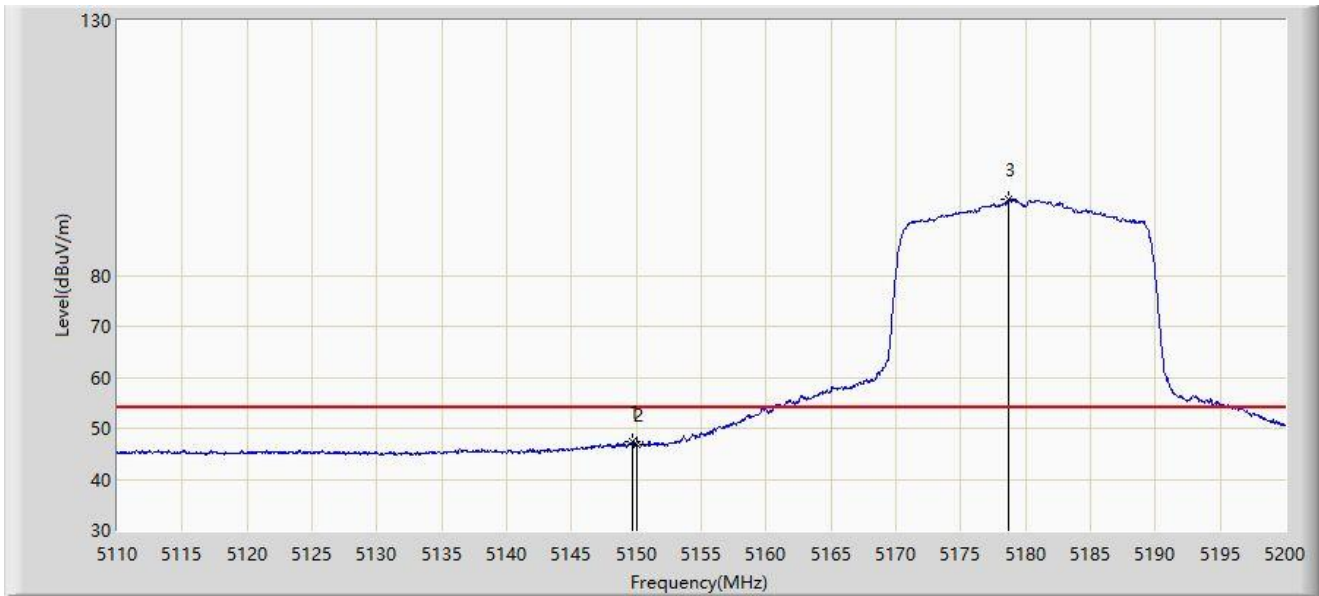


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.690	47.387	44.719	-6.613	54.000	2.667	AV
2		5150.000	46.849	44.183	-7.151	54.000	2.665	AV
3		5178.715	94.857	92.765	N/A	N/A	2.092	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

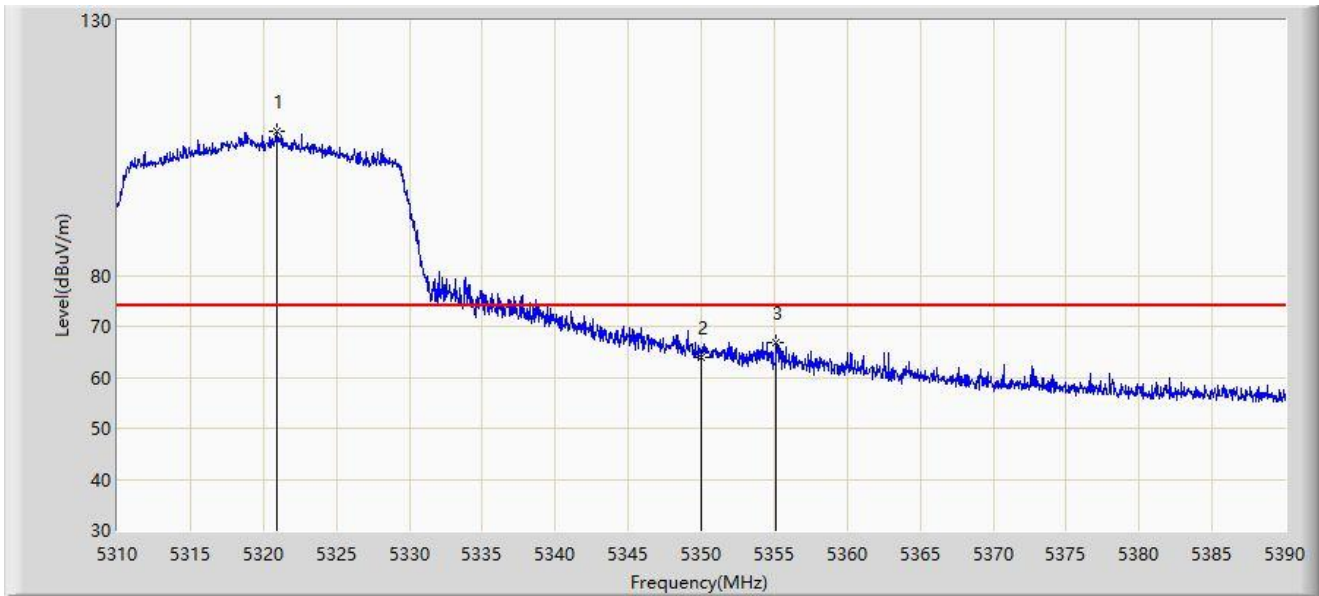


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5320.960	108.234	106.679	N/A	N/A	1.555	PK
2		5350.000	63.930	62.419	-10.070	74.000	1.511	PK
3	*	5355.160	66.817	65.264	-7.183	74.000	1.554	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

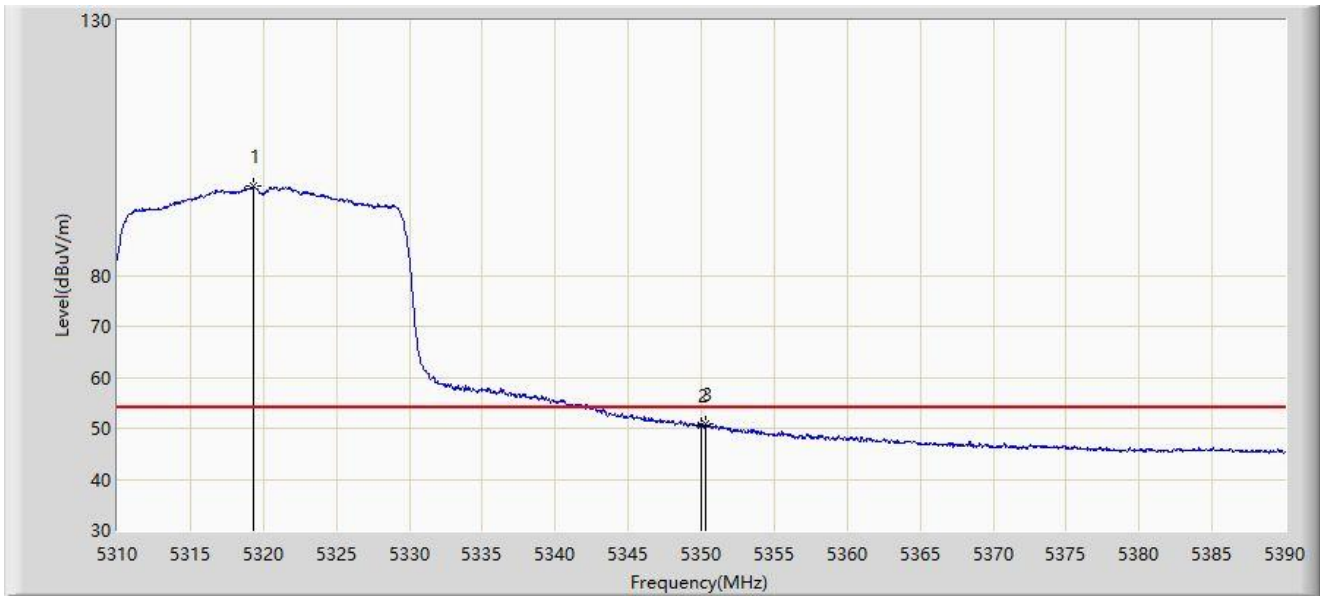


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.360	97.460	95.902	N/A	N/A	1.558	AV
2		5350.000	50.484	48.973	-3.516	54.000	1.511	AV
3	*	5350.320	50.738	49.228	-3.262	54.000	1.511	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

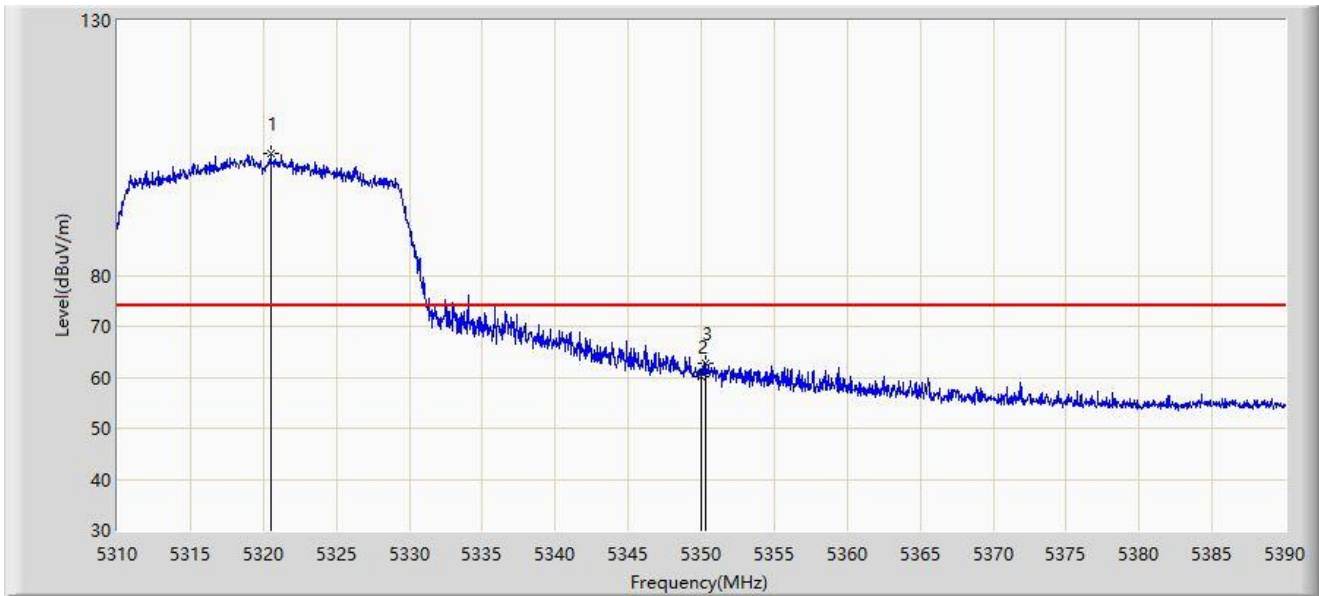


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.480	103.855	102.299	N/A	N/A	1.555	PK
2		5350.000	60.229	58.718	-13.771	74.000	1.511	PK
3	*	5350.320	62.897	61.387	-11.103	74.000	1.511	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

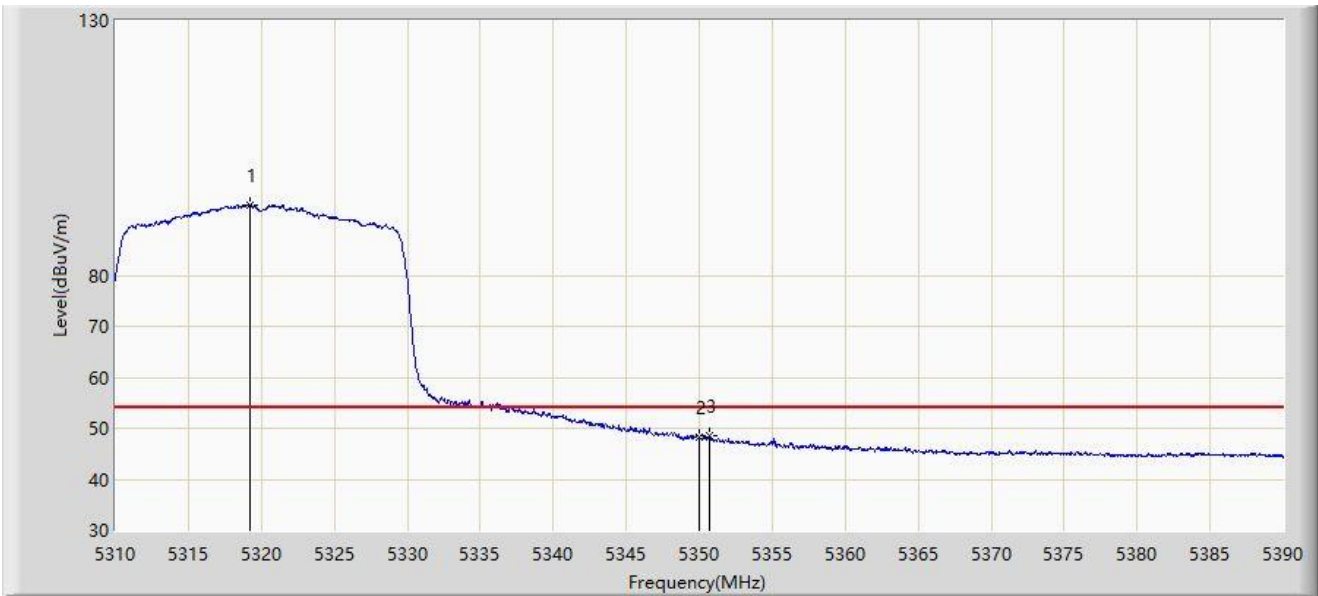


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.200	93.818	92.260	N/A	N/A	1.558	AV
2		5350.000	48.373	46.862	-5.627	54.000	1.511	AV
3	*	5350.720	48.460	46.950	-5.540	54.000	1.510	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

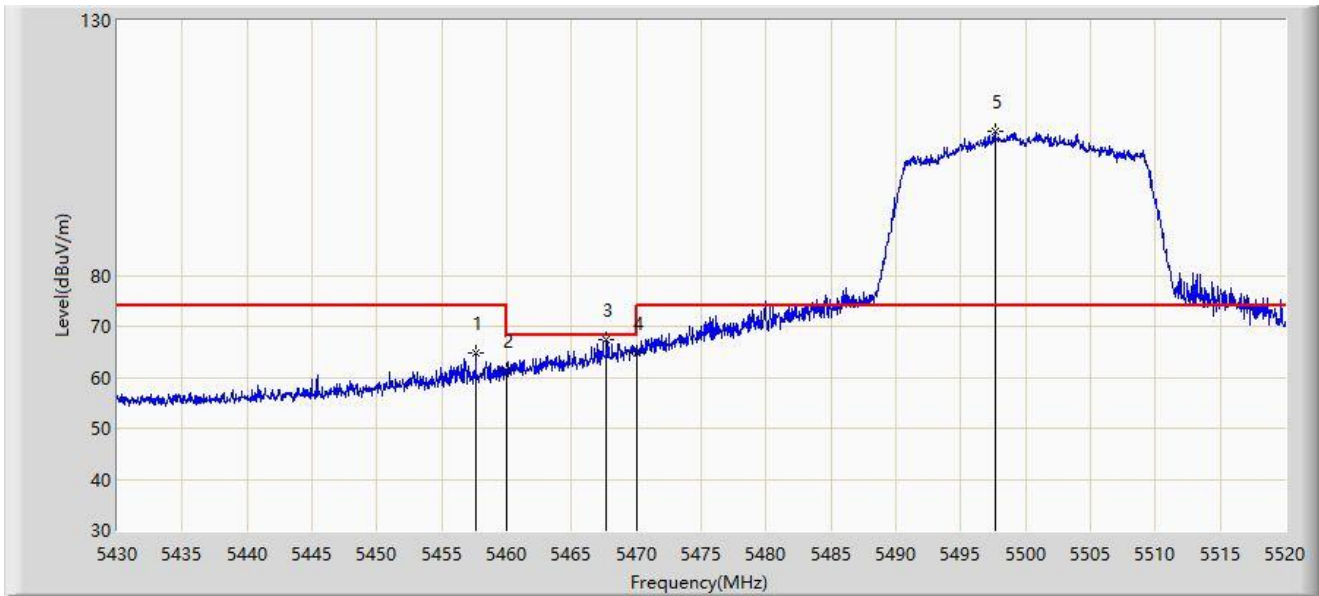


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.630	64.874	62.766	-9.126	74.000	2.108	PK
2		5460.000	61.241	59.107	-12.759	74.000	2.134	PK
3	*	5467.665	67.260	65.042	-0.940	68.200	2.219	PK
4		5470.000	64.711	62.467	-3.489	68.200	2.244	PK
5		5497.635	108.137	105.615	N/A	N/A	2.522	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

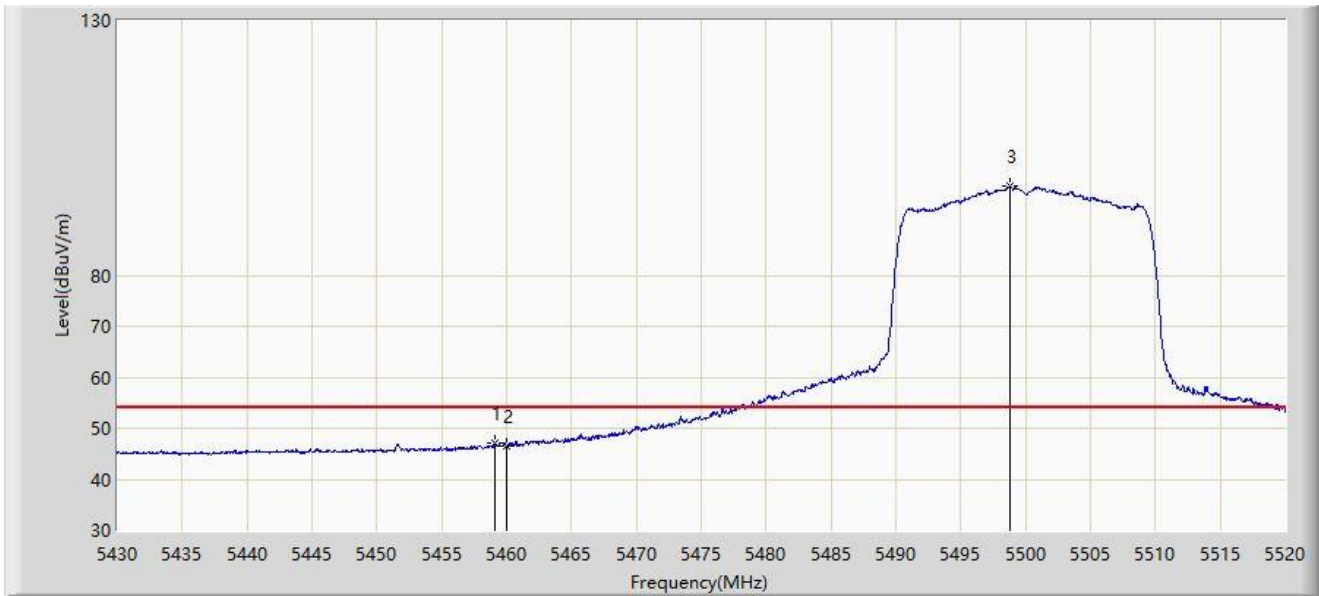


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.115	47.056	44.932	-6.944	54.000	2.124	AV
2		5460.000	46.504	44.370	-7.496	54.000	2.134	AV
3		5498.805	97.548	95.039	N/A	N/A	2.509	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

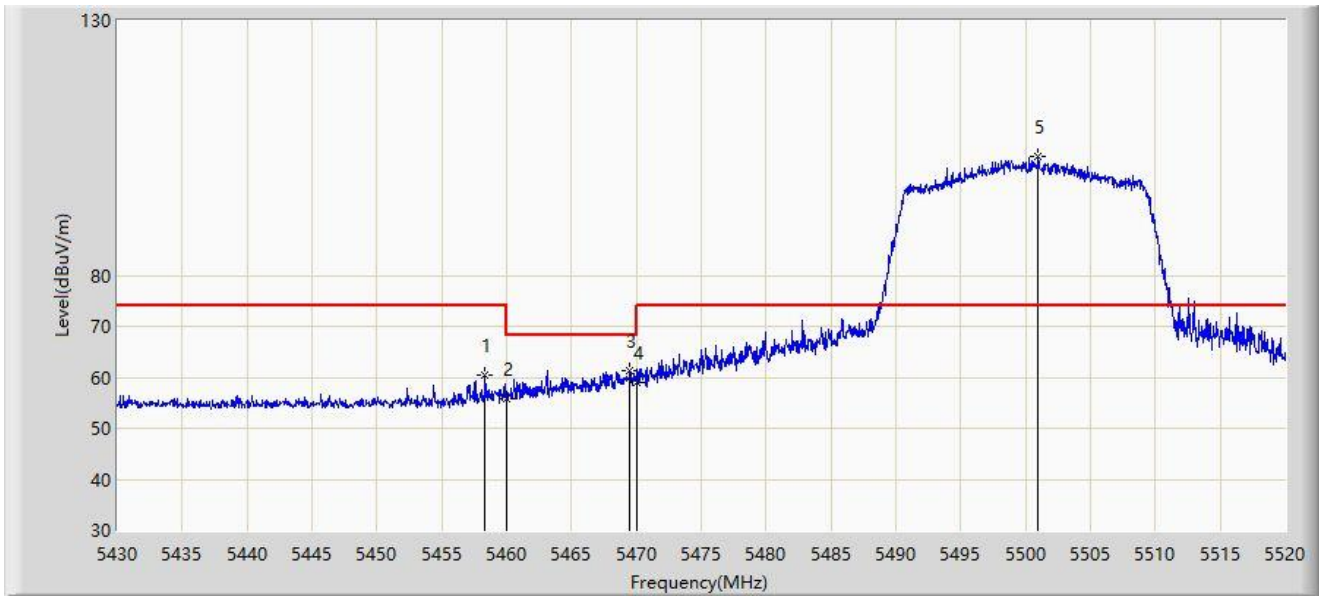

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.350	60.427	58.311	-13.573	74.000	2.116	PK
2		5460.000	55.874	53.740	-18.126	74.000	2.134	PK
3	*	5469.465	61.433	59.195	-6.767	68.200	2.239	PK
4		5470.000	58.952	56.708	-9.248	68.200	2.244	PK
5		5500.965	103.360	100.875	N/A	N/A	2.486	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

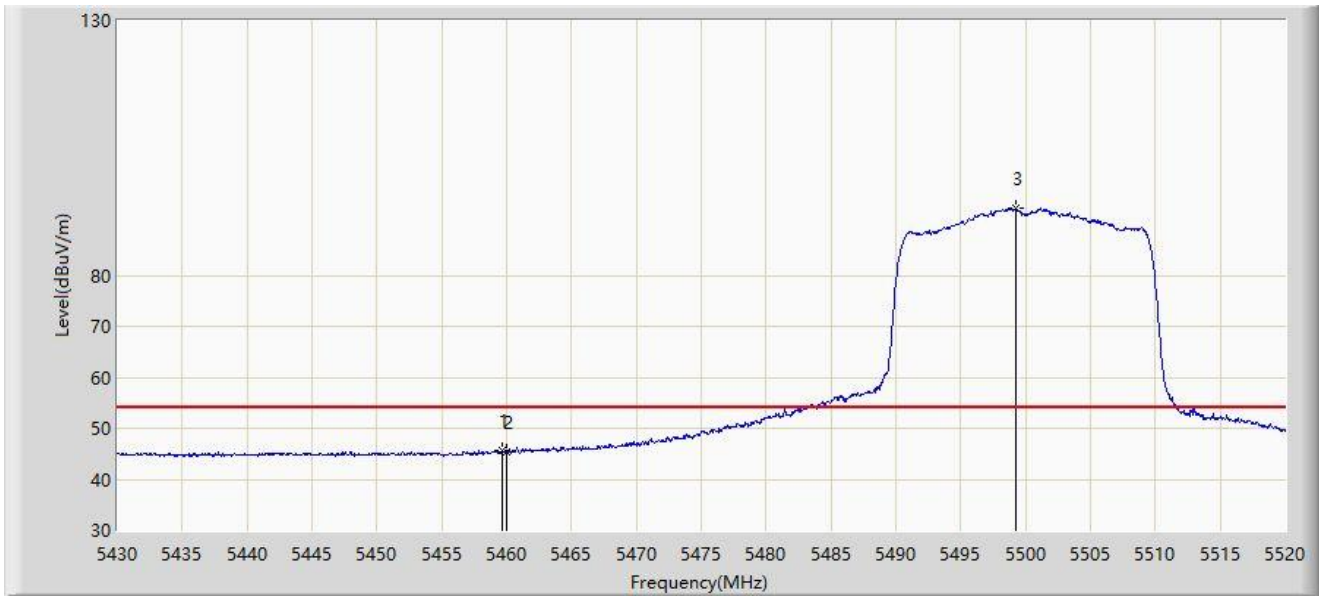


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.610	45.661	43.531	-8.339	54.000	2.130	AV
2		5460.000	45.237	43.103	-8.763	54.000	2.134	AV
3		5499.255	93.157	90.653	N/A	N/A	2.504	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

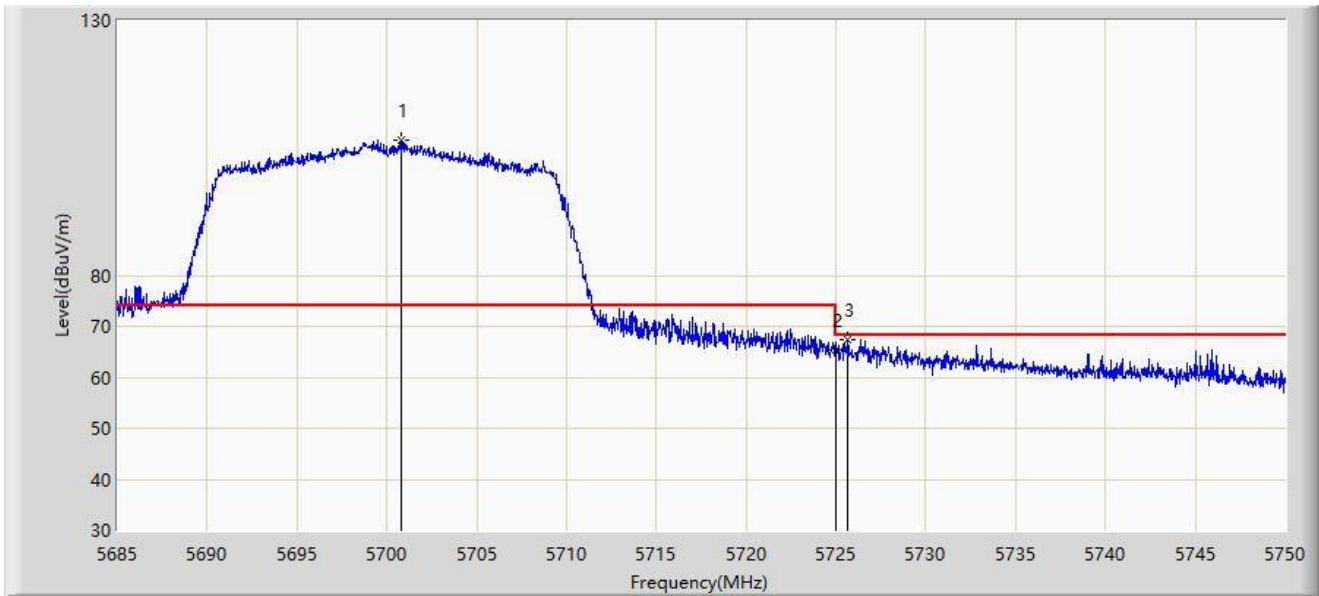


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5700.828	106.516	103.630	N/A	N/A	2.886	PK
2		5725.000	65.462	62.578	-2.738	68.200	2.884	PK
3	*	5725.658	67.359	64.470	-0.841	68.200	2.888	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

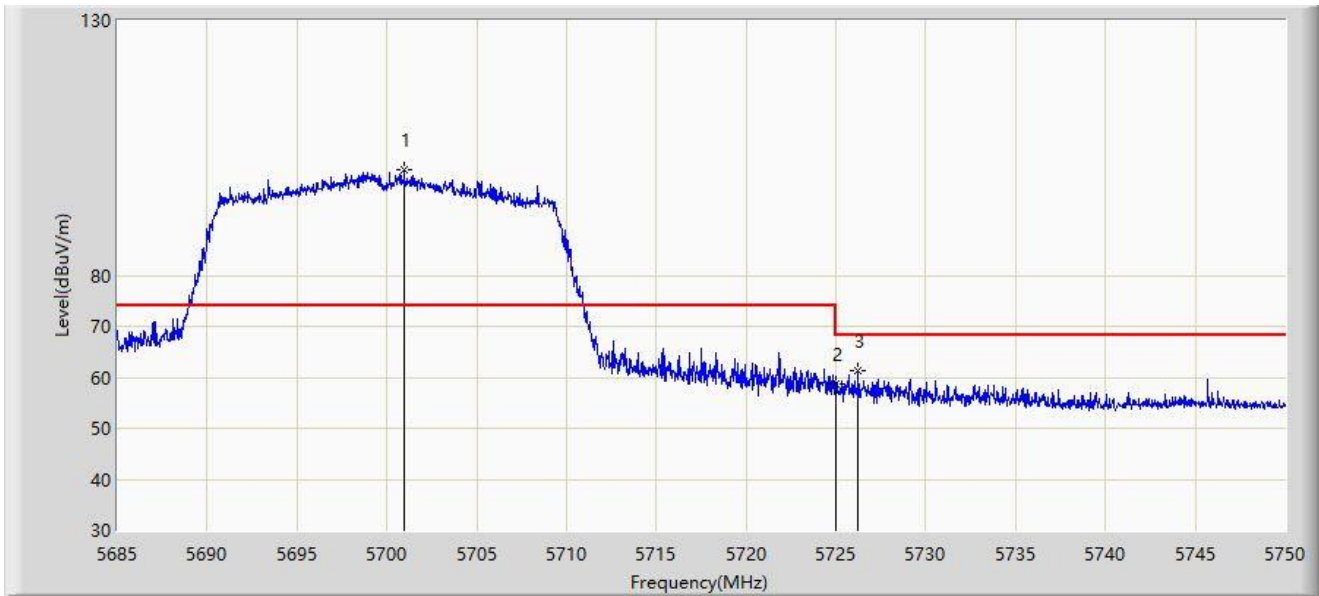


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5700.958	100.761	97.877	N/A	N/A	2.884	PK
2		5725.000	58.586	55.702	-9.614	68.200	2.884	PK
3	*	5726.243	61.173	58.279	-7.027	68.200	2.894	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

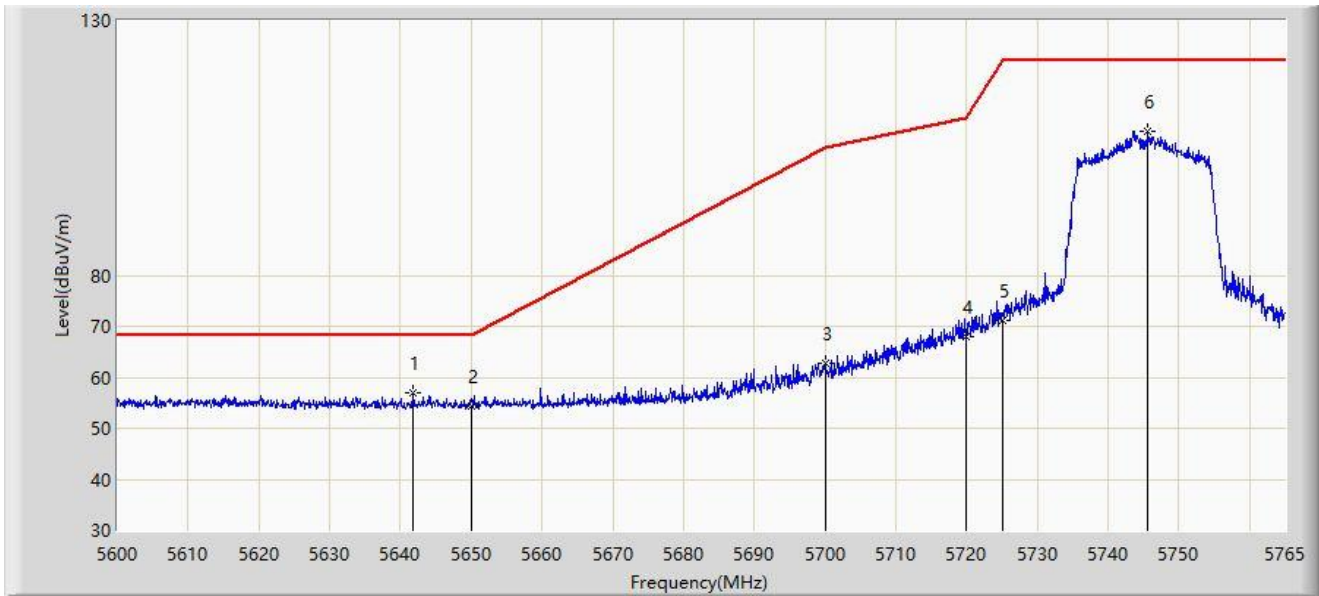


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5641.828	56.902	54.323	-11.298	68.200	2.579	PK
2		5650.000	54.441	51.843	-13.759	68.200	2.598	PK
3		5700.000	62.703	59.805	-42.497	105.200	2.897	PK
4		5720.000	68.048	65.200	-42.752	110.800	2.848	PK
5		5725.000	71.299	68.415	-50.901	122.200	2.884	PK
6		5745.612	108.265	105.164	N/A	N/A	3.100	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

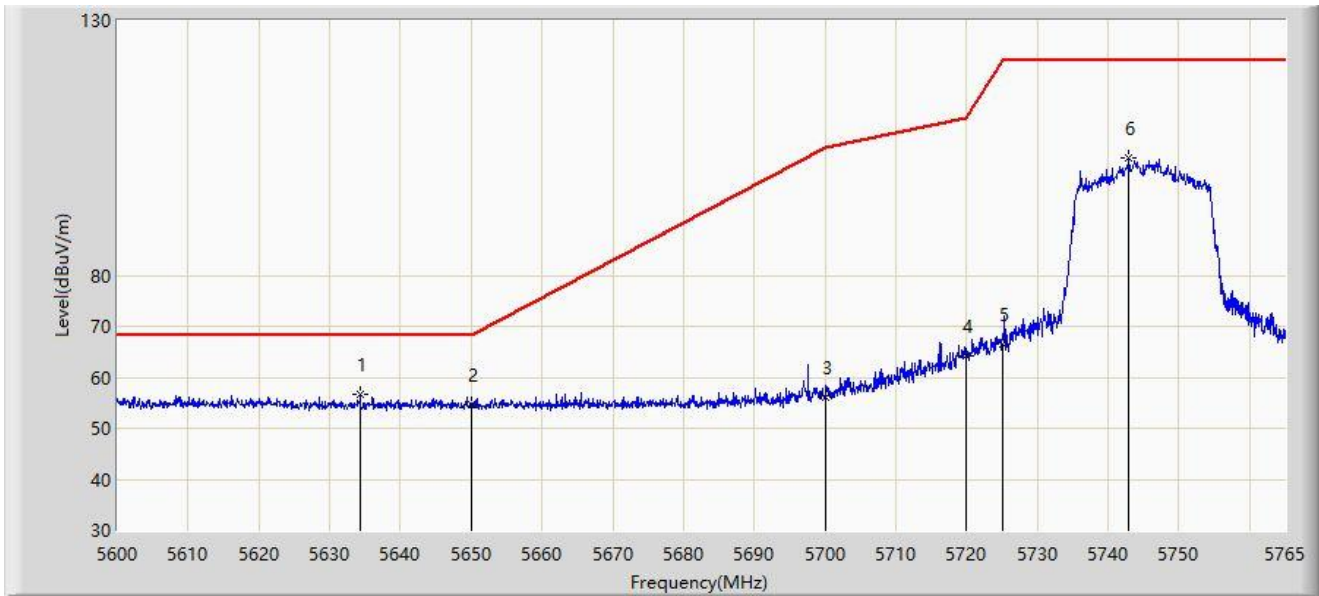


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5634.320	56.539	54.023	-11.661	68.200	2.516	PK
2		5650.000	54.763	52.165	-13.437	68.200	2.598	PK
3		5700.000	56.099	53.201	-49.101	105.200	2.897	PK
4		5720.000	64.073	61.225	-46.727	110.800	2.848	PK
5		5725.000	66.590	63.706	-55.610	122.200	2.884	PK
6		5742.973	103.019	99.940	N/A	N/A	3.079	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

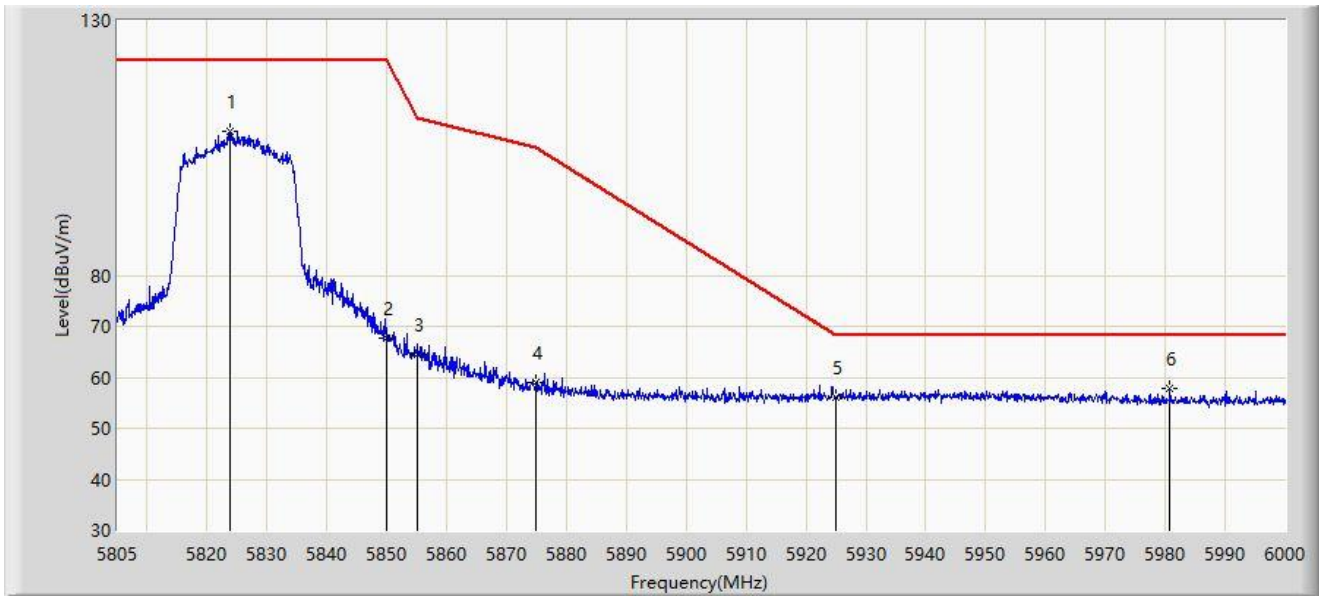


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5823.720	108.146	104.722	N/A	N/A	3.423	PK
2		5850.000	67.767	64.429	-54.433	122.200	3.338	PK
3		5855.000	64.356	61.013	-46.444	110.800	3.343	PK
4		5875.000	58.953	55.556	-46.247	105.200	3.397	PK
5		5925.000	56.036	52.306	-12.164	68.200	3.731	PK
6	*	5980.792	57.733	54.154	-10.467	68.200	3.579	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

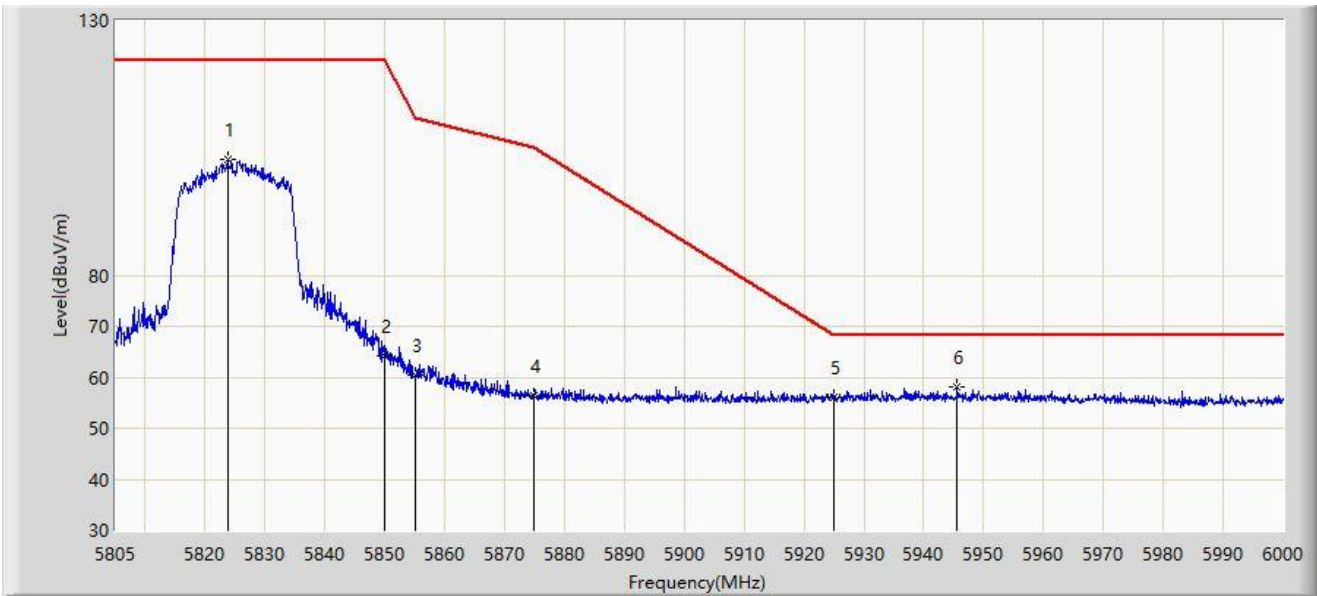


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.720	102.631	99.207	N/A	N/A	3.423	PK
2		5850.000	64.225	60.887	-57.975	122.200	3.338	PK
3		5855.000	60.419	57.076	-50.381	110.800	3.343	PK
4		5875.000	56.450	53.053	-48.750	105.200	3.397	PK
5		5925.000	56.145	52.415	-12.055	68.200	3.731	PK
6	*	5945.595	57.987	54.080	-10.213	68.200	3.907	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

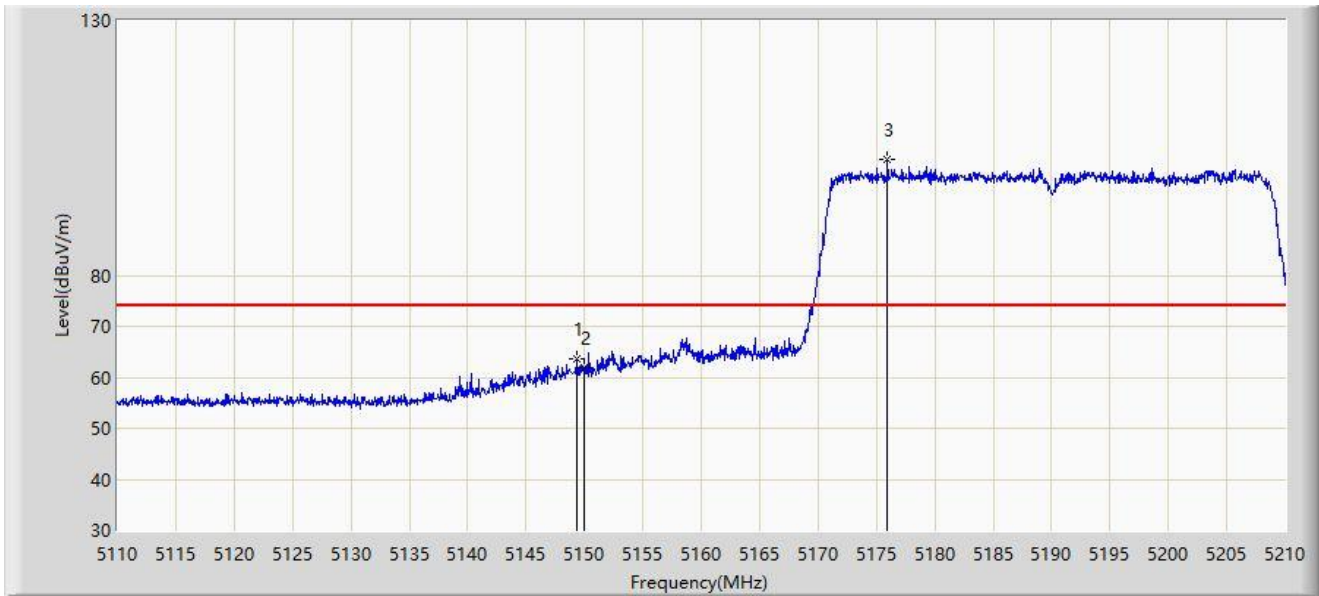

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.350	63.516	60.846	-10.484	74.000	2.670	PK
2		5150.000	61.848	59.182	-12.152	74.000	2.665	PK
3		5175.950	102.780	100.594	N/A	N/A	2.185	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

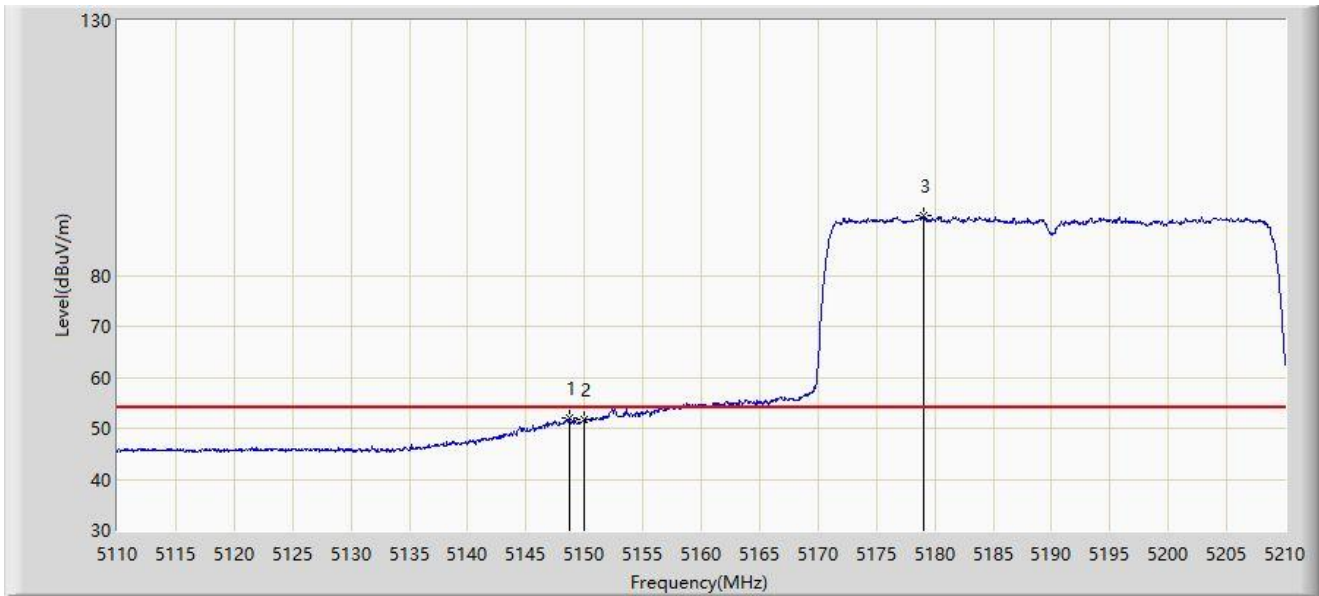


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.700	51.963	49.288	-2.037	54.000	2.675	AV
2		5150.000	51.604	48.938	-2.396	54.000	2.665	AV
3		5179.050	91.702	89.621	N/A	N/A	2.082	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

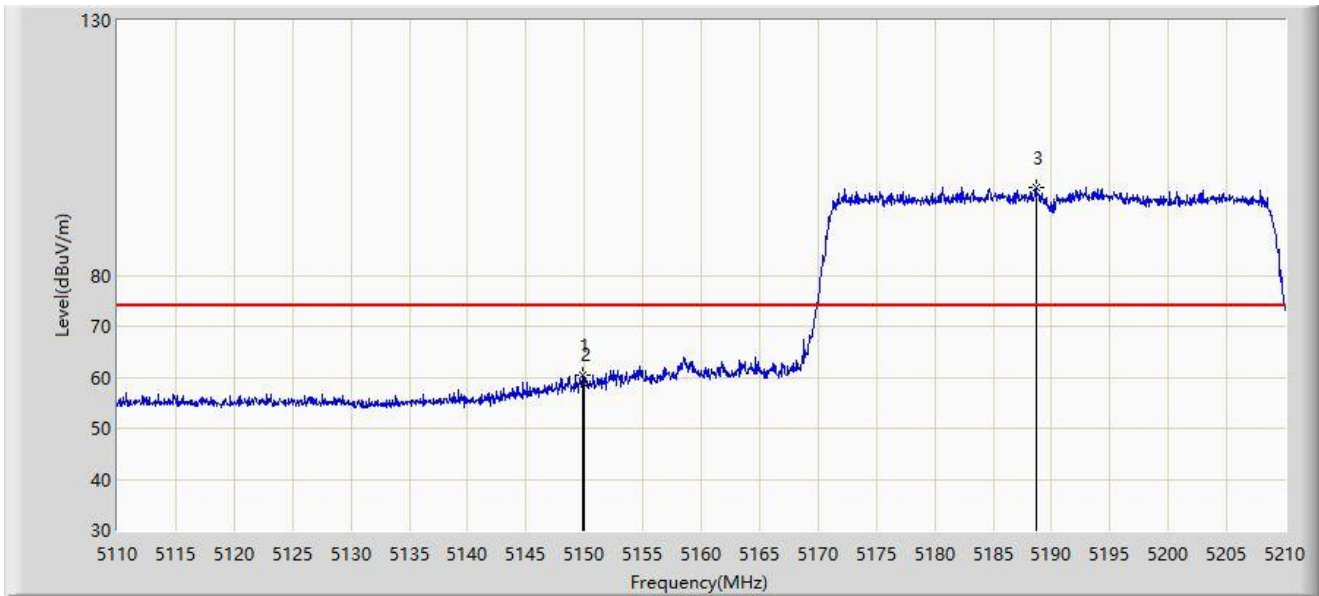


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.800	60.560	57.893	-13.440	74.000	2.667	PK
2		5150.000	58.555	55.889	-15.445	74.000	2.665	PK
3		5188.700	97.361	95.431	N/A	N/A	1.930	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

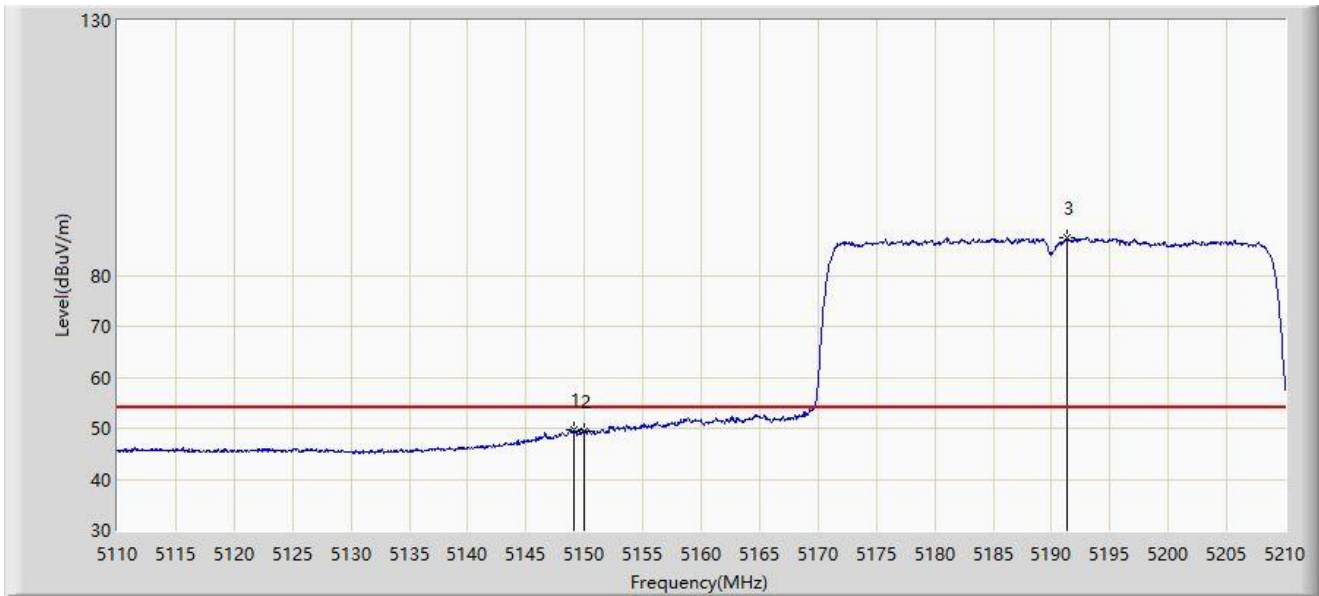


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.100	49.832	47.160	-4.168	54.000	2.671	AV
2		5150.000	49.398	46.732	-4.602	54.000	2.665	AV
3		5191.300	87.455	85.545	N/A	N/A	1.910	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

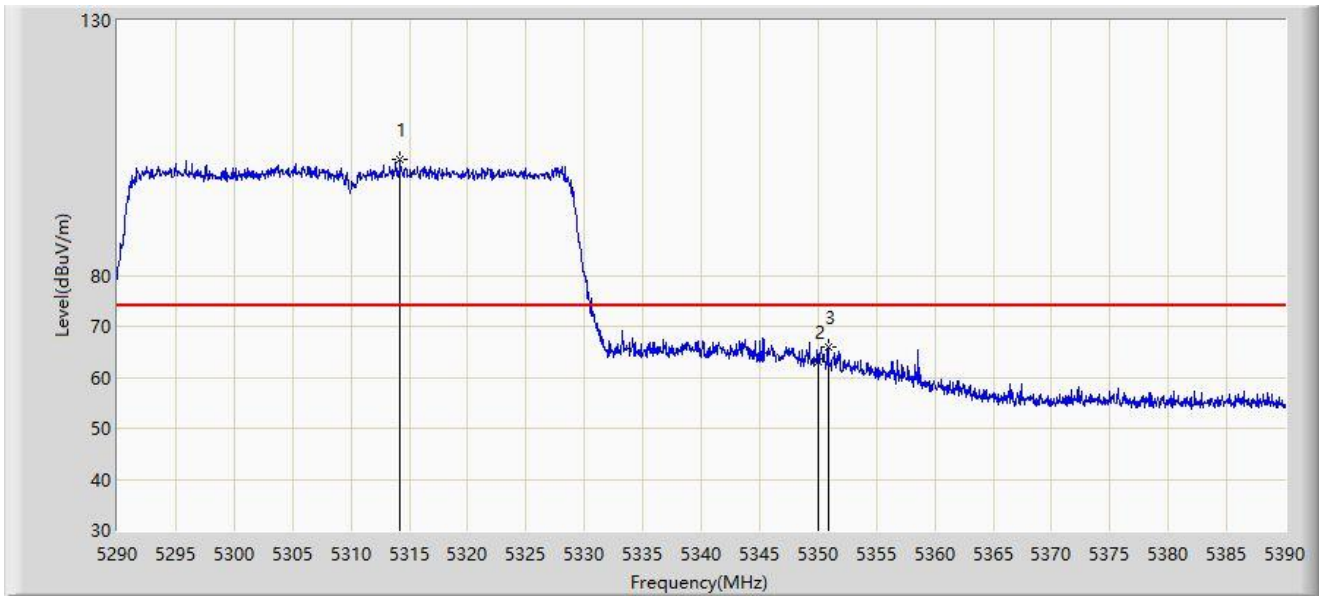


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5314.200	102.696	101.084	N/A	N/A	1.612	PK
2		5350.000	62.996	61.485	-11.004	74.000	1.511	PK
3	*	5350.850	65.831	64.321	-8.169	74.000	1.509	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

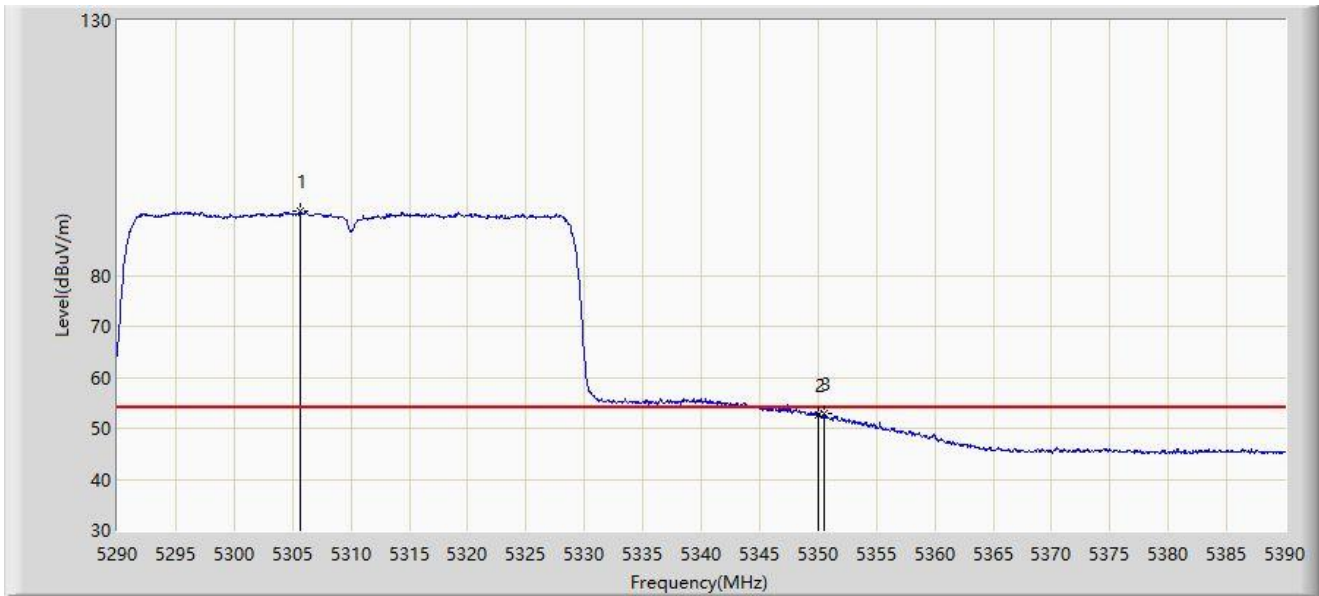


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5305.700	92.482	90.754	N/A	N/A	1.728	AV
2		5350.000	52.468	50.957	-1.532	54.000	1.511	AV
3	*	5350.550	52.878	51.368	-1.122	54.000	1.510	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

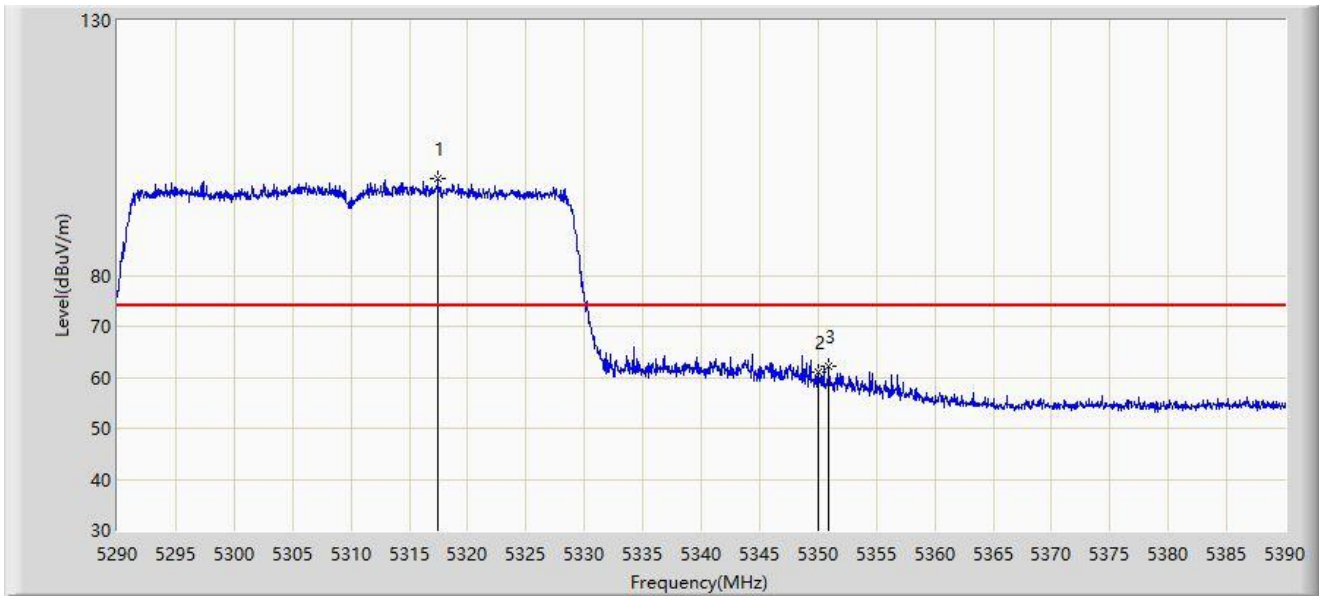


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5317.450	98.871	97.303	N/A	N/A	1.568	PK
2		5350.000	61.074	59.563	-12.926	74.000	1.511	PK
3	*	5350.950	62.306	60.797	-11.694	74.000	1.510	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

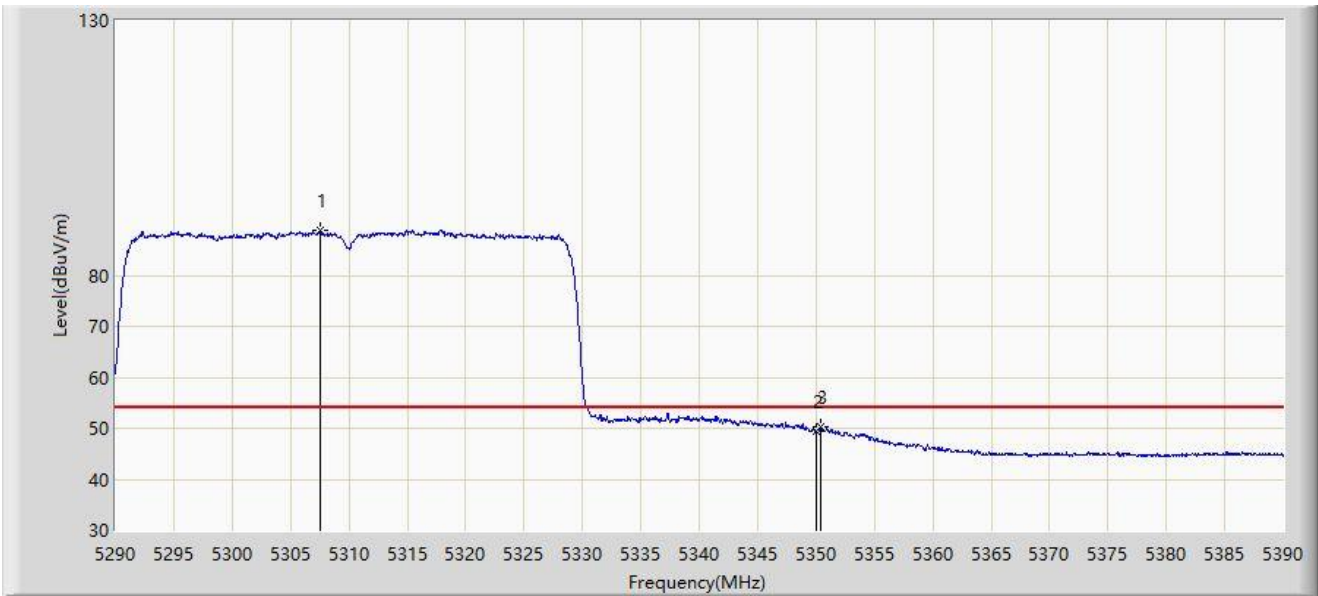


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.600	88.932	87.230	N/A	N/A	1.702	AV
2		5350.000	49.543	48.032	-4.457	54.000	1.511	AV
3	*	5350.450	50.149	48.639	-3.851	54.000	1.510	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

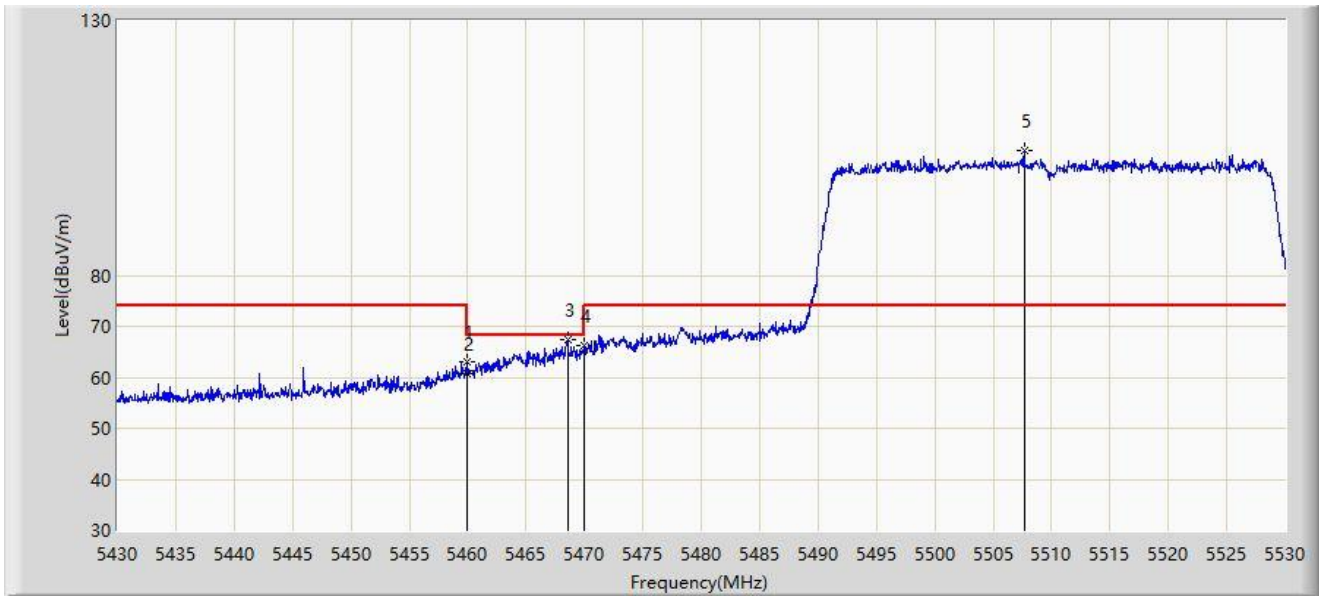

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.900	63.036	60.903	-10.964	74.000	2.132	PK
2		5460.000	60.723	58.589	-13.277	74.000	2.134	PK
3	*	5468.550	67.508	65.280	-0.692	68.200	2.229	PK
4		5470.000	66.350	64.106	-1.850	68.200	2.244	PK
5		5507.650	104.548	102.193	N/A	N/A	2.355	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

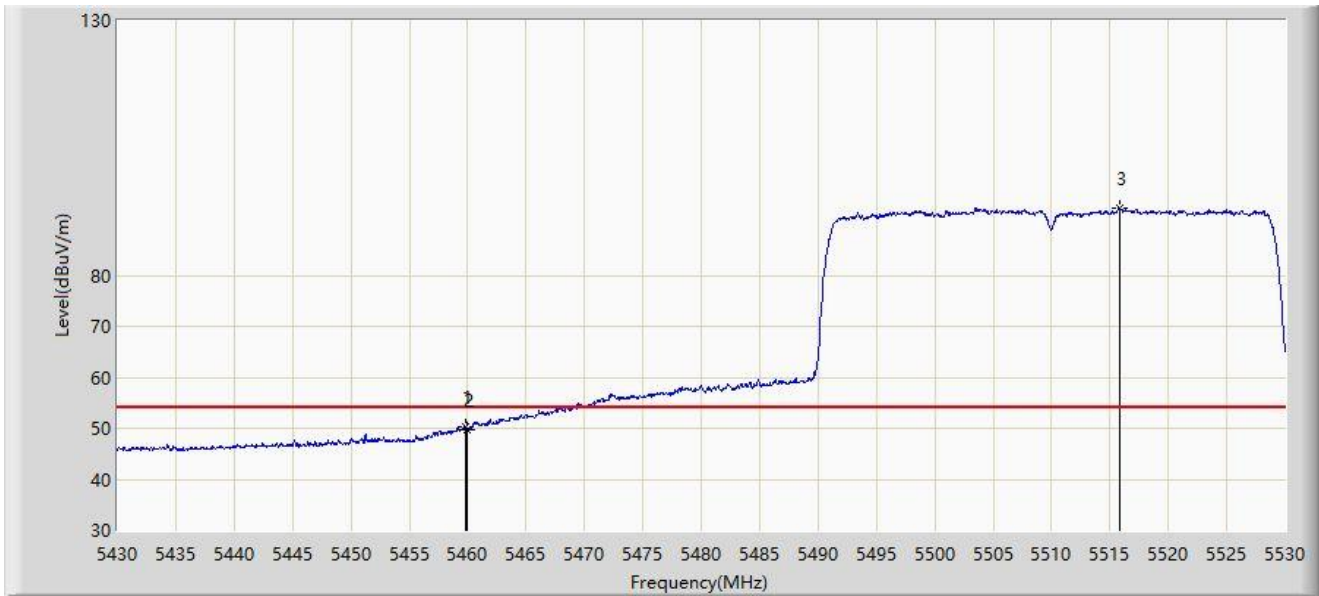


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.800	50.378	48.246	-3.622	54.000	2.132	AV
2		5460.000	49.766	47.632	-4.234	54.000	2.134	AV
3		5515.800	93.200	91.108	N/A	N/A	2.092	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

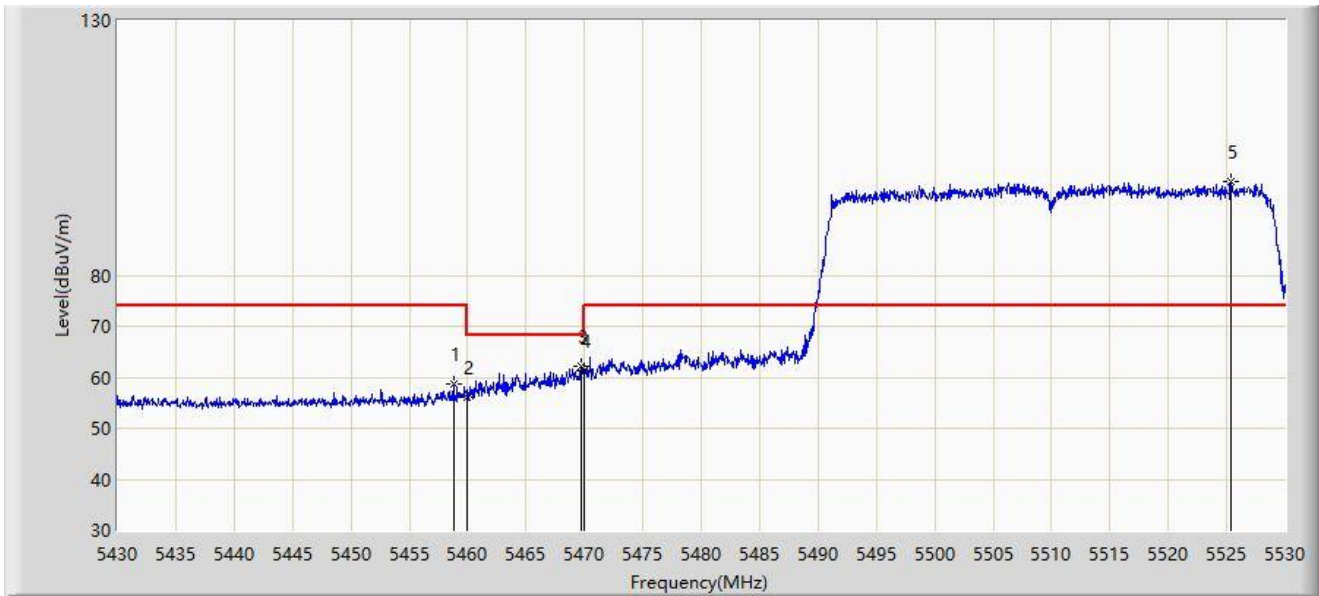


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.800	58.704	56.583	-15.296	74.000	2.121	PK
2		5460.000	56.157	54.023	-17.843	74.000	2.134	PK
3	*	5469.700	62.029	59.788	-6.171	68.200	2.241	PK
4		5470.000	61.233	58.989	-6.967	68.200	2.244	PK
5		5525.400	98.285	96.304	N/A	N/A	1.981	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

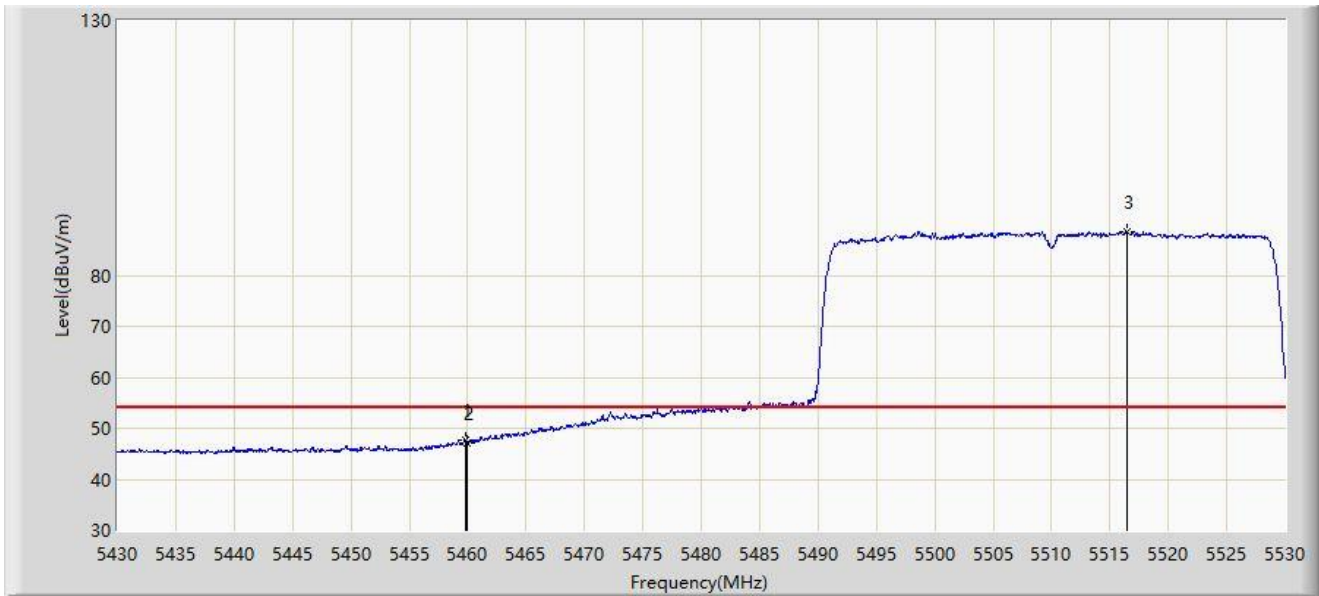


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.800	47.611	45.479	-6.389	54.000	2.132	AV
2		5460.000	47.162	45.028	-6.838	54.000	2.134	AV
3		5516.500	88.619	86.549	N/A	N/A	2.069	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

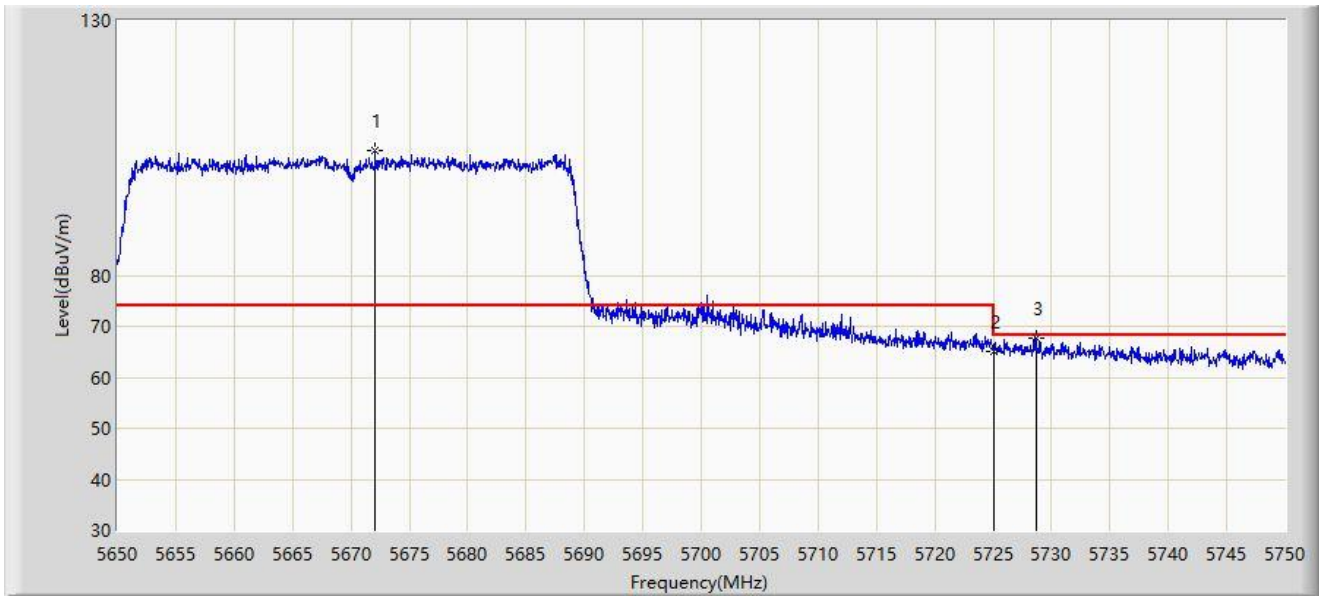


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5672.100	104.554	101.971	N/A	N/A	2.583	PK
2		5725.000	64.982	62.098	-3.218	68.200	2.884	PK
3	*	5728.650	67.620	64.700	-0.580	68.200	2.920	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

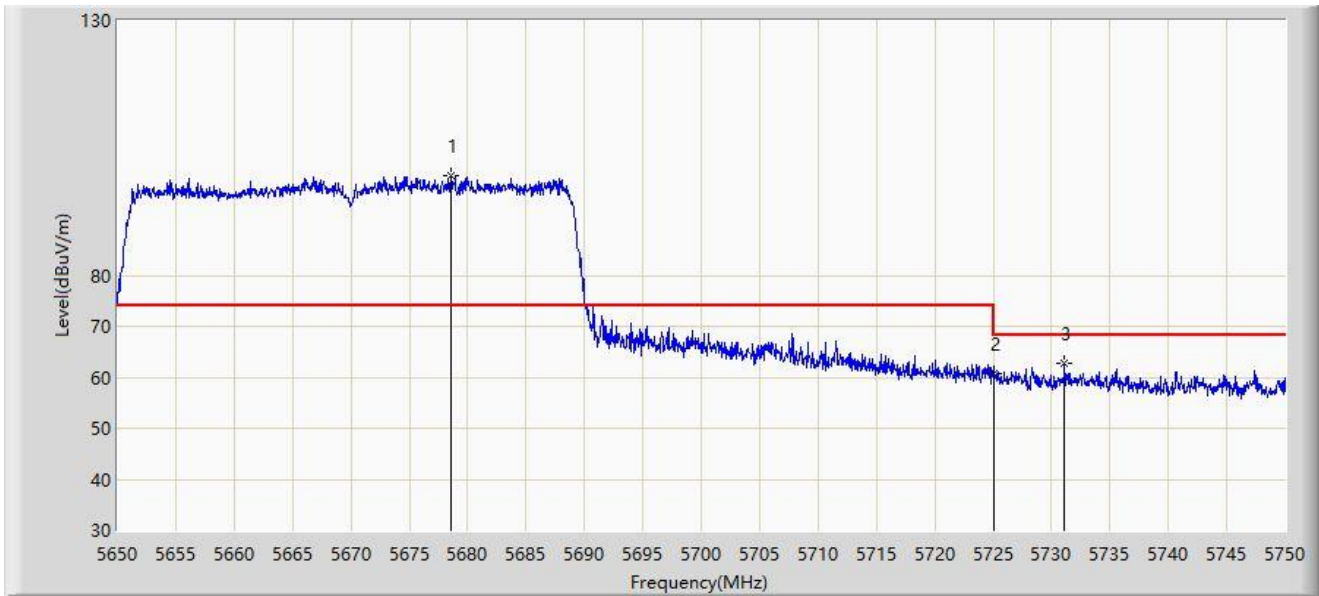


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5678.600	99.460	96.791	N/A	N/A	2.668	PK
2		5725.000	60.662	57.778	-7.538	68.200	2.884	PK
3	*	5731.100	62.652	59.705	-5.548	68.200	2.947	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

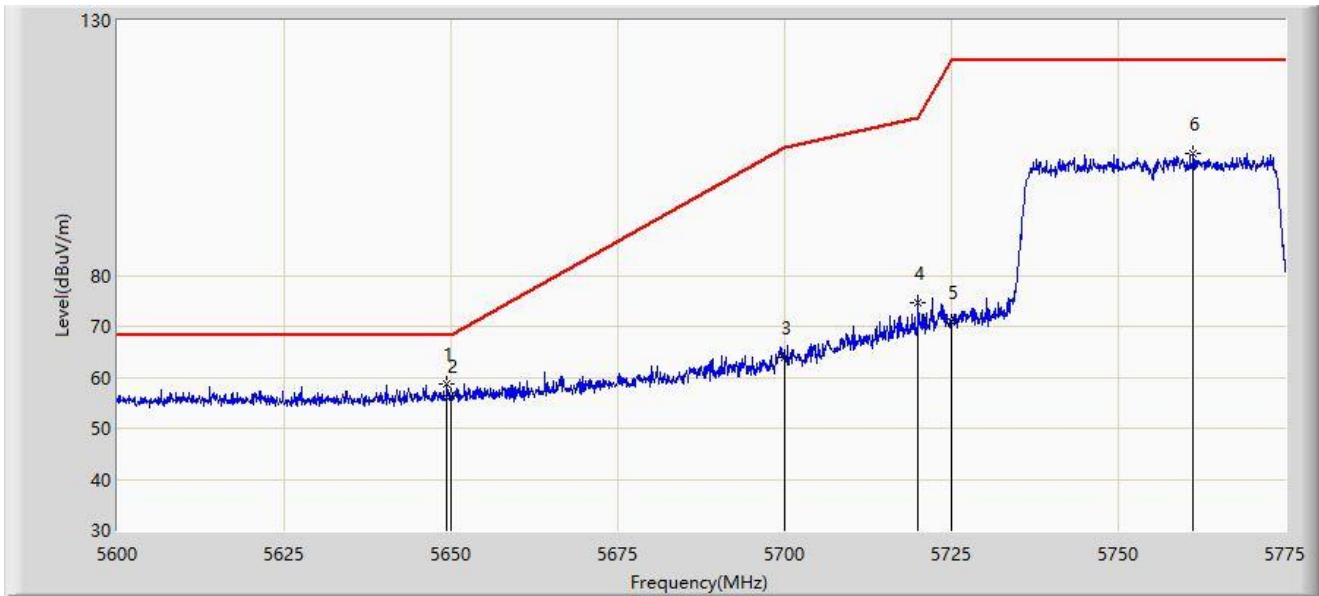


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5649.437	58.720	56.124	-9.480	68.200	2.597	PK
2		5650.000	56.239	53.641	-11.961	68.200	2.598	PK
3		5700.000	63.919	61.021	-41.281	105.200	2.897	PK
4		5720.000	74.780	71.932	-36.020	110.800	2.848	PK
5		5725.000	70.921	68.037	-51.279	122.200	2.884	PK
6		5761.175	103.898	100.685	N/A	N/A	3.213	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

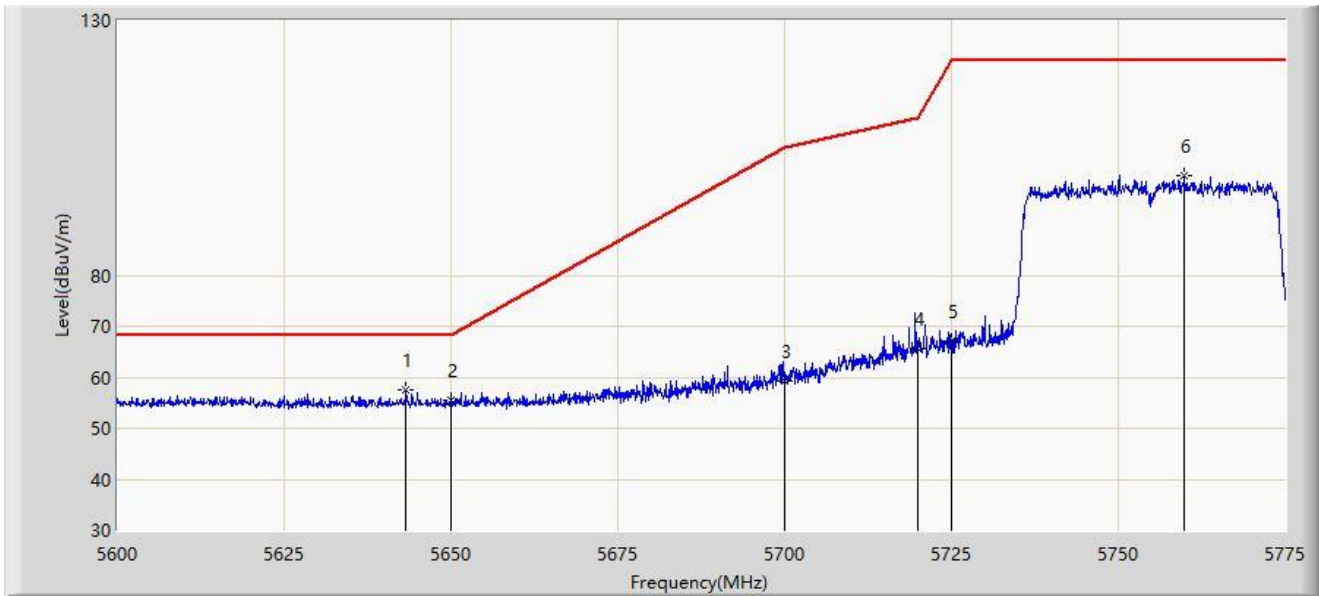


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.225	57.612	55.030	-10.588	68.200	2.582	PK
2		5650.000	55.384	52.786	-12.816	68.200	2.598	PK
3		5700.000	59.167	56.269	-46.033	105.200	2.897	PK
4		5720.000	65.545	62.697	-45.255	110.800	2.848	PK
5		5725.000	67.061	64.177	-55.139	122.200	2.884	PK
6		5759.950	99.676	96.454	N/A	N/A	3.221	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

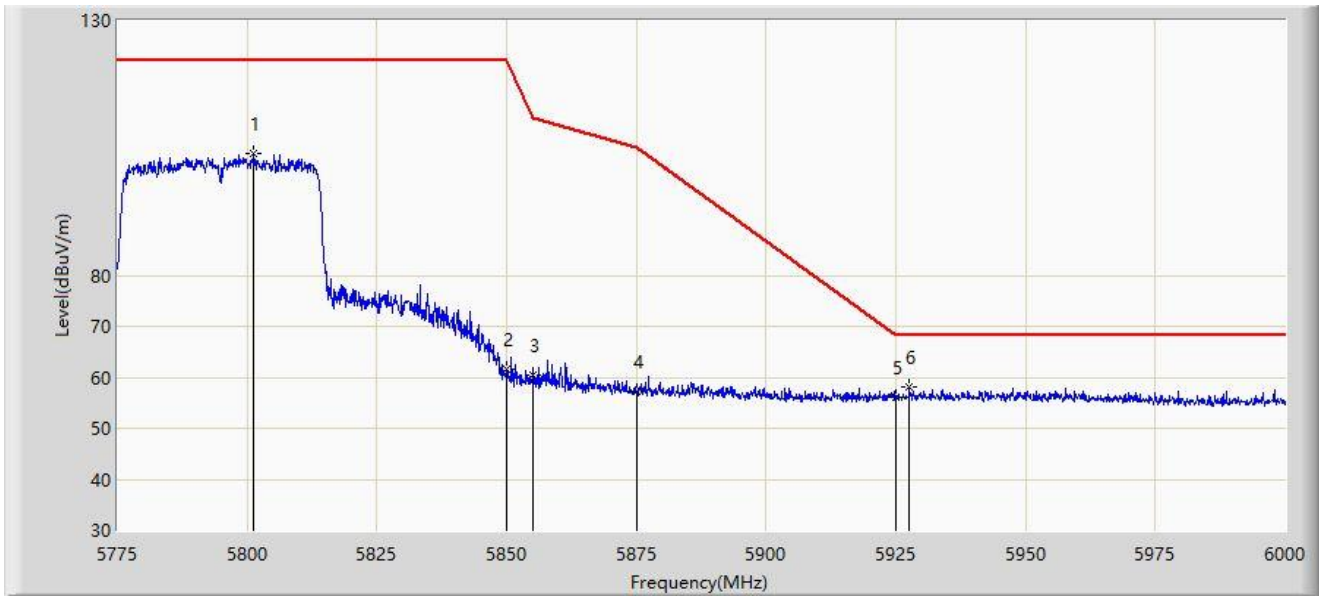

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5801.212	103.798	100.567	N/A	N/A	3.231	PK
2		5850.000	61.656	58.318	-60.544	122.200	3.338	PK
3		5855.000	60.411	57.068	-50.389	110.800	3.343	PK
4		5875.000	57.303	53.906	-47.897	105.200	3.397	PK
5		5925.000	56.081	52.351	-12.119	68.200	3.731	PK
6	*	5927.550	58.108	54.330	-10.092	68.200	3.778	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

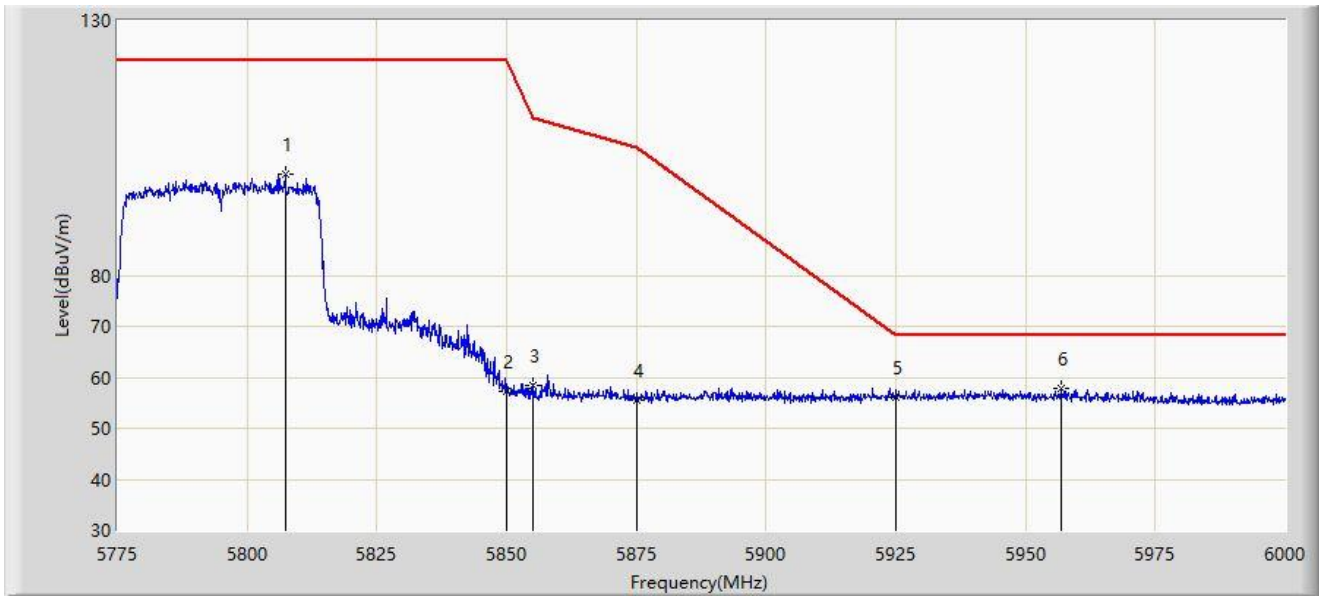


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5807.288	99.851	96.638	N/A	N/A	3.214	PK
2		5850.000	57.309	53.971	-64.891	122.200	3.338	PK
3		5855.000	58.358	55.015	-52.442	110.800	3.343	PK
4		5875.000	55.565	52.168	-49.635	105.200	3.397	PK
5		5925.000	56.221	52.491	-11.979	68.200	3.731	PK
6	*	5956.800	57.826	53.999	-10.374	68.200	3.827	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

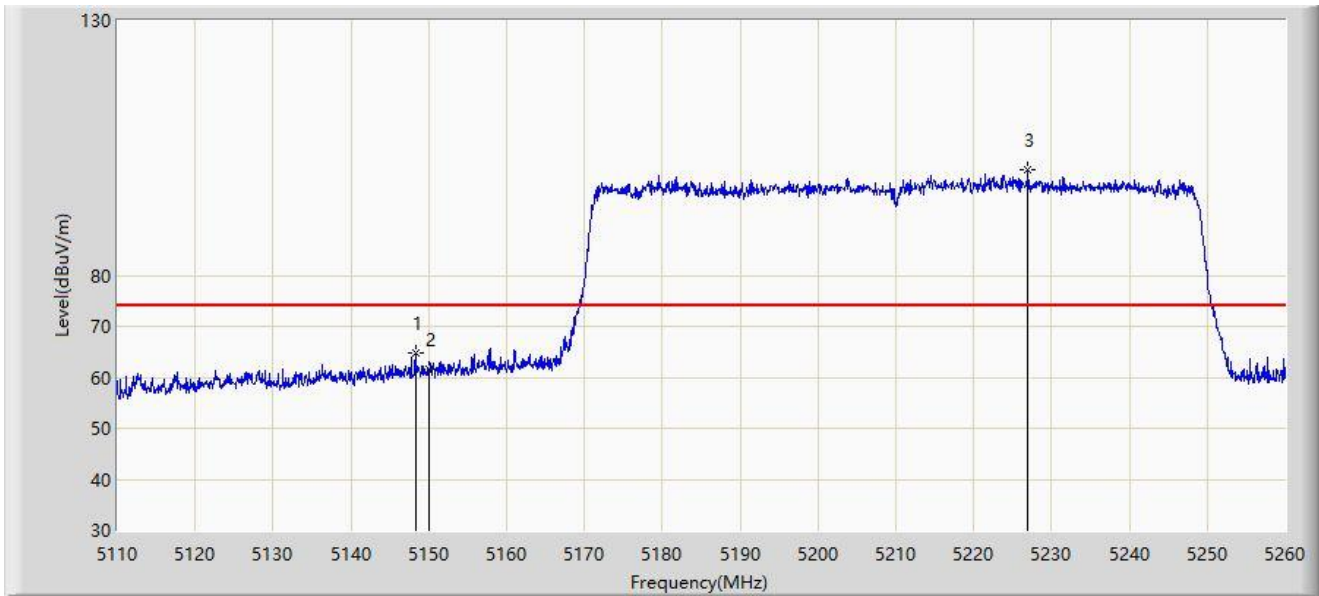


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.325	64.779	62.101	-9.221	74.000	2.678	PK
2		5150.000	61.643	58.977	-12.357	74.000	2.665	PK
3		5227.000	100.783	98.594	N/A	N/A	2.189	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

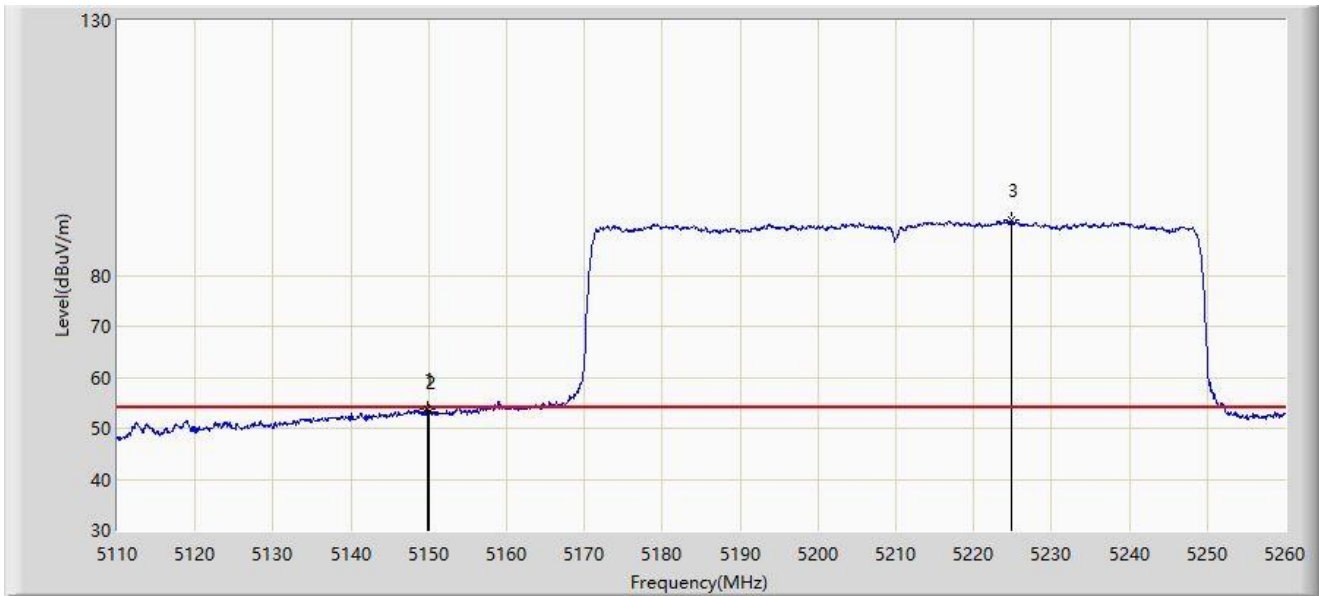


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.900	53.721	51.055	-0.279	54.000	2.667	AV
2		5150.000	53.122	50.456	-0.878	54.000	2.665	AV
3		5224.825	90.745	88.536	N/A	N/A	2.209	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

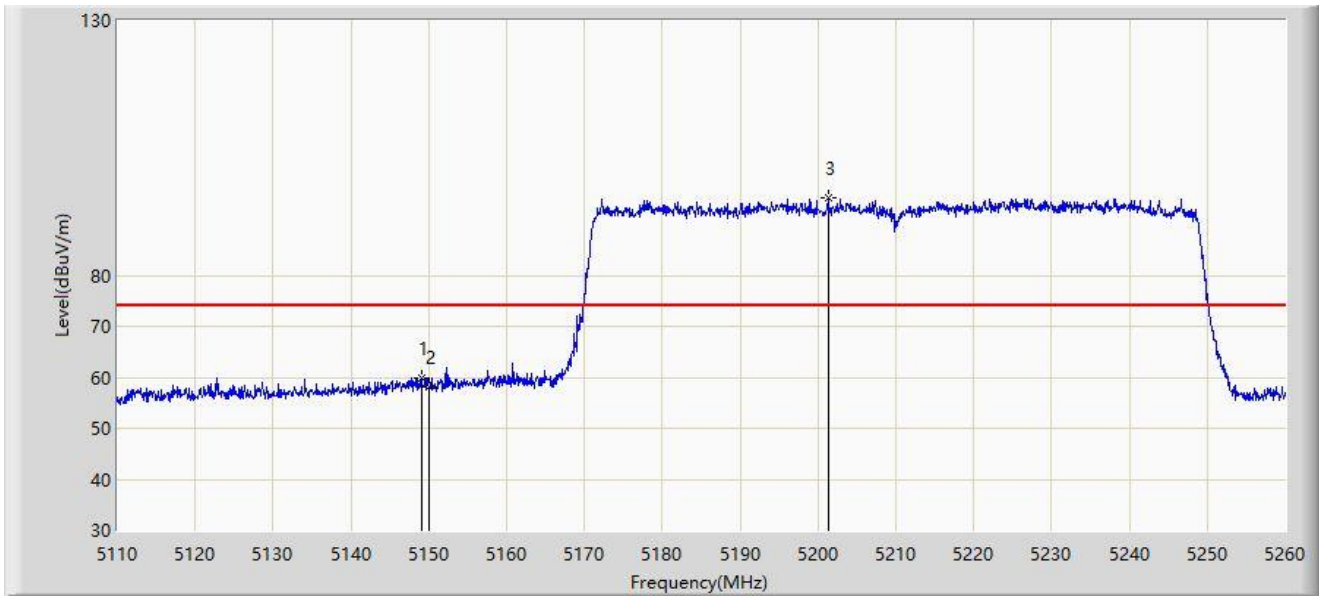

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.075	59.871	57.199	-14.129	74.000	2.672	PK
2		5150.000	58.093	55.427	-15.907	74.000	2.665	PK
3		5201.275	95.339	93.429	N/A	N/A	1.910	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.675	50.387	47.719	-3.613	54.000	2.667	AV
2		5150.000	49.809	47.143	-4.191	54.000	2.665	AV
3		5224.825	87.102	84.893	N/A	N/A	2.209	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

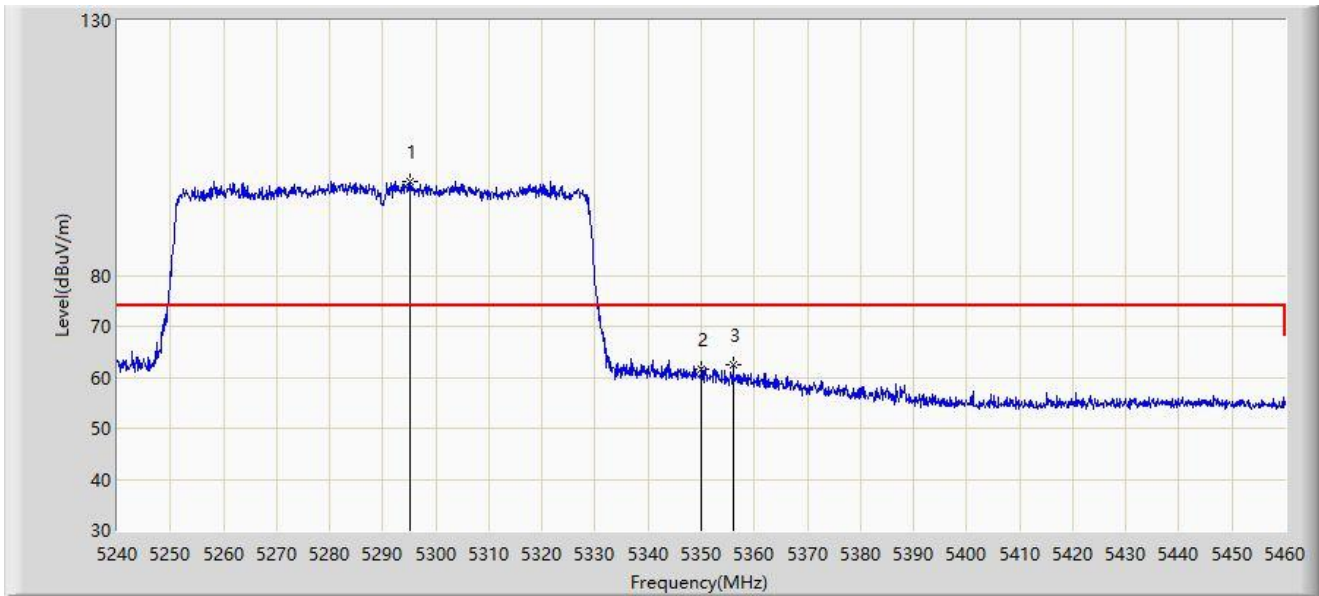


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5295.220	98.546	96.722	N/A	N/A	1.824	PK
2		5350.000	61.521	60.010	-12.479	74.000	1.511	PK
3	*	5355.940	62.533	60.968	-11.467	74.000	1.565	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

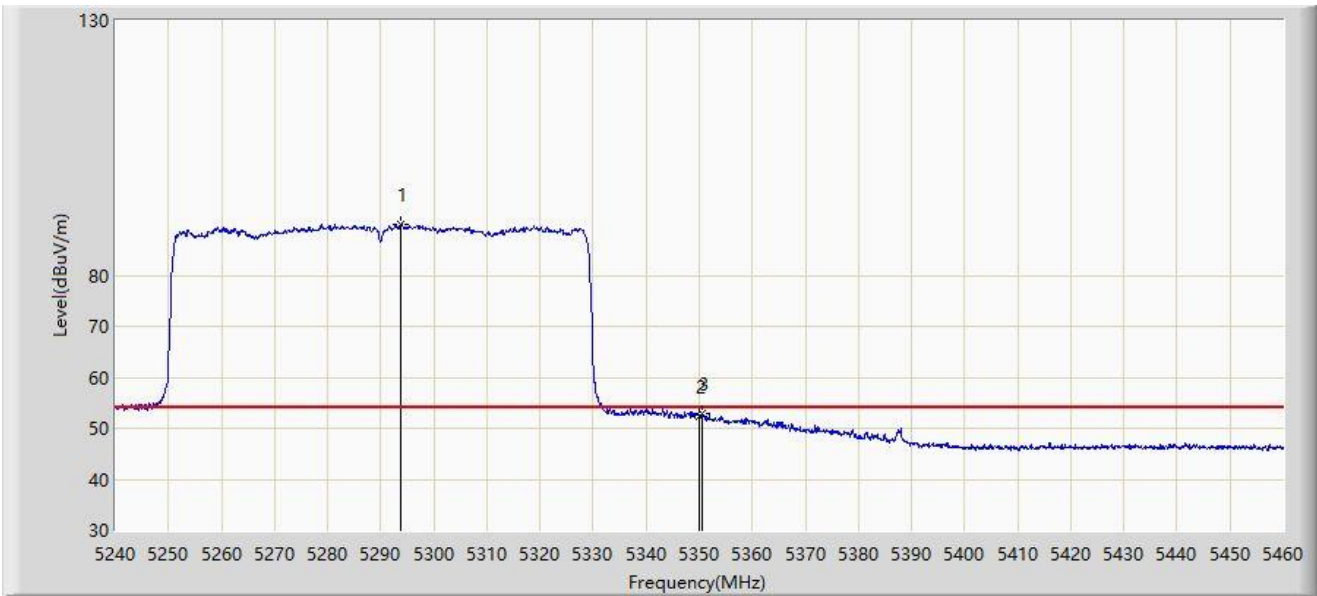


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5293.790	90.102	88.271	N/A	N/A	1.832	AV
2		5350.000	52.291	50.780	-1.709	54.000	1.511	AV
3	*	5350.660	52.796	51.286	-1.204	54.000	1.509	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

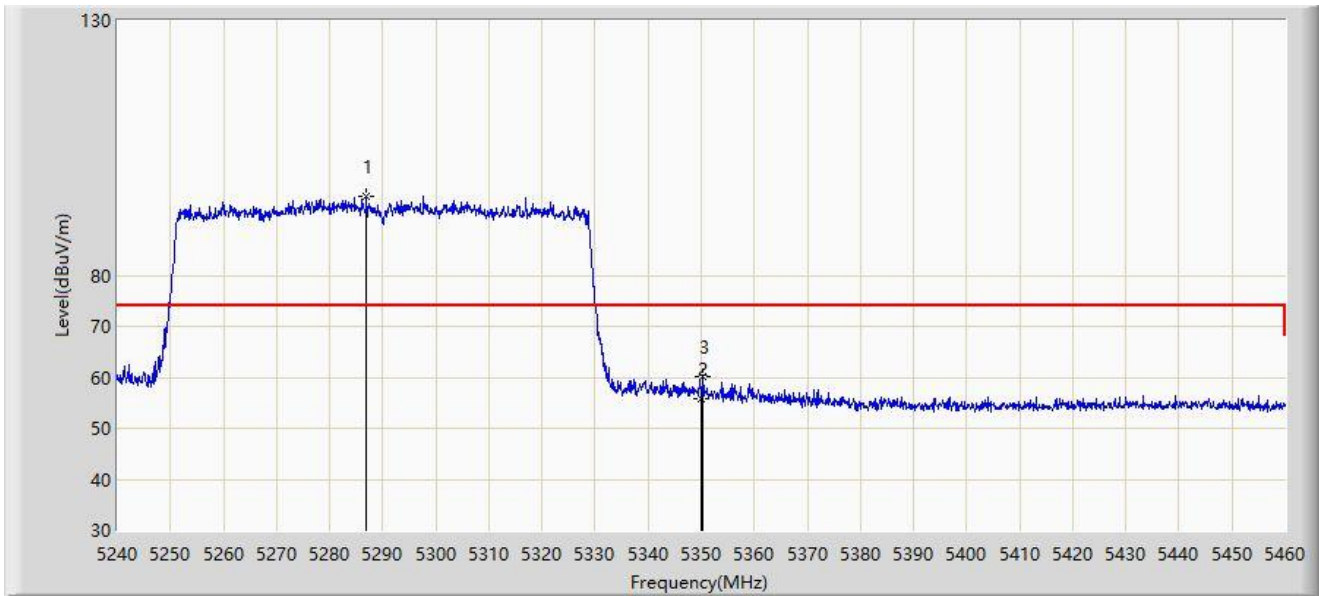

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5286.970	95.608	93.739	N/A	N/A	1.868	PK
2		5350.000	55.851	54.340	-18.149	74.000	1.511	PK
3	*	5350.330	60.262	58.752	-13.738	74.000	1.511	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

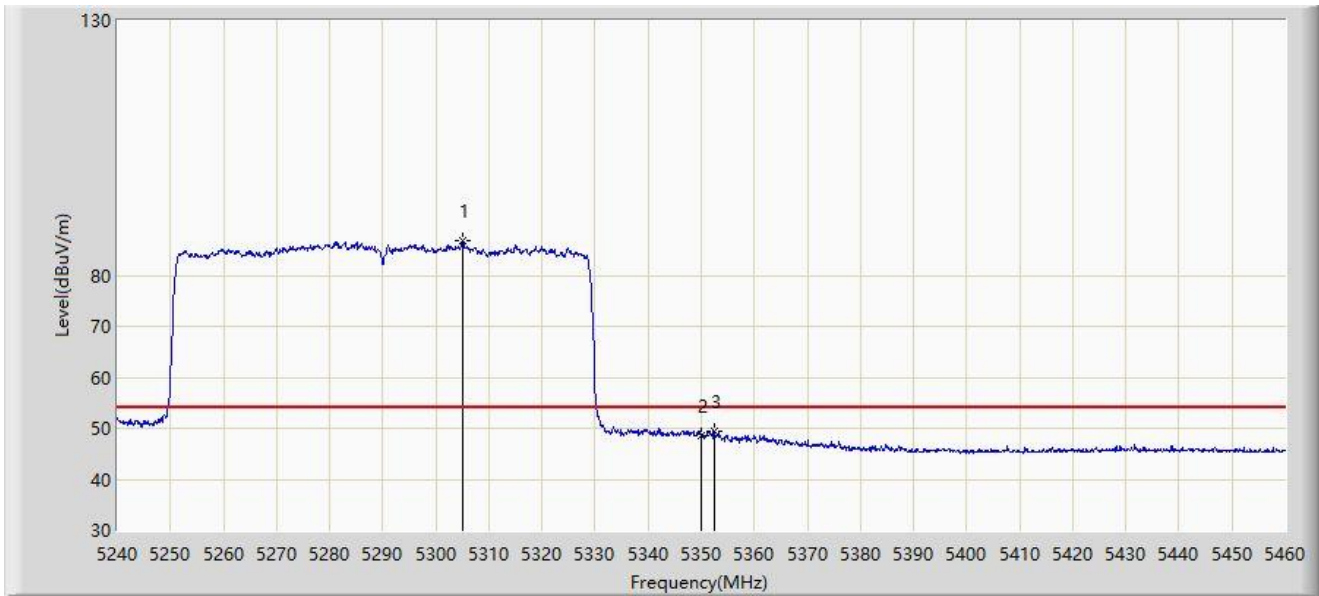


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5305.010	86.723	84.986	N/A	N/A	1.737	AV
2		5350.000	48.626	47.115	-5.374	54.000	1.511	AV
3	*	5352.420	49.523	48.009	-4.477	54.000	1.513	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

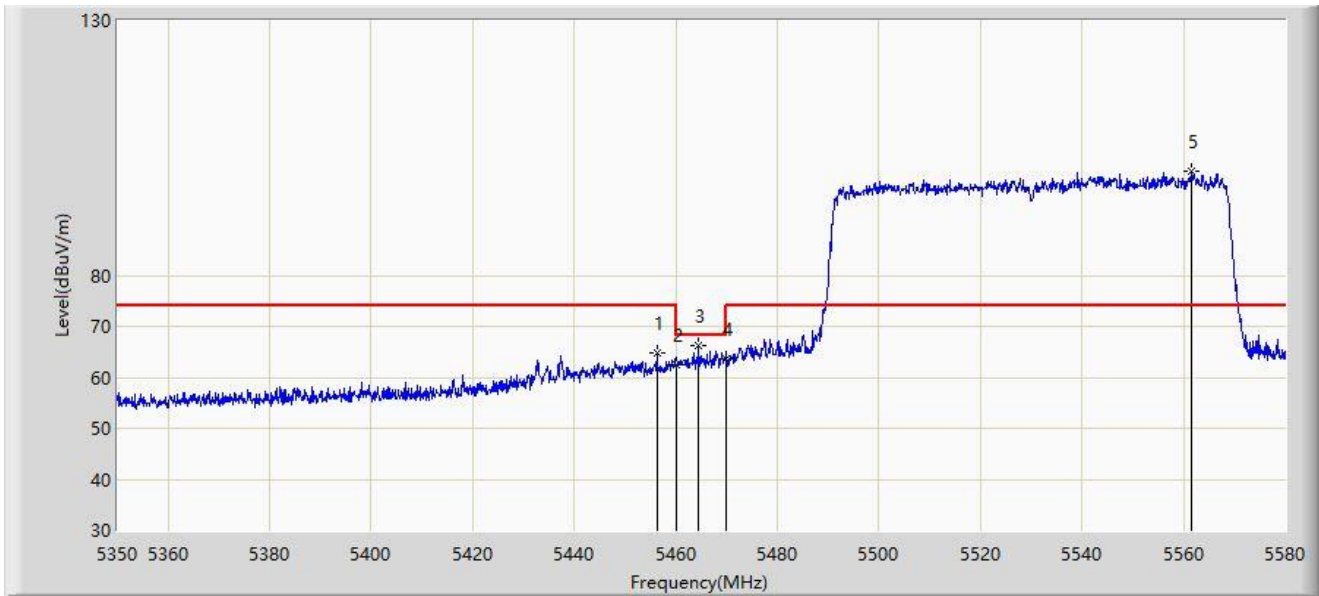


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5456.260	64.848	62.755	-9.152	74.000	2.093	PK
2		5460.000	62.359	60.225	-11.641	74.000	2.134	PK
3	*	5464.540	66.198	64.014	-2.002	68.200	2.184	PK
4		5470.000	63.665	61.421	-4.535	68.200	2.244	PK
5		5561.600	100.360	97.788	N/A	N/A	2.572	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

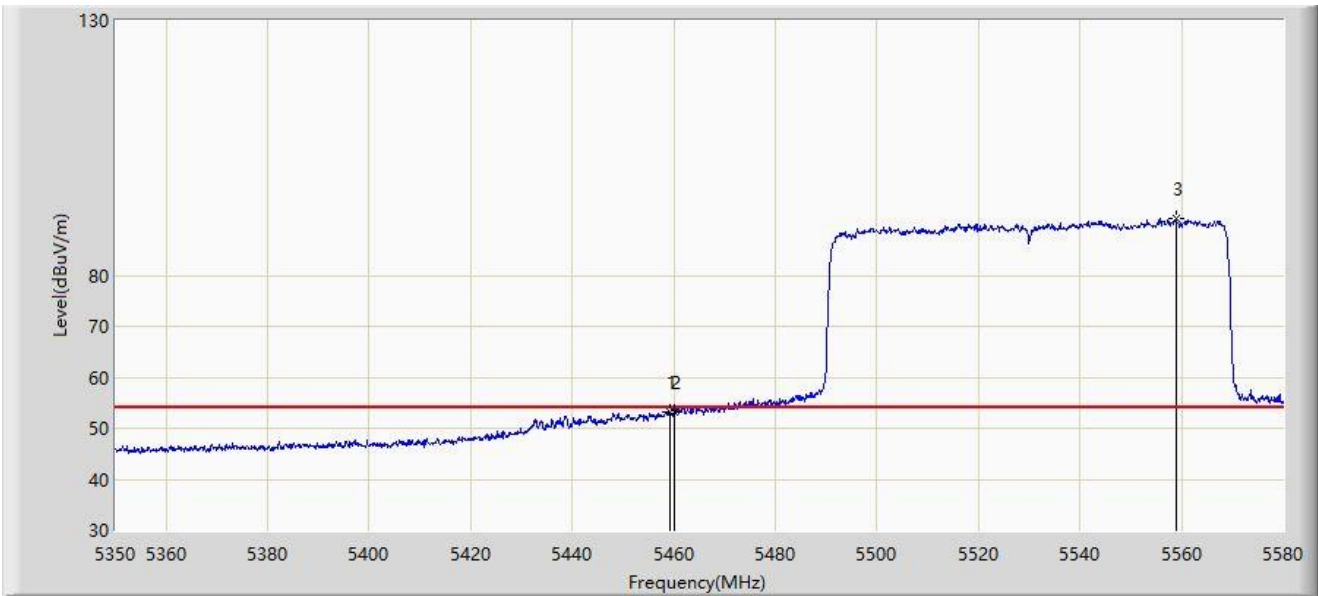


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.250	53.305	51.179	-0.695	54.000	2.126	AV
2		5460.000	53.074	50.940	-0.926	54.000	2.134	AV
3		5558.840	91.237	88.659	N/A	N/A	2.578	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

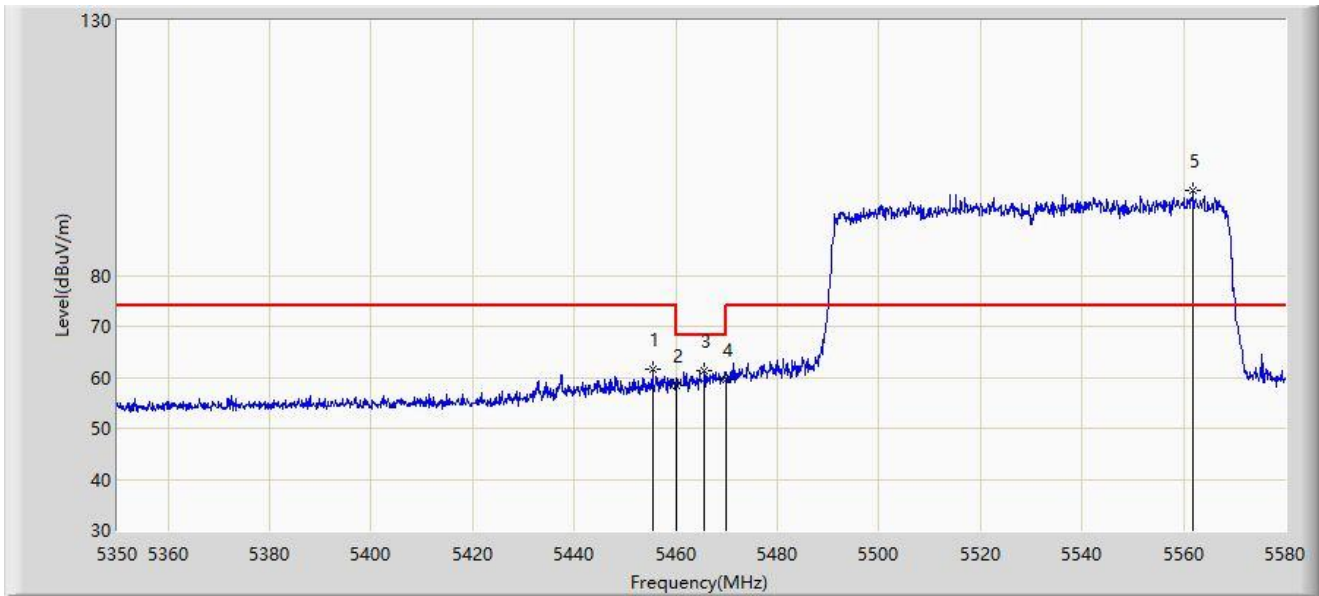


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5455.455	61.608	59.524	-12.392	74.000	2.083	PK
2		5460.000	58.443	56.309	-15.557	74.000	2.134	PK
3	*	5465.690	61.358	59.161	-6.842	68.200	2.196	PK
4		5470.000	59.520	57.276	-8.680	68.200	2.244	PK
5		5561.830	96.551	93.979	N/A	N/A	2.572	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

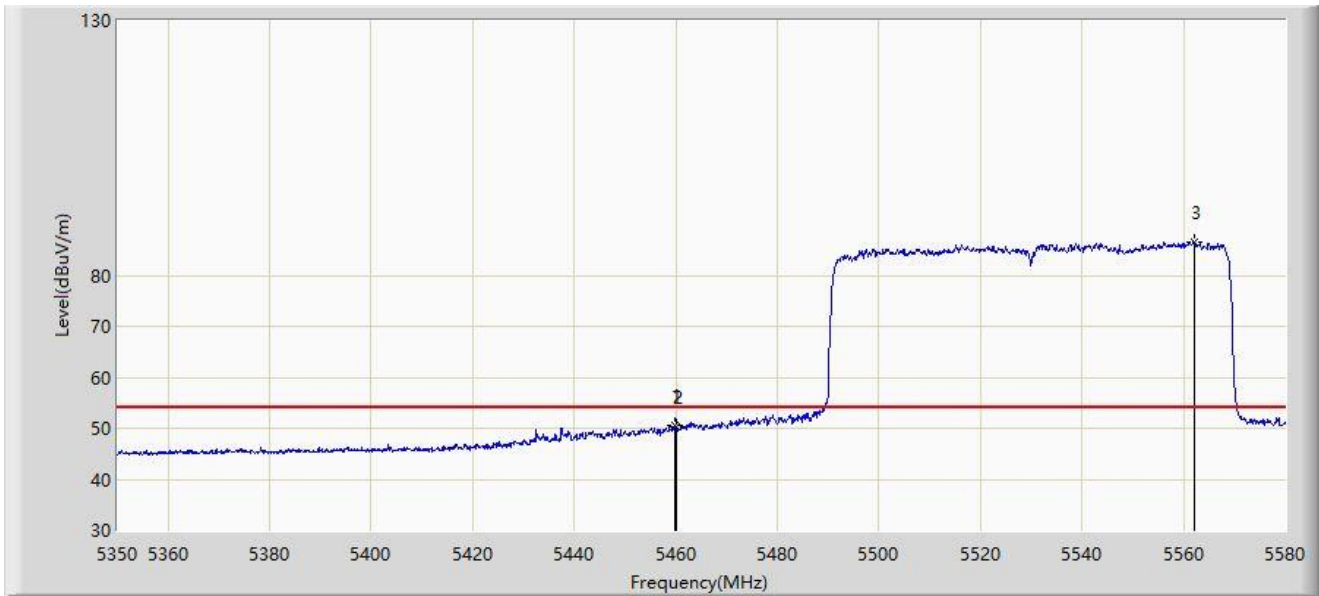


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.940	50.514	48.381	-3.486	54.000	2.133	AV
2		5460.000	50.180	48.046	-3.820	54.000	2.134	AV
3		5562.060	86.624	84.052	N/A	N/A	2.572	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

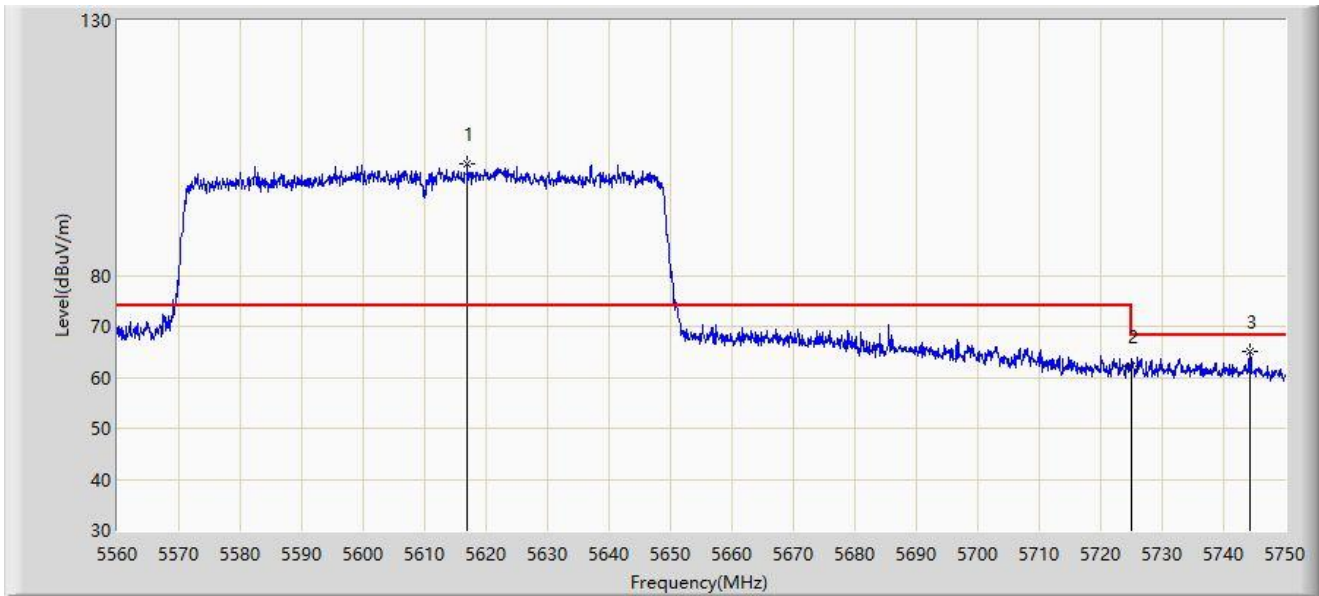


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5616.905	101.837	99.397	N/A	N/A	2.440	PK
2		5725.000	62.095	59.211	-6.105	68.200	2.884	PK
3	*	5744.205	64.933	61.844	-3.267	68.200	3.089	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-12
Limit: FCC_5.8G_RE(3m)	Engineer: Summer Tang
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

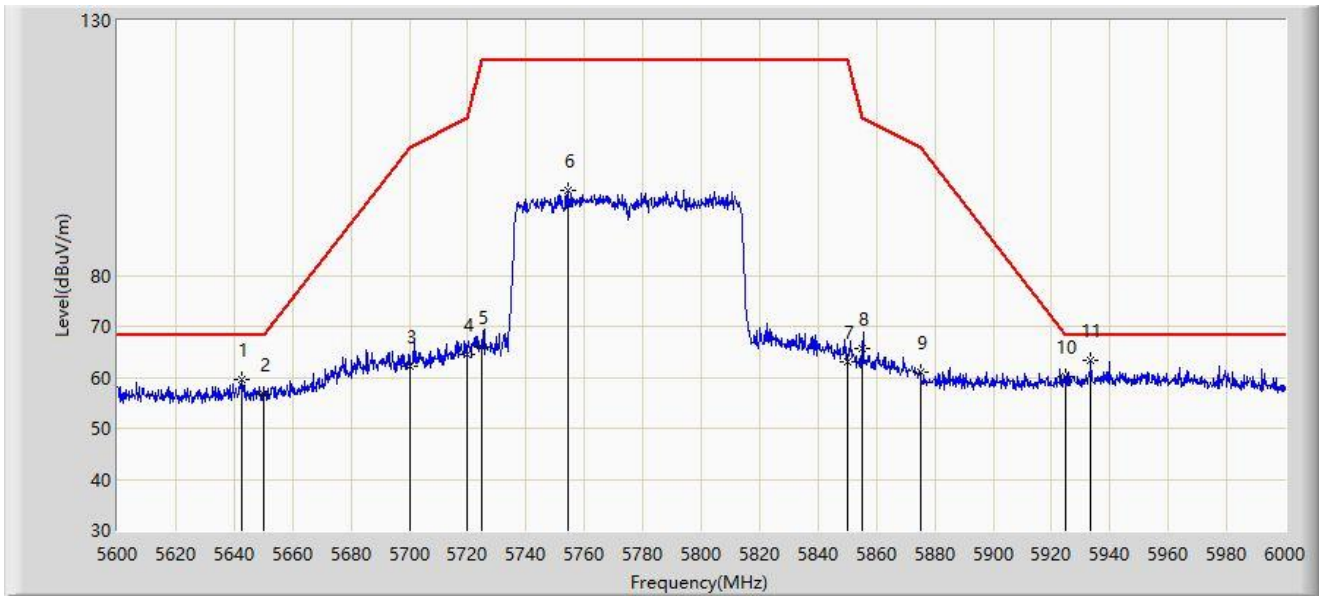

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5642.800	59.479	56.898	-8.721	68.200	2.581	PK
2		5650.000	56.687	54.089	-11.513	68.200	2.598	PK
3		5700.000	62.298	59.400	-42.902	105.200	2.897	PK
4		5720.000	64.562	61.714	-46.238	110.800	2.848	PK
5		5725.000	66.061	63.177	-56.139	122.200	2.884	PK
6		5754.600	96.761	93.584	N/A	N/A	3.176	PK
7		5850.000	63.074	59.736	-59.126	122.200	3.338	PK
8		5855.000	65.582	62.239	-45.218	110.800	3.343	PK
9		5875.000	60.964	57.567	-44.236	105.200	3.397	PK
10		5925.000	60.143	56.413	-8.057	68.200	3.731	PK
11	*	5933.400	63.439	59.597	-4.761	68.200	3.842	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**Partial RU:**

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5180MHz	

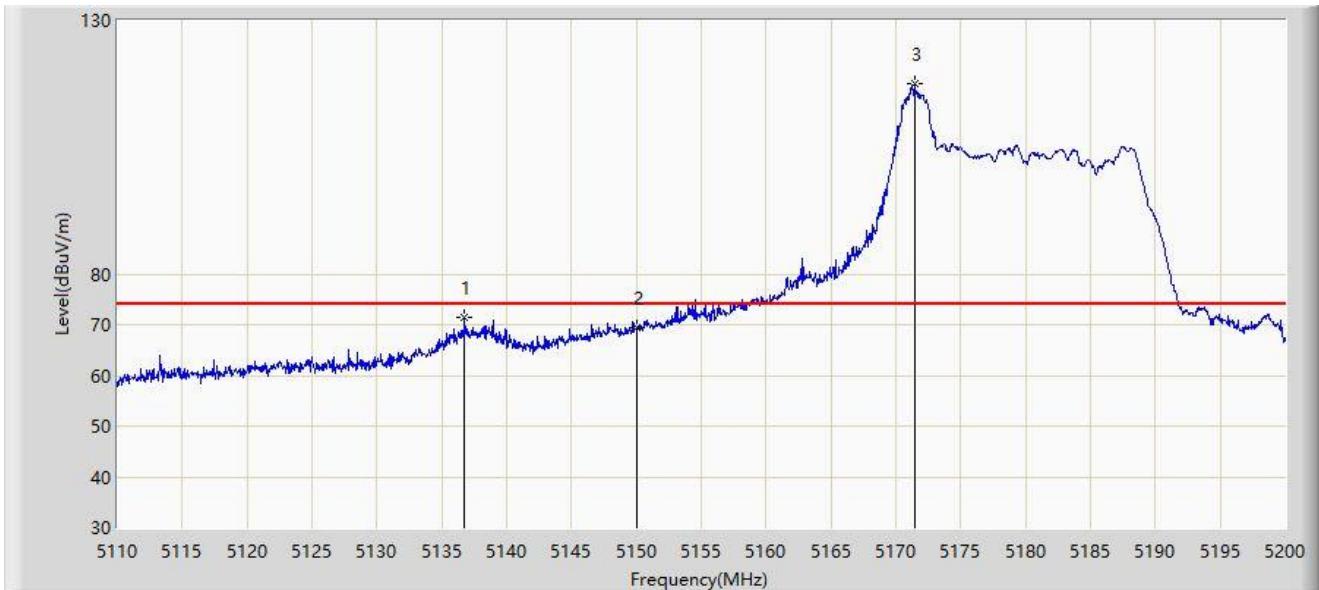

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5136.750	71.433	66.744	-2.567	74.000	4.690	PK
2		5150.000	69.405	64.437	-4.595	74.000	4.967	PK
3		5171.450	117.495	112.739	N/A	N/A	4.756	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5180MHz	

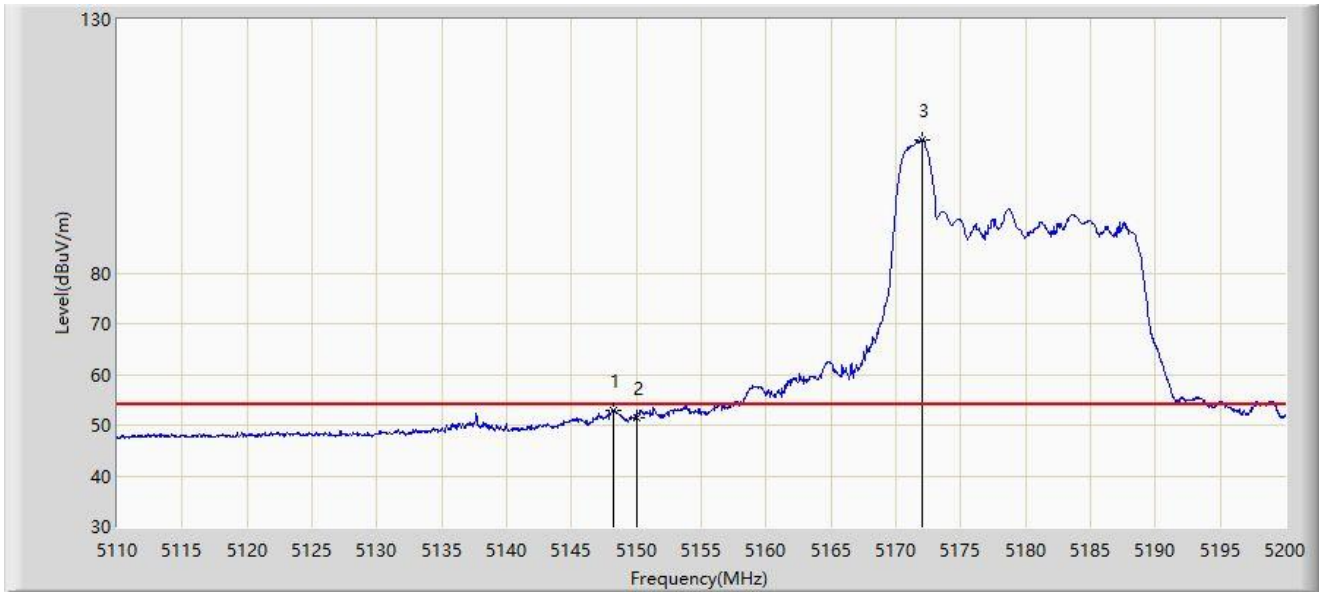


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5148.250	52.907	47.936	-1.093	54.000	4.971	AV
2		5150.000	51.333	46.365	-2.667	54.000	4.967	AV
3		5172.000	106.272	101.531	N/A	N/A	4.741	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5180MHz	

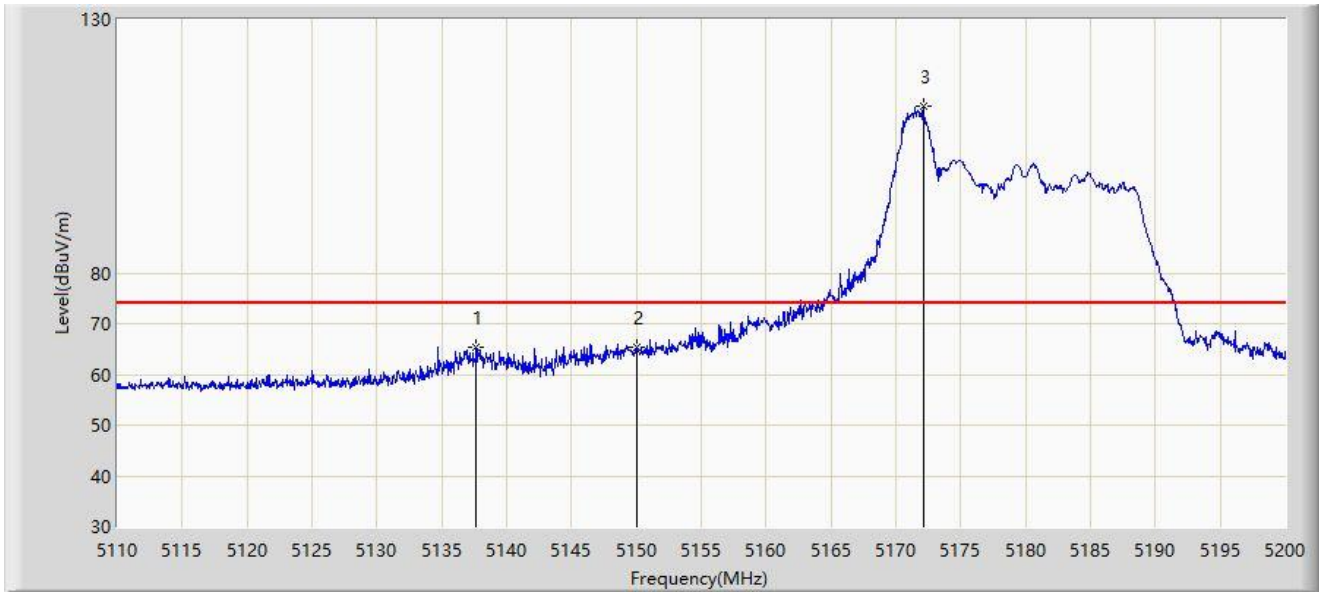


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5137.650	65.342	60.630	-8.658	74.000	4.712	PK
2	*	5150.000	65.413	60.445	-8.587	74.000	4.967	PK
3		5172.100	112.980	108.242	N/A	N/A	4.738	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5180MHz	

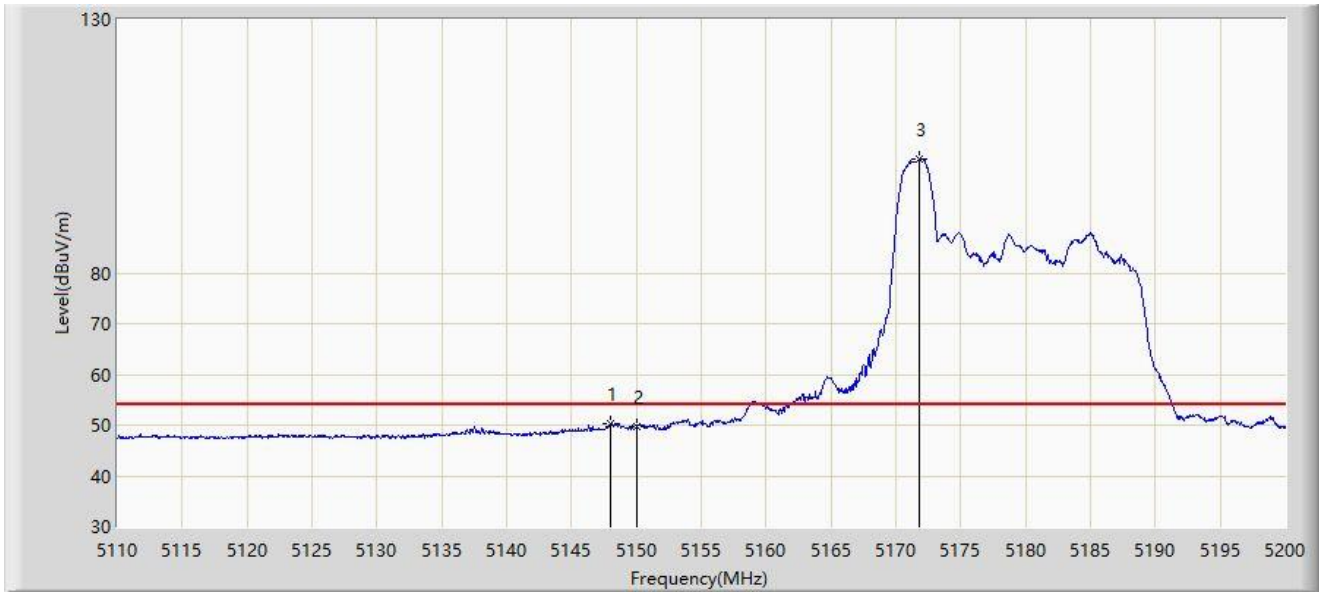


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.000	50.381	45.409	-3.619	54.000	4.972	AV
2		5150.000	49.768	44.800	-4.232	54.000	4.967	AV
3		5171.800	102.517	97.771	N/A	N/A	4.747	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5320MHz	

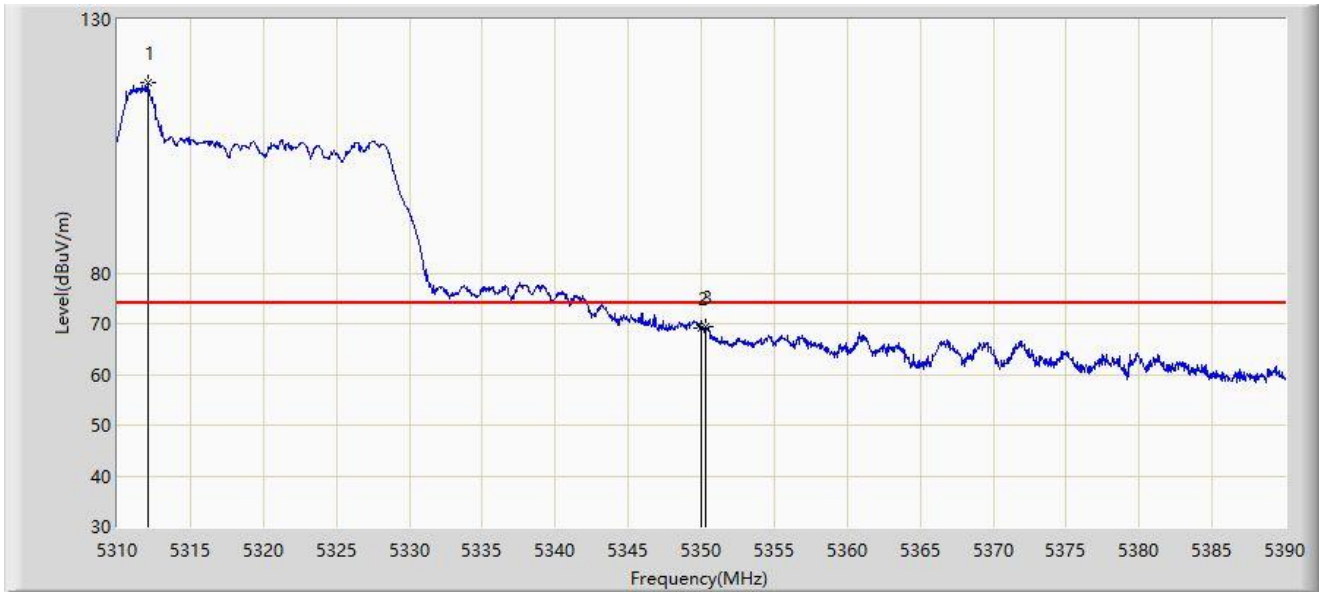

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5312.120	117.436	112.856	N/A	N/A	4.581	PK
2		5350.000	69.180	64.761	-4.820	74.000	4.419	PK
3	*	5350.280	69.560	65.142	-4.440	74.000	4.418	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5320MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5311.560	106.774	102.186	N/A	N/A	4.588	AV
2		5350.000	52.893	48.474	-1.107	54.000	4.419	AV
3	*	5350.480	53.245	48.828	-0.755	54.000	4.417	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5320MHz	

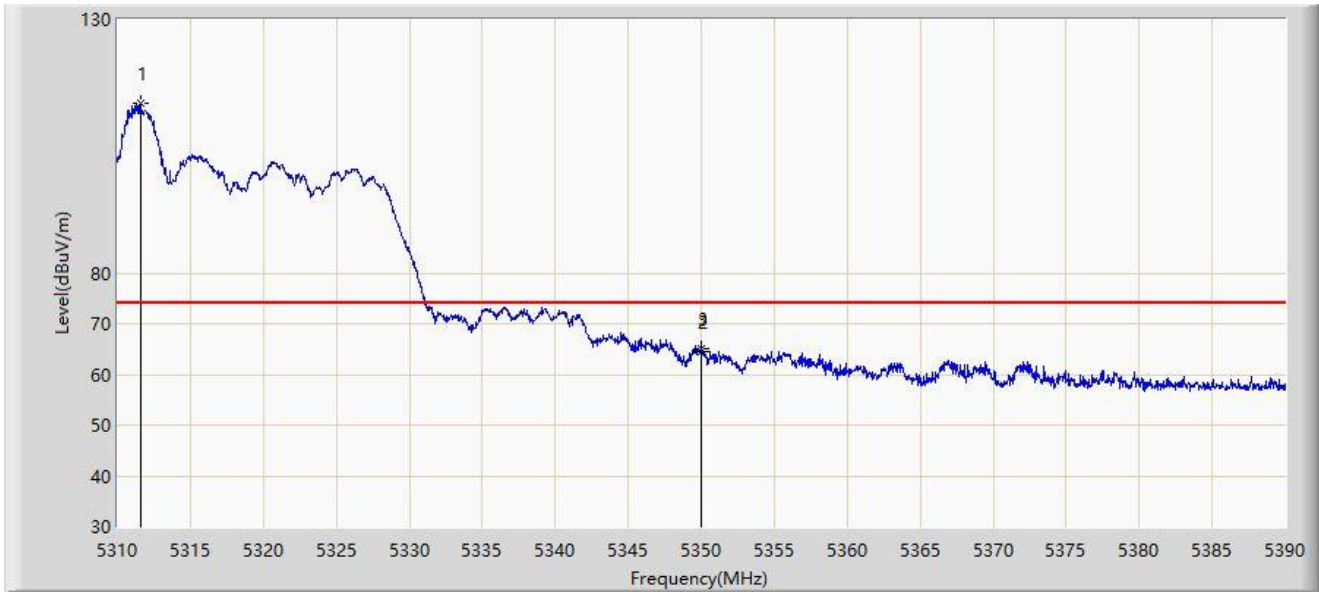


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.560	113.401	108.813	N/A	N/A	4.588	PK
2		5350.000	64.456	60.037	-9.544	74.000	4.419	PK
3	*	5350.040	64.992	60.573	-9.008	74.000	4.418	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5320MHz	

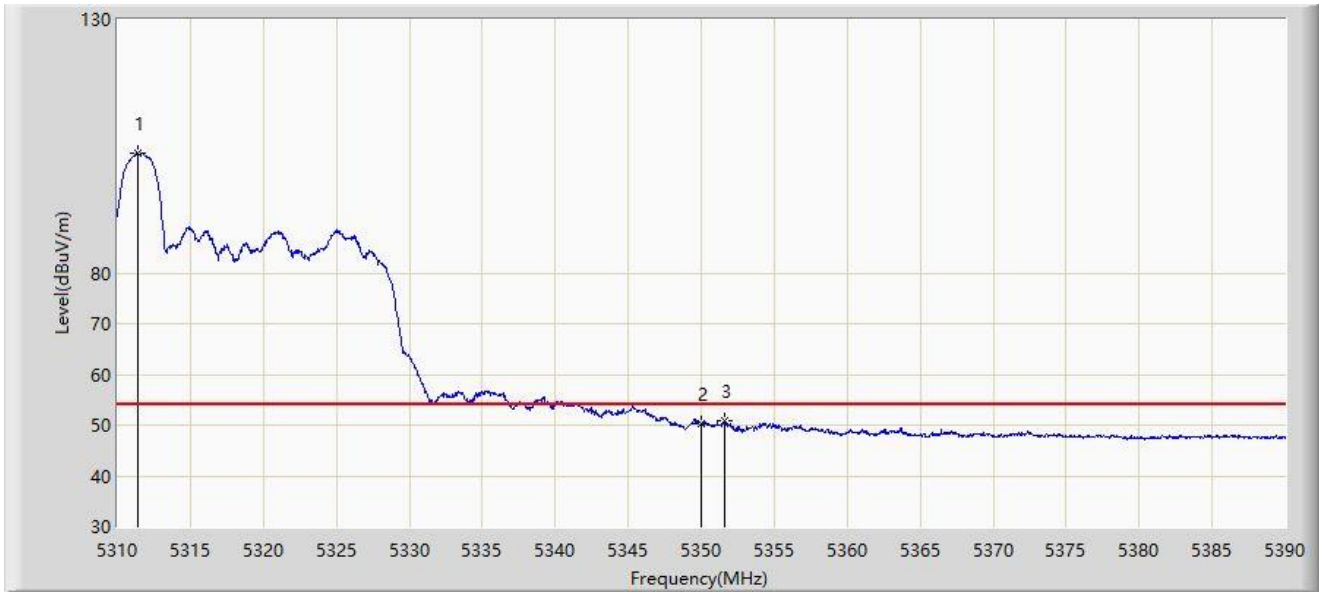


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5311.440	103.758	99.168	N/A	N/A	4.589	AV
2		5350.000	50.234	45.815	-3.766	54.000	4.419	AV
3	*	5351.600	50.735	46.322	-3.265	54.000	4.413	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5500MHz	

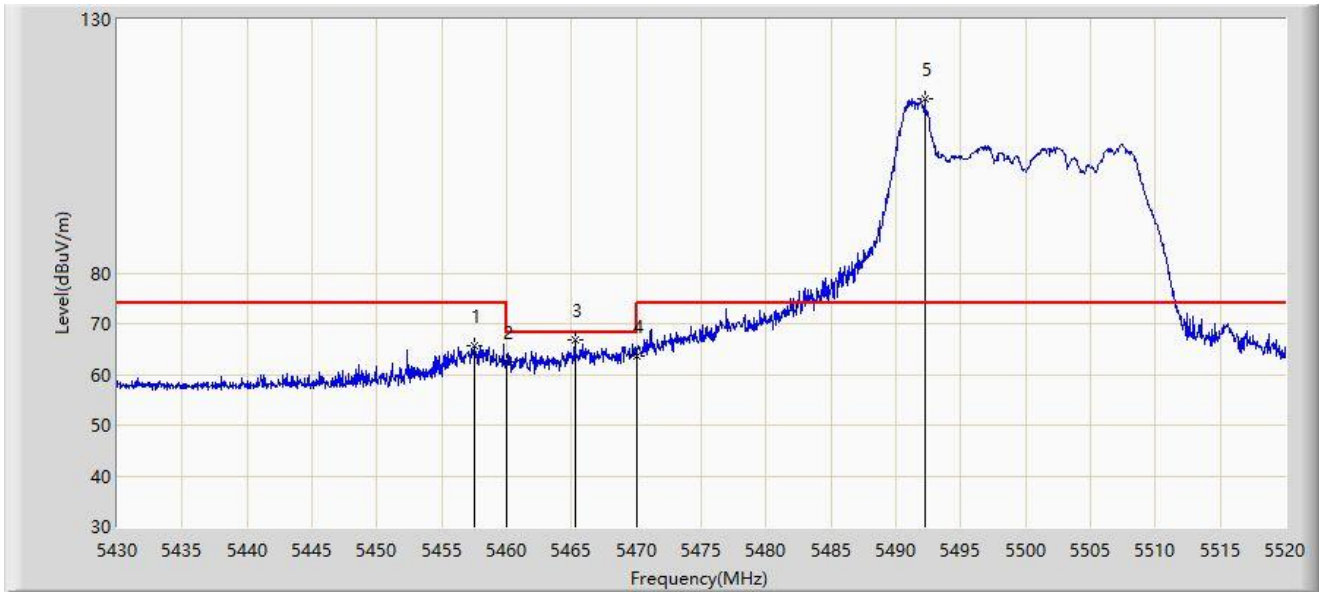

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.540	65.659	60.965	-8.341	74.000	4.694	PK
2		5460.000	62.358	57.642	-11.642	74.000	4.716	PK
3	*	5465.280	66.672	61.911	-1.528	68.200	4.761	PK
4		5470.000	63.618	58.817	-4.582	68.200	4.801	PK
5		5492.235	114.363	109.263	N/A	N/A	5.100	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5500MHz	

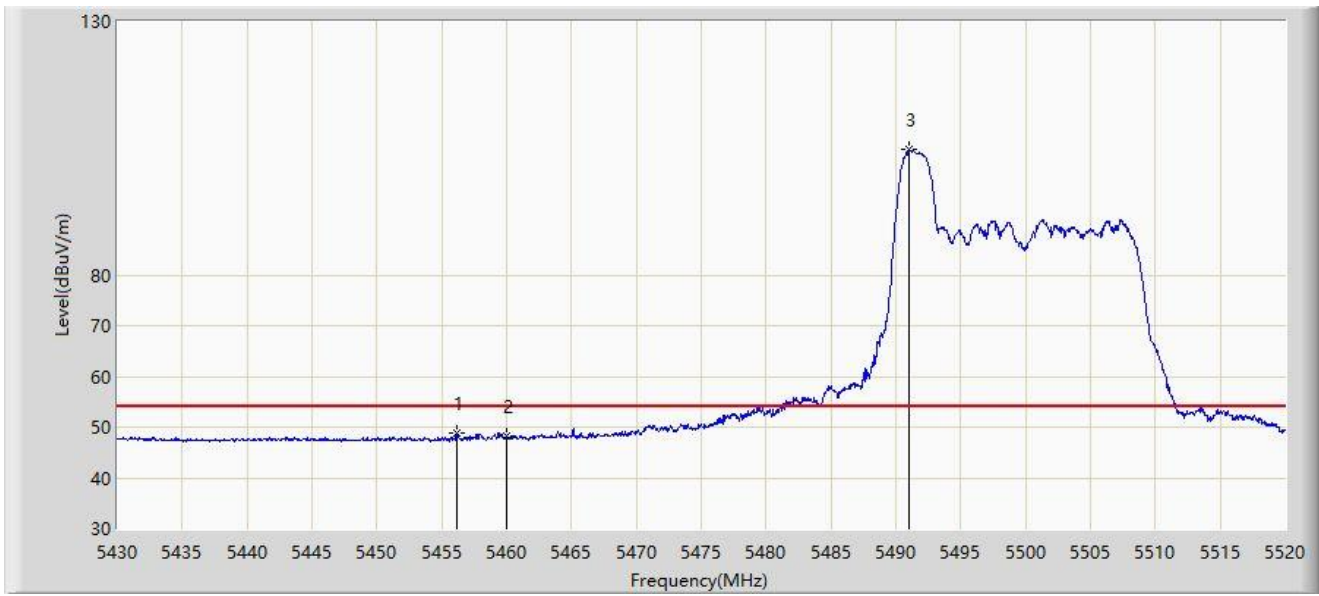


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5456.145	48.845	44.163	-5.155	54.000	4.683	AV
2		5460.000	48.164	43.448	-5.836	54.000	4.716	AV
3		5491.065	104.736	99.621	N/A	N/A	5.114	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5500MHz	

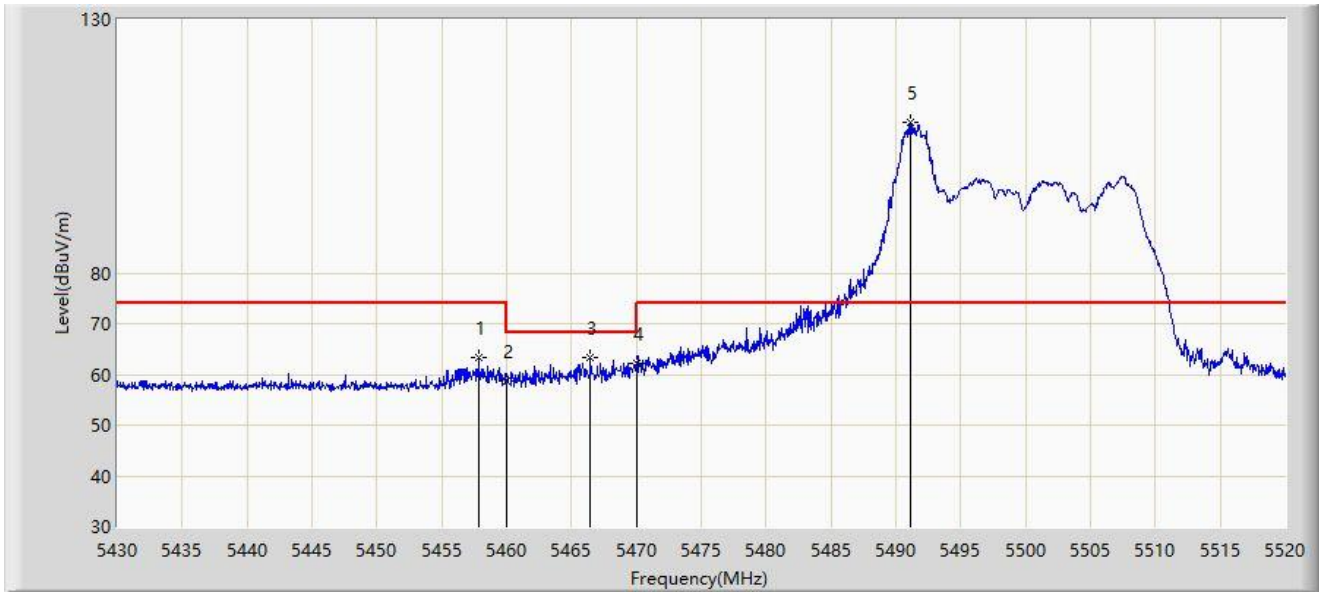


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.855	63.460	58.763	-10.540	74.000	4.697	PK
2		5460.000	58.565	53.849	-15.435	74.000	4.716	PK
3	*	5466.450	63.203	58.432	-4.997	68.200	4.772	PK
4		5470.000	62.242	57.441	-5.958	68.200	4.801	PK
5		5491.110	109.844	104.730	N/A	N/A	5.114	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5500MHz	

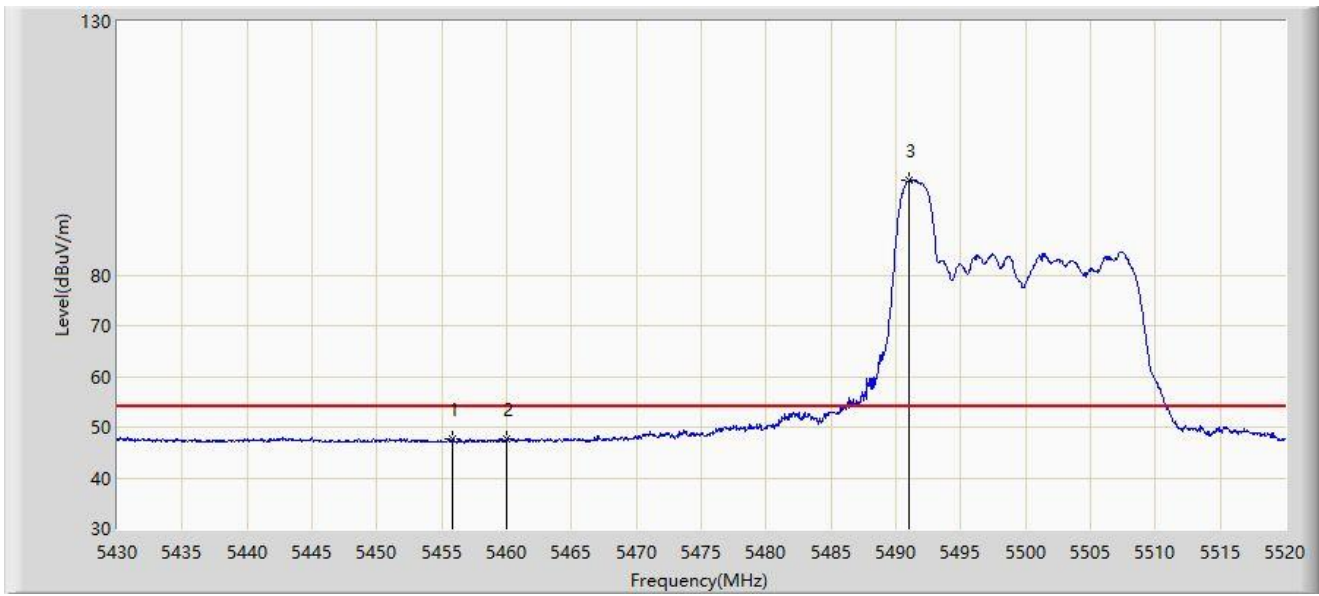


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5455.875	47.737	43.057	-6.263	54.000	4.680	AV
2		5460.000	47.543	42.827	-6.457	54.000	4.716	AV
3		5490.975	98.727	93.611	N/A	N/A	5.115	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5700MHz	

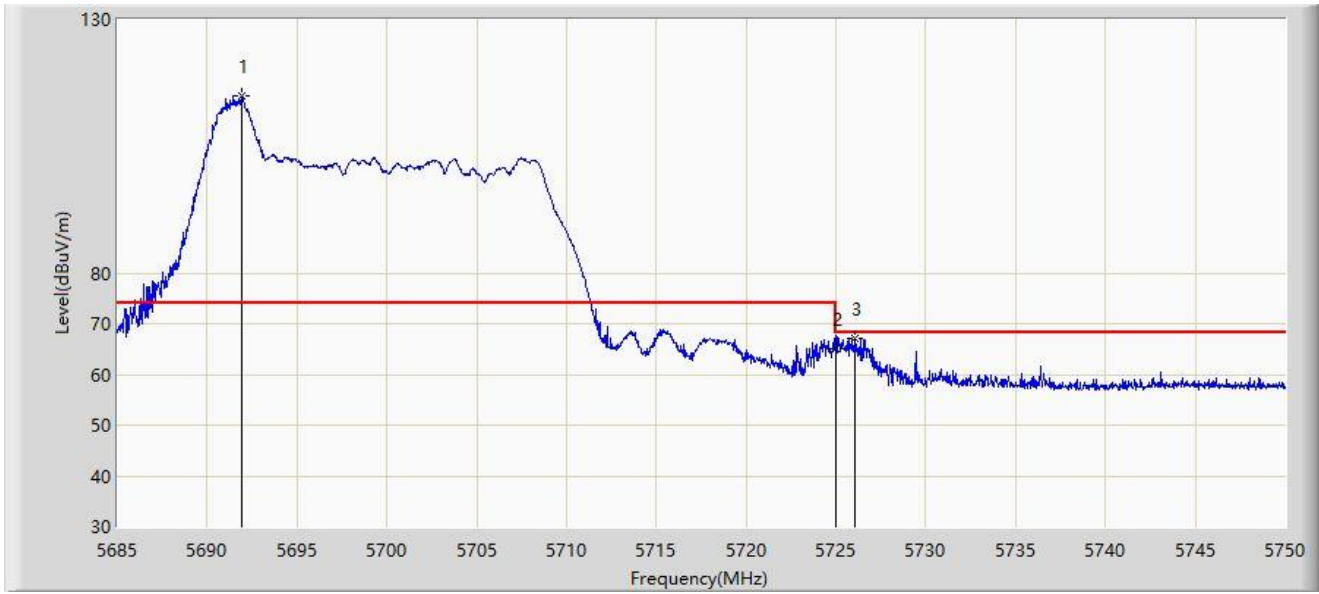


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5691.890	115.024	109.523	N/A	N/A	5.502	PK
2		5725.000	65.170	59.812	-3.030	68.200	5.358	PK
3	*	5726.080	67.243	61.877	-0.957	68.200	5.365	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5700MHz	

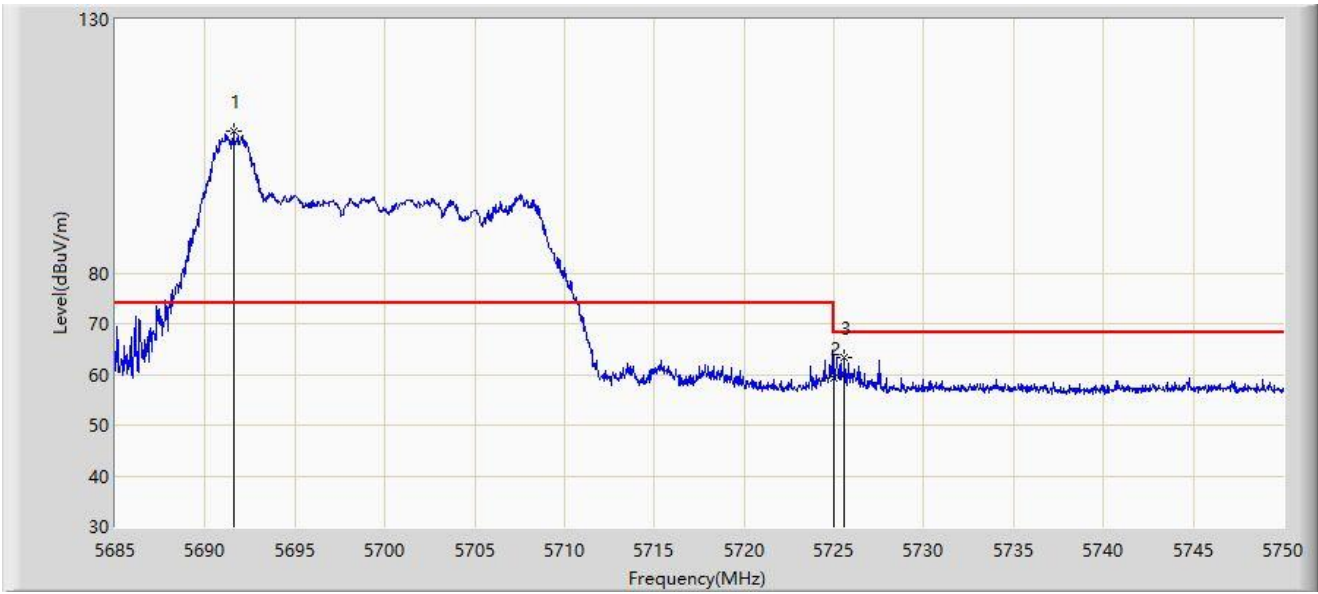


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5691.565	108.012	102.519	N/A	N/A	5.492	PK
2		5725.000	59.233	53.875	-8.967	68.200	5.358	PK
3	*	5725.592	63.265	57.903	-4.935	68.200	5.362	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5825MHz	

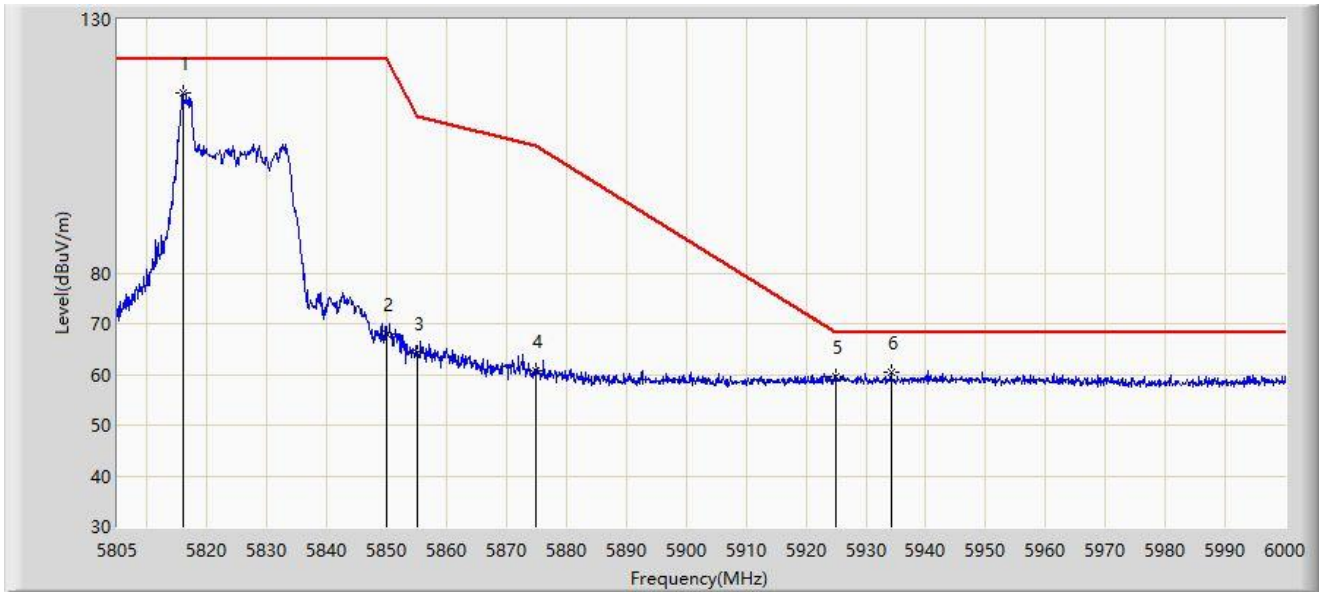


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5815.920	115.530	109.749	N/A	N/A	5.781	PK
2		5850.000	67.987	62.103	-54.213	122.200	5.885	PK
3		5855.000	64.166	58.270	-46.634	110.800	5.896	PK
4		5875.000	60.849	54.880	-44.351	105.200	5.968	PK
5		5925.000	59.483	53.119	-8.717	68.200	6.365	PK
6	*	5934.187	60.466	53.975	-7.734	68.200	6.491	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 0 by 5825MHz	

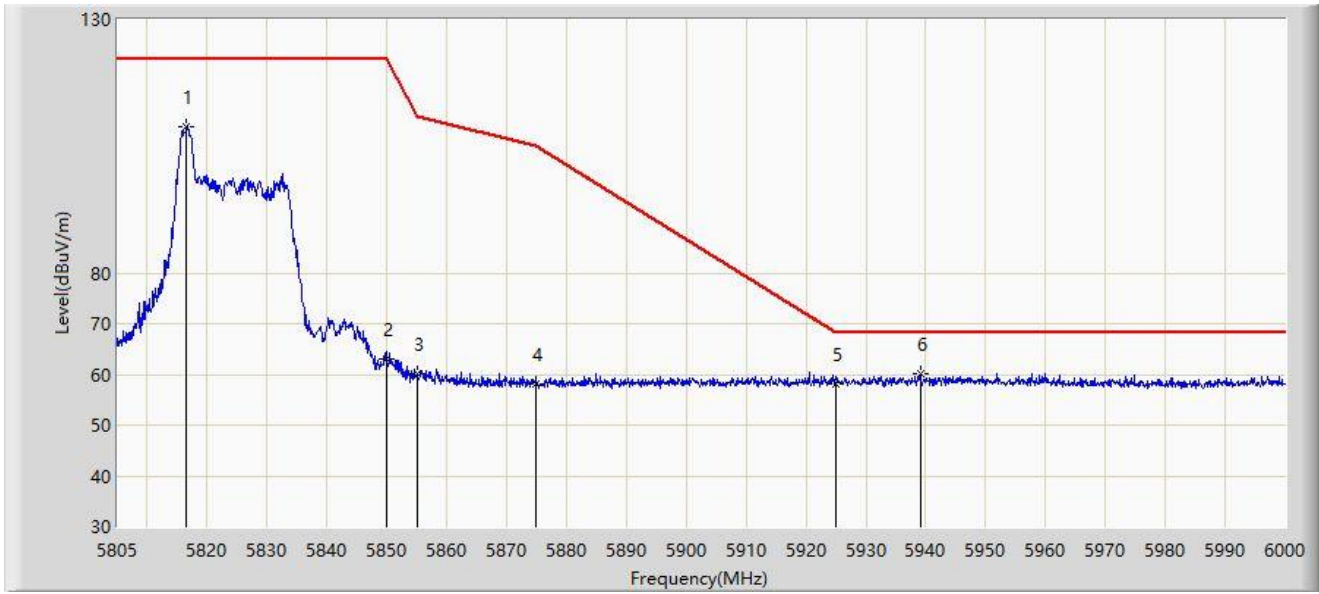

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5816.603	108.807	103.014	N/A	N/A	5.793	PK
2		5850.000	63.061	57.177	-59.139	122.200	5.885	PK
3		5855.000	60.002	54.106	-50.798	110.800	5.896	PK
4		5875.000	58.153	52.184	-47.047	105.200	5.968	PK
5		5925.000	58.194	51.830	-10.006	68.200	6.365	PK
6	*	5939.160	60.286	53.765	-7.914	68.200	6.521	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5180MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.685	70.092	65.178	-3.908	74.000	4.915	PK
2		5150.000	69.320	64.352	-4.680	74.000	4.967	PK
3		5179.165	115.924	111.381	N/A	N/A	4.543	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5180MHz	

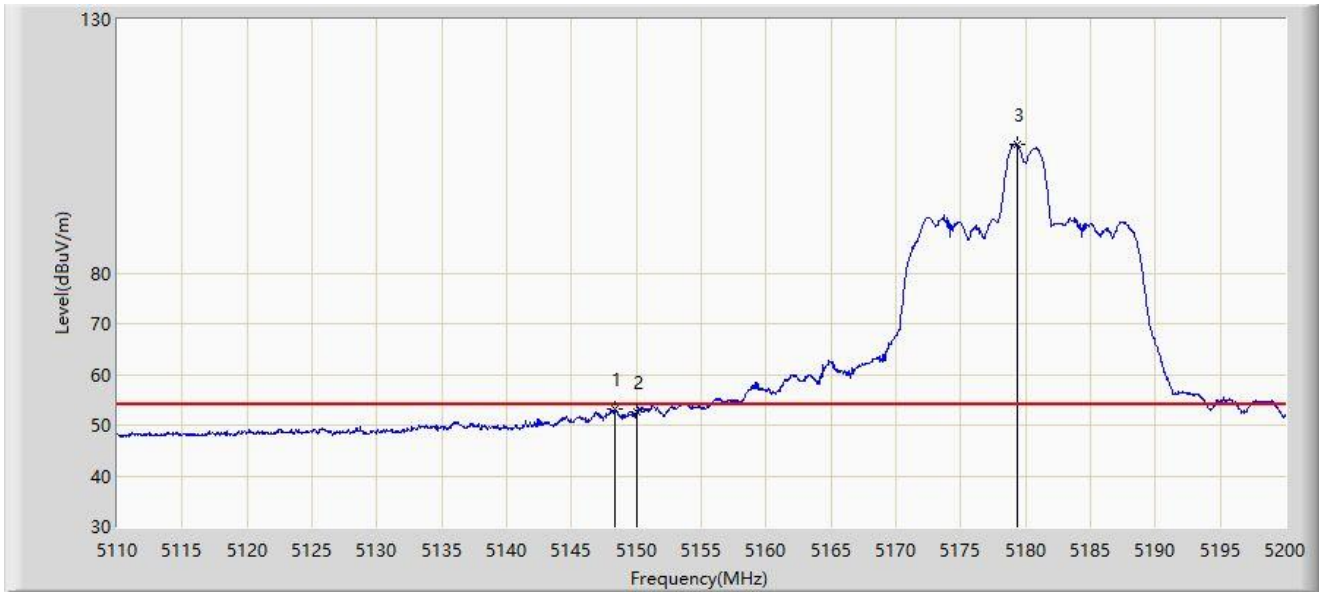


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5148.295	53.216	48.245	-0.784	54.000	4.971	AV
2		5150.000	52.571	47.603	-1.429	54.000	4.967	AV
3		5179.345	105.451	100.913	N/A	N/A	4.538	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5180MHz	

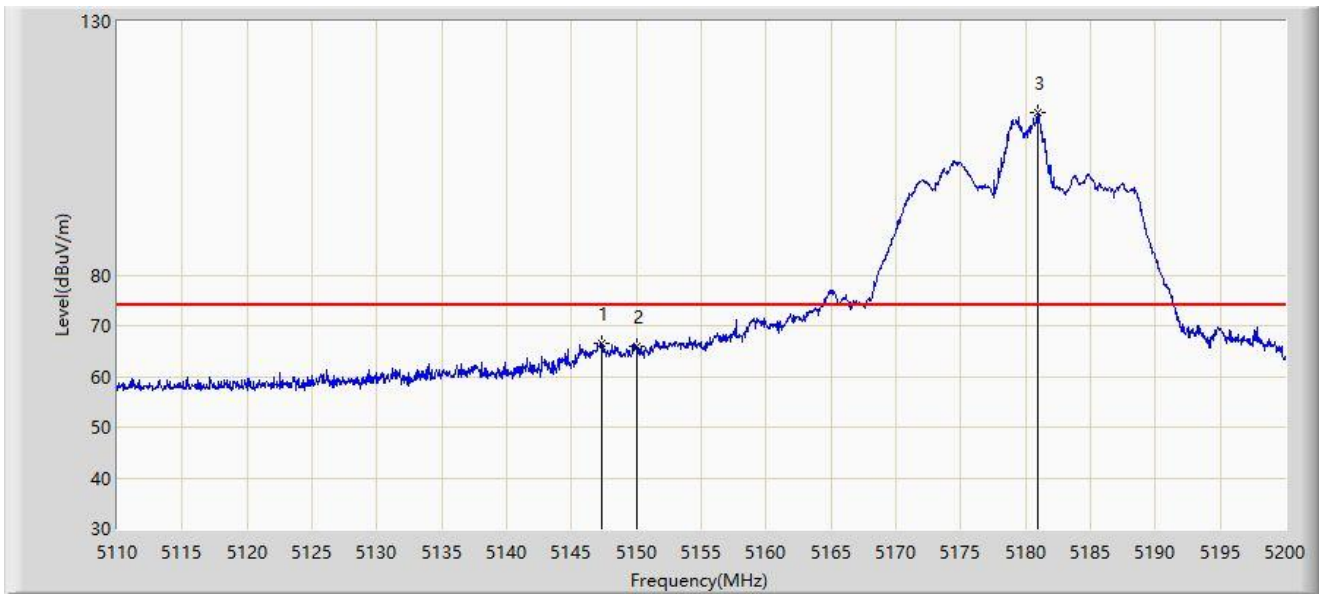

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.350	66.541	61.585	-7.459	74.000	4.956	PK
2		5150.000	65.885	60.917	-8.115	74.000	4.967	PK
3		5180.920	112.076	107.581	N/A	N/A	4.494	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5148.070	50.959	45.987	-3.041	54.000	4.972	AV
2		5150.000	49.879	44.911	-4.121	54.000	4.967	AV
3		5179.255	101.729	97.188	N/A	N/A	4.541	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5320MHz	

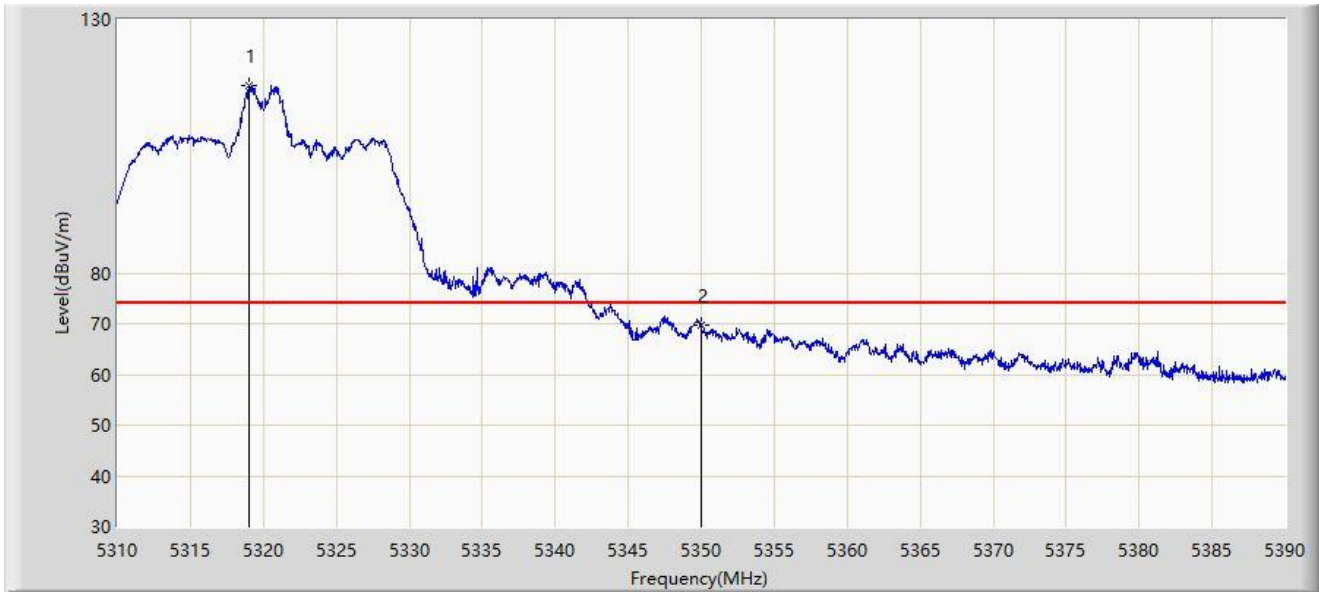


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5319.040	116.965	112.467	N/A	N/A	4.499	PK
2	*	5350.000	69.748	65.329	-4.252	74.000	4.419	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5320MHz	

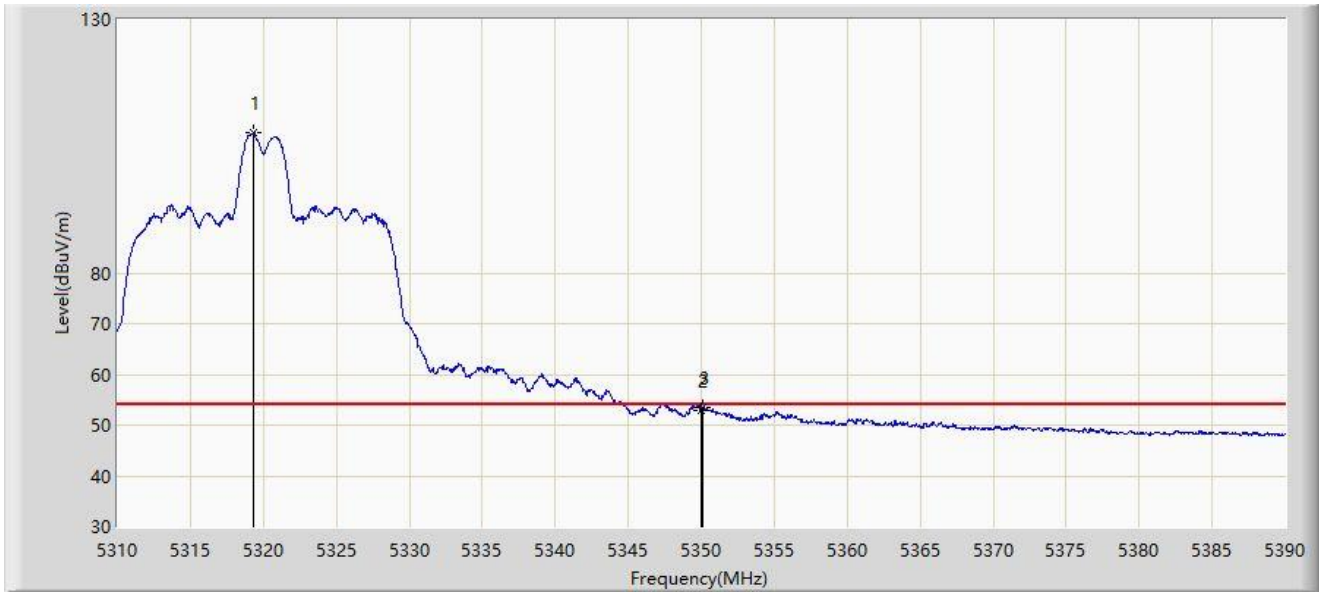


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.360	107.646	103.148	N/A	N/A	4.498	AV
2		5350.000	52.939	48.520	-1.061	54.000	4.419	AV
3	*	5350.080	53.448	49.029	-0.552	54.000	4.418	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5320MHz	

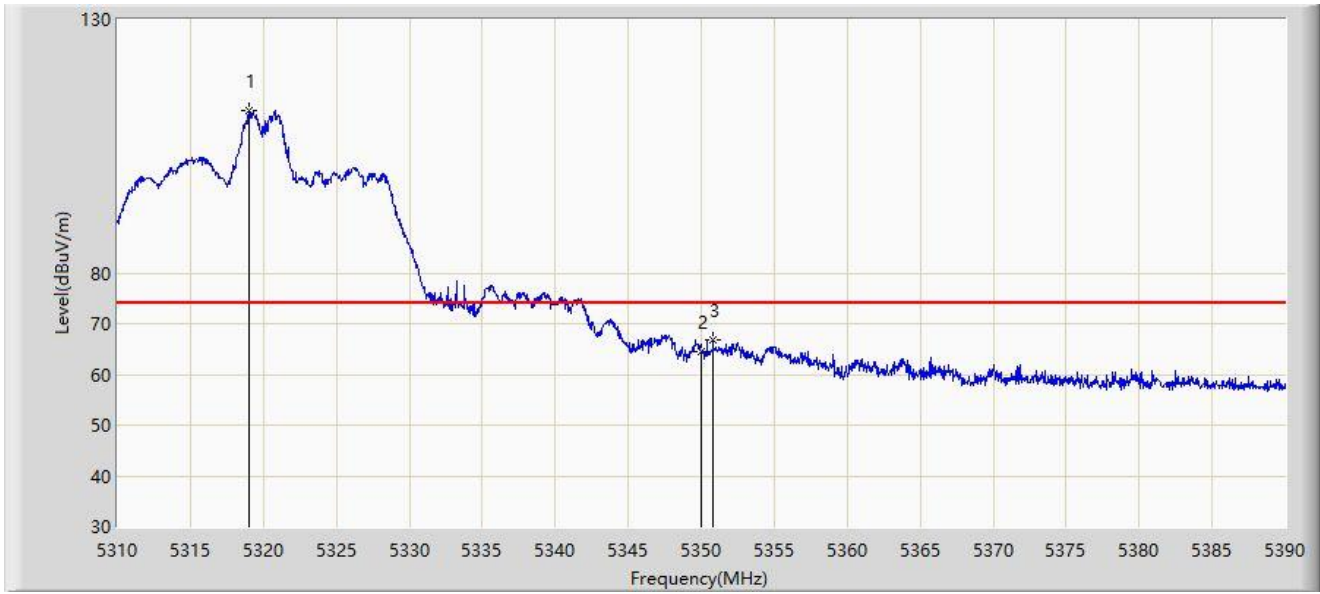


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5319.040	112.167	107.669	N/A	N/A	4.499	PK
2		5350.000	64.439	60.020	-9.561	74.000	4.419	PK
3	*	5350.800	66.683	62.267	-7.317	74.000	4.415	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5320MHz	

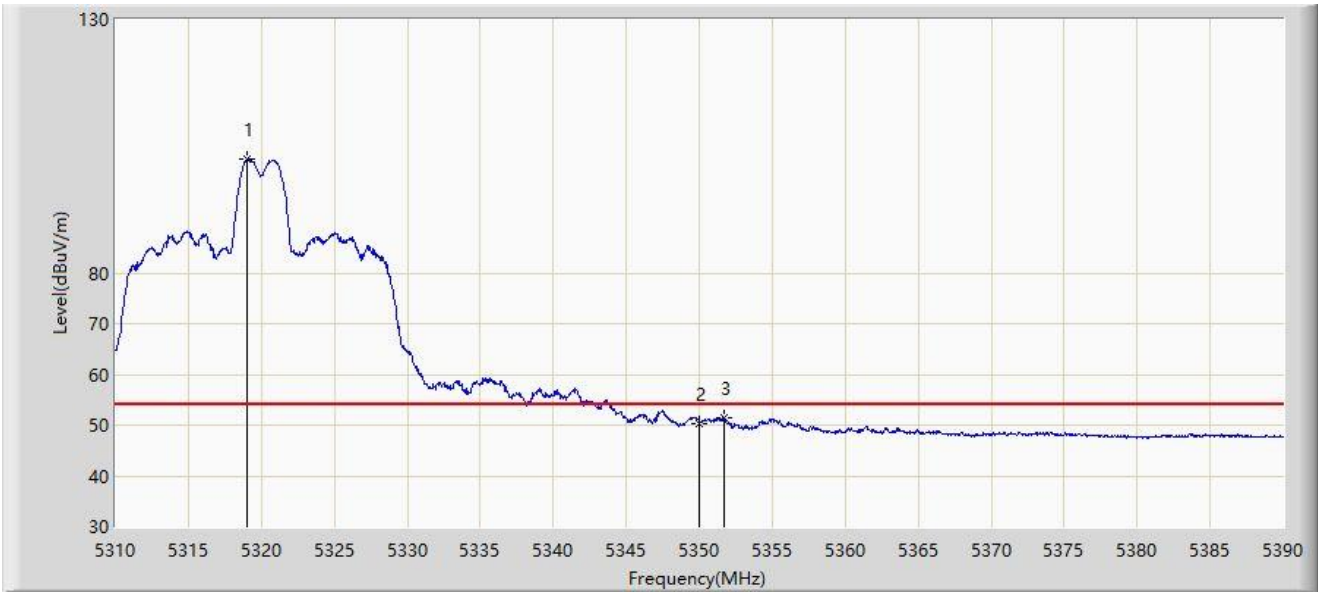


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.040	102.515	98.017	N/A	N/A	4.499	AV
2		5350.000	50.330	45.911	-3.670	54.000	4.419	AV
3	*	5351.680	51.475	47.062	-2.525	54.000	4.414	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5500MHz	

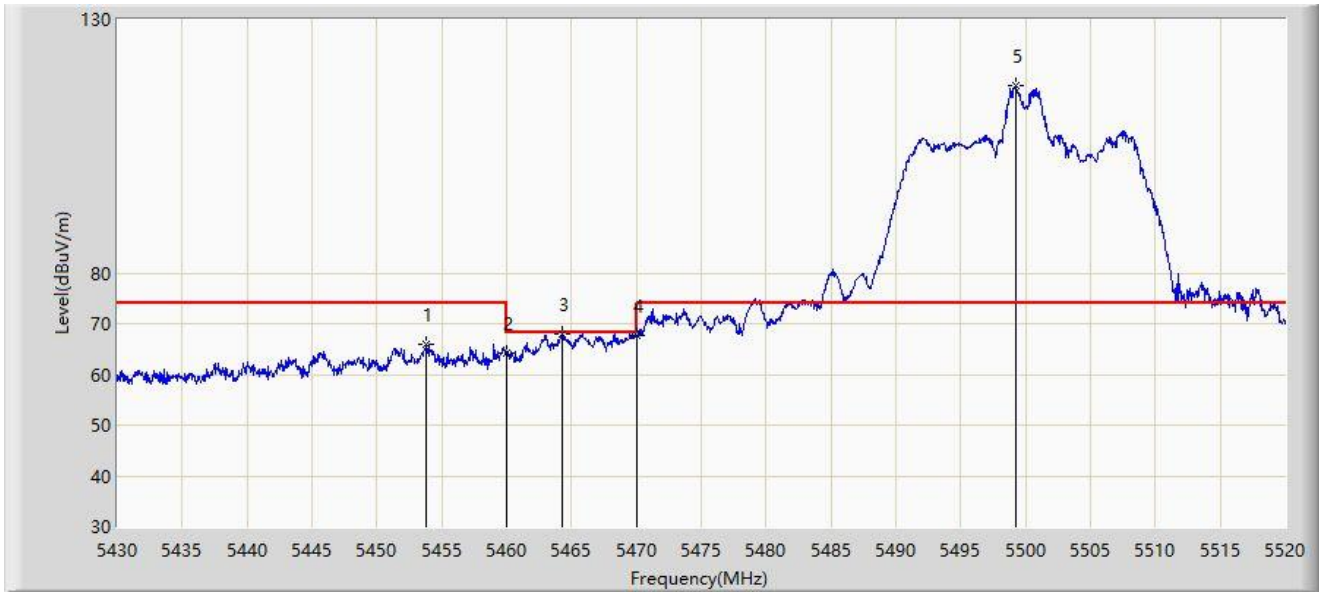

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5453.805	66.078	61.410	-7.922	74.000	4.668	PK
2		5460.000	64.279	59.563	-9.721	74.000	4.716	PK
3	*	5464.335	68.112	63.359	-0.088	68.200	4.753	PK
4		5470.000	67.702	62.901	-0.498	68.200	4.801	PK
5		5499.210	116.925	111.912	N/A	N/A	5.013	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5453.535	50.384	45.712	-3.616	54.000	4.672	AV
2		5460.000	49.661	44.945	-4.339	54.000	4.716	AV
3		5499.300	107.512	102.501	N/A	N/A	5.012	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5500MHz	

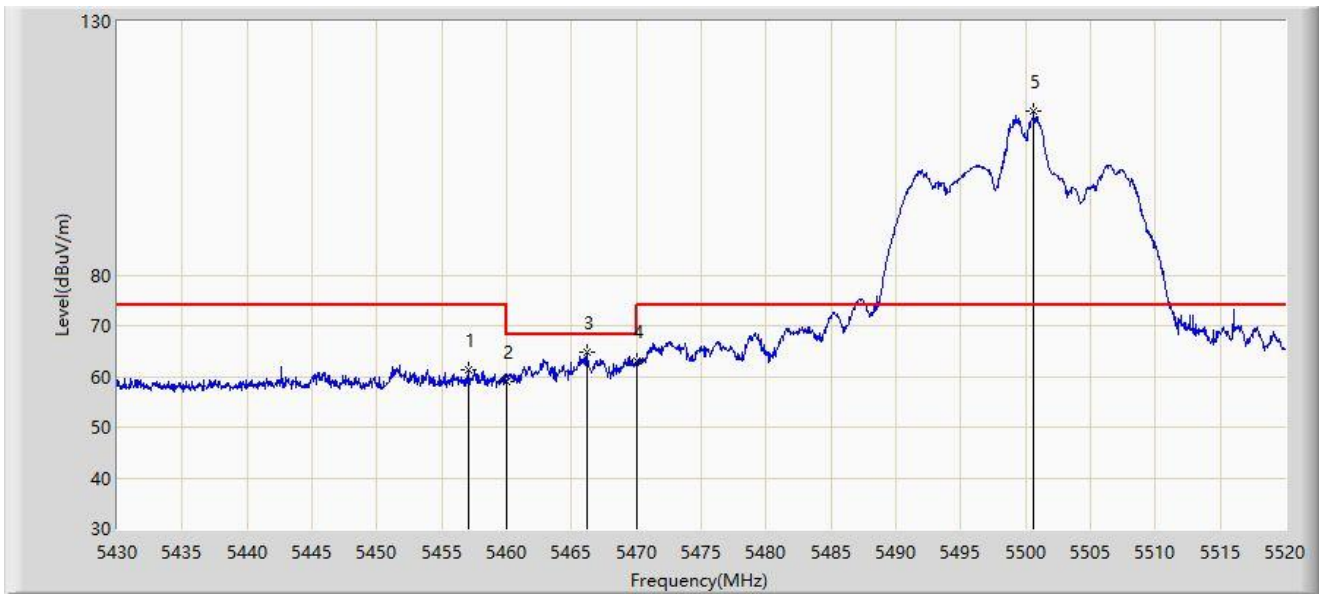

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5457.045	61.281	56.591	-12.719	74.000	4.689	PK
2		5460.000	58.997	54.281	-15.003	74.000	4.716	PK
3	*	5466.180	64.803	60.034	-3.397	68.200	4.769	PK
4		5470.000	62.904	58.103	-5.296	68.200	4.801	PK
5		5500.605	112.242	107.247	N/A	N/A	4.995	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-27
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5453.760	48.499	43.831	-5.501	54.000	4.669	AV
2		5460.000	48.120	43.404	-5.880	54.000	4.716	AV
3		5500.785	102.069	97.076	N/A	N/A	4.993	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5700MHz	

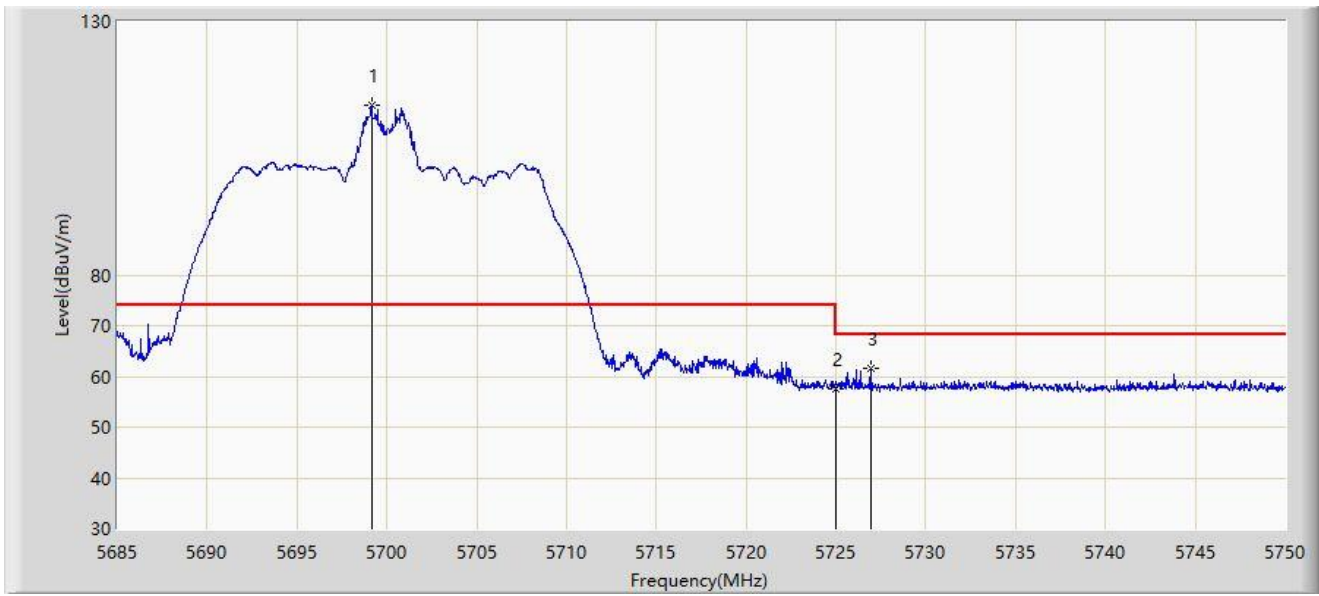


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5699.170	113.390	107.992	N/A	N/A	5.398	PK
2		5725.000	57.602	52.244	-10.598	68.200	5.358	PK
3	*	5726.925	61.676	56.302	-6.524	68.200	5.375	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5700MHz	

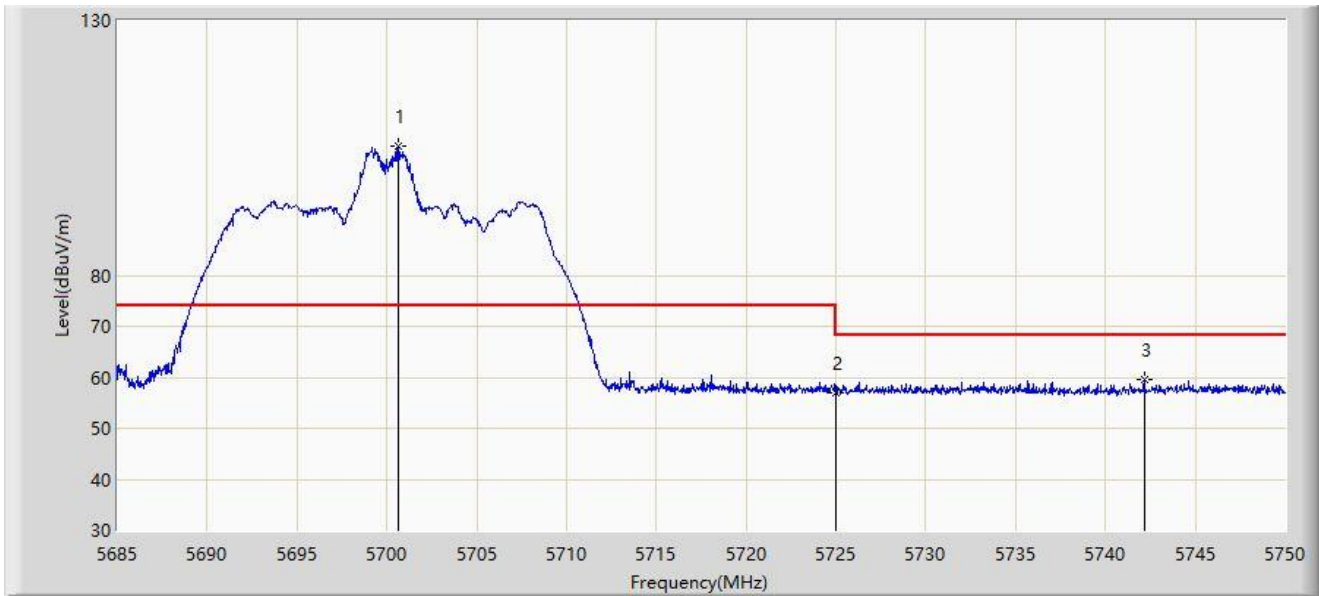


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5700.632	105.284	99.908	N/A	N/A	5.376	PK
2		5725.000	57.030	51.672	-11.170	68.200	5.358	PK
3	*	5742.167	59.683	54.153	-8.517	68.200	5.530	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5745MHz	

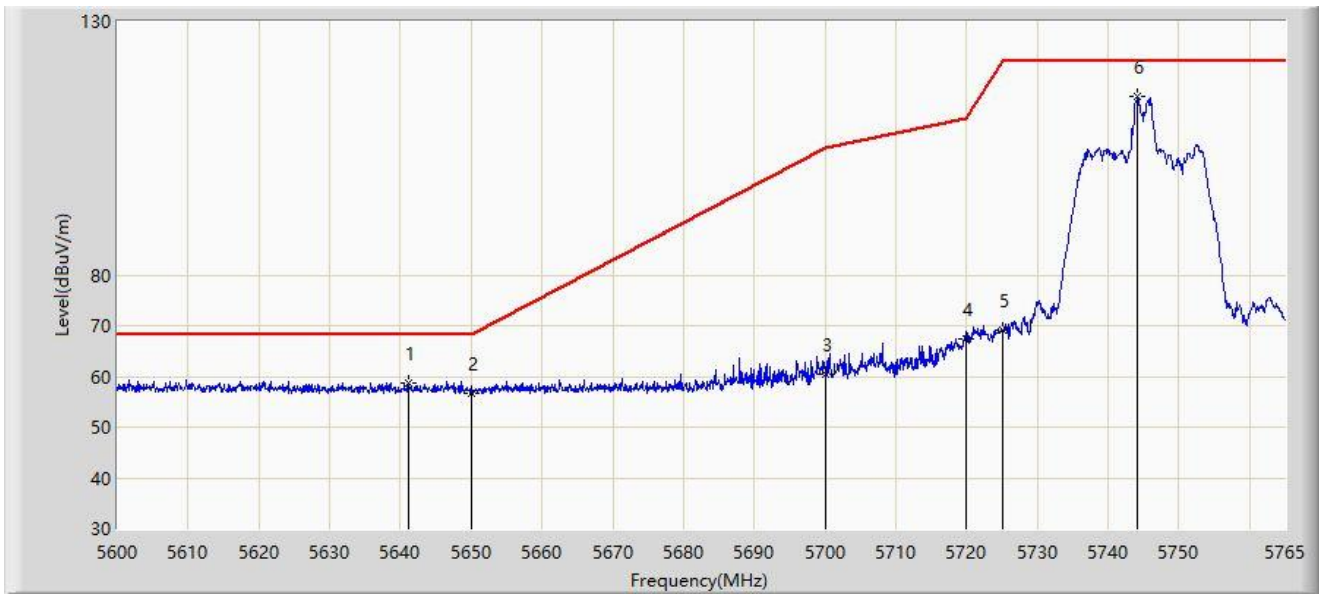


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5641.167	58.836	53.782	-9.364	68.200	5.055	PK
2		5650.000	56.641	51.562	-11.559	68.200	5.080	PK
3		5700.000	60.413	55.028	-44.787	105.200	5.385	PK
4		5720.000	67.307	61.982	-43.493	110.800	5.325	PK
5		5725.000	69.246	63.888	-52.954	122.200	5.358	PK
6		5744.210	115.249	109.701	N/A	N/A	5.549	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Vertical
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5745MHz	

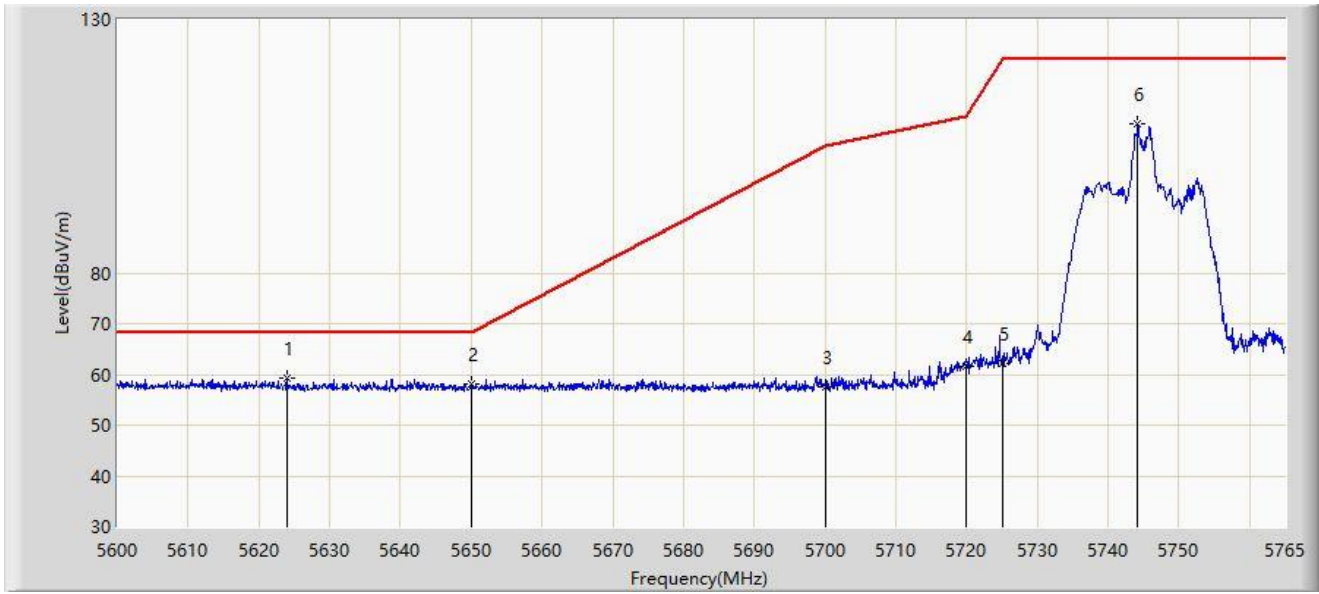


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5623.925	59.276	54.374	-8.924	68.200	4.902	PK
2		5650.000	58.009	52.930	-10.191	68.200	5.080	PK
3		5700.000	57.603	52.218	-47.597	105.200	5.385	PK
4		5720.000	61.729	56.404	-49.071	110.800	5.325	PK
5		5725.000	62.119	56.761	-60.081	122.200	5.358	PK
6		5744.210	109.537	103.989	N/A	N/A	5.549	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2023-03-30
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Ted Chen
Probe: WZ_Horn 3117_1-18GHz	Polarity: Horizontal
EUT: Tablet Computer	Power: By Battery
Test Mode: Transmit by 802.11ax20-Tone-RU 4 by 5825MHz	

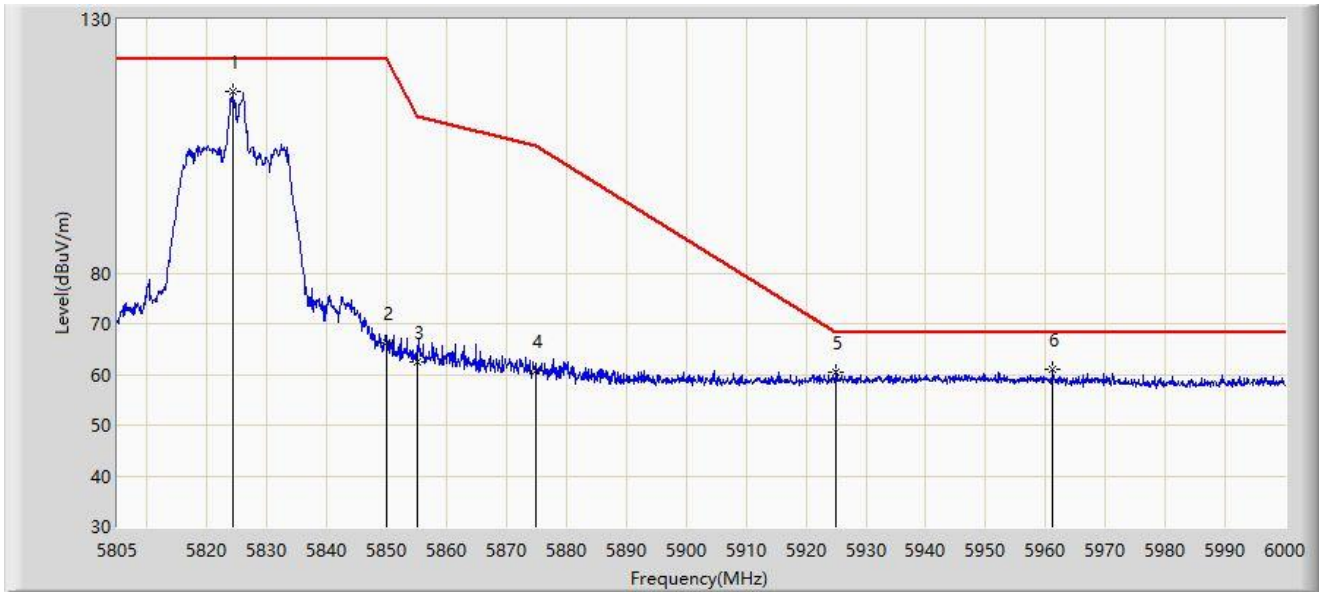

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5824.402	115.687	109.754	N/A	N/A	5.933	PK
2		5850.000	66.106	60.222	-56.094	122.200	5.885	PK
3		5855.000	62.605	56.709	-48.195	110.800	5.896	PK
4		5875.000	60.720	54.751	-44.480	105.200	5.968	PK
5		5925.000	60.318	53.954	-7.882	68.200	6.365	PK
6	*	5961.195	60.915	54.480	-7.285	68.200	6.435	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).