





802.11ax / 40 MHz / MCS0 / 5510 MHz / Ch102

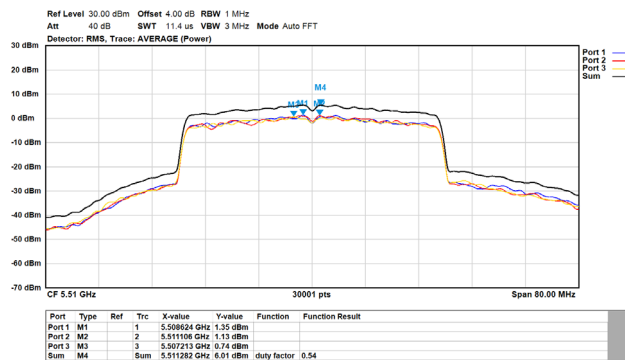


802.11ax / 40 MHz / MCS0 / 5550 MHz / Ch110

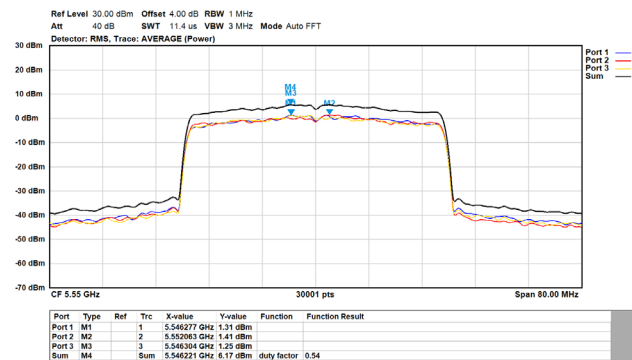


802.11ax / 40 MHz / MCS0 / 5670 MHz / Ch134

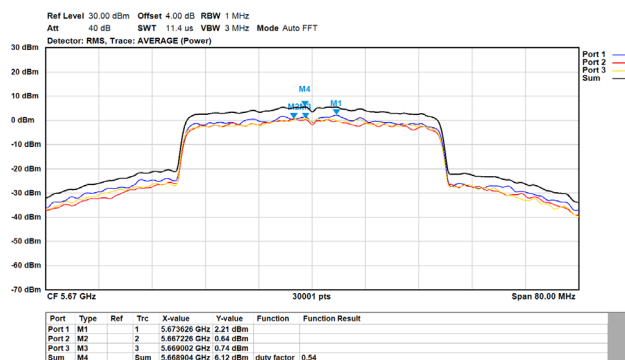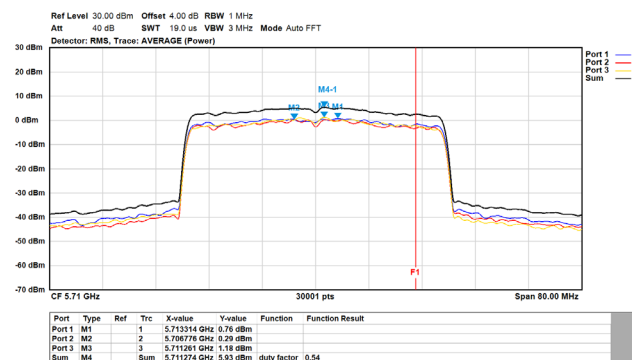802.11ax / 40 MHz / MCS0 / 5710 MHz / Ch142
(UNII-2C)


802.11ax / 80 MHz / MCS0 / 5210 MHz / Ch42

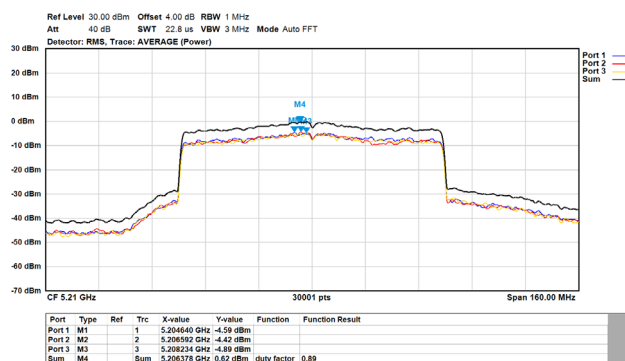




802.11ax / 80 MHz / MCS0 / 5290 MHz / Ch58

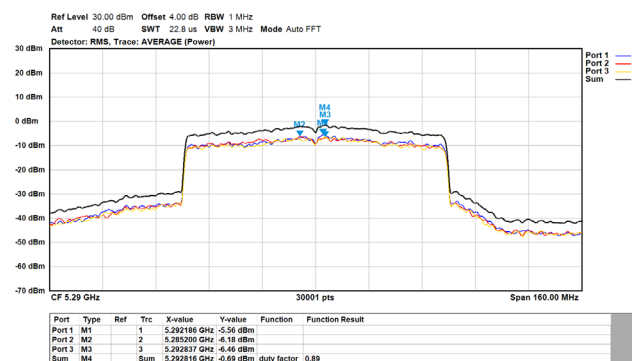


802.11ax / 80 MHz / MCS0 / 5530 MHz / Ch106

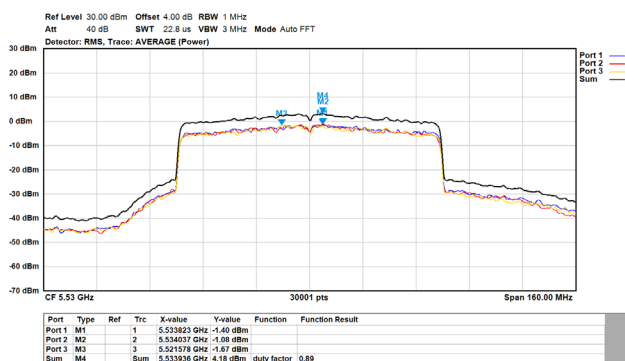

802.11ax / 80 MHz / MCS0 / 5610 MHz / Ch122

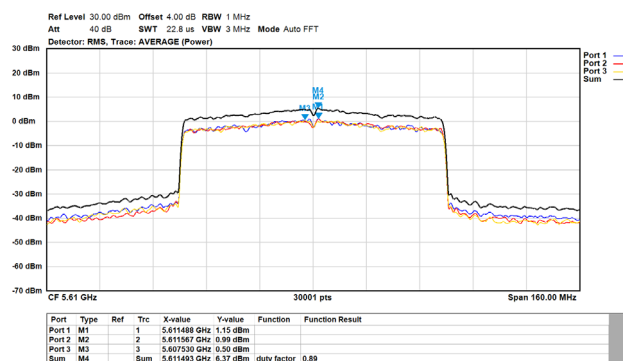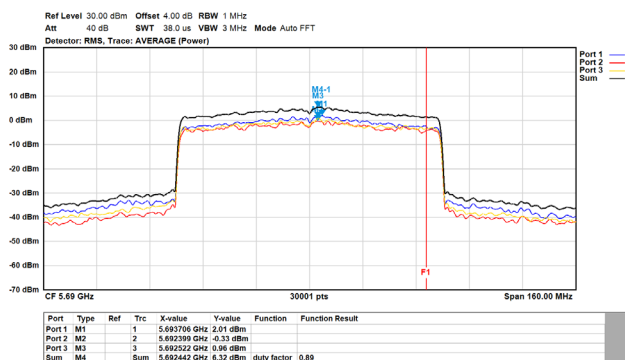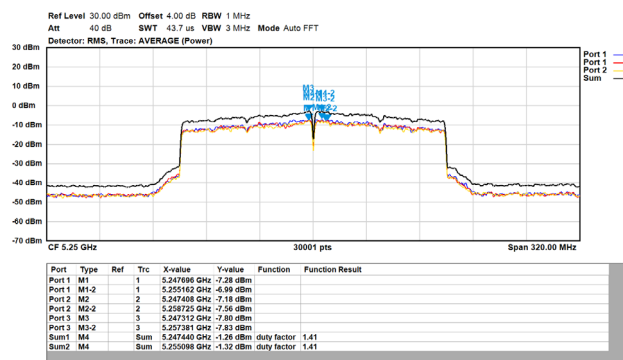
802.11ax / 80 MHz / MCS0 / 5690 MHz / Ch138
(UNII-2C)802.11ax / 160 MHz / MCS0 / 5250 MHz / Ch50
(UNII-1)

802.11ax / 160 MHz / MCS0 / 5570 MHz / Ch114

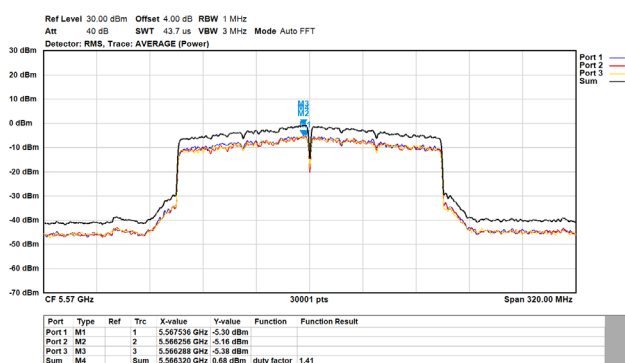


For 5GHz band 4


802.11a / 20 MHz / 6M / 5720 MHz / Ch144 (UNII-3)

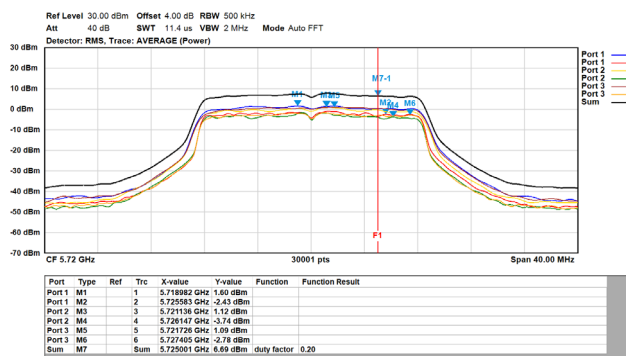


802.11a / 20 MHz / 6M / 5745 MHz / Ch149

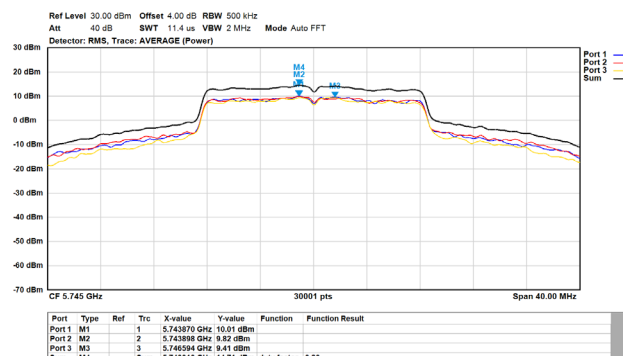


802.11a / 20 MHz / 6M / 5785 MHz / Ch157

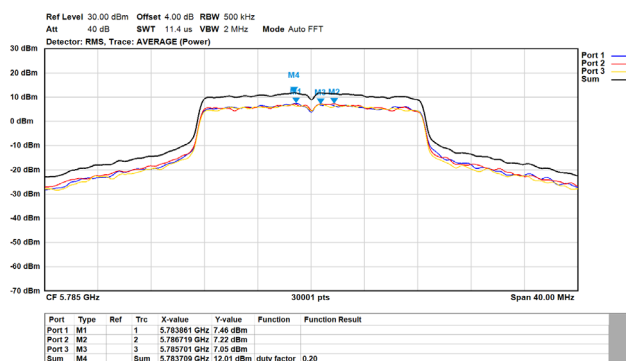


802.11a / 20 MHz / 6M / 5825 MHz / Ch165

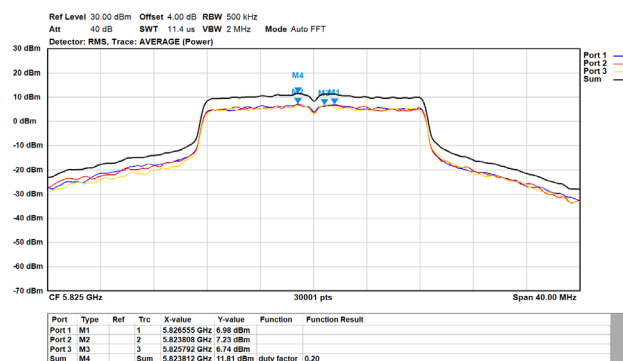


802.11ax / 20 MHz / MCS0 / 5720MHz / Ch144 (UNII-3)

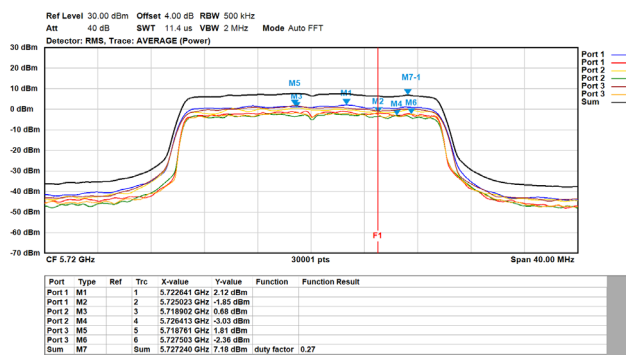



802.11ax / 20 MHz / MCS0 / 5745 MHz / Ch149

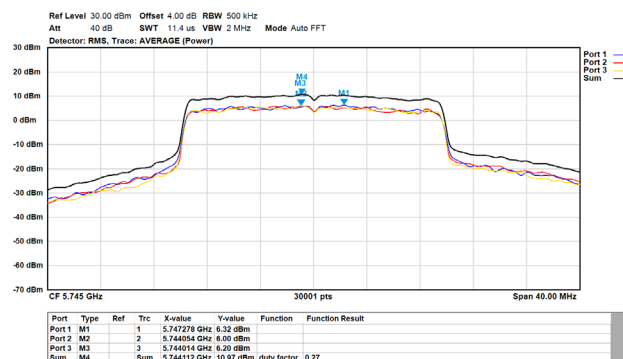


802.11ax / 20 MHz / MCS0 / 5785 MHz / Ch157

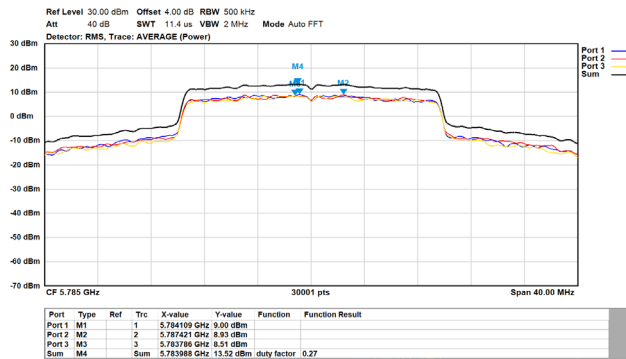



802.11ax / 20 MHz / MCS0 / 5825 MHz / Ch165

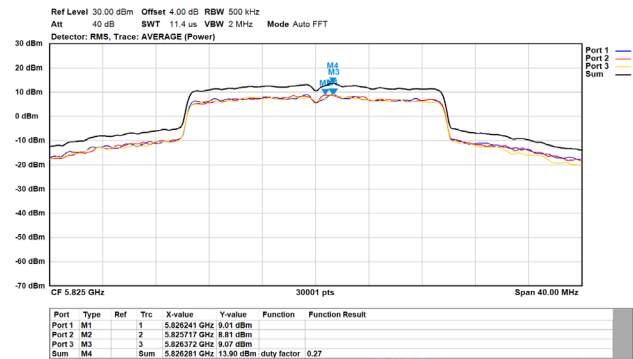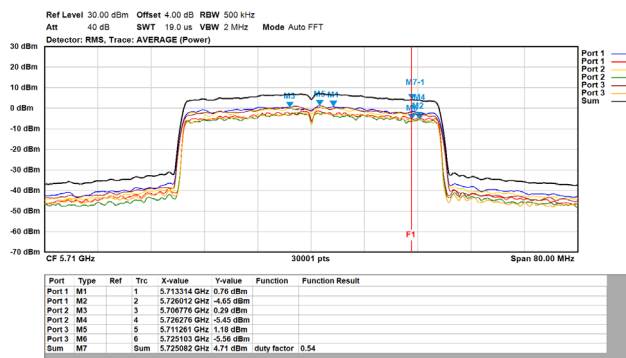802.11ax / 40 MHz / MCS0 / 5710MHz / Ch142
(UNII-3)


802.11ax / 40 MHz / MCS0 / 5755MHz / Ch151

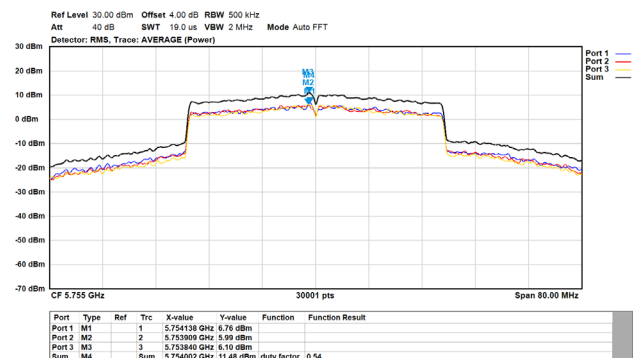

802.11ax / 40 MHz / MCS0 / 5795 MHz / Ch159

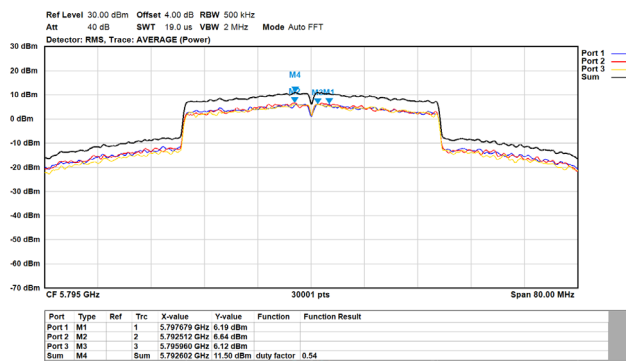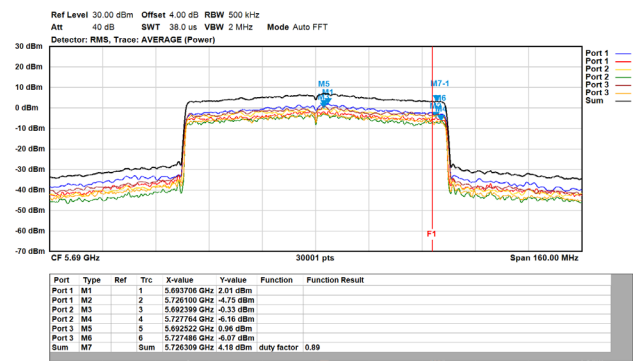802.11ax / 80 MHz / MCS0 / 5690 MHz / Ch138
(UNII-3)

802.11ax / 80 MHz / MCS0 / 5775 MHz / Ch155

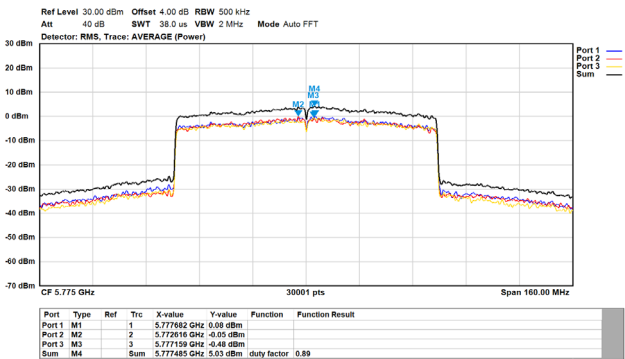


Appendix E. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Mode 1: EUT 1 + Adapter

Site : HC-CB04
Condition : 3m Horizontal
Mode : LF_ax80_TX_5755MHz
Test By : Ling Chen

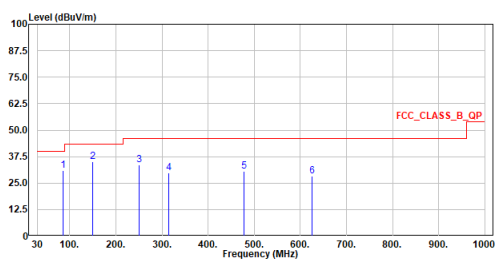


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	84.681	30.94	40.00	-9.06	39.63	-8.69	QP
2	149.019	34.91	43.50	-8.59	38.10	-3.19	QP
3	249.996	33.69	46.00	-12.31	38.19	-4.50	QP
4	314.598	29.96	46.00	-16.04	32.20	-2.24	QP
5	478.286	30.53	46.00	-15.47	28.75	1.78	QP
6	624.998	28.25	46.00	-17.75	23.28	4.97	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site : HC-CB04
Condition : 3m Vertical
Mode : LF_ax80_TX_5755MHz
Test By : Ling Chen

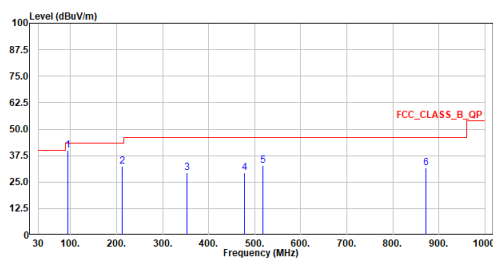


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	84.360	40.12	43.50	-3.38	48.58	-8.46	QP
2	212.118	32.54	43.50	-10.96	39.27	-6.73	QP
3	351.895	29.28	46.00	-16.72	30.84	-1.56	QP
4	478.237	29.57	46.00	-16.43	27.79	1.78	QP
5	518.250	32.83	46.00	-13.17	30.19	2.64	QP
6	871.524	31.67	46.00	-14.33	23.22	8.45	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Mode 2: EUT 1 + PoE

Site :HC-CB04
Condition :3m Horizontal
Mode :LF_ax80_TX_5775MHz
Test By :Ling Chen

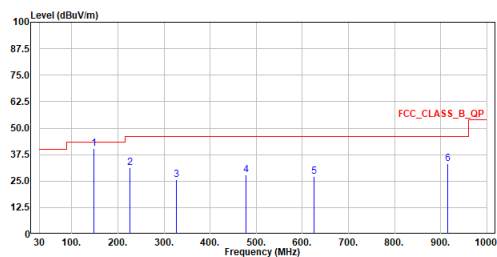


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	148.098	40.44	43.50	-3.06	43.64	-3.20	QP
2	226.134	31.24	46.00	-14.76	37.46	-6.22	QP
3	327.208	25.82	46.00	-20.18	27.66	-1.84	QP
4	476.928	27.74	46.00	-18.26	25.96	1.78	QP
5	625.047	27.26	46.00	-18.74	22.29	4.97	QP
6	914.980	33.11	46.00	-12.89	24.05	9.06	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m Vertical
Mode :LF_ax80_TX_5775MHz
Test By :Ling Chen

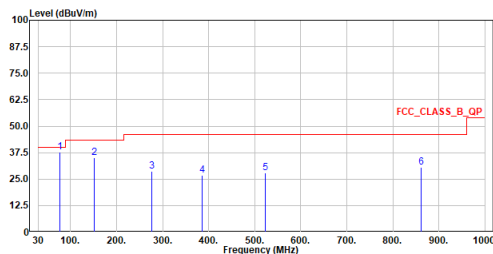


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	77.191	37.82	40.00	-2.18	44.67	-6.85	QP
2	151.590	35.08	43.50	-8.42	38.13	-3.05	QP
3	276.526	28.69	46.00	-17.31	32.06	-3.37	QP
4	385.408	26.98	46.00	-19.02	27.36	-0.38	QP
5	523.100	27.80	46.00	-18.20	25.10	2.70	QP
6	861.048	30.44	46.00	-15.56	21.91	8.53	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Mode 3: EUT 2 + Adapter

Site :HC-CB04
Condition :3m ,Horizontal
Mode :LF_a_TX_5745MHz
Test By :Cyril Chen

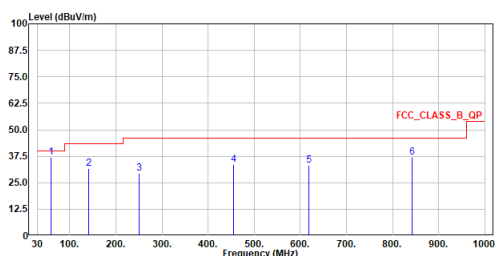


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	59.100	37.13	46.00	-2.87	40.10	-2.97	QP
2	140.095	31.75	43.50	-11.75	35.45	-3.70	QP
3	249.996	29.54	46.00	-16.46	34.04	-4.50	QP
4	454.957	33.58	46.00	-12.42	32.07	1.51	QP
5	618.790	33.33	46.00	-12.67	28.48	4.85	QP
6	843.054	36.89	46.00	-9.11	28.61	8.28	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :LF_a_TX_5745MHz
Test By :Cyril Chen

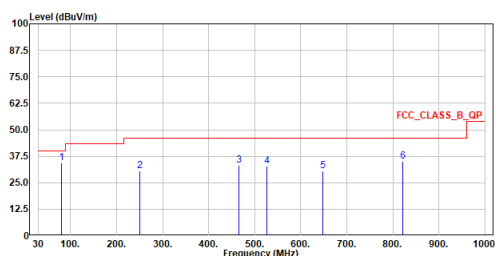


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	79.955	34.32	46.00	-5.68	41.91	-7.59	QP
2	249.996	30.61	46.00	-15.39	35.11	-4.50	QP
3	465.627	33.18	46.00	-12.82	31.43	1.75	QP
4	526.737	32.90	46.00	-13.10	30.16	2.74	QP
5	648.569	30.50	46.00	-15.50	25.16	5.34	QP
6	821.908	34.99	46.00	-11.01	27.10	7.89	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Mode 4: EUT 3 + Adapter

Site :HC-CB04
Condition :3m ,Horizontal
Mode :LF_a_TX_5745MHz
Test By :Cyril Chen

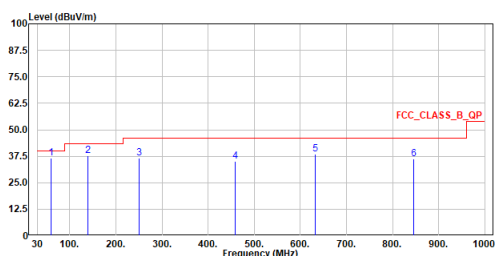


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	59.100	36.54	40.00	-3.46	39.51	-2.97	QP
2	138.349	37.86	43.50	-5.64	41.70	-3.84	QP
3	249.996	36.67	46.00	-9.33	41.17	-4.50	QP
4	458.255	35.14	46.00	-10.86	33.62	1.52	QP
5	631.885	38.48	46.00	-7.52	33.45	5.03	QP
6	845.285	36.14	46.00	-9.86	27.84	8.30	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :LF_a_TX_5745MHz
Test By :Cyril Chen

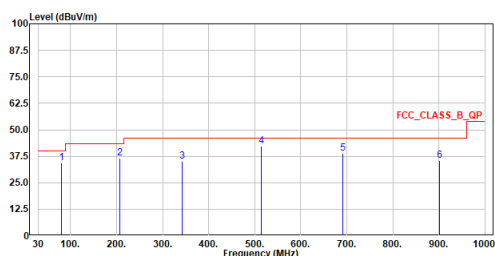

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	79.955	34.49	40.00	-5.51	42.08	-7.59	QP
2	207.510	36.52	43.50	-6.98	43.29	-6.77	QP
3	341.661	35.22	46.00	-10.78	36.85	-1.63	QP
4	514.418	42.37	46.00	-3.63	39.81	2.56	QP
5	691.540	38.96	46.00	-7.04	32.95	6.01	QP
6	900.672	35.29	46.00	-10.71	26.56	8.73	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Above 1 GHz

Mode 1: EUT 1 + Adapter

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5180MHz
Test By :Gary

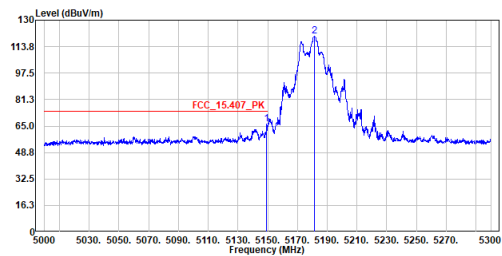


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.400	66.36	74.00	-7.64	44.92	21.44	Peak
2	5181.200	120.36	-----	-----	98.90	21.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5180MHz
Test By :Gary

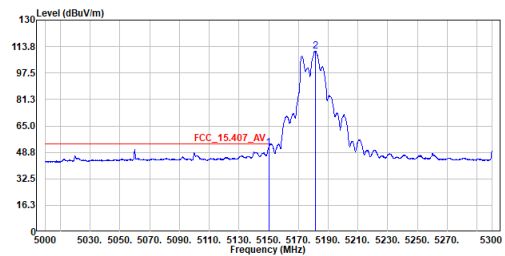


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	51.47	54.00	-2.53	30.03	21.44	Average
2	5181.200	111.00	-----	-----	89.54	21.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5180MHz
Test By :Gary

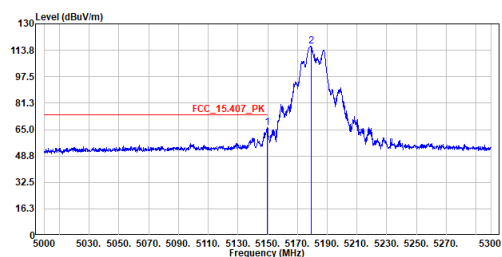


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.550	66.29	74.00	-7.71	44.85	21.44	Peak
2	5179.250	116.06	-----	-----	94.60	21.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5180MHz
Test By :Gary

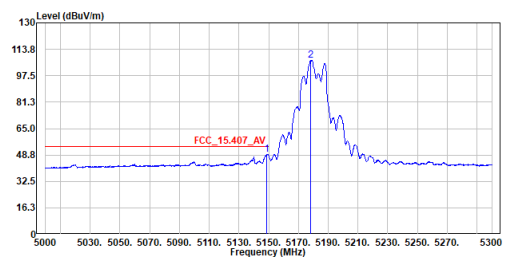


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.800	49.29	54.00	-4.71	27.85	21.44	Average
2	5178.350	107.08	-----	-----	85.62	21.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5180MHz
Test By :Gary

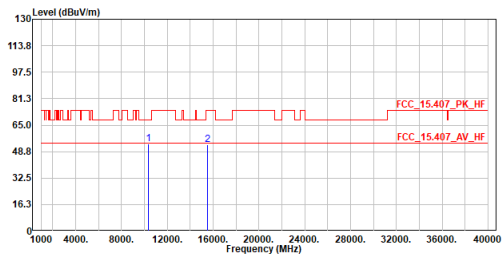


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10360.000	53.35	68.20	-14.85	61.35	-8.00	Peak
2	15540.000	52.90	74.00	-21.10	56.11	-3.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5180MHz
Test By :Gary

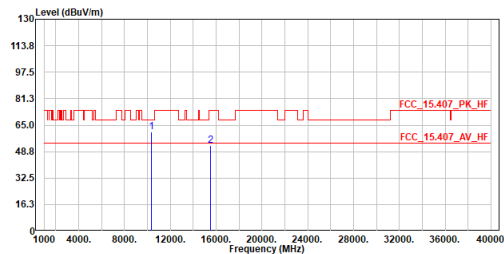


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10360.000	60.64	68.20	-7.56	68.64	-8.00	Peak
2	15540.000	52.41	74.00	-21.59	55.62	-3.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5220MHz
Test By :Gary

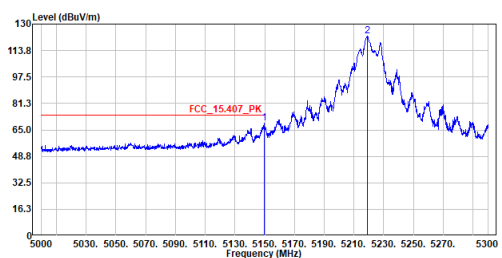


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.700	69.05	74.00	-4.95	47.61	21.44	Peak
2	5218.850	122.43	-----	-----	100.95	21.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5220MHz
Test By :Gary

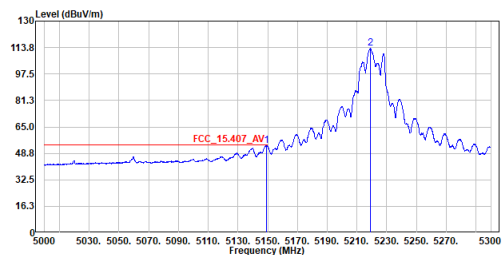


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.250	53.59	54.00	-0.41	32.15	21.44	Average
2	5219.000	113.38	-----	-----	91.90	21.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5220MHz
Test By :Gary

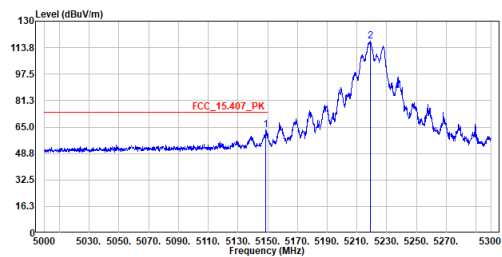


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.800	63.22	74.00	-10.78	41.78	21.44	Peak
2	5219.150	117.49	-----	-----	96.01	21.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5220MHz
Test By :Gary

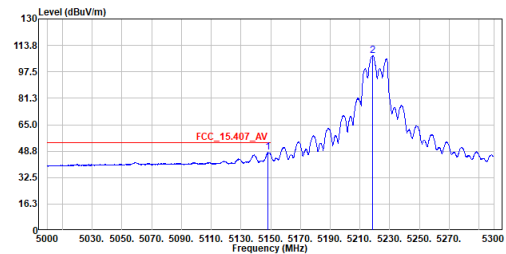


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.200	47.86	54.00	-6.14	26.42	21.44	Average
2	5218.400	107.64	-----	-----	86.16	21.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5220MHz
Test By :Gary

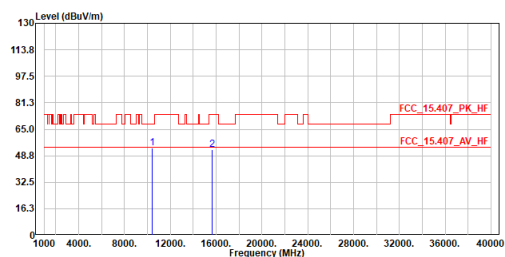


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10440.000	53.41	68.20	-14.79	61.25	-7.84	Peak
2	15660.000	52.36	74.00	-21.64	55.52	-3.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5220MHz
Test By :Gary

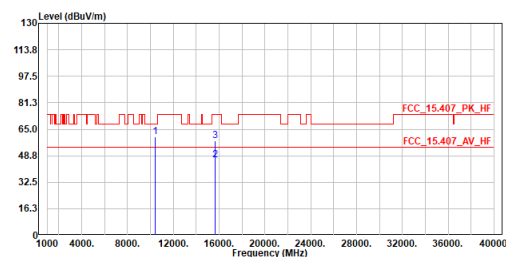


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10440.000	60.10	68.20	-8.10	67.94	-7.84	Peak
2	15660.000	46.13	54.00	-7.87	49.29	-3.16	Average
3	15660.000	58.02	74.00	-15.98	61.18	-3.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5240MHz
Test By :Gary

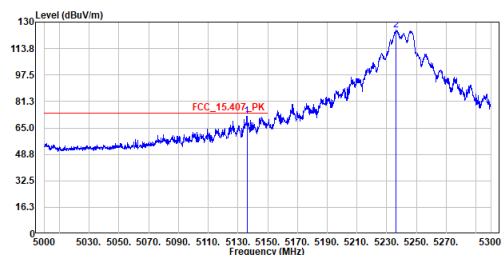


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5136.050	72.26	74.00	-1.74	50.83	21.43	Peak
2	5236.100	125.13	-----	-----	103.64	21.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5240MHz
Test By :Gary

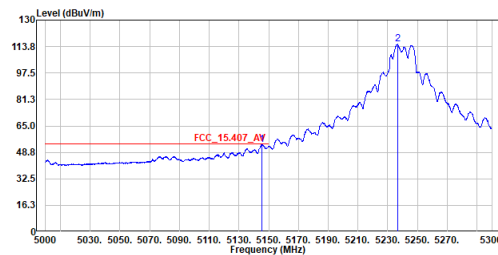


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.200	53.62	54.00	-0.38	32.18	21.44	Average
2	5236.700	115.04	-----	-----	93.55	21.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5240MHz
Test By :Gary

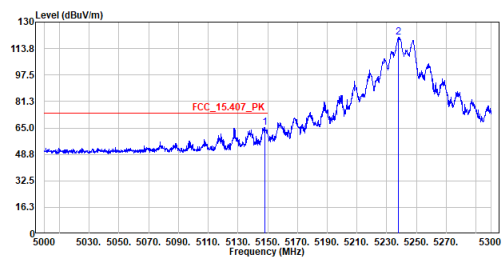


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.200	65.46	74.00	-8.54	44.02	21.44	Peak
2	5237.750	120.65	-----	-----	99.16	21.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5240MHz
Test By :Gary

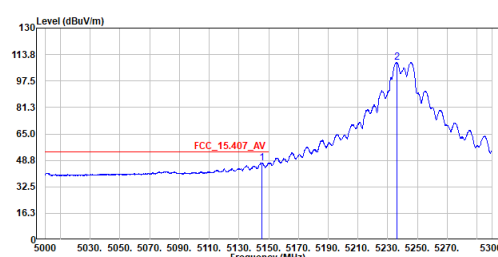


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.650	47.25	54.00	-6.75	25.81	21.44	Average
2	5236.100	109.03	-----	-----	87.54	21.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5240MHz
Test By :Gary

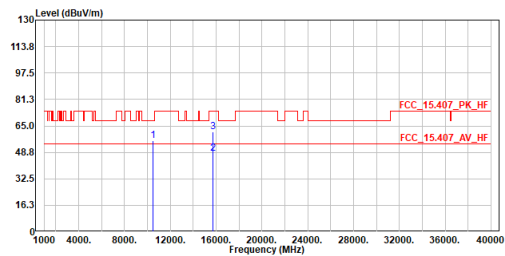


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10480.000	56.11	68.20	-12.09	63.88	-7.77	Peak
2	15720.000	47.93	54.00	-6.07	51.05	-3.12	Average
3	15720.000	61.26	74.00	-12.74	64.38	-3.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5240MHz
Test By :Gary

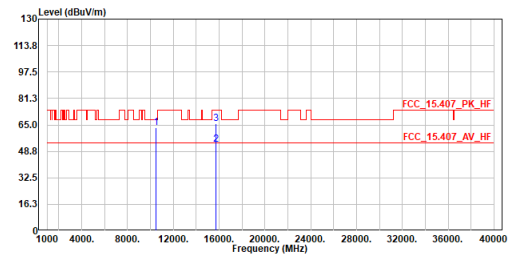


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10480.000	63.30	68.20	-4.90	71.07	-7.77	Peak
2	15720.000	52.87	54.00	-1.13	55.99	-3.12	Average
3	15720.000	65.91	74.00	-8.09	69.03	-3.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5260MHz
Test By :Gary

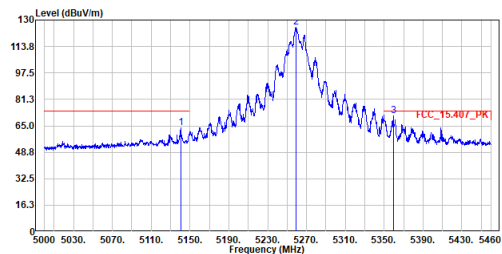


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5140.300	63.59	74.00	-10.41	42.15	21.44	Peak
2	5259.210	125.35	-----	-----	103.84	21.51	Peak
3	5359.490	71.37	74.00	-2.63	49.81	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5260MHz
Test By :Gary

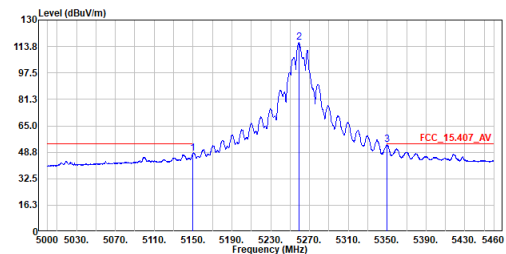


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5149.960	47.94	54.00	-6.06	26.50	21.44	Average
2	5258.980	116.32	-----	-----	94.81	21.51	Average
3	5350.060	53.38	54.00	-0.62	31.82	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5260MHz
Test By :Gary

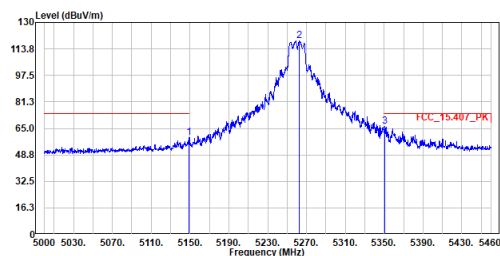


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5149.270	59.35	74.00	-14.65	37.91	21.44	Peak
2	5262.660	118.96	-----	-----	97.45	21.51	Peak
3	5350.290	66.16	74.00	-7.84	44.60	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5260MHz
Test By :Gary

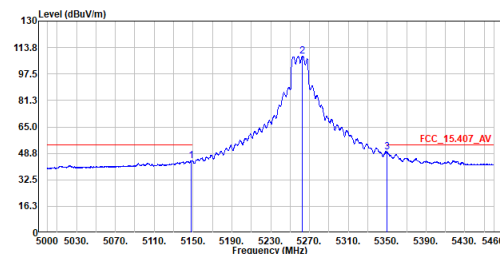


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5148.350	44.14	54.00	-9.86	22.70	21.44	Average
2	5262.890	108.50	-----	-----	86.99	21.51	Average
3	5350.060	49.43	54.00	-4.57	27.87	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5260MHz
Test By :Gary

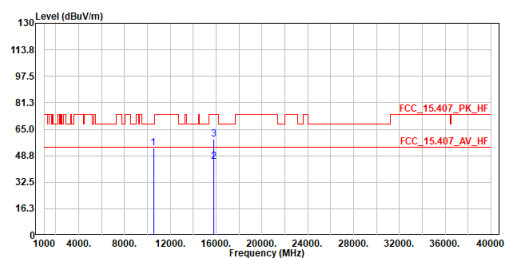


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10520.000	53.33	68.20	-14.87	61.04	-7.71	Peak
2	15780.000	44.96	54.00	-9.04	48.05	-3.09	Average
3	15780.000	58.76	74.00	-15.24	61.85	-3.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5260MHz
Test By :Gary

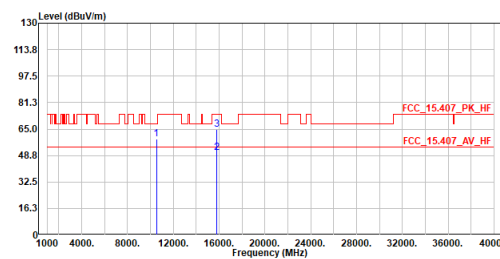


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10520.000	59.10	68.20	-9.10	66.81	-7.71	Peak
2	15780.000	50.77	54.00	-3.23	53.86	-3.09	Average
3	15780.000	64.83	74.00	-9.17	67.92	-3.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5300MHz
Test By :Gary

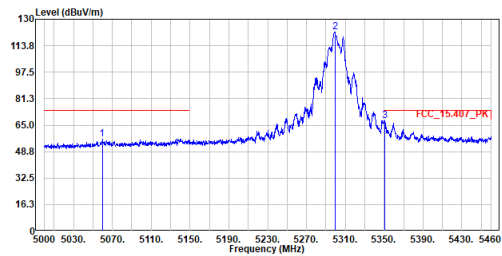


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5059.570	56.47	74.00	-17.53	35.08	21.39	Peak
2	5299.230	122.26	-----	-----	100.73	21.53	Peak
3	5350.290	67.84	74.00	-6.16	46.28	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5300MHz
Test By :Gary

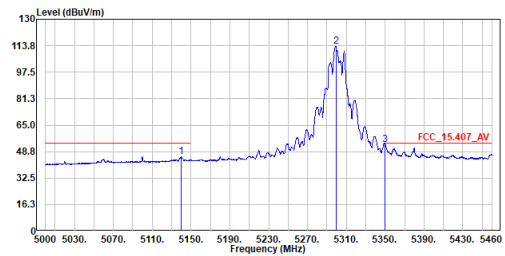


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5140.070	45.62	54.00	-8.38	24.18	21.44	Average
2	5299.230	113.34	-----	-----	91.81	21.53	Average
3	5350.060	52.96	54.00	-1.04	31.40	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5300MHz
Test By :Gary

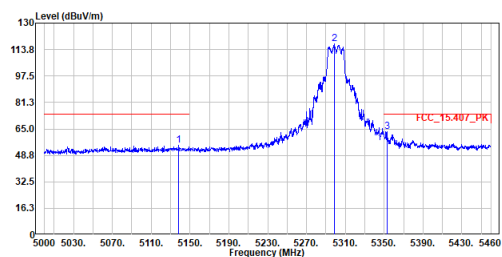


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5138.230	54.75	74.00	-19.25	33.32	21.43	Peak
2	5298.770	117.34	-----	-----	95.81	21.53	Peak
3	5353.050	63.39	74.00	-10.61	41.83	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5300MHz
Test By :Gary

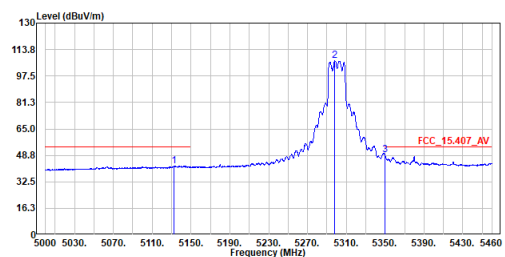


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5132.480	42.27	54.00	-11.73	20.84	21.43	Average
2	5298.080	106.79	-----	-----	85.26	21.53	Average
3	5350.060	48.95	54.00	-5.05	27.39	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5300MHz
Test By :Gary

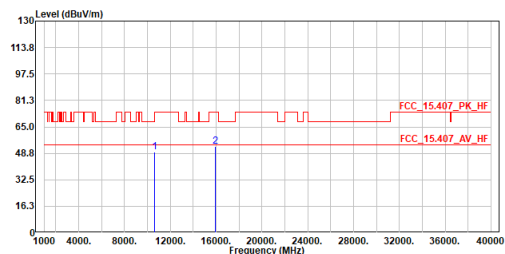


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	49.70	74.00	-24.30	57.32	-7.62	Peak
2	15900.000	52.86	74.00	-21.14	55.89	-3.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5300MHz
Test By :Gary

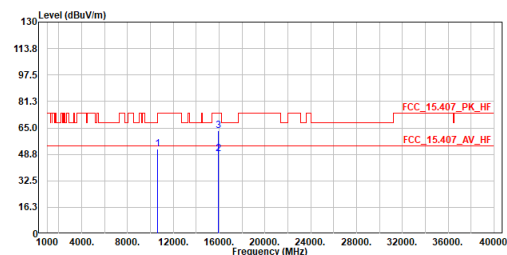


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	51.89	74.00	-22.11	59.51	-7.62	Peak
2	15900.000	48.83	54.00	-5.17	51.86	-3.03	Average
3	15900.000	63.44	74.00	-10.56	66.47	-3.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5320MHz
Test By :Gary

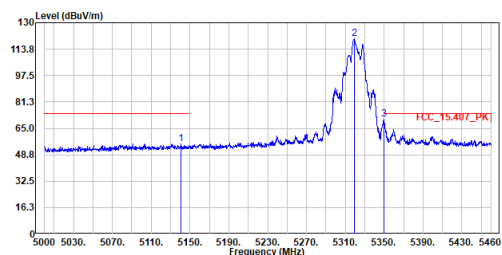


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5140.990	55.61	74.00	-18.39	34.17	21.44	Peak
2	5319.010	120.07	-----	-----	98.53	21.54	Peak
3	5350.060	70.53	74.00	-3.47	48.97	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5320MHz
Test By :Gary

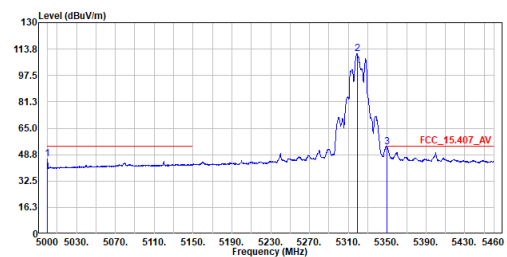


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5000.000	46.09	54.00	-7.91	24.73	21.36	Average
2	5319.010	111.10	-----	-----	89.56	21.54	Average
3	5350.060	53.28	54.00	-0.72	31.72	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5320MHz
Test By :Gary

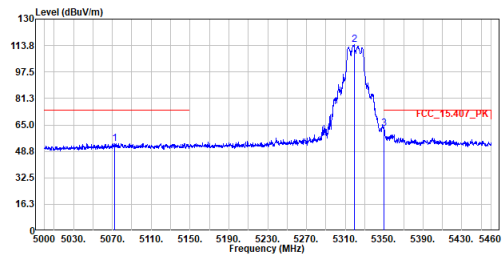


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5072.450	53.59	74.00	-20.41	32.19	21.40	Peak
2	5319.010	114.14	74.00	40.14	92.60	21.54	Peak
3	5350.060	62.55	74.00	-11.45	40.99	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5320MHz
Test By :Gary

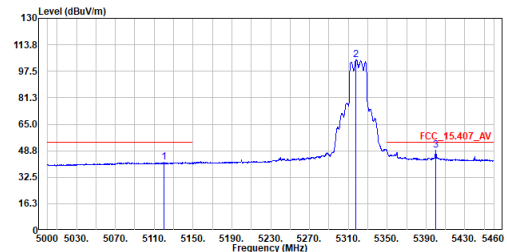


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5120.060	41.68	74.00	-32.32	20.26	21.42	Average
2	5317.860	104.51	74.00	30.51	82.97	21.54	Average
3	5399.970	48.82	74.00	-25.18	27.23	21.59	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5320MHz
Test By :Gary

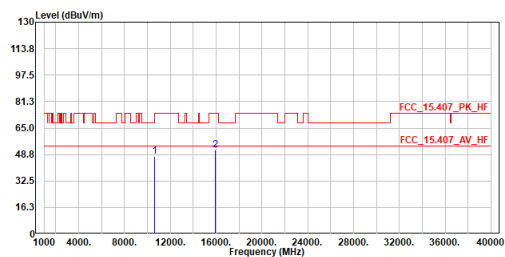


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10640.000	47.70	74.00	-26.30	55.26	-7.56	Peak
2	15960.000	51.55	74.00	-22.45	54.55	-3.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5320MHz
Test By :Gary

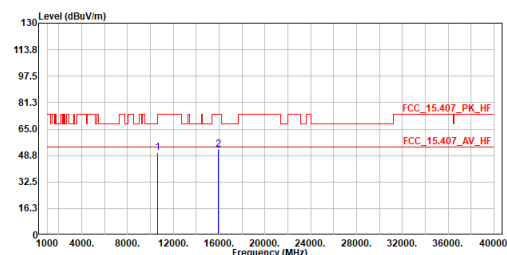


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10640.000	50.54	74.00	-23.46	58.10	-7.56	Peak
2	15960.000	52.65	74.00	-21.35	55.65	-3.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5500MHz
Test By :Ling Chen

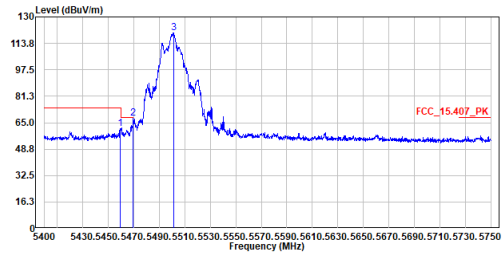


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.675	61.52	74.00	-12.48	39.90	21.62	Peak
2	5459.300	67.81	68.20	-0.39	46.19	21.62	Peak
3	5501.325	120.12	-----	-----	98.48	21.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5500MHz
Test By :Ling Chen

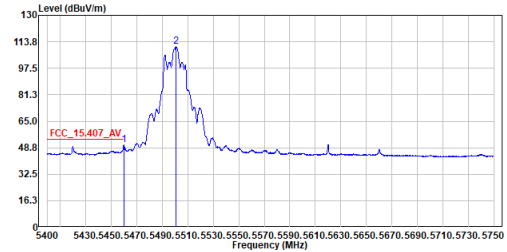


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.850	50.45	54.00	-3.55	28.83	21.62	Average
2	5500.975	111.06	-----	-----	89.42	21.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5500MHz
Test By :Ling Chen

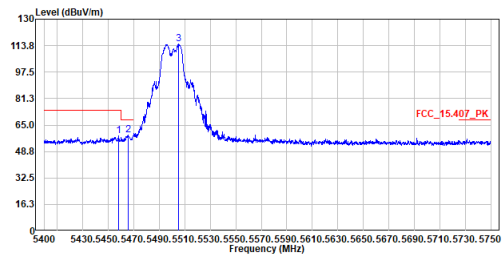


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5457.925	58.25	74.00	-15.75	36.63	21.62	Peak
2	5465.625	58.80	68.20	-9.40	37.18	21.62	Peak
3	5505.350	114.72	-----	-----	93.07	21.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5500MHz
Test By :Ling Chen

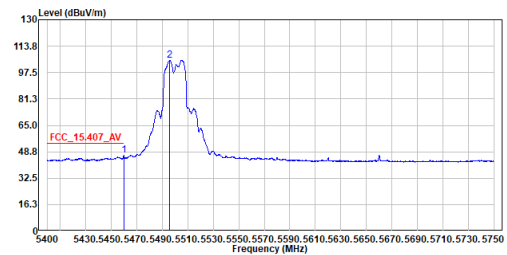


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.850	46.58	54.00	-7.42	24.96	21.62	Average
2	5495.550	105.11	-----	-----	83.47	21.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5500MHz
Test By :Ling Chen

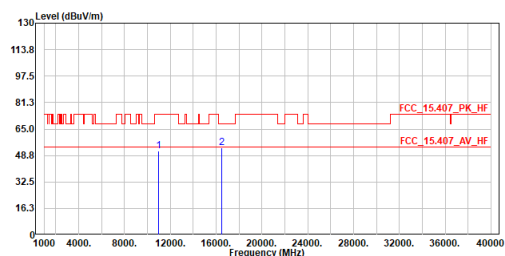


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11000.000	51.72	74.00	-22.28	58.88	-7.16	Peak
2	16500.000	53.66	68.20	-14.54	57.10	-3.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5500MHz
Test By :Ling Chen

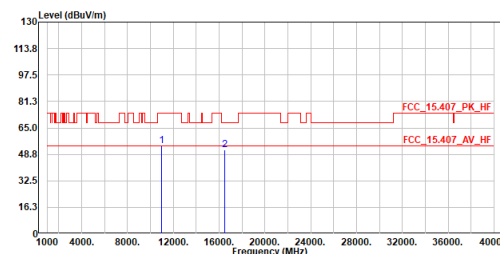


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11000.000	53.82	74.00	-20.18	60.98	-7.16	Peak
2	16500.000	51.69	68.20	-16.51	55.13	-3.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5580MHz
Test By :Ling Chen

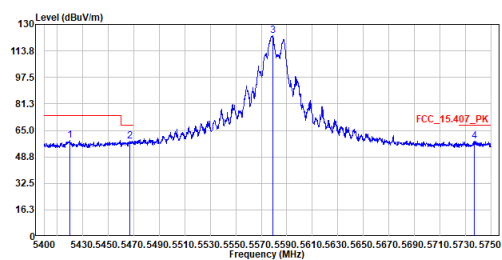


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5419.950	58.72	74.00	-15.28	37.12	21.60	Peak
2	5466.675	58.53	68.20	-9.67	36.91	21.62	Peak
3	5579.025	123.04	-----	-----	101.15	21.89	Peak
4	5736.700	58.48	68.20	-9.72	36.07	22.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5580MHz
Test By :Ling Chen

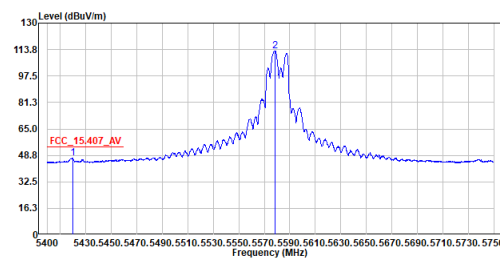


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5419.950	47.09	54.00	-6.91	25.49	21.60	Average
2	5578.500	113.07	-----	-----	91.18	21.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5580MHz
Test By :Ling Chen

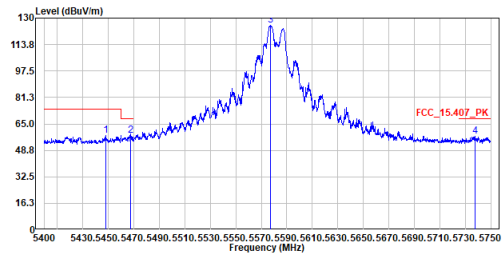


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5447.950	57.69	74.00	-16.31	36.08	21.61	Peak
2	5467.550	57.87	68.20	-10.33	36.25	21.62	Peak
3	5577.100	125.81	-----	-----	103.92	21.89	Peak
4	5737.575	57.64	68.20	-10.56	35.23	22.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5580MHz
Test By :Ling Chen

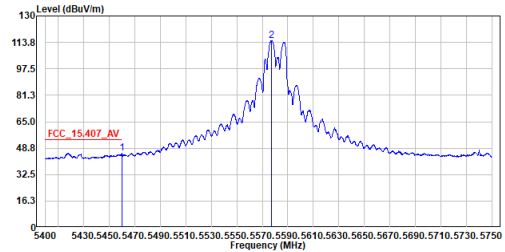


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.850	45.64	54.00	-8.36	24.02	21.62	Average
2	5576.925	114.97	-----	-----	93.08	21.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5580MHz
Test By :Ling Chen

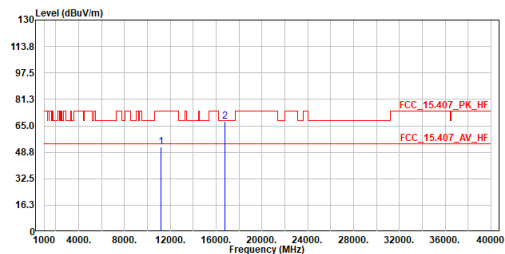


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11160.000	51.88	74.00	-22.12	58.68	-6.80	Peak
2	16740.000	67.57	68.20	-0.63	71.11	-3.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5580MHz
Test By :Ling Chen

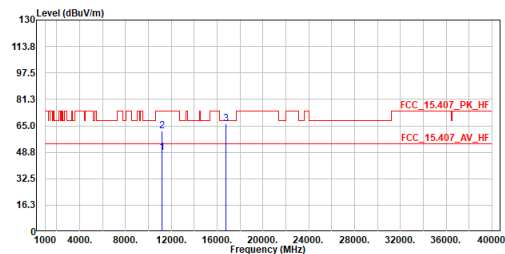


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11160.000	48.40	54.00	-5.60	55.20	-6.80	Average
2	11160.000	62.03	74.00	-11.97	68.83	-6.80	Peak
3	16740.000	66.29	68.20	-1.91	69.83	-3.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5700MHz
Test By :Ling Chen

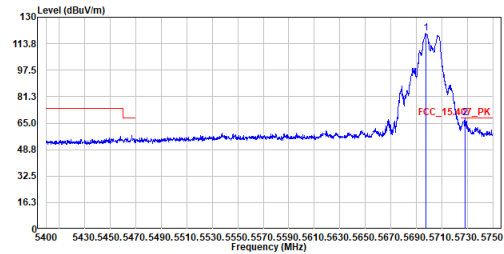


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5697.325	120.13	-----	-----	97.85	22.28	Peak
2	5727.950	67.99	68.20	-0.21	45.61	22.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5700MHz
Test By :Ling Chen

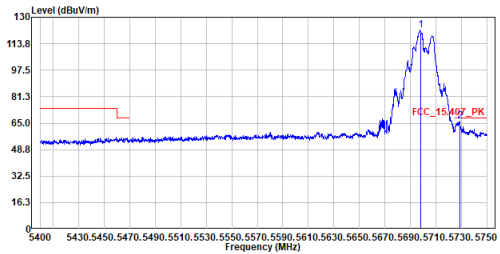


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5698.375	122.19	-----	-----	99.91	22.28	Peak
2	5728.650	66.20	68.20	-2.00	43.82	22.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5700MHz
Test By :Ling Chen

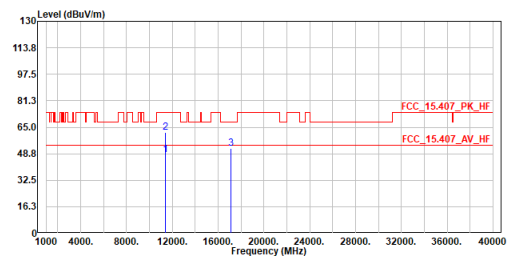


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	48.31	54.00	-5.69	54.60	-6.29	Average
2	11400.000	61.93	74.00	-12.07	68.22	-6.29	Peak
3	17100.000	52.23	68.20	-15.97	55.76	-3.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5700MHz
Test By :Ling Chen

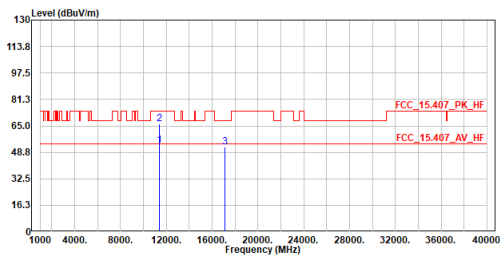


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	53.12	54.00	-0.88	59.41	-6.29	Average
2	11400.000	66.36	74.00	-7.64	72.65	-6.29	Peak
3	17100.000	52.02	68.20	-16.18	55.55	-3.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5745MHz
Test By :Gary

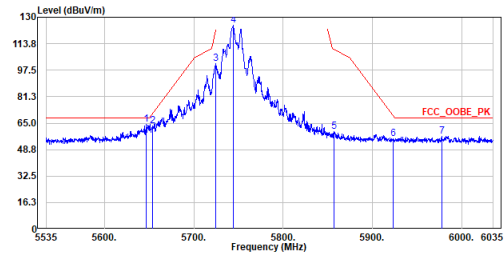


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5646.750	64.13	68.20	-4.07	42.02	22.11	Peak
2	5653.500	63.47	70.80	-7.33	41.32	22.15	Peak
3	5724.750	101.36	121.63	-20.27	79.00	22.36	Peak
4	5744.250	125.00	-----	-----	102.57	22.43	Peak
5	5857.000	59.92	110.24	-50.32	37.13	22.79	Peak
6	5923.500	55.62	69.32	-13.70	32.61	23.01	Peak
7	5977.500	57.09	68.20	-11.11	33.90	23.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5745MHz
Test By :Gary

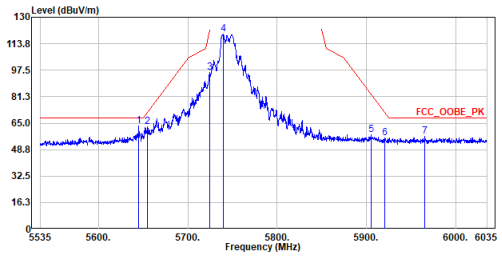


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5645.250	63.22	68.20	-4.98	41.11	22.11	Peak
2	5655.000	62.71	71.91	-9.20	40.56	22.15	Peak
3	5724.750	96.24	121.63	-25.39	73.88	22.36	Peak
4	5739.500	119.90	-----	-----	97.48	22.42	Peak
5	5905.000	57.90	83.00	-25.10	34.95	22.95	Peak
6	5921.000	55.73	71.17	-15.44	32.72	23.01	Peak
7	5965.750	56.80	68.20	-11.40	33.65	23.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5745MHz
Test By :Gary

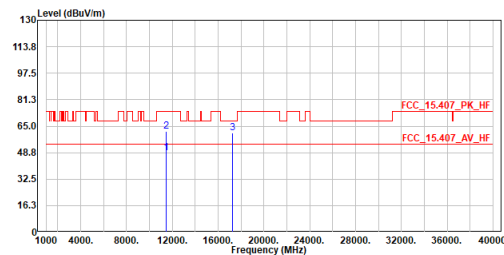


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	48.67	54.00	-5.33	54.76	-6.09	Average
2	11490.000	61.75	74.00	-12.25	67.84	-6.09	Peak
3	17235.000	60.88	68.20	-7.32	64.25	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5745MHz
Test By :Gary

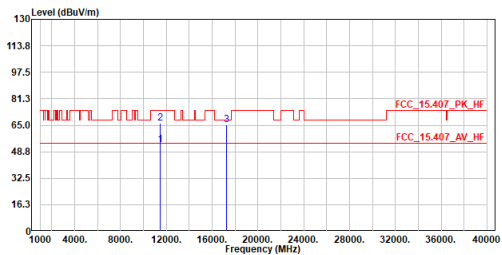


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	53.10	54.00	-0.90	59.19	-6.09	Average
2	11490.000	66.05	74.00	-7.95	72.14	-6.09	Peak
3	17235.000	65.09	68.20	-3.11	68.46	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5785MHz
Test By :Gary

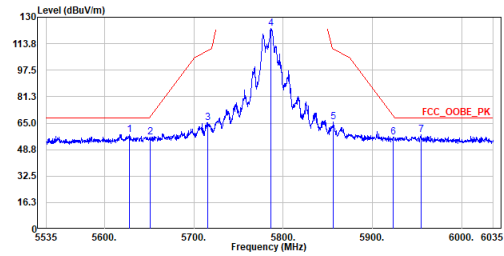


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5628.250	58.03	68.20	-10.17	35.97	22.06	Peak
2	5651.250	56.66	69.13	-12.47	34.54	22.12	Peak
3	5715.250	65.47	109.47	-44.00	43.13	22.34	Peak
4	5786.500	122.97	-----	-----	100.40	22.57	Peak
5	5856.000	65.61	110.52	-44.91	42.82	22.79	Peak
6	5923.250	56.17	69.50	-13.33	33.16	23.01	Peak
7	5954.750	57.81	68.20	-10.39	34.70	23.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5785MHz
Test By :Gary

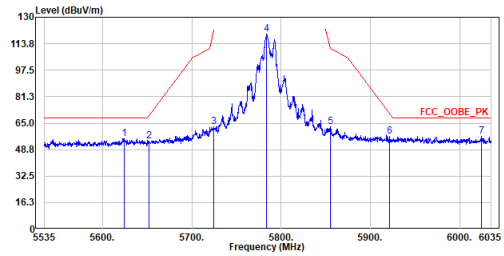


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5624.000	55.46	68.20	-12.74	33.42	22.04	Peak
2	5652.250	54.13	69.87	-15.74	32.01	22.12	Peak
3	5724.500	62.56	121.06	-58.50	40.20	22.36	Peak
4	5784.000	119.62	-----	-----	97.06	22.56	Peak
5	5855.000	62.76	110.80	-48.04	39.97	22.79	Peak
6	5921.500	56.69	70.80	-14.11	33.68	23.01	Peak
7	6024.750	56.95	68.20	-11.25	33.58	23.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5785MHz
Test By :Gary

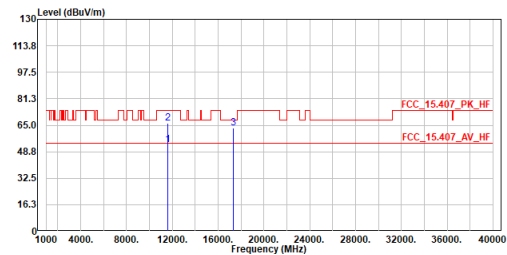


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	53.17	54.00	-0.83	59.21	-6.04	Average
2	11570.000	66.38	74.00	-7.62	72.42	-6.04	Peak
3	17355.000	63.29	68.20	-4.91	66.52	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5785MHz
Test By :Gary

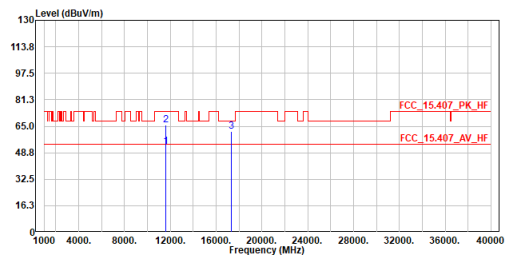


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	52.67	54.00	-1.33	58.71	-6.04	Average
2	11570.000	65.50	74.00	-8.50	71.54	-6.04	Peak
3	17355.000	61.98	68.20	-6.22	65.21	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5825MHz
Test By :Gary

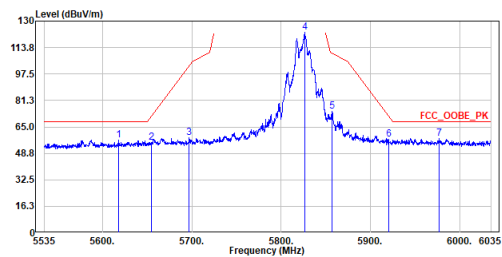


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5617.750	56.92	68.20	-11.28	34.90	22.02	Peak
2	5655.000	55.60	71.91	-16.31	33.45	22.15	Peak
3	5697.250	58.54	103.17	-44.63	36.26	22.28	Peak
4	5825.500	122.89	-----	-----	100.19	22.70	Peak
5	5856.750	74.44	110.31	-35.87	51.65	22.79	Peak
6	5920.750	57.16	71.35	-14.19	34.15	23.01	Peak
7	5976.750	57.88	68.20	-10.32	34.69	23.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5825MHz
Test By :Gary

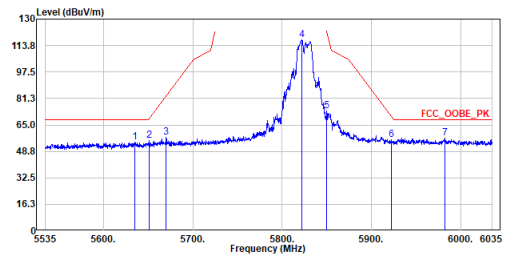


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5635.000	54.60	68.20	-13.60	32.53	22.07	Peak
2	5651.250	55.28	69.13	-13.85	33.16	22.12	Peak
3	5670.250	57.19	83.19	-26.00	34.99	22.20	Peak
4	5821.750	117.07	-----	-----	94.39	22.68	Peak
5	5850.000	73.58	122.20	-48.62	50.80	22.78	Peak
6	5922.000	56.14	70.43	-14.29	33.13	23.01	Peak
7	5982.500	57.10	68.20	-11.10	33.89	23.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :a_TX_5825MHz
Test By :Gary

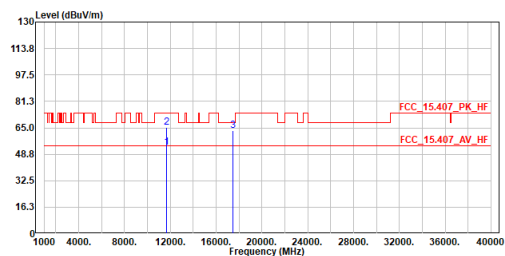


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	53.01	54.00	-0.99	59.00	-5.99	Average
2	11650.000	65.44	74.00	-8.56	71.43	-5.99	Peak
3	17475.000	63.09	68.20	-5.11	66.17	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :a_TX_5825MHz
Test By :Gary

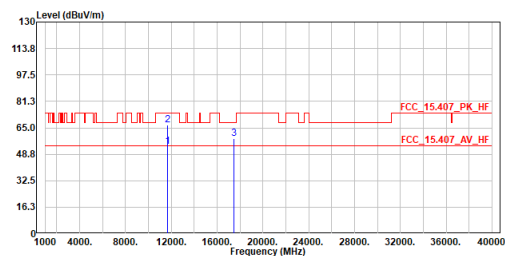


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	53.41	54.00	-0.59	59.40	-5.99	Average
2	11650.000	66.61	74.00	-7.39	72.60	-5.99	Peak
3	17475.000	58.36	68.20	-9.84	61.44	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5180MHz
Test By :Gary

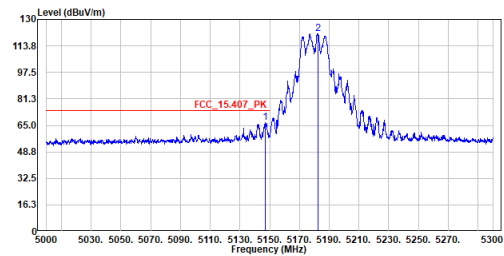


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.300	66.78	74.00	-7.22	45.34	21.44	Peak
2	5182.400	121.23	-----	-----	99.77	21.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5180MHz
Test By :Gary

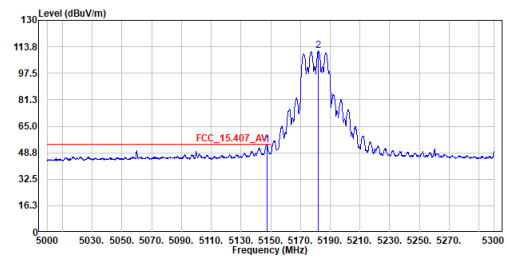


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.450	53.66	54.00	-0.34	32.22	21.44	Average
2	5182.100	111.13	-----	-----	89.67	21.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5180MHz
Test By :Gary

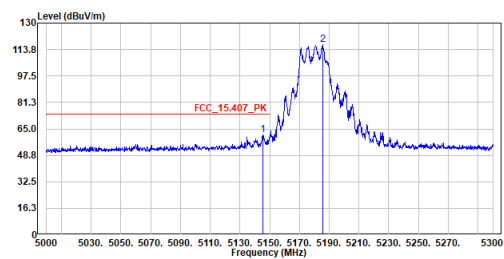


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.500	61.41	74.00	-12.59	39.97	21.44	Peak
2	5185.700	116.82	-----	-----	95.36	21.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5180MHz
Test By :Gary

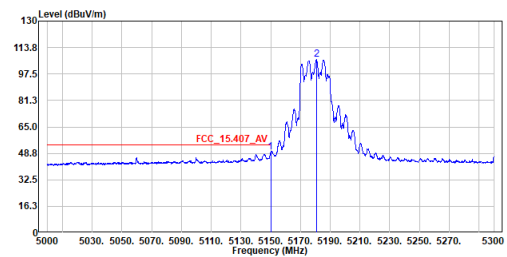


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	49.53	54.00	-4.47	28.09	21.44	Average
2	5180.750	106.27	-----	-----	84.81	21.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5180MHz
Test By :Gary

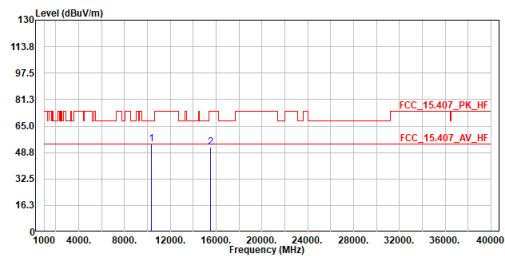


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10360.000	54.08	68.20	-14.12	62.08	-8.00	Peak
2	15540.000	52.16	74.00	-21.84	55.37	-3.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5180MHz
Test By :Gary

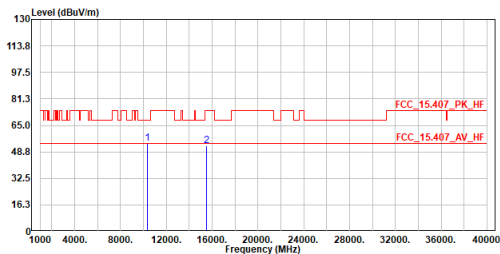


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10360.000	53.96	68.20	-14.24	61.96	-8.00	Peak
2	15540.000	52.62	74.00	-21.38	55.83	-3.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5220MHz
Test By :Gary

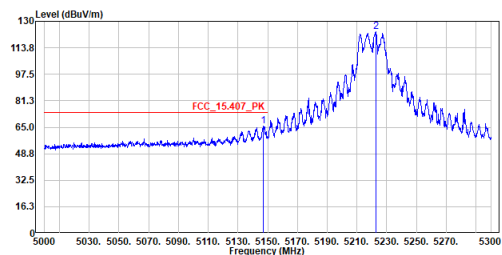


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.300	65.72	74.00	-8.28	44.28	21.44	Peak
2	5222.600	123.59	-----	-----	102.11	21.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5220MHz
Test By :Gary

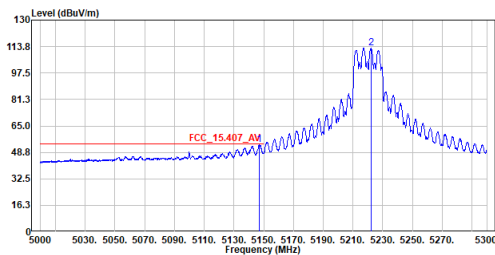


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5147.300	53.33	54.00	-0.67	31.89	21.44	Average
2	5222.000	112.77	-----	-----	91.29	21.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5220MHz
Test By :Gary

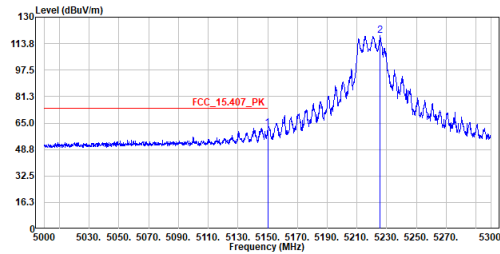


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	62.04	74.00	-11.96	40.60	21.44	Peak
2	5225.450	118.80	-----	-----	97.32	21.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5220MHz
Test By :Gary

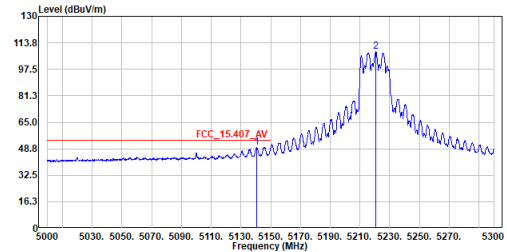


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5140.700	49.57	54.00	-4.43	28.13	21.44	Average
2	5220.650	108.26	-----	-----	86.78	21.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5220MHz
Test By :Gary

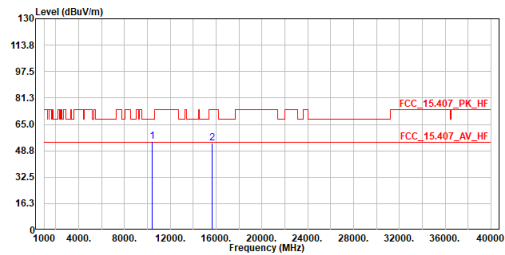


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10440.000	54.35	68.20	-13.85	62.19	-7.84	Peak
2	15660.000	53.27	74.00	-20.73	56.43	-3.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5220MHz
Test By :Gary

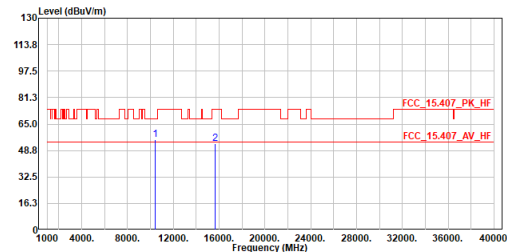


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10440.000	55.27	68.20	-12.93	63.11	-7.84	Peak
2	15660.000	53.01	74.00	-20.99	56.17	-3.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5240MHz
Test By :Gary

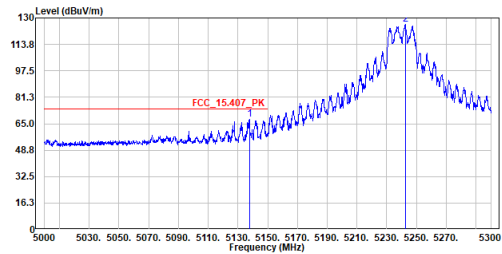


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5137.700	67.59	74.00	-6.41	46.16	21.43	Peak
2	5242.400	126.06	-----	-----	104.57	21.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5240MHz
Test By :Gary

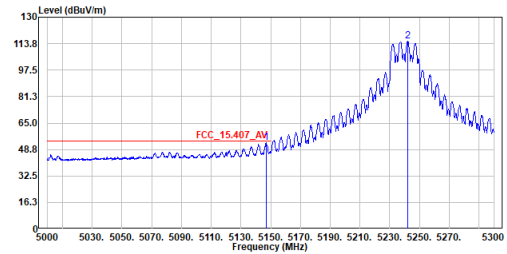


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.150	53.20	54.00	-0.80	31.76	21.44	Average
2	5242.100	115.05	-----	-----	93.56	21.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5240MHz
Test By :Gary

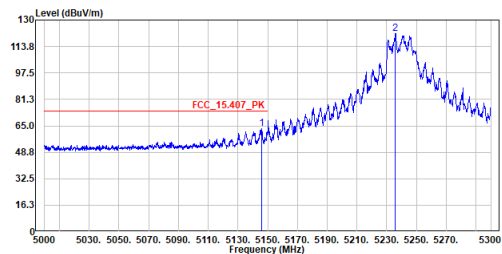


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.800	63.32	74.00	-10.68	41.88	21.44	Peak
2	5235.800	121.54	-----	-----	100.05	21.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5240MHz
Test By :Gary

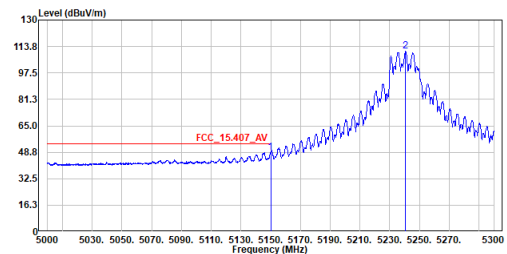


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	48.67	54.00	-5.33	27.23	21.44	Average
2	5240.600	110.85	-----	-----	89.36	21.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5240MHz
Test By :Gary

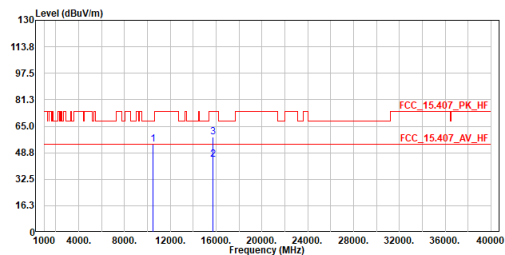


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10480.000	54.16	68.20	-14.04	61.93	-7.77	Peak
2	15720.000	44.77	54.00	-9.23	47.89	-3.12	Average
3	15720.000	58.18	74.00	-15.82	61.30	-3.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5240MHz
Test By :Gary

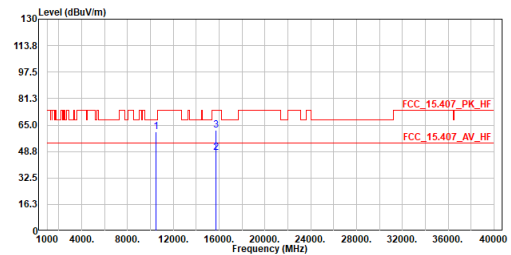


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10480.000	60.90	68.20	-7.30	68.67	-7.77	Peak
2	15720.000	48.15	54.00	-5.85	51.27	-3.12	Average
3	15720.000	61.62	74.00	-12.38	64.74	-3.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5260MHz
Test By :Gary

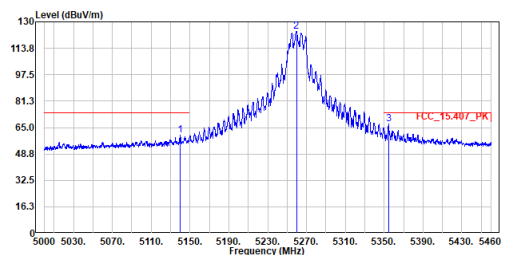


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5139.610	60.13	74.00	-13.87	38.69	21.44	Peak
2	5259.670	123.96	-----	-----	102.45	21.51	Peak
3	5354.660	67.08	74.00	-6.92	45.52	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5260MHz
Test By :Gary

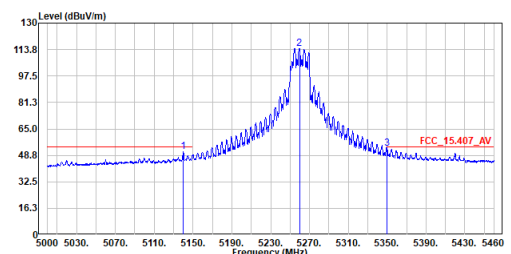


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5140.070	51.02	54.00	-2.98	29.58	21.44	Average
2	5259.670	114.43	-----	-----	92.92	21.51	Average
3	5350.060	52.79	54.00	-1.21	31.23	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5260MHz
Test By :Gary

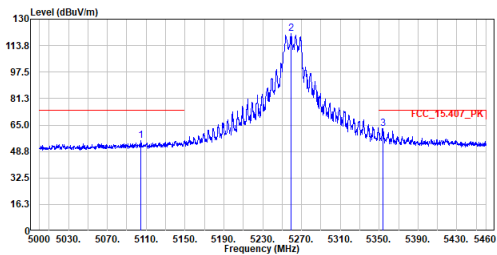


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5104.420	55.42	74.00	-18.58	34.00	21.42	Peak
2	5259.210	121.31	-----	-----	99.80	21.51	Peak
3	5353.970	63.03	74.00	-10.97	41.47	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5260MHz
Test By :Gary

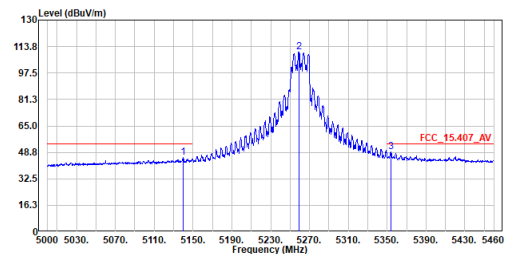


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5140.070	45.54	54.00	-8.46	24.10	21.44	Average
2	5258.980	110.56	-----	-----	89.05	21.51	Average
3	5353.970	48.86	54.00	-5.14	27.30	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5260MHz
Test By :Gary

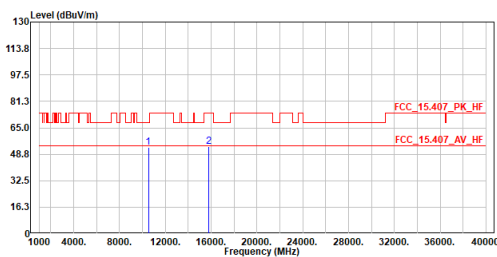


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10520.000	52.83	68.20	-15.37	60.54	-7.71	Peak
2	15780.000	53.66	74.00	-20.34	56.75	-3.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5260MHz
Test By :Gary

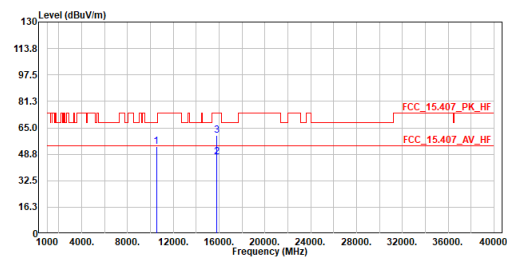


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10520.000	53.55	68.20	-14.65	61.26	-7.71	Peak
2	15780.000	47.08	54.00	-6.92	50.17	-3.09	Average
3	15780.000	60.35	74.00	-13.65	63.44	-3.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5300MHz
Test By :Gary

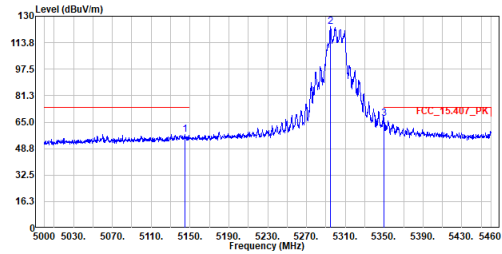


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5144.900	57.53	74.00	-16.47	36.09	21.44	Peak
2	5294.860	123.49	-----	-----	101.96	21.53	Peak
3	5350.060	67.08	74.00	-6.92	45.52	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5300MHz
Test By :Gary

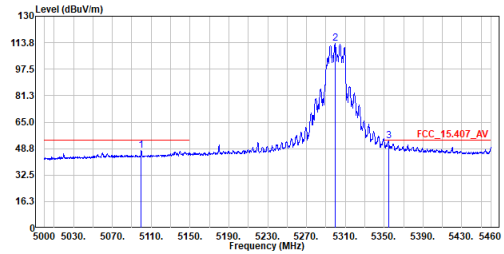


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5099.820	47.40	54.00	-6.60	25.99	21.41	Average
2	5299.230	113.33	-----	-----	91.80	21.53	Average
3	5354.660	53.38	54.00	-0.62	31.82	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5300MHz
Test By :Gary

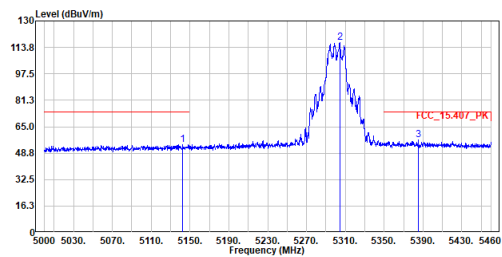


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5142.600	53.94	74.00	-20.06	32.50	21.44	Peak
2	5304.290	116.53	-----	-----	95.00	21.53	Peak
3	5385.250	57.06	74.00	-16.94	35.48	21.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5300MHz
Test By :Gary

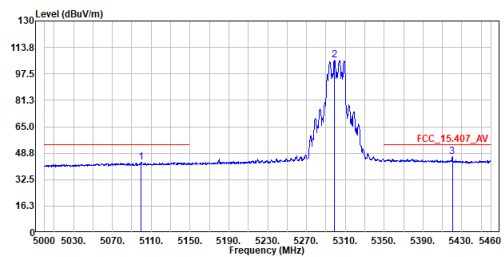


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5099.820	43.07	54.00	-10.93	21.66	21.41	Average
2	5298.540	106.10	-----	-----	84.57	21.53	Average
3	5420.210	46.61	54.00	-7.39	25.01	21.60	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5300MHz
Test By :Gary

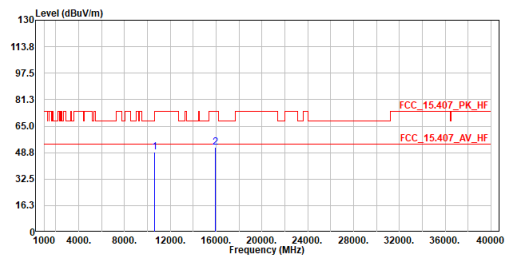


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	49.25	74.00	-24.75	56.87	-7.62	Peak
2	15900.000	52.01	74.00	-21.99	55.04	-3.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5300MHz
Test By :Gary

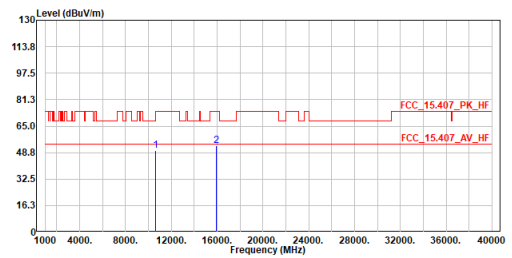


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	50.16	74.00	-23.84	57.78	-7.62	Peak
2	15900.000	52.95	74.00	-21.05	55.98	-3.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5320MHz
Test By :Gary

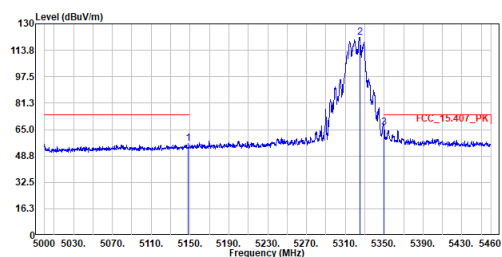


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.890	56.58	74.00	-17.42	35.14	21.44	Peak
2	5324.760	121.72	-----	-----	100.17	21.55	Peak
3	5350.060	66.29	74.00	-7.71	44.73	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5320MHz
Test By :Gary

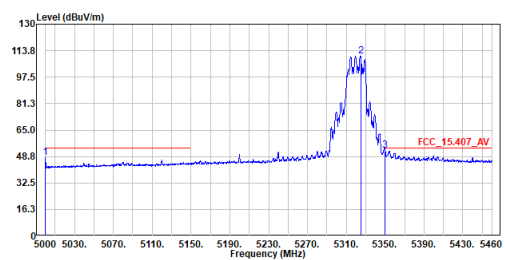


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5000.000	48.22	54.00	-5.78	26.86	21.36	Average
2	5324.760	110.56	-----	-----	89.01	21.55	Average
3	5350.060	52.56	54.00	-1.44	31.00	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5320MHz
Test By :Gary

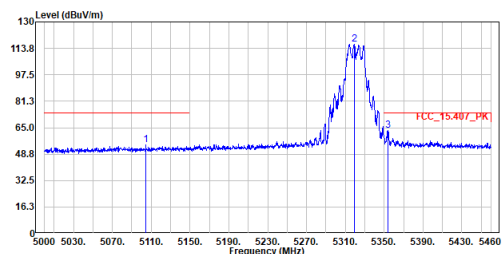


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5104.420	54.25	74.00	-19.75	32.83	21.42	Peak
2	5319.010	116.22	-----	-----	94.68	21.54	Peak
3	5353.740	63.30	74.00	-10.70	41.74	21.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5320MHz
Test By :Gary

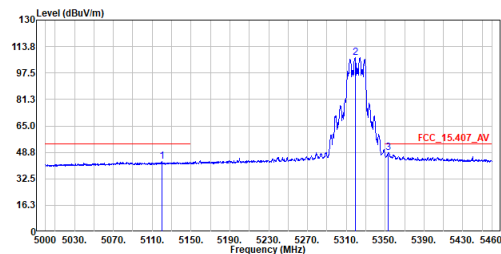


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	5119.830	43.41	54.00	-10.59	21.99	21.42	Average
2	5319.010	107.10	-----	-----	85.56	21.54	Average
3	5353.510	48.76	54.00	-5.24	27.20	21.56	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5320MHz
Test By :Gary

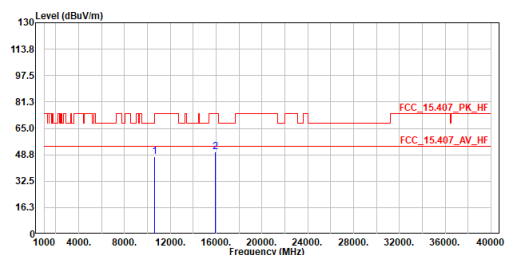


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	10640.000	47.59	74.00	-26.41	55.15	-7.56	Peak
2	15960.000	50.37	74.00	-23.63	53.37	-3.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5320MHz
Test By :Gary

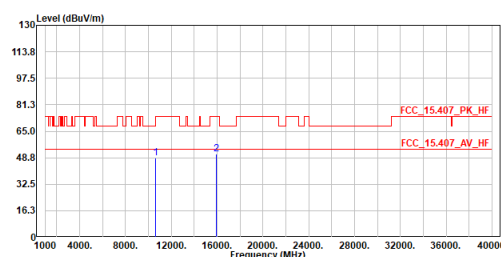


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
1	10640.000	48.81	74.00	-25.19	56.37	-7.56	Peak
2	15960.000	51.06	74.00	-22.94	54.06	-3.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5500MHz
Test By :Ling Chen

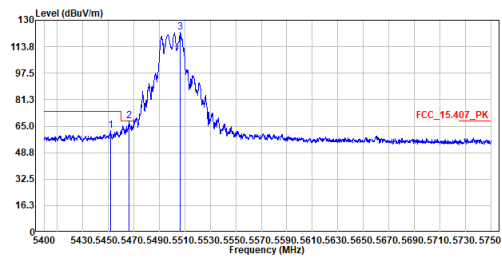


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5451.625	62.53	74.00	-11.47	40.92	21.61	Peak
2	5466.325	68.00	68.20	-0.20	46.38	21.62	Peak
3	5506.575	122.76	-----	-----	101.10	21.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5500MHz
Test By :Ling Chen

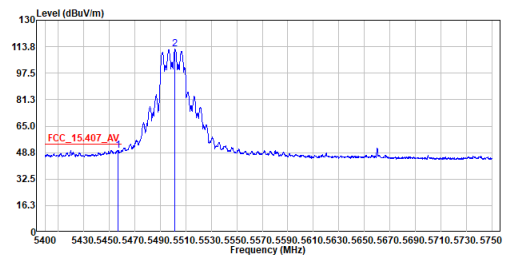


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.700	50.23	54.00	-3.77	28.61	21.62	Average
2	5501.675	112.42	-----	-----	90.78	21.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5500MHz
Test By :Ling Chen

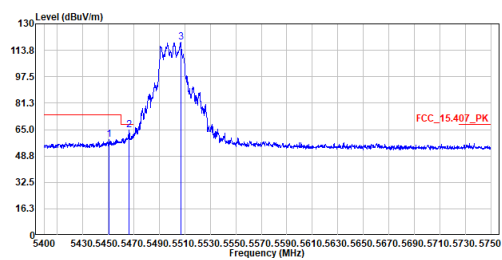


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5450.750	58.86	74.00	-15.14	37.25	21.61	Peak
2	5466.500	64.90	68.20	-3.30	43.28	21.62	Peak
3	5506.750	118.55	-----	-----	96.89	21.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5500MHz
Test By :Ling Chen

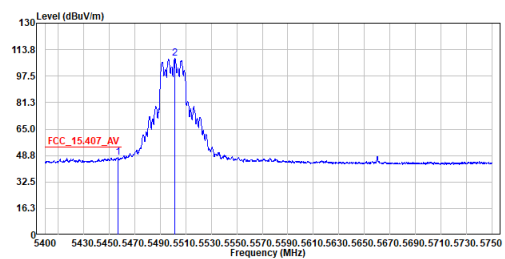


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.700	47.80	54.00	-6.20	26.18	21.62	Average
2	5501.500	108.19	-----	-----	86.55	21.64	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5500MHz
Test By :Ling Chen

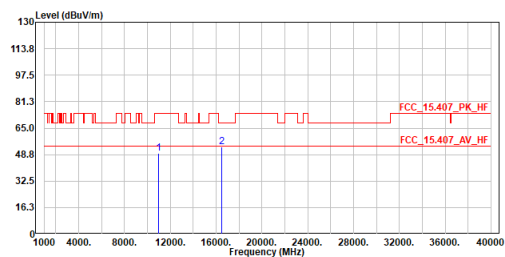


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11000.000	49.48	74.00	-24.52	56.64	-7.16	Peak
2	16500.000	53.34	68.20	-14.86	56.78	-3.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5500MHz
Test By :Ling Chen

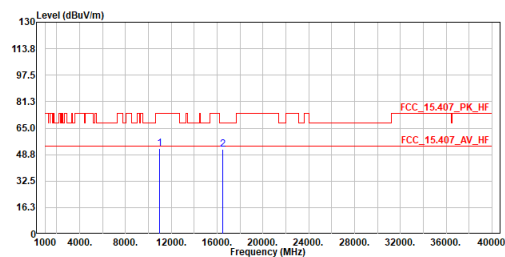


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11000.000	52.29	74.00	-21.71	59.45	-7.16	Peak
2	16500.000	51.82	68.20	-16.38	55.26	-3.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5580MHz
Test By :Ling Chen

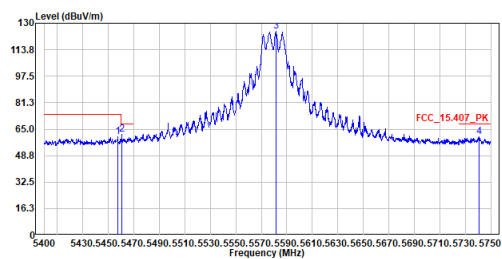


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5457.575	60.18	74.00	-13.82	38.56	21.62	Peak
2	5460.550	61.82	68.20	-6.38	40.20	21.62	Peak
3	5581.300	124.91	-----	-----	103.00	21.91	Peak
4	5740.550	60.10	68.20	-8.10	37.68	22.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5580MHz
Test By :Ling Chen

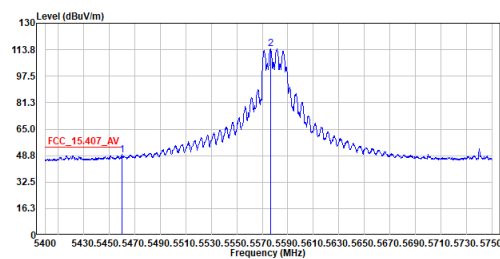


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.850	49.24	54.00	-4.76	27.62	21.62	Average
2	5576.400	114.15	-----	-----	92.26	21.89	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5580MHz
Test By :Ling Chen

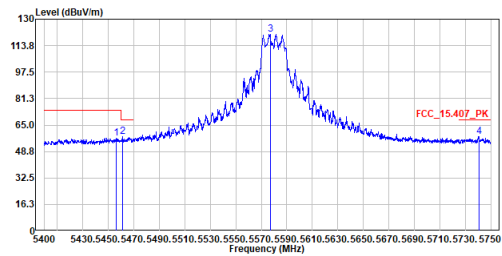


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5456.000	57.05	74.00	-16.95	35.43	21.62	Peak
2	5461.075	57.70	68.20	-10.50	36.08	21.62	Peak
3	5576.925	120.84	68.20	52.64	98.95	21.89	Peak
4	5740.550	57.85	68.20	-10.35	35.43	22.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5580MHz
Test By :Ling Chen

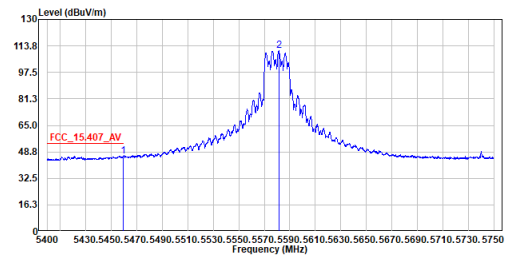


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.675	45.98	54.00	-8.02	24.36	21.62	Average
2	5581.475	110.97	68.20	42.77	89.06	21.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5580MHz
Test By :Ling Chen

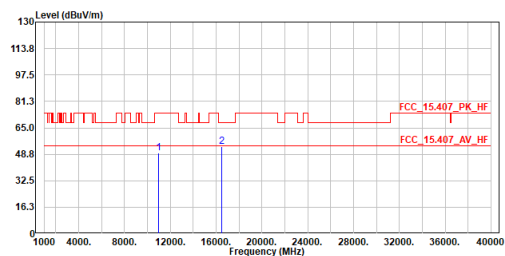


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11000.000	49.48	74.00	-24.52	56.64	-7.16	Peak
2	16500.000	53.34	68.20	-14.86	56.78	-3.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5580MHz
Test By :Ling Chen

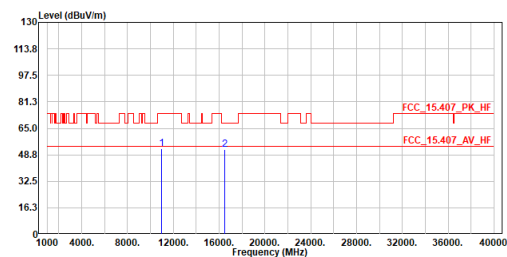


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11000.000	52.29	74.00	-21.71	59.45	-7.16	Peak
2	16500.000	51.82	68.20	-16.38	55.26	-3.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5700MHz
Test By :Ling Chen

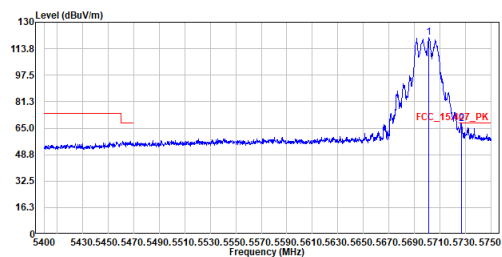


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5701.525	120.55	-----	-----	98.26	22.29	Peak
2	5726.725	67.82	68.20	-0.38	45.44	22.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5700MHz
Test By :Ling Chen

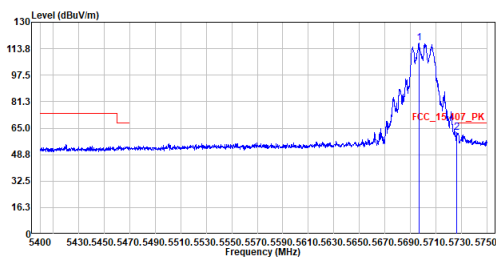


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5696.625	117.27	-----	-----	95.00	22.27	Peak
2	5726.550	62.18	68.20	-6.02	39.80	22.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5700MHz
Test By :Ling Chen

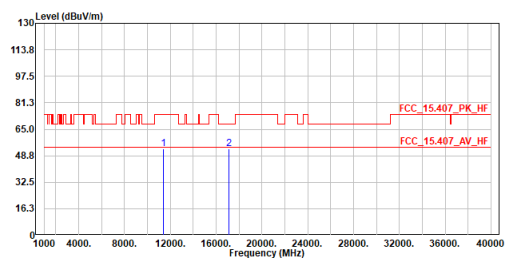


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	53.03	74.00	-20.97	59.32	-6.29	Peak
2	17100.000	52.96	68.20	-15.24	56.49	-3.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5700MHz
Test By :Ling Chen

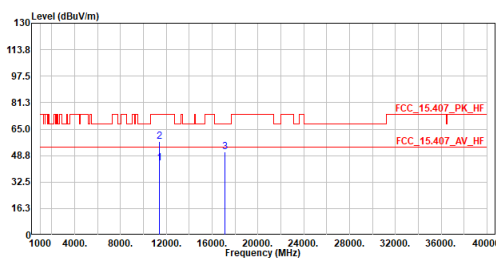


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11400.000	44.28	54.00	-9.72	50.57	-6.29	Average
2	11400.000	57.57	74.00	-16.43	63.86	-6.29	Peak
3	17100.000	50.81	68.20	-17.39	54.34	-3.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5745MHz
Test By :Gary

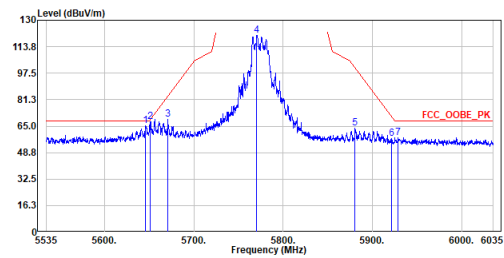


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	5646.000	65.36	68.20	-2.84	43.25	22.11	Peak
2	5651.500	67.65	69.32	-1.67	45.53	22.12	Peak
3	5671.000	69.10	83.74	-14.64	46.90	22.20	Peak
4	5770.500	120.70	-----	-----	98.18	22.52	Peak
5	5880.750	64.00	100.95	-36.95	41.12	22.88	Peak
6	5921.750	57.17	70.61	-13.44	34.16	23.01	Peak
7	5929.000	57.86	68.20	-10.34	34.83	23.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5745MHz
Test By :Gary

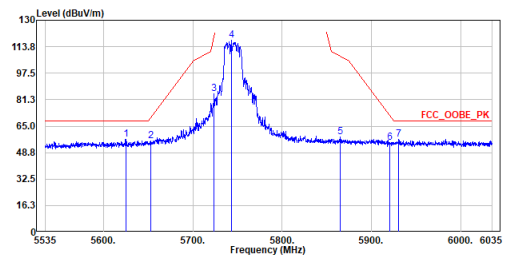


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	5625.000	56.82	68.20	-11.38	34.78	22.04	Peak
2	5652.750	55.90	70.24	-14.34	33.77	22.13	Peak
3	5723.750	84.71	119.35	-34.64	62.35	22.36	Peak
4	5743.250	117.81	-----	-----	95.38	22.43	Peak
5	5864.750	58.21	108.07	-49.86	35.38	22.83	Peak
6	5920.750	55.17	71.35	-16.18	32.16	23.01	Peak
7	5930.750	57.05	68.20	-11.15	34.01	23.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5745MHz
Test By :Gary

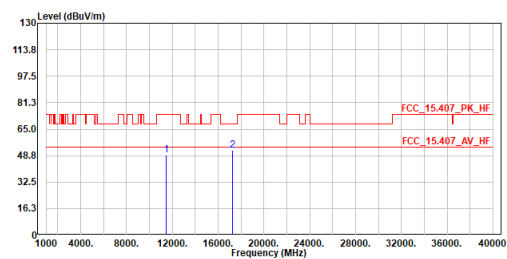


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11490.000	48.89	74.00	-25.11	54.98	-6.09	Peak
2	17235.000	52.14	68.20	-16.06	55.51	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5745MHz
Test By :Gary

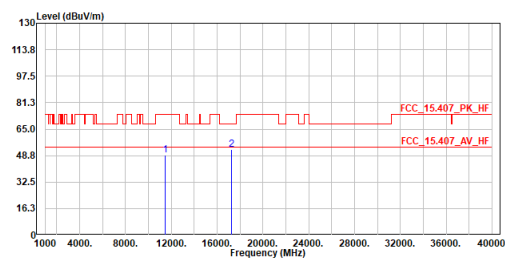


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	11490.000	48.90	74.00	-25.10	54.99	-6.09	Peak
2	17235.000	52.34	68.20	-15.86	55.71	-3.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5785MHz
Test By :Gary

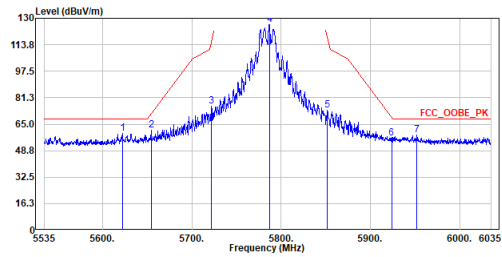


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5622.250	59.29	68.20	-8.91	37.25	22.04	Peak
2	5654.500	61.25	71.54	-10.29	39.10	22.15	Peak
3	5722.250	76.00	115.93	-39.93	53.64	22.36	Peak
4	5787.000	126.26	-----	-----	103.68	22.58	Peak
5	5852.000	73.37	117.64	-44.27	50.59	22.78	Peak
6	5923.750	56.61	69.13	-12.52	33.60	23.01	Peak
7	5951.750	58.28	68.20	-9.92	35.18	23.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5785MHz
Test By :Gary

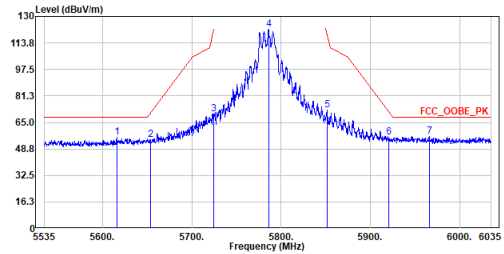


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5616.000	55.88	68.20	-12.32	33.86	22.02	Peak
2	5653.750	54.38	70.98	-16.60	32.23	22.15	Peak
3	5724.500	70.27	121.06	-50.79	47.91	22.36	Peak
4	5786.000	122.00	-----	-----	99.44	22.56	Peak
5	5851.500	72.73	118.78	-46.05	49.95	22.78	Peak
6	5920.750	56.00	71.35	-15.35	32.99	23.01	Peak
7	5966.000	56.52	68.20	-11.68	33.37	23.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5785MHz
Test By :Gary

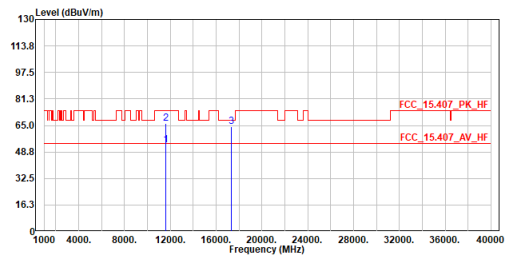


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	53.08	54.00	-0.92	59.12	-6.04	Average
2	11570.000	66.12	74.00	-7.88	72.16	-6.04	Peak
3	17355.000	64.37	68.20	-3.83	67.60	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5785MHz
Test By :Gary

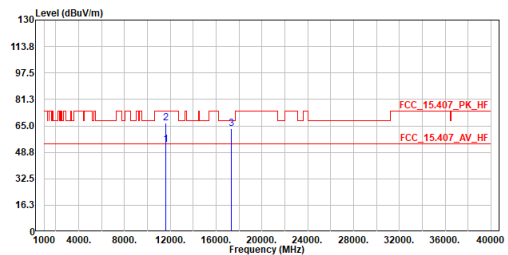


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	53.49	54.00	-0.51	59.53	-6.04	Average
2	11570.000	66.70	74.00	-7.30	72.74	-6.04	Peak
3	17355.000	63.17	68.20	-5.03	66.40	-3.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5825MHz
Test By :Gary

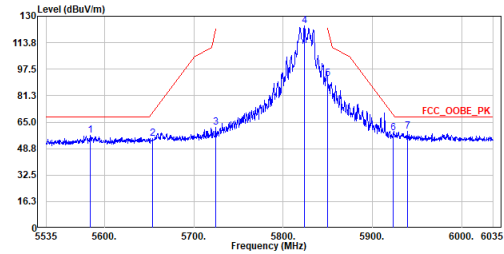


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5584.000	57.09	68.20	-11.11	35.18	21.91	Peak
2	5653.500	54.84	70.80	-15.96	32.69	22.15	Peak
3	5724.250	61.62	120.49	-58.87	39.26	22.36	Peak
4	5823.750	124.19	-----	-----	101.50	22.69	Peak
5	5850.000	91.68	122.20	-30.52	68.90	22.78	Peak
6	5923.500	58.40	69.32	-10.92	35.39	23.01	Peak
7	5939.000	59.50	68.20	-8.70	36.44	23.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5825MHz
Test By :Gary

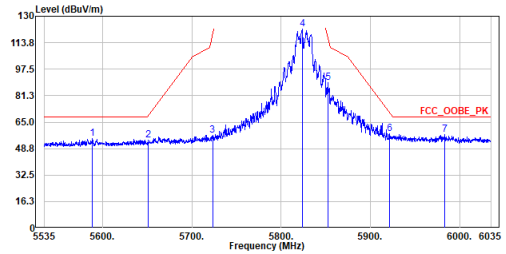


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5588.750	54.80	68.20	-13.40	32.87	21.93	Peak
2	5651.000	53.85	68.95	-15.10	31.73	22.12	Peak
3	5723.250	57.10	118.21	-61.11	34.74	22.36	Peak
4	5823.750	121.91	-----	-----	99.22	22.69	Peak
5	5852.250	89.50	117.07	-27.57	66.72	22.78	Peak
6	5921.250	57.81	70.98	-13.17	34.80	23.01	Peak
7	5983.250	57.55	68.20	-10.65	34.34	23.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax20_TX_5825MHz
Test By :Gary

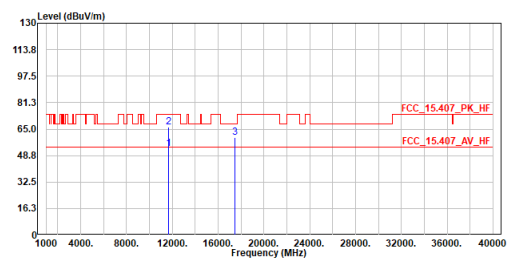


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	53.22	54.00	-0.78	59.21	-5.99	Average
2	11650.000	66.12	74.00	-7.88	72.11	-5.99	Peak
3	17475.000	60.06	68.20	-8.14	63.14	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax20_TX_5825MHz
Test By :Gary

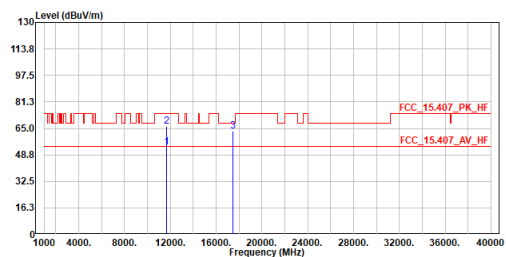


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	53.36	54.00	-0.64	59.35	-5.99	Average
2	11650.000	66.37	74.00	-7.63	72.36	-5.99	Peak
3	17475.000	63.30	68.20	-4.90	66.38	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax40_TX_5190MHz
Test By :Gary

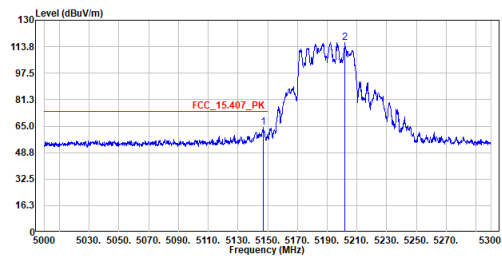


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.150	64.20	74.00	-9.80	42.76	21.44	Peak
2	5201.900	116.50	-----	-----	95.03	21.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax40_TX_5190MHz
Test By :Gary

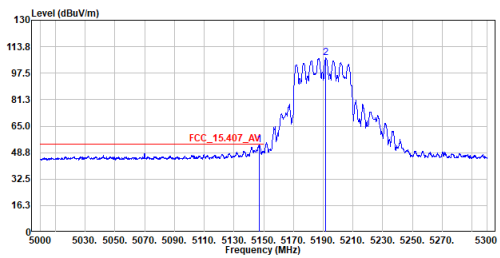


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.150	53.43	54.00	-0.57	31.99	21.44	Average
2	5191.850	106.74	-----	-----	85.28	21.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax40_TX_5190MHz
Test By :Gary

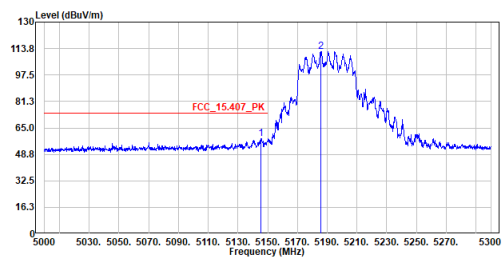


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.200	58.62	74.00	-15.38	37.18	21.44	Peak
2	5185.700	112.00	-----	-----	90.54	21.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax40_TX_5190MHz
Test By :Gary

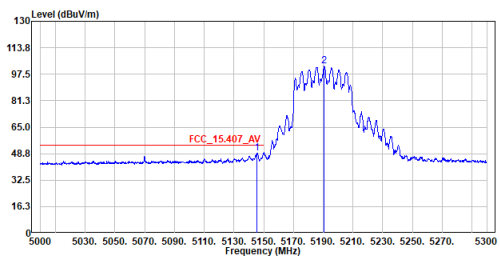


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.350	49.24	54.00	-4.76	27.80	21.44	Average
2	5190.650	102.63	-----	-----	81.17	21.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax40_TX_5190MHz
Test By :Gary

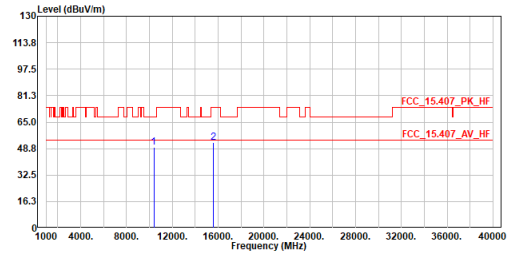


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10380.000	49.69	68.20	-18.51	57.64	-7.95	Peak
2	15570.000	52.55	74.00	-21.45	55.75	-3.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Vertical
Mode :ax40_TX_5190MHz
Test By :Gary

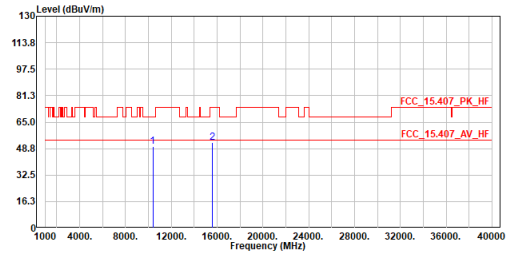


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10380.000	50.14	68.20	-18.06	58.09	-7.95	Peak
2	15570.000	52.31	74.00	-21.69	55.51	-3.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax40_TX_5230MHz
Test By :Gary

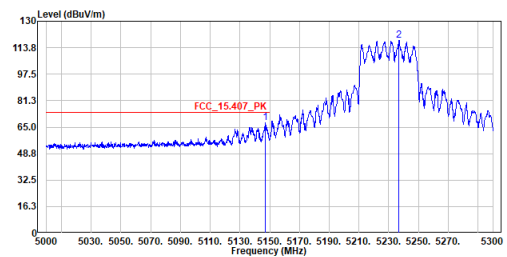


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.000	67.51	74.00	-6.49	46.07	21.44	Peak
2	5236.850	118.41	-----	-----	96.92	21.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
Condition :3m ,Horizontal
Mode :ax40_TX_5230MHz
Test By :Gary

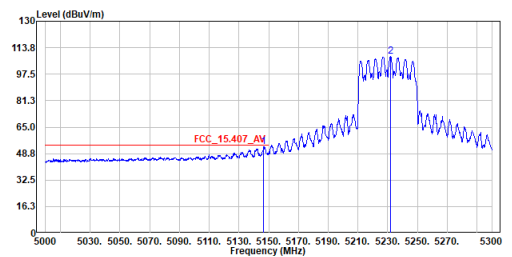

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5146.700	52.92	54.00	-1.08	31.48	21.44	Average
2	5231.900	108.44	-----	-----	86.95	21.49	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.