

# TEST REPORT

**Applicant:** Shantou Yile Technology Co., Ltd.

**Address of Applicant:** No.5 Yongxiang Road,Lingting, Chenghai Area, Shantou, China

**Manufacturer:** Shantou Yile Technology Co., Ltd.

**Address of Manufacturer:** No.5 Yongxiang Road,Lingting, Chenghai Area, Shantou, China

**Equipment Under Test (EUT)**

Product Name: FOUR AXIS AIRCRAFT

Model No.: See section 5.1

**FCC ID:** 2A5OM-S150

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249

**Date of sample receipt:** February 26, 2024

**Date of Test:** February 27, 2024-March 15, 2024

**Date of report issued:** March 15, 2024

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Luo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	March 15, 2024	Original

Prepared By:




Date:

March 15, 2024

Project Engineer

Check By:

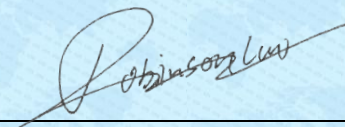

Date:

March 15, 2024

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
5.6 TEST FACILITY.....	7
5.7 TEST LOCATION .....	7
5.8 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT.....	10
7.2 RADIATED EMISSION METHOD.....	11
7.2.1 <i>Field Strength of The Fundamental Signal</i> .....	13
7.2.2 <i>Spurious emissions</i> .....	14
7.2.3 <i>Bandedge emissions</i> .....	23
7.3 20dB OCCUPY BANDWIDTH.....	24
8 TEST SETUP PHOTO.....	26
9 EUT CONSTRUCTIONAL DETAILS .....	26

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remarks:

1. Test according to ANSI C63.10:2013.
2. Pass: The EUT complies with the essential requirements in the standard.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	FOUR AXIS AIRCRAFT
Model No.:	S65, S76, S80, S82, S83, S85, S86, S89, S91, S92, S98, S99, S101, S109, S113, S115, S116, S118, S119, S121, S125, S130, S132, S135, S136, S138, S139, S150, S151, S152, S155, S156, S158, S159, S160, S165, S166, S167, S168, S169, S173, S175, S176, S177, S178, S179, S180, S181, S182, S185, S186, S188, S189, S190, S191, S192, S193, S195, S196, S198, S199, S312, S315, S316, S317, S319, S325, S326, S327, S350, S356, S357, S358, S359, S361, S362, S365, S367, S368, S369, S370, S371, S372, S375, S376, S377, S378, S379, S391, S395, S396, S397, S610, S612, S613, S615, S617, S618, S619, S621, S623, S625, S627, S628, S629, S710, S712, S713, S715, S716, S717, S718, S719, S720, S725, S726, S728, S729, S731, S735, S736, S739, S751, S752, S753, S755, S756, S758, S759, S760, E58, E88, E99, E100, E88EVO, YT163, YT150, S162
Test Model No.:	S150
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Serial No.:	6971045311502
Test sample(s) ID:	GTS2024020105-1
Sample(s) Status	Engineered sample
Operation Frequency:	2420MHz~2460MHz
Channel numbers:	41
Modulation type:	GFSK
Antenna Type:	Integral Antenna
Antenna gain:	0.17dBi(declare by applicant)
Power supply:	DC 4.5V (3*1.5V Size "AA" Battery)

**Remark:**

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.
3. The report is for TX device only.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2420	12	2431	23	2442	34	2453
2	2421	13	2432	24	2443	35	2454
3	2422	14	2433	25	2444	36	2455
4	2423	15	2434	26	2445	37	2456
5	2424	16	2435	27	2446	38	2457
6	2425	17	2436	28	2447	39	2458
7	2426	18	2437	29	2448	40	2459
8	2427	19	2438	30	2449	41	2460
9	2428	20	2439	31	2450		
10	2429	21	2440	32	2451		
11	2430	22	2441	33	2452		

The test frequencies are below:

Channel	Frequency
The lowest channel	2420MHz
The middle channel	2440MHz
The Highest channel	2460MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: New battery is used during all test.	

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	83.64	84.26	82.45

## 5.3 Description of Support Units

None.
-------

## 5.4 Deviation from Standards

None.
-------

## 5.5 Abnormalities from Standard Conditions

None.
-------

## 5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC—Registration No.: 381383</b> Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.</li> <li>● <b>ISED—Registration No.: 9079A</b> CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing</li> <li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).</li> </ul>
--

## 5.7 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

## 5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 23, 2021	June 22, 2024
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 14, 2023	April 13, 2024
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 14, 2023	April 13, 2024
8	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 13, 2023	Nov.12, 2024
9	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 14, 2023	April 13, 2024
10	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 14, 2023	April 13, 2024
11	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 29, 2023	Oct. 28, 2024
12	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 29, 2023	Oct. 28, 2024
13	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 12, 2024	March 11, 2025
14	Amplifier	/	LNA-1000-30S	GTS650	April 14, 2023	April 13, 2024
15	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 08, 2023	Nov.07, 2024
16	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	April 14, 2023	April 13, 2024
17	Thermo meter	JINCHUANG	GSP-8A	GTS643	April 19, 2023	April 18, 2024
18	RE cable 1	GTS	N/A	GTS675	July 31. 2023	July 30. 2024
19	RE cable 2	GTS	N/A	GTS676	July 31. 2023	July 30. 2024
20	RE cable 3	GTS	N/A	GTS677	July 31. 2023	July 30. 2024
21	RE cable 4	GTS	N/A	GTS678	July 31. 2023	July 30. 2024
22	RE cable 5	GTS	N/A	GTS679	July 31. 2023	July 30. 2024
23	RE cable 6	GTS	N/A	GTS680	July 31. 2023	July 30. 2024
24	RE cable 7	GTS	N/A	GTS681	July 31. 2023	July 30. 2024
25	RE cable 8	GTS	N/A	GTS682	July 31. 2023	July 30. 2024



RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 14, 2023	April 13, 2024
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	April 14, 2023	April 13, 2024
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 14, 2023	April 13, 2024
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 14, 2023	April 13, 2024
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 14, 2023	April 13, 2024
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 14, 2023	April 13, 2024
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 14, 2023	April 13, 2024
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	April 19, 2023	April 18, 2024


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	April 19, 2023	April 18, 2024



## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>15.247(c) (1)(i) requirement:</b> (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
<b>EUT Antenna:</b>	
The antenna is integral antenna, reference to the appendix II for details.	

## 7.2 Radiated Emission Method

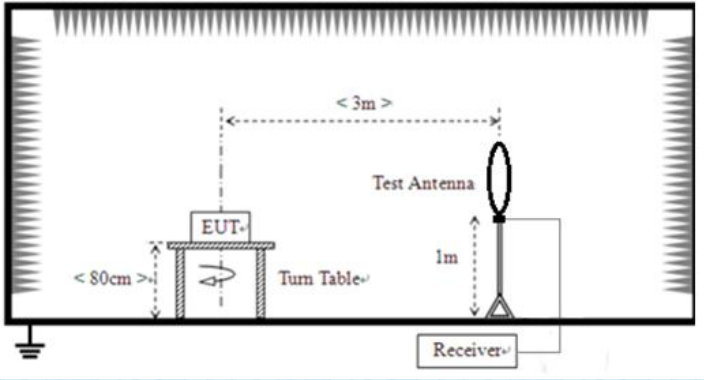Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)		Remark	
	0.009MHz-0.490MHz	2400/F(kHz) @300m		Quasi-peak Value	
	0.490MHz-1.705MHz	24000/F(kHz) @30m		Quasi-peak Value	
	1.705MHz-30.0MHz	30 @30m		Quasi-peak Value	
	30MHz-88MHz	100 @3m		Quasi-peak Value	
	88MHz-216MHz	150 @3m		Quasi-peak Value	
	216MHz-960MHz	200 @3m		Quasi-peak Value	
	960MHz-1GHz	500 @3m		Quasi-peak Value	
	Above 1GHz	500 @3m		Average Value	
	5000 @3m		Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	For radiated emissions from 9kHz to 30MHz				
	 <p>The diagram illustrates the test setup for radiated emissions from 9kHz to 30MHz. It shows an Equipment Under Test (EUT) placed on a turn table. The EUT is 80cm high. A test antenna is positioned 3m away from the EUT and is 1m high. A receiver is connected to the test antenna. The setup is shown on a ground plane.</p>				
	For radiated emissions from 30MHz to 1GHz				

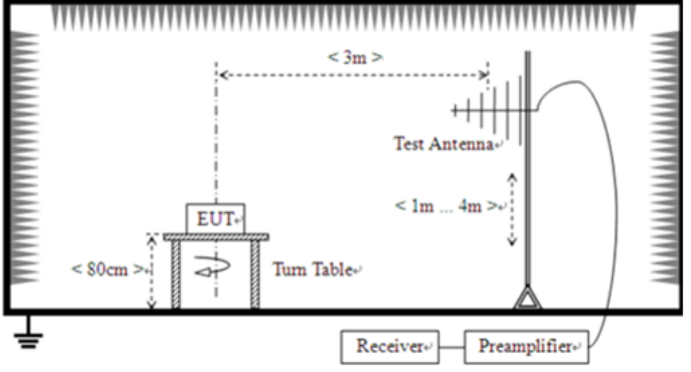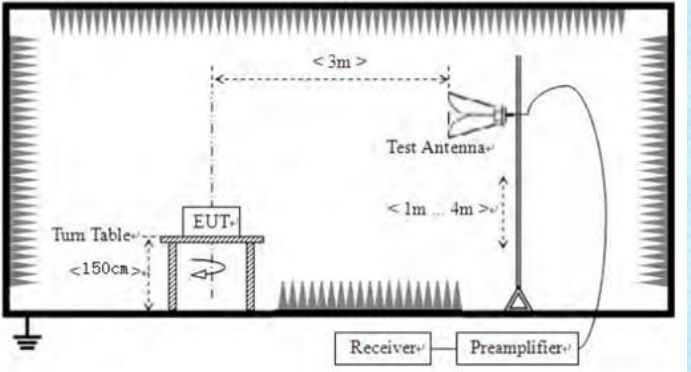	 <p>For radiated emissions above 1GHz</p> 						
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>						
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>						
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>						
<p>Test environment:</p>	<table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
<p>Test voltage:</p>	<p>DC 4.5V</p>						
<p>Test results:</p>	<p>Pass</p>						

**Measurement data:**

**7.2.1 Field Strength of The Fundamental Signal**

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2420.00	87.71	27.43	4.57	38.56	81.15	114.00	-32.85	Vertical
2420.00	83.87	27.43	4.57	38.56	77.31	114.00	-36.69	Horizontal
2440.00	90.72	27.55	4.56	38.57	84.26	114.00	-29.74	Vertical
2440.00	85.04	27.55	4.56	38.57	78.58	114.00	-35.42	Horizontal
2460.00	88.84	27.64	4.55	38.58	82.45	114.00	-31.55	Vertical
2460.00	81.34	27.64	4.55	38.58	74.95	114.00	-39.05	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2420.00	74.63	27.43	4.57	38.56	68.07	94.00	-25.93	Vertical
2420.00	72.32	27.43	4.57	38.56	65.76	94.00	-28.24	Horizontal
2440.00	76.69	27.55	4.56	38.57	70.23	94.00	-23.77	Vertical
2440.00	73.20	27.55	4.56	38.57	66.74	94.00	-27.26	Horizontal
2460.00	75.74	27.64	4.55	38.58	69.35	94.00	-24.65	Vertical
2460.00	74.32	27.64	4.55	38.58	67.93	94.00	-26.07	Horizontal

Note: RBW>20dB BW, VBW> RBW, PK detector is for PK value, AV detector is for AV value .


## 7.2.2 Spurious emissions

### ■ Below 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

### ■ Below 1GHz

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

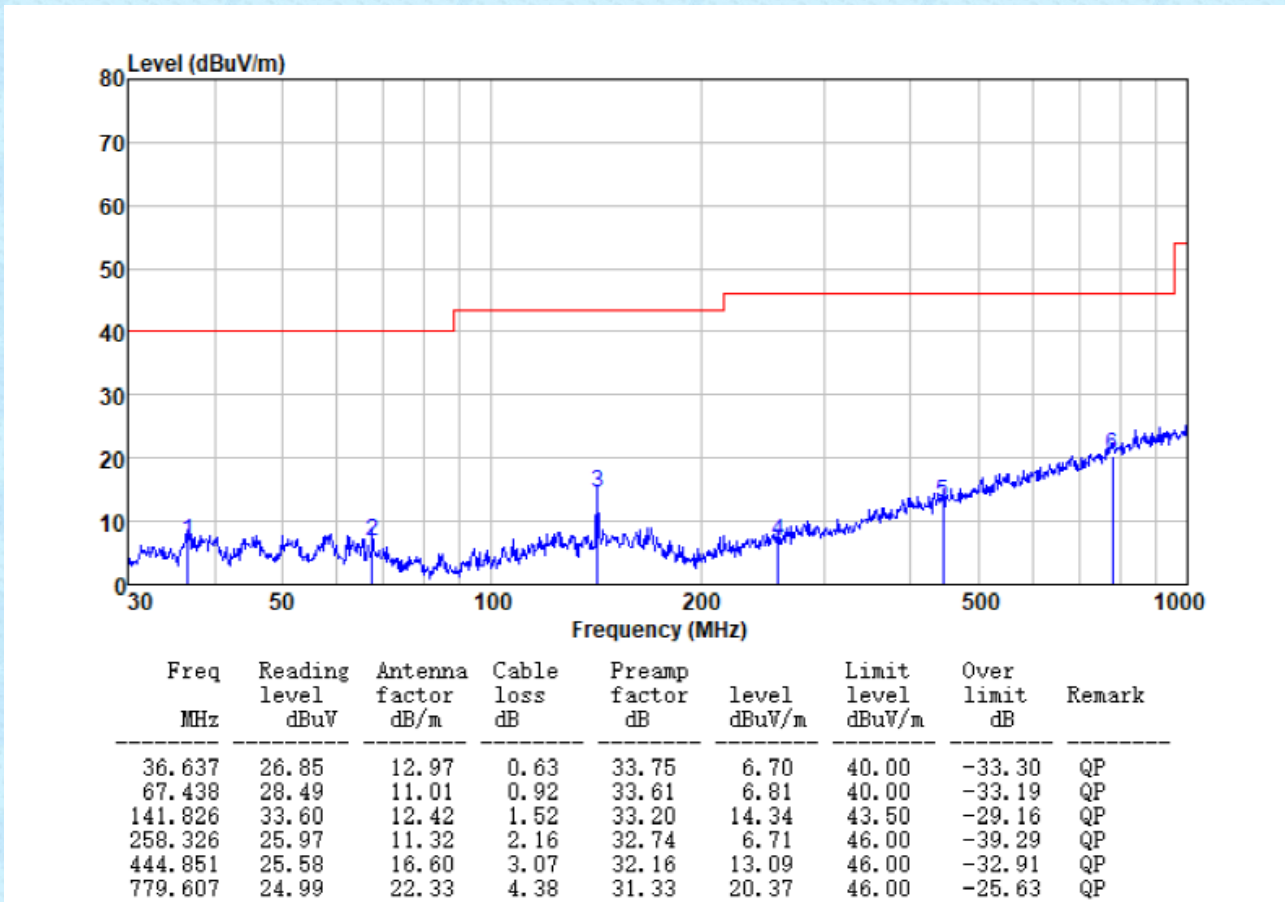


Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

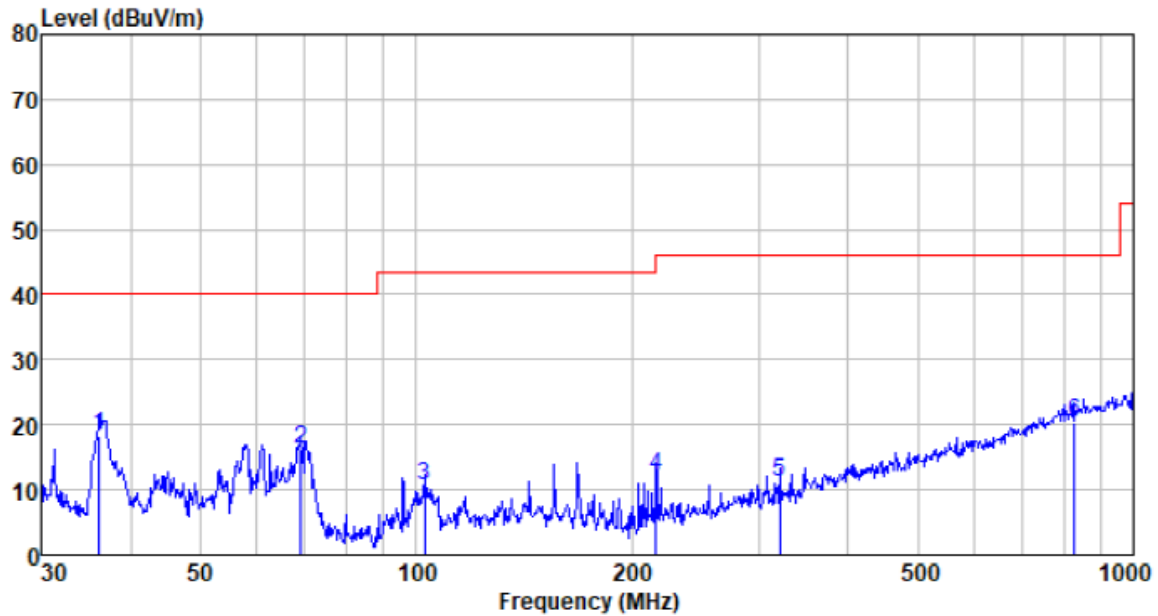

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.127	38.57	12.89	0.62	33.76	18.32	40.00	-21.68	QP
69.114	38.19	10.67	0.93	33.60	16.19	40.00	-23.81	QP
102.719	32.92	9.92	1.22	33.57	10.49	43.50	-33.01	QP
216.024	33.00	10.09	1.93	32.78	12.24	46.00	-33.76	QP
321.061	28.22	13.18	2.47	32.61	11.26	46.00	-34.74	QP
827.493	23.93	23.04	4.57	31.18	20.36	46.00	-25.64	QP


Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

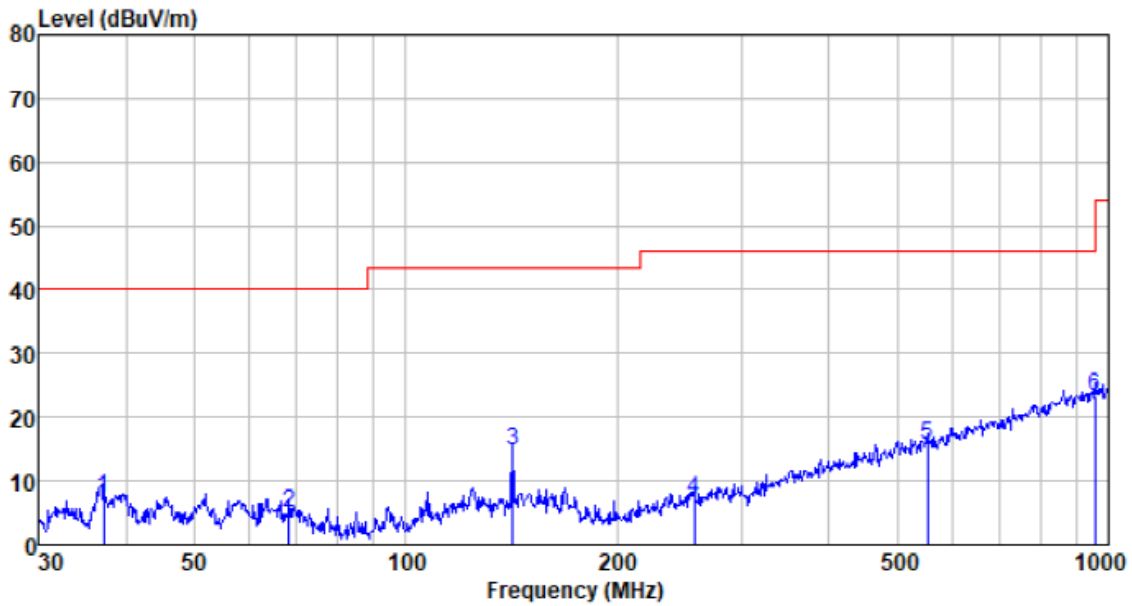

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
37.155	27.58	13.06	0.63	33.75	7.52	40.00	-32.48	QP
68.151	26.92	10.86	0.93	33.61	5.10	40.00	-34.90	QP
141.826	33.98	12.42	1.52	33.20	14.72	43.50	-28.78	QP
257.422	26.43	11.34	2.16	32.74	7.19	46.00	-38.81	QP
552.883	25.32	18.54	3.53	31.88	15.51	46.00	-30.49	QP
955.438	24.73	24.35	5.06	30.82	23.32	46.00	-22.68	QP




Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

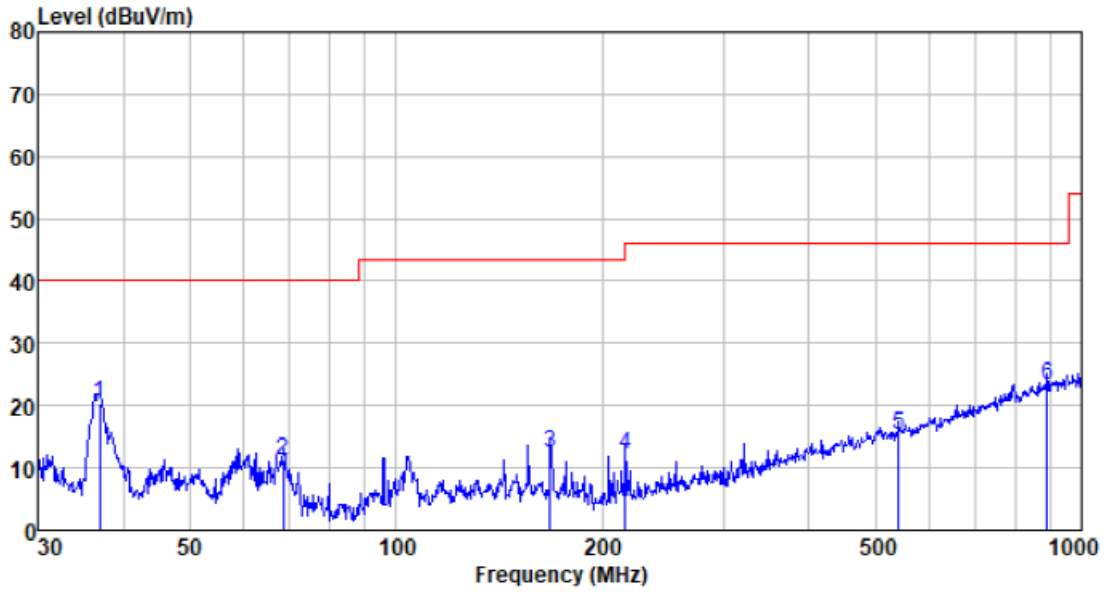


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.895	40.34	13.02	0.63	33.75	20.24	40.00	-19.76	QP
68.391	32.99	10.82	0.93	33.61	11.13	40.00	-28.87	QP
167.824	32.06	11.67	1.67	33.00	12.40	43.50	-31.10	QP
216.024	32.77	10.09	1.93	32.78	12.01	46.00	-33.99	QP
541.373	25.37	18.34	3.49	31.91	15.29	46.00	-30.71	QP
890.728	25.60	23.79	4.82	30.99	23.22	46.00	-22.78	QP

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

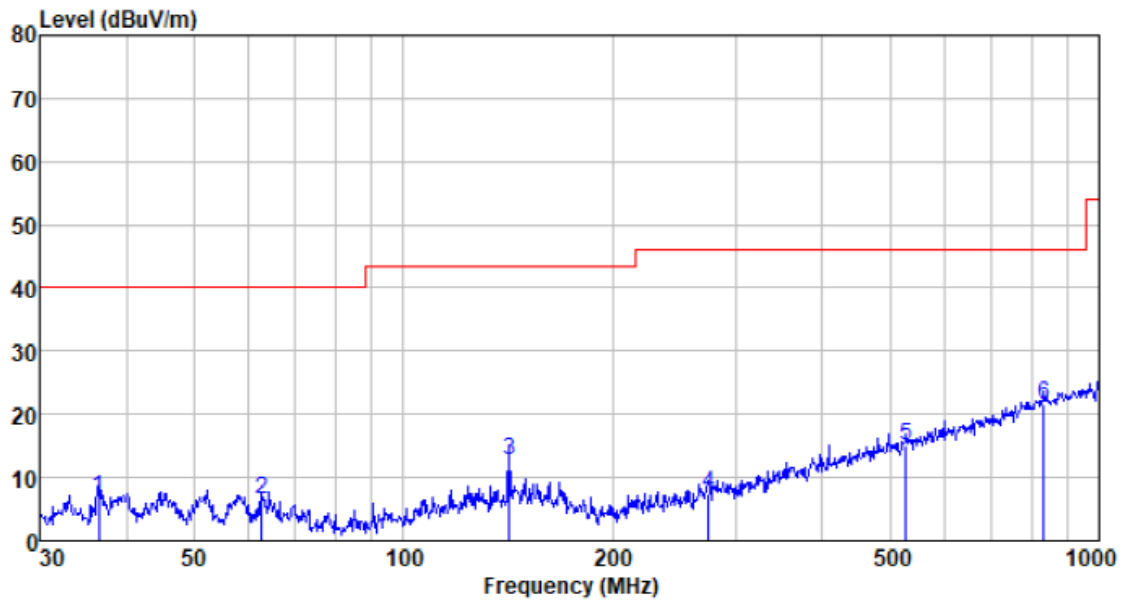

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.509	26.96	12.95	0.62	33.75	6.78	40.00	-33.22	QP
62.651	27.32	12.01	0.88	33.63	6.58	40.00	-33.42	QP
141.826	31.99	12.42	1.52	33.20	12.73	43.50	-30.77	QP
274.194	25.55	12.45	2.24	32.72	7.52	46.00	-38.48	QP
528.246	25.34	18.11	3.43	31.93	14.95	46.00	-31.05	QP
833.317	24.93	23.12	4.58	31.16	21.47	46.00	-24.53	QP

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

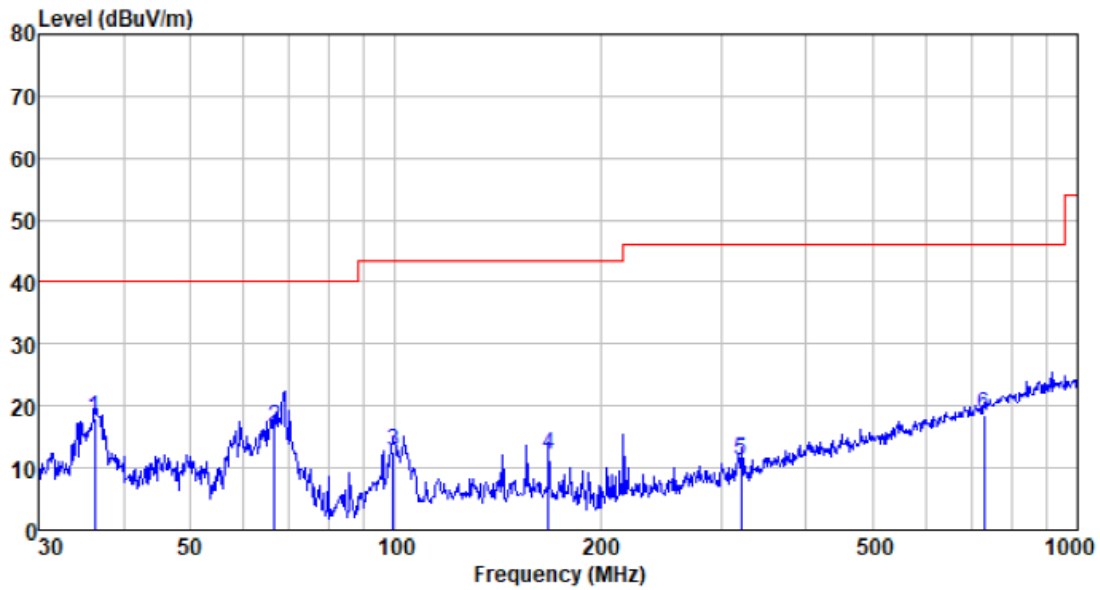

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.254	38.26	12.91	0.62	33.76	18.03	40.00	-21.97	QP
66.499	37.90	11.20	0.91	33.61	16.40	40.00	-23.60	QP
99.180	35.47	9.61	1.18	33.60	12.66	43.50	-30.84	QP
167.824	31.76	11.67	1.67	33.00	12.10	43.50	-31.40	QP
321.061	28.14	13.18	2.47	32.61	11.18	46.00	-34.82	QP
729.358	24.53	21.38	4.19	31.50	18.60	46.00	-27.40	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4840.00	34.99	31.08	7.30	38.36	35.01	74.00	-38.99	Vertical
7260.00	30.30	35.95	9.44	38.97	36.72	74.00	-37.28	Vertical
9680.00	30.10	37.93	10.01	39.69	38.35	74.00	-35.65	Vertical
4840.00	38.81	31.08	7.30	38.36	38.83	74.00	-35.17	Horizontal
7260.00	31.85	35.95	9.44	38.97	38.27	74.00	-35.73	Horizontal
9680.00	29.31	37.93	10.01	39.69	37.56	74.00	-36.44	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4840.00	24.25	31.08	7.30	38.36	24.27	54.00	-29.73	Vertical
7260.00	19.25	35.95	9.44	38.97	25.67	54.00	-28.33	Vertical
9680.00	18.47	37.93	10.01	39.69	26.72	54.00	-27.28	Vertical
4840.00	28.22	31.08	7.30	38.36	28.24	54.00	-25.76	Horizontal
7260.00	21.27	35.95	9.44	38.97	27.69	54.00	-26.31	Horizontal
9680.00	18.00	37.93	10.01	39.69	26.25	54.00	-27.75	Horizontal

Test channel:	Middle channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	35.60	31.26	7.04	38.38	35.52	74.00	-38.48	Vertical
7320.00	30.70	36.14	9.18	39.00	37.02	74.00	-36.98	Vertical
9760.00	30.46	38.06	10.27	39.73	39.06	74.00	-34.94	Vertical
4880.00	39.54	31.26	7.04	38.38	39.46	74.00	-34.54	Horizontal
7320.00	32.30	36.14	9.18	39.00	38.62	74.00	-35.38	Horizontal
9760.00	29.72	38.06	10.27	39.73	38.32	74.00	-35.68	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	24.74	31.26	7.04	38.38	24.66	54.00	-29.34	Vertical
7320.00	19.58	36.14	9.18	39.00	25.90	54.00	-28.10	Vertical
9760.00	18.76	38.06	10.27	39.73	27.36	54.00	-26.64	Vertical
4880.00	28.78	31.26	7.04	38.38	28.70	54.00	-25.30	Horizontal
7320.00	21.64	36.14	9.18	39.00	27.96	54.00	-26.04	Horizontal
9760.00	18.35	38.06	10.27	39.73	26.95	54.00	-27.05	Horizontal

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4920.00	35.68	31.46	6.75	38.39	35.50	74.00	-38.50	Vertical
7380.00	30.75	36.35	9.00	39.03	37.07	74.00	-36.93	Vertical
9840.00	30.51	38.20	10.12	39.77	39.06	74.00	-34.94	Vertical
4920.00	39.63	31.46	6.75	38.39	39.45	74.00	-34.55	Horizontal
7380.00	32.36	36.35	9.00	39.03	38.68	74.00	-35.32	Horizontal
9840.00	29.78	38.20	10.12	39.77	38.33	74.00	-35.67	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4920.00	24.84	31.46	6.75	38.39	24.66	54.00	-29.34	Vertical
7380.00	19.65	36.35	9.00	39.03	25.97	54.00	-28.03	Vertical
9840.00	18.82	38.20	10.12	39.77	27.37	54.00	-26.63	Vertical
4920.00	28.89	31.46	6.75	38.39	28.71	54.00	-25.29	Horizontal
7380.00	21.71	36.35	9.00	39.03	28.03	54.00	-25.97	Horizontal
9840.00	18.42	38.20	10.12	39.77	26.97	54.00	-27.03	Horizontal

*Remarks:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
3. *For above 18GHz, no emission found.*
4. *If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.*

### 7.2.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	45.82	27.17	4.60	38.52	39.07	74.00	-34.93	Horizontal
2390.00	50.03	27.27	4.65	38.56	43.39	74.00	-30.61	Horizontal
2400.00	51.77	27.41	4.66	38.57	45.27	74.00	-28.73	Horizontal
2310.00	46.65	27.17	4.60	38.52	39.90	74.00	-34.10	Vertical
2390.00	51.38	27.27	4.65	38.56	44.74	74.00	-29.26	Vertical
2400.00	52.97	27.41	4.66	38.57	46.47	74.00	-27.53	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	35.71	27.17	4.60	38.52	28.96	54.00	-25.04	Horizontal
2390.00	37.12	27.27	4.65	38.56	30.48	54.00	-23.52	Horizontal
2400.00	38.49	27.41	4.66	38.57	31.99	54.00	-22.01	Horizontal
2310.00	35.86	27.17	4.60	38.52	29.11	54.00	-24.89	Vertical
2390.00	38.05	27.27	4.65	38.56	31.41	54.00	-22.59	Vertical
2400.00	39.07	27.41	4.66	38.57	32.57	54.00	-21.43	Vertical

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.28	27.38	4.52	38.59	41.59	74.00	-32.41	Horizontal
2500.00	46.89	27.40	4.49	38.60	40.18	74.00	-33.82	Horizontal
2483.50	49.61	27.38	4.52	38.59	42.92	74.00	-31.08	Vertical
2500.00	48.17	27.40	4.49	38.60	41.46	74.00	-32.54	Vertical


**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.57	27.38	4.52	38.59	29.88	54.00	-24.12	Horizontal
2500.00	36.15	27.40	4.49	38.60	29.44	54.00	-24.56	Horizontal
2483.50	36.45	27.38	4.52	38.59	29.76	54.00	-24.24	Vertical
2500.00	36.32	27.40	4.49	38.60	29.61	54.00	-24.39	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

### 7.3 20dB Occupy Bandwidth

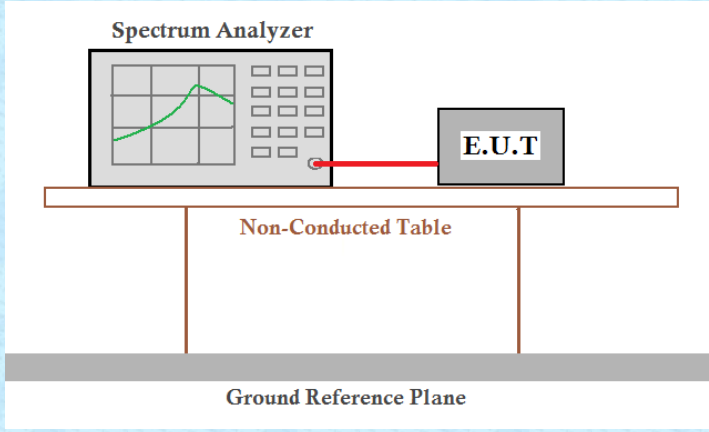
Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Test channel	20dB bandwidth(MHz)	Result
Lowest	2.156	Pass
Middle	2.005	Pass
Highest	2.183	Pass




Test plot as follows:

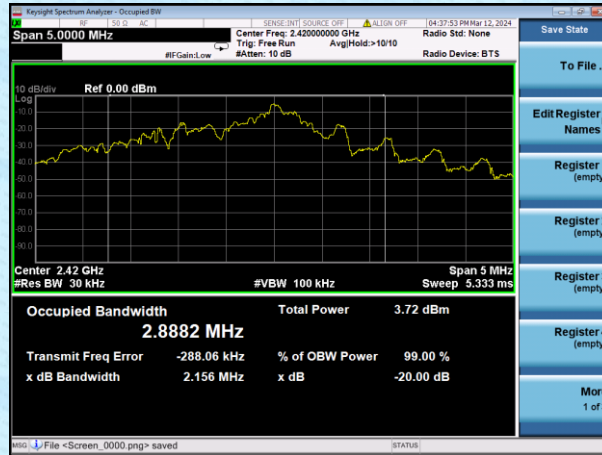

Lowest channel

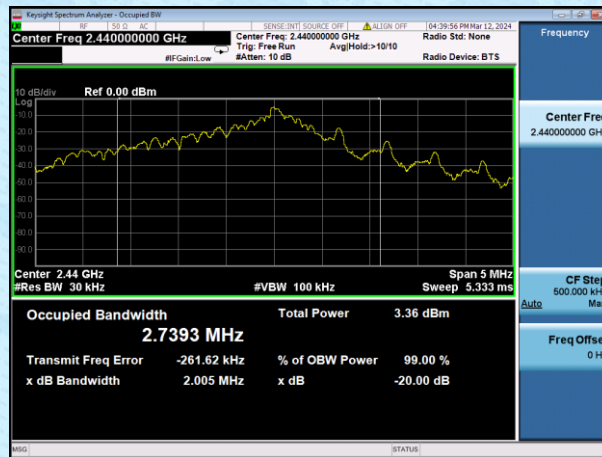

Middle channel

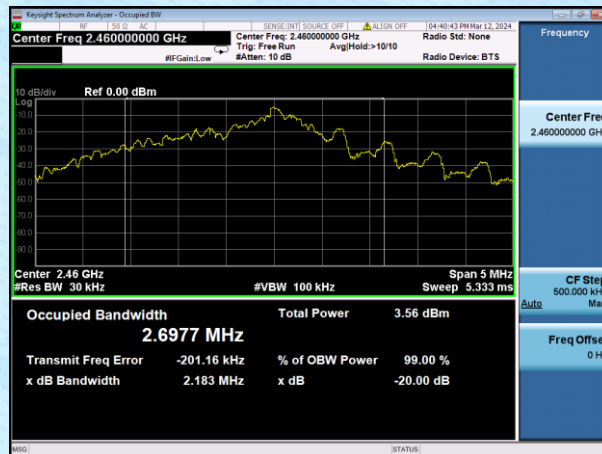

Highest channel

## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----