





11AX20MIMO_Ant3_7095_26Tone_RU8

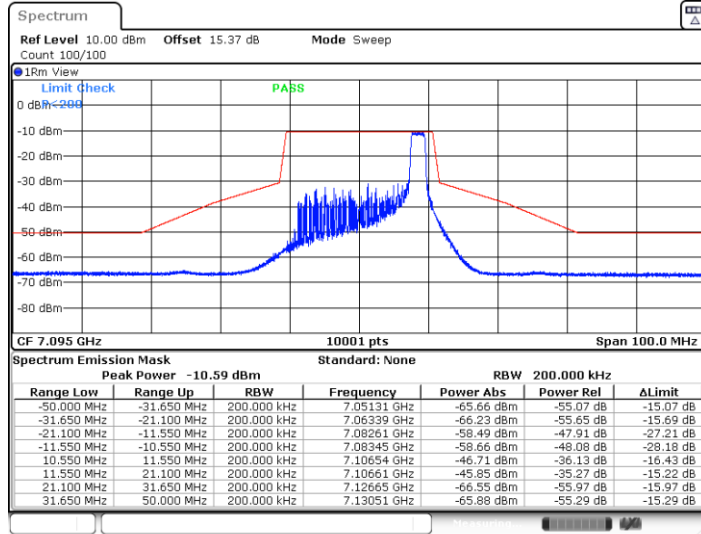



Date: 22.AUG.2023 09:01:47


11AX20MIMO_Ant3_7095_52Tone_RU40

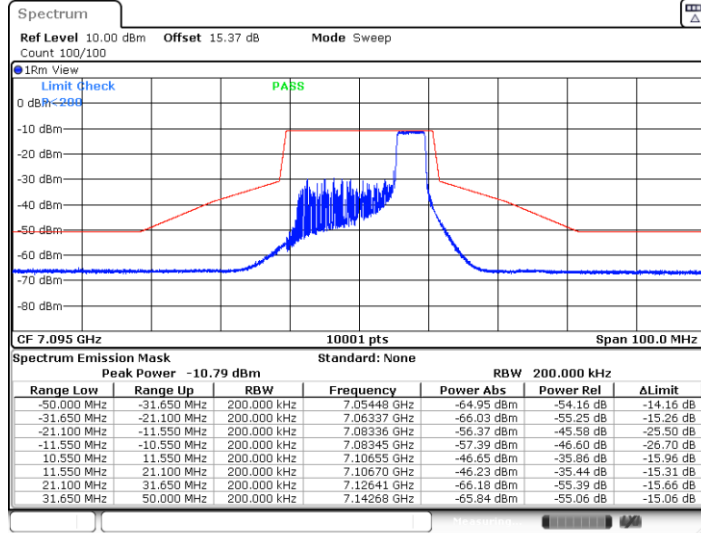

Date: 22.AUG.2023 09:04:59

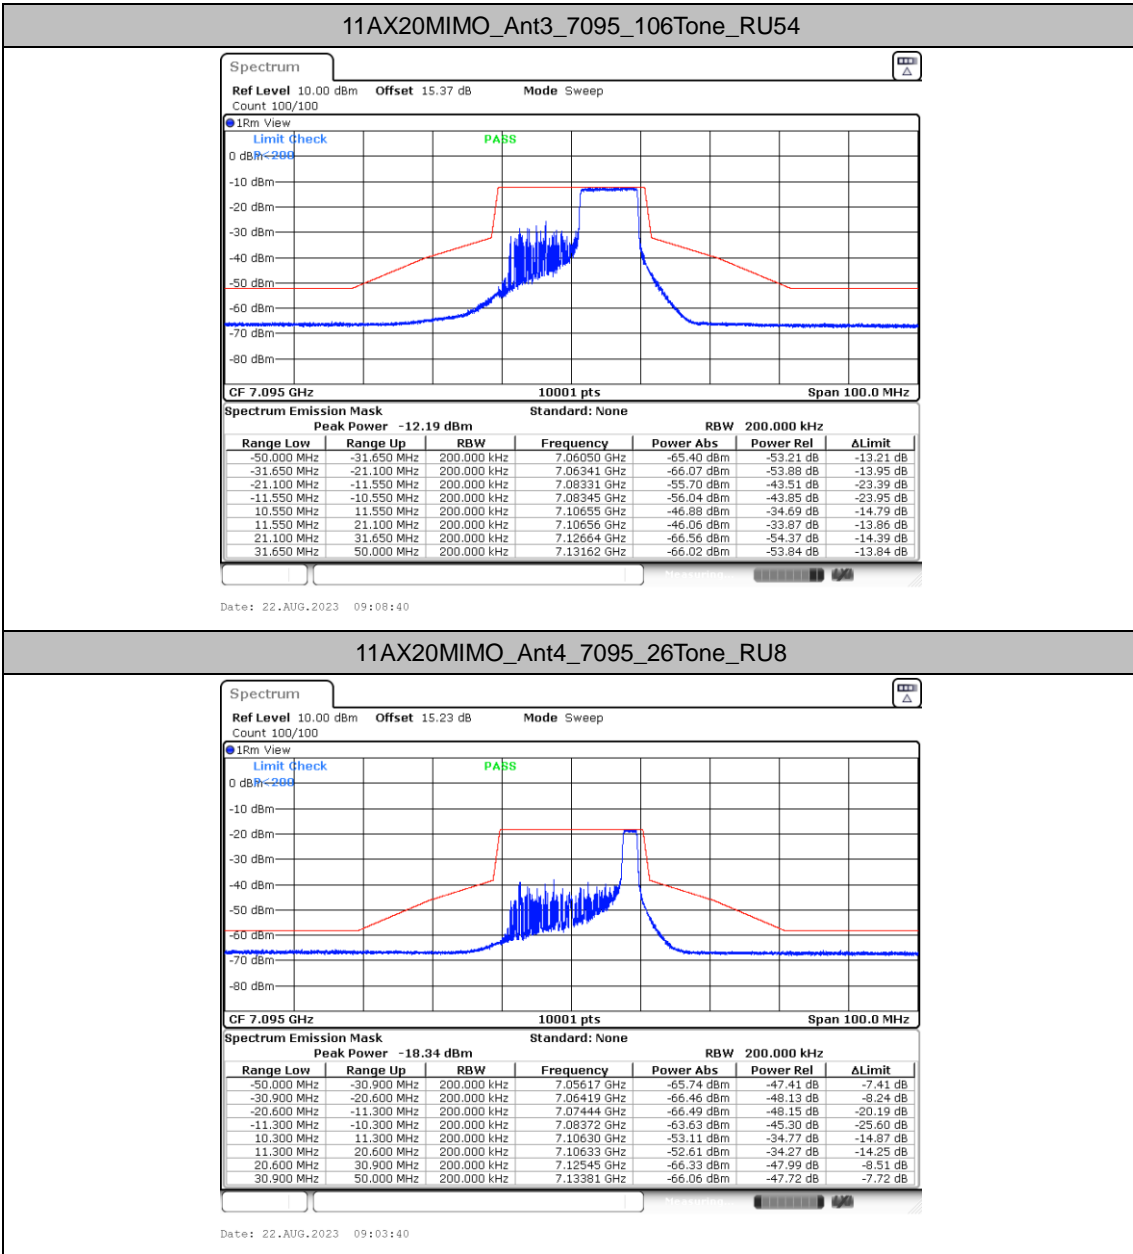


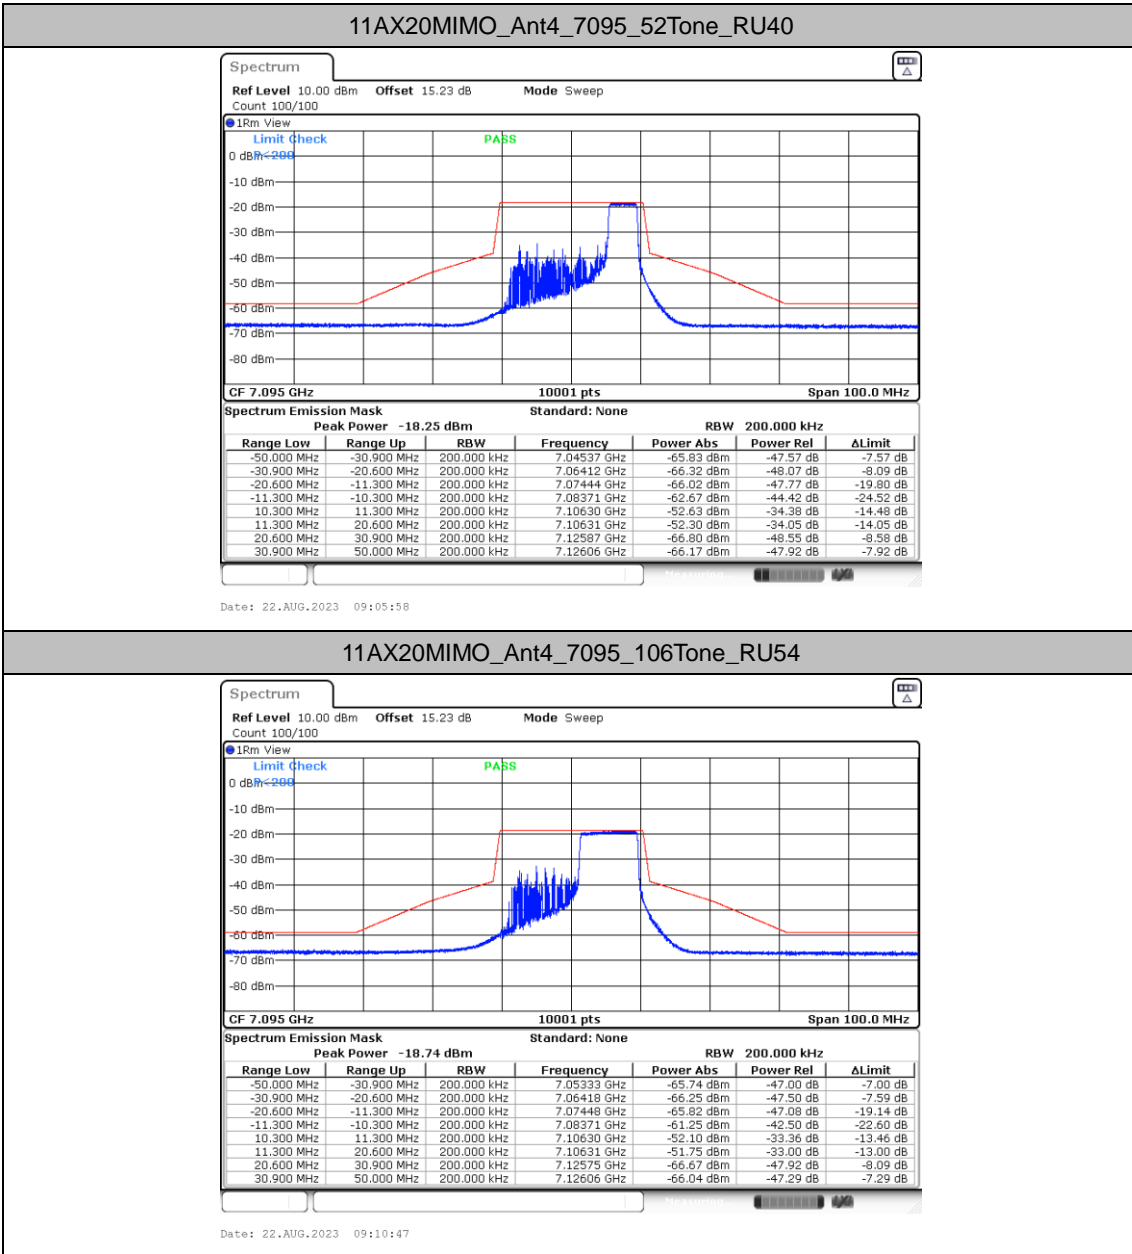

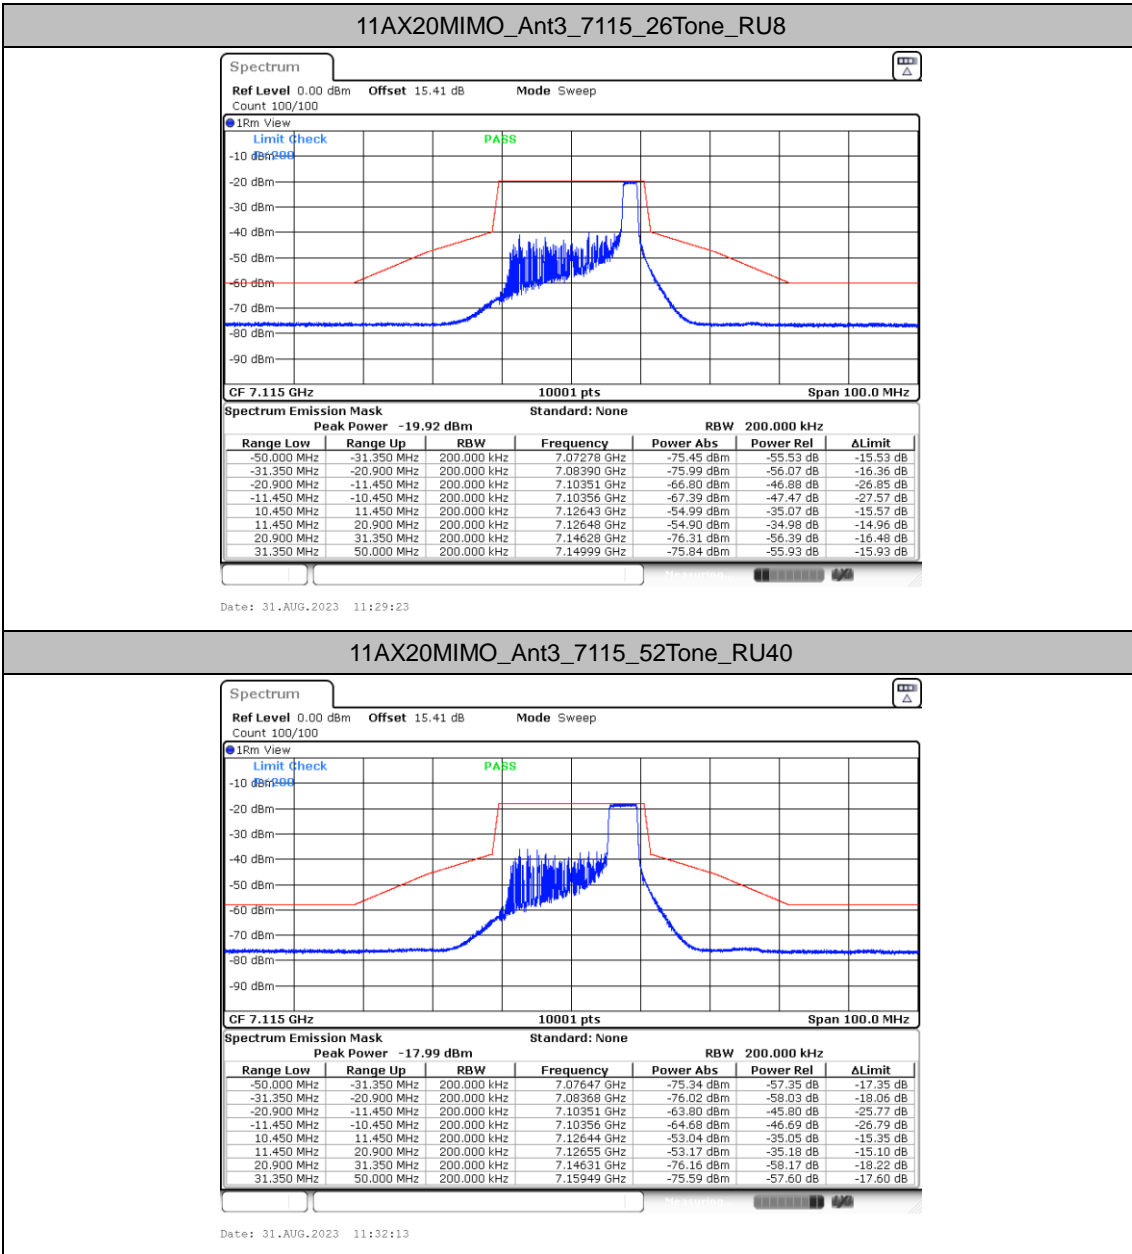




11AX20MIMO_Ant3_7115_106Tone_RU54

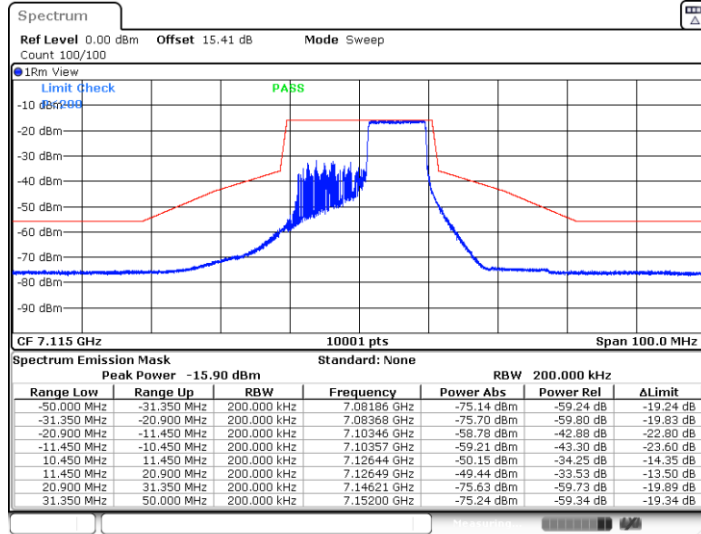


Date: 31.AUG.2023 11:34:47

11AX20MIMO_Ant4_7115_26Tone_RU8

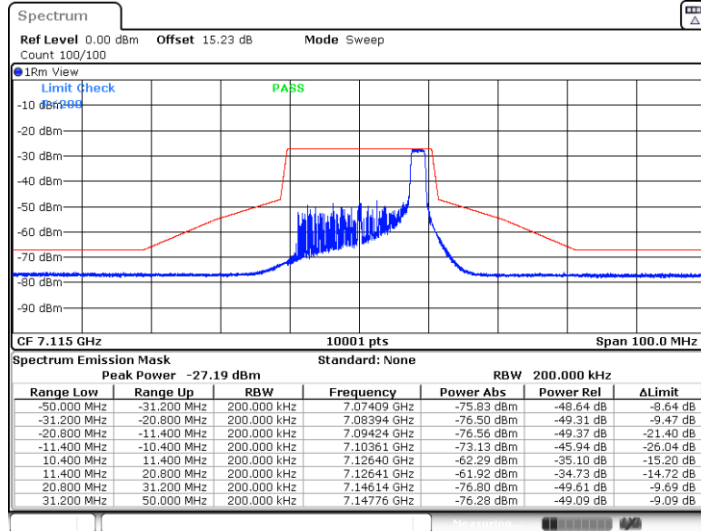


Date: 31.AUG.2023 11:30:21

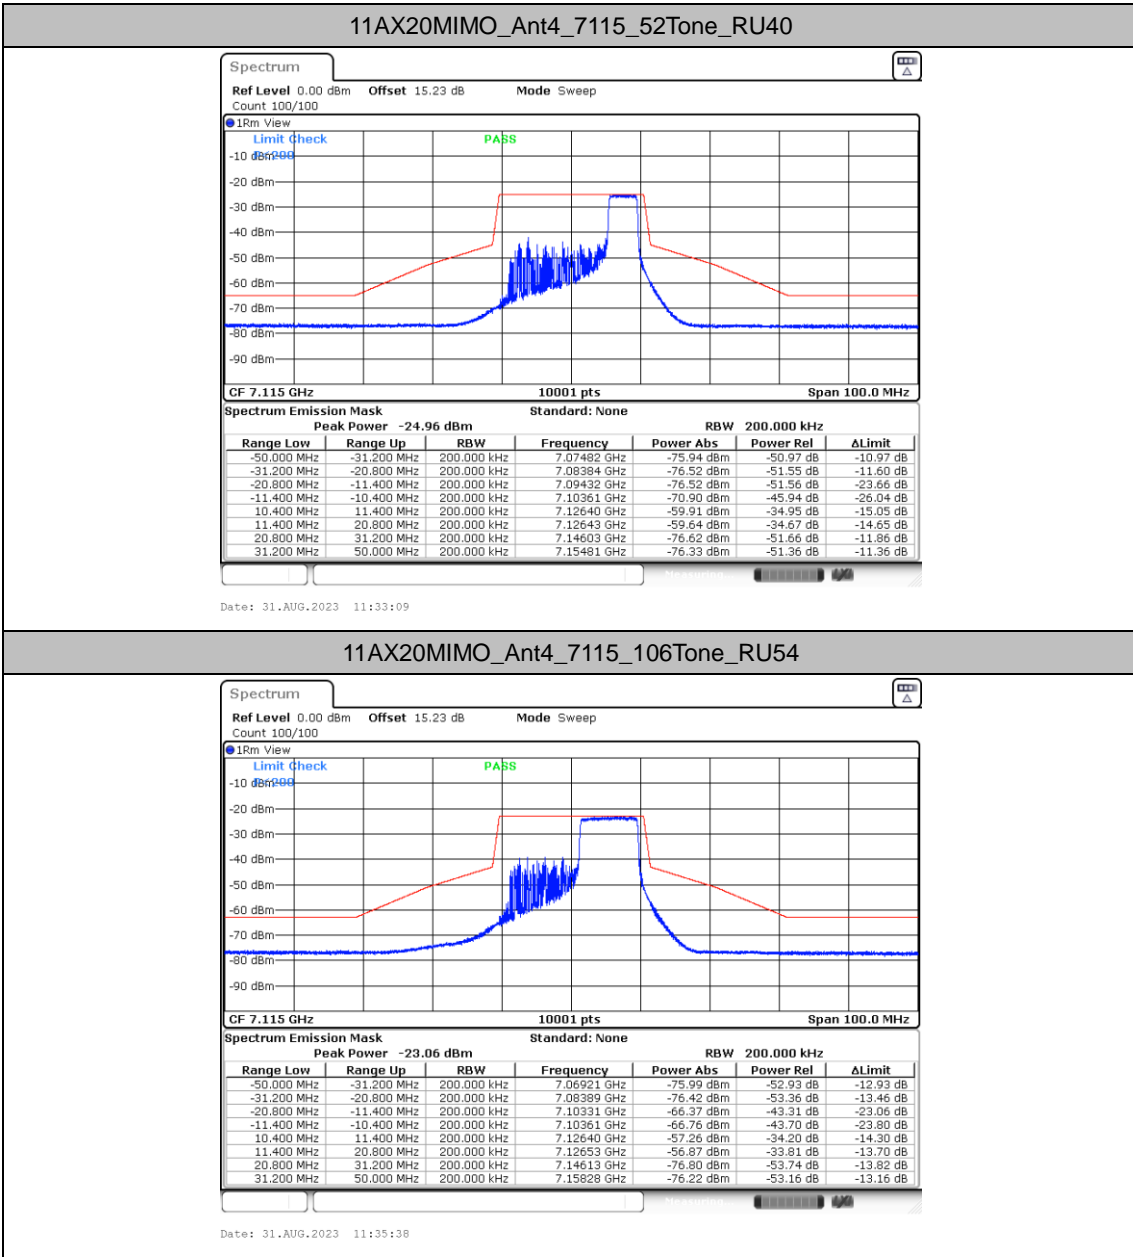



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

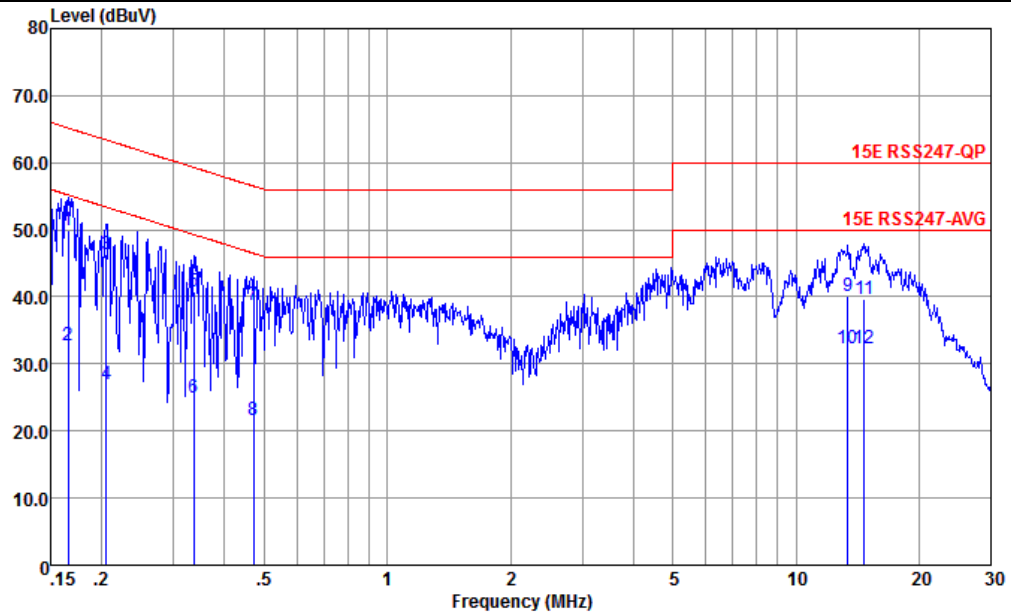


Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.166	49.97	-15.19	65.16	39.50	0.04	10.43	QP
2	0.166	32.67	-22.49	55.16	22.20	0.04	10.43	Average
3	0.205	46.35	-17.05	63.40	35.90	0.03	10.42	QP
4	0.205	27.05	-26.35	53.40	16.60	0.03	10.42	Average
5	0.336	40.85	-18.46	59.31	30.50	0.02	10.33	QP
6	0.336	24.95	-24.36	49.31	14.60	0.02	10.33	Average
7	0.471	38.71	-17.78	56.49	28.50	-0.02	10.23	QP
8	0.471	21.51	-24.98	46.49	11.30	-0.02	10.23	Average
9	13.408	40.18	-19.82	60.00	29.20	-0.13	11.11	QP
10	13.408	32.28	-17.72	50.00	21.30	-0.13	11.11	Average
11	14.672	39.59	-20.41	60.00	28.50	-0.12	11.21	QP
12	14.672	32.29	-17.71	50.00	21.20	-0.12	11.21	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

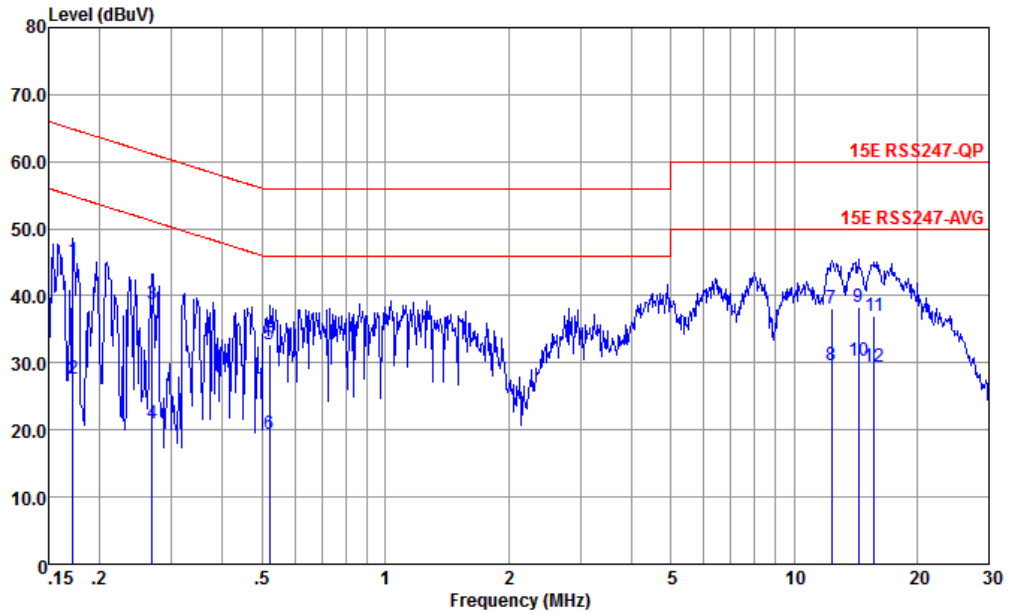

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.172	45.27	-19.59	64.86	34.80	0.04	10.43	QP
2	0.172	27.67	-27.19	54.86	17.20	0.04	10.43	Average
3	0.269	38.85	-22.31	61.16	28.50	-0.02	10.37	QP
4	0.269	20.85	-30.31	51.16	10.50	-0.02	10.37	Average
5	0.521	32.73	-23.27	56.00	22.60	-0.07	10.20	QP
6	0.521	19.33	-26.67	46.00	9.20	-0.07	10.20	Average
7	12.384	38.07	-21.93	60.00	27.20	-0.15	11.02	QP
8	12.384	29.67	-20.33	50.00	18.80	-0.15	11.02	Average
9	14.364	38.27	-21.73	60.00	27.19	-0.11	11.19	QP
10	14.364	30.37	-19.63	50.00	19.29	-0.11	11.19	Average
11	15.718	36.92	-23.08	60.00	25.79	-0.12	11.25	QP
12	15.718	29.32	-20.68	50.00	18.19	-0.12	11.25	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	41~42 %
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-5	5.925-6.425	CDD 3+4	802.11a	1	5955	6Mbps	-	-
Mode 2	U-NII-5	5.925-6.425	CDD 3+4	802.11a	45	6175	6Mbps	-	-
Mode 3	U-NII-5	5.925-6.425	CDD 3+4	802.11a	93	6415	6Mbps	-	-
Mode 4	U-NII-6	6.425-6.525	CDD 3+4	802.11a	97	6435	6Mbps	-	-
Mode 5	U-NII-6	6.425-6.525	CDD 3+4	802.11a	105	6475	6Mbps	-	-
Mode 6	U-NII-6	6.425-6.525	CDD 3+4	802.11a	113	6515	6Mbps	-	-
Mode 7	U-NII-7	6.525-6.875	CDD 3+4	802.11a	117	6535	6Mbps	-	-
Mode 8	U-NII-7	6.525-6.875	CDD 3+4	802.11a	149	6695	6Mbps	-	-
Mode 9	U-NII-7	6.525-6.875	CDD 3+4	802.11a	185	6875	6Mbps	-	-
Mode 10	U-NII-8	6.875-7.125	CDD 3+4	802.11a	189	6895	6Mbps	-	-
Mode 11	U-NII-8	6.875-7.125	CDD 3+4	802.11a	209	6995	6Mbps	-	-
Mode 12	U-NII-8	6.875-7.125	CDD 3+4	802.11a	229	7095	6Mbps	-	-
Mode 13	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	1	5955	MCS0	-	-
Mode 14	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	1	5955	MCS0	Partial_R U26/0	-
Mode 15	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	1	5955	MCS0	Partial_R U52/37	-
Mode 16	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	1	5955	MCS0	Partial_R U106/53	-
Mode 17	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	45	6175	MCS0	-	-
Mode 18	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	93	6415	MCS0	-	-
Mode 19	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE40	3	5965	MCS0	-	-
Mode 20	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE40	43	6165	MCS0	-	-
Mode 21	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE40	91	6405	MCS0	-	-
Mode 22	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE80	7	5985	MCS0	Full RU	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE80	39	6145	MCS0	Full RU	-
Mode 24	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE80	87	6385	MCS0	Full RU	-
Mode 25	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE160	15	6025	MCS0	Full RU	-
Mode 26	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE160	47	6185	MCS0	Full RU	-
Mode 27	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE160	79	6345	MCS0	Full RU	-
Mode 28	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	97	6435	MCS0	-	-
Mode 29	U-NII-6	6.425-6.525	CDD 3+4	802.11ax HE20	105	6475	MCS0	-	-
Mode 30	U-NII-6	6.425-6.525	CDD 3+4	802.11ax HE20	113	6515	MCS0	-	-
Mode 31	U-NII-6	6.425-6.525	CDD 3+4	802.11ax HE20	99	6445	MCS0	Full RU	-
Mode 32	U-NII-6	6.425-6.525	CDD 3+4	802.11ax HE40	107	6485	MCS0	Full RU	-
Mode 33	U-NII-6	6.425-6.525	CDD 3+4	802.11ax HE80	103	6465	MCS0	Full RU	-
Mode 34	U-NII-6	6.425-6.525	CDD 3+4	802.11ax HE40	115	6525	MCS0	Full RU	-
Mode 35	U-NII-6	6.425-6.525	CDD 3+4	802.11ax HE80	119	6545	MCS0	Full RU	-
Mode 36	U-NII-6	6.425-6.525	CDD 3+4	802.11ax HE160	111	6505	MCS0	Full RU	-
Mode 37	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE20	117	6535	MCS0	Full RU	-
Mode 38	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE20	149	6695	MCS0	Full RU	-
Mode 39	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE40	123	6565	MCS0	Full RU	-
Mode 40	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE40	147	6685	MCS0	Full RU	-
Mode 41	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE40	179	6845	MCS0	Full RU	-
Mode 42	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE80	135	6625	MCS0	Full RU	-
Mode 43	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE80	151	6705	MCS0	Full RU	-
Mode 44	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE160	143	6665	MCS0	Full RU	-
Mode 45	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE20	185	6875	MCS0	Full RU	-
Mode 46	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE80	183	6865	MCS0	Full RU	-
Mode 47	U-NII-7	6.525-6.875	CDD 3+4	802.11ax HE160	175	6825	MCS0	Full RU	-
Mode 48	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	189	6895	MCS0	Full RU	-
Mode 49	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	209	6995	MCS0	Full RU	-
Mode 50	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	229	7095	MCS0	Full RU	-
Mode 51	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	229	7095	MCS0	Partial_RU26/8	-
Mode 52	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	229	7095	MCS0	Partial_RU52/40	-
Mode 53	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	229	7095	MCS0	Partial_RU106/54	-
Mode 54	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE40	203	6965	MCS0	Full RU	-
Mode 55	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE40	227	7085	MCS0	Full RU	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 56	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE80	199	6945	MCS0	Full RU	-
Mode 57	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE80	215	7025	MCS0	Full RU	-
Mode 58	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE160	207	6985	MCS0	Full RU	-
Mode 59	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE40	187	6885	MCS0	Full RU	-
Mode 60	U-NII-5	5.925-6.425	CDD 3+4	802.11a	2	5935	6Mbps	-	-
Mode 61	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	2	5935	MCS0	-	-
Mode 62	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	2	5935	MCS0	Partial_RU26/0	-
Mode 63	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	2	5935	MCS0	Partial_RU52/37	-
Mode 64	U-NII-5	5.925-6.425	CDD 3+4	802.11ax HE20	2	5935	MCS0	Partial_RU106/53	-
Mode 65	U-NII-8	6.875-7.125	CDD 3+4	802.11a	233	7115	6Mbps	-	-
Mode 66	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	233	7115	MCS0	-	-
Mode 67	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	233	7115	MCS0	Partial_RU26/8	-
Mode 68	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	233	7115	MCS0	Partial_RU52/40	-
Mode 69	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	233	7115	MCS0	Partial_RU106/54	-
Mode 70	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	233	7115	MCS0		LF

Co-Location

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 71	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	233	7115	MCS0	-	-
	2400-2483.5	2400-2483.5	2	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
	WWAN Part 96 B48 BW=20M								
Mode 72	U-NII-8	6.875-7.125	CDD 3+4	802.11ax HE20	233	7115	MCS0	-	-
	2400-2483.5	2400-2483.5	3	802.11b	11	2462	1Mbps	-	-
	WWAN Part 96 B48 BW=20M								
Mode 73	U-NII-8	6.875-7.125	3	802.11ax HE20	233	7115	MCS0	-	-
	2400-2483.5	2400-2483.5	2	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-
	2400-2483.5	2400-2483.5	4	802.11b	11	2462	1Mbps	-	-
	WWAN Part 96 B48 BW=20M								



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	1	5924.06	47.15	68.20	-21.05	V	AVERAGE	Pass	Band Edge
1	802.11a	1	11910.00	46.09	54.00	-7.91	V	AVERAGE	Pass	Harmonic
2	802.11a	45	-	-	-	-	-	-	-	Band Edge
2	802.11a	45	12350.00	44.35	54.00	-9.65	V	AVERAGE	Pass	Harmonic
3	802.11a	93	-	-	-	-	-	-	-	Band Edge
3	802.11a	93	12830.00	48.55	88.20	-39.65	V	PEAK	Pass	Harmonic
4	802.11a	97	-	-	-	-	-	-	-	Band Edge
4	802.11a	97	12870.00	49.48	88.20	-38.72	H	PEAK	Pass	Harmonic
5	802.11a	105	-	-	-	-	-	-	-	Band Edge
5	802.11a	105	12950.00	49.77	88.20	-38.43	H	PEAK	Pass	Harmonic
6	802.11a	113	-	-	-	-	-	-	-	Band Edge
	802.11a	113	13030.00	49.60	88.20	-38.60	V	PEAK	Pass	Harmonic
7	802.11a	117	-	-	-	-	-	-	-	Band Edge
7	802.11a	117	13070.00	49.52	88.20	-38.68	V	PEAK	Pass	Harmonic
8	802.11a	149	-	-	-	-	-	-	-	Band Edge
8	802.11a	149	13390.00	42.68	54.00	-11.32	H	AVERAGE	Pass	Harmonic
9	802.11a	185	-	-	-	-	-	-	-	Band Edge
9	802.11a	185	13750.00	48.65	88.20	-39.55	H	PEAK	Pass	Harmonic
10	802.11a	189	-	-	-	-	-	-	-	Band Edge
10	802.11a	189	13790.00	52.69	88.20	-35.51	V	Peak	Pass	Harmonic
11	802.11a	209	-	-	-	-	-	-	-	Band Edge
11	802.11a	209	13990.00	50.74	88.20	-37.46	H	PEAK	Pass	Harmonic
12	802.11a	229	7127.24	48.24	68.20	-19.96	V	AVERAGE	Pass	Band Edge
12	802.11a	229	14190.00	53.11	88.20	-35.09	V	Peak	Pass	Harmonic
13	802.11ax HE20	1	5924.97	47.91	68.20	-20.29	H	AVERAGE	Pass	Band Edge
13	802.11ax HE20	1	11910.00	46.69	54.00	-7.31	V	AVERAGE	Pass	Harmonic
14	802.11ax HE20	1	5903.78	43.84	68.20	-24.36	V	AVERAGE	Pass	Band Edge
14	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
15	802.11ax HE20	1	5905.08	43.75	68.20	-24.45	V	AVERAGE	Pass	Band Edge
15	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
16	802.11ax HE20	1	5904.43	43.83	68.20	-24.37	H	AVERAGE	Pass	Band Edge
16	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
17	802.11ax HE20	45	-	-	-	-	-	-	-	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
17	802.11ax HE20	45	12350.00	42.90	54.00	-11.10	V	AVERAGE	Pass	Harmonic
18	802.11ax HE20	93	-	-	-	-	-	-	-	Band Edge
18	802.11ax HE20	93	12830.00	50.55	88.20	-37.65	H	PEAK	Pass	Harmonic
19	802.11ax HE40	3	5924.96	60.09	68.20	-8.11	V	AVERAGE	Pass	Band Edge
19	802.11ax HE40	3	11930.00	43.87	54.00	-10.13	V	AVERAGE	Pass	Harmonic
20	802.11ax HE40	43	-	-	-	-	-	-	-	Band Edge
20	802.11ax HE40	43	12330.00	43.64	54.00	-10.36	V	AVERAGE	Pass	Harmonic
21	802.11ax HE40	91	-	-	-	-	-	-	-	Band Edge
21	802.11ax HE40	91	12810.00	48.28	88.20	-39.92	V	PEAK	Pass	Harmonic
22	802.11ax HE80	7	5925.00	60.79	68.20	-7.41	V	AVERAGE	Pass	Band Edge
22	802.11ax HE80	7	11970.00	42.68	54.00	-11.32	V	AVERAGE	Pass	Harmonic
23	802.11ax HE80	39	-	-	-	-	-	-	-	Band Edge
23	802.11ax HE80	39	12290.00	38.32	54.00	-15.68	H	AVERAGE	Pass	Harmonic
24	802.11ax HE80	87	-	-	-	-	-	-	-	Band Edge
24	802.11ax HE80	87	12770.00	48.44	88.20	-39.76	V	PEAK	Pass	Harmonic
25	802.11ax HE160	15	5908.00	51.61	68.20	-16.59	V	AVERAGE	Pass	Band Edge
25	802.11ax HE160	15	12050.00	37.68	54.00	-16.32	H	AVERAGE	Pass	Harmonic
26	802.11ax HE160	47	-	-	-	-	-	-	-	Band Edge
26	802.11ax HE160	47	12370.00	37.64	54.00	-16.36	H	AVERAGE	Pass	Harmonic
27	802.11ax HE160	79	-	-	-	-	-	-	-	Band Edge
27	802.11ax HE160	79	12690.00	38.02	54.00	-15.98	V	AVERAGE	Pass	Harmonic
28	802.11ax HE20	97	-	-	-	-	-	-	-	Band Edge
28	802.11ax HE20	97	12870.00	50.70	88.20	-37.50	V	PEAK	Pass	Harmonic
29	802.11ax HE20	105	-	-	-	-	-	-	-	Band Edge
29	802.11ax HE20	105	12950.00	49.09	88.20	-39.11	V	PEAK	Pass	Harmonic
30	802.11ax HE20	113	-	-	-	-	-	-	-	Band Edge
30	802.11ax HE20	113	13030.00	52.24	88.20	-35.96	V	PEAK	Pass	Harmonic
31	802.11ax HE20	99	-	-	-	-	-	-	-	Band Edge
31	802.11ax HE20	99	12890.00	50.29	88.20	-37.91	V	PEAK	Pass	Harmonic
32	802.11ax HE40	107	-	-	-	-	-	-	-	Band Edge
32	802.11ax HE40	107	12970.00	48.49	88.20	-39.71	V	PEAK	Pass	Harmonic
33	802.11ax HE80	103	-	-	-	-	-	-	-	Band Edge
33	802.11ax HE80	103	12930.00	47.91	88.20	-40.29	H	PEAK	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
34	802.11ax HE40	115	-	-	-	-	-	-	-	Band Edge
	802.11ax HE40	115	13050.00	51.30	88.20	-36.90	V	PEAK	Pass	Harmonic
35	802.11ax HE80	119	-	-	-	-	-	-	-	Band Edge
	802.11ax HE80	119	13090.00	49.10	88.20	-39.10	V	PEAK	Pass	Harmonic
36	802.11ax HE160	111	-	-	-	-	-	-	-	Band Edge
	802.11ax HE160	111	13010.00	48.34	88.20	-39.86	V	PEAK	Pass	Harmonic
37	802.11ax HE20	117	-	-	-	-	-	-	-	Band Edge
	802.11ax HE20	117	13070.00	50.32	88.20	-37.88	V	PEAK	Pass	Harmonic
38	802.11ax HE20	149	-	-	-	-	-	-	-	Band Edge
	802.11ax HE20	149	13390.00	46.94	54.00	-7.06	V	AVERAGE	Pass	Harmonic
39	802.11ax HE40	123	-	-	-	-	-	-	-	Band Edge
39	802.11ax HE40	123	13130.00	48.39	88.20	-39.81	H	PEAK	Pass	Harmonic
40	802.11ax HE40	147	-	-	-	-	-	-	-	Band Edge
	802.11ax HE40	147	13370.00	38.30	54.00	-15.70	H	AVERAGE	Pass	Harmonic
41	802.11ax HE40	179	-	-	-	-	-	-	-	Band Edge
	802.11ax HE40	179	13690.00	47.42	88.20	-40.78	V	PEAK	Pass	Harmonic
42	802.11ax HE80	135	-	-	-	-	-	-	-	Band Edge
	802.11ax HE80	135	13250.00	38.66	54.00	-15.34	V	AVERAGE	Pass	Harmonic
43	802.11ax HE80	151	-	-	-	-	-	-	-	Band Edge
	802.11ax HE80	151	13410.00	48.25	88.20	-39.95	H	PEAK	Pass	Harmonic
44	802.11ax HE160	143	-	-	-	-	-	-	-	Band Edge
	802.11ax HE160	143	13330.00	38.05	54.00	-15.95	V	AVERAGE	Pass	Harmonic
45	802.11ax HE20	185	-	-	-	-	-	-	-	Band Edge
	802.11ax HE20	185	13750.00	49.76	88.20	-38.44	H	PEAK	Pass	Harmonic
46	802.11ax HE80	183	-	-	-	-	-	-	-	Band Edge
	802.11ax HE80	183	13730.00	47.68	88.20	-40.52	V	PEAK	Pass	Harmonic
47	802.11ax HE160	175	-	-	-	-	-	-	-	Band Edge
	802.11ax HE160	175	13650.00	47.85	88.20	-40.35	V	PEAK	Pass	Harmonic
48	802.11ax HE20	189	-	-	-	-	-	-	-	Band Edge
	802.11ax HE20	189	13790.00	49.36	88.20	-38.84	H	PEAK	Pass	Harmonic
49	802.11ax HE20	209	-	-	-	-	-	-	-	Band Edge
	802.11ax HE20	209	13990.00	47.78	88.20	-40.42	H	PEAK	Pass	Harmonic
50	802.11ax HE20	229	7127.88	47.91	68.20	-20.29	V	AVERAGE	Pass	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
50	802.11ax HE20	229	14190.00	47.74	88.20	-40.46	H	PEAK	Pass	Harmonic
51	802.11ax HE20	229	7242.76	44.71	68.20	-23.49	V	AVERAGE	Pass	Band Edge
51	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic
52	802.11ax HE20	229	7244.36	44.61	68.20	-23.59	V	AVERAGE	Pass	Band Edge
52	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic
53	802.11ax HE20	229	7243.88	44.57	68.20	-23.63	V	AVERAGE	Pass	Band Edge
53	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic
54	802.11ax HE40	203	-	-	-	-	-	-	-	Band Edge
54	802.11ax HE40	203	13930.00	47.31	88.20	-40.89	H	PEAK	Pass	Harmonic
55	802.11ax HE40	227	7127.24	60.16	68.20	-8.04	V	AVERAGE	Pass	Band Edge
55	802.11ax HE40	227	14170.00	48.44	88.20	-39.76	H	PEAK	Pass	Harmonic
56	802.11ax HE80	199	-	-	-	-	-	-	-	Band Edge
56	802.11ax HE80	199	13890.00	47.91	88.20	-40.29	V	PEAK	Pass	Harmonic
57	802.11ax HE80	215	7129.06	52.81	68.20	-15.39	V	AVERAGE	Pass	Band Edge
57	802.11ax HE80	215	14050.00	48.14	88.20	-40.06	V	PEAK	Pass	Harmonic
58	802.11ax HE160	207	7129.48	50.70	68.20	-17.50	V	AVERAGE	Pass	Band Edge
58	802.11ax HE160	207	13970.00	48.37	88.20	-39.83	H	PEAK	Pass	Harmonic
59	802.11ax HE40	187	-	-	-	-	-	-	-	Band Edge
59	802.11ax HE40	187	13770.00	47.04	88.20	-41.16	H	PEAK	Pass	Harmonic
60	802.11a	2	5924.97	65.00	68.20	-3.20	V	AVERAGE	Pass	Band Edge
60	802.11a	2	11870.00	44.77	54.00	-9.23	H	AVERAGE	Pass	Harmonic
61	802.11ax HE20	2	5924.97	65.02	68.20	-3.18	H	AVERAGE	Pass	Band Edge
61	802.11ax HE20	2	11870.00	47.24	74.00	-26.76	H	PEAK	Pass	Harmonic
62	802.11ax HE20	2	5924.97	64.41	68.20	-3.79	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	2	-	-	-	-	-	-	-	Harmonic
63	802.11ax HE20	2	5924.97	64.48	68.20	-3.72	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	2	-	-	-	-	-	-	-	Harmonic
64	802.11ax HE20	2	5924.97	64.97	68.20	-3.23	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	2	-	-	-	-	-	-	-	Harmonic
65	802.11a	233	7125.01	64.36	68.20	-3.84	V	AVERAGE	Pass	Band Edge
	802.11a	233	14230.00	47.34	88.20	-40.86	H	PEAK	Pass	Harmonic
66	802.11ax HE20	233	7125.01	65.11	68.20	-3.09	V	AVERAGE	Pass	Band Edge
	802.11ax HE20	233	14230.00	47.57	88.20	-40.63	H	PEAK	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
67	802.11ax HE20	233	7125.01	64.38	68.20	-3.82	V	AVERAGE	Pass	Band Edge
	802.11ax HE20	233	-	-	-	-	-	-	-	Harmonic
68	802.11ax HE20	233	7125.01	64.49	68.20	-3.71	V	AVERAGE	Pass	Band Edge
	802.11ax HE20	233	-	-	-	-	-	-	-	Harmonic
69	802.11ax HE20	233	7125.01	64.37	68.20	-3.83	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	233	-	-	-	-	-	-	-	Harmonic
70	802.11ax HE20	233	59.10	33.79	40.00	-6.21	V	PEAK	Pass	LF





Co-Location

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
71	802.11ax HE20	233	7125.01	58.02	68.20	-10.18	H	Average	Pass	Band Edge
	802.11ax HE20	233	10848.00	49.81	55.20	-5.39	V	Average	Pass	Harmonic
	Bluetooth-LE_GSKF	39	2499.46	46.26	54.00	-7.74	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.90	74.00	-29.10	V	PEAK	Pass	Harmonic
72	802.11ax HE20	233	7125.01	64.89	68.20	-3.31	V	Average	Pass	Band Edge
	802.11ax HE20	233	10856.00	49.14	55.20	-6.06	H	Average	Pass	Harmonic
	802.11b	11	2499.54	43.49	54.00	-10.51	H	AVERAGE	Pass	Band Edge
	802.11b	11	7386.00	44.38	74.00	-29.62	V	PEAK	Pass	Harmonic
73	802.11ax HE20	233	7125.01	65.06	68.20	-3.14	V	Average	Pass	Band Edge
	802.11ax HE20	233	10848.00	49.09	55.20	-6.11	H	Average	Pass	Harmonic
	Bluetooth-LE_GSKF	39	2483.50	43.97	54.00	-10.03	H	Average	Pass	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	45.03	74.00	-28.97	V	PEAK	Pass	Harmonic
	802.11b	11	2483.51	43.97	54.00	-10.03	H	Average	Pass	Band Edge
	802.11b	11	7386.00	44.89	74.00	-29.11	H	PEAK	Pass	Harmonic



	1																																																																																					
Mode	Band Edge																																																																																					
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																					
ANT	CDD 3+4																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.84</td> <td>58.35</td> <td>88.20</td> <td>-29.85</td> <td>44.72</td> <td>35.10</td> <td>10.52</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.84	58.35	88.20	-29.85	44.72	35.10	10.52	31.99	0.00	100	187	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>106.17</td> <td>-----</td> <td>-----</td> <td>92.44</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	106.17	-----	-----	92.44	35.20	10.54	32.01	0.00	100	187	PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5924.84	58.35	88.20	-29.85	44.72	35.10	10.52	31.99	0.00	100	187	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5955.00	106.17	-----	-----	92.44	35.20	10.54	32.01	0.00	100	187	PEAK																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.97</td> <td>46.76</td> <td>68.20</td> <td>-21.44</td> <td>33.13</td> <td>35.10</td> <td>10.52</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>187</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.97	46.76	68.20	-21.44	33.13	35.10	10.52	31.99	0.00	100	187	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>97.38</td> <td>-----</td> <td>-----</td> <td>83.65</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>187</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	97.38	-----	-----	83.65	35.20	10.54	32.01	0.00	100	187	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5924.97	46.76	68.20	-21.44	33.13	35.10	10.52	31.99	0.00	100	187	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5955.00	97.38	-----	-----	83.65	35.20	10.54	32.01	0.00	100	187	AVERAGE																																																																										

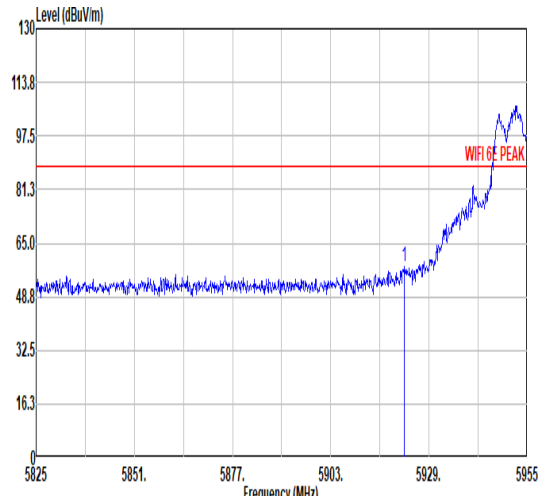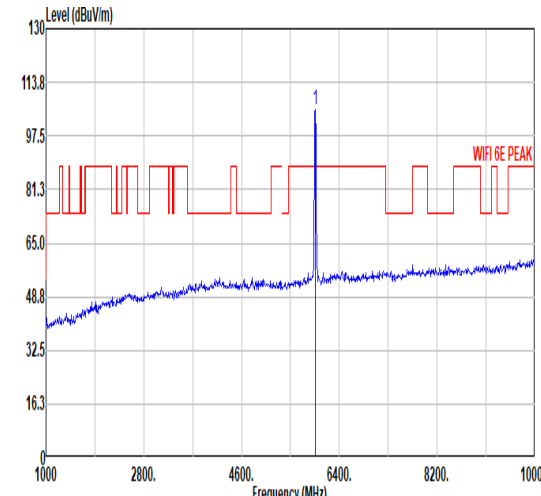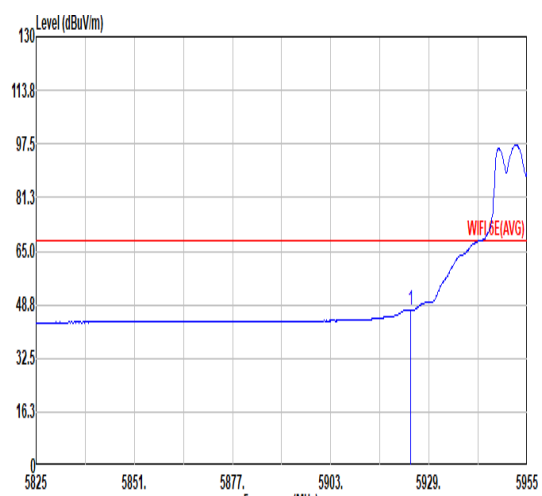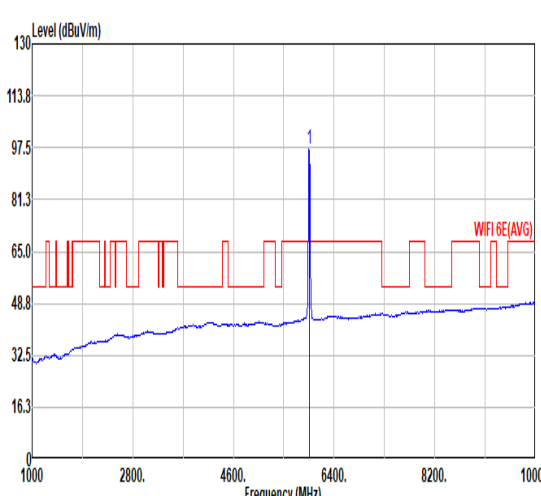

	1																																																																																					
Mode	Band Edge																																																																																					
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																					
ANT	CDD 3+4																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz. A red horizontal line indicates the limit at approximately 97.5 dBuV/m. A blue line shows the measured signal, which rises sharply after 5925 MHz. A peak is labeled 'WIFI 6E PEAK' at approximately 5955 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.50</td> <td>57.99</td> <td>88.20</td> <td>-30.21</td> <td>44.38</td> <td>35.09</td> <td>10.51</td> <td>31.99</td> <td>0.00</td> <td>300</td> <td>219</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.50	57.99	88.20	-30.21	44.38	35.09	10.51	31.99	0.00	300	219	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line indicates the limit at approximately 97.5 dBuV/m. A blue line shows the measured signal with a prominent peak at 5955 MHz. A peak is labeled 'WIFI 6E PEAK' at approximately 5955 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>105.71</td> <td>-----</td> <td>-----</td> <td>91.97</td> <td>35.21</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>300</td> <td>219</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	105.71	-----	-----	91.97	35.21	10.54	32.01	0.00	300	219	PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5922.50	57.99	88.20	-30.21	44.38	35.09	10.51	31.99	0.00	300	219	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5955.00	105.71	-----	-----	91.97	35.21	10.54	32.01	0.00	300	219	PEAK																																																																										
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz. A red horizontal line indicates the limit at approximately 65.0 dBuV/m. A blue line shows the averaged signal, which rises after 5925 MHz. A peak is labeled 'WIFI 6E (AVG)' at approximately 5955 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.06</td> <td>47.15</td> <td>68.20</td> <td>-21.05</td> <td>33.53</td> <td>35.10</td> <td>10.51</td> <td>31.99</td> <td>0.00</td> <td>300</td> <td>219</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.06	47.15	68.20	-21.05	33.53	35.10	10.51	31.99	0.00	300	219	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line indicates the limit at approximately 65.0 dBuV/m. A blue line shows the averaged signal with a peak at 5955 MHz. A peak is labeled 'WIFI 6E (AVG)' at approximately 5955 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>97.03</td> <td>-----</td> <td>-----</td> <td>83.30</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>300</td> <td>219</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	97.03	-----	-----	83.30	35.20	10.54	32.01	0.00	300	219	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5924.06	47.15	68.20	-21.05	33.53	35.10	10.51	31.99	0.00	300	219	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5955.00	97.03	-----	-----	83.30	35.20	10.54	32.01	0.00	300	219	AVERAGE																																																																										



Mode	1																																																																																																					
	Harmonic																																																																																																					
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																																					
ANT	CDD 3+4																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11910.00</td> <td>55.28</td> <td>74.00</td> <td>-18.72</td> <td>61.87</td> <td>38.81</td> <td>15.21</td> <td>60.61</td> <td>0.00</td> <td>108</td> <td>302 PEAK</td> </tr> <tr> <td>2 11910.00</td> <td>45.83</td> <td>54.00</td> <td>-8.17</td> <td>52.42</td> <td>38.81</td> <td>15.21</td> <td>60.61</td> <td>0.00</td> <td>108</td> <td>302 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11910.00	55.28	74.00	-18.72	61.87	38.81	15.21	60.61	0.00	108	302 PEAK	2 11910.00	45.83	54.00	-8.17	52.42	38.81	15.21	60.61	0.00	108	302 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11910.00</td> <td>55.56</td> <td>74.00</td> <td>-18.44</td> <td>62.15</td> <td>38.81</td> <td>15.21</td> <td>60.61</td> <td>0.00</td> <td>100</td> <td>328 PEAK</td> </tr> <tr> <td>2 11910.00</td> <td>46.09</td> <td>54.00</td> <td>-7.91</td> <td>52.68</td> <td>38.81</td> <td>15.21</td> <td>60.61</td> <td>0.00</td> <td>100</td> <td>328 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11910.00	55.56	74.00	-18.44	62.15	38.81	15.21	60.61	0.00	100	328 PEAK	2 11910.00	46.09	54.00	-7.91	52.68	38.81	15.21	60.61	0.00	100	328 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1 11910.00	55.28	74.00	-18.72	61.87	38.81	15.21	60.61	0.00	108	302 PEAK																																																																																												
2 11910.00	45.83	54.00	-8.17	52.42	38.81	15.21	60.61	0.00	108	302 AVERAGE																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1 11910.00	55.56	74.00	-18.44	62.15	38.81	15.21	60.61	0.00	100	328 PEAK																																																																																												
2 11910.00	46.09	54.00	-7.91	52.68	38.81	15.21	60.61	0.00	100	328 AVERAGE																																																																																												



Mode	2																																																																																																									
	Harmonic																																																																																																									
	U-NII-5_5.925-6.425_802.11a_CH45_6175MHz																																																																																																									
ANT	CDD 3+4																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12350.00</td> <td>48.94</td> <td>74.00</td> <td>-25.06</td> <td>55.06</td> <td>38.85</td> <td>15.54</td> <td>60.51</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2 12350.00</td> <td>37.52</td> <td>54.00</td> <td>-16.48</td> <td>43.64</td> <td>38.85</td> <td>15.54</td> <td>60.51</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 12350.00	48.94	74.00	-25.06	55.06	38.85	15.54	60.51	0.00	300	360	PEAK	2 12350.00	37.52	54.00	-16.48	43.64	38.85	15.54	60.51	0.00	300	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12350.00</td> <td>53.62</td> <td>74.00</td> <td>-20.38</td> <td>59.74</td> <td>38.85</td> <td>15.54</td> <td>60.51</td> <td>0.00</td> <td>100</td> <td>286</td> <td>PEAK</td> </tr> <tr> <td>2 12350.00</td> <td>44.35</td> <td>54.00</td> <td>-9.65</td> <td>50.47</td> <td>38.85</td> <td>15.54</td> <td>60.51</td> <td>0.00</td> <td>100</td> <td>286</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 12350.00	53.62	74.00	-20.38	59.74	38.85	15.54	60.51	0.00	100	286	PEAK	2 12350.00	44.35	54.00	-9.65	50.47	38.85	15.54	60.51	0.00	100	286	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																	
Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 12350.00	48.94	74.00	-25.06	55.06	38.85	15.54	60.51	0.00	300	360	PEAK																																																																																															
2 12350.00	37.52	54.00	-16.48	43.64	38.85	15.54	60.51	0.00	300	360	AVERAGE																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 12350.00	53.62	74.00	-20.38	59.74	38.85	15.54	60.51	0.00	100	286	PEAK																																																																																															
2 12350.00	44.35	54.00	-9.65	50.47	38.85	15.54	60.51	0.00	100	286	AVERAGE																																																																																															



Mode	3																																																																															
	Harmonic																																																																															
	U-NII-5_5.925-6.425_802.11a_CH93_6415MHZ																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12838.00</td> <td>48.28</td> <td>88.20</td> <td>-39.92</td> <td>53.36</td> <td>39.43</td> <td>15.92</td> <td>60.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12838.00	48.28	88.20	-39.92	53.36	39.43	15.92	60.43	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12838.00</td> <td>48.55</td> <td>88.20</td> <td>-39.65</td> <td>53.63</td> <td>39.43</td> <td>15.92</td> <td>60.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12838.00	48.55	88.20	-39.65	53.63	39.43	15.92	60.43	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12838.00	48.28	88.20	-39.92	53.36	39.43	15.92	60.43	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12838.00	48.55	88.20	-39.65	53.63	39.43	15.92	60.43	0.00	---	---	PEAK																																																																					



Mode	4																																																																															
	Harmonic																																																																															
	U-NII-6_6.425-6.525_802.11a_CH97_6435MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>49.48</td> <td>88.20</td> <td>-38.72</td> <td>54.49</td> <td>39.47</td> <td>15.95</td> <td>60.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12870.00	49.48	88.20	-38.72	54.49	39.47	15.95	60.43	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>49.32</td> <td>88.20</td> <td>-38.88</td> <td>54.33</td> <td>39.47</td> <td>15.95</td> <td>60.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12870.00	49.32	88.20	-38.88	54.33	39.47	15.95	60.43	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12870.00	49.48	88.20	-38.72	54.49	39.47	15.95	60.43	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12870.00	49.32	88.20	-38.88	54.33	39.47	15.95	60.43	0.00	---	---	PEAK																																																																					



Mode	5																																																																											
	Harmonic																																																																											
	U-NII-6_6.425-6.525_802.11a_CH105_6475MHz																																																																											
ANT	CDD 3+4																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12950.00</td> <td>49.77</td> <td>88.20</td> <td>-38.43</td> <td>54.67</td> <td>39.50</td> <td>16.01</td> <td>60.41</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12950.00	49.77	88.20	-38.43	54.67	39.50	16.01	60.41	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12950.00</td> <td>49.39</td> <td>88.20</td> <td>-38.81</td> <td>54.29</td> <td>39.50</td> <td>16.01</td> <td>60.41</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12950.00	49.39	88.20	-38.81	54.29	39.50	16.01	60.41	0.00	--- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 12950.00	49.77	88.20	-38.43	54.67	39.50	16.01	60.41	0.00	--- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 12950.00	49.39	88.20	-38.81	54.29	39.50	16.01	60.41	0.00	--- PEAK																																																																			



Mode	6																																																																															
	Harmonic																																																																															
	U-NII-6_6.425-6.525_802.11a_CH113_6515MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>48.89</td> <td>88.20</td> <td>-39.31</td> <td>53.76</td> <td>39.47</td> <td>16.06</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13030.00	48.89	88.20	-39.31	53.76	39.47	16.06	60.40	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>49.60</td> <td>88.20</td> <td>-38.60</td> <td>54.47</td> <td>39.47</td> <td>16.06</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13030.00	49.60	88.20	-38.60	54.47	39.47	16.06	60.40	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13030.00	48.89	88.20	-39.31	53.76	39.47	16.06	60.40	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13030.00	49.60	88.20	-38.60	54.47	39.47	16.06	60.40	0.00	---	---	PEAK																																																																					



Mode	7																																																																															
	Harmonic																																																																															
	U-NII-7_6.525-6.875_802.11a_CH117_6535MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>49.42</td> <td>88.20</td> <td>-38.78</td> <td>54.31</td> <td>39.43</td> <td>16.08</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13070.00	49.42	88.20	-38.78	54.31	39.43	16.08	60.40	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>49.52</td> <td>88.20</td> <td>-38.68</td> <td>54.41</td> <td>39.43</td> <td>16.08</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13070.00	49.52	88.20	-38.68	54.41	39.43	16.08	60.40	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13070.00	49.42	88.20	-38.78	54.31	39.43	16.08	60.40	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13070.00	49.52	88.20	-38.68	54.41	39.43	16.08	60.40	0.00	---	---	PEAK																																																																					



Mode	8																																																																																																											
	Harmonic																																																																																																											
	U-NII-7_6.525-6.875_802.11a_CH149_6695MHz																																																																																																											
ANT	CDD 3+4																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13390.00</td> <td>51.30</td> <td>74.00</td> <td>-22.70</td> <td>56.31</td> <td>39.11</td> <td>16.23</td> <td>60.35</td> <td>0.00</td> <td>110</td> <td>291</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>13390.00</td> <td>42.68</td> <td>54.00</td> <td>-11.32</td> <td>47.69</td> <td>39.11</td> <td>16.23</td> <td>60.35</td> <td>0.00</td> <td>110</td> <td>291</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13390.00	51.30	74.00	-22.70	56.31	39.11	16.23	60.35	0.00	110	291	PEAK	2	13390.00	42.68	54.00	-11.32	47.69	39.11	16.23	60.35	0.00	110	291	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13390.00</td> <td>52.14</td> <td>74.00</td> <td>-21.86</td> <td>57.15</td> <td>39.11</td> <td>16.23</td> <td>60.35</td> <td>0.00</td> <td>100</td> <td>261</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>13390.00</td> <td>41.51</td> <td>54.00</td> <td>-12.49</td> <td>46.52</td> <td>39.11</td> <td>16.23</td> <td>60.35</td> <td>0.00</td> <td>100</td> <td>261</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13390.00	52.14	74.00	-21.86	57.15	39.11	16.23	60.35	0.00	100	261	PEAK	2	13390.00	41.51	54.00	-12.49	46.52	39.11	16.23	60.35	0.00	100	261	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	13390.00	51.30	74.00	-22.70	56.31	39.11	16.23	60.35	0.00	110	291	PEAK																																																																																																
2	13390.00	42.68	54.00	-11.32	47.69	39.11	16.23	60.35	0.00	110	291	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	13390.00	52.14	74.00	-21.86	57.15	39.11	16.23	60.35	0.00	100	261	PEAK																																																																																																
2	13390.00	41.51	54.00	-12.49	46.52	39.11	16.23	60.35	0.00	100	261	AVERAGE																																																																																																



Mode	9																																																																															
	Harmonic																																																																															
	U-NII-7_6.525-6.875_802.11a_CH185_6875MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13750.00</td> <td>48.65</td> <td>88.20</td> <td>-39.55</td> <td>53.26</td> <td>38.75</td> <td>16.40</td> <td>59.76</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13750.00	48.65	88.20	-39.55	53.26	38.75	16.40	59.76	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13750.00</td> <td>46.87</td> <td>88.20</td> <td>-41.33</td> <td>51.48</td> <td>38.75</td> <td>16.40</td> <td>59.76</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13750.00	46.87	88.20	-41.33	51.48	38.75	16.40	59.76	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13750.00	48.65	88.20	-39.55	53.26	38.75	16.40	59.76	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13750.00	46.87	88.20	-41.33	51.48	38.75	16.40	59.76	0.00	---	---	PEAK																																																																					



Mode	10																																																																											
	Harmonic																																																																											
	U-NII-8_6.875-7.125_802.11a_CH189_6895MHz																																																																											
ANT	CDD 3+4																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>51.91</td> <td>88.20</td> <td>-36.29</td> <td>56.36</td> <td>38.79</td> <td>16.42</td> <td>59.66</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13790.00	51.91	88.20	-36.29	56.36	38.79	16.42	59.66	0.00	--- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>52.69</td> <td>88.20</td> <td>-35.51</td> <td>57.14</td> <td>38.79</td> <td>16.42</td> <td>59.66</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13790.00	52.69	88.20	-35.51	57.14	38.79	16.42	59.66	0.00	--- Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 13790.00	51.91	88.20	-36.29	56.36	38.79	16.42	59.66	0.00	--- Peak																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 13790.00	52.69	88.20	-35.51	57.14	38.79	16.42	59.66	0.00	--- Peak																																																																			



Mode	11																																																																															
	Harmonic																																																																															
	U-NII-8_6.875-7.125_802.11a_CH209_6995MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13990.00</td> <td>50.74</td> <td>88.20</td> <td>-37.46</td> <td>54.63</td> <td>38.00</td> <td>16.51</td> <td>59.20</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13990.00	50.74	88.20	-37.46	54.63	38.00	16.51	59.20	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13990.00</td> <td>47.53</td> <td>88.20</td> <td>-40.67</td> <td>51.42</td> <td>38.00</td> <td>16.51</td> <td>59.20</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13990.00	47.53	88.20	-40.67	51.42	38.00	16.51	59.20	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13990.00	50.74	88.20	-37.46	54.63	38.00	16.51	59.20	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13990.00	47.53	88.20	-40.67	51.42	38.00	16.51	59.20	0.00	---	---	PEAK																																																																					



	12																																																																																			
Mode	Band Edge																																																																																			
	U-NII-8_6.875-7.125_802.11a_CH229_7095MHz																																																																																			
ANT	CDD 3+4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.48</td> <td>58.19</td> <td>88.20</td> <td>-30.01</td> <td>43.69</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>100</td> <td>231</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.48	58.19	88.20	-30.01	43.69	35.70	11.59	32.79	0.00	100	231	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>103.51</td> <td>-----</td> <td>-----</td> <td>89.03</td> <td>35.69</td> <td>11.56</td> <td>32.77</td> <td>0.00</td> <td>100</td> <td>231</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	103.51	-----	-----	89.03	35.69	11.56	32.77	0.00	100	231	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7125.48	58.19	88.20	-30.01	43.69	35.70	11.59	32.79	0.00	100	231	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7095.00	103.51	-----	-----	89.03	35.69	11.56	32.77	0.00	100	231	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.96</td> <td>47.43</td> <td>68.20</td> <td>-20.77</td> <td>32.93</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>100</td> <td>231</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.96	47.43	68.20	-20.77	32.93	35.70	11.59	32.79	0.00	100	231	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>80.97</td> <td>-----</td> <td>-----</td> <td>66.49</td> <td>35.69</td> <td>11.56</td> <td>32.77</td> <td>0.00</td> <td>300</td> <td>323</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	80.97	-----	-----	66.49	35.69	11.56	32.77	0.00	300	323	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7125.96	47.43	68.20	-20.77	32.93	35.70	11.59	32.79	0.00	100	231	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7095.00	80.97	-----	-----	66.49	35.69	11.56	32.77	0.00	300	323	AVERAGE																																																																								



	12																																																																																	
Mode	Band Edge																																																																																	
	U-NII-8_6.875-7.125_802.11a_CH229_7095MHz																																																																																	
ANT	CDD 3+4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.16</td> <td>60.55</td> <td>88.20</td> <td>-27.65</td> <td>46.05</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>100</td> <td>239</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7125.16	60.55	88.20	-27.65	46.05	35.70	11.59	32.79	0.00	100	239	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>105.44</td> <td>-----</td> <td>-----</td> <td>90.96</td> <td>35.69</td> <td>11.56</td> <td>32.77</td> <td>0.00</td> <td>100</td> <td>239</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7095.00	105.44	-----	-----	90.96	35.69	11.56	32.77	0.00	100	239	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	7125.16	60.55	88.20	-27.65	46.05	35.70	11.59	32.79	0.00	100	239	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	7095.00	105.44	-----	-----	90.96	35.69	11.56	32.77	0.00	100	239	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7127.24</td> <td>48.24</td> <td>68.20</td> <td>-19.96</td> <td>33.74</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>100</td> <td>239</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7127.24	48.24	68.20	-19.96	33.74	35.70	11.59	32.79	0.00	100	239	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>82.66</td> <td>-----</td> <td>-----</td> <td>68.18</td> <td>35.69</td> <td>11.56</td> <td>32.77</td> <td>0.00</td> <td>100</td> <td>232</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7095.00	82.66	-----	-----	68.18	35.69	11.56	32.77	0.00	100	232	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	7127.24	48.24	68.20	-19.96	33.74	35.70	11.59	32.79	0.00	100	239	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	7095.00	82.66	-----	-----	68.18	35.69	11.56	32.77	0.00	100	232	AVERAGE																																																																						







Mode	12																																																																																			
	Harmonic																																																																																			
	U-NII-8_6.875-7.125_802.11a_CH229_7095MHz																																																																																			
ANT	CDD 3+4																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak																																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 14190.00</td> <td>47.85</td> <td>88.20</td> <td>-40.35</td> <td>51.50</td> <td>39.09</td> <td>16.65</td> <td>59.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 14190.00	47.85	88.20	-40.35	51.50	39.09	16.65	59.39	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 14190.00</td> <td>53.11</td> <td>88.20</td> <td>-35.09</td> <td>56.76</td> <td>39.09</td> <td>16.65</td> <td>59.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 14190.00	53.11	88.20	-35.09	56.76	39.09	16.65	59.39	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 14190.00	47.85	88.20	-40.35	51.50	39.09	16.65	59.39	0.00	---	---	PEAK																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 14190.00	53.11	88.20	-35.09	56.76	39.09	16.65	59.39	0.00	---	---	Peak																																																																									



	13																																																																																	
Mode	Band Edge																																																																																	
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_5955MHz																																																																																	
ANT	CDD 3+4																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5924.06</td> <td>60.18</td> <td>88.20</td> <td>-28.02</td> <td>46.56</td> <td>35.10</td> <td>10.51</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>183 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5924.06	60.18	88.20	-28.02	46.56	35.10	10.51	31.99	0.00	100	183 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>106.79</td> <td>-----</td> <td>-----</td> <td>93.04</td> <td>35.22</td> <td>10.55</td> <td>32.02</td> <td>0.00</td> <td>100</td> <td>183 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5955.00	106.79	-----	-----	93.04	35.22	10.55	32.02	0.00	100	183 PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5924.06	60.18	88.20	-28.02	46.56	35.10	10.51	31.99	0.00	100	183 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5955.00	106.79	-----	-----	93.04	35.22	10.55	32.02	0.00	100	183 PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5924.97</td> <td>47.91</td> <td>68.20</td> <td>-20.29</td> <td>34.28</td> <td>35.10</td> <td>10.52</td> <td>31.99</td> <td>0.00</td> <td>100</td> <td>183 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5924.97	47.91	68.20	-20.29	34.28	35.10	10.52	31.99	0.00	100	183 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>96.64</td> <td>-----</td> <td>-----</td> <td>82.89</td> <td>35.22</td> <td>10.55</td> <td>32.02</td> <td>0.00</td> <td>100</td> <td>183 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5955.00	96.64	-----	-----	82.89	35.22	10.55	32.02	0.00	100	183 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5924.97	47.91	68.20	-20.29	34.28	35.10	10.52	31.99	0.00	100	183 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5955.00	96.64	-----	-----	82.89	35.22	10.55	32.02	0.00	100	183 AVERAGE																																																																								

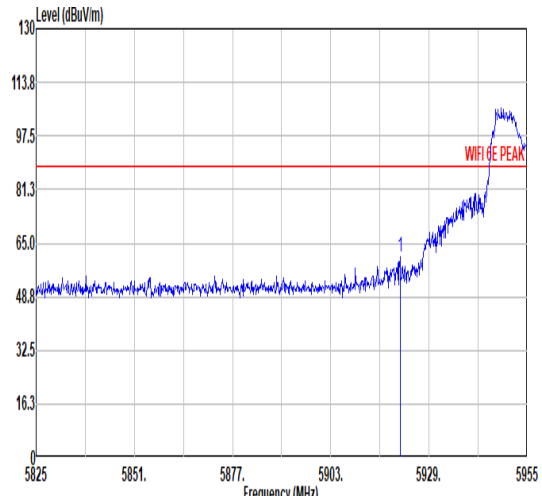
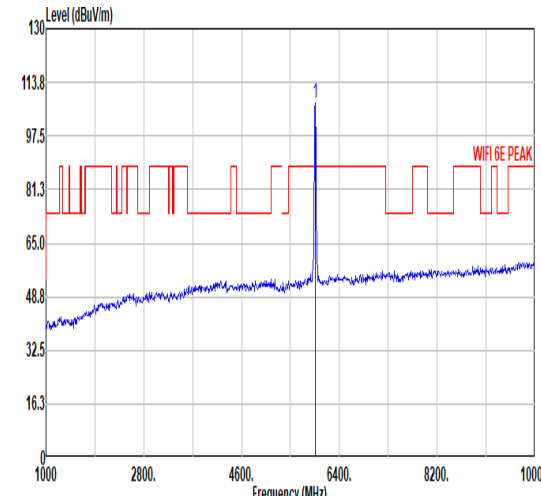
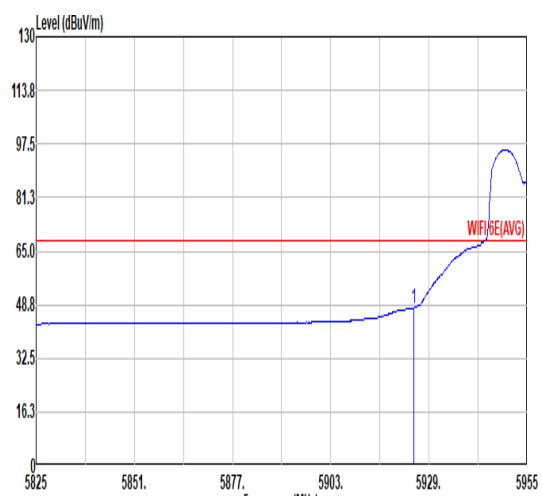
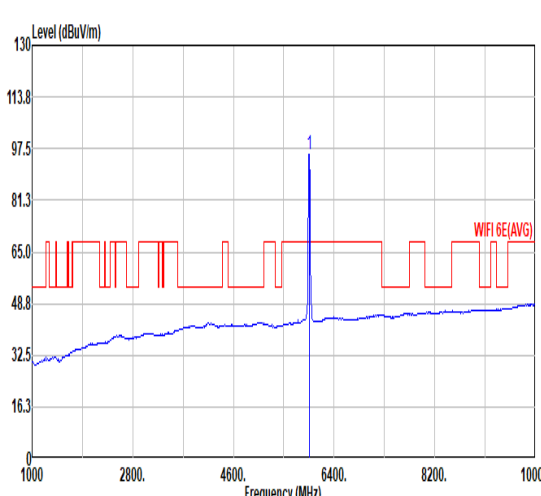


	13																																																																															
Mode	Band Edge																																																																															
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_5955MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz. A red horizontal line indicates the limit at approximately 97.5 dBuV/m. A blue trace shows the signal level, with a peak labeled 'WIFI 6E PEAK' at approximately 5921.33 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5921.33</td> <td>60.73</td> <td>88.20</td> <td>-27.47</td> <td>47.12</td> <td>35.09</td> <td>10.51</td> <td>31.99</td> <td>0.00</td> <td>301 219 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5921.33	60.73	88.20	-27.47	47.12	35.09	10.51	31.99	0.00	301 219 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line indicates the limit at approximately 97.5 dBuV/m. A blue trace shows the signal level, with a peak labeled 'WIFI 6E PEAK' at approximately 5955.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>107.38</td> <td>-----</td> <td>-----</td> <td>93.63</td> <td>35.22</td> <td>10.55</td> <td>32.02</td> <td>0.00</td> <td>301 219 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5955.00	107.38	-----	-----	93.63	35.22	10.55	32.02	0.00	301 219 PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5921.33	60.73	88.20	-27.47	47.12	35.09	10.51	31.99	0.00	301 219 PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1 5955.00	107.38	-----	-----	93.63	35.22	10.55	32.02	0.00	301 219 PEAK																																																																							
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz. A red horizontal line indicates the limit at approximately 65.0 dBuV/m. A blue trace shows the average signal level, with a peak labeled 'WIFI 6E(AVG)' at approximately 5924.97 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5924.97</td> <td>47.80</td> <td>68.20</td> <td>-20.40</td> <td>34.17</td> <td>35.10</td> <td>10.52</td> <td>31.99</td> <td>0.00</td> <td>301 219 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5924.97	47.80	68.20	-20.40	34.17	35.10	10.52	31.99	0.00	301 219 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line indicates the limit at approximately 65.0 dBuV/m. A blue trace shows the average signal level, with a peak labeled 'WIFI 6E(AVG)' at approximately 5955.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>95.63</td> <td>-----</td> <td>-----</td> <td>81.90</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>301 219 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5955.00	95.63	-----	-----	81.90	35.20	10.54	32.01	0.00	301 219 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1 5924.97	47.80	68.20	-20.40	34.17	35.10	10.52	31.99	0.00	301 219 AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1 5955.00	95.63	-----	-----	81.90	35.20	10.54	32.01	0.00	301 219 AVERAGE																																																																							







Mode	13																																																																																																													
	Harmonic																																																																																																													
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_5955MHz																																																																																																													
ANT	CDD 3+4																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11910.00</td> <td>54.37</td> <td>74.00</td> <td>-19.63</td> <td>60.96</td> <td>38.81</td> <td>15.21</td> <td>60.61</td> <td>0.00</td> <td>102</td> <td>302</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11910.00</td> <td>44.91</td> <td>54.00</td> <td>-9.09</td> <td>51.50</td> <td>38.81</td> <td>15.21</td> <td>60.61</td> <td>0.00</td> <td>102</td> <td>302</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11910.00	54.37	74.00	-19.63	60.96	38.81	15.21	60.61	0.00	102	302	PEAK	2	11910.00	44.91	54.00	-9.09	51.50	38.81	15.21	60.61	0.00	102	302	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11910.00</td> <td>57.18</td> <td>74.00</td> <td>-16.82</td> <td>63.77</td> <td>38.81</td> <td>15.21</td> <td>60.61</td> <td>0.00</td> <td>100</td> <td>330</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11910.00</td> <td>46.69</td> <td>54.00</td> <td>-7.31</td> <td>53.28</td> <td>38.81</td> <td>15.21</td> <td>60.61</td> <td>0.00</td> <td>100</td> <td>330</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11910.00	57.18	74.00	-16.82	63.77	38.81	15.21	60.61	0.00	100	330	PEAK	2	11910.00	46.69	54.00	-7.31	53.28	38.81	15.21	60.61	0.00	100	330	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11910.00	54.37	74.00	-19.63	60.96	38.81	15.21	60.61	0.00	102	302	PEAK																																																																																																		
2	11910.00	44.91	54.00	-9.09	51.50	38.81	15.21	60.61	0.00	102	302	AVERAGE																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	11910.00	57.18	74.00	-16.82	63.77	38.81	15.21	60.61	0.00	100	330	PEAK																																																																																																		
2	11910.00	46.69	54.00	-7.31	53.28	38.81	15.21	60.61	0.00	100	330	AVERAGE																																																																																																		

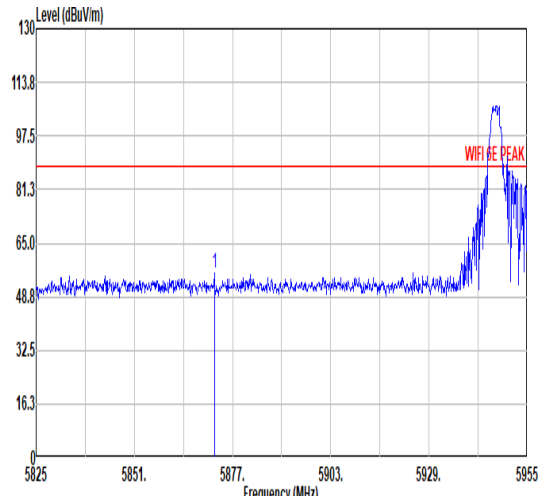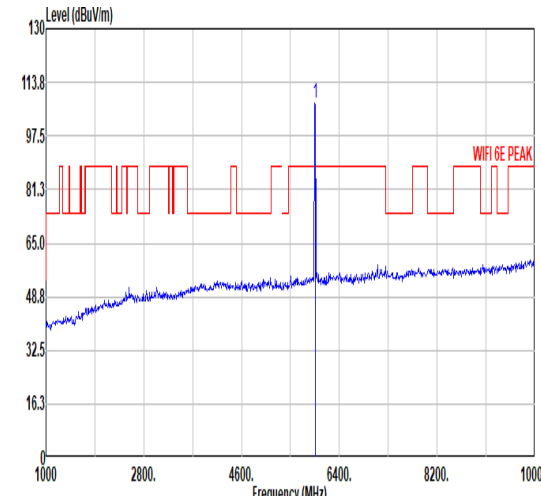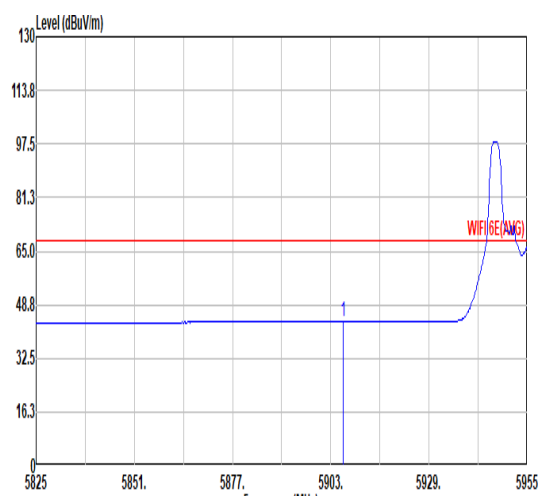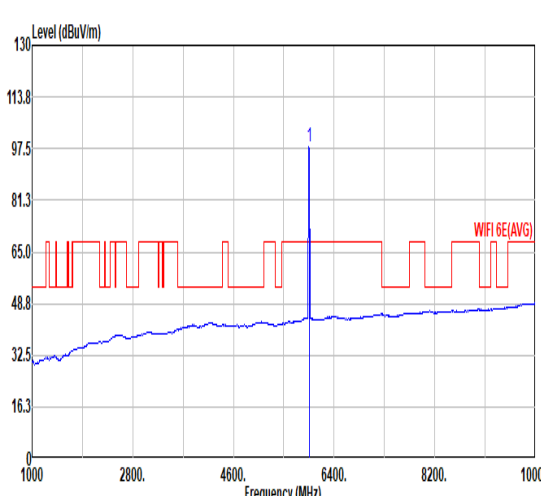

	14																																																																															
Mode	Band Edge																																																																															
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU26/0_5955MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz. A red horizontal line is labeled 'WIFI 6E PEAK' at approximately 81.3 dBuV/m. A blue trace shows a signal peak at 5955 MHz reaching approximately 107.28 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5872.19</td> <td>55.92</td> <td>88.20</td> <td>-32.28</td> <td>42.46</td> <td>34.94</td> <td>10.47</td> <td>31.95</td> <td>0.00</td> <td>100</td> <td>194 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5872.19	55.92	88.20	-32.28	42.46	34.94	10.47	31.95	0.00	100	194 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line is labeled 'WIFI 6E PEAK' at approximately 81.3 dBuV/m. A blue trace shows a signal peak at 5955 MHz reaching approximately 107.28 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>107.28</td> <td>-----</td> <td>-----</td> <td>93.55</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>194 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5955.00	107.28	-----	-----	93.55	35.20	10.54	32.01	0.00	100	194 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5872.19	55.92	88.20	-32.28	42.46	34.94	10.47	31.95	0.00	100	194 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5955.00	107.28	-----	-----	93.55	35.20	10.54	32.01	0.00	100	194 PEAK																																																																						
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz. A red horizontal line is labeled 'WIFI 6E(AVG)' at approximately 65.0 dBuV/m. A blue trace shows an average signal peak at 5955 MHz reaching approximately 98.05 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5906.25</td> <td>43.76</td> <td>68.20</td> <td>-24.44</td> <td>30.21</td> <td>35.03</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>100</td> <td>194 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5906.25	43.76	68.20	-24.44	30.21	35.03	10.50	31.98	0.00	100	194 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line is labeled 'WIFI 6E(AVG)' at approximately 65.0 dBuV/m. A blue trace shows an average signal peak at 5955 MHz reaching approximately 98.05 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>98.05</td> <td>-----</td> <td>-----</td> <td>84.32</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>194 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5955.00	98.05	-----	-----	84.32	35.20	10.54	32.01	0.00	100	194 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5906.25	43.76	68.20	-24.44	30.21	35.03	10.50	31.98	0.00	100	194 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5955.00	98.05	-----	-----	84.32	35.20	10.54	32.01	0.00	100	194 AVERAGE																																																																						

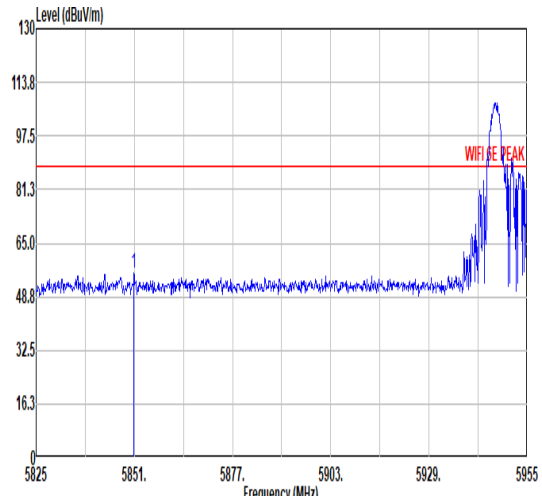
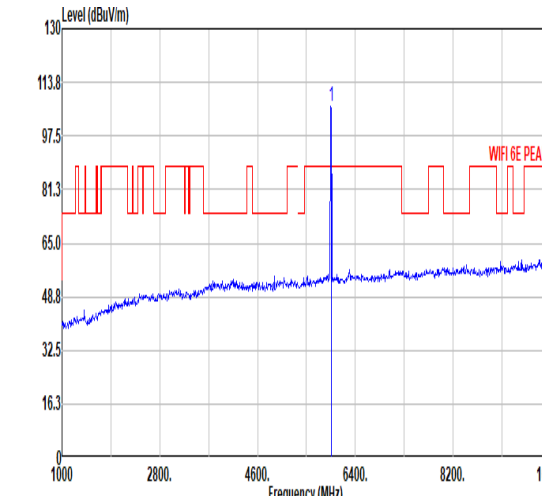
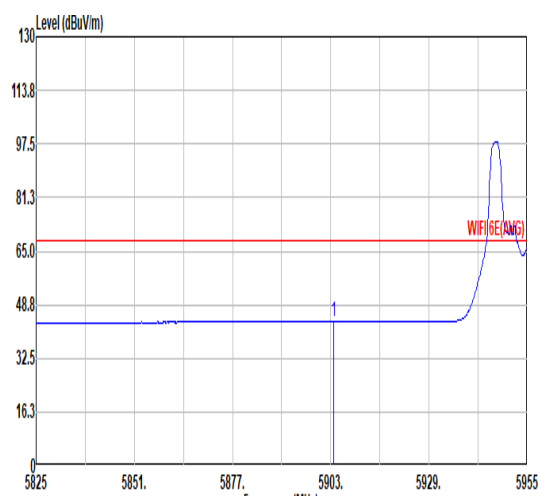
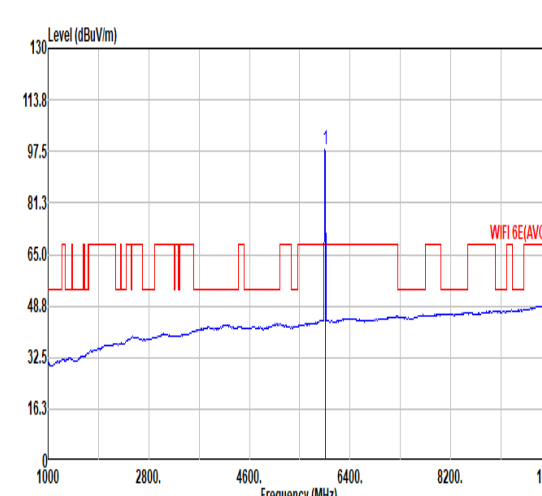


	14																																																																																	
Mode	Band Edge																																																																																	
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU26/0_5955MHz																																																																																	
ANT	CDD 3+4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz. A red horizontal line indicates the limit at approximately 92.75 dBuV/m. A blue trace shows the signal level, with a prominent peak labeled 'WIFI 6E PEAK' at 5955.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>106.48</td> <td>-----</td> <td>-----</td> <td>92.75</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>272 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5955.00	106.48	-----	-----	92.75	35.20	10.54	32.01	0.00	100	272 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line indicates the limit at approximately 92.75 dBuV/m. A blue trace shows the signal level, with a prominent peak labeled 'WIFI 6E PEAK' at 5955.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>106.48</td> <td>-----</td> <td>-----</td> <td>92.75</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>272 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5955.00	106.48	-----	-----	92.75	35.20	10.54	32.01	0.00	100	272 PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5955.00	106.48	-----	-----	92.75	35.20	10.54	32.01	0.00	100	272 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5955.00	106.48	-----	-----	92.75	35.20	10.54	32.01	0.00	100	272 PEAK																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5825 to 5955 MHz. A red horizontal line indicates the limit at approximately 68.20 dBuV/m. A blue trace shows the average signal level, with a peak labeled 'WIFI 6E (AVG)' at 5903.78 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5903.78</td> <td>43.84</td> <td>68.20</td> <td>-24.36</td> <td>30.30</td> <td>35.02</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>100</td> <td>272 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5903.78	43.84	68.20	-24.36	30.30	35.02	10.50	31.98	0.00	100	272 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line indicates the limit at approximately 98.01 dBuV/m. A blue trace shows the average signal level, with a peak labeled 'WIFI 6E (AVG)' at 5955.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>98.01</td> <td>-----</td> <td>-----</td> <td>84.28</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>272 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5955.00	98.01	-----	-----	84.28	35.20	10.54	32.01	0.00	100	272 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5903.78	43.84	68.20	-24.36	30.30	35.02	10.50	31.98	0.00	100	272 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1 5955.00	98.01	-----	-----	84.28	35.20	10.54	32.01	0.00	100	272 AVERAGE																																																																								



	15																																																																													
Mode	Band Edge																																																																													
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU52/37_5955MHz																																																																													
ANT	CDD 3+4																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5872.19</td> <td>55.13</td> <td>88.20</td> <td>-33.07</td> <td>41.67</td> <td>34.94</td> <td>10.47</td> <td>31.95</td> <td>0.00</td> <td>100 193 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5872.19	55.13	88.20	-33.07	41.67	34.94	10.47	31.95	0.00	100 193 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>107.34</td> <td>-----</td> <td>-----</td> <td>93.61</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100 193 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5955.00	107.34	-----	-----	93.61	35.20	10.54	32.01	0.00	100 193 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5872.19	55.13	88.20	-33.07	41.67	34.94	10.47	31.95	0.00	100 193 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5955.00	107.34	-----	-----	93.61	35.20	10.54	32.01	0.00	100 193 PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5904.30</td> <td>43.73</td> <td>68.20</td> <td>-24.47</td> <td>30.19</td> <td>35.02</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>100 193 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5904.30	43.73	68.20	-24.47	30.19	35.02	10.50	31.98	0.00	100 193 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5955.00</td> <td>97.87</td> <td>-----</td> <td>-----</td> <td>84.14</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100 193 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5955.00	97.87	-----	-----	84.14	35.20	10.54	32.01	0.00	100 193 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5904.30	43.73	68.20	-24.47	30.19	35.02	10.50	31.98	0.00	100 193 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5955.00	97.87	-----	-----	84.14	35.20	10.54	32.01	0.00	100 193 AVERAGE																																																																					

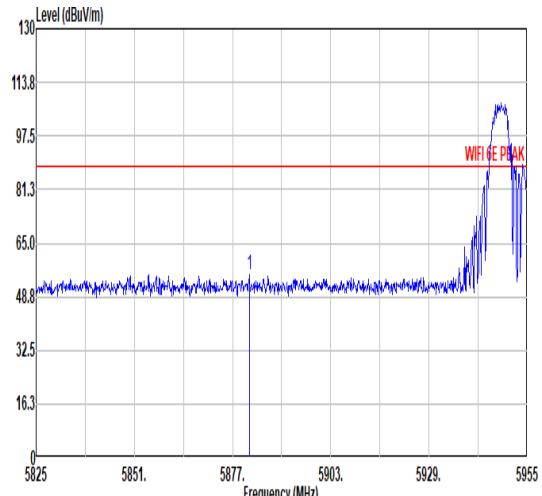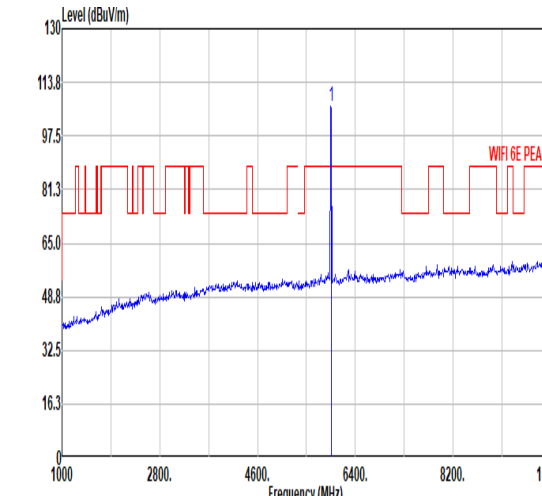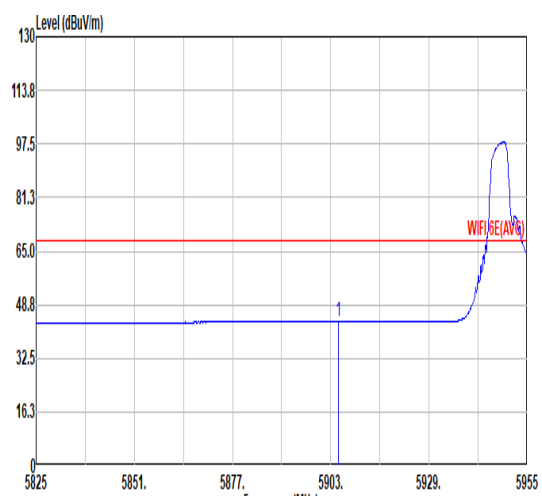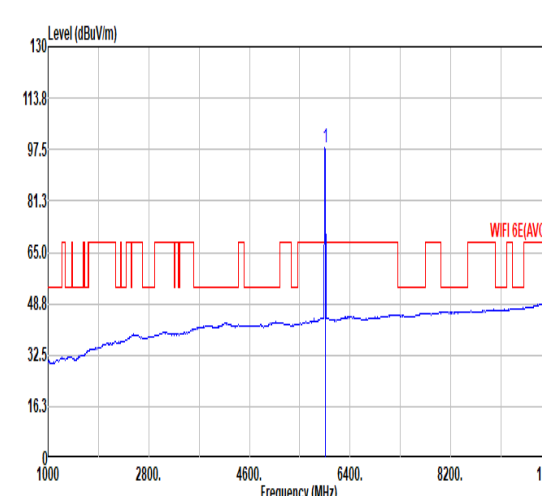

	15																																																																																					
Mode	Band Edge																																																																																					
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU52/37_5955MHz																																																																																					
ANT	CDD 3+4																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. Shows a peak at 5955 MHz labeled 'WIFI 6E PEAK'. A red limit line is at approximately 81.3 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5881.42</td> <td>55.38</td> <td>88.20</td> <td>-32.82</td> <td>41.90</td> <td>34.96</td> <td>10.48</td> <td>31.96</td> <td>0.00</td> <td>100</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5881.42	55.38	88.20	-32.82	41.90	34.96	10.48	31.96	0.00	100	227	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Shows a peak at 5955 MHz labeled 'WIFI 6E PEAK'. A red limit line is at approximately 81.3 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>106.58</td> <td>-----</td> <td>-----</td> <td>92.85</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>227</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	106.58	-----	-----	92.85	35.20	10.54	32.01	0.00	100	227	PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5881.42	55.38	88.20	-32.82	41.90	34.96	10.48	31.96	0.00	100	227	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5955.00	106.58	-----	-----	92.85	35.20	10.54	32.01	0.00	100	227	PEAK																																																																										
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. Shows a peak at 5955 MHz labeled 'WIFI 6E(AVG)'. A red limit line is at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5905.08</td> <td>43.75</td> <td>68.20</td> <td>-24.45</td> <td>30.21</td> <td>35.02</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>100</td> <td>227</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5905.08	43.75	68.20	-24.45	30.21	35.02	10.50	31.98	0.00	100	227	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Shows a peak at 5955 MHz labeled 'WIFI 6E(AVG)'. A red limit line is at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>97.91</td> <td>-----</td> <td>-----</td> <td>84.18</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>227</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	97.91	-----	-----	84.18	35.20	10.54	32.01	0.00	100	227	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5905.08	43.75	68.20	-24.45	30.21	35.02	10.50	31.98	0.00	100	227	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5955.00	97.91	-----	-----	84.18	35.20	10.54	32.01	0.00	100	227	AVERAGE																																																																										



	16																																																																																			
Mode	Band Edge																																																																																			
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU106/53_5955MHz																																																																																			
ANT	CDD 3+4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5889.48</td> <td>55.31</td> <td>88.20</td> <td>-32.89</td> <td>41.81</td> <td>34.98</td> <td>10.48</td> <td>31.96</td> <td>0.00</td> <td>100</td> <td>195</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5889.48	55.31	88.20	-32.89	41.81	34.98	10.48	31.96	0.00	100	195	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>108.28</td> <td>-</td> <td>-</td> <td>94.55</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>195</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	108.28	-	-	94.55	35.20	10.54	32.01	0.00	100	195	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5889.48	55.31	88.20	-32.89	41.81	34.98	10.48	31.96	0.00	100	195	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5955.00	108.28	-	-	94.55	35.20	10.54	32.01	0.00	100	195	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5904.43</td> <td>43.83</td> <td>68.20</td> <td>-24.37</td> <td>30.29</td> <td>35.02</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>100</td> <td>195</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5904.43	43.83	68.20	-24.37	30.29	35.02	10.50	31.98	0.00	100	195	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>98.16</td> <td>-</td> <td>-</td> <td>84.43</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>195</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	98.16	-	-	84.43	35.20	10.54	32.01	0.00	100	195	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5904.43	43.83	68.20	-24.37	30.29	35.02	10.50	31.98	0.00	100	195	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5955.00	98.16	-	-	84.43	35.20	10.54	32.01	0.00	100	195	AVERAGE																																																																								



	16																																																																																					
Mode	Band Edge																																																																																					
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU106/53_5955MHz																																																																																					
ANT	CDD 3+4																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5912.62</td> <td>55.23</td> <td>88.20</td> <td>-32.97</td> <td>41.66</td> <td>35.05</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>100</td> <td>235</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5912.62	55.23	88.20	-32.97	41.66	35.05	10.50	31.98	0.00	100	235	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>106.87</td> <td>-----</td> <td>-----</td> <td>93.14</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>235</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	106.87	-----	-----	93.14	35.20	10.54	32.01	0.00	100	235	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5912.62	55.23	88.20	-32.97	41.66	35.05	10.50	31.98	0.00	100	235	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5955.00	106.87	-----	-----	93.14	35.20	10.54	32.01	0.00	100	235	PEAK																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5906.25</td> <td>43.73</td> <td>68.20</td> <td>-24.47</td> <td>30.18</td> <td>35.03</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>100</td> <td>235</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5906.25	43.73	68.20	-24.47	30.18	35.03	10.50	31.98	0.00	100	235	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>97.41</td> <td>-----</td> <td>-----</td> <td>83.68</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>100</td> <td>235</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5955.00	97.41	-----	-----	83.68	35.20	10.54	32.01	0.00	100	235	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5906.25	43.73	68.20	-24.47	30.18	35.03	10.50	31.98	0.00	100	235	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5955.00	97.41	-----	-----	83.68	35.20	10.54	32.01	0.00	100	235	AVERAGE																																																																										



Mode	17																																																																																																											
	Harmonic																																																																																																											
	U-NII-5_5.925-6.425_802.11ax HE20_CH45_6175MHz																																																																																																											
ANT	CDD 3+4																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12350.00</td> <td>50.38</td> <td>74.00</td> <td>-23.62</td> <td>56.50</td> <td>38.85</td> <td>15.54</td> <td>60.51</td> <td>0.00</td> <td>104</td> <td>280</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12350.00</td> <td>41.33</td> <td>54.00</td> <td>-12.67</td> <td>47.45</td> <td>38.85</td> <td>15.54</td> <td>60.51</td> <td>0.00</td> <td>104</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	12350.00	50.38	74.00	-23.62	56.50	38.85	15.54	60.51	0.00	104	280	PEAK	2	12350.00	41.33	54.00	-12.67	47.45	38.85	15.54	60.51	0.00	104	280	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12350.00</td> <td>52.05</td> <td>74.00</td> <td>-21.95</td> <td>58.17</td> <td>38.85</td> <td>15.54</td> <td>60.51</td> <td>0.00</td> <td>305</td> <td>235</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12350.00</td> <td>42.90</td> <td>54.00</td> <td>-11.10</td> <td>49.02</td> <td>38.85</td> <td>15.54</td> <td>60.51</td> <td>0.00</td> <td>305</td> <td>235</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	12350.00	52.05	74.00	-21.95	58.17	38.85	15.54	60.51	0.00	305	235	PEAK	2	12350.00	42.90	54.00	-11.10	49.02	38.85	15.54	60.51	0.00	305	235	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	12350.00	50.38	74.00	-23.62	56.50	38.85	15.54	60.51	0.00	104	280	PEAK																																																																																																
2	12350.00	41.33	54.00	-12.67	47.45	38.85	15.54	60.51	0.00	104	280	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	12350.00	52.05	74.00	-21.95	58.17	38.85	15.54	60.51	0.00	305	235	PEAK																																																																																																
2	12350.00	42.90	54.00	-11.10	49.02	38.85	15.54	60.51	0.00	305	235	AVERAGE																																																																																																







Mode	18																																																																															
	Harmonic																																																																															
	U-NII-5_5.925-6.425_802.11ax HE20_CH93_6415MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12838.00</td> <td>50.55</td> <td>88.20</td> <td>-37.65</td> <td>55.63</td> <td>39.43</td> <td>15.92</td> <td>60.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12838.00	50.55	88.20	-37.65	55.63	39.43	15.92	60.43	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12838.00</td> <td>49.96</td> <td>88.20</td> <td>-38.24</td> <td>55.04</td> <td>39.43</td> <td>15.92</td> <td>60.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12838.00	49.96	88.20	-38.24	55.04	39.43	15.92	60.43	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12838.00	50.55	88.20	-37.65	55.63	39.43	15.92	60.43	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12838.00	49.96	88.20	-38.24	55.04	39.43	15.92	60.43	0.00	---	---	PEAK																																																																					



	19																																																																																					
Mode	Band Edge																																																																																					
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_5965MHz																																																																																					
ANT	CDD 3+4																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.42</td> <td>71.84</td> <td>88.20</td> <td>-16.36</td> <td>58.23</td> <td>35.09</td> <td>10.51</td> <td>31.99</td> <td>0.00</td> <td>107</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.42	71.84	88.20	-16.36	58.23	35.09	10.51	31.99	0.00	107	190	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>103.76</td> <td>-----</td> <td>-----</td> <td>90.00</td> <td>35.24</td> <td>10.55</td> <td>32.03</td> <td>0.00</td> <td>107</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5965.00	103.76	-----	-----	90.00	35.24	10.55	32.03	0.00	107	190	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5923.42	71.84	88.20	-16.36	58.23	35.09	10.51	31.99	0.00	107	190	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5965.00	103.76	-----	-----	90.00	35.24	10.55	32.03	0.00	107	190	PEAK																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>59.63</td> <td>68.20</td> <td>-8.57</td> <td>46.00</td> <td>35.10</td> <td>10.52</td> <td>31.99</td> <td>0.00</td> <td>107</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.96	59.63	68.20	-8.57	46.00	35.10	10.52	31.99	0.00	107	190	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>93.60</td> <td>-----</td> <td>-----</td> <td>79.84</td> <td>35.24</td> <td>10.55</td> <td>32.03</td> <td>0.00</td> <td>107</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5965.00	93.60	-----	-----	79.84	35.24	10.55	32.03	0.00	107	190	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5924.96	59.63	68.20	-8.57	46.00	35.10	10.52	31.99	0.00	107	190	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5965.00	93.60	-----	-----	79.84	35.24	10.55	32.03	0.00	107	190	AVERAGE																																																																										

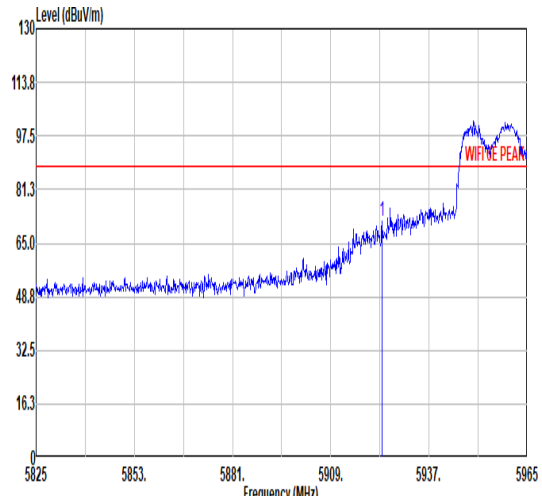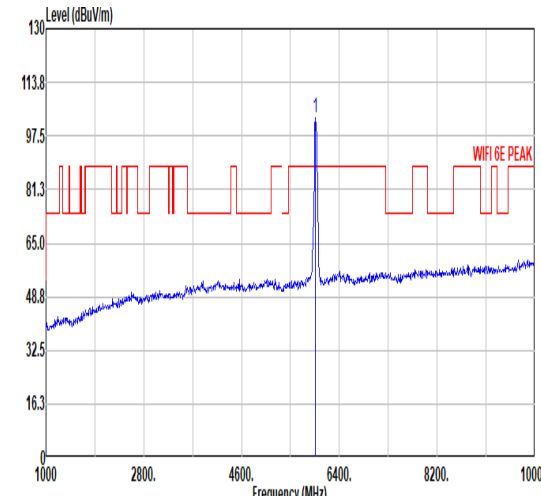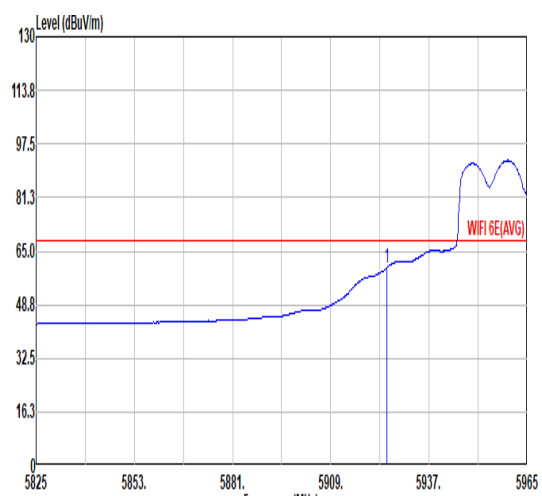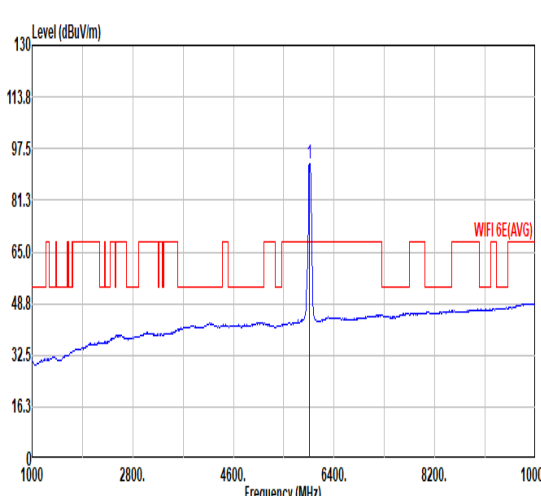

	19																																																																																					
Mode	Band Edge																																																																																					
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_5965MHz																																																																																					
ANT	CDD 3+4																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Peak at 5923.70 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.70</td> <td>71.50</td> <td>88.20</td> <td>-16.70</td> <td>57.89</td> <td>35.09</td> <td>10.51</td> <td>31.99</td> <td>0.00</td> <td>316</td> <td>220</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.70	71.50	88.20	-16.70	57.89	35.09	10.51	31.99	0.00	316	220	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Peak at 5965.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>102.81</td> <td>-----</td> <td>-----</td> <td>89.06</td> <td>35.22</td> <td>10.55</td> <td>32.02</td> <td>0.00</td> <td>316</td> <td>220</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5965.00	102.81	-----	-----	89.06	35.22	10.55	32.02	0.00	316	220	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5923.70	71.50	88.20	-16.70	57.89	35.09	10.51	31.99	0.00	316	220	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5965.00	102.81	-----	-----	89.06	35.22	10.55	32.02	0.00	316	220	PEAK																																																																										
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical. Average at 5924.96 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.96</td> <td>60.09</td> <td>68.20</td> <td>-8.11</td> <td>46.46</td> <td>35.10</td> <td>10.52</td> <td>31.99</td> <td>0.00</td> <td>316</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.96	60.09	68.20	-8.11	46.46	35.10	10.52	31.99	0.00	316	220	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Average at 5965.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>92.55</td> <td>-----</td> <td>-----</td> <td>78.80</td> <td>35.22</td> <td>10.55</td> <td>32.02</td> <td>0.00</td> <td>316</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5965.00	92.55	-----	-----	78.80	35.22	10.55	32.02	0.00	316	220	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5924.96	60.09	68.20	-8.11	46.46	35.10	10.52	31.99	0.00	316	220	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	5965.00	92.55	-----	-----	78.80	35.22	10.55	32.02	0.00	316	220	AVERAGE																																																																										



Mode	19																																																																																															
	Harmonic																																																																																															
	U-NII-5_5.925-6.425_802.11ax HE40_CH3_5965MHz																																																																																															
ANT	CDD 3+4																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11930.00</td> <td>46.84</td> <td>74.00</td> <td>-27.16</td> <td>53.39</td> <td>38.83</td> <td>15.22</td> <td>60.60</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11930.00	46.84	74.00	-27.16	53.39	38.83	15.22	60.60	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11930.00</td> <td>53.32</td> <td>74.00</td> <td>-20.68</td> <td>59.87</td> <td>38.83</td> <td>15.22</td> <td>60.60</td> <td>0.00</td> <td>140</td> <td>332</td> <td>PEAK</td> </tr> <tr> <td>2 11930.00</td> <td>43.87</td> <td>54.00</td> <td>-10.13</td> <td>50.42</td> <td>38.83</td> <td>15.22</td> <td>60.60</td> <td>0.00</td> <td>140</td> <td>332</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11930.00	53.32	74.00	-20.68	59.87	38.83	15.22	60.60	0.00	140	332	PEAK	2 11930.00	43.87	54.00	-10.13	50.42	38.83	15.22	60.60	0.00	140	332	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1 11930.00	46.84	74.00	-27.16	53.39	38.83	15.22	60.60	0.00	---	---	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1 11930.00	53.32	74.00	-20.68	59.87	38.83	15.22	60.60	0.00	140	332	PEAK																																																																																					
2 11930.00	43.87	54.00	-10.13	50.42	38.83	15.22	60.60	0.00	140	332	AVERAGE																																																																																					



Mode	20																																																																																																												
	Harmonic																																																																																																												
	U-NII-5_5.925-6.425_802.11ax HE40_CH43_6165MHz																																																																																																												
ANT	CDD 3+4																																																																																																												
Pol.	Horizontal	Vertical																																																																																																											
Peak Avg																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12330.00</td> <td>47.35</td> <td>74.00</td> <td>-26.65</td> <td>53.50</td> <td>38.83</td> <td>15.53</td> <td>60.51</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12330.00</td> <td>38.54</td> <td>54.00</td> <td>-15.46</td> <td>44.69</td> <td>38.83</td> <td>15.53</td> <td>60.51</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12330.00	47.35	74.00	-26.65	53.50	38.83	15.53	60.51	0.00	300	360	PEAK	2	12330.00	38.54	54.00	-15.46	44.69	38.83	15.53	60.51	0.00	300	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12330.00</td> <td>52.12</td> <td>74.00</td> <td>-21.88</td> <td>58.27</td> <td>38.83</td> <td>15.53</td> <td>60.51</td> <td>0.00</td> <td>109</td> <td>246</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12330.00</td> <td>43.64</td> <td>54.00</td> <td>-10.36</td> <td>49.79</td> <td>38.83</td> <td>15.53</td> <td>60.51</td> <td>0.00</td> <td>109</td> <td>246</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12330.00	52.12	74.00	-21.88	58.27	38.83	15.53	60.51	0.00	109	246	PEAK	2	12330.00	43.64	54.00	-10.36	49.79	38.83	15.53	60.51	0.00	109	246
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	12330.00	47.35	74.00	-26.65	53.50	38.83	15.53	60.51	0.00	300	360	PEAK																																																																																																	
2	12330.00	38.54	54.00	-15.46	44.69	38.83	15.53	60.51	0.00	300	360	AVERAGE																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	12330.00	52.12	74.00	-21.88	58.27	38.83	15.53	60.51	0.00	109	246	PEAK																																																																																																	
2	12330.00	43.64	54.00	-10.36	49.79	38.83	15.53	60.51	0.00	109	246	AVERAGE																																																																																																	







Mode	21																																																																																	
	Harmonic																																																																																	
	U-NII-5_5.925-6.425_802.11ax HE40_CH91_6405MHz																																																																																	
ANT	CDD 3+4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12810.00</td> <td>48.22</td> <td>88.20</td> <td>-39.98</td> <td>53.35</td> <td>39.41</td> <td>15.90</td> <td>60.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	12810.00	48.22	88.20	-39.98	53.35	39.41	15.90	60.44	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12810.00</td> <td>48.28</td> <td>88.20</td> <td>-39.92</td> <td>53.41</td> <td>39.41</td> <td>15.90</td> <td>60.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	12810.00	48.28	88.20	-39.92	53.41	39.41	15.90	60.44	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	12810.00	48.22	88.20	-39.98	53.35	39.41	15.90	60.44	0.00	---	---	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	12810.00	48.28	88.20	-39.92	53.41	39.41	15.90	60.44	0.00	---	---	PEAK																																																																						



	22																																																																																			
Mode	Band Edge																																																																																			
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full RU_5985MHz																																																																																			
ANT	CDD 3+4																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5916.04</td> <td>71.27</td> <td>88.20</td> <td>-16.93</td> <td>57.68</td> <td>35.06</td> <td>10.51</td> <td>31.98</td> <td>0.00</td> <td>117</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5916.04	71.27	88.20	-16.93	57.68	35.06	10.51	31.98	0.00	117	190	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>99.15</td> <td>-----</td> <td>-----</td> <td>85.33</td> <td>35.29</td> <td>10.58</td> <td>32.05</td> <td>0.00</td> <td>117</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5985.00	99.15	-----	-----	85.33	35.29	10.58	32.05	0.00	117	190	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5916.04	71.27	88.20	-16.93	57.68	35.06	10.51	31.98	0.00	117	190	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5985.00	99.15	-----	-----	85.33	35.29	10.58	32.05	0.00	117	190	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.52</td> <td>60.56</td> <td>68.20</td> <td>-7.64</td> <td>46.93</td> <td>35.10</td> <td>10.52</td> <td>31.99</td> <td>0.00</td> <td>117</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.52	60.56	68.20	-7.64	46.93	35.10	10.52	31.99	0.00	117	190	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>90.24</td> <td>-----</td> <td>-----</td> <td>76.44</td> <td>35.27</td> <td>10.57</td> <td>32.04</td> <td>0.00</td> <td>117</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5985.00	90.24	-----	-----	76.44	35.27	10.57	32.04	0.00	117	190	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5924.52	60.56	68.20	-7.64	46.93	35.10	10.52	31.99	0.00	117	190	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5985.00	90.24	-----	-----	76.44	35.27	10.57	32.04	0.00	117	190	AVERAGE																																																																								

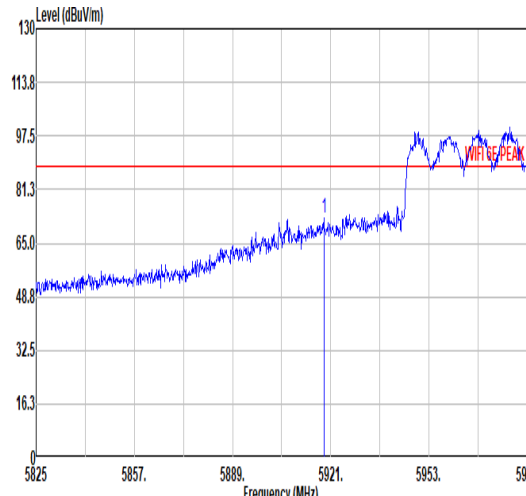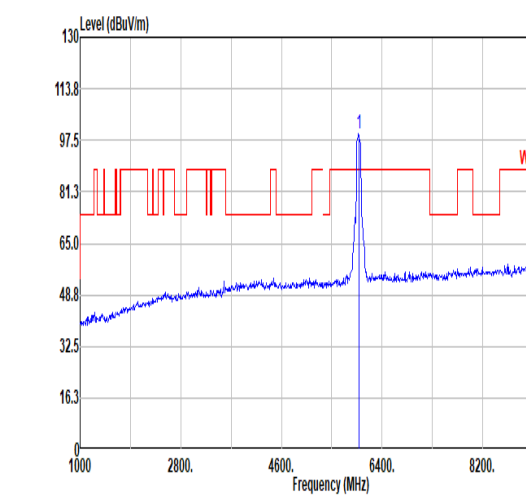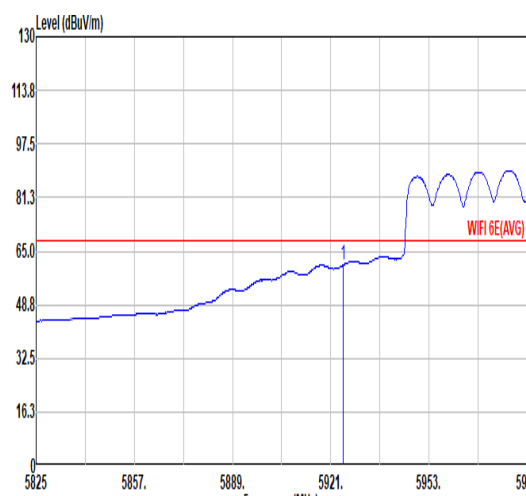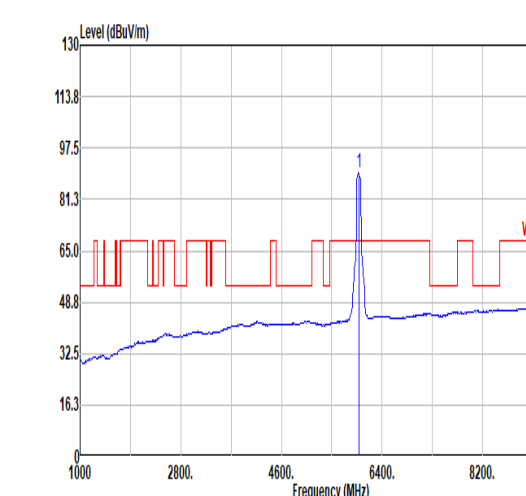

	22																																																																																			
Mode	Band Edge																																																																																			
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full RU_5985MHz																																																																																			
ANT	CDD 3+4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>5825 5857. 5889. 5921. 5953. 5985</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5918.76</td> <td>72.53</td> <td>88.20</td> <td>-15.67</td> <td>58.93</td> <td>35.08</td> <td>10.51</td> <td>31.99</td> <td>0.00</td> <td>319</td> <td>220</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5918.76	72.53	88.20	-15.67	58.93	35.08	10.51	31.99	0.00	319	220	PEAK	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>1000 2800. 4600. 6400. 8200. 10000</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>99.36</td> <td>-----</td> <td>-----</td> <td>85.58</td> <td>35.25</td> <td>10.56</td> <td>32.03</td> <td>0.00</td> <td>319</td> <td>220</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5985.00	99.36	-----	-----	85.58	35.25	10.56	32.03	0.00	319	220	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5918.76	72.53	88.20	-15.67	58.93	35.08	10.51	31.99	0.00	319	220	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5985.00	99.36	-----	-----	85.58	35.25	10.56	32.03	0.00	319	220	PEAK																																																																								
Avg	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>5825 5857. 5889. 5921. 5953. 5985</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5925.00</td> <td>60.79</td> <td>68.20</td> <td>-7.41</td> <td>47.16</td> <td>35.10</td> <td>10.52</td> <td>31.99</td> <td>0.00</td> <td>319</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	60.79	68.20	-7.41	47.16	35.10	10.52	31.99	0.00	319	220	AVERAGE	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0</p> <p>1000 2800. 4600. 6400. 8200. 10000</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>89.66</td> <td>-----</td> <td>-----</td> <td>75.88</td> <td>35.25</td> <td>10.56</td> <td>32.03</td> <td>0.00</td> <td>319</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5985.00	89.66	-----	-----	75.88	35.25	10.56	32.03	0.00	319	220	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5925.00	60.79	68.20	-7.41	47.16	35.10	10.52	31.99	0.00	319	220	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5985.00	89.66	-----	-----	75.88	35.25	10.56	32.03	0.00	319	220	AVERAGE																																																																								



Mode	22																																																																																																															
	Harmonic																																																																																																															
	U-NII-5_5.925-6.425_802.11ax HE80_CH7_Full RU_5985MHz																																																																																																															
ANT	CDD 3+4																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11970.00</td> <td>47.76</td> <td>74.00</td> <td>-26.24</td> <td>54.22</td> <td>38.87</td> <td>15.25</td> <td>60.58</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11970.00</td> <td>37.49</td> <td>54.00</td> <td>-16.51</td> <td>43.92</td> <td>38.88</td> <td>15.26</td> <td>60.57</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11970.00	47.76	74.00	-26.24	54.22	38.87	15.25	60.58	0.00	300	360	PEAK	2	11970.00	37.49	54.00	-16.51	43.92	38.88	15.26	60.57	0.00	300	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11970.00</td> <td>51.16</td> <td>74.00</td> <td>-22.84</td> <td>57.62</td> <td>38.87</td> <td>15.25</td> <td>60.58</td> <td>0.00</td> <td>117</td> <td>325</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11970.00</td> <td>42.68</td> <td>54.00</td> <td>-11.32</td> <td>49.14</td> <td>38.87</td> <td>15.25</td> <td>60.58</td> <td>0.00</td> <td>117</td> <td>325</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11970.00	51.16	74.00	-22.84	57.62	38.87	15.25	60.58	0.00	117	325	PEAK	2	11970.00	42.68	54.00	-11.32	49.14	38.87	15.25	60.58	0.00	117	325	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	11970.00	47.76	74.00	-26.24	54.22	38.87	15.25	60.58	0.00	300	360	PEAK																																																																																																				
2	11970.00	37.49	54.00	-16.51	43.92	38.88	15.26	60.57	0.00	300	360	AVERAGE																																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	11970.00	51.16	74.00	-22.84	57.62	38.87	15.25	60.58	0.00	117	325	PEAK																																																																																																				
2	11970.00	42.68	54.00	-11.32	49.14	38.87	15.25	60.58	0.00	117	325	AVERAGE																																																																																																				



Mode	23																																																																																																											
	Harmonic																																																																																																											
	U-NII-5_5.925-6.425_802.11ax HE80_CH39_Full RU_6145MHz																																																																																																											
ANT	CDD 3+4																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12290.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>53.74</td> <td>38.81</td> <td>15.50</td> <td>60.52</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12290.00</td> <td>38.32</td> <td>54.00</td> <td>-15.68</td> <td>44.52</td> <td>38.87</td> <td>15.45</td> <td>60.52</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	12290.00	47.53	74.00	-26.47	53.74	38.81	15.50	60.52	0.00	300	360	PEAK	2	12290.00	38.32	54.00	-15.68	44.52	38.87	15.45	60.52	0.00	300	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12290.00</td> <td>48.30</td> <td>74.00</td> <td>-25.70</td> <td>54.51</td> <td>38.81</td> <td>15.50</td> <td>60.52</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12290.00</td> <td>37.66</td> <td>54.00</td> <td>-16.34</td> <td>43.86</td> <td>38.85</td> <td>15.47</td> <td>60.52</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	12290.00	48.30	74.00	-25.70	54.51	38.81	15.50	60.52	0.00	100	360	PEAK	2	12290.00	37.66	54.00	-16.34	43.86	38.85	15.47	60.52	0.00	100	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	12290.00	47.53	74.00	-26.47	53.74	38.81	15.50	60.52	0.00	300	360	PEAK																																																																																																
2	12290.00	38.32	54.00	-15.68	44.52	38.87	15.45	60.52	0.00	300	360	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	12290.00	48.30	74.00	-25.70	54.51	38.81	15.50	60.52	0.00	100	360	PEAK																																																																																																
2	12290.00	37.66	54.00	-16.34	43.86	38.85	15.47	60.52	0.00	100	360	AVERAGE																																																																																																







Mode	24																																																																															
	Harmonic																																																																															
	U-NII-5_5.925-6.425_802.11ax HE80_CH87_Full RU_6385MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12778.00</td> <td>47.57</td> <td>88.20</td> <td>-40.63</td> <td>52.77</td> <td>39.37</td> <td>15.87</td> <td>60.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12778.00	47.57	88.20	-40.63	52.77	39.37	15.87	60.44	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12778.00</td> <td>48.44</td> <td>88.20</td> <td>-39.76</td> <td>53.64</td> <td>39.37</td> <td>15.87</td> <td>60.44</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12778.00	48.44	88.20	-39.76	53.64	39.37	15.87	60.44	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12778.00	47.57	88.20	-40.63	52.77	39.37	15.87	60.44	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12778.00	48.44	88.20	-39.76	53.64	39.37	15.87	60.44	0.00	---	---	PEAK																																																																					



		25																																																																													
Mode	Band Edge																																																																														
	U-NII-5_5.925-6.425_802.11ax HE160_CH15_Full RU_6025MHz																																																																														
ANT	CDD 3+4																																																																														
Pol.	Horizontal	Fundamental																																																																													
Peak																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5904.40</td> <td>61.90</td> <td>88.20</td> <td>-26.30</td> <td>48.36</td> <td>35.02</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>104 191 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5904.40	61.90	88.20	-26.30	48.36	35.02	10.50	31.98	0.00	104 191 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 6025.00</td> <td>95.67</td> <td>-----</td> <td>-----</td> <td>81.76</td> <td>35.37</td> <td>10.64</td> <td>32.10</td> <td>0.00</td> <td>104 191 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 6025.00	95.67	-----	-----	81.76	35.37	10.64	32.10	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5904.40	61.90	88.20	-26.30	48.36	35.02	10.50	31.98	0.00	104 191 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 6025.00	95.67	-----	-----	81.76	35.37	10.64	32.10	0.00	104 191 PEAK																																																																						
Avg																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5916.00</td> <td>51.46</td> <td>68.20</td> <td>-16.74</td> <td>37.87</td> <td>35.06</td> <td>10.51</td> <td>31.98</td> <td>0.00</td> <td>104 191 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5916.00	51.46	68.20	-16.74	37.87	35.06	10.51	31.98	0.00	104 191 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 6025.00</td> <td>85.04</td> <td>-----</td> <td>-----</td> <td>71.22</td> <td>35.29</td> <td>10.58</td> <td>32.05</td> <td>0.00</td> <td>104 191 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 6025.00	85.04	-----	-----	71.22	35.29	10.58	32.05	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5916.00	51.46	68.20	-16.74	37.87	35.06	10.51	31.98	0.00	104 191 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 6025.00	85.04	-----	-----	71.22	35.29	10.58	32.05	0.00	104 191 AVERAGE																																																																						

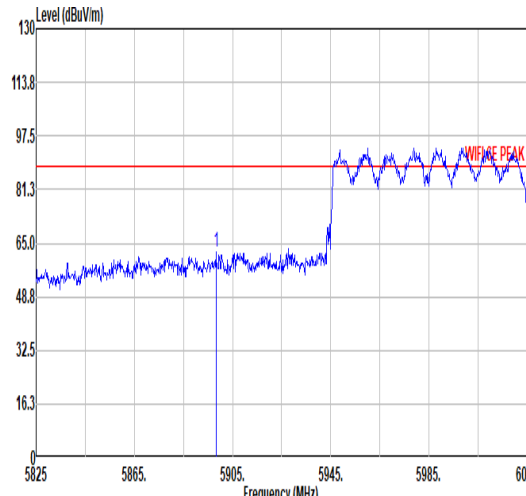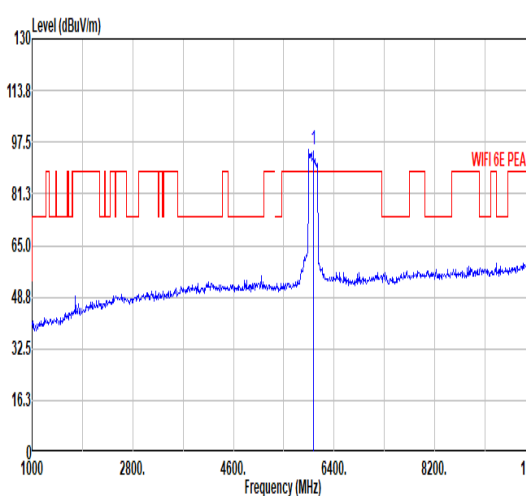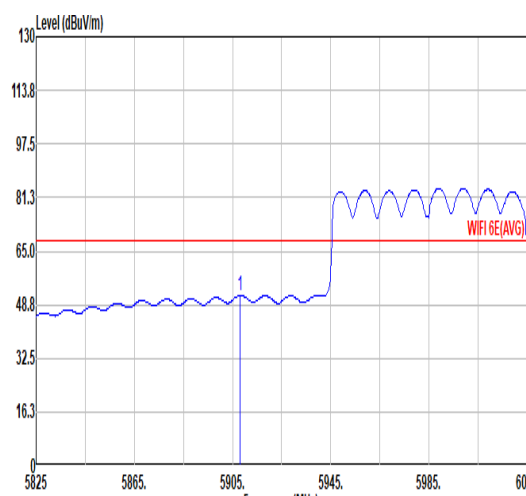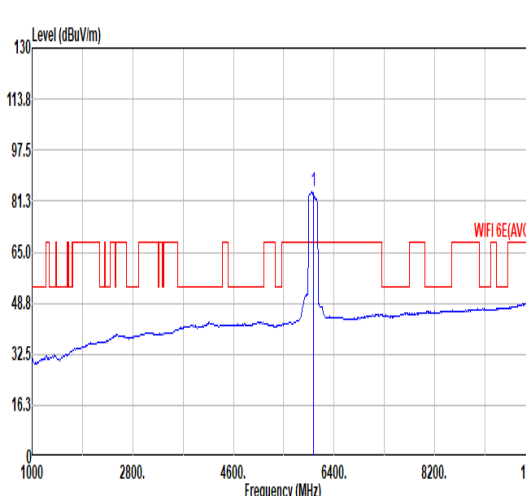

		25																																																																																		
Mode		Band Edge																																																																																		
		U-NII-5_5.925-6.425_802.11ax HE160_CH15_Full RU_6025MHz																																																																																		
ANT		CDD 3+4																																																																																		
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5898.20</td> <td>62.07</td> <td>88.20</td> <td>-26.13</td> <td>48.55</td> <td>35.00</td> <td>10.49</td> <td>31.97</td> <td>0.00</td> <td>300</td> <td>220</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5898.20	62.07	88.20	-26.13	48.55	35.00	10.49	31.97	0.00	300	220	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6025.00</td> <td>95.37</td> <td>-----</td> <td>-----</td> <td>81.64</td> <td>35.20</td> <td>10.54</td> <td>32.01</td> <td>0.00</td> <td>300</td> <td>220</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6025.00	95.37	-----	-----	81.64	35.20	10.54	32.01	0.00	300	220	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5898.20	62.07	88.20	-26.13	48.55	35.00	10.49	31.97	0.00	300	220	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	6025.00	95.37	-----	-----	81.64	35.20	10.54	32.01	0.00	300	220	PEAK																																																																								
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5908.00</td> <td>51.61</td> <td>68.20</td> <td>-16.59</td> <td>38.06</td> <td>35.03</td> <td>10.50</td> <td>31.98</td> <td>0.00</td> <td>300</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5908.00	51.61	68.20	-16.59	38.06	35.03	10.50	31.98	0.00	300	220	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6025.00</td> <td>84.14</td> <td>-----</td> <td>-----</td> <td>70.32</td> <td>35.29</td> <td>10.58</td> <td>32.05</td> <td>0.00</td> <td>300</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6025.00	84.14	-----	-----	70.32	35.29	10.58	32.05	0.00	300	220	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5908.00	51.61	68.20	-16.59	38.06	35.03	10.50	31.98	0.00	300	220	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	6025.00	84.14	-----	-----	70.32	35.29	10.58	32.05	0.00	300	220	AVERAGE																																																																								



Mode	25																																																																																																											
	Harmonic																																																																																																											
	U-NII-5_5.925-6.425_802.11ax HE160_CH15_Full RU_6025MHz																																																																																																											
ANT	CDD 3+4																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12050.00</td> <td>47.50</td> <td>74.00</td> <td>-26.50</td> <td>53.89</td> <td>38.85</td> <td>15.31</td> <td>60.55</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12050.00</td> <td>37.68</td> <td>54.00</td> <td>-16.32</td> <td>43.98</td> <td>38.85</td> <td>15.39</td> <td>60.54</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	12050.00	47.50	74.00	-26.50	53.89	38.85	15.31	60.55	0.00	300	360	PEAK	2	12050.00	37.68	54.00	-16.32	43.98	38.85	15.39	60.54	0.00	300	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12050.00</td> <td>49.25</td> <td>74.00</td> <td>-24.75</td> <td>55.64</td> <td>38.85</td> <td>15.31</td> <td>60.55</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12050.00</td> <td>37.40</td> <td>54.00</td> <td>-16.60</td> <td>44.02</td> <td>38.80</td> <td>15.20</td> <td>60.62</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	12050.00	49.25	74.00	-24.75	55.64	38.85	15.31	60.55	0.00	100	360	PEAK	2	12050.00	37.40	54.00	-16.60	44.02	38.80	15.20	60.62	0.00	100	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	12050.00	47.50	74.00	-26.50	53.89	38.85	15.31	60.55	0.00	300	360	PEAK																																																																																																
2	12050.00	37.68	54.00	-16.32	43.98	38.85	15.39	60.54	0.00	300	360	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	12050.00	49.25	74.00	-24.75	55.64	38.85	15.31	60.55	0.00	100	360	PEAK																																																																																																
2	12050.00	37.40	54.00	-16.60	44.02	38.80	15.20	60.62	0.00	100	360	AVERAGE																																																																																																



Mode	26																																																																																																													
	Harmonic																																																																																																													
	U-NII-5_5.925-6.425_802.11ax HE160_CH47_Full RU_6185MHz																																																																																																													
ANT	CDD 3+4																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12370.00</td> <td>47.35</td> <td>74.00</td> <td>-26.65</td> <td>53.42</td> <td>38.87</td> <td>15.56</td> <td>60.50</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12370.00</td> <td>37.64</td> <td>54.00</td> <td>-16.36</td> <td>43.85</td> <td>38.89</td> <td>15.43</td> <td>60.53</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12370.00	47.35	74.00	-26.65	53.42	38.87	15.56	60.50	0.00	300	360	PEAK	2	12370.00	37.64	54.00	-16.36	43.85	38.89	15.43	60.53	0.00	300	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12370.00</td> <td>48.39</td> <td>74.00</td> <td>-25.61</td> <td>54.46</td> <td>38.87</td> <td>15.56</td> <td>60.50</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12370.00</td> <td>37.56</td> <td>54.00</td> <td>-16.44</td> <td>43.76</td> <td>38.89</td> <td>15.44</td> <td>60.53</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12370.00	48.39	74.00	-25.61	54.46	38.87	15.56	60.50	0.00	100	360	PEAK	2	12370.00	37.56	54.00	-16.44	43.76	38.89	15.44	60.53	0.00	100	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	12370.00	47.35	74.00	-26.65	53.42	38.87	15.56	60.50	0.00	300	360	PEAK																																																																																																		
2	12370.00	37.64	54.00	-16.36	43.85	38.89	15.43	60.53	0.00	300	360	AVERAGE																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	12370.00	48.39	74.00	-25.61	54.46	38.87	15.56	60.50	0.00	100	360	PEAK																																																																																																		
2	12370.00	37.56	54.00	-16.44	43.76	38.89	15.44	60.53	0.00	100	360	AVERAGE																																																																																																		



Mode	27																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-5_5.925-6.425_802.11ax HE160_CH79_Full RU_6345MHz																																																																																																																							
ANT	CDD 3+4																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12690.00</td> <td>48.09</td> <td>74.00</td> <td>-25.91</td> <td>53.44</td> <td>39.29</td> <td>15.81</td> <td>60.45</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12690.00</td> <td>37.59</td> <td>54.00</td> <td>-16.41</td> <td>43.27</td> <td>39.10</td> <td>15.70</td> <td>60.48</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	12690.00	48.09	74.00	-25.91	53.44	39.29	15.81	60.45	0.00	300	360	PEAK	2	12690.00	37.59	54.00	-16.41	43.27	39.10	15.70	60.48	0.00	300	360	AVERAGE	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12690.00</td> <td>47.52</td> <td>74.00</td> <td>-26.48</td> <td>52.87</td> <td>39.29</td> <td>15.81</td> <td>60.45</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>12690.00</td> <td>38.02</td> <td>54.00</td> <td>-15.98</td> <td>43.45</td> <td>39.25</td> <td>15.78</td> <td>60.46</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	12690.00	47.52	74.00	-26.48	52.87	39.29	15.81	60.45	0.00	100	360	PEAK	2	12690.00	38.02	54.00	-15.98	43.45	39.25	15.78	60.46	0.00	100	360	AVERAGE
Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	12690.00	48.09	74.00	-25.91	53.44	39.29	15.81	60.45	0.00	300	360	PEAK																																																																																																												
2	12690.00	37.59	54.00	-16.41	43.27	39.10	15.70	60.48	0.00	300	360	AVERAGE																																																																																																												
Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	12690.00	47.52	74.00	-26.48	52.87	39.29	15.81	60.45	0.00	100	360	PEAK																																																																																																												
2	12690.00	38.02	54.00	-15.98	43.45	39.25	15.78	60.46	0.00	100	360	AVERAGE																																																																																																												



Mode	28																																																																															
	Harmonic																																																																															
	U-NII-5_5.925-6.425_802.11ax HE20_CH97_6435MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>48.43</td> <td>88.20</td> <td>-39.77</td> <td>53.44</td> <td>39.47</td> <td>15.95</td> <td>60.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12870.00	48.43	88.20	-39.77	53.44	39.47	15.95	60.43	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>50.70</td> <td>88.20</td> <td>-37.50</td> <td>55.71</td> <td>39.47</td> <td>15.95</td> <td>60.43</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12870.00	50.70	88.20	-37.50	55.71	39.47	15.95	60.43	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12870.00	48.43	88.20	-39.77	53.44	39.47	15.95	60.43	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 12870.00	50.70	88.20	-37.50	55.71	39.47	15.95	60.43	0.00	---	---	PEAK																																																																					



Mode	29																																																																											
	Harmonic																																																																											
	U-NII-6_6.425-6.525_802.11ax HE20_CH105_6475MHz																																																																											
ANT	CDD 3+4																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12950.00</td> <td>48.28</td> <td>88.20</td> <td>-39.92</td> <td>53.18</td> <td>39.50</td> <td>16.01</td> <td>60.41</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12950.00	48.28	88.20	-39.92	53.18	39.50	16.01	60.41	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12950.00</td> <td>49.09</td> <td>88.20</td> <td>-39.11</td> <td>53.99</td> <td>39.50</td> <td>16.01</td> <td>60.41</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12950.00	49.09	88.20	-39.11	53.99	39.50	16.01	60.41	0.00	--- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 12950.00	48.28	88.20	-39.92	53.18	39.50	16.01	60.41	0.00	--- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 12950.00	49.09	88.20	-39.11	53.99	39.50	16.01	60.41	0.00	--- PEAK																																																																			



Mode	30																																																																															
	Harmonic																																																																															
	U-NII-6_6.425-6.525_802.11ax HE20_CH113_6515MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>48.13</td> <td>88.20</td> <td>-40.07</td> <td>53.00</td> <td>39.47</td> <td>16.06</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13030.00	48.13	88.20	-40.07	53.00	39.47	16.06	60.40	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>52.24</td> <td>88.20</td> <td>-35.96</td> <td>57.11</td> <td>39.47</td> <td>16.06</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13030.00	52.24	88.20	-35.96	57.11	39.47	16.06	60.40	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13030.00	48.13	88.20	-40.07	53.00	39.47	16.06	60.40	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13030.00	52.24	88.20	-35.96	57.11	39.47	16.06	60.40	0.00	---	---	PEAK																																																																					



Mode	31																																																																										
	Harmonic																																																																										
	U-NII-6_6.425-6.525_802.11ax HE20_CH99_Full RU_6445MHz																																																																										
ANT	CDD 3+4																																																																										
Pol.	Horizontal	Vertical																																																																									
Peak Avg																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12890.00</td> <td>48.39</td> <td>88.20</td> <td>-39.81</td> <td>53.36</td> <td>39.49</td> <td>15.96</td> <td>60.42</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12890.00	48.39	88.20	-39.81	53.36	39.49	15.96	60.42	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12890.00</td> <td>50.29</td> <td>88.20</td> <td>-37.91</td> <td>55.26</td> <td>39.49</td> <td>15.96</td> <td>60.42</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12890.00	50.29	88.20	-37.91	55.26	39.49	15.96	60.42	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																			
1 12890.00	48.39	88.20	-39.81	53.36	39.49	15.96	60.42	0.00	--- PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																			
1 12890.00	50.29	88.20	-37.91	55.26	39.49	15.96	60.42	0.00	--- PEAK																																																																		



Mode	32																																																																											
	Harmonic																																																																											
	U-NII-6_6.425-6.525_802.11ax HE40_CH107_Full RU_6485MHz																																																																											
ANT	CDD 3+4																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12970.00</td> <td>47.65</td> <td>88.20</td> <td>-40.55</td> <td>52.53</td> <td>39.50</td> <td>16.03</td> <td>60.41</td> <td>0.00</td> <td>--- --- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12970.00	47.65	88.20	-40.55	52.53	39.50	16.03	60.41	0.00	--- --- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12970.00</td> <td>48.49</td> <td>88.20</td> <td>-39.71</td> <td>53.37</td> <td>39.50</td> <td>16.03</td> <td>60.41</td> <td>0.00</td> <td>--- --- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 12970.00	48.49	88.20	-39.71	53.37	39.50	16.03	60.41	0.00	--- --- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 12970.00	47.65	88.20	-40.55	52.53	39.50	16.03	60.41	0.00	--- --- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 12970.00	48.49	88.20	-39.71	53.37	39.50	16.03	60.41	0.00	--- --- PEAK																																																																			



Mode	33																																																																																		
	Harmonic																																																																																		
	U-NII-6_6.425-6.525_802.11ax HE80_CH103_Full RU_6465MHZ																																																																																		
ANT	CDD 3+4																																																																																		
Pol.	Horizontal	Vertical																																																																																	
Peak Avg																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12930.00</td> <td>47.91</td> <td>88.20</td> <td>-40.29</td> <td>52.84</td> <td>39.50</td> <td>15.99</td> <td>60.42</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12930.00	47.91	88.20	-40.29	52.84	39.50	15.99	60.42	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 12930.00</td> <td>47.49</td> <td>88.20</td> <td>-40.71</td> <td>52.42</td> <td>39.50</td> <td>15.99</td> <td>60.42</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 12930.00	47.49	88.20	-40.71	52.42	39.50	15.99	60.42	0.00	---	---
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 12930.00	47.91	88.20	-40.29	52.84	39.50	15.99	60.42	0.00	---	---	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 12930.00	47.49	88.20	-40.71	52.42	39.50	15.99	60.42	0.00	---	---	PEAK																																																																								



Mode	34																																																																															
	Harmonic																																																																															
	U-NII-6_6.425-6.525_802.11ax HE40_CH115_Full RU_6525MHZ																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13050.00</td> <td>47.62</td> <td>88.20</td> <td>-40.58</td> <td>52.50</td> <td>39.45</td> <td>16.07</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13050.00	47.62	88.20	-40.58	52.50	39.45	16.07	60.40	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13050.00</td> <td>51.30</td> <td>88.20</td> <td>-36.90</td> <td>56.18</td> <td>39.45</td> <td>16.07</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13050.00	51.30	88.20	-36.90	56.18	39.45	16.07	60.40	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13050.00	47.62	88.20	-40.58	52.50	39.45	16.07	60.40	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13050.00	51.30	88.20	-36.90	56.18	39.45	16.07	60.40	0.00	---	---	PEAK																																																																					



Mode	35																																																																															
	Harmonic																																																																															
	U-NII-6_6.425-6.525_802.11ax HE80_CH119_Full RU_6545MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13090.00</td> <td>47.47</td> <td>88.20</td> <td>-40.73</td> <td>52.36</td> <td>39.41</td> <td>16.09</td> <td>60.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13090.00	47.47	88.20	-40.73	52.36	39.41	16.09	60.39	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13090.00</td> <td>49.10</td> <td>88.20</td> <td>-39.10</td> <td>53.99</td> <td>39.41</td> <td>16.09</td> <td>60.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13090.00	49.10	88.20	-39.10	53.99	39.41	16.09	60.39	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13090.00	47.47	88.20	-40.73	52.36	39.41	16.09	60.39	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13090.00	49.10	88.20	-39.10	53.99	39.41	16.09	60.39	0.00	---	---	PEAK																																																																					



Mode	36																																																																															
	Harmonic																																																																															
	U-NII-6_6.425-6.525_802.11ax HE160_CH111_Full RU_6505MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13010.00</td> <td>47.37</td> <td>88.20</td> <td>-40.83</td> <td>52.24</td> <td>39.49</td> <td>16.05</td> <td>60.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13010.00	47.37	88.20	-40.83	52.24	39.49	16.05	60.41	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13010.00</td> <td>48.34</td> <td>88.20</td> <td>-39.86</td> <td>53.21</td> <td>39.49</td> <td>16.05</td> <td>60.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13010.00	48.34	88.20	-39.86	53.21	39.49	16.05	60.41	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13010.00	47.37	88.20	-40.83	52.24	39.49	16.05	60.41	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13010.00	48.34	88.20	-39.86	53.21	39.49	16.05	60.41	0.00	---	---	PEAK																																																																					



Mode	37																																																																															
	Harmonic																																																																															
	U-NII-7_6.525-6.875_802.11ax HE20_CH117_Full RU_6535MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>48.87</td> <td>88.20</td> <td>-39.33</td> <td>53.76</td> <td>39.43</td> <td>16.08</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13070.00	48.87	88.20	-39.33	53.76	39.43	16.08	60.40	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>50.32</td> <td>88.20</td> <td>-37.88</td> <td>55.21</td> <td>39.43</td> <td>16.08</td> <td>60.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13070.00	50.32	88.20	-37.88	55.21	39.43	16.08	60.40	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13070.00	48.87	88.20	-39.33	53.76	39.43	16.08	60.40	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13070.00	50.32	88.20	-37.88	55.21	39.43	16.08	60.40	0.00	---	---	PEAK																																																																					



Mode	38																																																																																																											
	Harmonic																																																																																																											
	U-NII-7_6.525-6.875_802.11ax HE20_CH149_Full RU_6695MHz																																																																																																											
ANT	CDD 3+4																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13390.00</td> <td>50.91</td> <td>74.00</td> <td>-23.09</td> <td>55.92</td> <td>39.11</td> <td>16.23</td> <td>60.35</td> <td>0.00</td> <td>115</td> <td>285</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>13390.00</td> <td>41.09</td> <td>54.00</td> <td>-12.91</td> <td>46.10</td> <td>39.11</td> <td>16.23</td> <td>60.35</td> <td>0.00</td> <td>115</td> <td>285</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13390.00	50.91	74.00	-23.09	55.92	39.11	16.23	60.35	0.00	115	285	PEAK	2	13390.00	41.09	54.00	-12.91	46.10	39.11	16.23	60.35	0.00	115	285	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13390.00</td> <td>60.11</td> <td>74.00</td> <td>-13.89</td> <td>65.12</td> <td>39.11</td> <td>16.23</td> <td>60.35</td> <td>0.00</td> <td>300</td> <td>31</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>13390.00</td> <td>46.94</td> <td>54.00</td> <td>-7.06</td> <td>51.95</td> <td>39.11</td> <td>16.23</td> <td>60.35</td> <td>0.00</td> <td>300</td> <td>31</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13390.00	60.11	74.00	-13.89	65.12	39.11	16.23	60.35	0.00	300	31	PEAK	2	13390.00	46.94	54.00	-7.06	51.95	39.11	16.23	60.35	0.00	300	31	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	13390.00	50.91	74.00	-23.09	55.92	39.11	16.23	60.35	0.00	115	285	PEAK																																																																																																
2	13390.00	41.09	54.00	-12.91	46.10	39.11	16.23	60.35	0.00	115	285	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	13390.00	60.11	74.00	-13.89	65.12	39.11	16.23	60.35	0.00	300	31	PEAK																																																																																																
2	13390.00	46.94	54.00	-7.06	51.95	39.11	16.23	60.35	0.00	300	31	AVERAGE																																																																																																



Mode	39																																																																															
	Harmonic																																																																															
	U-NII-7_6.525-6.875_802.11ax HE40_CH123_Full RU_6565MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13130.00</td> <td>48.39</td> <td>88.20</td> <td>-39.81</td> <td>53.33</td> <td>39.34</td> <td>16.11</td> <td>60.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13130.00	48.39	88.20	-39.81	53.33	39.34	16.11	60.39	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13130.00</td> <td>47.24</td> <td>88.20</td> <td>-40.96</td> <td>52.18</td> <td>39.34</td> <td>16.11</td> <td>60.39</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13130.00	47.24	88.20	-40.96	52.18	39.34	16.11	60.39	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13130.00	48.39	88.20	-39.81	53.33	39.34	16.11	60.39	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13130.00	47.24	88.20	-40.96	52.18	39.34	16.11	60.39	0.00	---	---	PEAK																																																																					



Mode	40																																																																																																				
	Harmonic																																																																																																				
	U-NII-7_6.525-6.875_802.11ax HE40_CH147_Full RU_6685MHz																																																																																																				
ANT	CDD 3+4																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13370.00</td> <td>47.80</td> <td>74.00</td> <td>-26.20</td> <td>52.80</td> <td>39.13</td> <td>16.22</td> <td>60.35</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>13370.00</td> <td>38.30</td> <td>54.00</td> <td>-15.70</td> <td>43.30</td> <td>39.13</td> <td>16.22</td> <td>60.35</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13370.00	47.80	74.00	-26.20	52.80	39.13	16.22	60.35	0.00	100	360	PEAK	2	13370.00	38.30	54.00	-15.70	43.30	39.13	16.22	60.35	0.00	100	360	AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13370.00</td> <td>46.69</td> <td>74.00</td> <td>-27.31</td> <td>51.69</td> <td>39.13</td> <td>16.22</td> <td>60.35</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13370.00	46.69	74.00	-27.31	51.69	39.13	16.22	60.35	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																												
1	13370.00	47.80	74.00	-26.20	52.80	39.13	16.22	60.35	0.00	100	360	PEAK																																																																																									
2	13370.00	38.30	54.00	-15.70	43.30	39.13	16.22	60.35	0.00	100	360	AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																												
1	13370.00	46.69	74.00	-27.31	51.69	39.13	16.22	60.35	0.00	---	---	PEAK																																																																																									



Mode	41																																																																											
	Harmonic																																																																											
	U-NII-7_6.525-6.875_802.11ax HE40_CH179_Full RU_6845MHz																																																																											
ANT	CDD 3+4																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13690.00</td> <td>47.40</td> <td>88.20</td> <td>-40.80</td> <td>52.20</td> <td>38.72</td> <td>16.37</td> <td>59.89</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13690.00	47.40	88.20	-40.80	52.20	38.72	16.37	59.89	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13690.00</td> <td>47.42</td> <td>88.20</td> <td>-40.78</td> <td>52.22</td> <td>38.72</td> <td>16.37</td> <td>59.89</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13690.00	47.42	88.20	-40.78	52.22	38.72	16.37	59.89	0.00	--- PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 13690.00	47.40	88.20	-40.80	52.20	38.72	16.37	59.89	0.00	--- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 13690.00	47.42	88.20	-40.78	52.22	38.72	16.37	59.89	0.00	--- PEAK																																																																			



Mode	42																																																																																	
	Harmonic																																																																																	
	U-NII-7_6.525-6.875_802.11ax HE80_CH135_Full RU_6625MHz																																																																																	
ANT	CDD 3+4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13250.00</td> <td>47.67</td> <td>74.00</td> <td>-26.33</td> <td>52.67</td> <td>39.20</td> <td>16.17</td> <td>60.37</td> <td>0.00</td> <td>100 360 PEAK</td> </tr> <tr> <td>2 13250.00</td> <td>38.34</td> <td>54.00</td> <td>-15.66</td> <td>43.35</td> <td>39.20</td> <td>16.16</td> <td>60.37</td> <td>0.00</td> <td>100 360 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 13250.00	47.67	74.00	-26.33	52.67	39.20	16.17	60.37	0.00	100 360 PEAK	2 13250.00	38.34	54.00	-15.66	43.35	39.20	16.16	60.37	0.00	100 360 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13250.00</td> <td>47.98</td> <td>74.00</td> <td>-26.02</td> <td>52.98</td> <td>39.20</td> <td>16.17</td> <td>60.37</td> <td>0.00</td> <td>300 360 PEAK</td> </tr> <tr> <td>2 13250.00</td> <td>38.66</td> <td>54.00</td> <td>-15.34</td> <td>43.66</td> <td>39.20</td> <td>16.17</td> <td>60.37</td> <td>0.00</td> <td>300 360 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 13250.00	47.98	74.00	-26.02	52.98	39.20	16.17	60.37	0.00	300 360 PEAK	2 13250.00	38.66	54.00	-15.34	43.66	39.20	16.17	60.37	0.00	300 360 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 13250.00	47.67	74.00	-26.33	52.67	39.20	16.17	60.37	0.00	100 360 PEAK																																																																									
2 13250.00	38.34	54.00	-15.66	43.35	39.20	16.16	60.37	0.00	100 360 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 13250.00	47.98	74.00	-26.02	52.98	39.20	16.17	60.37	0.00	300 360 PEAK																																																																									
2 13250.00	38.66	54.00	-15.34	43.66	39.20	16.17	60.37	0.00	300 360 AVERAGE																																																																									



Mode	43																																																																															
	Harmonic																																																																															
	U-NII-7_6.525-6.875_802.11ax HE80_CH151_Full RU_6705MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13410.00</td> <td>48.25</td> <td>88.20</td> <td>-39.95</td> <td>53.27</td> <td>39.08</td> <td>16.24</td> <td>60.34</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13410.00	48.25	88.20	-39.95	53.27	39.08	16.24	60.34	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13410.00</td> <td>46.73</td> <td>88.20</td> <td>-41.47</td> <td>51.75</td> <td>39.08</td> <td>16.24</td> <td>60.34</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13410.00	46.73	88.20	-41.47	51.75	39.08	16.24	60.34	0.00	---	---	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13410.00	48.25	88.20	-39.95	53.27	39.08	16.24	60.34	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13410.00	46.73	88.20	-41.47	51.75	39.08	16.24	60.34	0.00	---	---	PEAK																																																																					



Mode	44																																																																																																											
	Harmonic																																																																																																											
	U-NII-7_6.525-6.875_802.11ax HE160_CH143_Full RU_6665MHz																																																																																																											
ANT	CDD 3+4																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13330.00</td> <td>48.05</td> <td>74.00</td> <td>-25.95</td> <td>53.04</td> <td>39.17</td> <td>16.20</td> <td>60.36</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>13330.00</td> <td>37.81</td> <td>54.00</td> <td>-16.19</td> <td>42.83</td> <td>39.20</td> <td>16.15</td> <td>60.37</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13330.00	48.05	74.00	-25.95	53.04	39.17	16.20	60.36	0.00	100	360	PEAK	2	13330.00	37.81	54.00	-16.19	42.83	39.20	16.15	60.37	0.00	100	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13330.00</td> <td>47.98</td> <td>74.00</td> <td>-26.02</td> <td>52.97</td> <td>39.17</td> <td>16.20</td> <td>60.36</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>13330.00</td> <td>38.05</td> <td>54.00</td> <td>-15.95</td> <td>43.04</td> <td>39.17</td> <td>16.20</td> <td>60.36</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13330.00	47.98	74.00	-26.02	52.97	39.17	16.20	60.36	0.00	300	360	PEAK	2	13330.00	38.05	54.00	-15.95	43.04	39.17	16.20	60.36	0.00	300	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	13330.00	48.05	74.00	-25.95	53.04	39.17	16.20	60.36	0.00	100	360	PEAK																																																																																																
2	13330.00	37.81	54.00	-16.19	42.83	39.20	16.15	60.37	0.00	100	360	AVERAGE																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	13330.00	47.98	74.00	-26.02	52.97	39.17	16.20	60.36	0.00	300	360	PEAK																																																																																																
2	13330.00	38.05	54.00	-15.95	43.04	39.17	16.20	60.36	0.00	300	360	AVERAGE																																																																																																



Mode	45																																																																																	
	Harmonic																																																																																	
	U-NII-7_6.525-6.875_802.11ax HE20_CH185_Full RU_6875MHz																																																																																	
ANT	CDD 3+4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13750.00</td> <td>49.76</td> <td>88.20</td> <td>-38.44</td> <td>54.37</td> <td>38.75</td> <td>16.40</td> <td>59.76</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13750.00	49.76	88.20	-38.44	54.37	38.75	16.40	59.76	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13768.00</td> <td>59.06</td> <td>88.20</td> <td>-29.14</td> <td>63.59</td> <td>38.77</td> <td>16.41</td> <td>59.71</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13768.00	59.06	88.20	-29.14	63.59	38.77	16.41	59.71	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	13750.00	49.76	88.20	-38.44	54.37	38.75	16.40	59.76	0.00	---	---	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	13768.00	59.06	88.20	-29.14	63.59	38.77	16.41	59.71	0.00	---	---	Peak																																																																						



Mode	46																																																																																	
	Harmonic																																																																																	
	U-NII-7_6.525-6.875_802.11ax HE80_CH183_Full RU_6865MHz																																																																																	
ANT	CDD 3+4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13730.00</td> <td>47.29</td> <td>88.20</td> <td>-40.91</td> <td>51.97</td> <td>38.73</td> <td>16.39</td> <td>59.80</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13730.00	47.29	88.20	-40.91	51.97	38.73	16.39	59.80	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13730.00</td> <td>47.68</td> <td>88.20</td> <td>-40.52</td> <td>52.36</td> <td>38.73</td> <td>16.39</td> <td>59.80</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13730.00	47.68	88.20	-40.52	52.36	38.73	16.39	59.80	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	13730.00	47.29	88.20	-40.91	51.97	38.73	16.39	59.80	0.00	---	---	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	13730.00	47.68	88.20	-40.52	52.36	38.73	16.39	59.80	0.00	---	---	PEAK																																																																						



Mode	47																																																																																	
	Harmonic																																																																																	
	U-NII-7_6.525-6.875_802.11ax HE160_CH175_Full RU_6825MHz																																																																																	
ANT	CDD 3+4																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13650.00</td> <td>47.54</td> <td>88.20</td> <td>-40.66</td> <td>52.38</td> <td>38.80</td> <td>16.35</td> <td>59.99</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13650.00	47.54	88.20	-40.66	52.38	38.80	16.35	59.99	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>13650.00</td> <td>47.85</td> <td>88.20</td> <td>-40.35</td> <td>52.69</td> <td>38.80</td> <td>16.35</td> <td>59.99</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	13650.00	47.85	88.20	-40.35	52.69	38.80	16.35	59.99	0.00	---	---	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	13650.00	47.54	88.20	-40.66	52.38	38.80	16.35	59.99	0.00	---	---	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	13650.00	47.85	88.20	-40.35	52.69	38.80	16.35	59.99	0.00	---	---	PEAK																																																																						



Mode	48																																																																																			
	Harmonic																																																																																			
	U-NII-8_6.875-7.125_802.11ax HE20_CH189_Full RU_6895MHz																																																																																			
ANT	CDD 3+4																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>49.36</td> <td>88.20</td> <td>-38.84</td> <td>53.81</td> <td>38.79</td> <td>16.42</td> <td>59.66</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13790.00	49.36	88.20	-38.84	53.81	38.79	16.42	59.66	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 13776.00</td> <td>61.30</td> <td>88.20</td> <td>-26.90</td> <td>65.81</td> <td>38.78</td> <td>16.41</td> <td>59.70</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 13776.00	61.30	88.20	-26.90	65.81	38.78	16.41	59.70	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 13790.00	49.36	88.20	-38.84	53.81	38.79	16.42	59.66	0.00	---	---	PEAK																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 13776.00	61.30	88.20	-26.90	65.81	38.78	16.41	59.70	0.00	---	---	Peak																																																																									







Mode	49																																																																											
	Harmonic																																																																											
	U-NII-8_6.875-7.125_802.11ax HE20_CH209_Full RU_6995MHz																																																																											
ANT	CDD 3+4																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13998.00</td> <td>47.78</td> <td>88.20</td> <td>-40.42</td> <td>51.67</td> <td>38.80</td> <td>16.51</td> <td>59.20</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13998.00	47.78	88.20	-40.42	51.67	38.80	16.51	59.20	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 14000.00</td> <td>59.36</td> <td>88.20</td> <td>-28.84</td> <td>63.22</td> <td>38.80</td> <td>16.52</td> <td>59.18</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 14000.00	59.36	88.20	-28.84	63.22	38.80	16.52	59.18	0.00	--- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 13998.00	47.78	88.20	-40.42	51.67	38.80	16.51	59.20	0.00	--- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 14000.00	59.36	88.20	-28.84	63.22	38.80	16.52	59.18	0.00	--- Peak																																																																			



	50																																																																													
Mode	Band Edge																																																																													
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full RU_7095MHz																																																																													
ANT	CDD 3+4																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7126.92</td> <td>58.34</td> <td>88.20</td> <td>-29.86</td> <td>43.84</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>300 321 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7126.92	58.34	88.20	-29.86	43.84	35.70	11.59	32.79	0.00	300 321 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>104.20</td> <td>-----</td> <td>-----</td> <td>89.72</td> <td>35.69</td> <td>11.56</td> <td>32.77</td> <td>0.00</td> <td>300 321 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	104.20	-----	-----	89.72	35.69	11.56	32.77	0.00	300 321 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7126.92	58.34	88.20	-29.86	43.84	35.70	11.59	32.79	0.00	300 321 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7095.00	104.20	-----	-----	89.72	35.69	11.56	32.77	0.00	300 321 PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7128.36</td> <td>47.45</td> <td>68.20</td> <td>-20.75</td> <td>32.95</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>300 321 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7128.36	47.45	68.20	-20.75	32.95	35.70	11.59	32.79	0.00	300 321 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>93.08</td> <td>-----</td> <td>-----</td> <td>78.60</td> <td>35.69</td> <td>11.56</td> <td>32.77</td> <td>0.00</td> <td>300 321 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	93.08	-----	-----	78.60	35.69	11.56	32.77	0.00	300 321 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7128.36	47.45	68.20	-20.75	32.95	35.70	11.59	32.79	0.00	300 321 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7095.00	93.08	-----	-----	78.60	35.69	11.56	32.77	0.00	300 321 AVERAGE																																																																					

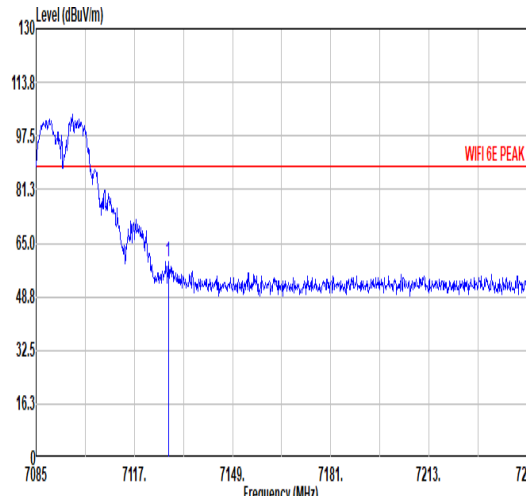
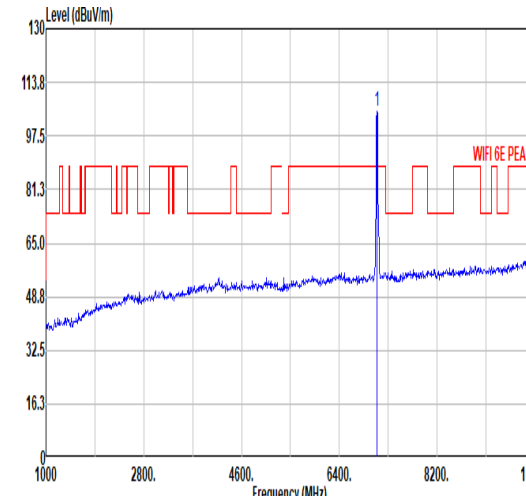
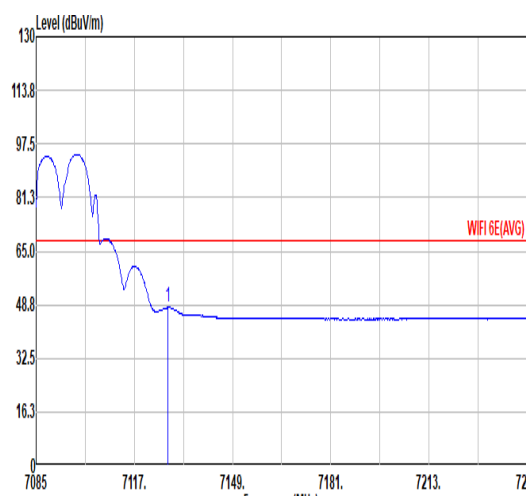
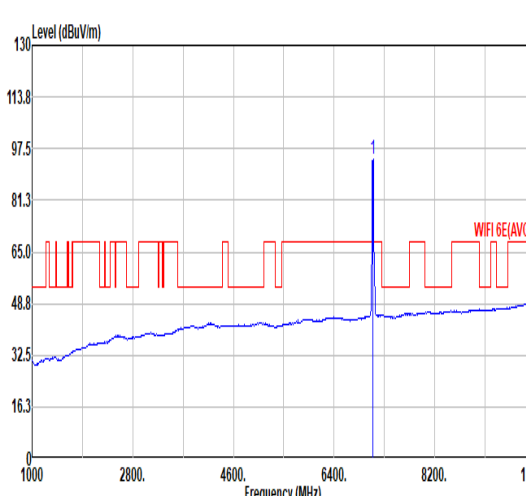


50																																								
Mode	Band Edge																																							
U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full RU_7095MHz																																								
ANT	CDD 3+4																																							
Pol.	Vertical																																							
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Peak. The plot shows a signal level starting around 97.5 dBuV/m at 7085 MHz and decreasing to approximately 48.8 dBuV/m at 7245 MHz. A red horizontal line indicates the 'WIFI 6E PEAK' limit at approximately 81.3 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7128.04</td> <td>59.34</td> <td>88.20</td> <td>-28.86</td> <td>44.84</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>100</td> <td>236 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7128.04	59.34	88.20	-28.86	44.84	35.70	11.59	32.79	0.00	100	236 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 7128.04	59.34	88.20	-28.86	44.84	35.70	11.59	32.79	0.00	100	236 PEAK																														
Fundamental	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a signal level starting around 48.8 dBuV/m at 1000 MHz and increasing to approximately 97.5 dBuV/m at 10000 MHz. A red horizontal line indicates the 'WIFI 6E PEAK' limit at approximately 81.3 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>104.84</td> <td>-----</td> <td>-----</td> <td>90.36</td> <td>35.69</td> <td>11.56</td> <td>32.77</td> <td>0.00</td> <td>100</td> <td>236 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	104.84	-----	-----	90.36	35.69	11.56	32.77	0.00	100	236 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 7095.00	104.84	-----	-----	90.36	35.69	11.56	32.77	0.00	100	236 PEAK																														
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Avg. The plot shows a signal level starting around 97.5 dBuV/m at 7085 MHz and decreasing to approximately 48.8 dBuV/m at 7245 MHz. A red horizontal line indicates the 'WIFI 6E(AVG)' limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7127.88</td> <td>47.91</td> <td>68.20</td> <td>-20.29</td> <td>33.41</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>100</td> <td>236 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7127.88	47.91	68.20	-20.29	33.41	35.70	11.59	32.79	0.00	100	236 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 7127.88	47.91	68.20	-20.29	33.41	35.70	11.59	32.79	0.00	100	236 AVERAGE																														
Fundamental	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Avg. The plot shows a signal level starting around 48.8 dBuV/m at 1000 MHz and increasing to approximately 97.5 dBuV/m at 10000 MHz. A red horizontal line indicates the 'WIFI 6E(AVG)' limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>94.14</td> <td>-----</td> <td>-----</td> <td>79.65</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100</td> <td>236 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	94.14	-----	-----	79.65	35.70	11.57	32.78	0.00	100	236 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 7095.00	94.14	-----	-----	79.65	35.70	11.57	32.78	0.00	100	236 AVERAGE																														







Mode	50																																																																											
	Harmonic																																																																											
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full RU_7095MHz																																																																											
ANT	CDD 3+4																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 14190.00</td> <td>47.74</td> <td>88.20</td> <td>-40.46</td> <td>51.39</td> <td>39.09</td> <td>16.65</td> <td>59.39</td> <td>0.00</td> <td>--- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 14190.00	47.74	88.20	-40.46	51.39	39.09	16.65	59.39	0.00	--- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 14192.00</td> <td>58.65</td> <td>88.20</td> <td>-29.55</td> <td>62.30</td> <td>39.09</td> <td>16.65</td> <td>59.39</td> <td>0.00</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 14192.00	58.65	88.20	-29.55	62.30	39.09	16.65	59.39	0.00	--- Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 14190.00	47.74	88.20	-40.46	51.39	39.09	16.65	59.39	0.00	--- PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																				
1 14192.00	58.65	88.20	-29.55	62.30	39.09	16.65	59.39	0.00	--- Peak																																																																			

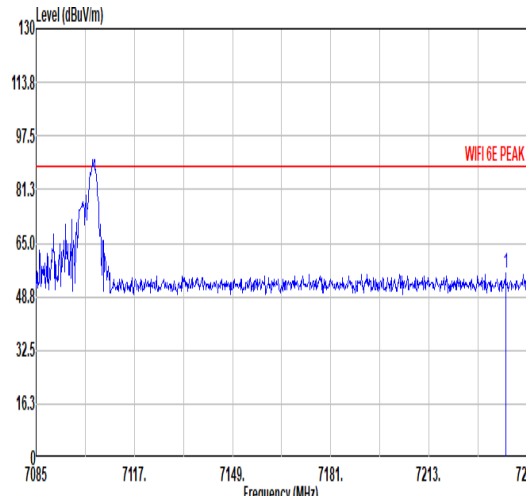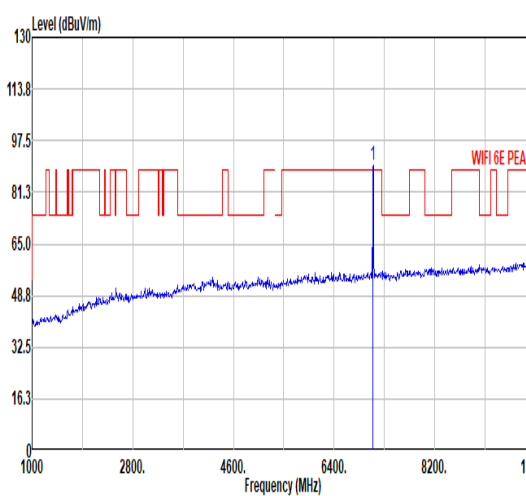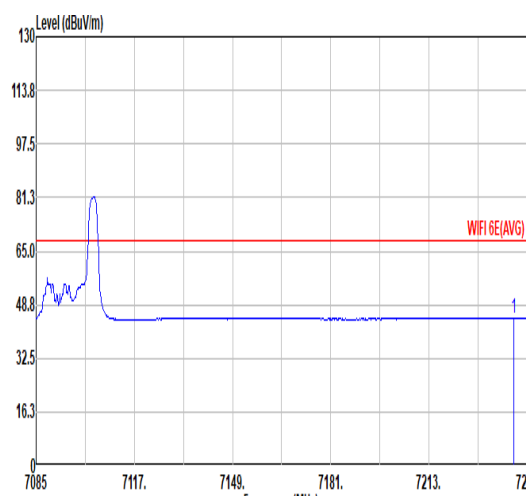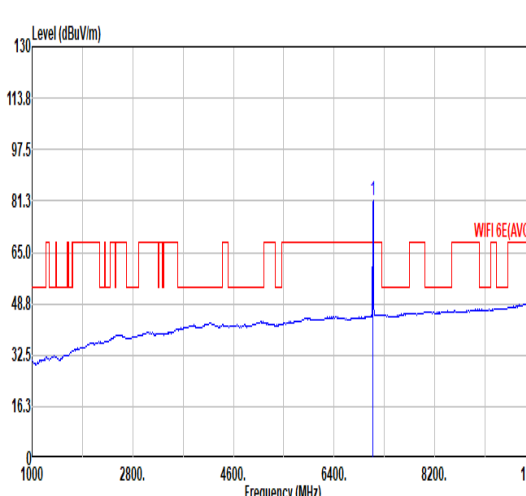

		51																																																																												
Mode		Band Edge																																																																												
		U-NII-8_6.875-7.125_802.11ax HE20_CH229_Partial_RU26/8_7095MHz																																																																												
ANT		CDD 3+4																																																																												
Pol.	Horizontal	Fundamental																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. Shows a peak at 7237.96 MHz. A red horizontal line indicates the limit at 81.3 dBuV/m. The plot is labeled 'WIFI 6E PEAK'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7237.96</td> <td>55.90</td> <td>88.20</td> <td>-32.30</td> <td>41.35</td> <td>35.75</td> <td>11.66</td> <td>32.86</td> <td>0.00</td> <td>100 220 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7237.96	55.90	88.20	-32.30	41.35	35.75	11.66	32.86	0.00	100 220 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Shows a peak at 7095.00 MHz. A red horizontal line indicates the limit at 81.3 dBuV/m. The plot is labeled 'WIFI 6E PEAK'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>89.97</td> <td>-----</td> <td>-----</td> <td>75.48</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100 220 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	89.97	-----	-----	75.48	35.70	11.57	32.78	0.00	100 220 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7237.96	55.90	88.20	-32.30	41.35	35.75	11.66	32.86	0.00	100 220 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7095.00	89.97	-----	-----	75.48	35.70	11.57	32.78	0.00	100 220 PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Horizontal polarization. Shows a peak at 7240.68 MHz. A red horizontal line indicates the limit at 65.0 dBuV/m. The plot is labeled 'WIFI 6E(AVG)'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7240.68</td> <td>44.63</td> <td>68.20</td> <td>-23.57</td> <td>30.07</td> <td>35.76</td> <td>11.66</td> <td>32.86</td> <td>0.00</td> <td>100 220 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7240.68	44.63	68.20	-23.57	30.07	35.76	11.66	32.86	0.00	100 220 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Fundamental polarization. Shows a peak at 7095.00 MHz. A red horizontal line indicates the limit at 65.0 dBuV/m. The plot is labeled 'WIFI 6E(AVG)'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>81.21</td> <td>-----</td> <td>-----</td> <td>66.72</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100 220 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	81.21	-----	-----	66.72	35.70	11.57	32.78	0.00	100 220 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7240.68	44.63	68.20	-23.57	30.07	35.76	11.66	32.86	0.00	100 220 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7095.00	81.21	-----	-----	66.72	35.70	11.57	32.78	0.00	100 220 AVERAGE																																																																					

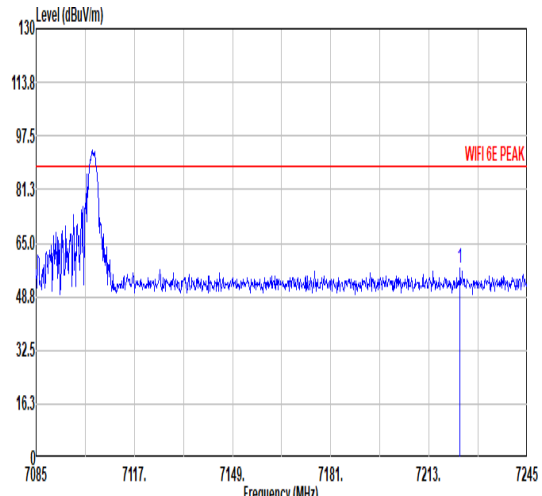
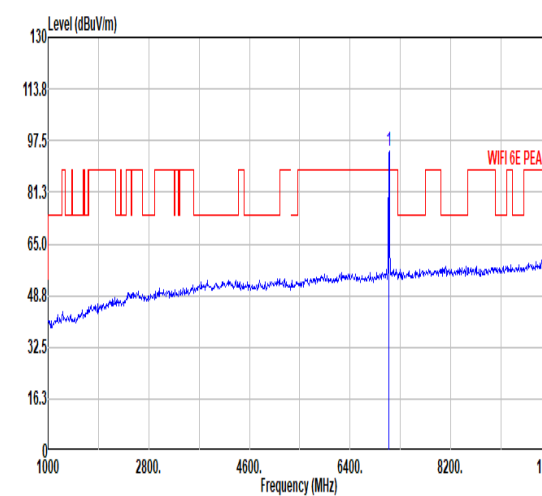
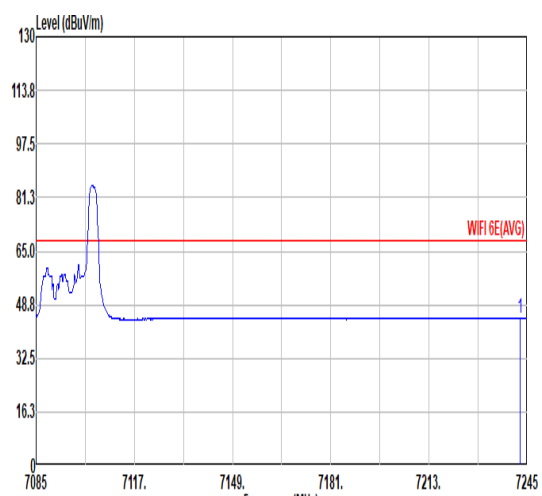
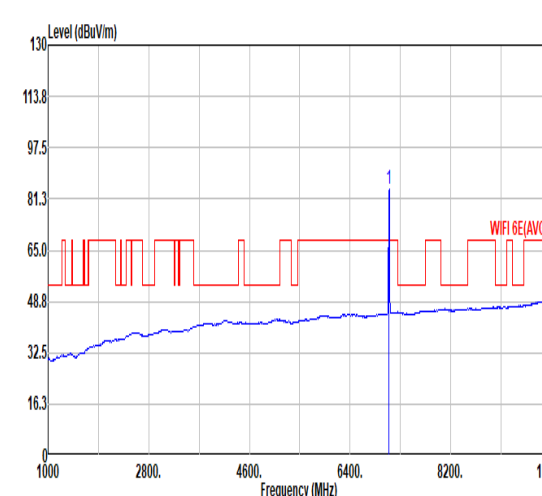


		51																																																																																		
Mode	Band Edge																																																																																			
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Partial_RU26/8_7095MHz																																																																																			
ANT	CDD 3+4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI 6E PEAK</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7223.08</td> <td>57.16</td> <td>88.20</td> <td>-31.04</td> <td>42.66</td> <td>35.69</td> <td>11.66</td> <td>32.85</td> <td>0.00</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7223.08	57.16	88.20	-31.04	42.66	35.69	11.66	32.85	0.00	100	118	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI 6E PEAK</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>94.00</td> <td>-----</td> <td>-----</td> <td>79.51</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100</td> <td>118</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	94.00	-----	-----	79.51	35.70	11.57	32.78	0.00	100	118	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7223.08	57.16	88.20	-31.04	42.66	35.69	11.66	32.85	0.00	100	118	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7095.00	94.00	-----	-----	79.51	35.70	11.57	32.78	0.00	100	118	PEAK																																																																								
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7242.76</td> <td>44.71</td> <td>68.20</td> <td>-23.49</td> <td>30.14</td> <td>35.77</td> <td>11.66</td> <td>32.86</td> <td>0.00</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7242.76	44.71	68.20	-23.49	30.14	35.77	11.66	32.86	0.00	100	118	AVERAGE	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>WIFI 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>84.55</td> <td>-----</td> <td>-----</td> <td>70.06</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100</td> <td>118</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	84.55	-----	-----	70.06	35.70	11.57	32.78	0.00	100	118	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7242.76	44.71	68.20	-23.49	30.14	35.77	11.66	32.86	0.00	100	118	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7095.00	84.55	-----	-----	70.06	35.70	11.57	32.78	0.00	100	118	AVERAGE																																																																								







		52																																																																								
Mode	Band Edge																																																																									
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Partial_RU52/40_7095MHz																																																																									
ANT	CDD 3+4																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak																																																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7127.72</td> <td>55.81</td> <td>88.20</td> <td>-32.39</td> <td>41.31</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>118</td> <td>221</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 7127.72	55.81	88.20	-32.39	41.31	35.70	11.59	32.79	0.00	118	221	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>90.27</td> <td>-----</td> <td>-----</td> <td>75.78</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>118</td> <td>221</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 7095.00	90.27	-----	-----	75.78	35.70	11.57	32.78	0.00	118	221
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 7127.72	55.81	88.20	-32.39	41.31	35.70	11.59	32.79	0.00	118	221	PEAK																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 7095.00	90.27	-----	-----	75.78	35.70	11.57	32.78	0.00	118	221	PEAK																																																															
Avg																																																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7244.04</td> <td>44.55</td> <td>68.20</td> <td>-23.65</td> <td>29.97</td> <td>35.78</td> <td>11.66</td> <td>32.86</td> <td>0.00</td> <td>118</td> <td>221</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 7244.04	44.55	68.20	-23.65	29.97	35.78	11.66	32.86	0.00	118	221	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>81.64</td> <td>-----</td> <td>-----</td> <td>67.15</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>118</td> <td>221</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 7095.00	81.64	-----	-----	67.15	35.70	11.57	32.78	0.00	118	221
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 7244.04	44.55	68.20	-23.65	29.97	35.78	11.66	32.86	0.00	118	221	AVERAGE																																																															
Limit	Read	Ant	Cable	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 7095.00	81.64	-----	-----	67.15	35.70	11.57	32.78	0.00	118	221	AVERAGE																																																															

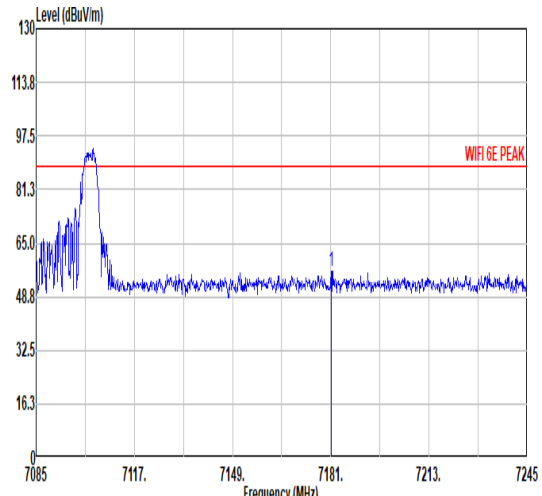
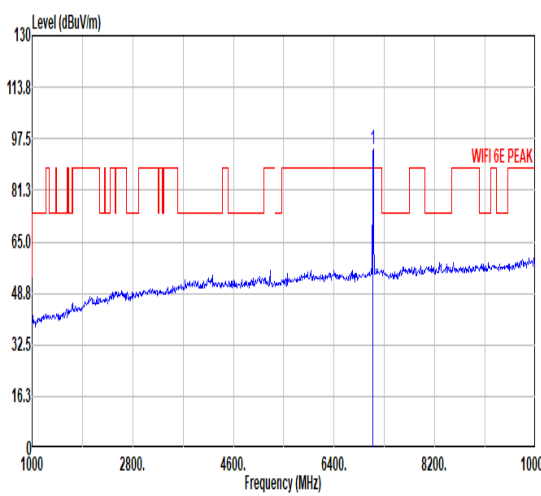
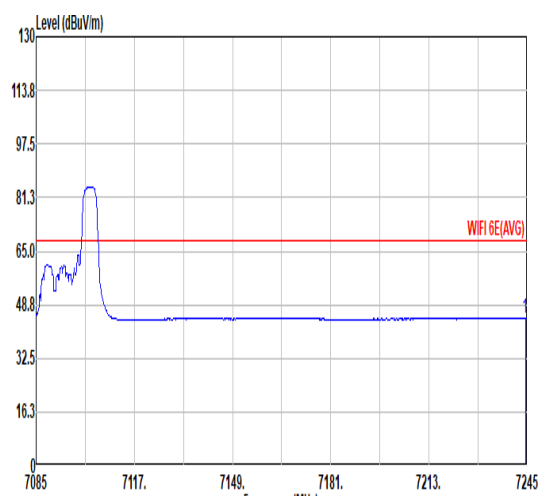
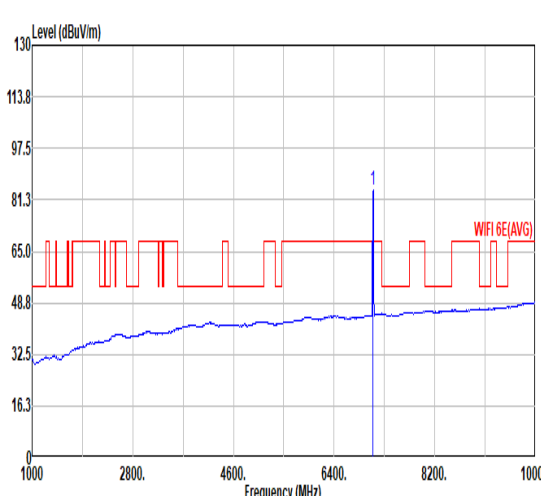


		52																																																																																		
Mode	Band Edge																																																																																			
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Partial_RU52/40_7095MHz																																																																																			
ANT	CDD 3+4																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 16.3 0</p> <p>7085 7117. 7149. 7181. 7213. 7245</p> <p style="text-align: center;">Frequency (MHz)</p> <p style="text-align: right; color: red;">WIFI 6E PEAK</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7181.16</td> <td>56.58</td> <td>88.20</td> <td>-31.62</td> <td>42.13</td> <td>35.64</td> <td>11.63</td> <td>32.82</td> <td>0.00</td> <td>100</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7181.16	56.58	88.20	-31.62	42.13	35.64	11.63	32.82	0.00	100	117	PEAK	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 16.3 0</p> <p>1000 2800. 4600. 6400. 8200. 10000</p> <p style="text-align: center;">Frequency (MHz)</p> <p style="text-align: right; color: red;">WIFI 6E PEAK</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>94.43</td> <td>.....</td> <td>.....</td> <td>79.94</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100</td> <td>117</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	94.43	79.94	35.70	11.57	32.78	0.00	100	117	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7181.16	56.58	88.20	-31.62	42.13	35.64	11.63	32.82	0.00	100	117	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7095.00	94.43	79.94	35.70	11.57	32.78	0.00	100	117	PEAK																																																																								
Avg	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 16.3 0</p> <p>7085 7117. 7149. 7181. 7213. 7245</p> <p style="text-align: center;">Frequency (MHz)</p> <p style="text-align: right; color: red;">WIFI 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7244.36</td> <td>44.61</td> <td>68.20</td> <td>-23.59</td> <td>30.03</td> <td>35.78</td> <td>11.66</td> <td>32.86</td> <td>0.00</td> <td>100</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7244.36	44.61	68.20	-23.59	30.03	35.78	11.66	32.86	0.00	100	117	AVERAGE	 <p>Level (dBuV/m)</p> <p>130 113.8 97.5 81.3 65.0 48.8 16.3 0</p> <p>1000 2800. 4600. 6400. 8200. 10000</p> <p style="text-align: center;">Frequency (MHz)</p> <p style="text-align: right; color: red;">WIFI 6E(AVG)</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>84.46</td> <td>.....</td> <td>.....</td> <td>69.97</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100</td> <td>117</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	84.46	69.97	35.70	11.57	32.78	0.00	100	117	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7244.36	44.61	68.20	-23.59	30.03	35.78	11.66	32.86	0.00	100	117	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	7095.00	84.46	69.97	35.70	11.57	32.78	0.00	100	117	AVERAGE																																																																								

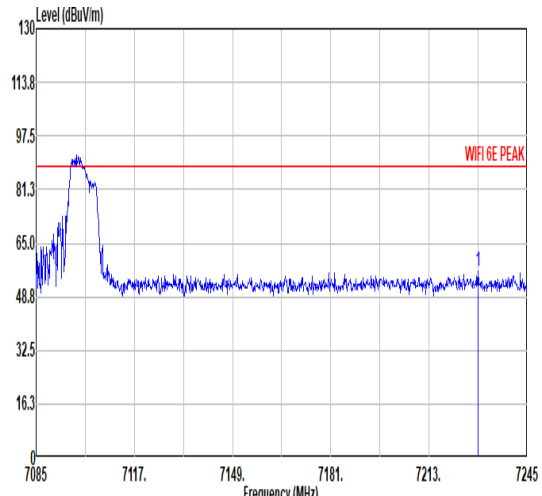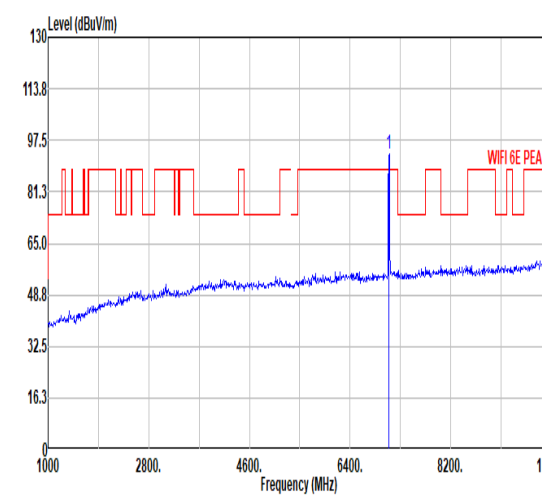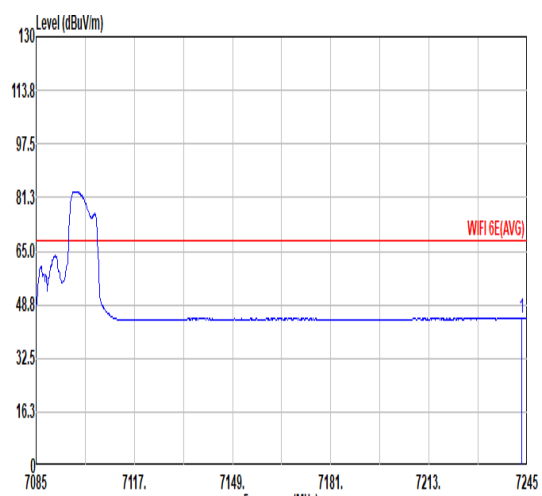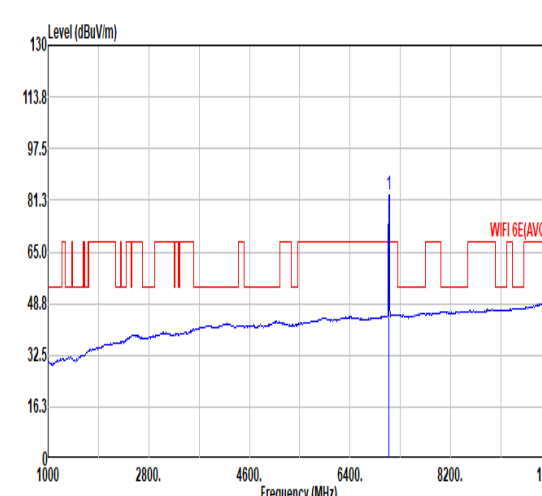

		53																																																																												
Mode	Band Edge																																																																													
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Partial_RU106/54_7095MHz																																																																													
ANT	CDD 3+4																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 7085 to 7245 MHz. A red horizontal line indicates the 'WIFI 6E PEAK' limit at approximately 81.3 dBuV/m. The blue trace shows a peak at 7229.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7229.00</td> <td>56.52</td> <td>88.20</td> <td>-31.68</td> <td>41.99</td> <td>35.72</td> <td>11.66</td> <td>32.85</td> <td>0.00</td> <td>300 326 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7229.00	56.52	88.20	-31.68	41.99	35.72	11.66	32.85	0.00	300 326 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line indicates the 'WIFI 6E PEAK' limit at approximately 81.3 dBuV/m. The blue trace shows a peak at 7095.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>93.00</td> <td>-----</td> <td>-----</td> <td>78.51</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>300 326 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	93.00	-----	-----	78.51	35.70	11.57	32.78	0.00	300 326 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7229.00	56.52	88.20	-31.68	41.99	35.72	11.66	32.85	0.00	300 326 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7095.00	93.00	-----	-----	78.51	35.70	11.57	32.78	0.00	300 326 PEAK																																																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 7085 to 7245 MHz. A red horizontal line indicates the 'WIFI 6E(AVG)' limit at approximately 68.20 dBuV/m. The blue trace shows an average level at 7243.24 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7243.24</td> <td>44.56</td> <td>68.20</td> <td>-23.64</td> <td>29.99</td> <td>35.77</td> <td>11.66</td> <td>32.86</td> <td>0.00</td> <td>300 326 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7243.24	44.56	68.20	-23.64	29.99	35.77	11.66	32.86	0.00	300 326 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 10000 MHz. A red horizontal line indicates the 'WIFI 6E(AVG)' limit at approximately 68.20 dBuV/m. The blue trace shows an average level at 7095.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>82.89</td> <td>-----</td> <td>-----</td> <td>68.40</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>300 326 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	82.89	-----	-----	68.40	35.70	11.57	32.78	0.00	300 326 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7243.24	44.56	68.20	-23.64	29.99	35.77	11.66	32.86	0.00	300 326 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 7095.00	82.89	-----	-----	68.40	35.70	11.57	32.78	0.00	300 326 AVERAGE																																																																					

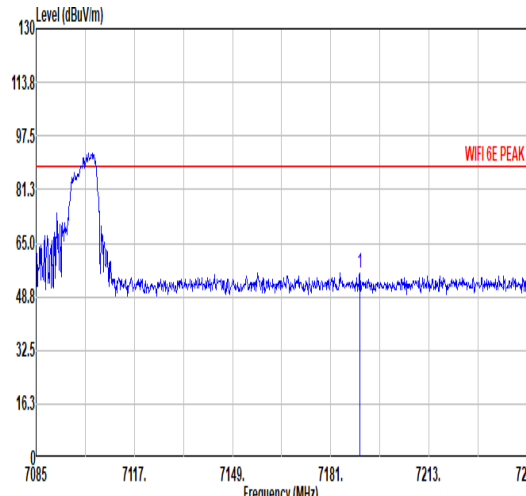
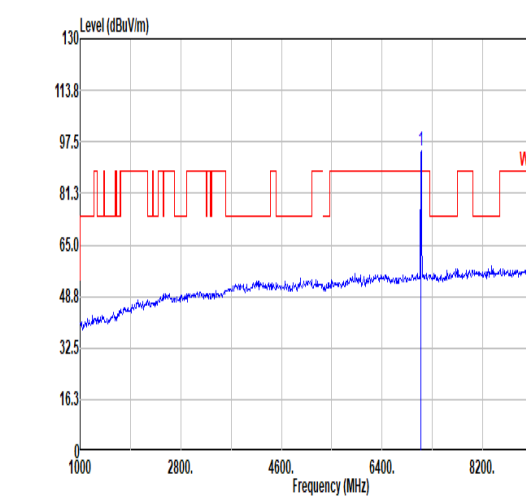
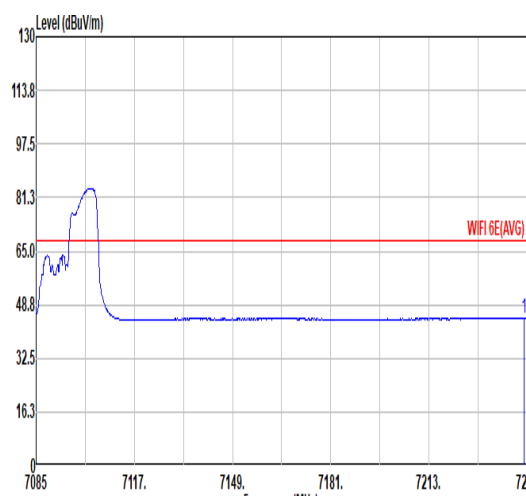
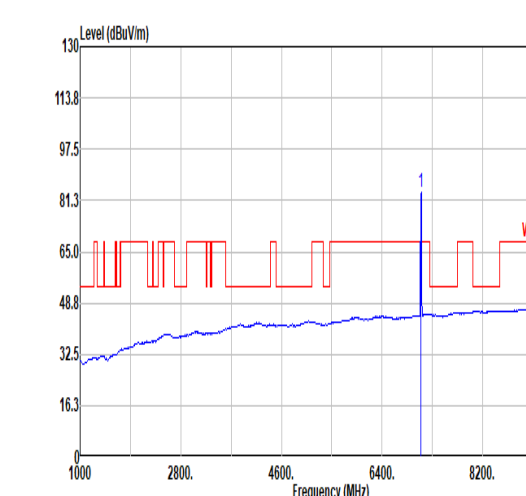


		53																																																																														
Mode	Band Edge																																																																															
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Partial_RU106/54_7095MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal peaking at approximately 7095 MHz. A red horizontal line indicates the 'WIFI 6E PEAK' limit at 81.3 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7190.44</td> <td>55.97</td> <td>88.20</td> <td>-32.23</td> <td>41.54</td> <td>35.62</td> <td>11.64</td> <td>32.83</td> <td>0.00</td> <td>100</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7190.44	55.97	88.20	-32.23	41.54	35.62	11.64	32.83	0.00	100	117 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal peaking at approximately 7095 MHz. A red horizontal line indicates the 'WIFI 6E PEAK' limit at 81.3 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>94.49</td> <td>-----</td> <td>-----</td> <td>80.00</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100</td> <td>117 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	94.49	-----	-----	80.00	35.70	11.57	32.78	0.00	100	117 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 7190.44	55.97	88.20	-32.23	41.54	35.62	11.64	32.83	0.00	100	117 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 7095.00	94.49	-----	-----	80.00	35.70	11.57	32.78	0.00	100	117 PEAK																																																																						
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows the average signal level. A red horizontal line indicates the 'WIFI 6E(AVG)' limit at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7243.88</td> <td>44.57</td> <td>68.20</td> <td>-23.63</td> <td>29.99</td> <td>35.78</td> <td>11.66</td> <td>32.86</td> <td>0.00</td> <td>100</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7243.88	44.57	68.20	-23.63	29.99	35.78	11.66	32.86	0.00	100	117 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows the average signal level. A red horizontal line indicates the 'WIFI 6E(AVG)' limit at 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 7095.00</td> <td>83.78</td> <td>-----</td> <td>-----</td> <td>69.29</td> <td>35.70</td> <td>11.57</td> <td>32.78</td> <td>0.00</td> <td>100</td> <td>117 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	83.78	-----	-----	69.29	35.70	11.57	32.78	0.00	100	117 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 7243.88	44.57	68.20	-23.63	29.99	35.78	11.66	32.86	0.00	100	117 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 7095.00	83.78	-----	-----	69.29	35.70	11.57	32.78	0.00	100	117 AVERAGE																																																																						



Mode	54																																																																															
	Harmonic																																																																															
	U-NII-8_6.875-7.125_802.11ax HE40_CH203_Full RU_6965MHz																																																																															
ANT	CDD 3+4																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13930.00</td> <td>47.31</td> <td>88.20</td> <td>-40.89</td> <td>51.37</td> <td>38.80</td> <td>16.48</td> <td>59.34</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13930.00	47.31	88.20	-40.89	51.37	38.80	16.48	59.34	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13928.00</td> <td>57.66</td> <td>88.20</td> <td>-30.54</td> <td>61.73</td> <td>38.80</td> <td>16.48</td> <td>59.35</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 13928.00	57.66	88.20	-30.54	61.73	38.80	16.48	59.35	0.00	---	---	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13930.00	47.31	88.20	-40.89	51.37	38.80	16.48	59.34	0.00	---	---	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1 13928.00	57.66	88.20	-30.54	61.73	38.80	16.48	59.35	0.00	---	---	Peak																																																																					

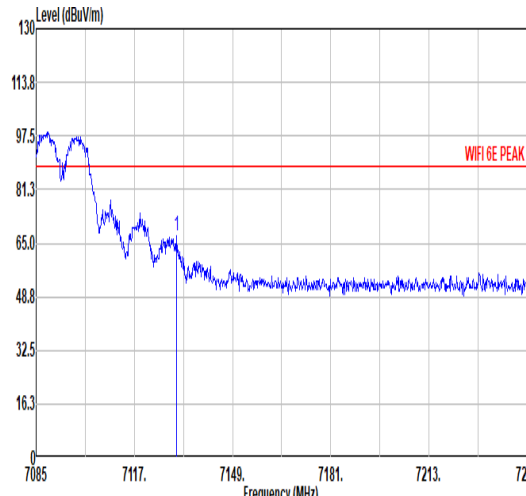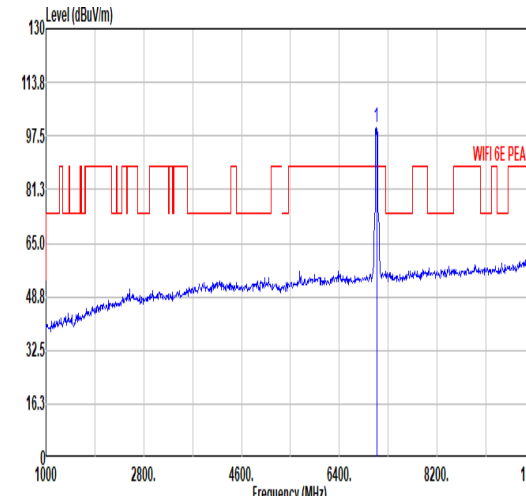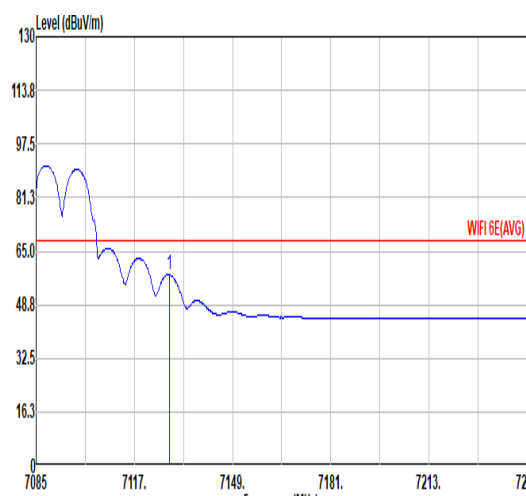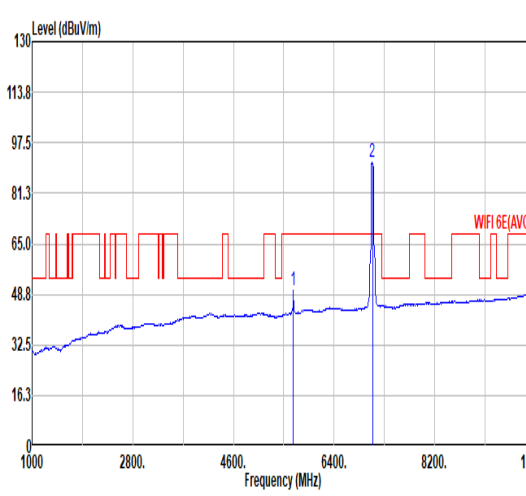

		55																																																																																																		
Mode	Band Edge																																																																																																			
	U-NII-8_6.875-7.125_802.11ax HE40_CH227_Full RU_7085MHz																																																																																																			
ANT	CDD 3+4																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																		
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. Shows a peak at 7130.76 MHz. A red horizontal line indicates the WiFi 6E PEAK limit at approximately 97.5 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7130.76</td> <td>67.34</td> <td>88.20</td> <td>-20.86</td> <td>52.84</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>308</td> <td>323</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7130.76	67.34	88.20	-20.86	52.84	35.70	11.59	32.79	0.00	308	323	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Shows a peak at 7085.00 MHz. A red horizontal line indicates the WiFi 6E PEAK limit at approximately 97.5 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>100.22</td> <td>-</td> <td>-</td> <td>85.78</td> <td>35.65</td> <td>11.55</td> <td>32.76</td> <td>0.00</td> <td>308</td> <td>323</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7085.00	100.22	-	-	85.78	35.65	11.55	32.76	0.00	308	323	PEAK																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	7130.76	67.34	88.20	-20.86	52.84	35.70	11.59	32.79	0.00	308	323	PEAK																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	7085.00	100.22	-	-	85.78	35.65	11.55	32.76	0.00	308	323	PEAK																																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Horizontal polarization. Shows a peak at 7128.36 MHz. A red horizontal line indicates the WiFi 6E(AVG) limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7128.36</td> <td>57.77</td> <td>68.20</td> <td>-10.43</td> <td>43.27</td> <td>35.70</td> <td>11.59</td> <td>32.79</td> <td>0.00</td> <td>308</td> <td>323</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7128.36	57.77	68.20	-10.43	43.27	35.70	11.59	32.79	0.00	308	323	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Fundamental polarization. Shows two peaks at 5671.00 MHz and 7085.00 MHz. A red horizontal line indicates the WiFi 6E(AVG) limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5671.00</td> <td>49.91</td> <td>-</td> <td>-</td> <td>37.05</td> <td>34.64</td> <td>10.30</td> <td>32.08</td> <td>0.00</td> <td>308</td> <td>323</td> <td>AVERAGE</td> </tr> <tr> <td>2</td> <td>7085.00</td> <td>91.09</td> <td>-</td> <td>-</td> <td>76.65</td> <td>35.65</td> <td>11.55</td> <td>32.76</td> <td>0.00</td> <td>308</td> <td>323</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5671.00	49.91	-	-	37.05	34.64	10.30	32.08	0.00	308	323	AVERAGE	2	7085.00	91.09	-	-	76.65	35.65	11.55	32.76	0.00	308	323	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	7128.36	57.77	68.20	-10.43	43.27	35.70	11.59	32.79	0.00	308	323	AVERAGE																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5671.00	49.91	-	-	37.05	34.64	10.30	32.08	0.00	308	323	AVERAGE																																																																																								
2	7085.00	91.09	-	-	76.65	35.65	11.55	32.76	0.00	308	323	AVERAGE																																																																																								