



Appendix F. FCC 3G SAR Measurement Procedures

Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT supports WCDMA and HSPA function. A detailed analysis of the output power for all WCDMA, HSPDA, and HSPA (HSUPA & HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures, and the EUT does not support VOIP function over the HSPA function. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table.

<without Power Reduction>


WCDMA SAR Test mode - Conducted Power							
Mode	Setup	Cell band (850)			PCS band (1900)		
		CH4132	CH4182	CH4233	CH9262	CH9400	CH9538
		826.4 (MHz)	836.4 (MHz)	846.6 (MHz)	1852.4 (MHz)	1880.0 (MHz)	1907.6 (MHz)
WCDMA	RMC 12.2Kbps	23.19	23.25	23.19	23.05	23.03	22.91
HSDPA	Subtest 1	23.34	23.39	23.33	22.33	22.26	22.15
	Subtest 2	23.32	23.36	23.32	22.29	22.25	22.11
	Subtest 3	22.78	22.86	22.77	21.76	21.74	21.50
	Subtest 4	22.76	22.86	22.78	21.82	21.77	21.63
HSUPA	Subtest 1	22.20	22.29	22.27	22.22	22.18	22.04
	Subtest 2	20.18	20.24	20.22	20.21	20.29	20.15
	Subtest 3	20.26	21.26	20.41	21.21	21.19	21.01
	Subtest 4	20.17	20.22	20.23	20.18	20.10	20.05
	Subtest 5	22.07	21.82	22.29	22.20	22.14	22.02

<with Power Reduction>

WCDMA SAR Test mode - Conducted Power							
Mode	Setup	Cell band (850)			PCS band (1900)		
		CH4132	CH4182	CH4233	CH9262	CH9400	CH9538
		826.4 (MHz)	836.4 (MHz)	846.6 (MHz)	1852.4 (MHz)	1880.0 (MHz)	1907.6 (MHz)
WCDMA	RMC 12.2Kbps	19.23	19.27	19.26	19.09	19.06	18.91
HSDPA	Subtest 1	19.36	19.46	19.35	18.39	18.59	18.15
	Subtest 2	19.41	19.38	19.63	18.29	18.25	18.11
	Subtest 3	18.80	18.90	18.79	17.76	17.76	17.56
	Subtest 4	18.77	18.88	18.83	17.86	17.77	17.63
HSUPA	Subtest 1	19.01	19.18	19.25	18.27	18.21	18.02
	Subtest 2	17.12	17.08	17.18	16.27	16.18	16.20
	Subtest 3	18.11	18.19	18.20	16.76	17.20	17.11
	Subtest 4	17.15	17.13	17.18	16.18	16.21	16.17
	Subtest 5	19.12	19.20	19.14	18.21	18.18	18.01

WCDMA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
 - i. Data rates: Varied from RMC 12.2Kbps
 - ii. RMC Test Loop = Loop Mode 1
 - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

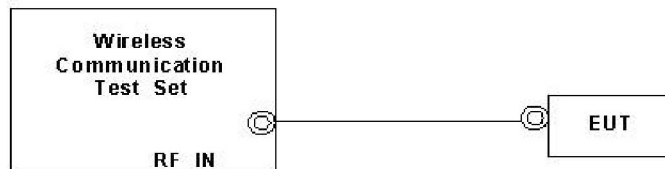

Setup Configuration

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d=12/15, \beta_{HS}/\beta_c=24/15$. For all other combinations of DPDCCH, DPCCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSPA (HSUPA & HSPDA) Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d=12/15, \beta_{HS}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

Note: For details settings in the Agilent 8960 test equipment, please refer to the user guide “ HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18”



Call Setup Screen			
Call Control	Active Cell Operating Mode		Call Parms
Channel (UARFCN) Info	UE Information		Cell Power
	INSI: INEI: Power Class:		-86.00
Cell Parameters	UE Expected Open Loop Transmit Power		dBm/3.84 MHz
	Initial PRACH TX Power: -11.70 dBm Initial DPCCH TX Power: -0.56 dBm		Channel Type
Generator Info	Uplink Parameters		12.2k + HSPA
	Value		Paging Service
Uplink Parameters	PRACH Preambles	64	RB Test Mode
	PRACH Ramping Cycles(NMAX)	2	
UE Rep Neas	Available Subchannels (Bit Mask)	000000000001	HSPA Parameters
	Uplink DPCH Scrambling Code	0	
Close Menu	Uplink DPCH Bc/Bd Control	Manual	34,121 Preset Call Configs
	Manual Uplink DPCH Bc	11	
2 of 4	Manual Uplink DPCH Bd	15	Channel (UARFCN) Parms
	Maximum Uplink Transmit Power Level	21 dBm	
Active Cell		Sys Type: UTRA FDD	1 of 3
Idle			
	IntRef	Offset	

Example for HSPA Subtest 1, and other subtests following table, C11.1.3 (Gain Factors ($\beta_c = 11$ and $\beta_d = 15$))

Call Setup Screen			
Call Control	Active Cell Operating Mode		Serving Grant
Additional Screens	UE Information		AG Mode
	INSI: INEI: Power Class:		Single Shot
Cell Parameters	UE Expected Open Loop Transmit Power		Single Shot AG
	Initial PRACH TX Power: -11.70 dBm Initial DPCCH TX Power: -0.56 dBm		20: (119/15)^2
Generator Info	Call Processing Status		Send Single Shot Absolute Grant
	Current Service Type: None RII Status: GIII State: Current DPCH		Send Relative Grant Up
Uplink Parameters	Abs Single Shot AG Index 15: (67/15)^2 Index 16: (75/15)^2 Index 17: (84/15)^2 Index 18: (95/15)^2 Index 19: (106/15)^2 Index 20: (119/15)^2		Send Relative Grant Down
	HSUPA In UE Rep E-DCH Last Received Throughput: ACKs Transmitted		Return
Trig Output Setup Sys Frame Clock	Active Cell		Sys Type: UTRA FDD
	Idle		
2 of 4	IntRef	Offset	1 of 2

Example: AG – Index = 20 for HSPA subtest 1



Call Setup Screen		
Screen Ctrl	Recorded E-TFCI Information	E-TFCI Record
Channel (UARFCN) Info	E-TFCI Recording State	E-TFCI Rec Count
	Idle	15
HSPA Information	Recorded E-TFCI Values	Start Recording E-TFCI Values
E-TFCI Recording Information	1: 75 11: 75 21: ---- 31: ---- 41: ---- 2: 75 12: 75 22: ---- 32: ---- 42: ---- 3: 75 13: 75 23: ---- 33: ---- 43: ---- 4: 75 14: 75 24: ---- 34: ---- 44: ---- 5: 75 15: 75 25: ---- 35: ---- 45: ---- 6: 75 16: ---- 26: ---- 36: ---- 46: ---- 7: 75 17: ---- 27: ---- 37: ---- 47: ---- 8: 75 18: ---- 28: ---- 38: ---- 48: ---- 9: 75 19: ---- 29: ---- 39: ---- 49: ---- 10: 75 20: ---- 30: ---- 40: ---- 50: ----	
Clear UE Info	15/15	Send Step Up TPC Bit Pattern
Return		Send Step Down TPC Bit Pattern
	<input type="checkbox"/> Background Active Cell Connected IntRef Offset	Sys Type: UTRA FDD

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1

Reference:

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18