

TEST REPORT

Report No.: BCTC2306902327-2E

Applicant: Shenzhen Dsenbor Technology Co., Ltd.

Product Name: 3-in-1 Magnetic Wireless Charging Stand

Model/Type Ref.: T600-F

Tested Date: 2023-06-20 to 2023-06-26

Issued Date: 2023-07-05

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A5RCT600-F

Product Name: 3-in-1 Magnetic Wireless Charging Stand

Trademark: N/A

Model/Type Ref.: T600-F, T602-F, T603-F, T605-F, T606-F, T607-F, T608-F, T609-F, T611-F, T612-F, T613-F, T614-F, T615-F, T617-F, T619-F, T700-F, T323, T324, LMS201, LMS301

Prepared For: Shenzhen Dsenbor Technology Co., Ltd.

Address: No.13, Feimei RD, Zhuyangkeng Village, Liulian Community, Pingshan St., Pingshan District, Shenzhen China

Manufacturer: Shenzhen Dsenbor Technology Co., Ltd.

Address: No.13, Feimei RD, Zhuyangkeng Village, Liulian Community, Pingshan St., Pingshan District, Shenzhen China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2023-06-20


Sample tested Date: 2023-06-20 to 2023-06-26

Report No.: BCTC2306902327-2E

Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310
KDB 680106 D01 RF Exposure Wireless Charging App v03r01

Test Results: PASS

Tested by:

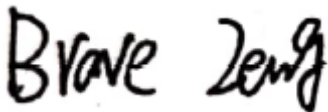

Brave Zeng/ Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table of Content

Test Report Declaration	Page
1. Version	4
2. Product Information	5
2.1 Product Information.....	5
2.2 Support Equipment	5
2.3 Test Mode	6
3. Test Facility and Test Instrument Used	7
3.1 Test Facility	7
3.2 Test Instrument Used.....	7
4. Method Of Measurement.....	8
4.1 Applicable Standard	8
4.2 Block Diagram Of Test Setup.....	8
4.3 Limit	9
4.4 Test Procedure	9
4.5 The EUT does comply with item 5(b) of KDB 680106 D01v03.....	10
4.6 E And H Field Strength	11
5. Photographs of Test Set-Up	12

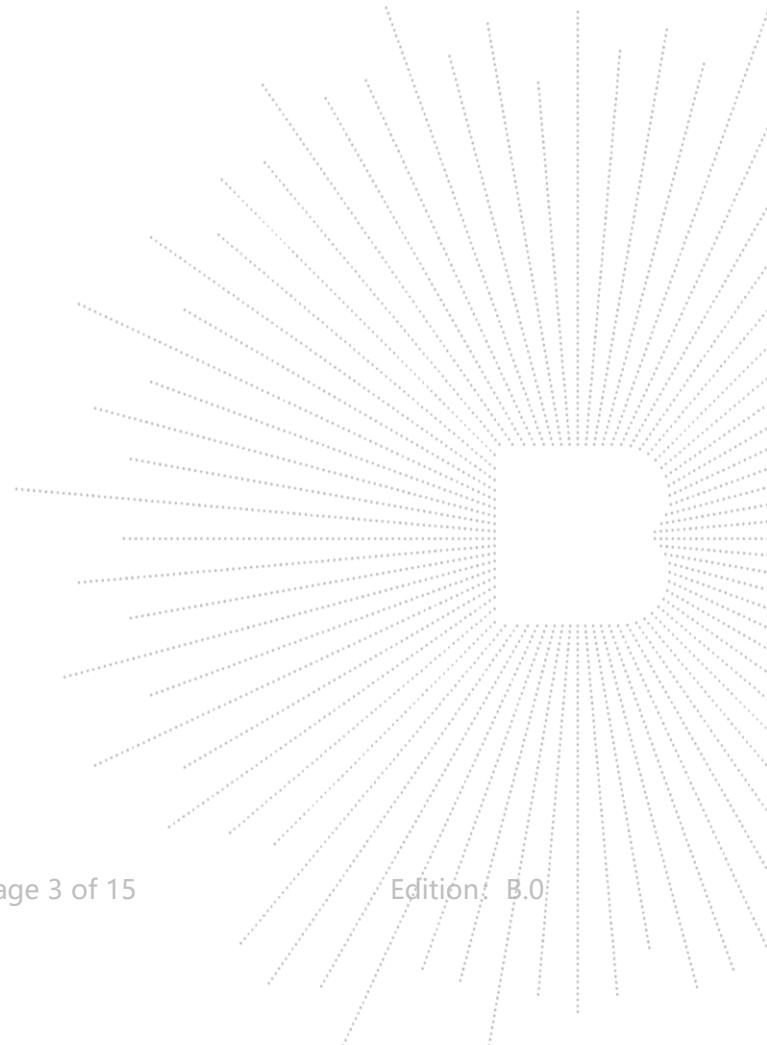

1. Version

Report No.	Issue Date	Description	Approved
BCTC2306902327-2E	2022-06-16	Original	Valid

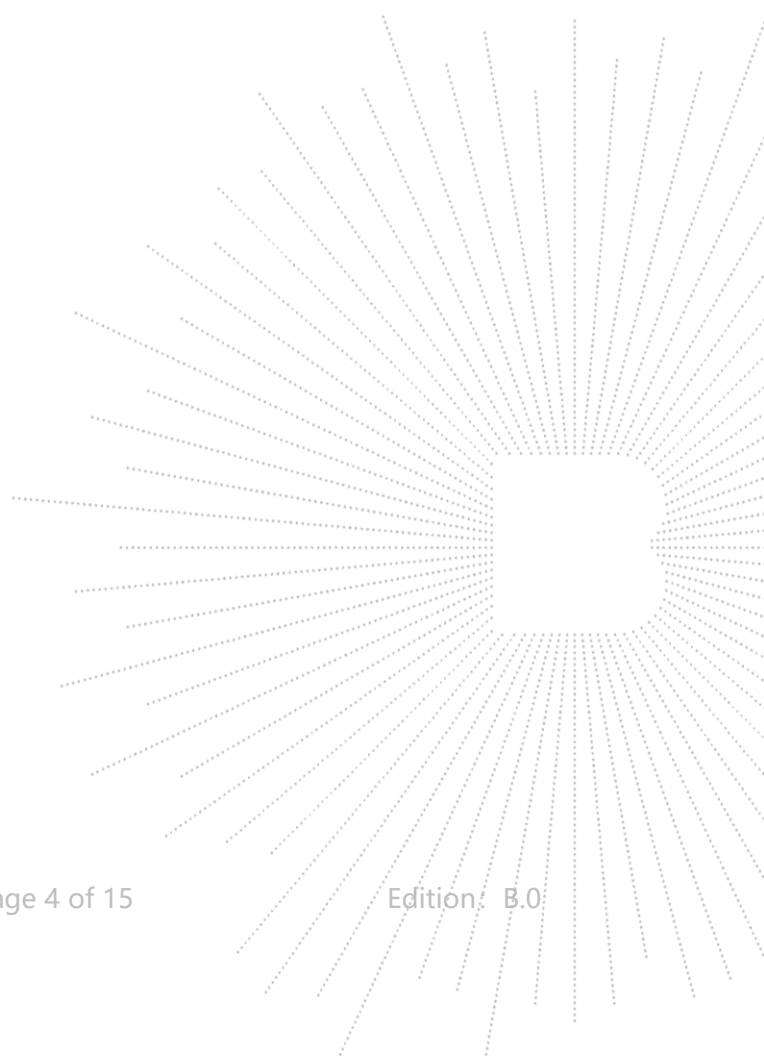

2. Product Information

2.1 Product Information

Model/Type Ref.:	T600-F, T602-F, T603-F, T605-F, T606-F, T607-F, T608-F, T609-F, T611-F, T612-F, T613-F, T614-F, T615-F, T617-F, T619-F, T700-F, T323, T324, LMS201, LMS301
Model differences:	Our production units bearing the following model numbers are identical in circuitry and electrical, mechanical and physical construction; The difference is only in model names.
Product Description:	Multi-function wireless charger
Operation Frequency:	112-205KHz
Antenna installation:	Loop coil antenna
Ratings:	Input: DC 5V-9V/2.2A Output: Phone:15W Headphones: 5W Watch: 5W Gross power: 15W
Hardware Version:	N/A
Software Version:	N/A

2.2 Support Equipment


No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
E-1	Phone	N/A	DL01	N/A	Auxiliary	E-1
E-2	Headphones	N/A	N/A	N/A	Auxiliary	E-2
E-3	Watch	N/A	N/A	N/A	Auxiliary	E-3
E-4	3-in-1 Magnetic Wireless Charging Stand	N/A	T600-F	N/A	EUT	E-4
E-5	Adapter	HUIWEI	HW-050100 A01	N/A	Auxiliary	E-5

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

2.3 Test Mode

Test Modes 1	Phone: 15W
Test Modes 2	Headphones: 5W
Test Modes 3	Watch: 5W
Test Modes 4	Phone: 15W + Headphones: 5W + Watch: 5W

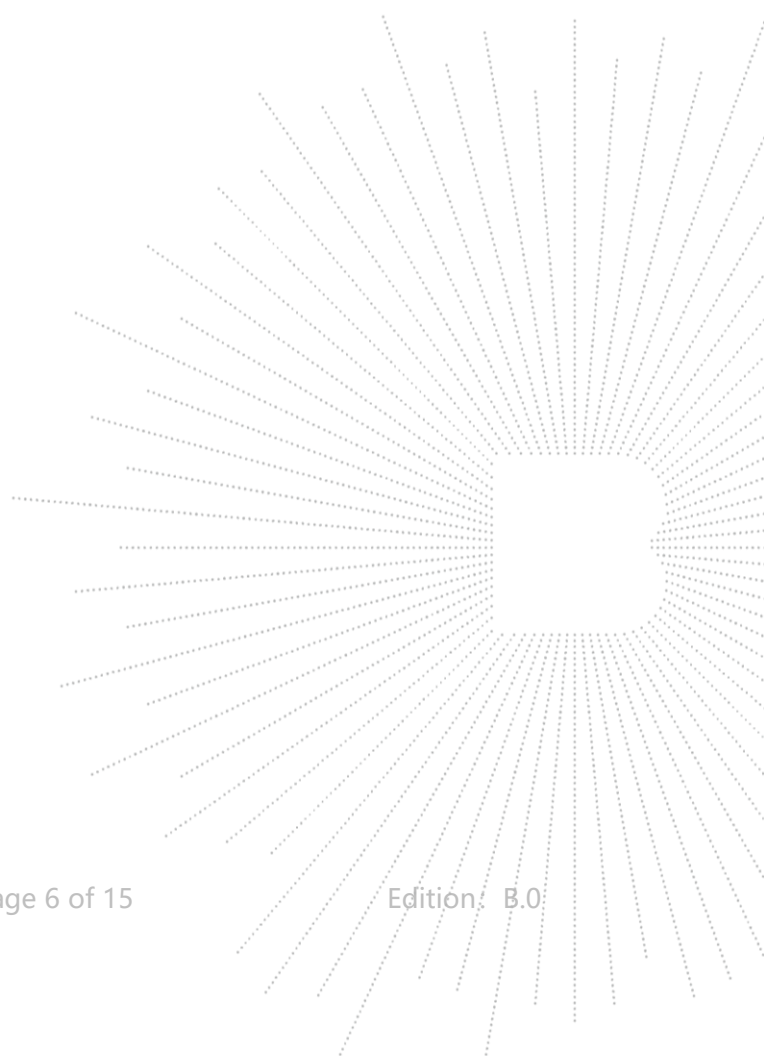

3. Test Facility and Test Instrument Used

3.1 Test Facility


All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

3.2 Test Instrument Used

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electromagnetic radiation tester	Wavecontrol	SMP160	19SN0980	May 15, 2023	May 14, 2024
Electromagnetic field probe	Wavecontrol	WP400-3	20WP120082	Sept. 08, 2022	Sept. 07, 2023
843 Chamber	ETS	843	84301	Aug. 27, 2020	Aug. 26, 2023

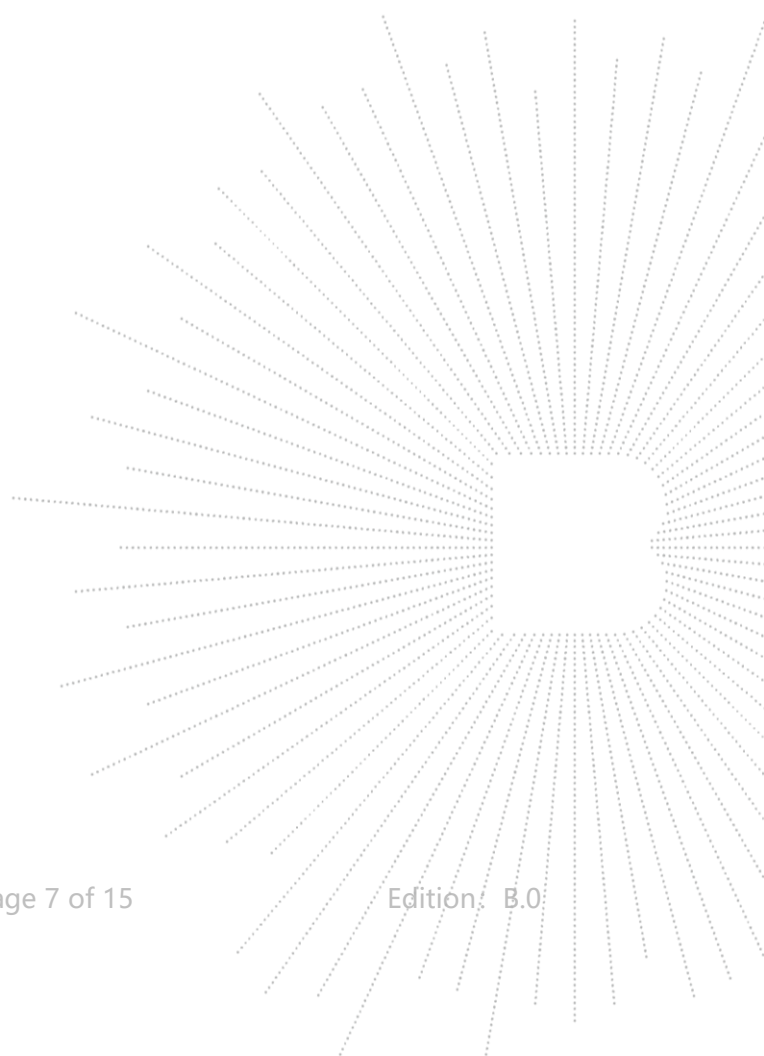


4. Method Of Measurement

4.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB 680106 D01 RF Exposure Wireless Charging.

4.2 Block Diagram Of Test Setup

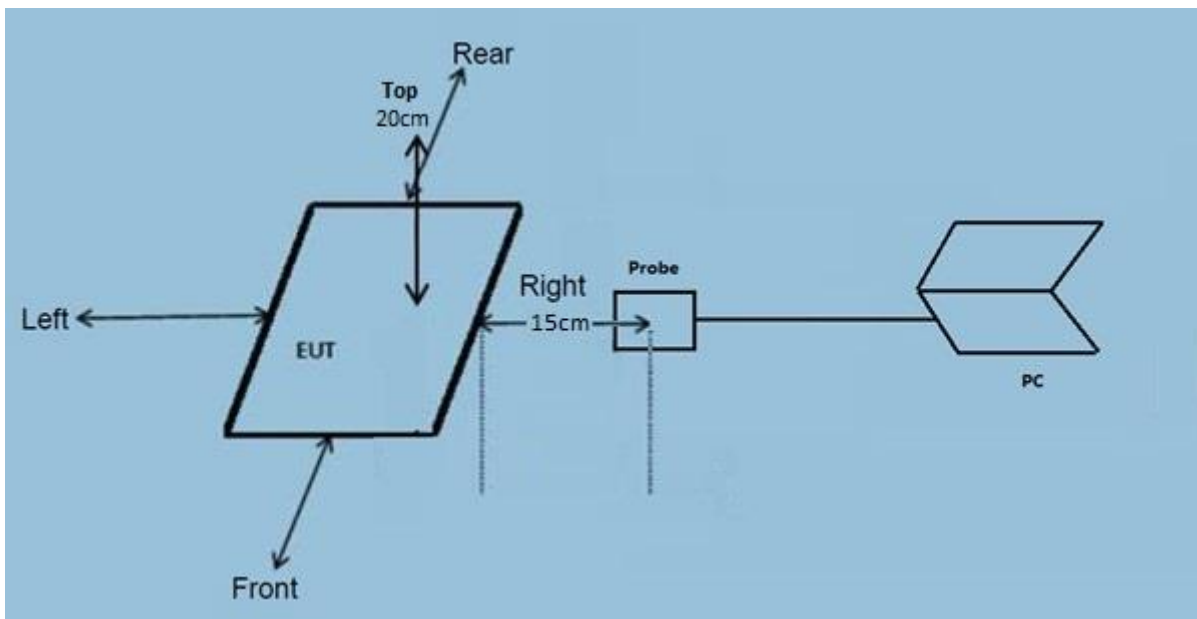

4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

4.4 Test Procedure

- 1) RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed 15cm around the device for testing; The measurement probe was placed at 20 cm for surface testing.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of eachd) The highest emission level was recorded and compared with limit as soon as measurement of each points (left, right, front, rear and top) were completed.
- 4) The EUT was measured according to the dictates of KDB680106 D01
- 5) Remark:
The EUT's test position left, right, front, rear and top is valid for the E and H field measurements.

4.5 The EUT does comply with item 5(b) of KDB 680106 D01v03

- 1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 112-205 kHz

- 2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 15W.

- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.

No, the product is composed of 3 primary coils, which can be powered on at the same time to charge 3 clients

- 4) Client device is inserted in or placed directly in contact with the transmitter.


Yes, client device is placed directly in contact with the transmitter.

- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, This product is a Mobile device

- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 10% x MPE limit.

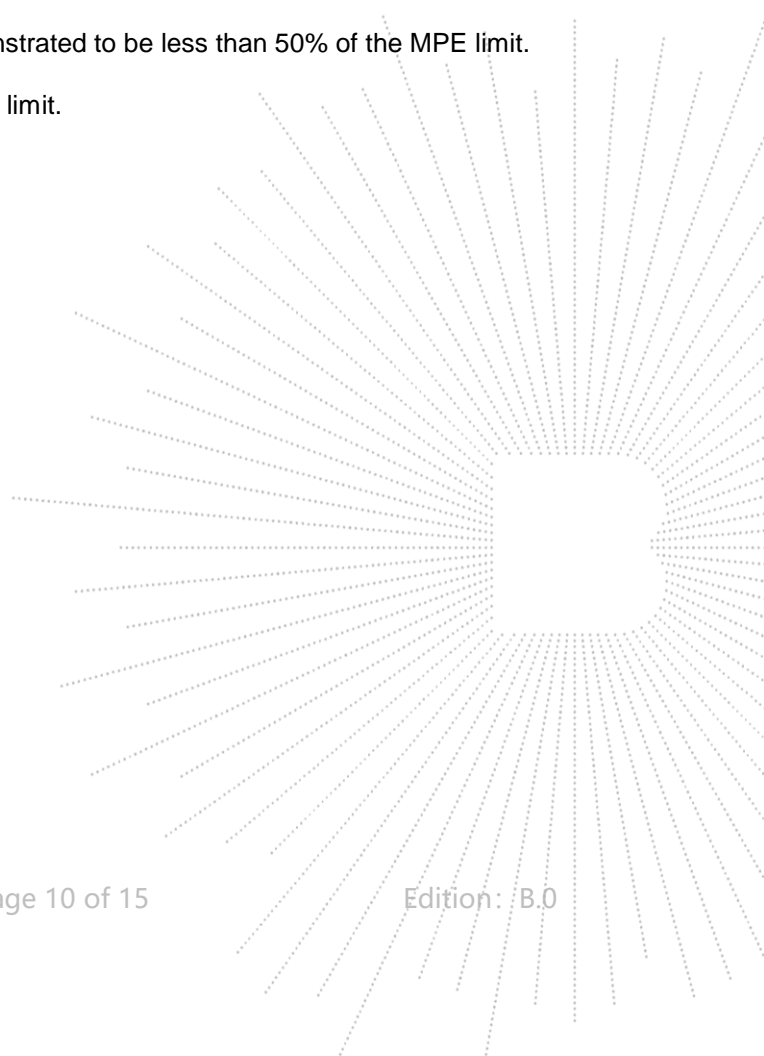

4.6 E And H Field Strength

Worst Case Operating Mode: Mode 4

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (KHz)	Operation condition	Test Position Front (uT)	Test Position Rear (uT)	Test Position Left (uT)	Test Position Right (uT)	Test Position Top (uT)	Limits (uT)
112-205KHz	Full load	0.280	0.251	0.280	0.231	0.234	2.0375
112-205KHz	Half load	0.255	0.213	0.230	0.235	0.239	2.0375
112-205KHz	No load	0.256	0.243	0.255	0.243	0.244	2.0375

Note: A/m = uT ÷ 1.25

Frequency Range (KHz)	Operation condition	Test Position Front (A/m)	Test Position Rear (A/m)	Test Position Left (A/m)	Test Position Right (A/m)	Test Position Top (A/m)	Limits (A/m)
112-205KHz	Full load	0.224	0.201	0.224	0.185	0.187	1.63
112-205KHz	Half load	0.204	0.170	0.184	0.188	0.191	1.63
112-205KHz	No load	0.205	0.194	0.204	0.194	0.195	1.63


E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (KHz)	Operation condition	Test Position Front (V/m)	Test Position Rear (V/m)	Test Position Left (V/m)	Test Position Right (V/m)	Test Position Top (V/m)	Limits (V/m)
112-205KHz	Full load	0.254	0.202	0.204	0.190	0.184	614
112-205KHz	Half load	0.203	0.194	0.194	0.198	0.183	614
112-205KHz	No load	0.196	0.184	0.185	0.187	0.170	614



Note: In the frequency range of 1k-10M, except the fundamental frequency, other transmissions of the power transmission system are less than 20dB lower than the maximum fundamental transmission, so it is not necessary to evaluate.

5. Photographs of Test Set-Up


Front

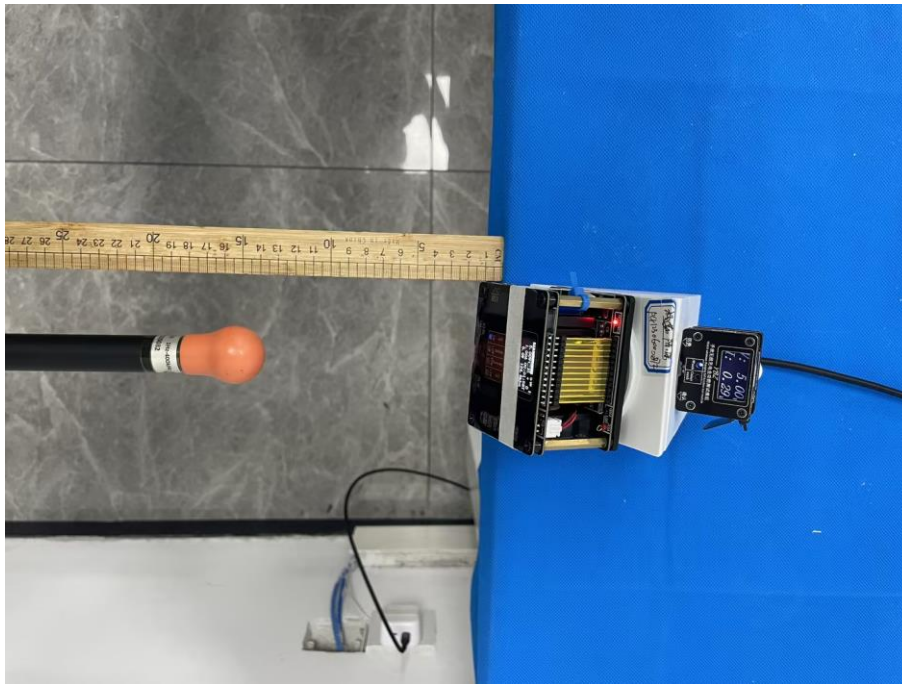



Rear

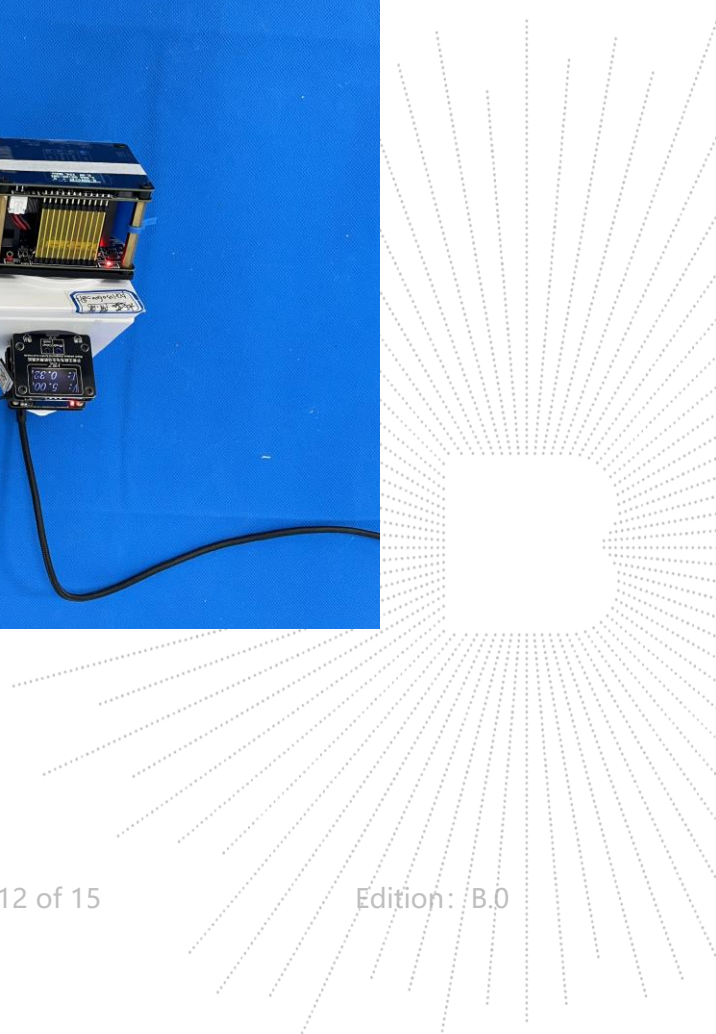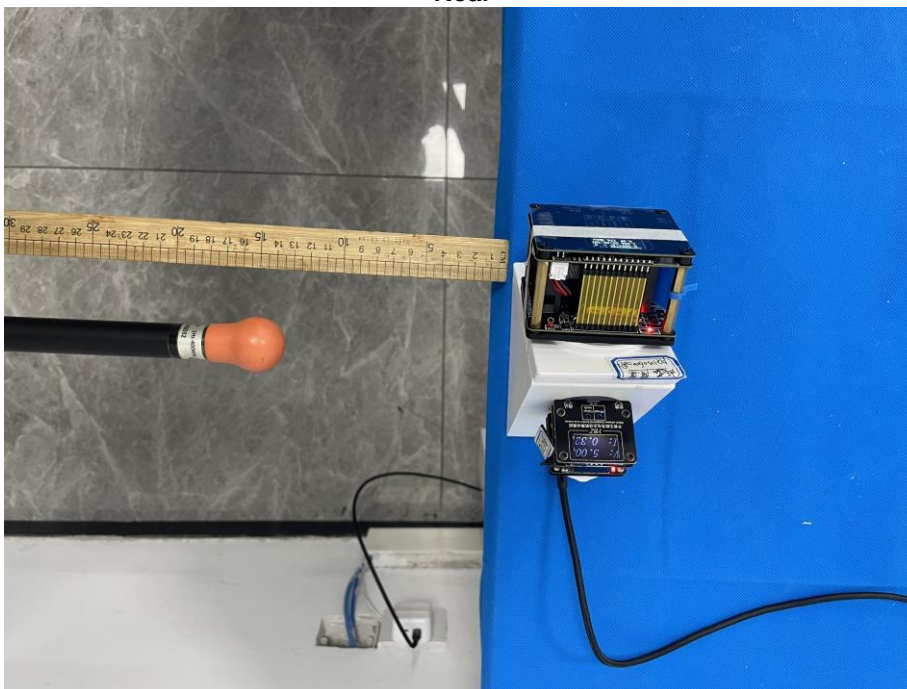



Left

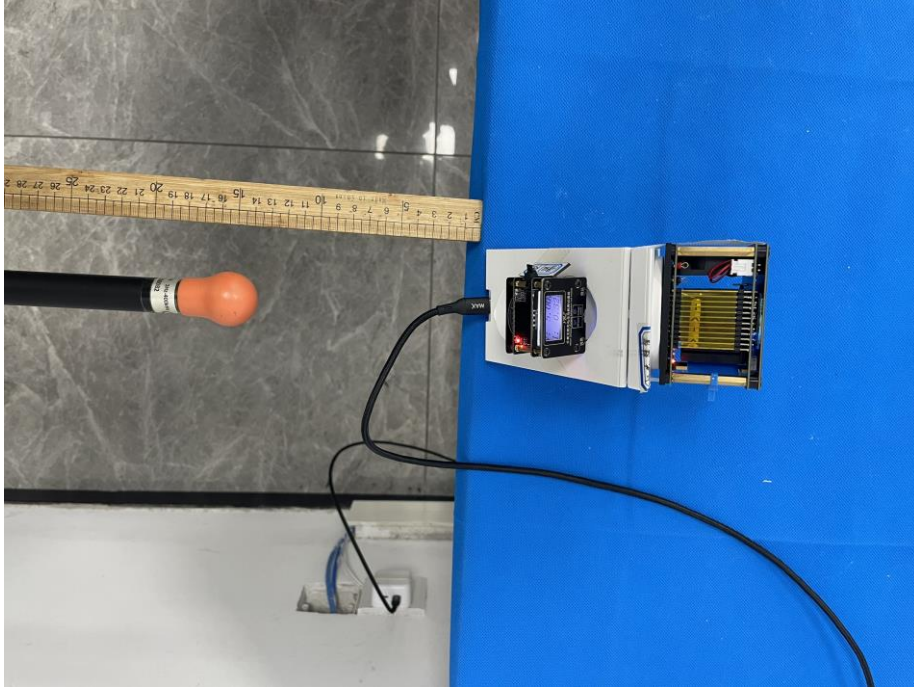

Right

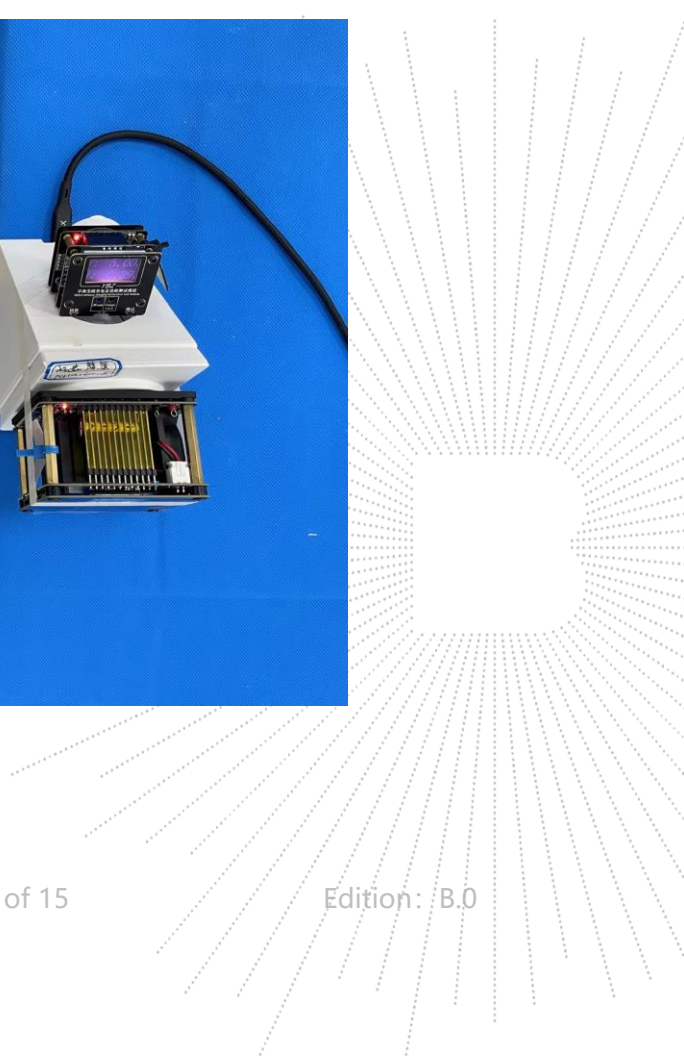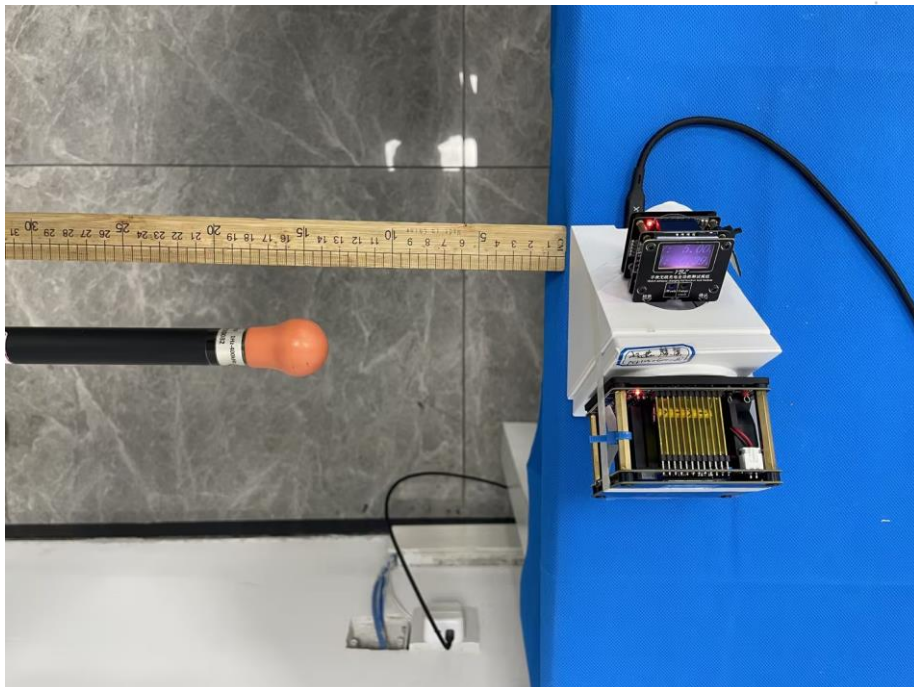

Top

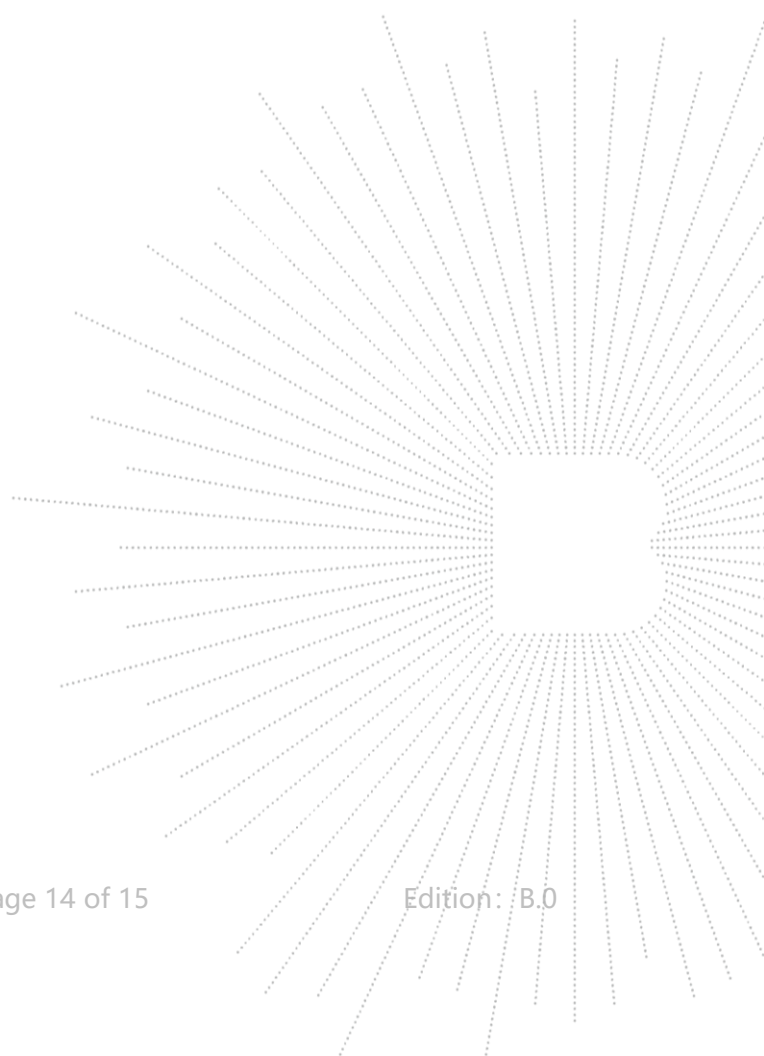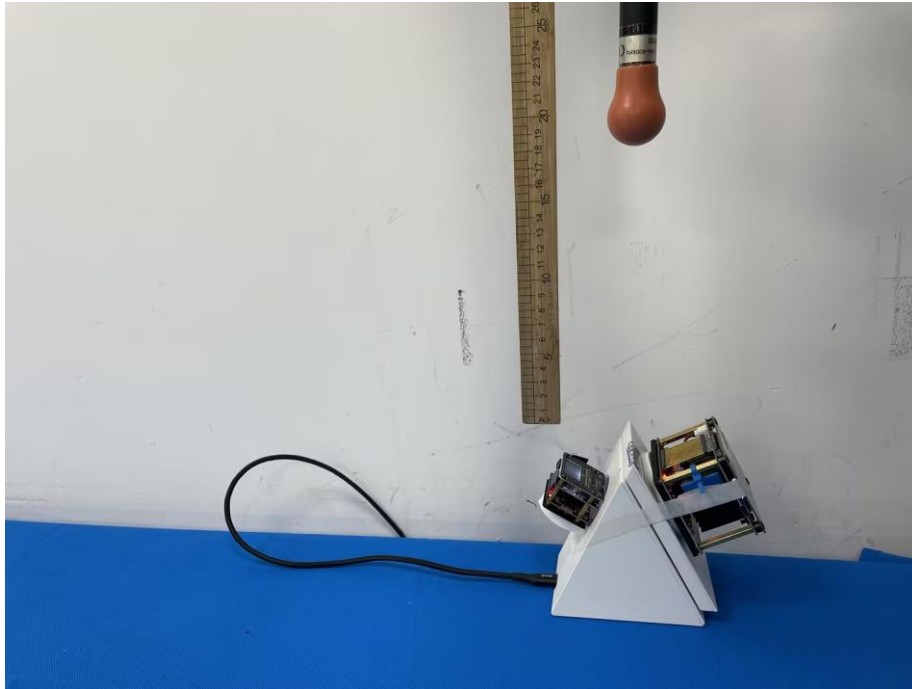

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****

