




Power	:	From System (AC120V /60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, Band 8, CH199		:	

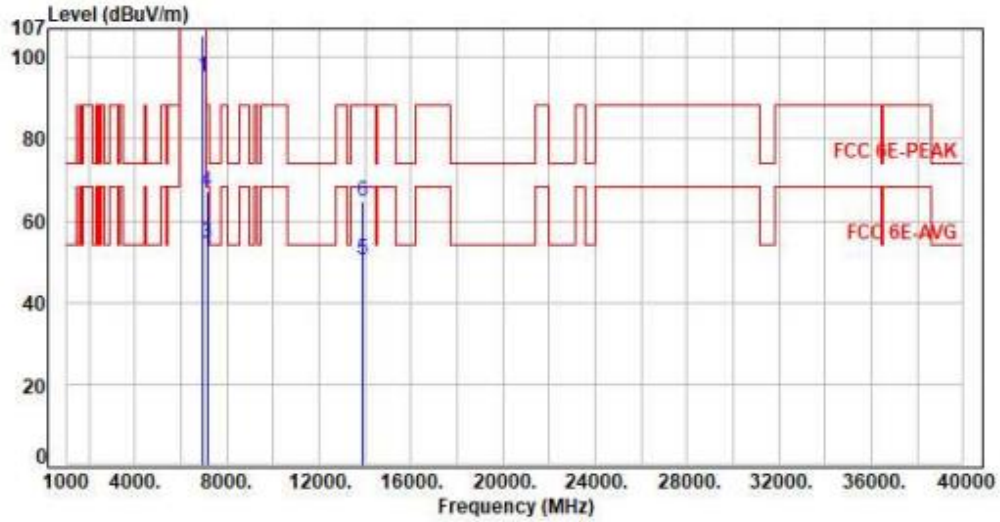


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	85.44	95.06	200.00	-104.94	Average	100	50	P
2	6945.00	9.62	95.58	105.20	200.00	-94.80	Peak	100	50	P
3	7125.00	10.05	44.66	54.71	68.20	-13.49	Average	100	50	P
4	7125.00	10.05	57.27	67.32	88.20	-20.88	Peak	100	50	P
5	13890.00	22.95	27.56	50.51	68.20	-17.69	Average	100	314	P
6	13890.00	22.95	41.68	64.63	88.20	-23.57	Peak	100	314	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC120V /60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, Band 8, CH215		:	

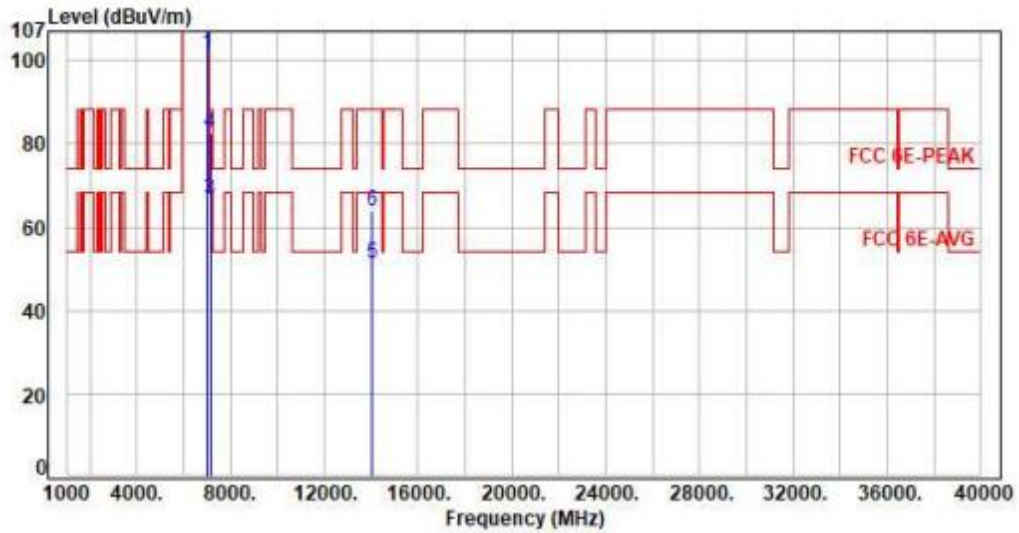


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	92.09	101.80	200.00	-98.20	Average	100	148	P
2	7025.00	9.71	102.33	112.04	200.00	-87.96	Peak	100	148	P
3	7125.00	10.05	56.53	66.58	68.20	-1.62	Average	100	148	P
4	7125.00	10.05	72.44	82.49	88.20	-5.71	Peak	100	148	P
5	14050.00	23.47	27.92	51.39	68.20	-16.81	Average	100	147	P
6	14050.00	23.47	40.59	64.06	88.20	-24.14	Peak	100	147	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC120V /60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, Band 8, CH215		:	

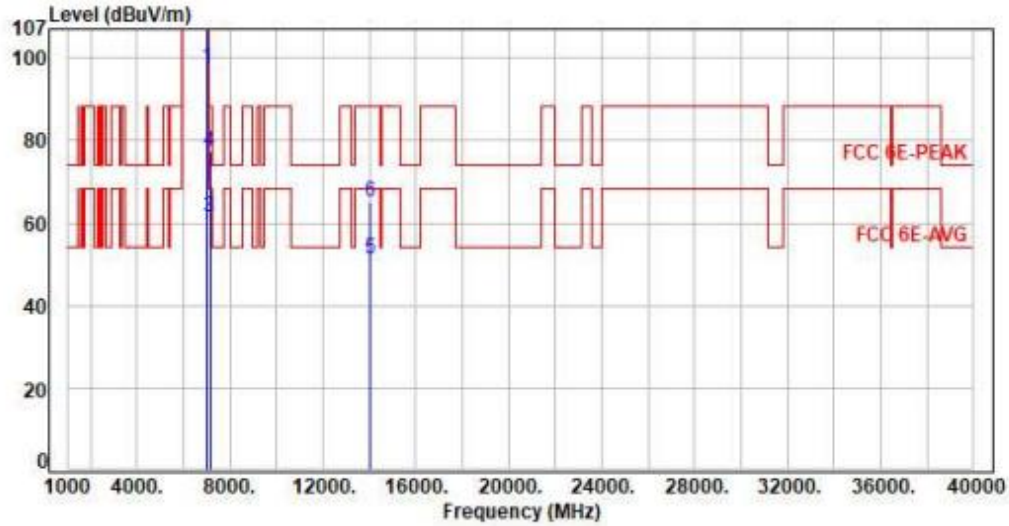


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	87.93	97.64	200.00	-102.36	Average	126	35	P
2	7025.00	9.71	98.21	107.92	200.00	-92.08	Peak	126	35	P
3	7125.00	10.05	51.41	61.46	68.20	-6.74	Average	126	35	P
4	7125.00	10.05	67.43	77.48	88.20	-10.72	Peak	126	35	P
5	14050.00	23.47	27.86	51.33	68.20	-16.87	Average	100	223	P
6	14050.00	23.47	41.66	65.13	88.20	-23.07	Peak	100	223	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC120V /60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, Band 8, CH207		:	

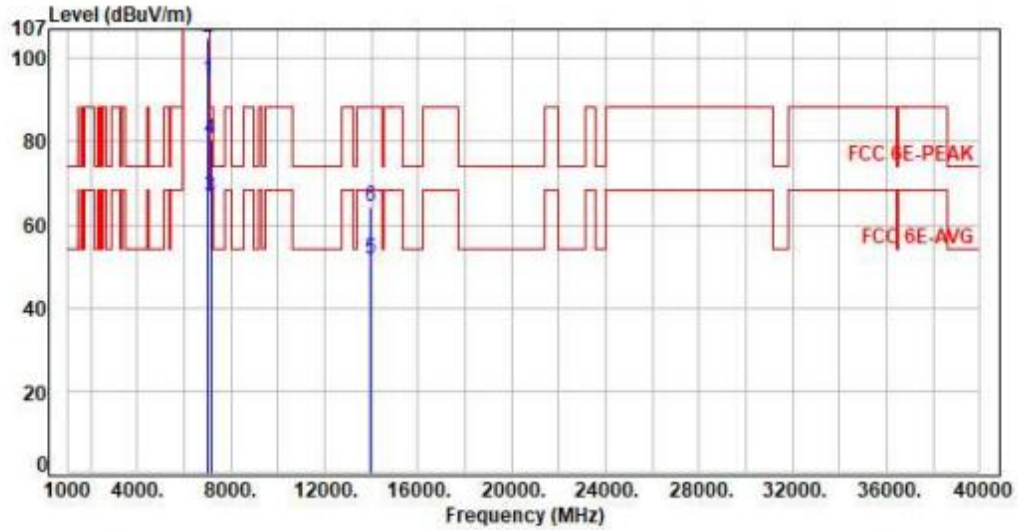

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	85.26	94.89	200.00	-105.11	Average	311	140	P
2	6985.00	9.63	95.18	104.81	200.00	-95.19	Peak	311	140	P
3	7125.00	10.05	56.66	66.71	68.20	-1.49	Average	311	140	P
4	7125.00	10.05	70.33	80.38	88.20	-7.82	Peak	311	140	P
5	13970.00	23.15	28.44	51.59	68.20	-16.61	Average	100	221	P
6	13970.00	23.15	41.05	64.20	88.20	-24.00	Peak	100	221	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	From System (AC120V /60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, Band 8, CH207		:	

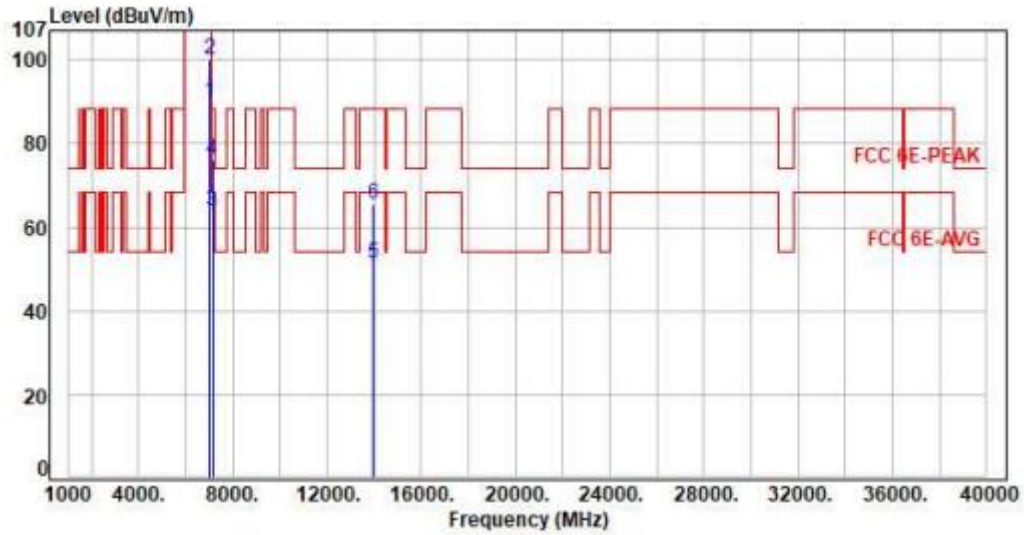

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	80.25	89.88	200.00	-110.12	Average	100	36	P
2	6985.00	9.63	90.55	100.18	200.00	-99.82	Peak	100	36	P
3	7125.00	10.05	53.78	63.83	68.20	-4.37	Average	100	36	P
4	7125.00	10.05	66.07	76.12	88.20	-12.08	Peak	100	36	P
5	13970.00	23.15	28.29	51.44	68.20	-16.76	Average	100	223	P
6	13970.00	23.15	42.33	65.48	88.20	-22.72	Peak	100	223	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor





6.7. In-Band Emission


U-NII-5

Modulation Type: 802.11ax HE20 CH01
ANT A


Modulation Type: 802.11ax HE20 CH45
ANT A

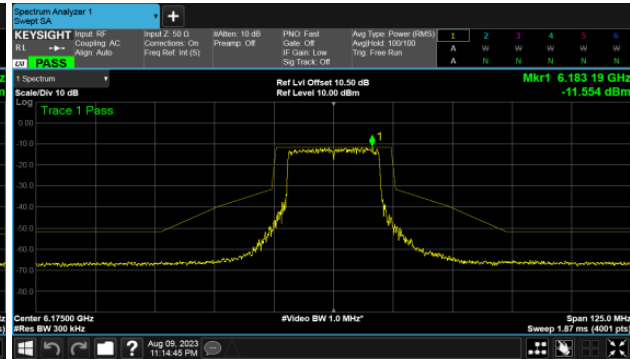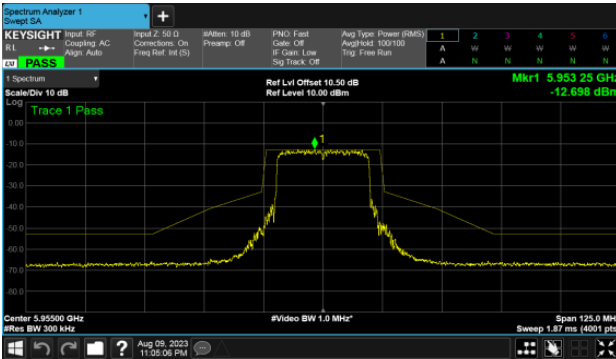

ANT B

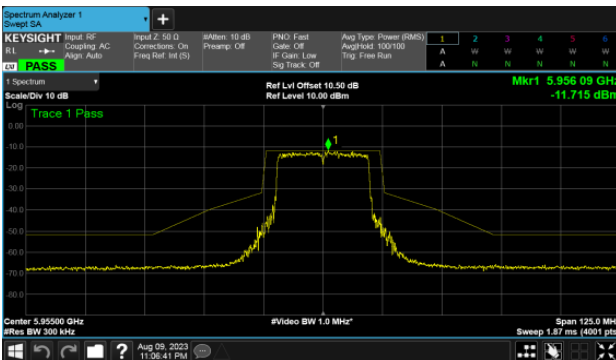


ANT B

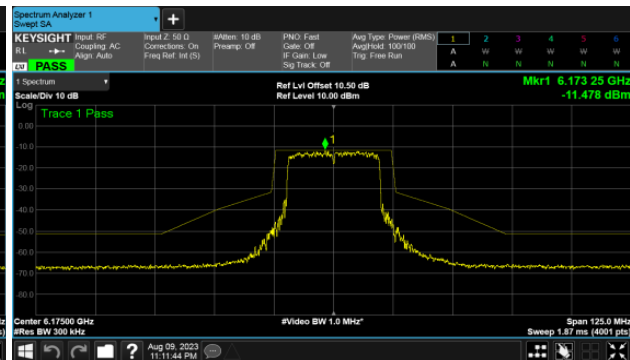




Modulation Type: 802.11ax HE20 CH93
ANT A

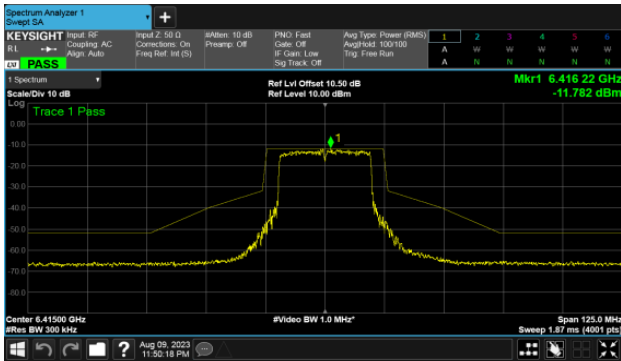

ANT B


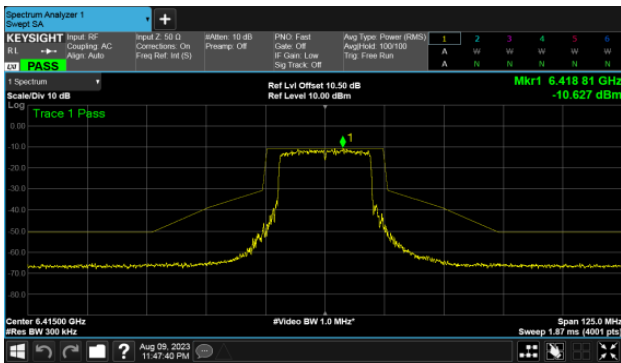




U-NII-5



Modulation Type: 802.11ax HE40 CH03
ANT A

Modulation Type: 802.11ax HE40 CH43
ANT A

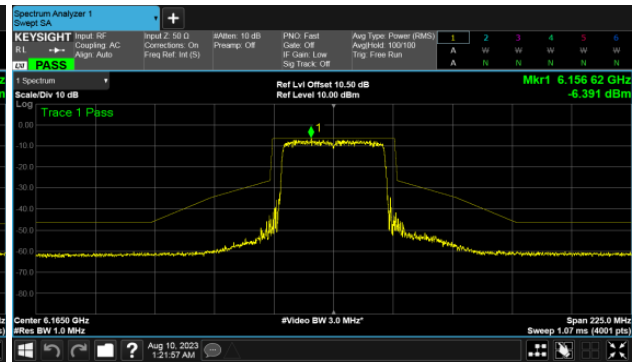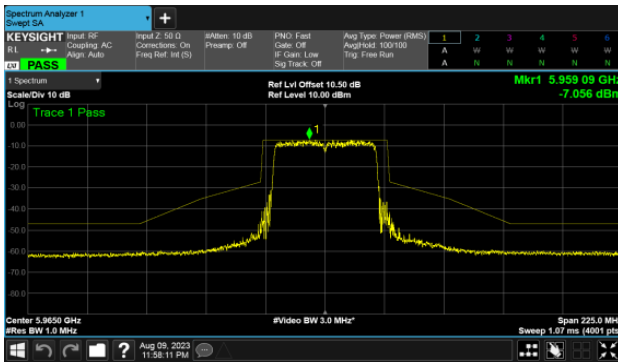


ANT B

ANT B

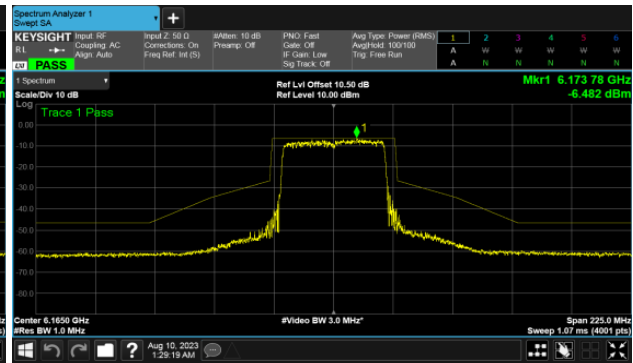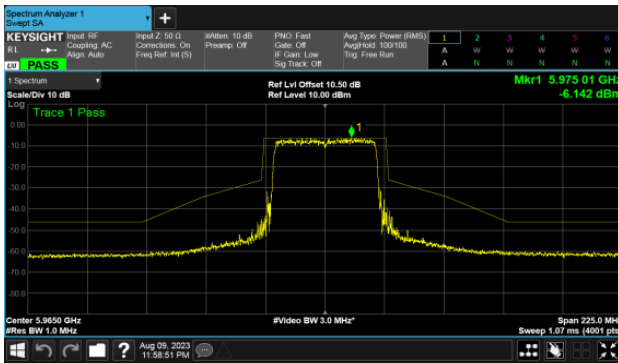




Modulation Type: 802.11ax HE40 CH91
ANT A

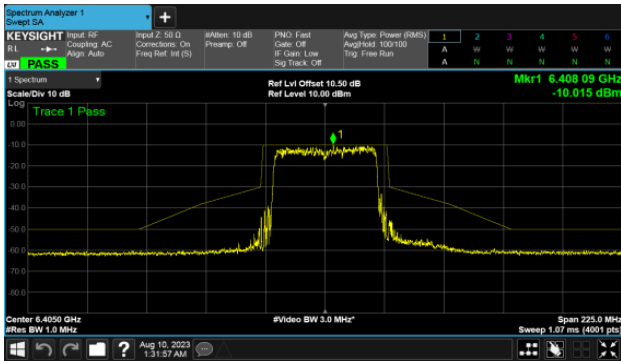

ANT B


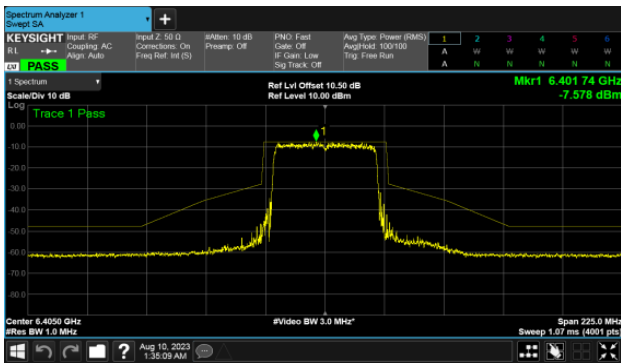




U-NII-5



Modulation Type: 802.11ax HE80 CH07
ANT A

Modulation Type: 802.11ax HE80 CH39
ANT A

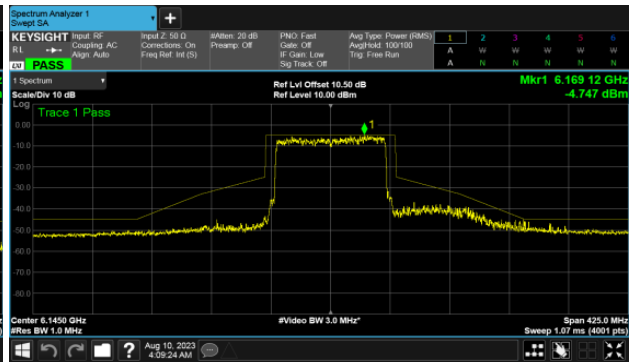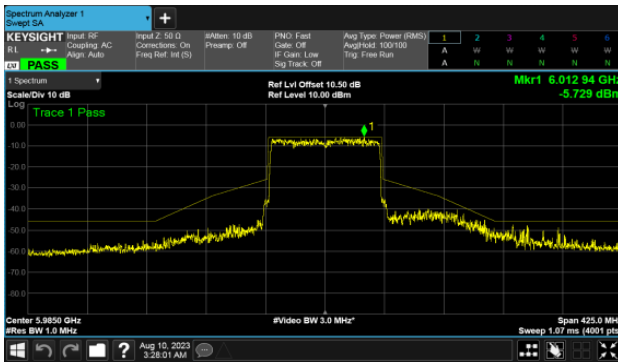


ANT B

ANT B

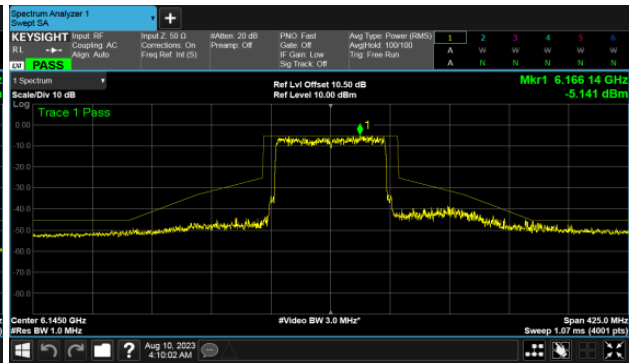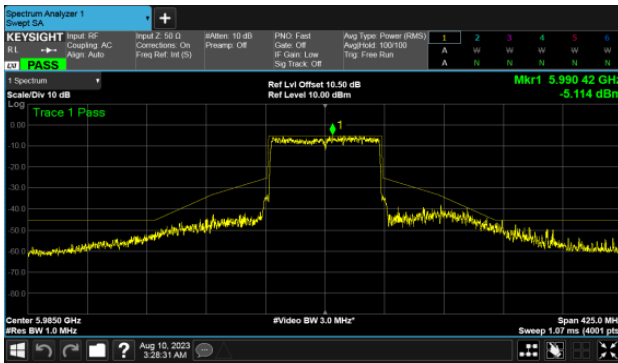




Modulation Type: 802.11ax HE80 CH87
ANT A

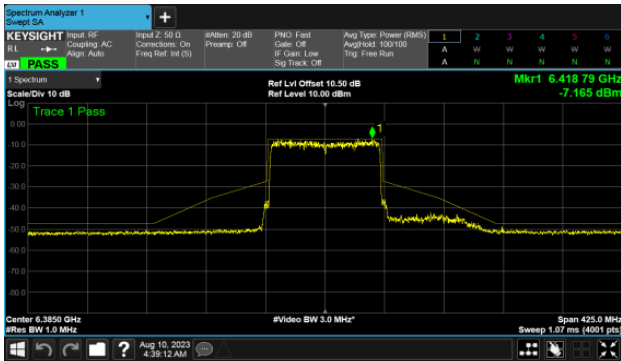

ANT B


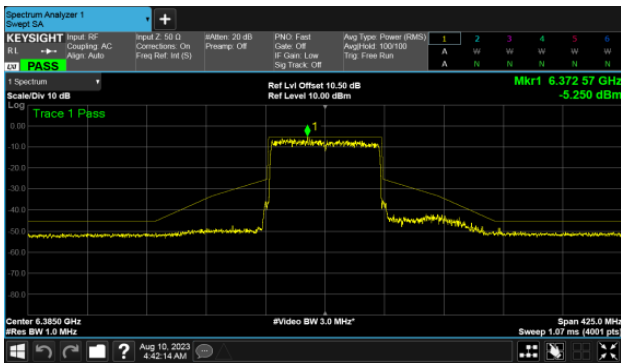





U-NII-5

Modulation Type: 802.11ax HE160 CH15
ANT A


Modulation Type: 802.11ax HE160 CH47
ANT A

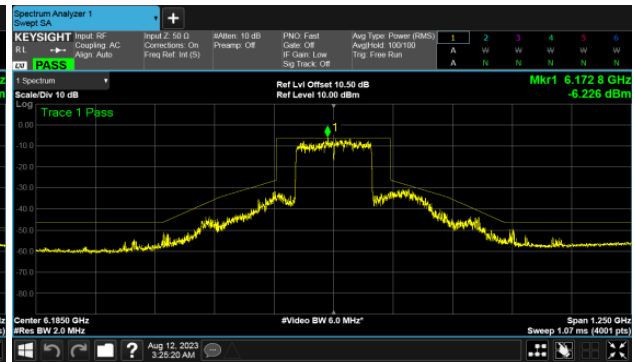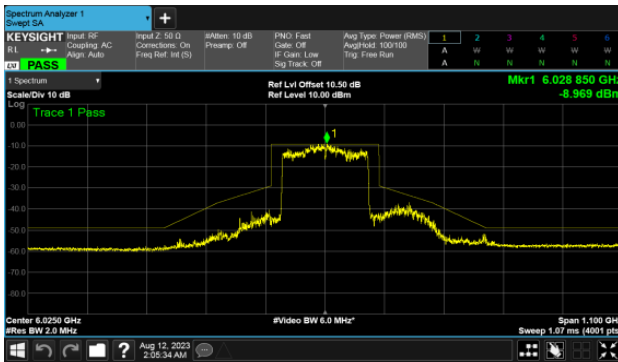

ANT B

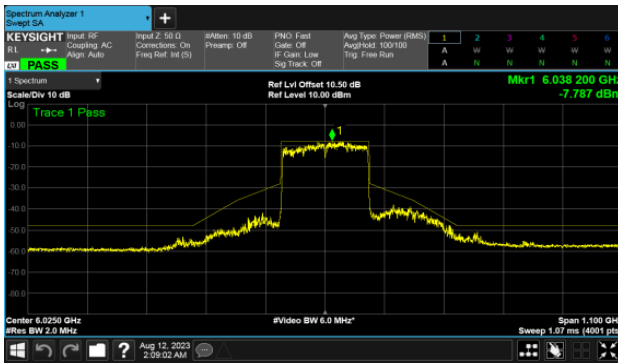


ANT B

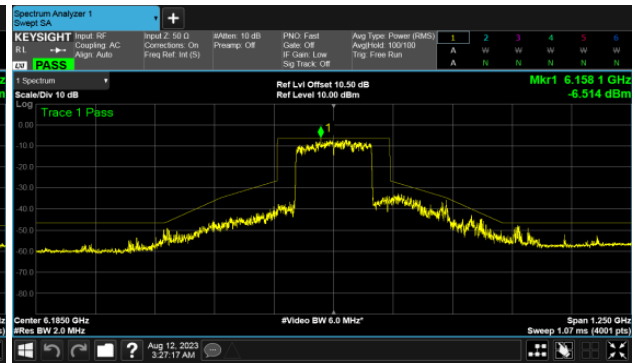




Modulation Type: 802.11ax HE160 CH79
ANT A

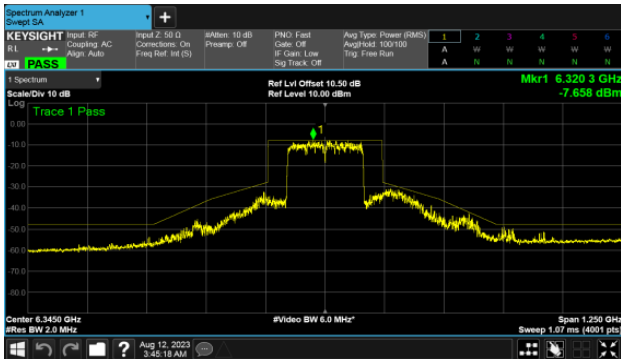



ANT B

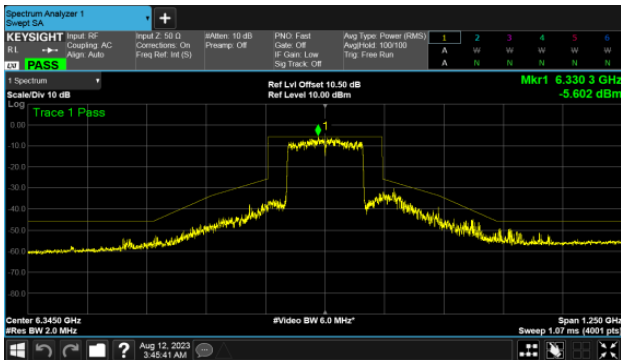





U-NII-6
Modulation Type: 802.11ax HE20 CH97
ANT A

Modulation Type: 802.11ax HE20 CH105
ANT A

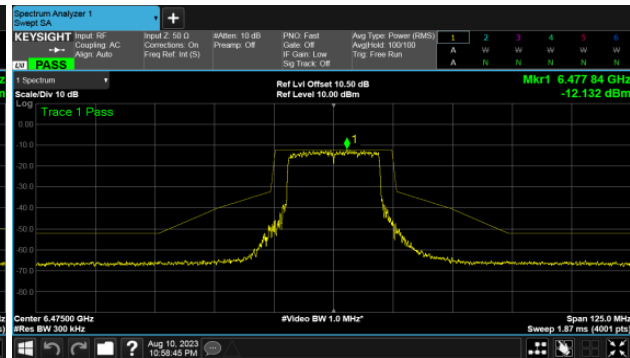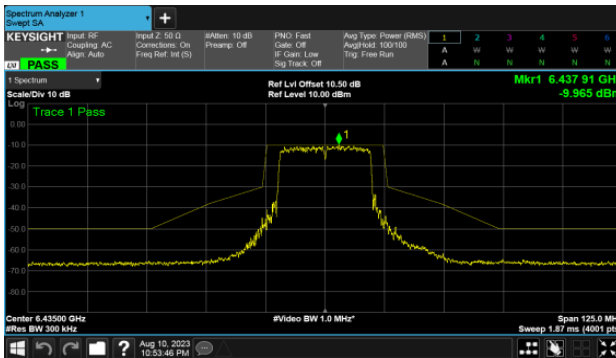


ANT B

ANT B

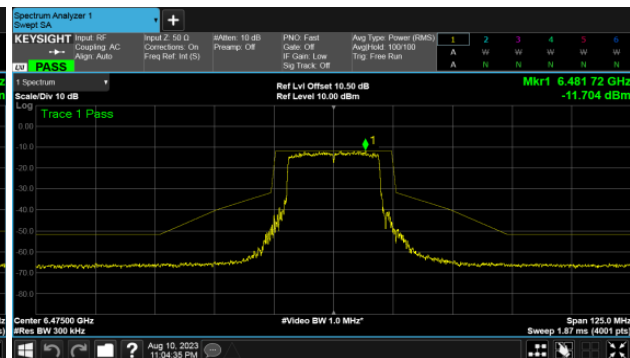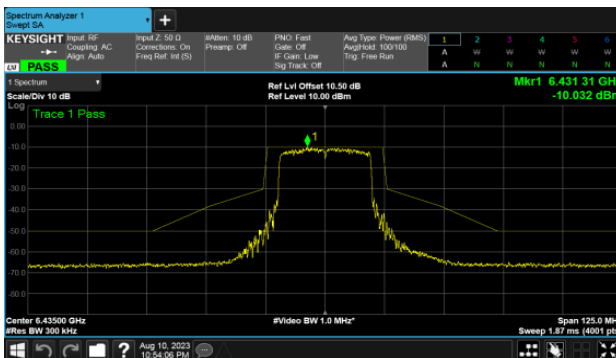




Modulation Type: 802.11ax HE20 CH113
ANT A

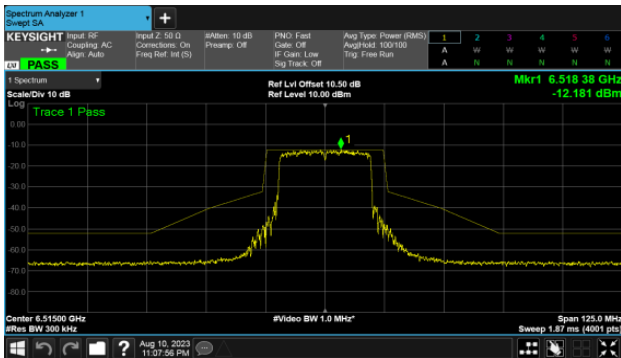

ANT B


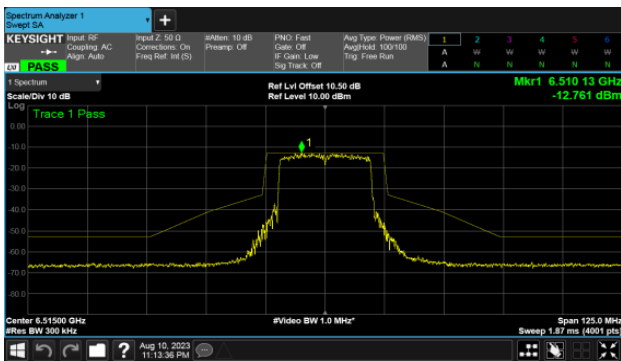





U-NII-6

Modulation Type: 802.11ax HE40 CH99
ANT A


Modulation Type: 802.11ax HE40 CH107
ANT A

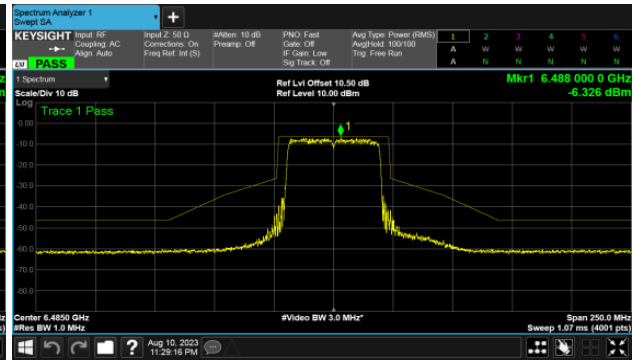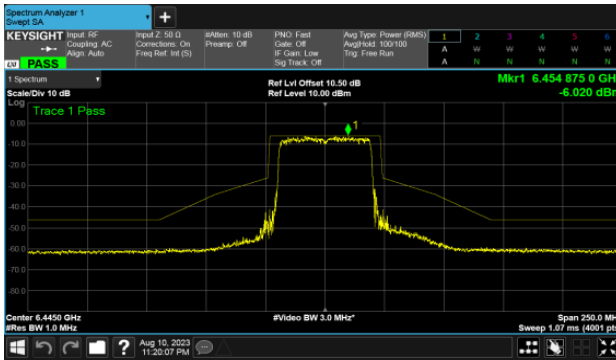

ANT B

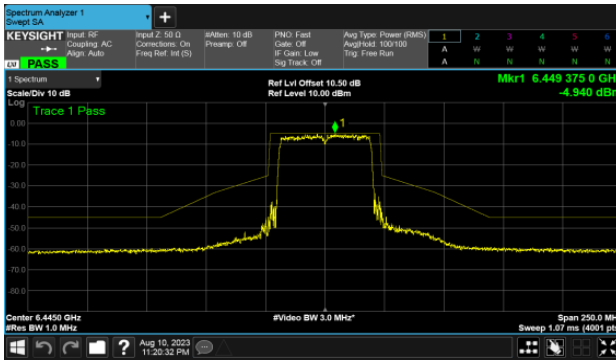


ANT B

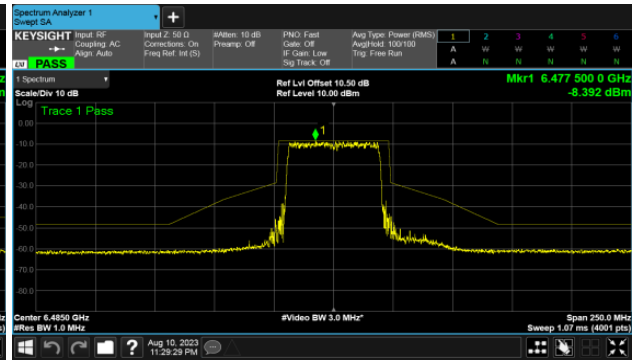




Modulation Type: 802.11ax HE80 CH103
ANT A

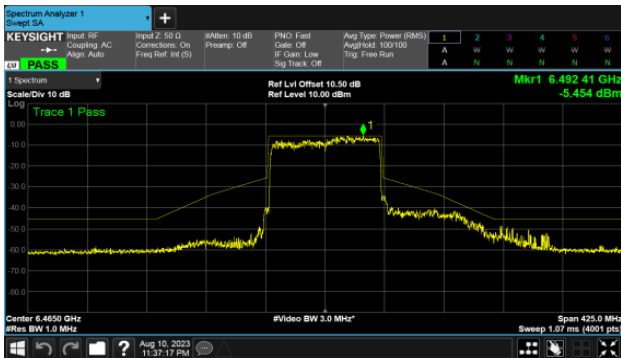



ANT B

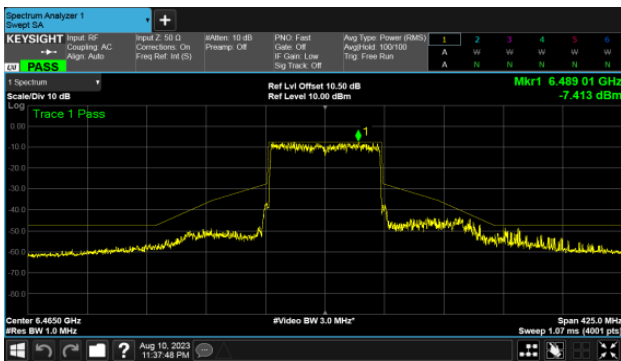





Within 6425-6525MHz band
Modulation Type: 802.11ax HE40 CH115
ANT A

Modulation Type: 802.11ax HE80 CH119
ANT A

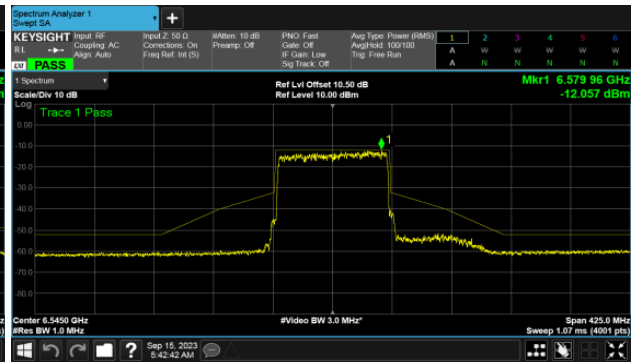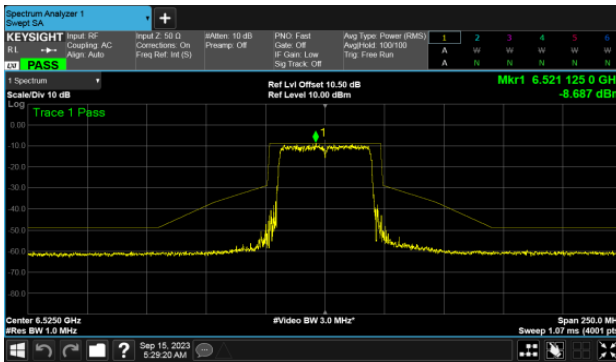


ANT B

ANT B

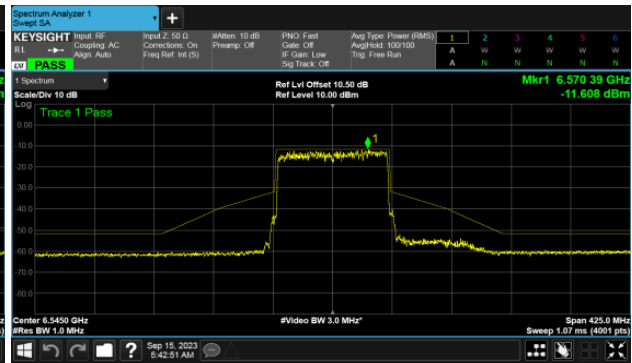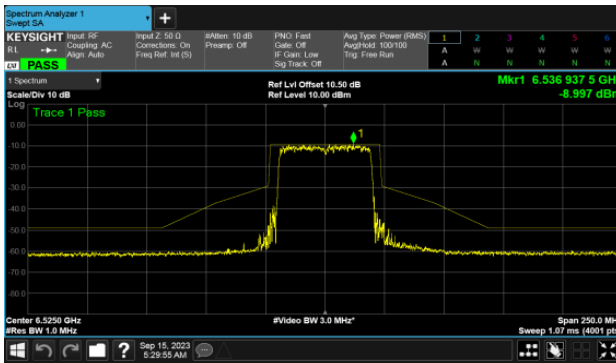




Modulation Type: 802.11ax HE160 CH111
ANT A

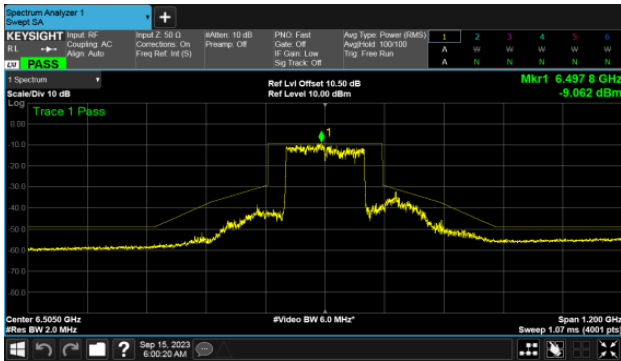

ANT B


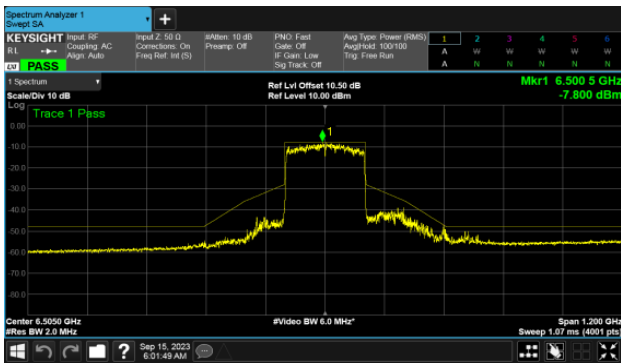





U-NII-7

Modulation Type: 802.11ax HE20 CH117
ANT A


Modulation Type: 802.11ax HE20 CH149
ANT A

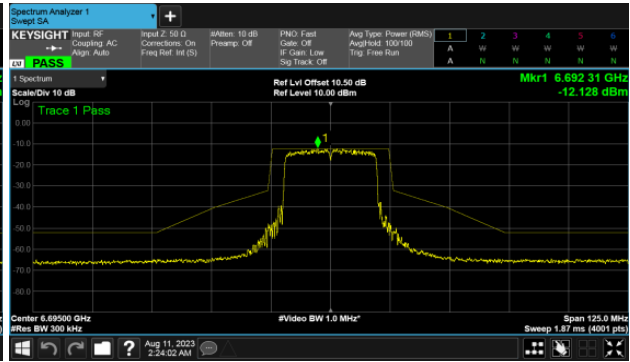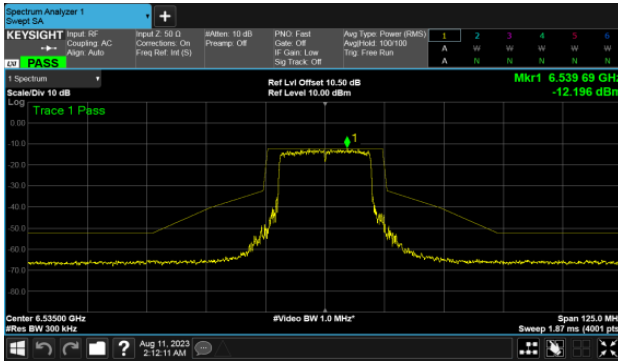

ANT B

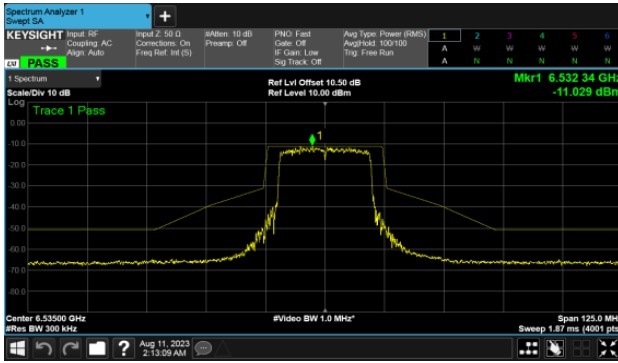


ANT B

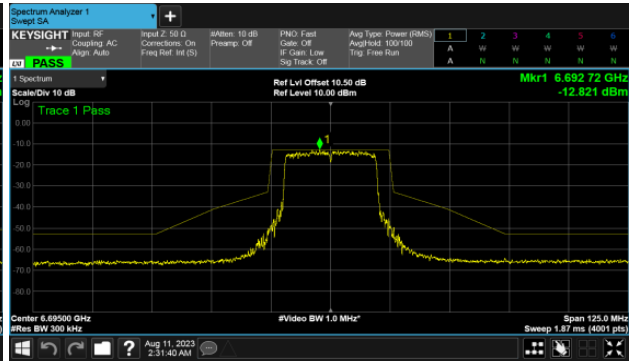




Modulation Type: 802.11ax HE20 CH181
ANT A

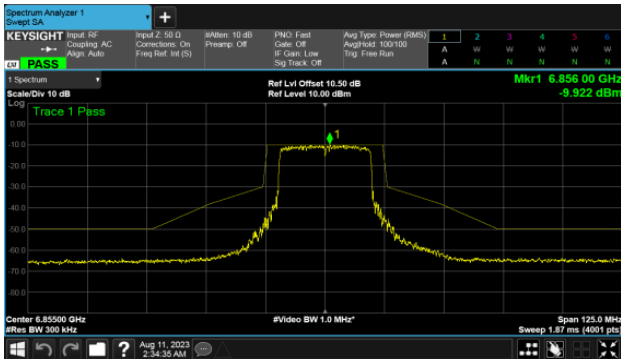

ANT B


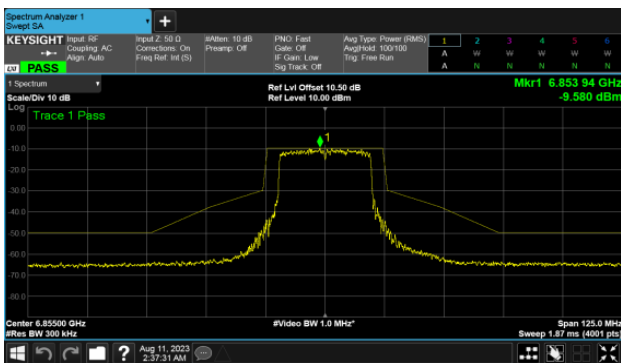





U-NII-7

Modulation Type: 802.11ax HE40 CH123
ANT A


Modulation Type: 802.11ax HE40 CH147
ANT A

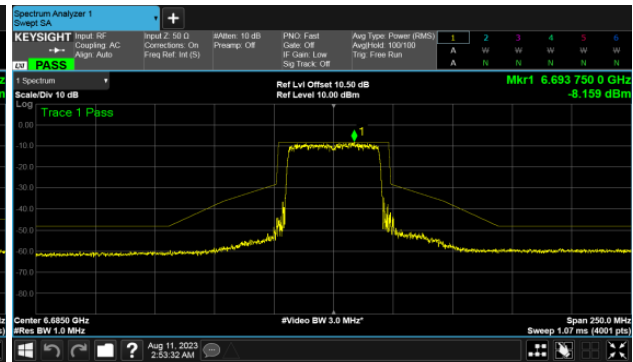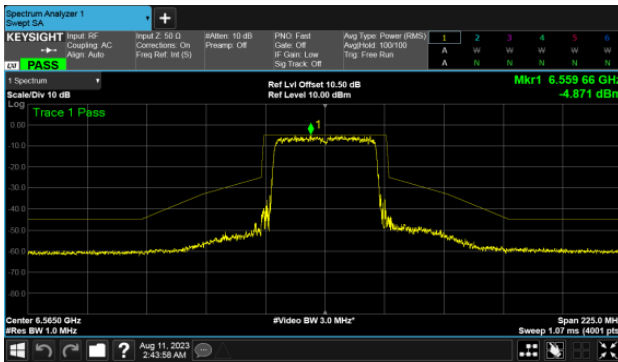

ANT B

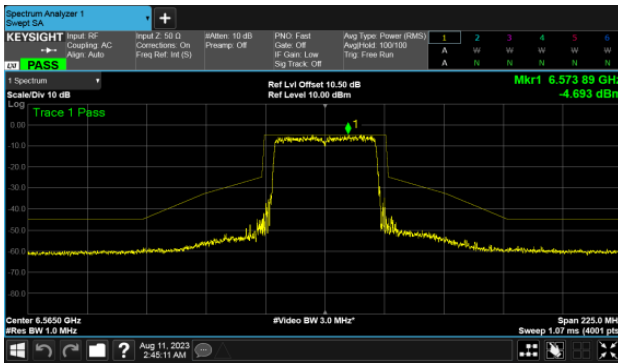


ANT B

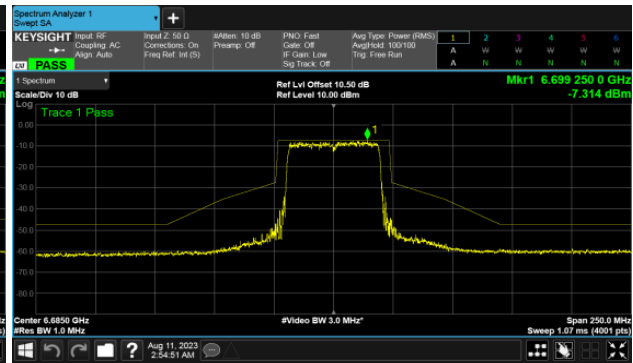




Modulation Type: 802.11ax HE40 CH179
ANT A

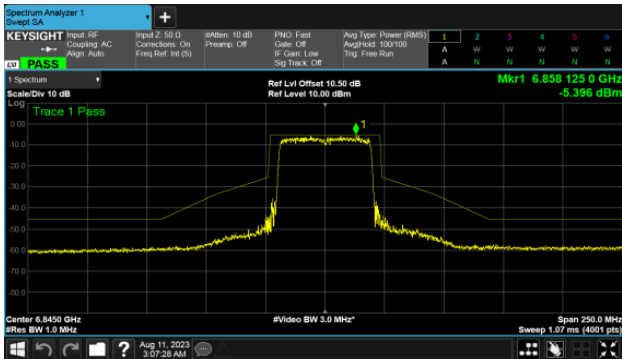

ANT B


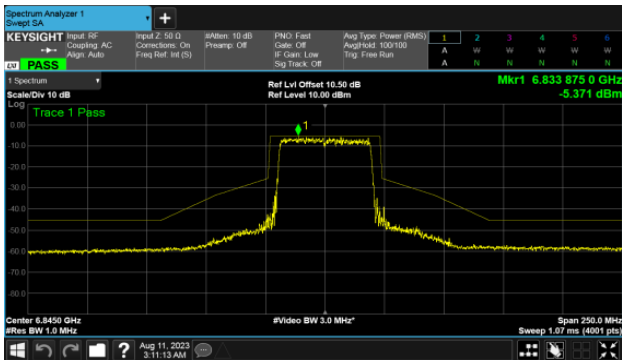





U-NII-7

Modulation Type: 802.11ax HE80 CH135
ANT A


Modulation Type: 802.11ax HE80 CH167
ANT A

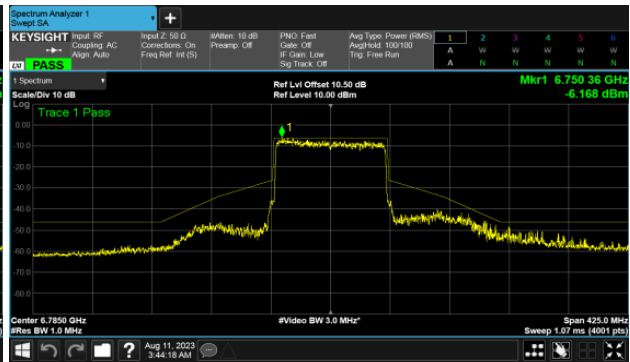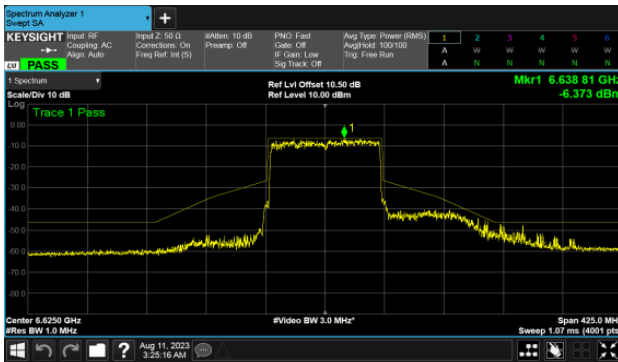

ANT B

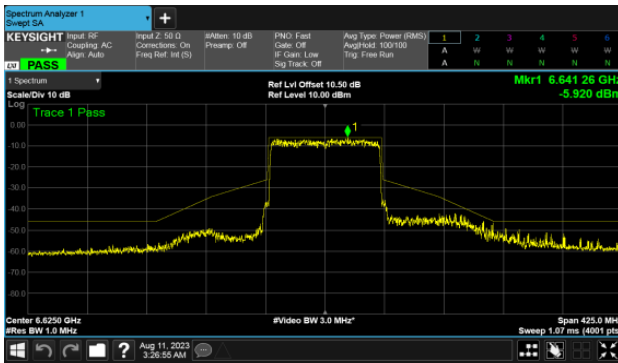


ANT B

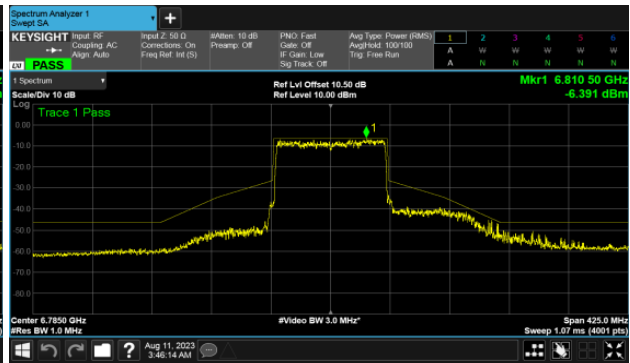




Modulation Type: 802.11ax HE160 CH143
ANT A

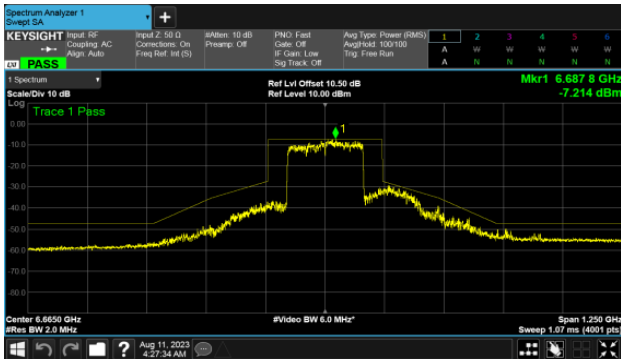



ANT B

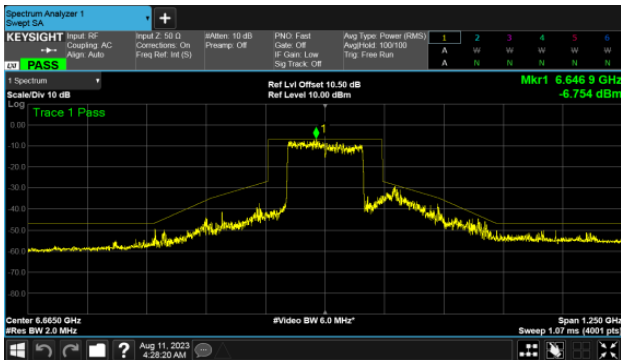





U-NII-8
Modulation Type: 802.11ax HE20 CH209
ANT A

Modulation Type: 802.11ax HE20 CH233
ANT A

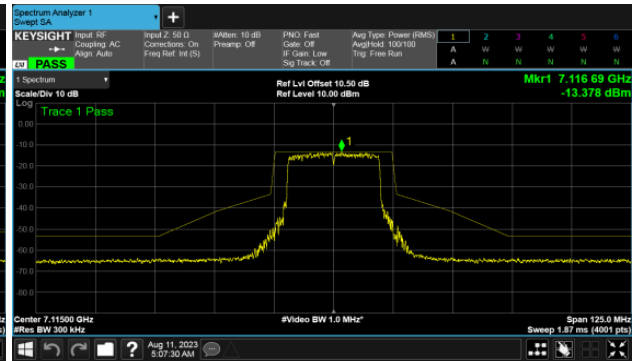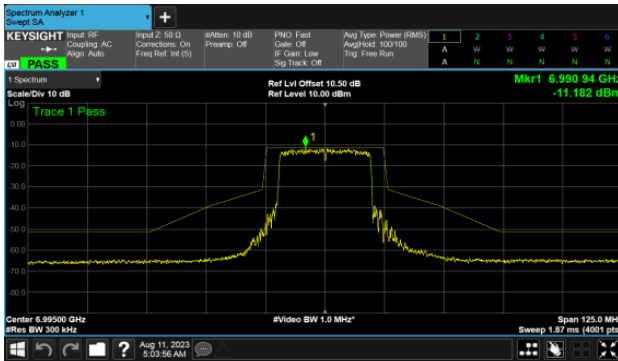

ANT B

ANT B

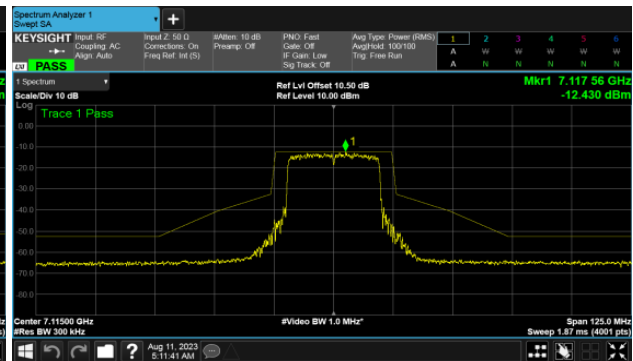
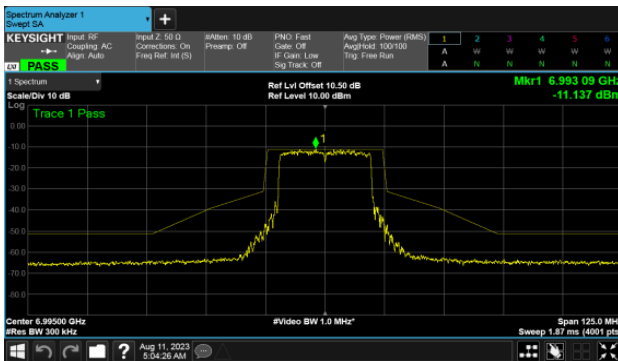





U-NII-8

Modulation Type: 802.11ax HE40 CH203
ANT A


Modulation Type: 802.11ax HE40 CH227
ANT A

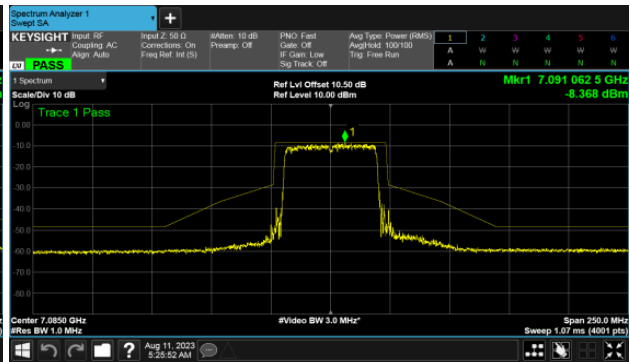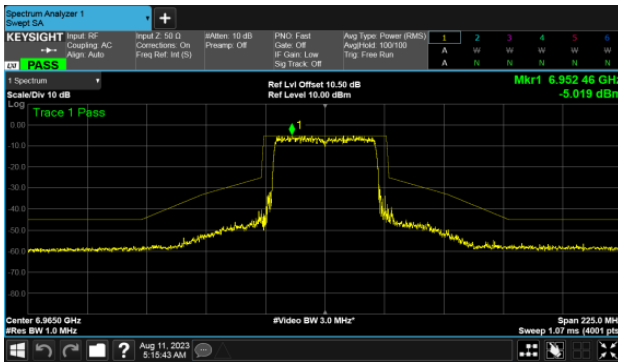

ANT B

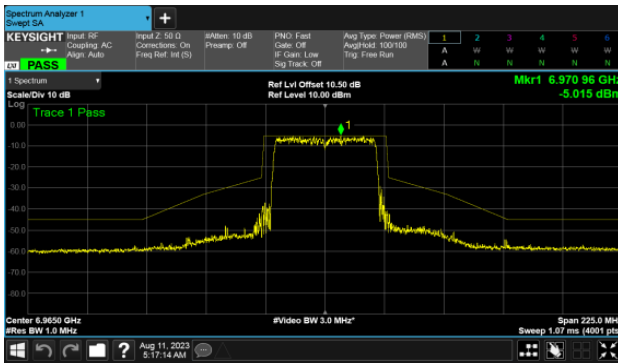

ANT B


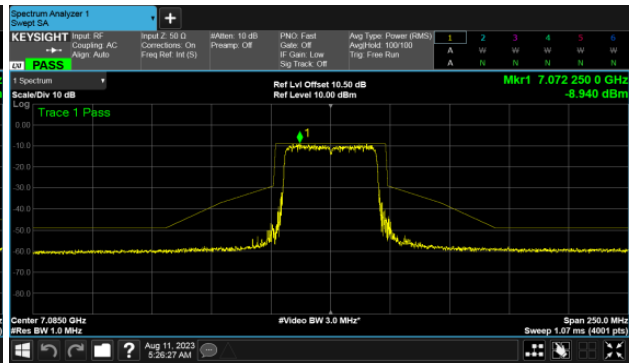




U-NII-7



Modulation Type: 802.11ax HE80 CH199
ANT A

Modulation Type: 802.11ax HE80 CH215
ANT A

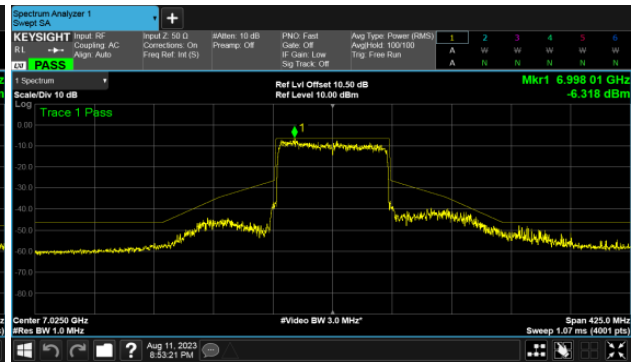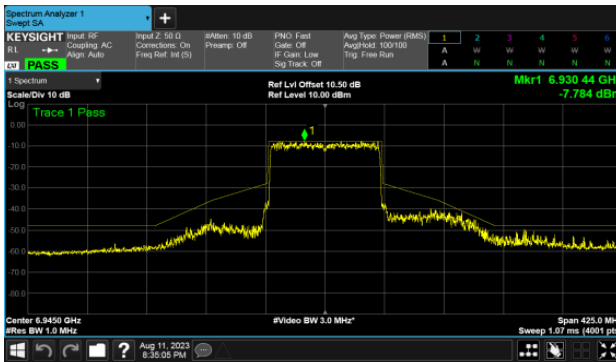


ANT B

ANT B

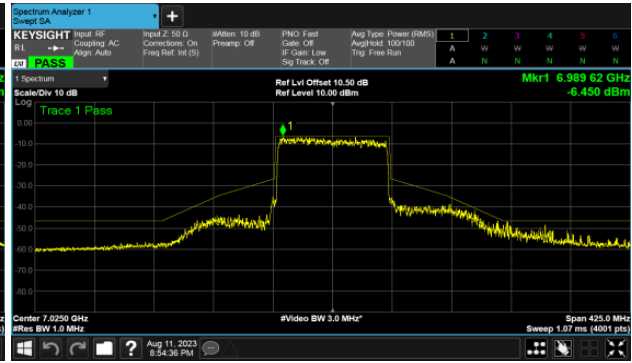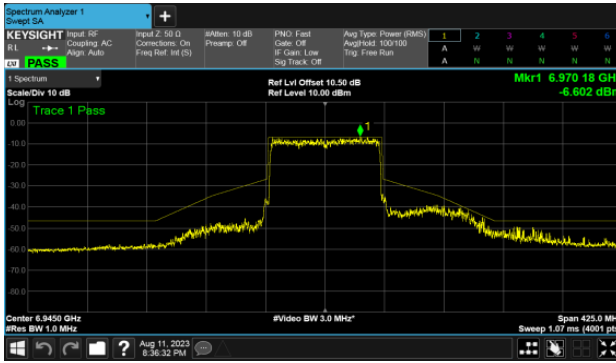




Modulation Type: 802.11ax HE160 CH207
ANT A

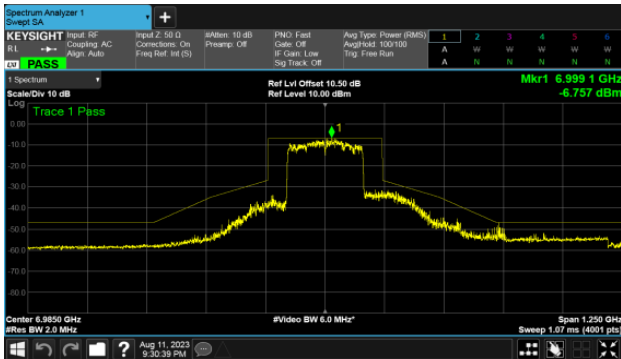



ANT B

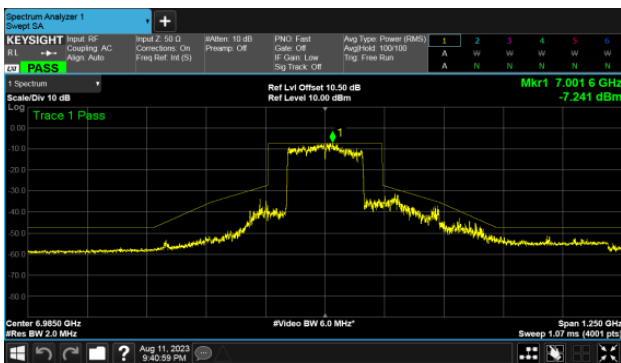





Extends across 6875MHz band
Modulation Type: 802.11ax HE20 CH185
ANT A

Modulation Type: 802.11ax HE40 CH187
ANT A

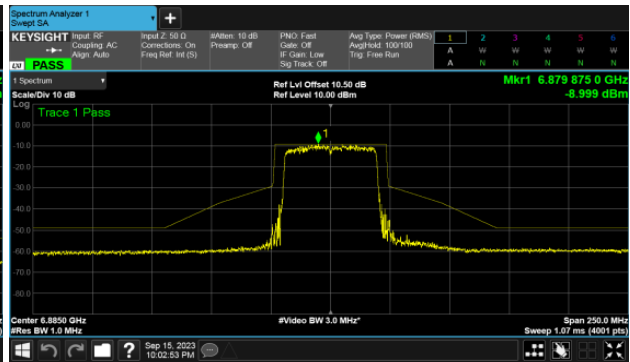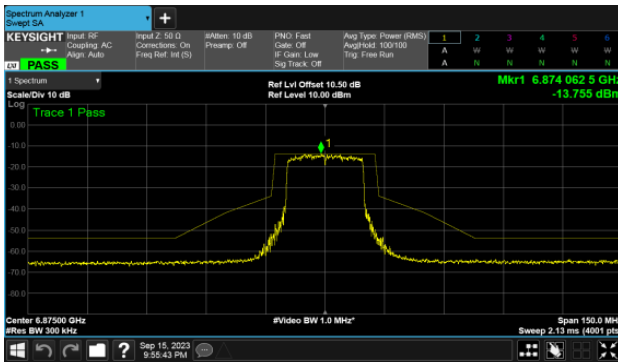


ANT B

ANT B

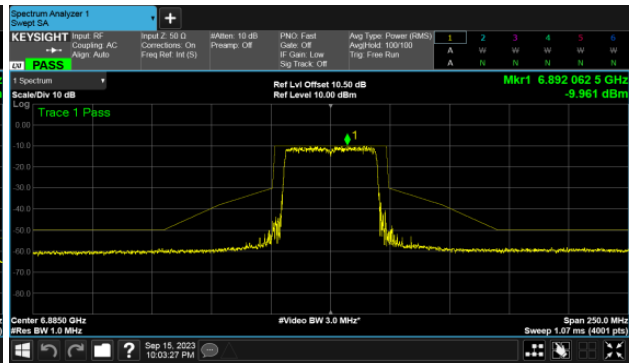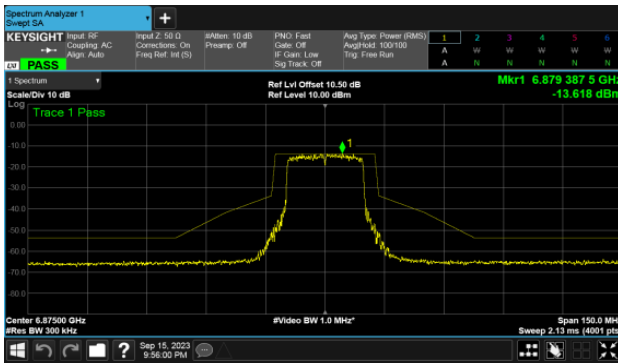





Modulation Type: 802.11ax HE80 CH183
ANT A

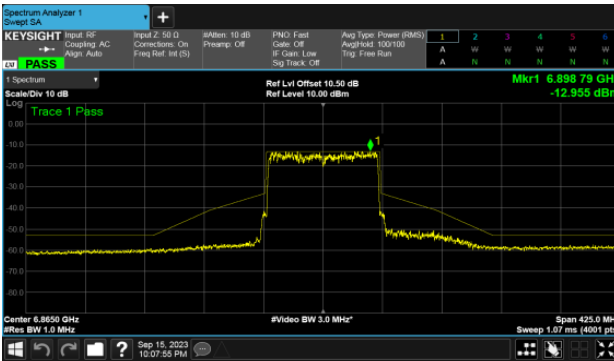


Modulation Type: 802.11ax HE160 CH175
ANT A

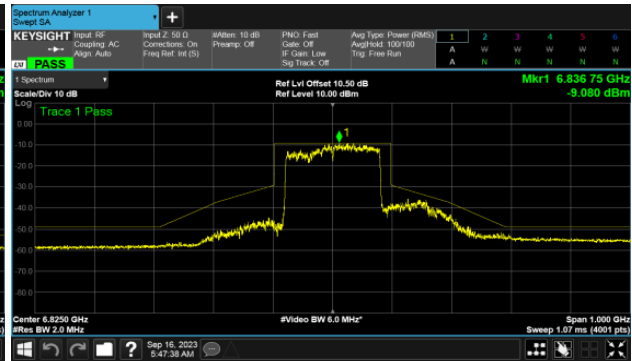

ANT B

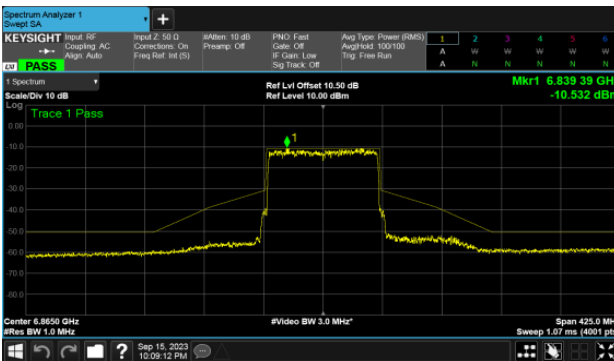

ANT B

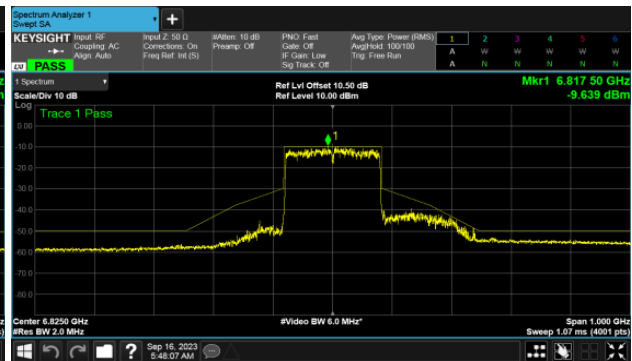



6.8. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. On Time, Duty Cycle


7.1. Test Limit

None; for reporting purposes only.

7.2. Test Procedure

KDB 789033 Zero-Span Spectrum Analyzer Method.

7.3. Test Setup Layout

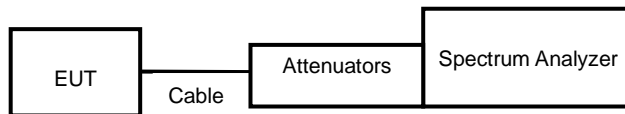


7.4. Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
802.11ax HE20	1.17	2.42	48.37%
802.11ax HE40	0.62	1.87	33.26%
802.11ax HE80	0.34	1.59	21.20%
802.11ax HE160	0.21	1.45	14.13%




Modulation Type: 802.11ax HE20 (7.3Mbps)

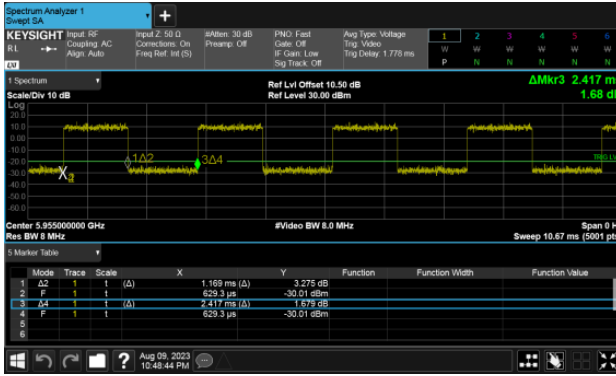


Modulation Type: 802.11ax HE80 (30.6Mbps)

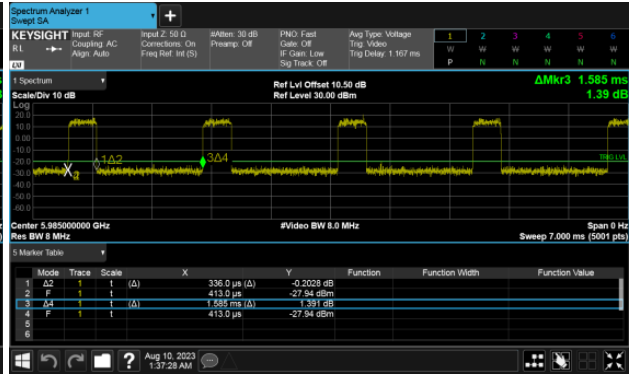

Modulation Type: 802.11ax HE40 (14.6Mbps)

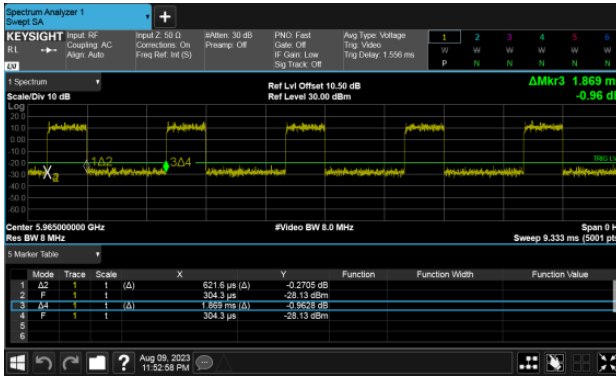

Modulation Type: 802.11ax HE160 (61.3Mbps)

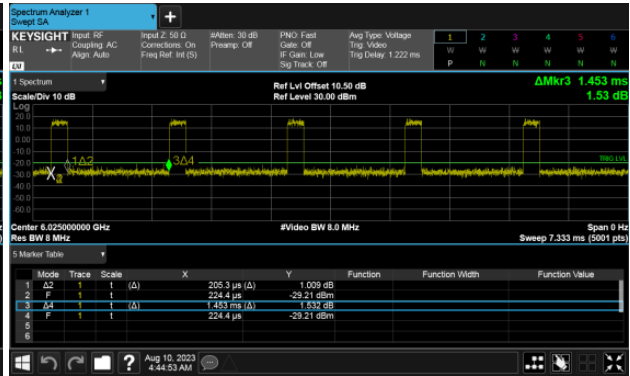



8. 26dB Bandwidth & 99% Occupied Bandwidth


8.1. Test Limit

26dB Bandwidth \leq 320MHz.

8.2. Test Procedure

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW = approximately 1% of the emission bandwidth, the VBW \geq 3 x RBW, peak detector and max hold.

8.3. Test Setup Layout

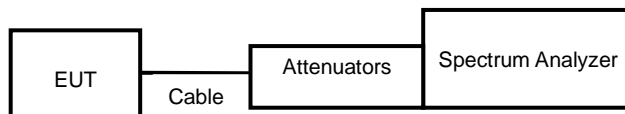



8.4. Test Result and Data (26dB Bandwidth)

U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	26dB Bandwidth(MHz)		Limit (MHz)
				ANT A	ANT B	
11ax HE20	NSS1-MCS0	1	5955	23.87	23.89	320.00
11ax HE20	NSS1-MCS0	45	6175	24.10	24.21	320.00
11ax HE20	NSS1-MCS0	93	6415	24.47	24.40	320.00
11ax HE40	NSS1-MCS0	3	5965	46.95	46.18	320.00
11ax HE40	NSS1-MCS0	43	6165	46.15	46.37	320.00
11ax HE40	NSS1-MCS0	91	6405	46.92	46.24	320.00
11ax HE80	NSS1-MCS0	7	5985	81.11	80.91	320.00
11ax HE80	NSS1-MCS0	39	6145	92.12	95.53	320.00
11ax HE80	NSS1-MCS0	87	6385	81.26	80.99	320.00
11ax HE160	NSS1-MCS0	15	6025	198.80	163.00	320.00
11ax HE160	NSS1-MCS0	47	6185	238.80	236.40	320.00
11ax HE160	NSS1-MCS0	79	6345	238.40	200.30	320.00



U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	26dB Bandwidth(MHz)		Limit (MHz)
				ANT A	ANT B	
11ax HE20	NSS1-MCS0	97	6435	24.45	24.18	320.00
11ax HE20	NSS1-MCS0	105	6475	24.48	24.34	320.00
11ax HE20	NSS1-MCS0	113	6515	24.50	24.47	320.00
11ax HE40	NSS1-MCS0	99	6445	46.37	46.10	320.00
11ax HE40	NSS1-MCS0	107	6485	46.13	46.19	320.00
11ax HE80	NSS1-MCS0	103	6465	80.88	80.87	320.00

U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	26dB Bandwidth(MHz)		Limit (MHz)
				ANT A	ANT B	
11ax HE20	NSS1-MCS0	117	6535	24.11	24.03	320.00
11ax HE20	NSS1-MCS0	149	6695	24.48	24.42	320.00
11ax HE20	NSS1-MCS0	181	6855	24.24	24.25	320.00
11ax HE40	NSS1-MCS0	123	6565	46.46	45.95	320.00
11ax HE40	NSS1-MCS0	147	6685	46.21	46.72	320.00
11ax HE40	NSS1-MCS0	179	6845	46.13	46.08	320.00
11ax HE80	NSS1-MCS0	135	6625	81.28	80.72	320.00
11ax HE80	NSS1-MCS0	167	6785	81.07	80.93	320.00
11ax HE160	NSS1-MCS0	143	6665	238.50	163.10	320.00



U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	26dB Bandwidth(MHz)		Limit (MHz)
				ANT A	ANT B	
11ax HE20	NSS1-MCS0	209	6995	24.50	24.13	320.00
11ax HE20	NSS1-MCS0	233	7115	24.51	24.40	320.00
11ax HE40	NSS1-MCS0	203	6965	46.46	46.22	320.00
11ax HE40	NSS1-MCS0	227	7085	46.41	46.17	320.00
11ax HE80	NSS1-MCS0	199	6945	81.03	80.84	320.00
11ax HE80	NSS1-MCS0	215	7025	81.11	81.01	320.00
11ax HE160	NSS1-MCS0	207	6985	238.70	202.90	320.00

26dB Bandwidth (Within 6425-6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	Measured value of each antenna port (MHz)		Limit (MHz)
			ANT A	ANT B	
11ax HE40	NSS1-MCS0	6525	23.50	23.31	320.00
11ax HE80	NSS1-MCS0	6545	20.52	20.54	320.00
11ax HE160	NSS1-MCS0	6505	100.00	100.00	320.00

26dB Bandwidth (Extends across 6525MHz band)

Modulation Type	Data Rate	Frequency (MHz)	Measured value of each antenna port (MHz)		Limit (MHz)
			ANT A	ANT B	
11ax HE40	NSS1-MCS0	6525	23.35	23.22	320.00
11ax HE80	NSS1-MCS0	6545	60.80	61.00	320.00
11ax HE160	NSS1-MCS0	6505	65.47	64.26	320.00



26dB Bandwidth (Within 6525-6875MHz band)					
Modulation Type	Data Rate	Frequency (MHz)	Measured value of each antenna port (MHz)		Limit (MHz)
			ANT A	ANT B	
11ax HE20	NSS1-MCS0	6875	12.01	12.02	320.00
11ax HE40	NSS1-MCS0	6885	13.50	13.53	320.00
11ax HE80	NSS1-MCS0	6865	50.59	50.62	320.00
11ax HE160	NSS1-MCS0	6825	131.60	131.60	320.00

26dB Bandwidth (Extends across 6875MHz band)					
Modulation Type	Data Rate	Frequency (MHz)	Measured value of each antenna port (MHz)		Limit (MHz)
			ANT A	ANT B	
11ax HE20	NSS1-MCS0	6875	12.05	12.09	320.00
11ax HE40	NSS1-MCS0	6885	33.33	33.04	320.00
11ax HE80	NSS1-MCS0	6865	30.77	30.69	320.00
11ax HE160	NSS1-MCS0	6825	33.80	33.85	320.00



8.5. Test Result and Data (99% Occupied Bandwidth)

U-NII-5

Modulation Type	Data Rate	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
				ANT A	ANT B
11ax HE20	NSS1-MCS0	1	5955	19.06	19.05
11ax HE20	NSS1-MCS0	45	6175	19.05	19.05
11ax HE20	NSS1-MCS0	93	6415	19.08	19.06
11ax HE40	NSS1-MCS0	3	5965	38.46	38.37
11ax HE40	NSS1-MCS0	43	6165	38.41	38.37
11ax HE40	NSS1-MCS0	91	6405	38.48	38.26
11ax HE80	NSS1-MCS0	7	5985	77.34	77.32
11ax HE80	NSS1-MCS0	39	6145	77.33	77.32
11ax HE80	NSS1-MCS0	87	6385	77.29	77.25
11ax HE160	NSS1-MCS0	15	6025	156.41	156.44
11ax HE160	NSS1-MCS0	47	6185	178.73	166.20
11ax HE160	NSS1-MCS0	79	6345	165.43	160.20

U-NII-6

Modulation Type	Data Rate	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
				ANT A	ANT B
11ax HE20	NSS1-MCS0	97	6435	19.17	19.14
11ax HE20	NSS1-MCS0	105	6475	19.15	19.17
11ax HE20	NSS1-MCS0	113	6515	19.17	19.15
11ax HE40	NSS1-MCS0	99	6445	38.43	38.31
11ax HE40	NSS1-MCS0	107	6485	38.34	38.26
11ax HE80	NSS1-MCS0	103	6465	77.17	77.19



U-NII-7

Modulation Type	Data Rate	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
				ANT A	ANT B
11ax HE20	NSS1-MCS0	117	6535	19.07	19.06
11ax HE20	NSS1-MCS0	149	6695	19.07	19.08
11ax HE20	NSS1-MCS0	181	6855	19.07	19.07
11ax HE40	NSS1-MCS0	123	6565	38.48	38.36
11ax HE40	NSS1-MCS0	147	6685	38.43	38.30
11ax HE40	NSS1-MCS0	179	6845	38.44	38.34
11ax HE80	NSS1-MCS0	135	6625	77.18	77.20
11ax HE80	NSS1-MCS0	167	6785	77.33	77.23
11ax HE160	NSS1-MCS0	143	6665	158.61	158.66

U-NII-8

Modulation Type	Data Rate	Channel	Frequency (MHz)	99% Bandwidth(MHz)	
				ANT A	ANT B
11ax HE20	NSS1-MCS0	209	6995	19.05	19.07
11ax HE20	NSS1-MCS0	233	7115	19.08	19.08
11ax HE40	NSS1-MCS0	203	6965	38.41	38.32
11ax HE40	NSS1-MCS0	227	7085	38.45	38.35
11ax HE80	NSS1-MCS0	199	6945	77.28	77.28
11ax HE80	NSS1-MCS0	215	7025	77.22	77.15
11ax HE160	NSS1-MCS0	207	6985	160.76	158.91



99% Bandwidth (Within 6425-6525MHz band)					
Setting	Modulation Type	Data Rate	Frequency (MHz)	Measured value of each antenna port (MHz)	
				ANT A	ANT B
9	11ax HE40	NSS1-MCS0	6525	19.41	19.38
10	11ax HE80	NSS1-MCS0	6545	19.08	19.00
15	11ax HE160	NSS1-MCS0	6505	98.24	98.12

99% Bandwidth (Extends across 6525MHz band)					
Setting	Modulation Type	Data Rate	Frequency (MHz)	Measured value of each antenna port (MHz)	
				ANT A	ANT B
9	11ax HE40	NSS1-MCS0	6525	19.86	19.61
10	11ax HE80	NSS1-MCS0	6545	58.59	58.51
15	11ax HE160	NSS1-MCS0	6505	58.33	58.59




99% Bandwidth (Within 6525-6875MHz band)					
Setting	Modulation Type	Data Rate	Frequency (MHz)	Measured value of each antenna port (MHz)	
				ANT A	ANT B
5.75	11ax HE20	NSS1-MCS0	6875	9.87	9.84
9	11ax HE40	NSS1-MCS0	6885	10.58	10.52
11.75	11ax HE80	NSS1-MCS0	6865	48.84	48.93
14.5	11ax HE160	NSS1-MCS0	6825	128.13	128.15


99% Bandwidth (Extends across 6875MHz band)					
Setting	Modulation Type	Data Rate	Frequency (MHz)	Measured value of each antenna port (MHz)	
				ANT A	ANT B
5.75	11ax HE20	NSS1-MCS0	6875	9.84	9.68
9	11ax HE40	NSS1-MCS0	6885	29.49	29.31
11.75	11ax HE80	NSS1-MCS0	6865	53.58	41.32
14.5	11ax HE160	NSS1-MCS0	6825	29.41	29.40




26dB Bandwidth U-NII-5
Modulation Type: 802.11ax HE20 CH01
ANT A

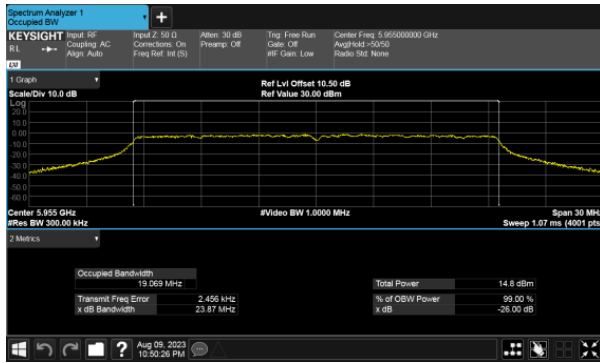


Modulation Type: 802.11ax HE20 CH45
ANT A

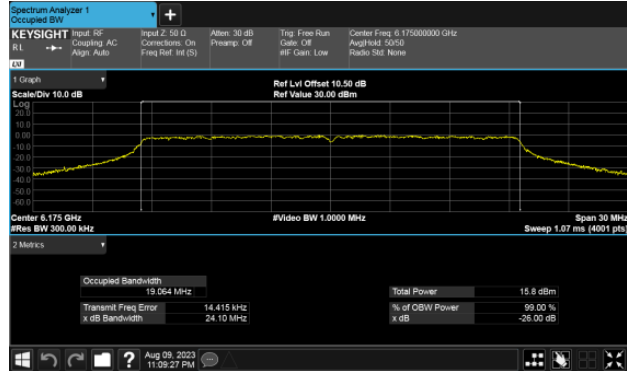

ANT B

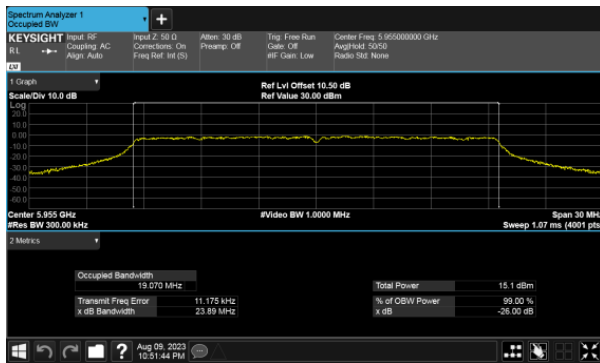


ANT B

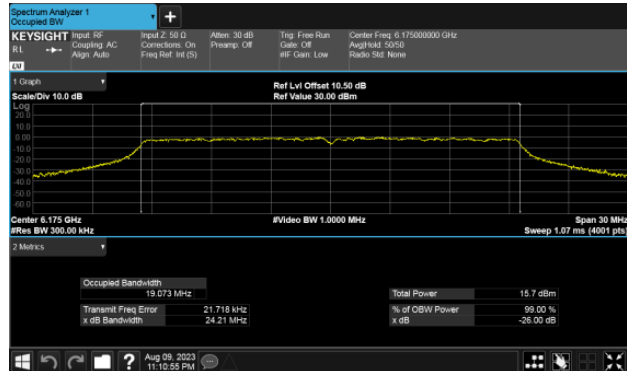




26dB Bandwidth
Modulation Type: 802.11ax HE20 CH93
ANT A

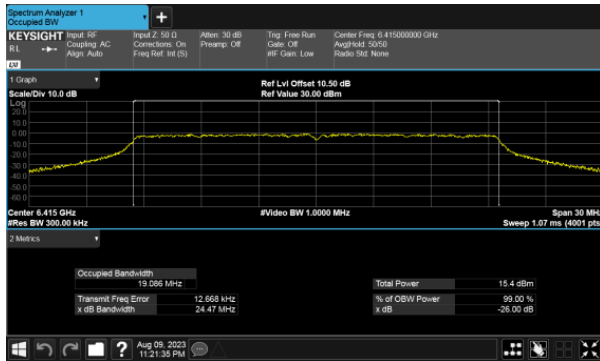

ANT B

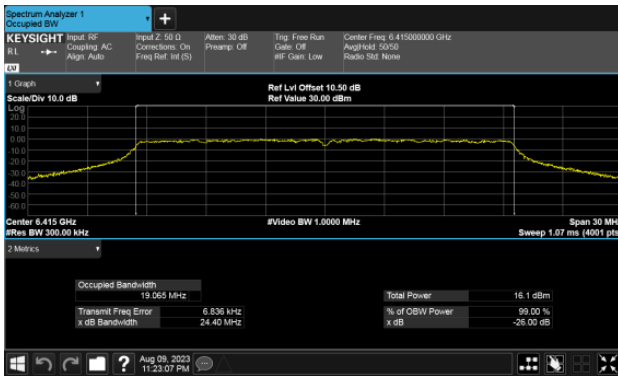





26dB Bandwidth
Modulation Type: 802.11ax HE40 CH03
ANT A




Modulation Type: 802.11ax HE40 CH43
ANT A

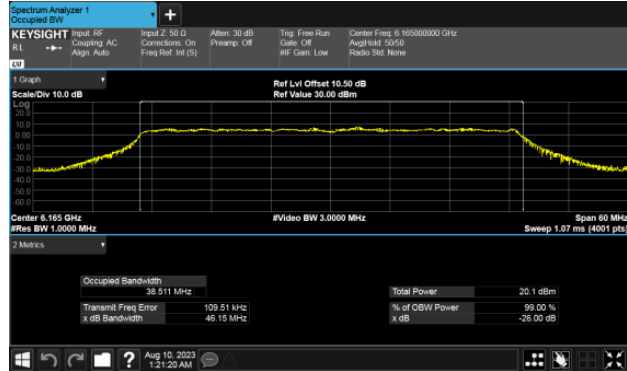

ANT B

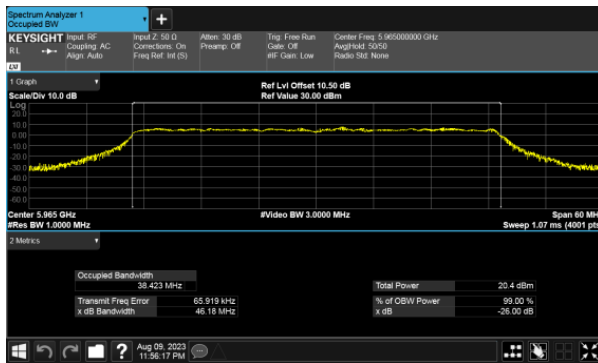


ANT B

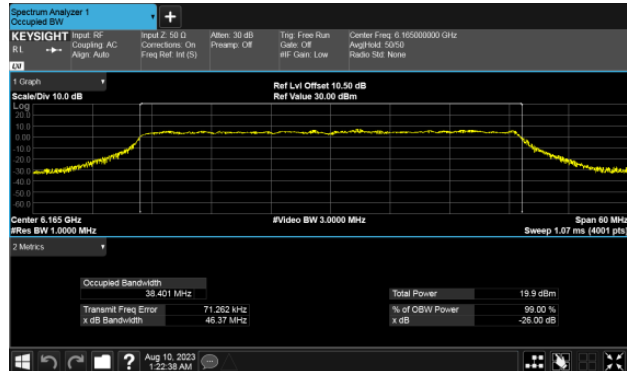




26dB Bandwidth
Modulation Type: 802.11ax HE40 CH91
ANT A

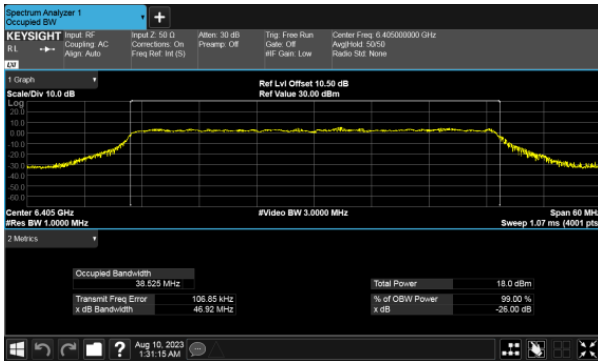


ANT B

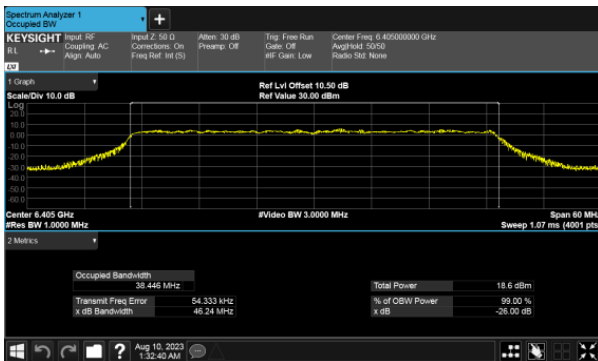





26dB Bandwidth
Modulation Type: 802.11ax HE80 CH07
ANT A

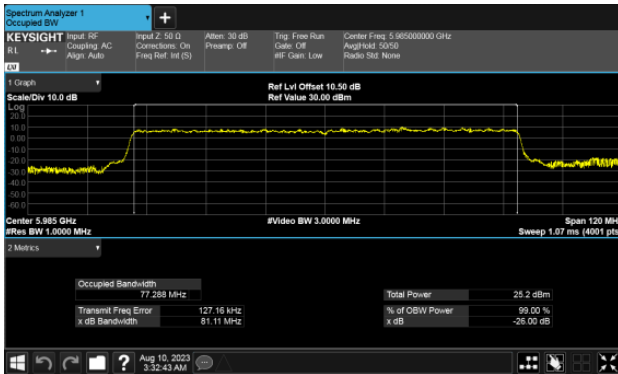


Modulation Type: 802.11ax HE80 CH39
ANT A

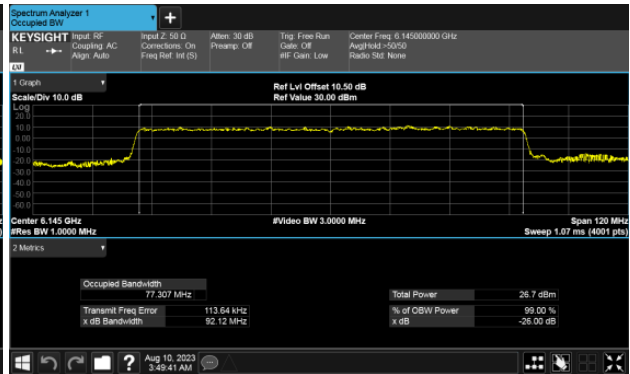

ANT B

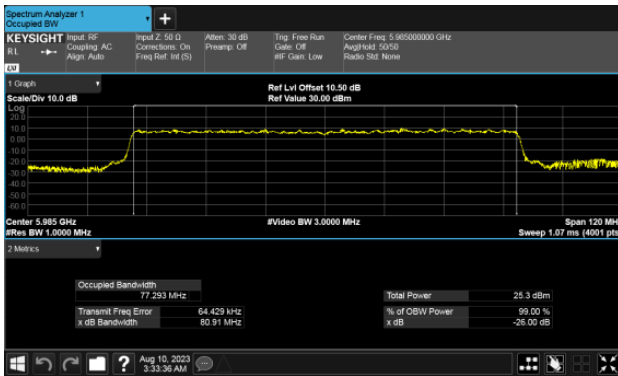


ANT B

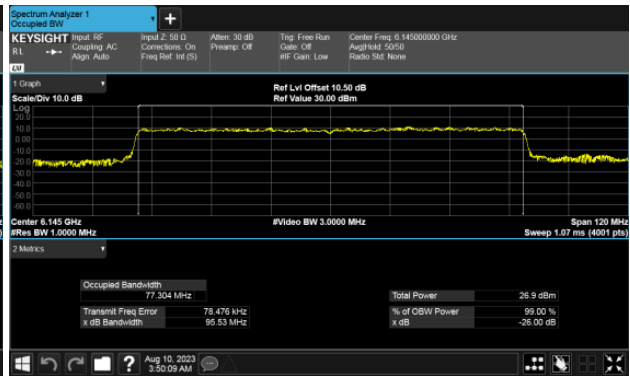




26dB Bandwidth
Modulation Type: 802.11ax HE80 CH87
ANT A

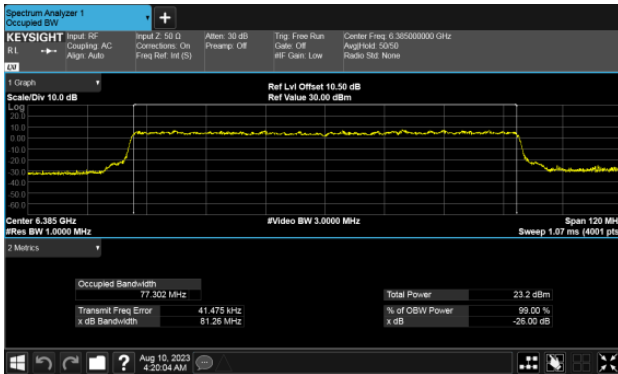



ANT B

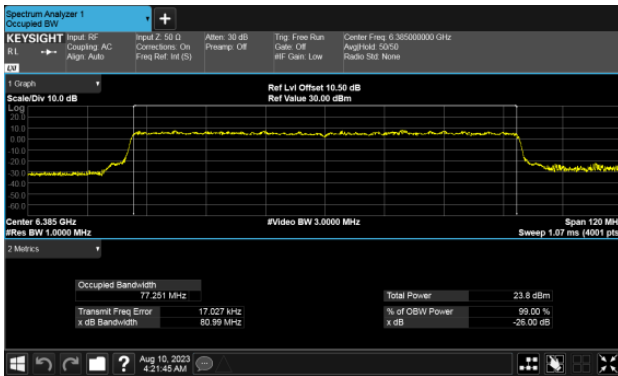





26dB Bandwidth
Modulation Type: 802.11ax HE160 CH15
ANT A

Modulation Type: 802.11ax HE160 CH47
ANT A

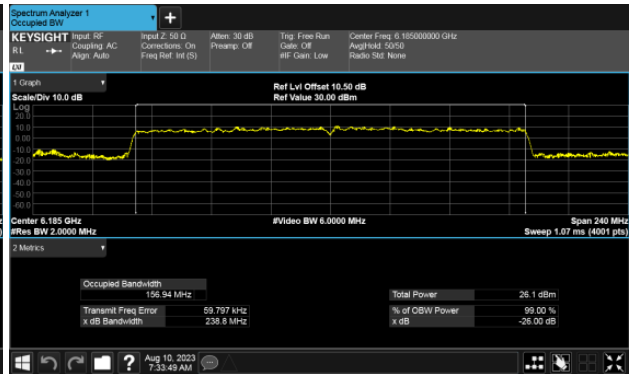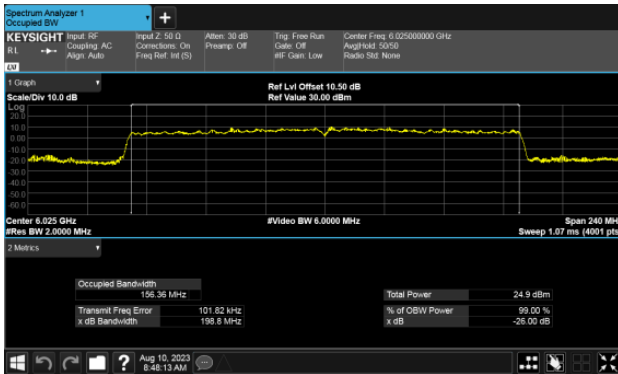


ANT B

ANT B

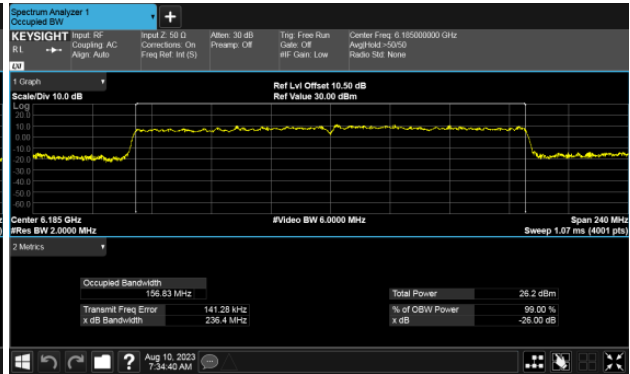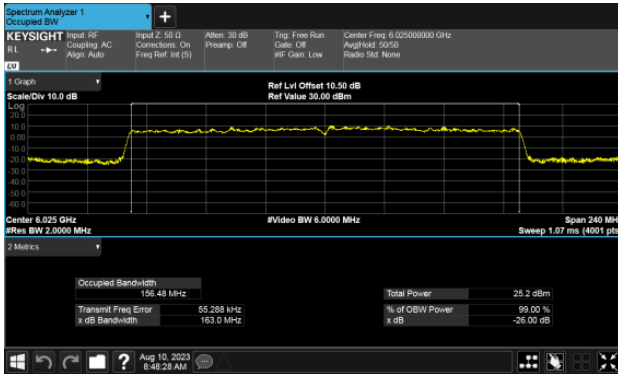




26dB Bandwidth
Modulation Type: 802.11ax HE160 CH79
ANT A

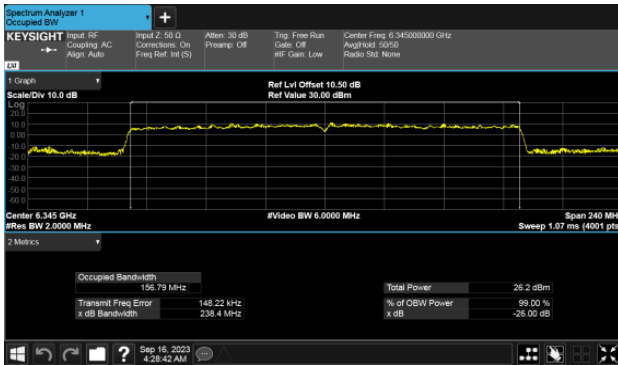


ANT B

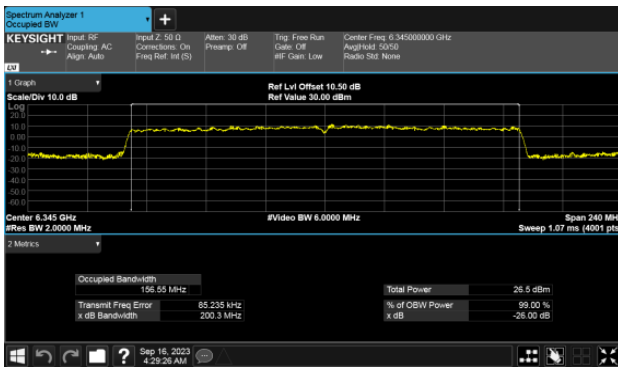





26dB Bandwidth U-NII-6
Modulation Type: 802.11ax HE20 CH97
ANT A

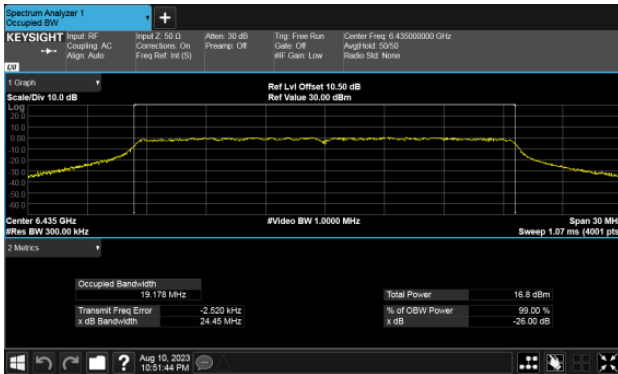


Modulation Type: 802.11ax HE20 CH105
ANT A

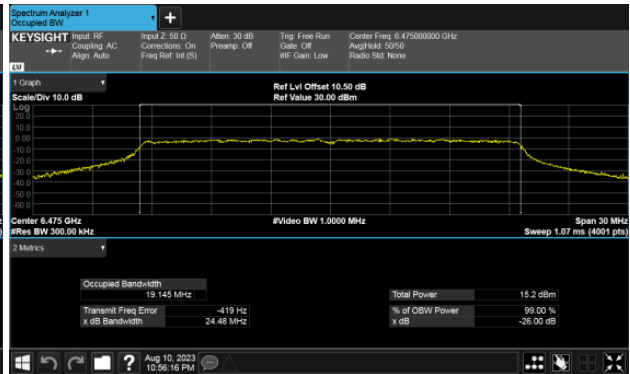

ANT B

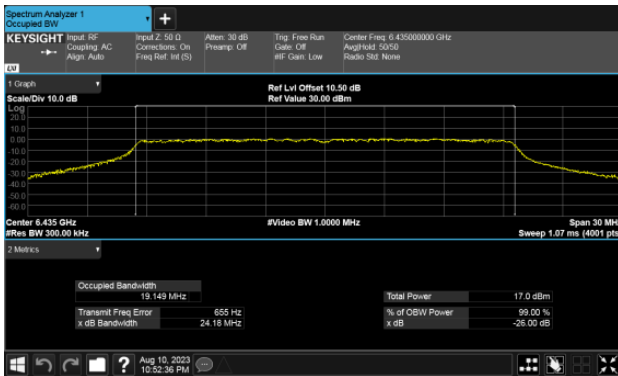


ANT B

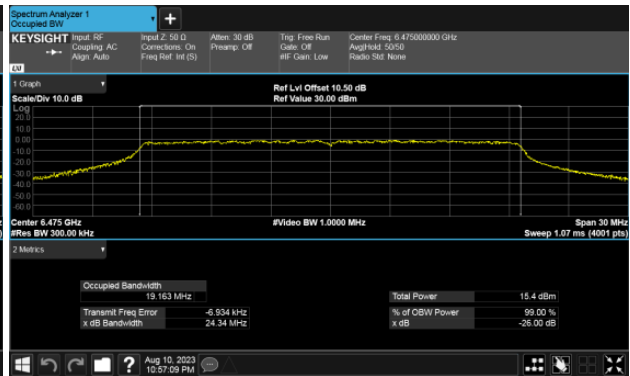




26dB Bandwidth
Modulation Type: 802.11ax HE20 CH113
ANT A

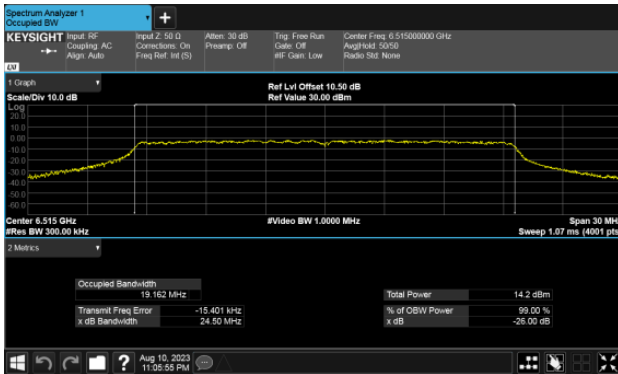


ANT B

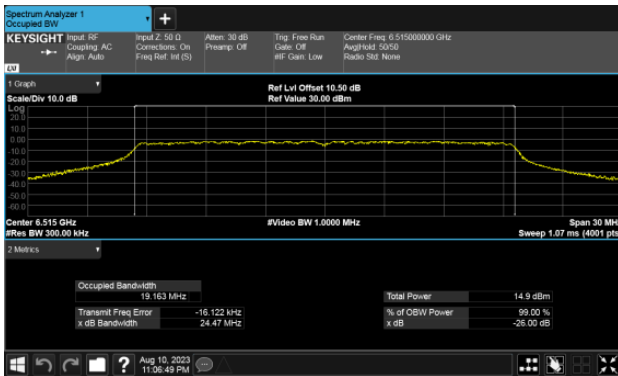



26dB Bandwidth
Modulation Type: 802.11ax HE40 CH99
ANT A

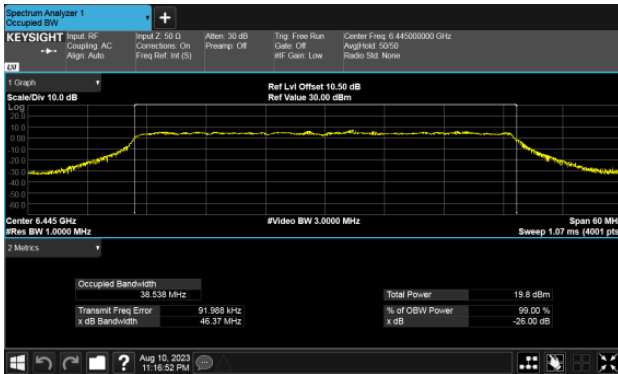

Modulation Type: 802.11ax HE40 CH107
ANT A



ANT B



ANT B

