




Appendix A: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.939	2401.577	2402.516	---	---
		2441	0.954	2440.574	2441.528	---	---
		2480	0.927	2479.577	2480.504	---	---
2DH5	Ant1	2402	1.329	2401.370	2402.699	---	---
		2441	1.329	2440.379	2441.708	---	---
		2480	1.368	2479.358	2480.726	---	---
3DH5	Ant1	2402	1.296	2401.388	2402.684	---	---
		2441	1.326	2440.379	2441.705	---	---
		2480	1.323	2479.382	2480.705	---	---

Test Graphs

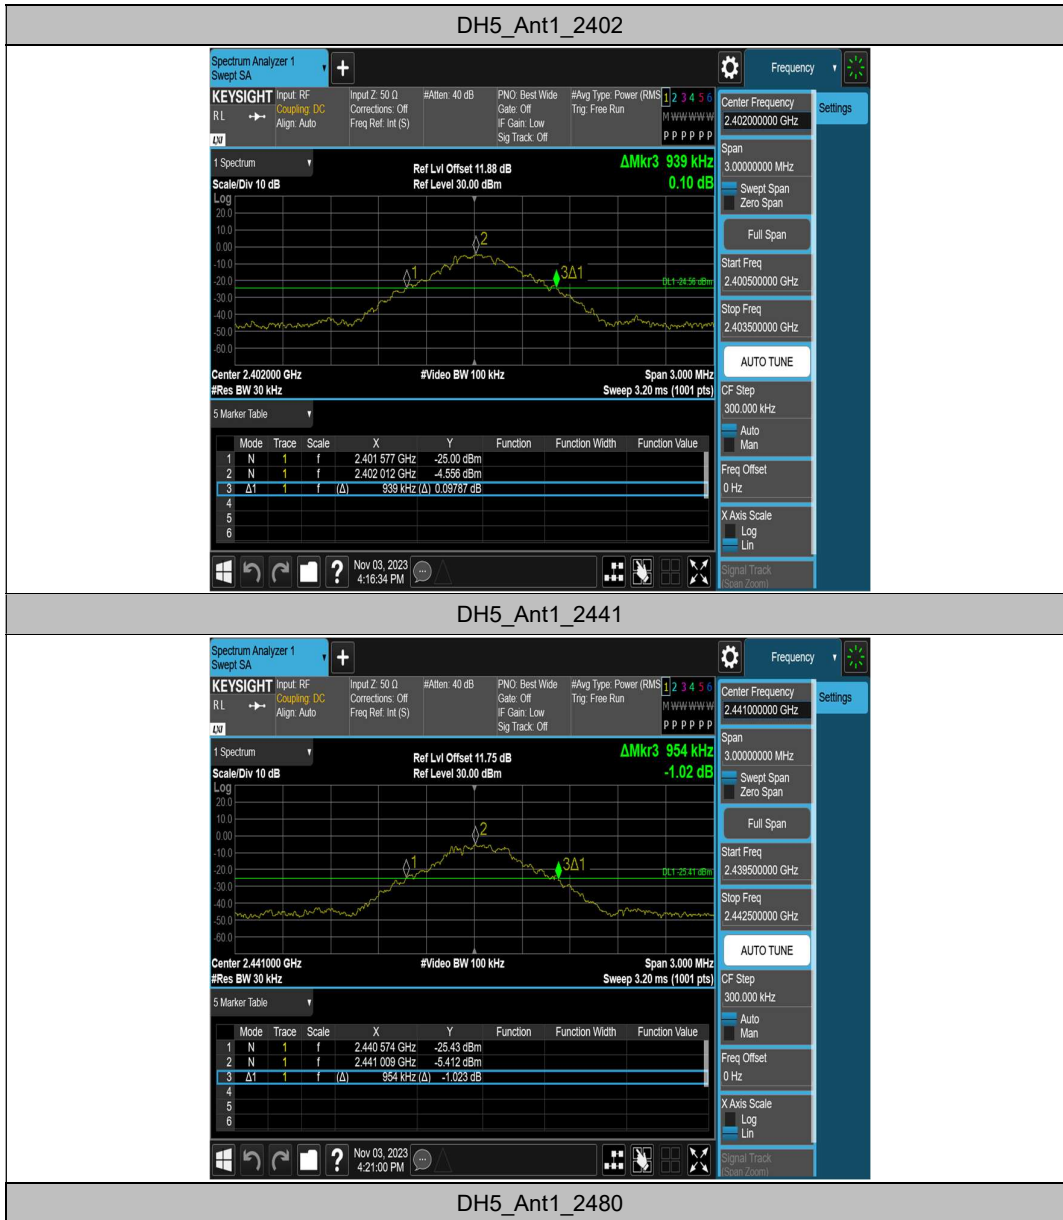

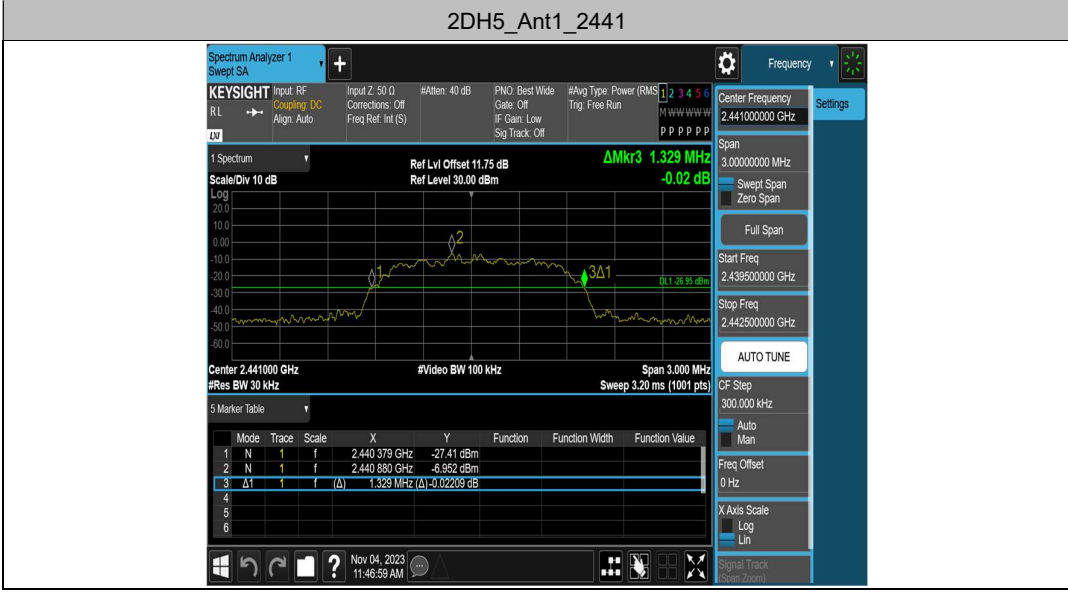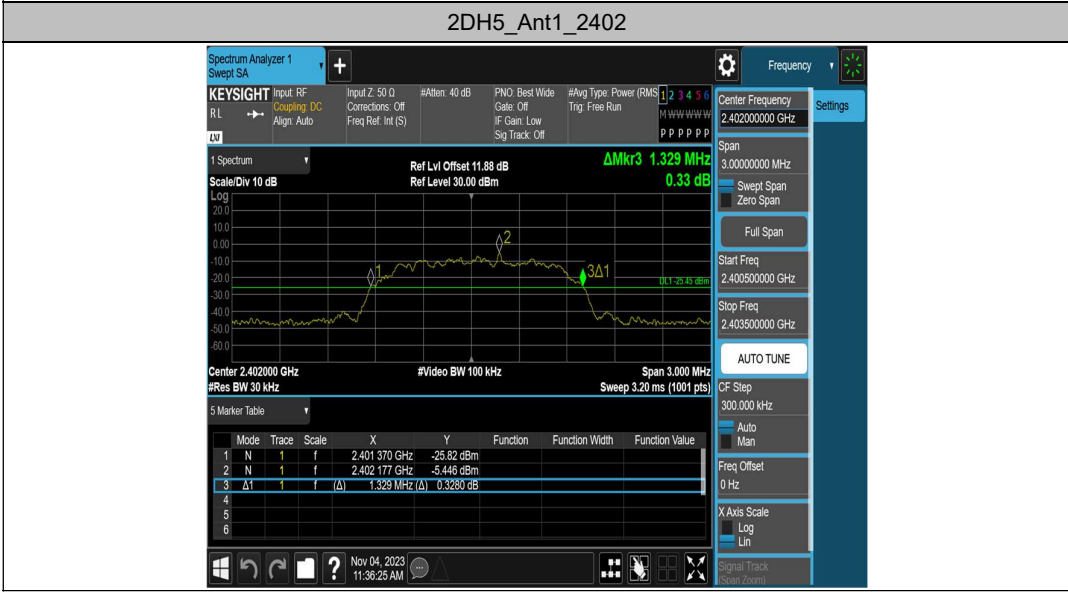

2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480




Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.84553	2401.6122	2402.4577	---	---
		2441	0.85197	2440.6120	2441.4640	---	---
		2480	0.84188	2479.6161	2480.4580	---	---
2DH5	Ant1	2402	1.1873	2401.4444	2402.6317	---	---
		2441	1.1883	2440.4464	2441.6347	---	---
		2480	1.1912	2479.4451	2480.6363	---	---
3DH5	Ant1	2402	1.1817	2401.4502	2402.6319	---	---
		2441	1.1873	2440.4472	2441.6345	---	---
		2480	1.1839	2479.4491	2480.6330	---	---

Test Graphs

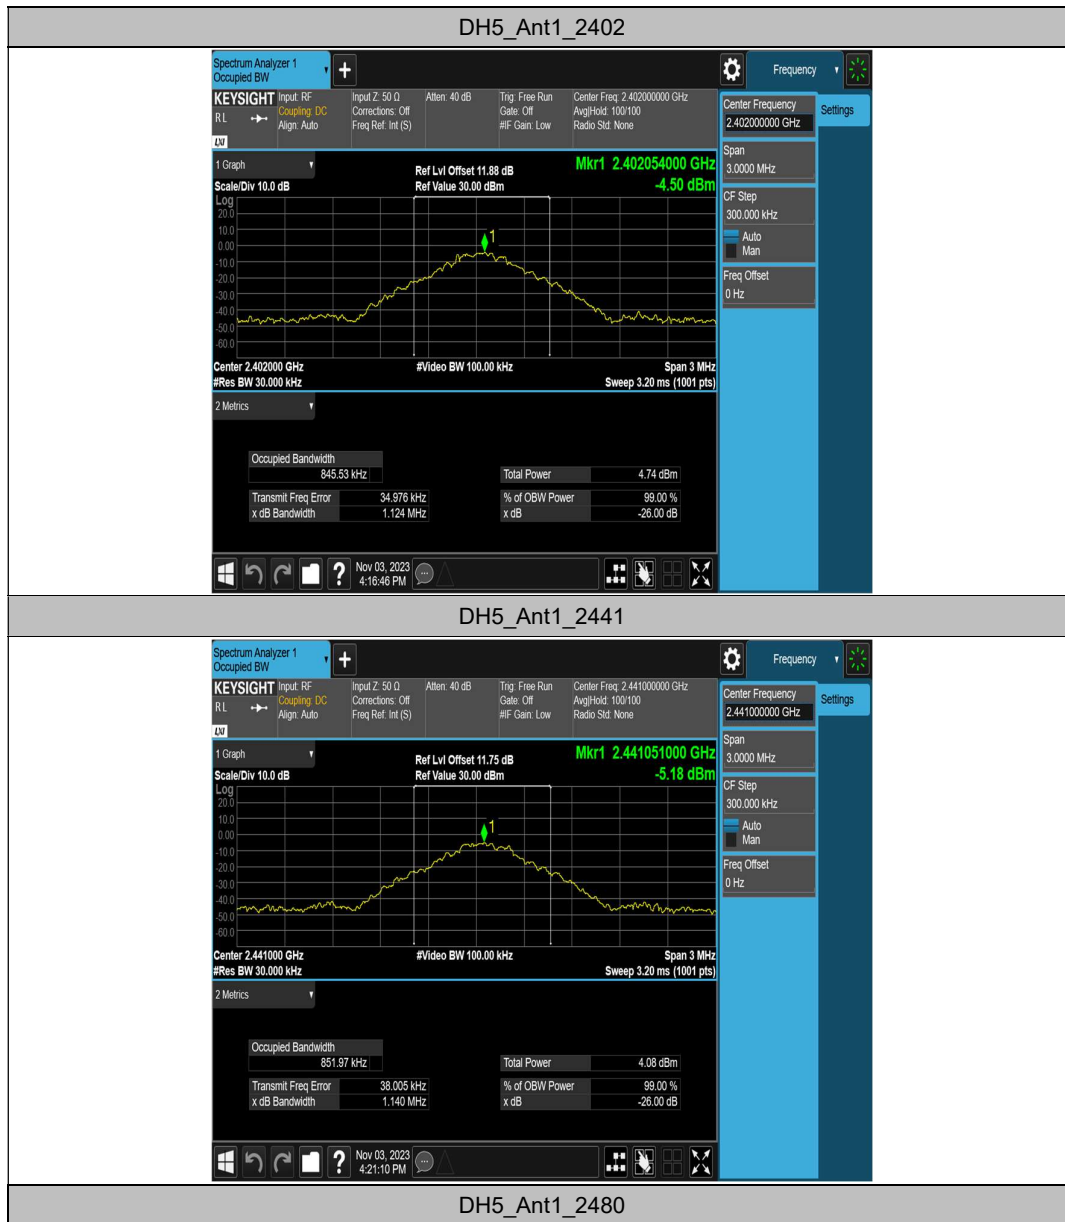




2DH5_Ant1_2402




2DH5_Ant1_2441




2DH5_Ant1_2480

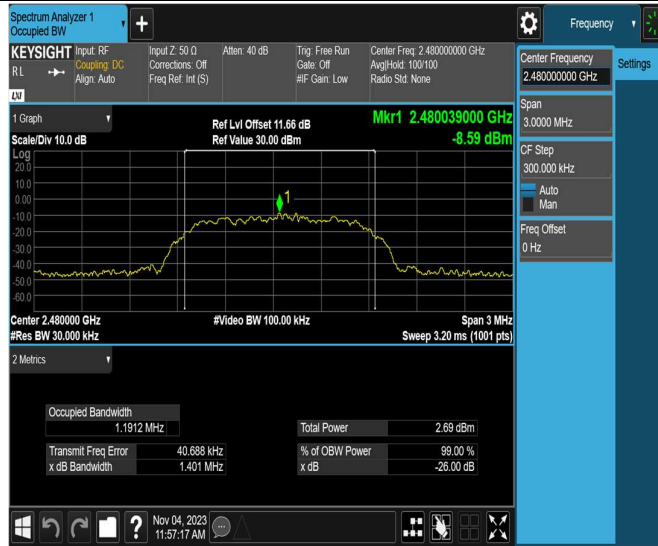

3DH5_Ant1_2402

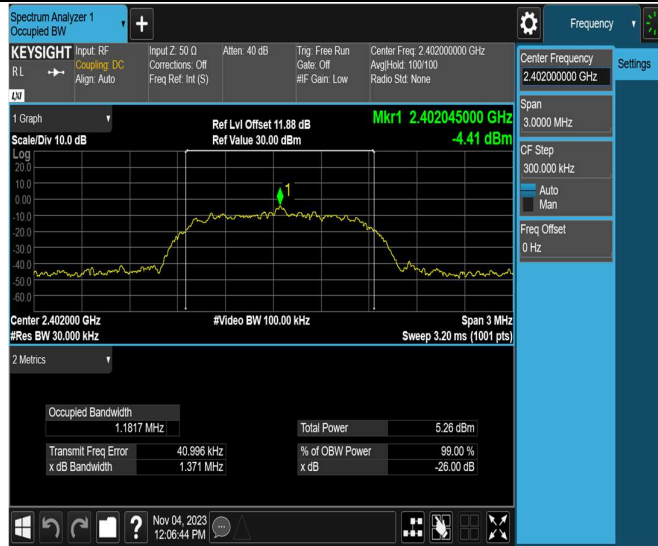

3DH5_Ant1_2441

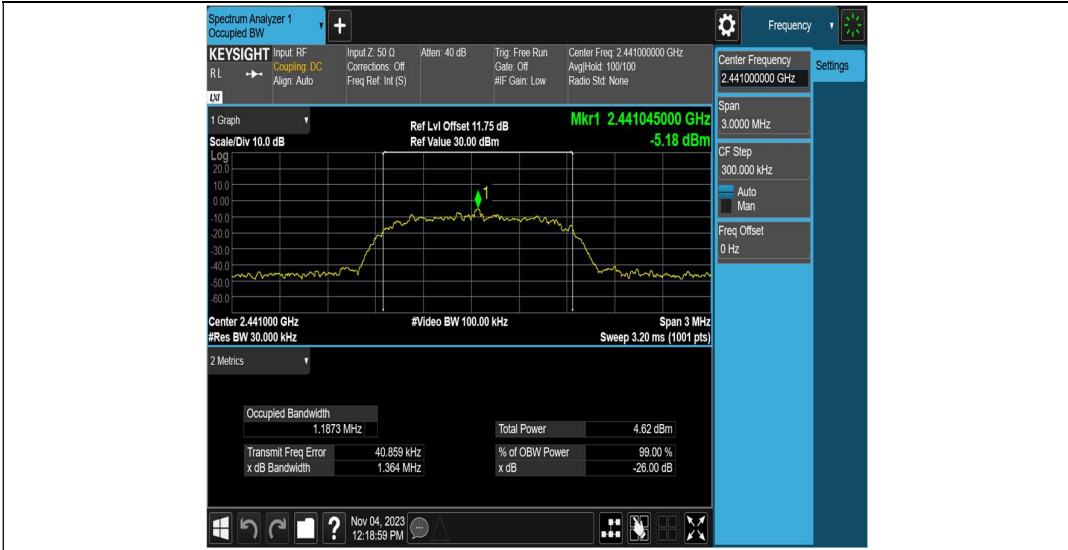

3DH5_Ant1_2480





Appendix C: Maximum conducted output power

Test Result Peak


Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	E.I.R.P[dBm]	E.I.R.P[dBm]	Verdict
DH5	Ant1	2402	-1.3	≤20.97	-1.88	≤36	PASS
		2441	-2.04	≤20.97	-2.62	≤36	PASS
		2480	-3.19	≤20.97	-3.77	≤36	PASS
2DH5	Ant1	2402	0.71	≤20.97	0.13	≤36	PASS
		2441	0	≤20.97	-0.58	≤36	PASS
		2480	-1.01	≤20.97	-1.59	≤36	PASS
3DH5	Ant1	2402	1.34	≤20.97	0.76	≤36	PASS
		2441	0.54	≤20.97	-0.04	≤36	PASS
		2480	-0.63	≤20.97	-1.21	≤36	PASS

Test Graphs

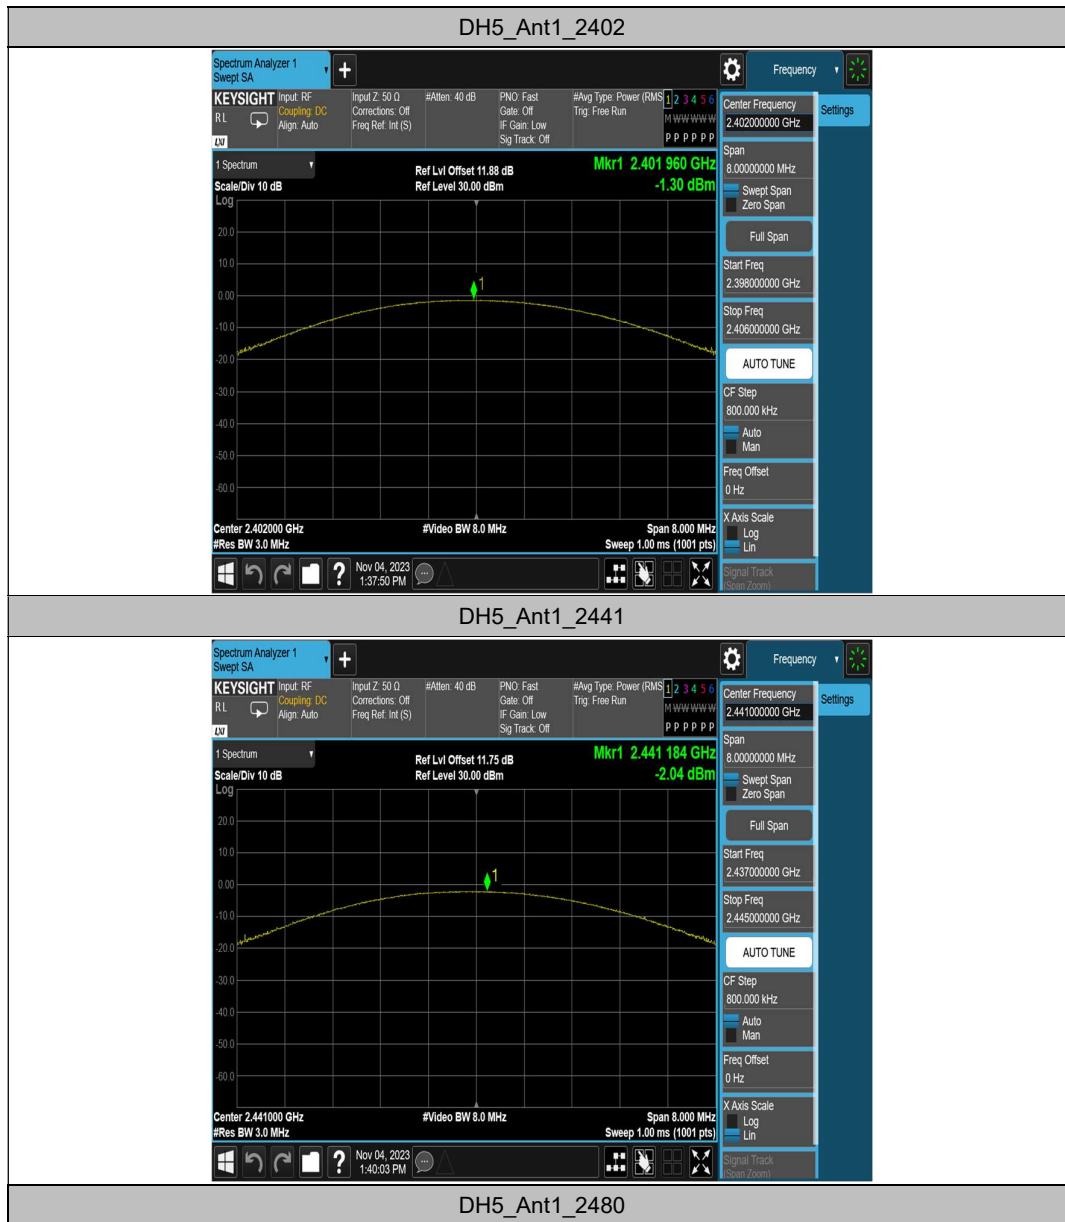


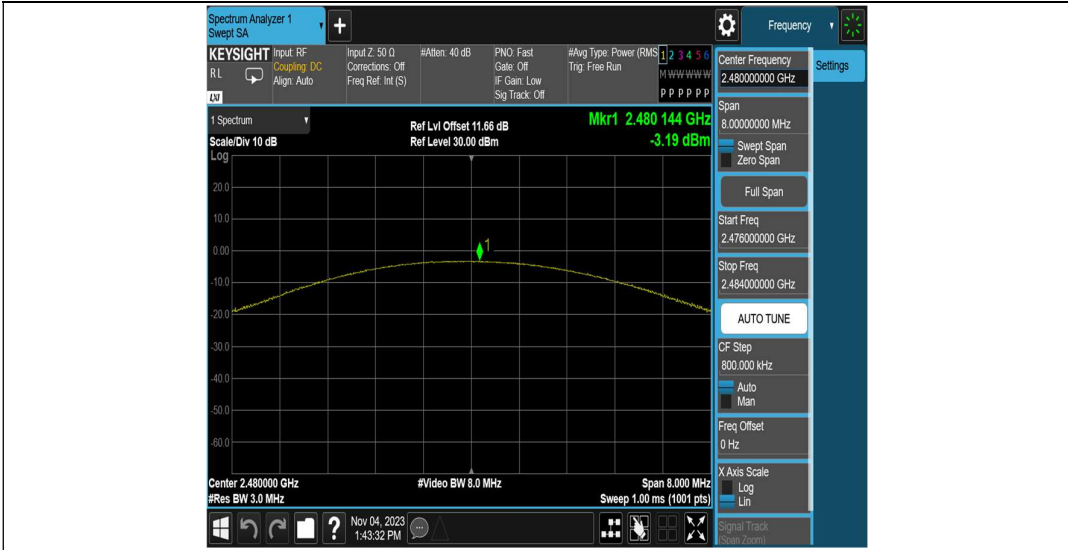

2DH5_Ant1_2402

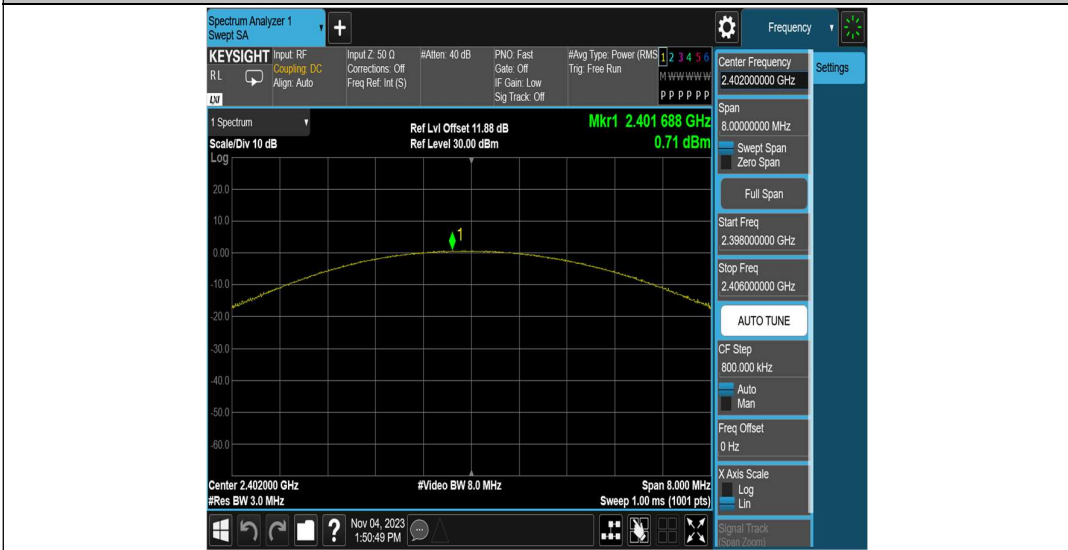


2DH5_Ant1_2441

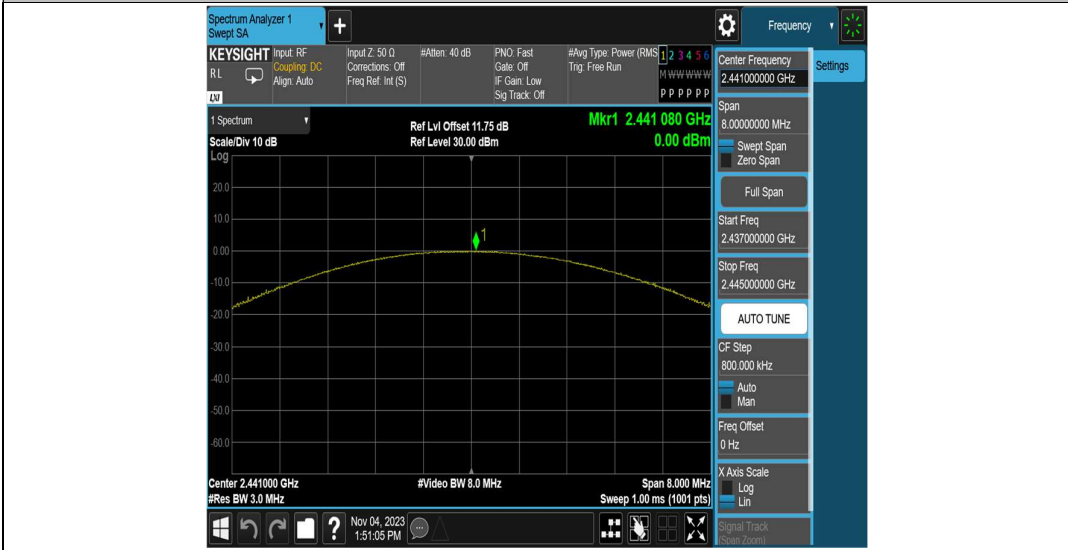

2DH5_Ant1_2480




3DH5_Ant1_2402

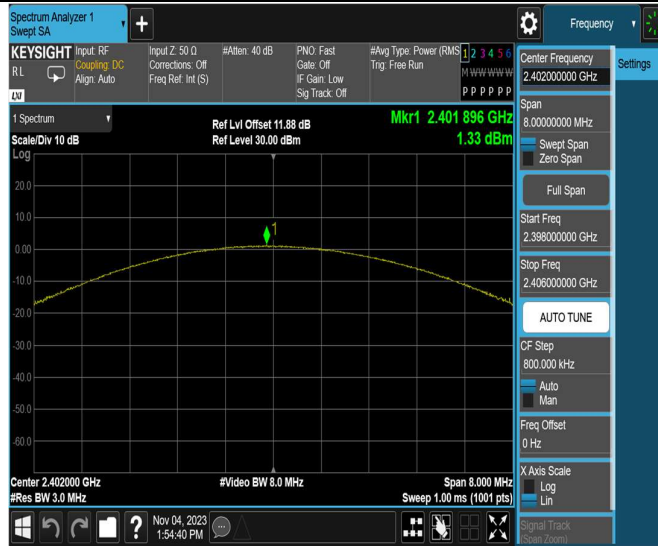

3DH5_Ant1_2441



3DH5_Ant1_2480

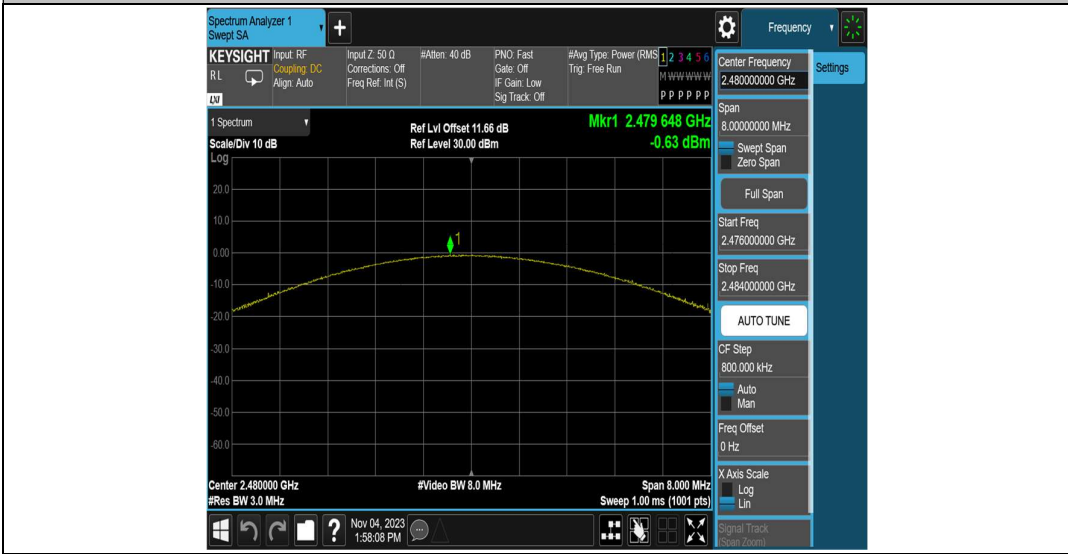


Appendix D: Carrier frequency separation

Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.7	≥ 0.636	PASS
2DH5	Ant1	Hop	1.142	≥ 0.912	PASS
3DH5	Ant1	Hop	1.034	≥ 0.884	PASS

Test Graphs



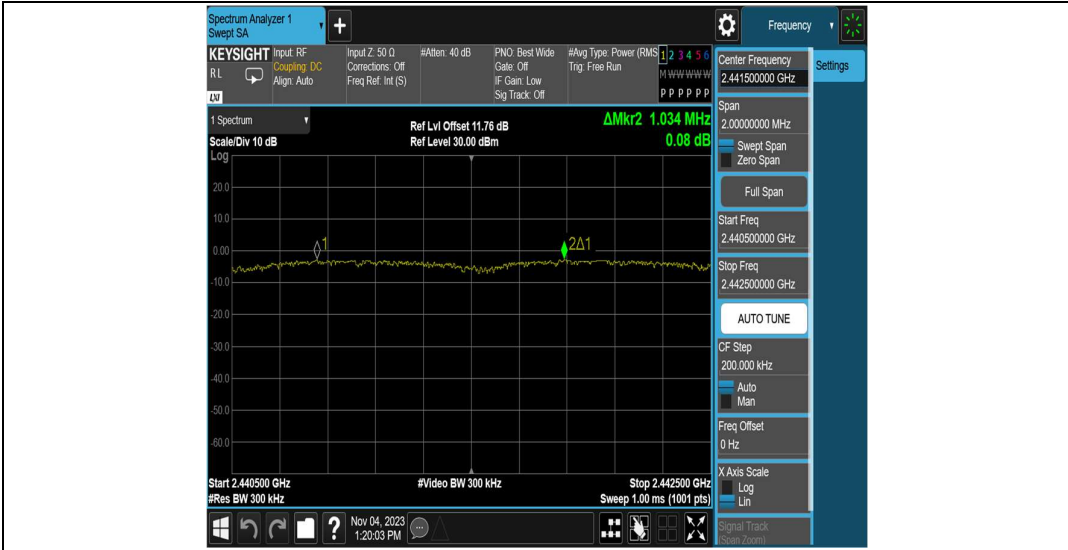



Appendix E: Time of occupancy

Test Result


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.395	320	0.126	≤0.4	PASS
DH3	Ant1	Hop	1.652	160	0.264	≤0.4	PASS
DH5	Ant1	Hop	2.899	106.67	0.309	≤0.4	PASS
2DH1	Ant1	Hop	0.405	320	0.13	≤0.4	PASS
2DH3	Ant1	Hop	1.657	160	0.265	≤0.4	PASS
2DH5	Ant1	Hop	2.904	106.67	0.31	≤0.4	PASS
3DH1	Ant1	Hop	0.408	320	0.131	≤0.4	PASS
3DH3	Ant1	Hop	1.657	160	0.265	≤0.4	PASS
3DH5	Ant1	Hop	2.906	106.67	0.31	≤0.4	PASS

Test Graphs

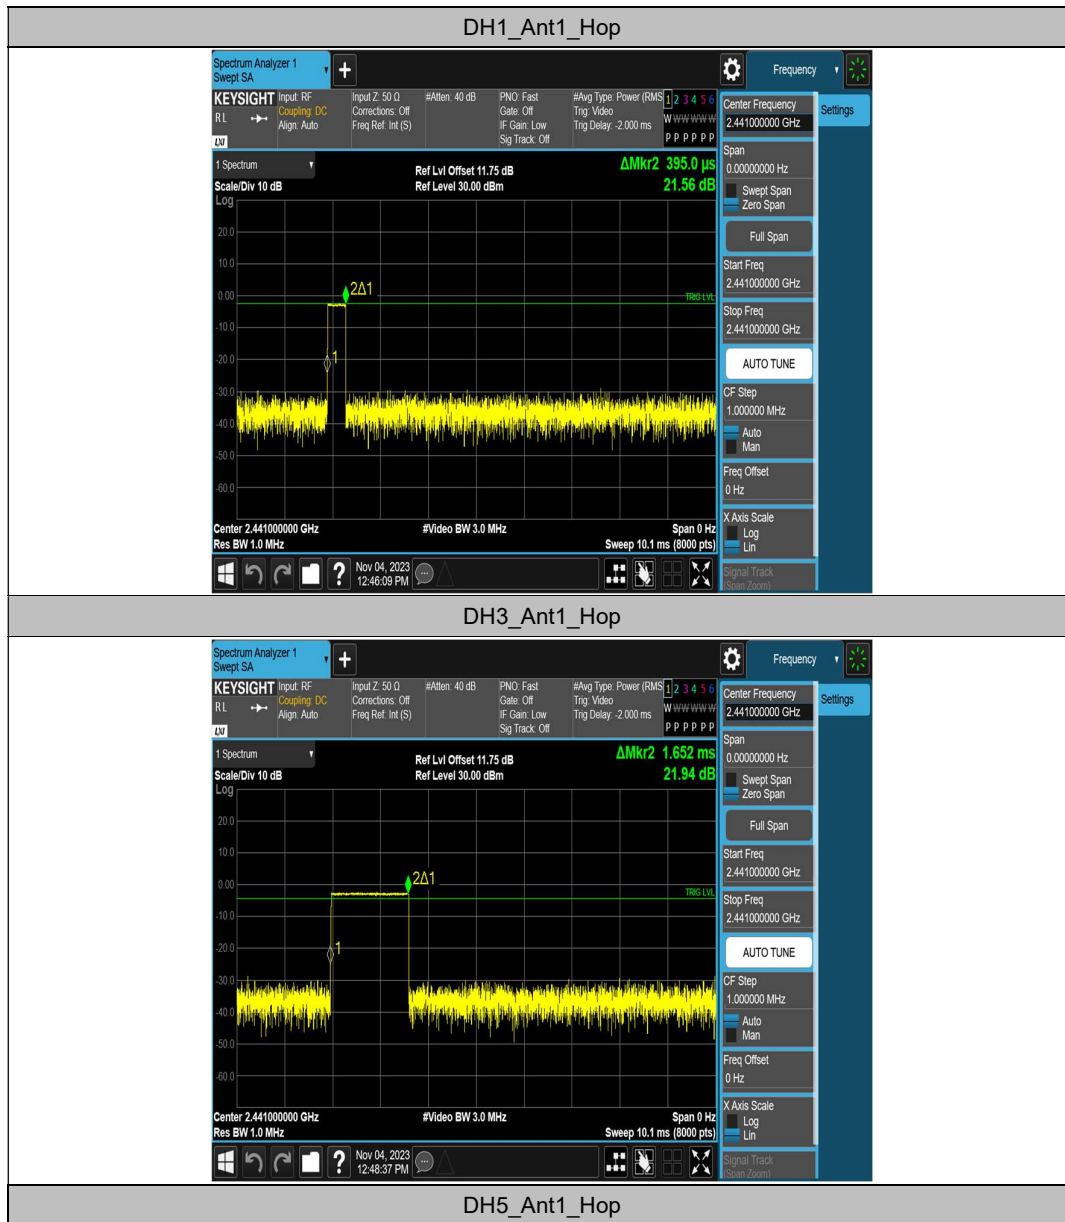


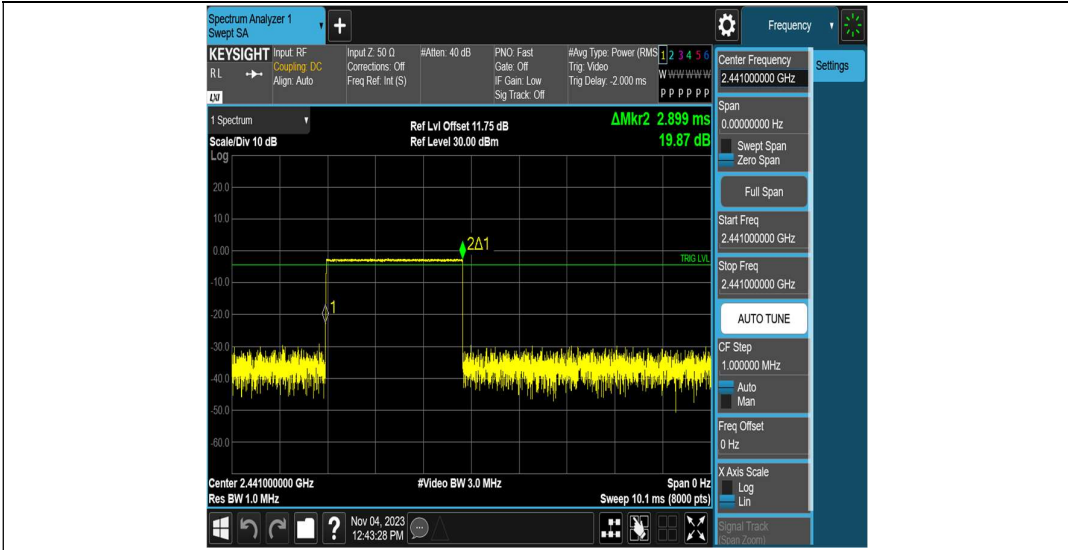


2DH1_Ant1_Hop

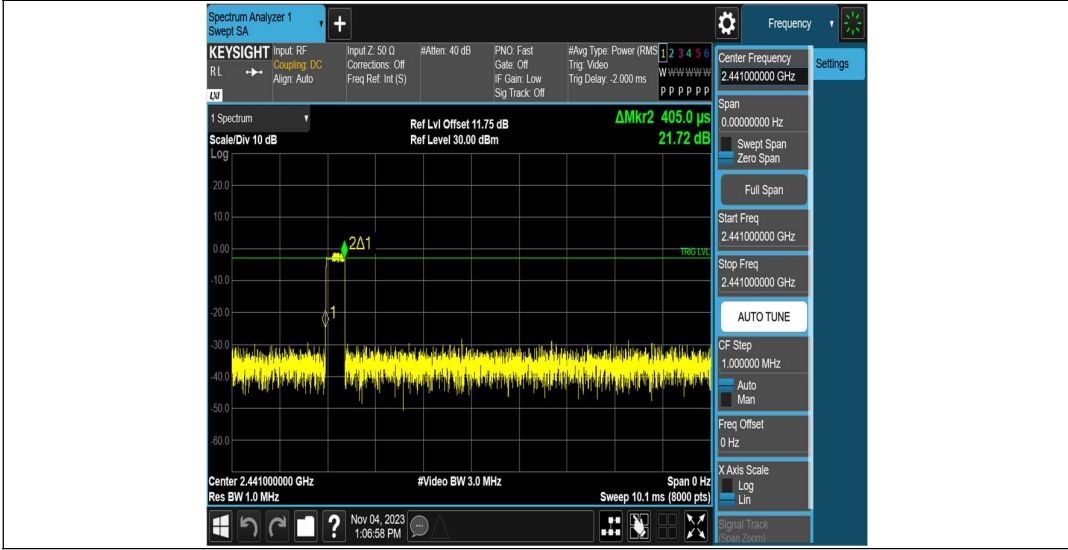


2DH3_Ant1_Hop

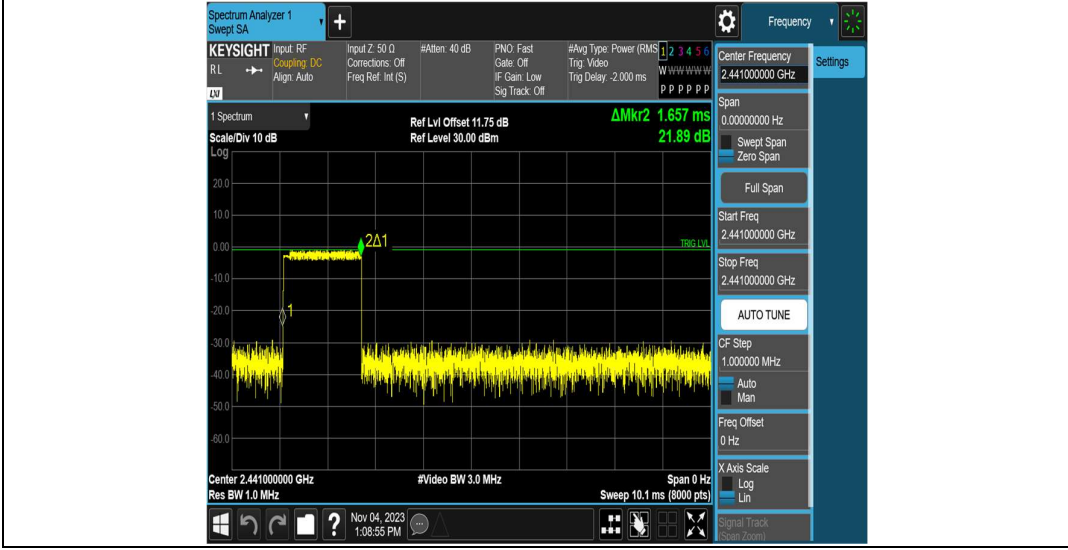


2DH5_Ant1_Hop

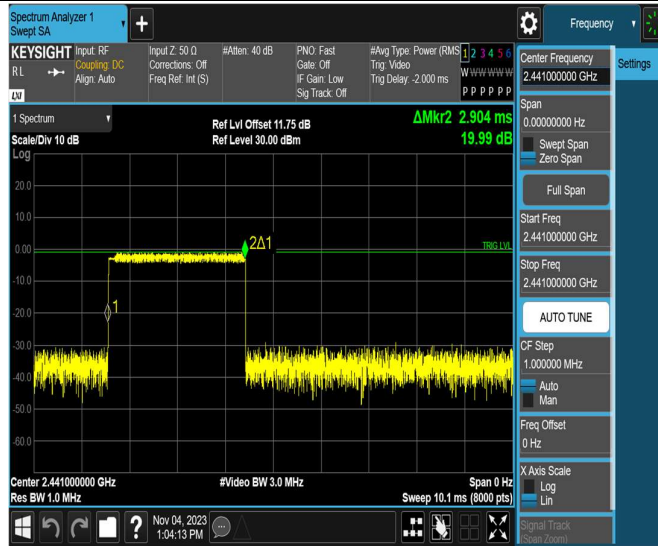


3DH1_Ant1_Hop

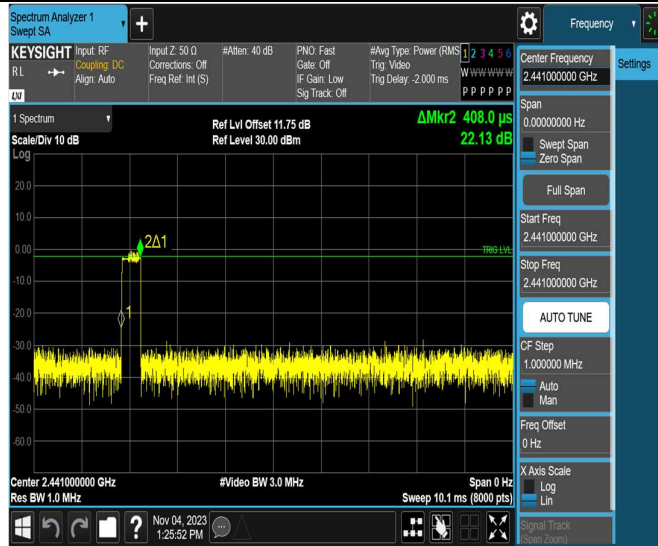

3DH3_Ant1_Hop

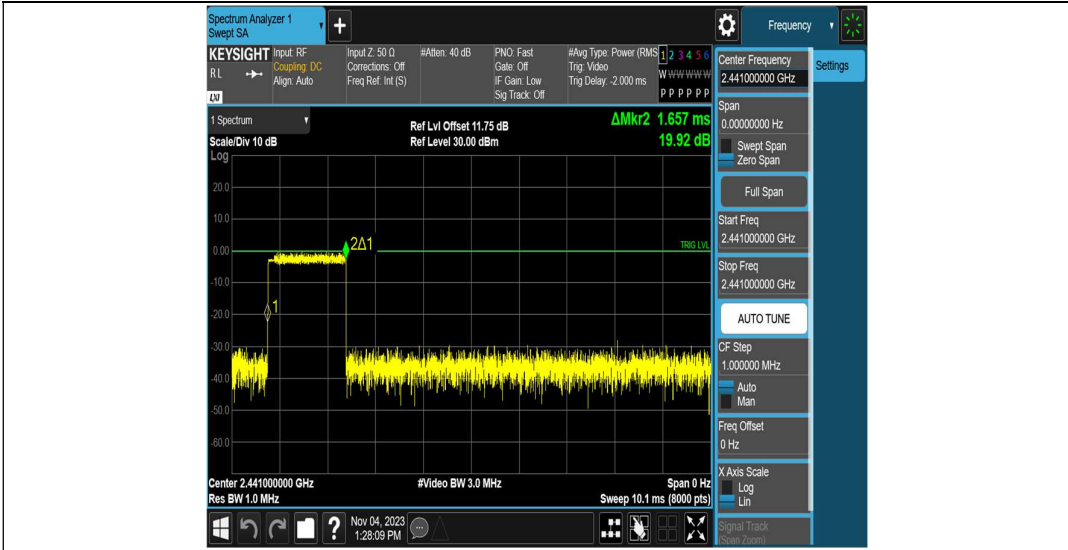

3DH5_Ant1_Hop

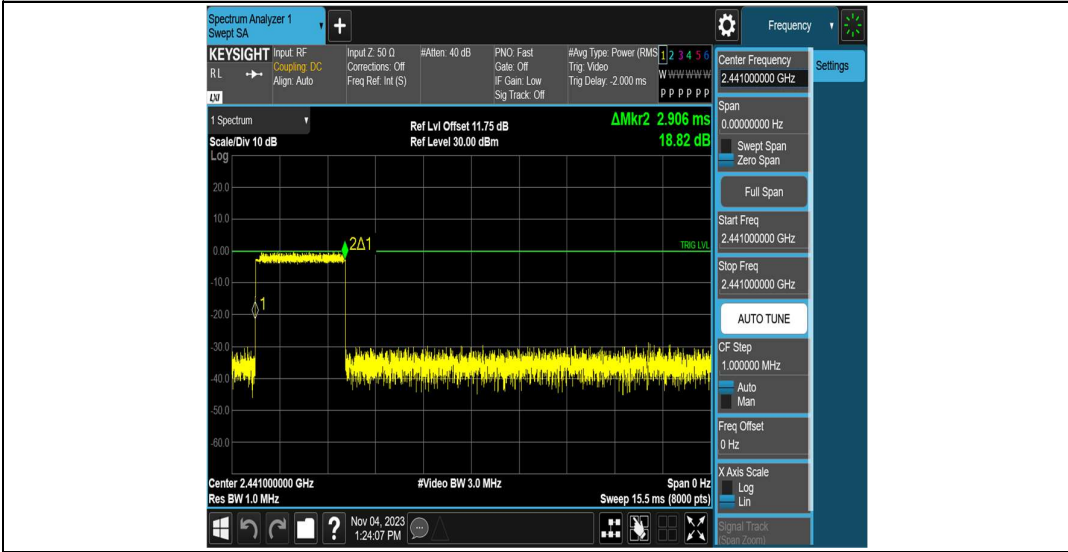

Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

