

APPLICANT: TIGER ELECTRONICS, INC.
FCC ID: I54-05051

TEST EQUIPMENT LIST

1. Spectrum Analyzer: Hewlett Packard 8566B, with preselector HP 85685A, & Quasi-Peak Adapter HP 85650A, & HP 8449B OPT H02 Cal. 9/30/97
2. Eaton Biconnical Antenna Model 94455-1 20-200 MHz Serial No. 0997 Cal. 9/17/97
3. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA 25 cal. 5/15/97
4. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 9/24/97
5. Electro-Metric Antennas Model TDS-25-1, TDS-25-2, 9/3/97
6. Electro-Metric Line Impedance Stabilization Network Model No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. 9/30/97
7. Electro-Metric Line Impedance Stabilization Network Model No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. 9/30/97

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz. The ambient temperature of the UUT was 80.4F with a humidity of 62%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz)	METER READING + ACF = FS
33	20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 79.4F with a humidity of 61%.

APPLICANT: TIGER ELECTRONICS, INC.
FCC ID: I54-05051
REPORT #: F:\CUS\T\TIGER\TIG92H8.RPT
PAGE #: 3

APPLICANT: TIGER ELECTRONICS, INC.

FCCID: I54-05051

CIRCUIT DESCRIPTION:

In the receive mode the signal comes in on the antenna to the inductor to the RF amplifier Q1 to the double tuned circuit to the super-regenerative detector Q2, where the audio is detected. From Q2 the audio goes to the volume resistor VR1 to the input to the two(2) stage audio amplification, Q3, & Q4. Q4 drives the audio output transformer T3 which is connected to the speaker.

In the transmit mode the speaker is switched so that it is connected to the input to the audio amplifiers Q3 & Q4 and the output of Q4 drives the transformer T3, which modulates the voltage of the crystal controlled oscillator. Q5, the crystal controlled oscillator is the transmitter. Q5 is connected to the antenna via the output filter made up of T2, C17, L1, .

ANTENNA AND GROUND CIRCUITRY

This unit makes use of a short, antenna. The antenna is inductively coupled. The antenna is self contained, no provision is made for an external antenna. This unit is powered from a 9.0V battery.

No ground connection is provided. The unit relies on the ground tract of the printed circuit board.

APPLICANT: TIGER ELECTRONICS, INC.
FCC ID: I54-05051
REPORT #: F:\CUS\T\TIGER\TIG92H8.RPT
PAGE #: _____

APPLICANT: TIGER ELECTRONICS, INC.

FCC ID: I54-05051 - RECEIVER

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.109

REQUIREMENTS: 30 to 80 MHz: 40.0 dBuV/M @ 1 METER
88 to 216 MHz: 43.5 dBuV/M
216 to 960 MHz: 46.0 dBuV/M
ABOVE 960 MHz: 54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000 MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

TUNED FREQ. MHz	EMISSION FREQUENCY MHz	METER READING @ 1m dBuV	COAX LOSS dB	A.C.F. dB	FIELD STRENGTH dBuV/m@1m	MARGIN dB	ANT.
49.86	46.51	15.60	0.25	10.87	26.72	13.28	V
49.86	46.97	14.70	0.25	10.89	25.84	14.16	V
49.86	47.48	14.70	0.25	10.91	25.86	14.14	V
49.86	47.99	13.20	0.25	10.92	24.37	15.63	V
49.86	48.48	13.70	0.25	10.94	24.89	15.11	V
49.86	48.98	15.50	0.25	10.96	26.71	13.29	V
49.86	49.50	16.30	0.25	10.98	27.53	12.47	V
49.86	49.97	15.30	0.25	11.00	26.55	13.45	V
49.86	50.47	12.10	0.80	10.85	23.75	16.25	V
49.86	50.97	12.20	0.80	10.68	23.68	16.32	V
49.86	51.48	14.70	0.80	10.52	26.02	13.98	V

SAMPLE CALCULATION: $FSdBuV/m = MR(dBuV) + ACFdB$.

TEST PROCEDURE: ANSI STANDARD C63.4-1992 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Preselector, a Hewlett Packard Model 85650A Quasi-Peak adapter, an Electro-Metric Dipole Kit, and an Eaton Model 94455-1 Biconical Antenna. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The receiver was put into the coherent mode by placing an antenna driven by a signal generator off site. The UUT was tested in 3 orthogonal planes. ✓

PERFORMED BY: *Handus* DATE: APRIL 7, 1998

APPLICANT: TIGER ELECTRONICS, INC. FCC ID: I54-05051

PAGE #: 11

APPLICANT: TIGER ELECTRONICS, INC.

FCC ID: I54-05051 - TRANSMITTER

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO.: 15.235

REQUIREMENTS: CARRIER FREQUENCY WILL NOT EXCEED 80 dBuV/m AT 3M.
OUT-OF-BAND EMISSIONS SHALL NOT EXCEED:

30 - 88 MHz	40.0 dBuV/M MEASURED AT 3 METERS
88 - 216 MHz	43.5 dBuV/M
216 - 960 MHz	46.0 dBuV/M
ABOVE 960 MHz	54.0 dBuV/M

TEST DATA:

EMISSION FREQUENCY MHz	METER READING AT 3 METERS dBuV	COAX LOSS dB	ANTENNA CORRECTION FACTOR dB	FIELD STRENGTH dBuV/m@3m	MARGIN dB	ANT. POL.
49.86	64.10	0.25	10.99	75.34	4.66	V
99.70	21.20	0.80	8.39	30.39	13.11	V
149.60	10.50	0.80	16.90	28.20	15.30	V
199.40	8.70	0.90	12.66	22.26	21.24	V
249.30	3.50	1.20	13.35	18.05	27.95	V
299.20	2.60	1.40	15.65	19.65	26.35	V
349.00	2.70	1.40	15.52	19.62	26.38	H
398.90	3.20	1.40	16.97	21.57	24.43	V
448.70	3.00	1.60	18.12	22.72	23.28	V
498.60	4.50	1.60	19.27	25.37	20.63	V
548.40	1.70	1.60	19.69	22.99	23.01	V
598.30	3.00	1.60	20.09	24.69	21.31	H
648.20	2.20	1.60	21.16	24.96	21.04	H
698.00	3.80	2.00	22.26	28.06	17.94	H
747.90	3.30	2.00	21.88	27.18	18.82	V
797.70	2.80	2.00	22.01	26.81	19.19	V
847.60	2.90	2.90	23.57	29.37	16.63	V

SAMPLE CALCULATION:

$FSdBuV/m = MR(dBuV) + ACFdB.$

TEST PROCEDURE: The procedure used was ANSI STANDARD C63 spectrum was scanned from 30 MHz to 1000 MHz. When an found, the table was rotated to produce the maximum sign The antenna was placed in both the horizontal and vertical the worse case emissions were reported. The UUT was t orthogonal planes.

TEST RESULTS: THE UNIT DOES MEET THE FCC REQUIREMENTS.

PERFORMED BY:  DATE: APRIL 7, 1998

APPLICANT: TIGER ELECTRONICS, INC. FCC ID: I54-05051

REPORT #: F:\CUS\T\TIGER\TIG92H8.RPT

PAGE #: 12

APPLICANT: TIGER ELECTRONICS, INC.
FCC ID: I54-05051
NAME OF TEST: Occupied Bandwidth
RULES PART NO.: 15.235
REQUIREMENTS: The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits of 15.209, whichever permits the higher emission levels.

THE GRAPH ON THE FOLLOWING PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was taken. The vertical scale is set to -10 dBm per division. The horizontal scale is set to 5 kHz per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY:  APRIL 7, 1998

APPLICANT: TIGER ELECTRONICS, INC.
FCC ID: I54-05051
REPORT #: F:\CUS\T\TIGER\TIG92H8.RPT
PAGE #: 13

MKR 49.858 60 MHz
-68.20 dBm


REF -68.2 dBm ATTN 10 dB +0 dB

10 dB/

OFFSET
-20.0
dB

CF STEP
5.0 KHZ

SRG 102

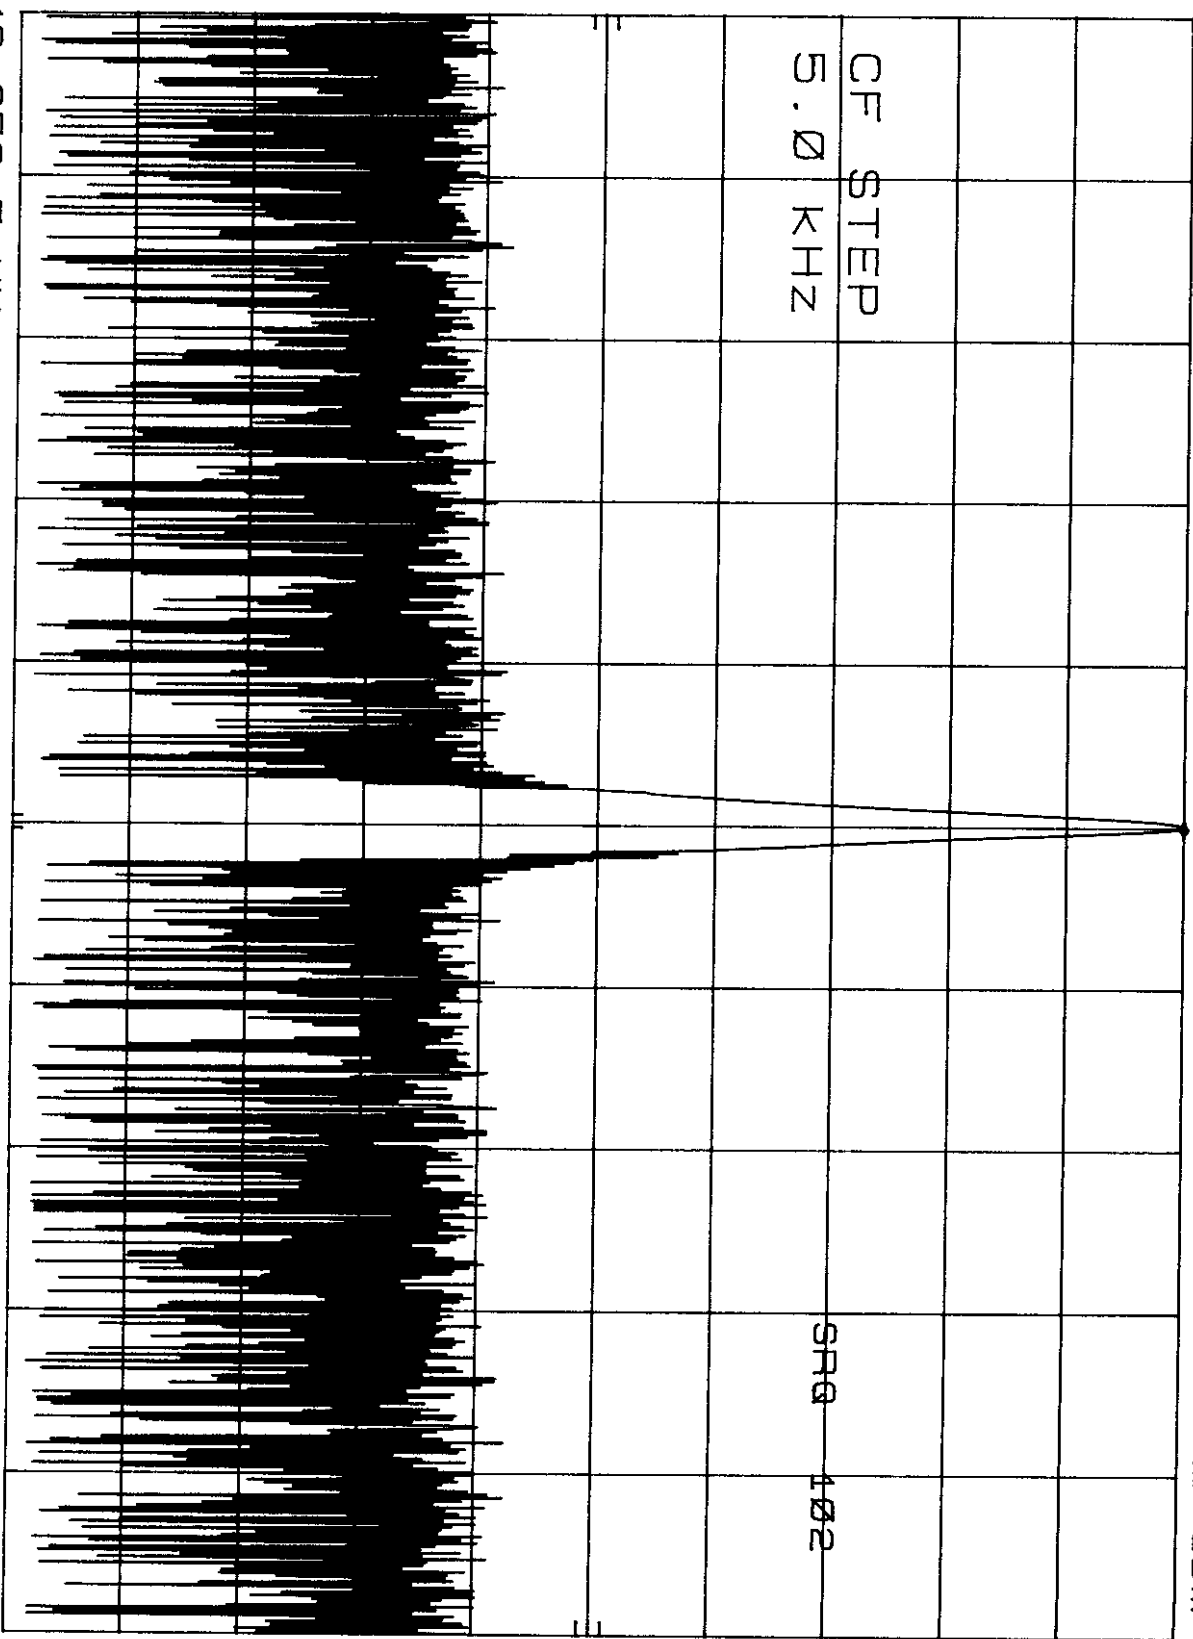

CENTER 49.858 5 MHz
RES BW 300 Hz (1) VBW 100 KHZ
SPAN 50.0 KHZ
SWP 4.00 sec


h7D REF -68.2 dBm ATTN 10 dB +0.0 dB MKR 49.858 60 MHz -67.20 dBm

10 dB/

OFFSET
-20.0
dB

CF STEP
5.0 KHZ

SRA 102

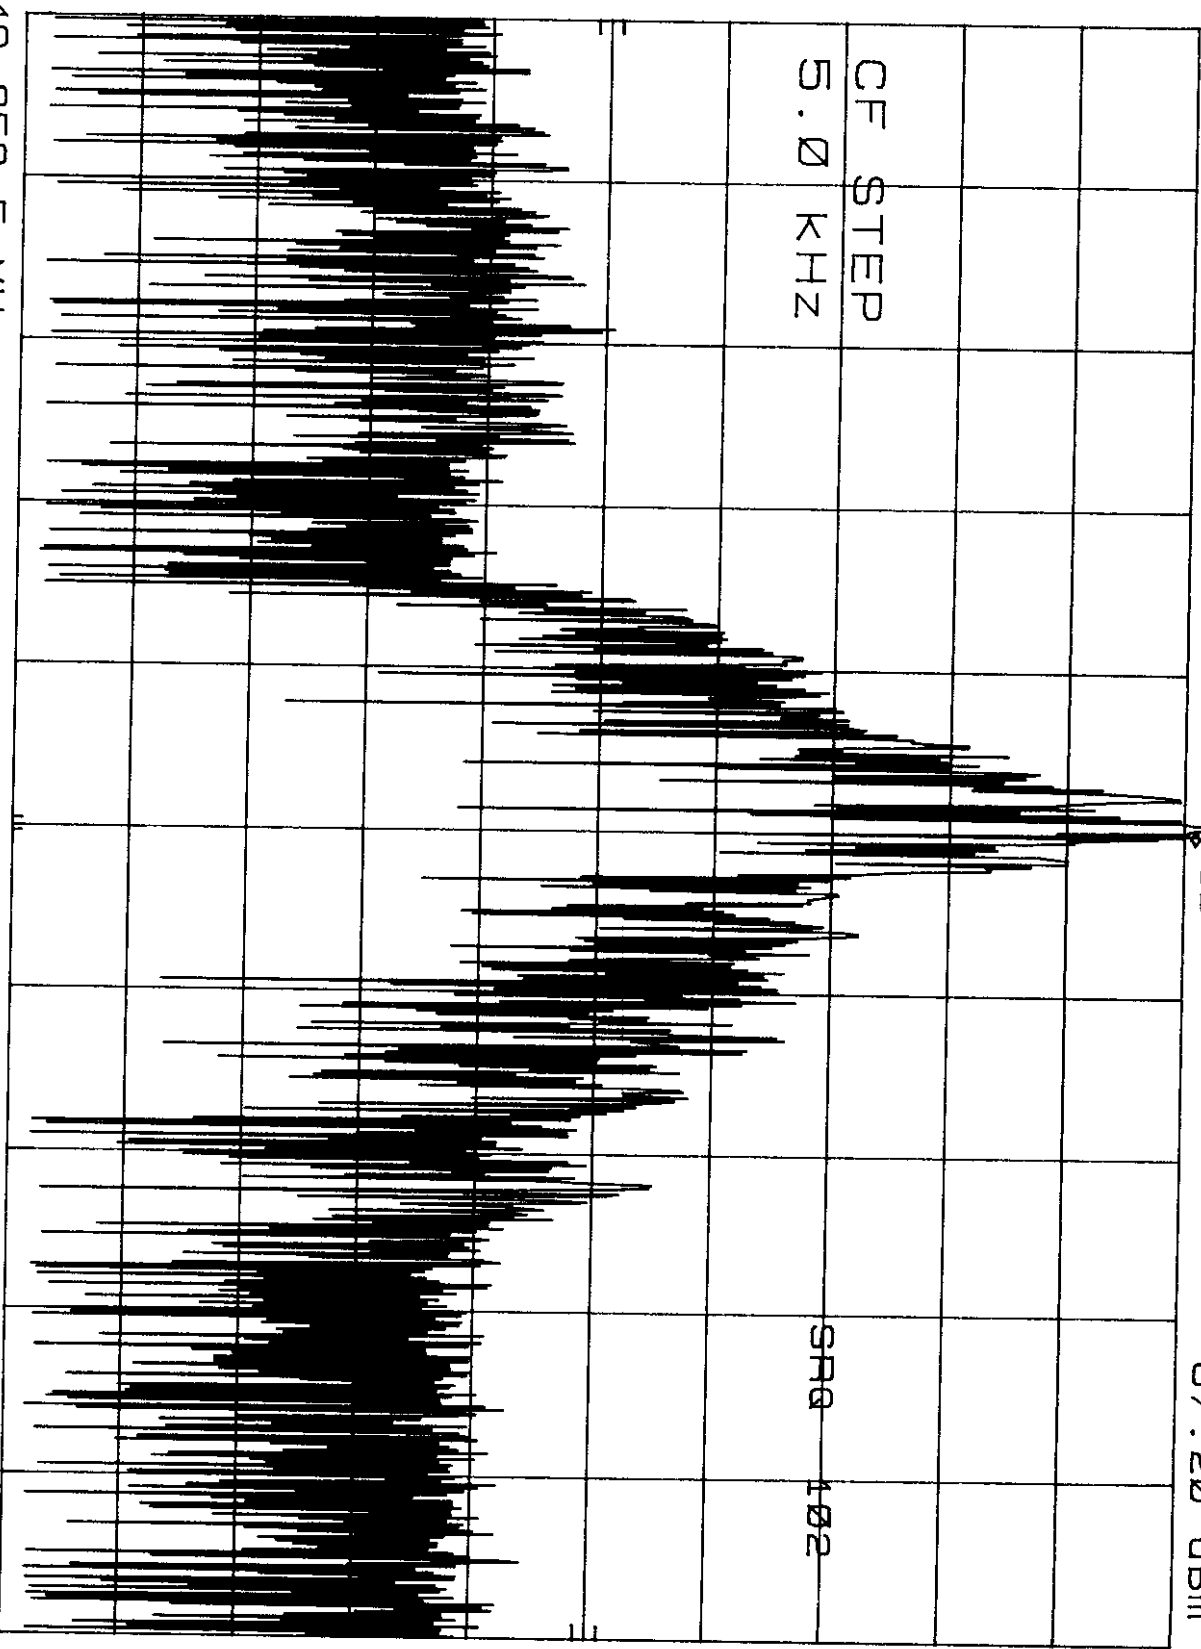

CENTER 49.858 5 MHz
RES BW 300 Hz (1) VBW 100 KHZ
SPAN 50.0 KHZ
SFP 4.00 sec

HP

REF -68.2 dBm

ATTEN 10 dB +0 dB


MKR 49.858 60 MHz
-65.90 dBm

10 dB/

OFFSET
-20.0
dB

CF STEP
5.0 KHZ

SR0 102

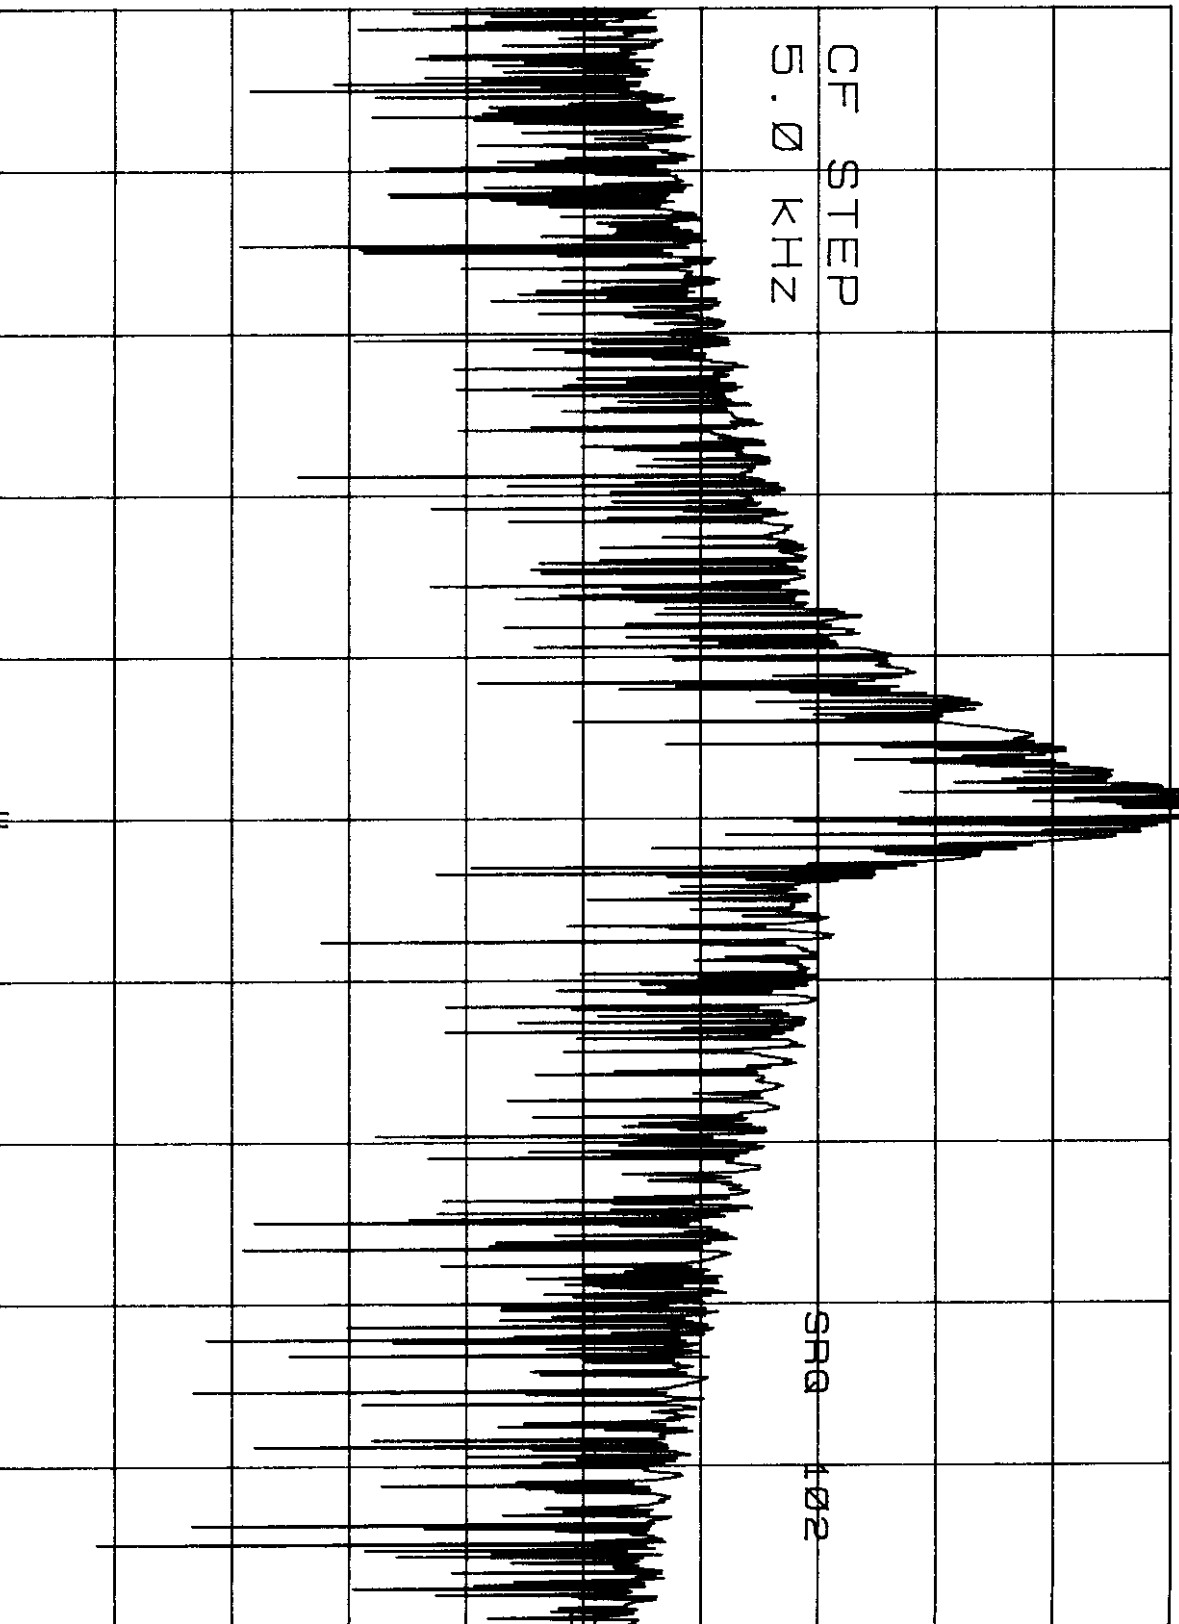

CENTER 49.858 5 MHz
RES BW 300 Hz (1) VBW 100 KHZ
SPAN 50.0 KHZ
SMP 4.00 sec